EX3DV4- SN:3866 May 31, 2017

10112- CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	3.38	68.12	16.52	0.00	150.0	± 9.6 %
		Y	3.13	67.71	16.13		150.0	
		Z	3.02	67.52	15.96		150.0	
10113- CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	3.13	68.77	16.98	0.00	150.0	± 9.6 %
		Y	2.91	68.81	16.68		150.0	
		Z	2.79	68.66	16.40		150.0	
10114- CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	Х	5.38	67.36	16.61	0.00	150.0	± 9.6 %
		Y	5.19	67.25	16.45		150.0	
		Z	5.11	67.25	16.43		150.0	
10115- CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.86	67.90	16.87	0.00	150.0	± 9.6 %
		Y	5.54	67.52	16.58		150.0	
		Z	5.39	67.35	16.49		150.0	
10116- CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.53	67.63	16.65	0.00	150.0	± 9.6 %
		Y	5.31	67.49	16.49		150.0	
		Z	5.20	67.43	16.45		150.0	
10117- CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	Х	5.38	67.35	16.62	0.00	150.0	±9.6 %
		Y	5.18	67.22	16.45		150.0	
		Z	5.07	67.11	16.38		150.0	
10118- CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16- QAM)	Х	5.83	67.70	16.77	0.00	150.0	± 9.6 %
		Y	5.61	67.67	16.66		150.0	
		Z	5.46	67.54	16.59		150.0	
10119- CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64- QAM)	X	5.48	67.51	16.62	0.00	150.0	± 9.6 %
		Y	5.28	67.43	16.47		150.0	
		Z	5.18	67.38	16.43		150.0	
10140- CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	Х	3.74	68.35	16.51	0.00	150.0	± 9.6 %
		Y	3.49	67.83	16.13		150.0	
		Z	3.38	67.61	15.99		150.0	HE.
10141- CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.85	68.30	16.62	0.00	150.0	± 9.6 %
		Y	3.61	67.92	16.30		150.0	
		Z	3.50	67.72	16.16		150.0	
10142- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	Х	2.47	70.19	17.11	0.00	150.0	± 9.6 %
		Y	2.15	69.32	16.33		150.0	
		Z	2.01	68.99	15.96	1.	150.0	
10143- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.89	69.59	17.08	0.00	150.0	± 9.6 %
		Y	2.67	69.73	16.56		150.0	
	E - 17 1 2 - 1 - 1 - 1 - 1	Z	2.52	69.44	16.05	- F	150.0	
10144- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	2.70	67.64	15.72	0.00	150.0	± 9.6 %
		Y	2.40	67.16	14.83		150.0	
		Z	2.24	66.84	14.28		150.0	
10145- CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	1.97	70.10	16.38	0.00	150.0	± 9.6 %
		Y	1.52	67.65	13.88		150.0	
		Z	1.24	65.51	11.97		150.0	
10146- CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	Х	4.51	76.77	18.96	0.00	150.0	±9.6 %
		Y	2.44	68.50	13.41		150.0	
		2	1.88	65.68	11.07		150.0	
10147- CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	Х	5.75	80.68	20.67	0.00	150.0	±9.6 %
		Y	3.03	71.42	14.87		150.0	
		Z	2.20	67.48	12.06		150.0	

EX3DV4- SN:3866 May 31, 2017

10149- CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	×	3.28	68.36	16.57	0.00	150.0	± 9.6 %
		Y	3.02	67.81	16.13		150.0	
		Z	2.90	67.58	15.95		150.0	
10150- CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	3.39	68.17	16,56	0.00	150.0	± 9.6 %
		Y	3.14	67.77	16.18		150.0	
		Z	3.03	67.57	16.00		150.0	
10151-	LTE-TDD (SC-FDMA, 50% RB, 20 MHz,	X	8.20	77.58	20.81	3.98	65.0	± 9.6 %
CAC	QPSK)	Y	6.49	75.24	19.50	7.00	65.0	20.0 10
_		Z	6.49	75.92	19.85		65.0	_
10152- CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	7.78	75.36	20.58	3.98	65.0	± 9.6 %
	10 20 11/	Y	6.15	72.70	19.01		65.0	
		Z	6.01	72.92	19.11		65.0	
10153- CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	8.10	76.01	21,20	3.98	65.0	± 9.6 %
		Y	6.53	73.66	19.80		65.0	
		Z	6.41	73.92	19.91		65.0	-
10154- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.79	70.93	17.54	0.00	150.0	± 9.6 %
		Y	2.43	69.84	16.85		150.0	
		Z	2.28	69,36	16.54		150.0	
10155- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	Х	2.97	68.79	16.93	0.00	150.0	± 9.6 %
		Y	2.75	68.70	16.56		150.0	
		2	2.64	68.53	16.29		150.0	
10156- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	2.38	70,70	17.32	0.00	150.0	± 9.6 %
		Y	2.03	69.70	16.35		150.0	
		Z	1.86	69.17	15.79		150.0	
10157- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	2.56	68.45	16.06	0.00	150.0	± 9.6 %
		Y	2.27	67.99	15.08		150.0	
		Z	2.10	67.52	14.38		150.0	
10158- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	3.14	68.82	17.02	0.00	150.0	± 9.6 %
		Y	2.92	68.88	16.73		150.0	
		Z	2.79	68.73	16.45		150.0	
10159- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	2.69	68.91	16.37	0.00	150.0	± 9.6 %
		Y	2.41	68.63	15.46		150.0	
		Z	2.22	68.05	14.69		150.0	
10160- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	3.11	69.55	16.94	0.00	150.0	±9.6 %
		Y	2.84	68.95	16.51		150.0	
		Z	2.74	68.78	16.38		150.0	
10161- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	3.28	68.03	16.53	0.00	150.0	± 9.6 %
		Y	3.04	67.71	16.14		150.0	
		Z	2.93	67.53	15.94		150.0	
10162- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	3.37	67.94	16.52	0.00	150.0	± 9.6 %
		Y	3.15	67.79	16.21		150.0	
		Z	3.04	67.69	16.05		150.0	
10166- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.28	70.28	19.69	3.01	150.0	±9.6 %
		Y	3.74	69.45	18.87		150.0	
		Z	3.63	69.87	19.11		150.0	
10167- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	5.55	73.25	20.22	3.01	150.0	± 9.6 %
		Y	4.69	72.31	19.32		150.0	-

EX3DV4- SN:3866 May 31, 2017

10168- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	Х	6.00	74.91	21.24	3.01	150.0	± 9.6 %
		Y	5.28	74.84	20.79		150.0	
		Z	5.27	76.11	21.29		150.0	
10169- CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.34	73.27	20.82	3.01	150.0	± 9.6 %
-		Υ	3.28	69.91	19.02		150.0	
		Z	3.11	69.87	19.09		150.0	
10170- CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	Х	6.52	79.56	22.99	3.01	150.0	± 9.6 %
		Υ	4.86	76.70	21.63		150.0	
		Z	4.75	77.55	22.02	100	150.0	
10171- AAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	×	5.30	75.06	20.34	3.01	150.0	± 9.6 %
		Υ	3.78	71.45	18.41		150.0	
75030		Z	3.67	72.20	18.78		150.0	
10172- CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	×	14.20	92.21	27.61	6.02	65.0	± 9.6 %
		Y	6.31	80.40	22.75		65.0	
10477		Z	7.75	85.93	25.05	-	65.0	
DAC LTE-TDD (SC-FDMA 16-QAM)	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	15.48	90.10	25.55	6.02	65.0	± 9.6 %
		Υ	9.20	83.52	22.24		65.0	
40471	175 755 160 550 1	Z	10.68	87.60	23.70		65.0	
10174- CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	12.86	86.06	23.83	6.02	65.0	± 9.6 %
_		Υ	5.38	74.78	18.72		65.0	
40475	LTE FOR 100 FRUIT & DR. 40 IVI	Z	8.28	82.76	21.60	0.04	65.0	
10175- CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.26	72.82	20.52	3.01	150.0	± 9.6 %
		Υ	3.23	69.49	18.71		150.0	
10100		Z	3.07	69.51	18.82		150.0	0.000
10176- CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	6.53	79.58	23.00	3.01	150.0	± 9.6 %
		Y	4.87	76.73	21.64		150.0	
10177- CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	4.75	77.58 73.06	22.03	3.01	150.0 150.0	±9.6 %
Uni	(di div)	Y.	3.26	69.71	18.85		150.0	
_		Z	3.10	69.68	18.92		150.0	
10178- CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM)	X	6.40	79.18	22.81	3.01	150.0	± 9.6 %
		Y	4.78	76.35	21.45		150.0	
		Z	4.69	77.29	21.89		150.0	
10179- CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	Х	5.82	77.04	21.48	3.01	150.0	±9,6 %
		Y	4.23	73.75	19.80	1	150.0	
No.		Z	4.14	74.64	20.22		150.0	
10180- CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	X	5.26	74.91	20.25	3.01	150.0	± 9.6 %
		Y	3.76	71.33	18.33		150.0	
1,000		Z	3.66	72.12	18.72		150.0	
10181- CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.30	73.03	20,65	3.01	150.0	±9.6 %
		Y	3,26	69.69	18.83		150.0	
-	the state of the s	Z	3.09	69.66	18.91		150.0	
10182- CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	6.39	79.15	22.80	3.01	150,0	± 9.6 %
	17.0	Y	4.77	76.32	21.44		150.0	
A	The second secon	Z	4.68	77.26	21.88		150.0	
10183- AAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	5.26	74.89	20.24	3.01	150.0	± 9.6 %
		Y	3.75	71.31	18.32	1	150.0	1
		Z	3.65	72.09	18.71		150.0	

EX3DV4- SN:3866 May 31, 2017

10184- CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	4,32	73.09	20,68	3.01	150.0	± 9.6 %
		Y	3.27	69.74	18.86		150.0	
	A COLUMN TO SERVICE SE	Z	3.10	69.71	18.94		150.0	
10185- CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM)	×	6.42	79.23	22,83	3.01	150.0	± 9.6 %
		Υ	4.80	76.41	21.48		150.0	
		Z	4.71	77.35	21.92		150.0	
10186- AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM)	х	5.28	74.95	20.27	3.01	150.0	± 9.6 %
		Υ	3.77	71.37	18.36		150.0	
		Z	3.67	72.16	18.75		150.0	
10187- CAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	4.32	73.09	20.70	3.01	150.0	± 9.6 %
		Y	3.28	69.77	18.91		150.0	
		Z	3.11	69.77	19.00		150.0	
10188- CAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	6.69	80.08	23.26	3.01	150.0	± 9.6 %
		Y	5.03	77.38	21.99		150.0	
		2	4.91	78.22	22.37	1	150.0	Car to a
	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	5.42	75.48	20.58	3.01	150.0	± 9.6 %
	1 - 10	Y	3.87	71.90	18.68		150.0	
		Z	3.77	72.68	19.06		150.0	
10193- CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	Х	4.82	66.68	16.41	0.00	150.0	± 9.6 %
	17.5 %	Y	4.61	66.69	16.22		150.0	
		Z	4.51	66.70	16.15		150.0	
10194- CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	Х	5.04	67.10	16.51	0.00	150.0	± 9.6 %
		Y	4.80	67.04	16.34		150.0	
		Z	4.68	67.00	16.27		150.0	
10195- CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	5.08	67.07	16.50	0.00	150.0	± 9.6 %
		Υ	4.84	67.06	16.35		150.0	
		Z	4.72	67.03	16.29		150.0	
10196- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	Х	4.85	66.81	16.45	0.00	150.0	± 9.6 %
		Y	4.63	66.78	16.25		150.0	
	A CONTRACTOR OF THE PARTY OF TH	Z	4.51	66.75	16.16	1000	150.0	
10197- CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	5.06	67.11	16.51	0.00	150.0	± 9.6 %
		Y	4.81	67.06	16.35		150.0	
		Z	4.69	67.02	16.28		150.0	
10198- CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64- QAM)	X	5.09	67.08	16.50	0.00	150.0	± 9.6 %
		Y	4.84	67.07	16.36		150.0	
		Z	4.72	67.05	16.30	1.0	150.0	
10219- CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.81	66.84	16.43	0.00	150.0	± 9.6 %
		Y	4.58	66.79	16.22		150.0	
		Z	4.46	66.77	16.13		150.0	
10220- CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	Х	5.07	67.12	16,52	0.00	150.0	± 9.6 %
		Y	4.81	67.04	16.34		150.0	
		Z	4.68	66.99	16.27		150.0	
10221- CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64- QAM)	X	5.09	67.03	16.50	0.00	150.0	± 9.6 %
		Υ	4.85	67,00	16.34		150.0	
.,.,.		Z	4.73	66.97	16.28		150.0	
10222- CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	5.37	67.40	16.64	0.00	150.0	± 9.6 %
		Y	5.16	67.24	16.45		150.0	
		-						

EX3DV4- SN:3866 May 31, 2017

10223- CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	×	5.74	67.56	16.72	0.00	150.0	± 9.6 %
		Y	5.49	67.44	16.57		150.0	
	14	Z	5.34	67.30	16.48		150.0	
10224- CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	×	5.45	67.58	16.65	0.00	150.0	± 9.6 %
		Y	5.21	67.34	16.43		150.0	
		Z	5.10	67.24	16.36		150.0	11 100
10225- CAB	UMTS-FDD (HSPA+)	X	3.09	66.39	16.04	0.00	150.0	± 9.6 %
		Y	2.90	66.33	15.61		150.0	1
		Z	2.80	66.28	15.36		150.0	
10226- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	Х	16.00	90.76	25.85	6.02	65.0	± 9.6 %
		Y	9.66	84.39	22.63	-	65.0	
		Z	11.34	88.68	24.14		65.0	
10227- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	14.05	87.61	24,43	6.02	65.0	± 9.6 %
		Y	8.75	81.87	21.28		65.0	
		Z	10.02	85.56	22.56		65.0	-
10228- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	Х	16.43	95.41	28.75	6.02	65.0	± 9.6 %
		Y	8.49	85.80	24.72		65.0	
		Z	9.08	88.93	26.11		65.0	
10229- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM)	Х	15.52	90.13	25.57	6.02	65.0	± 9.6 %
		Y	9.26	83.61	22.28	-	65.0	
		Z	10.75	87.69	23.74		65.0	
10230- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM)	X	13.65	87.05	24.18	6.02	65.0	± 9.6 %
		Y	8.41	81.19	20.97		65.0	
		Z	9.53	84.70	22.20		65.0	
10231- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	15.89	94.70	28.45	6.02	65.0	± 9.6 %
		Y	8.15	85.00	24.36		65.0	
		Z	8.68	88.03	25.73	Facilities .	65.0	
10232- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM)	X	15.51	90.13	25.57	6,02	65.0	± 9.6 %
		Y	9.24	83.59	22.27		65.0	
		Z	10.74	87.68	23.73		65.0	
10233- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	Х	13.64	87.05	24.18	6.02	65.0	± 9.6 %
		Y	8.39	81.18	20.97		65.0	
		Z	9.51	84.69	22.19		65.0	
10234- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	15.33	93.90	28.11	6.02	65.0	± 9.6 %
		Y	7.84	84.19	23.97		65.0	
		Z	8.32	87.14	25.32		65.0	
10235- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	15.52	90.15	25.58	6.02	65.0	±9.6 %
		Y	9.24	83.60	22,28		65.0	
		Z	10.74	87.70	23.74		65.0	
10236- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	×	13.71	87.13	24.20	6.02	65.0	± 9.6 %
		Y	8.44	81.24	20.98		65.0	
		Z	9.58	84.78	22.22		65.0	1.2
10237- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	15.95	94.80	28.48	6.02	65.0	± 9.6 %
		Y	8.16	85.03	24.37		65.0	
		Z	8.69	88.09	25.75		65.0	
10238- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	15.50	90.13	25.57	6.02	65.0	± 9.6 %
	1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Y	9.23	83.56	22,26		65.0	
		2 1 1						

EX3DV4- SN:3866 May 31, 2017

10239- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	Х	13.64	87.06	24.18	6.02	65.0	± 9.6 %
		Ý	8.38	81.16	20.96		65.0	
		Z	9.49	84.66	22.18		65.0	
10240- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	15.91	94.76	28.47	6.02	65.0	± 9.6 %
		Y	8.13	84.99	24.36		65.0	
		Z	8.67	88.05	25.74	100	65.0	
10241- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	Х	11.13	82.41	25.70	6.98	65.0	± 9.6 %
		Y	8.34	78.68	23.38		65.0	
		Z	8.64	80.88	24.34	Sc. A. I	65.0	
10242- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	Х	9.91	79.85	24.58	6.98	65.0	± 9.6 %
		Y	7.20	75.75	22.09		65.0	
		Z	7.99	79.38	23.68		65.0	
10243- CAA	LTE-TDD (SC-FDMA, 50% RB, 1,4 MHz, QPSK)	X	8.27	77.94	24.58	6.98	65.0	± 9.6 %
		Y	5.98	73.27	21.82		65.0	
		Z	6.43	76.20	23.27		65.0	
10244- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	8.97	79.15	21.15	3.98	65.0	± 9.6 %
		Y	5.58	72.44	16.74		65.0	
		Z	5.08	71.38	15.69		65.0	
10245- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	8.92	78.82	20.99	3.98	65.0	± 9.6 %
	Ye	Y	5.56	72.17	16.58		65.0	
		Z	5.02	71.01	15.49		65.0	
10246- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	7.93	79.91	21.09	3.98	65.0	± 9.6 %
		Y	4.97	73.86	17.47		65.0	
		Z	4.55	72.94	16.66		65.0	1.44
10247- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	7.23	76.19	20.23	3,98	65.0	± 9.6 %
		Y	5.17	72.08	17.43		65.0	
		Z	4.86	71.50	16.77		65.0	
10248- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	7.29	75.82	20.08	3.98	65.0	± 9,6 %
		Y	5.24	71.81	17.31		65.0	
		Z	4.89	71.20	16.64		65.0	
10249- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	8.41	80.65	21.74	3.98	65.0	± 9.6 %
		Y	5.79	76.14	19.09		65.0	
10250- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	5.65 7.86	76.27 77.32	18.90 21.56	3.98	65.0 65.0	± 9.6 %
UNU	10-WAIVI)	Y	6.11	74.47	19.80		CF D	
		Z	5.97	74.64	19.80		65.0 65.0	
10251- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	7.54	75.43	20.55	3.98	65.0	± 9.6 %
3110	V i sartiti)	Y	5.90	72.73	18.76		65.0	
		Z	5.74	72.89	18.69			-
10252- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.41	79.71	21.76	3.98	65.0 65.0	± 9.6 %
	1 23	Y	6.35	76.72	20.07		65.0	
	A	Z	6.39	77.53	20.37		65.0	
10253- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	7.57	74.80	20.44	3.98	65.0	± 9.6 %
		Y	6.02	72.23	18.84		65.0	
	The state of the s	Z	5.91	72,49	18.92		65.0	
10254- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	7.91	75.46	21.02	3.98	65.0	±9.6 %
		Y	6.39	73.13	19.56		65.0	
		Z	6.27	73.41	19.63		65.0	
	*	1		0.75	10.00		WW.	

EX3DV4- SN:3866 May 31, 2017

10255- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	7.97	77.29	20.97	3.98	65.0	± 9.6 %
		Y	6.28	74.88	19.59		65.0	-
		Z	6.29	75.56	19.91		65.0	
10256- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	8.49	78.25	20.21	3.98	65.0	± 9.6 %
		Y	4.62	69.68	14.65		65.0	
		Z	3.97	67.90	13.13		65.0	
10257- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	8.47	77.86	20.00	3.98	65.0	±9.6 %
		Y	4.61	69.35	14.43		65.0	
		Z	3.94	67.51	12.87		65.0	
10258- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	Х	7.49	79.02	20.38	3.98	65.0	± 9.6 %
		Y	4.13	71.05	15.63		65.0	
		Z	3.55	69.20	14.22		65.0	1
10259- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	7.45	76.46	20.64	3.98	65.0	± 9.6 %
		Y	5.53	72.93	18.27		65.0	
		Z	5.29	72.68	17.86		65.0	
10260- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	7.53	76.34	20.62	3.98	65.0	± 9.6 %
		Y	5.60	72.83	18.25		65.0	
145.5		Z	5.33	72.52	17.80		65.0	
10261- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	8.18	79.85	21.65	3.98	65.0	± 9.6 %
		Y	5.83	75.89	19.33		65.0	
		2	5.75	76.27	19.31		65.0	
10262- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	Х	7.86	77.29	21.53	3.98	65.0	± 9.6 %
		Y	6.10	74.42	19.75		65.0	
		Z	5.95	74.58	19.70		65.0	
10263- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.54	75.44	20.55	3.98	65.0	± 9.6 %
		Y	5.89	72.72	18.75		65.0	
		Z	5.73	72.88	18.68	5	65.0	
10264- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	Х	8.37	79.61	21.70	3.98	65.0	± 9.6 %
		Y	6.30	76.58	19.99		65.0	
		Z	6.33	77.37	20.28		65.0	
10265- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	7.78	75.36	20.58	3.98	65.0	± 9.6 %
		Y	6.14	72.70	19.01		65.0	
		Z	6.01	72.92	19.12		65.0	
10266- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	8.10	76.01	21.19	3.98	65.0	± 9.6 %
		Y	6.53	73.65	19.79	1.	65.0	
		Z	6.41	73.91	19.90		65.0	
10267- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	8.19	77.55	20.80	3.98	65.0	± 9.6 %
		Y	6.48	75.21	19.49		65.0	
		Z	6.48	75.89	19.83		65.0	
10268- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	8.29	75.07	20.77	3.98	65.0	± 9.6 %
		Υ	6.83	72.94	19.54		65.0	
		Z	6.70	73.16	19.68		65.0	
10269- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	8,21	74.70	20.71	3.98	65.0	± 9.6 %
		Y	6.81	72.63	19.48		65.0	
		Z	6.69	72.85	19.62	25.4	65.0	
10270- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	х	8.08	75.76	20.23	3.98	65.0	± 9.6 %
		Y	6.62	73.80	19.12		65.0	
	1	Z	6.57	74.24	19.38		65.0	+



EX3DV4- SN:3866 May 31, 2017

10274- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.76	66.59	15,87	0,00	150.0	± 9.6 %
		Y	2.64	66.60	15.48		150.0	
		Z	2.59	66.69	15.30		150.0	
10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.90	69.79	16.94	0.00	150.0	± 9.6 %
-		Y	1.69	68.48	15.99		150.0	
		Z	1.62	68.20	15.71		150.0	
10277- CAA	PHS (QPSK)	×	5.02	68.20	13.47	9.03	50.0	± 9.6 %
		Y	3.07	63.14	8.94		50.0	
		Z	2.83	62.55	8.24		50.0	
10278- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	Х	8.60	78.91	20.42	9.03	50.0	± 9.6 %
		Y	4.73	69.97	14.69		50.0	
		Z	4.23	68.38	13.48		50.0	
10279- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	×	8.80	79.14	20.52	9.03	50.0	± 9.6 %
		Y	4.84	70.19	14.82		50.0	
		Z	4.32	68,59	13.61	1,000	50.0	
10290- AAB	CDMA2000, RC1, SO55, Full Rate	X	2.08	72.13	17.20	0.00	150.0	± 9.6 %
		Y	1.73	70.79	15.54		150.0	
		Z	1.49	69.39	14.25		150.0	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	X	1.23	69.84	16.17	0.00	150.0	± 9.6 %
		Y	0.95	67.41	13.92		150.0	
		Z	0.84	66.34	12.73		150.0	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	X	1.63	75.37	19.05	0.00	150.0	± 9.6 %
		Y	1.33	73.19	16.99		150.0	
	A STATE OF THE STA	Z	1.19	71.89	15.72	177.1	150.0	
10293- AAB	CDMA2000, RC3, SO3, Full Rate	х	2.37	81.78	22.06	0.00	150.0	±9.6 %
		Y	2.51	83.07	21.32		150.0	
	The state of the s	Z	2.33	81.64	20.01		150.0	
10295- AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	8.12	78.82	22.36	9,03	50.0	± 9.6 %
		Y	6.35	75.25	19.41		50.0	
		Z	6.85	76.57	19.54		50.0	100
10297- AAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	3.29	71.49	17,51	0.00	150.0	± 9.6 %
		Υ	2.91	70.36	16.93		150.0	
0303-		2	2.76	69.91	16.72		150.0	la de la constante de la const
10298- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	2.19	70.68	16.97	0.00	150.0	± 9.6 %
		Υ	1.81	69.34	15.44		150.0	
9100		Z	1.58	68.11	14.28		150.0	17.7
10299- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	4.44	75.75	18.97	0.00	150.0	± 9.6 %
		Y	3.00	70.72	15.22		150.0	
		Z	2.65	69.43	13.85		150.0	
10300- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	х	3.42	70.62	16.09	0.00	150.0	± 9.6 %
		Y	2.26	66.10	12.36		150.0	
		Z	1.94	64.85	10.97		150.0	
10301- AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	5.45	66.39	18.27	4.17	50.0	± 9.6 %
		Y	4.76	65.03	17.30	4	50.0	1
		Z	4.59	65.00	17.17		50.0	
10302- AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	Х	5.95	67.03	18.97	4.96	50.0	± 9.6 %
		Y	5.29	65.83	18.09		50.0	1
		Z	5.20	66.17	18.17		50.0	
	*							

EX3DV4- SN:3866 May 31, 2017

10303- AAA	(EEE 802.16e WIMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	5.78	67.02	19.02	4.96	50.0	± 9.6 %
		Y	5.06	65.55	17.98		50.0	
		Z	4.97	65.86	18.03		50.0	
10304- AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	5,48	66,51	18.31	4.17	50.0	± 9.6 %
		Y	4.84	65.37	17.46		50.0	
		Z	4.75	65.67	17.49		50.0	
10305- AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	6.08	72.50	22.89	6.02	35.0	± 9.6 %
		Y	4.70	67.98	19.95		35.0	
		Z	4.73	69.00	20.20		35.0	
10306- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	5.79	68.34	20.52	6.02	35.0	± 9.6 %
		Y	4.91	66.57	19.26		35.0	
		Z	4.87	67.25	19.44		35.0	
10307- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	Х	5.95	70.24	21.57	6.02	35.0	±9.6 %
		Y	4.86	66.96	19.34		35.0	
		Z	4.81	67.58	19.49		35.0	
10308- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	5.95	70.59	21.77	6.02	35.0	± 9.6 %
	7.	Y	4.83	67.14	19.47		35.0	
		Z	4.80	67.86	19.67		35.0	
10309- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	5.89	68.57	20.63	6.02	35.0	± 9.6 %
		Y	4.98	66.81	19.41		35.0	
		Z	4.92	67.45	19.58		35.0	
10310- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	5.76	68.46	20.49	6.02	35.0	± 9.6 %
7775		Y	4.87	66.70	19.27		35.0	
		Z	4.84	67.39	19.46		35.0	
10311- AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	3.67	70.83	17.17	0.00	150.0	± 9.6 %
	The second	Y	3.29	69.70	16.59		150.0	-
		Z	3.13	69.21	16.37		150.0	
10313- AAA	IDEN 1:3	X	5.42	73.66	16.54	6.99	70.0	± 9.6 %
		Y	3.23	68.66	13.67		70.0	
	+	Z	3.24	69.09	13.89		70.0	
10314- AAA	iDEN 1:6	X	6.44	77.53	20.45	10.00	30.0	± 9.6 %
		Y	3.71	71.31	17.32		30.0	
		Z	3.76	72.02	17.68		30.0	
10315- AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.19	65.03	16.23	0.17	150.0	± 9.6 %
		Y	1.10	64.01	15.31		150.0	
		Z	1.09	63.89	15.13		150.0	
10316- AAB	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle)	X	4.88	66.71	16.46	0.17	150.0	± 9.6 %
4.10	a - mi a makat aaka aari alara)	Y	4.64	66.59	16.19		150.0	
		Z	4.54	66.61	16.15		150.0	
10317- AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.88	66.71	16.46	0.17	150.0	± 9.6 %
	The second second	Y	4.64	66.59	16.19		150.0	
		Z	4.54	66.61	16.15	Top T	150.0	
10400- AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	5.07	67.13	16,48	0.00	150.0	± 9.6 %
	1.00	Y	4.80	67.07	16.31		150.0	
		Z	4.66	67.04	16.26		150.0	
	IEEE 802.11ac WiFi (40MHz, 64-QAM,	X	5.65	67.18	16.52	0.00	150.0	± 9.6 %
10401- AAC		1191						1000
10401- AAC	99pc duty cycle)	Y	5.44	67.12	16,38		150.0	

EX3DV4-- SN:3866 May 31, 2017

10402- AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.95	67.81	16.67	0.00	150.0	± 9.6 %
		Y	5.73	67.64	16.50		150.0	
		Z	5.61	67.51	16.42		150.0	-
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	2.08	72.13	17.20	0.00	115.0	± 9.6 %
		Y	1.73	70.79	15.54		115.0	
		Z	1.49	69.39	14.25		115.0	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	X	2.08	72.13	17.20	0.00	115.0	± 9.6 %
		Y	1.73	70.79	15.54		115.0	
	and a second second second second	Z	1.49	69.39	14.25		115.0	
10406- AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	25.96	105.00	28.55	0.00	100.0	± 9.6 %
		Y	35.97	107.39	27.34		100.0	
		Z	100.00	117.41	28.38		100.0	
10410- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	39.66	105.40	27.14	3.23	80.0	± 9.6 %
	and an additional and the follow	Y	5.60	78.79	17.37		80.0	
		Z	6.13	80.71	17.76		80.0	
10415-	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1	X	1.05	63.68	15.52	0.00	150.0	+060
	Mbps, 99pc duty cycle)	Y	2377	Larren	TE.C.	0.00	THOUSE.	± 9.6 %
			1.02	63.25	14.93		150.0	
10416-	IEEE 802.11g WiFi 2.4 GHz (ERP-	Z	1.01 4.81	63.14 66.68	14.73 16.41	0.00	150.0 150.0	± 9.6 %
AAA	OFDM, 6 Mbps, 99pc duty cycle)			5.450	1. 4	10.	1.00	The second
		Y	4.61	66.73	16.27		150.0	
		Z	4.51	66.73	16.21		150.0	
10417- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.81	66.68	16.41	0.00	150.0	± 9.6 %
		Y	4.61	66.73	16.27		150.0	
		Z	4.51	66.73	16.21		150.0	
10418- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	X	4.80	66.82	16.41	0.00	150.0	± 9.6 %
		Y	4.60	66.88	16.28		150.0	
		Z	4.50	66.90	16.24		150.0	-
10419- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Short preambule)	×	4.82	66.78	16.43	0.00	150.0	± 9.6 %
		Y	4.62	66.83	16.29		150.0	-
		Z	4.52	66.84	16.24		150.0	
10422- AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.96	66.79	16.43	0.00	150.0	± 9.6 %
		Y	4.75	66.83	16.30		150.0	
		Z	4.64	66.83	16.30		150.0	
10423- AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	5.21	67.23	16.59	0.00	150.0	± 9.6 %
2.00	magasi ito sarwiy	Y	4.94	67.18	16.43		150.0	_
		Z	4.80	67.14				
10424-	IEEE 802,11n (HT Greenfield, 72,2				16.36	0.00	150.0	
AAA	Mbps, 64-QAM)	X	5.10	67.16	16.55	0.00	150.0	±9.6 %
_		Y	4.85	67.13	16.40		150.0	
	IEEE don 14. (UT 6	Z	4.72	67.09	16.33		150.0	1000
	IEEE 802.11n (HT Greenfield, 15 Mbps,	X	5.64	67.50	16.68	0.00	150.0	± 9.6 %
	BPSK)	-			10.00			
	BPSK)	Y	5.42	67.40	16.52		150.0	
AAA	BPSK)	Y	5.42 5.31	67.40 67.34	16.52		150.0	
10425- AAA 10426- AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)					0.00		± 9.6 %
AAA 10426-	IEEE 802.11n (HT Greenfield, 90 Mbps,	Z	5.31	67.34	16.48	0.00	150.0	± 9.6 %

EX3DV4- SN:3866 May 31, 2017

10427- AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.70	67.63	16.73	0.00	150.0	± 9.6 %
	3	Y	5.44	67.42	16.53		150.0	
		Z	5.33	67.35	16.48		150.0	
10430- AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.61	70.13	18.46	0.00	150.0	±9.6 %
		Y	4.54	71.62	18.84		150.0	
		Z	4.34	71.47	18.45		150.0	
10431- AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.62	67.28	16.57	0.00	150.0	± 9.6 %
		Y	4.33	67.30	16.34		150.0	
		Z	4.19	67.30	16.21		150.0	
10432- AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.90	67.21	16.56	0.00	150.0	± 9.6 %
		Y	4.62	67.17	16.36		150.0	
		Z	4.49	67.16	16.28		150.0	
10433- AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	5.13	67.24	16.60	0.00	150.0	± 9.6 %
1		Y	4.86	67.17	16.42		150.0	
		Z	4.73	67.13	16.35		150.0	
10434- W-CDN	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.70	70.75	18.51	0.00	150.0	± 9.6 %
		Υ	4.71	72.68	18.95		150.0	
		Z	4.48	72.50	18.48		150.0	
10435- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	37.53	104.49	26.87	3.23	80.0	± 9.6 %
		Y	5.44	78.34	17.17		80.0	
		Z	5.88	80.12	17.53		80.0	
10447- AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	Х	3.97	67.39	16.31	0.00	150.0	± 9.6 %
		Y	3.65	67.40	15.84		150.0	
		Z	3.48	67.35	15.53		150.0	
10448- AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	X	4.41	67.05	16.43	0.00	150.0	± 9.6 %
		Y	4.16	67.08	16.20		150.0	
		Z	4.03	67.09	16.08		150.0	
10449- AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	Х	4.65	67.03	16.47	0.00	150.0	± 9.6 %
		Y	4.42	67.01	16.27		150.0	
		Z	4.30	66.99	16.19		150.0	
10450- AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	Х	4.81	66.98	16.46	0.00	150.0	± 9.6 %
		Y	4.61	66.94	16.28		150.0	
		Z	4,50	66.91	16.21		150.0	
10451- AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	×	3.93	67.73	16.20	0.00	150.0	±9.6 %
		Y	3.57	67.69	15.58		150.0	
		Z	3,37	67.51	15.13	1727	150.0	17.
10456- AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.49	68.19	16.87	0.00	150.0	± 9.6 %
		Y	6.27	67.99	16.68		150.0	
		Z	6,17	67.89	16.63		150.0	
10457- AAA	UMTS-FDD (DC-HSDPA)	X	3.92	65.38	16.20	0.00	150.0	± 9.6 %
		Y	3.83	65.36	16.00		150.0	
		Z	3.78	65.38	15.92		150.0	
10458- AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	×	3.67	66.56	15.63	0.00	150.0	±9.6 %
		Y	3.38	66.92	15.01		150.0	
		Z	3.18	66.77	14.47		150.0	
10459- AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4,75	64.52	15.97	0.00	150.0	± 9.6 %
		Y	4.38	64.72	15.57		150.0	
		Z	4.28	65.18	15.52		150.0	

Certificate No: EX3-3866_May17

Page 26 of 38



EX3DV4- SN:3866 May 31, 2017

10460- AAA	UMTS-FDD (WCDMA, AMR)	X	1.12	71.77	18.52	0.00	150.0	± 9.6 %
		Y	0.94	69.07	16.80		150.0	
		Z	0.91	68.55	16.38		150.0	
10461- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	119.31	30.82	3.29	80.0	± 9.6 %
		Y	3.10	73.05	16.04		80.0	
		Z	2.89	73.54	16.13		80.0	-
10462- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	18.95	88.90	20.75	3.23	80.0	± 9.6 %
		Y	1.38	61.26	8.79		80.0	
		Z	1.06	60.00	7.67		80.0	
10463- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	10.36	80.77	17.93	3.23	80.0	± 9.6 %
1		Υ	1.23	60.00	7.78		80.0	
		Z	1.08	60.00	7.25		80.0	
10464- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	117.71	29.93	3.23	80.0	± 9.6 %
		Υ	2.52	70.33	14.54		80.0	
		Z	2.25	70.28	14.39		80.0	
10465- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	14.09	85.26	19.62	3.23	80.0	± 9.6 %
		Y	1.33	60.91	8.56		80.0	
		Z	1.06	60.00	7.62		80.0	
10466- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	8.41	78.26	17.06	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.74		80.0	
		Z	1.08	60.00	7.21		80.0	
10467- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	117.87	30,00	3.23	80.0	±9.6 %
		Y	2.60	70.71	14.71		80.0	
	The second secon	Z	2.33	70.74	14.59		80.0	7.7
10468- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	15.00	86.04	19.87	3.23	80.0	± 9.6 %
		Y	1.34	60.98	8.61		80.0	
		Z	1.05	60.00	7.63		80.0	
10469- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	×	8.49	78.39	17.10	3.23	80.0	±9.6 %
		Y	1,23	60.00	7.73		80.0	
1		Z	1.08	60.00	7.21		80.0	
10470- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	100.00	117.89	30.01	3.23	80.0	±9.6 %
1.00		Y	2.59	70.68	14.70		80.0	
		Z	2.32	70.72	14.58		80.0	
10471- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	14.99	86.02	19.85	3.23	80.0	± 9.6 %
		Y	1.33	60.96	8.58		80.0	
		Z	1.05	60.00	7.62		80.0	
10472- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	Х	8.47	78,36	17.08	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.72		80.0	
		Z	1.08	60.00	7.20		80.0	1
10473- AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	100.00	117.86	30.00	3.23	80.0	±9.6 %
		Y	2.58	70.66	14.68		80.0	
		Z	2.32	70.69	14.56		80.0	
10474- AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	14.86	85.93	19.82	3.23	80.0	± 9.6 %
		Υ	1.33	60.94	8.58		80.0	
Live		Z	1,05	60.00	7.62	-	80.0	
10475- AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	8.43	78.30	17.07	3.23	80.0	± 9.6 %
		1.2	77.00	55.00	-		-	
		Y	1.23	60.00	7.73		80.0	

EX3DV4- SN:3866 May 31, 2017

10477- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	14.24	85.37	19.64	3.23	0.08	±9.6 %
		Y	1.32	60.87	8.52		80.0	
		Z	1.05	60.00	7.60	-	80.0	
10478- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	8.34	78.16	17.01	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.72		80.0	
		Z	1.08	60.00	7.19		80.0	
10479- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	7.58	82.44	22.68	3.23	80.0	± 9.6 %
		Y	3.59	72.16	17.26		80.0	
		Z	3.82	73.96	17.62		80.0	
10480- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	8.66	80.46	20.82	3.23	80.0	± 9.6 %
		Y	3.62	69.25	14.74		80.0	
		Z	3.25	68.73	13.95		80.0	
10481- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.32	79.39	20.20	3.23	80.0	±9.6 %
		Y	3.30	67.75	13.82		80.0	
	CONTRACTOR OF THE CO.	Z	2.81	66.70	12,77	-	80.0	
10482- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	х	4.61	74.84	18.74	2.23	80.0	± 9.6 %
		Y	2.45	67.42	14.54	-	80.0	
V-0-0-0-7		Z	2.17	66.40	13.61		80.0	
10483- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	х	7.04	78.01	20.15	2.23	80.0	± 9.6 %
		Y	3.22	67.65	14.25		80.0	
10101		Z	2.72	66.06	12.91		80.0	
10484- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	6.88	77.42	19.95	2.23	80.0	± 9.6 %
	1 Y	Y	3.19	67.33	14.13	Herman de	80.0	
-		Z	2.68	65.67	12.75		80.0	
10485- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.87	75.43	19.35	2.23	80.0	± 9.6 %
		Υ	2.80	68.87	15.89		80.0	
		Z	2.65	68.70	15.57		80.0	
10486- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.39	71.11	17.61	2.23	80.0	± 9.6 %
		Υ	2.97	66.86	14.77		80.0	
		Z	2.74	66.32	14.11		80.0	
10487- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	х	4.42	70.85	17.52	2,23	80.0	± 9,6 %
		Y	3.01	66.70	14.70		80.0	
10488-	LTE-TDD (SC-FDMA, 50% RB, 10 MHz,	Z	5.15	74.67	14.01 19.27	2.23	80.0 80.0	± 9.6 %
AAB	QPSK, UL Subframe=2,3,4,7,8,9)	-6-	0.00	00.00	46.44		00.0	
		Y	3.29	69.38	16.67	-	80.0	_
10489- AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Z	3.18 4.57	69.51 70.52	16.70 17.95	2.23	80.0	± 9.6 %
MAN	10-Q/101, OL GUDITAITIE=2,0,4,7,0,3)	Y	3.41	67.34	16.01		80.0	
		-			200			
10490- AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.64	70.21	15.90 17.86	2.23	80.0	± 9.6 %
		Y	3.52	67.30	16.03		80.0	
		Z	3.39	67.34	15.91		80.0	
10491- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.16	72.89	18.65	2.23	80.0	± 9.6 %
	E HEIST IEIE	Y	3.65	68.85	16.62		80.0	
		Z	3.54	68.96	16.70		80.0	
10492- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.86	69.73	17.79	2,23	80.0	± 9.6 %
		Y	3.83	67.17	16.24		80.0	
-		Z	3.72	67.23	16.22		80.0	1

TDt&C

EX3DV4- SN:3866 May 31, 2017

10493- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.93	69.55	17.75	2.23	80.0	± 9.6 %
		Y	3.91	67.12	16.25		80.0	
		Z	3.79	67.17	16.21		80.0	
10494- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	5.74	74.72	19.14	2.23	80.0	± 9.6 %
		Y	3.85	69.89	16.87		80.0	
. v . vo		Z	3.73	69.95	16.96		80.0	
10495- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.96	70.37	18.01	2.23	80.0	± 9.6 %
1	2 Aug 14 14 14 14 14 14 14 14 14 14 14 14 14	Y	3.85	67.52	16.39		80.0	
		Z	3.74	67.53	16.38		80.0	
10496- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.01	69.97	17.90	2.23	80.0	± 9.6 %
	1,2,-,-,-,-,-,-,-,-,-,-,-,-,-,-,-,-,-,	Y	3.95	67.37	16.38		0.08	
		Z	3.83	67.39	16.37	-7-0	80.0	-
10497- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	4.01	73.25	17.74	2.23	80.0	± 9.6 %
	12 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	Y	1.93	64.71	12.56		80.0	
		Z	1.59	62.88	11.00		80.0	
10498- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	3,65	69.30	15.53	2.23	80.0	± 9.6 %
		Y	1.84	62.00	10.41		80.0	
	beautiful to the second of the	Z	1.45	60.03	8.60		80.0	
10499- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	3.67	69.04	15.33	2.23	80.0	±9.6 %
		Y	1.83	61.70	10.14		80.0	
		Z	1.46	60.00	8.46		80.0	
10500- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	4.83	74.54	19.13	2.23	80.0	± 9.6 %
1		Y	2.97	68.88	16.15		80.0	
-		Z	2.85	68.93	16.01		80.0	
10501- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.45	70.72	17.68	2.23	80.0	± 9.6 %
		Y	3.17	67.08	15.27		80.0	
		Z	2.99	66.87	14.86		80.0	
10502- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.49	70.49	17.57	2.23	80.0	± 9.6 %
		Y	3.24	67.03	15.21		80.0	
		Z	3.05	66.79	14.78		80.0	
10503- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	5.08	74.48	19.18	2.23	80.0	± 9.6 %
	REAL TABLES OF THE PART OF THE	Y	3.26	69.22	16.59		80.0	
		Z	3.14	69.35	16.62		80.0	
10504- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.55	70.45	17.91	2.23	80.0	± 9.6 %
		Y	3.39	67.26	15.96		80.0	
1000		Z	3.27	67.30	15.84		80.0	
10505- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.62	70.13	17.82	2.23	80.0	± 9.6 %
		Y	3.50	67.21	15.98		80.0	
10505		Z	3.38	67.26	15.86		80.0	4.4
10506- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.70	74.57	19.08	2.23	80.0	± 9.6 %
	The second secon	Υ	3.82	69.76	16.81	111	80.0	
400000		Z	3.70	69.84	16.89		80.0	
10507- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.94	70.30	17.97	2.23	80.0	± 9.6 %
		Y	3.84	67.45	16.35		80.0	

EX3DV4- \$N:3866 May 31, 2017

10508- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.00	69.91	17.86	2.23	80.0	± 9.6 %
		Y	3.94	67.30	16.34		80.0	
		Z	3.82	67.33	16.33		80.0	777
10509- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.79	72.95	18.48	2,23	80.0	± 9.6 %
		Y	4.26	69.29	16.69		80.0	
		Z	4.14	69.32	16.77		80.0	
10510- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.42	70.01	17.89	2.23	80.0	± 9.6 %
	C. C	Y	4.37	67.55	16.52		80.0	
200		Z	4.25	67.52	16.53		80.0	
10511- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.43	69.67	17.81	2.23	80.0	±9.6 %
		Y	4.43	67.38	16.51		80.0	
		Z	4.31	67.37	16.51		80.0	
10512- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.25	74.86	19.04	2.23	80.0	± 9.6 %
		Υ	4.32	70.27	16.92		80.0	
7287		Z	4.20	70.27	16.99		80.0	
10513- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.36	70.54	18.07	2.23	80.0	± 9.6.%
		Y	4.24	67.74	16.56		80.0	
		Z	4.12	67.67	16.56		80.0	
10514- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.30	69.96	17.91	2.23	80.0	± 9.6 %
		Y	4.27	67.44	16.51		80.0	
		Z	4.16	67.39	16.51		80.0	
10515- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	1.02	63.96	15.65	0.00	150.0	±9.6 %
		Y	0.98	63.45	15.00		150.0	
107/0		Z	0.97	63.33	14.80	0.00	150.0	
10516- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.94	78.96	21.94	0.00	150.0	± 9.6 %
		Y	0.63	71.55	18.18		150.0	
10517	IFFE 000 111 WIFE 0 1 OU- (DODG 11	Z	0.60	70.68 67.01	17.59 16.91	0.00	150.0	±9.6 %
10517- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.84	65.58	15.77	0.00	150.0	2.3,0 %
		Z	0.82	65.26	15.47	-	150.0	_
10518- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.82	66.79	16.42	0.00	150.0	± 9,6 %
		Y	4.61	66,81	16.26		150.0	
		Z	4.50	66.81	16.20		150.0	
10519- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	5.08	67.12	16.56	0.00	150.0	± 9.6 %
		Υ	4.81	67.06	16.38		150.0	
		Z	4.68	67.02	16.30		150.0	
10520- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.92	67.13	16.50	0.00	150.0	± 9.6 %
		Y	4.67	67.05	16.31		150.0	
dwar.		Z	4.53	66.99	16.23	0.00	150.0	
10521- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.85	67.15	16.50	0.00	150.0	± 9.6 %
		Y	4.60	67.05	16.30		150.0	
40000	TIEFE DOD AND INSTITUTE OF TOPPAS OF	Z	4.47	66.98	16.22	0.00	150.0	1000
10522- AAA	IEEE 802,11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.87	66.98	16.46	0.00	150.0	± 9.6 %
		Y	4.65	67.07	16.35		150.0	
		Z	4.53	67.08	16.31	1	150.0	

EX3DV4- SN:3866 May 31, 2017

10523- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.75	66.99	16.37	0.00	150.0	± 9.6 %
	A THE STATE OF THE	Υ	4.53	66.97	16.21		150.0	
		Z	4.42	66.97	16.17		150.0	
10524- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	Х	4.84	66.98	16.47	0.00	150.0	± 9.6 %
	The second secon	Y	4.60	67,01	16.33		150.0	
-		Z	4.47	67.00	16.27		150.0	
10525- AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.77	66.04	16.07	0.00	150.0	± 9.6 %
		Y	4.57	66.07	15.93		150.0	
	Land - The Control of the Control	Z	4.47	66.07	15.88		150.0	V
10526- AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	5.00	66.46	16.21	0.00	150.0	± 9.6 %
		Y	4.76	66.45	16.07		150.0	
		Z	4.63	66.42	16.01		150.0	
10527- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	Х	4.92	66.48	16.20	0.00	150.0	± 9.6 %
		Y	4.67	66.43	16.03		150.0	
		Z	4,55	66.38	15.96		150.0	
10528- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	Х	4.94	66.50	16.23	0.00	150.0	± 9.6 %
		Y	4.69	66.44	16.06	-	150.0	-
	The second secon	Z	4.56	66.40	15.99		150.0	
10529- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	Х	4.94	66.50	16.23	0.00	150.0	± 9.6 %
	7	Y	4.69	66.44	16.06		150.0	
		Z	4.56	66.40	15.99		150.0	
10531- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.97	66.67	16.25	0.00	150.0	± 9.6 %
		Y	4.70	66.57	16.08	-	150.0	
		Z	4.55	66.49	16.00		150.0	
10532- AAA	IEEE 802,11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.82	66.62	16.25	0.00	150.0	± 9.6 %
	the second of th	Y	4.55	66.44	16.02		150.0	
		Z	4.42	66.35	15.93		150.0	
10533- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.96	66.50	16.19	0.00	150.0	± 9.6 %
		Y	4.70	66.48	16.04		150.0	
		Z	4.58	66.46	15.98		150.0	
10534- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	5.43	66.70	16.27	0.00	150.0	± 9.6 %
		Y	5.21	66.56	16.10	_	150.0	
		Z	5.10	66.47	16.03		150.0	
10535- AAA	IEEE 802,11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.52	66.87	16.33	0.00	150.0	± 9.6 %
	a read to the termination of the	Y	5.27	66.70	16.15		150.0	
		Z	5.16	66.64	16.11		150.0	
10536- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	Х	5.37	66.84	16.31	0.00	150.0	± 9.6 %
		Y	5.14	66.69	16.13		150.0	
		Z	5.03	66.60	16.07		150.0	-
10537- AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	5.44	66.79	16.28	0.00	150.0	± 9.6 %
		Y	5.20	66.65	16.12		150.0	
		Z	5.09	66.56	16.06	17.0	150.0	
10538- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duly cycle)	Х	5.57	66.89	16.36	0.00	150.0	± 9.6 %
		Y	5.31	66.69	16.18		150.0	100
		Z	5.17	66,57	16.10		150.0	
10540- AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	5.44	66.79	16.33	0.00	150.0	±9.6 %
		Y	5.22	66.67	16.18	-	150.0	_
			0.66		10.10			



EX3DV4- SN:3866 May 31, 2017

10541- AAA	IEEE 802,11ac WiFi (40MHz, MCS7, 99pc duty cycle)	Х	5.46	66.82	16.35	0.00	150.0	± 9.6 %
		Y	5.20	66.57	16.13		150.0	
		Z	5.08	66.47	16.05	- 1 - 1 - 1	150.0	37.75
10542- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.58	66.75	16.33	0.00	150.0	±9.6 %
		Y	5.35	66.62	16.16		150.0	
		Z	5.24	66.54	16.10		150.0	
10543- AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.72	66.87	16.39	0.00	150.0	± 9.6 %
		Y	5.43	66.64	16.19		150.0	7
OF LOCAL TO		Z	5.31	66.56	16.13	7	150.0	
10544- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	Х	5.68	66.81	16.25	0.00	150.0	± 9.6 %
		Y	5.50	66.67	16.09		150.0	
		Z	5.41	66.59	16.03		150.0	4.57
10545- AAA	IEEE 802,11ac WiFi (80MHz, MCS1, 99pc duty cycle)	Х	5.89	67.14	16.34	0.00	150.0	± 9.6 %
		Y	5.69	67.04	16.21		150.0	
		Z	5.59	66.96	16.17		150.0	
10546- AAA	IEEE 802,11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.81	67.15	16.37	0.00	150.0	± 9.6 %
		Y	5.58	66.92	16.17		150.0	
		Z	5.47	66.77	16.09		150.0	
10547- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	Х	5.91	67.23	16.39	0.00	150.0	± 9.6 %
		Y	5.66	66.98	16.19		150.0	
		Z	5.54	66.81	16.10		150.0	To a T
10548- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	6.14	68.03	16.76	0.00	150.0	±9.6 %
		Y	5.88	67.79	16.56		150.0	
		Z	5.73	67.57	16.45		150,0	
10550- AAA	IEEE 802,11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.82	67.06	16.33	0.00	150.0	± 9.6 %
		Y	5.60	66.89	16.16		150.0	
	3.700.000.000.000.000	Z	5.50	66.80	16.11		150.0	
10551- AAA	IEEE 802,11ac WiFi (80MHz, MCS7, 99pc duty cycle)	Х	5.83	67.13	16.32	0.00	150.0	± 9.6 %
4		Y	5.61	66,96	16.16		150.0	
		Z	5.50	66.84	16.09		150.0	
10552- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	Х	5.74	66.94	16.25	0.00	150.0	± 9.6 %
		Y	5.52	66.75	16.07		150.0	
	STATE OF THE STATE OF	Z	5.43	66.67	16.02		150.0	
10553- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	Х	5.83	66.97	16.29	0.00	150.0	± 9.6 %
		Y	5.61	66.80	16.12		150.0	
		Z	5.50	66.69	16.05		150.0	
10554- AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	Х	6.06	67.19	16.34	0.00	150.0	± 9.6 %
		Y	5.90	67.03	16.17		150.0	
		Z	5.82	66.94	16.11		150.0	
10555- AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	Х	6.26	67.62	16.52	0.00	150.0	± 9.6 %
		Y	6.03	67.32	16.29		150.0	
		Z	5.93	67.21	16.22	5	150.0	
10556- AAA	IEEE 1602,11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	6.24	67.53	16.47	0.00	150.0	± 9.6 %
		Y	6.05	67.36	16.30		150.0	
		Z	5.96	67.26	16.24		150.0	
10557- AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	6.24	67.54	16.50	0.00	150.0	± 9.6 %
		Y	6.03	67.30	16.29		150.0	

EX3DV4- SN:3866 May 31, 2017

10558- AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	6.30	67.71	16.59	0.00	150.0	± 9.6 %
		Y	6.08	67,47	16.38		150.0	
		Z	5.97	67.32	16.31		150.0	
10560- AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	6,32	67.63	16.59	0.00	150.0	± 9.6 %
77		Y	6.08	67.33	16.36		150.0	-
		Z	5.97	67,18	16.28		150.0	
10561- AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	Х	6,21	67.53	16.58	0.00	150.0	± 9.6 %
		Y	5.99	67.28	16.37		150.0	
		Z	5.89	67.14	16.29		150.0	
10562- AAA	IEEE 1602 11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	6.36	67.97	16.80	0.00	150.0	± 9.6 %
	The state of the s	Y	6.12	67.67	16.56		150.0	
	ALEXANDER OF THE PARTY OF THE P	Z	5.99	67.47	16.46		150.0	-
10563- AAA	IEEE 1602,11ac WiFi (160MHz, MCS9, 99pc duty cycle)	Х	6.56	68.09	16.80	0.00	150.0	± 9.6 %
		Y	6.44	68.16	16.75		150.0	
		Z	6.14	67.53	16.44		150.0	
10564- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 99pc duty cycle)	Х	5.15	66.88	16.56	0.46	150.0	± 9.6 %
		Y	4.93	66.82	16.35		150.0	
		Z	4.82	66.84	16.31		150.0	
10565- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 99pc duty cycle)	X	5.46	67.42	16.90	0.46	150.0	± 9.6 %
		Y	5.18	67.32	16.70		150.0	
	The state of the s	Z	5.04	67.27	16.63		150.0	
10566- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 99pc duty cycle)	X	5.28	67.29	16.72	0.46	150.0	± 9.6 %
		Y	5.01	67.17	16.51		150.0	
	The state of the s	Z	4.88	67.12	16.44		150.0	
10567- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 99pc duty cycle)	Х	5.30	67.69	17.07	0.46	150.0	± 9.6 %
		Y	5.04	67.62	16.90		150.0	
		Z	4.91	67.53	16.81		150.0	
10568- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 99pc duty cycle)	X	5.16	66.90	16.42	0.46	150.0	± 9.6 %
		Y	4.90	66.84	16.21		150.0	
	The state of the s	Z	4.78	66.86	16.19		150.0	
10569- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 99pc duty cycle)	X	5.23	67.67	17.07	0.46	150.0	± 9.6 %
		Y	4.99	67.67	16.93		150.0	
		Z	4.87	67.63	16.87		150.0	1
10570- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 99pc duty cycle)	X	5.28	67.45	16.98	0.46	150.0	± 9.6 %
		Y	5.03	67.51	16.88		150.0	
		Z	4.90	67.48	16.81	1	150.0	1
10571- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.35	66.13	16.64	0.46	130.0	±9.6 %
		Y	1.19	64.43	15.36		130.0	
		Z	1.18	64.35	15.23		130.0	
10572- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.38	66.86	17.05	0.46	130.0	± 9.6 %
		Y	1.20	65.01	15.71		130.0	
TELES.		Z	1.19	64.89	15.56		130.0	
10573- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	11.19	110.54	30.57	0.46	130.0	± 9.6 %
		Y	1.73	81.41	21.20		130.0	
7868		Z	1.63	80.44	20.78		130.0	But E
10574- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.76	75.02	20.84	0.46	130,0	± 9.6 %
		Y	1.35	70.98	18.69		130.0	-
		Z	1.30	70.28	18.27		130.0	

EX3DV4- SN:3866 May 31, 2017

10575- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 90pc duty cycle)	X	4.93	66.62	16.56	0.46	130.0	±9.6 %
		Y	4.69	66.49	16.28		130.0	-
		Z	4.59	66.53	16.25	-	130.0	
10576- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 90pc duty cycle)	X	4.96	66.79	16.64	0.46	130.0	± 9.6 %
		Y	4.72	66.67	16.36		130.0	
		Z	4.61	66.70	16.32	the second	130.0	
10577- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 90pc duty cycle)	X	5.24	67.17	16.82	0.46	130.0	± 9.6 %
		Y	4,94	67.00	16.54		130.0	
		Z	4.81	66.98	16.49		130.0	
10578- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 90pc duty cycle)	Х	5.13	67.36	16.93	0.46	130.0	± 9.6 %
		Y	4.84	67.19	16.67		130.0	
		Z	4.71	67.15	16.60		130.0	
10579- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 90pc duty cycle)	Х	4,90	66.75	16.31	0.46	130.0	± 9.6 %
		Y	4.59	66.39	15.91	P	130.0	
		Z	4.46	66.37	15.86	-	130.0	
10580- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 90pc duty cycle)	X	4.95	66.65	16.27	0.46	130.0	±9.6 %
		Y	4.63	66.38	15.90		130.0	
		Z	4.51	66.41	15.89		130.0	
10581- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 90pc duty cycle)	X	5.05	67.49	16.90	0.46	130.0	± 9.6 %
		Y	4.73	67.22	16.59		130.0	
		Z	4.61	67.17	16.53		130.0	
10582- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 90pc duty cycle)	Х	4.87	66.47	16.10	0.46	130.0	± 9.6 %
		Y	4.53	66.11	15.67		130.0	
		Z	4.40	66.12	15.64		130.0	
10583- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.93	66.62	16.56	0.46	130.0	±9.6 %
		Y	4.69	66.49	16.28		130.0	
		Z	4.59	66.53	16.25		130.0	
10584- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	Х	4.96	66.79	16.64	0.46	130.0	± 9.6 %
		Y	4.72	66.67	16.36		130.0	
		Z	4.61	66.70	16.32		130.0	
10585- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	5.24	67.17	16.82	0.46	130.0	±9.6 %
		Y	4.94	67.00	16.54		130.0	
		Z	4.81	66.98	16.49		130.0	
10586- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	Х	5.13	67.36	16.93	0.46	130.0	± 9.6 %
- 7		Y	4.84	67.19	16.67		130.0	
		Z	4.71	67.15	16.60		130.0	
10587- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.90	66.75	16.31	0.46	130.0	± 9.6 %
		Y	4.59	66.39	15.91		130.0	
		Z	4.46	66.37	15.86		130.0	
10588- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.95	66.65	16.27	0.46	130.0	± 9.6 %
		Y	4.63	66.38	15.90		130.0	
		Z	4.51	66.41	15.89		130.0	
10589- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	Х	5.05	67.49	16.90	0.46	130.0	± 9.6 %
		Y	4.73	67.22	16.59		130.0	
		Z	4.61	67.17	16.53		130.0	
10590- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.87	66.47	16.10	0.46	130.0	± 9.6 %
		Y	4.53	66.11	15.67		130.0	
		Z	4.40	66.12	15.64		130.0	

EX3DV4- SN:3866 May 31, 2017

10591- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	×	5.09	66.69	16.66	0.46	130.0	± 9.6 %
		Y	4.84	66.58	16.40		130.0	
		Z	4.74	66.60	16.36		130.0	
10592- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	5.29	67.05	16.77	0.46	130.0	± 9.6 %
		Y	5.01	66.92	16.53		130.0	
	the state of the s	Z	4.89	66.93	16.49		130.0	
10593- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	5.23	67.04	16.70	0.46	130.0	± 9.6 %
		Y	4,93	66.84	16.41		130.0	
	Lagrangian war again	Z	4.80	66.82	16.36		130.0	
10594- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	5.27	67.16	16.83	0.46	130.0	± 9.6 %
	Charles of American	Y	4.99	67.01	16.57		130.0	
77.4		Z	4.86	66.99	16.52		130.0	1000
10595- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	5.27	67.18	16.76	0.46	130.0	± 9.6 %
		Y	4.95	66.95	16.45		130.0	
		Z	4.82	66.94	16.41		130.0	
10596- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	5.19	67.13	16.73	0.46	130.0	± 9.6 %
	1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Y	4.89	66.93	16.44		130.0	
		Z	4.76	66.93	16.41		130.0	
10597-	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	5.15	67.11	16.67	0.46	130.0	± 9.6 %
AAA	MCS0, Supe daty cycle)	Y	4.84	66.84	16.33		130.0	
		Z						
10598-	IEEE 802.11n (HT Mixed, 20MHz,	X	4.71	66.82	16.28	0.40	130.0	+ 0.00
AAA	MCS7, 90pc duty cycle)	1000	5,13	67.41	16.95	0.46	130.0	± 9.6 %
		Y	4.83	67.13	16.63		130.0	
10000		Z	4.70	67.07	16.55		130.0	-
10599- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.77	67.42	16.87	0.46	130.0	± 9.6 %
		Y	5.50	67.15	16.59		130.0	-
		Z	5.39	67.08	16.55		130.0	
10600- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	х	5.99	68.01	17.13	0,46	130.0	± 9.6 %
		Y	5.64	67.53	16.75		130.0	
		Z	5.50	67.43	16.69		130.0	-
10601- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	Х	5.84	67.66	16.97	0,46	130.0	± 9.6 %
		Y	5.53	67.30	16.65		130.0	
		Z	5.41	67.23	16.61		130.0	
10602- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.96	67.73	16.92	0.46	130.0	± 9.6 %
		Y	5.61	67.25	16.54		130.0	
		Z	5.51	67.30	16.56		130.0	
10603- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	6.09	68.14	17.25	0.46	130.0	± 9.6 %
		Y	5.71	67.64	16.87		130.0	
		Z	5.58	67.56	16.83	-	130.0	
10604- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.79	67.43	16.89	0.46	130.0	± 9.6 %
		Y	5.50	67.09	16.59		130.0	-
		Z	5.43	67.15	16.61		130.0	-
10605- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	Х	5.88	67.61	16.98	0.46	130.0	± 9.6 %
	7.57-52	Y	5.60	67.34	16.70		130.0	
		Z	5.50	67.35	16.70		130.0	
10606- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.64	67.11	16.61	0.46	130.0	± 9.6 %
	Str. oppositely office)	-			1.000			
		Y	5.38	66.83	16.31		130.0	

EX3DV4- SN:3866 May 31, 2017

10607- AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.91	65.98	16.27	0.46	130.0	± 9.6 %
		Y	4.67	65.88	16.01		130.0	
		Z	4.58	65.91	15.98		130.0	
10608- AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	×	5.16	66.42	16.42	0.46	130.0	± 9.6 %
		Y	4.87	66.29	16.18		130.0	
		Z	4.75	66.30	16.14		130.0	
10609- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	5.04	66.34	16.31	0.46	130.0	± 9.6 %
1001	sope daty systey	Y	4.76	66.13	16.01		130.0	
		Z	4.64	66.13	15.97		130.0	
10610- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	x	5.10	66.49	16.46	0.46	130.0	± 9.6 %
		Y	4.81	66.31	16.18		130.0	
		Z	4.69	66.30	16.14		130.0	
10611- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	5.04	66.38	16.34	0.46	130.0	± 9.6 %
	sope sary system	Y	4.73	66.11	16.02		130.0	
		Z	4.61	66.09	15.98		130.0	
10612-	IEEE 802.11ac WiFi (20MHz, MCS5,	X	5.05	66.47	16.34	0.46	130.0	±9.6 %
AAA	90pc duty cycle)	Y		2.00		0.40		13.0 %
			4.74	66.23	16.04		130.0	
10010	IEEE 900 dd WIET 1000 W. Ligger	Z	4.61	66.23	16.01	0.10	130.0	
10613- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	5.07	66.42	16,27	0.46	130.0	± 9.6 %
		Y	4.75	66.14	15.94		130.0	
10011		Z	4.61	66.10	15.89	-	130.0	
10614- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	5.00	66.68	16.54	0.46	130.0	± 9.6 %
		Y	4.69	66.38	16.21		130.0	
		Z	4.56	66.32	16.14		130.0	
10615- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	5.03	66.12	16.09	0.46	130.0	± 9.6 %
		Y	4.72	65.88	15.77		130.0	
E-100		Z	4.60	65.91	15.74		130.0	
10616- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.57	66.66	16.47	0.46	130.0	± 9.6 %
		Y	5.32	66.41	16.21		130.0	
		Z	5.21	66.36	16.18		130.0	
10617- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.66	66.81	16.51	0.46	130.0	± 9.6 %
		Y	5.37	66.51	16.23		130.0	
		Z	5.28	66.52	16.23		130.0	
10618- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.53	66.83	16.55	0.46	130.0	± 9.6 %
		Y	5.27	66.59	16.29		130.0	
		Z	5.17	66.54	16.25		130.0	
10619- AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	×	5.55	66.62	16.38	0.46	130.0	± 9.6 %
		Y	5.29	66.38	16.11		130.0	
		Z	5.18	66.32	16.08		130.0	
10620- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.70	66.80	16.51	0.46	130.0	± 9.6 %
		Y	5.39	66.47	16.20		130.0	
		Z	5.27	66.37	16.15	1	130.0	
10621- AAA	IEEE 802.11ac WIFi (40MHz, MCS5, 90pc duty cycle)	X	5.67	66.88	16.66	0.46	130.0	± 9.6 %
		Y	5.39	66.61	16.40		130.0	
		Z	5.28	66.53	16.35		130.0	-
10622- AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.64	66.90	16.67	0.46	130.0	± 9.6 %
							-	
		IY	5.39	66.71	16.44		130.0	

EX3DV4- SN:3866 May 31, 2017

10623-	IEEE 802.11ac WiFi (40MHz, MCS7,	X	5.58	66.69	16.45	0.46	130.0	± 9.6 %
AAA	90pc duty cycle)	1			1000		7000	
		Y	5.27	66.24	16.08		130.0	
10624-	IEEE 902 11 as WIE: //ONLIN MOCO	Z	5.16	66.20	16.05	0.10	130.0	
AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	×	5,72	66.66	16.50	0.46	130.0	± 9.6 %
		Y	5.46	66.44	16.25		130.0	
		Z	5.35	66.40	16.21		130.0	
10625- AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	6.02	67.31	16.86	0.46	130.0	± 9.6 %
		Y	5.83	67.39	16.77		130.0	
	1-4	Z	5.66	67.19	16.66		130.0	
10626- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.80	66.70	16.41	0.46	130.0	± 9.6 %
	Super daily System	Y	5.59	66.47	16.17		130.0	
		Z	5.51	66.43	16.14		130.0	
10627-	IEEE 802.11ac WIFI (80MHz, MCS1,	X	6.04	67.10	16.54	0.46	130.0	± 9.6 %
AAA	90pc duty cycle)	Y	Harry I	107547	0.45	0.40		1 9.0 %
			5.82	66.97	16.37		130.0	
10600	IEEE 000 44 WIEE (001111 - 14000	Z	5.73	66.93	16.35	0.10	130.0	
10628- AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.89	66.92	16.41	0.46	130.0	± 9.6 %
		Y	5.64	66.58	16.10		130.0	
		Z	5.53	66.47	16.06		130.0	
10629- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	×	6.00	67.02	16.44	0.46	130.0	± 9.6 %
		Y	5.73	66.66	16.13		130.0	
		Z	5.60	66.52	16.07		130.0	
10630- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	6.47	68.52	17.19	0.46	130.0	± 9.6 %
		Y	6.14	68.04	16.82		130.0	
		Z	5.94	67.72	16.68		130.0	
10631- AAA	IEEE 802 11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	6.47	68.60	17.41	0.46	130.0	± 9.6 %
	7,500	Y	6.09	68.05	17.04		130.0	
		Z	5.91	67.74	16.88		130.0	
10632- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	6.09	67.42	16.84	0.46	130.0	± 9.6 %
-	10,000,000	Y	5.81	67.11	16.59		130.0	
		Z	5.71	67.03	16.54	_	130.0	
10633- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	6.02	67.23	16.58	0.46	130.0	± 9.6 %
,,,,,	- copo daty dydicy	Y	5.72	66.79	16.24		130.0	_
		Z	5.61	66.68	16.19		130.0	
10634- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	6.01	67.25	16.65	0.46	130.0	± 9.6 %
, icv	oopo adiy oyale)	Y	5.71	GC OA	10.04		4000	
		Z		66.84	16.34		130.0	
10635- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.59 5.88	66.71 66.55	16.27 16.04	0.46	130.0 130.0	± 9.6 %
i irva	superinty cycle)	V	5 F7	66.00	45.07		4000	
		Y	5.57	66.09	15.67		130.0	
10636-	IEEE 1602.11ac WiFi (160MHz, MCS0,	Z	5.46	66.00	15.63	7.10	130.0	
AAA	90pc duty cycle)	X	6.19	67.09	16.50	0.46	130.0	± 9.6 %
_		Y	6.00	66.85	16.26		130.0	
40007	IEEE JOOG JA CONTROLLED CONTROL	Z	5.92	66.78	16.22		130.0	
10637- AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	Х	6.42	67.60	16.73	0.46	130.0	± 9.6 %
		Y	6.15	67.20	16.41		130.0	
	The second secon	Z	6.07	67.13	16.38	154	130.0	
10638- AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.36	67.41	16.61	0.46	130.0	± 9.6 %
				1		_		
		Y	6.15	67.18	16.37		130.0	

EX3DV4- SN:3866 May 31, 2017

10639- AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.39	67.51	16.71	0.46	130.0	± 9.6 %
,		Y	6.15	67.18	16.43		130.0	
		Z	6.05	67.07	16.37		130.0	
10640- AAA	IEEE 1602.11ac WIFi (160MHz, MCS4, 90pc duty cycle)	X	6.42	67.57	16.68	0.46	130.0	± 9.6 %
		Y	6.15	67.18	16.36		130.0	
		Z	6.04	67.05	16.30		130.0	
10641- AAA	IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.42	67.34	16.58	0.46	130.0	± 9.6 %
		Y	6.17	67.01	16.29		130.0	-
		Z	6.09	66.98	16.28		130.0	
10642- AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.53	67.76	16.96	0.46	130.0	± 9.6 %
		Y	6.25	67.39	16.66	-	130.0	
		Z	6.14	67.25	16.60	1, - 7	130.0	
10643- AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	6.32	67.36	16.66	0.46	130.0	± 9.6 %
		Y	6.06	66.99	16.35		130.0	
	3	Z	5.97	66.91	16.32		130.0	1,7,5,7
10644- AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	6.56	68.07	17.04	0.46	130.0	± 9.6 %
		Y	6.25	67.56	16.65	-	130.0	
		Z	6.11	67.33	16.55	10.00	130.0	
10645- AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	Х	6.75	68.14	17.02	0,46	130.0	± 9.6 %
2,5		Y	6.64	68.25	16.94		130.0	
		Z	6.31	67.55	16.62		130.0	
10646- AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	Х	17.14	96.60	31.35	9,30	60.0	± 9.6 %
		Y	11.66	91.33	28.76		60.0	
		Z	14.54	98.42	31.68		60.0	
10647- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	Х	17.01	97.08	31.61	9,30	60.0	± 9.6 %
		Y	11.05	90.83	28.68	1	60.0	
		Z	13.46	97.50	31,51		60.0	
10648- AAA	CDMA2000 (1x Advanced)	X	1.00	66.85	14.21	0.00	150.0	± 9.6 %
		Y	0.78	64.69	11.99		150.0	
		Z	0.68	63.70	10.81		150.0	

E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client DT&C (Dymstec)

Certificate No: EX3-3916_Apr17

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3916

Calibration procedure(s) QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Calibration date: April 28, 2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 660	7-Dec-16 (No. DAE4-660_Dec16)	Dec-17
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by:

Name
Function
Signature
Laboratory Technician

Approved by:

Katja Pokovic
Technical Manager

Issued: May 1, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3916_Apr17

Page 1 of 38

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
NORMx,y,z sensitivity in free space
ConvF sensitivity in TSL / NORMx,y,z
DCP diode compression point

CF crest factor (1/duty_cycle) of the RF signal A, B, C, D modulation dependent linearization parameters

Polarization φ rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- Techniques", June 2013
 b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization \$ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
 NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is
 implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included
 in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EX3-3916_Apr17 Page 2 of 38

EX3DV4 - SN:3916 April 28, 2017

Probe EX3DV4

SN:3916

Manufactured: December 18, 2012 Calibrated: April 28, 2017

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

Certificate No: EX3-3916_Apr17

Page 3 of 38

EX3DV4-SN:3916 April 28, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) ²) ^A	0.56	0.48	0.52	± 10.1 %
DCP (mV) ⁸	98.3	99.9	100.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc ^E (k=2)
0	CW	CW X	0.0	0.0	1.0	0.00	130,6	±3.3 %
		Y	0.0	0.0	1.0		140.9	
	4	Z	0.0	0.0	1.0		143,1	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V~¹	T1 ms.V ⁻²	T2 ms.V ⁻¹	T3 ms	T4 V-2	T5 V-1	T6
X	65.19	488.4	36.03	23.45	1.482	5.035	0.472	0.51	1.005
Υ	51.04	381.3	35.65	17.54	1.307	4,985	1.12	0.337	1.005
Z	53.66	398.4	35.32	19.38	1.36	5.014	0.957	0.363	1.005

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

a Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4—SN:3916 April 28, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity F	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	39.2	1.80	7.68	7.68	7.68	0.46	0.86	± 12.0 %
2600	39.0	1.96	7.41	7.41	7.41	0.42	0.86	± 12.0 %
5200	36.0	4.66	5.37	5.37	5.37	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.14	5.14	5,14	0.35	1.80	± 13.1 %
5500	35.6	4.96	5.02	5.02	5.02	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.83	4.83	4.83	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.84	4.84	4.84	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of \pm 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to \pm 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is \pm 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to \pm 110 MHz.

validity can be extended to ± 110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the Convet function for inclination of the convet.

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

April 28, 2017 EX3DV4- SN:3916

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity F	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	52.7	1.95	7.75	7.75	7.75	0.31	0.90	± 12.0 %
2600	52.5	2.16	7.40	7.40	7.40	0.35	0.88	± 12.0 %
5200	49.0	5.30	4.84	4.84	4.84	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.65	4.65	4.65	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.30	4.30	4.30	0.45	1.90	± 13.1 %
5600	48.5	5.77	4.10	4.10	4.10	0.45	1.90	± 13.1 %
5800	48.2	6.00	4.22	4.22	4.22	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


F. At frequencies below 3 GHz, the validity of tissue parameters (s. and g.) can be released to ± 10% if liquid compensation formula is applied to

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

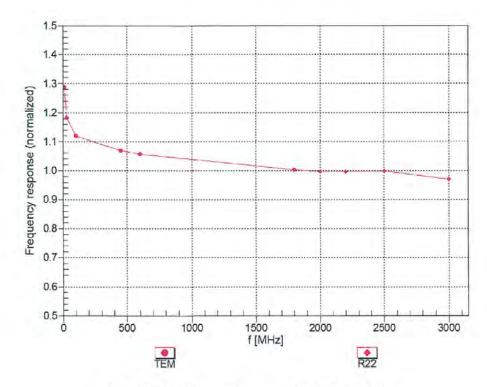


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


Certificate No: EX3-3916_Apr17

Page 7 of 38



Receiving Pattern (\$\phi\$), \$\partial = 0°

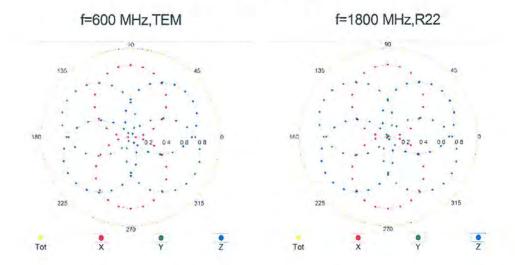


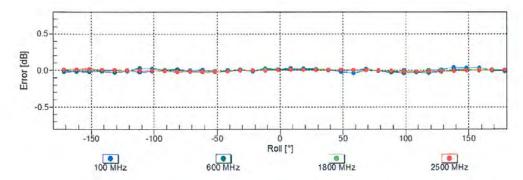


Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)



Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

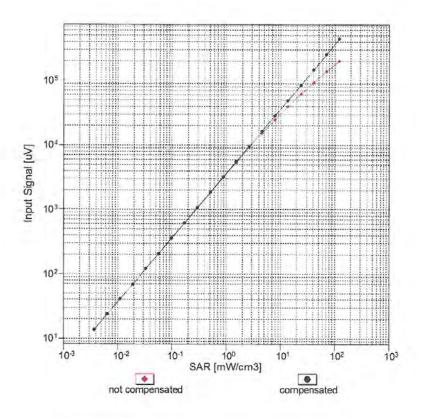

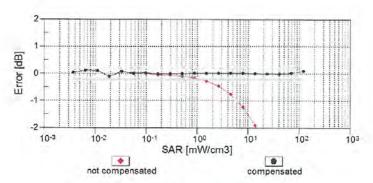


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3916_Apr17


Page 9 of 38



Conversion Factor Assessment

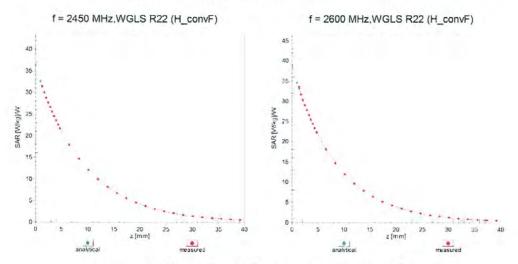

Deviation from Isotropy in Liquid

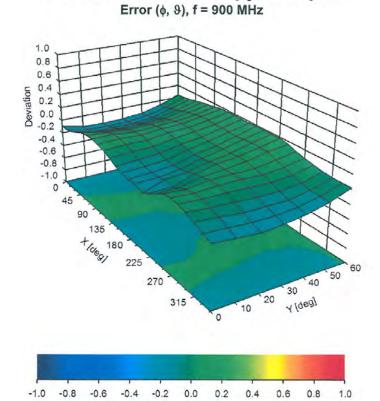

Certificate No: EX3-3916_Apr17

Page 10 of 38

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

EX3DV4- SN:3916 April 28, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	88.5
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:3916 April 28, 2017

Appendix: Modulation	Calibration	Parameters
----------------------	-------------	------------

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	130.6	± 3.3 %
		Y	0.00	0.00	1.00		140.9	
10010	CARVIELE	Z	0.00	0.00	1.00		143.1	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	5.40	74.40	15.48	10.00	20.0	± 9.6 %
		Y	3,36	68.51	12.46		20.0	
		Z	4.20	71.28	13.93		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	1.39	72.56	18.46	0.00	150.0	± 9.6 %
		Y	1.02	66.74	15.00		150.0	
10012-	IEEE 903 445 MIGE 2 4 CH / POOR 4	Z	1,11	68.51	16.07		150.0	
CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.30	65.68	16.72	0.41	150.0	± 9.6 %
		Y	1.20	63.68	14.99		150.0	
10013-	IEEE 802.11g WiFi 2.4 GHz (DSSS-	X	1.23	64.45	15.62	1.40	150.0	1000
CAB	OFDM, 6 Mbps)	-	5.08	66.80	17.32	1.46	150.0	± 9.6 %
		Z	4.90	66.47	16.86		150.0	
10021-	GSM-FDD (TDMA, GMSK)	X	4.96 100.00	66.68	17.06	0.20	150.0	4000
DAC	SSIIII DD (TDIVIA, GIVIGIA)	Y	15.07	116.88 88.60	29.83	9,39	50.0	± 9.6 %
		Z	44.37	104.29	21.23		50.0	_
10023-	GPRS-FDD (TDMA, GMSK, TN 0)	X	87.38	114.98	26.18	0.57	50.0	1000
DAC	GINGT DD (IDWA, GWSK, IN V)	Y	12.33	85.78	29.44	9.57	50.0	± 9.6 %
		Z	30.28	98.95	20.38	_	50.0	-
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	114.00	27.43	6.56	60.0	± 9.6 %
		Y	35.45	98.44	22.46		60.0	-
		Z	100.00	112.50	26.49		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	×	16,46	107.48	41.67	12.57	50.0	± 9.6 %
		Υ	5.83	76,12	27.77		50.0	
		Z	11.71	97.36	37.66		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	×	20.12	106.82	37.09	9.56	60.0	± 9.6 %
		Y	10.35	90.91	31.04		60.0	
40007	ODDO FOR (TOUR SHOW SHEET)	Z	14.89	100.16	34.77		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	113.47	26.41	4.80	80.0	± 9.6 %
		Y	100.00	109.17	24.02		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	111.75	25.37 26.14	3.55	100.0	± 9.6 %
74.19		Y	100.00	109.29	23.43		100.0	
		Z	100.00	112.31	24.94		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	11.66	94.01	31.60	7.80	80.0	± 9.6 %
		Y	6.89	82.39	26.76		80.0	
		Z	8.83	88.26	29.38		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Х	100.00	112.67	26.36	5.30	70.0	± 9.6 %
		Y	25.22	93.73	20.46		70.0	
1070		Z	100.00	110.83	25.25		70.0	20000
10031- CAA	IEEE 802,15.1 Bluetooth (GFSK, DH3)	Х	100.00	117.35	26.02	1.88	100.0	± 9.6 %
		Y	100.00	108.73	21.97		100.0	
		Z	100.00	112.96	23.91		100.0	

EX3DV4- SN:3916 April 28, 2017

10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	127.41	29.14	1.17	100.0	±9.6 %
		Y	100.00	113,66	23.17		100.0	
		Z	100.00	119.44	25.65		100.0	
10033- CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	30.83	108.03	29.86	5.30	70.0	±9.6 %
		Y	6.22	81.25	20.41		70.0	
		Z	11.41	91.07	24.18		70.0	
10034-	IEEE 802:15.1 Bluetooth (PI/4-DQPSK,	X	8.49	91.86	24.29	1.88	100,0	±9.6 %
CAA	DH3)	Y	2.63	73.41	16.51	1.00	100.0	20.0 %
_		2	4.00	79.65	19.30	_	100.0	
10035-	IEEE 802.15.1 Bluetooth (PI/4-DQPSK,	X	4.68	84.68	21.92	1.17	100.0	± 9.6 %
CAA	DH5)	100	200	GBOF		1,11	177.107	1 3.0 76
_		Y	1.95	71.00	15.44		100.0	
10000	JEEE DOO LE 4 DIVINI - III /O DOOK DILIA	Z	2.67	75.64	17.71	- 00	100.0	. 0.0.0/
10036- CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Х	48.12	115.52	31.89	5.30	70.0	± 9.6 %
		Υ	7.19	83.61	21.30		70.0	
V222 1		Z	14.49	94.97	25.45		70.0	
10037- CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	8.13	91.27	24.06	1.88	100.0	± 9.6 %
		Υ	2,51	72.89	16.27		100.0	
		Z	3.79	78.98	19.02		100.0	
10038- CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	4.88	85.63	22.34	1.17	100.0	±9.6%
		Y	1.97	71.31	15.67		100.0	
		Z	2.72	76.12	17.99		100.0	
10039- CAB	CDMA2000 (1xRTT, RC1)	X	3.20	79.92	20.27	0.00	150.0	±9.6 %
		Y	1.86	71.85	15.95		150.0	
		Z	2.22	74.51	17.31		150.0	
10042- CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4- DQPSK, Halfrate)	X	100.00	112.75	27.08	7.78	50.0	± 9.6 %
		Y	13.61	86.40	19.20		50.0	
		Z	100.00	111.31	26.19		50.0	
10044- CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	Х	0.00	109.56	1.09	0.00	150.0	± 9.6 %
		Y	0.00	93.13	1.30		150.0	
		Z	0.00	96.67	0.00		150.0	
10048- CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	14.73	88.75	24.00	13.80	25.0	± 9.6 %
2.4.	5,61,21	Y	7.88	77.40	19.07		25.0	
		Z	10.99	83.14	21.59		25.0	
10049- CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	21.98	95.15	24.61	10.79	40.0	± 9.6 %
		Y	8.69	80.36	18.87		40.0	
		Ż	13.76	87.53	21.76	7	40.0	I FI TO
10056- CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	17.56	94.57	26.40	9.03	50.0	± 9.6 %
5.07		Y	9.09	82.60	21.34		50.0	
		Z	12.86	88.73	23.91		50.0	
10058-	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	8.17	86.70	28.21	6.55	100.0	± 9.6 %
DAC	ESSET SS (TOWN, OF OR, TR 0-1-2-0)	1	5.30		30.00	0.00	70.1	2 0.0 76
		Y		77.65	24.18		100.0	
10059-	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2	X	6.38 1.43	81.83 67.70	26.19 17.69	0.61	100.0	±9.6 %
CAB	Mbps)	37	105	CA 70	45.40		440.0	
		Y	1.25	64.76	15.49		110.0	
10000	IEEE one say wife o s out more an	Z	1.31	65.89	16.31	4.00	110.0	1000
10060- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	×	100.00	135.81	35.33	1.30	110.0	±9.6 %
	10.	Y	4.65	88.20	22.20		110.0	
		Z	56.12	124.68	32.11		110.0	

EX3DV4- SN:3916 April 28, 2017

10061- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	11.00	100.50	28.70	2.04	110.0	± 9.6 %
7 7 7		Y	2.79	76.85	19.94		110.0	
		Z	4.37	84.57	23.16	1	110.0	-
10062- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.89	66.84	16.79	0.49	100.0	± 9.6 %
		Y	4.71	66.52	16.38	1	100.0	-
0.0		Z	4.75	66.69	16.53		100.0	+
10063- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.91	66.95	16.90	0.72	100.0	± 9.6 %
	1 2 2	Y	4.73	66,60	16.45		100.0	
		Z	4.77	66,79	16.63		100.0	
10064- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	Х	5.25	67,27	17,14	0.86	100.0	± 9.6 %
		Y	5.02	66.86	16.67		100.0	
		Z	5.08	67.07	16.86		100.0	-
10065- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	Х	5,12	67.20	17.24	1.21	100.0	± 9.6 %
100		Y	4.89	66.75	16.74		100.0	
		Z	4.95	66.99	16.94		100.0	
10066- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	Х	5,15	67.26	17.42	1.46	100.0	± 9.6 %
		Y	4.91	66.76	16.88		100.0	-
		Z	4.98	67.02	17.11		100.0	
10067- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	Х	5.43	67.28	17.79	2.04	100.0	± 9.6 %
		Y	5.19	66.87	17.27		100.0	
		Z	5.26	67.12	17.50		100.0	
10068- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.53	67.56	18.10	2.55	100.0	± 9.6 %
		Y	5.26	66.98	17.49		100.0	
177		Z	5.34	67.30	17.78		100.0	
10069- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	Х	5.60	67.43	18.24	2.67	100.0	± 9.6 %
		Y	5.34	66.96	17.67		100.0	-
		Z	5.42	67.26	17.95		100.0	
10071- CAB	JEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	х	5.19	66.92	17.63	1.99	100.0	± 9.6 %
		Y	5.00	66.55	17.12		100.0	
		Z	5.06	66.79	17.36		100.0	
10072- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	Х	5.21	67.39	17.89	2.30	100.0	± 9.6 %
7 . 7 . 1		Y	4.99	66.88	17.32		100.0	
J 100 100 10		Z	5.06	67.18	17.58		100.0	
10073- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	5.29	67.58	18.22	2.83	100.0	± 9.6 %
		Y	5.06	67.03	17.61		100.0	
		Z	5.14	67.37	17.91		100.0	
10074 CAB	IEEE 802,11g WiFi 2,4 GHz (DSSS/OFDM, 24 Mbps)	X	5.28	67.53	18.41	3.30	100.0	±9.6 %
		Y	5.05	66.95	17.75		100.0	
		Z	5.13	67.31	18.07		100.0	
10075- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	х	5.38	67.89	18.83	3.82	90.0	± 9.6 %
		Y	5.11	67.13	18.07		90.0	
-		Z	5,21	67.56	18.44		90.0	
10076- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	Х	5.35	67.56	18.88	4.15	90.0	±9.6 %
1 1		Y	5.12	66.92	18.16		90.0	
		Z	5.21	67.33	18.53		90.0	
10077- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	5.37	67.61	18.97	4.30	90.0	± 9.6 %
AB								
OND		Y	5.14	66.98	18.26		90.0	

Certificate No: EX3-3916_Apr17

Page 14 of 38

EX3DV4- SN:3916 April 28, 2017

10081-	CDMA2000 (1xRTT, RC3)	X	1,42	73.10	17.37	0.00	150.0	±9.6 %
CAB	M.C. W. C. S. C. S			1 1 1 1 1 1		-473	100	100
		Y	0.87	65.94	12.88		150.0	
VACCE TO SERVICE OF SE		Z	0.99	67.83	14.08		150.0	
10082- CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4- DQPSK, Fullrate)	Х	1.22	60.69	6.08	4.77	80.0	± 9.6 %
		Υ	0.89	59.21	4.75		80.0	
-		Z	1.03	60.00	5.44		80.0	
10090- DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	114.04	27.47	6.56	60.0	± 9.6 %
		Υ	33.48	97.78	22.31		60.0	
		Z	100.00	112.53	26.52		60.0	
10097- CAB	UMTS-FDD (HSDPA)	×	2.06	69.48	17.21	0.00	150.0	± 9.6 %
		Y	1.83	67.32	15.58		150.0	
10000		Z	1.90	68.12	16.11		150.0	
10098- CAB	UMTS-FDD (HSUPA, Subtest 2)	X	2.02	69.49	17.20	0.00	150.0	± 9.6 %
		Y	1.79	67.26	15.54		150.0	
1444		Z	1.86	68.08	16.09		150.0	
10099- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	20.14	106.79	37.07	9.56	60.0	± 9.6 %
		Y	10.39	90.94	31.04		60.0	
		Z	14.93	100.16	34.76	4.5.17	60.0	
10100- CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	3.69	72.79	18.00	0.00	150.0	± 9.6 %
		Y	3.15	70.15	16.61		150.0	
		Z	3.30	71.04	17.06		150.0	
10101- CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.53	68.63	16.69	0.00	150.0	± 9.6 %
		Υ	3.27	67.44	15.88		150.0	1.
		Z	3,34	67.86	16.14		150.0	
10102- CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.61	68.47	16.73	0.00	150.0	± 9.6 %
		Y	3.38	67.42	15.99	1	150.0	
		Z	3,44	67.79	16,22		150.0	1000
10103- CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	×	8.10	78.03	21.19	3.98	65.0	± 9.6 %
		Υ	6.29	74.08	19.30		65.0	1
		Z	7.08	76.12	20.29		65.0	
10104- CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	7.87	76.20	21.37	3.98	65.0	± 9.6 %
		Υ	6.69	73.55	19.92		65.0	
		Z	7.17	74.86	20.64		65.0	
10105- CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	7.57	75.42	21.36	3.98	65.0	± 9.6 %
		Y	6.12	71.80	19.44		65.0	
		Z	6.76	73.66	20.43		65.0	
10108- CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	3.24	71.87	17.81	0.00	150.0	± 9.6 %
		Y	2.76	69.35	16.42		150.0	1
		Z	2.89	70.20	16.88		150.0	11.7
10109- CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	3,20	68.51	16,70	0.00	150.0	± 9.6 %
		Y	2.93	67.27	15.79		150.0	
		Z	3.00	67.70	16.08		150.0	
10110- CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.66	70.93	17.58	0.00	150.0	± 9.6 %
		Y	2.24	68.38	16.01		150.0	
		Z	2.36	69.27	16.54		150.0	il to
10111- CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	×	2.93	69.33	17.18	0.00	150.0	± 9.6 %
		Y	2.65	68.05	16.11		150.0	
		Z	2.72	68.50	16.44		150.0	-

Certificate No: EX3-3916_Apr17

Page 15 of 38

EX3DV4- SN:3916 April 28, 2017

10112- CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	3.31	68.34	16.68	0.00	150.0	± 9.6 %
		Y	3.06	67.27	15.86		150.0	
		Z	3.12	67.65	16.12		150.0	
10113- CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	3.08	69.28	17.21	0.00	150.0	± 9.6 %
		Y	2.81	68.19	16.25		150.0	
	Except 17 17 17 17 17 17 17 17 17 17 17 17 17	Z	2.87	68.58	16.54		150.0	
10114- CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.29	67.38	16.67	0.00	150.0	± 9.6 %
		Y	5.17	67.15	16.40		150.0	
		Z	5.18	67.24	16.47		150.0	
10115- CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.67	67.67	16.81	0.00	150.0	± 9.6 %
17.		Y	5.48	67.35	16.51		150.0	
		Z	5.52	67.50	16.61		150.0	
10116- CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.42	67.64	16.72	0.00	150.0	±9.6 %
		Y	5.27	67.37	16.44		150.0	
		Z	5.30	67.48	16.52		150.0	
10117- CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	5.30	67.41	16.70	0.00	150.0	± 9.6 %
		Y	5.14	67.05	16.37		150.0	
		Z	5.17	67.18	16.46		150.0	
10118- CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16- QAM)	X	5.73	67.77	16.87	0.00	150.0	± 9.6 %
		Y	5.56	67.54	16.61		150.0	
		Z	5.59	67.66	16.69		150.0	-
10119- CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64- QAM)	Х	5.39	67.59	16.71	0.00	150.0	± 9.6 %
		Y	5.24	67.30	16.41		150.0	
		Z	5.27	67.41	16.49		150.0	
10140- CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.67	68.47	16.65	0.00	150.0	± 9.6 %
		Y	3.42	67.42	15.91		150.0	
		Z	3.48	67.79	16.14		150.0	
10141- CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.78	68.45	16.76	0.00	150.0	± 9.6 %
		Y	3,54	67.53	16.08		150.0	
		Z	3.60	67.85	16.29		150.0	
10142- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	2.46	71.17	17.59	0.00	150.0	± 9.6 %
		Y	2.02	68.35	15.73		150.0	
		Z	2.14	69.35	16.35		150.0	
10143- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	Х	2.88	70.45	17.34	0.00	150.0	± 9.6 %
		Υ	2.52	68.81	15.92		150.0	
		Z	2.62	69.41	16.35		150.0	
10144- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	Х	2,64	68,20	15.82	0.00	150.0	± 9.6 %
		Y	2.30	66.57	14.33		150.0	+
		Z	2.39	67,17	14.80		150.0	
10145- CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	1.97	71,13	16.35	0.00	150.0	±9.6 %
	2245	Υ	1.33	65.79	12.54		150.0	
		Z	1.47	67.23	13.55		150.0	
10146- CAD	LTE-FDD (SC-FDMA, 100% RB, 1,4 MHz, 16-QAM)	Х	3.30	72.92	16.29	0.00	150.0	± 9.6 %
		Y	2.11	66.90	12.19		150.0	
		Z	2.41	68.63	13.33		150.0	
10147- CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	4.27	76.67	17.99	0.00	150.0	± 9.6 %
		Y	2.52	69.08	13.36		150.0	
		Z	2.98	71.43	14.72		150.0	

Certificate No: EX3-3916_Apr17

Page 16 of 38

EX3DV4- \$N:3916 April 28, 2017

10149- CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	3.21	68.57	16.74	0.00	150.0	±9.6 %
		Y	2.94	67.33	15.84		150.0	
		Z	3.01	67.76	16.13		150.0	
10150- CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	Х	3.32	68.39	16.72	0.00	150.0	± 9.6 %
		Y	3.07	67.32	15.90		150.0	
		Z	3.13	67.70	16.16		150.0	
10151- CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	8.58	80.32	22.20	3.98	65.0	± 9.6 %
Ono	QF OI()	Y	6.75	76.58	20.37		65.0	
		Ż	7.57	78.60	21.35		65.0	
10152- CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	7.49	76.41	21.27	3.98	65.0	± 9.6 %
		Y	6.19	73.34	19.54		65.0	
		Z	6.71	74.84	20.38		65.0	
10153- CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	Х	7.83	77.12	21.92	3.98	65.0	± 9.6 %
-		Y	6.58	74.30	20.32		65.0	
		Z	7.09	75.70	21.10		65.0	
10154- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.75	71.53	17,93	0.00	150.0	± 9.6 %
		Y	2.30	68.84	16.30		150.0	
		Z	2.41	69.74	16.82		150.0	
10155- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	Х	2.93	69.33	17.18	0.00	150.0	± 9.6 %
		Y	2.65	68.05	16.13		150.0	
		Z	2.72	68.51	16.45		150.0	
10156- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	Х	2.38	71.86	17.81	0.00	150.0	± 9.6 %
-		Y	1.87	68.49	15.59		150.0	
		Z	2.01	69.65	16.31		150.0	
10157- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	2.54	69.29	16.24	0.00	150.0	± 9.6 %
		Y	2.14	67.17	14.43		150.0	
		Z	2,25	67.94	15.00		150.0	
10158- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	×	3.08	69.34	17.25	0.00	150.0	± 9.6 %
		Y	2.81	68.26	16.30		150.0	
		Z	2.88	68.64	16.58		150.0	
10159- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	2.67	69.80	16.55	0.00	150.0	± 9.6 %
		Y	2.26	67.69	14.75		150.0	
		Z	2.37	68,45	15.30		150.0	
10160- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	3.09	70.07	17.29	0.00	150.0	± 9.6 %
		Y	2.76	68.39	16.19		150.0	
		Z	2.85	68.98	16.55	Part I	150.0	1 7 8 7
10161- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	3.21	68.30	16.69	0.00	150.0	± 9.6 %
		Y	2.96	67.26	15.84		150.0	1
		Z	3.03	67.63	16.10		150.0	11, 15, 11
10162- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	Х	3.31	68.29	16.72	0.00	150.0	± 9.6 %
		Υ	3.07	67.39	15.94		150.0	
		Z	3.13	67.73	16.19		150.0	1907.
10166- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.86	69.75	19.34	3.01	150.0	± 9.6 %
		Y	3.63	69.36	18.91		150.0	11-11-11
12.33		Z	3.69	69.67	19.13		150.0	1277
10167- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	Х	4.87	72.82	19.91	3.01	150.0	± 9.6 %
		Y	4.54	72.54	19.49		150.0	
		Z	4.65	72.92	19.75		150.0	

EX3DV4- SN:3916 April 28, 2017

10168- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	5.32	74.71	21.04	3.01	150.0	± 9.6 %
		Y	5.10	75.07	20.94		150.0	
		Z	5.16	75.15	21.04		150.0	
10169- CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	3.46	71,17	19.97	3.01	150.0	± 9.6 %
		Y	3.07	69.39	18.92		150.0	
		Z	3.16	70.01	19.31		150.0	
10170- CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	5.14	78.14	22.55	3.01	150.0	± 9.6 %
		Y	4.51	76.58	21.73		150.0	
		Z	4.64	77.14	22.03		150.0	
10171- AAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	4.13	73.51	19.71	3.01	150.0	± 9.6 %
		Y	3.54	71.50	18.56		150.0	
		Z	3.71	72.41	19.09		150.0	
10172- CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	21.90	104.86	32.02	6.02	65.0	± 9.6 %
	11.44	Y	7.10	84.70	25.06		65.0	
		Z	12.72	95.84	29.16		65.0	
10173- CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	26.51	103.09	29.60	6.02	65.0	± 9.6 %
		Υ	12.97	91.55	25.49		65.0	
		Z	20.84	99.89	28.40		65.0	
10174- CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	19.01	96.03	27.00	6.02	65.0	± 9.6 %
	E RELEGION OF THE PROPERTY OF	Y	8.59	84.00	22.54		65.0	
		Z	14.03	92.06	25.51		65.0	1
10175- CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	3.41	70.80	19.70	3.01	150.0	± 9.6 %
	1.24.	Y	3.03	69.03	18.64		150.0	
		Z	3.11	69.68	19.06		150.0	
10176- CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	Х	5.15	78.16	22.56	3.01	150.0	± 9.6 %
		Y	4.52	76.61	21.74		150.0	
		Z	4.65	77.16	22.05		150.0	
10177- CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	×	3.44	70.99	19.82	3.01	150.0	± 9.6 %
-		Y	3.06	69.21	18.76		150.0	
		Z	3.14	69.85	19.16		150.0	
10178- CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	5.06	77.81	22.39	3.01	150.0	± 9.6 %
11/2		Υ	4.46	76.29	21.59		150.0	
		Z	4.59	76.88	21.90		150.0	14
10179- CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	4.58	75.64	20.97	3.01	150.0	± 9.6 %
-		Y	3.96	73.80	19.96		150.0	
		Z	4.13	74.61	20.41		150.0	
10180- CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	×	4.11	73.39	19.64	3.01	150.0	± 9.6 %
		Y	3.53	71.40	18.50		150.0	
		Z	3.69	72.32	19.03		150.0	
10181- CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	×	3.44	70.97	19.81	3.01	150.0	± 9.6 %
	1: 1 =	Υ	3.05	69.19	18.75		150.0	
1		Z	3.14	69.83	19.15		150.0	
10182- CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	×	5.05	77.79	22,38	3.01	150.0	± 9.6 %
		Υ	4.45	76.27	21.57		150.0	1
		Z	4.58	76.85	21.89		150.0	
10183- AAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	4.11	73.36	19.63	3.01	150.0	± 9.6 %
	1 - 2 -	Y	3.52	71.37	18.49		150.0	
		Z	3.69	72.29	19.02	H	150.0	



EX3DV4- SN:3916 April 28, 2017

10184- CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	3.45	71.01	19.83	3.01	150.0	±9.6 %
		Y	3.06	69.24	18.77		150.0	
		Z	3.15	69.87	19.17		150.0	
10185- CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	5.08	77.87	22.42	3.01	150.0	±9.6 %
		Y	4.47	76.35	21.62		150.0	
	termination of the second seco	Z	4.60	76.93	21.93		150.0	
10186-	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-	X	4.13	73.44	19.67	3.01	150.0	±9.6 %
AAD	QAM)	Y	3.54	71.45	18.53	1515.0	150.0	8,010,70
		Z	3.71	72.37	19.05		150.0	
10187- CAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	3.46	71.05	19.88	3.01	150.0	± 9.6 %
0.10	ar org	Y	3.07	69.29	18.83		150.0	
		Z	3.16	69.92	19.23		150.0	
10188- CAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	5.28	78.69	22.85	3.01	150.0	± 9.6 %
		Y	4.66	77.23	22.08		150.0	
		z	4.78	77.72	22.35		150.0	
10189- AAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	4.24	73.95	19.97	3.01	150.0	± 9.6 %
		Y	3.63	71.95	18.84		150.0	
		Z	3.80	72.86	19.35		150.0	
10193- CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.73	66.82	16.49	0.00	150.0	±9.6 %
		Y	4.57	66.56	16.12		150.0	
		Z	4.60	66.68	16.23		150.0	
10194- CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.94	67.20	16,60	0.00	150.0	±9.6 %
		Y	4.75	66.89	16.24		150.0	
		Z	4.78	67.02	16.35		150.0	
10195- CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.97	67.20	16.60	0.00	150.0	±9.6 %
		Y	4.79	66.92	16.26		150.0	
		Z	4.82	67.04	16.36		150.0	
10196- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.75	66.93	16.53	0.00	150.0	± 9.6 %
		Y	4.58	66.63	16.15		150.0	
		Z	4.61	66.76	16.26		150.0	
10197- CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16- QAM)	X	4.95	67.22	16.61	0.00	150.0	± 9.6 %
		Y	4.76	66.91	16.26		150.0	
		Z	4.80	67.04	16.36		150.0	
10198- CAB	IEEE 802 11n (HT Mixed, 65 Mbps, 64- QAM)	Х	4.98	67.22	16.61	0.00	150.0	± 9.6 %
		Y	4.79	66.93	16.27		150.0	
		Z	4.83	67.06	16.37		150.0	
10219- CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.70	66.95	16.50	0.00	150.0	± 9.6 %
		Y	4.53	66.64	16.11		150.0	
		Z	4.56	66.77	16.22		150.0	
10220- CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.95	67.22	16.61	0.00	150.0	± 9.6 %
		Y	4.76	66,88	16.25	-	150.0	
		Z	4.79	67.02	16.35		150.0	
10221- CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	Х	4.98	67.15	16.60	0.00	150.0	± 9.6 %
		Y	4.80	66.86	16.26		150.0	
		Z	4.83	66.98	16.36		150.0	
10222- CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	Х	5.28	67.44	16.71	0.00	150.0	± 9.6 %
		_		-	100000		-	
		Y	5.12	67.06	16.36		150.0	

EX3DV4- SN:3916 April 28, 2017

10223- CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16- QAM)	×	5.66	67.74	16.87	0.00	150.0	± 9.6 %
4.5.		Y	5.42	67.24	16.48		150.0	
		Z	5.46	67.37	16.56		150.0	
10224- CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64- QAM)	X	5.34	67.56	16.69	0.00	150.0	± 9.6 %
		Y	5.16	67.17	16.35		150.0	
		Z	5.19	67.30	16.44		150.0	
10225- CAB	UMTS-FDD (HSPA+)	X	3.03	66.71	16.14	0.00	150.0	± 9.6 %
		Y	2.84	66.03	15.33		150.0	
		Z	2.89	66.31	15.58		150.0	
10226- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	28.53	104.52	30,11	6.02	65.0	± 9.6 %
		Y	13.92	92.85	26.00		65.0	
	A 5. 5. 1 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Z	22.56	101.40	28.94		65.0	
10227- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	21.42	98.09	27.69	6.02	65.0	± 9.6 %
		Y	12.22	89.42	24.34		65.0	
-		Z	18.26	96.29	26.84		65.0	
10228- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	24.07	107.08	32.76	6.02	65.0	± 9.6 %
		Y	9.87	90.91	27.23		65.0	
		Z	15.77	100.13	30.56		65.0	
10229- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	×	26.61	103.14	29.63	6.02	65.0	± 9.6 %
		Y	13.07	91.66	25.54		65.0	
		Z	20.97	99.99	28.44		65.0	
10230- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM)	Х	20.22	97.01	27.30	6.02	65.0	± 9.6 %
		Y	11.52	88.39	23.93		65.0	
		Z	17.12	95.13	26.41		65.0	
10231- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	Х	22.70	105.82	32.31	6.02	65.0	± 9.6 %
		Y	9.41	89.94	26.83		65.0	
		Z	14.92	98.97	30.12		65.0	
10232- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM)	Х	26.60	103.14	29.63	6.02	65.0	± 9.6 %
		Y	13.05	91.64	25.53		65.0	
		Z	20.95	99.98	28.44		65.0	
10233- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	х	20.22	97.02	27.30	6.02	65.0	± 9.6 %
		Y	11.50	88.37	23.92		65.0	
		Z	17.10	95.12	26.41		65.0	
10234- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	×	21.36	104.45	31.80	6.02	65.0	± 9.6 %
		Y	9.01	89.00	26.40		65.0	
		Z	14.16	97.80	29.64		65.0	
10235- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	26.67	103.20	29.64	6.02	65.0	± 9.6 %
		Y	13.06	91.67	25.54		65.0	
		Z	20.99	100.03	28.45		65.0	
10236- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	×	20.43	97.18	27.34	6.02	65.0	± 9.6 %
		Υ	11.60	88.48	23.96		65.0	
99.1		Z	17.28	95.27	26.45		65.0	
10237- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	22.89	106.01	32.37	6.02	65.0	± 9.6 %
YY		Y	9.43	90.00	26.85		65.0	
		Z	15.00	99.10	30.16		65.0	
10238- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	26.60	103.15	29.62	6.02	65.0	± 9.6 %
		Y	13.02	91.62	25.52		65.0	
		Z	20.92	99.96	28.43		65.0	



EX3DV4- SN:3916 April 28, 2017

10239- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	20.21	97.03	27.30	6.02	65.0	± 9.6 %
		Y	11.47	88.35	23.92		65.0	
		Z	17.07	95.11	26.40		65.0	
10240- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	Х	22.80	105.94	32.35	6.02	65.0	± 9.6 %
	3.3.7	Y	9.40	89.95	26.83		65.0	
		Z	14.95	99.04	30.14		65.0	
10241- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	10,13	83.23	26.16	6.98	65.0	± 9.6 %
Cir C C	10 @ 111/	Y	8.54	80.58	24.55		65.0	
		Ż	9.43	82.68	25.67		65.0	
10242- CAA	LTE-TDD (SC-FDMA, 50% RB, 1,4 MHz, 64-QAM)	Х	9.45	81.70	25.46	6.98	65.0	± 9.6 %
	7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Y	7.38	77.61	23.26		65.0	
		Z	8.48	80.46	24.70		65.0	
10243- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	Х	7.75	79.17	25.33	6.98	65.0	± 9.6 %
-		Y	6.05	74.55	22.79		65.0	
		Z	6.84	77.27	24.27		65.0	
10244- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	8.21	79.26	20.66	3.98	65.0	± 9.6 %
		Y	5.73	73.50	17.20		65.0	-
		Z	6.67	75.97	18.58		65.0	
10245- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	×	8.11	78.79	20.44	3.98	65.0	± 9.6 %
	21.4.114	Y	5.66	73.09	16.98	-	65.0	
		Z	6.57	75.49	18.34		65.0	
10246- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	9.12	84.21	22.58	3.98	65.0	± 9.6 %
		Y	5.24	75.32	18.20		65.0	
		Z	6.62	79.07	20.02		65.0	
10247- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	7.04	77.55	20.71	3.98	65.0	± 9.6 %
		Y	5.23	72.78	17.82		65.0	
		Z	5.91	74.83	18.99		65.0	
10248- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	7.03	76.99	20.47	3.98	65.0	± 9.6 %
		Y	5.26	72.41	17.65		65.0	
		Z	5.92	74.37	18.79		65.0	
10249- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	9.95	85.73	23.70	3.98	65.0	± 9.6 %
		Y	6.24	78.09	20.08		65.0	
1.797-4	THE STATE OF THE S	Z	7.75	81.74	21.77		65.0	111
10250- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	7.76	79.02	22.45	3.98	65.0	± 9.6 %
		Y	6.20	75.31	20.36		65.0	
		Z	6.84	77.09	21.32		65.0	J
10251- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	×	7.32	76.73	21.24	3.98	65.0	± 9.6 %
		Y	5.95	73.46	19.26		65.0	
14		Z	6.52	75.10	20.19		65.0	
10252- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	9.39	83.89	23.62	3.98	65.0	± 9.6 %
		Y	6.73	78.51	21.09		65.0	
		Z	7.91	81.35	22.41		65.0	
10253- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	7.24	75.68	21.03	3.98	65.0	± 9.6 %
		Y	6.06	72.85	19.34		65.0	
		Z	6.55	74.26	20.16		65.0	
	LITE TOD (OC COMA FOR OR AF MUL	X	7.60	76.42	21.65	3.98	65.0	± 9.6 %
10254- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)		1,04	3.00	1000		00.0	- 515.0

EX3DV4- SN:3916 April 28, 2017

10255- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	8.18	79.74	22.25	3.98	65.0	± 9.6 %
		Y	6.50	76.12	20.40		65.0	
		Z	7.25	78.07	21.38	-	65.0	
10256- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	7.23	77.05	19.00	3.98	65.0	± 9.6 %
		Y	4.57	70.10	14.77		65.0	
7		Z	5.41	72.60	16.26		65.0	
10257- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	7,10	76.40	18.67	3.98	65.0	± 9.6 %
	mile, or will	Y	4.52	69.62	14,47		65.0	
		ż	5.30	71.99	15.92		65.0	1
10258- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	7.84	81.51	21.04	3.98	65.0	± 9.6 %
		Y	4.18	71.75	15.96		65.0	
		Z	5.25	75.21	17.80		65.0	100
10259- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	7.31	77.99	21.29	3.98	65.0	± 9.6 %
1 7	12 3 7	Y	5.61	73.71	18.73		65.0	
		Z	6.28	75.65	19.83		65.0	
10260-	LTE-TDD (SC-FDMA, 100% RB, 3 MHz,	X	7.34	77.72	21.20	3.98	65.0	± 9.6 %
CAB	64-QAM)	Y		1.000	27.74	0.50	11 (E-12)	1 3,0 %
			5.66	73.54	18.68		65.0	
10261-	LTE TOD /CC FDMA 4000 DR 6111	Z	6.31	75.42	19.74	0.00	65.0	1 2 2 2 2
CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	9.22	84.15	23.43	3.98	65.0	± 9.6 %
		Y	6.20	77.65	20.28		65.0	-
40000	LTE TOD ING EDITAL VARIABLE TO THE	Z	7.46	80.84	21.79		65.0	
10262- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	×	7.76	78.98	22.41	3.98	65.0	± 9.6 %
		Υ	6.19	75.26	20.32		65.0	
		Z	6.83	77.04	21.28		65.0	
10263- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.32	76.73	21.24	3.98	65.0	± 9.6 %
		Y	5.95	73.45	19.26		65.0	
		Z	6.52	75.08	20.19		65.0	
10264- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	9,31	83.73	23.55	3.98	65.0	± 9.6 %
		Y	6.68	78.35	21.00		65.0	
		Z	7.85	81.18	22.32		65.0	
10265- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	7.49	76.41	21.27	3.98	65.0	±9.6 %
		Y	6.18	73.34	19.54		65.0	
		Z	6.71	74.84	20.38		65.0	
10266- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	7.83	77.11	21.91	3.98	65.0	± 9.6 %
		Υ	6.57	74.29	20.31		65.0	
		Z	7.09	75.69	21.09		65.0	
10267- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	8,56	80.28	22.18	3.98	65.0	± 9.6 %
		Υ	6.74	76.55	20.35		65.0	
		Z	7.56	78.56	21.34		65.0	1
10268- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	7.94	75.82	21.36	3.98	65.0	± 9.6 %
		Y	6.85	73.45	20.01		65.0	
		Z	7.29	74.64	20.68		65.0	
10269- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	7.85	75.34	21.24	3.98	65.0	± 9.6 %
1 -		Y	6.83	73.11	19.93		65.0	
- I		Z	7.24	74.24	20.58		65.0	
10270- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	Х	8.03	77.32	21.16	3.98	65.0	± 9.6 %
		Y	6.75	74.68	19.78		65.0	
		Z	7.31	76.08	20.51		65.0	

EX3DV4- SN:3916 April 28, 2017

CAB Rei8 10) Y 2.81 86.81 15.20 150.0 150.0 100.75	10274-								
Y 2.61 68.31 15.20 150.0 150.0 10275-			X	2.76	67.10	16.08	0.00	150.0	± 9.6 %
10275- CAB Rei8.4 X 198 70.91 17.55 0.00 150.0 ± 9.61		1276	Y	2.61	66.31	15.20		150.0	
10275 UMTS-FDD (HSUPA, Sublest 5, 3GPP X 1.96 70.91 17.55 0.00 150.0 ± 9.6 150.0 Y 1.61 67.49 15.39 150.0 150.		-							
Y 1.61 67.49 15.39 15.00 150.0 10277- PHS (QPSK) X 3.88 65.62 11.02 9.03 50.0 ± 9.61 10278- PHS (QPSK) X 3.88 65.62 11.02 9.03 50.0 ± 9.61 10278- PHS (QPSK, BW 884M+z, Rolloff 0.5) X 8.99 81.35 20.65 9.03 50.0 ± 9.61 10278- PHS (QPSK, BW 884M+z, Rolloff 0.5) X 8.99 81.35 20.65 9.03 50.0 ± 9.61 10278- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK, BW 884M+z, Rolloff 0.38) X 9.23 81.62 20.76 9.03 50.0 ± 9.61 10279- PHS (QPSK)							0.00		± 9.6 %
10277- PHS (QPSK)	UMD	Reio.4)	V	1.01	67.40	15.00	_	450.0	
10277- PHS (QPSK)	_					7.07.00			
CAA Y 2.90 63.08 8.79 50.0 10278- 10278- CAA PHS (QPSK, BW 884MHz, Rolloff 0.5) X 8.99 81.35 20.65 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.5) X 8.99 81.35 20.65 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CAA PHS (QPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.65 CDMA2000, RC1, SO55, Full Rate X 2.60 75.15 18.14 0.00 150.0 ±9.65 CDMA2000, RC3, SO55, Full Rate X 1.37 72.61 17.15 0.00 150.0 ±9.65 CDMA2000, RC3, SO32, Full Rate X 2.27 81.76 21.28 0.00 150.0 ±9.65 CDMA2000, RC3, SO32, Full Rate X 2.27 81.76 21.28 0.00 150.0 ±9.65 CDMA2000, RC3, SO3, Full Rate X 1.07 89.89 15.09 150.0 10293- AAB Y 1.07 89.89 15.09 150.0 10293- AAB Y 1.07 89.89 15.09 150.0 10204- AAB Y 1.07 89.89 15.09 150.0 10209- CDMA2000, RC3, SO3, Full Rate X 2.27 81.76 21.28 0.00 150.0 ±9.65 AAB Y 1.07 89.89 15.09 150.0 10209- CDMA2000, RC3, SO3, Full Rate X 2.27 81.70 21.70 20.00 150.0 ±9.65 AAB Y 1.07 89.89 15.09 150.0 10209- CDMA2000, RC3, SO3, Full Rate X 2.27 81.70 21.70 20.00 150.0 ±9.65 AAB Y 1.07 89.89 15.09 150.0 10209- CDMA2000, RC3, SO3, Full Rate X 2.29 7	10077	DUG (ODOW)					0.00		
TO278-		PHS (QPSK)	124	777	142	100,000	9.03	77.00	± 9.6 %
10278- CAA CAA PHS (QPSK, BW 984MHz, Rolloff 0.5)									
V 4.90 71.24 15.34 50.0									
TOZ79		PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	8.99	81.35	44.57	9.03	50.0	± 9.6 %
10276			Y	4.90	71.24	15.34		50.0	-
10279- PHS (OPSK, BW 884MHz, Rolloff 0.38) X 9.23 81.62 20.78 9.03 50.0 ±9.6 state 20.78 20.0 ±9.6 state 20.78 20.0 ±9.6 state 20.78 20.0 ±9.6 state 20.74 20.0 ±9.6 state 20.0			Z	6.05	74.59	17.21		50.0	
Y 5,02 71,48 15,48 50,0		PHS (QPSK, BW 884MHz, Rolloff 0.38)					9.03	50.0	± 9.6 %
10290-			Y	5.02	71.48	15.48		50.0	
10290- CDMA2000, RC1, SO65, Full Rate			_						
AAB Y 1.50 68.70 14.27 150.0	10290-	CDMA2000 RC1 SOSS Full Rate					0.00		+96%
CDMA2000, RC3, SO55, Full Rate		ODIVINZUUU, NOT, SUUU, FUII NAIE	574.54		0.3.2		0.00	1000	2 3.0 70
10291- CDMA2000, RC3, SO55, Full Rate									
AAB Y 0.86 65.73 12.75 150.0							Alba		24.4
CDMA2000, RC3, SO32, Full Rate		CDMA2000, RC3, SO55, Full Rate	(22)		T. men		0.00	- 10.00	± 9.6 %
10292- CDMA2000, RC3, SO32, Full Rate			Y	0.86		12.75		150.0	
AAB Y 1.07 69.69 15.09 150.0			Z	0.96	67.53	13.92		150.0	
Y 1.07 69.69 15.09 150.0 150.0 10293- AAB CDMA2000, RC3, SO3, Full Rate X 4.49 93.26 25.73 0.00 150.0 ± 9.6 10295- ABB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 83.06 23.96 9.03 50.0 ± 9.6 10295- AAB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 83.06 23.96 9.03 50.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 83.06 23.96 9.03 50.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 83.06 23.96 9.03 50.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 83.06 23.96 9.03 50.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 83.06 23.96 9.03 50.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 81.20 22.50 50.0 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 81.20 22.50 50.0 150.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 81.20 22.50 50.0 150.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 81.20 22.50 50.0 150.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 81.20 22.50 50.0 150.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 81.20 22.50 50.0 150.0 ± 9.6 10297- ACB CDMA2000, RC1, SO3, R		CDMA2000, RC3, SO32, Full Rate	X	2.27	81.76	21.28	0.00	150.0	± 9.6 %
10293- AAB			Y	1.07	69.69	15.09		150.0	
10293- AAB									
Y 1.61 75.74 18.15 150.0 Z 2.20 80.82 20.41 150.0 10295- AAB Y 7.26 78.49 20.99 50.0 Z 8.27 81.20 22.50 50.0 10297- AAB QPSK) Y 2.77 69.45 16.49 150.0 Z 2.90 70.30 16.95 150.0 10298- AAC QPSK) Y 1.62 67.73 14.37 150.0 Y 1.62 67.73 14.37 150.0 10299- AAC 16-QAM) Y 2.75 69.80 14.46 150.0 Y 2.75 69.80 14.46 150.0 10300- AAC 16-QAM) Y 2.78 69.41 11.67 150.0 Y 2.79 68.40 14.23 0.00 150.0 ±9.6 100.0 Y 2.79 68.40 14.23 0.00 150.0 ±9.6 100.0 Y 2.79 69.80 14.46 150.0 Y 2.75 69.80 14.46 150.0 Z 3.04 71.27 15.39 150.0 10300- AAC 64-QAM) Y 2.78 69.80 14.46 150.0 Y 2.79 69.45 16.49 150.0 Y 2.70 69.45 16.49 150.0 Y 2.70 69.45 16.49 150.0 Y 4.81 65.37 17.43 50.0 D 300-		CDMA2000, RC3, SO3, Full Rate					0.00		± 9.6 %
10295- CDMA2000, RC1, SO3, 1/8th Rate 25 fr. X 8.87 83.06 23.96 9.03 50.0 ± 9.64	7010		V	1.61	75.74	18.15		150.0	
10295- AAB			_				_		
Y 7.26 78.49 20.99 50.0 Z 8.27 81.20 22.50 50.0 AB		CDMA2000, RC1, SO3, 1/8th Rate 25 fr.					9.03		± 9.6 %
Tensor T	7010		v	7.26	78.40	20.00		50.0	
10297- AAB QPSK QPSK Y 2.77 69.45 16.49 150.0 ± 9.6 strictly 150.0 ± 9.6									
AAB QPSK) Y 2.77 69.45 16.49 150.0 10298- AAC QPSK) Y 1.62 67.73 14.37 150.0 Z 1.78 69.13 15.27 150.0 10299- AAC 16-QAM) Y 2.75 69.80 14.46 150.0 Y 2.75 69.80 14.46 150.0 Y 2.75 69.80 14.46 150.0 Z 3.04 71.27 15.39 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ± 9.6 or 0.00 AC 64-QAM) Y 2.08 65.41 11.67 150.0 Z 2.23 66.30 12.38 150.0 10301- AAA 10MHz, QPSK, PUSC) Y 4.81 65.37 17.96 4.17 50.0 ± 9.6 or 0.00 LIEEE 802.16e WiMAX (29:18, 5ms, X 5.13 65.87 17.96 4.17 50.0 ± 9.6 or 0.00 LIEEE 802.16e WiMAX (29:18, 5ms, X 5.10 66.93 18.91 50.0 LIEEE 802.16e WiMAX (29:18, 5ms, X 5.70 66.93 18.93 4.96 50.0 ± 9.6 or 0.00 Y 5.30 66.00 18.14 50.0		1 TE EDD (00 ED) 11 HOW DO 00 HU			A STATE OF THE PARTY OF THE PAR	CONTRACTOR AND ADDRESS OF THE PARTY OF THE P	0.00		
10298- LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.23 72.12 17.36 0.00 150.0 ± 9.6 s 2.23 150.0 150.0 150.0 ± 9.6 s 2.23 150.0 150.0 150.0 ± 9.6 s 2.23 150.0 150.0 150.0 ± 9.6 s 16-QAM) Y 2.75 69.80 14.46 150.0 150.0 ± 9.6 s 16-QAM 150.0 2.23 150.0 15			170	2000	16900	LANGE.	0.00	100	± 9.6 %
10298- LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.23 72.12 17.36 0.00 150.0 ± 9.6 structure 150.0 ± 9.6 st									
AAC QPSK) Y 1.62 67.73 14.37 150.0 Z 1.78 69.13 15.27 150.0 10299- AAC 16-QAM) Y 2.75 69.80 14.46 150.0 Z 3.04 71.27 15.39 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 Y 2.75 69.80 14.46 150.0 Z 3.04 71.27 15.39 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 LTE-FDD (SC-FDMA, 50% RB, 3 MHz, X 2.69 68.40 14.23 0.00 150.0 ±9.6 or x 2.23 66.30 12.38 150.0 to x 2.23 66.30 1	100								
Te-FDD (SC-FDMA, 50% RB, 3 MHz, AC 16-QAM)			11.50	2.23	72.12	17.36	0.00	150.0	± 9.6 %
Te-FDD (SC-FDMA, 50% RB, 3 MHz, AC 16-QAM)		P. C.		1.62	67.73	14.37		150.0	
10299- AAC 16-QAM)	Townsel	Large grant ways to a Table 1	Z	1.78	69.13	15.27		150.0	
Y 2.75 69.80 14.46 150.0 Z 3.04 71.27 15.39 150.0 10300- AAC 64-QAM) Y 2.08 65.41 11.67 150.0 Z 2.23 66.30 12.38 150.0 V 2.08 65.41 11.67 150.0 Z 2.23 66.30 12.38 150.0 IEEE 802.16e WiMAX (29:18, 5ms, X 5.13 65.87 17.96 4.17 50.0 ±9.6 (20.16) Y 4.81 65.37 17.43 50.0 IEEE 802.16e WiMAX (29:18, 5ms, X 5.16 66.33 18.01 50.0 IBEE 802.16e WiMAX (29:18, 5ms, X 5.70 66.93 18.93 4.96 50.0 ±9.6 (20.16) IBEE 802.16e WiMAX (29:18, 5ms, X 5.70 66.93 18.93 4.96 50.0 ±9.6 (20.16) IBEE 802.16e WiMAX (29:18, 5ms, X 5.70 66.93 18.93 4.96 50.0 ±9.6 (20.16) Y 5.30 66.00 18.14 50.0							0.00		± 9.6 %
2 3.04 71.27 15.39 150.0	100		Y	2.75	69.80	14.46	1	150.0	
10300- AAC 64-QAM)									
AAC 64-QAM) Y 2.08 65.41 11.67 150.0 Z 2.23 66.30 12.38 150.0 10301- IEEE 802.16e WiMAX (29:18, 5ms, AAA 10MHz, QPSK, PUSC) Y 4.81 65.37 17.43 50.0 Z 5.06 66.33 18.01 50.0 10302- IEEE 802.16e WiMAX (29:18, 5ms, AAA 10MHz, QPSK, PUSC, 3 CTRL symbols) Y 5.30 66.00 18.14 50.0	10300-	LTE-EDD (SC-EDMA 50% DR 3 MH-					0.00		+96%
Z 2.23 66.30 12.38 150.0 10301- AAA 10MHz, QPSK, PUSC) Y 4.81 65.37 17.43 50.0 Z 5.06 66.33 18.01 50.0 10302- AAA 10MHz, QPSK, PUSC, 3 CTRL symbols) Y 5.30 66.00 18.14 50.0			2.7	1.2.3		Chillery	0.00	10000	2 0.0 %
10301- IEEE 802.16e WiMAX (29:18, 5ms, AAA 10MHz, QPSK, PUSC)									
Y 4.81 65.37 17.43 50.0 Z 5.06 66.33 18.01 50.0 10302- IEEE 802.16e WiMAX (29:18, 5ms, X 5.70 66.93 18.93 4.96 50.0 ±9.6 AAA 10MHz, QPSK, PUSC, 3 CTRL symbols) Y 5.30 66.00 18.14 50.0							4.17		± 9.6 %
Z 5.06 66.33 18.01 50.0 10302- IEEE 802.16e WiMAX (29:18, 5ms, X 5.70 66.93 18.93 4.96 50.0 ± 9.6 AAA 10MHz, QPSK, PUSC, 3 CTRL symbols) Y 5.30 66.00 18.14 50.0	AAA	10MHz, QPSK, PUSC)			05.75	24.10		-	-
10302- IEEE 802.16e WiMAX (29:18, 5ms, X 5.70 66.93 18.93 4.96 50.0 ± 9.6 AAA 10MHz, QPSK, PUSC, 3 CTRL symbols) Y 5.30 66.00 18.14 50.0						-			
AAA 10MHz, QPSK, PUSC, 3 CTRL symbols) Y 5.30 66.00 18.14 50.0	the Tr	The state of the s		5.06	66.33	18.01		50.0	100
Y 5.30 66.00 18.14 50.0			Х	5.70	66.93	18.93	4.96	50.0	± 9.6 %
	1 11		Y	5.30	66.00	18.14		50.0	
			Z	5.48	66.68	18.57		50.0	

Certificate No: EX3-3916_Apr17

Page 23 of 38

EX3DV4- SN:3916 April 28, 2017

10303- AAA	IEEE 802.16e WIMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	5.49	66.79	18.92	4.96	50.0	± 9.6 %
	The same of the sa	Y	5.06	65.71	18.01		50.0	
		Z	5.25	66.44	18.49		50.0	-
10304- AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	5.23	66.41	18.25	4.17	50.0	± 9.6 %
		Y	4.84	65.50	17.47		50.0	
		Z	5.01	66.12	17.87		50.0	
10305- AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	5.34	70.68	21.92	6,02	35.0	± 9.6 %
		Y	4.72	68.38	20.06		35.0	
		Z	5,10	70.18	21.19		35.0	
10306- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	5.37	67.76	20.20	6.02	35.0	± 9.6 %
	And the state of t	Y	4.92	66.90	19.39		35.0	
		Z	5.17	68.08	20.19		35.0	J
10307- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	Х	5.38	69.02	20.91	6.02	35.0	± 9.6 %
	THE DATE OF STREET	Y	4.86	67.24	19.43		35.0	
		Z	5.14	68.56	20.30		35.0	
10308- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	Х	5.36	69.26	21.07	6.02	35.0	± 9.6 %
		Y	4.84	67.46	19.58		35.0	
		Z	5.13	68.84	20.48		35.0	
10309- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	5.47	68.09	20.38	6.02	35.0	± 9.6 %
		Y	4.99	67.13	19.53		35.0	
		Z	5.26	68.38	20.36		35.0	
10310- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	5.33	67.86	20.17	6.02	35.0	± 9.6 %
		Y	4.88	67.02	19.39		35.0	
		Z	5.14	68.25	20.21		35.0	
10311- AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	Х	3.64	71.18	17.45	0.00	150.0	±9.6 %
		Y	3.13	68.80	16.16		150.0	
		Z	3.27	69.59	16.58		150.0	
10313- AAA	IDEN 1:3	X	6.16	77.43	17.90	6.99	70.0	± 9.6 %
		Y	3.62	70.96	15.03		70.0	
		Z	4.57	73.88	16.39		70.0	
10314- AAA	IDEN 1:6	X	8.53	85.24	23.36	10.00	30.0	± 9.6 %
		Y	4.39	75.16	19.39		30.0	
-,-,		Z	5.79	79.42	21.18		30.0	
10315- AAB	IEEE 802 11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.18	65.46	16.66	0.17	150.0	± 9.6 %
	T. 12.	Y	1.10	63.55	14.94		150.0	
		Z	1.13	64.26	15.53		150.0	
10316- AAB	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle)	×	4.79	66.87	16.59	0.17	150.0	± 9.6 %
		Y	4.61	66.54	16.17		150.0	
		Z	4.66	66.71	16.32		150.0	
10317- AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.79	66,87	16.59	0.17	150.0	± 9.6 %
		Y	4.61	66.54	16.17		150.0	
		2	4.66	66,71	16.32		150.0	
10400- AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.95	67.26	16.59	0.00	150.0	± 9.6 %
	William St. Co.	Y	4.74	66.93	16.23		150.0	
		Z	4.78	67.07	16.34		150.0	
10401- AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.54	67.21	16.59	0.00	150.0	± 9.6 %
	Y-91 III	Y	5.42	67.09	16.37		150.0	
		Z	5,44	67.16	16.44		150.0	

EX3DV4-SN:3916 April 28, 2017

10402- AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.86	67.83	16.73	0.00	150.0	± 9.6 %
		Y	5.69	67.48	16.42		150.0	
		Z	5.72	67.60	16.51		150.0	
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	Х	2.36	75.15	18.14	0.00	115.0	± 9.6 %
		Y	1.50	68.70	14.27		115.0	
		Z	1.72	70.74	15.44		115.0	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	X	2.36	75.15	18.14	0.00	115.0	± 9.6 %
		Y	1.50	68.70	14.27		115.0	
_		Z	1.72	70.74	15.44		115.0	
10406- AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	100.00	125.57	32.61	0.00	100.0	± 9.6 %
		Y	100.00	119.65	29.46		100.0	
		Z	100.00	121.40	30.32	-	100.0	
10410- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3.4.7,8,9)	X	100.00	118.78	29.59	3.23	80.0	± 9.6 %
	di siti en sesimente alettititelei	Y	11.23	89.06	20.95		80.0	
		Z	58.47	110.84	27.09		80.0	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.06	64.20	15.95	0.00	150.0	± 9.6 %
1001	mose, seperacy system	Y	1.02	62.77	14.49		150.0	
	+	Z	1.03	63.30	14.97		150.0	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	X	4.73	66.85	16.52	0.00	150.0	± 9.6 %
	Cr Sint C mellal apparately affice	Y	4.57	66.60	16.18		150.0	
		Z	4.60	66.72	16.29		150.0	
10417- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.73	66.85	16.52	0.00	150.0	± 9.6 %
7.00	mops, sope daily sydisy	Y	4.57	66.60	16.18		150.0	
		Z	4.60	66.72	16.29		150.0	
10418- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	X	4.72	67.00	16.53	0.00	150.0	±9.6 %
		Y	4.56	66.75	16.20		150.0	
		Z	4.59	66.87	16.30		150.0	
10419- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Short preambule)	X	4.74	66.95	16.54	0.00	150.0	± 9.6 %
		Y	4.58	66.70	16.20		150.0	
		Z	4.61	66.82	16.30		150.0	
10422- AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	×	4.87	66.95	16.54	0.00	150.0	± 9.6 %
		Y	4.70	66.71	16.22		150.0	
		Z	4.73	66.82	16.32		150.0	
10423- AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	5.08	67.34	16.69	0.00	150.0	± 9.6 %
1 12		Y	4.88	67.03	16.34		150.0	1 -
		Z	4.92	67.16	16.44		150.0	
10424-	IEEE 802.11n (HT Greenfield, 72.2	X	4.99	67.28	16.65	0.00	150.0	± 9.6 %
AAA	Mbps, 64-QAM)	Y	4.79	66.98	16.31		150.0	77.873.1
_		Z	4.83	67.11	16.41		150.0	
10425- AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5,54	67.54	16.75	0.00	150.0	± 9.6 %
7777	Di Gity	Y	5.39	67.30	16.48		150.0	
	+	Z	5.41	67.39	16.55	-	150.0	-
10426-	IEEE 802.11n (HT Greenfield, 90 Mbps,	X	5.55	67.59	16.77	0.00	150.0	± 9.6 %
AAA	16-QAM)	-		07.04	10.15		100.5	
		Y	5,39	67.31	16.48	-	150.0	-
		Z	5.41	67.40	16.55		150.0	

EX3DV4- SN:3916 April 28, 2017

10427- AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.58	67.62	16.78	0.00	150.0	± 9.6 %
		Y	5.40	67.30	16.47		150.0	-
		Z	5.43	67.40	16.55		150.0	
10430- AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.51	70.67	18.61	0.00	150.0	± 9.6 %
		Y	4.35	70.93	18.33		150.0	
	He are the second of the secon	Z	4.34	70.69	18.27		150.0	
10431- AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.50	67.49	16.66	0.00	150.0	± 9.6 %
		Y	4.26	67.13	16.19		150.0	
		Z	4.31	67.29	16.34		150.0	
10432- AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.77	67.35	16.65	0.00	150.0	± 9.6 %
		Y	4.56	67.02	16.26		150.0	
		Z	4.60	67.16	16.37	F	150.0	
10433- AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	5.01	67.34	16.68	0.00	150.0	± 9.6 %
		Y	4.81	67.02	16.33		150.0	
		Z	4.85	67.15	16.43	DESTRUCTION OF	150.0	
10434- AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.63	71,51	18.68	0.00	150.0	± 9.6 %
		Y	4.47	71.85	18,35		150.0	
1010-		Z	4.45	71.57	18.30		150.0	
10435- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	118.58	29.50	3.23	80.0	± 9.6 %
		Y	10.62	88.24	20.66		80.0	
12000	The second second second second	Z	52.09	109.17	26.64	7.2	80.0	2.6.1
10447- AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	Х	3.84	67.72	16.35	0.00	150.0	± 9.6 %
		Y	3.56	67.13	15.56		150.0	
	the second secon	Z	3.63	67.38	15.80		150.0	
10448- AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	Х	4,31	67.27	16.53	0.00	150.0	±9.6 %
		Y	4.10	66.91	16.05		150.0	
		Z	4.14	67.07	16.20		150.0	
10449- AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	X	4.55	67.19	16.56	0.00	150.0	±9.6 %
		Y	4.37	66.85	16.16		150.0	
		Z	4.41	66.99	16.28	200	150.0	
10450- AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	Х	4.73	67.10	16.55	0.00	150.0	± 9.6 %
7 11 1		Y	4.56	66.78	16.18		150.0	
		Z	4.59	66.92	16.29	-	150.0	1
10451- AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	3.80	68.12	16.19	0.00	150.0	± 9.6 %
		Υ	3.46	67.33	15.21		150.0	
		Z	3.54	67.65	15.51		150.0	
10456- AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	х	6.39	68.17	16.91	0.00	150.0	± 9.6 %
		Y	6.25	67.86	16.64		150.0	
		Z	6.26	67.96	16.70		150.0	-
10457- AAA	UMTS-FDD (DC-HSDPA)	X	3.89	65.49	16.28	0.00	150.0	± 9.6 %
1		Y	3.82	65.24	15.89		150.0	
		Z	3.83	65.35	16.00		150.0	
10458- AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3,59	67.26	15.68	0.00	150.0	± 9.6 %
		Y	3.28	66,65	14.64		150.0	
		Z	3.37	66.99	14.99		150.0	
10459- AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	×	4.71	65.35	16.24	0.00	150.0	± 9.6 %
		Y	4.47	65.37	15.75		150.0	
		Z	4.44	65.11	15.75		150.0	

Certificate No: EX3-3916_Apr17

Page 26 of 38



EX3DV4- SN:3916 April 28, 2017

10460- AAA	UMTS-FDD (WCDMA, AMR)	X	1,26	74.53	19.97	0.00	150.0	±9.6 %
		Y	0.88	67.24	15.69		150.0	-
		Z	0.97	69.39	16.99		150.0	
10461-	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz,	X	100.00	121.73	31.04	3.29	80.0	±9.6 %
AAA	QPSK, UL Subframe=2,3,4,7,8,9)						1	13,513,51
		Y	4.97	80.86	19.26		80.0	
		Z	34.94	106.88	26.96		80.0	4.5.
10462-	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz,	Х	11.20	83.22	17.90	3.23	80.0	± 9.6 %
AAA	16-QAM, UL Subframe=2,3,4,7,8,9)	-		1.1	1877	313,277		3-47
		Y	1.32	61.99	9.12		80.0	
		Z	2.11	66.44	11.46		80.0	
10463- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	4,22	72.05	13.84	3.23	80.0	± 9.6 %
		Y	1.09	60.04	7.72		80.0	-
		Z	1.49	62.65	9.35		80.0	
10464- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	119.48	29.85	3.23	80.0	± 9.6 %
		Y	3.78	76.87	17.38		80.0	
		Z	23.51	100.06	24.58		80.0	
10465-	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-	X	7.49	78.87	16.51	3.23	80.0	±9.6 %
AAA	QAM, UL Subframe=2,3,4,7,8,9)	Y	1.25	61.51	8.83	(2157)	80.0	E 21 × 10
		Z	1.89	65.31	10.92		80.0	
10466-	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-	X	3.48	70.04	13.05	3.23	80.0	±9.6 %
AAA	QAM, UL Subframe=2,3,4,7,8,9)			74.37		3.23	100	± 9.6 %
		Y	1.09	60.00	7.65		80.0	
40.400		Z	1.41	62,10	9.04	2.00	80.0	
10467- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	×	100.00	119.69	29.94	3.23	80.0	±9.6 %
		Y	3.99	77.62	17.66		80.0	
		Z	27.74	102,28	25.18		80.0	
10468- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	8.17	79.83	16.82	3.23	80.0	± 9.6 %
		Υ	1.27	61.62	8.90		80.0	
		Z	1.93	65.57	11.05		80.0	
10469- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	3.49	70.10	13.07	3.23	80.0	±9.6 %
		Y	1.09	60.00	7.65		80.0	
		Z	1.41	62.11	9.04		80.0	1
10470- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	100.00	119.72	29.94	3.23	80.0	± 9.6 %
		Y	3.98	77.60	17.65		80.0	
		Z	27.93	102.38	25.20		80.0	
10471- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	×	8.09	79.71	16.77	3.23	80.0	± 9.6 %
		Y	1.26	61.59	8.87		80.0	
		Z	1.92	65.51	11.01		80.0	1 - 1 -
10472- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	3.47	70.02	13.03	3.23	80.0	± 9.6 %
-	7,512,015,52	Y	1.09	60.00	7.64	-	80.0	
		Z	1.40	62.07	9.01		80.0	
10473- AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	119.68	29.93	3.23	80.0	± 9.6 %
		Y	3.97	77.56	17.63		80.0	
		Z	27.81	102.30	25.17		80.0	
		~				3.23	80.0	±9.6 %
	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	8.01	79.61	16.74	J.L.	100	20.0 //
	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	×		79.61 61.57		3.23	1.5.1	2 0.0 //
		X	1.26	61.57	8.86	0.20	80.0	20.07/
10475-	QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-	×				3.23	1.5.1	± 9.6 %
10474- AAB 10475- AAB	QAM, UL Subframe=2,3,4,7,8,9)	X Y Z	1.26 1.91	61.57 65.48	8.86 10.99		80.0 80.0	

EX3DV4- SN:3916 April 28, 2017

10477- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	7.48	78.85	16.48	3.23	80.0	±9.6 %
		Y	1.24	61.46	8.79	1	80.0	
		Z	1.87	65.25	10.87		80.0	
10478- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	Х	3.42	69.86	12.96	3.23	80.0	± 9.6 %
		Y	1.09	60.00	7.63		80.0	100
		Z	1.39	62.02	8.98		80.0	
10479- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	7.59	84.42	22.98	3.23	80.0	± 9.6 %
		Υ	4.22	75.51	18.76		80.0	
40400	1	Z	5.90	80.69	21.01		80.0	
10480- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	8.54	81.81	20.60	3.23	80.0	±9.6 %
		Y	4.05	71.64	15.69		80.0	
10101	1	Z	5.89	76.68	17.96		80.0	
10481- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	7.61	79.58	19.53	3.23	80.0	±9.6 %
		Υ	3.52	69.48	14.51		80.0	-
10400	LTC TOD (OO FOLK)	Z	5.00	74.03	16.66		80.0	
10482- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.41	79.04	20.27	2.23	80.0	± 9.6 %
		Υ	2.51	68.17	14.90		80.0	
40400	1 77 705 /05 55	Z	3.40	72.41	17.03		80.0	
10483- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	6.20	77.32	19.28	2.23	80.0	± 9.6 %
		Y	3.30	68.52	14.58		80.0	
10404	LTE TOO (OO FOLL) FOR DO O !!!	Z	4.33	72.24	16.49	-	80.0	
10484- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.93	76.43	18.96	2.23	80.0	± 9.6 %
		Υ	3.23	68.02	14.37		80.0	
10100	175 705 (66 50)	Z	4.16	71.49	16.20	-	80.0	
10485- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.42	79.09	20.91	2.23	80.0	± 9.6 %
		Υ	2.90	69.81	16.44		80.0	
40400	LTC TDD (OO CDL) FOR DD TAW	Z	3.74	73.66	18.32		80.0	
10486- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4,42	72.79	18.25	2.23	80.0	± 9.6 %
		Y	3.00	67.35	15.00		80.0	
10107	1.75 TOD 100 COLU. TOU TO THE	Z	3.53	69.71	16.34	-	80.0	
10487- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	×	4.39	72.31	18.06	2.23	80.0	± 9.6 %
		Y	3.03	67.12	14.90		80.0	
10488- AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.53 5.31	69.36 77.01	16.19 20.51	2.23	80.0	± 9.6 %
, ,,,,,	G. 5(1) OE GGGRBING=2,0,4,1,0,0)	Y	3.36	70.13	17.22		80.0	
		Z	4.04	73.06	18.65		80.0	
10489- AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.42	71.43	18.51	2,23	80.0	± 9.6 %
	and the second second second	Y	3.43	67.78	16.33		80.0	
		Z	3.81	69.43	17.28		80.0	
10490- AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.48	71.06	18.39	2.23	80.0	± 9.6 %
		Y	3.54	67.71	16.33		80.0	
		Z	3.90	69.25	17.23		80.0	
10491- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.13	74.32	19.54	2.23	80.0	± 9.6 %
		Y	3.70	69.41	17.08		80.0	
	E.C. S. S. S. S. S. S. S.	Z	4.22	71.55	18_18		80.0	
10492- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.65	70.26	18.22	2.23	80.0	± 9.6 %
		Y	3.84	67.49	16.53		80.0	
		Z	4.15	68.76	17.28		80.0	

EX3DV4- SN:3916 April 28, 2017

10493- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.71	70.04	18.15	2.23	80.0	± 9.6 %
		Y	3.92	67.42	16.52		80.0	
		Z	4.22	68.63	17.24		80.0	
10494- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.86	76.59	20.21	2.23	80.0	± 9.6 %
		Y	3.92	70.52	17.38		80.0	
		Z	4.59	73.07	18.61		80.0	
10495- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	х	4.75	70.90	18.47	2.23	80.0	± 9.6 %
		Y	3.87	67.82	16.69		80.0	
		Z	4.19	69.19	17.47		80.0	
10496- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.78	70.44	18.32	2.23	80.0	± 9.6 %
		Y	3.96	67.65	16.67		80.0	
		Z	4.27	68.90	17.39		80.0	
10497- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.46	76.33	18.65	2.23	80.0	± 9.6 %
		Y	1.91	64.92	12.59		80.0	
		Z	2.57	68.71	14.69		80.0	
10498- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	3.37	69.46	15.07	2.23	80.0	± 9.6 %
		Y	1.74	61.64	10.05		80.0	
		Z	2.10	63.77	11.50		80.0	
10499- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	x	3.30	68.85	14.69	2.23	80,0	± 9.6 %
		Y	1.71	61.27	9.73		80.0	
		Z	2.05	63.26	11.12		80.0	
10500- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.15	77.48	20,50	2.23	80.0	± 9.6 %
		Y	3.06	69.76	16.70		80.0	1
		Z	3.79	73.07	18.35		80.0	
10501- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.40	72.07	18.28	2.23	80.0	± 9.6 %
		Y	3.20	67.58	15.54		80.0	
	ACCURATE TO A PROPERTY OF THE PARTY OF THE P	Z	3.66	69.60	16,70	L. t.	80.0	
10502- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.44	71.80	18.14	2.23	80.0	± 9.6 %
		Y	3.26	67.50	15.47		80.0	
		Z	3.71	69.46	16.60		80.0	
10503- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	5.24	76.79	20.41	2.23	80.0	± 9.6 %
		Y	3.33	69.97	17.13	2 -	80.0	
		Z	3.99	72.87	18.57		80.0	
10504- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.40	71.34	18.46	2.23	80.0	± 9.6 %
		Y	3.42	67.69	16.28		80.0	
		Z	3.79	69.35	17.23		80.0	
10505- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.45	70.97	18.34	2.23	80,0	± 9.6 %
		Υ	3.52	67.62	16.28		80.0	
		Z	3.88	69.16	17.18		0.08	
10506- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	5.80	76.43	20.13	2.23	80.0	±9,6 %
		Y	3.89	70.40	17.32		80.0	
		Z	4.56	72.93	18.55		80.0	
10507- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.73	70.84	18.43	2.23	80.0	±9.6 %
	777171717171	Y	3.85	67.77	16.65		80.0	

EX3DV4- SN:3916 April 28, 2017

10508- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.77	70.37	18.28	2.23	80.0	± 9.6 %
		Y	3.95	67.59	16.63		80.0	
		Z	4.25	68.84	17.35		80.0	-
10509- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.74	74.10	19.24	2.23	80.0	±9.6 %
		Y	4.31	69.75	17.10		80.0	
	A STATE OF THE PARTY OF THE PAR	Z	4.83	71.63	18.05	-	80.0	
10510- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.17	70.32	18.25	2.23	80.0	±9.6 %
		Y	4.37	67.77	16.79		80.0	
		Z	4.67	68.89	17.43		80.0	
10511- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.18	69.92	18.14	2.23	80.0	± 9.6 %
		Y	4.43	67.59	16.76		80.0	
	I TO THE PERSON OF THE PERSON	Z	4.71	68.63	17.37		80.0	
10512- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	6.38	76.54	20.00	2.23	80.0	± 9.6 %
		Y	4.40	70.84	17.39		80.0	
		Z	5.09	73.22	18.52		80.0	
10513- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	x	5.12	70.86	18.46	2.23	80.0	±9.6 %
		Y	4.24	67.96	16.84		80.0	
		Z	4.56	69.21	17.54		80.0	
10514- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	×	5.06	70.23	18.27	2.23	80.0	± 9.6 %
-		Y	4.28	67.64	16.77		80.0	
	The second secon	Z	4.57	68.77	17.42		80.0	16.00
10515- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	1.03	64.53	16.11	0.00	150.0	± 9.6 %
	AND THE PARTY OF T	Y	0.98	62.93	14.53		150.0	
		Z	0.99	63.51	15.05		150.0	
10516- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	×	1.49	88.61	26.07	0.00	150.0	±9.6 %
		Y	0.56	68.22	16.27	-	150.0	
10517-	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11	Z	0.69	72.69	18.76	0.00	150.0	. 0.00
AAA	Mbps, 99pc duty cycle)	X	0.95	68.20	17.75	0.00	150.0	± 9.6 %
		Z	0.83	64.56 65.73	15.02 15.88		150.0 150.0	-
10518- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.73	66.94	16.51	0.00	150.0	± 9.6 %
		Y	4.57	66,67	16.16		150.0	
	5.371 ~	Z	4.60	66.79	16.27	4.4.4	150.0	
10519- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.96	67.23	16.65	0.00	150.0	± 9.6 %
	THE RESERVE THE PROPERTY OF THE PARTY OF THE	Y	4.76	66,92	16.28		150.0	
7000		Z	4.80	67.04	16.39		150.0	
10520- AAA	IEEE 802.11a/h WIFI 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.81	67.24	16.59	0.00	150.0	±9.6 %
		Y	4.61	66.88	16.21		150.0	
10521- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.65	67.02 67.26	16.32 16.59	0.00	150.0 150.0	± 9.6 %
	mega, oopo daty dydie/	Y	4.54	66.87	16.19		150.0	
_		Z	4.58	67.02	16.13	-	150.0	
10522- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.78	67.19	16.60	0.00	150.0	±9.6 %
	1	Y	4.60	66.95	16.27		150.0	-
		Z	4.64	67.07	16.37		150.0	

EX3DV4- SN:3916 April 28, 2017

10523- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.66	67.13	16.48	0.00	150.0	± 9.6 %
		Y	4.48	66.82	16.12		150.0	
		Z	4.51	66.95	16.23		150.0	
10524- AAA	(IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.74	67.16	16.60	0.00	150.0	± 9.6 %
		Y	4.54	66.87	16.24		150.0	
		Z	4.58	67.00	16.35		150.0	
10525-	IEEE 802.11ac WiFi (20MHz, MCS0,	X	4.69	66.20	16.18	0.00	150.0	± 9.6 %
AAA	99pc duty cycle)	Y	4.52	65.92	15.83	0.00	150.0	20.07
		Z	4.56	66.05	15.94		150.0	
10526- AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.90	66.62	16.33	0.00	150.0	± 9.6 %
	Supplemental Control of Control o	Y	4.70	66.29	15.97		150.0	
		Z	4.74	66.43	16.08	-	150.0	
10527-	IEEE 802.11ac WiFi (20MHz, MCS2,	X	4.82	66.61	16.30	0.00		+000
AAA	99pc duty cycle)	Ŷ	2.74	1 24224	Library 1	0.00	150.0	± 9.6 %
			4.62	66.25	15.92		150.0	
10500		Z	4.66	66.40	16.03	10.00	150.0	
10528- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.84	66,63	16.33	0.00	150.0	± 9.6 %
		Y	4.63	66.27	15.95		150.0	
		Z	4.67	66.42	16.06		150.0	
10529- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.84	66.63	16,33	0.00	150.0	± 9,6 %
		Y	4.63	66.27	15.95		150.0	
75555		Z	4.67	66.42	16.06		150.0	
10531- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.85	66.79	16.36	0.00	150.0	±9.6 %
		Y	4.63	66.38	15.96		150.0	
	E TOTAL TOTA	Z	4.67	66.54	16.08		150.0	
10532- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.70	66.68	16.32	0.00	150.0	± 9.6 %
		Y	4.49	66.23	15.90		150.0	
		Z	4.53	66.40	16.02		150.0	
10533- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	Х	4.85	66.64	16.30	0.00	150.0	± 9.6 %
		Y	4.64	66.31	15.94		150.0	
		Z	4.69	66.46	16.05		150.0	
10534- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	5.34	66.74	16.34	0.00	150.0	± 9.6 %
		Y	5.16	66.39	16.01		150.0	
		Z	5.19	66.52	16.10		150.0	
10535- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.41	66.89	16.39	0.00	150.0	± 9.6 %
		Y	5.23	66.56	16.08		150.0	
7		Z	5.26	66.67	16.17		150.0	
10536- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	Х	5.28	66.89	16.39	0.00	150.0	± 9.6 %
		Y	5.10	66.51	16.05		150.0	
0.115		Z	5.13	66.65	16.14		150.0	
10537- AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duly cycle)	X	5.34	66.85	16.37	0.00	150.0	± 9.6 %
		Y	5.16	66.48	16.03		150.0	-
		Z	5.19	66.62	16.12	1 - 1	150.0	1 - 12
10538- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.46	66,91	16.43	0.00	150.0	± 9.6 %
7-7-		Y	5.25	66.51	16.09		150.0	
		Z	5.29	66.65	16.18		150.0	
10540-	IEEE 802.11ac WiFi (40MHz, MCS6,	X	5.35	66.86	16.42	0.00	150.0	± 9.6 %
	99DC duty cycle)							
AAA	99pc duty cycle)	Y	5,18	66.52	16.10	_	150.0	

EX3DV4- SN:3916 April 28, 2017

10541- AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	5.34	66.80	16.39	0.00	150.0	± 9.6 %
	J	Y	5.15	66.39	16.04	4.0	150.0	100
		Z	5.18	66.53	16.13		150.0	-
10542- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.48	66.79	16.40	0.00	150.0	± 9.6 %
	1,1	Y	5.31	66.46	16.08		150.0	
0.00		Z	5.34	66.58	16.17		150.0	
10543- AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.58	66.81	16.42	0.00	150.0	± 9.6 %
		Y	5.38	66.50	16.12		150.0	
1000		Z	5.42	66.61	16.20		150.0	
10544- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	Х	5.61	66.84	16.31	0.00	150.0	± 9.6 %
		Y	5.47	66.52	16.01		150.0	
		Z	5.49	66.64	16.09		150.0	
10545- AAA	IEEE 802,11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.82	67.22	16.44	0.00	150.0	± 9.6 %
		Y	5.66	66.90	16.15		150.0	
		Z	5.68	67.02	16.23		150.0	
10546- AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	Х	5.71	67.14	16.42	0.00	150.0	±9.6 %
		Y	5.54	66.73	16.09		150.0	
		Z	5.57	66.87	16.18		150.0	
10547- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	Х	5.80	67.20	16.44	0.00	150.0	± 9.6 %
		Y	5.61	66.77	16.09		150.0	
		Z	5.64	66.92	16.19		150.0	
10548- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	6.07	68.17	16.89	0.00	150.0	± 9.6 %
		Y	5.84	67.63	16.49		150.0	
		Z	5.87	67.78	16.59		150.0	
10550- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.73	67.08	16.39	0.00	150.0	± 9.6 %
		Y	5.56	66.73	16.09		150.0	
		Z	5.59	66.86	16.17		150.0	
10551- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.75	67.18	16,41	0.00	150.0	±9.6 %
	3.05-23.54	Y	5.57	66.79	16.08		150.0	
		Z	5.60	66.91	16.16		150.0	
10552- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.65	66.95	16.31	0.00	150.0	± 9.6 %
	7 4	Y	5.48	66.59	15.99		150.0	
		Z	5.51	66.71	16.08		150.0	
10553- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	×	5.74	66.98	16.35	0.00	150.0	±9.6 %
		Y	5.57	66,63	16.04		150.0	
		Z	5.60	66.76	16.13		150.0	
10554- AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	6.00	67.21	16.39	0.00	150.0	±9.6 %
		Y	5.87	66,88	16.10		150.0	
		Z	5.89	67.00	16.18		150.0	
10555- AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	6.16	67.56	16.54	0.00	150.0	± 9.6 %
		Y	6.00	67.17	16.22		150.0	
1925	Committee of the Commit	Z	6.02	67.29	16.30		150.0	
10556- AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	6.17	67.55	16.53	0.00	150.0	±9.6 %
		Y	6.02	67.21	16.24		150.0	
-		Z	6.04	67.33	16.31	H- 4 (150.0	
10557- AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	Х	6.16	67.54	16.54	0.00	150.0	± 9.6 %
-	7 - 2 - 2	Y	5.99	67.13	16.22		150.0	
		Z	6.02	67.26	16.30	_	150.0	

EX3DV4- SN:3916 April 28, 2017

10558- AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	Х	6.22	67,72	16.65	0.00	150.0	± 9.6 %
	- Star Start Start	Υ	6.04	67.29	16.31		150.0	
		Z	6.06	67.43	16.40		150.0	
10560- AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	x	6.22	67.56	16.61	0.00	150.0	± 9.6 %
		Y	6.04	67.15	16.28		150.0	
	m ²	Z	6.07	67.29	16.37		150.0	
10561- AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	6.12	67.51	16.62	0.00	150.0	±9.6 %
	deps daily dysicy	Y	5.95	67.11	16.29		150.0	
		Z	5.98	67.24	16.38		150.0	
10562- AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	6.28	67.98	16.86	0.00	150.0	± 9.6 %
017-	3350 321) 37312/	Y	6.08	67.48	16.48	-	150.0	
		Z	6.11	67.64	16.58		150.0	
10563- AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	6.55	68.33	16.97	0.00	150.0	±9.6 %
, , , ,	obbo daty ayordy	Y	6.34	67.85	16.62		150.0	
		Z	6.41	68.12	16.77		150.0	
10564-	IEEE 802.11g WiFi 2.4 GHz (DSSS-	X	5.06	67.01	16.65	0.46	150.0	± 9.6 %
AAA	OFDM, 9 Mbps, 99pc duty cycle)	Ŷ	4.89	66,73	16.30	0.40	150.0	1.0.0 /6
			4.89	66.87	16.41		150.0	
10565-	IEEE 802.11g WiFi 2.4 GHz (DSSS-	Z	5.33	67.50	16.98	0.46	150.0	±9.6 %
AAA	OFDM, 12 Mbps, 99pc duty cycle)				1000	0.46	-	19.0 %
		Y	5.12	67.20	16.63	_	150.0	-
40500	IEEE COO AL MIET O A OUT TOOOD	Z	5.16	67.32	16.73	0.40	150.0	V O O O
10566- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 99pc duty cycle)	Х	5,16	67.38	16.81	0.46	150.0	±9.6 %
	Programme and the state of the	Y	4.96	67.03	16.44		150.0	
		Z	5.00	67.18	16,55		150.0	Lanca de
10567- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 99pc duty cycle)	Х	5.19	67.78	17.15	0.46	150.0	± 9.6 %
		Y	4.99	67.45	16.81		150.0	1
		Z	5.03	67.57	16.90		150.0	
10568- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 99pc duty cycle)	Х	5.06	67.08	16.55	0.46	150.0	± 9.6 %
		Y	4.86	66.77	16.18		150.0	
		Z	4.91	66.94	16.32		150.0	
10569- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 99pc duty cycle)	Х	5.12	67.78	17.17	0.46	150.0	± 9.6 %
		Y	4.94	67.51	16.85		150.0	
		Z	4.97	67.62	16.94		150.0	
10570- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 99pc duty cycle)	X	5.17	67.60	17.10	0.46	150.0	± 9.6 %
		Y	4.98	67.37	16.79		150.0	
		Z	5.01	67.47	16.88		150.0	
10571- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.32	66.53	17.12	0.46	130.0	± 9.6 %
/		Y	1.19	64.08	15.14		130.0	
		Z	1.23	65.02	15.86		130.0	
10572- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.35	67.31	17.56	0.46	130.0	± 9.6 %
		Y	1.20	64.60	15.46		130.0	
		Z	1.25	65.62	16.22		130.0	
10573- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	100.00	151.50	40.98	0.46	130.0	±9.6 %
		Y	1.37	77.31	19.73		130.0	
		Z	2.95	90.34	24.71	7.7	130.0	
10574- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.80	76.73	21.97	0.46	130.0	±9.6 %
	maket aske cert alone)	Y	4.00	00.00	47.50		1000	_
		Y 1	1.28	69.53	17.96		130.0	

EX3DV4- SN:3916

April 28, 2017

10575- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 90pc duty cycle)	X	4.84	66.77	16.68	0.46	130.0	± 9.6 %
		Y	4.66	66.45	16.27		130.0	-
		Z	4.70	66.62	16.42		130.0	
10576- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 90pc duty cycle)	X	4.87	66.93	16.75	0.46	130.0	±9.6 %
	War and Table and Table and	Y	4.69	66.62	16.34		130.0	
		2	4.73	66.78	16.48		130.0	
10577- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 90pc duty cycle)	X	5.11	67.28	16.93	0.46	130.0	± 9.6 %
		Y	4.90	66.93	16.52	_	130.0	
		Z	4.94	67.09	16.66		130.0	
10578- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 90pc duty cycle)	Х	5.01	67.46	17.03	0.46	130.0	± 9.6 %
		Y	4.79	67.09	16.62		130.0	
		Z	4.84	67.25	16.76	100	130.0	
10579- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 90pc duty cycle)	Х	4.78	66.84	16.41	0.46	130.0	± 9.6 %
	4_ = - + + - +	Y	4.55	66.33	15.90		130.0	
		Z	4.61	66.57	16.09		130.0	
10580- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 90pc duty cycle)	X	4.82	66.78	16.39	0.46	130.0	± 9.6 %
		Y	4.60	66.36	15.92		130.0	
		Z	4.66	66.58	16.11		130.0	
10581- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 90pc duty cycle)	X	4.91	67.54	16.99	0.46	130.0	± 9.6 %
	D TELEVISION OF THE PERSON OF	Y	4.69	67.11	16.55		130.0	
		Z	4.74	67.28	16.69		130.0	
10582- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 90pc duty cycle)	X	4.73	66.58	16.20	0.46	130.0	± 9.6 %
1,7,4		Y	4.50	66.08	15.68		130.0	
-		Z	4.56	66.33	15.89		130.0	
10583- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.84	66.77	16.68	0.46	130.0	± 9.6 %
		Y	4.66	66.45	16.27		130.0	
		Z	4.70	66.62	16.42		130.0	
10584- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.87	66.93	16.75	0.46	130.0	± 9.6 %
1.7		Y	4.69	66.62	16.34		130.0	
		Z	4.73	66.78	16.48		130.0	
10585- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	5,11	67.28	16.93	0.46	130.0	± 9.6 %
-		Y	4.90	66.93	16.52		130.0	
		Z	4.94	67.09	16.66		130.0	
10586- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	5.01	67.46	17.03	0.46	130.0	± 9.6 %
		Y	4.79	67.09	16.62		130.0	
		Z	4.84	67.25	16.76		130.0	0.00
10587- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	Х	4.78	66.84	16.41	0.46	130.0	±9.6 %
		Y	4.55	66.33	15.90		130.0	
-		Z	4.61	66.57	16.09		130.0	
10588- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	Х	4.82	66.78	16.39	0.46	130.0	± 9.6 %
		Y	4.60	66.36	15.92		130.0	
		Z	4.66	66.58	16.11		130.0	
10589- AAA	IEEE 802.11a/h WIFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	Х	4.91	67.54	16.99	0.46	130.0	±9.6 %
		Y	4.69	67.11	16.55		130.0	
		Z	4.74	67.28	16.69		130.0	
						0.10		
	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.73	66.58	16.20	0.46	130.0	± 9.6 %
10590- AAA		X	4.73	66.58	15.68	0.46	130.0	± 9,6 %

Certificate No: EX3-3916_Apr17

Page 34 of 38

EX3DV4- SN:3916 April 28, 2017

10591- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.99	66.82	16.77	0.46	130.0	± 9.6 %
		Y	4.82	66.53	16.38		130.0	
		Z	4.85	66.68	16.52		130.0	
10592- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	Х	5.17	67.17	16.89	0.46	130.0	± 9.6 %
		Y	4.97	66.86	16.51		130.0	
100		Z	5.02	67.02	16.64		130.0	- 1
10593-	IEEE 802.11n (HT Mixed, 20MHz,	X	5.10	67.14	16.80	0.46	130.0	± 9.6 %
AAA	MCS2, 90pc duty cycle)	Y	4.89	66.77	16.39	*V/*	130.0	19220
		Z	4.94	66.94	16.54		130.0	
10594- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	5.15	67.28	16.94	0.46	130.0	± 9.6 %
, , ,	mode, out duty cycle)	Y	4.95	66.94	16.55		130.0	
		Z	4.99	67.10	16.68		130.0	
10595-	IEEE 802.11n (HT Mixed, 20MHz,	X	5.13	67.26	16.85	0.46	130.0	± 9.6 %
AAA	MCS4, 90pc duty cycle)	Ŷ		1		0.40	4	1 3.0 70
-			4.91	66.88	16.44		130.0	
10500	IEEE OOD AND ALT MANDE A DOLLAR	Z	4.96	67.05	16.58	0.40	130.0	
10596- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	5.07	67.25	16.85	0.46	130.0	± 9.6 %
	120 20 20 20 20 20 20 20 20 20 20 20 20 2	Υ	4.85	66.87	16.43		130.0	
		Z	4.90	67.05	16.58		130.0	
10597- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	5.02	67.20	16.77	0.46	130.0	± 9.6 %
	The state of the s	Y	4.80	66,78	16.32		130.0	
		Z	4.85	66.97	16.48		130.0	
10598- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	5.00	67.47	17.04	0.46	130.0	± 9.6 %
		Y	4.78	67.03	16.59		130.0	
		Z	4.83	67.21	16.74		130.0	
10599- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.65	67.40	16.93	0.46	130.0	± 9.6 %
		Y	5.48	67.08	16.59		130.0	
		Z	5.51	67.21	16.70		130.0	12.00
10600- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	x	5.86	68.03	17.21	0.46	130.0	± 9.6 %
		Y	5.60	67.45	16.74		130.0	
		Z	5.65	67.62	16.88		130.0	
10601- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	Х	5.71	67,66	17.04	0.46	130.0	± 9.6 %
		Y	5.50	67.23	16.65		130.0	
		Z	5.54	67.38	16.77		130.0	
10602- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.81	67.68	16.97	0.46	130.0	± 9.6 %
		Y	5.58	67.23	16.57		130.0	1
	Per- again the second s	Z	5.62	67.37	16.68		130.0	
10603- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.93	68.08	17.30	0.46	130.0	± 9.6 %
	7.7.27	Y	5.68	67.57	16.87		130.0	
		Z	5.72	67.72	16.99		130.0	
10604- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.66	67.40	16.95	0.46	130.0	± 9.6 %
		Y	5.48	67.04	16.60		130.0	
		Z	5.51	67.17	16.70		130.0	
10605- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.76	67.66	17.08	0.46	130.0	± 9.6 %
	THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAM	Y	5.58	67.33	16.74		130.0	
		Z	5.62	67.46	16.85	+	130.0	
10606- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.54	67.17	16.71	0.46	130.0	± 9.6 %
	moor, sopo doty cycle)							-
/VV1		Y	5.35	66.74	16.30		130.0	

EX3DV4- SN:3916 April 28, 2017

10607- AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.82	66.14	16.39	0.46	130.0	± 9.6 %
1		Y	4.65	65.82	15.99		130.0	
		Z	4.69	65.99	16.14		130.0	
10608- AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	5.05	66.58	16.55	0.46	130.0	± 9.6 %
		Y	4.83	66.23	16.16		130.0	
		Z	4.89	66.40	16.30		130.0	
10609- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.94	66.47	16.43	0.46	130.0	± 9.6 %
		Y	4.72	66.07	15.99		130.0	
	the contract of the contract of	Z	4.77	66.26	16.15		130.0	_
10610- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	×	4.99	66.63	16.58	0.46	130.0	± 9.6 %
		Y	4.77	66.23	16.16		130.0	
		Z	4.83	66.42	16.31		130.0	
10611- AAA	IEEE 802,11ac WiFi (20MHz, MCS4, 90pc duty cycle)	Х	4.92	66.47	16.45	0.46	130.0	±9.6 %
1.		Y	4.69	66.03	16.00		130.0	
-		Z	4.74	66.23	16.16		130.0	
10612- AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.93	66.62	16.48	0.46	130.0	± 9.6 %
		Y	4.70	66.17	16.03		130.0	
		Z	4.76	66.38	16.20	_	130.0	
10613- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.95	66.55	16.39	0.46	130.0	± 9.6 %
		Y	4.70	66.06	15.92		130.0	
		Z	4.76	66.29	16.10		130.0	
10614- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.88	66.74	16,63	0.46	130.0	± 9.6 %
		Y	4.65	66.26	16.16		130.0	
		Z	4.70	66.46	16.32		130.0	
10615- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.91	66.27	16.22	0.46	130.0	±9.6 %
		Y	4.69	65.84	15.76		130.0	
		Z	4.74	66.06	15.94		130.0	-
10616- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	×	5.48	66.71	16.57	0.46	130.0	± 9.6 %
		Y	5.29	66.33	16.20		130.0	
		2	5.33	66.49	16.32		130.0	7 1 9 9
10617- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.54	66.83	16.59	0.46	130.0	± 9.6 %
	1 - 2 - 1	Y	5.36	66.48	16.24		130.0	
/1-1		2	5.39	66.62	16.36		130.0	
10618- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	х	5.44	66,90	16.65	0.46	130.0	± 9.6 %
	. 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Y	5.24	66.50	16.27		130.0	
		Z	5.28	66.66	16.40		130.0	
10619- AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.46	66.71	16.49	0.46	130.0	± 9.6 %
		Y	5.26	66.31	16.11		130.0	
		Z	5.31	66.49	16.24		130.0	
10620- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.58	66.83	16.60	0.46	130.0	± 9.6 %
		Y	5.36	66.37	16.19		130.0	
		Z	5.41	66.55	16.33		130.0	
10621- AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	х	5.55	66.89	16.74	0,46	130.0	± 9.6 %
		Y	5.36	66.50	16.38		130.0	
		Z	5.39	66.64	16.49		130.0	
10622- AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	×	5.54	66.99	16.78	0.46	130.0	± 9.6 %
		Y	5.36	66.64	16.44		130.0	
		Z	5.40	66.77	16.54		130.0	

EX3DV4- SN:3916 April 28, 2017

10623- AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	5.45	66.63	16.49	0.46	130.0	± 9.6 %
	1 200 200 200 200 200 200 200 200 200 20	Y	5.24	66.17	16.08		130.0	
		Ż	5.28	66.34	16.21		130.0	
10624- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.62	66.73	16.60	0.46	130.0	± 9.6 %
	Sope daty systey	Y	5.43	66.38	16.25		130.0	
		Z	5.47	66.53	16.36		130.0	
10625-	IEEE 802.11ac WiFi (40MHz, MCS9,	X	5.99	67.64	17.10	0.46	130.0	± 9.6 %
AAA	90pc duty cycle)		T -	- CALLEGO	30.75	0.40	77.77	1 3.0 76
	-	Y	5.80	67.33	16.77		130.0	
(0000	LESS CON A C NAMES (CONTA) - LICON	Z	5.84	67.50	16.90	0.40		1000
10626- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.73	66.75	16.50	0.46	130.0	± 9.6 %
	7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Y	5.58	66.41	16.18		130.0	
		Z	5.61	66.55	16.27		130.0	
10627- AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.98	67.25	16.69	0.46	130.0	± 9.6 %
7	in the star was	Y	5.81	66.93	16.38		130.0	7
		Z	5.84	67.06	16.49		130.0	
10628- AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.80	66,94	16.49	0.46	130.0	± 9.6 %
		Y	5.62	66.49	16.10		130.0	
		Z	5.66	66.67	16.23		130.0	
10629- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	Х	5.89	67.01	16.51	0.46	130.0	± 9.6 %
		Y	5.70	66.57	16.13		130.0	
		Z	5.75	66.76	16.27		130.0	
10630- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	6.41	68.69	17.35	0.46	130.0	± 9.6 %
^^^	sope daty cycle)	Y	6.10	67.95	16.82		130.0	
		Z	6.16	68.17	16.98		130.0	
10631- AAA	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	6.31	68.49	17.43	0.46	130.0	± 9.6 %
	oops daty system	Y	6.03	67.85	16,97		130.0	
		Z	6.08	68.04	17.09		130.0	-
10632- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.97	67.38	16.89	0.46	130.0	± 9.6 %
	- Saperating System	Y	5.79	67.01	16.57		130.0	
		Z	5.82	67.13	16.66		130.0	
10633- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.92	67.23	16.65	0.46	130.0	± 9.6 %
7001	Sope daty cycle)	Y	5.69	66.67	16.22		130.0	
		Z	5.73	66.84	16.35		130.0	
10634- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.89	67.21	16.71	0.46	130.0	± 9.6 %
	Sales and olone	Y	5.67	66.71	16.31		130.0	
		Z	5.71	66.87	16.42		130.0	
10635- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.77	66.54	16.12	0.46	130.0	± 9.6 %
,,,,,	cope daty cycles	Y	5.55	66.02	15.68		130.0	
		Z	5.60	66.23	15.84		130.0	-
10636- AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	6.13	67.13	16.58	0.46	130.0	± 9.6 %
, vv	John dary cycle)	Y	5.99	66.78	16.26	-	130.0	
		Z	6.02	66.92	16.36		130.0	
10637- AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.31	67.54	16.76	0.46	130.0	± 9.6 %
-VV	sope duty cycle)	Y	6.14	67.13	16.42		130.0	
_		2	6.17	67.28	16.52		130.0	
10638-	IEEE 1602.11ac WiFi (160MHz, MCS2,	X	6.30	67.48	16.52	0.46	130.0	± 9.6 %
AAA	90pc duty cycle)	Y	6.14	67.12	16.38		130.0	
		Z	6.17	67.26	16.49		130.0	