

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2111-0137

2. Customer

• Name (FCC) : Point Mobile Co., LTD. / Name (IC) : POINTMOBILE CO.,LTD

• Address (FCC) : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea
153-709

Address (IC) : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Mobile Computer / PM75

FCC ID : V2X-PM75

IC : 10664A-PM75

5. FCC Regulation(s): Part 2, 22, 24, 27

IC Standard(s): RSS-Gen Issue 5, 130 Issue 2, 132 Issue 3, 133 Issue 6, 139 Issue 3, 199 Issue 3

Test Method Used : KDB971168 D01v03, ANSI/TIA-603-E-2016, ANSI C63.26-2015

6. Date of Test : 2021.09.06 ~ 2021.11.17

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by Name : JaeHyeok Bang (Signature)	Reviewed by Name : JaeJin Lee (Signature)
-------------	--	---

2021 . 11 . 17 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2111-0137	Nov. 17, 2021	Initial issue	JaeHyeok Bang	JaeJin Lee

Table of Contents

1. GENERAL INFORMATION	6
2. INTRODUCTION	9
2.1. EUT DESCRIPTION	9
2.2. TESTING ENVIRONMENT	9
2.3. MEASURING INSTRUMENT CALIBRATION.....	9
2.4. MEASUREMENT UNCERTAINTY.....	9
2.5. TEST FACILITY.....	9
3. DESCRIPTION OF TESTS.....	10
3.1. ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)	10
3.2. PEAK TO AVERAGE RATIO	12
3.3. OCCUPIED BANDWIDTH.....	13
3.4. BAND EDGE EMISSIONS AT ANTENNA TERMINAL	14
3.5. SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.6. UNDESIRABLE EMISSIONS	16
3.7. FREQUENCY STABILITY	17
4. LIST OF TEST EQUIPMENT	18
5. SUMMARY OF TEST RESULTS.....	19
6. SAMPLE CALCULATION	20
7. TEST DATA.....	23
7.1. OCCUPIED BANDWIDTH.....	23
7.2. PEAK TO AVERAGE RATIO	23
7.3. BAND EDEG EMISSIONS (Conducted).....	23
7.4. SPURIOUS AND HARMONICS EMISSIONS (Conducted)	23
7.5. ERP & EIRP	24
7.5.1. LTE Band 12.....	24
7.5.2. LTE Band 17.....	25
7.5.3. LTE Band 13.....	26
7.5.4. LTE Band 26.....	27
7.5.5. LTE Band 26(5)	28
7.5.6. LTE Band 66(4)	29
7.5.7. LTE Band 25(2)	30
7.5.8. LTE Band 41(38)	31
7.5.9. LTE Band 7	32
7.6. UNDESIRABLE EMISSIONS (Radiated).....	33
7.6.1. LTE Band 12.....	33
7.6.2. LTE Band 17.....	34
7.6.3. LTE Band 13.....	35
7.6.4. LTE Band 26.....	36
7.6.5. LTE Band 66(4)	37
7.6.6. LTE Band 25(2)	38
7.6.7. LTE Band 41(38)	39
7.6.8. LTE Band 7	40

7.7. FREQUENCY STABILITY	41
7.7.1. LTE Band 12.....	41
7.7.2. LTE Band 17.....	42
7.7.3. LTE Band 13.....	43
7.7.4. LTE Band 26(5)	44
7.7.5. LTE Band 66(4)	45
7.7.6. LTE Band 25(2)	46
7.7.7. LTE Band 41(38)	47
7.7.8. LTE Band 7.....	48
8. TEST PLOTS	49
8.1. OCCUPIED BANDWIDTH.....	49
8.1.1. LTE Band 12.....	49
8.1.2. LTE Band 17.....	53
8.1.3. LTE Band 13.....	55
8.1.4. LTE Band 26.....	57
8.1.5. LTE Band 26(5)	58
8.1.6. LTE Band 66(4)	62
8.1.7. LTE Band 25(2)	68
8.1.8. LTE Band 41(38)	74
8.1.9. LTE Band 7.....	78
8.2. PEAK TO AVERAGE RATIO	82
8.2.1. LTE Band 12.....	82
8.2.2. LTE Band 17.....	86
8.2.3. LTE Band 13.....	88
8.2.4. LTE Band 26.....	90
8.2.5. LTE Band 26(5)	91
8.2.6. LTE Band 66(4)	95
8.2.7. LTE Band 25(2)	101
8.2.8. LTE Band 41(38)	107
8.2.9. LTE Band 7.....	111
8.3. BAND EDGE EMISSIONS(Conducted).....	115
8.3.1. LTE Band 12.....	115
8.3.2. LTE Band 17.....	123
8.3.3. LTE Band 13.....	127
8.3.4. LTE Band 26.....	135
8.3.5. LTE Band 26(5)	137
8.3.6. LTE Band 66(4)	145
8.3.7. LTE Band 25(2)	157
8.3.8. LTE Band 41(38)	169
8.3.9. LTE Band 7.....	175
8.4. SPURIOUS AND HARMONICS EMISSIONS(Conducted).....	181
8.4.1. LTE Band 12.....	181
8.4.2. LTE Band 17.....	188
8.4.3. LTE Band 13.....	191

8.4.4. LTE Band 26.....	193
8.4.5. LTE Band 26(5)	194
8.4.6. LTE Band 66(4)	200
8.4.7. LTE Band 25(2)	218
8.4.8. LTE Band 41(38)	236
8.4.9. LTE Band 7.....	248

1. GENERAL INFORMATION

FCC Classification	PCS Licensed Transmitter held to ear (PCE)
FCC ID	V2X-PM75
IC	10664A-PM75
Product Name	Mobile Computer
Model Name	PM75
Add Model Name	-
FVIN(Firmware Version Identification Number)	75.00
EUT Serial Number	21196A0010(Radiated), 21196A0013(Conducted)
Supplying power	DC 3.85 V
Antenna Information	Antenna Type: LDS Antenna Gain: -2.89 dBi (Band 12,17), -3.48 dBi (Band 13), -2.55 dBi (Band 26, 5), 1.31 dBi (Band 66, 4), 2.68 dBi (Band 25, 2), 2.66 dBi (Band 38, 7, 41)

Mode	TX Frequency (MHz)	Emission Designator	Modulation	ERP(FCC&IC)		EIRP	
				Max power (dBm)	Max power (W)	Max power (dBm)	Max power (W)
LTE Band 12	704 ~ 711	8M95G7D	QPSK	16.82	0.048	-	-
LTE Band 12	704 ~ 711	8M90W7D	16QAM	15.45	0.035	-	-
LTE Band 12	701.5 ~ 713.5	4M47G7D	QPSK	16.81	0.048	-	-
LTE Band 12	701.5 ~ 713.5	4M47W7D	16QAM	15.49	0.035	-	-
LTE Band 12	700.5 ~ 714.5	2M69G7D	QPSK	16.72	0.047	-	-
LTE Band 12	700.5 ~ 714.5	2M68W7D	16QAM	15.59	0.036	-	-
LTE Band 12	699.7 ~ 715.3	1M08G7D	QPSK	16.34	0.043	-	-
LTE Band 12	699.7 ~ 715.3	1M08W7D	16QAM	15.56	0.036	-	-
LTE Band 13	782 ~ 782	8M95G7D	QPSK	20.89	0.123	-	-
LTE Band 13	782 ~ 782	8M92W7D	16QAM	19.75	0.094	-	-
LTE Band 13	779.5 ~ 784.5	4M47G7D	QPSK	21.06	0.128	-	-
LTE Band 13	779.5 ~ 784.5	4M46W7D	16QAM	19.60	0.091	-	-

Mode	TX Frequency (MHz)	Emission Designator	Modulation	ERP(FCC&IC)		EIRP	
				Max power (dBm)	Max power (W)	Max power (dBm)	Max power (W)
LTE Band 17	709 ~ 711	8M91G7D	QPSK	18.20	0.066	-	-
LTE Band 17	709 ~ 711	8M91W7D	16QAM	17.30	0.054	-	-
LTE Band 17	706.5 ~ 713.5	4M47G7D	QPSK	18.50	0.071	-	-
LTE Band 17	706.5 ~ 713.5	4M47W7D	16QAM	17.31	0.054	-	-

Mode	TX Frequency (MHz)	Emission Designator	Modulation	ERP(For FCC)		EIRP(For IC)	
				Max power (dBm)	Max power (W)	Max power (dBm)	Max power (W)
LTE Band 26	831.5 ~ 841.5	13M4G7D	QPSK	19.55	0.090	21.70	0.148
LTE Band 26	831.5 ~ 841.5	13M4W7D	16QAM	18.82	0.076	20.97	0.125
LTE Band 26(5)	829 ~ 844	8M94G7D	QPSK	19.85	0.097	22.00	0.158
LTE Band 26(5)	829 ~ 844	8M92W7D	16QAM	18.50	0.071	20.65	0.116
LTE Band 26(5)	826.5 ~ 846.5	4M48G7D	QPSK	19.63	0.092	21.78	0.151
LTE Band 26(5)	826.5 ~ 846.5	4M47W7D	16QAM	18.26	0.067	20.41	0.110
LTE Band 26(5)	825.5 ~ 847.5	2M68G7D	QPSK	19.52	0.090	21.67	0.147
LTE Band 26(5)	825.5 ~ 847.5	2M68W7D	16QAM	18.12	0.065	20.27	0.106
LTE Band 26(5)	824.7 ~ 848.3	1M08G7D	QPSK	19.71	0.094	21.86	0.153
LTE Band 26(5)	824.7 ~ 848.3	1M08W7D	16QAM	18.05	0.064	20.20	0.105

Mode	TX Frequency (MHz)	Emission Designator	Modulation	EIRP(FCC & IC)	
				Max power(dBm)	Max power(W)
LTE Band 66(4)	1 720 ~ 1 770	17M8G7D	QPSK	26.56	0.453
LTE Band 66(4)	1 720 ~ 1 770	17M8W7D	16QAM	24.98	0.315
LTE Band 66(4)	1 717.5 ~ 1 772.5	13M4G7D	QPSK	26.74	0.472
LTE Band 66(4)	1 717.5 ~ 1 772.5	13M4W7D	16QAM	25.14	0.327
LTE Band 66(4)	1 715 ~ 1 775	8M92G7D	QPSK	26.59	0.456
LTE Band 66(4)	1 715 ~ 1 775	8M91W7D	16QAM	25.29	0.338
LTE Band 66(4)	1 712.5 ~ 1 777.5	4M47G7D	QPSK	26.31	0.428
LTE Band 66(4)	1 712.5 ~ 1 777.5	4M47W7D	16QAM	24.90	0.309
LTE Band 66(4)	1 711.5 ~ 1 778.5	2M68G7D	QPSK	26.38	0.435
LTE Band 66(4)	1 711.5 ~ 1 778.5	2M68W7D	16QAM	25.11	0.324
LTE Band 66(4)	1 710.7 ~ 1 779.3	1M08G7D	QPSK	26.17	0.414
LTE Band 66(4)	1 710.7 ~ 1 779.3	1M08W7D	16QAM	25.20	0.331
LTE Band 25(2)	1 860 ~ 1 905	17M8G7D	QPSK	25.39	0.346
LTE Band 25(2)	1 860 ~ 1 905	17M8W7D	16QAM	24.21	0.264
LTE Band 25(2)	1 857.5 ~ 1 907.5	13M4G7D	QPSK	25.48	0.353
LTE Band 25(2)	1 857.5 ~ 1 907.5	13M4W7D	16QAM	23.88	0.244
LTE Band 25(2)	1 855 ~ 1 910	8M91G7D	QPSK	25.57	0.361
LTE Band 25(2)	1 855 ~ 1 910	8M94W7D	16QAM	23.94	0.248
LTE Band 25(2)	1 852.5 ~ 1 912.5	4M48G7D	QPSK	24.65	0.292
LTE Band 25(2)	1 852.5 ~ 1 912.5	4M47W7D	16QAM	23.11	0.205
LTE Band 25(2)	1 851.5 ~ 1 913.5	2M69G7D	QPSK	24.62	0.290
LTE Band 25(2)	1 851.5 ~ 1 913.5	2M69W7D	16QAM	23.31	0.214
LTE Band 25(2)	1 850.7 ~ 1 914.3	1M08G7D	QPSK	24.41	0.276
LTE Band 25(2)	1 850.7 ~ 1 914.3	1M08W7D	16QAM	23.19	0.208

Mode	TX Frequency (MHz)	Emission Designator	Modulation	EIRP(FCC & IC)	
				Max power(dBm)	Max power(W)
LTE Band 7	2 510 ~ 2 560	17M9G7D	QPSK	24.14	0.259
LTE Band 7	2 510 ~ 2 560	17M8W7D	16QAM	22.99	0.199
LTE Band 7	2 507.5 ~ 2 562.5	13M4G7D	QPSK	24.28	0.268
LTE Band 7	2 507.5 ~ 2 562.5	13M4W7D	16QAM	22.78	0.190
LTE Band 7	2 505 ~ 2 565	8M93G7D	QPSK	24.24	0.265
LTE Band 7	2 505 ~ 2 565	8M91W7D	16QAM	22.55	0.180
LTE Band 7	2 502.5 ~ 2 567.5	4M47G7D	QPSK	24.81	0.303
LTE Band 7	2 502.5 ~ 2 567.5	4M47W7D	16QAM	23.11	0.205
LTE Band 41(38)	2 506 ~ 2 680	17M8G7D	QPSK	24.42	0.277
LTE Band 41(38)	2 506 ~ 2 680	17M8W7D	16QAM	23.71	0.235
LTE Band 41(38)	2 503.5 ~ 2 682.5	13M3G7D	QPSK	24.02	0.252
LTE Band 41(38)	2 503.5 ~ 2 682.5	13M2W7D	16QAM	22.41	0.174
LTE Band 41(38)	2 501 ~ 2 685	8M92G7D	QPSK	24.78	0.301
LTE Band 41(38)	2 501 ~ 2 685	8M91W7D	16QAM	24.12	0.258
LTE Band 41(38)	2 498.5 ~ 2 687.5	4M46G7D	QPSK	25.00	0.316
LTE Band 41(38)	2 498.5 ~ 2 687.5	4M48W7D	16QAM	24.07	0.255

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment Under Test (EUT) supports 850/1900 GSM, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n/ac WLAN(2.4GHz), 802.11a/n/ac WLAN(5GHz), Bluetooth(BDR, EDR, LE) and NFC.

2.2. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+21 °C ~ +25 °C
▪ Relative Humidity	42 % ~ 45 %

2.3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.4. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	4.9 dB (The confidence level is about 95 %, k = 2)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, k = 2)
Radiated Disturbance (Above 18 GHz)	5.3 dB (The confidence level is about 95 %, k = 2)

2.5. TEST FACILITY

DT&C Co., Ltd.

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.

The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.

- FCC & IC MRA Designation No. : KR0034

- ISED#: 5740A


www.dtnc.net

Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

3. DESCRIPTION OF TESTS

3.1. ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

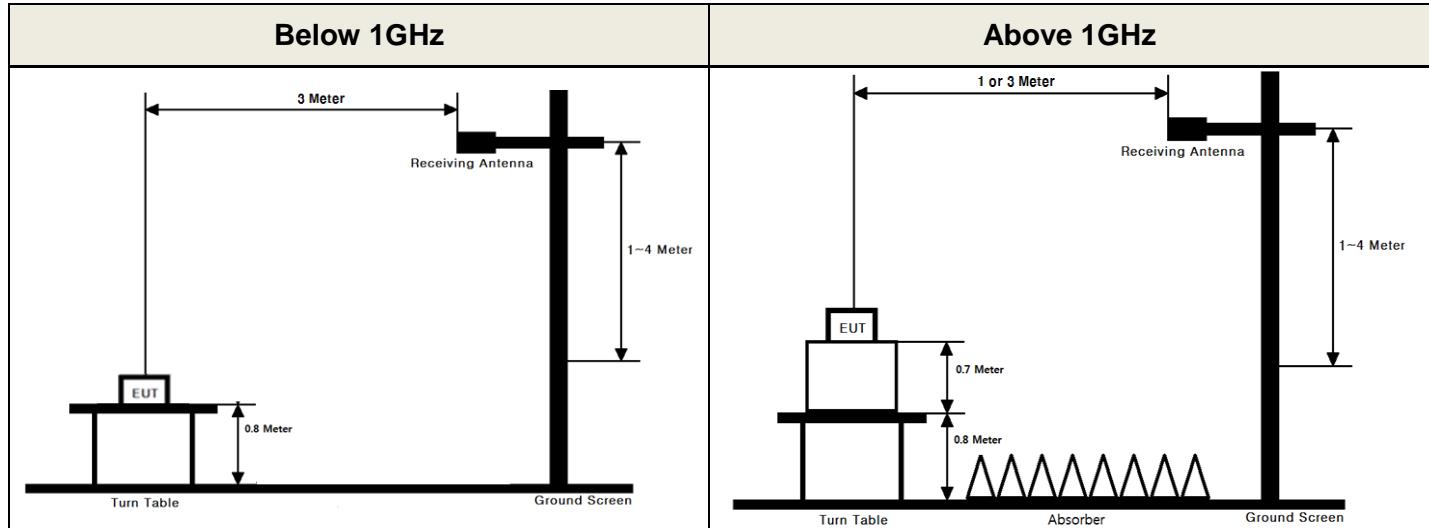

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.17
- KDB971168 D01v03 - Section 5.2.2
- ANSI C63.26-2015 – Section 5.2.4.4.1

Test setting

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW = 1 % to 5 % of the OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2. PEAK TO AVERAGE RATIO

Test set-up

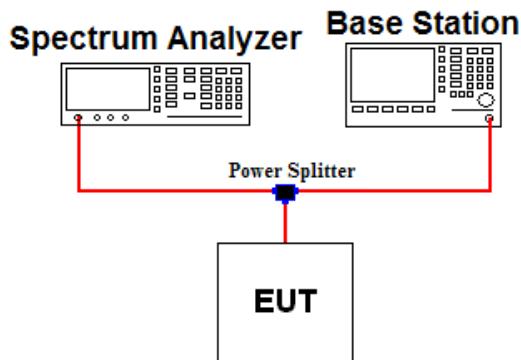

Test Procedure

- KDB971168 D01v03 - Section 5.7.2
- ANSI C63.26-2015 – Section 5.2.3.4

A peak to average ratio measurement is performed at the conducted port of the EUT.

The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The present of time the signal spends at or above the level defines the probability for that particular power level.


Test setting

The spectrum Analyzer's CCDF measurement function is enabled.

1. Set resolution/measurement bandwidth \geq OBW or specified reference bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to the greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
4. Record the maximum PAPR level associated with a probability of 0.1 %.
5. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

3.3. OCCUPIED BANDWIDTH.

Test set-up

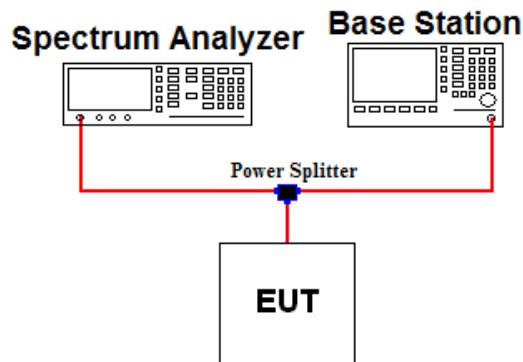

Test Procedure

- **KDB971168 D01v03 - Section 4.3**
- **ANSI C63.26-2015 – Section 5.4.4**


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 % ~ 5 % of the expected OBW & VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within 1 % ~ 5 % of the 99 % occupied bandwidth observed in step 6.

3.4. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

Test set-up

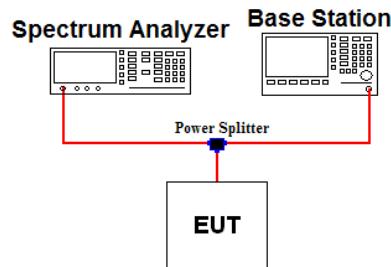

Test Procedure

- KDB971168 D01v03 - Section 6
- ANSI C63.26-2015 – Section 5.7

All out of band emissions are measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its lowest and highest channel with all bandwidths, modulations and RB configurations.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.

Test setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission bandwidth
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS & Trace mode = Max hold
6. Sweep time = Auto couple or 1 s for band edge
7. Number of sweep point $\geq 2 \times$ span / RBW
8. The trace was allowed to stabilize

Note 1: Per Part 22.917(b)(1) / 24.238(b) / 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Note 2: Per Part 27(g) for operations in the 600 MHz band and the 698-746 MHz band, compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.


Note 3: Per Part 27.53(c.4) for all frequencies between 763 MHz - 775 MHz and 793 MHz - 805 MHz, the FCC limit is $65 + 10 \log_{10}(P[\text{Watts}]) = -35$ dBm in a 6.25 kHz bandwidth.

Note 4: For part 27.53(m)(4) the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2 490.5 MHz and 2 496 MHz and $55 + 10 \log (P)$ dB at or below 2 490.5 MHz.

Note 5: Per part 27.53(m)(6) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 MHz band is 2 495 MHz - 2 496 MHz, in which case a resolution bandwidth of at least one percent may be employed.

3.5. SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

Test set-up

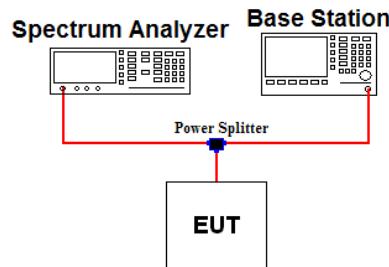

Test Procedure

- **KDB971168 D01v03 - Section 6**
- **ANSI C63.26-2015 – Section 5.7**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations. The spectrum is scanned from 9 kHz up to a frequency including its 10th harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.


Test setting

1. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW $\geq 3 \times$ RBW (Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1GHz.

3.6. UNDESIRABLE EMISSIONS

Test Set-up

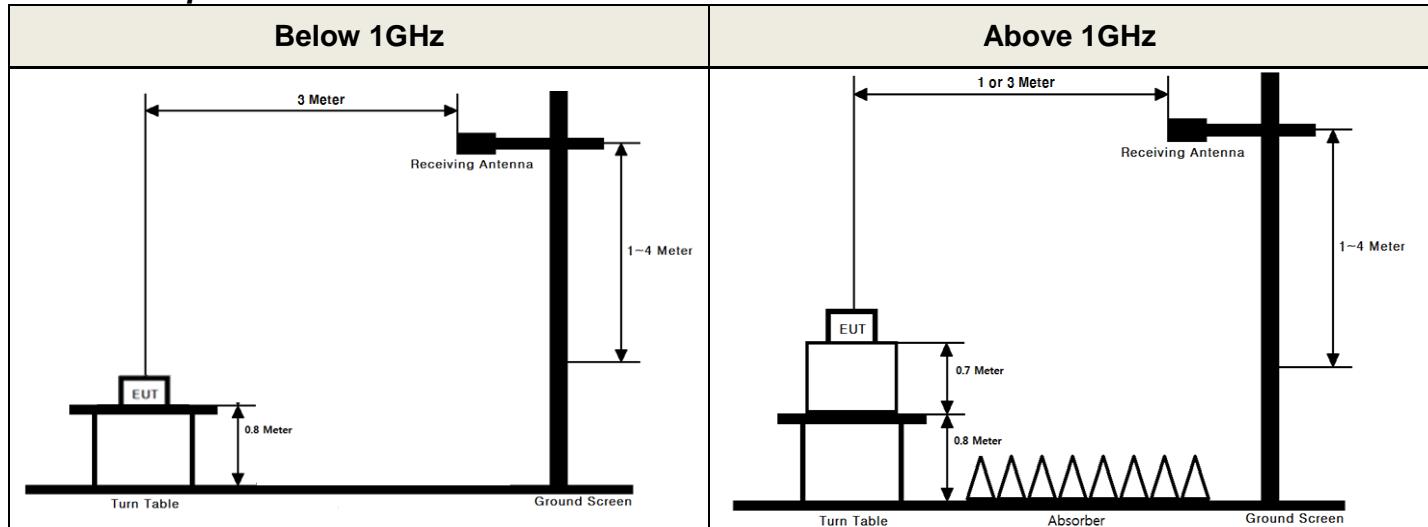

These measurements were performed at 3 test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.12
- KDB971168 D01v03 - Section 5.8
- ANSI C63.26-2015 – Section 5.5

Test setting


1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW $\geq 3 \times$ RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration. This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.7. FREQUENCY STABILITY

Test Set-up

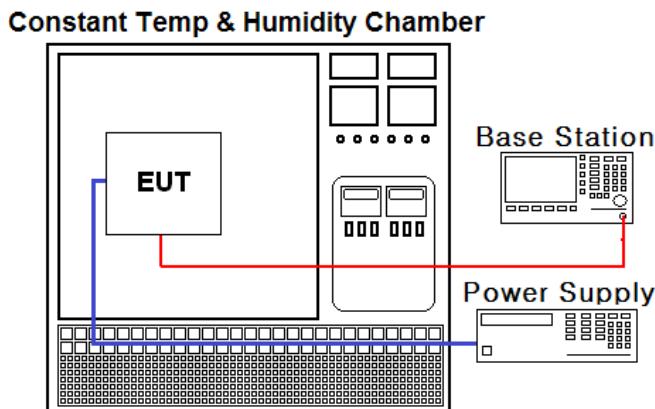

Test Procedure

- ANSI/TIA-603-E-2016
- KDB971168 D01v03 - Section 9

The frequency stability of the transmitter is measured by:

a.) **Temperature:**

The temperature is varied from -30 °C to +50 °C using an environmental chamber.

b.) **Primary Supply Voltage:**

The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24, 27, 90. The frequency stability of the transmitter shall be maintained within ±0.000 25 % ($\pm 2.5 \text{ ppm}$) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(20 °C to provide a reference)
2. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	21/06/24	22/06/24	US47360812
Spectrum Analyzer	Agilent Technologies	N9020A	20/12/16	21/12/16	MY50410399
Spectrum Analyzer	Agilent Technologies	N9030B	20/12/16	21/12/16	MY55480168
Spectrum Analyzer	Agilent Technologies	N9030A	20/12/16	21/12/16	MY53310140
Spectrum Analyzer	Agilent Technologies	N9020A	21/06/24	22/06/24	MY50200867
DC power supply	Agilent Technologies	66332A	21/06/24	22/06/24	US37474125
Multimeter	FLUKE	17B+	20/12/16	21/12/16	36390701WS
Power Splitter	Anritsu	K241B	21/06/24	22/06/24	1701102
Temp & Humi	SJ Science	SJ-TH-S50	20/12/14	21/12/14	U5542113
Radio Communication Analyzer	Anritsu	MT8820C	21/06/24	22/06/24	6200951873
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-2
Thermohygrometer	XIAOMI	MHO-C201	20/12/16	21/12/16	00089675
Signal Generator	Rohde Schwarz	SMBV100A	20/12/16	21/12/16	255571
Signal Generator	ANRITSU	MG3695C	20/12/16	21/12/16	173501
Loop Antenna	ETS-Lindgren	6502	21/01/28	23/01/28	00226186
Bilog Antenna	Schwarzbeck	VULB 9160	20/12/16	21/12/16	3362
Dipole Antenna	A.H.Systems Inc.	FCC-4	20/12/16	22/12/16	710A
Dipole Antenna	Schwarzbeck	UHA9105	20/04/10	22/04/10	2262
HORN ANT	ETS	3117	20/12/16	21/12/16	00140394
HORN ANT	ETS	3117	21/06/24	22/06/24	00143278
HORN ANT	A.H.Systems	SAS-574	21/06/24	22/06/24	154
HORN ANT	A.H.Systems	SAS-574	21/06/24	22/06/24	155
Amplifier	EMPOWER	BBS3Q7ELU	21/06/24	22/06/24	1020
PreAmplifier	H.P	8447D	20/12/16	21/12/16	2944A07774
PreAmplifier	Agilent	8449B	21/06/24	22/06/24	3008A02108
PreAmplifier	A.H.Systems Inc.	PAM-1840VH	21/06/24	22/06/24	163
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	21/06/24	22/06/24	7
High-pass filter	Wainwright	WHKX10-2838-3300-18000-60SS	21/06/24	22/06/24	2
High-pass filter	Wainwright	WHKX6-6320-8000-26500-40CC	21/06/24	22/06/24	2
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-2
Cable	JUNFLON	MWX241/B	21/01/08	22/01/08	M-3
Cable	JUNFLON	MWX221	21/01/08	22/01/08	M-4
Cable	JUNFLON	MWX221	21/01/08	22/01/08	M-5
Cable	DTNC	Cable	21/01/08	22/01/08	M-6
Cable	JUNFLON	J12J101757-00	21/01/08	22/01/08	M-7
Cable	HUBER+SUHNER	SUCOFLEX104	21/01/08	22/01/08	M-8
Cable	HUBER+SUHNER	SUCOFLEX106	21/01/08	22/01/08	M-9

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Status Note 1
2.1046	-	Conducted Output Power	N/A		C Note2
2.1049	RSS-GEN[6.7]	Occupied Bandwidth	N/A		C
24.232(d) 27.50(d.5)	RSS-130 [4.6] RSS-132 [5.4] RSS-133 [6.4] RSS-139 [6.5] RSS-199 [4.4]	Peak to Average Ratio	< 13 dB		C
2.1051 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	RSS-130 [4.7] RSS-132 [5.5] RSS-133 [6.5] RSS-139 [6.6]	Band Edge / Conducted Spurious Emissions	> 43 + 10log ₁₀ (P) dB at Band edge and for all out-of-band emissions	Conducted	C
27.53(c.4)	RSS-130 [4.7.2]	Undesirable emissions in 763 ~ 775MHz & 793 ~ 806MHz	>65 + 10 log (P) dB in a 6.25 kHz band segment frequencies between 763-775 MHz and 793-805 MHz		C
27.53(m)	RSS-199 [4.5]	Band Edge / Conducted Spurious Emissions	> 40 + 10log10 (P) dB at channel edge and 5 MHz from the channel edge > 43 + 10log10 (P) dB at 5 MHz and X MHz from the channel edge > 55 + 10log10 (P) dB at all frequencies more than X MHz from the channel edge		C
2.1055 22.355 24.235 27.54	RSS-130 [4.5] RSS-132 [5.3] RSS-133 [6.3] RSS-139 [6.4] RSS-199 [4.3]	Frequency Stability	< 2.5 ppm (Part 22) or Fundamental emissions must stay within Authorized frequency block (Part 24, 27)		C
27.50(b.10) 27.50(c.10)	RSS-130 [4.6]	Radiated Output Power (B12, 13, 17)	< 3 Watts max. ERP (FCC & IC)	Radiated	C Note3
22.913(a.5)	RSS-132 [5.4]	Radiated Output Power (B26, 5)	< 7 Watts max. ERP (FCC) < 11.5 Watts max. EIRP (IC)		C Note3
27.50(d.4)	RSS-139 [6.5]	Radiated Output Power (B66, 4)	< 1 Watts max. EIRP (FCC & IC)		C Note3
24.232(c) 27.50(h.2)	RSS-133 [6.4] RSS-199 [4.4]	Radiated Output Power (B25, 2, 7, 41, 38)	< 2 Watts max. EIRP (FCC & IC)		C Note3
2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	RSS-130 [4.7] RSS-132 [5.5] RSS-133 [6.5] RSS-139 [6.6]	Undesirable Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions		C Note3
27.53(m)	RSS-199 [4.5]	Undesirable Emissions (B7, 41, 38)	> 55 + 10log ₁₀ (P) dB for all out-of-band emissions		C Note3
27.53(f)	RSS-130 [4.7.2]	Undesirable Emissions in 1559 ~ 1610 MHz (B13)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions of less than 700 Hz bandwidth)		C Note3

Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable

Note 2: Refer to RF Exposure Report (Test Report SAR)

Note 3: This test item was performed in three orthogonal EUT positions and the worst case data was reported.

6. SAMPLE CALCULATION

A. Emission Designator

LTE Band 12(QPSK)

Emission Designator = **8M95G7D**

LTE OBW = 8.948 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 17(QPSK)

Emission Designator = **8M91G7D**

LTE OBW = 8.908 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 13(QPSK)

Emission Designator = **8M95G7D**

LTE OBW = 8.947 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 26(5)(QPSK)

Emission Designator = **13M4G7D**

LTE OBW = 13.414 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 25(2)(QPSK)

Emission Designator = **17M8G7D**

LTE OBW = 17.817 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 41(38)(QPSK)

Emission Designator = **17M8G7D**

LTE OBW = 17.750 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 12(16QAM)

Emission Designator = **8M90W7D**

LTE OBW = 8.895 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 17(16QAM)

Emission Designator = **8M91W7D**

LTE OBW = 8.908 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 13(16QAM)

Emission Designator = **8M92W7D**

LTE OBW = 8.917 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 26(5)(16QAM)

Emission Designator = **13M4W7D**

LTE OBW = 13.379 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 25(2)(16QAM)

Emission Designator = **17M8W7D**

LTE OBW = 17.809 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 41(38)(16QAM)

Emission Designator = **17M8W7D**

LTE OBW = 17.757 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 7(QPSK)

Emission Designator = **17M9G7D**

LTE OBW = 17.859 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 66(4)(QPSK)

Emission Designator = **17M8G7D**

LTE OBW = 17.809 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 7(16QAM)

Emission Designator = **17M8W7D**

LTE OBW = 17.826 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 66(4)(16QAM)

Emission Designator = **17M8W7D**

LTE OBW = 17.805 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

B. For substitution method

- 1) The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1 GHz respectively above ground.
- 2) The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3) During the test, the turn table is rotated until the maximum signal is found.
- 4) Record the field strength meter's level. (ex. Spectrum reading level is -8.5 dBm)
- 5) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 6) Increase the signal generator output till the field strength meter's level is equal to the item (4).
(ex. Signal generator level is -18.04 dBm)
- 7) The gain of the cable and amplifier between the signal generator and terminals of substituted antenna is 46.92 dB at test frequency.
- 8) Record the level at substituted antenna terminal. (ex. 28.88dBm)
- 9) The result is calculated as below;

EIRP(dBm) = LEVEL@ANTENNA TERMINAL + TX Antenna Gain (dBi)

ERP(dBm) = LEVEL@ANTENNA TERMINAL + TX Antenna Gain (dBd)

Where, TX Antenna Gain (dBd) = TX Antenna Gain (dBi) - 2.15 dB

7. TEST DATA

7.1. OCCUPIED BANDWIDTH

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.1

7.2. PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.2

7.3. BAND EDEG EMISSIONS (Conducted)

- Plots of the EUT's Band Edge Emissions are shown in Clause 8.3

7.4. SPURIOUS AND HARMONICS EMISSIONS (Conducted)

- Plots of the EUT's Spurious Emissions are shown in Clause 8.4

7.5. ERP & EIRP

- Test Notes

- 1) This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the below table.

7.5.1. LTE Band 12

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
10	704	QPSK	1/49	H	16.73	-0.63	16.10	0.041
		16QAM	1/49	H	15.68	-0.63	15.05	0.032
	711	QPSK	1/25	H	17.44	-0.62	16.82	0.048
		16QAM	1/25	H	16.07	-0.62	15.45	0.035
5	701.5	QPSK	1/12	H	17.14	-0.63	16.51	0.045
		16QAM	1/12	H	16.10	-0.63	15.47	0.035
	707.5	QPSK	1/24	H	16.93	-0.62	16.31	0.043
		16QAM	1/24	H	15.94	-0.62	15.32	0.034
	713.5	QPSK	1/12	H	17.43	-0.62	16.81	0.048
		16QAM	1/12	H	16.11	-0.62	15.49	0.035
3	700.5	QPSK	1/7	H	16.68	-0.63	16.05	0.040
		16QAM	1/7	H	15.32	-0.63	14.69	0.029
	707.5	QPSK	1/14	H	16.64	-0.62	16.02	0.040
		16QAM	1/14	H	15.67	-0.62	15.05	0.032
	714.5	QPSK	1/0	H	17.34	-0.62	16.72	0.047
		16QAM	1/0	H	16.21	-0.62	15.59	0.036
1.4	699.7	QPSK	1/5	H	16.53	-0.63	15.90	0.039
		16QAM	1/5	H	15.60	-0.63	14.97	0.031
	707.5	QPSK	1/2	H	16.55	-0.62	15.93	0.039
		16QAM	1/2	H	15.40	-0.62	14.78	0.030
	715.3	QPSK	1/2	H	16.96	-0.62	16.34	0.043
		16QAM	1/2	H	16.18	-0.62	15.56	0.036

7.5.2. LTE Band 17

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
10	709	QPSK	1/25	H	18.71	-0.62	18.09	0.064
		16QAM	1/25	H	17.92	-0.62	17.30	0.054
	711	QPSK	1/25	H	18.82	-0.62	18.20	0.066
		16QAM	1/25	H	17.71	-0.62	17.09	0.051
5	706.5	QPSK	1/12	H	19.11	-0.62	18.49	0.071
		16QAM	1/12	H	17.93	-0.62	17.31	0.054
	710	QPSK	1/12	H	19.12	-0.62	18.50	0.071
		16QAM	1/12	H	17.36	-0.62	16.74	0.047
	713.5	QPSK	1/12	H	18.89	-0.62	18.27	0.067
		16QAM	1/12	H	17.22	-0.62	16.60	0.046

7.5.3. LTE Band 13

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
10	782	QPSK	1/0	H	21.47	-0.58	20.89	0.123
		16QAM	1/0	H	20.33	-0.58	19.75	0.094
5	779.5	QPSK	1/12	H	21.64	-0.58	21.06	0.128
		16QAM	1/12	H	20.18	-0.58	19.60	0.091
	784.5	QPSK	1/0	H	20.90	-0.58	20.32	0.108
		16QAM	1/0	H	19.42	-0.58	18.84	0.077

7.5.4. LTE Band 26

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
15	831.5	QPSK	1/0	H	20.13	-0.81	19.32	0.086
		16QAM	1/0	H	19.08	-0.81	18.27	0.067
	841.5	QPSK	1/36	H	20.44	-0.89	19.55	0.090
		16QAM	1/36	H	19.71	-0.89	18.82	0.076

7.5.5. LTE Band 26(5)

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
10	829	QPSK	1/0	H	19.98	-0.79	19.19	0.083
		16QAM	1/0	H	18.81	-0.79	18.02	0.063
	836.5	QPSK	1/25	H	20.70	-0.85	19.85	0.097
		16QAM	1/25	H	19.35	-0.85	18.50	0.071
	844	QPSK	1/25	H	20.43	-0.91	19.52	0.090
		16QAM	1/25	H	19.09	-0.91	18.18	0.066
	826.5	QPSK	1/12	H	20.41	-0.78	19.63	0.092
		16QAM	1/12	H	18.80	-0.78	18.02	0.063
	836.5	QPSK	1/12	H	20.42	-0.85	19.57	0.091
		16QAM	1/12	H	18.97	-0.85	18.12	0.065
5	846.5	QPSK	1/0	H	20.01	-0.93	19.08	0.081
		16QAM	1/0	H	19.19	-0.93	18.26	0.067
	825.5	QPSK	1/7	H	20.26	-0.77	19.49	0.089
		16QAM	1/7	H	18.69	-0.77	17.92	0.062
	836.5	QPSK	1/7	H	20.37	-0.85	19.52	0.090
		16QAM	1/7	H	18.97	-0.85	18.12	0.065
	847.5	QPSK	1/0	H	19.87	-0.94	18.93	0.078
		16QAM	1/0	H	18.22	-0.94	17.28	0.053
1.4	824.7	QPSK	1/2	H	20.08	-0.76	19.32	0.086
		16QAM	1/2	H	18.60	-0.76	17.84	0.061
	836.5	QPSK	1/2	H	20.56	-0.85	19.71	0.094
		16QAM	1/2	H	18.90	-0.85	18.05	0.064
	848.3	QPSK	1/2	H	19.20	-0.95	18.25	0.067
		16QAM	1/2	H	18.17	-0.95	17.22	0.053

7.5.6. LTE Band 66(4)

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
20	1 720	QPSK	1/0	V	20.52	6.04	26.56	0.453
		16QAM	1/0	V	18.94	6.04	24.98	0.315
	1 745	QPSK	1/0	V	19.70	5.88	25.58	0.361
		16QAM	1/0	V	18.10	5.88	23.98	0.250
	1 770	QPSK	1/0	V	20.42	5.63	26.05	0.403
		16QAM	1/0	V	18.28	5.63	23.91	0.246
	1 717.5	QPSK	1/0	V	20.68	6.06	26.74	0.472
		16QAM	1/0	V	19.08	6.06	25.14	0.327
	1 745	QPSK	1/0	V	19.11	5.88	24.99	0.316
		16QAM	1/0	V	17.12	5.88	23.00	0.200
15	1 772.5	QPSK	1/0	V	20.10	5.60	25.70	0.372
		16QAM	1/0	V	18.51	5.60	24.11	0.258
	1 715	QPSK	1/25	V	20.52	6.07	26.59	0.456
		16QAM	1/25	V	19.22	6.07	25.29	0.338
	1 745	QPSK	1/49	V	18.97	5.88	24.85	0.305
		16QAM	1/49	V	17.50	5.88	23.38	0.218
	1 775	QPSK	1/0	V	19.82	5.57	25.39	0.346
		16QAM	1/0	V	18.39	5.57	23.96	0.249
10	1 712.5	QPSK	1/12	V	20.22	6.09	26.31	0.428
		16QAM	1/12	V	18.81	6.09	24.90	0.309
	1 745	QPSK	1/24	V	18.78	5.88	24.66	0.292
		16QAM	1/24	V	17.56	5.88	23.44	0.221
	1 777.5	QPSK	1/12	V	19.85	5.54	25.39	0.346
		16QAM	1/12	V	18.74	5.54	24.28	0.268
	1 711.5	QPSK	1/7	V	20.28	6.10	26.38	0.435
		16QAM	1/7	V	19.01	6.10	25.11	0.324
3	1 745	QPSK	1/7	V	18.62	5.88	24.50	0.282
		16QAM	1/7	V	17.68	5.88	23.56	0.227
	1 778.5	QPSK	1/7	V	19.97	5.53	25.50	0.355
		16QAM	1/7	V	18.39	5.53	23.92	0.247
	1 710.7	QPSK	1/2	V	20.07	6.10	26.17	0.414
		16QAM	1/2	V	19.10	6.10	25.20	0.331
	1 745	QPSK	1/2	V	18.87	5.88	24.75	0.299
		16QAM	1/2	V	17.34	5.88	23.22	0.210
1.4	1 779.3	QPSK	1/0	V	19.97	5.52	25.49	0.354
		16QAM	1/0	V	18.82	5.52	24.34	0.272

7.5.7. LTE Band 25(2)

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
20	1 860	QPSK	1/50	V	20.37	5.02	25.39	0.346
		16QAM	1/50	V	19.19	5.02	24.21	0.264
	1 882.5	QPSK	1/0	V	19.46	4.81	24.27	0.267
		16QAM	1/0	V	17.53	4.81	22.34	0.171
	1 905	QPSK	1/0	V	19.52	4.66	24.18	0.262
		16QAM	1/0	V	17.86	4.66	22.52	0.179
	1 857.5	QPSK	1/36	V	20.43	5.05	25.48	0.353
		16QAM	1/36	V	18.83	5.05	23.88	0.244
15	1 882.5	QPSK	1/0	V	19.18	4.81	23.99	0.251
		16QAM	1/0	V	17.89	4.81	22.70	0.186
	1 907.5	QPSK	1/0	V	19.58	4.67	24.25	0.266
		16QAM	1/0	V	18.11	4.67	22.78	0.190
10	1 855	QPSK	1/25	V	20.50	5.07	25.57	0.361
		16QAM	1/25	V	18.87	5.07	23.94	0.248
	1 882.5	QPSK	1/0	V	19.35	4.81	24.16	0.261
		16QAM	1/0	V	18.09	4.81	22.90	0.195
	1 910	QPSK	1/25	V	19.76	4.68	24.44	0.278
		16QAM	1/25	V	18.21	4.68	22.89	0.195
5	1 852.5	QPSK	1/12	V	19.55	5.10	24.65	0.292
		16QAM	1/12	V	18.01	5.10	23.11	0.205
	1 882.5	QPSK	1/0	V	18.75	4.81	23.56	0.227
		16QAM	1/0	V	17.28	4.81	22.09	0.162
	1 912.5	QPSK	1/0	V	19.27	4.69	23.96	0.249
		16QAM	1/0	V	18.06	4.69	22.75	0.188
3	1 851.5	QPSK	1/7	V	19.51	5.11	24.62	0.290
		16QAM	1/7	V	17.56	5.11	22.67	0.185
	1 882.5	QPSK	1/0	V	18.81	4.81	23.62	0.230
		16QAM	1/0	V	17.57	4.81	22.38	0.173
	1 913.5	QPSK	1/0	V	19.89	4.69	24.58	0.287
		16QAM	1/0	V	18.62	4.69	23.31	0.214
1.4	1 850.7	QPSK	1/2	V	19.05	5.11	24.16	0.261
		16QAM	1/2	V	17.54	5.11	22.65	0.184
	1 882.5	QPSK	1/2	V	18.64	4.81	23.45	0.221
		16QAM	1/2	V	17.26	4.81	22.07	0.161
	1 914.3	QPSK	1/0	V	19.71	4.70	24.41	0.276
		16QAM	1/0	V	18.49	4.70	23.19	0.208

7.5.8. LTE Band 41(38)

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
20	2 506	QPSK	1/50	H	18.56	5.80	24.36	0.273
		16QAM	1/50	H	17.91	5.80	23.71	0.235
	2 593	QPSK	1/50	H	18.57	5.85	24.42	0.277
		16QAM	1/50	H	16.84	5.85	22.69	0.186
	2 680	QPSK	1/50	H	15.78	6.19	21.97	0.157
		16QAM	1/50	H	13.96	6.19	20.15	0.104
15	2 503.5	QPSK	1/36	H	18.22	5.80	24.02	0.252
		16QAM	1/36	H	16.61	5.80	22.41	0.174
	2 593	QPSK	1/36	H	17.77	5.85	23.62	0.230
		16QAM	1/36	H	16.18	5.85	22.03	0.160
	2 682.5	QPSK	1/36	H	15.50	6.20	21.70	0.148
		16QAM	1/36	H	14.02	6.20	20.22	0.105
10	2 501	QPSK	1/25	H	18.97	5.81	24.78	0.301
		16QAM	1/25	H	18.31	5.81	24.12	0.258
	2 593	QPSK	1/25	H	18.57	5.85	24.42	0.277
		16QAM	1/25	H	17.94	5.85	23.79	0.239
	2 685	QPSK	1/25	H	16.39	6.21	22.60	0.182
		16QAM	1/25	H	15.49	6.21	21.70	0.148
5	2 498.5	QPSK	1/12	H	19.19	5.81	25.00	0.316
		16QAM	1/12	H	18.26	5.81	24.07	0.255
	2 593	QPSK	1/12	H	18.53	5.85	24.38	0.274
		16QAM	1/12	H	17.68	5.85	23.53	0.225
	2 687.5	QPSK	1/12	H	15.99	6.21	22.20	0.166
		16QAM	1/12	H	14.93	6.21	21.14	0.130

7.5.9. LTE Band 7

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
20	2 510	QPSK	1/0	H	18.35	5.79	24.14	0.259
		16QAM	1/0	H	17.20	5.79	22.99	0.199
	2 535	QPSK	1/50	H	18.08	5.75	23.83	0.242
		16QAM	1/50	H	16.78	5.75	22.53	0.179
	2 560	QPSK	1/0	H	18.32	5.75	24.07	0.255
		16QAM	1/0	H	16.94	5.75	22.69	0.186
15	2 507.5	QPSK	1/0	H	18.48	5.80	24.28	0.268
		16QAM	1/0	H	16.98	5.80	22.78	0.190
	2 535	QPSK	1/36	H	18.08	5.75	23.83	0.242
		16QAM	1/36	H	16.39	5.75	22.14	0.164
	2 562.5	QPSK	1/0	H	17.87	5.76	23.63	0.231
		16QAM	1/0	H	16.43	5.76	22.19	0.166
10	2 505	QPSK	1/25	H	18.35	5.80	24.15	0.260
		16QAM	1/25	H	16.48	5.80	22.28	0.169
	2 535	QPSK	1/0	H	18.26	5.75	24.01	0.252
		16QAM	1/0	H	16.49	5.75	22.24	0.167
	2 565	QPSK	1/25	H	18.47	5.77	24.24	0.265
		16QAM	1/25	H	16.78	5.77	22.55	0.180
5	2 502.5	QPSK	1/12	H	19.00	5.81	24.81	0.303
		16QAM	1/12	H	17.30	5.81	23.11	0.205
	2 535	QPSK	1/0	H	18.12	5.75	23.87	0.244
		16QAM	1/0	H	16.54	5.75	22.29	0.169
	2 567.5	QPSK	1/12	H	18.18	5.77	23.95	0.248
		16QAM	1/12	H	17.00	5.77	22.77	0.189

7.6. UNDESIRABLE EMISSIONS (Radiated)

- Test Notes

- 1) This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported.
- 2) The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter.
No other spurious and harmonic emissions were reported greater than listed emissions.
- 3) Limit Calculation for Band 25(2)/66(4)/12(17)/13/26(5) = $43 + 10 \log_{10} (P[\text{Watts}])$
- 4) Limit Calculation for Band 7/41(38) = $55 + 10 \log_{10} (P[\text{Watts}])$
- 5) Limit Calculation for 1 559 MHz ~ 1 610 MHz in Band 13 = -70 dBW/MHz (equivalent isotropically radiated power for wideband signals)

7.6.1. LTE Band 12

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)	
								(dBm)	(dBc)		
10	704	1/49	QPSK	1 416.83	H	-50.42	2.92	-47.50	63.60	29.10	
				2 131.86	V	-55.67	3.03	-52.64	68.74		
		1/25	16QAM	1 416.77	H	-50.64	2.92	-47.72	62.77	28.05	
				2 126.86	V	-55.45	3.02	-52.43	67.48		
	711		QPSK	1 421.99	H	-49.23	2.97	-46.26	63.08	29.82	
				2 127.88	V	-55.37	3.02	-52.35	69.17		
			16QAM	1 422.37	H	-49.46	2.97	-46.49	61.94	28.45	
				2 124.50	V	-55.68	3.01	-52.67	68.12		

7.6.2. LTE Band 17

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)
								(dBm)	(dBc)	
10	709	1/25	QPSK	1 418.21	H	-50.69	2.93	-47.76	65.85	31.09
				2 122.69	H	-55.12	3.01	-52.11	70.20	
			16QAM	1 418.44	H	-50.70	2.93	-47.77	65.07	30.30
				2 130.35	H	-56.20	3.03	-53.17	70.47	
	711	1/25	QPSK	1 422.30	H	-49.43	2.97	-46.46	64.66	31.20
				2 127.18	H	-56.14	3.02	-53.12	71.32	
			16QAM	1 422.25	H	-49.45	2.97	-46.48	63.57	30.09
				2 121.80	H	-56.37	3.01	-53.36	70.45	
5	710	1/12	QPSK	1 419.94	H	-50.15	2.95	-47.20	65.70	31.50
				2 127.50	H	-56.55	3.02	-53.53	72.03	
			16QAM	1 419.94	H	-50.17	2.95	-47.22	63.96	29.74
				2 124.28	H	-55.89	3.01	-52.88	69.62	

7.6.3. LTE Band 13

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)
								(dBm)	(dBc)	
10	782	1/0	QPSK	1 555.20	H	-58.33	3.16	-55.17	76.06	33.89
				2 332.68	V	-53.49	4.06	-49.43	70.32	
			16QAM	1 555.40	H	-57.46	3.16	-54.30	74.05	32.75
				2 332.40	V	-53.46	4.06	-49.40	69.15	
5	779.5	1/12	QPSK	2 338.62	V	-53.11	4.06	-49.05	70.11	34.06
				2 338.76	V	-53.87	4.06	-49.81	69.41	32.60

UNDESIRABLE EMISSIONS IN 1 559 MHz ~ 1 610 MHz (LTE Band 13)

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result	Margin	Limit (dBm/MHz)
10	782	1/25	QPSK	1 564.36	H	-59.14	5.41	-53.73	13.73	-40.00
			16QAM	1 563.41	H	-59.18	5.40	-53.78	13.78	
5	779.5	1/12	QPSK	1 559.32	H	-58.17	5.35	-52.82	12.82	-40.00
			16QAM	1 558.89	H	-58.79	5.35	-53.44	13.44	

7.6.4. LTE Band 26

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)	
								(dBm)	(dBc)		
15	831.5	1/0	QPSK	1 649.04	V	-58.24	3.82	-54.42	73.74	32.32	
				2 474.39	H	-49.07	3.79	-45.28	64.60		
		1/36	16QAM	1 633.90	V	-58.64	3.77	-54.87	73.14	31.27	
				2 474.48	H	-50.05	3.79	-46.26	64.53		
	841.5		QPSK	1 682.57	V	-58.76	3.95	-54.81	74.36	32.55	
				2 524.00	H	-49.76	3.62	-46.14	65.69		
			16QAM	1 682.53	V	-58.05	3.95	-54.10	72.92	31.82	
				2 524.10	H	-49.51	3.62	-45.89	64.71		
10	836.5	1/25	QPSK	1 663.46	V	-58.86	3.87	-54.99	74.84	32.85	
				2 510.00	H	-50.27	3.64	-46.63	66.48		
		1/25	16QAM	1 660.82	V	-58.65	3.86	-54.79	73.29	31.50	
				2 509.59	H	-50.59	3.64	-46.95	65.45		

7.6.5. LTE Band 66(4)

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
20	1 720	1/0	QPSK	3 440.85	V	-56.17	8.67	-47.50	74.06	39.56
				5 126.48	V	-57.64	10.54	-47.10	73.66	
		1/0	16QAM	3 404.35	V	-56.69	8.53	-48.16	73.14	37.98
				5 105.76	V	-57.61	10.56	-47.05	72.03	
	1 745	1/0	QPSK	3 492.53	V	-56.70	8.68	-48.02	73.60	38.58
				5 194.65	V	-57.49	10.55	-46.94	72.52	
		1/0	16QAM	3 448.25	V	-56.58	8.70	-47.88	71.86	36.98
				5 205.52	V	-57.82	10.52	-47.30	71.28	
	1 770	1/0	QPSK	3 534.55	V	-56.48	8.62	-47.86	73.91	39.05
				5 300.42	V	-57.09	10.17	-46.92	72.97	
		1/0	16QAM	3 544.41	V	-56.56	8.60	-47.96	71.87	36.91
				5 267.63	V	-57.87	10.25	-47.62	71.53	
15	1 717.5	1/0	QPSK	3 405.14	V	-56.09	8.53	-47.56	74.30	39.74
				5 116.60	V	-58.06	10.55	-47.51	74.25	
		1/0	16QAM	3 412.49	V	-55.81	8.56	-47.25	72.39	38.14
				5 145.84	V	-57.74	10.51	-47.23	72.37	

7.6.6. LTE Band 25(2)

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
20	1 860	1/50	QPSK	3 725.28	H	-55.95	8.12	-47.83	73.22	38.39
				5 577.23	H	-57.10	10.88	-46.22	71.61	
			16QAM	3 717.25	H	-56.23	8.10	-48.13	72.34	37.21
				5 560.84	H	-57.37	10.82	-46.55	70.76	
	1 882.5	1/0	QPSK	3 723.08	H	-56.21	8.11	-48.10	72.37	37.27
				5 641.56	H	-56.16	11.03	-45.13	69.40	
			16QAM	3 747.65	H	-56.17	8.16	-48.01	70.35	35.34
				5 594.82	H	-56.46	10.94	-45.52	67.86	
	1 905	1/0	QPSK	3 771.61	H	-55.26	8.33	-46.93	71.11	37.18
				5 698.52	H	-56.78	11.11	-45.67	69.85	
			16QAM	3 791.83	H	-55.87	8.48	-47.39	69.91	35.52
				5 683.44	H	-56.62	11.09	-45.53	68.05	
10	1 855	1/25	QPSK	3 699.03	H	-56.08	8.06	-48.02	73.59	38.57
				5 563.50	H	-56.41	10.83	-45.58	71.15	
			16QAM	3 708.71	H	-55.85	8.08	-47.77	71.71	36.94
				5 562.12	H	-56.88	10.82	-46.06	70.00	

7.6.7. LTE Band 41(38)

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
20	2 506	1/50	QPSK	4 992.01	H	-56.87	10.32	-46.55	70.91	49.36
				7 494.63	V	-55.92	12.17	-43.75	68.11	
		1/50	16QAM	5 033.39	H	-57.07	10.51	-46.56	70.27	48.71
				7 514.00	V	-55.51	12.18	-43.33	67.04	
		2 593	QPSK	5 179.06	H	-57.35	10.53	-46.82	71.24	49.42
				7 785.79	V	-54.74	12.66	-42.08	66.50	
			16QAM	5 205.87	H	-56.64	10.52	-46.12	68.81	47.69
				7 765.94	V	-55.21	12.61	-42.60	65.29	
		2 680	QPSK	5 345.74	H	-56.83	10.20	-46.63	68.60	46.97
				8 052.05	V	-54.85	12.66	-42.19	64.16	
			16QAM	5 338.22	H	-57.05	10.19	-46.86	67.01	45.15
				8 057.00	V	-54.83	12.65	-42.18	62.34	
5	2 498.5	1/12	QPSK	4 999.59	H	-56.60	10.36	-46.24	71.24	50.00
				7 500.23	V	-56.10	12.16	-43.94	68.94	
			16QAM	4 996.28	H	-57.23	10.34	-46.89	70.96	49.07
				7 498.64	V	-55.40	12.16	-43.24	67.31	

7.6.8. LTE Band 7

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	Result		Limit (dBc)		
							(dBm)	(dBc)			
20	2 510	1/0	QPSK	5 013.72	V	-57.21	10.42	-46.79	70.93	49.14	
				7 522.18	H	-55.75	12.19	-43.56	67.70		
		1/50	16QAM	4 992.65	V	-57.07	10.32	-46.75	69.74	47.99	
				7 519.30	H	-55.59	12.18	-43.41	66.40		
	2 535		QPSK	5 074.72	V	-57.85	10.58	-47.27	71.10	48.83	
				7 608.58	H	-55.41	12.32	-43.09	66.92		
	1/0	16QAM	5 052.26	V	-57.09	10.59	-46.50	69.03	47.53		
			7 591.25	H	-55.61	12.29	-43.32	65.85			
		2 560		QPSK	5 119.77	V	-58.05	10.55	-47.50	71.57	49.07
					7 656.86	H	-55.79	12.40	-43.39	67.46	
	1/12	16QAM	5 087.61	V	-57.08	10.57	-46.51	69.20	47.69		
			7 665.82	H	-55.61	12.42	-43.19	65.88			
5	2 502.5	1/0	QPSK	5 009.69	V	-57.69	10.40	-47.29	72.10	49.81	
				7 507.90	H	-56.59	12.17	-44.42	69.23		
		1/12	16QAM	5 007.67	V	-57.97	10.40	-47.57	70.68	48.11	
				7 510.68	H	-56.27	12.17	-44.10	67.21		

7.7. FREQUENCY STABILITY

- Test Notes

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.7.1. LTE Band 12

OPERATING FREQUENCY	:	707.5 MHz
REFERENCE VOLTAGE	:	3.85_VDC
LIMIT(FCC&IC)	:	The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	707,500,007	+7	+0.009 9	+0.000 000 989
100 %		-30	707,499,997	-3	-0.004 2	-0.000 000 424
100 %		-20	707,499,989	-11	-0.015 5	-0.000 001 555
100 %		-10	707,500,001	+1	+0.001 4	+0.000 000 141
100 %		0	707,499,991	-9	-0.012 7	-0.000 001 272
100 %		+10	707,499,984	-16	-0.022 6	-0.000 002 261
100 %		+20	707,500,007	+7	+0.009 9	+0.000 000 989
100 %		+30	707,500,003	+3	+0.004 2	+0.000 000 424
100 %		+40	707,500,010	+10	+0.014 1	+0.000 001 413
100 %		+50	707,499,999	-1	-0.001 4	-0.000 000 141
115 %	4.43	+20	707,499,998	-2	-0.002 8	-0.000 000 283
BATT.ENDPOINT	3.10	+20	707,500,003	+3	+0.004 2	+0.000 000 424

7.7.2. LTE Band 17

OPERATING FREQUENCY : 710 MHz
 REFERENCE VOLTAGE : 3.85 VDC
 LIMIT(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	710,000,005	+5	+0.007 0	+0.000 000 704
100 %		-30	710,000,012	+12	+0.016 9	+0.000 001 690
100 %		-20	709,999,997	-3	-0.004 2	-0.000 000 423
100 %		-10	709,999,991	-9	-0.012 7	-0.000 001 268
100 %		0	709,999,984	-16	-0.022 5	-0.000 002 254
100 %		+10	709,999,999	-1	-0.001 4	-0.000 000 141
100 %		+20	710,000,005	+5	+0.007 0	+0.000 000 704
100 %		+30	710,000,003	+3	+0.004 2	+0.000 000 423
100 %		+40	710,000,012	+12	+0.016 9	+0.000 001 690
100 %		+50	709,999,989	-11	-0.015 5	-0.000 001 549
115 %	4.43	+20	710,000,002	+2	+0.002 8	+0.000 000 282
BATT.ENDPOINT	3.10	+20	710,000,006	+6	+0.008 5	+0.000 000 845

7.7.3. LTE Band 13

OPERATING FREQUENCY : 779.5 MHz
 REFERENCE VOLTAGE : 3.85 VDC
 LIMIT(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	779,500,007	+7	+0.009 0	+0.000 000 898
100 %		-30	779,499,998	-2	-0.002 6	-0.000 000 257
100 %		-20	779,499,989	-11	-0.014 1	-0.000 001 411
100 %		-10	779,499,984	-16	-0.020 5	-0.000 002 053
100 %		0	779,500,002	+2	+0.002 6	+0.000 000 257
100 %		+10	779,500,007	+7	+0.009 0	+0.000 000 898
100 %		+20	779,500,007	+7	+0.009 0	+0.000 000 898
100 %		+30	779,499,997	-3	-0.003 8	-0.000 000 385
100 %		+40	779,499,991	-9	-0.011 5	-0.000 001 155
100 %		+50	779,500,011	+11	+0.014 1	+0.000 001 411
115 %	4.43	+20	779,500,008	+8	+0.010 3	+0.000 001 026
BATT.ENDPOINT	3.10	+20	779,499,998	-2	-0.002 6	-0.000 000 257

7.7.4. LTE Band 26(5)

OPERATING FREQUENCY : 836.5 MHz
REFERENCE VOLTAGE : 3.85 VDC
DEVIATION LIMIT(FCC&IC) : ± 0.000 25 % or 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	836,500,002	+2	+0.002 4	+0.000 000 239
100 %		-30	836,499,989	-11	-0.013 2	-0.000 001 315
100 %		-20	836,499,999	-1	-0.001 2	-0.000 000 120
100 %		-10	836,500,006	+6	+0.007 2	+0.000 000 717
100 %		0	836,499,998	-2	-0.002 4	-0.000 000 239
100 %		+10	836,500,007	+7	+0.008 4	+0.000 000 837
100 %		+20	836,500,002	+2	+0.002 4	+0.000 000 239
100 %		+30	836,499,991	-9	-0.010 8	-0.000 001 076
100 %		+40	836,500,003	+3	+0.003 6	+0.000 000 359
100 %		+50	836,499,989	-11	-0.013 2	-0.000 001 315
115 %	4.43	+20	836,500,006	+6	+0.007 2	+0.000 000 717
BATT.ENDPOINT	3.10	+20	836,499,985	-15	-0.017 9	-0.000 001 793

7.7.5. LTE Band 66(4)

OPERATING FREQUENCY : 1 745 MHz
 REFERENCE VOLTAGE 3.85 VDC
 LIMIT(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	1,745,000,003	+3	+0.001 7	+0.000 000 172
100 %		-30	1,744,999,993	-7	-0.004 0	-0.000 000 401
100 %		-20	1,744,999,984	-16	-0.009 2	-0.000 000 917
100 %		-10	1,745,000,002	+2	+0.001 1	+0.000 000 115
100 %		0	1,745,000,007	+7	+0.004 0	+0.000 000 401
100 %		+10	1,744,999,997	-3	-0.001 7	-0.000 000 172
100 %		+20	1,745,000,003	+3	+0.001 7	+0.000 000 172
100 %		+30	1,745,000,005	+5	+0.002 9	+0.000 000 287
100 %		+40	1,744,999,987	-13	-0.007 4	-0.000 000 745
100 %		+50	1,745,000,002	+2	+0.001 1	+0.000 000 115
115 %	4.43	+20	1,744,999,999	-1	-0.000 6	-0.000 000 057
BATT.ENDPOINT	3.10	+20	1,745,000,006	+6	+0.003 4	+0.000 000 344

7.7.6. LTE Band 25(2)

OPERATING FREQUENCY : 1 882.5 MHz
 REFERENCE VOLTAGE : 3.85 VDC
 LIMIT(FCC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.
 LIMIT(IC) : ± 0.000 25 % or 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	1,882,500,011	+11	+0.005 8	+0.000 000 584
100 %		-30	1,882,499,999	-1	-0.000 5	-0.000 000 053
100 %		-20	1,882,499,991	-9	-0.004 8	-0.000 000 478
100 %		-10	1,882,500,005	+5	+0.002 7	+0.000 000 266
100 %		0	1,882,500,012	+12	+0.006 4	+0.000 000 637
100 %		+10	1,882,499,993	-7	-0.003 7	-0.000 000 372
100 %		+20	1,882,500,011	+11	+0.005 8	+0.000 000 584
100 %		+30	1,882,500,016	+16	+0.008 5	+0.000 000 850
100 %		+40	1,882,500,005	+5	+0.002 7	+0.000 000 266
100 %		+50	1,882,499,994	-6	-0.003 2	-0.000 000 319
115 %	4.43	+20	1,882,500,011	+11	+0.005 8	+0.000 000 584
BATT.ENDPOINT	3.10	+20	1,882,499,998	-2	-0.001 1	-0.000 000 106

7.7.7. LTE Band 41(38)

OPERATING FREQUENCY : 2.593 MHz
 REFERENCE VOLTAGE : 3.85 VDC
 LIMIT(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	2,592,999,993	-7	-0.002 7	-0.000 000 270
100 %		-30	2,592,999,999	-1	-0.000 4	-0.000 000 039
100 %		-20	2,593,000,006	+6	+0.002 3	+0.000 000 231
100 %		-10	2,593,000,011	+11	+0.004 2	+0.000 000 424
100 %		0	2,592,999,998	-2	-0.000 8	-0.000 000 077
100 %		+10	2,592,999,991	-9	-0.003 5	-0.000 000 347
100 %		+20	2,592,999,993	-7	-0.002 7	-0.000 000 270
100 %		+30	2,593,000,003	+3	+0.001 2	+0.000 000 116
100 %		+40	2,592,999,991	-9	-0.003 5	-0.000 000 347
100 %		+50	2,592,999,997	-3	-0.001 2	-0.000 000 116
115 %	4.43	+20	2,593,000,002	+2	+0.000 8	+0.000 000 077
BATT.ENDPOINT	3.10	+20	2,593,000,009	+9	+0.003 5	+0.000 000 347

7.7.8. LTE Band 7

OPERATING FREQUENCY : 2.535 MHz
 REFERENCE VOLTAGE : 3.85 VDC
 LIMIT(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	2,535,000,007	+7	+0.002 8	+0.000 000 276
100 %		-30	2,534,999,998	-2	-0.000 8	-0.000 000 079
100 %		-20	2,534,999,984	-16	-0.006 3	-0.000 000 631
100 %		-10	2,534,999,997	-3	-0.001 2	-0.000 000 118
100 %		0	2,535,000,006	+6	+0.002 4	+0.000 000 237
100 %		+10	2,534,999,991	-9	-0.003 6	-0.000 000 355
100 %		+20	2,535,000,007	+7	+0.002 8	+0.000 000 276
100 %		+30	2,534,999,998	-2	-0.000 8	-0.000 000 079
100 %		+40	2,535,000,007	+7	+0.002 8	+0.000 000 276
100 %		+50	2,534,999,994	-6	-0.002 4	-0.000 000 237
115 %	4.43	+20	2,535,000,011	+11	+0.004 3	+0.000 000 434
BATT.ENDPOINT	3.10	+20	2,534,999,999	-1	-0.000 4	-0.000 000 039


8. TEST PLOTS

- Test Notes:

All bandwidths, RB configurations, and modulations were investigated.
The worst case test results are reported.

8.1. OCCUPIED BANDWIDTH


8.1.1. LTE Band 12

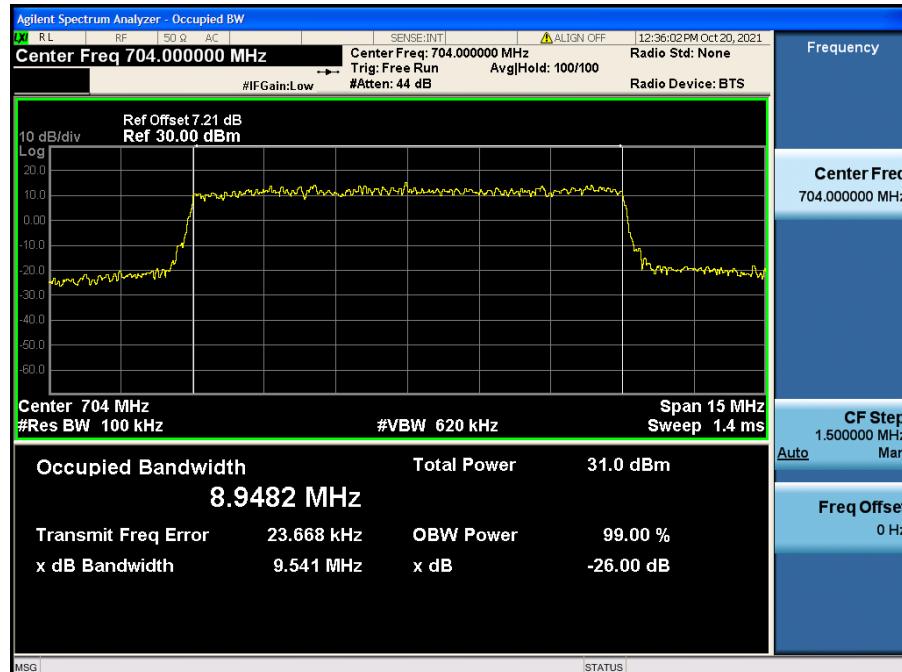


LTE Band 12 / 10 MHz / QPSK - RB Size 50




LTE Band 12 / 10 MHz / 16QAM - RB Size 50

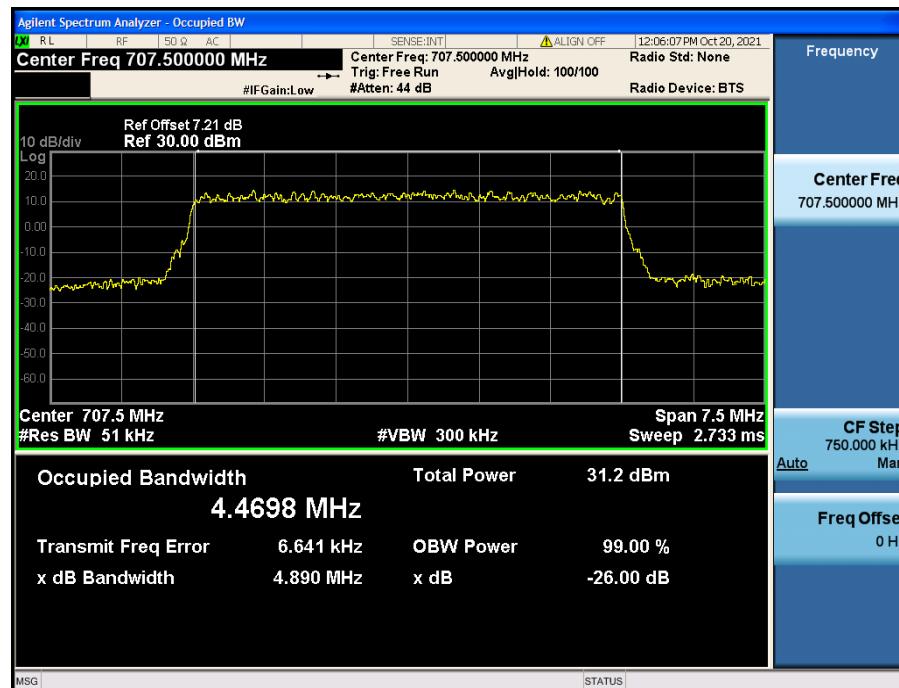


LTE Band 12 / 5 MHz / QPSK - RB Size 25

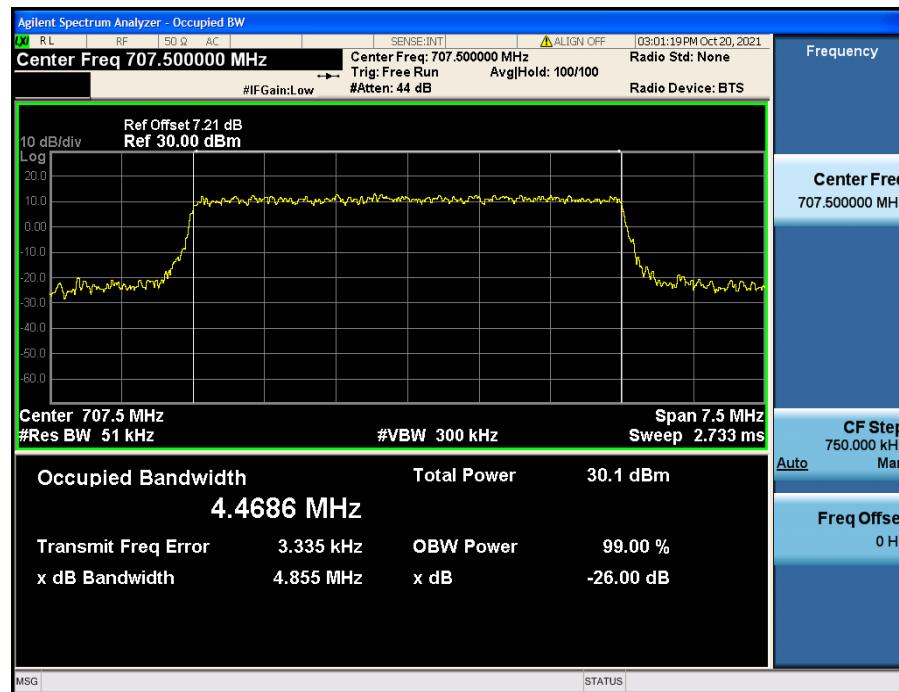


LTE Band 12 / 5 MHz / 16QAM - RB Size 25

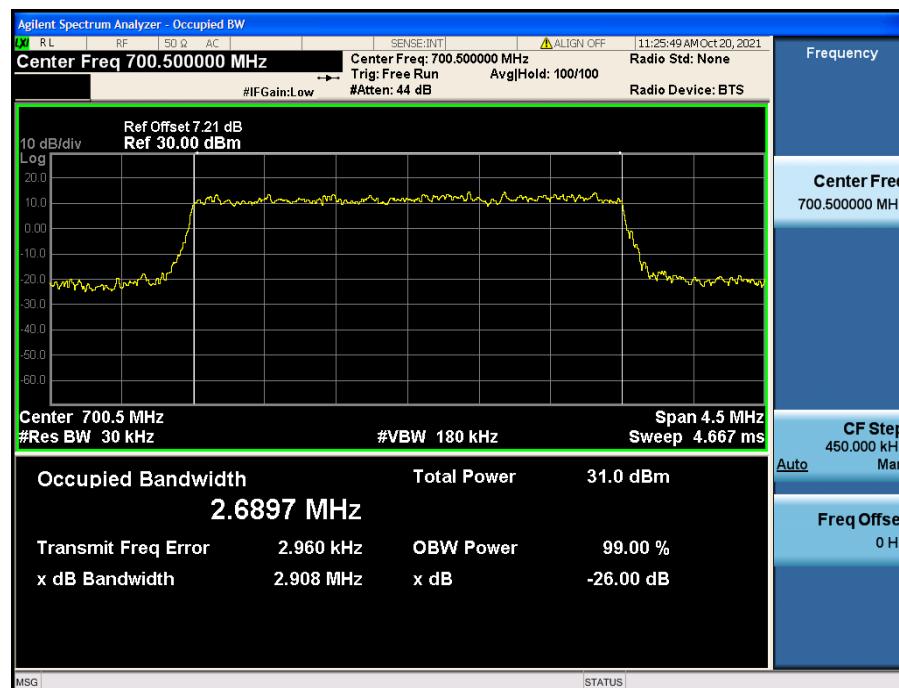


LTE Band 12 / 3 MHz / QPSK - RB Size 15

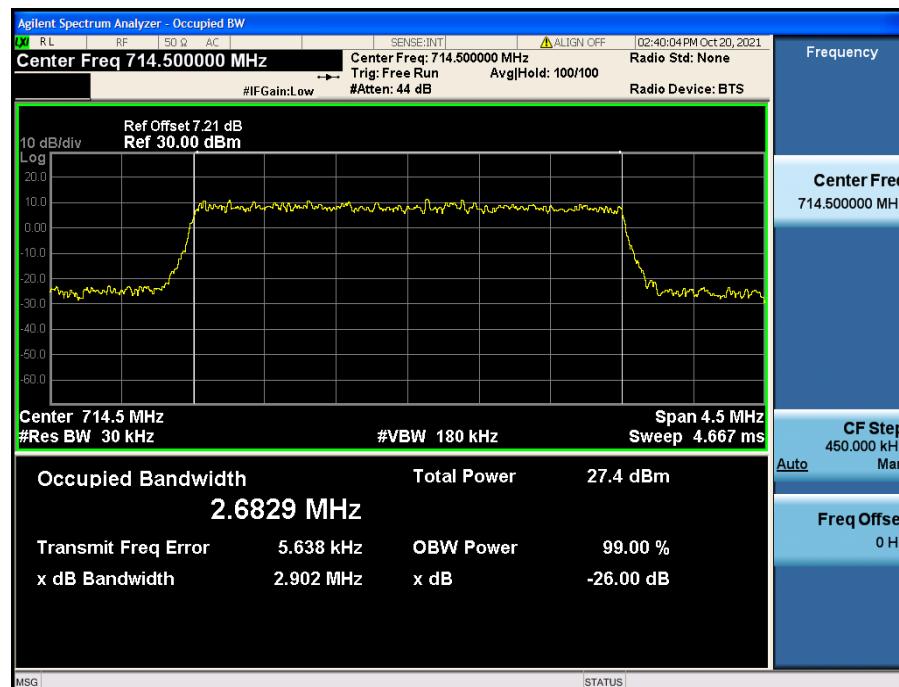

LTE Band 12 / 3 MHz / 16QAM - RB Size 15

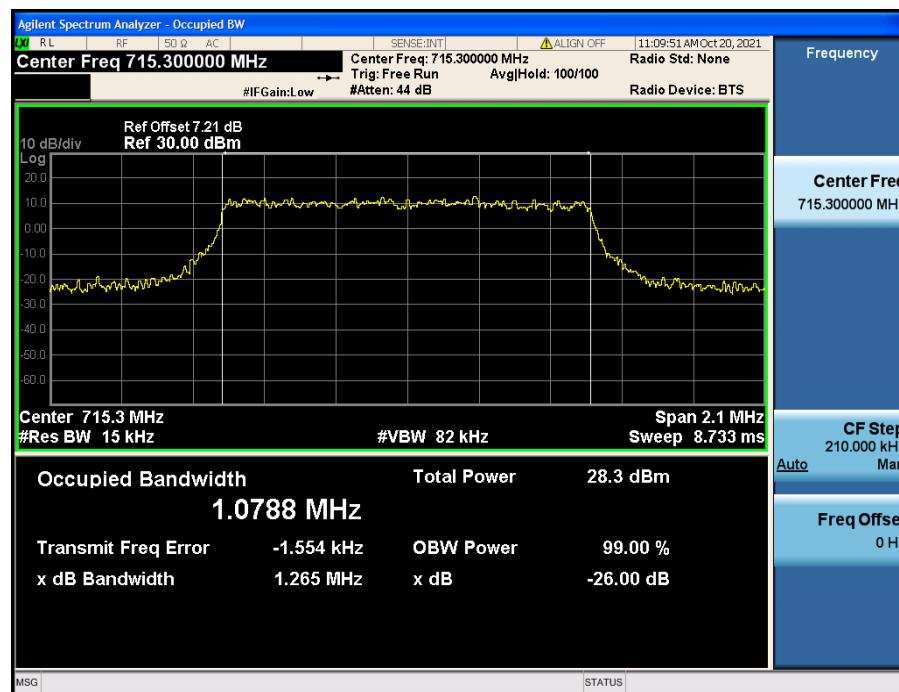

LTE Band 12 / 1.4 MHz / QPSK - RB Size 6

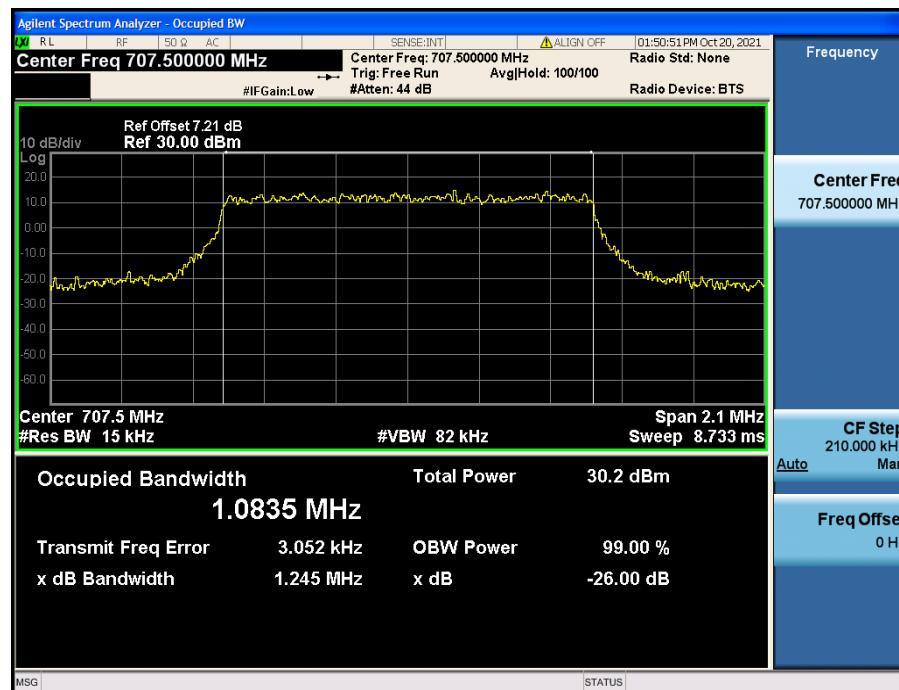


LTE Band 12 / 1.4 MHz / 16QAM - RB Size 6

8.1.2. LTE Band 17




LTE Band 17 / 10 MHz / QPSK - RB Size 15

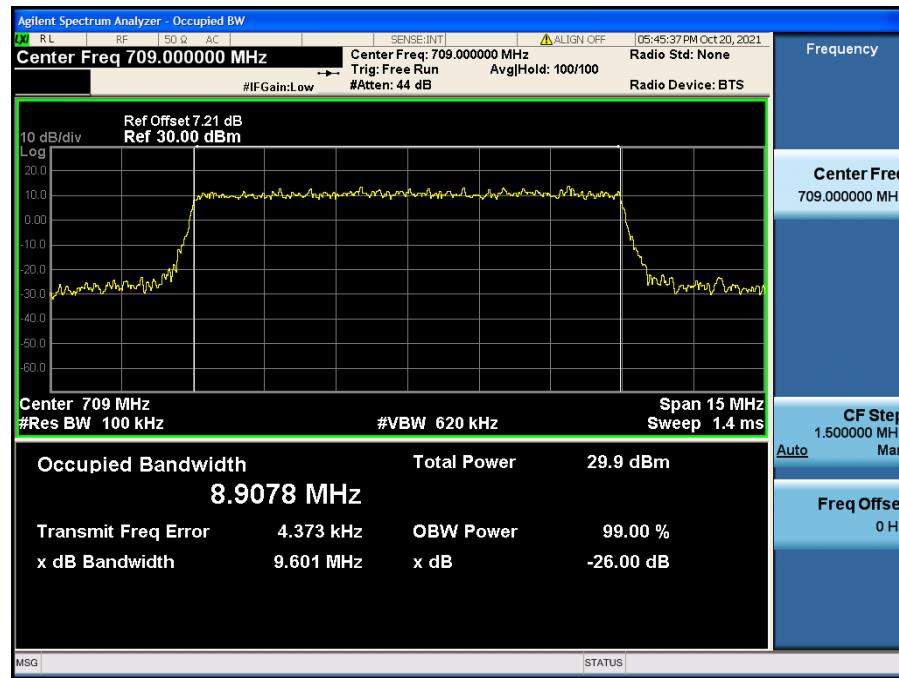

LTE Band 17 / 10 MHz / 16QAM - RB Size 15



LTE Band 17 / 5 MHz / QPSK - RB Size 25

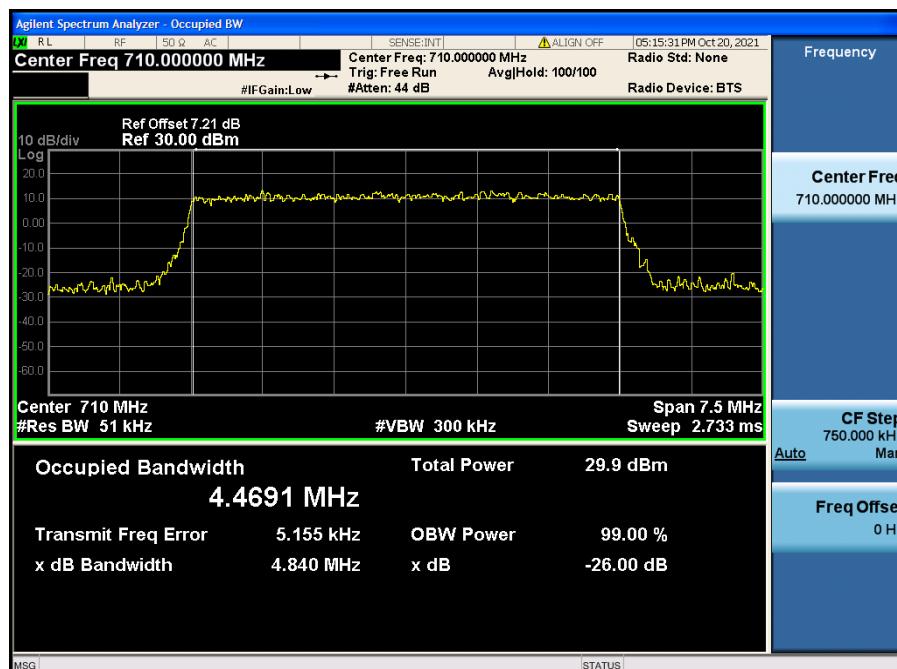


LTE Band 17 / 5 MHz / 16QAM - RB Size 25


8.1.3. LTE Band 13




LTE Band 13 / 10 MHz / QPSK - RB Size 50

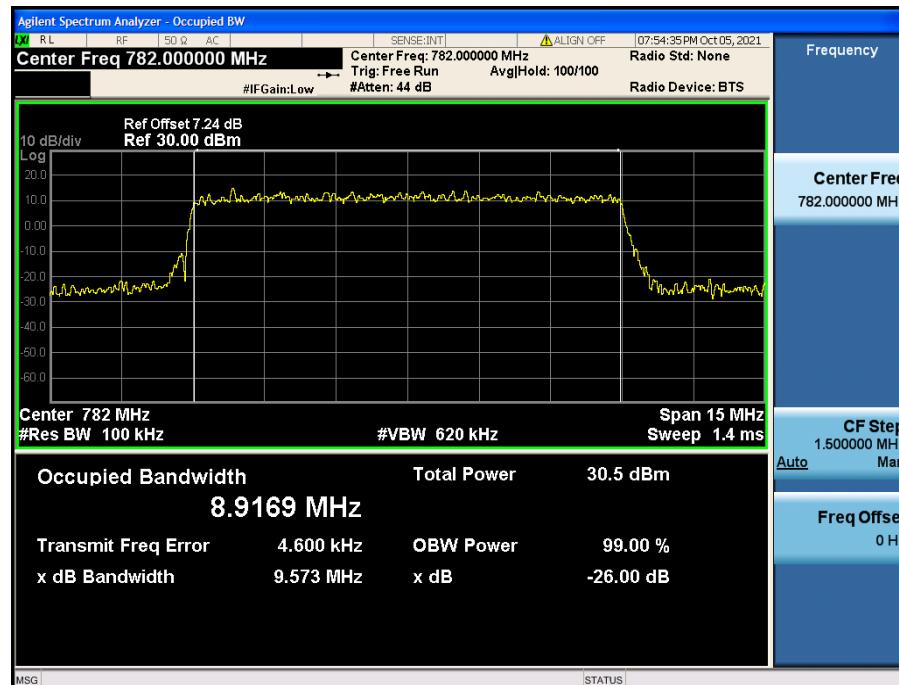

LTE Band 13 / 10 MHz / 16QAM - RB Size 50

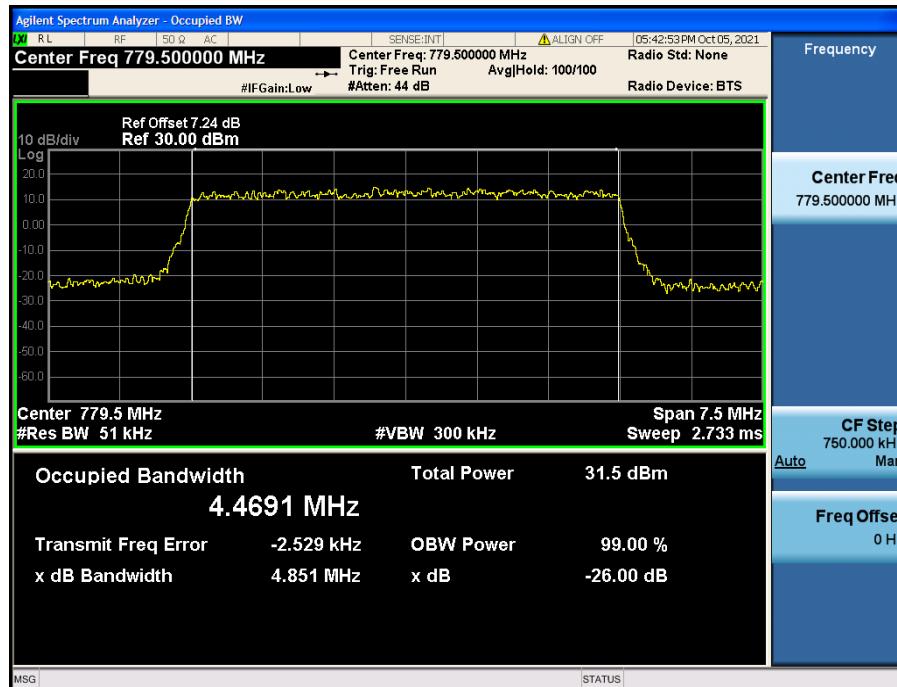

LTE Band 13 / 5 MHz / QPSK - RB Size 25

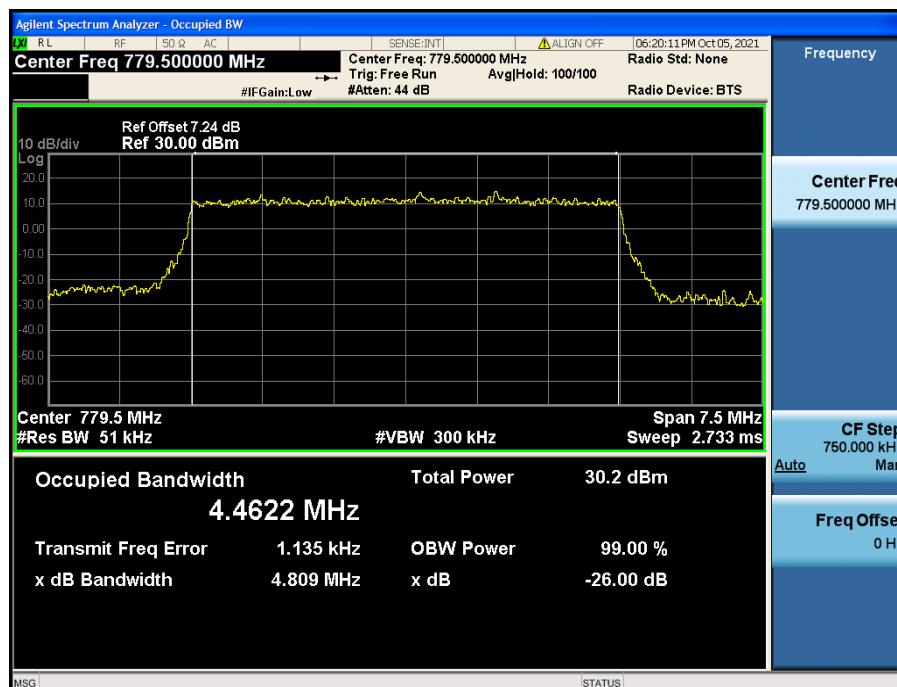


LTE Band 13 / 5 MHz / 16QAM - RB Size 25

8.1.4. LTE Band 26




LTE Band 26 / 15 MHz / QPSK - RB Size 75

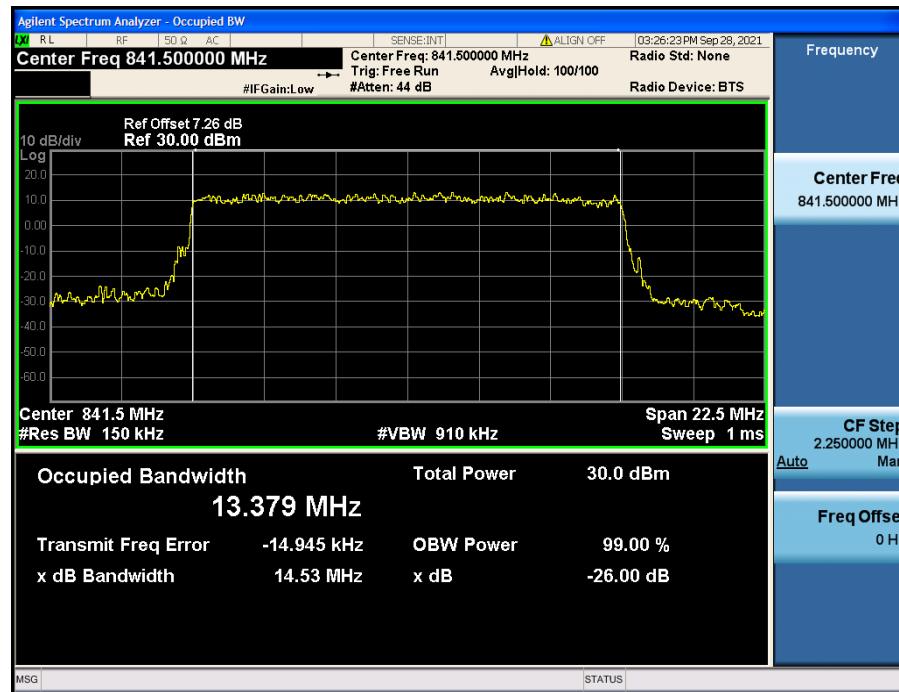

LTE Band 26 / 15 MHz / 16QAM - RB Size 75


8.1.5. LTE Band 26(5)

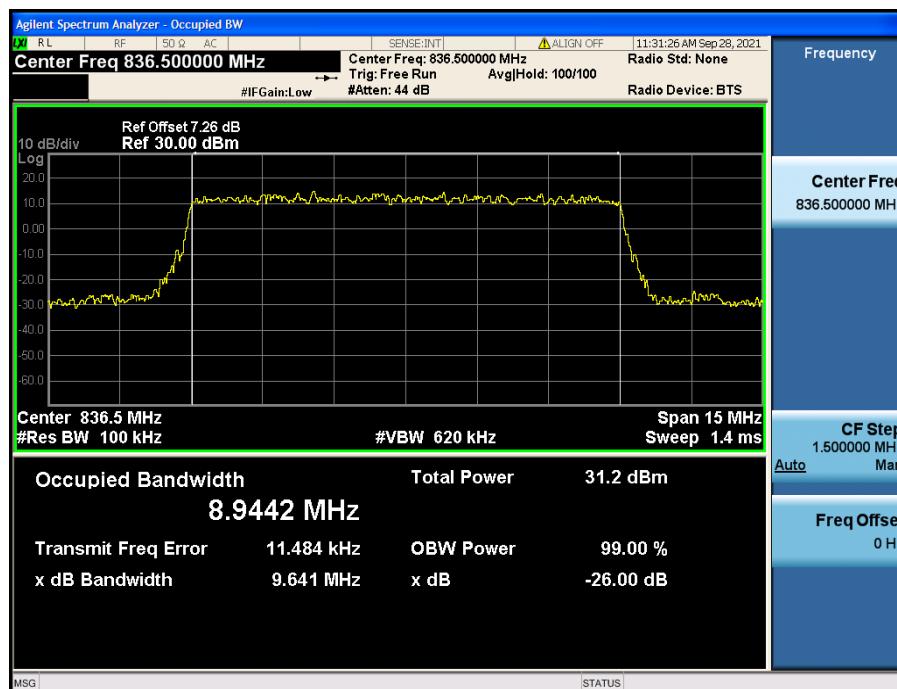


LTE Band 26(5) / 10 MHz / QPSK - RB Size 50




LTE Band 26(5) / 10 MHz / 16QAM - RB Size 50

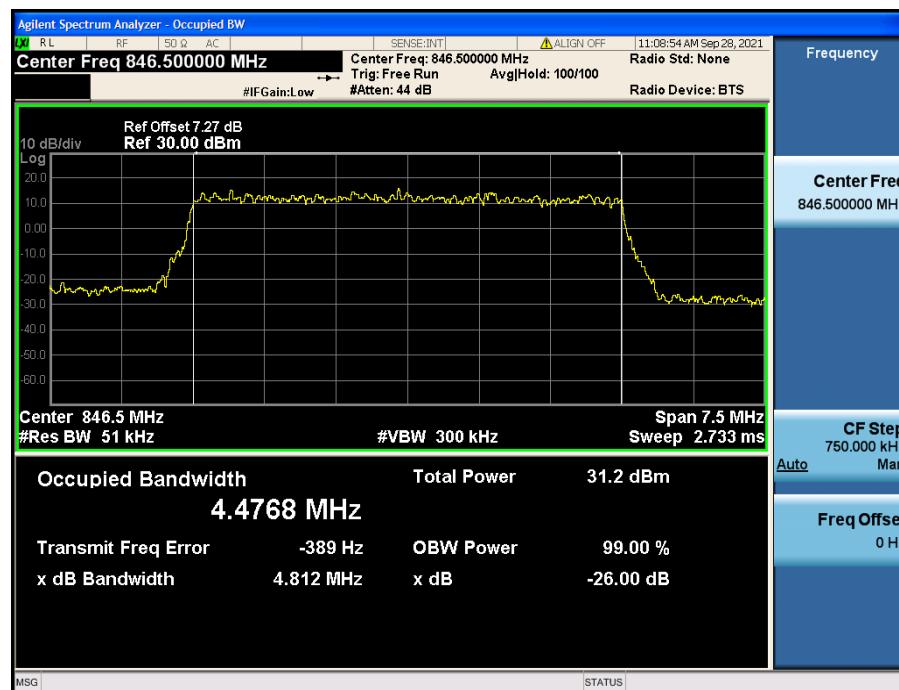

LTE Band 26(5) / 5 MHz / QPSK - RB Size 25

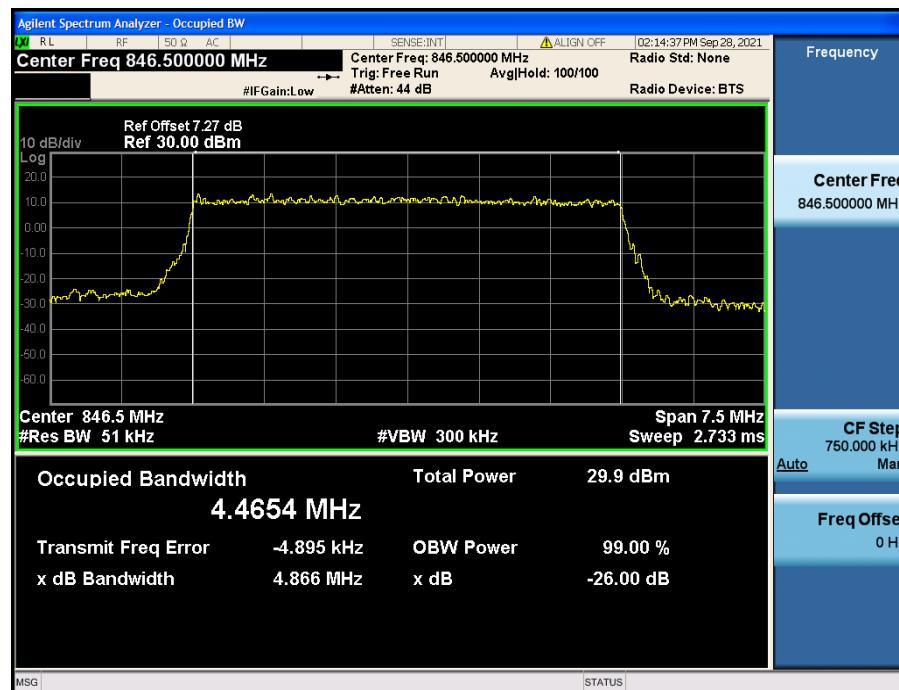


LTE Band 26(5) / 5 MHz / 16QAM - RB Size 25

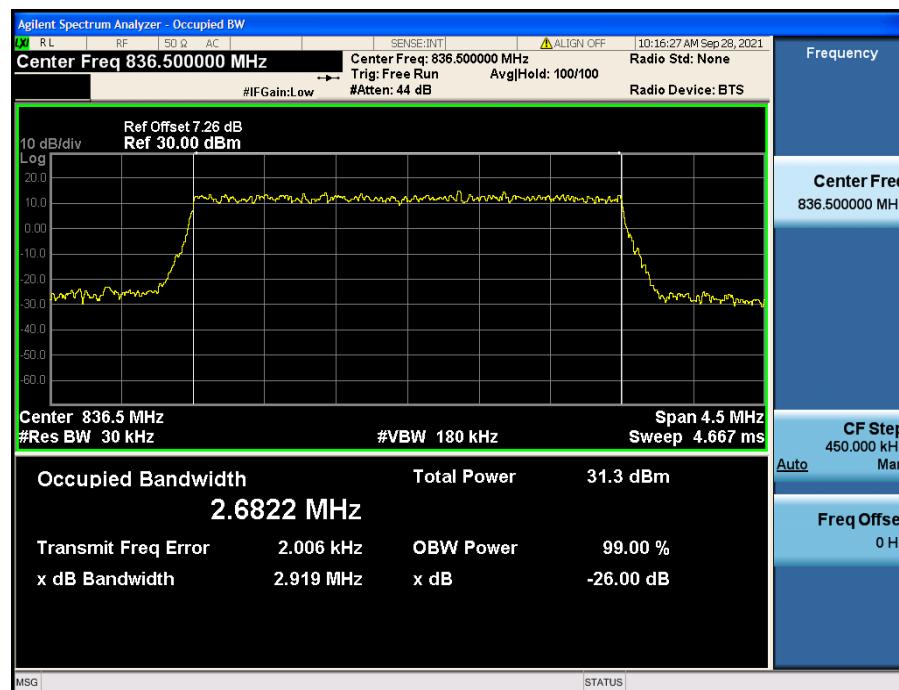

LTE Band 26(5) / 3 MHz / QPSK - RB Size 15



LTE Band 26(5) / 3 MHz / 16QAM - RB Size 15

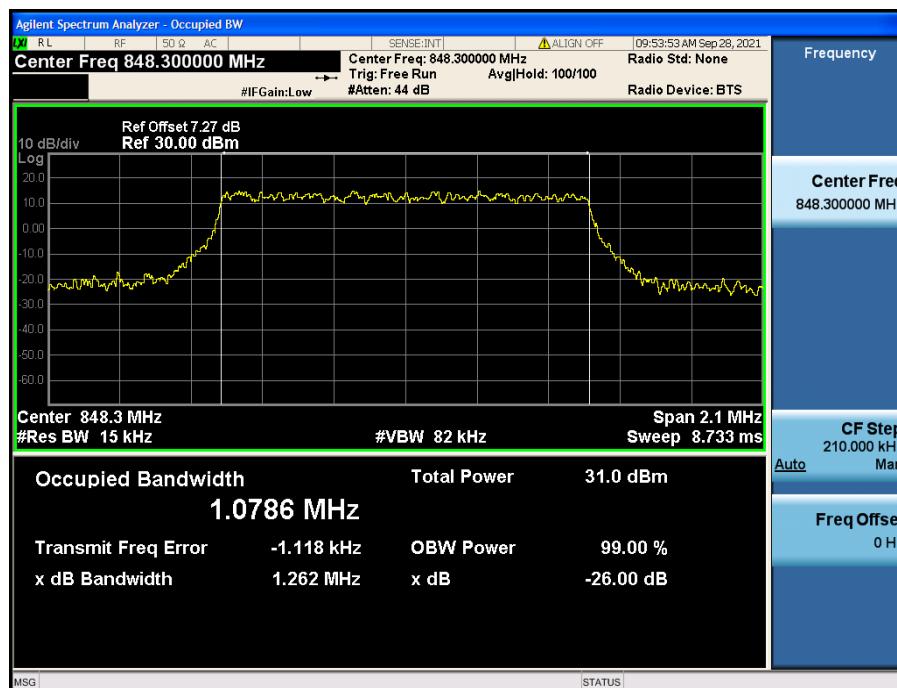

LTE Band 26(5) / 1.4 MHz / QPSK - RB Size 6




LTE Band 26(5) / 1.4 MHz / 16QAM - RB Size 6


8.1.6. LTE Band 66(4)




LTE Band 66(4) / 20 MHz / QPSK - RB Size 100

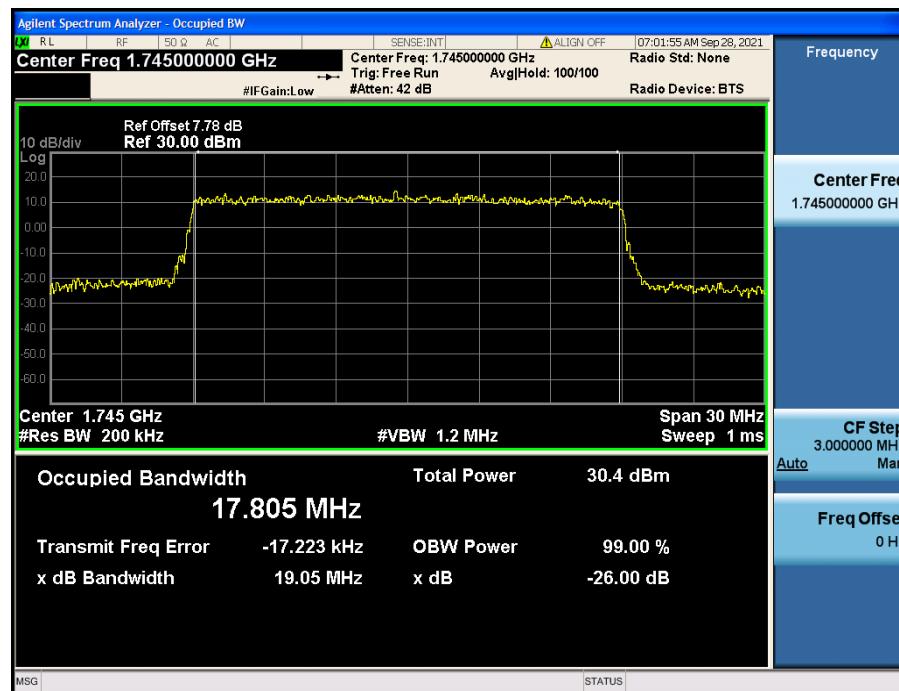


LTE Band 66(4) / 20 MHz / 16QAM - RB Size 100

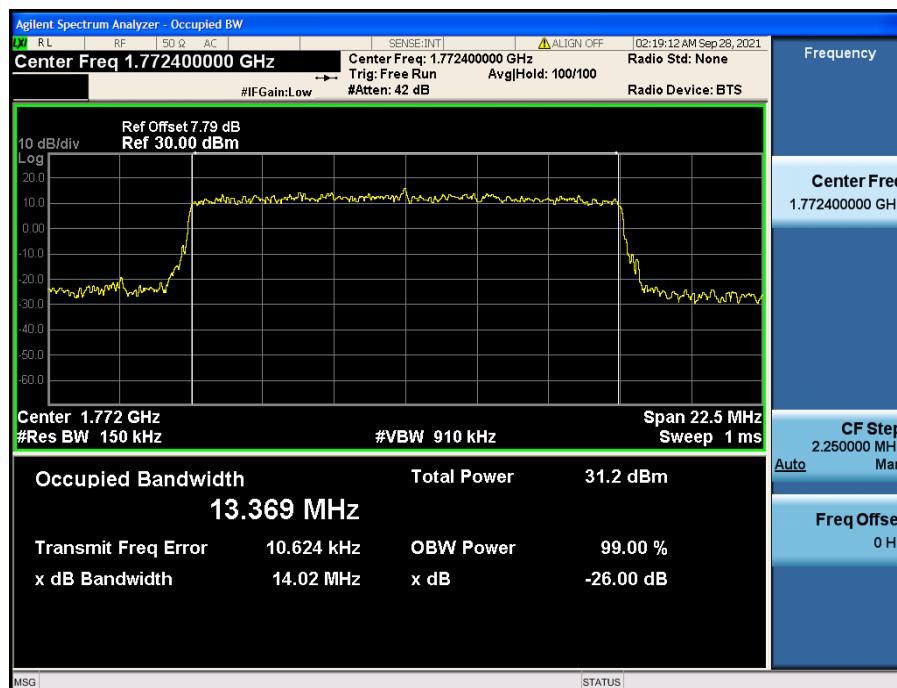

LTE Band 66(4) / 15 MHz / QPSK - RB Size 75

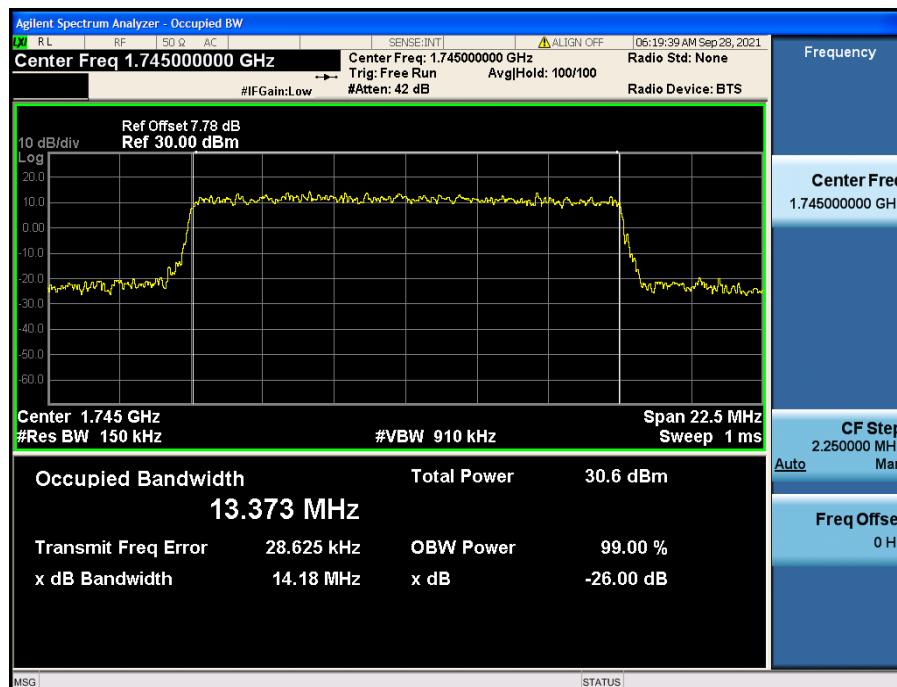


LTE Band 66(4) / 15 MHz / 16QAM - RB Size 75

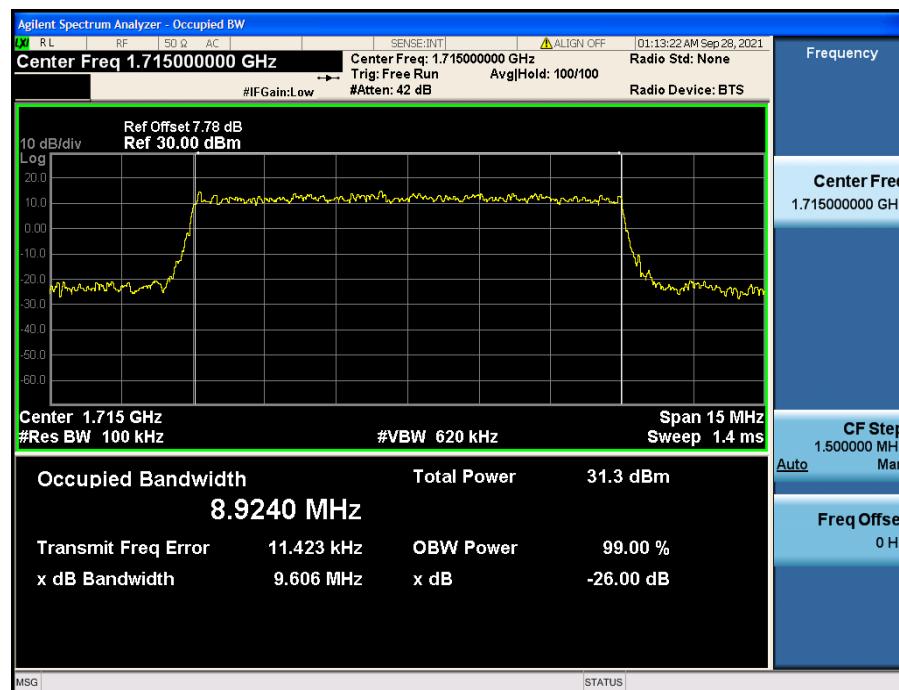


LTE Band 66(4) / 10 MHz / QPSK - RB Size 50



LTE Band 66(4) / 10 MHz / 16QAM - RB Size 50

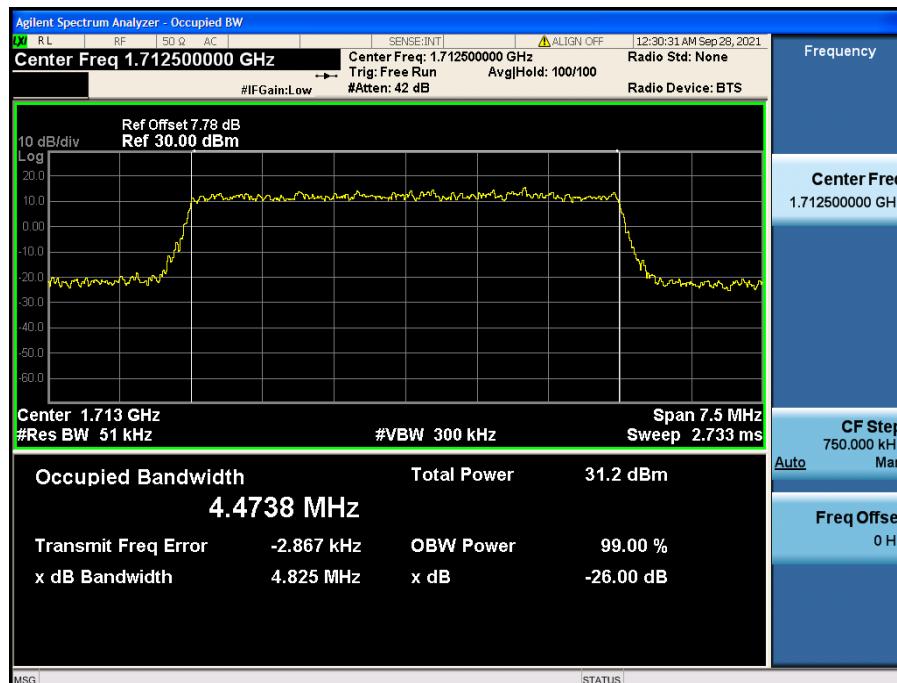


LTE Band 66(4) / 5 MHz / QPSK - RB Size 25

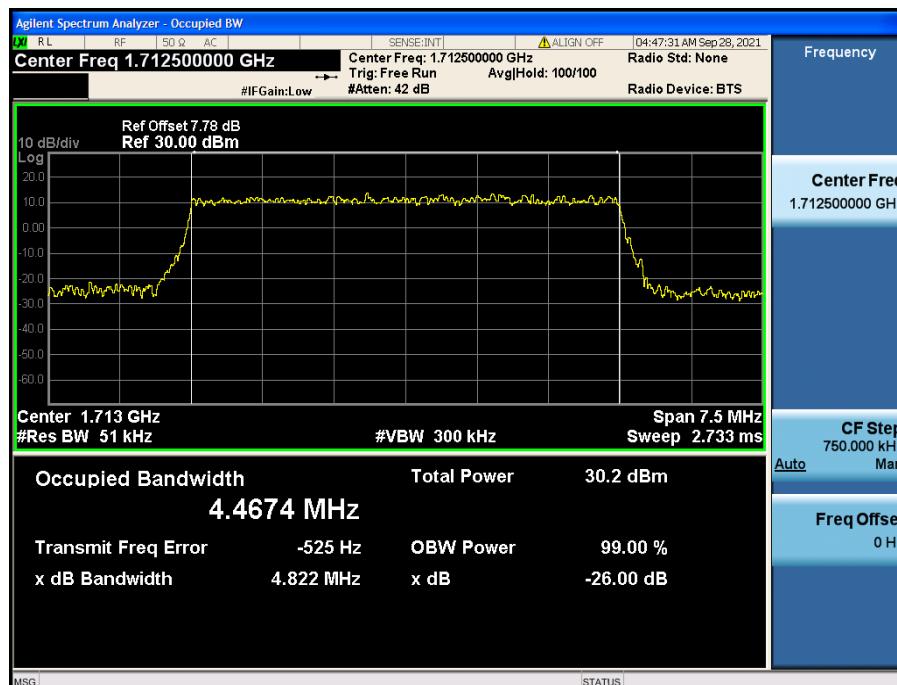

LTE Band 66(4) / 5 MHz / 16QAM - RB Size 25




LTE Band 66(4) / 3 MHz / QPSK - RB Size 15

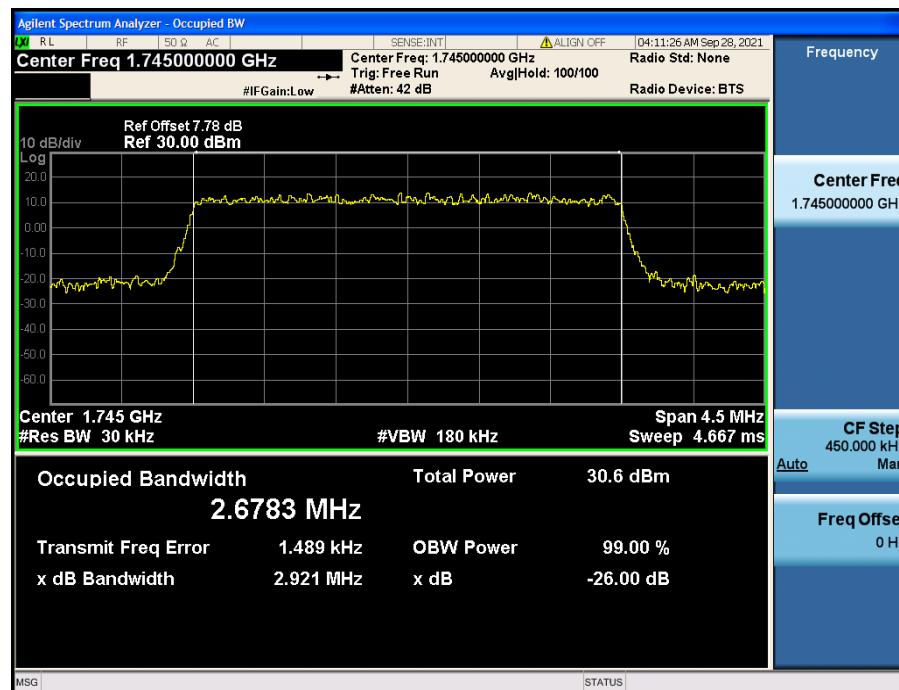

LTE Band 66(4) / 3 MHz / 16QAM - RB Size 15




LTE Band 66(4) / 1.4 MHz / QPSK - RB Size 6

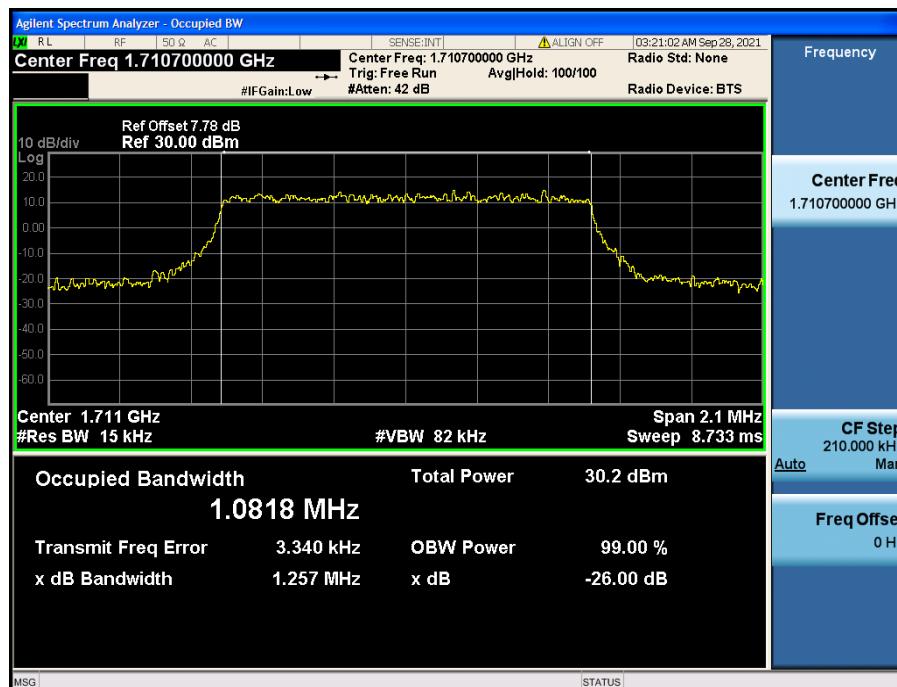


LTE Band 66(4) / 1.4 MHz / 16QAM - RB Size 6


8.1.7. LTE Band 25(2)

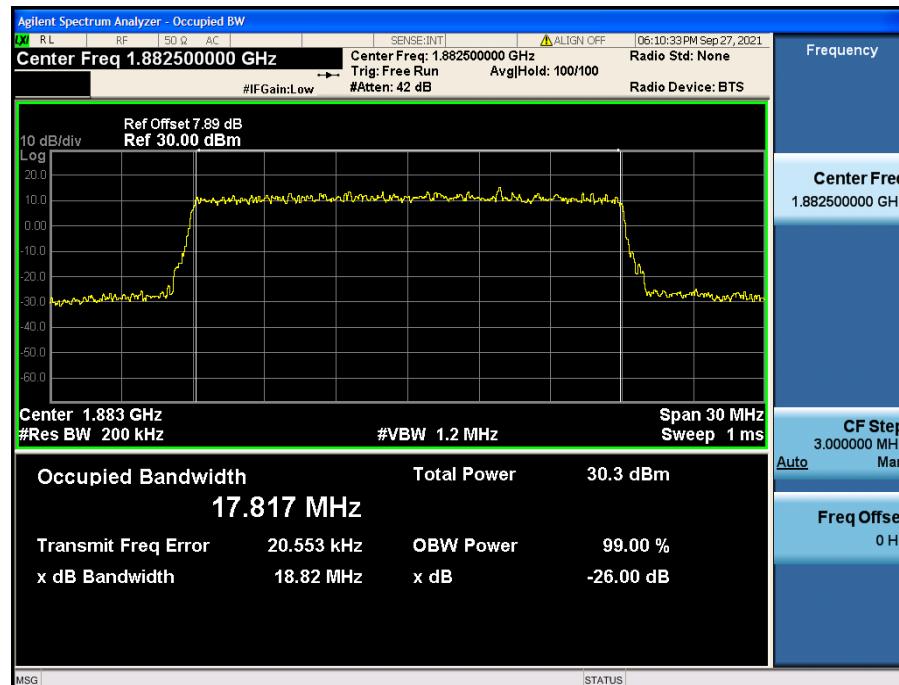


LTE Band 25(2) / 20 MHz / QPSK - RB Size 100

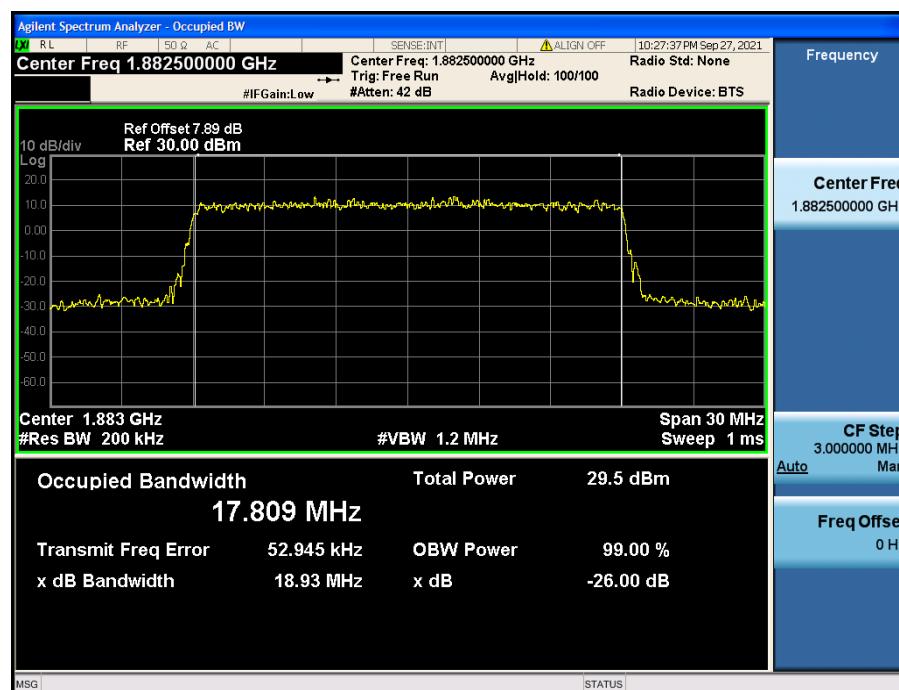


LTE Band 25(2) / 20 MHz / 16QAM - RB Size 100

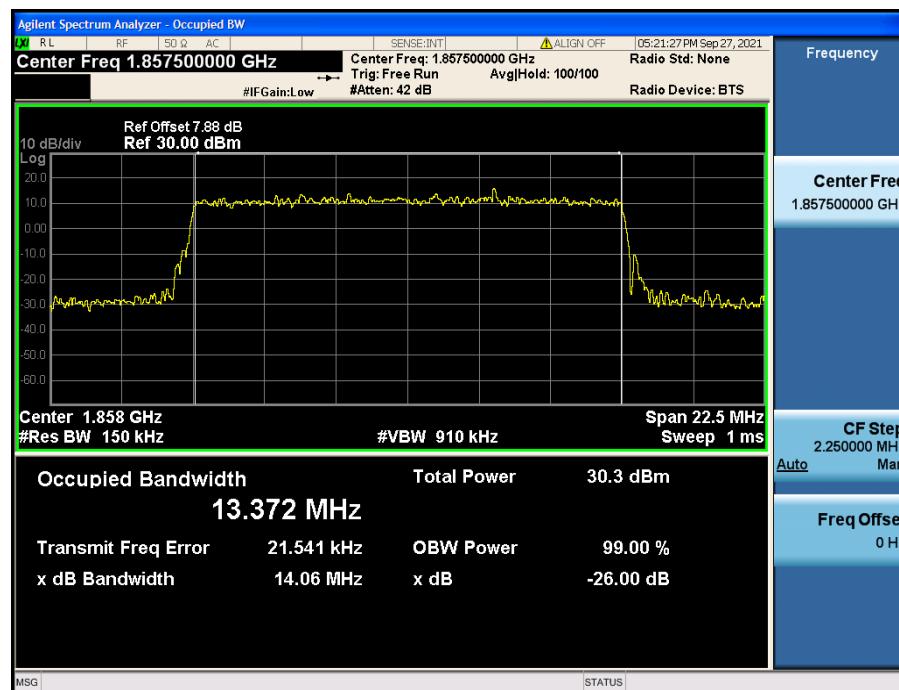

LTE Band 25(2) / 15 MHz / QPSK - RB Size 75

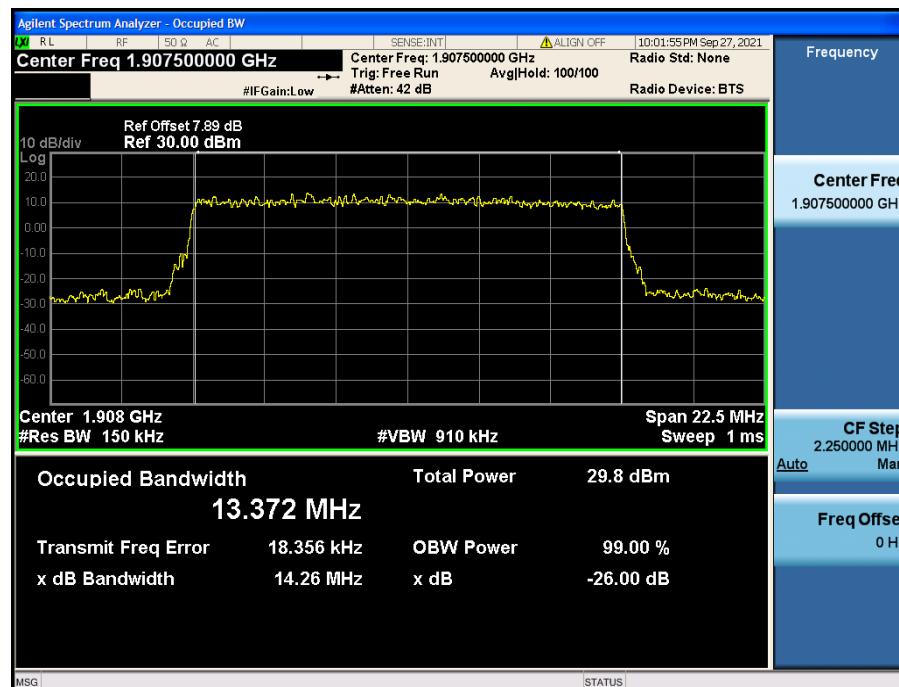


LTE Band 25(2) / 15 MHz / 16QAM - RB Size 75

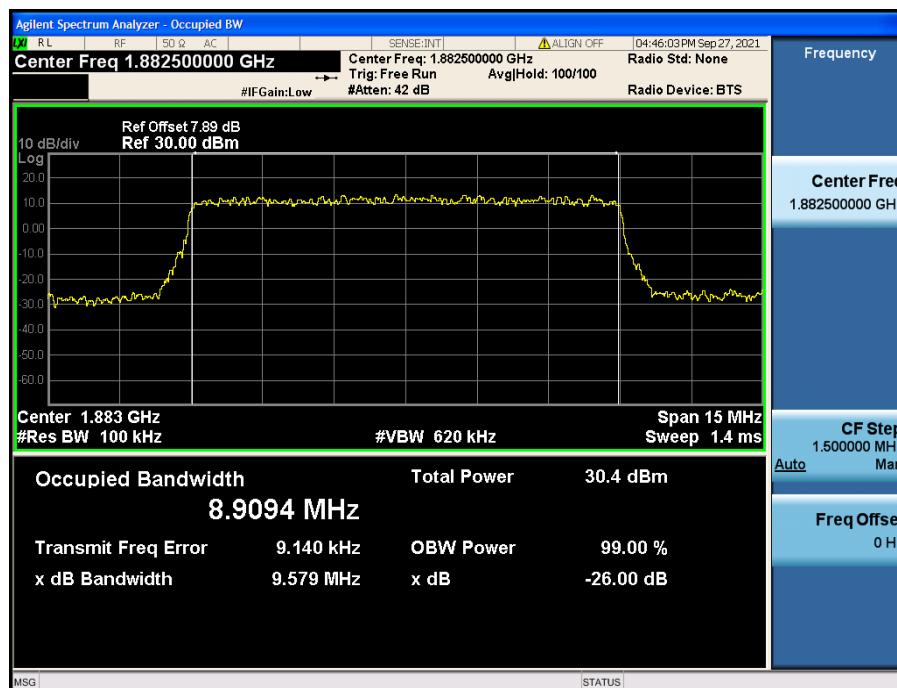


LTE Band 25(2) / 10 MHz / QPSK - RB Size 50




LTE Band 25(2) / 10 MHz / 16QAM - RB Size 50

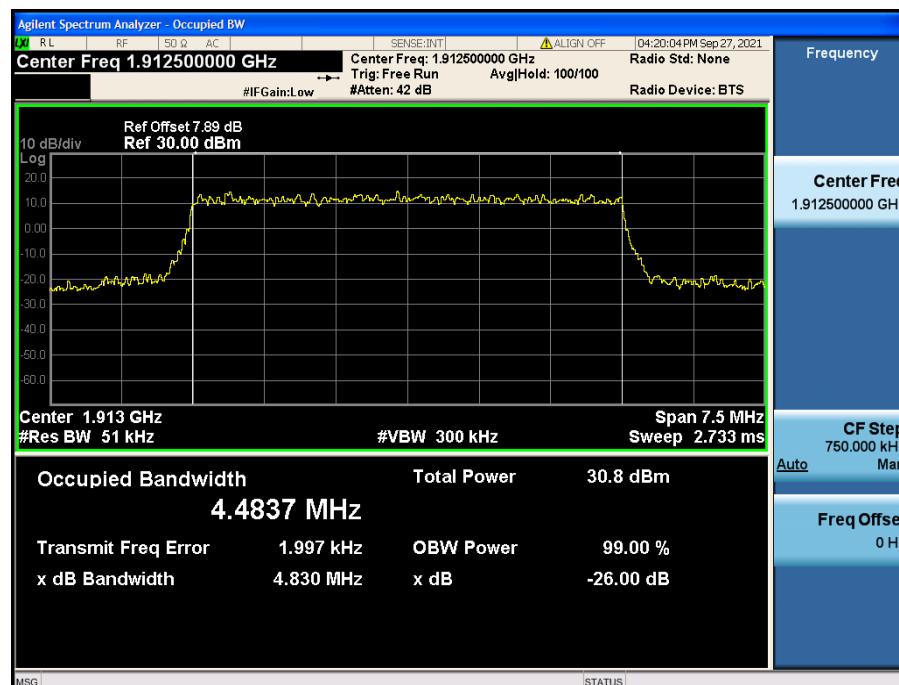


LTE Band 25(2) / 5 MHz / QPSK - RB Size 25

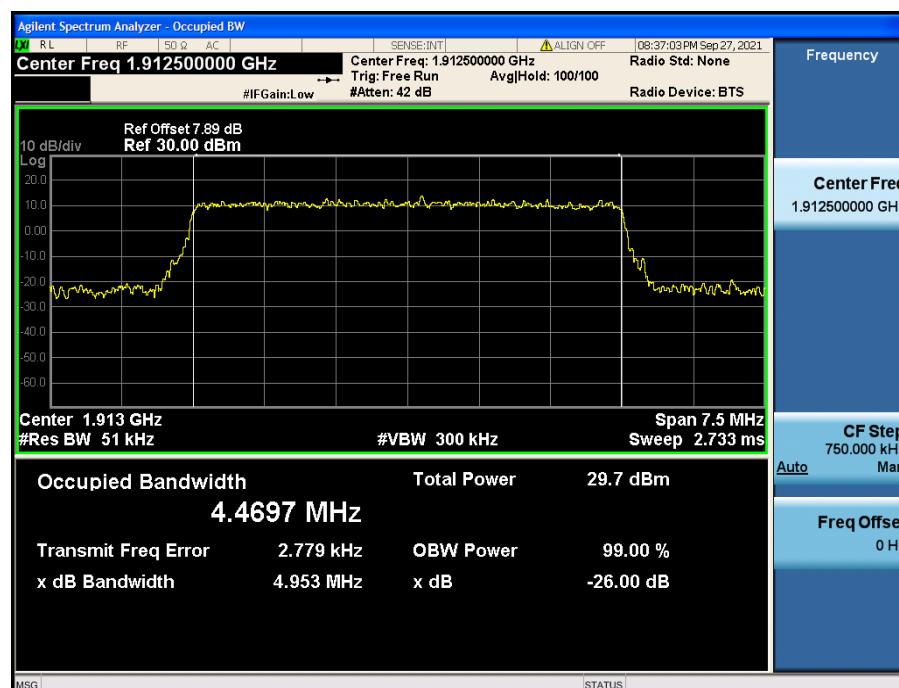

LTE Band 25(2) / 5 MHz / 16QAM - RB Size 25

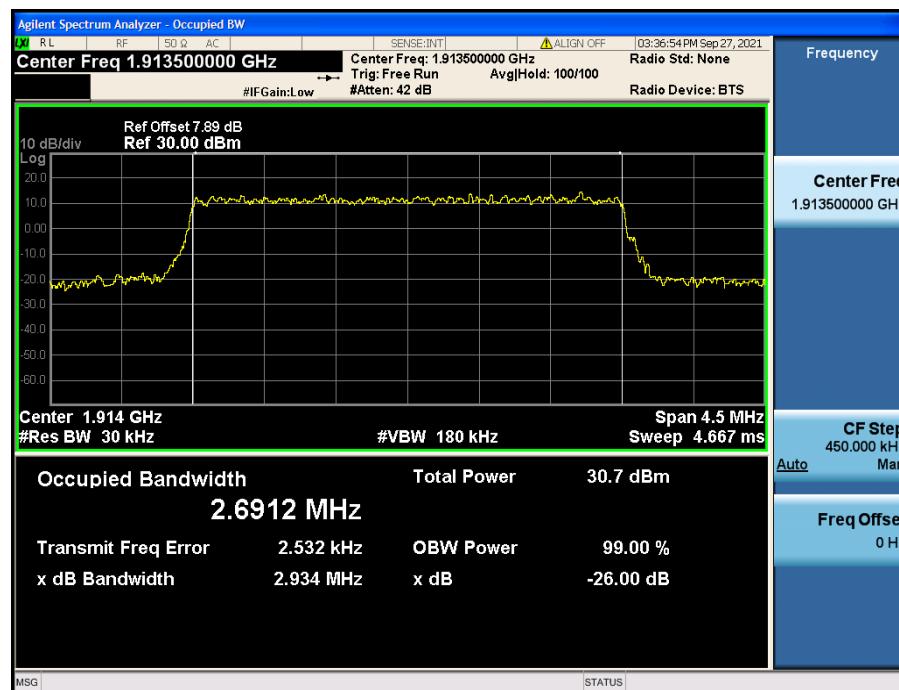


LTE Band 25(2) / 3 MHz / QPSK - RB Size 15

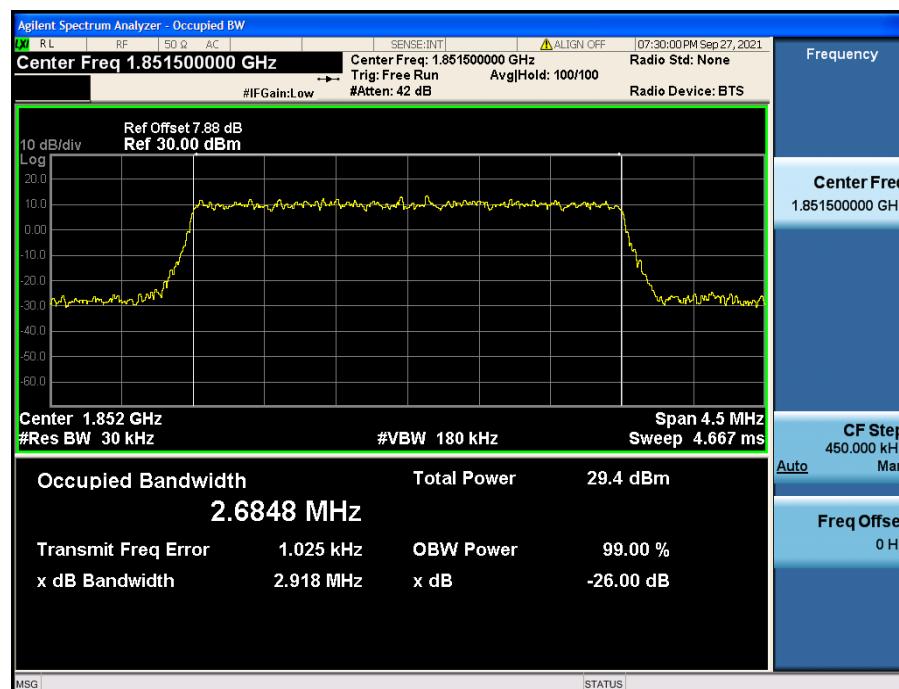

LTE Band 25(2) / 3 MHz / 16QAM - RB Size 15




LTE Band 25(2) / 1.4 MHz / QPSK - RB Size 6

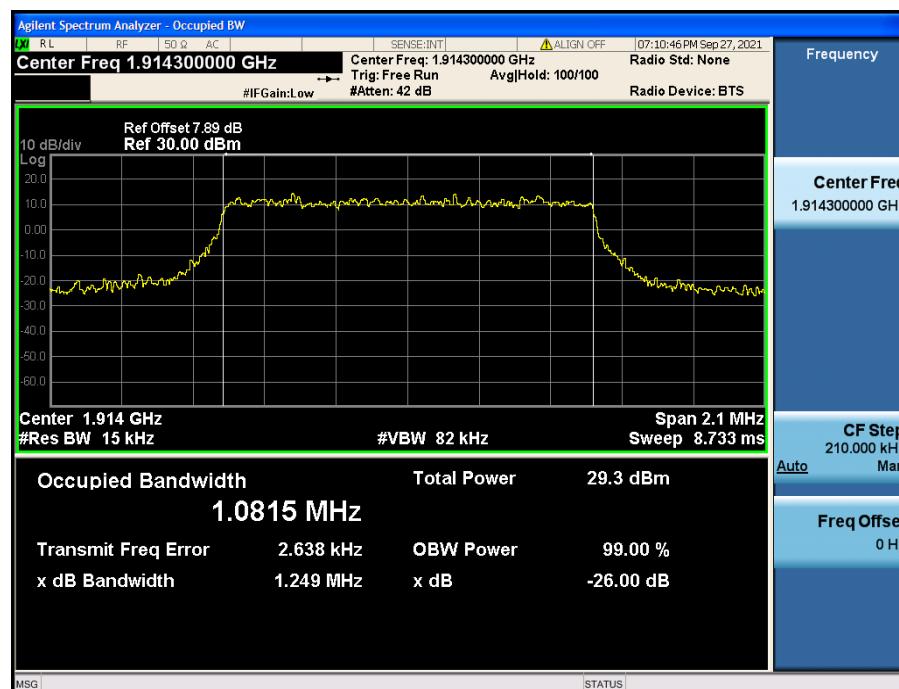


LTE Band 25(2) / 1.4 MHz / 16QAM - RB Size 6



8.1.8. LTE Band 41(38)

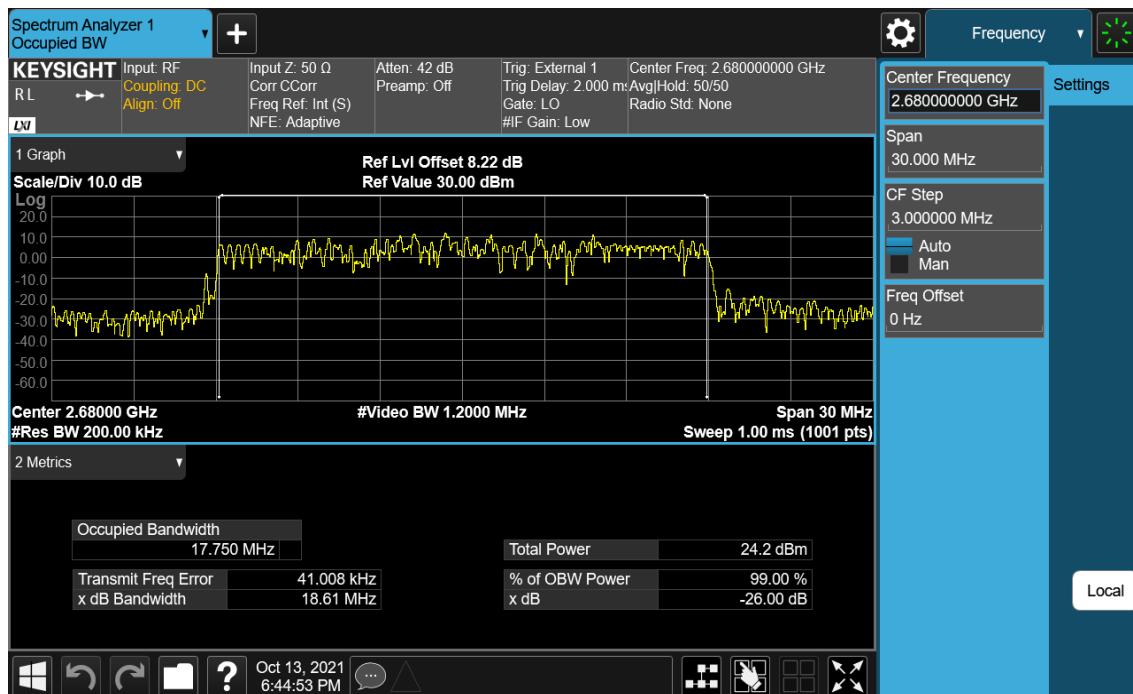


LTE Band 41(38) / 20 MHz / QPSK - RB Size 100

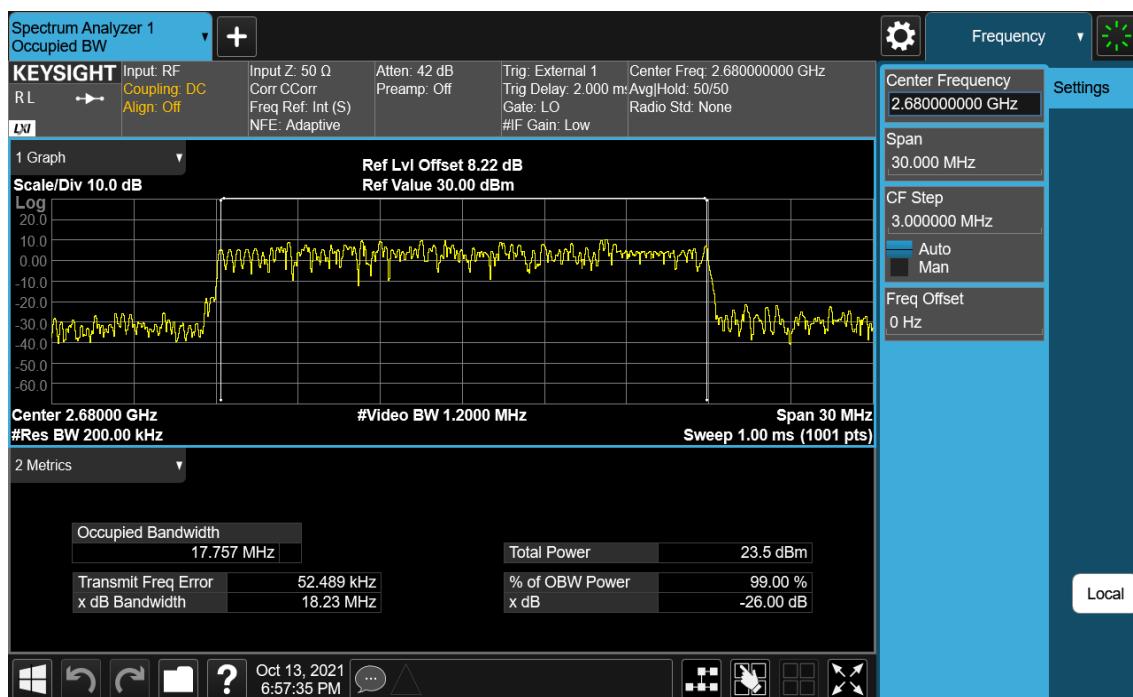


LTE Band 41(38) / 20 MHz / 16QAM - RB Size 100

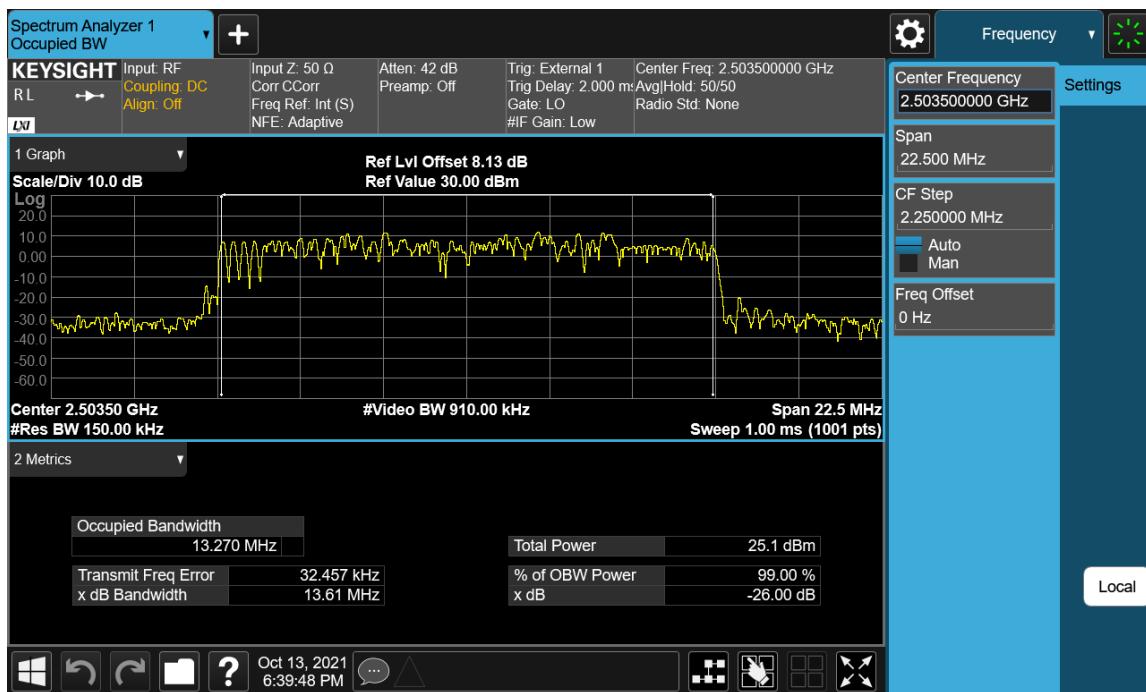
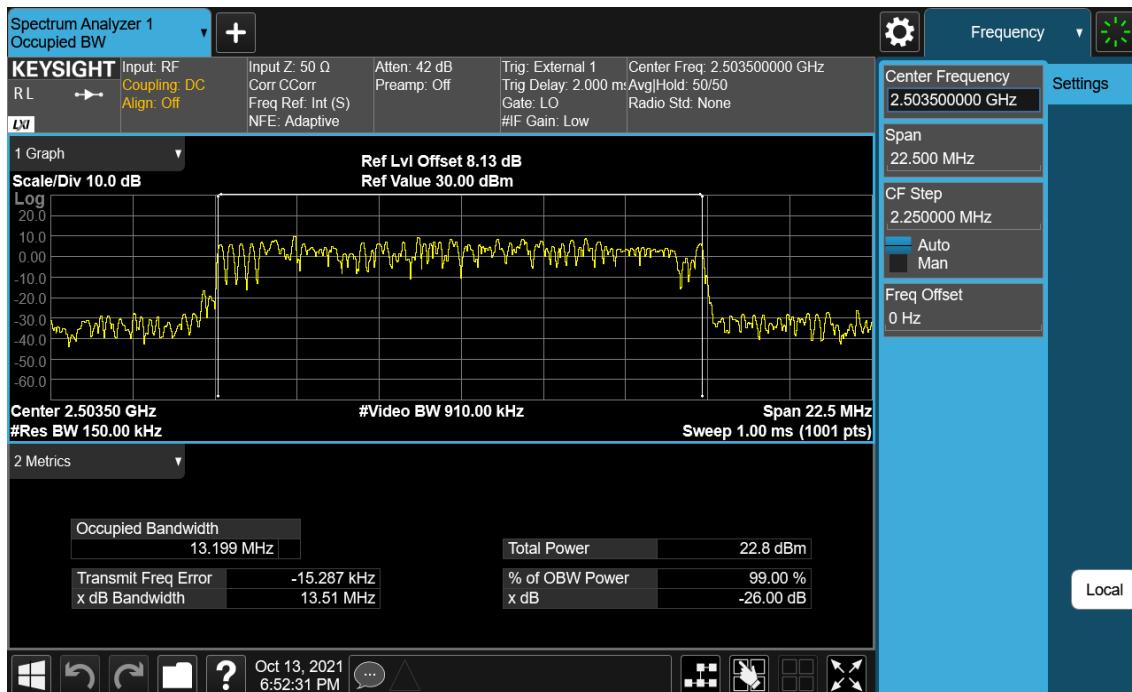

LTE Band 41(38) / 15 MHz / QPSK - RB Size 75

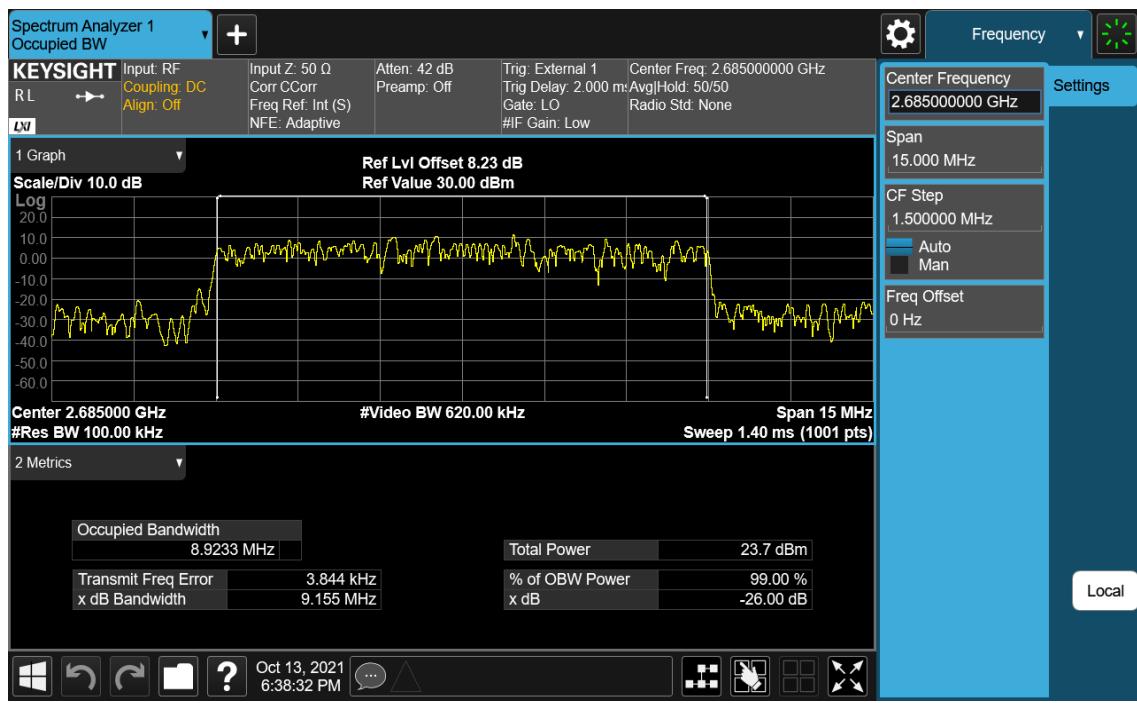LTE Band 41(38) / 15 MHz / 16QAM - RB Size 75

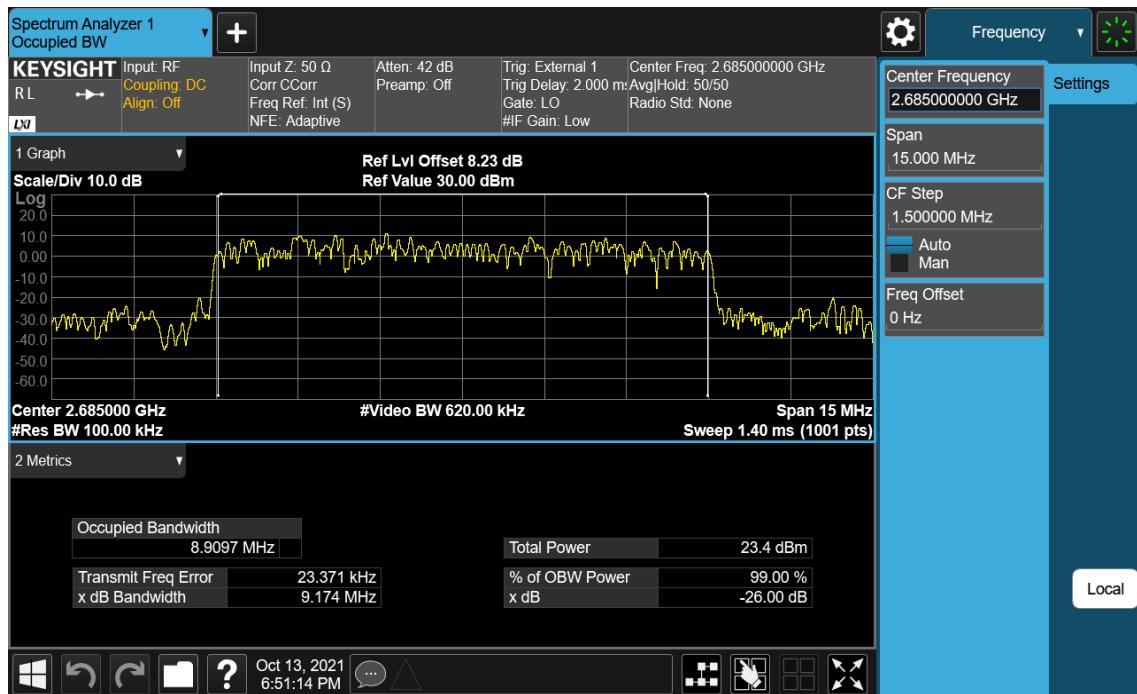


LTE Band 41(38) / 10 MHz / QPSK - RB Size 50

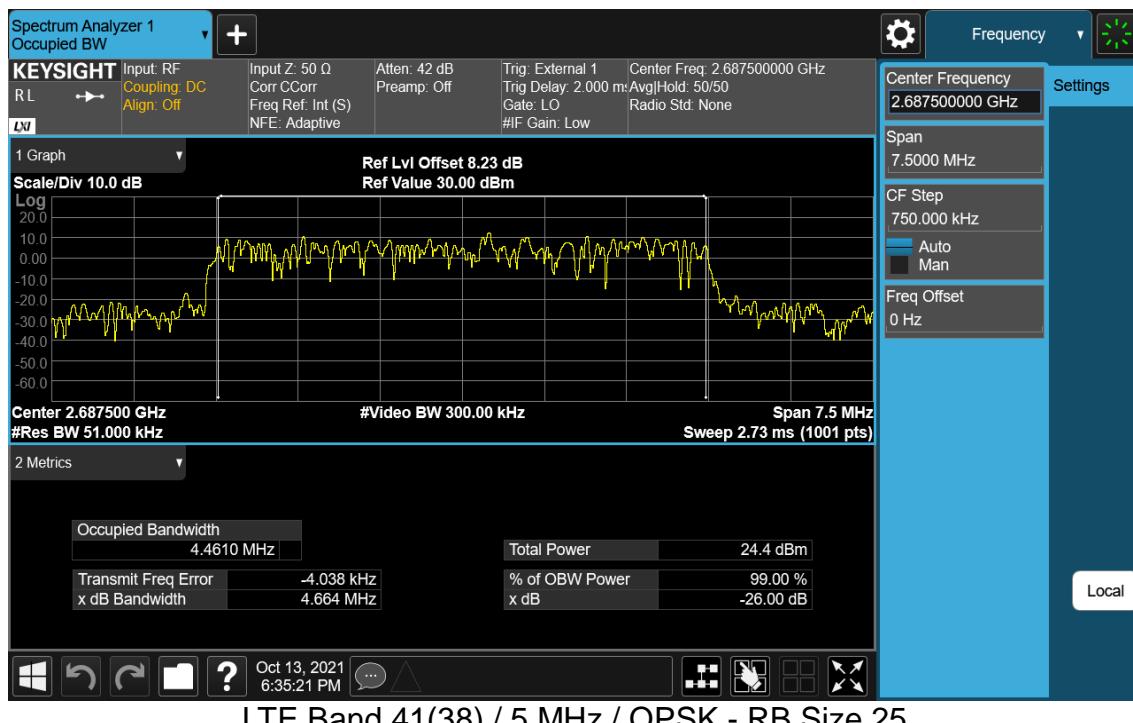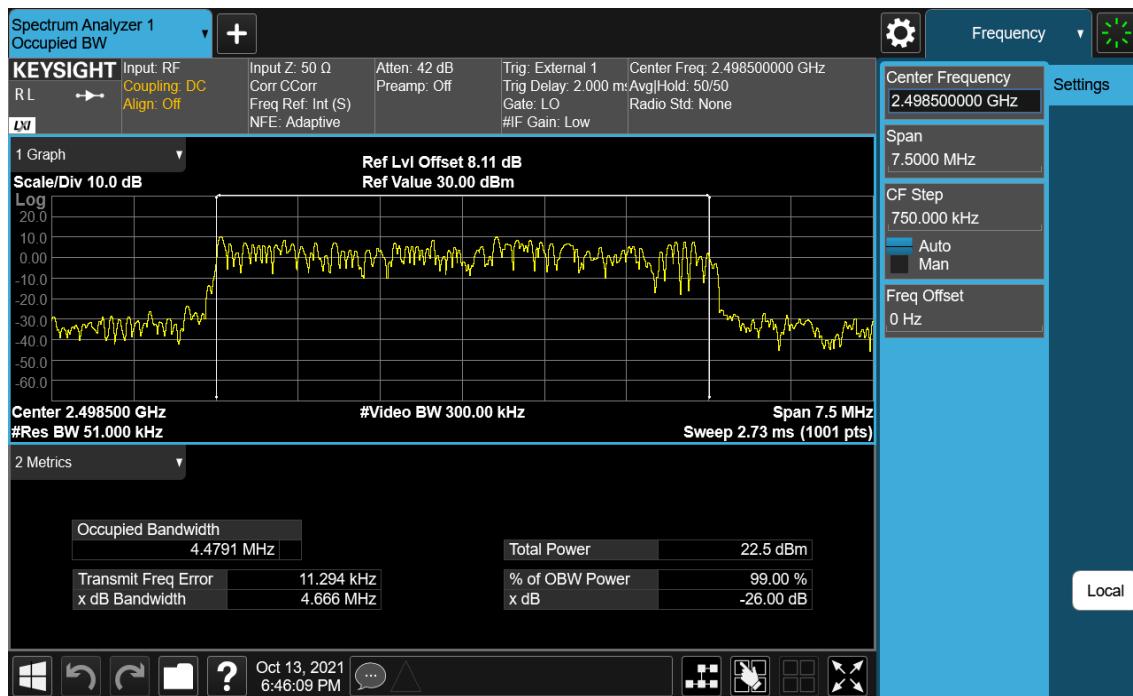


LTE Band 41(38) / 10 MHz / 16QAM - RB Size 50


LTE Band 41(38) / 5 MHz / QPSK - RB Size 25

LTE Band 41(38) / 5 MHz / 16QAM - RB Size 25

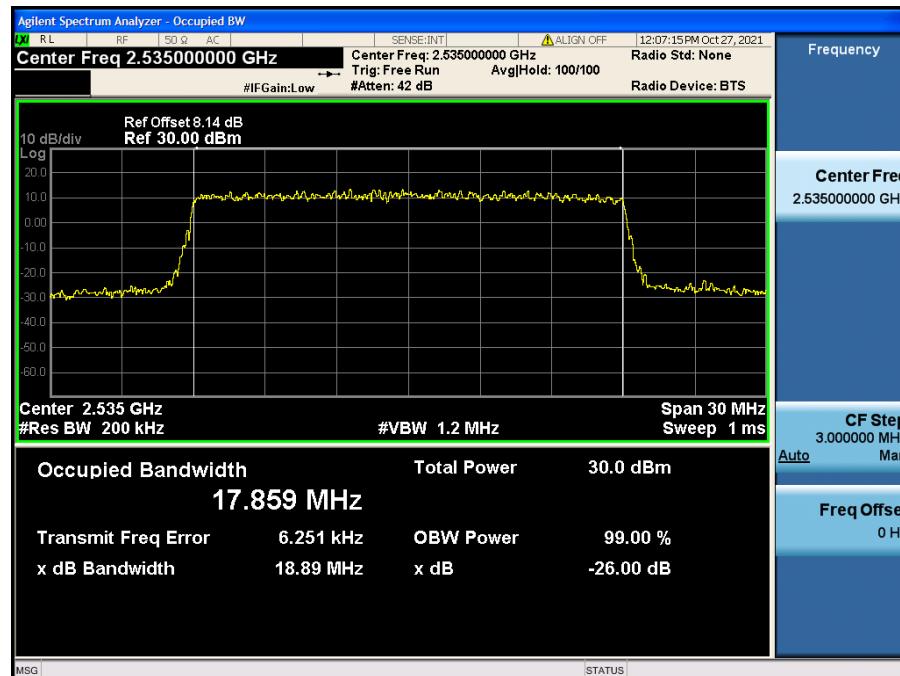
8.1.9. LTE Band 7

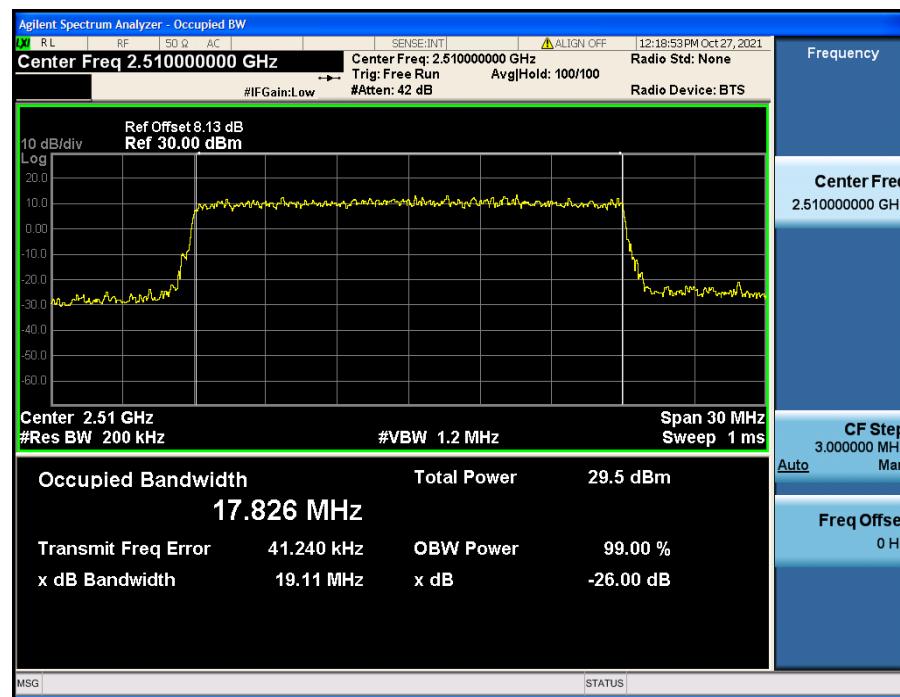


LTE Band 7 / 20 MHz / QPSK - RB Size 100




LTE Band 7 / 20 MHz / 16QAM - RB Size 100

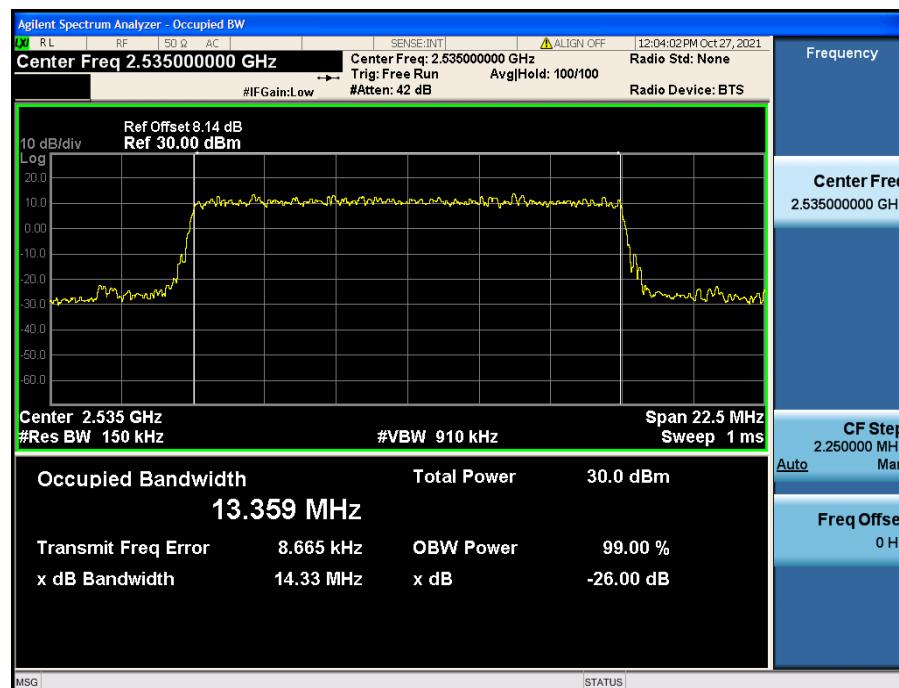

LTE Band 7 / 15 MHz / QPSK - RB Size 75

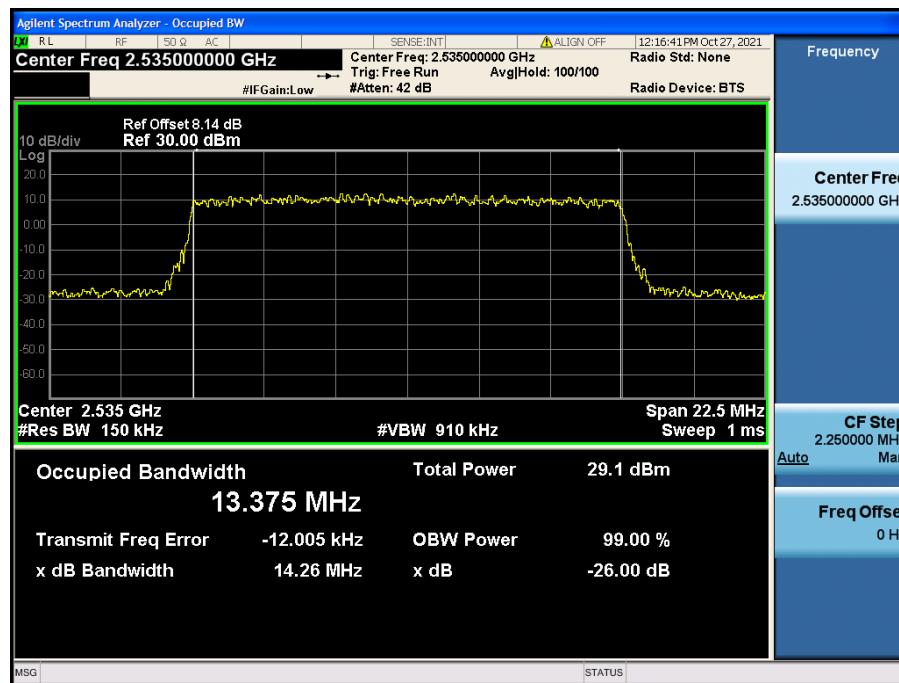


LTE Band 7 / 15 MHz / 16QAM - RB Size 75

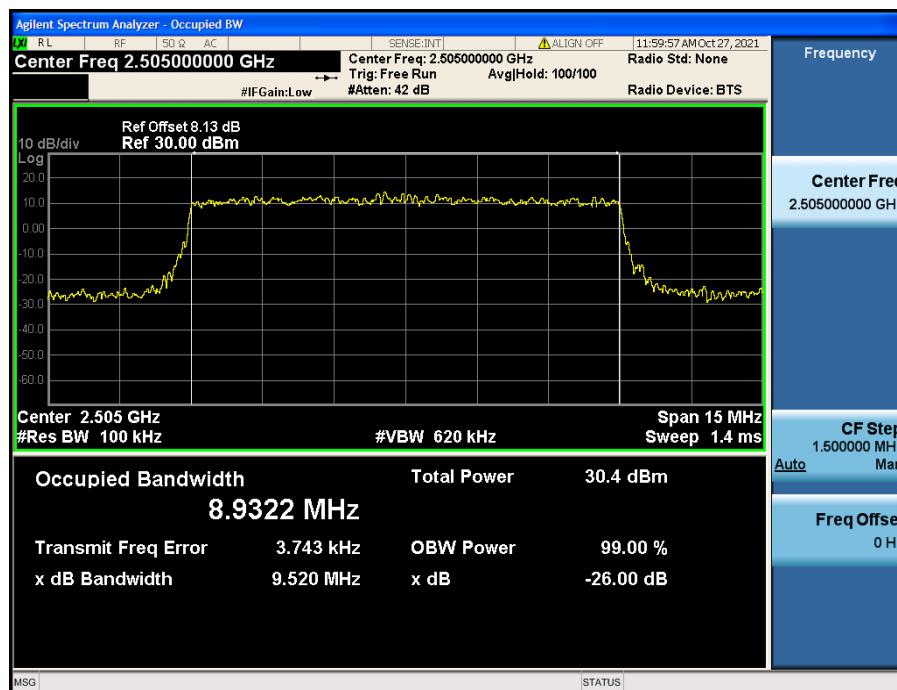


LTE Band 7 / 10 MHz / QPSK - RB Size 50



LTE Band 7 / 10 MHz / 16QAM - RB Size 50

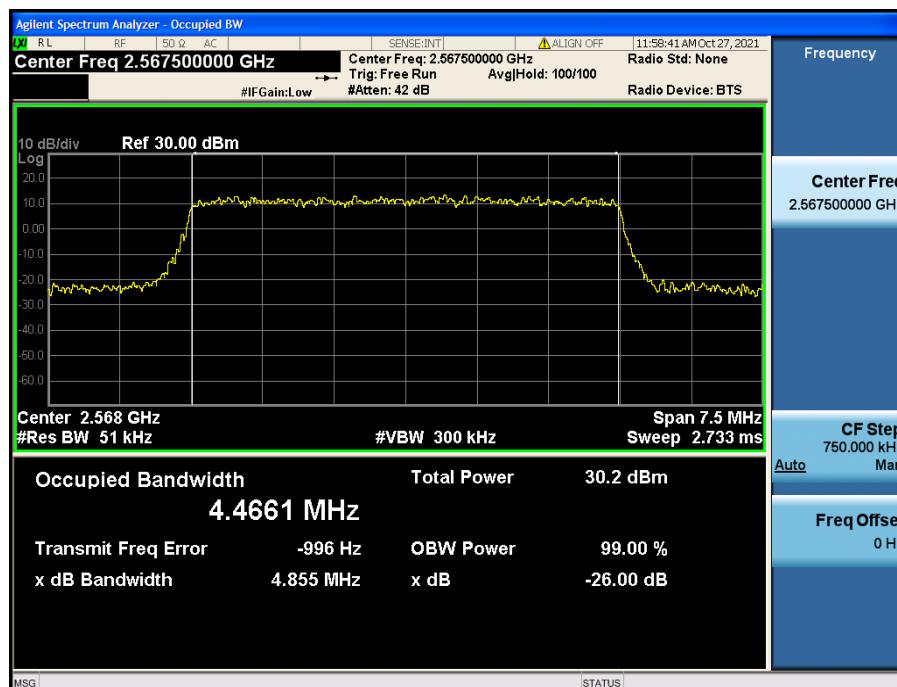

LTE Band 7 / 5 MHz / QPSK - RB Size 25

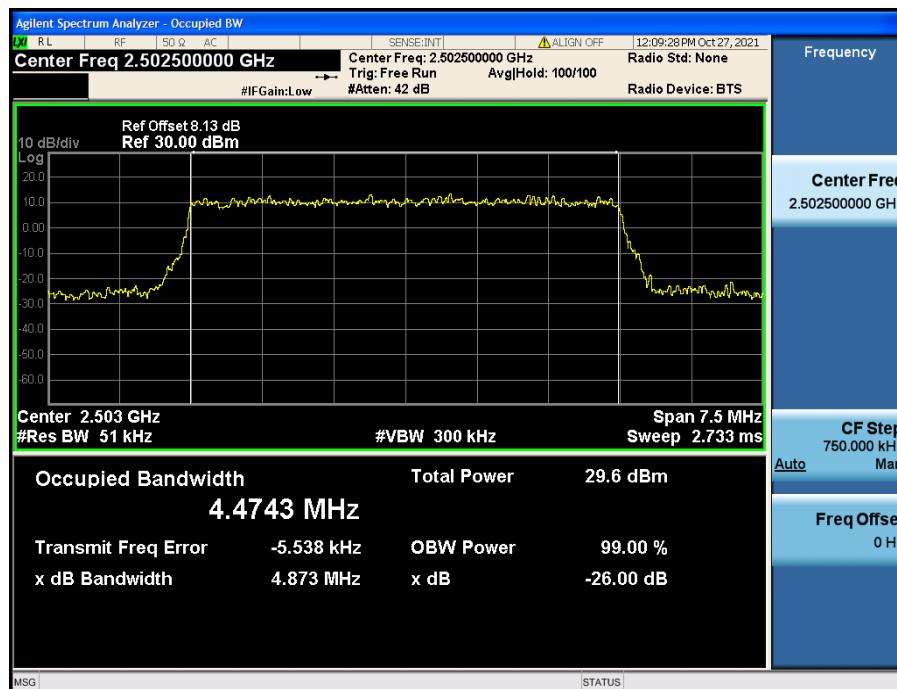

LTE Band 7 / 5 MHz / 16QAM - RB Size 25

8.2. PEAK TO AVERAGE RATIO

8.2.1. LTE Band 12



LTE Band 12 / 10 MHz / QPSK - RB Size 50




LTE Band 12 / 10 MHz / 16QAM - RB Size 50



LTE Band 12 / 5 MHz / QPSK - RB Size 25



LTE Band 12 / 5 MHz / 16QAM - RB Size 25

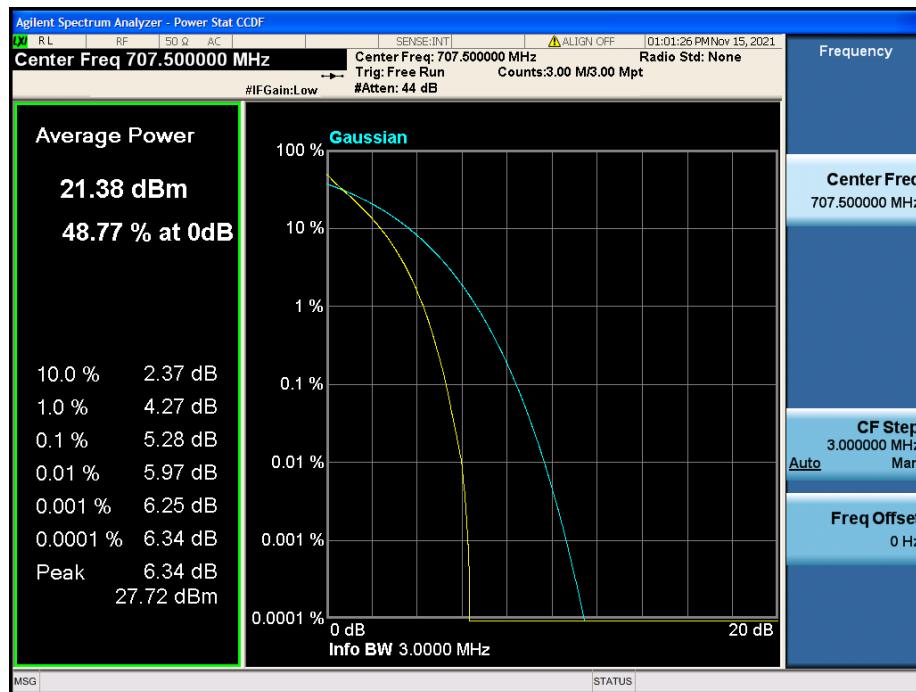


LTE Band 12 / 3 MHz / QPSK - RB Size 15



LTE Band 12 / 3 MHz / 16QAM - RB Size 15



LTE Band 12 / 1.4 MHz / QPSK - RB Size 6

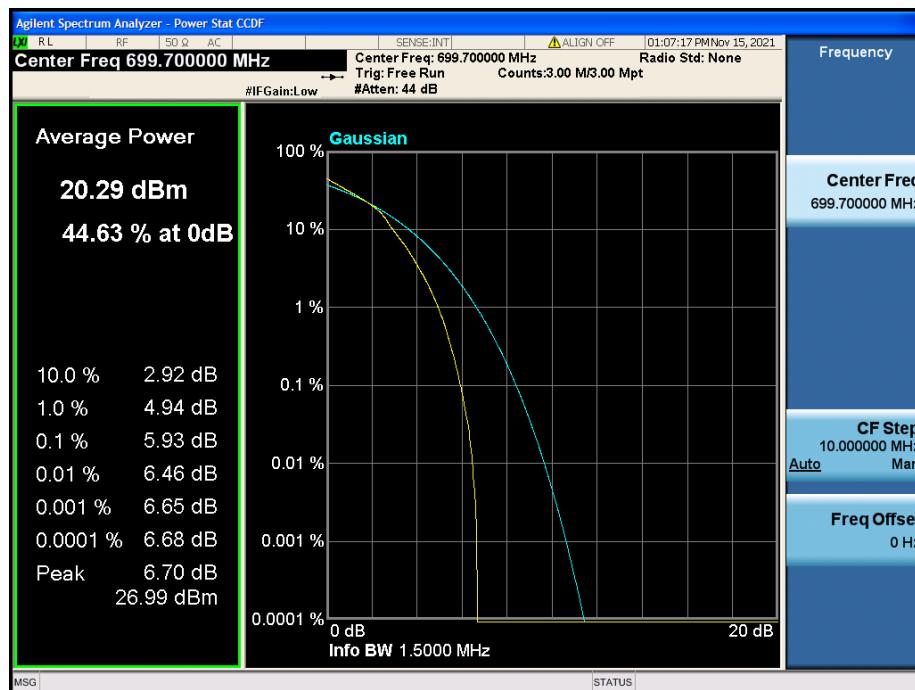


LTE Band 12 / 1.4 MHz / 16QAM - RB Size 6

8.2.2. LTE Band 17



LTE Band 17 / 10 MHz / QPSK - RB Size 50

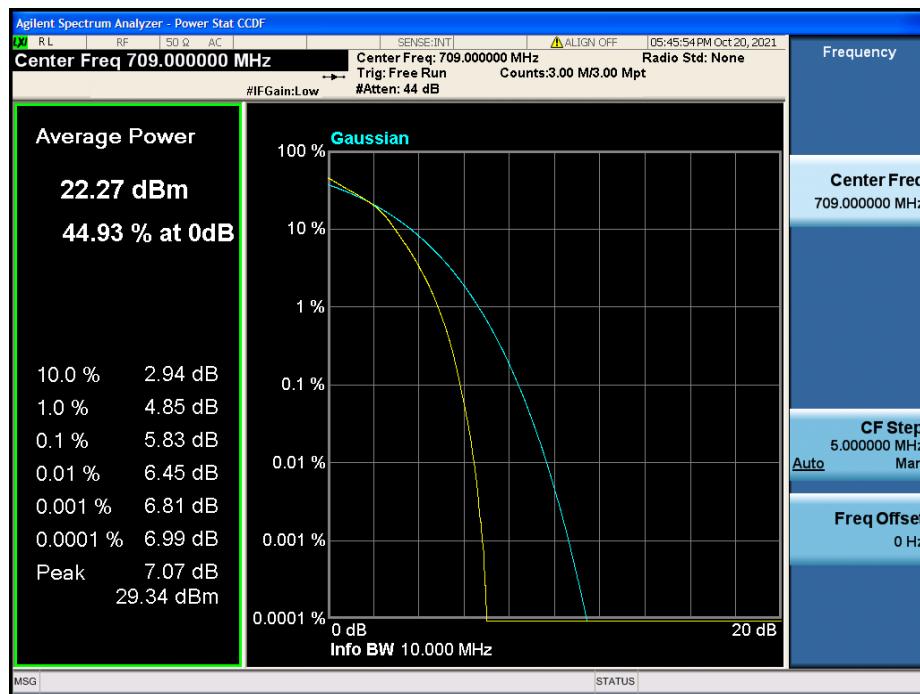

LTE Band 17 / 10 MHz / 16QAM - RB Size 50



LTE Band 17 / 5 MHz / QPSK - RB Size 25



LTE Band 17 / 5 MHz / 16QAM - RB Size 25

8.2.3. LTE Band 13




LTE Band 13 / 10 MHz / QPSK - RB Size 50



LTE Band 13 / 10 MHz / 16QAM - RB Size 50



LTE Band 13 / 5 MHz / QPSK - RB Size 25

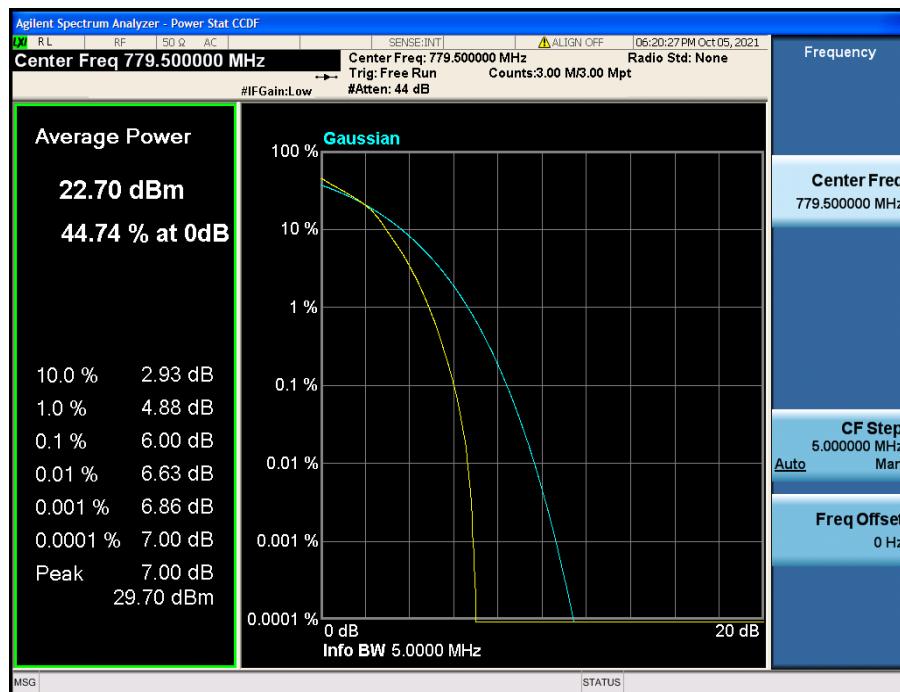


LTE Band 13 / 5 MHz / 16QAM - RB Size 25

8.2.4. LTE Band 26



LTE Band 26 / 15 MHz / QPSK - RB Size 75

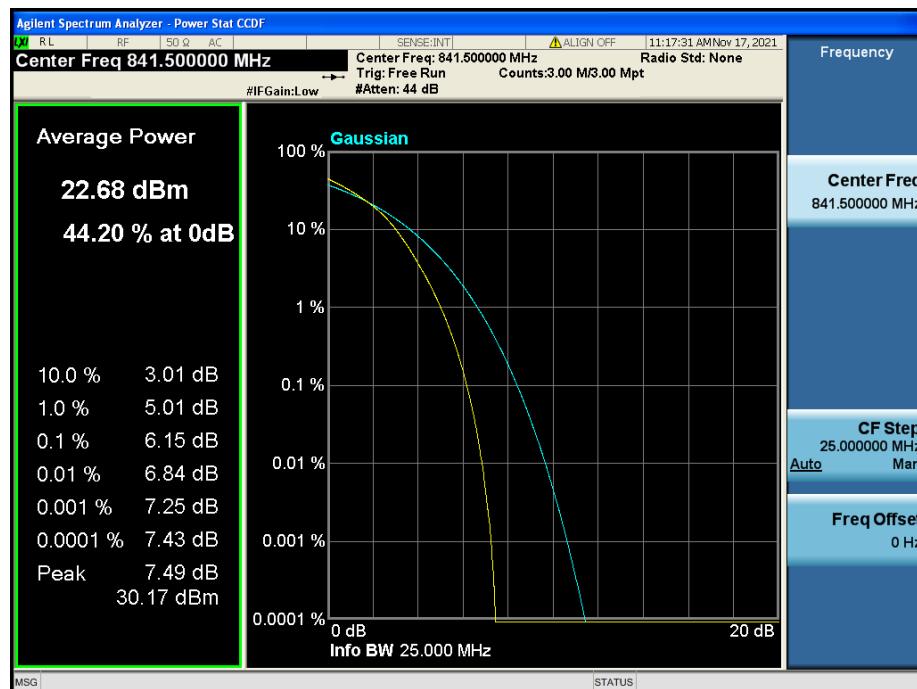

LTE Band 26 / 15 MHz / 16QAM - RB Size 75