

# TEST REPORT



**DT&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC2111-0117

2. Customer

• Name : Point Mobile Co., LTD.

• Address : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Mobile Computer / PM75

FCC ID : V2X-PM75

5. IC Regulation(s) : CFR 47 Part 2 subpart 2.1093

Test Method Used : IEEE 1528-2013, FCC SAR KDB Publications (Details in test report)

IEC/IEEE 62209-1528

6. Date of Test : 2021.09.01 ~ 2021.10.27

7. Location of Test :  Permanent Testing Lab  On Site Testing

8. Testing Environment : Refer to appended test report.

9. Test Result : Refer to attached test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Reviewed by
	Name : DuHee Lee 	Name : HakMin Kim 

2021 . 11 . 17 .

**DT&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description	Tested by	Reviewed by
DRRFCC2111-0117	Nov. 17, 2021	Initial issue	DuHee Lee	HakMin Kim

## Table of Contents

<b>1. DESCRIPTION OF DEVICE .....</b>	<b>5</b>
1.1 General Information.....	5
1.2 Power Reduction for SAR.....	7
1.3 Nominal and Maximum Output Power Specifications.....	7
1.4 DUT Antenna Locations.....	7
1.5 Simultaneous Transmission Capabilities.....	7
1.6 Miscellaneous SAR Test Considerations.....	8
1.7 Guidance Applied.....	8
1.8 Device Serial Numbers.....	8
<b>2. LTE INFORMATION.....</b>	<b>9</b>
<b>3. INTROCUCTION.....</b>	<b>10</b>
<b>4. DOSIMETRIC ASSESSMENT .....</b>	<b>11</b>
4.1 Measurement Procedure.....	11
<b>5. DEFINITION OF REFERENCE POINTS .....</b>	<b>13</b>
5.1 Ear Reference Point.....	13
5.2 Handset Reference Points.....	13
<b>6. TEST CONFIGURATION POSITIONS FOR HANDSETS.....</b>	<b>14</b>
6.1 Device Holder.....	14
6.2 Positioning for Cheek/Touch.....	14
6.3 Positioning for Ear / 15 ° Tilt.....	14
6.4 Body-Worn Accessory Configurations.....	15
6.5 Extremity Exposure Configurations.....	15
6.6 Wireless Router Configurations.....	16
<b>7. RF EXPOSURE LIMITS.....</b>	<b>17</b>
<b>8. FCC MEASUREMENT PROCEDURES .....</b>	<b>18</b>
8.1 Measured and Reported SAR.....	18
8.2 Procedures Used to Establish RF Signal for SAR.....	18
8.3 SAR Measurement Conditions for WCDMA (UMTS).....	18
8.3.1 Output Power Verification.....	18
8.3.2 Head SAR Measurements for Handsets.....	18
8.3.3 Body SAR Measurements.....	19
8.3.4 Release 5 HSDPA Data Devices.....	19
8.3.5 Release 6 HSUPA Data Devices.....	19
8.3.6 SAR Measurement Conditions for DC-HSDPA.....	20
8.4 SAR Measurement Conditions for LTE.....	21
8.4.1 Spectrum Plots for RB Configurations.....	21
8.4.2 MPR.....	21
8.4.3 A-MPR.....	21
8.4.4 Required RB Size and RB Offsets for SAR Testing.....	21
8.4.5 LTE TDD Consideration setup for SAR measurement.....	22
8.5 SAR Testing with 802.11 Transmitters.....	23
8.5.1 General Device Setup.....	23
8.5.2 U-NII and U-NII-2A.....	24
8.5.3 U-NII-2C and U-NII-3.....	24
8.5.4 Initial Test Position Procedure.....	24
8.5.5 2.4 GHz SAR Test Requirements.....	24
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection.....	25
8.5.7 Initial Test Configuration Procedure.....	25
8.5.8 Subsequent Test Configuration Procedures.....	25
<b>9. RF CONDUCTED POWERS.....</b>	<b>26</b>
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers.....	26
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers.....	27
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers.....	28
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers.....	42
9.5 Bluetooth Conducted Powers.....	46

<b>10. SYSTEM VERIFICATION</b>	<b>48</b>
10.1 Tissue Verification	48
10.2 Test System Verification	50
<b>11. SAR TEST RESULTS</b>	<b>51</b>
11.1 Head SAR Results	51
11.2 Standalone Body-Worn SAR Worn SAR Results	55
11.3 Standalone Hotspot SAR Results	57
11.4 Standalone Phablet SAR Results	61
11.5 SAR Test Notes	62
<b>12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS</b>	<b>65</b>
12.1 Introduction	65
12.2 Simultaneous Transmission Procedures	65
12.3 Simultaneous Transmission Capabilities	65
12.4 Head SAR Simultaneous Transmission Analysis	67
12.5 Body-Worn Simultaneous Transmission Analysis	72
12.6 Hotspot SAR Simultaneous Transmission Analysis	75
12.7 Phablet SAR Simultaneous Transmission Analysis	80
12.8 Simultaneous Transmission Conclusion	80
<b>13. SAR MEASUREMENT VARIABILITY</b>	<b>81</b>
13.1 Measurement Variability	81
13.2 Measurement Uncertainty	81
<b>14. EQUIPMENT LIST</b>	<b>82</b>
<b>15. MEASUREMENT UNCERTAINTIES</b>	<b>83</b>
<b>16. CONCLUSION</b>	<b>87</b>
<b>17. REFERENCES</b>	<b>88</b>
<b>APPENDIX A. – Probe Calibration Data</b>	<b>90</b>
<b>APPENDIX B. – Dipole Calibration Data</b>	<b>145</b>
<b>APPENDIX C. – SAR Tissue Specifications</b>	<b>208</b>
<b>APPENDIX D. – SAR SYSTEM VALIDATION</b>	<b>211</b>
<b>APPENDIX E. – Description of Test Equipment</b>	<b>213</b>

# 1. DESCRIPTION OF DEVICE

## 1.1 General Information

EUT type	Mobile Computer					
FCC ID	V2X-PM75					
Equipment model name	PM75					
Equipment add model name	N/A					
Equipment serial no.	Identical prototype					
FVIN (Firmware Version Identification Number)	75.00					
FCC & ISED MRA Designation No. ISED#	KR0034 5740A					
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1700, WCDMA 1900, LTE Band 12, 17, 13, 26, 5, 66, 4, 25, 2, 7, 41, 38, 2.4 G W-LAN (802.11b/g/n-HT20/n-HT40/ac-VHT20/ac-VHT40), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/ac-VHT80), Bluetooth					
TX Frequency Range	<b>Band</b>	<b>Mode</b>	<b>Operating Modes</b>	<b>Bandwidth</b>	<b>Frequency</b>	
	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 ~ 848.8 MHz	
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1 850.2 ~ 1 909.8 MHz	
	WCDMA 850	WCDMA	Voice/Data	-	826.4 ~ 846.6 MHz	
	WCDMA 1700	WCDMA	Voice/Data	-	1 712.4 ~ 1 752.6 MHz	
	WCDMA 1900	WCDMA	Voice/Data	-	1 852.4 ~ 1 907.6 MHz	
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 ~ 715.3 MHz	
	LTE Band 17	LTE	Voice/Data	5/10MHz	706.5 ~ 713.5 MHz	
	LTE Band 13	LTE	Voice/Data	5/10MHz	779.5 ~ 784.5 MHz	
	LTE Band 26	LTE	Voice/Data	1.4/3/5/10/15MHz	814.7 ~ 848.3 MHz	
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 ~ 848.3 MHz	
	LTE Band 66	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 710.7 ~ 1 779.3 MHz	
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 710.7 ~ 1 754.3 MHz	
	LTE Band 25	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 850.7 ~ 1 914.3 MHz	
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 850.7 ~ 1 909.3 MHz	
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2 502.5 ~ 2 567.5 MHz	
	LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2 498.5 ~ 2 687.5 MHz	
	LTE Band 38	LTE	Voice/Data	5/10/15/20MHz	2 572.5 ~ 2 617.5 MHz	
	2.4 GHz W-LAN	802.11b/g/n/ac	Voice/Data	HT20/VHT20	2 412 ~ 2 462 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	2 422 ~ 2 452 MHz	
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 180 ~ 5 240 MHz	
		802.11ac	Voice/Data	HT40/VHT40 VHT80	5 190 ~ 5 230 MHz 5 210 MHz	
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 260 ~ 5 320 MHz	
		802.11ac	Voice/Data	HT40/VHT40 VHT80	5 270 ~ 5 310 MHz 5 290 MHz	
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 500 ~ 5 720 MHz	
		802.11ac	Voice/Data	HT40/VHT40 VHT80	5 510 ~ 5 710 MHz 5 530 ~ 5 690 MHz	
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 745 ~ 5 825 MHz	
		802.11ac	Voice/Data	HT40/VHT40 VHT80	5 755 ~ 5 795 MHz 5 775 MHz	
	Bluetooth	-	Data	-	2 402 ~ 2 480 MHz	
	RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	869.2 ~ 893.8 MHz
		GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1 930.2 ~ 1 989.8 MHz
		WCDMA 850	WCDMA	Voice/Data	-	871.4 ~ 891.6 MHz
		WCDMA 1700	WCDMA	Voice/Data	-	2 112.4 ~ 2 152.6 MHz
		WCDMA 1900	WCDMA	Voice/Data	-	1 932.4 ~ 1 987.6 MHz
		LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	729.7 ~ 745.3 MHz
		LTE Band 17	LTE	Voice/Data	5/10MHz	736.5 ~ 743.5 MHz
		LTE Band 13	LTE	Voice/Data	5/10MHz	748.5 ~ 753.5 MHz
		LTE Band 26	LTE	Voice/Data	1.4/3/5/10/15MHz	859.7 ~ 893.3 MHz
		LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	869.7 ~ 893.3 MHz
		LTE Band 66	LTE	Voice/Data	1.4/3/5/10/15/20MHz	2 110.7 ~ 2 179.3 MHz
		LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	2 110.7 ~ 2 154.3 MHz
		LTE Band 25	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 930.7 ~ 1 994.3 MHz
		LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 930.7 ~ 1 989.3 MHz
		LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2 622.5 ~ 2 687.5 MHz
		LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2 498.5 ~ 2 687.5 MHz
		LTE Band 38	LTE	Voice/Data	5/10/15/20MHz	2 572.5 ~ 2 617.5 MHz
		2.4 GHz W-LAN	802.11b/g/n/ac	Voice/Data	HT20/VHT20	2 412 ~ 2 462 MHz
			802.11n/ac	Voice/Data	HT40/VHT40	2 422 ~ 2 452 MHz
5.2 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5 180 ~ 5 240 MHz	
		802.11ac	Voice/Data	HT40/VHT40 VHT80	5 190 ~ 5 230 MHz 5 210 MHz	
5.3 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5 260 ~ 5 320 MHz	
		802.11ac	Voice/Data	HT40/VHT40 VHT80	5 270 ~ 5 310 MHz 5 290 MHz	
5.6 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5 500 ~ 5 720 MHz	
		802.11ac	Voice/Data	HT40/VHT40 VHT80	5 510 ~ 5 710 MHz 5 530 ~ 5 690 MHz	
5.8 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5 745 ~ 5 825 MHz	
		802.11ac	Voice/Data	HT40/VHT40 VHT80	5 755 ~ 5 795 MHz 5 775 MHz	
Bluetooth		-	Data	-	2 402 ~ 2 480 MHz	

**SAR Summary Table**

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
PCE	GSM 850	0.29	0.37	-	-
PCE	GPRS 850	0.33	0.41	0.41	-
PCE	GSM 1900	0.28	0.44	-	-
PCE	GPRS 1900	0.34	0.47	0.59	-
PCE	WCDMA 850	0.30	0.47	0.47	-
PCE	WCDMA 1700	0.68	<b>1.03</b>	<b>1.03</b>	-
PCE	WCDMA 1900	0.55	0.93	0.93	-
PCE	LTE Band 12	0.23	0.41	0.41	-
PCE	LTE Band 17	0.25	0.51	0.51	-
PCE	LTE Band 13	0.26	0.46	0.46	-
PCE	LTE Band 26	0.31	0.39	0.39	-
PCE	LTE Band 5	-	-	-	-
PCE	LTE Band 66	0.69	0.84	0.85	-
PCE	LTE Band 4	-	-	-	-
PCE	LTE Band 25	0.48	0.60	0.69	-
PCE	LTE Band 2	-	-	-	-
PCE	LTE Band 7	0.71	0.97	0.97	-
PCE	LTE Band 41	0.33	0.83	0.83	-
PCE	LTE Band 38	-	-	-	-
DTS	2.4 GHz W-LAN	<b>0.83</b>	0.20	0.22	-
U-NII-1	5.2 GHz W-LAN	-	-	0.33	-
U-NII-2A	5.3 GHz W-LAN	0.50	0.32	-	0.47
U-NII-2C	5.6 GHz W-LAN	0.57	0.52	-	<b>0.60</b>
U-NII-3	5.8 GHz W-LAN	0.49	0.47	0.47	-
DSS	Bluetooth	0.26	< 0.1	< 0.1	-
Simultaneous SAR per KDB 690783 D01v01r03		<b>1.55</b>	<b>1.59</b>	<b>1.54</b>	-
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)				
Date(s) of Tests	2021.09.01 ~ 2021.10.27				
Antenna Type	Internal Antenna				
Functions	<ul style="list-style-type: none"> <li>● GSM/GPRS/EDGE (GPRS/EDGE Class: 33) supported.</li> <li>* DTM not supported.</li> <li>● No simultaneous transmission between BT &amp; 2.4GHz WLAN</li> <li>● Simultaneous transmission between [GSM, WCDMA voice &amp; WLAN], [GPRS, WCDMA &amp; WLAN], [LTE &amp; WLAN].</li> <li>● VoIP is supported.</li> <li>● W-LAN 2.4GHz is supported Hotspot.</li> <li>● W-LAN 5 GHz is supported Hotspot.</li> </ul>				

## 1.2 Power Reduction for SAR

This device uses an independent fixed level power reduction mechanism for WLAN 5GHz operations during receiver & hotspot mode. Detailed descriptions of the power reduction mechanism are included in the operational description.

## 1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

## 1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in (PM75)\_Antenna Location. Since the diagonal dimension of this device is < 160 mm and the diagonal display is < 150 mm, it is not considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS/EDGE 850	X	O	O	O	O	O
GSM/GPRS/EDGE 1900	X	O	O	O	O	O
WCDMA 850	X	O	O	O	O	O
WCDMA 1700	X	O	O	O	O	O
WCDMA 1900	X	O	O	O	O	O
LTE Band 12	X	O	O	O	O	O
LTE Band 17	X	O	O	O	O	O
LTE Band 13	X	O	O	O	O	O
LTE Band 26	X	O	O	O	O	O
LTE Band 5	X	O	O	O	O	O
LTE Band 66	X	O	O	O	O	O
LTE Band 4	X	O	O	O	O	O
LTE Band 25	X	O	O	O	O	O
LTE Band 2	X	O	O	O	O	O
LTE Band 7	X	O	O	O	O	O
LTE Band 41	X	O	O	O	O	O
LTE Band 38	X	O	O	O	O	O
2.4G W-LAN	O	X	O	O	O	O
5G W-LAN	O Note 2	X	O	O	O Note 2	O Note 2
Bluetooth	O	X	O	O	O	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: WLAN Hotspot UNII-1, 3 supported.

Note 3: O - Test / X - Not test.

Note 4: This DUT has NFC operations. The NFC antenna is integrated into the back side.

The SAR tests were performed with NFC antenna already incorporated.

A diagram showing the location of the device antenna can be found in (PM75)\_Antenna Location.

## 1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.



## 1.6 Miscellaneous SAR Test Considerations

### (A) WIFI

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

## 1.7 Guidance Applied

- IEEE 1528-2013
- IEC/IEEE 62209-1528
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01(Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)

## 1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.



## 2. LTE INFORMATION

LTE Information					
FCC ID	V2X-PM75				
Form Factor	Mobile Computer				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 13 (779.5 ~ 784.5 MHz) LTE Band 26 (Cell) (814.7 ~ 848.3 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 66 (AWS) (1710.7 ~ 1779.3 MHz) LTE Band 4 (AWS) (1710.7 ~ 1754.3 MHz) LTE Band 25 (PCS) (1850.7 ~ 1914.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz) LTE Band 7 (2502.5 ~ 2567.5 MHz) LTE Band 41 (2498.5 ~ 2687.5 MHz) LTE Band 38 (2572.5 ~ 2617.5 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 : 5 MHz, 10 MHz LTE Band 13 : 5 MHz, 10 MHz LTE Band 26 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 66 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 25 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 7 : 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41 : 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 38 : 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) <sup>Note1</sup>	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5(23755)	N/A	710.0(23790)	N/A	713.5(23825)
LTE Band 17: 10 MHz	709.0(23780)	N/A	710.0(23790)	N/A	711.0(23800)
LTE Band 13: 5 MHz	779.5(23205)	N/A	782.0(23230) <sup>Note2</sup>	N/A	784.5(23255)
LTE Band 13: 10 MHz	N/A	N/A	782.0(23230)	N/A	N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	N/A	831.5 (26865)	N/A	848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	N/A	831.5 (26865)	N/A	847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	N/A	831.5 (26865)	N/A	846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819.0 (26740)	N/A	831.5 (26865)	N/A	844.0 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)	N/A	831.5 (26865) <sup>Note3</sup>	N/A	841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) <sup>Note4</sup>	N/A	844.0 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	N/A	1745.0 (132322)	N/A	1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	N/A	1745.0 (132322)	N/A	1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	N/A	1745.0 (132322)	N/A	1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715.0 (132022)	N/A	1745.0 (132322)	N/A	1775.0 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	N/A	1745.0 (132322)	N/A	1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720.0 (132072)	N/A	1745.0 (132322)	N/A	1770.0 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175) <sup>Note5</sup>	N/A	1745.0 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	N/A	1882.5 (26365)	N/A	1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	N/A	1882.5 (26365)	N/A	1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	N/A	1882.5 (26365)	N/A	1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855.0 (26090)	N/A	1882.5 (26365)	N/A	1910.0 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	N/A	1882.5 (26365)	N/A	1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860.0 (26140)	N/A	1882.5 (26365)	N/A	1905.0 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	N/A	2535.0 (21100)	N/A	2567.5 (21425)
LTE Band 7: 10 MHz	2505.0 (20800)	N/A	2535.0 (21100)	N/A	2565.0 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	N/A	2535.0 (21100)	N/A	2562.5 (21375)
LTE Band 7: 20 MHz	2510.0 (20850)	N/A	2535.0 (21100)	N/A	2560.0 (21350)
LTE Band 41: 5 MHz	2498.5 (39675)	2545.8 (40148)	2593.0 (40620)	2630.3 (41093)	2687.5 (41565)
LTE Band 41: 10 MHz	2501.0 (39700)	2547.0 (40160)	2593.0 (40620)	2630.0 (41080)	2685.0 (41540)
LTE Band 41: 15 MHz	2503.5 (39725)	2548.3 (40173)	2593.0 (40620)	2637.8 (41068)	2682.5 (41515)
LTE Band 41: 20 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
LTE Band 38: 5 MHz	2572.5 (37775)	N/A	2595.0 (38000)	N/A	2617.5 (38225)
LTE Band 38: 10 MHz	2575.0 (37800)	N/A	2595.0 (38000)	N/A	2615.0 (38200)
LTE Band 38: 15 MHz	2577.5 (37825)	N/A	2595.0 (38000)	N/A	2612.5 (38175)
LTE Band 38: 20 MHz	2580.0 (37850)	N/A	2595.0 (38000)	N/A	2610.0 (38150)
UE Category	LTE Rel. 10, UE Cat 4				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	LTE Carrier Aggregation is not supported.				
LTE Additional Information	This device does not support CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WiFi Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

- Note(s)
- LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.  
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
  - LTE B13 can not contain three non-overlapping channels of 5 MHz bandwidth.  
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
  - LTE B26(Cell) can not contain three non-overlapping channels of 15 MHz bandwidth.  
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
  - LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.  
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
  - LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.  
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

### 3. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)


NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

## 4. DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 4.1**  
**Sample SAR Area Scan**

		$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\*

## 5. DEFINITION OF REFERENCE POINTS

### 5.1 Ear Reference Point

Figure 5.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 5.1  
Close-up side view of ERP

### 5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 5.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5.2 Front, back and side view SAM Twin Phantom

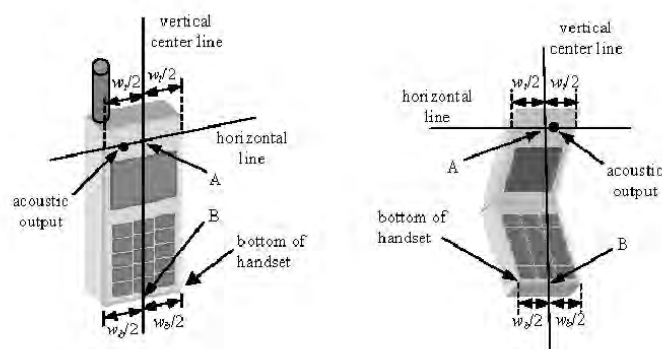


Figure 5.3 Handset Vertical Center & Horizontal Line Reference Points



## 6. TEST CONFIGURATION POSITIONS FOR HANDSETS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

### 6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

## 6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

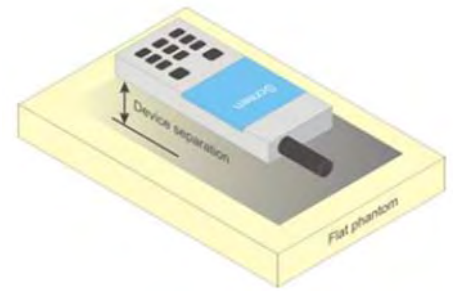


Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.



## 6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 7. RF EXPOSURE LIMITS

### Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992**

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

## 8. FCC MEASUREMENT PROCEDURES

---

Power measurements were performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

### 8.3 SAR Measurement Conditions for WCDMA (UMTS)

#### 8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

#### 8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

### 8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

### 8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	CM (dB) <sup>(2)</sup>
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	12/15 <sup>(3)</sup>	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$   
 Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ .  
 Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

Figure 9.1 Table 1

### 8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ed}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  cannot be set directly; it is set by Absolute Grant Value.

Figure 9.2 Table 2

### 8.3.6 SAR Measurement Conditions for DC-HSDPA

In the following DB 941225 D01v03r01 procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

## 8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

### 8.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

## 8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

### 8.4.5 LTE TDD Consideration setup for SAR measurement

According to KDB 941225 D05 SAR for LTE Devices v02r05 for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configuration and Table 4.2-1 for Special subframe configurations.

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-		
8	$24144 \cdot T_s$			-		

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink \* (Ts) \* # of S + # of U

$T_s = 1/(15000 * 2048)$  seconds

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 * [1/(15000 * 2048)] * 2 + 6 \text{ ms} = 63.33 \%$



## 8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

### 8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

### 8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

### 8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test position are measured.

#### 8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

### 8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n or 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### 8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured.

### 8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is  $\leq 1.2$  W/kg, no additional SAR testing for the subsequent test configurations is required.

## 9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

### 9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]				Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS/EDGE 850	Maximum	33.5	33.5	31.5	29.5	27.5	27.5	27.5	26.0	25.5
	Nominal	32.5	32.5	30.5	28.5	26.5	26.5	26.5	25.0	24.5
GSM/GPRS/EDGE 1900	Maximum	30.5	30.5	28.5	26.5	24.5	26.5	26.5	26.5	26.0
	Nominal	29.5	29.5	27.5	25.5	23.5	25.5	25.5	25.5	25.0

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	33.4	33.4	30.9	28.9	26.0	26.6	25.9	24.2	24.0
	190	33.1	33.1	30.8	28.8	25.9	26.5	25.9	24.2	23.8
	251	33.3	33.3	30.9	28.9	25.9	26.4	25.7	24.1	23.8
PCS 1900	512	30.1	30.1	28.0	26.0	23.8	26.0	24.8	24.6	24.3
	661	30.4	30.4	28.2	26.2	24.2	26.0	24.8	24.6	24.3
	810	30.2	30.2	28.1	26.1	23.8	26.0	24.8	24.6	24.4
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	24.37	24.37	24.88	24.64	22.99	17.57	19.88	19.94	20.99
	190	24.07	24.07	24.78	24.54	22.89	17.47	19.88	19.94	20.79
	251	24.27	24.27	24.88	24.64	22.89	17.37	19.68	19.84	20.79
PCS 1900	512	21.07	21.07	21.98	21.74	20.79	16.97	18.78	20.34	21.29
	661	21.37	21.37	22.18	21.94	21.19	16.97	18.78	20.34	21.29
	810	21.17	21.17	22.08	21.84	20.79	16.97	18.78	20.34	21.39
<b>GSM850</b>	Frame Avg. Targets:	23.47	23.47	24.48	24.24	23.49	17.47	20.48	20.74	21.49
<b>PCS 1900</b>		20.47	20.47	21.48	21.24	20.49	16.47	19.48	21.24	21.99

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GPRS Multislot class: 33 (max 4 TX Uplink slots)  
 EDGE Multislot class: 33 (max 4 TX Uplink slots)  
 DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

## 9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode		Cellular Band (dBm)		AWS Band (dBm)		PCS Band (dBm)		3GPP MPR (dB)
99	WCDMA	Voice	Maximum	24.0	24.0	24.0	24.0	24.0	-
			Nominal	23.0	23.0	23.0	23.0	23.0	-
5	HSDPA	Subtest 1	Maximum	24.0	24.0	24.0	24.0	24.0	0
			Nominal	23.0	23.0	23.0	23.0	23.0	0
5		Subtest 2	Maximum	24.0	24.0	24.0	24.0	24.0	0
			Nominal	23.0	23.0	23.0	23.0	23.0	0
5		Subtest 3	Maximum	23.5	23.5	23.5	23.5	23.5	0.5
			Nominal	22.5	22.5	22.5	22.5	22.5	0.5
5		Subtest 4	Maximum	23.5	23.5	23.5	23.5	23.5	0.5
			Nominal	22.5	22.5	22.5	22.5	22.5	0.5
6	HSUPA	Subtest 1	Maximum	24.0	24.0	24.0	24.0	24.0	0
			Nominal	23.0	23.0	23.0	23.0	23.0	0
6		Subtest 2	Maximum	22.0	22.0	22.0	22.0	22.0	2
			Nominal	21.0	21.0	21.0	21.0	21.0	2
6		Subtest 3	Maximum	23.0	23.0	23.0	23.0	23.0	1
			Nominal	22.0	22.0	22.0	22.0	22.0	1
6		Subtest 4	Maximum	22.0	22.0	22.0	22.0	22.0	2
			Nominal	21.0	21.0	21.0	21.0	21.0	2
6		Subtest 5	Maximum	24.0	24.0	24.0	24.0	24.0	0
			Nominal	23.0	23.0	23.0	23.0	23.0	0
8	DC-HSDPA	Subtest 1	Maximum	24.0	24.0	24.0	24.0	24.0	0
			Nominal	23.0	23.0	23.0	23.0	23.0	0
8		Subtest 2	Maximum	24.0	24.0	24.0	24.0	24.0	0
			Nominal	23.0	23.0	23.0	23.0	23.0	0
8		Subtest 3	Maximum	23.5	23.5	23.5	23.5	23.5	0.5
			Nominal	22.5	22.5	22.5	22.5	22.5	0.5
8		Subtest 4	Maximum	23.5	23.5	23.5	23.5	23.5	0.5
			Nominal	22.5	22.5	22.5	22.5	22.5	0.5

Table 9.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			AWS Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.17	23.34	23.37	23.24	23.46	23.26	23.45	23.47	23.28	-
99		12.2 kbps AMR	23.14	23.30	23.33	23.30	23.49	23.29	23.43	23.46	23.29	-
5	HSDPA	Subtest 1	22.18	22.38	22.38	22.35	22.56	22.27	22.45	22.44	22.31	0
5		Subtest 2	22.25	22.39	22.39	22.36	22.56	22.35	22.52	22.48	22.32	0
5		Subtest 3	21.63	21.86	21.88	21.80	22.05	21.76	21.99	21.95	21.80	0.5
5		Subtest 4	21.62	21.86	21.87	21.81	22.04	21.83	21.98	21.94	21.77	0.5
6	HSUPA	Subtest 1	22.23	22.33	22.42	22.36	22.55	22.33	22.43	22.51	22.42	0
6		Subtest 2	20.28	20.44	20.45	21.35	21.55	21.35	20.61	20.63	20.44	2
6		Subtest 3	21.30	21.46	21.36	21.40	21.60	21.40	21.58	21.50	21.44	1
6		Subtest 4	20.32	20.48	20.51	20.38	20.60	20.40	20.69	20.62	20.47	2
6		Subtest 5	22.27	22.42	22.41	22.35	22.59	22.37	22.51	22.51	22.36	0
8	DC-HSDPA	Subtest 1	22.35	22.38	22.34	22.27	22.44	22.27	22.45	22.42	22.31	0
8		Subtest 2	22.32	22.37	22.33	22.24	22.42	22.25	22.44	22.40	22.30	0
8		Subtest 3	21.82	21.85	21.83	21.72	21.90	21.71	21.93	21.89	21.78	0.5
8		Subtest 4	21.83	21.84	21.82	21.70	21.89	21.69	21.92	21.87	21.77	0.5

Table 9.2.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance.
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements.
- The DUT supports UE category 24 for HSDPA.



Figure 9.2 Power Measurement Setup

### 9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode	Modulated Average[dBm]	
	LTE Band 12	Maximum
	Nominal	21.1

Table 9.3.1.1 Nominal and Maximum Output Power Spec

#### 1) LTE Band 12

LTE Band 12 Conducted Power– 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)
			23095 (707.5 MHz)	Conducted Power (dBm)		
QPSK	1	0		21.68	≤ 1	0
	1	25		21.93		
	1	49		21.62		
	25	0		20.77		1
	25	12		20.91		
	25	25		20.75		
16QAM	50	0		20.85	≤ 1	1
	1	0		20.59		
	1	25		21.00		
	1	49		20.55		
	25	0		19.68	≤ 2	2
	25	12		19.95		
	25	25		19.64		
	50	0		19.80		

Table 9.3.1.2 LTE Conducted Power

Note: LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	21.41	21.46	21.47	≤ 1	0
	1	12	21.61	21.64	21.63		
	1	24	21.43	21.56	21.41		
	12	0	20.42	20.68	20.63		1
	12	6	20.63	20.83	20.68		
	12	13	20.60	20.70	20.45		
16QAM	25	0	20.55	20.81	20.57	≤ 1	1
	1	0	20.46	20.49	20.54		
	1	12	20.56	20.81	20.58		
	1	24	20.49	20.64	20.46		
	12	0	19.45	19.53	19.66		
	12	6	19.55	19.74	19.82	≤ 2	2
	12	13	19.49	19.51	19.52		
	25	0	19.48	19.62	19.49		

Table 9.3.1.3 LTE Conducted Power

LTE Band 12 Conducted Power-- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	21.51	21.62	21.66	≤ 1	0
	1	7	21.57	21.84	21.77		
	1	14	21.53	21.63	21.68		
	8	0	20.55	20.84	20.61		1
	8	4	20.66	20.85	20.78		
	8	7	20.64	20.79	20.68		
	15	0	20.55	20.82	20.61		
16QAM	1	0	20.45	20.64	20.48	≤ 1	1
	1	7	20.57	20.79	20.70		
	1	14	20.47	20.69	20.65		
	8	0	19.46	19.65	19.72	≤ 2	2
	8	4	19.49	19.72	19.82		
	8	7	19.48	19.60	19.75		
	15	0	19.59	19.78	19.57		

Table 9.3.1.4 LTE Conducted Power

LTE Band 12 Conducted Power-- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	21.44	21.62	21.61	≤ 1	0
	1	2	21.56	21.78	21.70		
	1	5	21.47	21.65	21.66		
	3	0	21.41	21.63	21.56		0
	3	2	21.53	21.64	21.68		
	3	3	21.47	21.60	21.62		
	6	0	20.45	20.78	20.58		
16QAM	1	0	20.47	20.75	20.53	≤ 1	1
	1	2	20.73	20.88	20.87		
	1	5	20.49	20.46	20.58		
	3	0	20.59	20.68	20.61		1
	3	2	20.64	20.70	20.79		
	3	3	20.54	20.69	20.74		
	6	0	19.48	19.77	19.72		
					≤ 2	2	

Table 9.3.1.5 LTE Conducted Power



Band & Mode	Modulated Average(dBm)	
	LTE Band 17	Maximum
	Nominal	23.0

Table 9.3.2.1 Nominal and Maximum Output Power Spec

## 2) LTE Band 17

LTE Band 17 Conducted Power– 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)
			23790 (710.0 MHz)	Conducted Power (dBm)		
QPSK	1	0		23.55	0	0
	1	25		23.63		
	1	49		23.60		
	25	0		22.41	0-1	1
	25	12		22.56		
	25	25		22.50		
16QAM	50	0		22.42	0-1	1
	1	0		22.53		
	1	25		22.54		
	1	49		22.52	0-2	2
	25	0		21.42		
	25	12		21.55		
	25	25		21.52	0-2	2
	50	0		21.43		

Table 9.3.2.2 LTE Conducted Power

Note : LTE B17 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power– 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)
			23790 (710.0 MHz)	Conducted Power (dBm)		
QPSK	1	0		23.52	0	0
	1	12		23.61		
	1	24		23.55		
	12	0		22.45	0-1	1
	12	6		22.55		
	12	13		22.51		
16QAM	25	0		22.48	0-1	1
	1	0		22.35		
	1	12		22.52		
	1	24		22.48	0-2	2
	12	0		21.50		
	12	6		21.53		
	12	13		21.52	0-2	2
	25	0		21.48		

Table 9.3.2.3 LTE Conducted Power

Note: LTE B17 can not contain three non-overlapping channels of 5 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band & Mode	Modulated Average[dBm]	
LTE Band 13	Maximum	24.0
	Nominal	23.0

Table 9.3.3.1 Nominal and Maximum Output Power Spec

### 3) LTE Band 13

LTE Band 13 Conducted Power– 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23230 (782.0 MHz)			
			Conducted Power (dBm)			
QPSK	1	0	23.86	≤ 1	0	
	1	25	23.98			
	1	49	23.85			
	25	0	22.95		1	
	25	12	22.97			
	25	25	22.86			
16QAM	50	0	22.96	≤ 1	1	
	1	0	22.91			
	1	25	23.00			
	1	49	22.87			
	16QAM	25	0	21.86	≤ 2	2
		25	12	21.96		
		25	25	21.94		
		50	0	21.97		

Table 9.3.3.2 LTE Conducted Power

LTE Band 13 Conducted Power– 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23230 (782.0 MHz)			
			Conducted Power (dBm)			
QPSK	1	0	23.86	≤ 1	0	
	1	12	23.92			
	1	24	23.84			
	QPSK	12	0		22.90	1
		12	6		22.93	
		12	13		22.86	
		25	0		22.93	
16QAM	1	0	22.85	≤ 1	1	
	1	12	22.89			
	1	24	22.82			
	16QAM	12	0	21.87	≤ 2	2
		12	6	21.90		
		12	13	21.84		
		25	0	21.90		

Table 9.3.3.3 LTE Conducted Power

Note: LTE B13 can not contain three non-overlapping channels of 5 MHz bandwidth.  
 Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band & Mode	Modulated Average[dBm]	
LTE Band 26	Maximum	24.0
	Nominal	23.0

Table 9.3.4.1 Nominal and Maximum Output Power Spec

#### 4) LTE Band 26 (Cell)

LTE Band 26 (Cell) Conducted Power– 15 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)
			26865 (831.5 MHz)	Conducted Power (dBm)		
QPSK	1	0		23.85	≤ 1	0
	1	36		23.95		
	1	74		23.81		
	36	0		22.95		1
	36	18		22.97		
	36	37		22.89		
16QAM	75	0		22.94	≤ 1	1
	1	0		22.82		
	1	36		22.86		
	1	74		22.69	≤ 2	2
	36	0		21.85		
	36	18		21.89		
	36	37		21.82		
75	0		21.86			

Table 9.3.4.2 LTE Conducted Power

Note: LTE B26 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 26 (Cell) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.86	23.85	23.87	≤ 1	0
	1	25	23.94	23.93	23.90		
	1	49	23.88	23.90	23.81		
	25	0	22.85	22.84	22.88		1
	25	12	22.96	22.95	22.92		
	25	25	22.93	22.92	22.89		
16QAM	50	0	22.95	22.94	22.91	≤ 1	1
	1	0	22.77	22.76	22.84		
	1	25	22.87	22.85	22.89		
	1	49	22.78	22.80	22.71	≤ 2	2
	25	0	21.70	21.69	21.77		
	25	12	21.82	21.81	21.80		
	25	25	21.83	21.73	21.78		
50	0	21.85	21.82	21.82			

Table 9.3.4.3 LTE Conducted Power

LTE Band 26 (Cell) Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)			
Conducted Power (dBm)								
QPSK	1	0	23.82	23.81	23.83	≤ 1	0	
	1	12	23.91	23.90	23.89			
	1	24	23.83	23.82	23.81			
	12	0	22.87	22.86	22.93		1	
	12	6	22.96	22.90	22.94			
	12	13	22.88	22.88	22.89			
16QAM	25	0	22.90	22.88	22.87	≤ 1	1	
	1	0	22.65	22.64	22.82			
	1	12	22.87	22.86	22.82			
	16QAM	1	24	22.70	22.68	22.74	≤ 2	2
		12	0	21.73	21.72	21.79		
		12	6	21.85	21.83	21.84		
		12	13	21.74	21.75	21.79		
		25	0	21.82	21.80	21.74		

Table 9.3.4.4 LTE Conducted Power

LTE Band 26 (Cell) Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)			
Conducted Power (dBm)								
QPSK	1	0	23.86	23.85	23.82	0	0	
	1	7	23.88	23.86	23.83			
	1	14	23.83	23.82	23.81			
	QPSK	8	0	22.80	22.82	22.88	0-1	1
		8	4	22.86	22.88	22.89		
		8	7	22.81	22.84	22.85		
		15	0	22.89	22.88	22.87		
16QAM	1	0	22.74	22.68	22.79	0-1	1	
	1	7	22.75	22.70	22.82			
	1	14	22.68	22.66	22.75			
	16QAM	8	0	21.68	21.70	21.81	0-2	2
		8	4	21.77	21.79	21.88		
		8	7	21.69	21.73	21.78		
		15	0	21.78	21.74	21.73		

Table 9.3.4.5 LTE Conducted Power

LTE Band 26 (Cell) Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)			
Conducted Power (dBm)								
QPSK	1	0	23.80	23.83	23.83	0	0	
	1	2	23.88	23.86	23.85			
	1	5	23.83	23.82	23.80			
	QPSK	3	0	23.83	23.84	23.83	0	0
		3	2	23.87	23.85	23.84		
		3	3	23.80	23.82	23.83		
		6	0	22.84	22.83	22.81		
16QAM	1	0	22.67	22.68	22.68	0-1	1	
	1	2	22.83	22.80	22.83			
	1	5	22.71	22.70	22.63			
	16QAM	3	0	22.69	22.70	22.67	0-1	1
		3	2	22.73	22.72	22.68		
		3	3	22.71	22.70	22.65		
		6	0	21.75	21.73	21.62		

Table 9.3.4.6 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 66 (AWS)	Maximum	24.5
	Nominal	23.5

Table 9.3.5.1 Nominal and Maximum Output Power Spec

**5) LTE Band 66 (AWS)**

LTE Band 66 (AWS) Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132072 (1 720.0 MHz)	132322 (1 745.0 MHz)	132572 (1 770.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.17	24.44	23.86	≤ 1	0
	1	50	24.46	24.48	24.43		
	1	99	24.33	24.15	23.85		
	50	0	22.99	23.27	23.14		1
	50	25	23.20	23.36	23.15		
	50	50	23.04	23.15	23.03		
16QAM	100	0	23.13	23.18	23.08	≤ 1	1
	1	0	23.20	23.27	23.04		
	1	50	23.34	23.39	23.33		
	1	99	23.23	23.12	22.84		≤ 2
	50	0	21.96	22.24	22.14		
	50	25	22.12	22.29	22.20		
16QAM	50	50	21.86	22.10	21.88	≤ 2	2
	100	0	22.06	22.15	21.92		
							2

Table 9.3.5.2 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132047 (1 717.5 MHz)	132322 (1 745.0 MHz)	132597 (1 772.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.17	24.43	24.11	≤ 1	0
	1	36	24.24	24.45	24.20		
	1	74	24.21	24.18	23.96		
	36	0	22.99	23.29	23.03		1
	36	18	23.06	23.30	23.05		
	36	37	23.05	23.18	23.04		
16QAM	75	0	23.10	23.17	23.06	≤ 1	1
	1	0	23.10	23.36	23.02		
	1	36	23.18	23.38	23.16		
	1	74	23.15	23.10	22.87		≤ 2
	36	0	21.85	22.18	21.95		
	36	18	22.02	22.20	21.96		
16QAM	36	37	21.93	22.14	21.93	≤ 2	2
	75	0	21.91	22.08	21.93		
							2

Table 9.3.5.3 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132022 (1 715.0 MHz)	132322 (1 745.0 MHz)	132622 (1 775.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.17	24.37	24.05	≤ 1	0
	1	25	24.35	24.40	24.28		
	1	49	24.26	24.22	23.96		
	25	0	23.05	23.25	23.04		1
	25	12	23.12	23.26	23.05		
	25	25	23.11	23.24	23.01		
16QAM	50	0	23.11	23.16	23.00	≤ 1	1
	1	0	23.16	23.24	23.00		
	1	25	23.27	23.39	23.26		
	1	49	23.20	23.09	22.81		≤ 2
	25	0	22.00	22.12	21.94		
	25	12	22.13	22.26	21.99		
16QAM	25	25	22.00	22.23	21.86	≤ 2	2
	50	0	22.08	22.11	21.87		
							2

Table 9.3.5.4 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			131997 (1 712.5 MHz)	132322 (1 745.0 MHz)	132647 (1 777.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.95	24.17	24.00	≤ 1	0	
	1	12	24.05	24.31	24.02			
	1	24	23.95	24.13	23.91			
	12	0	22.92	23.14	23.01		1	
	12	6	23.15	23.20	23.12			
	12	13	22.93	23.14	23.00			
	25	0	23.06	23.15	23.03			
16QAM	1	0	22.86	23.15	22.94	≤ 1	1	
	1	12	23.02	23.28	22.99			
	1	24	22.84	22.95	22.90			
	12	0	21.84	22.06	21.98		≤ 2	2
	12	6	22.11	22.08	22.06			
	12	13	21.85	22.03	21.94			
	25	0	21.89	22.08	21.86			

Table 9.3.5.5 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			131987 (1 711.5 MHz)	132322 (1 745.0 MHz)	132657 (1 778.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.97	24.18	24.21	≤ 1	0	
	1	7	24.25	24.36	24.23			
	1	14	23.89	24.20	24.11			
	8	0	22.98	23.20	23.02		1	
	8	4	23.09	23.23	23.08			
	8	7	23.01	23.21	23.03			
	15	0	23.06	23.13	23.04			
16QAM	1	0	22.96	23.02	23.14	≤ 1	1	
	1	7	23.14	23.19	23.16			
	1	14	22.86	23.05	23.10			
	8	0	21.92	22.10	21.88		≤ 2	2
	8	4	22.01	22.12	22.05			
	8	7	21.95	22.11	22.00			
	15	0	22.07	22.12	22.05			

Table 9.3.5.6 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			131979 (1 710.7 MHz)	132322 (1 745.0 MHz)	132665 (1 779.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.00	24.25	24.13	≤ 1	0	
	1	2	24.16	24.33	24.14			
	1	5	24.10	24.22	24.11			
	3	0	23.94	24.12	24.02		0	
	3	2	24.05	24.21	24.04			
	3	3	23.84	24.08	23.96			
	6	0	23.15	23.17	23.13			
16QAM	1	0	23.15	23.27	23.18	≤ 1	1	
	1	2	23.28	23.30	23.20			
	1	5	23.12	23.20	23.03			
	3	0	22.99	23.20	23.00		≤ 2	2
	3	2	23.04	23.29	23.01			
	3	3	22.98	23.21	22.99			
	6	0	22.08	22.21	22.07			

Table 9.3.5.7 LTE Conducted Power

Band & Mode	Modulated Average(dBm)	
	LTE Band 25(PCS)	Maximum
	Nominal	23.0

Table 9.3.6.1 Nominal and Maximum Output Power Spec

6) LTE Band 25 (PCS)

LTE Band 25 (PCS) Conducted Power- 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26140 (1 860.0 MHz)	26365 (1 882.5 MHz)	26590 (1 905.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.70	23.63	23.89	≤ 1	0
	1	50	23.53	23.46	23.64		
	1	99	23.39	23.32	23.60		
	50	0	22.65	22.56	22.76		
	50	25	22.57	22.51	22.69		
	50	50	22.52	22.44	22.64		
16QAM	100	0	22.58	22.51	22.72	≤ 1	1
	1	0	22.81	22.73	22.84		
	1	50	22.63	22.61	22.77		
	1	99	22.54	22.49	22.72		
	50	0	21.56	21.46	21.62		
	50	25	21.48	21.41	21.58		
16QAM	50	50	21.41	21.31	21.50	≤ 2	2
	100	0	21.45	21.37	21.57		

Table 9.3.6.2 LTE Conducted Power

LTE Band 25 (PCS) Conducted Power- 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26115 (1 857.5 MHz)	26365 (1 882.5 MHz)	26615 (1 907.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.73	23.61	23.82	≤ 1	0
	1	36	23.55	23.43	23.61		
	1	74	23.52	23.42	23.61		
	36	0	22.62	22.56	22.71		
	36	18	22.61	22.48	22.67		
	36	37	22.50	22.46	22.61		
16QAM	75	0	22.57	22.49	22.66	≤ 1	1
	1	0	22.80	22.74	22.83		
	1	36	22.71	22.60	22.77		
	1	74	22.61	22.55	22.72		
	36	0	21.49	21.39	21.60		
	36	18	21.47	21.36	21.52		
16QAM	36	37	21.41	21.32	21.49	≤ 2	2
	75	0	21.45	21.36	21.52		

Table 9.3.6.3 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26090 (1 855.0 MHz)	26365 (1 882.5 MHz)	26640 (1 910.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.62	23.48	23.65	≤ 1	0
	1	25	23.53	23.42	23.60		
	1	49	23.44	23.39	23.59		
	25	0	22.63	22.52	22.67		
	25	12	22.58	22.51	22.65		
	25	25	22.55	22.45	22.61		
16QAM	50	0	22.55	22.48	22.64	≤ 1	1
	1	0	22.79	22.62	22.81		
	1	25	22.66	22.58	22.77		
	1	49	22.59	22.49	22.71		
	25	0	21.49	21.39	21.50		
	25	12	21.46	21.37	21.49		
16QAM	25	25	21.40	21.31	21.46	≤ 2	2
	50	0	21.44	21.36	21.48		

Table 9.3.6.4 LTE Conducted Power



LTE Band 2 (PCS) Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26065 (1 852.5 MHz)	26365 (1 882.5 MHz)	26665 (1 912.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.59	23.49	23.62	≤ 1	0
	1	12	23.57	23.48	23.60		
	1	24	23.50	23.41	23.54		
	12	0	22.60	22.46	22.61		1
	12	6	22.58	22.44	22.60		
	12	13	22.57	22.42	22.56		
	25	0	22.56	22.47	22.59		
16QAM	1	0	22.76	22.64	22.74	≤ 1	1
	1	12	22.64	22.62	22.70		
	1	24	22.59	22.58	22.69		
	12	0	21.49	21.35	21.49	≤ 2	2
	12	6	21.45	21.34	21.44		
	12	13	21.44	21.33	21.41		
	25	0	21.43	21.34	21.46		

Table 9.3.6.5 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26055 (1 851.5 MHz)	26365 (1 882.5 MHz)	26675 (1 913.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.55	23.45	23.58	≤ 1	0
	1	7	23.53	23.40	23.57		
	1	14	23.50	23.43	23.56		
	8	0	22.57	22.48	22.59		1
	8	4	22.56	22.45	22.58		
	8	7	22.55	22.43	22.58		
	15	0	22.56	22.40	22.60		
16QAM	1	0	22.67	22.62	22.70	≤ 1	1
	1	7	22.66	22.57	22.68		
	1	14	22.63	22.51	22.64		
	8	0	21.48	21.40	21.54	≤ 2	2
	8	4	21.45	21.39	21.52		
	8	7	21.44	21.32	21.49		
	15	0	21.40	21.34	21.46		

Table 9.3.6.6 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26047 (1 850.7 MHz)	26365 (1 882.5 MHz)	26683 (1 914.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.57	23.53	23.63	≤ 1	0
	1	2	23.47	23.52	23.48		
	1	5	23.46	23.51	23.45		
	3	0	23.55	23.52	23.61		0
	3	2	23.47	23.51	23.53		
	3	3	23.46	23.50	23.52		
	6	0	22.49	22.48	22.54		
16QAM	1	0	22.72	22.62	22.81	≤ 1	1
	1	2	22.57	22.53	22.60		
	1	5	22.56	22.51	22.59		
	3	0	22.47	22.60	22.53	≤ 2	2
	3	2	22.37	22.56	22.43		
	3	3	22.38	22.50	22.42		
	6	0	21.44	21.43	21.45		

Table 9.3.6.7 LTE Conducted Power

LTE Band 7	Band & Mode	Modulated Average(dBm)
		Maximum Nominal

Table 9.3.7.1 Nominal and Maximum Output Power Spec

### 7) LTE Band 7

Modulation	RB Size	RB Offset	LTE Band 7 Conducted Power– 20 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			20850 (2 510.0 MHz)	21100 (2 535.0 MHz)	21350 (2 560.0 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.78	23.75	23.72	≤ 1	0
	1	50	23.83	23.80	23.97		
	1	99	23.66	23.67	23.79		
	50	0	22.56	22.42	22.69		1
	50	25	22.54	22.33	22.59		
	50	50	22.45	22.37	22.49		
100	0	22.43	22.30	22.60	1		
16QAM	1	0	22.59	22.64	22.57	≤ 1	1
	1	50	22.68	22.82	22.96		
	1	99	22.49	22.62	22.77		
	50	0	21.64	21.40	21.63		
	50	25	21.55	21.31	21.59	≤ 2	2
	50	50	21.47	21.31	21.50		
	100	0	21.47	21.33	21.58		
	100	0	21.47	21.33	21.58		

Table 9.3.7.2 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 7 Conducted Power– 15 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			20825 (2 507.5 MHz)	21100 (2 535.0 MHz)	21375 (2 562.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.74	23.61	23.85	≤ 1	0
	1	36	23.77	23.64	23.87		
	1	74	23.76	23.62	23.84		
	36	0	22.58	22.40	22.67		1
	36	18	22.55	22.31	22.62		
	36	37	22.52	22.38	22.44		
	75	0	22.49	22.34	22.58		
16QAM	1	0	22.64	22.53	22.77	≤ 1	1
	1	36	22.73	22.54	22.79		
	1	74	22.60	22.44	22.66		
	36	0	21.50	21.40	21.60		
	36	18	21.48	21.34	21.43	≤ 2	2
	36	37	21.46	21.35	21.45		
	75	0	21.52	21.36	21.47		
	75	0	21.52	21.36	21.47		

Table 9.3.7.3 LTE Conducted Power

LTE Band 7 Conducted Power– 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20800 (2 505.0 MHz)	21100 (2 535.0 MHz)	21400 (2 565.0 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.83	23.62	23.81	≤ 1	0	
	1	25	23.84	23.80	23.85			
	1	49	23.81	23.79	23.70			
	25	0	22.63	22.36	22.64		1	
	25	12	22.53	22.32	22.51			
	25	25	22.51	22.33	22.39			
16QAM	50	0	22.53	22.32	22.55	≤ 1	1	
	1	0	22.71	22.57	22.64			
	1	25	22.91	22.81	22.91			
	1	49	22.70	22.77	22.75			
	25	0	21.50	21.54	21.62		≤ 2	2
	25	12	21.46	21.42	21.59			
	25	25	21.46	21.43	21.57			
	50	0	21.48	21.42	21.53			

Table 9.3.7.4 LTE Conducted Power

LTE Band 7 Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20775 (2 502.5 MHz)	21100 (2 535.0 MHz)	21425 (2 567.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.60	23.42	23.56	≤ 1	0	
	1	12	23.73	23.56	23.79			
	1	24	23.60	23.48	23.50			
	12	0	22.52	22.34	22.55		1	
	12	6	22.51	22.31	22.46			
	12	13	22.51	22.30	22.34			
16QAM	25	0	22.39	22.34	22.50	≤ 1	1	
	1	0	22.72	22.43	22.64			
	1	12	22.74	22.56	22.82			
	1	24	22.64	22.54	22.60			
	12	0	21.63	21.46	21.59		≤ 2	2
	12	6	21.60	21.39	21.53			
	12	13	21.52	21.33	21.39			
	25	0	21.45	21.43	21.50			

Table 9.3.7.5 LTE Conducted Power

Band & Mode	Modulated Average[dBm]
LTE Band 41	Maximum
	Nominal

Table 9.3.8.1 Nominal and Maximum Output Power Spec

**8) LTE Band 41**

LTE Band 41 Conducted Power– 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39750 (2 506.0 MHz)	40185 (2 549.5 MHz)	40620 (2 593.0 MHz)	41055 (2 636.5 MHz)	41490 (2 680.0 MHz)		
Conducted Power (dBm)									
QPSK	1	0	23.64	23.66	23.68	23.60	23.58	≤ 1	0
	1	50	23.42	23.46	23.48	23.40	23.39		
	1	99	23.40	23.42	23.45	23.38	23.38		
	50	0	22.57	22.58	22.61	22.56	22.55		1
	50	25	22.49	22.52	22.53	22.48	22.46		
	50	50	22.43	22.41	22.42	22.35	22.32		
16QAM	100	0	22.51	22.53	22.55	22.49	22.47	≤ 1	1
	1	0	22.60	22.64	22.68	22.58	22.56		
	1	50	22.41	22.42	22.44	22.35	22.32		
	1	99	22.32	22.40	22.42	22.31	22.31		≤ 2
	50	0	21.66	21.67	21.69	21.63	21.62		
	50	25	21.63	21.64	21.63	21.61	21.53		
50	50	21.58	21.56	21.52	21.43	21.40	2		
100	0	21.58	21.60	21.61	21.55	21.53			

Table 9.3.8.2 LTE Conducted Power

LTE Band 41 Conducted Power– 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39725 (2 503.5 MHz)	40173 (2 548.3 MHz)	40620 (2 593.0 MHz)	41068 (2 637.8 MHz)	41515 (2 682.5 MHz)		
Conducted Power (dBm)									
QPSK	1	0	23.62	23.63	23.64	23.57	23.55	≤ 1	0
	1	36	23.45	23.46	23.47	23.38	23.35		
	1	74	23.41	23.42	23.41	23.35	23.32		
	36	0	22.52	22.58	22.60	22.53	22.51		1
	36	18	22.51	22.52	22.55	22.43	22.38		
	36	37	22.45	22.46	22.47	22.34	22.32		
16QAM	75	0	22.50	22.52	22.54	22.46	22.42	≤ 1	1
	1	0	22.58	22.60	22.61	22.54	22.50		
	1	36	22.42	22.43	22.44	22.40	22.31		
	1	74	22.39	22.40	22.34	22.33	22.31		≤ 2
	36	0	21.57	21.60	21.64	21.55	21.51		
	36	18	21.55	21.56	21.57	21.48	21.42		
36	37	21.53	21.53	21.52	21.37	21.35	2		
75	0	21.56	21.57	21.60	21.54	21.50			

Table 9.3.8.3 LTE Conducted Power

LTE Band 41 Conducted Power– 10 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			39700 (2 501.0 MHz)	40160 (2 547.0 MHz)	40620 (2 593.0 MHz)	41080 (2 639.0 MHz)	41540 (2 685.0 MHz)			
Conducted Power (dBm)										
QPSK	1	0	23.57	23.58	23.60	23.55	23.52	≤ 1	0	
	1	25	23.51	23.50	23.50	23.43	23.39			
	1	49	23.39	23.38	23.40	23.33	23.31			
	25	0	22.51	22.55	22.58	22.52	22.46		1	
	25	12	22.48	22.50	22.55	22.45	22.43			
	25	25	22.46	22.45	22.47	22.40	22.38			
16QAM	50	0	22.50	22.52	22.54	22.48	22.45	≤ 1	1	
	1	0	22.54	22.55	22.57	22.50	22.48			
	1	25	22.45	22.45	22.46	22.38	22.31			
	1	49	22.39	22.36	22.39	22.30	22.31			
	25	0	21.65	21.64	21.62	21.63	21.60		≤ 2	2
	25	12	21.63	21.62	21.61	21.56	21.48			
	25	25	21.54	21.53	21.55	21.50	21.47			
	50	0	21.56	21.57	21.58	21.55	21.50			2

Table 9.3.8.4 LTE Conducted Power

LTE Band 41 Conducted Power– 5 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			39675 (2 498.5 MHz)	40148 (2 545.8 MHz)	40620 (2 593.0 MHz)	41093 (2 640.3 MHz)	41565 (2 687.5 MHz)			
Conducted Power (dBm)										
QPSK	1	0	23.50	23.51	23.52	23.46	23.42	≤ 1	0	
	1	12	23.46	23.48	23.51	23.44	23.39			
	1	24	23.44	23.39	23.39	23.38	23.30			
	12	0	22.50	22.52	22.54	22.45	22.42		1	
	12	6	22.49	22.51	22.53	22.42	22.40			
	12	13	22.47	22.48	22.44	22.41	22.36			
16QAM	25	0	22.50	22.51	22.52	22.44	22.38	≤ 1	1	
	1	0	22.52	22.53	22.55	22.45	22.35			
	1	12	22.46	22.48	22.49	22.44	22.31			
	1	24	22.40	22.42	22.43	22.37	22.33			
	12	0	21.63	21.62	21.63	21.58	21.51		≤ 2	2
	12	6	21.62	21.59	21.61	21.55	21.48			
	12	13	21.61	21.58	21.58	21.50	21.40			
	25	0	21.58	21.59	21.64	21.56	21.47			2

Table 9.3.8.5 LTE Conducted Power

### 9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
2.4	802.11b	1	15.0	14.0
		6	15.0	14.0
		11	15.0	14.0
	802.11g	1	14.0	13.0
		6	14.0	13.0
		11	14.0	13.0
	802.11n (HT20)	1	14.0	13.0
		6	14.0	13.0
		11	14.0	13.0
	802.11ac (VHT20)	1	14.0	13.0
		6	14.0	13.0
		11	14.0	13.0
	802.11n (HT40)	3	14.0	13.0
		6	14.0	13.0
		9	14.0	13.0
	802.11ac (VHT40)	3	14.0	13.0
		6	14.0	13.0
		9	14.0	13.0

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11 (2.4 GHz) Conducted Power[dBm]	
			Maximum	Nominal
802.11b	2 412	1	14.42	
	2 437	6	14.28	
	2 462	11	14.38	
802.11g	2 412	1	13.43	
	2 437	6	13.61	
	2 462	11	13.37	
802.11n (HT-20)	2 412	1	13.15	
	2 437	6	13.01	
	2 462	11	13.21	
802.11ac (VHT20)	2 412	1	13.18	
	2 437	6	13.36	
	2 462	11	13.27	
802.11n (HT40)	2 422	3	12.56	
	2 437	6	13.52	
	2 452	9	12.71	
802.11ac (VHT40)	2 422	3	12.53	
	2 437	6	13.31	
	2 452	9	12.71	

Table 9.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
5 (UNII)	802.11a	36-64	14.0	13.0
		100-165	12.0	11.0
	802.11n (20MHz)	36-64	14.0	13.0
		100-165	12.0	11.0
	802.11ac (20MHz)	36-64	14.0	13.0
		100-165	12.0	11.0
	802.11n (40MHz)	38	11.0	10.0
		46-62	13.5	12.5
		102-159	11.5	10.5
	802.11ac (40MHz)	38	11.0	10.0
		46-62	13.5	12.5
		102-159	11.5	10.5
	802.11ac (80MHz)	42-58	11.0	10.0
		106-155	11.0	10.0

Table 9.4.3 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]
802.11a	5 180	36	13.85
	<b>5 200</b>	<b>40</b>	<b>13.89</b>
	5 220	44	13.82
	5 240	48	13.77
	5 260	52	13.86
	5 280	56	13.85
	5 300	60	13.78
	<b>5 320</b>	<b>64</b>	<b>13.94</b>
	<b>5 500</b>	<b>100</b>	<b>11.58</b>
	5 580	116	11.51
	5 660	132	11.53
	5 720	144	11.52
	5 745	149	11.46
	5 785	157	11.45
	<b>5 825</b>	<b>165</b>	<b>11.51</b>

Table 9.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]
802.11n (HT-20)	5 180	36	13.65
	5 200	40	13.57
	5 220	44	13.58
	5 240	48	13.48
	5 260	52	13.58
	5 280	56	13.64
	5 300	60	13.71
	5 320	64	13.74
	5 500	100	11.38
	5 580	116	11.29
	5 660	132	11.20
	5 720	144	11.34
	5 745	149	11.24
	5 785	157	11.25
	5 825	165	11.33

Table 9.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-20)	5 180	36	13.57
	5 200	40	13.52
	5 220	44	13.55
	5 240	48	13.43
	5 260	52	13.51
	5 280	56	13.62
	5 300	60	13.64
	5 320	64	13.66
	5 500	100	11.34
	5 580	116	11.25
	5 660	132	11.27
	5 720	144	11.28
	5 745	149	11.20
	5 785	157	11.22
	5 825	165	11.27

Table 9.4.6 IEEE 802.11ac VHT20 Average RF Power



Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]
802.11n (HT-40)	5 190	38	10.82
	5 230	46	12.85
	5 270	54	13.01
	5 310	62	12.79
	5 510	102	11.46
	5 550	110	11.28
	5 670	134	11.33
	5 710	142	11.34
	5 755	151	11.26
	5 795	159	11.32

Table 9.4.7 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-40)	5 190	38	10.78
	5 230	46	12.81
	5 270	54	12.96
	5 310	62	12.75
	5 510	102	11.42
	5 550	110	11.24
	5 670	134	11.32
	5 710	142	11.31
	5 755	151	11.22
	5 795	159	11.29

Table 9.4.8 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-80)	5 210	42	10.12
	5 290	58	10.95
	5 530	106	10.34
	5 690	138	10.75
	5 775	155	10.43

Table 9.4.9 IEEE 802.11ac VHT80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is  $\leq 1.2$  W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

## 9.5 Bluetooth Conducted Powers

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	5.85
	Nominal	4.85
Bluetooth 2 Mbps	Maximum	5.85
	Nominal	4.85
Bluetooth 3 Mbps	Maximum	5.85
	Nominal	4.85
Bluetooth (LE / 1Mbps)	Maximum	4.46
	Nominal	3.46
Bluetooth (LE / 2Mbps)	Maximum	1.69
	Nominal	0.69

Table 9.5.2 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Frame AVG Output Power (1Mbps)	Frame AVG Output Power (2Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)
Low	2 402	4.94	4.66	4.67
Mid	2 441	5.27	5.02	5.03
High	2 480	4.36	4.24	4.24

Table 9.5.3 Bluetooth Burst and Frame Average RF Power

Channel	Frequency	Frame AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)	(dBm)
Low	2 402	4.33	1.56
Mid	2 440	4.31	1.50
High	2 480	4.12	1.34

Table 9.5.4 Bluetooth LE Burst and Frame Average RF Power

- Bluetooth Conducted Powers procedures

- Bluetooth (BDR, EDR)

- 1) Enter DUT mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

- 2) Instruments and EUT were connected like Figure 9.5.1.

- 3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.

- 4) Power levels were measured by a Power Meter.




Figure 9.5.1 Average Power Measurement Setup

● Bluetooth Transmission Plot

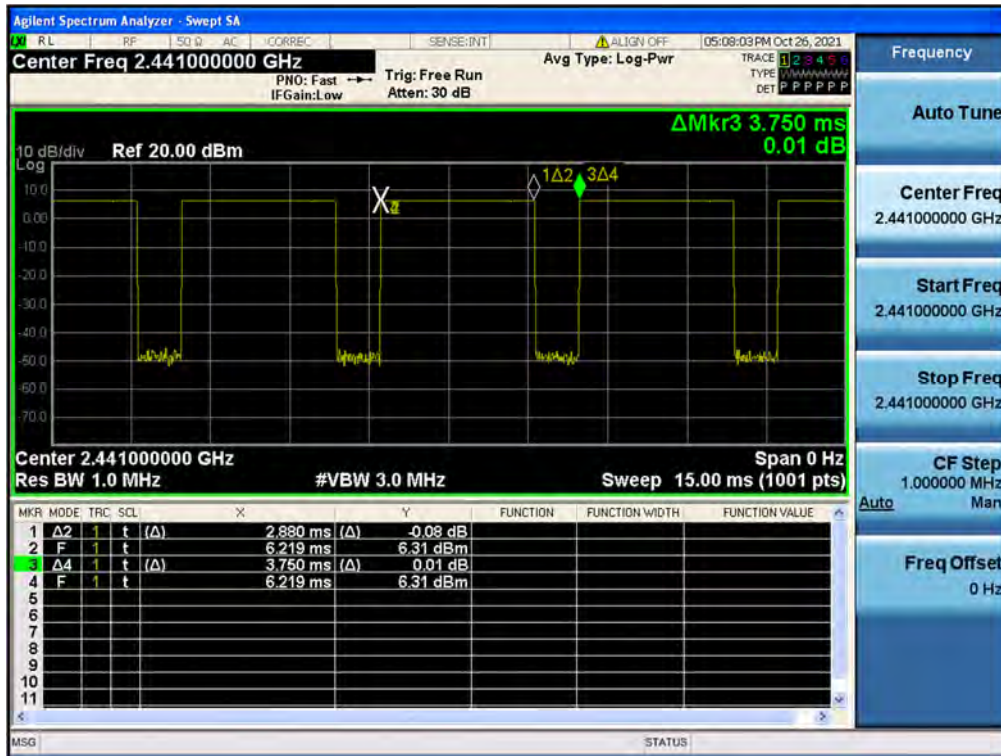


Figure 9.5.2 Bluetooth Transmission Plot

● Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

## 10. SYSTEM VERIFICATION

### 10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured Conductivity, $\sigma$ (S/m)	Er Deviation [%]	$\sigma$ Deviation [%]
Sep. 2. 2021	750 Head	20.9	20.7	707.5	42.129	0.887	43.500	0.879	3.25	-0.90
				750.0	41.900	0.890	42.919	0.911	2.43	2.36
				782.0	41.749	0.894	42.508	0.929	1.82	3.91
Oct 27. 2021	750 Head	20.6	20.9	710.0	42.113	0.887	40.783	0.877	-3.21	-1.13
				750.0	41.900	0.890	40.340	0.916	-3.72	2.92
Sep. 1. 2021	835 Head	21.1	20.9	821.5	41.566	0.898	41.113	0.903	-1.09	0.56
				824.2	41.552	0.899	41.081	0.906	-1.13	0.78
				826.4	41.542	0.899	41.056	0.908	-1.17	1.00
				829.0	41.528	0.899	41.022	0.911	-1.22	1.33
				831.5	41.519	0.900	40.992	0.913	-1.27	1.44
				835.0	41.500	0.900	40.957	0.916	-1.31	1.78
				836.5	41.500	0.901	40.943	0.918	-1.34	1.89
				836.6	41.500	0.901	40.942	0.918	-1.34	1.89
				841.5	41.500	0.906	40.880	0.923	-1.49	1.88
				844.0	41.500	0.910	40.848	0.925	-1.57	1.65
				846.6	41.500	0.912	40.817	0.927	-1.65	1.64
				848.8	41.500	0.914	40.794	0.929	-1.70	1.64
				Sep. 1. 2021	1800 Head	21.4	21.5	1712.4	40.126	1.350
1720.0	40.114	1.354	39.280					1.325	-2.08	-2.14
1732.4	40.097	1.361	39.209					1.335	-2.21	-1.91
1732.5	40.097	1.361	39.209					1.335	-2.21	-1.91
1745.0	40.079	1.369	39.147					1.345	-2.33	-1.75
1752.6	40.069	1.373	39.115					1.351	-2.38	-1.60
1770.0	40.043	1.383	39.044					1.365	-2.49	-1.30
1800.0	40.000	1.400	38.929					1.391	-2.68	-0.64
Sep. 2. 2021	1900 Head	21.4	21.6	1850.2	40.000	1.400	39.471	1.375	-1.32	-1.79
				1852.4	40.000	1.400	39.465	1.378	-1.34	-1.57
				1860.0	40.000	1.400	39.446	1.385	-1.39	-1.07
				1880.0	40.000	1.400	39.372	1.403	-1.57	0.21
				1882.5	40.000	1.400	39.362	1.405	-1.60	0.36
				1900.0	40.000	1.400	39.288	1.422	-1.78	1.57
				1905.0	40.000	1.400	39.267	1.427	-1.83	1.93
				1907.6	40.000	1.400	39.256	1.429	-1.86	2.07
				1909.8	40.000	1.400	39.248	1.431	-1.88	2.21
Sep. 30. 2021	2450 Head	21.1	21.3	2402.0	39.282	1.757	39.102	1.790	-0.46	1.88
				2412.0	39.265	1.766	39.069	1.800	-0.50	1.93
				2437.0	39.222	1.788	38.993	1.828	-0.58	2.24
				2441.0	39.215	1.792	38.979	1.832	-0.60	2.23
				2450.0	39.200	1.800	38.950	1.843	-0.64	2.39
				2462.0	39.184	1.813	38.916	1.855	-0.68	2.32
				2467.0	39.177	1.818	38.901	1.860	-0.70	2.31
				2472.0	39.171	1.823	38.885	1.866	-0.73	2.36
				2480.0	39.160	1.832	38.854	1.874	-0.78	2.29

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured Conductivity, $\sigma$ (S/m)	Er Deviation [%]	$\sigma$ Deviation [%]
Sep. 3. 2021	2600 Head	21.7	21.6	2 506.0	39.125	1.860	40.242	1.882	2.85	1.18
				2 510.0	39.120	1.864	40.229	1.887	2.83	1.23
				2 535.0	39.087	1.891	40.139	1.916	2.69	1.32
				2 549.5	39.068	1.906	40.085	1.932	2.60	1.36
				2 560.0	39.053	1.917	40.044	1.945	2.54	1.46
				2 593.0	39.009	1.953	39.928	1.982	2.36	1.48
				2 600.0	39.000	1.960	39.899	1.990	2.31	1.53
				2 636.5	38.955	2.000	39.751	2.029	2.04	1.45
				2 680.0	38.900	2.048	39.579	2.078	1.75	1.46
Sep. 13. 2021	5200 Head	21.2	21.3	5 180.0	36.020	4.639	35.988	4.545	-0.09	-2.03
				5 190.0	36.010	4.650	35.962	4.554	-0.13	-2.06
				5 200.0	36.000	4.660	35.954	4.570	-0.13	-1.93
				5 210.0	35.990	4.670	35.942	4.586	-0.13	-1.80
				5 220.0	35.980	4.680	35.933	4.598	-0.13	-1.75
				5 230.0	35.970	4.690	35.925	4.608	-0.13	-1.75
				5 240.0	35.960	4.700	35.908	4.616	-0.14	-1.79
Sep. 13. 2021	5300 Head	21.2	21.3	5 260.0	35.940	4.720	35.857	4.637	-0.23	-1.76
				5 270.0	35.930	4.730	35.847	4.651	-0.23	-1.67
				5 280.0	35.920	4.740	35.800	4.659	-0.33	-1.71
				5 290.0	35.910	4.750	35.824	4.674	-0.24	-1.60
				5 300.0	35.900	4.760	35.774	4.681	-0.35	-1.66
				5 310.0	35.890	4.770	35.768	4.698	-0.34	-1.51
				5 320.0	35.880	4.780	35.749	4.713	-0.37	-1.40
Sep. 23. 2021	5600 Head	20.8	20.9	5 500.0	35.650	4.965	34.875	5.111	-2.17	2.94
				5 510.0	35.635	4.976	34.870	5.120	-2.15	2.89
				5 530.0	35.605	4.997	34.822	5.140	-2.20	2.86
				5 550.0	35.575	5.018	34.789	5.164	-2.21	2.91
				5 580.0	35.530	5.049	34.725	5.198	-2.27	2.95
				5 600.0	35.500	5.070	34.685	5.227	-2.30	3.10
				5 660.0	35.440	5.130	34.596	5.293	-2.38	3.18
				5 670.0	35.430	5.140	34.578	5.303	-2.40	3.17
				5 690.0	35.410	5.160	34.533	5.327	-2.48	3.24
				5 710.0	35.390	5.180	34.495	5.355	-2.53	3.38
				5 720.0	35.380	5.190	34.491	5.367	-2.51	3.41
5 800.0	35.300	5.270	34.339	5.456	-2.72	3.53				
Sep. 23. 2021	5800 Head	20.8	20.9	5 745.0	35.355	5.215	34.440	5.389	-2.59	3.34
				5 755.0	35.345	5.225	34.418	5.404	-2.62	3.43
				5 775.0	35.325	5.245	34.392	5.427	-2.64	3.47
				5 785.0	35.315	5.255	34.372	5.437	-2.67	3.46
				5 795.0	35.305	5.265	34.350	5.449	-2.70	3.49
				5 800.0	35.300	5.270	34.339	5.456	-2.72	3.53
				5 825.0	35.275	5.296	34.304	5.490	-2.75	3.66

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

#### Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

## 10.2 Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

**Table 10.2.1 System Verification Results (1g)**


SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR <sub>1g</sub> (W/kg)	Measured SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation [%]
F	750	D750V3, SN:1049	Sep. 2. 2021	Head	20.9	20.7	3933	250	8.39	2.15	8.60	2.50
F	750	D750V3, SN:1049	Oct 27. 2021	Head	20.6	20.9	3866	250	8.39	2.08	8.32	-0.83
F	835	D835V2, SN:464	Sep. 1. 2021	Head	21.1	20.9	3933	250	9.75	2.46	9.84	0.92
B	1 800	D1800V2, SN:2d047	Sep. 1. 2021	Head	21.4	21.5	3866	100	39.3	3.88	38.80	-1.27
B	1 900	D1900V2, SN:5d029	Sep. 2. 2021	Head	21.4	21.6	3866	100	40.5	4.03	40.30	-0.49
B	2 450	D2450V2, SN: 716	Sep. 30. 2021	Head	21.1	21.3	3866	100	54.1	5.21	52.10	-3.70
B	2 600	D2600V2, SN: 1016	Sep. 3. 2021	Head	21.7	21.6	3866	100	55.9	5.62	56.20	0.54
F	5 200	D5GHZV2, SN:1103	Sep. 13. 2021	Head	21.2	21.3	3930	100	82.3	7.86	78.60	-4.50
F	5 300	D5GHZV2, SN:1103	Sep. 13. 2021	Head	21.2	21.3	3930	100	84.7	8.26	82.60	-2.48
F	5 500	D5GHZV2, SN:1103	Sep. 23. 2021	Head	20.8	20.9	3930	100	87.7	8.64	86.40	-1.48
F	5 600	D5GHZV2, SN:1103	Sep. 23. 2021	Head	20.8	20.9	3930	100	86.4	8.33	83.30	-3.59
F	5 800	D5GHZV2, SN:1103	Sep. 23. 2021	Head	20.8	20.9	3930	100	83.5	8.43	84.30	0.96

**Table 10.2.2 System Verification Results (10g)**

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR <sub>10g</sub> (W/kg)	Measured SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation [%]
F	5 300	D5GHZV2, SN:1103	Sep. 13. 2021	Body	21.2	21.3	3930	100	24.1	2.38	23.80	-1.24
F	5 500	D5GHZV2, SN:1103	Sep. 23. 2021	Body	20.8	20.9	3930	100	24.8	2.47	24.70	-0.40
F	5 600	D5GHZV2, SN:1103	Sep. 23. 2021	Body	20.8	20.9	3930	100	24.5	2.38	24.70	0.82
F	5 800	D5GHZV2, SN:1103	Sep. 23. 2021	Body	20.8	20.9	3930	100	23.5	2.38	23.80	1.28

Note(s):

1. System Verification was measured with input 250 mW, 100 mW and normalized to 1W.
2. Full system validation status and results can be found in Appendix D.



**Figure 10.1 Dipole Verification Test Setup Diagram & Photo**

# 11. SAR TEST RESULTS

## 11.1 Head SAR Results

**Table 11.1.1 GSM/GPRS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.50	33.10	-0.120	Left Touch	FCC #1	1	1:8.3	0.267	1.096	0.293	A1
836.6	190	GSM850	GSM	33.50	33.10	0.180	Right Touch	FCC #1	1	1:8.3	0.183	1.096	0.201	
836.6	190	GSM850	GSM	33.50	33.10	-0.160	Left Tilt	FCC #1	1	1:8.3	0.099	1.096	0.109	
836.6	190	GSM850	GSM	33.50	33.10	-0.150	Right Tilt	FCC #1	1	1:8.3	0.155	1.096	0.170	
836.6	190	GSM850	GPRS	29.50	28.80	0.130	Left Touch	FCC #1	3	1:2.77	0.278	1.175	0.327	A2
836.6	190	GSM850	GPRS	29.50	28.80	-0.120	Right Touch	FCC #1	3	1:2.77	0.226	1.175	0.266	
836.6	190	GSM850	GPRS	29.50	28.80	-0.050	Left Tilt	FCC #1	3	1:2.77	0.124	1.175	0.146	
836.6	190	GSM850	GPRS	29.50	28.80	-0.010	Right Tilt	FCC #1	3	1:2.77	0.168	1.175	0.197	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Head 1.6 W/kg (mW/g) averaged over 1 gram			
Uncontrolled Exposure/General Population Exposure														

**Table 11.1.2 PCS/GPRS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	30.50	30.40	-0.080	Left Touch	FCC #1	1	1:8.3	0.127	1.023	0.130	
1880.0	661	PCS1900	PCS	30.50	30.40	-0.080	Right Touch	FCC #1	1	1:8.3	0.272	1.023	0.278	A3
1880.0	661	PCS1900	PCS	30.50	30.40	0.090	Left Tilt	FCC #1	1	1:8.3	0.096	1.023	0.098	
1880.0	661	PCS1900	PCS	30.50	30.40	0.180	Right Tilt	FCC #1	1	1:8.3	0.060	1.023	0.061	
1880.0	661	PCS1900	GPRS	26.50	26.20	0.000	Left Touch	FCC #1	3	1:2.77	0.157	1.072	0.168	
1880.0	661	PCS1900	GPRS	26.50	26.20	0.180	Right Touch	FCC #1	3	1:2.77	0.314	1.072	0.337	A4
1880.0	661	PCS1900	GPRS	26.50	26.20	0.060	Left Tilt	FCC #1	3	1:2.77	0.110	1.072	0.118	
1880.0	661	PCS1900	GPRS	26.50	26.20	0.040	Right Tilt	FCC #1	3	1:2.77	0.062	1.072	0.066	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Head 1.6 W/kg (mW/g) averaged over 1 gram			
Uncontrolled Exposure/General Population Exposure														

**Table 11.1.3 WCDMA 850 Head SAR**

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	24.00	23.34	0.120	Left Touch	FCC #1	1:1	0.259	1.164	0.301	A5
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.080	Right Touch	FCC #1	1:1	0.223	1.164	0.260	
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.000	Left Tilt	FCC #1	1:1	0.113	1.164	0.132	
836.6	4183	WCDMA 850	RMC	24.00	23.34	0.110	Right Tilt	FCC #1	1:1	0.122	1.164	0.142	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Head 1.6 W/kg (mW/g) averaged over 1 gram		
Uncontrolled Exposure/General Population Exposure													

**Table 11.1.4 WCDMA 1700 Head SAR**

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.150	Left Touch	FCC #1	1:1	0.347	1.132	0.393	
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	-0.050	Right Touch	FCC #1	1:1	0.604	1.132	0.684	A6
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.120	Left Tilt	FCC #1	1:1	0.110	1.132	0.125	
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.040	Right Tilt	FCC #1	1:1	0.216	1.132	0.245	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak											Head 1.6 W/kg (mW/g) averaged over 1 gram		
Uncontrolled Exposure/General Population Exposure													

**Table 11.1.5 WCDMA 1900 Head SAR**

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	0.170	Left Touch	FCC #1	1:1	0.252	1.130	0.285	
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	0.160	Right Touch	FCC #1	1:1	0.484	1.130	0.547	A7
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	-0.010	Left Tilt	FCC #1	1:1	0.167	1.130	0.189	
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	0.090	Right Tilt	FCC #1	1:1	0.120	1.130	0.136	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Head 1.6 W/kg (mW/g) averaged over 1 gram		
Uncontrolled Exposure/General Population Exposure													



**Table 11.1.6 LTE Band 12 Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	22.10	21.93	-0.040	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.224	1.040	0.233	A8
707.5	23095	LTE B12	10	21.10	20.91	-0.060	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.167	1.045	0.175	
707.5	23095	LTE B12	10	22.10	21.93	0.190	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.219	1.040	0.228	
707.5	23095	LTE B12	10	21.10	20.91	0.180	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.160	1.045	0.167	
707.5	23095	LTE B12	10	22.10	21.93	0.190	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.116	1.040	0.121	
707.5	23095	LTE B12	10	21.10	20.91	0.090	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.091	1.045	0.095	
707.5	23095	LTE B12	10	22.10	21.93	-0.090	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.149	1.040	0.155	
707.5	23095	LTE B12	10	21.10	20.91	0.120	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.107	1.045	0.112	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram					

**Table 11.1.7 LTE Band 17 Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
710.0	23790	LTE B17	10	24.00	23.63	-0.080	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.230	1.089	0.250	A9
710.0	23790	LTE B17	10	23.00	22.56	-0.030	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.191	1.107	0.211	
710.0	23790	LTE B17	10	24.00	23.63	0.010	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.140	1.089	0.152	
710.0	23790	LTE B17	10	23.00	22.56	-0.100	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.119	1.107	0.132	
710.0	23790	LTE B17	10	24.00	23.63	0.030	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.228	1.089	0.248	
710.0	23790	LTE B17	10	23.00	22.56	0.010	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.172	1.107	0.190	
710.0	23790	LTE B17	10	24.00	23.63	0.050	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.150	1.089	0.163	
710.0	23790	LTE B17	10	23.00	22.56	0.090	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.116	1.107	0.128	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram					

**Table 11.1.8 LTE Band 13 Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
782.0	23230	LTE B13	10	24.00	23.98	0.080	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.254	1.005	0.255	A10
782.0	23230	LTE B13	10	23.00	22.97	-0.030	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.208	1.007	0.209	
782.0	23230	LTE B13	10	24.00	23.98	-0.170	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.186	1.005	0.187	
782.0	23230	LTE B13	10	23.00	22.97	-0.180	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.148	1.007	0.149	
782.0	23230	LTE B13	10	24.00	23.98	-0.040	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.133	1.005	0.134	
782.0	23230	LTE B13	10	23.00	22.97	0.030	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.104	1.007	0.105	
782.0	23230	LTE B13	10	24.00	23.98	-0.010	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.132	1.005	0.133	
782.0	23230	LTE B13	10	23.00	22.97	0.080	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.102	1.007	0.103	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram					

**Table 11.1.9 LTE Band 26 (Cell) Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
831.5	26865	LTE B26	15	24.00	23.95	0.120	0	Left Touch	FCC #1	QPSK	1	36	1:1	0.301	1.012	0.305	A11
831.5	26865	LTE B26	15	23.00	22.97	-0.050	1	Left Touch	FCC #1	QPSK	36	18	1:1	0.236	1.007	0.238	
831.5	26865	LTE B26	15	24.00	23.95	-0.090	0	Right Touch	FCC #1	QPSK	1	36	1:1	0.267	1.012	0.270	
831.5	26865	LTE B26	15	23.00	22.97	0.090	1	Right Touch	FCC #1	QPSK	36	18	1:1	0.193	1.007	0.194	
831.5	26865	LTE B26	15	24.00	23.95	0.090	0	Left Tilt	FCC #1	QPSK	1	36	1:1	0.160	1.012	0.162	
831.5	26865	LTE B26	15	23.00	22.97	-0.150	1	Left Tilt	FCC #1	QPSK	36	18	1:1	0.116	1.007	0.117	
831.5	26865	LTE B26	15	24.00	23.95	-0.160	0	Right Tilt	FCC #1	QPSK	1	36	1:1	0.150	1.012	0.152	
831.5	26865	LTE B26	15	23.00	22.97	-0.000	1	Right Tilt	FCC #1	QPSK	36	18	1:1	0.110	1.007	0.111	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.



**Table 11.1.10 LTE Band 66 (AWS) Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1745.0	132322	LTE B66	20	24.50	23.48	0.060	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.347	1.005	0.349	
1745.0	132322	LTE B66	20	23.50	23.36	-0.060	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.262	1.033	0.271	
1745.0	132322	LTE B66	20	24.50	24.48	-0.030	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.685	1.005	0.688	A12
1745.0	132322	LTE B66	20	23.50	23.36	-0.180	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.596	1.033	0.616	
1745.0	132322	LTE B66	20	24.50	24.48	-0.030	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.128	1.005	0.129	
1745.0	132322	LTE B66	20	23.50	23.36	0.080	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.104	1.033	0.107	
1745.0	132322	LTE B66	20	24.50	24.48	0.020	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.189	1.005	0.190	
1745.0	132322	LTE B66	20	23.50	23.36	0.140	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.147	1.033	0.152	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.1.11 LTE Band 25 (PCS) Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1905.0	26590	LTE B25	20	24.00	23.89	0.060	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.223	1.026	0.229	
1905.0	26590	LTE B25	20	23.00	22.76	0.020	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.192	1.057	0.203	
1905.0	26590	LTE B25	20	24.00	23.89	0.070	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.465	1.026	0.477	A13
1905.0	26590	LTE B25	20	23.00	22.76	0.070	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.343	1.057	0.363	
1905.0	26590	LTE B25	20	24.00	23.89	0.140	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.130	1.026	0.133	
1905.0	26590	LTE B25	20	23.00	22.76	0.150	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.115	1.057	0.122	
1905.0	26590	LTE B25	20	24.00	23.89	0.150	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.108	1.026	0.111	
1905.0	26590	LTE B25	20	23.00	22.76	0.070	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.081	1.057	0.086	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.1.12 LTE Band 7 Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2560.0	21350	LTE B7	20	24.00	23.97	0.100	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.312	1.007	0.314	
2560.0	21350	LTE B7	20	23.00	22.69	0.090	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.249	1.074	0.267	
2560.0	21350	LTE B7	20	24.00	23.97	0.020	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.708	1.007	0.713	A14
2560.0	21350	LTE B7	20	23.00	22.69	0.080	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.508	1.074	0.546	
2560.0	21350	LTE B7	20	24.00	23.97	-0.140	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.350	1.007	0.352	
2560.0	21350	LTE B7	20	23.00	22.69	0.130	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.253	1.074	0.272	
2560.0	21350	LTE B7	20	24.00	23.97	0.120	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.202	1.007	0.203	
2560.0	21350	LTE B7	20	23.00	22.69	0.010	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.159	1.074	0.171	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.1.13 LTE Band 41 Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2593.0	40620	LTE B41	20	24.00	23.68	0.170	0	Left Touch	FCC #1	QPSK	1	0	1:1.58	0.224	1.076	0.241	
2593.0	40620	LTE B41	20	23.00	22.61	0.070	1	Left Touch	FCC #1	QPSK	50	0	1:1.58	0.113	1.094	0.124	
2593.0	40620	LTE B41	20	24.00	23.68	-0.090	0	Right Touch	FCC #1	QPSK	1	0	1:1.58	0.302	1.076	0.325	A15
2593.0	40620	LTE B41	20	23.00	22.61	0.050	1	Right Touch	FCC #1	QPSK	50	0	1:1.58	0.220	1.094	0.241	
2593.0	40620	LTE B41	20	24.00	23.68	0.100	0	Left Tilt	FCC #1	QPSK	1	0	1:1.58	0.146	1.076	0.157	
2593.0	40620	LTE B41	20	23.00	22.61	0.090	1	Left Tilt	FCC #1	QPSK	50	0	1:1.58	0.115	1.094	0.126	
2593.0	40620	LTE B41	20	24.00	23.68	0.010	0	Right Tilt	FCC #1	QPSK	1	0	1:1.58	0.085	1.076	0.091	
2593.0	40620	LTE B41	20	23.00	22.61	0.012	1	Right Tilt	FCC #1	QPSK	50	0	1:1.58	0.068	1.094	0.074	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.1.14 DTS Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
2 412.0	1	802.11b	15.00	14.42	0.020	Left Touch	FCC #2	0.324	1	98.4	0.312	1.143	1.016	0.362	A16
2 412.0	1	802.11b	15.00	14.42	-0.020	Right Touch	FCC #2	0.754	1	98.4	0.713	1.143	1.016	0.828	
2 437.0	6	802.11b	15.00	14.28	-0.080	Right Touch	FCC #2	0.540	1	98.4	0.518	1.180	1.016	0.621	
2 462.0	11	802.11b	15.00	14.38	-0.030	Right Touch	FCC #2	0.649	1	98.4	0.621	1.153	1.016	0.728	
2 412.0	1	802.11b	15.00	14.42	-0.080	Left Tilt	FCC #2	0.233	1	98.4	0.236	1.143	1.016	0.274	
2 412.0	1	802.11b	15.00	14.42	0.000	Right Tilt	FCC #2	0.549	1	98.4	0.504	1.143	1.016	0.585	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 412.0	1	802.11b	DSSS	15.00	0.828	2 412.0	802.11g	OFDM	14.00	0.794	0.657	X
2 412.0	1	802.11b	DSSS	15.00	0.828	2 412.0	802.11n (HT20)	OFDM	14.00	0.794	0.657	X
2 412.0	1	802.11b	DSSS	15.00	0.828	2 412.0	802.11ac (VHT20)	OFDM	14.00	0.794	0.657	X
2 412.0	1	802.11b	DSSS	15.00	0.828	2 412.0	802.11n (HT40)	OFDM	14.00	0.794	0.657	X
2 412.0	1	802.11b	DSSS	15.00	0.828	2 412.0	802.11ac (CHT40)	OFDM	14.00	0.794	0.657	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram	

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

**Table 11.1.15 UNII Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 320.0	64	802.11a	14.00	13.94	-0.030	Left Touch	FCC #2	0.307	6	97.8	0.333	1.014	1.022	0.345	A17
5 320.0	64	802.11a	14.00	13.94	0.090	Right Touch	FCC #2	0.456	6	97.8	0.478	1.014	1.022	0.496	
5 320.0	64	802.11a	14.00	13.94	0.190	Left Tilt	FCC #2	0.326	6	97.8	0.296	1.014	1.022	0.307	
5 320.0	64	802.11a	14.00	13.94	0.090	Right Tilt	FCC #2	0.398	6	97.8	0.408	1.014	1.022	0.423	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5 320.0	64	802.11a	OFDM	14.0	0.496	5 200.0	802.11a	OFDM	14.0	1.000	0.496	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram	

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

**Table 11.1.16 UNII Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 500.0	100	802.11a	12.00	11.58	0.000	Left Touch	FCC #2	0.386	6	97.8	0.349	1.102	1.022	0.393	A18
5 500.0	100	802.11a	12.00	11.58	0.000	Right Touch	FCC #2	0.477	6	97.8	0.508	1.102	1.022	0.572	
5 500.0	100	802.11a	12.00	11.58	0.000	Left Tilt	FCC #2	0.363	6	97.8	0.349	1.102	1.022	0.393	
5 500.0	100	802.11a	12.00	11.58	0.000	Right Tilt	FCC #2	0.407	6	97.8	0.415	1.102	1.022	0.468	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.1.17 UNII Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 825.0	165	802.11a	12.00	11.51	0.000	Left Touch	FCC #2	0.297	6	97.8	0.262	1.119	1.022	0.300	A19
5 825.0	165	802.11a	12.00	11.51	0.000	Right Touch	FCC #2	0.404	6	97.8	0.427	1.119	1.022	0.489	
5 825.0	165	802.11a	12.00	11.51	0.000	Left Tilt	FCC #2	0.297	6	97.8	0.286	1.119	1.022	0.327	
5 825.0	165	802.11a	12.00	11.51	0.000	Right Tilt	FCC #2	0.324	6	97.8	0.335	1.119	1.022	0.383	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.1.18 Bluetooth Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth	5.85	5.27	0.060	Left Touch	FCC #2	1	76.8	0.053	1.143	1.302	0.079	A20
2 441.0	39	Bluetooth	5.85	5.27	0.020	Right Touch	FCC #2	1	76.8	0.177	1.143	1.302	0.263	
2 441.0	39	Bluetooth	5.85	5.27	-0.090	Left Tilt	FCC #2	1	76.8	0.051	1.143	1.302	0.076	
2 441.0	39	Bluetooth	5.85	5.27	0.020	Right Tilt	FCC #2	1	76.8	0.112	1.143	1.302	0.167	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

## 11.2 Standalone Body-Worn SAR Worn SAR Results

**Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.50	33.10	-0.170	10 mm [Front]	FCC #1	1	1:8.3	0.169	1.096	0.185	
836.6	190	GSM850	GSM	33.50	33.10	-0.120	10 mm [Rear]	FCC #1	1	1:8.3	0.338	1.096	0.370	A21
836.6	190	GSM850	GPRS	29.50	28.80	-0.060	10 mm [Front]	FCC #1	3	1:2.77	0.190	1.175	0.223	
836.6	190	GSM850	GPRS	29.50	28.80	-0.120	10 mm [Rear]	FCC #1	3	1:2.77	0.347	1.175	0.408	A22
1880.0	661	PCS1900	PCS	30.50	30.40	0.010	10 mm [Front]	FCC #1	1	1:8.3	0.282	1.023	0.288	
1880.0	661	PCS1900	PCS	30.50	30.40	-0.010	10 mm [Rear]	FCC #1	1	1:8.3	0.430	1.023	0.440	A23
1880.0	661	PCS1900	GPRS	26.50	26.20	-0.020	10 mm [Front]	FCC #1	3	1:2.77	0.293	1.072	0.314	
1880.0	661	PCS1900	GPRS	26.50	26.20	-0.010	10 mm [Rear]	FCC #1	3	1:2.77	0.439	1.072	0.471	A24
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.110	10 mm [Front]	FCC #1	N/A	1:1	0.184	1.164	0.214	
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.180	10 mm [Rear]	FCC #1	N/A	1:1	0.405	1.164	0.471	A25
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.030	10 mm [Front]	FCC #1	N/A	1:1	0.671	1.132	0.760	
1732.4	1412	WCDMA 1700	RMC	24.00	23.24	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.861	1.191	1.025	A26
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.040	10 mm [Rear]	FCC #1	N/A	1:1	0.860	1.132	0.974	
1752.6	1513	WCDMA 1700	RMC	24.00	23.26	0.120	10 mm [Rear]	FCC #1	N/A	1:1	0.730	1.186	0.866	
1712.4	1312	WCDMA 1700	RMC	24.00	23.24	0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.858	1.191	1.022	
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	0.020	10 mm [Front]	FCC #1	N/A	1:1	0.491	1.130	0.555	
1852.4	9262	WCDMA 1900	RMC	24.00	23.45	0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.820	1.135	0.931	A27
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	-0.040	10 mm [Rear]	FCC #1	N/A	1:1	0.773	1.130	0.873	
1907.6	9538	WCDMA 1900	RMC	24.00	23.28	-0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.672	1.180	0.793	
1852.4	9262	WCDMA 1900	RMC	24.00	23.45	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.818	1.135	0.928	

ANSI / IEEE C95.1-1992- SAFETY LIMIT  
Spatial Peak  
Uncontrolled Exposure/General Population Exposure

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

Note: Blue entries represent variability measurements.

**Table 11.2.2 LTE B12, B17, B13, B26, B66 Body-Worn SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	22.10	21.93	-0.060	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.179	1.040	0.186	
707.5	23095	LTE B12	10	21.10	20.91	-0.080	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.151	1.045	0.158	
707.5	23095	LTE B12	10	22.10	21.93	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.398	1.040	0.414	A28
707.5	23095	LTE B12	10	21.10	20.91	-0.080	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.333	1.045	0.348	
710.0	23790	LTE B17	10	24.00	23.63	0.120	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.230	1.089	0.250	
710.0	23790	LTE B17	10	23.00	22.56	-0.040	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.189	1.107	0.209	
710.0	23790	LTE B17	10	24.00	23.63	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.468	1.089	0.510	A29
710.0	23790	LTE B17	10	23.00	22.56	-0.050	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.378	1.107	0.418	
782.0	23230	LTE B13	10	24.00	23.98	-0.020	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.206	1.005	0.207	
782.0	23230	LTE B13	10	23.00	22.97	-0.010	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.169	1.007	0.170	
782.0	23230	LTE B13	10	24.00	23.98	-0.140	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.459	1.005	0.461	A30
782.0	23230	LTE B13	10	23.00	22.97	-0.120	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.363	1.007	0.366	
831.5	26865	LTE B26	15	24.00	23.95	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	36	1:1	0.196	1.012	0.200	
831.5	26865	LTE B26	15	23.00	22.97	-0.090	1	10 mm [Front]	FCC #1	QPSK	36	18	1:1	0.157	1.007	0.158	
831.5	26865	LTE B26	15	24.00	23.95	-0.150	0	10 mm [Rear]	FCC #1	QPSK	1	36	1:1	0.384	1.012	0.389	A31
831.5	26865	LTE B26	15	23.00	22.97	-0.050	1	10 mm [Rear]	FCC #1	QPSK	36	18	1:1	0.282	1.007	0.284	
1745.0	132322	LTE B66	20	24.50	24.48	-0.130	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.658	1.005	0.661	
1745.0	132322	LTE B66	20	23.50	23.36	-0.050	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.500	1.033	0.517	
1720.0	132072	LTE B66	20	24.50	24.46	0.140	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.783	1.009	0.790	
1745.0	132322	LTE B66	20	24.50	24.48	0.130	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.834	1.005	0.838	A32
1745.0	132322	LTE B66	20	23.50	23.36	0.110	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.671	1.033	0.693	
1745.0	132322	LTE B66	20	23.50	23.18	0.100	1	10 mm [Rear]	FCC #1	QPSK	100	0	1:1	0.621	1.076	0.668	
1770.0	132572	LTE B66	20	24.50	24.43	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.794	1.016	0.807	

ANSI / IEEE C95.1-1992- SAFETY LIMIT  
Spatial Peak  
Uncontrolled Exposure/General Population Exposure

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

**Table 11.2.3 LTE B25, B7, B41 Body-Worn SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1905.0	26590	LTE B25	20	24.00	23.89	-0.160	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.438	1.026	0.449	
1905.0	26590	LTE B25	20	23.00	22.76	-0.060	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.360	1.057	0.381	
1905.0	26590	LTE B25	20	24.00	23.89	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.585	1.026	0.600	A33
1905.0	26590	LTE B25	20	23.00	22.76	0.060	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.448	1.057	0.474	
2560.0	21350	LTE B7	20	24.00	23.97	-0.080	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.709	1.007	0.714	
2560.0	21350	LTE B7	20	23.00	22.69	0.060	0	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.555	1.074	0.596	
2510.0	20850	LTE B7	20	24.00	23.83	0.090	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.791	1.040	0.823	
2535.0	21100	LTE B7	20	24.00	23.80	-0.130	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.886	1.047	0.928	
2560.0	21350	LTE B7	20	24.00	23.97	-0.100	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.962	1.007	0.969	A34
2560.0	21350	LTE B7	20	23.00	22.69	-0.040	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.724	1.074	0.778	
2560.0	21350	LTE B7	20	23.00	22.60	-0.020	1	10 mm [Rear]	FCC #1	QPSK	100	0	1:1	0.675	1.096	0.740	
2560.0	21350	LTE B7	20	24.00	23.97	0.080	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.951	1.007	0.958	
2593.0	40620	LTE B41	20	24.00	23.68	0.070	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1.58	0.505	1.076	0.543	
2593.0	40620	LTE B41	20	23.00	22.61	-0.040	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1.58	0.387	1.094	0.423	
2506.0	39750	LTE B41	20	24.00	23.64	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.523	1.086	0.568	
2549.5	40185	LTE B41	20	24.00	23.66	-0.100	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.570	1.081	0.616	
2593.0	40620	LTE B41	20	24.00	23.68	-0.110	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.768	1.076	0.826	A35
2593.0	40620	LTE B41	20	23.00	22.61	-0.060	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1.58	0.540	1.094	0.591	
2593.0	40620	LTE B41	20	23.00	22.55	-0.050	1	10 mm [Rear]	FCC #1	QPSK	100	0	1:1.58	0.513	1.109	0.569	
2636.5	41055	LTE B41	20	24.00	23.60	-0.150	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.707	1.096	0.775	
2680.0	41490	LTE B41	20	24.00	23.58	-0.100	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.642	1.102	0.707	

ANSI / IEEE C95.1-1992- SAFETY LIMIT  
Spatial Peak  
Uncontrolled Exposure/General Population Exposure

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

Note: Blue entries represent variability measurements.

**Table 11.2.4 DTS Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2 412.0	1	802.11b	15.00	14.42	-0.120	10 mm [Front]	FCC #2	0.186	1	98.4	0.176	1.143	1.016	0.204	A36
2 412.0	1	802.11b	15.00	14.42	0.010	10 mm [Rear]	FCC #2	0.179	1	98.4	0.164	1.143	1.016	0.191	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 412.0	1	802.11b	DSSS	15.00	0.204	2 412.0	802.11g	OFDM	14.00	0.794	0.162	X
2 412.0	1	802.11b	DSSS	15.00	0.204	2 412.0	802.11n (HT20)	OFDM	14.00	0.794	0.162	X
2 412.0	1	802.11b	DSSS	15.00	0.204	2 412.0	802.11ac (VHT20)	OFDM	14.00	0.794	0.162	X
2 412.0	1	802.11b	DSSS	15.00	0.204	2 412.0	802.11n (HT40)	OFDM	14.00	0.794	0.162	X
2 412.0	1	802.11b	DSSS	15.00	0.204	2 412.0	802.11ac (CHT40)	OFDM	14.00	0.794	0.162	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

**Table 11.2.5 UNII Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 320.0	64	802.11a	14.00	13.94	0.100	10 mm [Front]	FCC #2	0.095	6	97.8	0.091	1.014	1.022	0.094	
5 320.0	64	802.11a	14.00	13.94	0.030	10 mm [Rear]	FCC #2	0.298	6	97.8	0.309	1.014	1.022	0.320	A37
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5 320.0	64	802.11a	OFDM	14.0	0.320	5 200.0	802.11a	OFDM	14.0	1.000	0.320	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

**Table 11.2.6 UNII Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 500.0	100	802.11a	12.00	11.58	-0.030	10 mm [Front]	FCC #2	0.122	6	97.8	0.113	1.102	1.022	0.127	
5 500.0	100	802.11a	12.00	11.58	-0.030	10 mm [Rear]	FCC #2	0.482	6	97.8	0.459	1.102	1.022	0.517	A38
5 825.0	165	802.11a	12.00	11.51	-0.040	10 mm [Front]	FCC #2	0.146	6	97.8	0.153	1.119	1.022	0.175	
5 825.0	165	802.11a	12.00	11.51	0.050	10 mm [Rear]	FCC #2	0.408	6	97.8	0.411	1.119	1.022	0.470	A39
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.2.7 Bluetooth Body-Worn SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth	5.85	5.27	-0.070	10 mm [Front]	FCC #2	1	76.8	0.016	1.143	1.302	0.024	
2 441.0	39	Bluetooth	5.85	5.27	-0.020	10 mm [Rear]	FCC #2	1	76.8	0.030	1.143	1.302	0.045	A40
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram			

### 11.3 Standalone Hotspot SAR Results

**Table 11.3.1 GPRS/WCDMA Hotspot SAR**

FREQUENCY		MEASUREMENT RESULTS												
MHz	Ch	Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
836.6	190	GSM850	GPRS	29.50	28.80	-0.120	10 mm [Bottom]	FCC #1	3	1:2.77	0.103	1.175	0.121	
836.6	190	GSM850	GPRS	29.50	28.80	-0.060	10 mm [Front]	FCC #1	3	1:2.77	0.190	1.175	0.223	
836.6	190	GSM850	GPRS	29.50	28.80	-0.120	10 mm [Rear]	FCC #1	3	1:2.77	0.347	1.175	0.408	A22
836.6	190	GSM850	GPRS	29.50	28.80	-0.100	10 mm [Right]	FCC #1	3	1:2.77	0.154	1.175	0.181	
836.6	190	GSM850	GPRS	29.50	28.80	-0.160	10 mm [Left]	FCC #1	3	1:2.77	0.262	1.175	0.308	
1880.0	661	PCS1900	GPRS	26.50	26.20	-0.110	10 mm [Bottom]	FCC #1	3	1:2.77	0.170	1.072	0.182	
1880.0	661	PCS1900	GPRS	26.50	26.20	-0.020	10 mm [Front]	FCC #1	3	1:2.77	0.293	1.072	0.314	
1880.0	661	PCS1900	GPRS	26.50	26.20	-0.010	10 mm [Rear]	FCC #1	3	1:2.77	0.439	1.072	0.471	
1880.0	661	PCS1900	GPRS	26.50	26.20	0.000	10 mm [Right]	FCC #1	3	1:2.77	0.551	1.072	0.591	A41
1880.0	661	PCS1900	GPRS	26.50	26.20	-0.000	10 mm [Left]	FCC #1	3	1:2.77	0.103	1.072	0.110	
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.080	10 mm [Bottom]	FCC #1	N/A	1:1	0.117	1.164	0.136	
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.110	10 mm [Front]	FCC #1	N/A	1:1	0.184	1.164	0.214	
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.180	10 mm [Rear]	FCC #1	N/A	1:1	0.405	1.164	0.471	A25
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.020	10 mm [Right]	FCC #1	N/A	1:1	0.149	1.164	0.173	
836.6	4183	WCDMA 850	RMC	24.00	23.34	-0.140	10 mm [Left]	FCC #1	N/A	1:1	0.262	1.164	0.305	
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	-0.060	10 mm [Bottom]	FCC #1	N/A	1:1	0.382	1.132	0.432	
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.030	10 mm [Front]	FCC #1	N/A	1:1	0.671	1.132	0.760	
1712.4	1312	WCDMA 1700	RMC	24.00	23.24	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.861	1.191	1.025	A26
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.040	10 mm [Rear]	FCC #1	N/A	1:1	0.860	1.132	0.974	
1752.6	1513	WCDMA 1700	RMC	24.00	23.26	0.120	10 mm [Rear]	FCC #1	N/A	1:1	0.730	1.186	0.866	
1712.4	1312	WCDMA 1700	RMC	24.00	23.24	-0.000	10 mm [Right]	FCC #1	N/A	1:1	0.724	1.191	0.862	
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.020	10 mm [Right]	FCC #1	N/A	1:1	0.782	1.132	0.885	
1752.6	1513	WCDMA 1700	RMC	24.00	23.26	-0.060	10 mm [Right]	FCC #1	N/A	1:1	0.688	1.186	0.816	
1732.4	1412	WCDMA 1700	RMC	24.00	23.46	0.020	10 mm [Left]	FCC #1	N/A	1:1	0.220	1.132	0.249	
1712.4	1312	WCDMA 1700	RMC	24.00	23.24	0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.858	1.191	1.022	
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	-0.080	10 mm [Bottom]	FCC #1	N/A	1:1	0.306	1.130	0.346	
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	0.020	10 mm [Front]	FCC #1	N/A	1:1	0.491	1.130	0.555	
1852.4	9262	WCDMA 1900	RMC	24.00	23.45	0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.820	1.135	0.931	A27
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	-0.040	10 mm [Rear]	FCC #1	N/A	1:1	0.773	1.130	0.873	
1907.6	9538	WCDMA 1900	RMC	24.00	23.28	-0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.672	1.180	0.793	
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	0.010	10 mm [Right]	FCC #1	N/A	1:1	0.706	1.130	0.798	
1880.0	9400	WCDMA 1900	RMC	24.00	23.47	-0.070	10 mm [Left]	FCC #1	N/A	1:1	0.215	1.130	0.243	
1852.4	9262	WCDMA 1900	RMC	24.00	23.45	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.818	1.135	0.928	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak										Body 1.6 W/kg (mW/g) averaged over 1 gram				
Uncontrolled Exposure/General Population Exposure														

Note: Blue entries represent variability measurements.

**Table 11.3.2 LTE B12, B17, B13, B26 Hotspot SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	22.10	21.93	0.020	0	10 mm (Bottom)	FCC #1	QPSK	1	25	1:1	0.046	1.040	0.048	
707.5	23095	LTE B12	10	21.10	20.91	-0.170	1	10 mm (Bottom)	FCC #1	QPSK	25	12	1:1	0.035	1.045	0.037	
707.5	23095	LTE B12	10	22.10	21.93	-0.060	0	10 mm (Front)	FCC #1	QPSK	1	25	1:1	0.179	1.040	0.186	
707.5	23095	LTE B12	10	21.10	20.91	-0.080	1	10 mm (Front)	FCC #1	QPSK	25	12	1:1	0.151	1.045	0.158	
707.5	23095	LTE B12	10	22.10	21.93	-0.020	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.398	1.040	0.414	A28
707.5	23095	LTE B12	10	21.10	20.91	-0.080	1	10 mm (Rear)	FCC #1	QPSK	25	12	1:1	0.333	1.045	0.348	
707.5	23095	LTE B12	10	22.10	21.93	-0.030	0	10 mm (Right)	FCC #1	QPSK	1	25	1:1	0.175	1.040	0.182	
707.5	23095	LTE B12	10	21.10	20.91	-0.070	1	10 mm (Right)	FCC #1	QPSK	25	12	1:1	0.155	1.045	0.162	
707.5	23095	LTE B12	10	22.10	21.93	0.130	0	10 mm (Left)	FCC #1	QPSK	1	25	1:1	0.176	1.040	0.183	
707.5	23095	LTE B12	10	21.10	20.91	-0.150	1	10 mm (Left)	FCC #1	QPSK	25	12	1:1	0.154	1.045	0.161	
710.0	23790	LTE B17	10	24.00	23.63	0.080	0	10 mm (Bottom)	FCC #1	QPSK	1	25	1:1	0.046	1.089	0.050	
710.0	23790	LTE B17	10	23.00	22.56	-0.020	1	10 mm (Bottom)	FCC #1	QPSK	25	12	1:1	0.039	1.107	0.043	
710.0	23790	LTE B17	10	24.00	23.63	0.120	0	10 mm (Front)	FCC #1	QPSK	1	25	1:1	0.230	1.089	0.250	
710.0	23790	LTE B17	10	23.00	22.56	-0.040	1	10 mm (Front)	FCC #1	QPSK	25	12	1:1	0.189	1.107	0.209	
710.0	23790	LTE B17	10	24.00	23.63	-0.020	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.468	1.089	0.510	A29
710.0	23790	LTE B17	10	23.00	22.56	-0.050	1	10 mm (Rear)	FCC #1	QPSK	25	12	1:1	0.378	1.107	0.418	
710.0	23790	LTE B17	10	24.00	23.63	-0.170	0	10 mm (Right)	FCC #1	QPSK	1	25	1:1	0.214	1.089	0.233	
710.0	23790	LTE B17	10	23.00	22.56	0.030	1	10 mm (Right)	FCC #1	QPSK	25	12	1:1	0.186	1.107	0.206	
710.0	23790	LTE B17	10	24.00	23.63	0.010	0	10 mm (Left)	FCC #1	QPSK	1	25	1:1	0.218	1.089	0.237	
710.0	23790	LTE B17	10	23.00	22.56	-0.020	1	10 mm (Left)	FCC #1	QPSK	25	12	1:1	0.188	1.107	0.208	
782.0	23230	LTE B13	10	24.00	23.98	0.070	0	10 mm (Bottom)	FCC #1	QPSK	1	25	1:1	0.070	1.005	0.070	
782.0	23230	LTE B13	10	23.00	22.97	-0.180	1	10 mm (Bottom)	FCC #1	QPSK	25	12	1:1	0.060	1.007	0.060	
782.0	23230	LTE B13	10	24.00	23.98	-0.020	0	10 mm (Front)	FCC #1	QPSK	1	25	1:1	0.206	1.005	0.207	
782.0	23230	LTE B13	10	23.00	22.97	-0.010	1	10 mm (Front)	FCC #1	QPSK	25	12	1:1	0.169	1.007	0.170	
782.0	23230	LTE B13	10	24.00	23.98	-0.140	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.459	1.005	0.461	A30
782.0	23230	LTE B13	10	23.00	22.97	-0.120	1	10 mm (Rear)	FCC #1	QPSK	25	12	1:1	0.363	1.007	0.366	
782.0	23230	LTE B13	10	24.00	23.98	-0.090	0	10 mm (Right)	FCC #1	QPSK	1	25	1:1	0.253	1.005	0.254	
782.0	23230	LTE B13	10	23.00	22.97	-0.110	1	10 mm (Right)	FCC #1	QPSK	25	12	1:1	0.205	1.007	0.206	
782.0	23230	LTE B13	10	24.00	23.98	-0.040	0	10 mm (Left)	FCC #1	QPSK	1	25	1:1	0.322	1.005	0.324	
782.0	23230	LTE B13	10	23.00	22.97	-0.160	1	10 mm (Left)	FCC #1	QPSK	25	12	1:1	0.270	1.007	0.272	
831.5	26865	LTE B26	15	24.00	23.95	-0.030	0	10 mm (Bottom)	FCC #1	QPSK	1	36	1:1	0.113	1.012	0.114	
831.5	26865	LTE B26	15	23.00	22.97	-0.040	1	10 mm (Bottom)	FCC #1	QPSK	25	18	1:1	0.089	1.007	0.090	
831.5	26865	LTE B26	15	24.00	23.95	-0.010	0	10 mm (Front)	FCC #1	QPSK	1	36	1:1	0.198	1.012	0.200	
831.5	26865	LTE B26	15	23.00	22.97	-0.090	1	10 mm (Front)	FCC #1	QPSK	25	18	1:1	0.157	1.007	0.158	
831.5	26865	LTE B26	15	24.00	23.95	-0.150	0	10 mm (Rear)	FCC #1	QPSK	1	36	1:1	0.384	1.012	0.389	A31
831.5	26865	LTE B26	15	23.00	22.97	-0.050	1	10 mm (Rear)	FCC #1	QPSK	25	18	1:1	0.282	1.007	0.284	
831.5	26865	LTE B26	15	24.00	23.95	-0.110	0	10 mm (Right)	FCC #1	QPSK	1	36	1:1	0.178	1.012	0.180	
831.5	26865	LTE B26	15	23.00	22.97	-0.050	1	10 mm (Right)	FCC #1	QPSK	25	18	1:1	0.137	1.007	0.138	
831.5	26865	LTE B26	15	24.00	23.95	0.090	0	10 mm (Left)	FCC #1	QPSK	1	36	1:1	0.280	1.012	0.283	
831.5	26865	LTE B26	15	23.00	22.97	-0.140	1	10 mm (Left)	FCC #1	QPSK	25	18	1:1	0.212	1.007	0.213	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak												Body 1.6 W/kg (mW/g) averaged over 1 gram					
Uncontrolled Exposure/General Population Exposure																	
Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.																	

**Table 11.3.3 LTE B66 Hotspot SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1745.0	132322	LTE B66	20	24.50	24.48	-0.090	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.323	1.005	0.325	
1745.0	132322	LTE B66	20	23.50	23.36	0.070	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.258	1.033	0.267	
1745.0	132322	LTE B66	20	24.50	24.48	-0.130	0	10 mm (Front)	FCC #1	QPSK	1	50	1:1	0.658	1.005	0.661	
1745.0	132322	LTE B66	20	23.50	23.36	-0.050	1	10 mm (Front)	FCC #1	QPSK	50	25	1:1	0.500	1.033	0.517	
1720.0	132072	LTE B66	20	24.50	24.46	0.140	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.783	1.009	0.790	
1745.0	132322	LTE B66	20	24.50	24.48	0.130	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.834	1.005	0.838	
1745.0	132322	LTE B66	20	23.50	23.36	0.110	1	10 mm (Rear)	FCC #1	QPSK	50	25	1:1	0.671	1.033	0.693	
1745.0	132322	LTE B66	20	23.50	23.18	0.100	1	10 mm (Rear)	FCC #1	QPSK	100	0	1:1	0.621	1.076	0.668	
1770.0	132572	LTE B66	20	24.50	24.43	0.030	0	10 mm (Front)	FCC #1	QPSK	1	50	1:1	0.794	1.016	0.807	
1720.0	132072	LTE B66	20	24.50	24.46	0.000	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.797	1.009	0.804	
1745.0	132322	LTE B66	20	24.50	24.48	-0.020	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.844	1.005	0.848	A42
1745.0	132322	LTE B66	20	23.50	23.36	-0.050	1	10 mm (Right)	FCC #1	QPSK	50	25	1:1	0.649	1.033	0.670	
1745.0	132322	LTE B66	20	23.50	23.18	0.020	1	10 mm (Right)	FCC #1	QPSK	100	0	1:1	0.601	1.076	0.647	
1770.0	132572	LTE B66	20	24.50	24.43	-0.000	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.764	1.016	0.776	
1745.0	132322	LTE B66	20	24.50	24.48	0.060	0	10 mm (Left)	FCC #1	QPSK	1	50	1:1	0.196	1.005	0.197	
1745.0	132322	LTE B66	20	23.50	23.36	-0.040	1	10 mm (Left)	FCC #1	QPSK	50	25	1:1	0.165	1.033	0.170	
1745.0	132322	LTE B66	20	24.50	24.48	-0.010	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.833	1.005	0.837	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak												Body 1.6 W/kg (mW/g) averaged over 1 gram					
Uncontrolled Exposure/General Population Exposure																	
Note: Blue entries represent variability measurements.																	



**Table 11.3.4 LTE B25 Hotspot SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1905.0	26590	LTE B25	20	24.00	23.89	-0.030	0	10 mm (Bottom)	FCC #1	QPSK	1	0	1:1	0.253	1.026	0.260	
1905.0	26590	LTE B25	20	23.00	22.76	-0.020	1	10 mm (Bottom)	FCC #1	QPSK	50	0	1:1	0.207	1.057	0.219	
1905.0	26590	LTE B25	20	24.00	23.89	-0.160	0	10 mm (Front)	FCC #1	QPSK	1	0	1:1	0.438	1.026	0.449	
1905.0	26590	LTE B25	20	23.00	22.76	-0.060	1	10 mm (Front)	FCC #1	QPSK	50	0	1:1	0.360	1.057	0.381	
1905.0	26590	LTE B25	20	24.00	23.89	0.030	0	10 mm (Rear)	FCC #1	QPSK	1	0	1:1	0.585	1.026	0.600	
1905.0	26590	LTE B25	20	23.00	22.76	0.060	1	10 mm (Rear)	FCC #1	QPSK	50	0	1:1	0.448	1.057	0.474	
1905.0	26590	LTE B25	20	24.00	23.89	0.050	0	10 mm (Right)	FCC #1	QPSK	1	0	1:1	0.674	1.026	0.692	A43
1905.0	26590	LTE B25	20	23.00	22.76	-0.160	1	10 mm (Right)	FCC #1	QPSK	50	0	1:1	0.535	1.057	0.565	
1905.0	26590	LTE B25	20	24.00	23.89	0.040	0	10 mm (Left)	FCC #1	QPSK	1	0	1:1	0.177	1.026	0.182	
1905.0	26590	LTE B25	20	23.00	22.76	-0.030	1	10 mm (Left)	FCC #1	QPSK	50	0	1:1	0.147	1.057	0.155	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak										Body 1.6 W/kg (mW/g) averaged over 1 gram							
Uncontrolled Exposure/General Population Exposure																	

**Table 11.3.5 LTE B7 Hotspot SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2560.0	21350	LTE B7	20	24.00	23.97	-0.090	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.313	1.007	0.315	
2560.0	21350	LTE B7	20	23.00	22.69	0.050	1	10 mm (Bottom)	FCC #1	QPSK	50	0	1:1	0.249	1.074	0.267	
2560.0	21350	LTE B7	20	24.00	23.97	-0.080	0	10 mm (Front)	FCC #1	QPSK	1	50	1:1	0.709	1.007	0.714	
2560.0	21350	LTE B7	20	23.00	22.69	0.060	1	10 mm (Front)	FCC #1	QPSK	50	0	1:1	0.555	1.074	0.596	
2510.0	20850	LTE B7	20	24.00	23.83	0.090	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.791	1.040	0.823	
2535.0	21100	LTE B7	20	24.00	23.80	-0.130	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.886	1.047	0.928	
2560.0	21350	LTE B7	20	24.00	23.97	-0.100	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.962	1.007	0.969	A34
2560.0	21350	LTE B7	20	23.00	22.69	-0.040	1	10 mm (Rear)	FCC #1	QPSK	50	0	1:1	0.724	1.074	0.778	
2560.0	21350	LTE B7	20	23.00	22.60	-0.020	1	10 mm (Rear)	FCC #1	QPSK	100	0	1:1	0.675	1.096	0.740	
2510.0	20850	LTE B7	20	24.00	23.83	0.020	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.738	1.040	0.768	
2535.0	21100	LTE B7	20	24.00	23.80	0.080	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.757	1.047	0.793	
2560.0	21350	LTE B7	20	24.00	23.97	0.000	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.825	1.007	0.831	
2560.0	21350	LTE B7	20	23.00	22.69	0.010	1	10 mm (Right)	FCC #1	QPSK	50	0	1:1	0.672	1.074	0.722	
2560.0	21350	LTE B7	20	23.00	22.60	0.030	1	10 mm (Right)	FCC #1	QPSK	100	0	1:1	0.627	1.096	0.687	
2560.0	21350	LTE B7	20	24.00	23.97	-0.150	0	10 mm (Left)	FCC #1	QPSK	1	50	1:1	0.030	1.007	0.030	
2560.0	21350	LTE B7	20	23.00	22.69	-0.060	1	10 mm (Left)	FCC #1	QPSK	50	0	1:1	0.021	1.074	0.023	
2560.0	21350	LTE B7	20	24.00	23.97	0.080	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.951	1.007	0.958	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak										Body 1.6 W/kg (mW/g) averaged over 1 gram							
Uncontrolled Exposure/General Population Exposure																	

Note: Blue entries represent variability measurements.

**Table 11.3.6 LTE B41 Hotspot SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2 593.0	40620	LTE B41	20	24.00	23.68	0.010	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1.58	0.247	1.076	0.266	
2 593.0	40620	LTE B41	20	23.00	22.61	0.030	1	10 mm [Bottom]	FCC #1	QPSK	50	0	1:1.58	0.196	1.094	0.214	
2 593.0	40620	LTE B41	20	24.00	23.68	0.070	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1.58	0.505	1.076	0.543	
2 593.0	40620	LTE B41	20	23.00	22.61	-0.040	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1.58	0.387	1.094	0.423	
2 506.0	39750	LTE B41	20	24.00	23.64	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.523	1.086	0.568	
2 549.5	40185	LTE B41	20	24.00	23.66	-0.100	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.570	1.081	0.616	
2 593.0	40620	LTE B41	20	24.00	23.68	-0.110	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.768	1.076	0.826	A35
2 593.0	40620	LTE B41	20	23.00	22.61	-0.060	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1.58	0.540	1.094	0.591	
2 593.0	40620	LTE B41	20	23.00	22.55	-0.050	1	10 mm [Rear]	FCC #1	QPSK	100	0	1:1.58	0.513	1.109	0.569	
2 636.5	41055	LTE B41	20	24.00	23.60	-0.150	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.707	1.096	0.775	
2 680.0	41490	LTE B41	20	24.00	23.58	-0.100	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.642	1.102	0.707	
2 593.0	40620	LTE B41	20	24.00	23.68	0.020	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.515	1.076	0.554	
2 593.0	40620	LTE B41	20	23.00	22.61	-0.040	1	10 mm [Right]	FCC #1	QPSK	50	0	1:1.58	0.399	1.094	0.437	
2 593.0	40620	LTE B41	20	24.00	23.68	0.170	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1.58	0.024	1.076	0.026	
2 593.0	40620	LTE B41	20	23.00	22.61	-0.080	1	10 mm [Left]	FCC #1	QPSK	50	0	1:1.58	0.018	1.094	0.020	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram					

**Table 11.3.7 DTS Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #	
MHz	Ch															
2 412.0	1	802.11b	15.00	14.42	-0.040	10 mm [Top]	FCC #2	0.090	1	98.4	0.089	1.143	1.016	0.103		
2 412.0	1	802.11b	15.00	14.42	-0.120	10 mm [Front]	FCC #2	0.186	1	98.4	0.176	1.143	1.016	0.204		
2 412.0	1	802.11b	15.00	14.42	0.010	10 mm [Rear]	FCC #2	0.179	1	98.4	0.164	1.143	1.016	0.191		
2 412.0	1	802.11b	15.00	14.42	0.110	10 mm [Right]	FCC #2	0.030	1	98.4	0.028	1.143	1.016	0.033		
2 412.0	1	802.11b	15.00	14.42	-0.020	10 mm [Left]	FCC #2	0.203	1	98.4	0.190	1.143	1.016	0.221	A44	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram				

Adjusted SAR results for OFDM SAR																
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR				
MHz	Ch															
2 412.0	1	802.11b	DSSS	15.00	0.221	2 412.0	802.11g	OFDM	14.00	0.794	0.175	X				
2 412.0	1	802.11b	DSSS	15.00	0.221	2 412.0	802.11n (HT20)	OFDM	14.00	0.794	0.175	X				
2 412.0	1	802.11b	DSSS	15.00	0.221	2 412.0	802.11ac (VHT20)	OFDM	14.00	0.794	0.175	X				
2 412.0	1	802.11b	DSSS	15.00	0.221	2 412.0	802.11n (HT40)	OFDM	14.00	0.794	0.175	X				
2 412.0	1	802.11b	DSSS	15.00	0.221	2 412.0	802.11ac (CHT40)	OFDM	14.00	0.794	0.175	X				
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

**Table 11.3.8 UNII Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch															
5 200.0	40	802.11a	14.00	13.89	0.000	10 mm [Top]	FCC #2	0.144	6	97.8	0.144	1.026	1.022	0.151		
5 200.0	40	802.11a	14.00	13.89	0.000	10 mm [Front]	FCC #2	0.115	6	97.8	0.118	1.026	1.022	0.124		
5 200.0	40	802.11a	14.00	13.89	0.030	10 mm [Rear]	FCC #2	0.305	6	97.8	0.312	1.026	1.022	0.327	A45	
5 200.0	40	802.11a	14.00	13.89	-0.050	10 mm [Right]	FCC #2	0.028	6	97.8	0.019	1.026	1.022	0.020		
5 200.0	40	802.11a	14.00	13.89	-0.030	10 mm [Left]	FCC #2	0.219	6	97.8	0.211	1.026	1.022	0.221		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.3.9 UNII Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch															
5 825.0	165	802.11a	12.00	11.51	-0.020	10 mm [Top]	FCC #2	0.223	6	97.8	0.225	1.119	1.022	0.257		
5 825.0	165	802.11a	12.00	11.51	-0.040	10 mm [Front]	FCC #2	0.146	6	97.8	0.153	1.119	1.022	0.175		
5 825.0	165	802.11a	12.00	11.51	0.050	10 mm [Rear]	FCC #2	0.408	6	97.8	0.411	1.119	1.022	0.470	A39	
5 825.0	165	802.11a	12.00	11.51	-0.050	10 mm [Right]	FCC #2	0.005	6	97.8	0.007	1.119	1.022	0.008		
5 825.0	165	802.11a	12.00	11.51	-0.030	10 mm [Left]	FCC #2	0.281	6	97.8	0.288	1.119	1.022	0.330		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 11.3.10 Bluetooth Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #		
MHz	Ch															
2 441.0	39	Bluetooth	5.85	5.27	-0.070	10 mm [Top]	FCC #2	1	76.8	0.014	1.143	1.302	0.021			
2 441.0	39	Bluetooth	5.85	5.27	-0.070	10 mm [Front]	FCC #2	1	76.8	0.016	1.143	1.302	0.024			
2 441.0	39	Bluetooth	5.85	5.27	-0.020	10 mm [Rear]	FCC #2	1	76.8	0.030	1.143	1.302	0.045			
2 441.0	39	Bluetooth	5.85	5.27	-0.050	10 mm [Right]	FCC #2	1	76.8	0.005	1.143	1.302	0.007			
2 441.0	39	Bluetooth	5.85	5.27	-0.110	10 mm [Left]	FCC #2	1	76.8	0.042	1.143	1.302	0.063	A46		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram				



### 11.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

**Table 11.4.1 UNII Phablet SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 320.0	64	802.11a	14.00	13.94	0.010	0 mm [Top]	FCC #2	0.222	6	97.8	0.226	1.014	1.022	0.234	
5 320.0	64	802.11a	14.00	13.94	0.020	0 mm [Front]	FCC #2	0.197	6	97.8	0.203	1.014	1.022	0.210	
5 320.0	64	802.11a	14.00	13.94	0.150	0 mm [Rear]	FCC #2	0.452	6	97.8	0.454	1.014	1.022	0.471	A47
5 320.0	64	802.11a	14.00	13.94	0.080	0 mm [Right]	FCC #2	0.004	6	97.8	0.003	1.014	1.022	0.003	
5 320.0	64	802.11a	14.00	13.94	-0.100	0 mm [Left]	FCC #2	0.431	6	97.8	0.443	1.014	1.022	0.459	
ANSI/IEEE C98.1-1992-SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Phablet 4.0 W/kg (mW/g) averaged over 10 gram				

**Table 11.4.2 UNII Phablet SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 500.0	100	802.11a	12.00	11.58	-0.100	0 mm [Top]	FCC #2	0.264	6	97.8	0.265	1.102	1.019	0.298	
5 500.0	100	802.11a	12.00	11.58	0.170	0 mm [Front]	FCC #2	0.226	6	97.8	0.228	1.102	1.019	0.256	
5 500.0	100	802.11a	12.00	11.58	0.000	0 mm [Rear]	FCC #2	0.535	6	97.8	0.530	1.102	1.019	0.595	A48
5 500.0	100	802.11a	12.00	11.58	0.040	0 mm [Right]	FCC #2	0.001	6	97.8	0.001	1.102	1.019	0.001	
5 500.0	100	802.11a	12.00	11.58	-0.010	0 mm [Left]	FCC #2	0.457	6	97.8	0.485	1.102	1.019	0.545	
ANSI/IEEE C98.1-1992-SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Phablet 4.0 W/kg (mW/g) averaged over 10 gram				

## 11.5 SAR Test Notes

### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

### GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not >  $\frac{1}{2}$  dB, the middle channel was used for testing.

**WCDMA (UMTS) Notes:**

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

**LTE Notes:**

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is  $\leq 0.8$  W/kg, testing of the 100% RB allocation and required test channels is not required.  
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.  
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was  $> 0.6$  W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
6. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r05. Testing was performed using UL-DL configuration 0 with 6 UL sub frames and 2S sub frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633 (cf=1.58).
7. SAR test reduction is applied using the following criteria:  
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $> 0.8$  W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

**WLAN Notes:**

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is  $\leq 1.2$  W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

**Bluetooth Notes:**

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation and Tx test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT tethering applications.

## **12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS**

---

### **12.1 Introduction**

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### **12.2 Simultaneous Transmission Procedures**

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

### **12.3 Simultaneous Transmission Capabilities**

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

**Table 12.3.1 Simultaneous SAR Cases**

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Phablet SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	Yes	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
3	GSM Voice + Bluetooth 2.4 GHz	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered.
4	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5 GHz	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered.
5	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
6	WCDMA + Wi-Fi 5 GHz	Yes	Yes	Yes	Yes	^Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
7	WCDMA + Bluetooth 2.4 GHz	Yes^	Yes	Yes	Yes	^Bluetooth Tethering is considered.
8	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5 GHz	Yes^	Yes	Yes	Yes	^Bluetooth Tethering is considered. ^Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
9	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
10	LTE + Wi-Fi 5 GHz	Yes	Yes	Yes	Yes	^Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
11	LTE + Bluetooth 2.4 GHz	Yes^	Yes	Yes	Yes	^Bluetooth Tethering is considered.
12	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes^	Yes	Yes	Yes	^Bluetooth Tethering is considered. ^Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
13	GPRS/EDGE + Wi-Fi 2.4 GHz	Yes*	Yes*	Yes	Yes	*Pre-installed VOIP applications are considered.
14	GPRS/EDGE + Wi-Fi 5 GHz	Yes*	Yes*	Yes	Yes	*Pre-installed VOIP applications are considered. ^Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
15	GPRS/EDGE + Bluetooth 2.4 GHz	Yes*^	Yes*	Yes	Yes	*Pre-installed VOIP applications are considered. ^Bluetooth Tethering is considered.
16	GPRS/EDGE + Bluetooth 2.4 GHz + Wi-Fi 5 GHz	Yes*^	Yes*	Yes	Yes	*Pre-installed VOIP applications are considered. ^Bluetooth Tethering is considered. ^Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
17	Bluetooth 2.4 GHz + Wi-Fi 5 GHz	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered.

Notes:

1. WiFi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC).
2. WiFi 5GHz is supported Hotspot in UNII B1.B3 and WiFi-Direct(GO/GC) in UNII B1.B3.
3. LTE, WCDMA, GPRS/EDGE is supported Hotspot.
4. VoIP is supported in LTE, WCDMA, GSM
5. Bluetooth and WiFi can not transmit simultaneously at 2.4G band.
6. GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.

## 12.4 Head SAR Simultaneous Transmission Analysis

**Table 12.4.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Held to Ear)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.293	0.079	0.345	0.372	0.638	0.717
		Right Touch	0.201	0.263	0.496	0.464	0.697	0.960
		Left Tilt	0.109	0.076	0.307	0.185	0.416	0.492
		Right Tilt	0.170	0.167	0.423	0.337	0.593	0.760
	GPRS 850	Left Touch	0.327	0.079	0.345	0.406	0.672	0.751
		Right Touch	0.266	0.263	0.496	0.529	0.762	1.025
		Left Tilt	0.146	0.076	0.307	0.222	0.453	0.529
		Right Tilt	0.197	0.167	0.423	0.364	0.620	0.787
	GSM 1900	Left Touch	0.130	0.079	0.345	0.209	0.475	0.554
		Right Touch	0.278	0.263	0.496	0.541	0.774	1.037
		Left Tilt	0.098	0.076	0.307	0.174	0.405	0.481
		Right Tilt	0.061	0.167	0.423	0.228	0.484	0.651
	GPRS 1900	Left Touch	0.168	0.079	0.345	0.247	0.513	0.592
		Right Touch	0.337	0.263	0.496	0.600	0.833	1.096
		Left Tilt	0.118	0.076	0.307	0.194	0.425	0.501
		Right Tilt	0.066	0.167	0.423	0.233	0.489	0.656
	WCDMA 850	Left Touch	0.301	0.079	0.345	0.380	0.646	0.725
		Right Touch	0.260	0.263	0.496	0.533	0.756	1.019
		Left Tilt	0.132	0.076	0.307	0.208	0.439	0.515
		Right Tilt	0.142	0.167	0.423	0.309	0.565	0.732
	WCDMA 1700	Left Touch	0.393	0.079	0.345	0.472	0.738	0.817
		Right Touch	0.684	0.263	0.496	0.947	1.180	1.443
		Left Tilt	0.125	0.076	0.307	0.201	0.432	0.508
		Right Tilt	0.245	0.167	0.423	0.412	0.668	0.835
	WCDMA 1900	Left Touch	0.285	0.079	0.345	0.364	0.630	0.709
		Right Touch	0.547	0.263	0.496	0.610	0.843	1.206
		Left Tilt	0.189	0.076	0.307	0.255	0.486	0.572
		Right Tilt	0.136	0.167	0.423	0.303	0.559	0.726
	LTE Band 12	Left Touch	0.233	0.079	0.345	0.312	0.578	0.657
		Right Touch	0.228	0.263	0.496	0.491	0.724	0.987
		Left Tilt	0.121	0.076	0.307	0.197	0.428	0.504
		Right Tilt	0.155	0.167	0.423	0.322	0.578	0.745
	LTE Band 17	Left Touch	0.250	0.079	0.345	0.329	0.595	0.674
		Right Touch	0.152	0.263	0.496	0.415	0.648	0.911
		Left Tilt	0.248	0.076	0.307	0.324	0.555	0.821
		Right Tilt	0.163	0.167	0.423	0.330	0.586	0.753
	LTE Band 13	Left Touch	0.255	0.079	0.345	0.334	0.600	0.679
		Right Touch	0.187	0.263	0.496	0.450	0.683	0.946
		Left Tilt	0.134	0.076	0.307	0.210	0.441	0.517
		Right Tilt	0.133	0.167	0.423	0.300	0.556	0.723
	LTE Band 26	Left Touch	0.305	0.079	0.345	0.384	0.650	0.729
		Right Touch	0.270	0.263	0.496	0.533	0.766	1.029
		Left Tilt	0.162	0.076	0.307	0.238	0.469	0.545
		Right Tilt	0.152	0.167	0.423	0.319	0.575	0.742
	LTE Band 66	Left Touch	0.349	0.079	0.345	0.428	0.694	0.773
		Right Touch	0.688	0.263	0.496	0.951	1.184	1.447
		Left Tilt	0.129	0.076	0.307	0.205	0.436	0.512
		Right Tilt	0.190	0.167	0.423	0.357	0.613	0.780
	LTE Band 25	Left Touch	0.229	0.079	0.345	0.308	0.574	0.653
		Right Touch	0.477	0.263	0.496	0.740	0.973	1.236
		Left Tilt	0.133	0.076	0.307	0.209	0.440	0.516
		Right Tilt	0.111	0.167	0.423	0.278	0.534	0.701
	LTE Band 7	Left Touch	0.314	0.079	0.345	0.393	0.659	0.738
		Right Touch	0.713	0.263	0.496	1.076	1.299	1.472
		Left Tilt	0.352	0.076	0.307	0.428	0.659	0.735
		Right Tilt	0.203	0.167	0.423	0.370	0.626	0.793
	LTE Band 41	Left Touch	0.241	0.079	0.345	0.320	0.586	0.665
		Right Touch	0.325	0.263	0.496	0.588	0.821	1.084
		Left Tilt	0.157	0.076	0.307	0.233	0.464	0.540
		Right Tilt	0.091	0.167	0.423	0.258	0.514	0.681

**Table 12.4.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Held to Ear)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.293	0.079	0.393	0.372	0.686	0.765
		Right Touch	0.201	0.263	0.572	0.464	0.773	1.036
		Left Tilt	0.109	0.076	0.393	0.185	0.502	0.578
		Right Tilt	0.170	0.167	0.468	0.337	0.638	0.805
	GPRS 850	Left Touch	0.327	0.079	0.393	0.406	0.720	0.799
		Right Touch	0.266	0.263	0.572	0.538	0.838	1.101
		Left Tilt	0.146	0.076	0.393	0.222	0.539	0.619
		Right Tilt	0.197	0.167	0.468	0.364	0.665	0.832
	GSM 1900	Left Touch	0.130	0.079	0.393	0.209	0.523	0.602
		Right Touch	0.278	0.263	0.572	0.541	0.850	1.113
		Left Tilt	0.098	0.076	0.393	0.174	0.491	0.567
		Right Tilt	0.061	0.167	0.468	0.228	0.529	0.696
	GPRS 1900	Left Touch	0.168	0.079	0.393	0.247	0.561	0.640
		Right Touch	0.337	0.263	0.572	0.600	0.909	1.172
		Left Tilt	0.118	0.076	0.393	0.194	0.511	0.587
		Right Tilt	0.066	0.167	0.468	0.233	0.534	0.701
	WCDMA 850	Left Touch	0.301	0.079	0.393	0.380	0.694	0.773
		Right Touch	0.260	0.263	0.572	0.523	0.832	1.095
		Left Tilt	0.132	0.076	0.393	0.208	0.525	0.601
		Right Tilt	0.142	0.167	0.468	0.309	0.610	0.777
	WCDMA 1700	Left Touch	0.393	0.079	0.393	0.472	0.786	0.865
		Right Touch	0.684	0.263	0.572	0.947	1.256	1.519
		Left Tilt	0.125	0.076	0.393	0.201	0.518	0.594
		Right Tilt	0.245	0.167	0.468	0.412	0.673	0.840
	WCDMA 1900	Left Touch	0.285	0.079	0.393	0.364	0.678	0.757
		Right Touch	0.547	0.263	0.572	0.810	1.119	1.382
		Left Tilt	0.189	0.076	0.393	0.265	0.582	0.658
		Right Tilt	0.136	0.167	0.468	0.303	0.604	0.771
	LTE Band 12	Left Touch	0.233	0.079	0.393	0.312	0.626	0.705
		Right Touch	0.228	0.263	0.572	0.491	0.800	1.063
		Left Tilt	0.121	0.076	0.393	0.197	0.514	0.590
		Right Tilt	0.155	0.167	0.468	0.322	0.623	0.790
	LTE Band 17	Left Touch	0.250	0.079	0.393	0.329	0.643	0.722
		Right Touch	0.152	0.263	0.572	0.415	0.724	0.987
		Left Tilt	0.248	0.076	0.393	0.324	0.641	0.717
		Right Tilt	0.163	0.167	0.468	0.330	0.631	0.798
	LTE Band 13	Left Touch	0.255	0.079	0.393	0.334	0.648	0.727
		Right Touch	0.187	0.263	0.572	0.450	0.759	1.022
		Left Tilt	0.134	0.076	0.393	0.210	0.527	0.603
		Right Tilt	0.133	0.167	0.468	0.300	0.601	0.768
	LTE Band 26	Left Touch	0.305	0.079	0.393	0.384	0.698	0.777
		Right Touch	0.270	0.263	0.572	0.533	0.842	1.105
		Left Tilt	0.162	0.076	0.393	0.238	0.555	0.631
		Right Tilt	0.152	0.167	0.468	0.319	0.620	0.787
	LTE Band 66	Left Touch	0.349	0.079	0.393	0.428	0.742	0.821
		Right Touch	0.688	0.263	0.572	0.951	1.260	1.523
		Left Tilt	0.129	0.076	0.393	0.205	0.522	0.598
		Right Tilt	0.190	0.167	0.468	0.357	0.658	0.825
	LTE Band 25	Left Touch	0.229	0.079	0.393	0.308	0.622	0.701
		Right Touch	0.477	0.263	0.572	0.740	1.049	1.312
		Left Tilt	0.133	0.076	0.393	0.209	0.526	0.602
		Right Tilt	0.111	0.167	0.468	0.278	0.579	0.746
	LTE Band 7	Left Touch	0.314	0.079	0.393	0.393	0.707	0.786
		Right Touch	0.713	0.263	0.572	0.976	1.285	1.548
		Left Tilt	0.352	0.076	0.393	0.428	0.745	0.821
		Right Tilt	0.203	0.167	0.468	0.370	0.671	0.838
	LTE Band 41	Left Touch	0.241	0.079	0.393	0.320	0.634	0.713
		Right Touch	0.325	0.263	0.572	0.588	0.897	1.160
		Left Tilt	0.157	0.076	0.393	0.233	0.550	0.626
		Right Tilt	0.091	0.167	0.468	0.258	0.559	0.726



**Table 12.4.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Held to Ear)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.293	0.079	0.300	0.372	0.593	0.672
		Right Touch	0.201	0.263	0.489	0.454	0.680	0.953
		Right Tilt	0.108	0.076	0.327	0.185	0.436	0.512
	GPRS 850	Left Touch	0.170	0.167	0.383	0.337	0.553	0.720
		Right Touch	0.327	0.079	0.300	0.406	0.627	0.706
		Right Tilt	0.266	0.263	0.489	0.529	0.755	1.018
	GSM 1900	Left Touch	0.146	0.076	0.327	0.222	0.473	0.549
		Right Touch	0.197	0.167	0.383	0.364	0.580	0.747
		Right Tilt	0.130	0.079	0.300	0.209	0.430	0.509
	GPRS 1900	Left Touch	0.278	0.263	0.489	0.541	0.767	1.030
		Right Touch	0.098	0.076	0.327	0.174	0.425	0.501
		Right Tilt	0.081	0.167	0.383	0.228	0.444	0.611
	WCDMA 850	Left Touch	0.168	0.079	0.300	0.247	0.468	0.547
		Right Touch	0.337	0.263	0.489	0.600	0.826	1.089
		Right Tilt	0.118	0.076	0.327	0.194	0.445	0.521
	WCDMA 1700	Left Touch	0.066	0.167	0.383	0.233	0.449	0.616
		Right Touch	0.301	0.079	0.300	0.380	0.601	0.680
		Right Tilt	0.260	0.263	0.489	0.523	0.749	1.012
	WCDMA 1900	Left Touch	0.132	0.076	0.327	0.238	0.459	0.535
		Right Touch	0.142	0.167	0.383	0.309	0.525	0.692
		Right Tilt	0.393	0.079	0.300	0.472	0.693	0.772
	LTE Band 12	Left Touch	0.684	0.263	0.489	0.947	1.173	1.436
		Right Touch	0.125	0.076	0.327	0.201	0.452	0.528
		Right Tilt	0.245	0.167	0.383	0.412	0.628	0.795
	LTE Band 17	Left Touch	0.285	0.079	0.300	0.364	0.585	0.664
		Right Touch	0.547	0.263	0.489	0.810	1.036	1.299
		Right Tilt	0.189	0.076	0.327	0.285	0.516	0.592
	LTE Band 25	Left Touch	0.136	0.167	0.383	0.333	0.519	0.686
		Right Touch	0.233	0.079	0.300	0.312	0.533	0.612
		Right Tilt	0.228	0.263	0.489	0.491	0.717	0.980
	LTE Band 13	Left Touch	0.121	0.076	0.327	0.197	0.448	0.524
		Right Touch	0.155	0.167	0.383	0.322	0.538	0.705
		Right Tilt	0.250	0.079	0.300	0.329	0.550	0.629
	LTE Band 26	Left Touch	0.152	0.263	0.489	0.415	0.641	0.904
		Right Touch	0.248	0.076	0.327	0.324	0.575	0.651
		Right Tilt	0.163	0.167	0.383	0.330	0.546	0.713
	LTE Band 66	Left Touch	0.255	0.079	0.300	0.334	0.555	0.634
		Right Touch	0.187	0.263	0.489	0.450	0.676	0.939
		Right Tilt	0.134	0.076	0.327	0.210	0.461	0.537
	LTE Band 41	Left Touch	0.133	0.167	0.383	0.300	0.516	0.683
		Right Touch	0.305	0.079	0.300	0.384	0.605	0.684
		Right Tilt	0.270	0.263	0.489	0.533	0.759	1.022
	LTE Band 7	Left Touch	0.162	0.076	0.327	0.238	0.489	0.565
		Right Touch	0.152	0.167	0.383	0.319	0.535	0.702
		Right Tilt	0.349	0.079	0.300	0.428	0.649	0.728
	LTE Band 25	Left Touch	0.688	0.263	0.489	0.951	1.177	1.440
		Right Touch	0.129	0.076	0.327	0.205	0.456	0.532
		Right Tilt	0.190	0.167	0.383	0.357	0.573	0.740
	LTE Band 41	Left Touch	0.228	0.079	0.300	0.308	0.529	0.608
		Right Touch	0.477	0.263	0.489	0.740	0.966	1.229
Right Tilt		0.133	0.076	0.327	0.209	0.460	0.536	
LTE Band 13	Left Touch	0.111	0.167	0.383	0.278	0.494	0.661	
	Right Touch	0.314	0.079	0.300	0.393	0.614	0.693	
	Right Tilt	0.713	0.263	0.489	0.976	1.202	1.465	
LTE Band 25	Left Touch	0.352	0.076	0.327	0.428	0.679	0.755	
	Right Touch	0.203	0.167	0.383	0.370	0.586	0.753	
	Right Tilt	0.241	0.079	0.300	0.320	0.541	0.620	
LTE Band 17	Left Touch	0.325	0.263	0.489	0.588	0.814	1.077	
	Right Touch	0.157	0.076	0.327	0.233	0.484	0.560	
	Right Tilt	0.091	0.167	0.383	0.258	0.474	0.641	

**Table 12.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Held to Ear)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.293	0.362	0.655
		Right Touch	0.201	0.628	1.029
		Right Tilt	0.109	0.274	0.383
	GPRS 850	Left Touch	0.170	0.585	0.755
		Right Touch	0.327	0.362	0.689
		Right Tilt	0.266	0.828	1.094
	GSM 1900	Left Touch	0.146	0.274	0.420
		Right Touch	0.197	0.585	0.782
		Right Tilt	0.130	0.362	0.492
	GPRS 1900	Left Touch	0.278	0.828	1.106
		Right Touch	0.098	0.489	0.587
		Right Tilt	0.081	0.585	0.666
	WCDMA 850	Left Touch	0.168	0.362	0.530
		Right Touch	0.337	0.828	1.165
		Right Tilt	0.118	0.274	0.392
	WCDMA 1700	Left Touch	0.066	0.585	0.651
		Right Touch	0.301	0.362	0.663
		Right Tilt	0.260	0.828	1.088
	WCDMA 1900	Left Touch	0.132	0.274	0.406
		Right Touch	0.142	0.585	0.727
		Right Tilt	0.393	0.362	0.755
	LTE Band 12	Left Touch	0.684	0.828	1.512
		Right Touch	0.125	0.274	0.399
		Right Tilt	0.245	0.585	0.830
	LTE Band 17	Left Touch	0.285	0.362	0.647
		Right Touch	0.547	0.828	1.375
		Right Tilt	0.189	0.274	0.463
	LTE Band 25	Left Touch	0.136	0.585	0.721
		Right Touch	0.233	0.362	0.595
		Right Tilt	0.228	0.828	1.056
	LTE Band 13	Left Touch	0.121	0.274	0.372
		Right Touch	0.155	0.585	0.735
		Right Tilt	0.250	0.362	0.612
	LTE Band 26	Left Touch	0.152	0.828	0.980
		Right Touch	0.248	0.274	0.522
		Right Tilt	0.163	0.585	0.748
	LTE Band 66	Left Touch	0.255	0.362	0.617
		Right Touch	0.187	0.828	1.015
		Right Tilt	0.134	0.274	0.408
	LTE Band 41	Left Touch	0.133	0.585	0.718
		Right Touch	0.305	0.362	0.667
		Right Tilt	0.270	0.828	1.098
	LTE Band 7	Left Touch	0.162	0.274	0.436
		Right Touch	0.152	0.585	0.737
		Right Tilt	0.349	0.362	0.711
	LTE Band 25	Left Touch	0.688	0.828	1.516
		Right Touch	0.129	0.274	0.403
		Right Tilt	0.190	0.585	0.775
	LTE Band 13	Left Touch	0.228	0.362	0.591
		Right Touch	0.477	0.828	1.305
Right Tilt		0.133	0.274	0.407	
LTE Band 17	Left Touch	0.111	0.585	0.696	
	Right Touch	0.314	0.362	0.676	
	Right Tilt	0.713	0.828	1.541	
LTE Band 25	Left Touch	0.352	0.274	0.626	
	Right Touch	0.203	0.585	0.788	
	Right Tilt	0.241	0.362	0.603	
LTE Band 17	Left Touch	0.325	0.828	1.153	
	Right Touch	0.157	0.274	0.431	
	Right Tilt	0.091	0.585	0.676	

**Table 12.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Held to Ear)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.293	0.345	0.638
		Right Touch	0.201	0.496	0.697
		Left Tilt	0.108	0.307	0.416
		Right Tilt	0.170	0.423	0.593
	GPRS 850	Left Touch	0.327	0.345	0.672
		Right Touch	0.266	0.496	0.762
		Left Tilt	0.146	0.307	0.453
		Right Tilt	0.197	0.423	0.620
	GSM 1900	Left Touch	0.130	0.345	0.475
		Right Touch	0.278	0.496	0.774
		Left Tilt	0.098	0.307	0.405
		Right Tilt	0.081	0.423	0.484
	GPRS 1900	Left Touch	0.168	0.345	0.513
		Right Touch	0.337	0.496	0.833
		Left Tilt	0.118	0.307	0.425
		Right Tilt	0.066	0.423	0.489
	WCDMA 850	Left Touch	0.301	0.345	0.646
		Right Touch	0.260	0.496	0.756
		Left Tilt	0.187	0.307	0.439
		Right Tilt	0.142	0.423	0.565
	WCDMA 1700	Left Touch	0.393	0.345	0.738
		Right Touch	0.684	0.496	1.180
		Left Tilt	0.125	0.307	0.432
		Right Tilt	0.245	0.423	0.668
	WCDMA 1900	Left Touch	0.285	0.345	0.630
		Right Touch	0.547	0.496	1.043
		Left Tilt	0.189	0.307	0.496
		Right Tilt	0.136	0.423	0.559
	LTE Band 12	Left Touch	0.233	0.345	0.578
		Right Touch	0.228	0.496	0.724
		Left Tilt	0.121	0.307	0.428
		Right Tilt	0.155	0.423	0.578
	LTE Band 17	Left Touch	0.250	0.345	0.595
		Right Touch	0.152	0.496	0.648
		Left Tilt	0.248	0.307	0.555
		Right Tilt	0.163	0.423	0.586
	LTE Band 13	Left Touch	0.255	0.345	0.600
		Right Touch	0.187	0.496	0.683
		Left Tilt	0.134	0.307	0.441
		Right Tilt	0.133	0.423	0.556
	LTE Band 26	Left Touch	0.305	0.345	0.650
		Right Touch	0.270	0.496	0.766
		Left Tilt	0.162	0.307	0.469
		Right Tilt	0.152	0.423	0.575
	LTE Band 66	Left Touch	0.349	0.345	0.694
		Right Touch	0.688	0.496	1.184
		Left Tilt	0.129	0.307	0.436
		Right Tilt	0.190	0.423	0.613
	LTE Band 25	Left Touch	0.229	0.345	0.574
		Right Touch	0.477	0.496	0.973
Left Tilt		0.133	0.307	0.440	
Right Tilt		0.111	0.423	0.534	
LTE Band 7	Left Touch	0.314	0.345	0.659	
	Right Touch	0.713	0.496	1.209	
	Left Tilt	0.352	0.307	0.659	
	Right Tilt	0.203	0.423	0.626	
LTE Band 41	Left Touch	0.241	0.345	0.586	
	Right Touch	0.325	0.496	0.821	
	Left Tilt	0.157	0.307	0.464	
	Right Tilt	0.091	0.423	0.514	

**Table 12.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Held to Ear)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.293	0.393	0.686
		Right Touch	0.201	0.572	0.773
		Left Tilt	0.109	0.393	0.502
		Right Tilt	0.170	0.468	0.638
	GPRS 850	Left Touch	0.327	0.393	0.720
		Right Touch	0.266	0.572	0.838
		Left Tilt	0.146	0.393	0.539
		Right Tilt	0.197	0.468	0.665
	GSM 1900	Left Touch	0.130	0.393	0.523
		Right Touch	0.278	0.572	0.850
		Left Tilt	0.098	0.393	0.491
		Right Tilt	0.081	0.468	0.529
	GPRS 1900	Left Touch	0.168	0.393	0.561
		Right Touch	0.337	0.572	0.909
		Left Tilt	0.118	0.393	0.511
		Right Tilt	0.066	0.468	0.534
	WCDMA 850	Left Touch	0.301	0.393	0.694
		Right Touch	0.260	0.572	0.832
		Left Tilt	0.132	0.393	0.525
		Right Tilt	0.142	0.468	0.610
	WCDMA 1700	Left Touch	0.393	0.393	0.786
		Right Touch	0.684	0.572	1.256
		Left Tilt	0.125	0.393	0.518
		Right Tilt	0.245	0.468	0.713
	WCDMA 1900	Left Touch	0.285	0.393	0.678
		Right Touch	0.547	0.572	1.119
		Left Tilt	0.189	0.393	0.582
		Right Tilt	0.136	0.468	0.604
	LTE Band 12	Left Touch	0.233	0.393	0.626
		Right Touch	0.228	0.572	0.800
		Left Tilt	0.121	0.393	0.514
		Right Tilt	0.155	0.468	0.623
	LTE Band 17	Left Touch	0.250	0.393	0.643
		Right Touch	0.152	0.572	0.724
		Left Tilt	0.248	0.393	0.641
		Right Tilt	0.163	0.468	0.631
	LTE Band 13	Left Touch	0.255	0.393	0.648
		Right Touch	0.187	0.572	0.759
		Left Tilt	0.134	0.393	0.527
		Right Tilt	0.133	0.468	0.601
	LTE Band 26	Left Touch	0.305	0.393	0.698
		Right Touch	0.270	0.572	0.842
		Left Tilt	0.162	0.393	0.555
		Right Tilt	0.152	0.468	0.620
	LTE Band 66	Left Touch	0.349	0.393	0.742
		Right Touch	0.688	0.572	1.260
		Left Tilt	0.129	0.393	0.522
		Right Tilt	0.190	0.468	0.658
	LTE Band 25	Left Touch	0.229	0.393	0.622
		Right Touch	0.477	0.572	1.049
Left Tilt		0.133	0.393	0.526	
Right Tilt		0.111	0.468	0.579	
LTE Band 7	Left Touch	0.314	0.393	0.707	
	Right Touch	0.713	0.572	1.285	
	Left Tilt	0.352	0.393	0.745	
	Right Tilt	0.203	0.468	0.671	
LTE Band 41	Left Touch	0.241	0.393	0.634	
	Right Touch	0.325	0.572	0.897	
	Left Tilt	0.157	0.393	0.550	
	Right Tilt	0.091	0.468	0.559	

**Table 12.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Held to Ear)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.293	0.300	0.593
		Right Touch	0.201	0.489	0.690
		Left Tilt	0.109	0.327	0.436
		Right Tilt	0.170	0.383	0.553
	GPRS 850	Left Touch	0.327	0.300	0.627
		Right Touch	0.266	0.489	0.755
		Left Tilt	0.146	0.327	0.473
		Right Tilt	0.197	0.383	0.580
	GSM 1900	Left Touch	0.130	0.300	0.430
		Right Touch	0.278	0.489	0.767
		Left Tilt	0.098	0.327	0.425
		Right Tilt	0.081	0.383	0.464
	GPRS 1900	Left Touch	0.168	0.300	0.468
		Right Touch	0.337	0.489	0.826
		Left Tilt	0.118	0.327	0.445
		Right Tilt	0.066	0.383	0.449
	WCDMA 850	Left Touch	0.301	0.300	0.601
		Right Touch	0.260	0.489	0.749
		Left Tilt	0.132	0.327	0.459
		Right Tilt	0.142	0.383	0.525
	WCDMA 1700	Left Touch	0.393	0.300	0.693
		Right Touch	0.684	0.489	1.173
		Left Tilt	0.125	0.327	0.452
		Right Tilt	0.245	0.383	0.628
	WCDMA 1900	Left Touch	0.285	0.300	0.585
		Right Touch	0.547	0.489	1.036
		Left Tilt	0.189	0.327	0.516
		Right Tilt	0.136	0.383	0.519
	LTE Band 12	Left Touch	0.233	0.300	0.533
		Right Touch	0.228	0.489	0.717
		Left Tilt	0.121	0.327	0.448
		Right Tilt	0.155	0.383	0.538
	LTE Band 17	Left Touch	0.250	0.300	0.550
		Right Touch	0.152	0.489	0.641
		Left Tilt	0.248	0.327	0.575
		Right Tilt	0.163	0.383	0.546
	LTE Band 13	Left Touch	0.255	0.300	0.555
		Right Touch	0.187	0.489	0.676
		Left Tilt	0.134	0.327	0.461
		Right Tilt	0.133	0.383	0.516
	LTE Band 26	Left Touch	0.305	0.300	0.605
		Right Touch	0.270	0.489	0.759
		Left Tilt	0.162	0.327	0.489
		Right Tilt	0.152	0.383	0.535
	LTE Band 66	Left Touch	0.349	0.300	0.649
		Right Touch	0.688	0.489	1.177
		Left Tilt	0.129	0.327	0.456
		Right Tilt	0.190	0.383	0.573
	LTE Band 25	Left Touch	0.229	0.300	0.529
		Right Touch	0.477	0.489	0.966
Left Tilt		0.133	0.327	0.460	
Right Tilt		0.111	0.383	0.494	
LTE Band 7	Left Touch	0.314	0.300	0.614	
	Right Touch	0.713	0.489	1.202	
	Left Tilt	0.352	0.327	0.679	
	Right Tilt	0.203	0.383	0.586	
LTE Band 41	Left Touch	0.241	0.300	0.541	
	Right Touch	0.325	0.489	0.814	
	Left Tilt	0.157	0.327	0.484	
	Right Tilt	0.091	0.383	0.474	

**Table 12.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Held to Ear)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.293	0.079	0.372
		Right Touch	0.201	0.263	0.464
		Left Tilt	0.109	0.076	0.185
		Right Tilt	0.170	0.167	0.337
	GPRS 850	Left Touch	0.327	0.079	0.406
		Right Touch	0.266	0.263	0.529
		Left Tilt	0.146	0.076	0.222
		Right Tilt	0.197	0.167	0.364
	GSM 1900	Left Touch	0.130	0.079	0.209
		Right Touch	0.278	0.263	0.541
		Left Tilt	0.098	0.076	0.174
		Right Tilt	0.081	0.167	0.228
	GPRS 1900	Left Touch	0.168	0.079	0.247
		Right Touch	0.337	0.263	0.600
		Left Tilt	0.118	0.076	0.194
		Right Tilt	0.066	0.167	0.233
	WCDMA 850	Left Touch	0.301	0.079	0.380
		Right Touch	0.260	0.263	0.523
		Left Tilt	0.132	0.076	0.208
		Right Tilt	0.142	0.167	0.309
	WCDMA 1700	Left Touch	0.393	0.079	0.472
		Right Touch	0.684	0.263	0.947
		Left Tilt	0.125	0.076	0.201
		Right Tilt	0.245	0.167	0.412
	WCDMA 1900	Left Touch	0.285	0.079	0.364
		Right Touch	0.547	0.263	0.810
		Left Tilt	0.189	0.076	0.265
		Right Tilt	0.136	0.167	0.303
	LTE Band 12	Left Touch	0.233	0.079	0.312
		Right Touch	0.228	0.263	0.491
		Left Tilt	0.121	0.076	0.197
		Right Tilt	0.155	0.167	0.322
	LTE Band 17	Left Touch	0.250	0.079	0.329
		Right Touch	0.152	0.263	0.415
		Left Tilt	0.248	0.076	0.324
		Right Tilt	0.163	0.167	0.330
	LTE Band 13	Left Touch	0.255	0.079	0.334
		Right Touch	0.187	0.263	0.450
		Left Tilt	0.134	0.076	0.210
		Right Tilt	0.133	0.167	0.300
	LTE Band 26	Left Touch	0.305	0.079	0.384
		Right Touch	0.270	0.263	0.533
		Left Tilt	0.162	0.076	0.238
		Right Tilt	0.152	0.167	0.319
	LTE Band 66	Left Touch	0.349	0.079	0.428
		Right Touch	0.688	0.263	0.951
		Left Tilt	0.129	0.076	0.205
		Right Tilt	0.190	0.167	0.357
	LTE Band 25	Left Touch	0.229	0.079	0.308
		Right Touch	0.477	0.263	0.740
Left Tilt		0.133	0.076	0.209	
Right Tilt		0.111	0.167	0.278	
LTE Band 7	Left Touch	0.314	0.079	0.393	
	Right Touch	0.713	0.263	0.976	
	Left Tilt	0.352	0.076	0.428	
	Right Tilt	0.203	0.167	0.370	
LTE Band 41	Left Touch	0.241	0.079	0.320	
	Right Touch	0.325	0.263	0.588	
	Left Tilt	0.157	0.076	0.233	
	Right Tilt	0.091	0.167	0.258	

**Table 12.4.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Held to Ear)**

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN	Left Touch	0.079	0.345	0.424
		Right Touch	0.263	0.496	<b>0.759</b>
		Left Tilt	0.076	0.307	0.383
		Right Tilt	0.167	0.423	0.590
	5.6G W-LAN	Left Touch	0.079	0.393	0.472
		Right Touch	0.263	0.572	<b>0.835</b>
		Left Tilt	0.076	0.393	0.469
		Right Tilt	0.167	0.468	0.635
	5.8G W-LAN	Left Touch	0.079	0.390	0.379
		Right Touch	0.263	0.489	<b>0.752</b>
		Left Tilt	0.076	0.327	0.403
		Right Tilt	0.167	0.383	0.550

## 12.5 Body-Worn Simultaneous Transmission Analysis

**Table 12.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			Bluetooth SAR (W/kg)			5.3G W-LAN SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3	1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.185	0.024	0.094	0.209	0.312	0.303						
		Rear	0.370	0.045	0.320	0.415	0.690	0.735						
	GPRS 850	Front	0.223	0.024	0.094	0.247	0.317	0.341						
		Rear	0.408	0.045	0.320	0.453	0.728	0.773						
	GSM 1900	Front	0.288	0.024	0.094	0.312	0.382	0.406						
		Rear	0.440	0.045	0.320	0.485	0.760	0.805						
	GPRS 1900	Front	0.314	0.024	0.094	0.338	0.408	0.432						
		Rear	0.471	0.045	0.320	0.516	0.791	0.836						
	WCDMA 850	Front	0.214	0.024	0.094	0.238	0.308	0.332						
		Rear	0.471	0.045	0.320	0.516	0.791	0.836						
	WCDMA 1700	Front	0.760	0.024	0.094	0.784	0.854	0.878						
		Rear	1.025	0.045	0.320	1.070	1.345	1.390						
	WCDMA 1900	Front	0.555	0.024	0.094	0.579	0.649	0.673						
		Rear	0.931	0.045	0.320	0.976	1.251	1.296						
	LTE Band 12	Front	0.186	0.024	0.094	0.210	0.280	0.304						
		Rear	0.414	0.045	0.320	0.459	0.734	0.779						
	LTE Band 17	Front	0.250	0.024	0.094	0.274	0.344	0.368						
		Rear	0.510	0.045	0.320	0.555	0.830	0.875						
	LTE Band 13	Front	0.207	0.024	0.094	0.231	0.301	0.325						
		Rear	0.461	0.045	0.320	0.506	0.781	0.826						
	LTE Band 26	Front	0.200	0.024	0.094	0.224	0.294	0.318						
		Rear	0.389	0.045	0.320	0.434	0.709	0.754						
	LTE Band 66	Front	0.661	0.024	0.094	0.685	0.755	0.779						
		Rear	0.838	0.045	0.320	0.883	1.158	1.203						
LTE Band 25	Front	0.449	0.024	0.094	0.473	0.543	0.567							
	Rear	0.600	0.045	0.320	0.645	0.920	0.965							
LTE Band 7	Front	0.714	0.024	0.094	0.738	0.808	0.832							
	Rear	0.969	0.045	0.320	1.014	1.289	1.334							
LTE Band 41	Front	0.543	0.024	0.094	0.567	0.637	0.661							
	Rear	0.826	0.045	0.320	0.871	1.146	1.191							

**Table 12.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			Bluetooth SAR (W/kg)			5.6G W-LAN SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3	1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.185	0.024	0.127	0.209	0.312	0.336						
		Rear	0.370	0.045	0.517	0.415	0.887	0.932						
	GPRS 850	Front	0.223	0.024	0.127	0.247	0.350	0.374						
		Rear	0.408	0.045	0.517	0.453	0.925	0.970						
	GSM 1900	Front	0.288	0.024	0.127	0.312	0.415	0.439						
		Rear	0.440	0.045	0.517	0.485	0.957	1.002						
	GPRS 1900	Front	0.314	0.024	0.127	0.338	0.441	0.465						
		Rear	0.471	0.045	0.517	0.516	0.988	1.033						
	WCDMA 850	Front	0.214	0.024	0.127	0.238	0.341	0.365						
		Rear	0.471	0.045	0.517	0.516	0.988	1.033						
	WCDMA 1700	Front	0.760	0.024	0.127	0.784	0.887	0.911						
		Rear	1.025	0.045	0.517	1.070	1.542	1.587						
	WCDMA 1900	Front	0.555	0.024	0.127	0.579	0.662	0.686						
		Rear	0.931	0.045	0.517	0.976	1.448	1.493						
	LTE Band 12	Front	0.186	0.024	0.127	0.210	0.313	0.337						
		Rear	0.414	0.045	0.517	0.459	0.931	0.976						
	LTE Band 17	Front	0.250	0.024	0.127	0.274	0.377	0.401						
		Rear	0.510	0.045	0.517	0.555	1.027	1.072						
	LTE Band 13	Front	0.207	0.024	0.127	0.231	0.334	0.358						
		Rear	0.461	0.045	0.517	0.506	0.978	1.023						
	LTE Band 26	Front	0.200	0.024	0.127	0.224	0.327	0.351						
		Rear	0.389	0.045	0.517	0.434	0.906	0.951						
	LTE Band 66	Front	0.661	0.024	0.127	0.685	0.788	0.812						
		Rear	0.838	0.045	0.517	0.883	1.355	1.400						
LTE Band 25	Front	0.449	0.024	0.127	0.473	0.576	0.600							
	Rear	0.600	0.045	0.517	0.645	1.117	1.162							
LTE Band 7	Front	0.714	0.024	0.127	0.738	0.841	0.865							
	Rear	0.969	0.045	0.517	1.014	1.486	1.531							
LTE Band 41	Front	0.543	0.024	0.127	0.567	0.670	0.694							
	Rear	0.826	0.045	0.517	0.871	1.343	1.388							

**Table 12.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			Bluetooth SAR (W/kg)			5.8G W-LAN SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3	1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.185	0.024	0.175	0.209	0.360	0.384						
		Rear	0.370	0.045	0.470	0.415	0.840	0.885						
	GPRS 850	Front	0.223	0.024	0.175	0.247	0.398	0.422						
		Rear	0.408	0.045	0.470	0.453	0.878	0.923						
	GSM 1900	Front	0.288	0.024	0.175	0.312	0.463	0.487						
		Rear	0.440	0.045	0.470	0.485	0.910	0.955						
	GPRS 1900	Front	0.314	0.024	0.175	0.338	0.489	0.513						
		Rear	0.471	0.045	0.470	0.516	0.941	0.986						
	WCDMA 850	Front	0.214	0.024	0.175	0.238	0.389	0.413						
		Rear	0.471	0.045	0.470	0.516	0.941	0.986						
	WCDMA 1700	Front	0.760	0.024	0.175	0.784	0.935	0.959						
		Rear	1.025	0.045	0.470	1.070	1.495	1.540						
	WCDMA 1900	Front	0.555	0.024	0.175	0.579	0.730	0.754						
		Rear	0.931	0.045	0.470	0.976	1.401	1.446						
	LTE Band 12	Front	0.186	0.024	0.175	0.210	0.361	0.385						
		Rear	0.414	0.045	0.470	0.459	0.884	0.929						
	LTE Band 17	Front	0.250	0.024	0.175	0.274	0.425	0.449						
		Rear	0.510	0.045	0.470	0.555	0.980	1.025						
	LTE Band 13	Front	0.207	0.024	0.175	0.231	0.382	0.406						
		Rear	0.461	0.045	0.470	0.506	0.931	0.976						
	LTE Band 26	Front	0.200	0.024	0.175	0.224	0.375	0.399						
		Rear	0.389	0.045	0.470	0.434	0.859	0.904						
	LTE Band 66	Front	0.661	0.024	0.175	0.685	0.836	0.860						
		Rear	0.838	0.045	0.470	0.883	1.308	1.353						
LTE Band 25	Front	0.449	0.024	0.175	0.473	0.624	0.648							
	Rear	0.600	0.045	0.470	0.645	1.070	1.115							
LTE Band 7	Front	0.714	0.024	0.175	0.738	0.889	0.913							
	Rear	0.969	0.045	0.470	1.014	1.439	1.484							
LTE Band 41	Front	0.543	0.024	0.175	0.567	0.718	0.742							
	Rear	0.826	0.045	0.470	0.871	1.296	1.341							

**Table 12.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.185	0.204	0.389		
		Rear	0.370	0.191	0.561		
	GPRS 850	Front	0.223	0.204	0.427		
		Rear	0.408	0.191	0.599		
	GSM 1900	Front	0.288	0.204	0.492		
		Rear	0.440	0.191	0.631		
	GPRS 1900	Front	0.314	0.204	0.518		
		Rear	0.471	0.191	0.662		
	WCDMA 850	Front	0.214	0.204	0.418		
		Rear	0.471	0.191	0.662		
	WCDMA 1700	Front	0.760	0.204	0.964		
		Rear	1.025	0.191	1.216		
	WCDMA 1900	Front	0.555	0.204	0.759		
		Rear	0.931	0.191	1.122		
	LTE Band 12	Front	0.186	0.204	0.390		
		Rear	0.414	0.191	0.605		
	LTE Band 17	Front	0.250	0.204	0.454		
		Rear	0.510	0.191	0.701		
	LTE Band 13	Front	0.207	0.204	0.411		
		Rear	0.461	0.191	0.652		
	LTE Band 26	Front	0.200	0.204	0.404		
		Rear	0.389	0.191	0.580		
	LTE Band 66	Front	0.661	0.204	0.865		
		Rear	0.838	0.191	1.029		
	LTE Band 25	Front	0.449	0.204	0.653		
		Rear	0.600	0.191	0.791		
	LTE Band 7	Front	0.714	0.204	0.918		
		Rear	0.969	0.191	1.160		
	LTE Band 41	Front	0.543	0.204	0.747		
		Rear	0.826	0.191	1.017		

**Table 12.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.3G W-LAN SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.185	0.094	0.279		
		Rear	0.370	0.320	0.690		
	GPRS 850	Front	0.223	0.094	0.317		
		Rear	0.408	0.320	0.728		
	GSM 1900	Front	0.288	0.094	0.382		
		Rear	0.440	0.320	0.760		
	GPRS 1900	Front	0.314	0.094	0.408		
		Rear	0.471	0.320	0.791		
	WCDMA 850	Front	0.214	0.094	0.308		
		Rear	0.471	0.320	0.791		
	WCDMA 1700	Front	0.760	0.094	0.854		
		Rear	1.025	0.320	1.345		
	WCDMA 1900	Front	0.555	0.094	0.649		
		Rear	0.931	0.320	1.251		
	LTE Band 12	Front	0.186	0.094	0.280		
		Rear	0.414	0.320	0.734		
	LTE Band 17	Front	0.250	0.094	0.344		
		Rear	0.510	0.320	0.830		
	LTE Band 13	Front	0.207	0.094	0.301		
		Rear	0.461	0.320	0.781		
	LTE Band 26	Front	0.200	0.094	0.294		
		Rear	0.389	0.320	0.709		
	LTE Band 66	Front	0.661	0.094	0.755		
		Rear	0.838	0.320	1.158		
	LTE Band 25	Front	0.449	0.094	0.543		
		Rear	0.600	0.320	0.920		
	LTE Band 7	Front	0.714	0.094	0.808		
		Rear	0.969	0.320	1.289		
	LTE Band 41	Front	0.543	0.094	0.637		
		Rear	0.826	0.320	1.146		

**Table 12.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.6G W-LAN SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.185	0.127	0.312		
		Rear	0.370	0.517	0.887		
	GPRS 850	Front	0.223	0.127	0.350		
		Rear	0.408	0.517	0.925		
	GSM 1900	Front	0.288	0.127	0.415		
		Rear	0.440	0.517	0.957		
	GPRS 1900	Front	0.314	0.127	0.441		
		Rear	0.471	0.517	0.988		
	WCDMA 850	Front	0.214	0.127	0.341		
		Rear	0.471	0.517	0.988		
	WCDMA 1700	Front	0.760	0.127	0.887		
		Rear	1.025	0.517	1.542		
	WCDMA 1900	Front	0.555	0.127	0.682		
		Rear	0.931	0.517	1.448		
	LTE Band 12	Front	0.186	0.127	0.313		
		Rear	0.414	0.517	0.931		
	LTE Band 17	Front	0.250	0.127	0.377		
		Rear	0.510	0.517	1.027		
	LTE Band 13	Front	0.207	0.127	0.334		
		Rear	0.461	0.517	0.978		
	LTE Band 26	Front	0.200	0.127	0.327		
		Rear	0.389	0.517	0.906		
	LTE Band 66	Front	0.661	0.127	0.788		
		Rear	0.838	0.517	1.355		
	LTE Band 25	Front	0.449	0.127	0.576		
		Rear	0.600	0.517	1.117		
	LTE Band 7	Front	0.714	0.127	0.841		
		Rear	0.969	0.517	1.486		
	LTE Band 41	Front	0.543	0.127	0.670		
		Rear	0.826	0.517	1.343		

**Table 12.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.8G W-LAN SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.185	0.175	0.360		
		Rear	0.370	0.470	0.840		
	GPRS 850	Front	0.223	0.175	0.398		
		Rear	0.408	0.470	0.878		
	GSM 1900	Front	0.288	0.175	0.463		
		Rear	0.440	0.470	0.910		
	GPRS 1900	Front	0.314	0.175	0.489		
		Rear	0.471	0.470	0.941		
	WCDMA 850	Front	0.214	0.175	0.389		
		Rear	0.471	0.470	0.941		
	WCDMA 1700	Front	0.760	0.175	0.935		
		Rear	1.025	0.470	1.495		
	WCDMA 1900	Front	0.555	0.175	0.730		
		Rear	0.931	0.470	1.401		
	LTE Band 12	Front	0.186	0.175	0.361		
		Rear	0.414	0.470	0.884		
	LTE Band 17	Front	0.250	0.175	0.425		
		Rear	0.510	0.470	0.980		
	LTE Band 13	Front	0.207	0.175	0.382		
		Rear	0.461	0.470	0.931		
	LTE Band 26	Front	0.200	0.175	0.375		
		Rear	0.389	0.470	0.859		
	LTE Band 66	Front	0.661	0.175	0.836		
		Rear	0.638	0.470	1.108		
	LTE Band 25	Front	0.449	0.175	0.624		
		Rear	0.600	0.470	1.070		
	LTE Band 7	Front	0.714	0.175	0.889		
		Rear	0.969	0.470	1.439		
	LTE Band 41	Front	0.543	0.175	0.718		
		Rear	0.826	0.470	1.296		

**Table 12.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.185	0.024	0.209		
		Rear	0.370	0.045	0.415		
	GPRS 850	Front	0.223	0.024	0.247		
		Rear	0.408	0.045	0.453		
	GSM 1900	Front	0.288	0.024	0.312		
		Rear	0.440	0.045	0.485		
	GPRS 1900	Front	0.314	0.024	0.338		
		Rear	0.471	0.045	0.516		
	WCDMA 850	Front	0.214	0.024	0.238		
		Rear	0.471	0.045	0.516		
	WCDMA 1700	Front	0.760	0.024	0.784		
		Rear	1.025	0.045	1.070		
	WCDMA 1900	Front	0.555	0.024	0.579		
		Rear	0.931	0.045	0.976		
	LTE Band 12	Front	0.186	0.024	0.210		
		Rear	0.414	0.045	0.459		
	LTE Band 17	Front	0.250	0.024	0.274		
		Rear	0.510	0.045	0.555		
	LTE Band 13	Front	0.207	0.024	0.231		
		Rear	0.461	0.045	0.506		
	LTE Band 26	Front	0.200	0.024	0.224		
		Rear	0.389	0.045	0.434		
	LTE Band 66	Front	0.661	0.024	0.685		
		Rear	0.638	0.045	0.883		
	LTE Band 25	Front	0.449	0.024	0.473		
		Rear	0.600	0.045	0.645		
	LTE Band 7	Front	0.714	0.024	0.738		
		Rear	0.969	0.045	1.014		
	LTE Band 41	Front	0.543	0.024	0.567		
		Rear	0.826	0.045	0.871		

**Table 12.5.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Body-Worn at 10 mm)**

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)		5G W-LAN SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	5.3G W-LAN	Front	0.024	0.094	0.118		
		Rear	0.045	0.320	0.365		
	5.6G W-LAN	Front	0.024	0.127	0.151		
		Rear	0.045	0.517	0.562		
	5.8G W-LAN	Front	0.024	0.175	0.199		
		Rear	0.045	0.470	0.515		

## 12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("").

**Table 12.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.2 GHz W-LAN (Hotspot at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.2G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.121	-	-	0.121	0.121	0.121
		Front	0.223	0.024	0.124	0.247	0.347	0.371
		Rear	0.408	0.045	0.327	0.453	0.735	0.780
		Right	0.181	0.007	0.020	0.188	0.201	0.208
	GPRS 1900	Left	0.308	0.063	0.221	0.371	0.559	0.592
		Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.182	-	-	0.182	0.182	0.182
		Front	0.314	0.024	0.124	0.338	0.438	0.462
		Rear	0.471	0.045	0.327	0.516	0.798	0.843
	WCDMA 850	Right	0.591	0.007	0.020	0.598	0.611	0.618
		Left	0.110	0.063	0.221	0.173	0.331	0.394
		Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.136	-	-	0.136	0.136	0.136
		Front	0.214	0.024	0.124	0.238	0.338	0.362
	WCDMA 1700	Rear	0.471	0.045	0.327	0.516	0.798	0.843
		Right	0.173	0.007	0.020	0.180	0.193	0.200
		Left	0.305	0.063	0.221	0.368	0.526	0.589
		Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.432	-	-	0.432	0.432	0.432
	WCDMA 1900	Front	0.760	0.024	0.124	0.784	0.884	0.908
		Rear	1.025	0.045	0.327	1.070	1.352	1.397
		Right	0.685	0.007	0.020	0.692	0.805	0.812
		Left	0.249	0.063	0.221	0.312	0.470	0.533
		Top	-	0.021	0.151	0.021	0.151	0.172
	LTE Band 12	Bottom	0.346	-	-	0.346	0.346	0.346
		Front	0.555	0.024	0.124	0.579	0.679	0.703
		Rear	0.931	0.045	0.327	0.976	1.258	1.303
		Right	0.798	0.007	0.020	0.805	0.818	0.825
		Left	0.243	0.063	0.221	0.306	0.464	0.527
	LTE Band 17	Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.048	-	-	0.048	0.048	0.048
		Front	0.186	0.024	0.124	0.210	0.310	0.334
		Rear	0.414	0.045	0.327	0.459	0.741	0.786
		Right	0.182	0.007	0.020	0.189	0.202	0.209
	LTE Band 13	Left	0.183	0.063	0.221	0.246	0.404	0.467
		Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.050	-	-	0.050	0.050	0.050
		Front	0.250	0.024	0.124	0.274	0.374	0.398
		Rear	0.510	0.045	0.327	0.555	0.837	0.882
	LTE Band 26	Right	0.233	0.007	0.020	0.240	0.253	0.260
		Left	0.237	0.063	0.221	0.300	0.458	0.521
		Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.070	-	-	0.070	0.070	0.070
		Front	0.207	0.024	0.124	0.231	0.331	0.355
	LTE Band 66	Rear	0.461	0.045	0.327	0.506	0.788	0.833
		Right	0.254	0.007	0.020	0.261	0.274	0.281
		Left	0.324	0.063	0.221	0.387	0.545	0.608
		Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.114	-	-	0.114	0.114	0.114
	LTE Band 25	Front	0.200	0.024	0.124	0.224	0.324	0.348
		Rear	0.389	0.045	0.327	0.434	0.716	0.761
		Right	0.180	0.007	0.020	0.187	0.200	0.207
		Left	0.283	0.063	0.221	0.346	0.504	0.567
		Top	-	0.021	0.151	0.021	0.151	0.172
	LTE Band 7	Bottom	0.325	-	-	0.325	0.325	0.325
		Front	0.661	0.024	0.124	0.685	0.785	0.809
		Rear	0.838	0.045	0.327	0.883	1.165	1.210
		Right	0.848	0.007	0.020	0.855	0.868	0.875
		Left	0.197	0.063	0.221	0.260	0.418	0.481
	LTE Band 41	Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.260	-	-	0.260	0.260	0.260
		Front	0.449	0.024	0.124	0.473	0.573	0.597
		Rear	0.600	0.045	0.327	0.645	0.927	0.972
		Right	0.692	0.007	0.020	0.699	0.712	0.719
	LTE Band 25	Left	0.182	0.063	0.221	0.245	0.403	0.466
		Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.315	-	-	0.315	0.315	0.315
		Front	0.714	0.024	0.124	0.738	0.838	0.862
		Rear	0.969	0.045	0.327	1.014	1.296	1.341
	LTE Band 41	Right	0.831	0.007	0.020	0.838	0.851	0.858
		Left	0.030	0.063	0.221	0.093	0.251	0.314
		Top	-	0.021	0.151	0.021	0.151	0.172
		Bottom	0.266	-	-	0.266	0.266	0.266
		Front	0.543	0.024	0.124	0.567	0.667	0.691
	LTE Band 41	Rear	0.826	0.045	0.327	0.871	1.153	1.198
		Right	0.554	0.007	0.020	0.561	0.574	0.581
		Left	0.026	0.063	0.221	0.089	0.247	0.310



**Table 12.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Hotspot at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.121	-	-	0.121	0.121	0.121
		Front	0.223	0.024	0.175	0.247	0.398	0.422
		Rear	0.408	0.045	0.470	0.453	0.678	0.523
		Right	0.181	0.007	0.008	0.188	0.189	0.189
		Left	0.308	0.063	0.330	0.371	0.638	0.701
	GPRS 1900	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.182	-	-	0.182	0.182	0.182
		Front	0.314	0.024	0.175	0.338	0.489	0.513
		Rear	0.471	0.045	0.470	0.516	0.941	0.986
		Right	0.591	0.007	0.008	0.598	0.599	0.606
		Left	0.110	0.063	0.330	0.173	0.440	0.503
	WCDMA 850	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.136	-	-	0.136	0.136	0.136
		Front	0.214	0.024	0.175	0.238	0.389	0.413
		Rear	0.471	0.045	0.470	0.516	0.941	0.986
		Right	0.173	0.007	0.008	0.180	0.181	0.188
		Left	0.305	0.063	0.330	0.368	0.635	0.698
	WCDMA 1700	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.432	-	-	0.432	0.432	0.432
		Front	0.760	0.024	0.175	0.784	0.935	0.959
		Rear	1.025	0.045	0.470	1.070	1.495	1.549
		Right	0.885	0.007	0.008	0.892	0.893	0.900
		Left	0.249	0.063	0.330	0.312	0.579	0.642
	WCDMA 1900	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.346	-	-	0.346	0.346	0.346
		Front	0.555	0.024	0.175	0.579	0.730	0.754
		Rear	0.931	0.045	0.470	0.976	1.401	1.446
		Right	0.798	0.007	0.008	0.805	0.806	0.813
		Left	0.243	0.063	0.330	0.306	0.573	0.636
	LTE Band 12	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.048	-	-	0.048	0.048	0.048
		Front	0.186	0.024	0.175	0.210	0.361	0.385
		Rear	0.414	0.045	0.470	0.459	0.884	0.929
		Right	0.182	0.007	0.008	0.189	0.190	0.197
		Left	0.183	0.063	0.330	0.246	0.513	0.576
	LTE Band 17	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.050	-	-	0.050	0.050	0.050
		Front	0.250	0.024	0.175	0.274	0.425	0.449
		Rear	0.510	0.045	0.470	0.555	0.980	1.025
		Right	0.233	0.007	0.008	0.240	0.241	0.248
		Left	0.237	0.063	0.330	0.300	0.567	0.630
	LTE Band 13	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.070	-	-	0.070	0.070	0.070
		Front	0.207	0.024	0.175	0.231	0.382	0.406
		Rear	0.481	0.045	0.470	0.506	0.931	0.976
		Right	0.254	0.007	0.008	0.261	0.262	0.269
		Left	0.324	0.063	0.330	0.387	0.654	0.717
	LTE Band 26	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.114	-	-	0.114	0.114	0.114
		Front	0.200	0.024	0.175	0.224	0.375	0.399
		Rear	0.389	0.045	0.470	0.045	0.470	0.515
		Right	0.180	0.007	0.008	0.007	0.008	0.015
		Left	0.293	0.063	0.330	0.063	0.330	0.393
	LTE Band 66	Top	-	0.021	0.257	0.021	0.257	0.278
		Bottom	0.325	-	-	0.325	0.325	0.325
		Front	0.661	0.024	0.175	0.024	0.175	0.199
		Rear	0.838	0.045	0.470	0.883	1.308	1.353
		Right	0.848	0.007	0.008	0.855	0.856	0.863
		Left	0.197	0.063	0.330	0.063	0.330	0.393
LTE Band 25	Top	-	0.021	0.257	0.021	0.257	0.278	
	Bottom	0.260	-	-	0.260	0.260	0.260	
	Front	0.449	0.024	0.175	0.473	0.624	0.648	
	Rear	0.600	0.045	0.470	0.645	1.070	1.115	
	Right	0.692	0.007	0.008	0.699	0.700	0.707	
	Left	0.182	0.063	0.330	0.245	0.512	0.575	
LTE Band 7	Top	-	0.021	0.257	0.021	0.257	0.278	
	Bottom	0.315	-	-	0.315	0.315	0.315	
	Front	0.714	0.024	0.175	0.738	0.889	0.913	
	Rear	0.969	0.045	0.470	1.014	1.439	1.484	
	Right	0.831	0.007	0.008	0.838	0.839	0.846	
	Left	0.030	0.063	0.330	0.093	0.360	0.423	
LTE Band 41	Top	-	0.021	0.257	0.021	0.257	0.278	
	Bottom	0.266	-	-	0.266	0.266	0.266	
	Front	0.543	0.024	0.175	0.567	0.718	0.742	
	Rear	0.826	0.045	0.470	0.871	1.296	1.341	
	Right	0.554	0.007	0.008	0.561	0.562	0.569	
	Left	0.026	0.063	0.330	0.089	0.356	0.419	

**Table 12.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Hotspot at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.103	0.103
		Bottom	0.121	-	0.121
		Front	0.223	0.204	0.427
		Rear	0.408	0.191	<b>0.599</b>
		Right	0.181	0.033	0.214
	Left	0.308	0.221	0.529	
	GPRS 1900	Top	-	0.103	0.103
		Bottom	0.182	-	0.182
		Front	0.314	0.204	0.518
		Rear	0.471	0.191	<b>0.662</b>
		Right	0.591	0.033	0.624
	Left	0.110	0.221	0.331	
	WCDMA 850	Top	-	0.103	0.103
		Bottom	0.136	-	0.136
		Front	0.214	0.204	0.418
		Rear	0.471	0.191	<b>0.662</b>
		Right	0.173	0.033	0.206
	Left	0.305	0.221	0.526	
	WCDMA 1700	Top	-	0.103	0.103
		Bottom	0.432	-	0.432
		Front	0.760	0.204	0.964
		Rear	1.025	0.191	<b>1.216</b>
		Right	0.885	0.033	0.918
	Left	0.249	0.221	0.470	
	WCDMA 1900	Top	-	0.103	0.103
		Bottom	0.346	-	0.346
		Front	0.555	0.204	0.759
		Rear	0.931	0.191	<b>1.122</b>
		Right	0.798	0.033	0.831
	Left	0.243	0.221	0.464	
	LTE Band 12	Top	-	0.103	0.103
		Bottom	0.048	-	0.048
		Front	0.186	0.204	0.390
		Rear	0.414	0.191	<b>0.605</b>
		Right	0.182	0.033	0.215
	Left	0.183	0.221	0.404	
	LTE Band 17	Top	-	0.103	0.103
		Bottom	0.050	-	0.050
		Front	0.250	0.204	0.454
		Rear	0.510	0.191	<b>0.701</b>
		Right	0.233	0.033	0.266
	Left	0.237	0.221	0.458	
	LTE Band 13	Top	-	0.103	0.103
		Bottom	0.070	-	0.070
		Front	0.207	0.204	0.411
		Rear	0.461	0.191	<b>0.652</b>
		Right	0.254	0.033	0.287
	Left	0.324	0.221	0.545	
	LTE Band 26	Top	-	0.103	0.103
		Bottom	0.114	-	0.114
Front		0.200	0.204	0.204	
Rear		0.389	0.191	0.191	
Right		0.180	0.033	0.033	
Left	0.283	0.221	<b>0.221</b>		
LTE Band 66	Top	-	0.103	0.103	
	Bottom	0.325	-	0.325	
	Front	0.661	0.204	0.204	
	Rear	0.838	0.191	<b>1.029</b>	
	Right	0.848	0.033	0.881	
Left	0.197	0.221	0.221		
LTE Band 25	Top	-	0.103	0.103	
	Bottom	0.260	-	0.260	
	Front	0.449	0.204	0.653	
	Rear	0.600	0.191	<b>0.791</b>	
	Right	0.692	0.033	0.725	
Left	0.182	0.221	0.403		
LTE Band 7	Top	-	0.103	0.103	
	Bottom	0.315	-	0.315	
	Front	0.714	0.204	0.918	
	Rear	0.969	0.191	1.160	
	Right	0.831	0.033	0.864	
Left	0.030	0.221	0.251		
LTE Band 41	Top	-	0.103	0.103	
	Bottom	0.266	-	0.266	
	Front	0.543	0.204	0.747	
	Rear	0.826	0.191	<b>1.017</b>	
	Right	0.554	0.033	0.587	
Left	0.026	0.221	0.247		

**Table 12.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN (Hotspot at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.151	0.151
		Bottom	0.121	-	0.121
		Front	0.223	0.124	0.347
		Rear	0.408	0.327	<b>0.735</b>
		Right	0.181	0.020	0.201
	Left	0.308	0.221	0.529	
	GPRS 1900	Top	-	0.151	0.151
		Bottom	0.182	-	0.182
		Front	0.314	0.124	0.438
		Rear	0.471	0.327	<b>0.798</b>
		Right	0.591	0.020	0.611
	Left	0.110	0.221	0.331	
	WCDMA 850	Top	-	0.151	0.151
		Bottom	0.136	-	0.136
		Front	0.214	0.124	0.338
		Rear	0.471	0.327	<b>0.798</b>
		Right	0.173	0.020	0.193
	Left	0.305	0.221	0.526	
	WCDMA 1700	Top	-	0.151	0.151
		Bottom	0.432	-	0.432
		Front	0.760	0.124	0.884
		Rear	1.025	0.327	<b>1.352</b>
		Right	0.885	0.020	0.905
	Left	0.249	0.221	0.470	
	WCDMA 1900	Top	-	0.151	0.151
		Bottom	0.346	-	0.346
		Front	0.555	0.124	0.679
		Rear	0.931	0.327	<b>1.258</b>
		Right	0.798	0.020	0.818
	Left	0.243	0.221	0.464	
	LTE Band 12	Top	-	0.151	0.151
		Bottom	0.048	-	0.048
		Front	0.186	0.124	0.310
		Rear	0.414	0.327	<b>0.741</b>
		Right	0.182	0.020	0.202
	Left	0.183	0.221	0.404	
	LTE Band 17	Top	-	0.151	0.151
		Bottom	0.050	-	0.050
		Front	0.250	0.124	0.374
		Rear	0.510	0.327	<b>0.837</b>
		Right	0.233	0.020	0.253
	Left	0.237	0.221	0.458	
	LTE Band 13	Top	-	0.151	0.151
		Bottom	0.070	-	0.070
		Front	0.207	0.124	0.331
		Rear	0.461	0.327	<b>0.788</b>
		Right	0.254	0.020	0.274
	Left	0.324	0.221	0.545	
	LTE Band 26	Top	-	0.151	0.151
		Bottom	0.114	-	0.114
		Front	0.200	0.124	0.324
		Rear	0.389	0.327	<b>0.716</b>
		Right	0.180	0.020	0.200
	Left	0.283	0.221	0.504	
	LTE Band 66	Top	-	0.151	0.151
		Bottom	0.325	-	0.325
		Front	0.661	0.124	0.785
		Rear	0.838	0.327	<b>1.165</b>
		Right	0.848	0.020	0.868
	Left	0.197	0.221	0.418	
LTE Band 25	Top	-	0.151	0.151	
	Bottom	0.260	-	0.260	
	Front	0.449	0.124	0.573	
	Rear	0.600	0.327	<b>0.927</b>	
	Right	0.692	0.020	0.712	
Left	0.182	0.221	0.403		
LTE Band 7	Top	-	0.151	0.151	
	Bottom	0.315	-	0.315	
	Front	0.714	0.124	0.838	
	Rear	0.969	0.327	<b>1.296</b>	
	Right	0.831	0.020	0.851	
Left	0.030	0.221	0.251		
LTE Band 41	Top	-	0.151	0.151	
	Bottom	0.266	-	0.266	
	Front	0.543	0.124	0.667	
	Rear	0.826	0.327	<b>1.153</b>	
	Right	0.554	0.020	0.574	
Left	0.026	0.221	0.247		

**Table 12.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Hotspot at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.257	0.257
		Bottom	0.121	-	0.121
		Front	0.223	0.175	0.398
		Rear	0.408	0.470	0.878
		Right	0.181	0.008	0.189
	Left	0.308	0.330	0.638	
	GPRS 1900	Top	-	0.257	0.257
		Bottom	0.182	-	0.182
		Front	0.314	0.175	0.489
		Rear	0.471	0.470	0.941
		Right	0.591	0.008	0.599
	Left	0.110	0.330	0.440	
	WCDMA 850	Top	-	0.257	0.257
		Bottom	0.136	-	0.136
		Front	0.214	0.175	0.389
		Rear	0.471	0.470	0.941
		Right	0.173	0.008	0.181
	Left	0.305	0.330	0.635	
	WCDMA 1700	Top	-	0.257	0.257
		Bottom	0.432	-	0.432
		Front	0.760	0.175	0.935
		Rear	1.025	0.470	1.495
		Right	0.885	0.008	0.893
	Left	0.249	0.330	0.579	
	WCDMA 1900	Top	-	0.257	0.257
		Bottom	0.346	-	0.346
		Front	0.555	0.175	0.730
		Rear	0.931	0.470	1.401
		Right	0.798	0.008	0.806
	Left	0.243	0.330	0.573	
	LTE Band 12	Top	-	0.257	0.257
		Bottom	0.048	-	0.048
		Front	0.186	0.175	0.361
		Rear	0.414	0.470	0.884
		Right	0.182	0.008	0.190
	Left	0.183	0.330	0.513	
	LTE Band 17	Top	-	0.257	0.257
		Bottom	0.050	-	0.050
		Front	0.250	0.175	0.425
		Rear	0.510	0.470	0.980
		Right	0.233	0.008	0.241
	Left	0.237	0.330	0.567	
	LTE Band 13	Top	-	0.257	0.257
		Bottom	0.070	-	0.070
		Front	0.207	0.175	0.382
		Rear	0.461	0.470	0.931
		Right	0.254	0.008	0.262
	Left	0.324	0.330	0.654	
	LTE Band 26	Top	-	0.257	0.257
		Bottom	0.114	-	0.114
Front		0.200	0.175	0.375	
Rear		0.389	0.470	0.859	
Right		0.180	0.008	0.188	
Left	0.283	0.330	0.613		
LTE Band 66	Top	-	0.257	0.257	
	Bottom	0.325	-	0.325	
	Front	0.661	0.175	0.836	
	Rear	0.838	0.470	1.308	
	Right	0.848	0.008	0.856	
Left	0.197	0.330	0.527		
LTE Band 25	Top	-	0.257	0.257	
	Bottom	0.260	-	0.260	
	Front	0.449	0.175	0.624	
	Rear	0.600	0.470	1.070	
	Right	0.692	0.008	0.700	
Left	0.182	0.330	0.512		
LTE Band 7	Top	-	0.257	0.257	
	Bottom	0.315	-	0.315	
	Front	0.714	0.175	0.889	
	Rear	0.969	0.470	1.439	
	Right	0.831	0.008	0.839	
Left	0.030	0.330	0.360		
LTE Band 41	Top	-	0.257	0.257	
	Bottom	0.266	-	0.266	
	Front	0.543	0.175	0.718	
	Rear	0.826	0.470	1.296	
	Right	0.554	0.008	0.562	
Left	0.026	0.330	0.356		

**Table 12.6.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Hotspot at 10 mm)**

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.021	0.021
		Bottom	0.121	-	0.121
		Front	0.223	0.024	0.247
		Rear	0.408	0.045	0.453
		Right	0.181	0.007	0.188
	Left	0.308	0.063	0.371	
	GPRS 1900	Top	-	0.021	0.021
		Bottom	0.182	-	0.182
		Front	0.314	0.024	0.338
		Rear	0.471	0.045	0.516
		Right	0.591	0.007	0.598
	Left	0.110	0.063	0.173	
	WCDMA 850	Top	-	0.021	0.021
		Bottom	0.136	-	0.136
		Front	0.214	0.024	0.238
		Rear	0.471	0.045	0.516
		Right	0.173	0.007	0.180
	Left	0.305	0.063	0.368	
	WCDMA 1700	Top	-	0.021	0.021
		Bottom	0.432	-	0.432
		Front	0.760	0.024	0.784
		Rear	1.025	0.045	1.070
		Right	0.885	0.007	0.892
	Left	0.249	0.063	0.312	
	WCDMA 1900	Top	-	0.021	0.021
		Bottom	0.346	-	0.346
		Front	0.555	0.024	0.579
		Rear	0.931	0.045	0.976
		Right	0.798	0.007	0.805
	Left	0.243	0.063	0.306	
	LTE Band 12	Top	-	0.021	0.021
		Bottom	0.048	-	0.048
		Front	0.186	0.024	0.210
		Rear	0.414	0.045	0.459
		Right	0.182	0.007	0.189
	Left	0.183	0.063	0.246	
	LTE Band 17	Top	-	0.021	0.021
		Bottom	0.050	-	0.050
		Front	0.250	0.024	0.274
		Rear	0.510	0.045	0.555
		Right	0.233	0.007	0.240
	Left	0.237	0.063	0.300	
	LTE Band 13	Top	-	0.021	0.021
		Bottom	0.070	-	0.070
		Front	0.207	0.024	0.231
		Rear	0.461	0.045	0.506
		Right	0.254	0.007	0.261
	Left	0.324	0.063	0.387	
	LTE Band 26	Top	-	0.021	0.021
		Bottom	0.114	-	0.114
		Front	0.200	0.024	0.224
		Rear	0.389	0.045	0.434
		Right	0.180	0.007	0.187
	Left	0.283	0.063	0.346	
LTE Band 66	Top	-	0.021	0.021	
	Bottom	0.325	-	0.325	
	Front	0.661	0.024	0.685	
	Rear	0.838	0.045	0.883	
	Right	0.848	0.007	0.855	
Left	0.197	0.063	0.260		
LTE Band 25	Top	-	0.021	0.021	
	Bottom	0.260	-	0.260	
	Front	0.449	0.024	0.473	
	Rear	0.600	0.045	0.645	
	Right	0.692	0.007	0.699	
Left	0.182	0.063	0.245		
LTE Band 7	Top	-	0.021	0.021	
	Bottom	0.315	-	0.315	
	Front	0.714	0.024	0.738	
	Rear	0.969	0.045	1.014	
	Right	0.831	0.007	0.838	
Left	0.030	0.063	0.093		
LTE Band 41	Top	-	0.021	0.021	
	Bottom	0.266	-	0.266	
	Front	0.543	0.024	0.567	
	Rear	0.826	0.045	0.871	
	Right	0.554	0.007	0.561	
Left	0.026	0.063	0.089		

**Table 12.6.7 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Hotspot at 10 mm)**

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN	Top	0.021	0.151	0.172
		Bottom	-	-	-
		Front	0.024	0.124	0.148
		Rear	0.045	0.327	0.372
		Right	0.007	0.020	0.027
	Left	0.063	0.221	0.284	
	5.8G W-LAN	Top	0.021	0.257	0.278
		Bottom	-	-	-
		Front	0.024	0.175	0.199
		Rear	0.045	0.470	0.515
		Right	0.007	0.008	0.015
		Left	0.063	0.330	0.393

## 12.7 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR (scaled to maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis was required to for Phablet Simultaneous Transmission Analysis.

## 12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

## 13. SAR MEASUREMENT VARIABILITY

### 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
4. Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

**Table 13.1 Body SAR Measurement Variability Results**

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1 712.4	1312	WCDMA 1700	RMC	-	10 mm [Rear]	0.861	0.858	1.00	-	-	-	-
1 852.4	9262	WCDMA 1900	RMC	-	10 mm [Rear]	0.820	0.818	1.00	-	-	-	-
2 560.0	21350	LTE B7	-	-	10 mm [Rear]	0.962	0.951	1.01	-	-	-	-
1 745.0	132322	LTE B66	-	-	10 mm [Right]	0.844	0.833	1.01	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

### 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for 1g and  $< 3.75$  W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

## 14. EQUIPMENT LIST

Table 14.1.1 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	Robot	SPEAG	TX60L	N/A	N/A	F14/5VR2A1/A/01
<input checked="" type="checkbox"/>	Robot	SPEAG	TX60L	N/A	N/A	F14/5WV5D1/A/01
<input checked="" type="checkbox"/>	Robot Controller	SPEAG	CS8C	N/A	N/A	F14/5VR2A1/C/01
<input checked="" type="checkbox"/>	Robot Controller	SPEAG	CS8C	N/A	N/A	F14/5WV5D1/C/01
<input checked="" type="checkbox"/>	Joystick	SPEAG	N/A	N/A	N/A	D21142605A
<input checked="" type="checkbox"/>	Joystick	SPEAG	P21142605A	N/A	N/A	005695
<input checked="" type="checkbox"/>	Intel Core i7-4 770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Intel Core i7-4 770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1220
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1783
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1837
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2021-04-27	2022-04-27	1391
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2021-03-23	2022-03-23	1394
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2021-05-31	2022-05-31	3866
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2021-07-26	2022-07-26	3930
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2020-09-23	2021-09-23	3933
<input checked="" type="checkbox"/>	750MHz SAR Dipole	SPEAG	D750V3	2021-01-21	2023-01-21	1049
<input checked="" type="checkbox"/>	835MHz SAR Dipole	SPEAG	D835V2	2021-07-21	2023-07-21	464
<input checked="" type="checkbox"/>	1 800MHz SAR Dipole	SPEAG	D1800V2	2021-04-23	2023-04-23	26047
<input checked="" type="checkbox"/>	1 900MHz SAR Dipole	SPEAG	D1900V2	2021-07-23	2023-07-23	56029
<input checked="" type="checkbox"/>	2 450MHz SAR Dipole	SPEAG	D2450V2	2021-05-27	2023-05-27	716
<input checked="" type="checkbox"/>	2 600MHz SAR Dipole	SPEAG	D2600V2	2021-02-18	2023-02-18	1016
<input checked="" type="checkbox"/>	5GHz SAR Dipole	SPEAG	D5GHzV2	2021-02-23	2023-02-23	1103
<input checked="" type="checkbox"/>	Network Analyzer	Agilent	E5071C	2021-06-24	2022-06-24	MY46106970
<input checked="" type="checkbox"/>	Signal Generator	Agilent	E4438C	2021-06-24	2022-06-24	US41461520
<input checked="" type="checkbox"/>	Amplifier	RFBAY.Inc	MPA-40-40	2020-12-16	2021-12-16	21151801
<input checked="" type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	2021-06-24	2022-06-24	1020
<input checked="" type="checkbox"/>	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2021-06-24	2022-06-24	1005
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2020-12-16	2021-12-16	GB37170267
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2020-12-16	2021-12-16	GB37170413
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2020-12-16	2021-12-16	US37294267
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2020-12-16	2021-12-16	2702A61707
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2020-12-16	2021-12-16	2702A65976
<input checked="" type="checkbox"/>	Dual Directional Coupler	Agilent	778D-012	2020-12-16	2021-12-16	50228
<input checked="" type="checkbox"/>	Directional Coupler	HP	772D	2021-06-24	2022-06-24	2889A01064
<input checked="" type="checkbox"/>	Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2021-06-24	2022-06-24	165
<input checked="" type="checkbox"/>	Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2021-06-24	2022-06-24	2
<input checked="" type="checkbox"/>	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2021-06-24	2022-06-24	2
<input checked="" type="checkbox"/>	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2020-12-16	2021-12-16	03942
<input checked="" type="checkbox"/>	Attenuators(10 dB)	WEINSCHTEL	23-10-34	2020-12-16	2021-12-16	BP4387
<input checked="" type="checkbox"/>	Step Attenuator	H/P	8494A	2021-06-24	2022-06-24	3308A33341
<input checked="" type="checkbox"/>	Dielectric Probe kit	SPEAG	DAK-3.5	2020-11-25	2021-11-25	1092
<input checked="" type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2021-06-24	2022-06-24	GB41321164
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2020-12-16	2021-12-16	101414
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2021-04-23	2022-04-23	166448
<input checked="" type="checkbox"/>	Power Splitter	Anritsu	K241B	2020-12-16	2021-12-16	1301183
<input checked="" type="checkbox"/>	Bluetooth Tester	TESCOM	TC-3000C	2021-06-24	2022-06-24	3000C000563

**NOTE(S):**

- The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.
- CBT(Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

## 15. MEASUREMENT UNCERTAINTIES

### 750 MHz Head (SN: 3933)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
<b>Measurement System</b>								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	Rectangular	√3	1	1	0.58	0.58	∞
<b>Test Sample Related</b>								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	∞
<b>Physical Parameters</b>								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.90	1.0	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	∞
<b>Combined Standard Uncertainty</b>						<b>13</b>	<b>13</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>						<b>26</b>	<b>26</b>	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

$$= 26\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

$$= 26\% \text{ (The confidence level is about 95 \% } k = 2)$$



**835 MHz Head (SN: 3933)**

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
<b>Measurement System</b>								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	Rectangular	√3	1	1	0.58	0.58	∞
<b>Test Sample Related</b>								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	∞
<b>Physical Parameters</b>								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.2	Normal	1	0.78	0.71	3.3	3.0	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.92	1.0	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	2.0	Rectangular	√3	0.23	0.26	0.27	0.30	∞
<b>Combined Standard Uncertainty</b>						<b>13</b>	<b>13</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>						<b>26</b>	<b>26</b>	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

= 26 % (The confidence level is about 95 %  $k = 2$ )

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

= 26 % (The confidence level is about 95 %  $k = 2$ )

**750 ~ 2 600 MHz Head (SN: 3866)**

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
<b>Measurement System</b>								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	Rectangular	√3	1	1	0.58	0.58	∞
<b>Test Sample Related</b>								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	∞
<b>Physical Parameters</b>								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.2	Normal	1	0.78	0.71	3.3	3.0	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1	Normal	1	0.23	0.26	0.94	1.1	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	∞
<b>Combined Standard Uncertainty</b>						<b>13</b>	<b>13</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>						<b>26</b>	<b>26</b>	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

= 26 % (The confidence level is about 95 %  $k = 2$ )

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

= 26 % (The confidence level is about 95 %  $k = 2$ )

**3 500 ~ 5 800 MHz Head (SN: 3930)**

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
<b>Measurement System</b>								
Probe calibration	6.5	Normal	1	1	1	6.5	6.5	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	Rectangular	√3	1	1	0.58	0.58	∞
<b>Test Sample Related</b>								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	∞
<b>Physical Parameters</b>								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.87	1.0	10
Temp. unc. - Conductivity	2.0	Rectangular	√3	0.78	0.71	0.90	0.82	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	∞
<b>Combined Standard Uncertainty</b>						<b>13</b>	<b>13</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>						<b>26</b>	<b>26</b>	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

= 26 % (The confidence level is about 95 %  $k = 2$ )

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

= 26 % (The confidence level is about 95 %  $k = 2$ )

## 16. CONCLUSION

---

### Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

## 17. REFERENCES

---

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

[20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.

[21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.

[22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009

[23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07

[24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02

[25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04

[26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04

[27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02

[28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02

[29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009

[30] Anexo à Resolução No. 533, de 10 de September de 2009.

[31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

## APPENDIX A. – Probe Calibration Data



**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **DT&C (Dymstec)**

Certificate No: EX3-3933\_Sep20

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3933**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7**  
 Calibration procedure for dosimetric E-field probes



Calibration date: **September 23, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: CC2552 (20x)	31-Mar-20 (No. 217-03106)	Apr-21
DAE4	SN: 660	27-Dec-19 (No. DAE4-660_Dec19)	Dec-20
Reference Probe ES3DV2	SN: 3013	31-Dec-19 (No. ES3-3013_Dec19)	Dec-20
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

	Name	Function	Signature
Calibrated by:	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
			Issued: September 30, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 0108

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

EX3DV4 – SN:3933

September 23, 2020

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.49	0.51	0.18	± 10.1 %
DCP (mV) <sup>B</sup>	101.7	101.6	91.3	

### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\backslash$ $\mu\text{V}$	C	D dB	VR mV	Max dev.	Max Unc <sup>E</sup> (k=2)
0	CW	X	0.00	0.00	1.00	0.00	185.6	± 3.5 %	± 4.7 %
		Y	0.00	0.00	1.00		172.1		
		Z	0.00	0.00	1.00		178.9		
10352-AAA	Pulse Waveform (200Hz, 10%)	X	20.00	96.03	24.59	10.00	60.0	± 3.0 %	± 9.6 %
		Y	20.00	94.18	23.83		60.0		
		Z	20.00	96.88	25.46		60.0		
10353-AAA	Pulse Waveform (200Hz, 20%)	X	20.00	101.88	26.30	6.99	80.0	± 2.2 %	± 9.6 %
		Y	20.00	95.80	23.58		80.0		
		Z	20.00	98.98	24.83		80.0		
10354-AAA	Pulse Waveform (200Hz, 40%)	X	20.00	122.84	34.87	3.98	95.0	± 2.5 %	± 9.6 %
		Y	20.00	97.96	23.20		95.0		
		Z	20.00	113.04	29.75		95.0		
10355-AAA	Pulse Waveform (200Hz, 60%)	X	9.30	160.00	54.55	2.22	120.0	± 2.8 %	± 9.6 %
		Y	20.00	105.13	25.34		120.0		
		Z	0.70	160.00	83.60		120.0		
10387-AAA	QPSK Waveform, 1 MHz	X	8.27	97.03	27.78	1.00	150.0	± 3.5 %	± 9.6 %
		Y	1.97	67.72	16.46		150.0		
		Z	20.00	117.58	34.43		150.0		
10388-AAA	QPSK Waveform, 10 MHz	X	4.94	84.20	23.69	0.00	150.0	± 3.9 %	± 9.6 %
		Y	2.71	70.84	17.31		150.0		
		Z	20.00	111.97	33.24		150.0		
10396-AAA	64-QAM Waveform, 100 kHz	X	2.86	74.03	22.33	3.01	150.0	± 3.4 %	± 9.6 %
		Y	3.24	71.45	19.48		150.0		
		Z	14.98	111.17	36.25		150.0		
10399-AAA	64-QAM Waveform, 40 MHz	X	4.12	71.10	18.46	0.00	150.0	± 3.3 %	± 9.6 %
		Y	3.68	67.81	16.30		150.0		
		Z	4.68	74.04	20.41		150.0		
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X	5.03	67.22	16.89	0.00	150.0	± 3.4 %	± 9.6 %
		Y	5.01	65.77	15.71		150.0		
		Z	5.17	68.11	17.89		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter; uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3933

September 23, 2020

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

### Sensor Model Parameters

	C1 fF	C2 fF	$\alpha$ V <sup>-1</sup>	T1 ms.V <sup>-2</sup>	T2 ms.V <sup>-1</sup>	T3 ms	T4 V <sup>-2</sup>	T5 V <sup>-1</sup>	T6
X	36.7	274.62	36.29	13.75	0.87	5.10	0.00	0.24	1.01
Y	57.5	424.90	35.09	25.97	0.70	5.10	0.41	0.44	1.01
Z	32.5	265.31	42.52	9.48	1.60	5.07	2.00	0.04	1.01

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-103.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

**Note:** Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.



EX3DV4- SN:3933

September 23, 2020

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
750	41.9	0.89	11.04	11.04	11.04	0.59	0.80	± 12.0 %
835	41.5	0.90	10.61	10.61	10.61	0.53	0.80	± 12.0 %
900	41.5	0.97	10.32	10.32	10.32	0.43	0.80	± 12.0 %
1750	40.1	1.37	8.97	8.97	8.97	0.33	0.86	± 12.0 %
1900	40.0	1.40	8.61	8.61	8.61	0.38	0.86	± 12.0 %
2300	39.5	1.67	8.09	8.09	8.09	0.33	0.90	± 12.0 %
2450	39.2	1.80	7.90	7.90	7.90	0.27	0.98	± 12.0 %
2600	39.0	1.96	7.69	7.69	7.69	0.38	0.90	± 12.0 %
3500	37.9	2.91	7.30	7.30	7.30	0.35	1.30	± 13.1 %
3700	37.7	3.12	7.22	7.22	7.22	0.35	1.30	± 13.1 %
5200	36.0	4.66	5.35	5.35	5.35	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.25	5.25	5.25	0.40	1.80	± 13.1 %
5500	35.6	4.96	5.10	5.10	5.10	0.40	1.80	± 13.1 %
5600	35.5	5.07	5.00	5.00	5.00	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.90	4.90	4.90	0.40	1.80	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3933

September 23, 2020

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
750	55.5	0.96	10.71	10.71	10.71	0.42	0.80	± 12.0 %
835	55.2	0.97	10.50	10.50	10.50	0.46	0.80	± 12.0 %
900	55.0	1.05	10.36	10.36	10.36	0.48	0.80	± 12.0 %
1750	53.4	1.49	8.77	8.77	8.77	0.32	0.86	± 12.0 %
1900	53.3	1.52	8.38	8.38	8.38	0.38	0.86	± 12.0 %
2300	52.9	1.81	8.13	8.13	8.13	0.41	0.90	± 12.0 %
2450	52.7	1.95	7.89	7.89	7.89	0.37	0.90	± 12.0 %
2600	52.5	2.16	7.74	7.74	7.74	0.34	0.90	± 12.0 %
3500	51.3	3.31	6.90	6.90	6.90	0.40	1.35	± 13.1 %
3700	51.0	3.55	6.83	6.83	6.83	0.40	1.35	± 13.1 %
5200	49.0	5.30	4.79	4.79	4.79	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.69	4.69	4.69	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.37	4.37	4.37	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.22	4.22	4.22	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.26	4.26	4.26	0.50	1.90	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3933

September 23, 2020

### Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

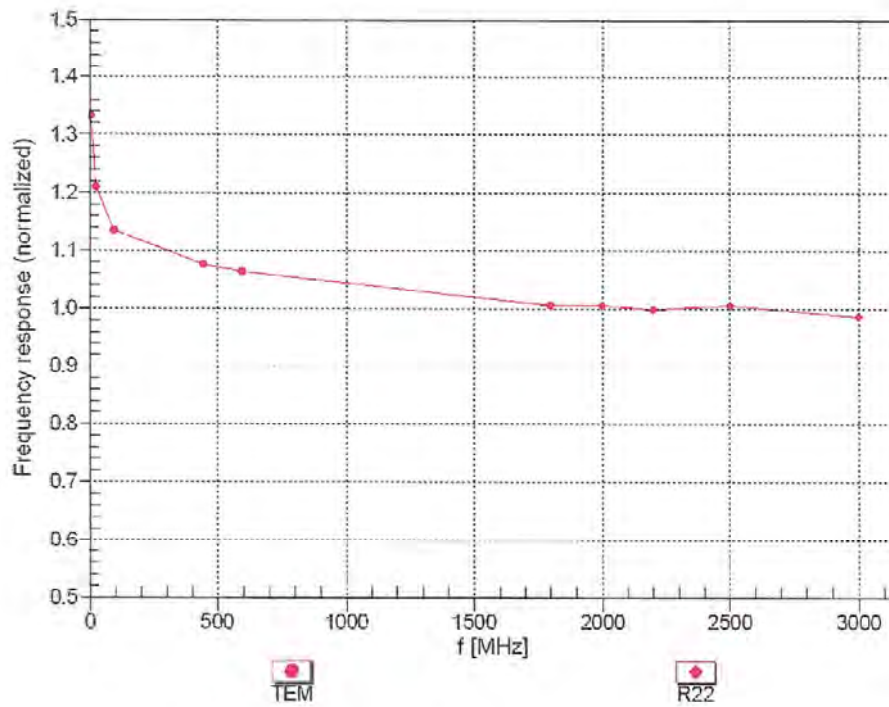

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

EX3DV4- SN:3933



September 23, 2020

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM



f=1800 MHz,R22

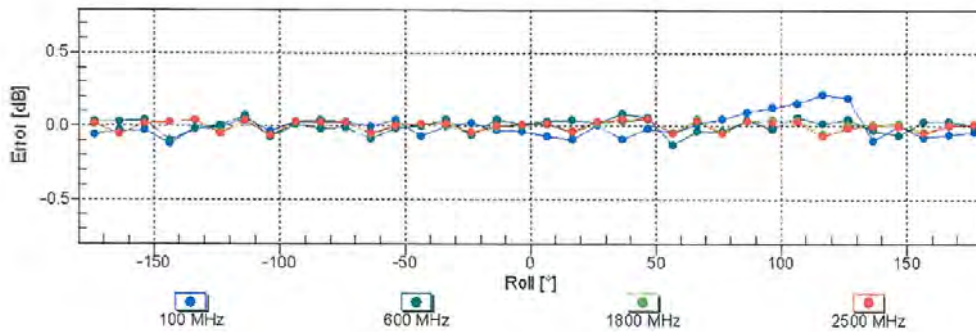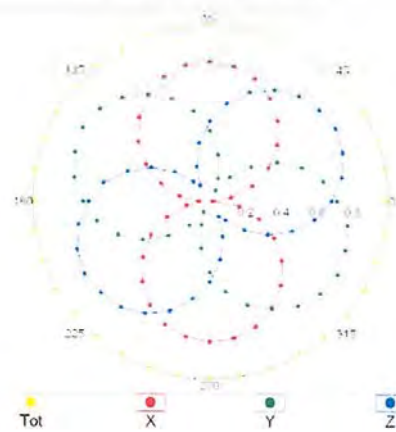


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)



EX3DV4- SN:3933

September 23, 2020

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$ )

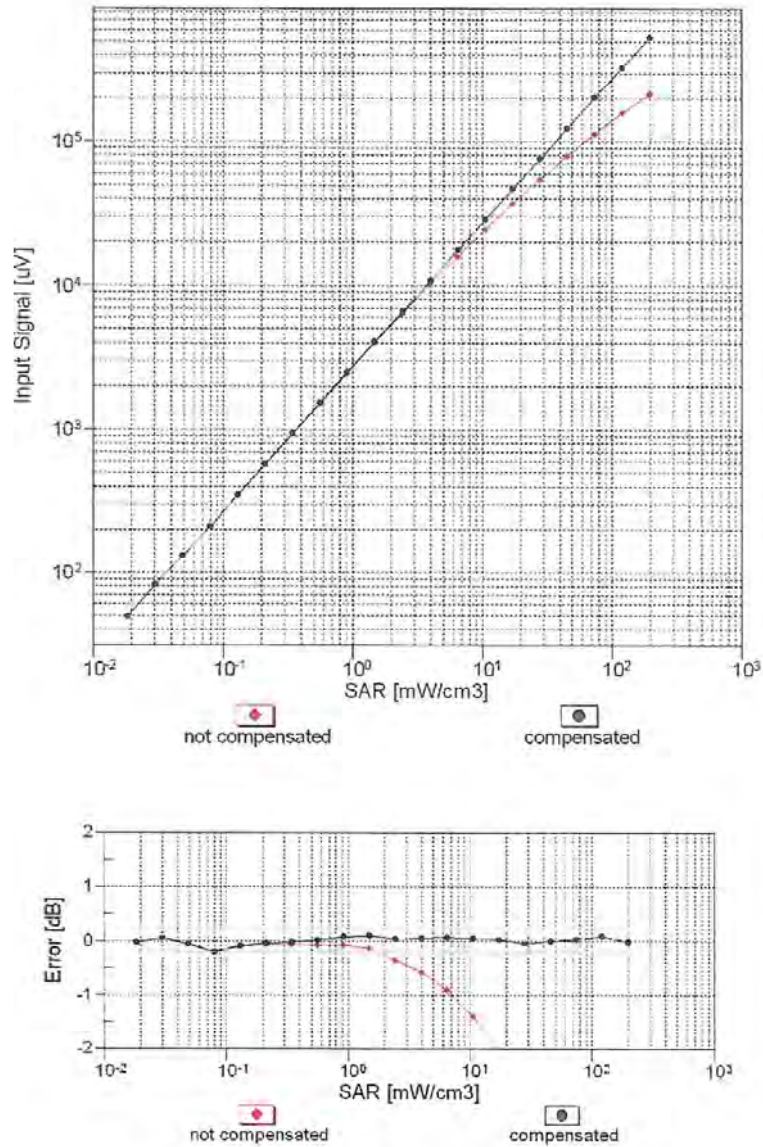


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )




EX3DV4- SN:3933

September 23, 2020

### Conversion Factor Assessment

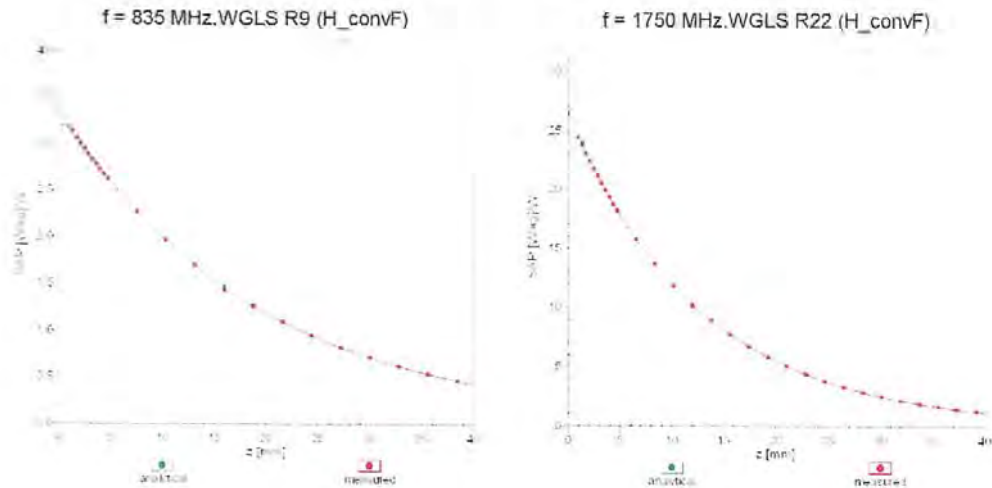

### Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), f = 900 MHz

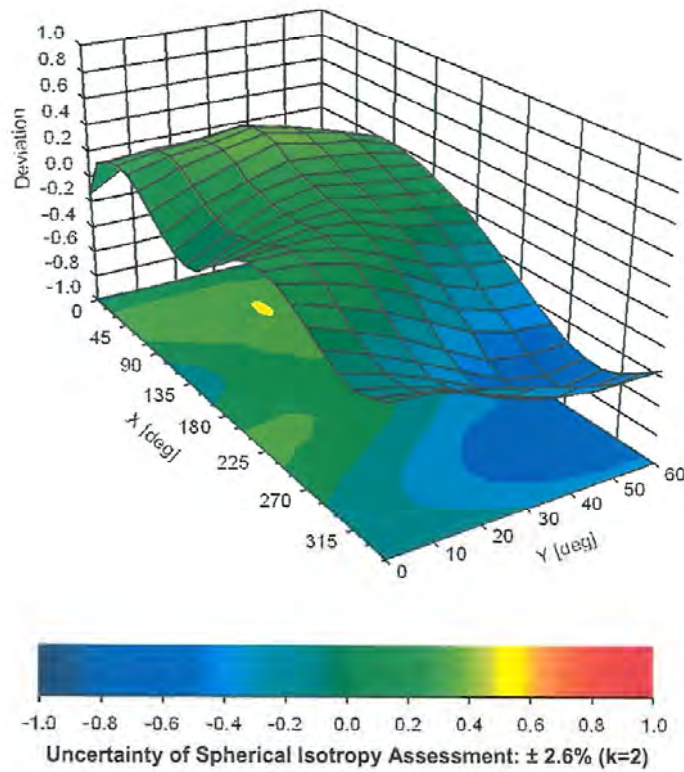

EX3DV4- SN:3933

September 23, 2020

**Appendix: Modulation Calibration Parameters**

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> (k=2)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 %
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 %
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 %
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 %
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 %
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 %
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 %
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 %
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 %
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 %
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 %
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 %
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 %
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 %
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6 %
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6 %
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6 %
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6 %
10098	DAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 %



EX3DV4- SN:3933

September 23, 2020

10099	CAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6 %
10100	CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6 %
10101	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10102	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10103	DAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 9.6 %
10105	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6 %
10108	CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6 %
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10114	CAG	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10115	CAG	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6 %
10116	CAG	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6 %
10117	CAG	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6 %
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	± 9.6 %
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6 %
10140	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10141	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	± 9.6 %
10142	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10143	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6 %
10144	CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6 %
10145	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	± 9.6 %
10146	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6 %
10147	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6 %
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10151	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10153	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6 %
10154	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10155	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10156	CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6 %
10157	CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10158	CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6 %
10160	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6 %
10161	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10162	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6 %
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6 %
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 %
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6 %
10169	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10170	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10171	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	± 9.6 %
10172	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10173	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10174	CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10175	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10176	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10177	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10178	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10179	AAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %

EX3DV4- SN:3933

September 23, 2020

10181	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10182	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10183	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10184	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10185	CAI	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	± 9.6 %
10186	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10189	CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10193	CAE	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	± 9.6 %
10194	AAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	± 9.6 %
10195	CAE	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	± 9.6 %
10196	CAE	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10197	AAE	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10198	CAF	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10219	CAF	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	± 9.6 %
10220	AAF	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	± 9.6 %
10223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	± 9.6 %
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	± 9.6 %
10225	CAD	UMTS-FDD (HSPA+)	WCDMA	5.97	± 9.6 %
10226	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	± 9.6 %
10227	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	± 9.6 %
10228	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 9.6 %
10229	DAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	± 9.6 %
10232	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10233	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10234	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10235	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10236	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10237	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10238	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10239	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10240	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10241	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	± 9.6 %
10242	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	± 9.6 %
10243	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	± 9.6 %
10244	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10245	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	± 9.6 %
10246	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10247	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	± 9.6 %
10248	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	± 9.6 %
10249	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10250	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	± 9.6 %
10251	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	± 9.6 %
10252	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	± 9.6 %
10254	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	± 9.6 %
10255	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	± 9.6 %
10256	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	± 9.6 %
10257	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	± 9.6 %
10258	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	± 9.6 %
10259	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	± 9.6 %



EX3DV4– SN:3933

September 23, 2020

10260	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	± 9.6 %
10261	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	± 9.6 %
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	± 9.6 %
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	± 9.6 %
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10266	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	± 9.6 %
10267	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10269	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 9.6 %
10270	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	± 9.6 %
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	± 9.6 %
10275	CAD	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	± 9.6 %
10277	CAD	PHS (QPSK)	PHS	11.81	± 9.6 %
10278	CAD	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6 %
10279	CAG	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	± 9.6 %
10290	CAG	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10291	CAG	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
10292	CAG	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	± 9.6 %
10293	CAG	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6 %
10295	CAG	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6 %
10297	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6 %
10298	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10299	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	± 9.6 %
10300	CAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10301	CAC	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WiMAX	12.03	± 9.6 %
10302	CAB	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3CTRL)	WiMAX	12.57	± 9.6 %
10303	CAB	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	12.52	± 9.6 %
10304	CAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	11.86	± 9.6 %
10305	CAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC)	WiMAX	15.24	± 9.6 %
10306	CAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC)	WiMAX	14.67	± 9.6 %
10307	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC)	WiMAX	14.49	± 9.6 %
10308	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WiMAX	14.46	± 9.6 %
10309	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3)	WiMAX	14.58	± 9.6 %
10310	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3)	WiMAX	14.57	± 9.6 %
10311	AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	± 9.6 %
10313	AAD	iDEN 1:3	iDEN	10.51	± 9.6 %
10314	AAD	iDEN 1:6	iDEN	13.48	± 9.6 %
10315	AAD	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.71	± 9.6 %
10316	AAD	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10317	AAA	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	± 9.6 %
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	± 9.6 %
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.6 %
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	± 9.6 %
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	± 9.6 %
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	± 9.6 %
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	± 9.6 %
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	± 9.6 %
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 9.6 %
10400	AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc dc)	WLAN	8.37	± 9.6 %
10401	AAA	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc dc)	WLAN	8.60	± 9.6 %
10402	AAA	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc dc)	WLAN	8.53	± 9.6 %
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 9.6 %
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.6 %
10406	AAD	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	± 9.6 %