

TEST REPORT





DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2105-0039
2. Customer
 - Name (FCC) : Point Mobile Co., LTD. / Name (IC) : POINTMOBILE CO.,LTD
 - Address (FCC) : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
 - Address (IC) : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)
3. Use of Report : FCC & IC Certification
4. Product Name / Model Name : RFID/USN Wireless / RF300
FCC ID : V2X-RF300
IC : 10664A-RF300
5. FCC Regulation(s) : Part 15.247
IC Standards(s) : RSS-247 Issue 2
Test Method Used : ANSI C63.10-2013, KDB 558074D01v05r02
6. Date of Test : 21.04.06 ~ 2021.04.23
7. Location of Test : Permanent Testing Lab On Site Testing
8. Testing Environment : See appended test report.
9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

| | | |
|-------------|--|---|
| Affirmation | Tested by | Reviewed by |
| | Name : JaeHyeok Bang  | Name : JaeJin Lee  (Signature) |

2021 . 05 . 06 .

DT&C Co., Ltd.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

| Test Report No. | Date | Description | Revised by | Reviewed by |
|-----------------|---------------|---------------|---------------|-------------|
| DRTFCC2105-0039 | May. 06, 2021 | Initial issue | JaeHyeok Bang | JaeJin Lee |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Table of Contents

| | |
|---|-----------|
| 1. General Information | 4 |
| 1.1 Testing Laboratory | 4 |
| 1.2 Testing Environment | 4 |
| 1.3 Measurement Uncertainty | 4 |
| 1.4 Details of Applicant | 5 |
| 1.5 Description of EUT | 5 |
| 1.6 Declaration by the manufacturer | 5 |
| 1.7 Test Equipment List | 6 |
| 1.8 Summary of Test Results | 7 |
| 1.9 Conclusion of worst-case and operation mode..... | 8 |
| 2. Maximum Peak Output Power Measurement | 9 |
| 2.1 Test Setup | 9 |
| 2.2 Limit..... | 9 |
| 2.3 Test Procedure..... | 9 |
| 2.4 Test Results | 9 |
| 3. 20dB BW & Occupied BW | 12 |
| 3.1 Test Setup | 12 |
| 3.2 Limit..... | 12 |
| 3.3 Test Procedure | 12 |
| 3.4 Test Results | 12 |
| 4. Carrier Frequency Separation | 15 |
| 4.1 Test Setup | 15 |
| 4.2 Limit..... | 15 |
| 4.3 Procedure..... | 15 |
| 4.4 Test Results | 15 |
| 5. Number of Hopping Frequencies | 16 |
| 5.1 Test Setup | 16 |
| 5.2 Limit..... | 16 |
| 5.3 Procedure..... | 16 |
| 5.4 Test Results | 16 |
| 6. Time of Occupancy (Dwell Time) | 17 |
| 6.1 Test Setup | 17 |
| 6.2 Limit..... | 17 |
| 6.3 Test Procedure..... | 17 |
| 6.4 Test Results | 17 |
| 7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission | 18 |
| 7.1 Test Setup | 18 |
| 7.2 Limit..... | 18 |
| 7.3 Test Procedures..... | 20 |
| 7.3.1 Test Procedures for Radiated Spurious Emissions..... | 20 |
| 7.3.2 Test Procedures for Conducted Spurious Emissions | 21 |
| 7.4 Test Results | 22 |
| 7.4.1 Radiated Emission | 22 |
| 7.4.2 Conducted Spurious Emissions | 23 |
| 8. Transmitter AC Power Line Conducted Emission | 29 |
| 8.1 Test Setup | 29 |
| 8.2 Limit..... | 29 |
| 8.3 Test Procedures..... | 29 |
| 8.4. Test Results | 30 |
| 9. Antenna Requirement | 32 |
| APPENDIX I | 33 |
| APPENDIX II | 34 |

1. General Information

1.1 Testing Laboratory

| | |
|---|--------------------|
| DT&C Co., Ltd. | |
| The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014. | |
| - FCC & IC MRA Designation No. : KR0034 - ISED #: 5740A | |
| www.dtnet.net | |
| Telephone | : + 82-31-321-2664 |
| FAX | : + 82-31-321-1664 |

1.2 Testing Environment

| Ambient Condition | |
|---------------------|-----------------|
| ▪ Temperature | +21 °C ~ +25 °C |
| ▪ Relative Humidity | 38 % ~ 45 % |

1.3 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

| Test items | Measurement uncertainty |
|------------------------------------|---|
| Antenna-port conducted emission | 0.9 dB (The confidence level is about 95 %, $k = 2$) |
| AC power-line conducted emission | 3.6 dB (The confidence level is about 95 %, $k=2$) |
| Radiated emission (1 GHz Below) | 4.9 dB (The confidence level is about 95 %, $k = 2$) |
| Radiated emission (1 GHz ~ 18 GHz) | 5.1 dB (The confidence level is about 95 %, $k = 2$) |
| Radiated emission (18 GHz Above) | 5.3 dB (The confidence level is about 95 %, $k = 2$) |

1.4 Details of Applicant

Applicant (FCC) : Point Mobile Co., LTD.
 Applicant (IC) : POINTMOBILE CO.,LTD
 Address (FCC) : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea
 153-709
 Address (IC) : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea
 (Republic Of)

1.5 Description of EUT

| | |
|---|---|
| Equipment Class | Part 15 Spread Spectrum Transmitter (DSS) |
| EUT | RFID/USN Wireless |
| Model Name | RF300 |
| Add Model Name | RF750 |
| Firmware Version Identification Number | 94.01 |
| EUT Serial Number | 2036310087(Conducted Sample), 2036310074(Radiated Sample) |
| Software version | 94.01 |
| Power Supply | DC 3.635 V |
| Frequency Range | 902.75 ~ 927.25 MHz |
| Modulation Technique | ASK |
| Number of Channels | 50(Channel Spacing: 500kHz) |
| Antenna Type | Antenna Type: Patch Antenna Gain: 2.21 dBi (PK) |

1.6 Declaration by the manufacturer

- N/A

1.7 Test Equipment List

| Type | Manufacturer | Model | Cal.Date (yy/mm/dd) | Next.Cal.Date (yy/mm/dd) | S/N |
|-------------------------------------|------------------------|-------------------------------|------------------------|-----------------------------|--------------------|
| Spectrum Analyzer | Agilent Technologies | N9020A | 20/12/16 | 21/12/16 | MY48010133 |
| Spectrum Analyzer | Agilent Technologies | N9020A | 20/12/16 | 21/12/16 | MY48011700 |
| Spectrum Analyzer | Agilent Technologies | N9020A | 20/06/24 | 21/06/24 | US47360812 |
| DC Power Supply | Agilent Technologies | 66332A | 20/06/24 | 21/06/24 | MY43000211 |
| Multimeter | FLUKE | 17B+ | 20/12/16 | 21/12/16 | 3630701WS |
| Signal Generator | Rohde Schwarz | SMBV100A | 20/12/16 | 21/12/16 | 255571 |
| Signal Generator | ANRITSU | MG3695C | 20/12/16 | 21/12/16 | 173501 |
| Thermohygrometer | BODYCOM | BJ5478 | 20/12/16 | 21/12/16 | 120612-1 |
| Thermohygrometer | BODYCOM | BJ5478 | 20/12/16 | 21/12/16 | 120612-2 |
| Thermohygrometer | BODYCOM | BJ5478 | 20/07/01 | 21/07/01 | N/A |
| Loop Antenna | ETS-Lindgren | 6502 | 21/01/28 | 23/01/28 | 00226186 |
| BILOG ANTENNA | Schwarzbeck | VULB 9160 | 20/12/16 | 21/12/16 | 3362 |
| Horn Antenna | ETS-Lindgren | 3117 | 20/10/23 | 21/10/23 | 00143278 |
| PreAmplifier | tsj | MLA-0118-B01-40 | 20/12/16 | 21/12/16 | 1852267 |
| PreAmplifier | H.P | 8447D | 20/12/16 | 21/12/16 | 2944A07774 |
| Band Reject Filter | Wainwright Instruments | WRCT800/960.0-2/40-8SSK | 20/06/24 | 21/06/24 | 32 |
| High Pass Filter | Wainwright Instruments | WHKX12-935-1000-15000-40SS | 20/06/24 | 21/06/24 | 8 |
| High Pass Filter | Wainwright Instruments | WHKX10-2838-3300-18000-60SS | 20/06/24 | 21/06/24 | 1 |
| High Pass Filter | Wainwright Instruments | WHNX8.0/26.5-6SS | 20/06/24 | 21/06/24 | 3 |
| Attenuator | Hefei Shunze | SS5T2.92-10-40 | 20/06/24 | 21/06/24 | 16012202 |
| Attenuator | SRTechnology | F01-B0606-01 | 20/06/24 | 21/06/24 | 13092403 |
| Attenuator | Aeroflex/Weinschel | 56-3 | 20/06/24 | 21/06/24 | Y2370 |
| Attenuator | SMAJK | SMAJK-2-3 | 20/06/24 | 21/06/24 | 2 |
| Attenuator | Aeroflex/Weinschel | 86-20-11 | 20/06/24 | 21/06/24 | 432 |
| Power Meter & Wide Bandwidth Sensor | Anritsu | ML2495A MA2490A | 20/06/24 | 21/06/24 | 1306007 1249001 |
| EMI Receiver | ROHDE&SCHWARZ | ESU | 20/11/16 | 21/11/16 | 100469 |
| PULSE LIMITER | Rohde Schwarz | ESH3-Z2 | 20/08/25 | 21/08/25 | 101333 |
| LISN | SCHWARZBECK | NSLK 8128 RC | 20/10/23 | 21/10/23 | 8128 RC-387 |
| HYGROMETER | TESTO | 608-H1 | 21/01/19 | 22/01/19 | 34862883 |
| Cable | DT&C | Cable | 21/01/08 | 22/01/08 | G-1 |
| Cable | DT&C | Cable | 21/01/08 | 22/01/08 | G-2 |
| Cable | HUBER+SUHNER | SUCOFLEX 100 | 21/01/08 | 22/01/08 | G-3 |
| Cable | DT&C | Cable | 21/01/08 | 22/01/08 | G-4 |
| Cable | HUBER+SUHNER | SUCOFLEX100 | 21/01/08 | 22/01/08 | M-01 |
| Cable | HUBER+SUHNER | SUCOFLEX100 | 21/01/08 | 22/01/08 | M-02 |
| Cable | JUNFLON | MWX241/B | 21/01/08 | 22/01/08 | M-03 |
| Cable | JUNFLON | J12J101757-00 | 21/01/08 | 22/01/08 | M-07 |
| Cable | HUBER+SUHNER | SUCOFLEX106 | 21/01/08 | 22/01/08 | M-09 |
| Cable | Radiall | TESTPRO3 | 21/01/08 | 22/01/08 | RFC-69 |
| Test Software | tsj | Radiated Emission Measurement | NA | NA | Version 2.00.0177 |
| Test Software | tsj | Noise Terminal Measurement | NA | NA | Version 2.00.0170 |

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

1.8 Summary of Test Results

| FCC part section(s) | RSS section(s) | Test Description | Limit (Using in 902-928 MHz) | Test Condition | Status Note 1 |
|---|---|-------------------------------|--|-------------------|--------------------|
| 15.247(a) | RSS-247[5.1] | Carrier Frequency Separation | >= 25 kHz or >= 20 dB BW, whichever is greater. | Conducted | C |
| | | Number of Hopping Frequencies | >= 50 hops, if 20 dB BW < 250kHz >= 25 hops, if 20 dB BW >= 250kHz | | C |
| | | 20 dB Bandwidth | < 500 kHz | | C |
| | | Dwell Time | =< 0.4 seconds | | C |
| 15.247(b) | RSS-247[5.4] | Transmitter Output Power | For FCC =< 1 Watt , if CHs >= 50 =< 0.25 W, if CHs >= 25, < 50 For IC if CHs >= 50 =< 1 Watt For Conducted Power =< 4 Watt For e.i.r.p, if CHs >= 25, < 50 =< 0.25 W For Conducted Power. =< 1 Watt For e.i.r.p | Conducted | C |
| 15.247(d) | RSS-247[5.5) | Conducted Spurious Emissions | The radiated emission to any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density. | Conducted | C |
| - | RSS-Gen[6.7] | Occupied Bandwidth (99 %) | N/A | | C |
| 15.247(d) 15.205 15.209 | RSS-247[5.5] RSS-Gen[8.9] RSS-Gen[8.10] | Radiated Spurious Emissions | FCC 15.209 Limits (Refer to section 7) | Radiated | C ^{Note3} |
| 15.207 | RSS-Gen[8.8] | AC Conducted Emissions | FCC 15.207 Limits (Refer to section 8) | AC Line Conducted | C |
| 15.203 | - | Antenna Requirements | FCC 15.203 (Refer to section 9) | - | C |
| Note 1: C = Comply NC = Not Comply NT = Not Tested NA = Not Applicable Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS. Note 3: This test item was performed in three orthogonal EUT positions and the worst case data was reported. | | | | | |

1.9 Conclusion of worst-case and operation mode

Tested frequency information,

- Hopping Function: Enable

| | TX Frequency (MHz) | RX Frequency (MHz) |
|---------------------|---------------------|---------------------|
| Hopping Band | 902.75 ~ 927.25 MHz | 902.75 ~ 927.25 MHz |

- Hopping Function: Disable

| Channel | TX Frequency (MHz) | RX Frequency (MHz) |
|------------------------|--------------------|--------------------|
| Lowest Channel | 902.75 | 902.75 |
| Middle Channel | 915.25 | 915.25 |
| Highest Channel | 927.25 | 927.25 |

Operation test setup for EUT

- Test Software Version: RFID Settings / 1.1.5
- Power setting: 28

2. Maximum Peak Output Power Measurement

2.1 Test Setup

Refer to the APPENDIX I.

2.2 Limit

■ FCC Requirements

The maximum peak output power of the intentional radiator shall not exceed the following :

- §15.247(b)(2), For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

■ IC Requirements

- RSS-247(5.4)(a), For FHSS operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W, and the e.i.r.p. shall not exceed 4 W if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W and the e.i.r.p. shall not exceed 1 W if the hopset uses less than 50 hopping channels.

2.3 Test Procedure

- The RF output power was measured with a spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
- The peak output power of the fundamental frequency was measured with the spectrum analyzer using;
 - Span = approximately 5 times of the 20 dB bandwidth, centered on a hopping channel
 - RBW \geq 20 dB BW
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

2.4 Test Results


| Tested Channel | Burst Average Output Power | | Peak Output Power | |
|----------------|----------------------------|--------|-------------------|--------|
| | dBm | mW | dBm | mW |
| Lowest | 28.76 | 751.62 | 29.49 | 889.20 |
| Middle | 28.37 | 687.07 | 29.15 | 822.24 |
| Highest | 28.21 | 662.22 | 28.87 | 770.90 |

Note 1: The average output power was tested using an average power meter for reference only.

Note 2: See next pages for actual measured spectrum plots.


Peak Output Power

Lowest Channel

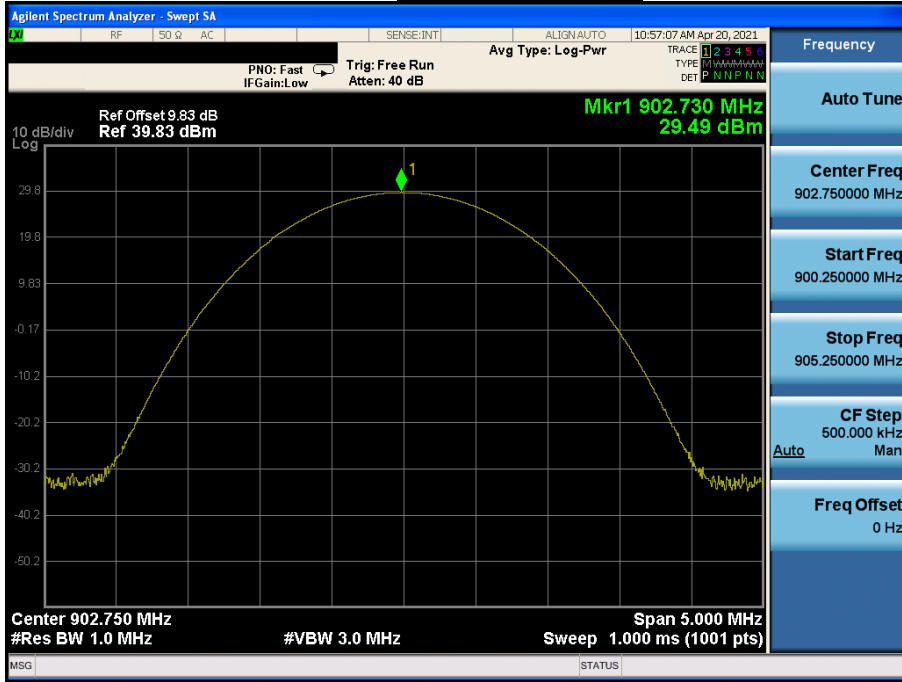


Peak Output Power

Middle Channel

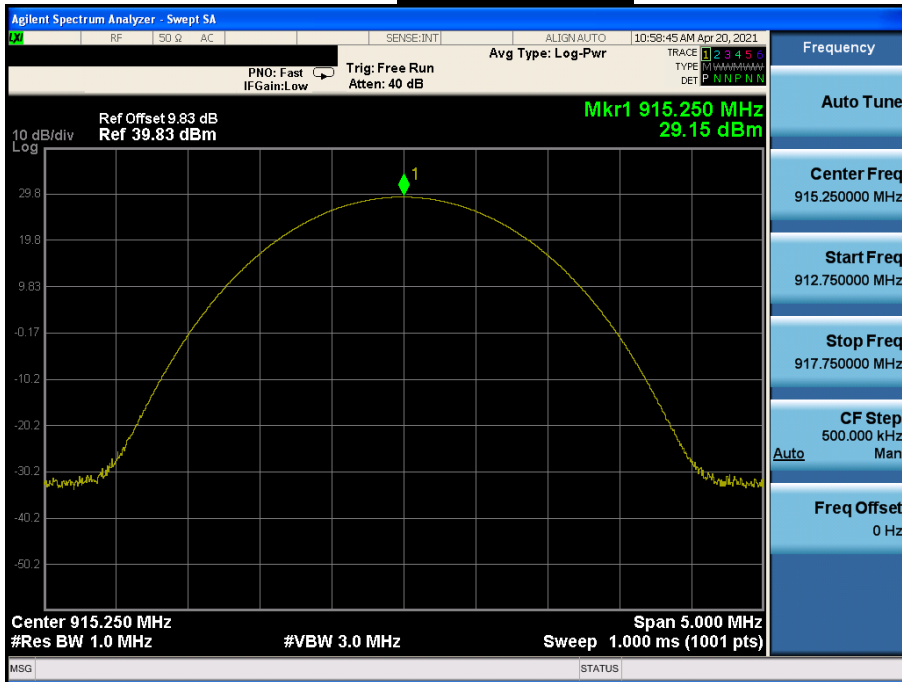

Peak Output Power

Highest Channel

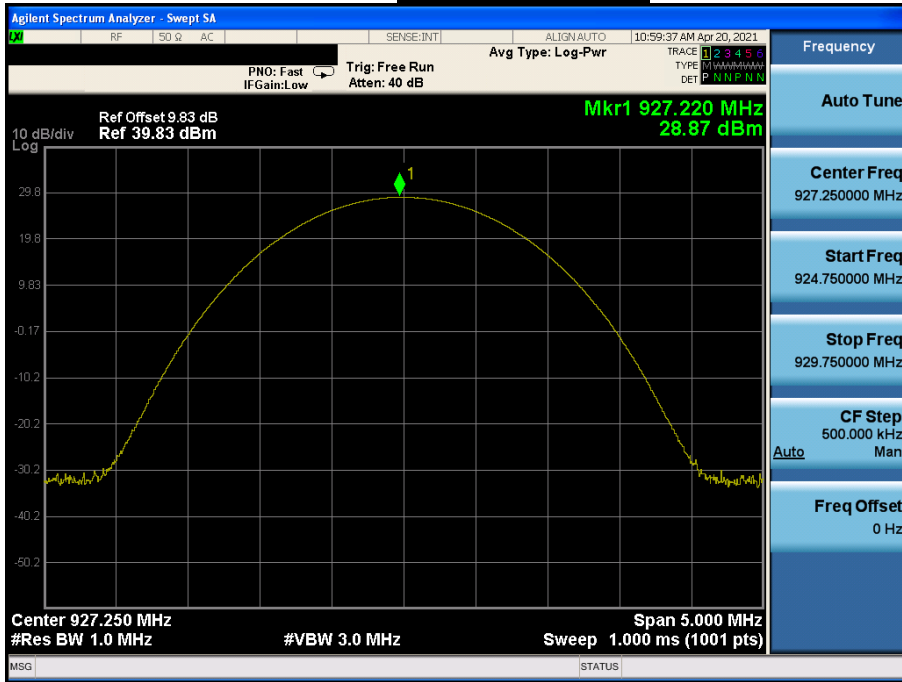

3. 20dB BW & Occupied BW

3.1 Test Setup

Refer to the APPENDIX I.

3.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.3 Test Procedure

1. The 20 dB bandwidth were measured with a spectrum analyzer connected to RF antenna Connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using below setting:
 - RBW = 1% to 5% of the 20 dB BW & Occupied BW
 - VBW $\geq 3 \times$ RBW
 - Span = between two times and five times the 20 dB bandwidth & Occupied BW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

3.4 Test Results

| Tested Channel | 20dB BW (kHz) | Occupied BW (kHz) |
|----------------|---------------|-------------------|
| Lowest | 39.16 | 52.07 |
| Middle | 40.95 | 53.14 |
| Highest | 41.14 | 51.73 |

Note 1: See next pages for actual measured spectrum plots.


20dB BW & Occupied BW

Lowest Channel




20dB BW & Occupied BW

Middle Channel

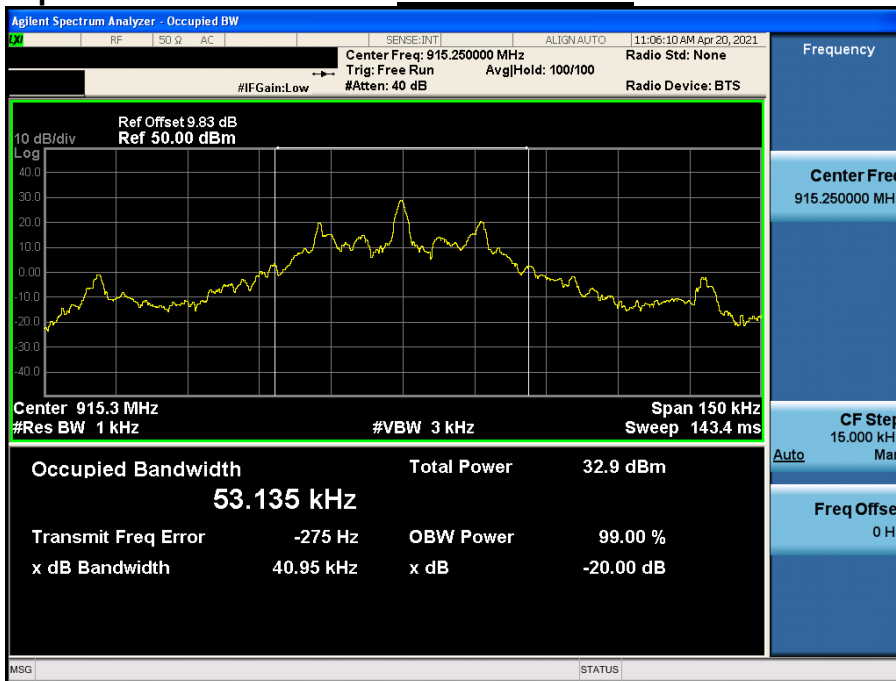

20dB BW & Occupied BW

Highest Channel

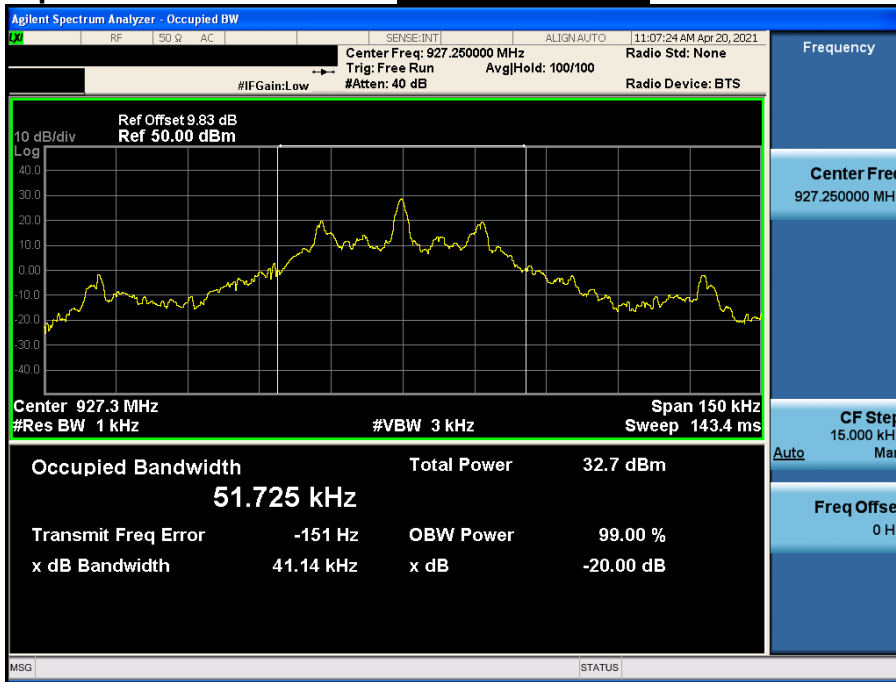

4. Carrier Frequency Separation

4.1 Test Setup

Refer to the APPENDIX I.

4.2 Limit

Limit : ≥ 25 kHz or ≥ 20 dB BW whichever is greater.

4.3 Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold

4.4 Test Results

| Hopping Mode | Peak of center channel (MHz) | Peak of adjacent Channel (MHz) | Test Result (kHz) |
|--------------|------------------------------|--------------------------------|-------------------|
| Enable | 915.247 | 915.750 | 502.5 |

Carrier Frequency Separation

Hopping mode : Enable

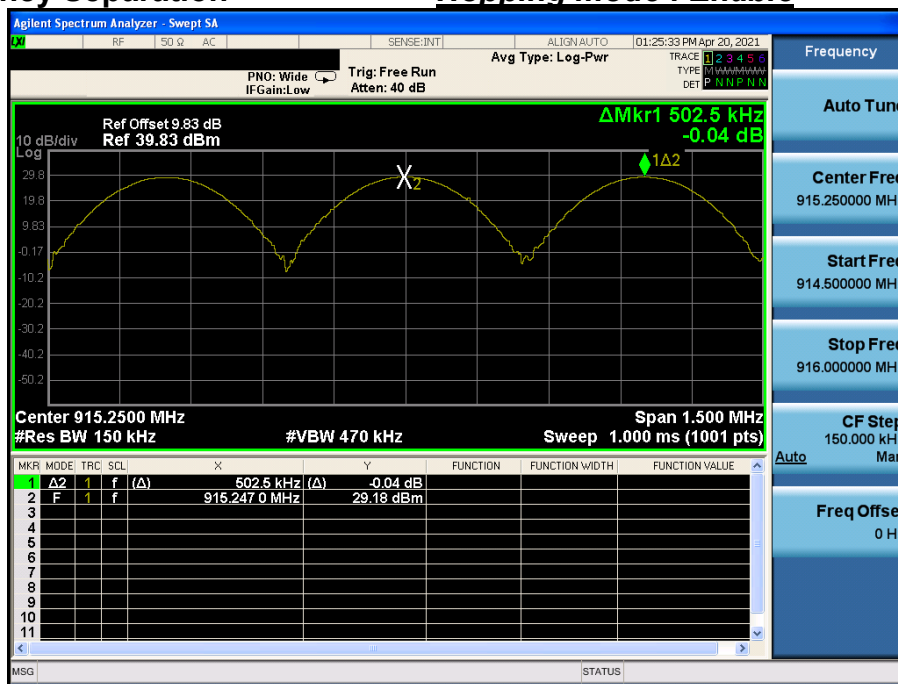

5. Number of Hopping Frequencies

5.1 Test Setup

Refer to the APPENDIX I.

5.2 Limit

Limit: ≥ 50 hops

5.3 Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, two frequency ranges for FH mode within the 902 ~ 928 MHz were examined.

The spectrum analyzer is set to :


- Span = 20 MHz
- Start Frequency = 897.75 MHz, Stop Frequency = 932.25 MHz
- RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- VBW \geq RBW
- Detector function = peak
- Sweep = auto
- Trace = max hold

5.4 Test Results

| Hopping mode | Test Result (Total Hops) |
|--------------|--------------------------|
| Enable | 50 |

Carrier Frequency Separation

Hopping mode : Enable

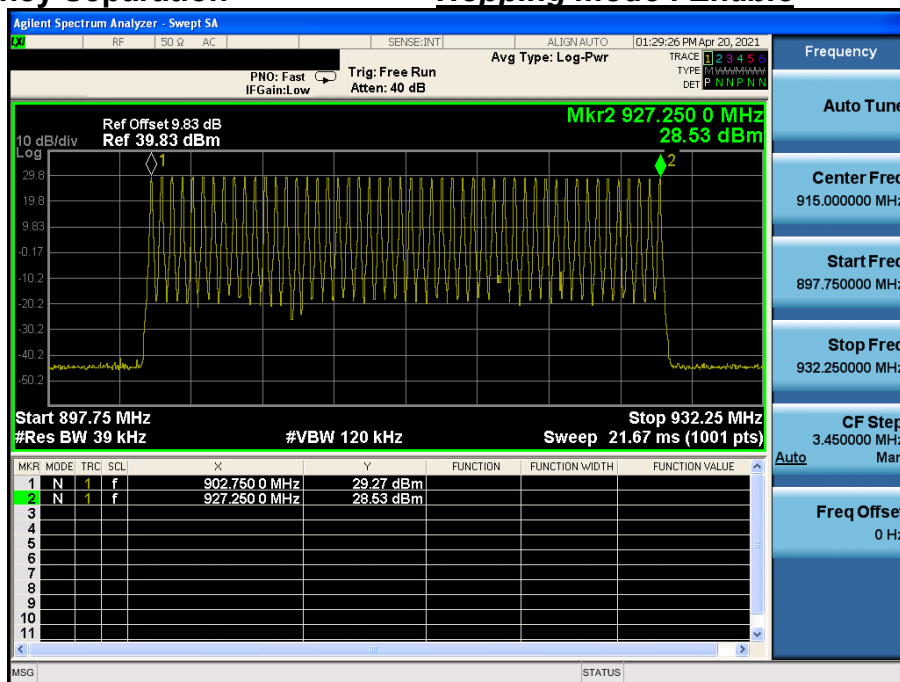

6. Time of Occupancy (Dwell Time)

6.1 Test Setup

Refer to the APPENDIX I.

6.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

6.3 Test Procedure


The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

- Center frequency = 915.25 MHz
- Span = zero
- RBW = 100 kHz (RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel)
- VBW \geq RBW
- Detector function = peak
- Trace = max hold

6.4 Test Results

| Hopping channels | Length (ms) | Number | Dwell Time (ms) |
|------------------|-------------|--------|-----------------|
| 50 | 61.75 | 2 | 123.500 |

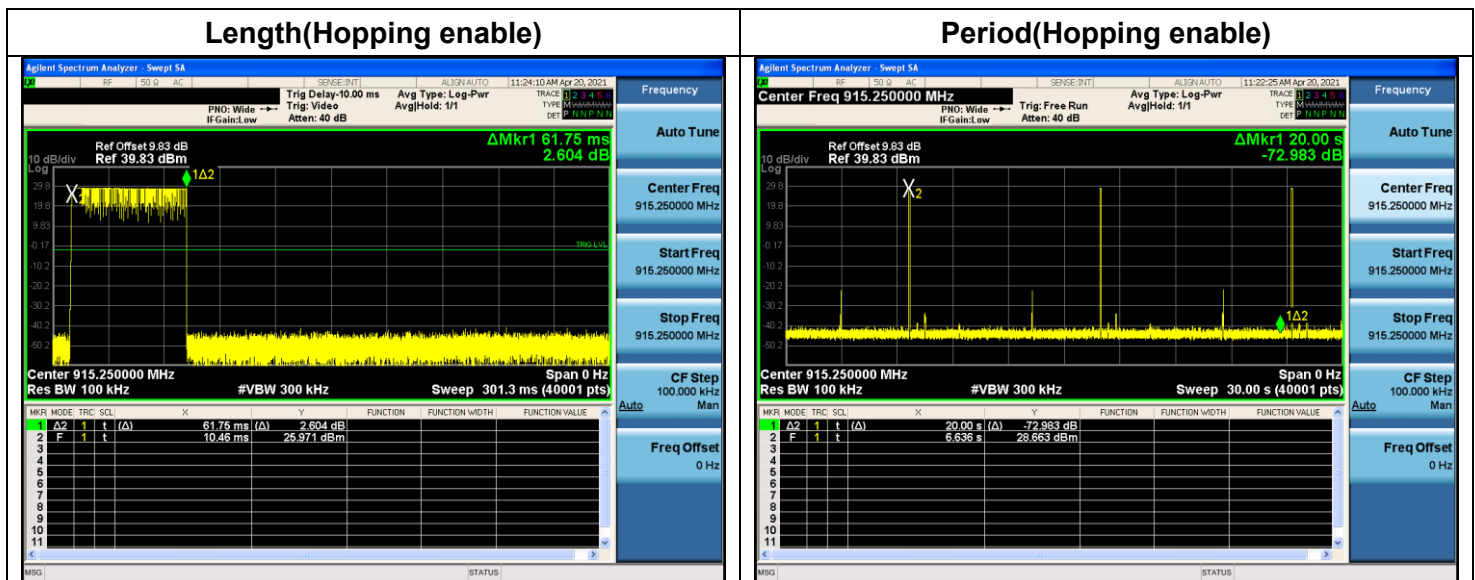

7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

7.1 Test Setup

Refer to the APPENDIX I.

7.2 Limit

Part 15.247(d), Part 15.205, Part 15.209 & RSS-247 [5.5], RSS-Gen [8.9], RSS-Gen [8.10]

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247 the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

- Part 15.209 & RSS-247[8.9]

| Frequency (MHz) | FCC Limit (uV/m) | IC Limit (µA/m) | Measurement Distance (m) |
|-----------------|------------------|-------------------|--------------------------|
| 0.009 – 0.490 | 2 400 / F (kHz) | 6.37/F (F in kHz) | 300 |
| 0.490 – 1.705 | 2 4000 / F (kHz) | 63.7/F (F in kHz) | 30 |
| 1.705 – 30.0 | 30 | 0.08 | 30 |

| Frequency (MHz) | FCC Limit (uV/m) | IC Limit (uV/m) | Measurement Distance (m) |
|-----------------|------------------|-----------------|--------------------------|
| 30 ~ 88 | 100 ** | 100 | 3 |
| 88 ~ 216 | 150 ** | 150 | 3 |
| 216 ~ 960 | 200 ** | 200 | 3 |
| Above 960 | 500 | 500 | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

- Part 15.205(a): Restricted band of operation

| MHz | MHz | MHz | MHz | GHz | GHz |
|-------------------|---------------------|-------------------|-----------------|--------------|---------------|
| 0.009 ~ 0.110 | 8.41425 ~ 8.41475 | 108 ~ 121.94 | 1300 ~ 1427 | 4.5 ~ 5.15 | 14.47 ~ 14.5 |
| 0.495 ~ 0.505 | 12.29 ~ 12.293 | 123 ~ 138 | 1435 ~ 1626.5 | 5.35 ~ 5.46 | 15.35 ~ 16.2 |
| 2.1735 ~ 2.1905 | 12.51975 ~ 12.52025 | 149.9 ~ 150.05 | 1645.5 ~ 1646.5 | 7.25 ~ 7.75 | 17.7 ~ 21.4 |
| 4.125 ~ 4.128 | 12.57675 ~ 12.57725 | 156.52475 ~ | 1660 ~ 1710 | 8.025 ~ 8.5 | 22.01 ~ 23.12 |
| 4.17725 ~ 4.17775 | 13.36 ~ 13.41 | 156.52525 | 1718.8 ~ 1722.2 | 9.0 ~ 9.2 | 23.6 ~ 24.0 |
| 4.20725 ~ 4.20775 | 16.42 ~ 16.423 | 156.7 ~ 156.9 | 2200 ~ 2300 | 9.3 ~ 9.5 | 31.2 ~ 31.8 |
| 6.215 ~ 6.218 | 16.69475 ~ 16.69525 | 162.0125 ~ 167.17 | 2310 ~ 2390 | 10.6 ~ 12.7 | 36.43 ~ 36.5 |
| 6.26775 ~ 6.26825 | 16.80425 ~ 16.80475 | 167.72 ~ 173.2 | 2483.5 ~ 2500 | 13.25 ~ 13.4 | Above 38.6 |
| 6.31175 ~ 6.31225 | 25.5 ~ 25.67 | 240 ~ 285 | 2655 ~ 2900 | | |
| 8.291 ~ 8.294 | 37.5 ~ 38.25 | 322 ~ 335.4 | 3260 ~ 3267 | | |
| 8.362 ~ 8.366 | 73 ~ 74.6 | 399.90 ~ 410 | 3332 ~ 3339 | | |
| 8.37625 ~ 8.38675 | 74.8 ~ 75.2 | 608 ~ 614 | 3345.8 ~ 3358 | | |
| | | 960 ~ 1240 | 3600 ~ 4400 | | |

- RSS-Gen[8.10]: Restricted frequency bands

| MHz | MHz | MHz | MHz | GHz | GHz |
|-------------------|---------------------|-------------------|-----------------|---------------|---------------|
| 0.090 ~ 0.110 | 8.362 ~ 8.366 | 73 ~ 74.6 | 608 ~ 614 | 3345.8 ~ 3358 | 9.0 ~ 9.2 |
| 0.495 ~ 0.505 | 8.37625 ~ 8.38675 | 74.8 ~ 75.2 | 960 ~ 1427 | 3500 ~ 4400 | 9.3 ~ 9.5 |
| 2.1735 ~ 2.1905 | 8.41425 ~ 8.41475 | 108 ~ 138 | 1435 ~ 1626.5 | 4500 ~ 5150 | 10.6 ~ 12.7 |
| 3.020 ~ 3.026 | 12.29 ~ 12.293 | 149.9 ~ 150.05 | 1645.5 ~ 1646.5 | 5350 ~ 5460 | 13.25 ~ 13.4 |
| 4.125 ~ 4.128 | 12.51975 ~ 12.52025 | 156.52475 ~ | 1660 ~ 1710 | 7250 ~ 7750 | 14.47 ~ 14.5 |
| 4.17725 ~ 4.17775 | 12.57675 ~ 12.57725 | 156.52525 | 1718.8 ~ 1722.2 | 8025 ~ 8500 | 15.35 ~ 16.2 |
| 4.20725 ~ 4.20775 | 13.36 ~ 13.41 | 156.7 ~ 156.9 | 2200 ~ 2300 | | 17.7 ~ 21.4 |
| 5.677 ~ 5.683 | 16.42 ~ 16.423 | 162.0125 ~ 167.17 | 2310 ~ 2390 | | 22.01 ~ 23.12 |
| 6.215 ~ 6.218 | 16.69475 ~ 16.69525 | 167.72 ~ 173.2 | 2483.5 ~ 2500 | | 23.6 ~ 24.0 |
| 6.26775 ~ 6.26825 | 16.80425 ~ 16.80475 | 240 ~ 285 | 2655 ~ 2900 | | 31.2 ~ 31.8 |
| 6.31175 ~ 6.31225 | 25.5 ~ 25.67 | 322 ~ 335.4 | 3260 ~ 3267 | | 36.43 ~ 36.5 |
| 8.291 ~ 8.294 | 37.5 ~ 38.25 | 399.90 ~ 410 | 3332 ~ 3339 | | Above 38.6 |

7.3 Test Procedures

7.3.1 Test Procedures for Radiated Spurious Emissions

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Measurement Instrument Setting

- Frequencies less than or equal to 1 000 MHz

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.

- Frequencies above 1 000 MHz

Peak Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

Average Measurement > 1GHz

RBW = 1MHz, VBW = Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. (Actual VBW setting: 30Hz)

Detector = Peak, Sweep Time = Auto, Trace Mode = Max Hold until the trace stabilizes

7.3.2 Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

Frequency range : 9 kHz ~ 30 MHz

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

Frequency range : 30 MHz ~ 10 GHz

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

7.4 Test Results

7.4.1 Radiated Emission

• Test Notes.

1. The radiated emissions were investigated 9 kHz to 10 GHz. And no other spurious and harmonic emissions were found below listed frequencies.
2. Information of Distance Correction Factor

For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.

In this case, the distance correction factor is applied to the result.

- Calculation of distance factor

At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$

At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$

When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.

3. Sample Calculation.

Margin = Limit – Result / Result = Reading + TF+ DCCF + DCF / TF = AF + CL + HL + AL – AG

Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss,

AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Radiated Emissions data

• Lowest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | TF (dB/m) | DCF (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|-----------|----------|-----------------|----------------|-------------|
| 2 708.100 | H | X | PK | 51.04 | 6.11 | N/A | 57.15 | 74.00 | 16.85 |
| 2 708.265 | H | X | AV | 41.15 | 6.11 | N/A | 47.26 | 54.00 | 6.74 |
| 3 610.732 | H | Y | PK | 53.13 | 0.64 | N/A | 53.77 | 74.00 | 20.23 |
| 3 610.948 | H | Y | AV | 47.16 | 0.64 | N/A | 47.80 | 54.00 | 6.20 |
| 5 416.586 | H | Y | PK | 53.82 | 3.32 | N/A | 57.14 | 74.00 | 16.86 |
| 5 416.530 | H | Y | AV | 48.14 | 3.32 | N/A | 51.46 | 54.00 | 2.54 |

• Middle Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | TF (dB/m) | DCF (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|-----------|----------|-----------------|----------------|-------------|
| 2 745.740 | H | X | PK | 50.88 | 5.98 | N/A | 56.86 | 74.00 | 17.14 |
| 2 745.734 | H | X | AV | 41.20 | 5.98 | N/A | 47.18 | 54.00 | 6.82 |
| 3 660.980 | H | Y | PK | 51.35 | 0.74 | N/A | 52.09 | 74.00 | 21.91 |
| 3 661.022 | H | Y | AV | 43.39 | 0.74 | N/A | 44.13 | 54.00 | 9.87 |
| 7 321.904 | H | Z | PK | 47.65 | 8.20 | N/A | 55.85 | 74.00 | 18.15 |
| 7 321.961 | H | Z | AV | 37.75 | 8.20 | N/A | 45.95 | 54.00 | 8.05 |


• Highest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | TF (dB/m) | DCF (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|-----------|----------|-----------------|----------------|-------------|
| 2 781.837 | H | X | PK | 49.91 | 5.99 | N/A | 55.90 | 74.00 | 18.10 |
| 2 781.762 | H | X | AV | 40.22 | 5.99 | N/A | 46.21 | 54.00 | 7.79 |
| 3 709.004 | H | Y | PK | 50.77 | 0.84 | N/A | 51.61 | 74.00 | 22.39 |
| 3 708.987 | H | Y | AV | 43.54 | 0.84 | N/A | 44.38 | 54.00 | 9.62 |
| 7 418.194 | H | Z | PK | 47.50 | 8.19 | N/A | 55.69 | 74.00 | 18.31 |
| 7 418.005 | H | Z | AV | 37.03 | 8.20 | N/A | 45.23 | 54.00 | 8.77 |

7.4.2 Conducted Spurious Emissions


Low Band-edge

Lowest Channel

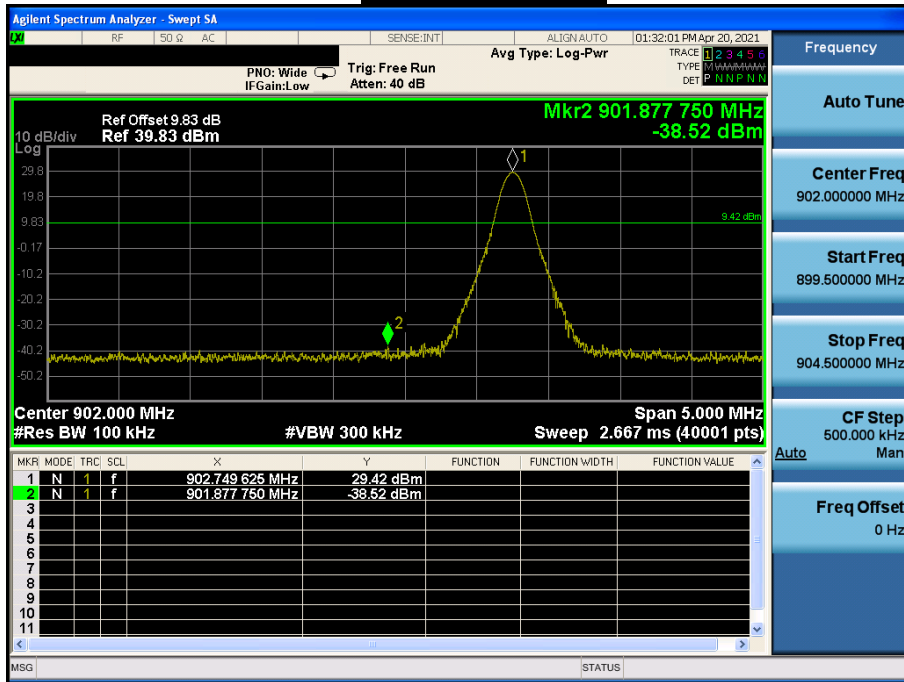



Low Band-edge

Hopping mode

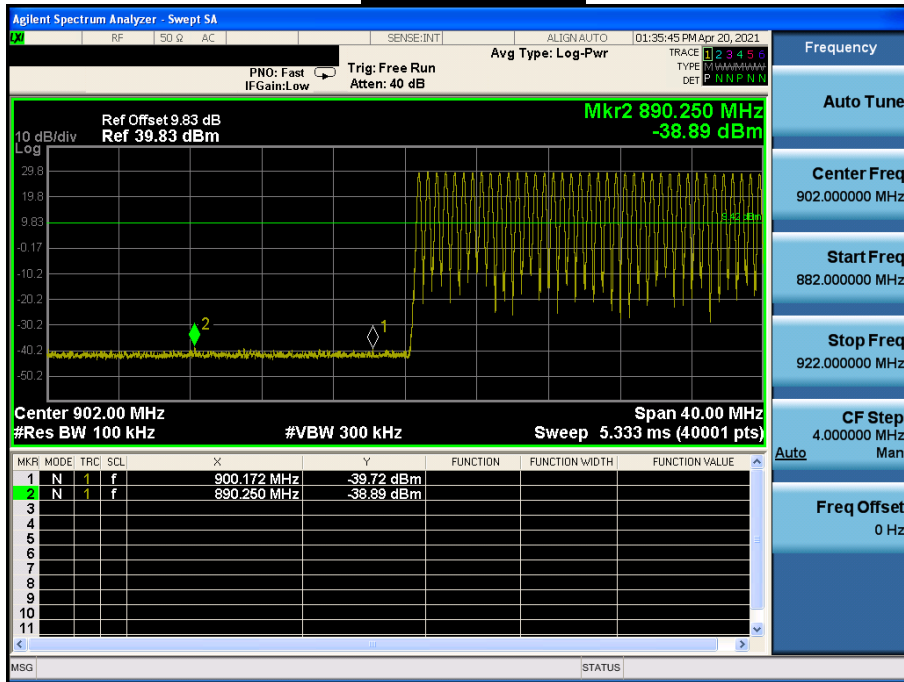


Conducted Spurious Emissions

Lowest Channel

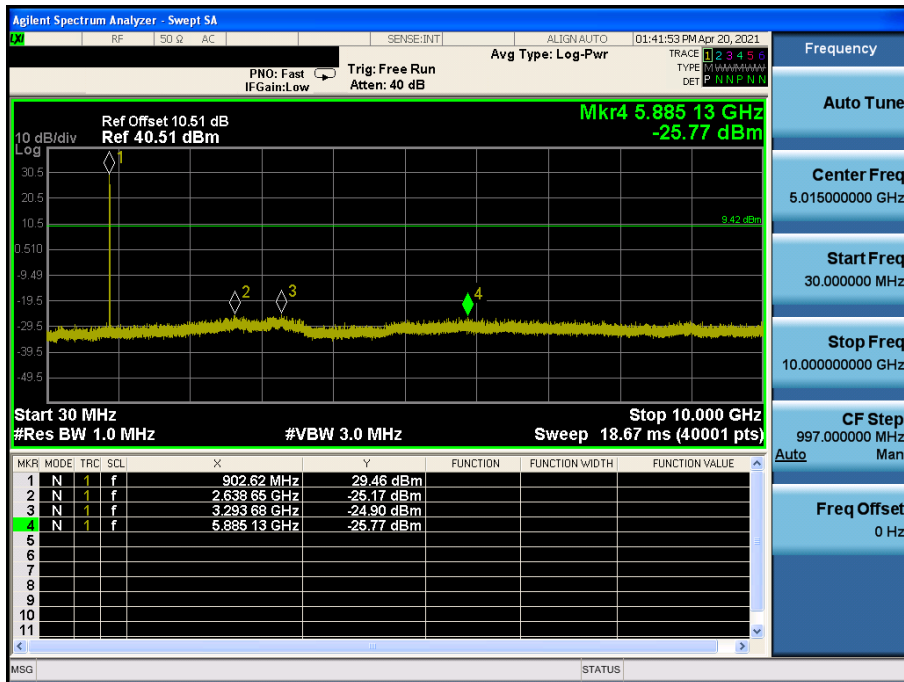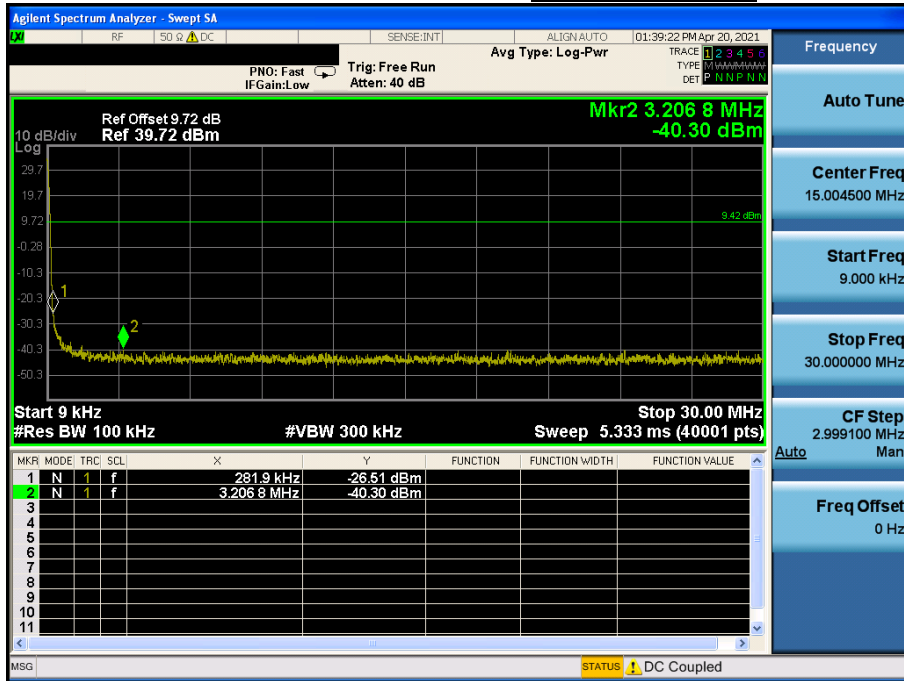



Reference for limit

Middle Channel

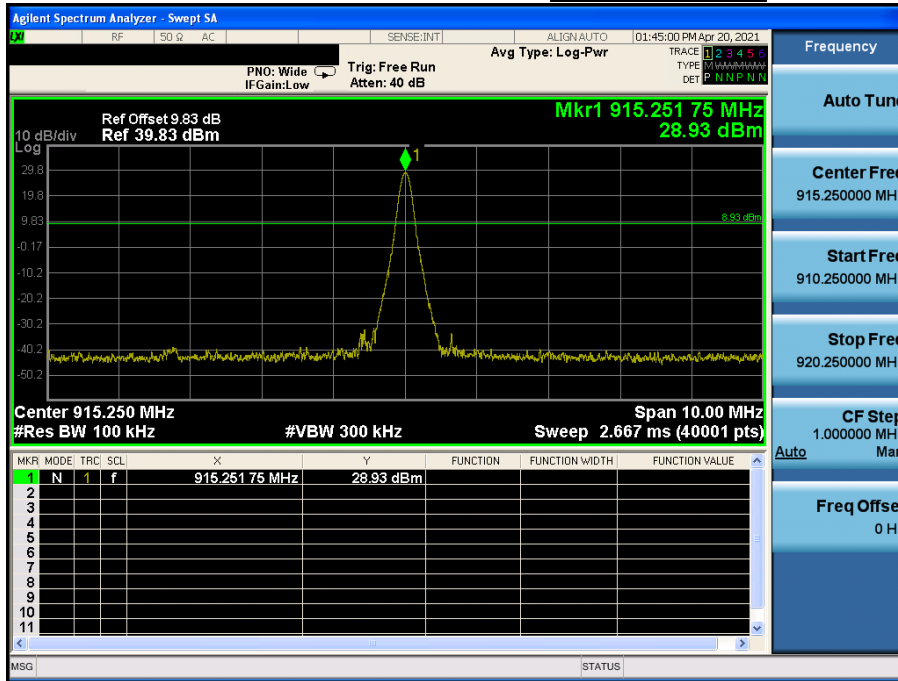


Conducted Spurious Emissions

Middle Channel

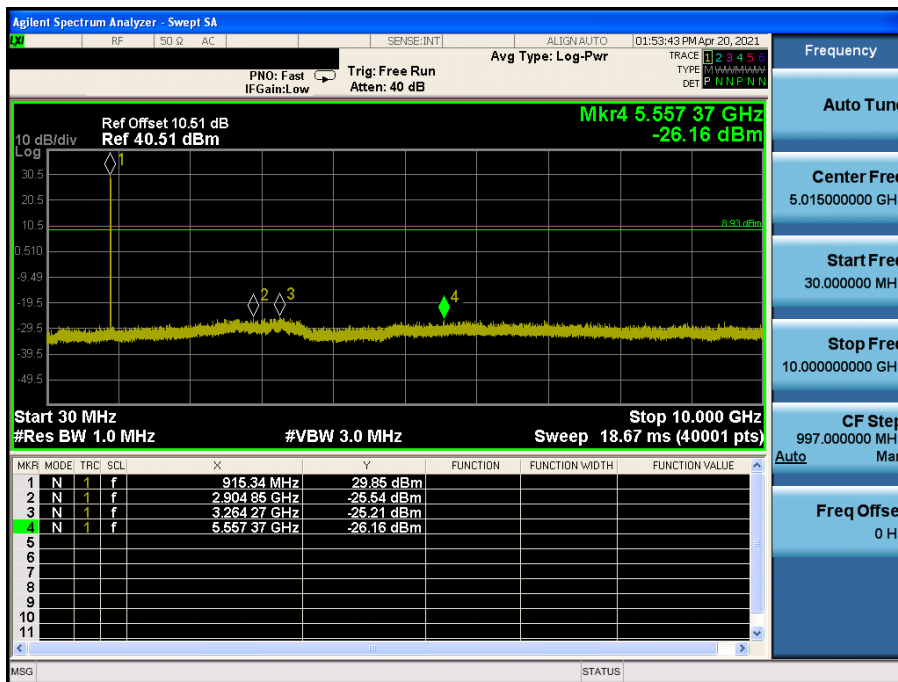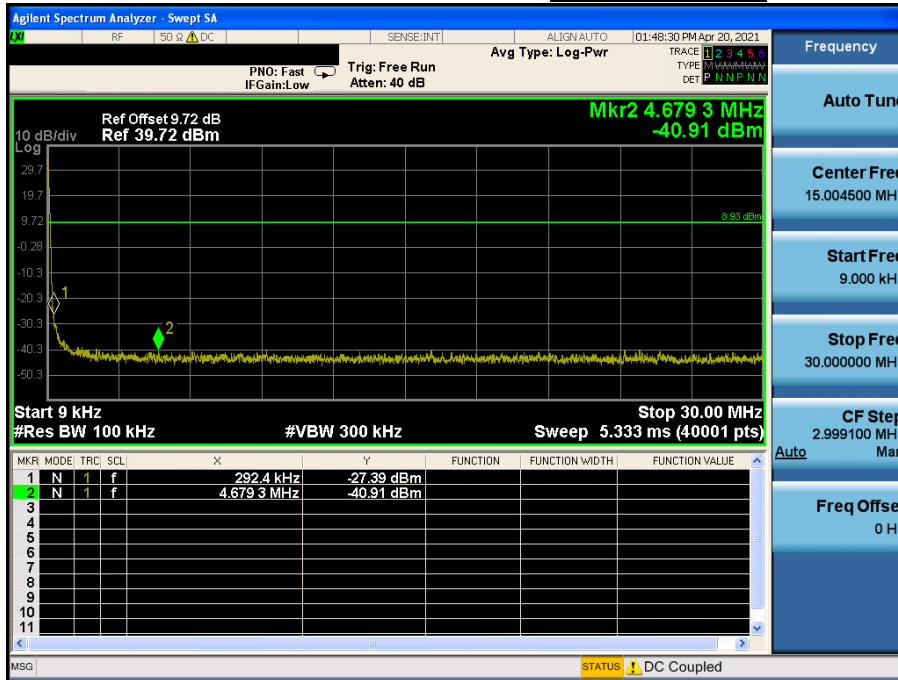


High Band-edge

Highest Channel

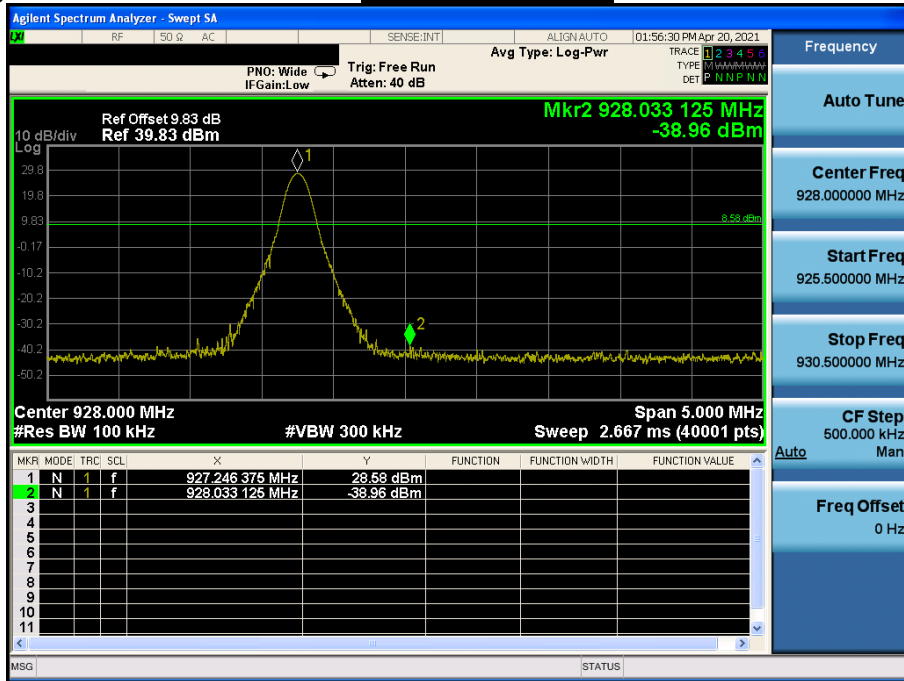



High Band-edge

Hopping mode

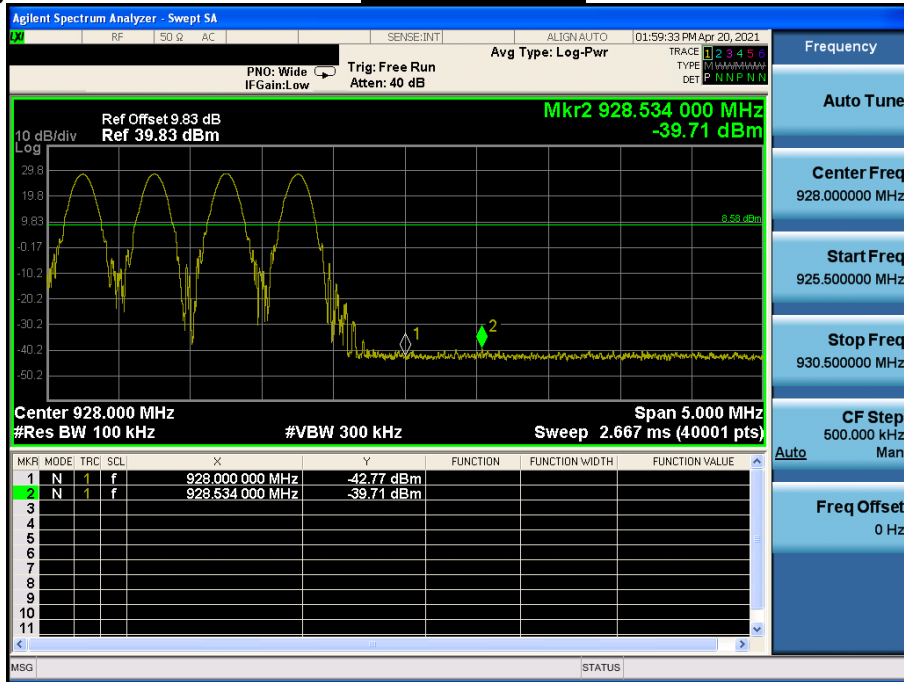

Conducted Spurious Emissions

Highest Channel

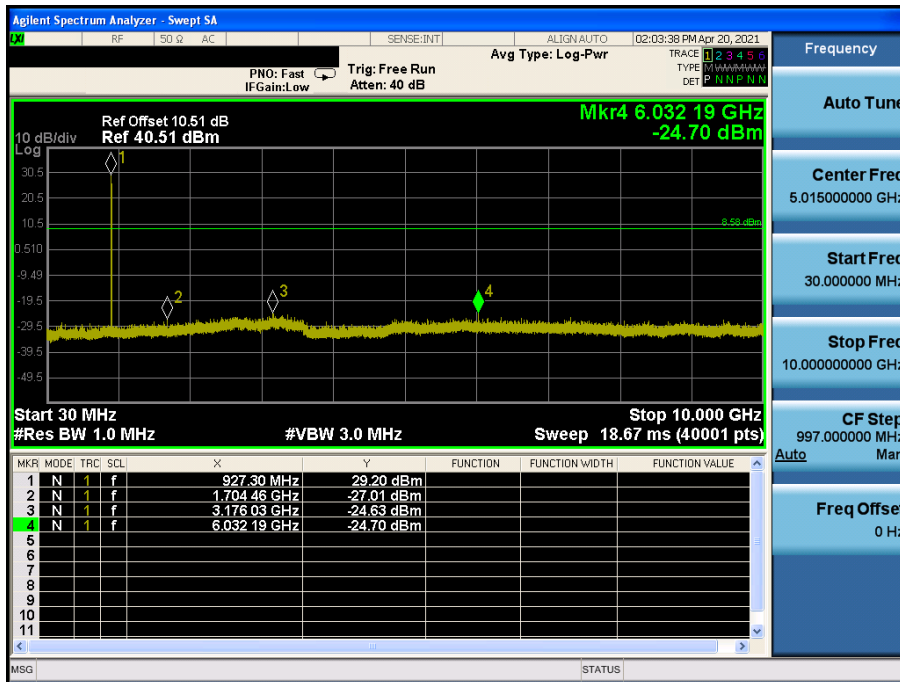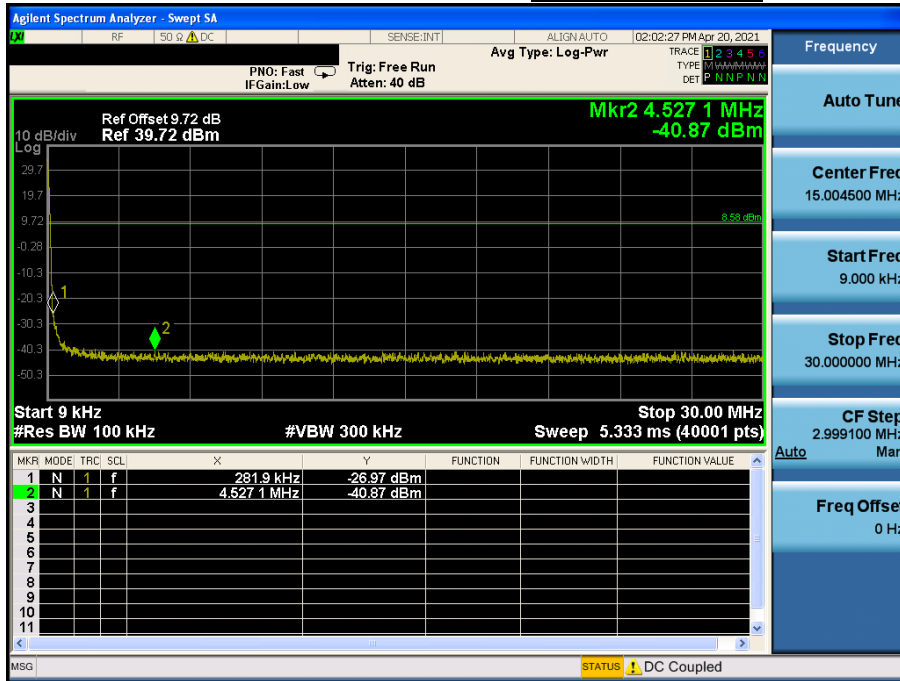

8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

See test photo graphs for the actual connections between EUT and support equipment.

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Conducted Limit (dBuV) | |
|-----------------------|------------------------|------------|
| | Quasi-Peak | Average |
| 0.15 ~ 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4. Test Results

AC Line Conducted Emissions (Graph) = Middle Channel

Results of Conducted Emission



DTNC

Date 2021-04-09

| | | | |
|----------------|-------|---------------|--------------|
| Order No. | | Reference No. | |
| Model No. | RF300 | Power Supply | 120 V, 60 Hz |
| Serial No. | | Temp/Humi. | 23 °C / 40 % |
| Test Condition | RFID | Operator | J.H.Bang |

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

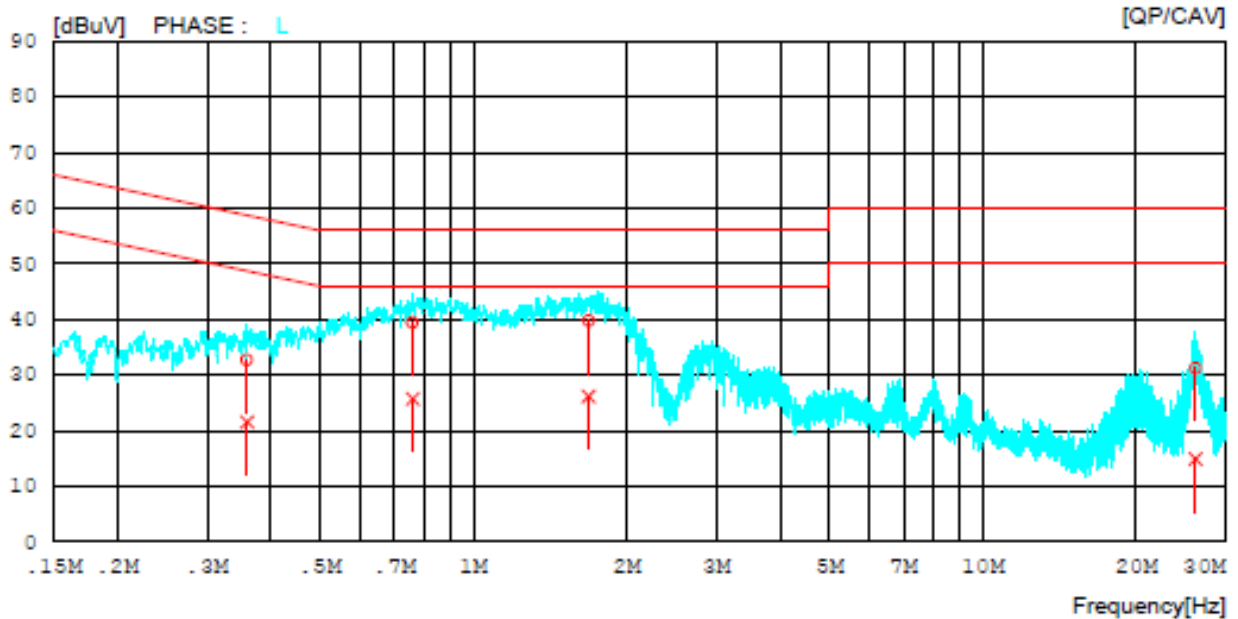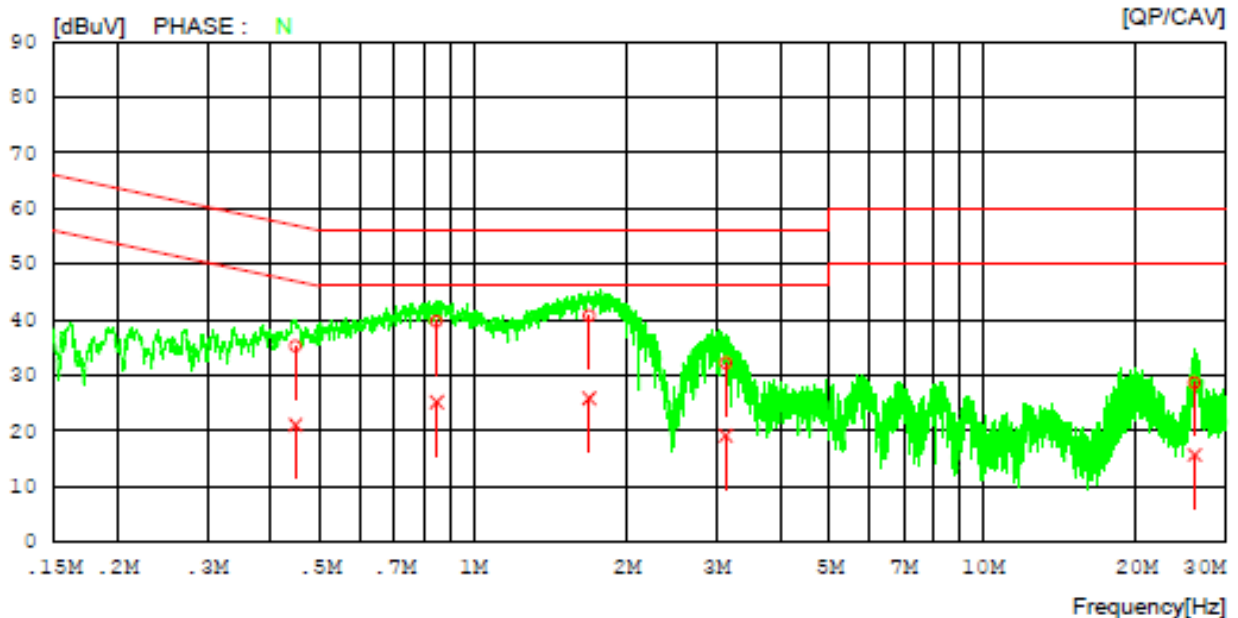

AC Line Conducted Emissions (List) = Middle Channel

Results of Conducted Emission

DTNC

Date 2021-04-09

| | | | |
|----------------|-------|---------------|--------------|
| Order No. | | Reference No. | |
| Model No. | RF300 | Power Supply | 120 V, 60 Hz |
| Serial No. | | Temp/Humi. | 23 °C / 40 % |
| Test Condition | RFID | Operator | J.H.Bang |

Memo

 LIMIT : FCC P15.207 QP
 FCC P15.207 AV

| NO | FREQ [MHz] | READING | | C. FACTOR [dB] | RESULT | | LIMIT | | MARGIN | | PHASE |
|----|---------------|--------------|---------------|-------------------|--------------|---------------|--------------|---------------|--------|-------|-------|
| | | QP [dBuV] | CAV [dBuV] | | QP [dBuV] | CAV [dBuV] | QP [dBuV] | CAV [dBuV] | | | |
| 1 | 0.44787 | 25.25 | 11.14 | 9.96 | 35.21 | 21.10 | 56.91 | 46.91 | 21.70 | 25.81 | N |
| 2 | 0.84801 | 29.65 | 15.24 | 9.97 | 39.62 | 25.21 | 56.00 | 46.00 | 16.38 | 20.79 | N |
| 3 | 1.68849 | 30.69 | 15.88 | 10.01 | 40.70 | 25.89 | 56.00 | 46.00 | 15.30 | 20.11 | N |
| 4 | 3.12959 | 22.03 | 9.05 | 10.08 | 32.11 | 19.13 | 56.00 | 46.00 | 23.89 | 26.87 | N |
| 5 | 26.02653 | 18.08 | 5.09 | 10.60 | 28.68 | 15.69 | 60.00 | 50.00 | 31.32 | 34.31 | N |
| 6 | 0.36002 | 22.68 | 11.60 | 9.95 | 32.63 | 21.55 | 58.73 | 48.73 | 26.10 | 27.18 | L |
| 7 | 0.76016 | 29.42 | 15.77 | 9.96 | 39.38 | 25.73 | 56.00 | 46.00 | 16.62 | 20.27 | L |
| 8 | 1.68365 | 29.67 | 16.18 | 10.02 | 39.69 | 26.20 | 56.00 | 46.00 | 16.31 | 19.80 | L |
| 9 | 26.12719 | 20.64 | 4.38 | 10.55 | 31.19 | 14.93 | 60.00 | 50.00 | 28.81 | 35.07 | L |

9. Antenna Requirement

▣ **According to FCC 47 CFR §15.203**


“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

**The antenna employs a unique antenna connector. (Refer to Internal Photo file.)
Therefore this E.U.T Complies with the requirement of §15.203**


APPENDIX I

Test set up diagrams

▪ **Radiated Measurement**

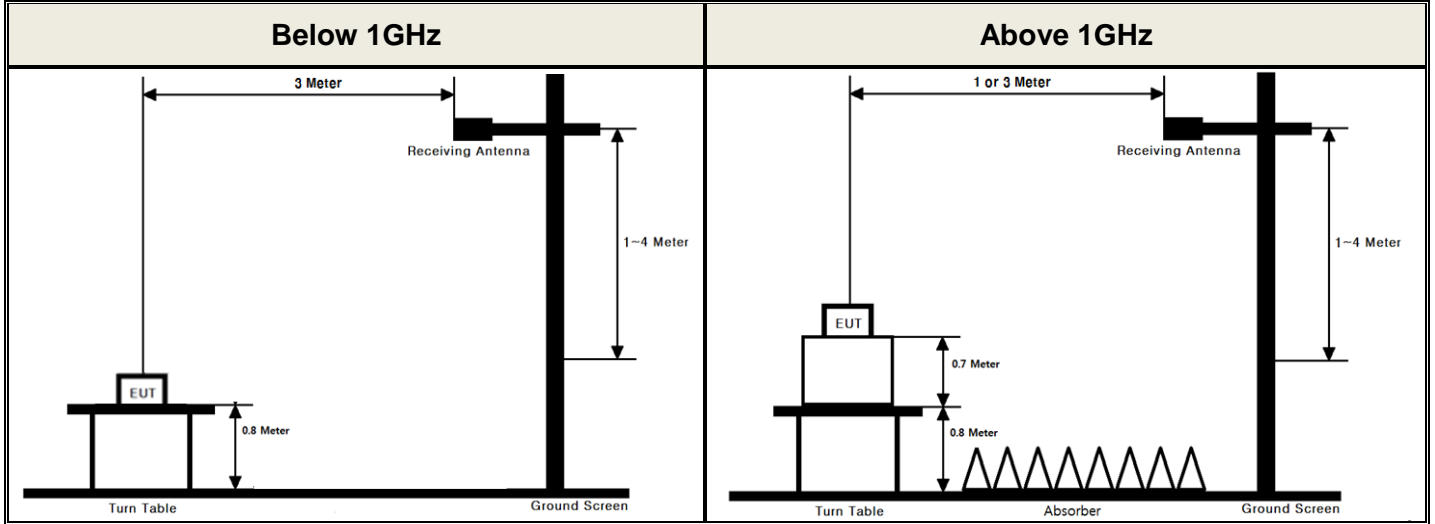

▪ **Conducted Measurement**

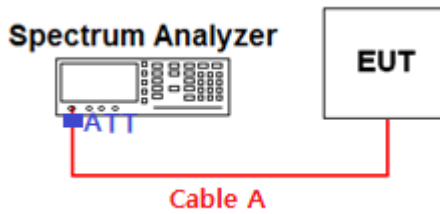

Path loss information

| Frequency (MHz) | Path Loss (dB) | Frequency (MHz) | Path Loss (dB) |
|--------------------------|----------------|-----------------|----------------|
| 30 | 9.72 | 1 000 | 9.89 |
| 500 | 9.78 | 5 000 | 10.10 |
| 902.75 & 915.25 & 927.25 | 9.83 | 10 000 | 10.51 |
| - | - | - | - |

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.

Path loss (S/A's Correction factor) = Cable A + Attenuator

APPENDIX II

Unwanted Emissions (Radiated) Test Plot

Highest & Y & Ver

Detector Mode : AV

