







ISO/IEC17025 Accredited Lab.

Report No: FCC 0808167 File reference No: 2008-11-27

Applicant: WIN ACCORD LTD.

Product: Digital Photo Frame

Brand Name: N/A

Model No: DPF070

Test Standards: FCC Part 15 Subpart B: 2006

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: Nov 27. 2008

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0808167 Page 2 of 31

Date: 2008-11-27



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 31

Report No: 0808167 Date: 2008-11-27



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test	5
2.2	Radiated electromagnetic disturbance test	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test	17
6.0	FCC ID Label	27
7.0	Photo of testing	28

Date: 2008-11-27



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F,NO.225,SEC 5,105 SONG SHAN DIST.,NAN JING EAST

ROAD, TAIPEI, TAIWAN, R.O.C

Telephone: 02-2749 3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame
Manufacturer: WIN ACCORD LTD.

Address: Shatou Section. Zhen'an Road, Chang'an, Town, Dongguan City

Brand Name: N/A Model Number: DPF070

Additional Model PJDPF107, DF-B6X (X: A-Z, a-z, 0-9)

Number:

Remark: Just model names and appearance colour are different.

Rating: Input: DC 5V, Current 2A

1.4 Submitted Sample: 1 Sample

The sample tested by

1.5 Test Duration: 2008-09-26 to 2008-11-26

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

12mg 1 and

Print Name: Terry Tang

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 31

Report No: 0808167 Date: 2008-11-27



2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2008.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2008.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2008.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2008.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2008.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2008.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2008.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2008.2.23	1Year
					ļ

2.3 Auxiliary Equipment

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	BOISB-027-00	CNFG029476	EPSON	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC ID

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 6 of 31

FCC DOC

Report No: 0808167 Date: 2008-11-27

TEST REPO	RT	P	age 6 of 31
$\left(\right)$		1.8m length	
	IBM	AC Mains cable	FCC DOC
		Data cable of	

1.5m length

BIGCOW

3.0 Technical Details

PC

Mouse

3.1 Investigations Requested
Perform Electromagnetic Interference [EMI] tests for FCC Requirement.

HM0509

3.2 Test Standards

FCC Part 15 Subpart B: 2006


8434

OM860XC



4.0 Conducted Power line Test

4.1 Schematics of the test




EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Block diagram of Test setup

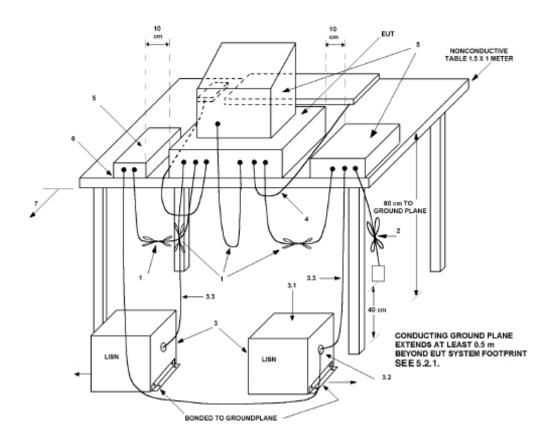

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0808167 Page 8 of 31

Date: 2008-11-27



4.3 Power line conducted Emission Limit

Eraguanay (MUz)	Class A Li	mits dB(μV)	Class B Limits dB(μV)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.00	66.00	66.00~56.00*	56.00~46.00*	
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00	
5.00 ~ 30.00	73.00	60.00	60.00	50.00	

Notes: 1. *decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.




EUT set Condition: Playing SD Card Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

Conducted Emission Measurement

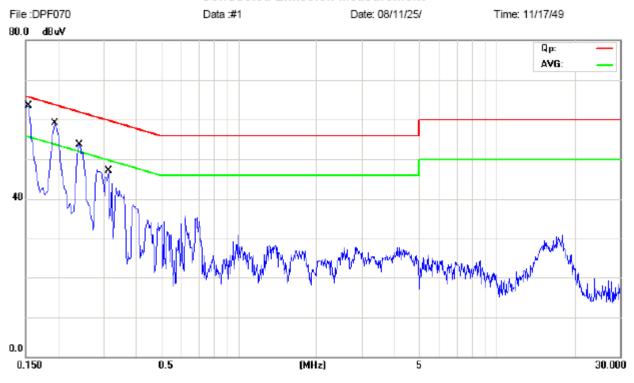

E		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1538			57.20	35.40	65.79	55.79
0.1931			54.75	32.65	63.90	53.90
0.2416			48.70	28.90	62.04	52.04
0.3087			35.27	31.47	60.01	50.01




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing SD Card Working Voltage: 120V~ 60Hz

Results: Pass
Please refer to following diagram for individual

Conducted Emission Measurement

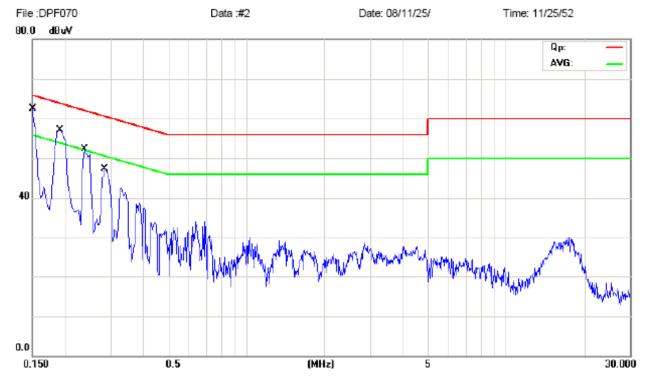

E		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1508	59.90	47.70			65.96	55.96
0.1934	54.05	41.15			63.89	53.89
0.2392	47.39	33.89			62.12	52.12
0.2858	35.44	28.04			60.65	50.65

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing USB Working Voltage: 120V~60Hz

Results: Pass

Please refer to following diagram for individual

Conducted Emission Measurement

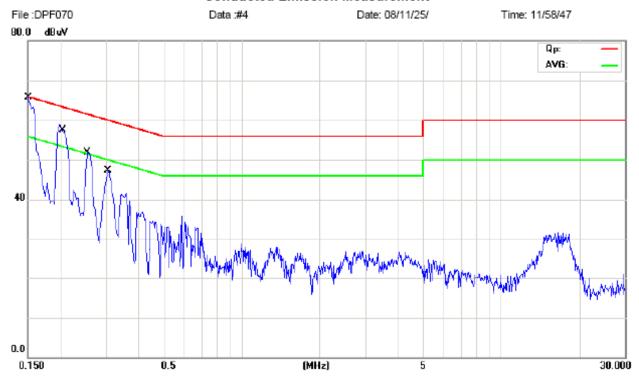


Eraguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1505	-	1	59.60	51.20	65.97	65.97
0.2051	-	1	53.36	47.66	63.40	63.40
0.2546			46.61	33.71	61.61	61.61
0.3054			40.76	28.86	60.09	60.09



EUT set Condition: Playing USB Working Voltage: 120V~ 60Hz

Results: Pass Please refer to following diagram for individual


Conducted Emission Measurement

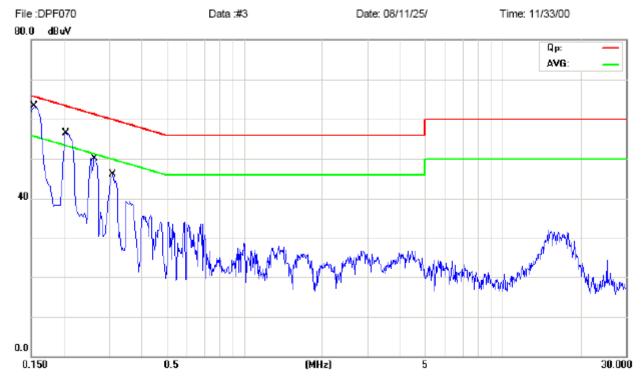

Engavener		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1540	59.40	52.90			65.78	55.78
0.2061	52.36	41.16			63.36	53.36
0.2645	46.42	44.42			61.29	51.29
0.3065	40.97	36.67			60.06	50.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




EUT set Condition: Connected to PC Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

Conducted Emission Measurement

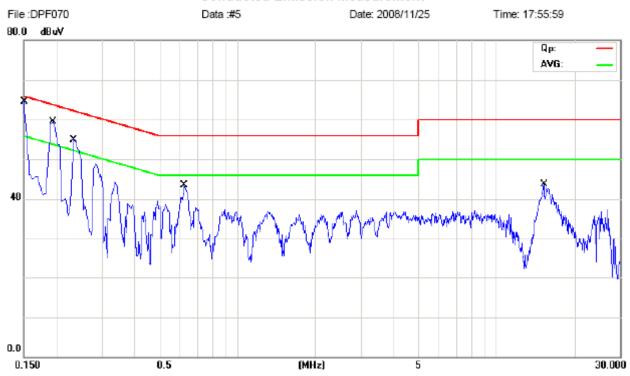

Emagayamay		Reading	Limi	t		
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1505			59.90	50.00	65.97	55.97
0.1937			54.75	31.75	63.88	53.88
0.2346			46.69	39.89	62.29	52.29
0.6287			38.71	26.21	56.00	46.00
15.2223			37.79	30.39	60.00	50.00




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC Working Voltage: 120V~ 60Hz

Results: Pass
Please refer to following diagram for individual

Conducted Emission Measurement

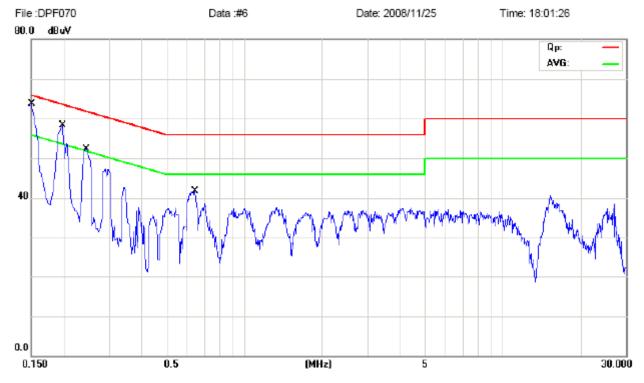

E		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1508	59.40	49.40			65.96	55.96
0.1976	53.65	39.95			63.71	53.71
0.2432	47.80	34.70			61.99	51.99
0.6372	38.42	26.02			56.00	46.00


Page 15 of 31

Report No: 0808167 Date: 2008-11-27



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Block diagram of Test setup

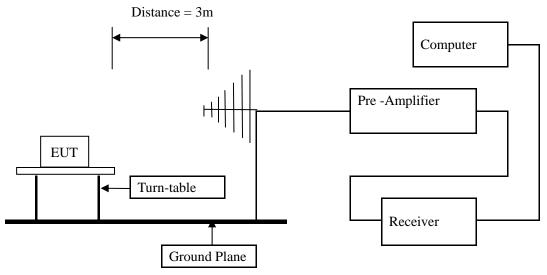



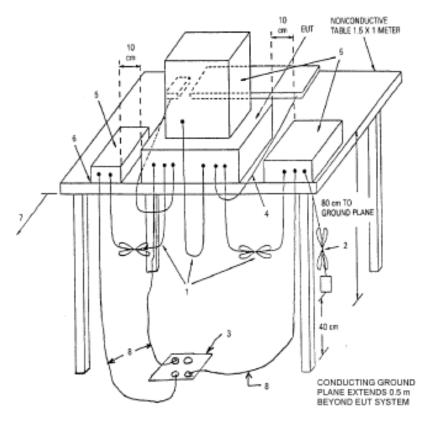

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 17 of 31

Report No: 0808167 Date: 2008-11-27


A: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connected to PC

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

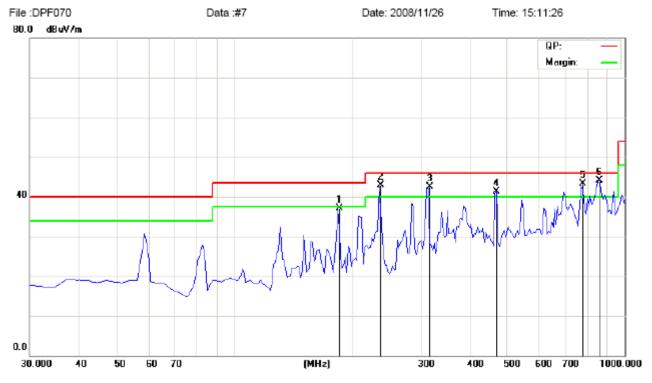

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
185.200	37.18	Н	43.50
236.125	42.96	Н	46.00
316.150	42.46	Н	46.00
467.350	41.35	Н	46.00
778.750	43.24	Н	46.00
860.775	44.02	Н	46.00

Page 18 of 31

Report No: 0808167 Date: 2008-11-27




B: Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Connected to PC

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

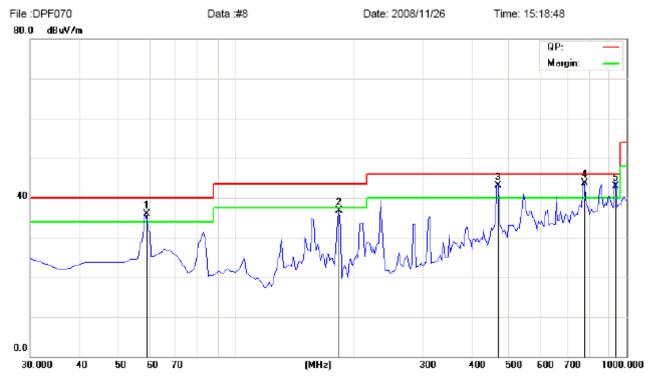

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
59.100	35.98	V	43.50
183.200	36.65	V	46.00
467.350	43.01	V	46.00
778.750	43.65	V	46.00
934.950	42.98	V	46.00

Page 19 of 31

Report No: 0808167 Date: 2008-11-27




EUT set Condition: Reading SD Card

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

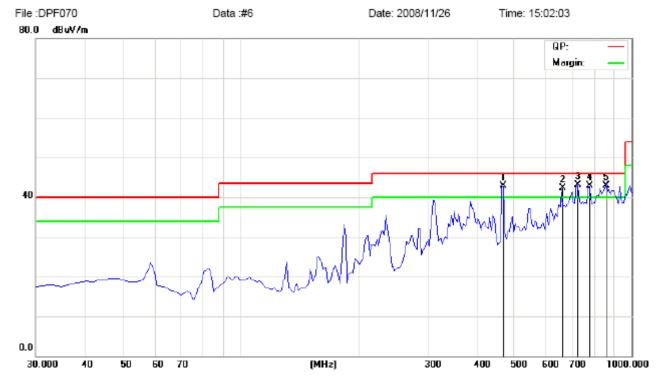

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
467.925	42.83	Н	46.00
665.350	42.28	Н	46.00
725.975	43.12	Н	46.00
778.750	42.94	Н	46.00
860.775	42.91	Н	46.00

Page 20 of 31

Report No: 0808167 Date: 2008-11-27



D: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Reading SD Card

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
59.10	35.18	V	40.00
467.201	41.58	V	46.00
778.379	44.15	V	46.00
859.911	43.14	V	46.00
933.964	42.63	V	46.00

Page 21 of 31

Report No: 0808167 Date: 2008-11-27




E: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Reading USB

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

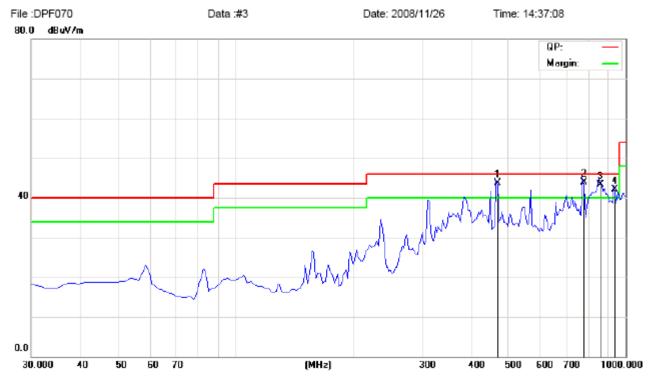

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
467.199	43.64	Н	46.00
778.396	43.99	Н	46.00
856.160	43.36	Н	46.00
934.950	42.12	Н	46.00

Page 22 of 31

Report No: 0808167 Date: 2008-11-27



F: Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Reading USB

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
59.100	35.48	V	40.00
467.214	43.69	V	46.00
778.411	44.21	V	46.00
933.391	42.66	V	46.00

Page 23 of 31

Report No: 0808167 Date: 2008-11-27



6.0 FCC ID Label

FCC ID: **V37-6210A7INCH**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 24 of 31

Report No: 0808167 Date: 2008-11-27



7.0 Photo of testing

7.1 Conducted test View-



Page 25 of 31

Report No: 0808167 Date: 2008-11-27



7.2 Radiated emission test view--



Page 26 of 31

Report No: 0808167 Date: 2008-11-27



7.3 Photo for the EUT

Front View



Page 27 of 31

Report No: 0808167 Date: 2008-11-27





Page 28 of 31

Report No: 0808167 Date: 2008-11-27





Page 29 of 31

Report No: 0808167 Date: 2008-11-27





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 30 of 31

Report No: 0808167 Date: 2008-11-27





Page 31 of 31

Report No: 0808167 Date: 2008-11-27





-End of the report-