







ISO/IEC17025 Accredited Lab.

Report No: FCC 0809071 File reference No: 2008-12-08

Applicant: WIN ACCORD LTD.

Product: DF-B4X

Brand Name: N/A

Model No: Digital Photo Frame

Test Standards: FCC Part 15 Subpart B: 2006

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: Dec 08. 2008

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0809071 Page 2 of 30

Date: 2008-12-08



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 30

Report No: 0809071 Date: 2008-12-08



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty.	4
1.5	Submitted Sample	4
1.6	Test Duration	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test.	5
2.3	Auxiliary Equipment	5
2.4	I/O Cable	5
3.0	Technical Details.	6
3.1	Investigations Requested.	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test.	15
6.0	FCC ID Label	23
7.0	Photo of testing	24

Report No: 0809071 Page 4 of 30

Date: 2008-12-08



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F,NO.225,SEC 5,105 SONG SHAN DIST.,NAN JING EAST

ROAD, TAIPEI, TAIWAN, R.O.C

Telephone: 02-2749 3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame
Manufacturer: WIN ACCORD LTD.

Address: Shatou Section. Zhen'an Road, Chang'an, Town, Dongguan City

Brand Name: N/A

Model Number: DF-B4X

Additional Model DPF080WL, DF-A4X, DPF080WBW, DPF080WMFB, DPF-BW08W, Number: DPF-CXI08W, DFP-CXM08W, DPF-RWP08W; DPF-BA08W, DPF-WA08W,

DPF-BL08W, DPF-BRL08W, DPF-BW08W, DPF-BW108W, DPF-BWP08W,

DPF-BWM08W, DPF-BRM08W, DPF-EWM08W (X: A-Z, a-z, 0-9)

Rating: Input: DC 5V, 2A

1.4 Submitted Sample: 1 Sample

1.5 Test Duration: 2008-09-26 to 2008-12-05

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB



1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2008.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2008.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2008.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2008.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2008.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2008.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2008.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2008.2.23	1Year

2.3 Auxiliary Equipment

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	BOISB-027-00	CNFG029476	EPSON	AC Mains cable	DOC
Monitor	6331-4CN	23-DNWX3	IBM	Data cable of	FCC ID

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 6 of 30

Report No: 0809071 Date: 2008-12-08

				1.5m length	
				unshielded and	
				1.8m length AC	
				Mains cable	
				1.8m length	
PC	8434		IBM	AC Mains cable	FCC DOC
				Data cable of	
Mouse	OM860XC	HM0509	BIGCOW	1.5m length	FCC DOC

3.0 **Technical Details**

3.1 **Investigations Requested** Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 **Test Standards**

FCC Part 15 Subpart B: 2006



4.0 Conducted Power line Test

4.1 Schematics of the test

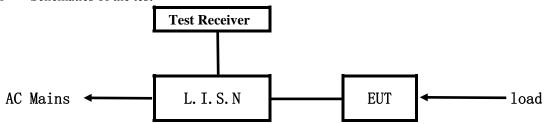


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Block diagram of Test setup

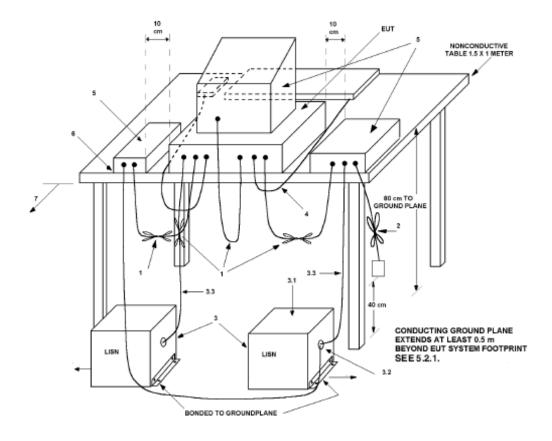

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0809071 Page 8 of 30

Date: 2008-12-08



4.3 Power line conducted Emission Limit

Fraguency(MHz)	Class A Li	Class A Limits $dB(\mu V)$ Class		nits dB(µV)
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.00	66.00	66.00~56.00*	56.00~46.00*
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00
5.00 ~ 30.00	73.00	60.00	60.00	50.00

Notes: 1. *decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

4.4 Test Results


The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing SD Card Working Voltage: $120V \sim 60Hz$

Results: Pass

Please refer to following diagram for individual

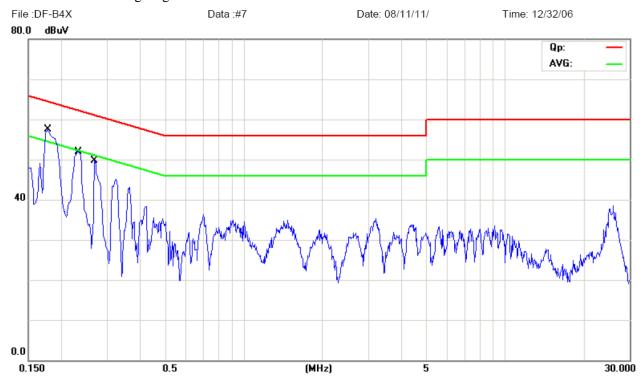

Eraguanav		Reading	Limi	t		
Frequency (MHz)	Live	;	Neutr	al	(dB µ	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.177			45.63	33.93	64.59	54.59
0.233			47.19	38.29	62.33	52.33
0.269			33.73	13.73	61.14	51.14



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing SD Card Working Voltage: $120V \sim 60Hz$

Results: Pass
Please refer to following diagram for individual

Ето аууот оху		Reading	Limi	t		
Frequency (MHz)	Live		Neutral (dB		(dB µ	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.186	50.54	46.94			64.20	54.20
0.229	45.48	33.18			62.48	52.48
0.277	41.64	34.24			60.88	50.88

30.000

Report No: 0809071 Date: 2008-12-08

0.0

0.150



EUT set Condition: Playing USB Working Voltage: $120V \sim 60Hz$

Results: Pass

Please refer to following diagram for individual

File :DF-B4X Data :#11 Date: 08/11/11/ Time: 12/49/09

80.0 dBuV

40

Eraguanav		Reading	Limit			
Frequency (MHz)	Live	;	Neutr	al	(dB µ	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.151			54.60	38.20	65.93	55.93
0.202			48.85	34.65	63.53	53.53
0.250			43.21	28.61	61.76	51.76


(MHz)



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing USB Working Voltage: $120V \sim 60Hz$

Results: Pass
Please refer to following diagram for individual

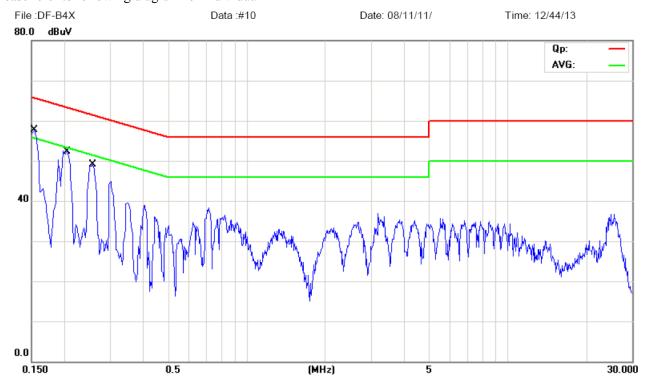


Eraguanav		Reading	Limit			
Frequency (MHz)	Live	Live		Neutral (dl		V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.154	54.90	41.90			65.78	55.78
0.205	48.26	35.06			63.41	53.41
0.257	43.91	31.91			61.51	51.51



EUT set Condition: Connect to PC Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

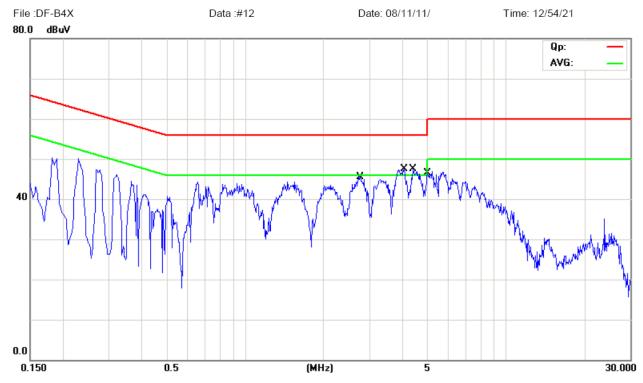


Eraguanav		Reading	V) Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(IVITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
2.762			40.91	29.81	56.00	46.00
4.080			41.53	30.93	56.00	46.00
4.411			41.46	30.66	56.00	46.00
5.019			40.89	29.59	60.00	50.00



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC Working Voltage: $120V \sim 60Hz$

Results: Pass
Please refer to following diagram for individual

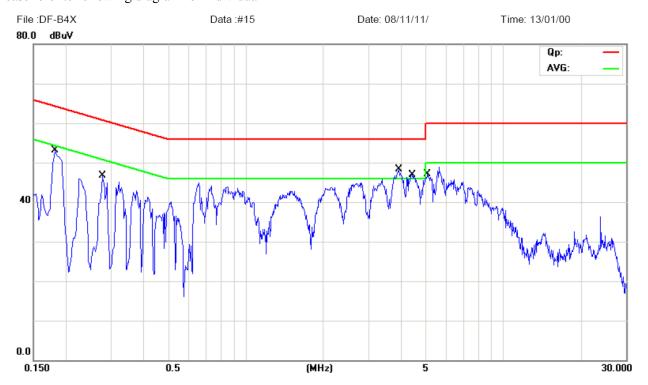

Егодиопом		Reading	Limi	t		
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.181	48.13	40.83			64.40	54.40
0.277	42.83	32.63			60.90	50.90
3.955	43.48	40.88			56.00	46.00
4.445	42.98	33.38			56.00	46.00
5.095	42.96	32.76			60.00	50.00


Page 15 of 30

Report No: 0809071 Date: 2008-12-08



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Block diagram of Test setup

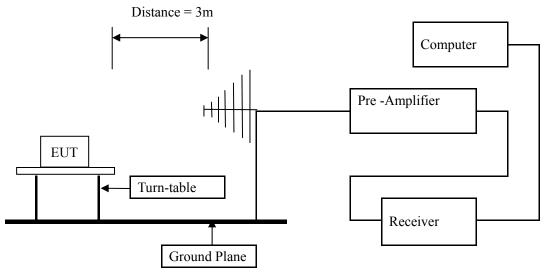



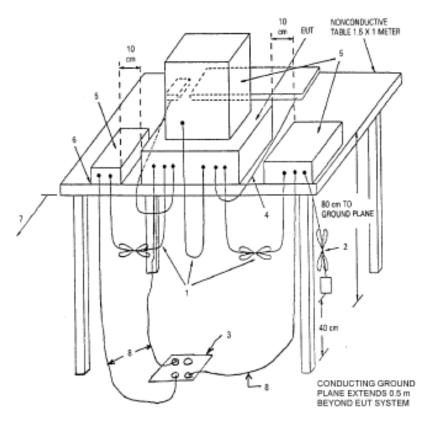

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Page 17 of 30

Report No: 0809071 Date: 2008-12-08


A: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connected to PC

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

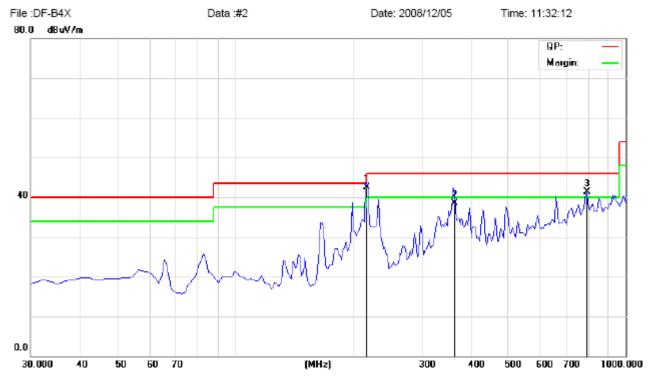

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
216.868	42.52	Н	46.00
361.924	38.58	Н	46.00
793.875	41.36	Н	46.00

Page 18 of 30

Report No: 0809071 Date: 2008-12-08




B: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Connected to PC

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

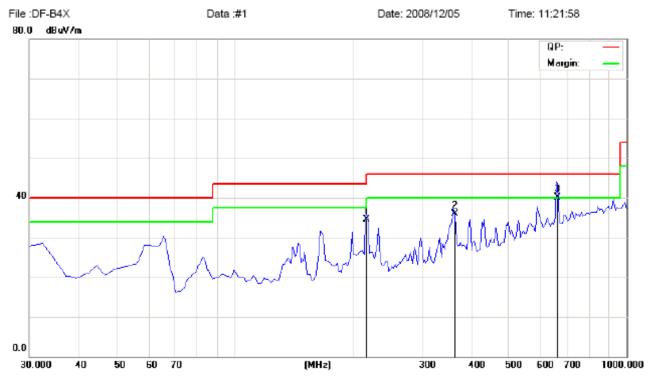

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
216.864	34.45	V	46.00
362.179	35.86	V	46.00
664.768	40.19	V	46.00

Page 19 of 30

Report No: 0809071 Date: 2008-12-08




C: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Reading SD Card

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

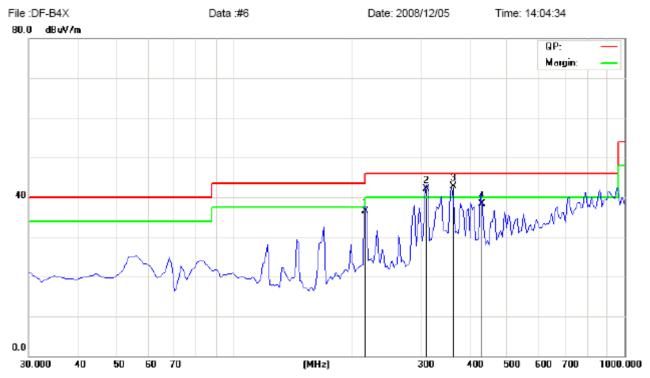

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
216.860	36.57	Н	46.00
310.919	42.10	Н	46.00
362.206	42.64	Н	46.00
430.361	38.30	Н	46.00

Page 20 of 30

Report No: 0809071 Date: 2008-12-08




D: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Reading SD Card

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

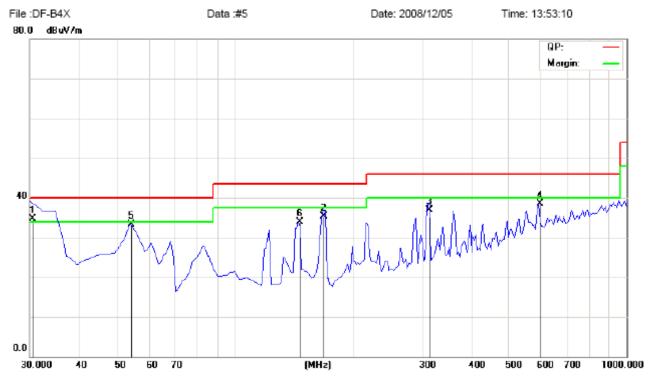

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30.280	34.61	V	40.00
168.590	35.27	V	43.50
313.142	36.99	V	46.00
597.450	38.43	V	46.00
54.250	33.38	V	40.00
146.400	33.81	V	43.50

Page 21 of 30

Report No: 0809071 Date: 2008-12-08




E: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Reading USB

Level: Class B
Results: PASS
Please refer to following diagram for individual

Picture of the test

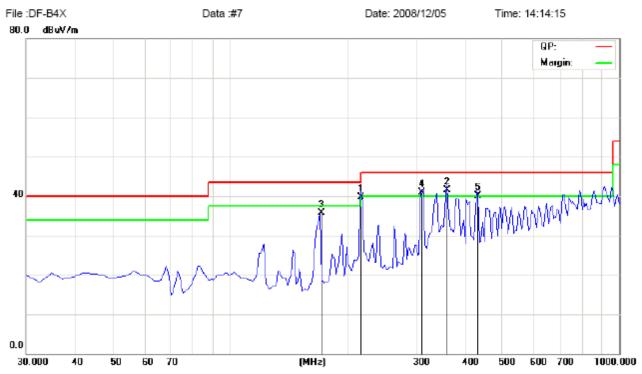

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
216.871	39.65	Н	46.00
361.432	41.48	Н	46.00
170.650	35.63	Н	43.50
310.906	40.86	Н	46.00
433.720	40.18	Н	46.00

Page 22 of 30

Report No: 0809071 Date: 2008-12-08




F: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Reading USB

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

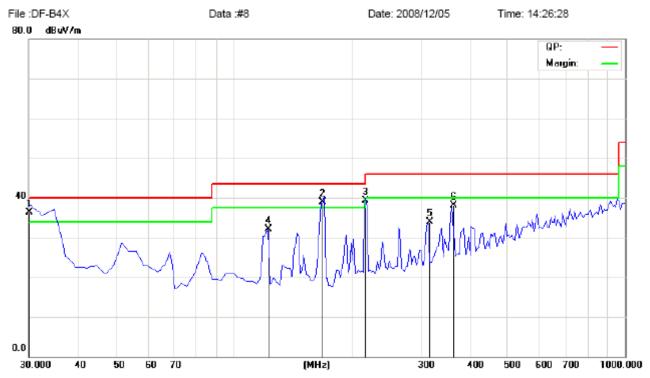

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30.032	36.31	V	40.00
168.585	38.87	V	43.50
216.478	39.21	V	46.00
122.150	32.13	V	43.50
316.150	33.83	V	46.00
362.225	38.09	V	46.00

Page 23 of 30

Report No: 0809071 Date: 2008-12-08



6.0 FCC ID Label

FCC ID: V37-6210D8WDPF

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 24 of 30

Report No: 0809071 Date: 2008-12-08



7.0 Photo of testing

7.1 Conducted test View—



7.2 Radiated emission test view--



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 25 of 30

Report No: 0809071 Date: 2008-12-08



7.3 Photo for the EUT





Page 26 of 30





Page 27 of 30





Page 28 of 30






Page 29 of 30





Page 30 of 30



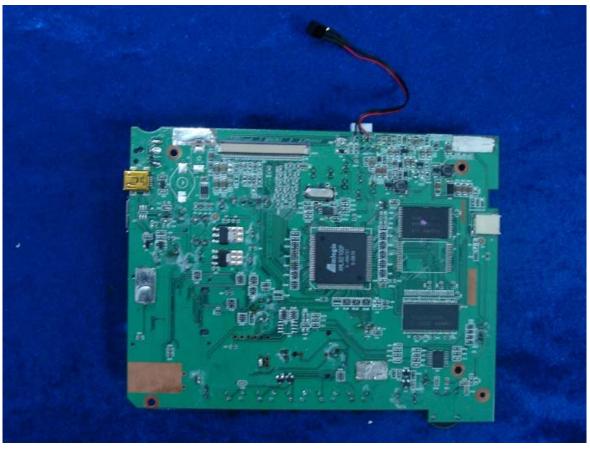

-End of the report-