







ISO/IEC17025 Accredited Lab.

Report No: FCC 0905022 File reference No: 2009-05-11

Applicant: WIN ACCORD LTD.

Product: Digital Photo Frame

Brand Name: N/A

Model No: DF-K2X

Test Standards: FCC Part 15 Subpart B: 2008

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: May 11, 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0905022 Page 2 of 62

Date: 2009-05-11



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 62

Report No: 0905022 Date: 2009-05-11



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration.	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test	5
2.2	Radiated electromagnetic disturbance test	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test	29
6.0	FCC ID Label	51
7.0	Photo of testing	52

Date: 2009-05-11



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F, NO.225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI,

TAIWAN

Telephone: 02-2749 3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame
Manufacturer: WIN ACCORD LTD.

Address: 12F, NO.225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI,

TAIWAN

Brand Name: N/A
Model Number: DF-K2X

Additional Model Number: DF1000102XXXXXXX,CV-DPF-10X, DPF-CRM10, DF10001-02, DPF-CX110, DPF-CXM10, DPF-JX110, DPF-JX110, DPF-JX110, DPF-RW110, DPF-RW110, DPF-BA10, DPF-WA10, DPF-BL10, DPF-BW10, DP

The adapter Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Rating: Input: 100-240V, 0.7A Max, 50/60Hz Output: DC12V, 1.5A

The adapter Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Rating: Input: 100-240V, 0.6A Max, 50/60Hz Output: DC 12V, 1.5A

Remark: Just model names and appearance color are different.

1.4 Submitted Sample(s): 1 Sample

1.5 Test Duration: 2009-05-05 to 2009-05-11

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 62

Report No: 0905022 Date: 2009-05-11



1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2009.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2009.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2009.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2009.2.23	1Year

2.3 Auxiliary Equipment

110/1111	ary Equipment				
Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
Tanic	Wodel IVO.	Schai No.	Widilulactulei	Cabic	TCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	LaserJet 1015	CNFG029476	HP	AC Mains cable	DOC

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1	1			1	1
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	LaserJet 1022	CNBG591GM7	HP	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	FP51G	ET47604175CLO	BENQ	Mains cable	FCC DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC DOC

			1.8m length	
PC	8434	 IBM	AC Mains cable	FCC DOC
			Data cable of	
Mouse	M-F105	 L.SEletron	1.5m length	FCC DOC

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 Test Standards

FCC Part 15 Subpart B: 2008



4.0 Conducted Power line Test

4.1 Schematics of the test

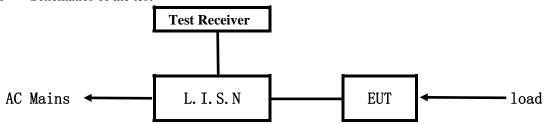


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Block diagram of Test setup

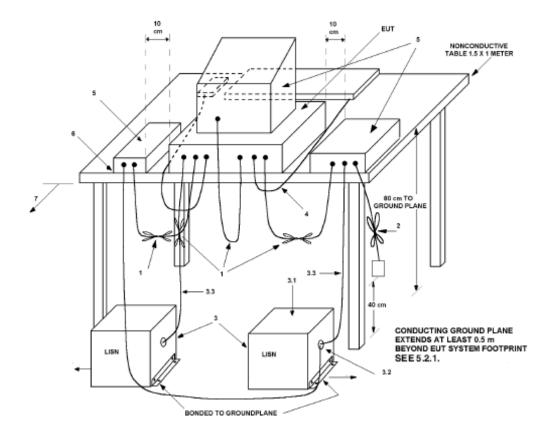

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 8 of 62

Report No: 0905022 Date: 2009-05-11



4.3 Power line conducted Emission Limit


Fraguanay(MHz)	Class A Li	mits dB(μV)	Class B Limits dB(μV)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.00	66.00	66.00~56.00*	56.00~46.00*	
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00	
5.00 ~ 30.00	73.00	60.00	60.00	50.00	

Notes:

- 1. *decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

4.4 Test Results


The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.



EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

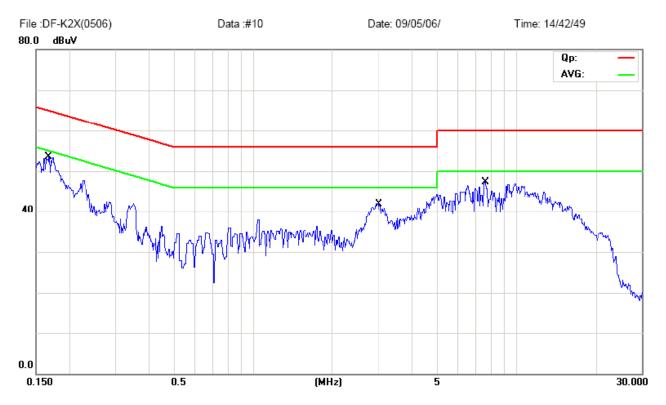

Enaguanav		Reading	Limi	t		
Frequency (MHz)	Live		Live Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.167	47.52	22.52			65.10	55.10
0.296	40.29	23.69			56.00	46.00
7.693	39.47	26.27			60.00	50.00




B: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

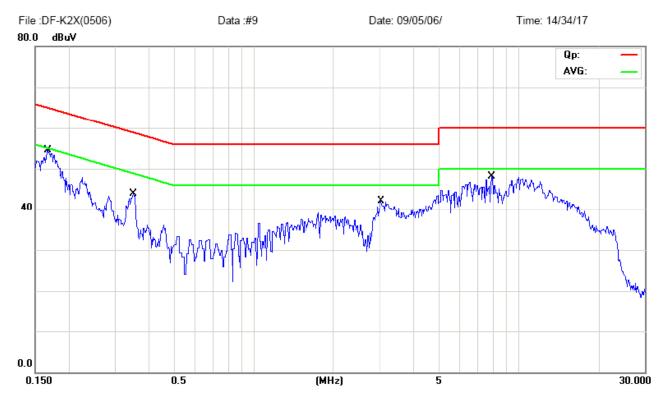

Engguenav		Reading		Limit		
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.166			48.22	18.52	65.15	55.15
0.348			40.81	30.91	59.01	49.01
3.024			39.81	22.11	56.00	46.00
7.930			40.17	26.77	60.00	50.00




C: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

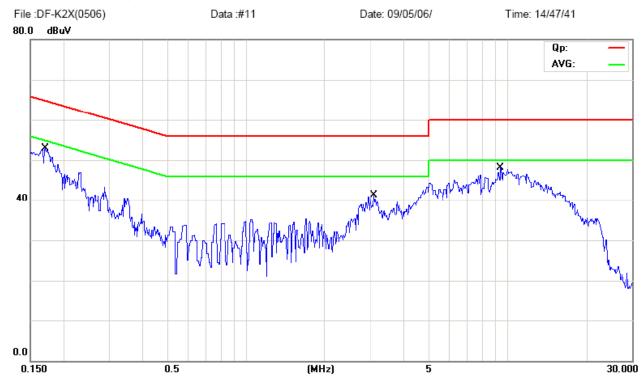

Engayonav		Reading	Limi	t		
Frequency (MHz)	Live	e Neutral		$(dB \mu V)$		
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.173	46.72	24.82			64.81	54.81
3.085	37.53	17.13			56.00	46.00
9.437	43.34	19.94			60.00	50.00




D: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

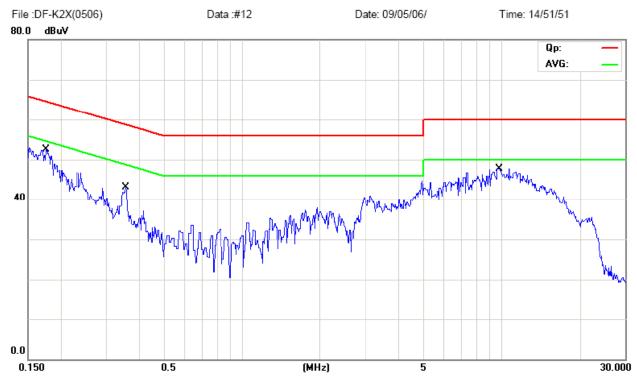

Fraguency		Reading	Limi	t		
Frequency (MHz)	Live		Live Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.173			47.33	32.73	64.79	54.79
0.353			39.72	36.22	58.88	48.88
9.732			43.81	33.91	60.00	50.00




E: Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD Card

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

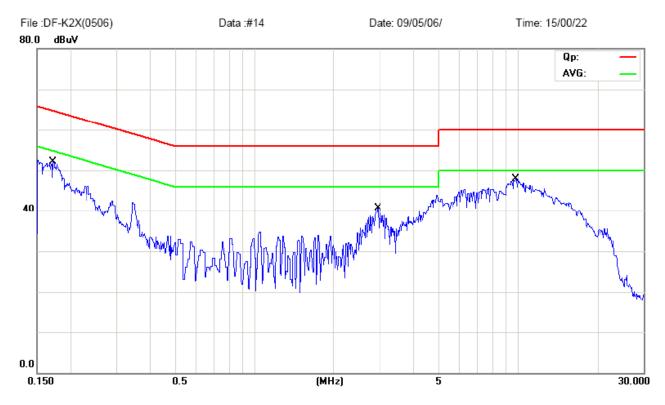

Fraguanay		Reading	Limi	t		
Frequency (MHz)	Live	Neutral		$(dB \mu V)$		
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.170	42.82	26.42			64.96	54.96
2.924	30.67	15.67			56.00	46.00
9.841	44.87	35.97			60.00	50.00




F: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD Card

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

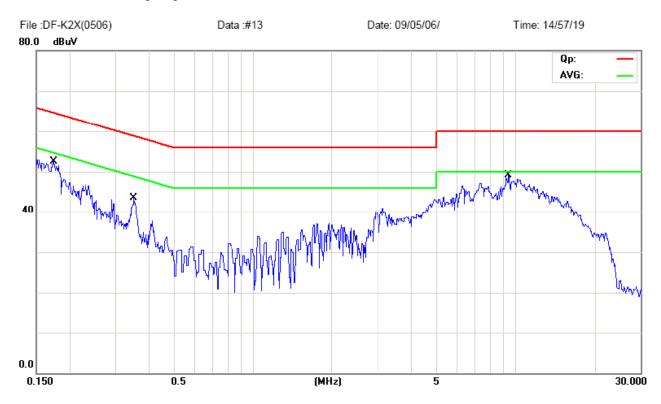

Emaguanay		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.173			46.42	30.02	64.80	54.80
0.350			39.21	34.31	58.96	48.96
9.429			44.44	33.44	60.00	50.00




G: Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

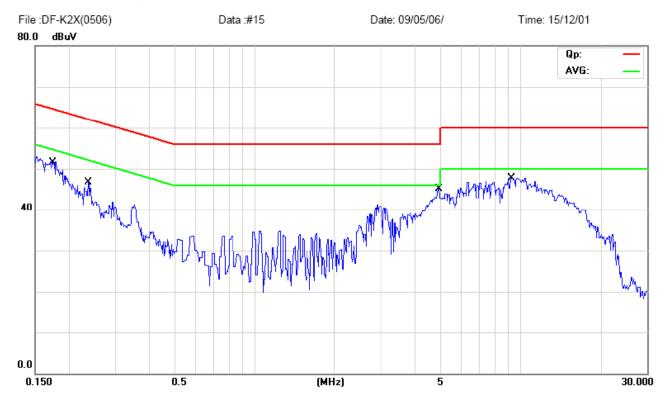

Frequency (MHz)		Reading	Limit			
	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.175	45.03	27.53			64.71	54.71
0.234	39.29	29.79			62.28	52.28
4.897	40.36	26.96			56.00	46.00
9.308	44.39	34.39			60.00	50.00



H: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass



Eraguanay		Reading		Limit		
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.172			41.92	21.22	64.85	54.85
0.352			40.51	36.61	58.90	48.90
9.481			45.22	36.02	60.00	50.00




I: Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Read CF Card

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

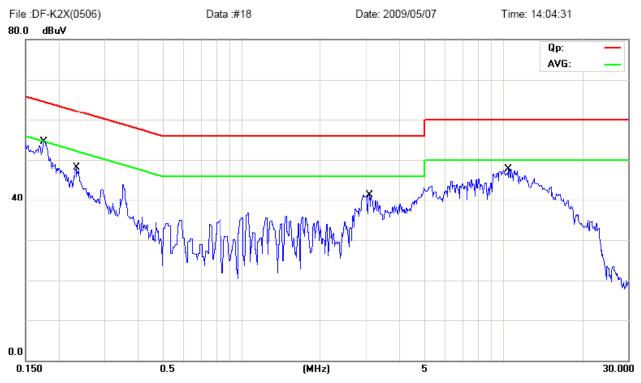

Eng gy an ary		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.174	49.23	30.33			64.77	54.77
0.234	42.19	32.09			62.30	52.30
3.080	37.83	18.83			56.00	46.00
10.442	43.59	34.59			60.00	50.00




J: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Read CF Card

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Results: Pass

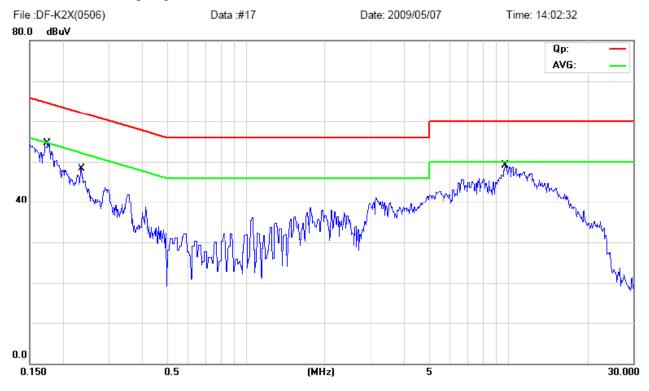

Eraguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.178			51. 78	27.02	64.73	54.73
0.236			47.98	19.75	62.23	52.23
9.674			48.91	23.82	60.00	50.00




K: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

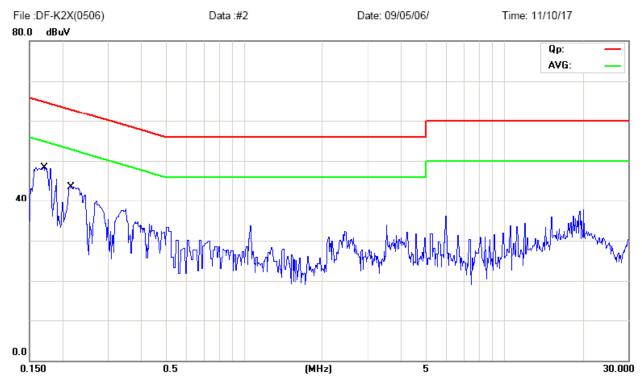

Eraguanay		Reading	Limit			
Frequency Liv		;	Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.170	46.22	27.92			64.98	54.98
0.216	38.7	24.17			62.96	52.96




L: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

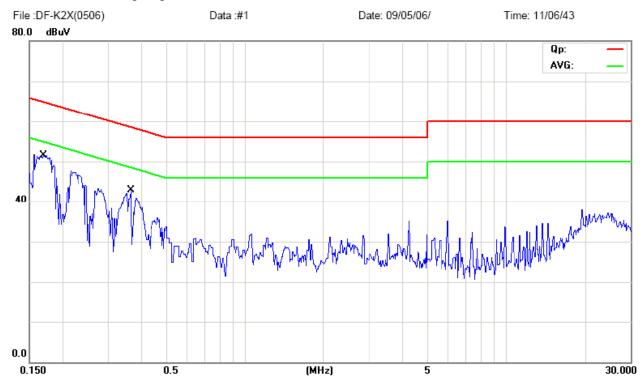


Fraguency		Reading	Limit			
Frequency Liv		;	Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.170			48.92	18.42	65.10	55.10
0.362			38.62	20.52	58.68	48.68



EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

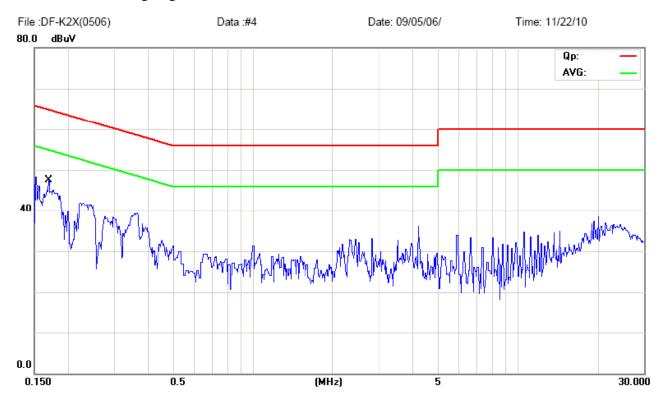

Fraguanay		Reading		Limit		
(MHz)	Frequency		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.169	42.61	22.23			65.00	55.00




N: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

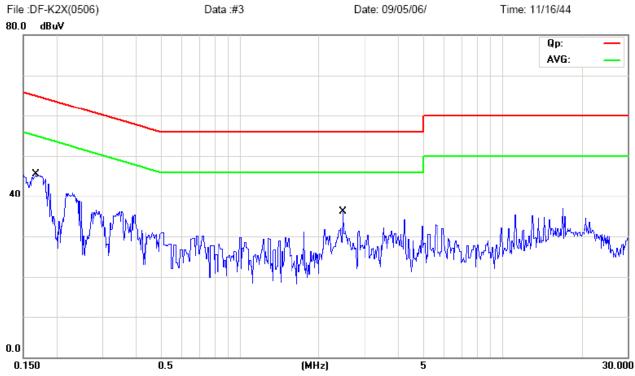

Fraguency		Reading	Limit			
Frequency		e Neutral		$(dB \mu V)$		
(MHz)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.165			40.52	21.32	65.20	55.20
2.461			24.58	20.68	56.00	46.00




O: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD Card

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

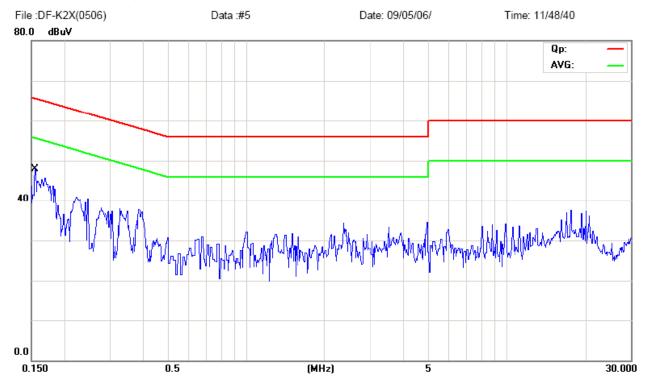

Fraguanay		Reading		Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.153	34.10	17.40			65.83	55.83




P: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play SD Card

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

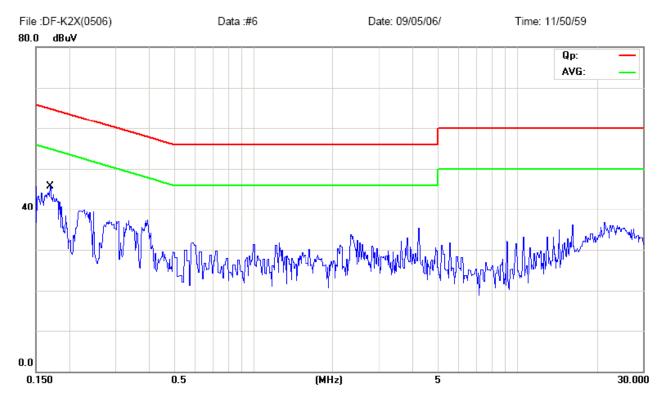


Fraguanay		Reading		Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MITZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.167			41.52	15.12	65.08	55.08



EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

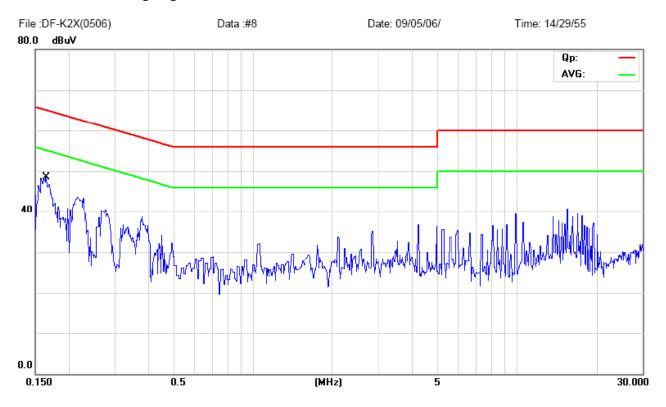

Eraguanay		Reading		Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.163	45.01	22.61			65.28	55.28




R: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

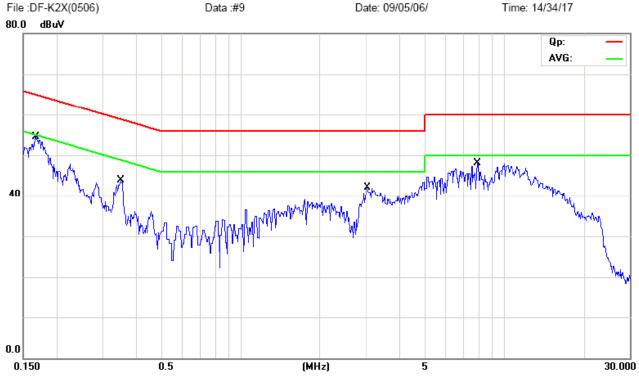

Eraguanav	Reading(dB μ V)			Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WIFIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.159	45.91	12.11			65.51	55.51




S: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF Card

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

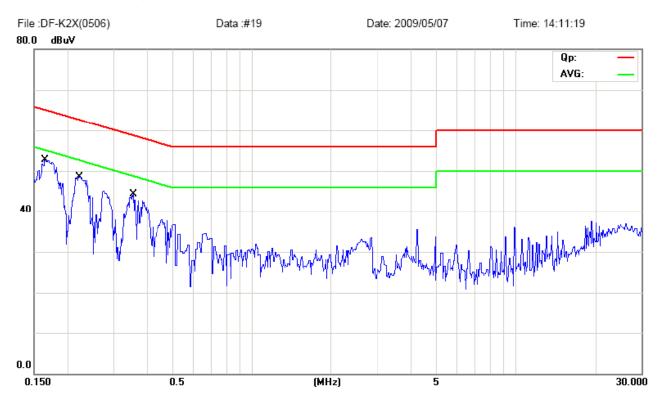

Fraguanay	Reading(dB µ V) Limit			t		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.166	49.52	27.62			65.14	55.14
0.219	43.17	24.77			62.85	52.85
0.355	35.52	22.32			58.84	48.84




T: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF Card

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Results: Pass

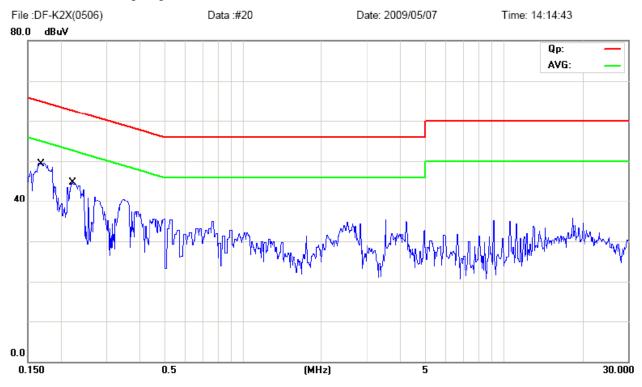

Eroguanav	Reading(dB µ V)			Limit		
Frequency (MHz)	Live	;	Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.168			47.02	19.92	65.06	55.06
0.220			58.26	41.25	62.81	52.81


Page 29 of 62

Report No: 0905022 Date: 2009-05-11



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Block diagram of Test setup

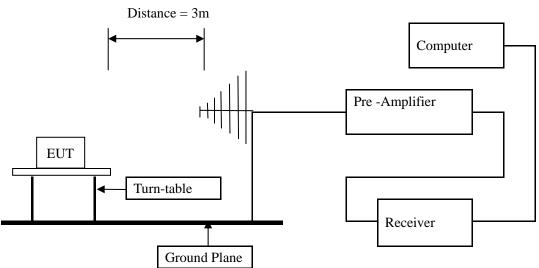



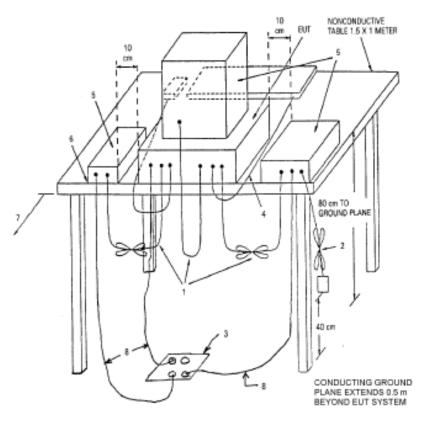

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.



A: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Level: Class I Results: PASS

Please refer to following diagram for individual

Picture of the test

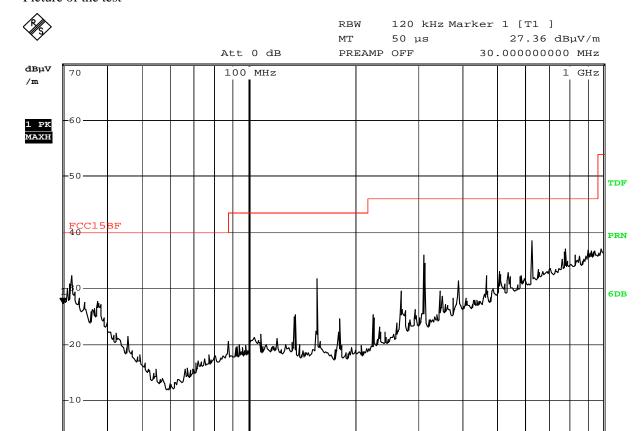

Date: 7.MAY.2009 09:20:15

30 MHz

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
312.28	35.80	Н	46.00
630.88	38.40	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

1 GHz

Report No: 0905022 Date: 2009-05-11



B: Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Level: Class 1
Results: PASS

Please refer to following diagram for individual

Picture of the test

%

RBW 120 kHz Marker 1 [T1] MT 50 μs 37.31 dBμV/m

Att 0 dB PREAMP OFF 629.200000000 MHz

DPR

SCOLSSF

CDB

CDB

Att 0 dB PREAMP OFF 629.200000000 MHz

TDF

COLSSF

CDB

Date: 7.MAY.2009 09:22:52

30 MHz

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
156.00	32.90	V	43.50
312.32	35.40	V	46.00

The report refers only to the sample tested and does not apply to the bulk.



C: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1] MT 50 μs 35.06 dBμV/m

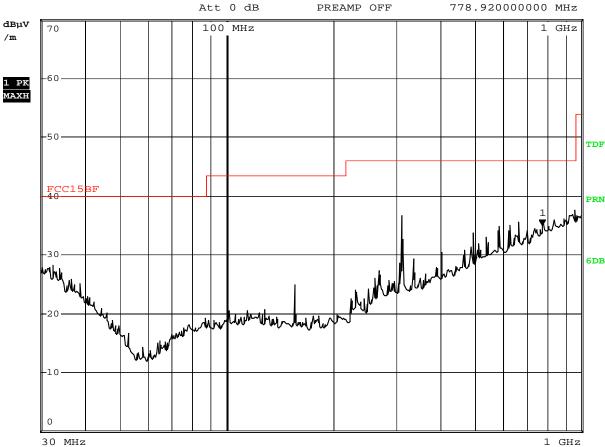

Date: 7.MAY.2009 09:33:28

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
311.796	37.50	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.



D: Radiated Disturbance In Vertical (30MHz---1000MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1] MT 50 μs 36.90 dBμV/m

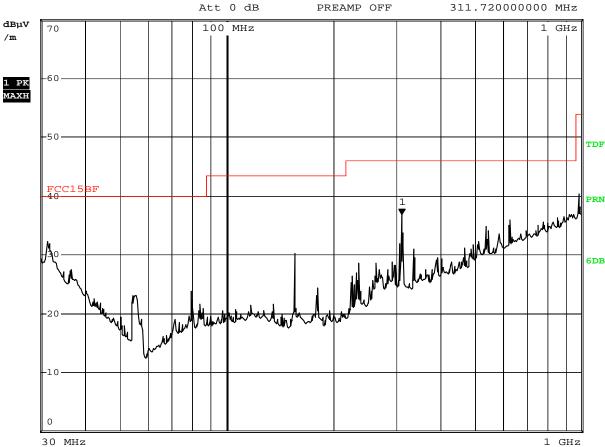

Date: 7.MAY.2009 09:39:50

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
311.72	36.90	V	46.00

The report refers only to the sample tested and does not apply to the bulk.



E: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play CF

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)


Level: Class I Results: PASS

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]

MT 100 ms 34.02 dBµV/m

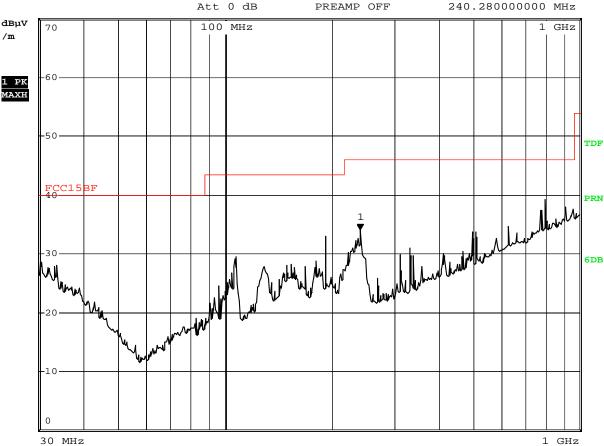

Date: 7.MAY.2009 10:17:16

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
800.04	39.20	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.



F: Radiated Disturbance In Vertical (30MHz --- 1000MHz


EUT set Condition: Play CF

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

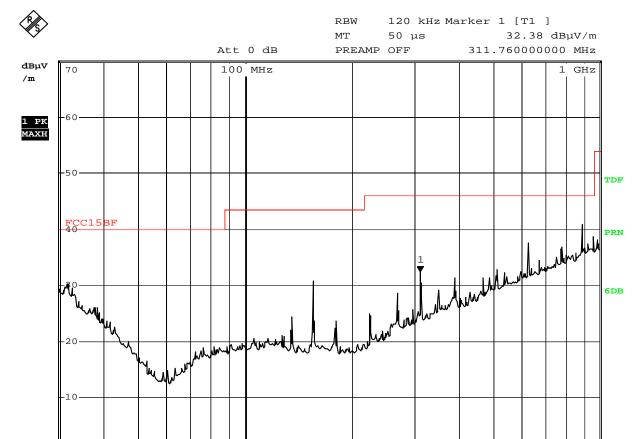

Date: 7.MAY.2009 09:50:21

30 MHz

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
891.84	40.10	V	46.00
156.00	31.20	V	43.50
629.16	37.50	V	46.00

The report refers only to the sample tested and does not apply to the bulk.



G: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

\$

RBW 120 kHz
MT 50 µs

Date: 7.MAY.2009 09:29:06

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
778.92	38.60	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



H: Radiated Disturbance In Vertical (30MHz----1000MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

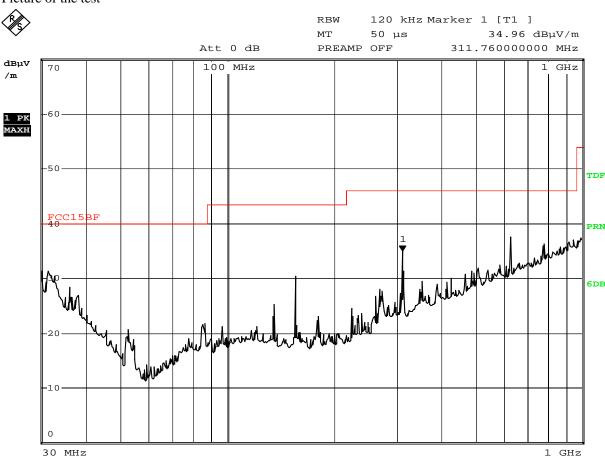

Date: 7.MAY.2009 09:25:59

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
311.76	35.20	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)


Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]

MT50 µs $36.91 \text{ dB}\mu\text{V/m}$

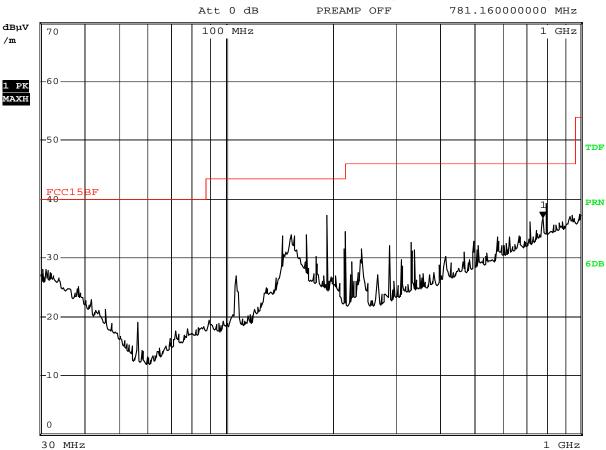

7.MAY.2009 10:10:09 Date:

	Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
Ī	192.00	37.20	Н	43.50
Ī	800.08	39.40	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



J Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)


Level: Class I Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1] MT 50 μs 37.39 dBμV/m

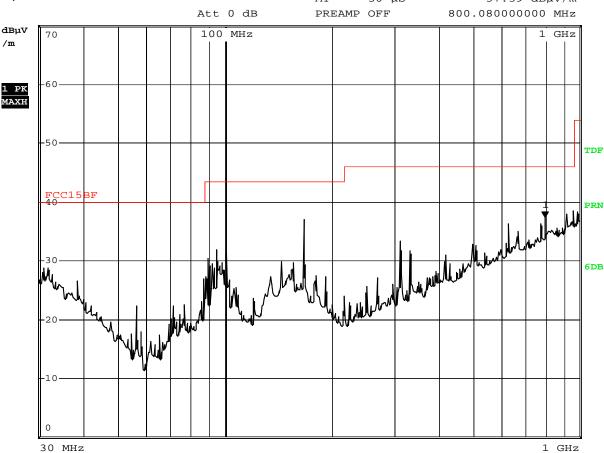

Date: 7.MAY.2009 10:12:39

I	Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	166.68	37.40	V	43.50

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



K Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

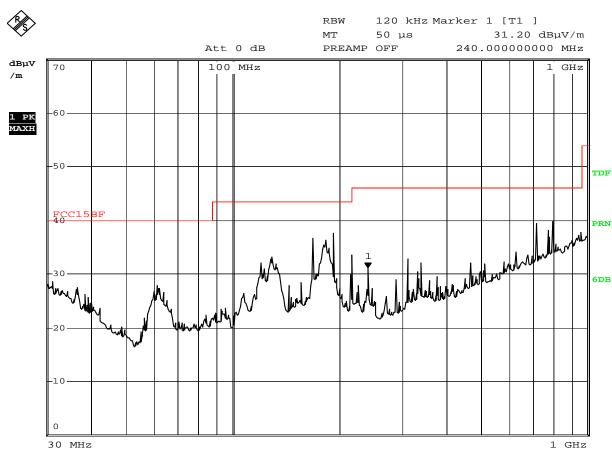

Date: 7.MAY.2009 10:23:46

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
168.00	36.50	Н	43.50
192.00	36.70	Н	43.50
800.04	38.70	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



L Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

%>

RBW 120 kHz Marker 1 [T1] MT 50 μs 36.62 dBμV/m

Att 0 dB PREAMP OFF 800.08000000 MHz dΒμV 100 MHz 70 /m MAXH TDF PRN 6DB 10 0 30 MHz 1 GHz

Date: 7.MAY.2009 10:26:09

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
61.80	35.20	V	40.00
92.96	34.30	V	43.50
120.48	35.10	V	43.50

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



M Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] МТ 50 us 32.97 dBuV/m Att 0 dB PREAMP OFF 120.760000000 MHz dΒμV 100 MHz 1 GHz /m HXAM -50 TDF PRN - manufacture of the second of 6DB -10

Date: 7.MAY.2009 10:49:18

30 MHz

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
120.76	33.20	Н	43.50
311.72	34.50	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B **PASS Results:**


Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]

МТ 50 µs 34.94 dBµV/m

Att 0 dB PREAMP OFF

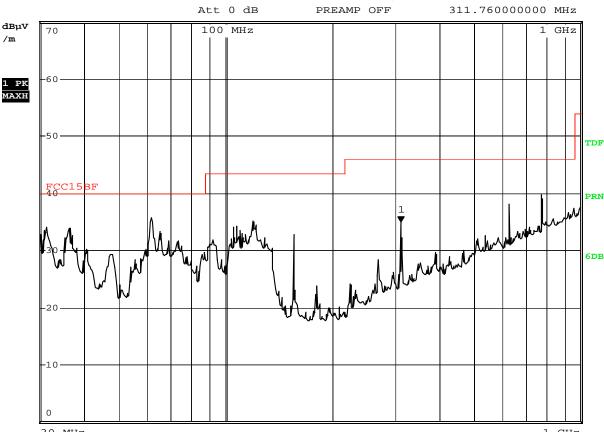

Date: 7.MAY.2009 10:51:59

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
61.60	31.60	V	40.00
119.60	33.50	V	43.50
778.92	39.60	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

6DB

Report No: 0905022 Date: 2009-05-11



Radiated Disturbance In Horizontal (30MHz----1000MHz) $\mathbf{0}$

EUT set Condition: Play SD


Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B **PASS Results:**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] МТ 50 us 39.83 dBuV/m Att 0 dB PREAMP OFF 312.280000000 MHz dΒμV 100 MHz 1 GHz /m MAXH TDF PRN

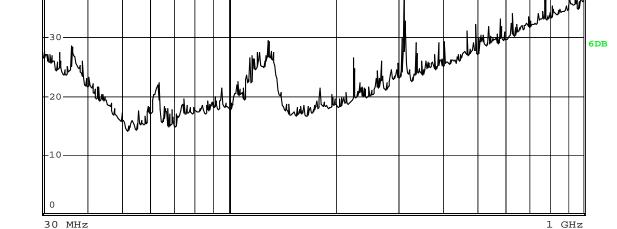

Date: 7.MAY.2009 10:58:03

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
312.28	39.70	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



P Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

-10


30 MHz



RBW 120 kHz Marker 1 [T1]

MT 50 μs 36.23 dBμV/m

PREAMP OFF 778.920000000 MHz

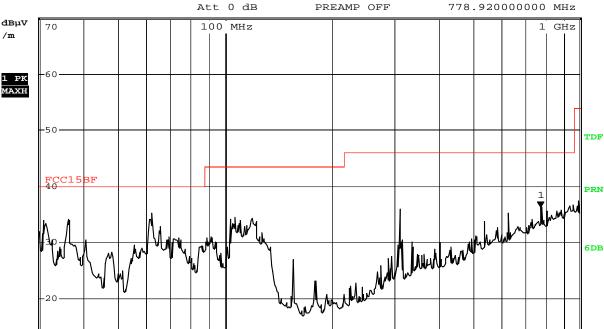

Date: 7.MAY.2009 10:55:20

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
62.16	33.20	V	40.00
107.00	31.50	V	43.50
311.76	35.60	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Q Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B
Results: PASS


Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1]

MT 50 μ s 33.46 $dB\mu V/m$

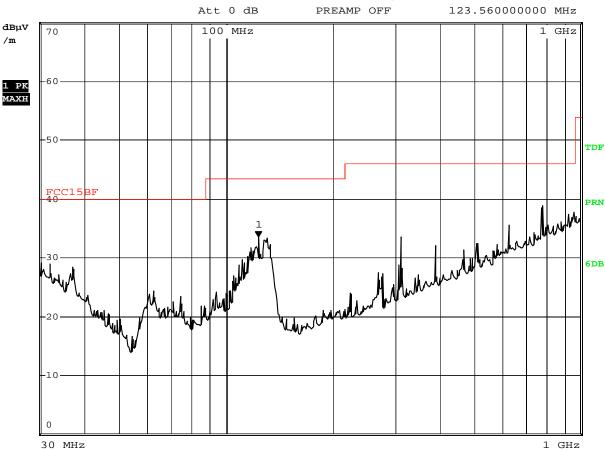

Date: 7.MAY.2009 11:21:34

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	$Limit@3m\ (dB\mu V/m)$
123.56	31.50	Н	43.50
779.80	38.90	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Disturbance In Vertical (30MHz --- 1000MHz) R

EUT set Condition: Play USB


Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] 50 µs MT $38.25 \text{ dB}\mu\text{V/m}$ Att 0 dB PREAMP OFF 70 100 MHz

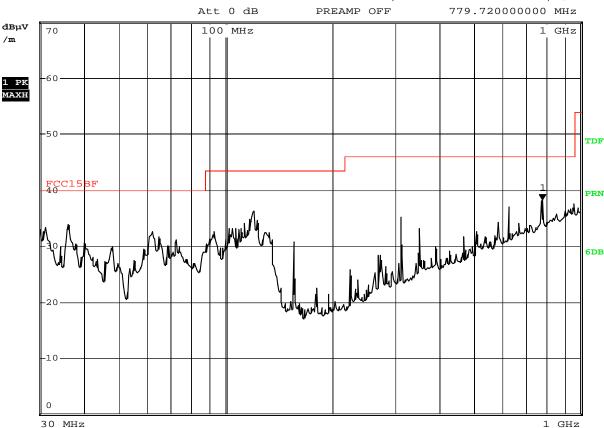

7.MAY.2009 11:24:07 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
120.48	35.20	V	43.50
311.72	34.80	V	46.00
779.72	38.60	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



S Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play CF Card

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Level: Class B
Results: PASS


Please refer to following diagram for individual

Picture of the test

%

RBW 120 kHz Marker 1 [T1]

MT 50 μ s 37.34 $dB\mu V/m$

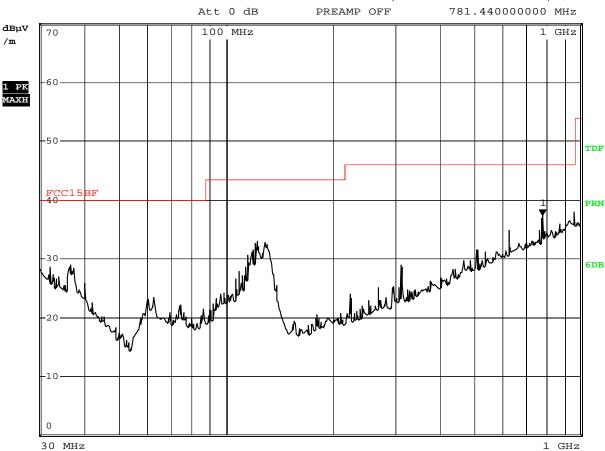

Date: 7.MAY.2009 11:32:13

L	Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
	122.92	31.80	Н	43.50
	781.44	36.90	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



\mathbf{T} Radiated Disturbance In Vertical (30MHz --- 1000MHz

EUT set Condition: Play CF

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)


Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] 50 µs $37.59 \text{ } dB\mu\text{V/m}$ МТ



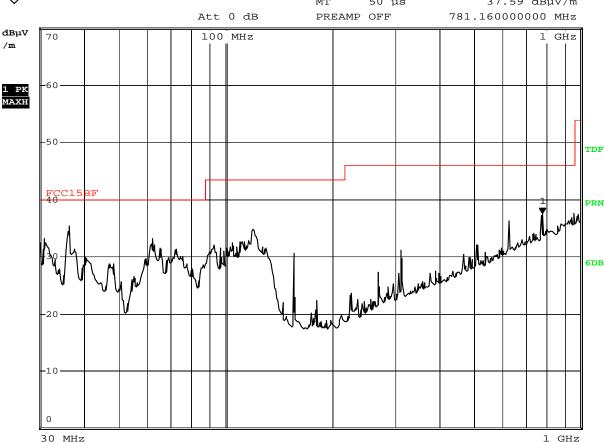

Date: 7.MAY.2009 11:27:58

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
36.16	31.40	V	40.00
119.08	3.82	V	43.50
781.16	36.60	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 51 of 62

Report No: 0905022 Date: 2009-05-11



6.0 FCC ID Label

FCC ID: V37-6213D-10W

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

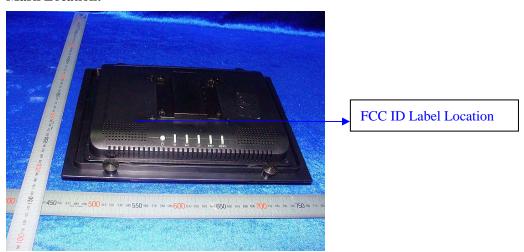




Photo of testing

7.1 Conducted test View—

Connect to PC



Page 53 of 62

Report No: 0905022 Date: 2009-05-11



7.2 Radiated emission test view--

Connect to PC



Page 54 of 62

Report No: 0905022 Date: 2009-05-11



Photo for the EUT




Page 55 of 62





Page 56 of 62



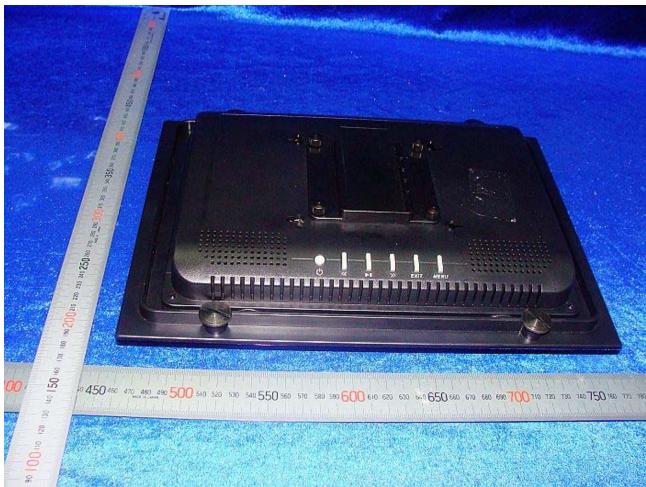


Page 57 of 62





Page 58 of 62



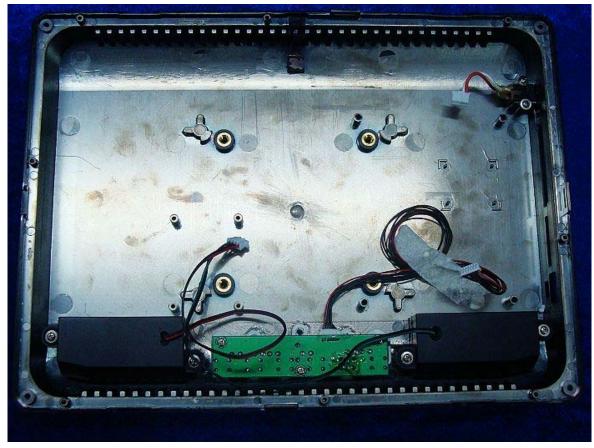


Page 59 of 62





Page 60 of 62



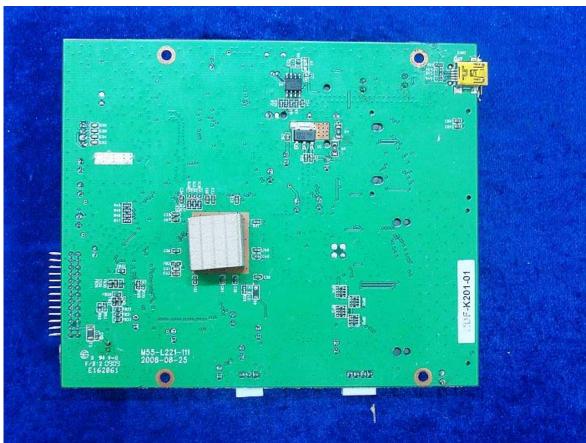

Page 61 of 62





Page 62 of 62

Report No: 0905022 Date: 2009-05-11





-End of the report-