







ISO/IEC17025 Accredited Lab.

Report No: FCC 0904107 File reference No: 2009-04-21

Applicant: WIN ACCORD LTD.

Product: Digital Photo Frame

Brand Name: N/A

Model No: DF-R2X (X=A-Z,0-9,a-z)

Test Standards: FCC Part 15 Subpart B: 2008

Test result: It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 21, 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0904107 Page 2 of 71

Date: 2009-04-21



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 71

Report No: 0904107 Date: 2009-04-21



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty.	4
1.5	Submitted Sample	4
1.6	Test Duration.	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test.	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards.	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test.	29
6.0	FCC ID Label	51
7.0	Photo of testing	52

Report No: 0904107 Page 4 of 71

Date: 2009-04-21



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F, NO.225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI.

TAIWAN

Telephone: 02-2749-3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame
Manufacturer: WIN ACCORD LTD.

Address: 12F, NO. 225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD,

TAIPEI. TAIWAN

Brand Name: N/A

Model Number: DF-R2X (X=A-Z, 0-9, a-z)

Additional Model Number: DF-R20, LT-P05, EL-DPF-12RW

The adapter Model No.:XKD-C1500IC12.0-18C-WS (Made by MOSO)

Rating: Input: 100-240V, 0.7A Max, 50/60Hz Output: 12V, 1.5A The adapter Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Rating: Input: 100-240V, 0.6A Max, 50/60Hz Output: 12V, 1.5A

Remark: refer to the appendix in page 72. Rating: Input: DC 5V, Current 2A

1.4 Submitted Sample(s): 2 Samples

1.5 Test Duration: 2009-04-16 to 2009-04-21

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

1 ang 1 mg

The sample tested by

Print Name: Terry Tang

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 5 of 71

Report No: 0904107 Date: 2009-04-21



2.0 **List of Measurement Equipment**

2.1 **Conducted Emission Test**

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2009.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2009.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2009.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2009.2.23	1Year

2.3 Auxiliary Equipment

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	BOISB-027-00	CNFG029476	EPSON	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC ID

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 6 of 71

Report No: 0904107 Date: 2009-04-21

			[3]		
				1.8m length	
PC	8434		IBM	AC Mains cable	FCC DOC
				Data cable of	
Mouse	OM860XC	HM0509	BIGCOW	1.5m length	FCC DOC

3.0 **Technical Details**

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 **Test Standards**

FCC Part 15 Subpart B: 2008



4.0 Conducted Power line Test

4.1 Schematics of the test

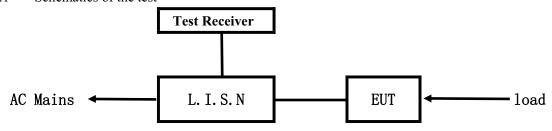


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Block diagram of Test setup

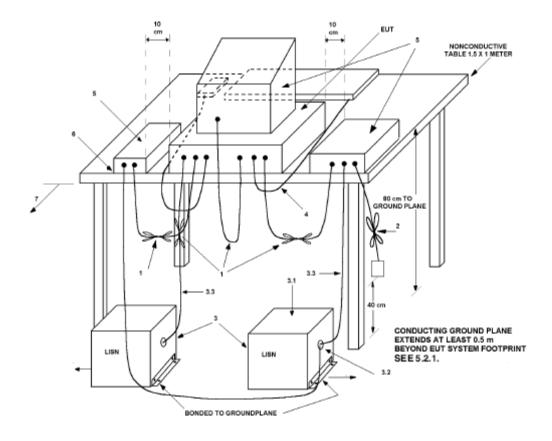

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0904107 Page 8 of 71

Date: 2009-04-21



4.3 Power line conducted Emission Limit

Fraguenay(MHz)	Class A Limits dB(μV)		Class B Lin	nits dB(μV)
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.00	79.00 66.00		56.00~46.00*
0.50 ~ 5.00	73.00	60.00	56.00	46.00
5.00 ~ 30.00	73.00	60.00	60.00	50.00

Notes:

- 1. *decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

4.4 Test Results


The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

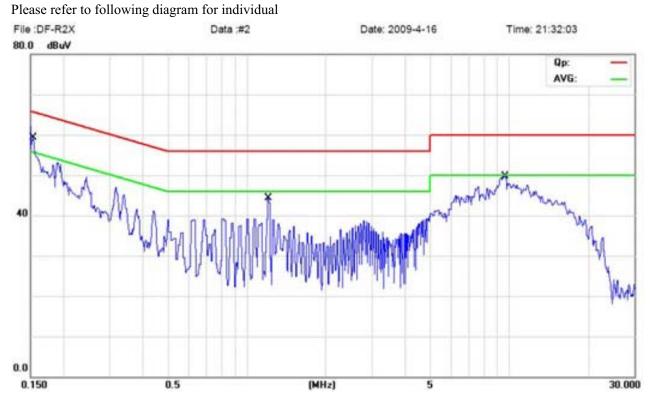

Enaguanav		Reading	Limi	t		
Frequency (MHz)	Live	;	Neutr	Neutral (dB µ V		V)
(WIT1Z)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.152	45.70	32.30			65.86	55.86
1.203	36.88	31.38			56.00	46.00
9.652	36.15	27.35			60.00	50.00




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

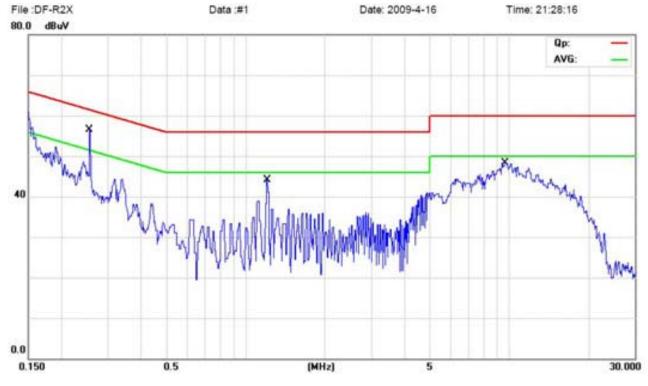


Emaguanay		Reading	Limi	t			
Frequency (MHz)	Live	;	Neutral (dl		(dB μ	μ V)	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.255			38.81	31.31	61.59	51.59	
1.204			30.58	26.48	56.00	46.00	
9.677			43.84	33.74	60.00	50.00	



EUT set Condition: Play SD (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

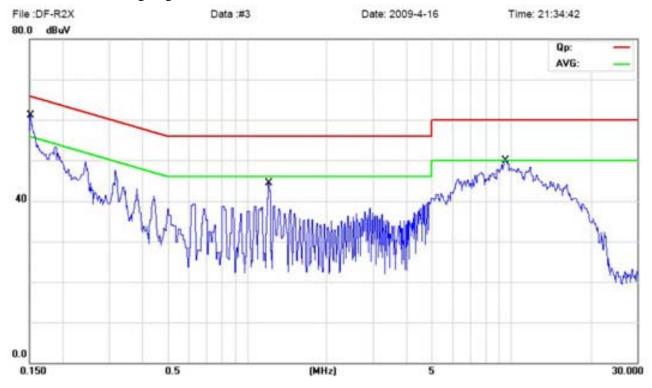


Engguenav		Reading	Limi	t		
Frequency (MHz)	Live	;	Neutr	al	(dB µ	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150	55.40	50.70			65.97	55.97
1.204	37.08	31.38			56.00	46.00
9.531	35.70	26.80			60.00	50.00



EUT set Condition: Play SD (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

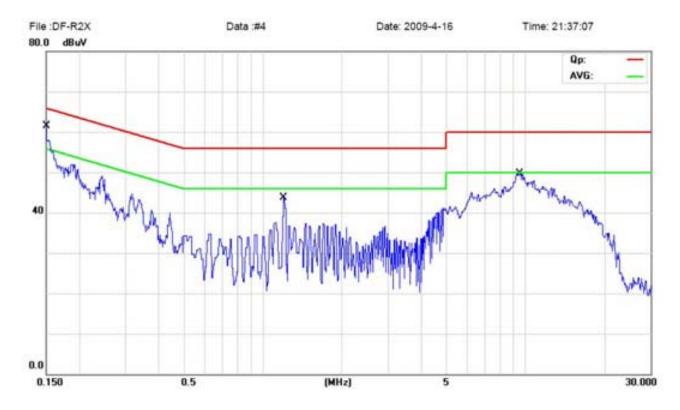

Enaguanav		Reading	Limi	t			
Frequency (MHz)	Live	;	Neutral (dB		Neutral (dB μ V)		V)
(WIT1Z)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.150			57.80	52.40	65.98	55.98	
1.2003			31.48	26.88	56.00	46.00	
9.563			47.58	40.78	60.00	50.00	




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

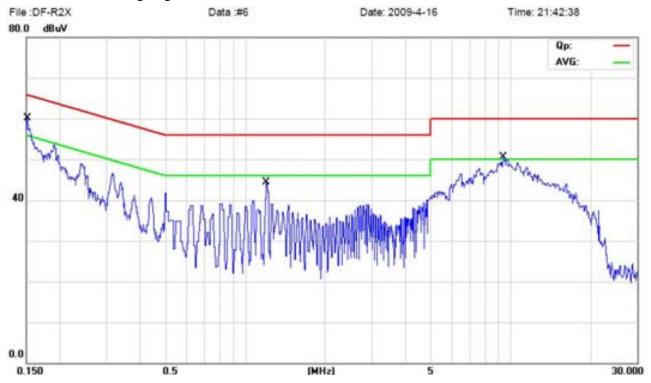

Fraguanay		Reading	Limi	t		
Frequency (MHz)	Live	;	Neutr	al	(dB µ)	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150	56.70	52.70			65.96	55.96
1.203	37.58	31.98			56.00	46.00
9.495	48.61	44.21			60.00	50.00




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

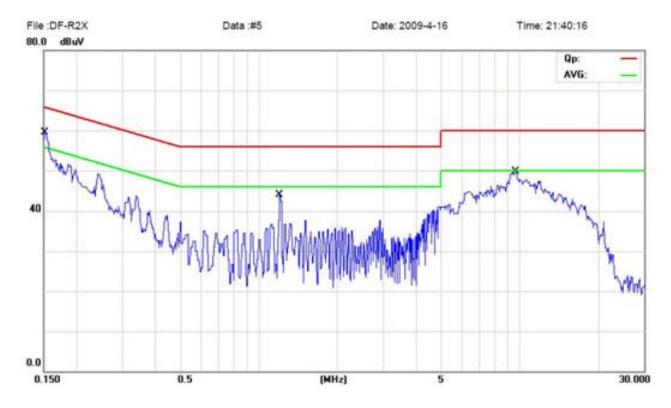


Fragueney		Reading	Limi	t		
Frequency	Live	;	Neutr	al	(dB µ	V)
(MHz)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			57.80	53.40	65.99	55.99
1.202			32.18	26.88	56.00	46.00
9.689			48.13	44.03	60.00	50.00



EUT set Condition: Play CF (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

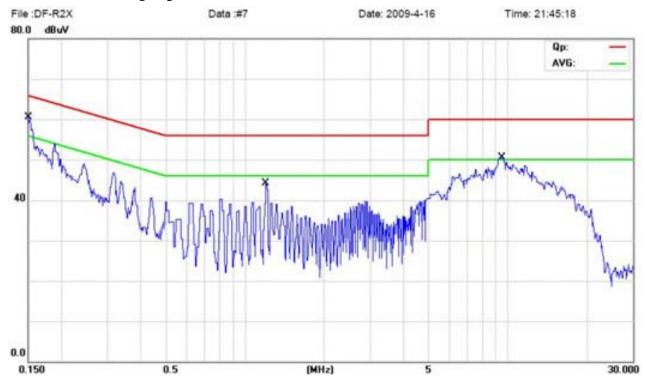


Frequency		Reading	Limit			
Frequency Live		Neutral		al	$(dB \mu V)$	
(MITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
9.497			48.71	44.41	60.00	50.00
1.203			37.68	31.98	56.00	46.00
0.150			56.30	52.20	65.99	55.99



EUT set Condition: Play CF (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

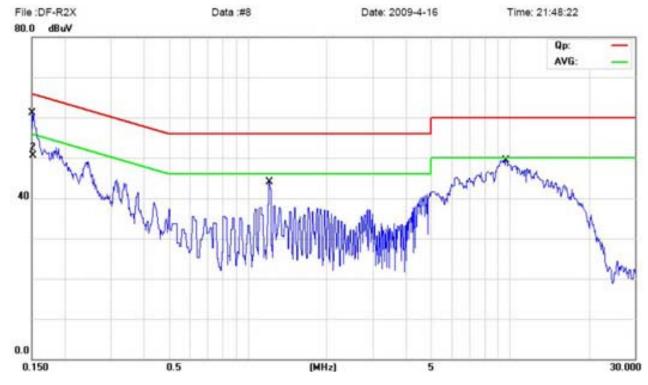


Erogyonov		Reading	Limit				
Frequency (MHz)		e	Neutr	Neutral		(dB µ V)	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.151	55.30	50.60			65.92	55.92	
1.205	32.58	26.98			56.00	46.00	
9.556	48.59	44.49			60.00	50.00	



EUT set Condition: Connect to PC (Adapter made by HONOR)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

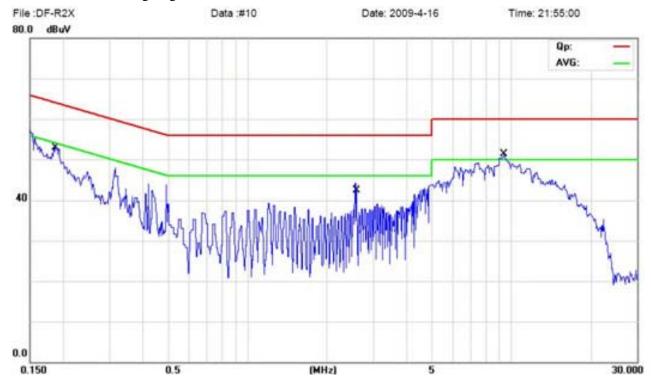

Frequency		Reading	Limit			
Frequency (MHz)	Live	;	Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
2.595			36.84	30.94	56.00	46.00
9.302			49.39	44.29	60.00	50.00
0.189			48.54	41.94	64.07	54.07




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC (Adapter made by HONOR)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

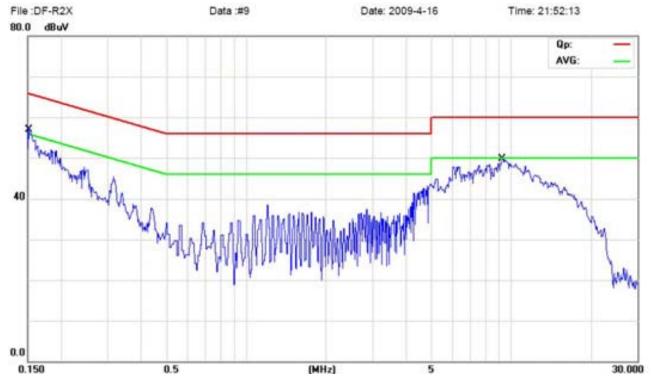

Eraguanay		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.152	45.60	37.70			65.85	55.85
9.299	48.49	44.49			60.00	50.00




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

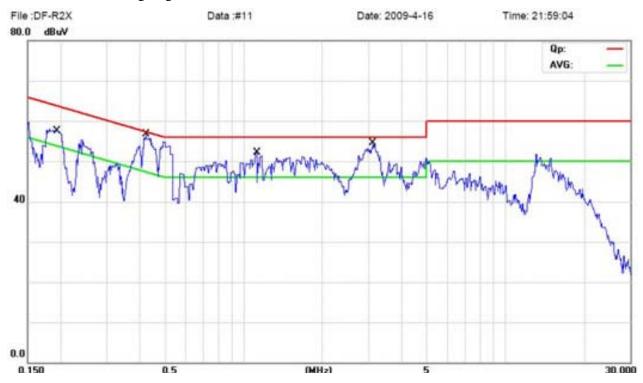

Frequency (MHz)		Reading	Limit			
	Live		Neutral		(dB µ V)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.424			49.69	38.19	57.37	47.37
3.114			48.95	39.45	56.00	46.00
1.118			46.35	34.05	56.00	46.00
0.193			54.25	39.85	63.89	53.89



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass



Emaguamay		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB μ V)	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.415	54.08	36.78			57.54	47.54
0.493	53.06	42.66			56.11	46.11
2.971	50.99	42.89			56.00	46.00
1.503	48.10	36.00			56.00	46.00




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

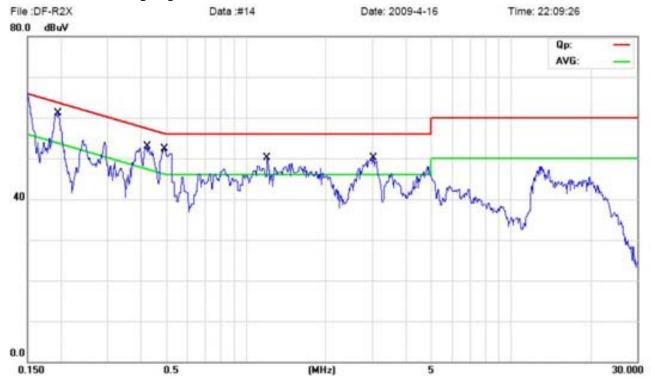

Frequency		Reading	Limit			
(MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.193			57.25	40.95	63.88	53.88
0.423			47.29	30.29	57.39	47.39
2.997			44.20	33.30	56.00	46.00
0.494			48.06	33.86	56.09	46.09
1.200			38.68	24.08	56.00	46.00




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

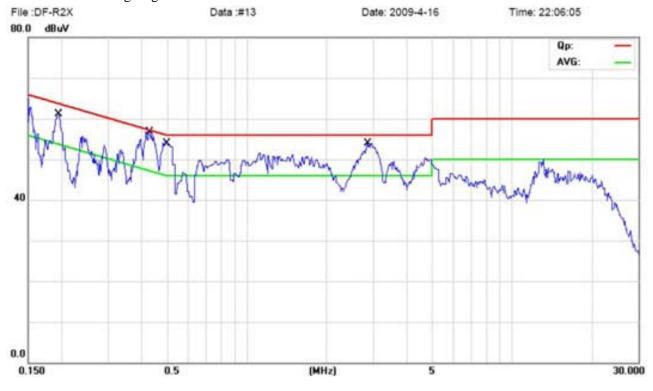


Emagniaman		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB μ V)	
(WIT1Z)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.195	56.55	40.95			63.81	53.81
0.434	51.70	41.30			57.16	47.16
2.850	49.34	40.24			56.00	46.00
0.504	51.77	41.37			56.00	46.00

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

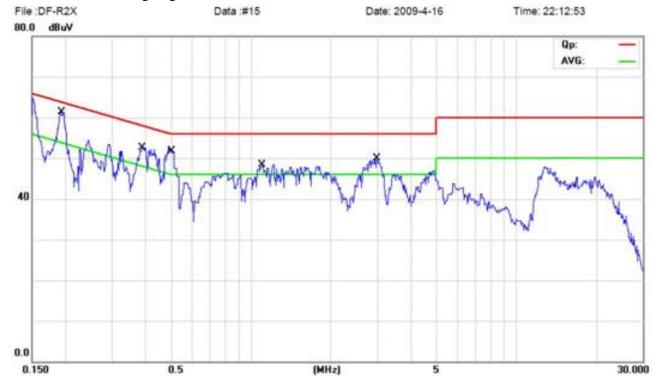

Frequency		Reading	Limit			
(MHz)	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.194			57.25	41.85	63.84	53.84
0.507			47.78	36.08	56.00	46.00
2.963			44.89	32.69	56.00	46.00
0.392			50.36	38.66	58.02	48.02
1.102			42.14	29.54	56.00	46.00



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play SD (Adapter made by MOSO)

Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

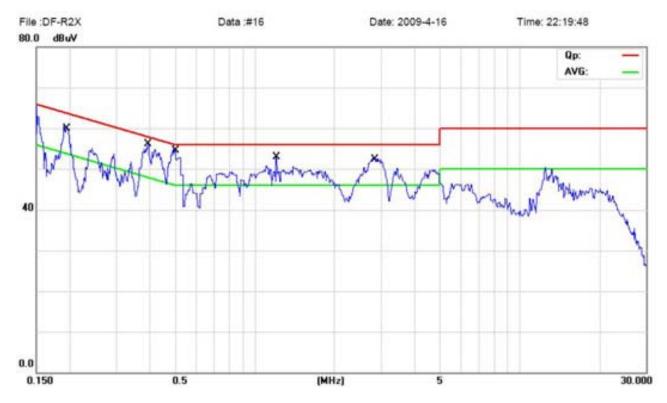

Frequency		Reading	Limit			
	Live		Neutral		(dB µ V)	
(MHz)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.193	56.35	40.85			63.88	53.88
0.391	52.66	42.76			58.04	48.04
0.499	51.27	40.57			56.00	46.00
2.828	48.53	38.23			56.00	46.00
1.209	41.88	33.68			56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF (Adapter made by MOSO)

Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

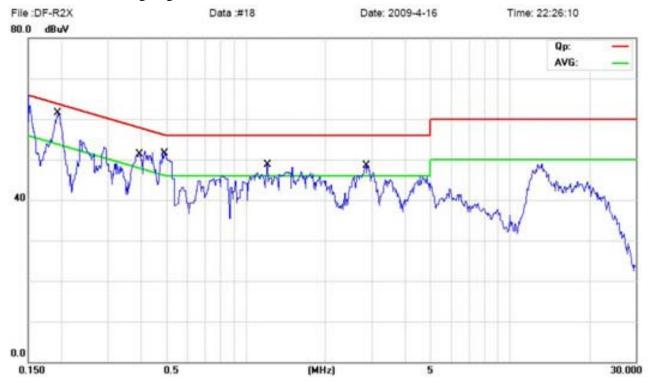

Enggyanavy		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.194			57.35	42.45	63.85	53.85
0.389			49.15	38.45	58.07	48.07
0.491			46.76	31.36	56.15	46.15
1.209			46.78	41.98	56.00	46.00
2.849			42.94	31.94	56.00	46.00




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF (Adapter made by MOSO)

Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

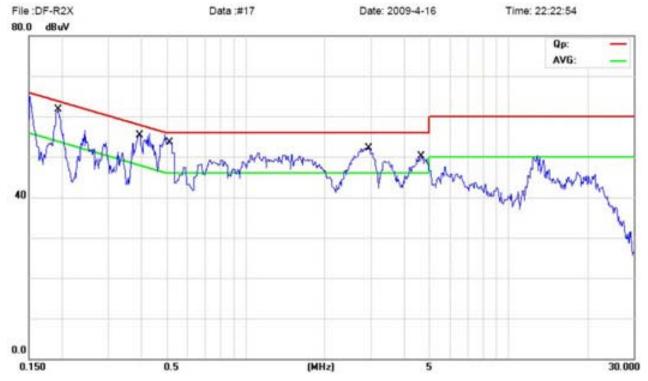

F		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB μ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.193	56.15	40.15			63.90	53.90
0.394	52.46	41.06			57.97	47.97
0.510	51.18	40.88			56.00	46.00
2.905	47.76	38.56			56.00	46.00
4.720	46.09	36.59			56.00	46.00




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

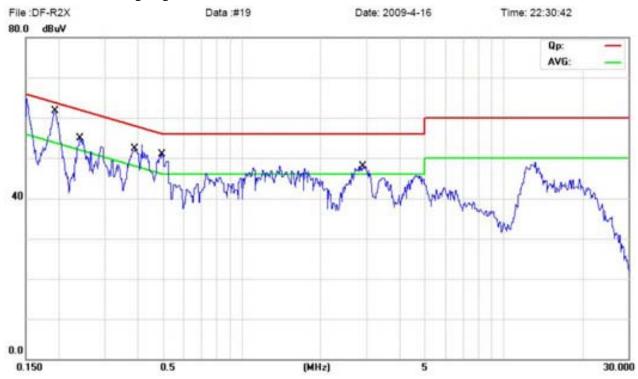

Enaguanav	Reading(dB µ V)			Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(IVIT1Z)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.193			57.45	43.05	63.89	53.89
0.388			50.45	39.55	58.09	48.09
0.499			46.47	33.57	56.01	46.01
2.912			43.06	30.66	56.00	46.00
0.243			51.50	43.80	61.97	51.97




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

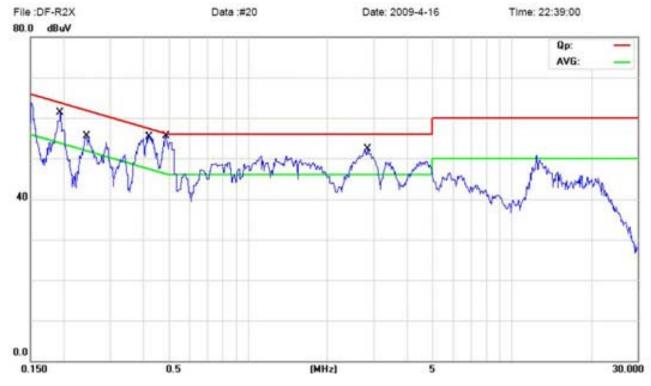

Emaguanay	Reading(dB µ V)			Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.194	56.25	40.75			63.86	53.86
0.423	49.79	32.49			57.39	47.39
0.487	50.86	40.36			56.21	46.21
2.828	48.13	37.73			56.00	46.00
0.243	51.60	43.30			61.98	51.98

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 29 of 71

Report No: 0904107 Date: 2009-04-21



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Working Voltage: 120V~ 60Hz Block diagram of Test setup

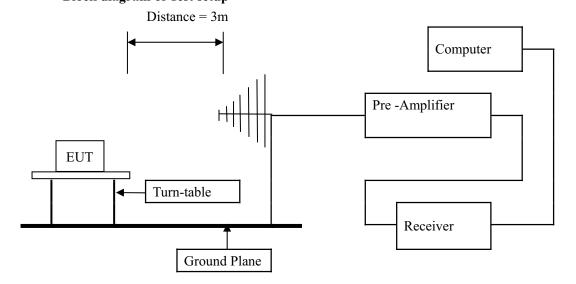



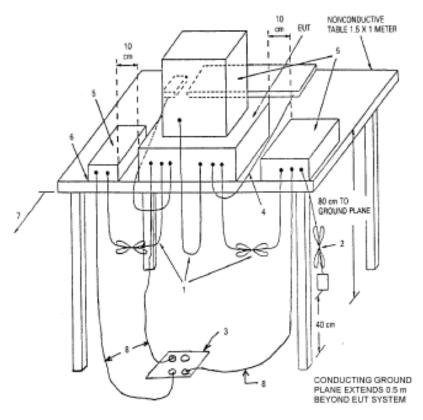

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



A: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Connected to PC (Adapter made by HONOR)

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

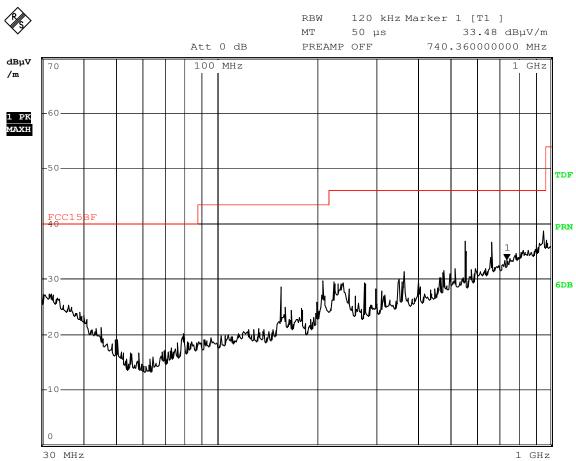

Comment: V

Date: 16.APR.2009 21:14:47

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
555.40	36.82	Н	46.00
664.40	36.70	Н	46.00
954.68	38.63	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



B: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Connected to PC (Adapter made by HONOR)

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1] MT 50 μs 34.77 dBμV/m

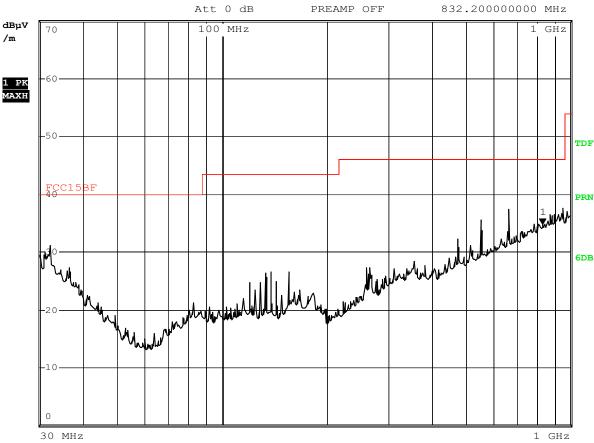

Comment: V

Date: 16.APR.2009 21:12:51

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
55.40	35.59	V	40.00
664.40	37.39	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




C: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Memory (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

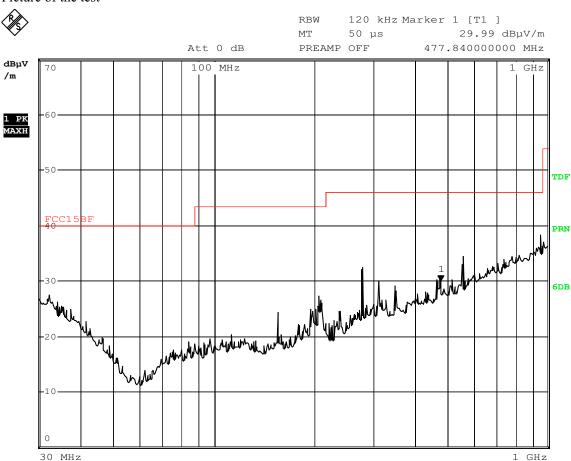

Comment: V

Date: 16.APR.2009 21:27:05

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
278.64	32.44	Н	46.00
556.84	34.43	Н	46.00
954.56	38.27	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



D: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Memory (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1]
MT 50 µs 30.19 dBµV/m

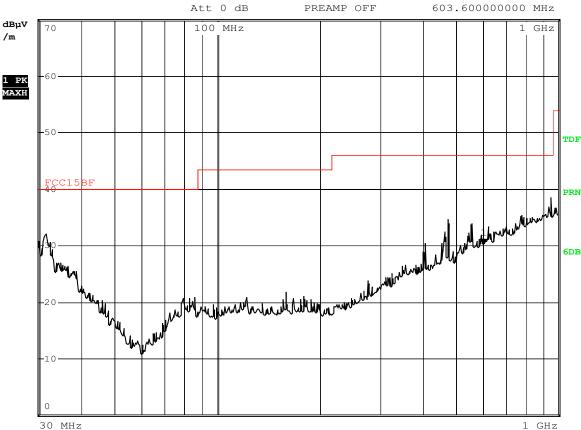

Comment: V

Date: 16.APR.2009 21:28:27

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m (dBµV/m)
476.16	34.71	V	46.00
954.52	38.52	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play USB (Adapter made by HONOR) Model No.: ADS-18C-12N 12018GPCU Adaptor used for test


Level: Class B **PASS Results:**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] ΜТ

50 µs 32.61 dBµV/m

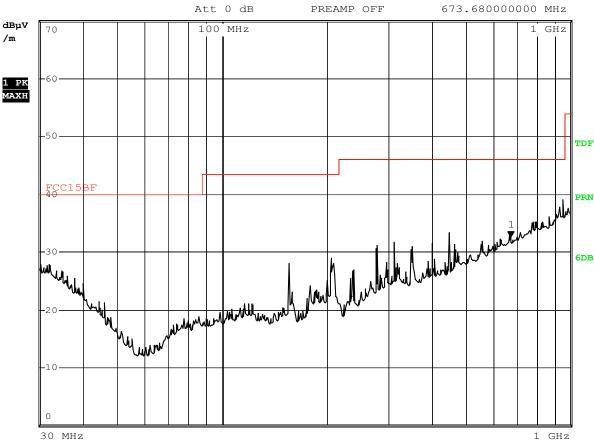

Comment: V

16.APR.2009 21:24:47 Date:

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
450.08	33.42	Н	46.00
954.64	39.02	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




F: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play USB (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

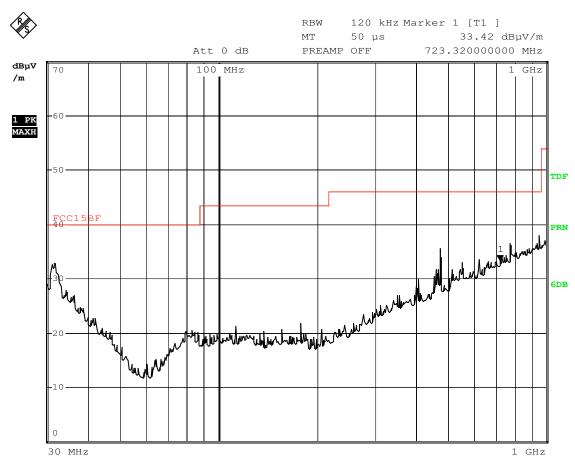

Comment: V

Date: 16.APR.2009 21:22:18

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
31.80	32.78	V	40.00
476.20	35.60	V	46.00
954.56	37.97	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




G: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play SD (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

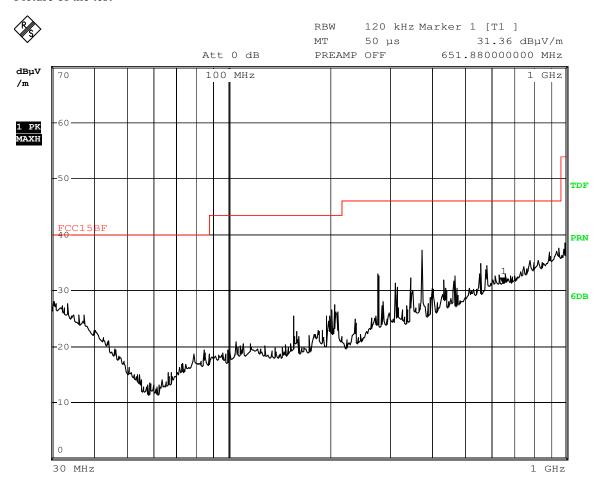

Comment: V

Date: 16.APR.2009 21:17:41

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m (dBµV/m)
374.84	37.14	Н	46.00
954.56	37.60	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



H: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play SD (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-18C-12N 12018GPCU


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1] MT 50 μs 32.39 dBμV/m

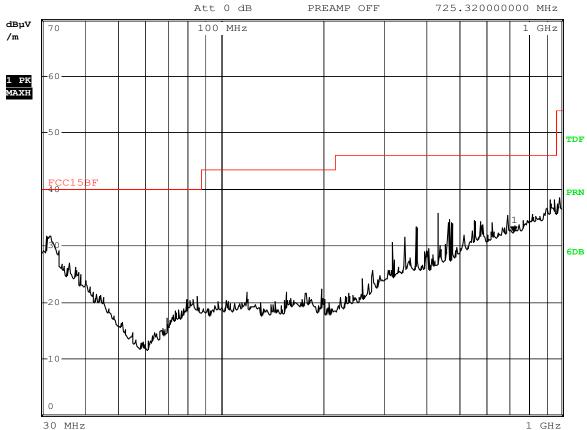

Comment: V

Date: 16.APR.2009 21:19:49

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
434.12	35.69	V	46.00
954.64	38.21	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




I: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play CF (Adapter made by HONOR)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

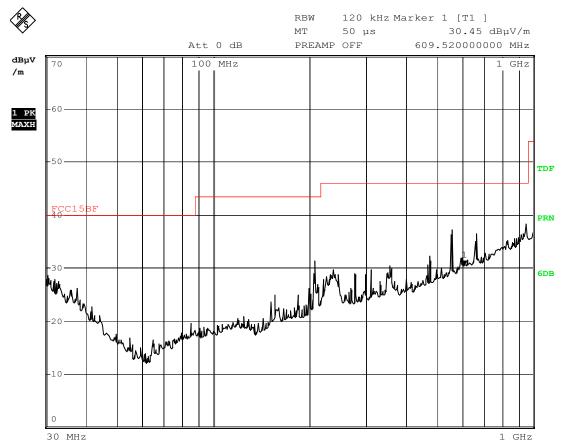

Comment: V

Date: 16.APR.2009 21:09:02

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
557.64	37.21	Н	46.00
665.68	36.47	Н	46.00
954.64	38.22	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



J: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play CF (Adapter made by HONOR)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1] MT 50 μs 32.09 dBμV/m

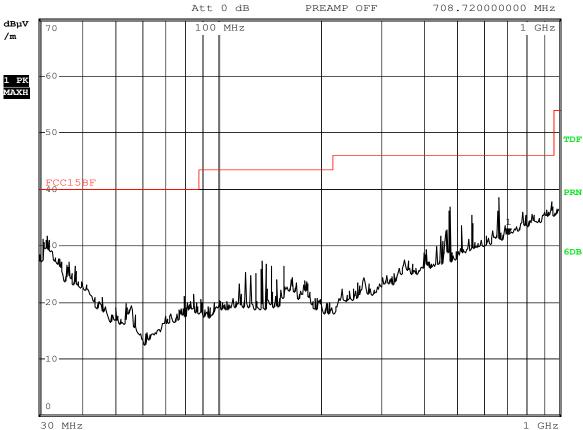

Comment: V

Date: 16.APR.2009 21:10:45

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
477.88	36.77	V	46.00
665.76	38.42	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



K Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Memory (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1] MT 50 μs 32.04 dBμV/m

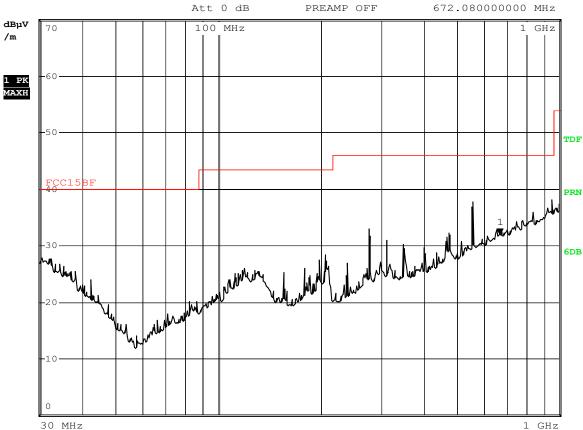

Comment: V

Date: 16.APR.2009 20:46:49

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
557.68	37.20	Н	46.00
954.52	38.18	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

1 GHz

Report No: 0904107 Date: 2009-04-21




L Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Memory (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

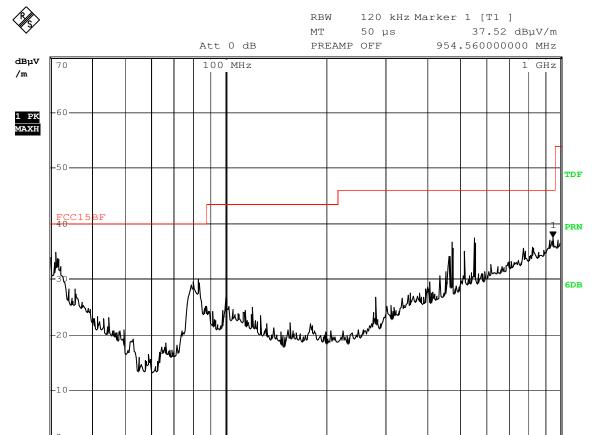

Comment: V

30 MHz

Date: 16.APR.2009 20:43:03

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
31.04	34.79	V	40.00
476.20	36.57	V	46.00
555.40	37.32	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

120 kHz Marker 1 [T1]

Report No: 0904107 Date: 2009-04-21



Radiated Disturbance In Horizontal (30MHz----1000MHz) M


EUT set Condition: Play SD (Adapter made by MOSO) Model No.:XKD-C1500IC12.0-18C-WS Adaptor used for test

Level: Class B **PASS Results:**

Please refer to following diagram for individual

Picture of the test



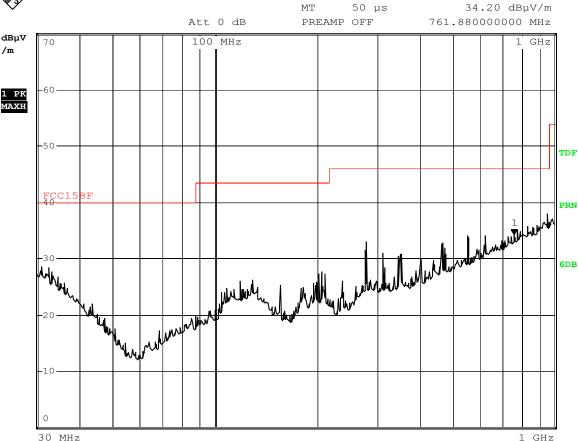

Comment: V

Date: 16.APR.2009 20:55:46

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
278.84	32.95	Н	46.00
954.64	37.99	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




N: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play SD (Adapter made by HONOR)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

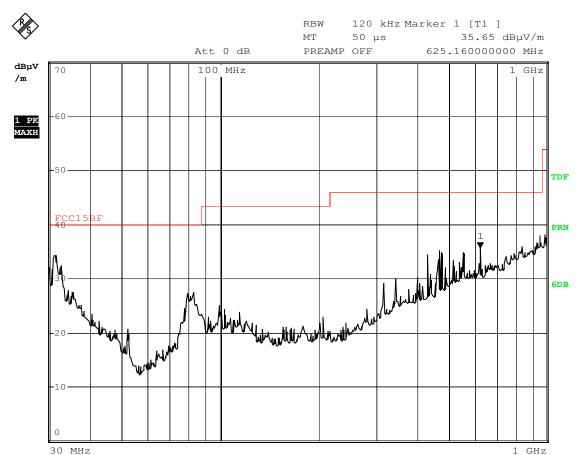

Comment: V

Date: 16.APR.2009 20:53:28

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
31.32	34.18	V	40.00
468.04	35.12	V	46.00
954.60	37.91	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




O: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play USB (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

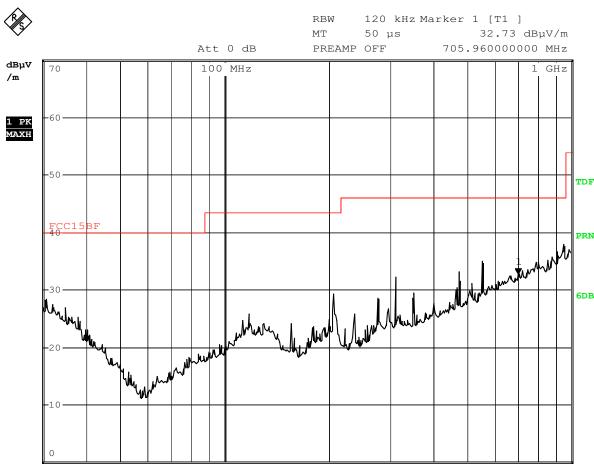

Comment: V

30 MHz

Date: 16.APR.2009 20:48:56

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m (dBµV/m)
555.44	34.92	Н	46.00
954.64	38.02	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




P: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play USB (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

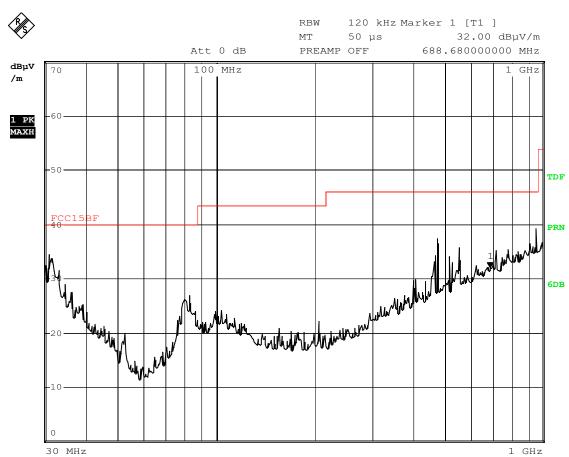

Comment: V

Date: 16.APR.2009 20:51:15

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m (dBµV/m)
30.92	34.50	V	40.00
476.16	37.36	V	46.00
954.60	39.13	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Q: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play CF (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

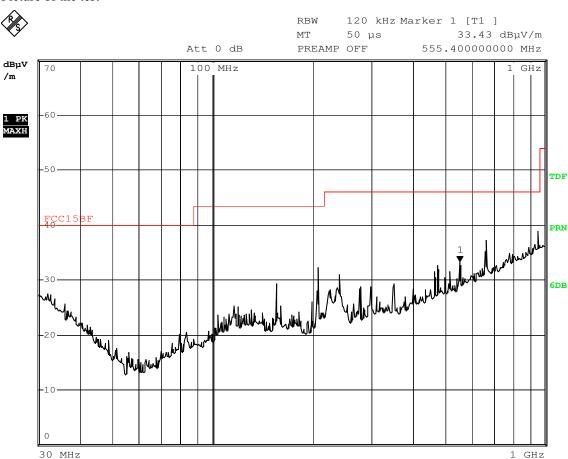

Comment: V

Date: 16.APR.2009 21:06:44

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
207.72	32.33	Н	46.00
664.72	37.14	Н	46.00
954.60	38.88	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



R: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play CF (Adapter made by MOSO)

Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1] MT 50 μs 31.38 dBμV/m

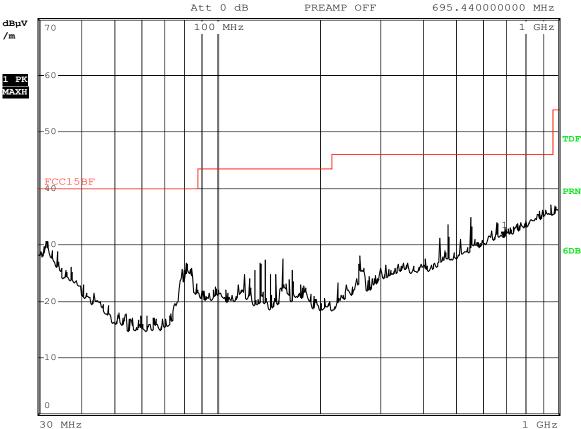

Comment: V

Date: 16.APR.2009 21:05:11

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
476.16	33.49	V	46.00
556.24	34.56	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



S: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connect to PC (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Level: Class B
Results: PASS


Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1]

MT 50 μ s 32.74 $dB\mu$ V/m

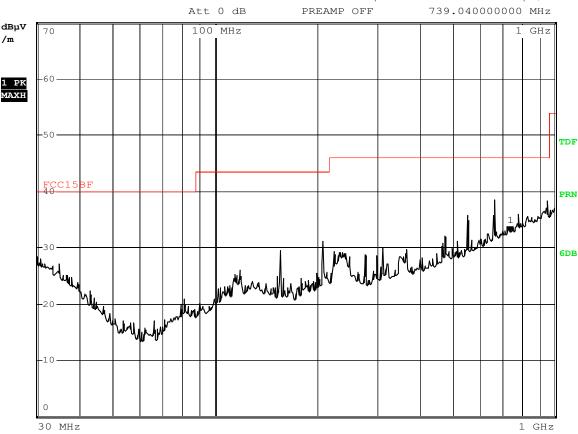

Comment: V

Date: 16.APR.2009 21:01:37

	Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	555.40	32.95	Н	46.00
Γ	665.72	37.99	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




T: Radiated Disturbance In Vertical (30MHz----1000MHz)


EUT set Condition: Connect to PC (Adapter made by MOSO)
Adaptor used for test Model No.:XKD-C1500IC12.0-18C-WS

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

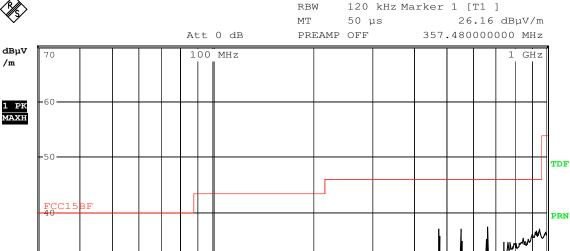

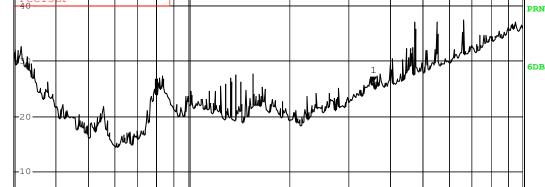

30 MHz

Comment: V Date: 16.APR.2009 21:03:26

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
31.32	34.18	V	40.00
468.04	35.12	V	46.00
954.60	37.91	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 51 of 71

Report No: 0904107 Date: 2009-04-21



6.0 FCC ID Label

FCC ID: V37-6213D-121INCH

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:





Photo of testing 7.0

7.1 Conducted test View—

Connect to PC



Page 53 of 71

Report No: 0904107 Date: 2009-04-21



7.2 Radiated emission test view--




Page 54 of 71

Report No: 0904107 Date: 2009-04-21



7.3 Photo for the EUT

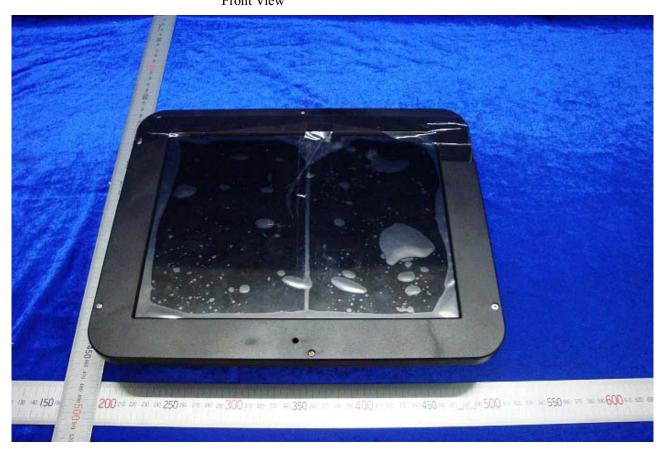

Page 55 of 71






Page 56 of 71





Page 57 of 71



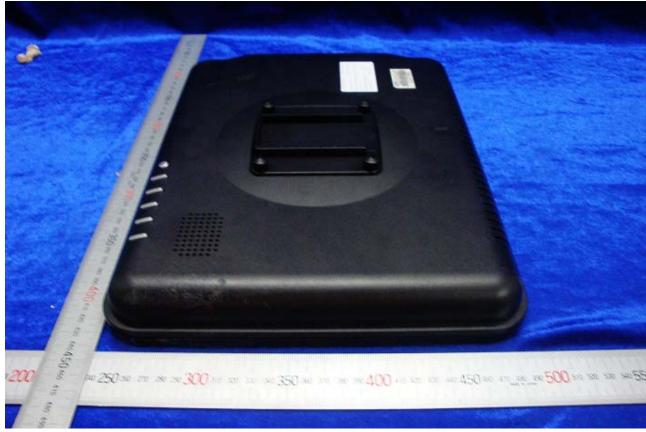

Page 58 of 71

Report No: 0904107 Date: 2009-04-21



Back View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 59 of 71






Page 60 of 71






Page 61 of 71



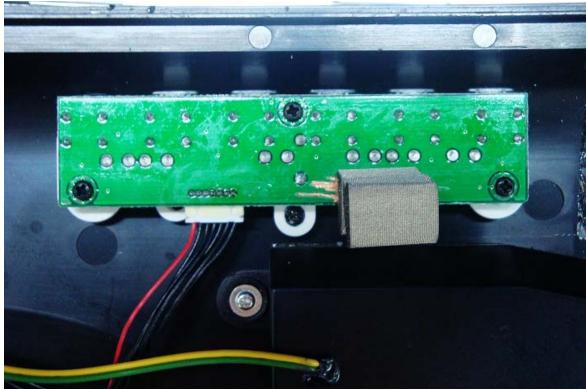

Page 62 of 71



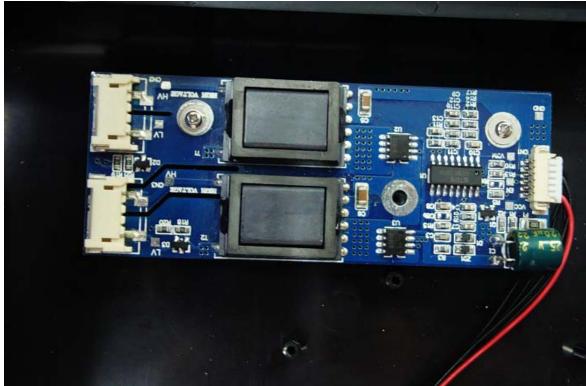


Page 63 of 71





Page 64 of 71



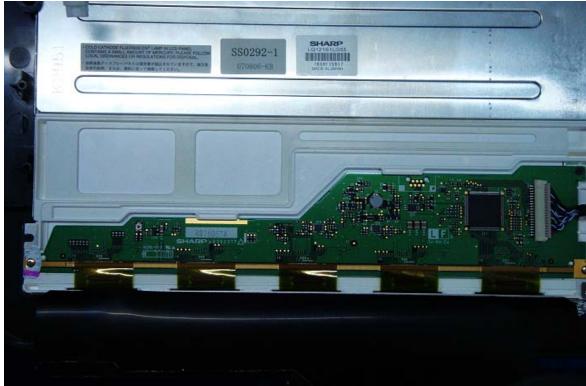


Page 65 of 71






Page 66 of 71



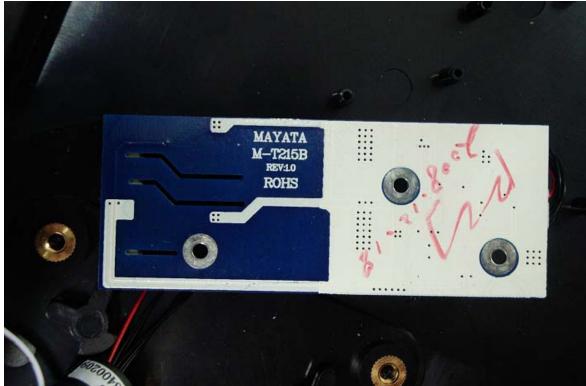


Page 67 of 71



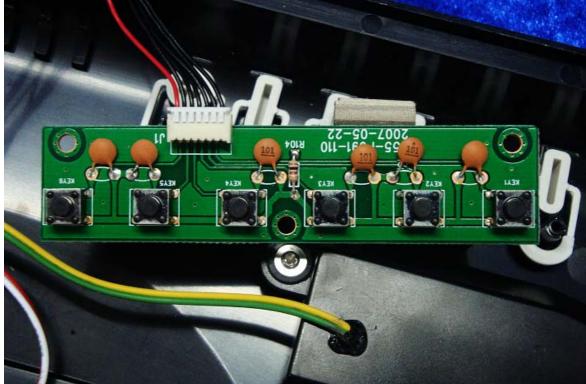

Page 68 of 71



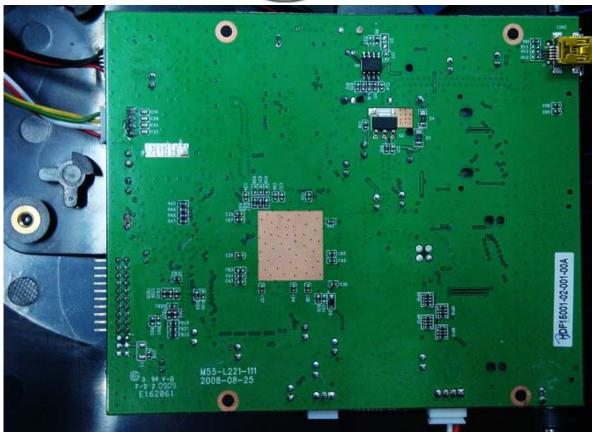

Report No: 0904107 Page 69 of 71

Date: 2009-04-21





Page 70 of 71





Page 71 of 71





-End of the report-