







ISO/IEC17025 Accredited Lab.

Report No: FCC 0904155 File reference No: 2009-04-30

Applicant: WIN ACCORD LTD.

Product: Digital Photo Frame

Brand Name: N/A

Model No: DF10405-05-XXX

Test Standards: FCC Part 15 Subpart B: 2008

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 30, 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0904155 Page 2 of 69

Date: 2009-04-30



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 69

Report No: 0904155 Date: 2009-04-30



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration	4
2.0	List of Measurement Equipment.	5
2.1	Conducted Emission Test	5
2.2	Radiated electromagnetic disturbance test	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test	29
6.0	FCC ID Label	51
7.0	Photo of testing	52



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F, NO.225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI,

TAIWAN

Telephone: 02-2749 3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame
Manufacturer: WIN ACCORD LTD.

Address: 12F, NO.225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI,

TAIWAN

Brand Name: N/A

Model Number: DF10405-05-XXX (X=A-Z, 0-9, a-z)

Additional Model Number: D104xxx, DF1018, DF1019, DF1020

The adapter Model No.: XKD-C1500IC12.0-18C-US (Made by MOSO)

Rating: Input: 100-240V, 0.7A Max, 50/60Hz Output: 12V, 1.5A The adapter Model No.: ADS-18C-12N 12018GPCU (Made by HONOR)

Rating: Input: 100-240V, 0.6A Max, 50/60Hz Output: 12V, 1.5A

Remark: Just model names and appearance color are different.

Rating: Input: DC 12V, Current 1.5A

1.4 Submitted Sample(s): 1 Sample

1.5 Test Duration: 2009-04-22 to 2009-04-30

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 5 of 69

Report No: 0904155 Date: 2009-04-30



1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2009.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2009.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2009.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2009.2.23	1Year

2.3 Auxiliary Equipment

7.5 TIUMITU	ny Equipment				
Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
Name	Wiodel No.	Schai No.	Manufacturer	Cabic	TCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	LaserJet 1015	CNFG029476	HP	AC Mains cable	DOC

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



	1			Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	LaserJet 1022	CNBG591GM7	HP	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	FP51G	ET47604175CLO	BENQ	Mains cable	FCC DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC DOC

			1.8m length	
PC	8434	 IBM	AC Mains cable	FCC DOC
			Data cable of	
Mouse	M-F105	 S.SElectron	1.5m length	FCC DOC

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 Test Standards

FCC Part 15 Subpart B: 2008



4.0 Conducted Power line Test

4.1 Schematics of the test

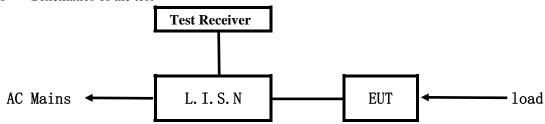


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

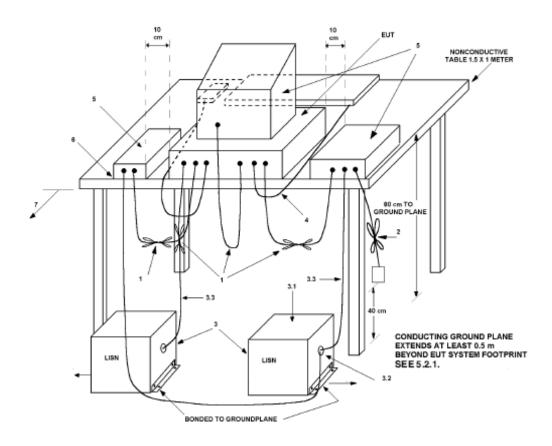

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 8 of 69

Report No: 0904155 Date: 2009-04-30



4.3 Power line conducted Emission Limit

Eraguanay (MUz)	Class A Li	mits dB(μV)	Class B Lin	nits dB(μV)	
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
0.15 ~ 0.50	79.00	66.00	66.00~56.00*	56.00~46.00*	
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00	
5.00 ~ 30.00	73.00	60.00	60.00	50.00	

Notes:

- 1. *decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.


A: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

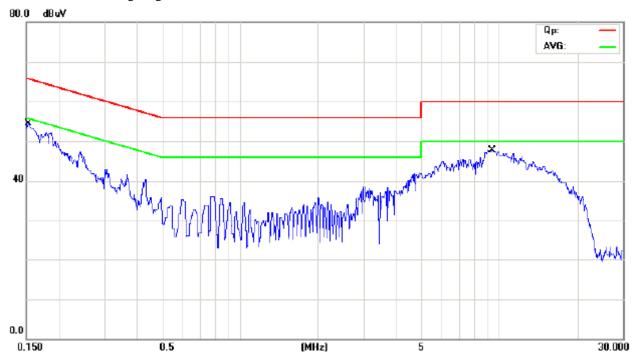

Emp assembly		Reading	Limi	t		
Frequency (MHz)	Live		Neutr	al	(dB µ)	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150	42.90	35.30			65.98	55.98
9.414	42.55	34.85			60.00	50.00




B: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory


Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

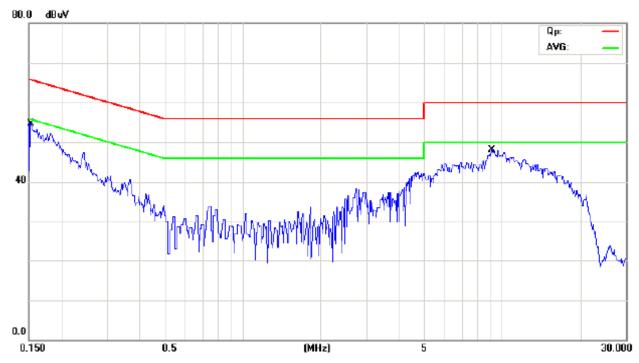

Eraguanay		Reading		Limi	t	
Frequency (MHz)	Live	;	Neutral		(dB µ	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.151			43.00	34.80	65.91	55.91
9.124			41.97	32.77	60.00	50.00




EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

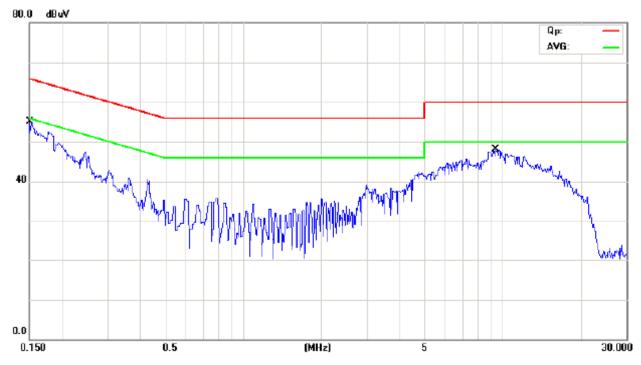

Eraguanay		Reading	Limi	t		
Frequency (MHz)	Live		Neutr	al	(dB µ	V)
(WITZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150	42.90	34.90			65.98	55.98
9.362	42.57	34.57		-1	60.00	50.00




D: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

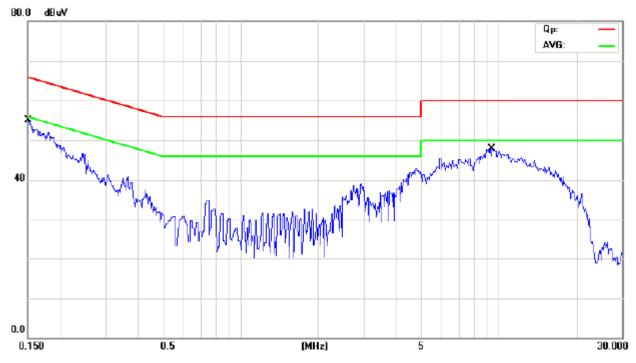

Eraguanay	Reading(dB µ V)		t			
Frequency (MHz)	Live	;	Neutr	al	(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			43.00	34.90	65.96	55.96
9.421			42.64	34.34	60.00	50.00



E: Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

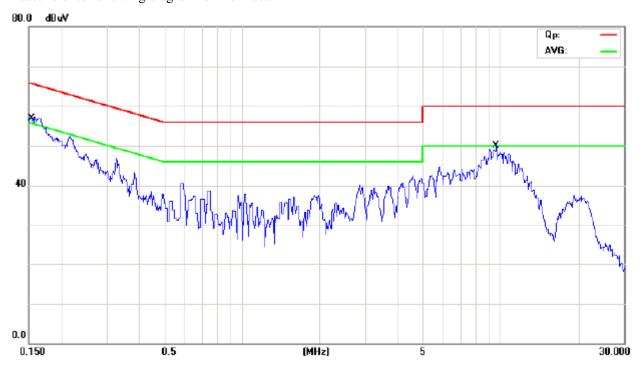

Eraguanay		Reading	Limi	t		
Frequency	(MHz) Live Quasi-peak Average		Live Neutral		(dB µ	V)
(WITIZ)			Quasi-peak	Average	Quasi-peak	Average
0.154	44.10	30.20	-		65.74	55.74
9.608	42.36	36.06			60.00	50.00




F: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

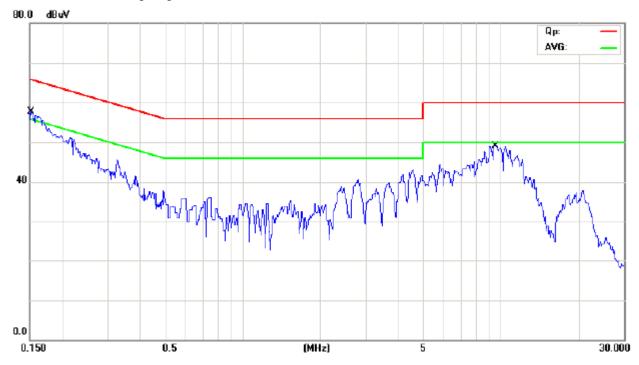

Eraguanav		Reading		Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			44.70	35.30	65.98	55.98
9.535			42.49	36.39	60.00	50.00




EUT set Condition: Play CF

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

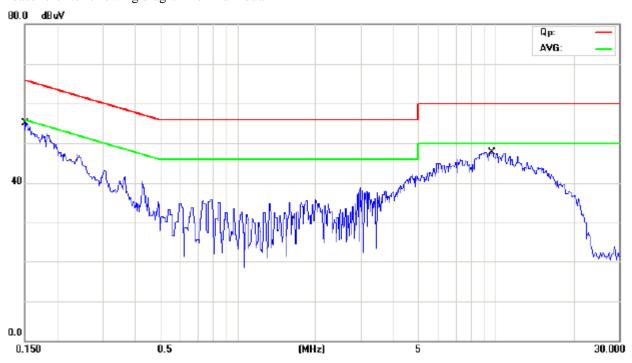

Eroguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.151	42.80	34.80			65.92	55.92
9.637	41.05	24.95			60.00	50.00




H: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

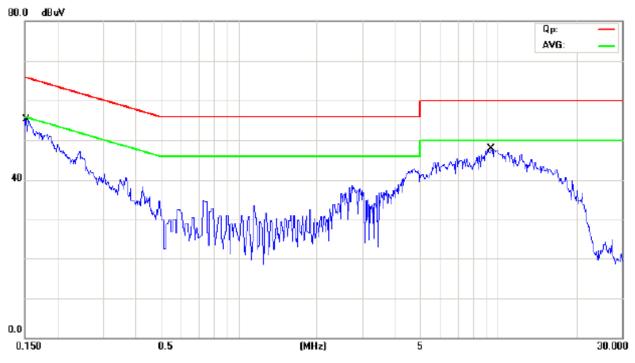

Eraguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			42.80	35.50	65.96	55.96
9.379			41.96	26.56	60.00	50.00




EUT set Condition: Connected to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

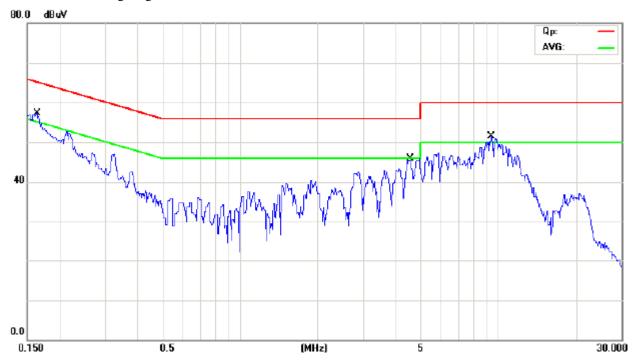

Eraguanay		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.162	44.91	33.31			65.32	55.32
4.558	40.92	33.92			56.00	46.00
9.391	43.66	37.46			60.00	50.00




J: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

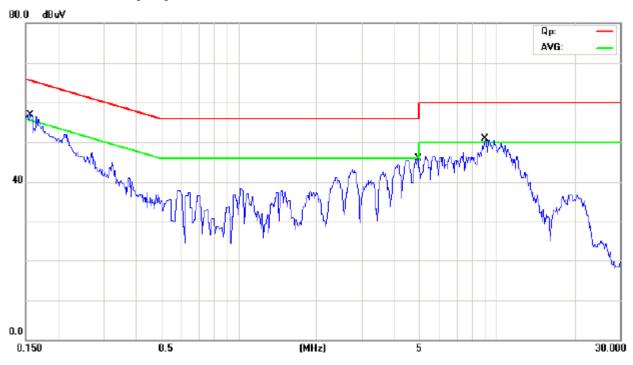

Fraguency		Reading	Limit			
Frequency (MHz)	Live	Live		Neutral		V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.155			44.11	23.11	65.71	55.71
4.929			37.27	34.37	56.00	46.00
8.994			43.02	36.72	60.00	50.00




K: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

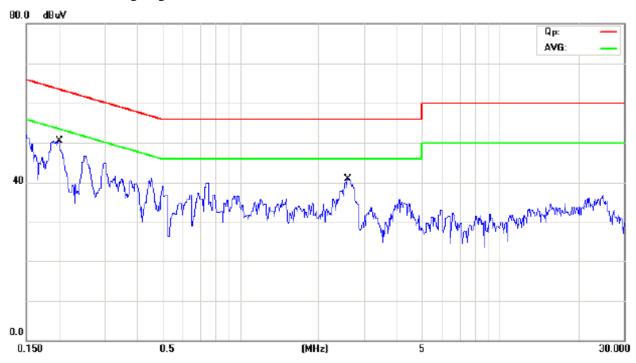

Fraguency		Reading		Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.200	44.15	34.65			63.61	53.61
2.580	32.03	12.13			56.00	46.00




L: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory


Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

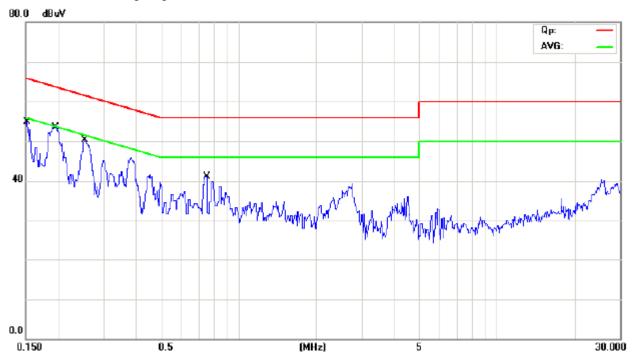

Frequency (MHz)		Reading	Limit			
	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			49.50	36.90	65.97	55.97
0.194			48.65	31.15	63.84	53.84
0.253			42.81	33.21	61.65	51.65
0.742			24.03	16.53	56.00	46.00




EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

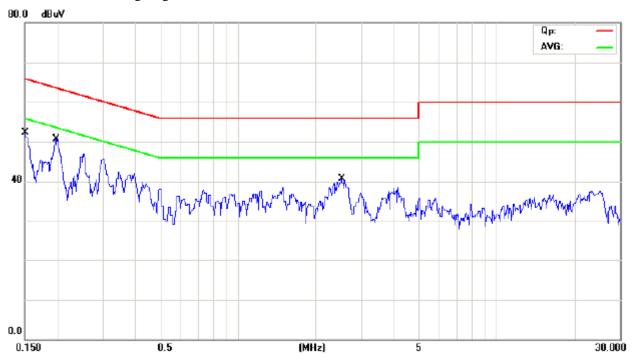

Eraguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150	45.40	36.90			65.96	55.96
0.197	43.75	34.35			63.74	53.74
2.497	32.80	19.50			56.00	46.00




N: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD


Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

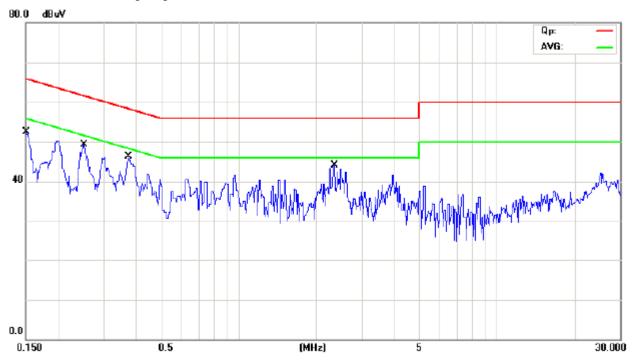

Frequency (MHz)		Reading	Limit			
	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			45.40	36.90	65.97	55.97
0.251			42.01	33.91	61.72	51.72
0.373			40.24	23.94	58.42	48.42
2.326			32.13	17.63	56.00	46.00




EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

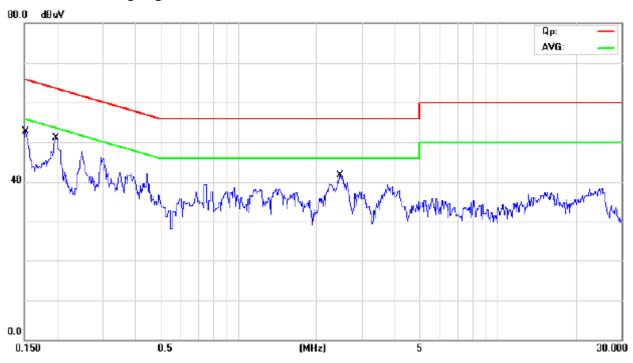

Eroguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150	45.20	36.90			65.96	55.96
0.197	43.75	34.45			43.72	53.72
2.463	32.89	21.49			56.00	46.00




P: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB


Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

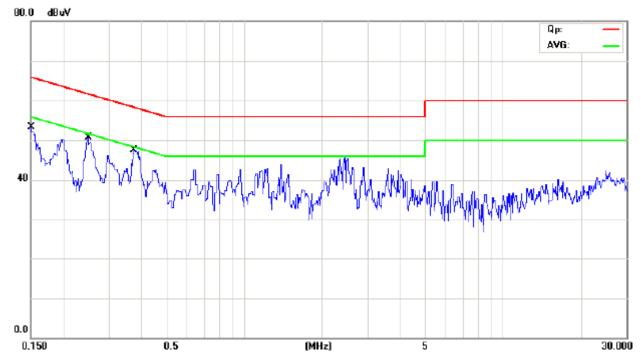

Eraguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			45.60	36.90	65.96	55.96
0.249			42.30	35.10	61.79	51.79
0.374			40.54	34.94	58.39	48.39




EUT set Condition: Play CF

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

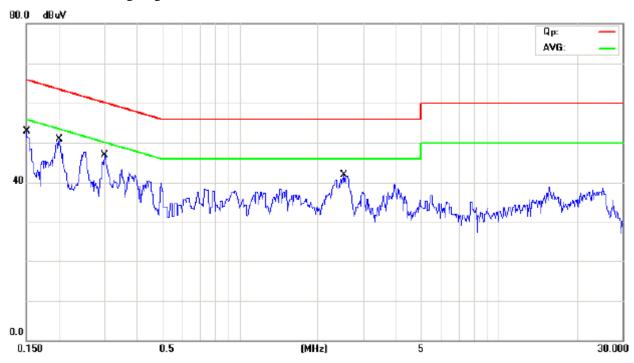

Frequency (MHz)		Reading	Limit			
	Live		Neutral		(dB µ V)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150	49.50	36.90			65.98	55.98
0.200	43.85	34.45			63.59	53.59
0.300	40.66	29.16			60.24	50.24
2.542	33.01	20.01			56.00	46.00




R: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF


Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

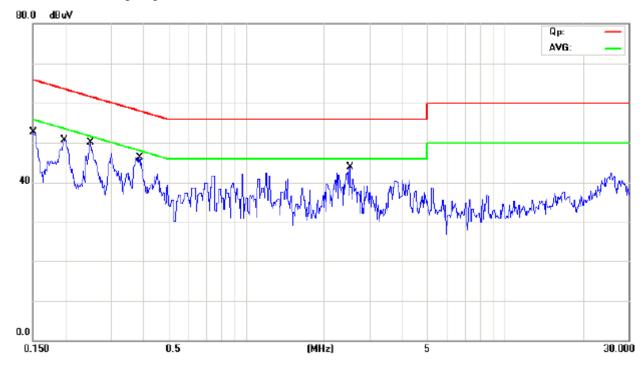

Enaguanav	Reading(dB µ V)				Limit	
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			45.50	36.90	65.96	55.96
0.199			43.85	35.25	63.65	53.65
0.249			42.41	34.91	61.77	51.77
0.386			40.35	24.85	58.15	48.15
2.503			32.80	19.80	56.00	46.00




EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Working Voltage: 120V~ 60Hz

Results: Pass

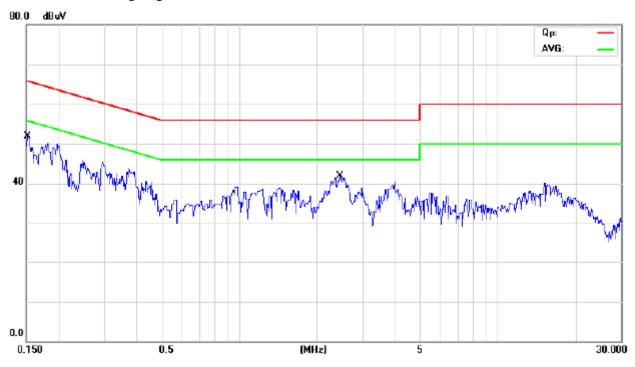

Eraguanav	Reading(dB µ V)				Limit	
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.151	44.90	33.70	-		65.92	55.92
2.446	32.78	19.78			56.00	46.00




T: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

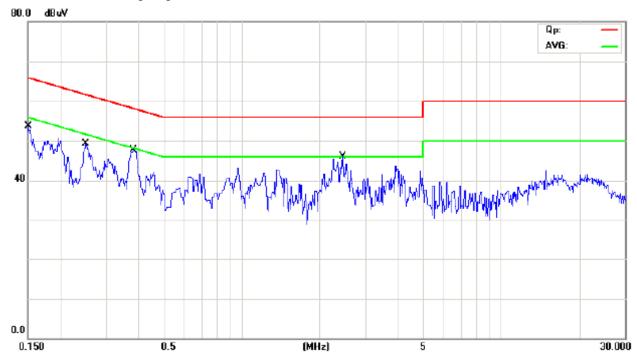

Engguenav	Reading(dB \(\mu \)				Limit	
Frequency (MHz)	Live		Neutr	al	(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.151			45.20	33.70	65.92	55.92
0.250			41.81	31.91	61.74	51.74
0.380			41.24	25.84	58.27	48.27
2.447			33.28	20.28	56.00	46.00


Page 29 of 69

Report No: 0904155 Date: 2009-04-30



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

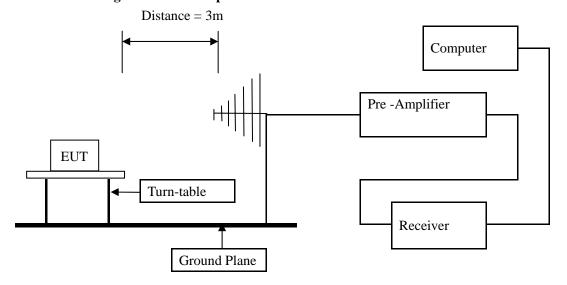



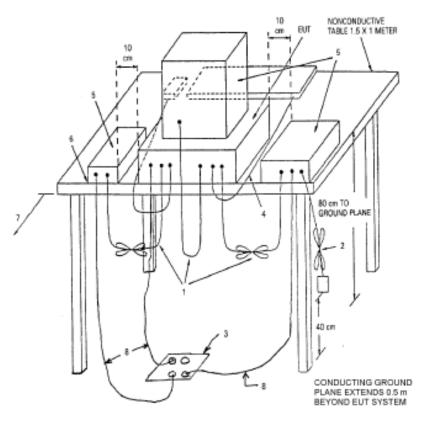

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.



A: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

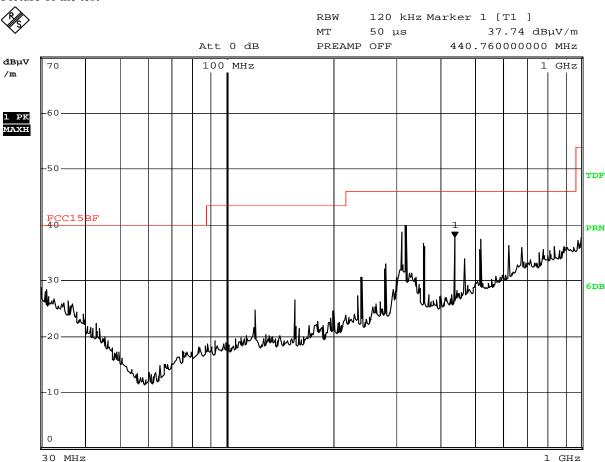

Comment: H

Date: 27.APR.2009 20:30:59

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
319.560	39.84	Н	46.00
440.760	37.74	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

1 GHz

Report No: 0904155 Date: 2009-04-30



Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU


Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] мт 50 µs 39.05 dBµV/m

520.92000000 MHz

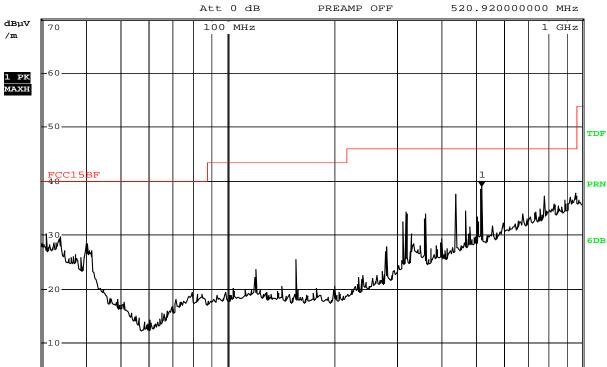

Comment: V

30 MHz

27.APR.2009 20:37:22 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
440.760	37.59	V	46.00
520.920	39.05	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



C: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

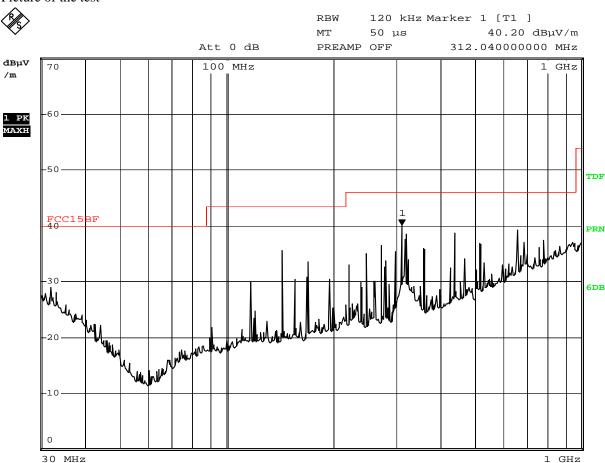

Comment: H

Date: 27.APR.2009 21:00:44

Ī	Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	143.000	34.59	Н	43.50
	312.040	41.02	Н	46.00
Ī	439.280	38.73	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



D: Radiated Disturbance In Vertical (30MHz---1000MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

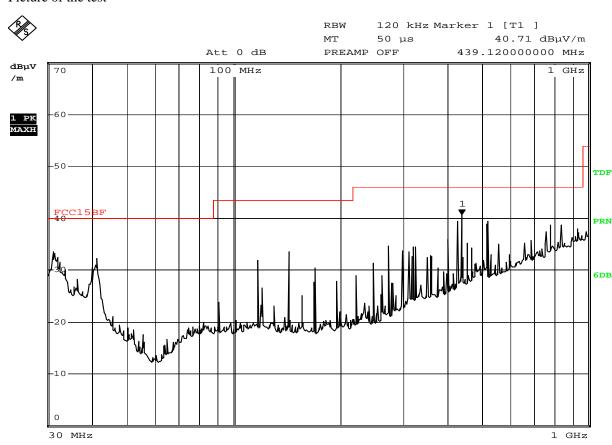

Comment: V

Date: 27.APR.2009 21:03:34

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
31.120	33.45	V	40.00
143.000	33.59	V	43.50
439.120	40.71	V	46.00
512.080	39.40	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

1 GHz

Report No: 0904155 Date: 2009-04-30



E: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play CF

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual


Picture of the test

%

RBW 120 kHz Marker 1 [T1] MT 50 μs 39.35 dBμV/m

Att 0 dB PREAMP OFF 312.00000000 MHz

100 MHz 1 GHz

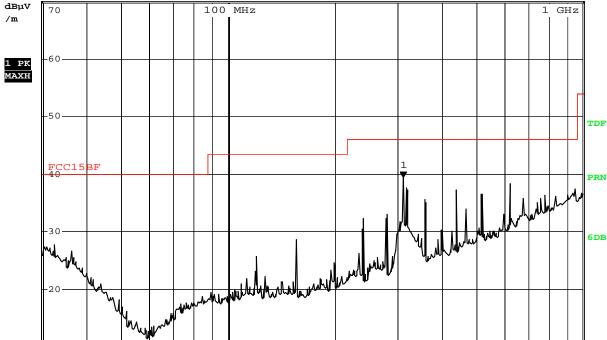

Comment: H

-10

0 30 MHz

Date: 27.APR.2009 21:15:43

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
312.040	39.35	Н	46.00
624.000	38.24	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



F: Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Play CF


Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] MT 50 µs 39.85

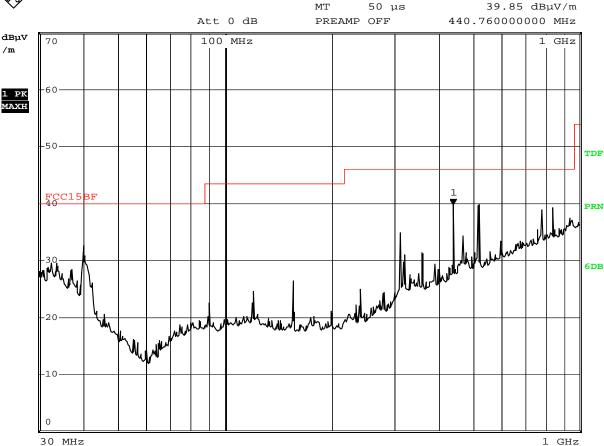

Comment: V

Date: 27.APR.2009 21:19:05

Fr	requency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	440.760	39.85	V	46.00
	519.120	39.77	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play USB


Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] МТ 50 µs 36.78 dBuV/m

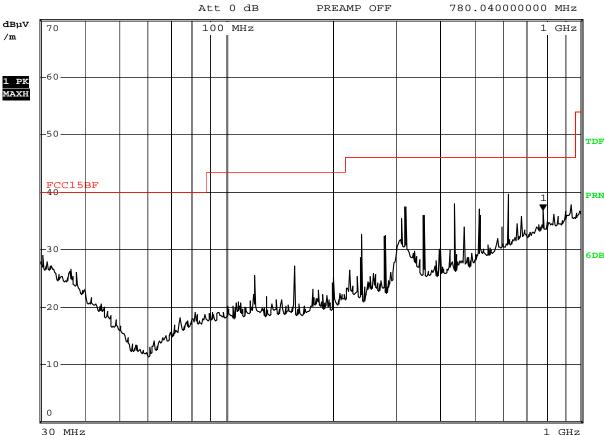

Comment: H

27.APR.2009 21:30:04 Date:

Ī	Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	440.920	38.00	Н	46.00
	624.040	39.62	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU


Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] 50 µs мт 40.65 dBμV/m PREAMP OFF 780.04000000 MHz



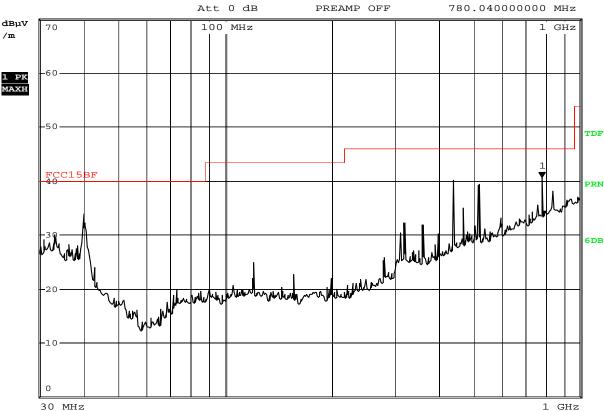

Comment: V

27.APR.2009 21:27:34 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
439.280	40.16	V	46.00
519.120	39.37	V	46.00
780.040	40.65	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B **PASS Results:**

Please refer to following diagram for individual


Picture of the test



RBW 120 kHz Marker 1 [T1]

 $37.73 \text{ } dB\mu\text{V/m}$ МТ 50 µs



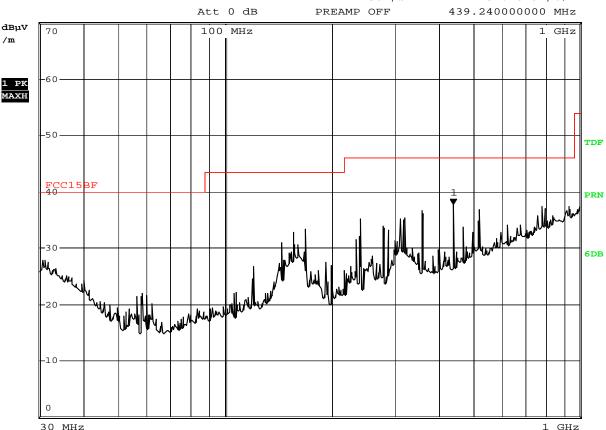

Comment: H

Date: 27.APR.2009 21:37:28

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
359.400	37.81	Н	46.00
439.240	39.24	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Vertical (30MHz --- 1000MHz) J

EUT set Condition: Connect to PC

Model No.: ADS-18C-12N 12018GPCU Adaptor used for test

Level: Class B **Results: PASS**


Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]

39.02 dBμV/m МТ 50 µs

439.280000000 MHz Att 0 dB PREAMP OFF 100 MHz

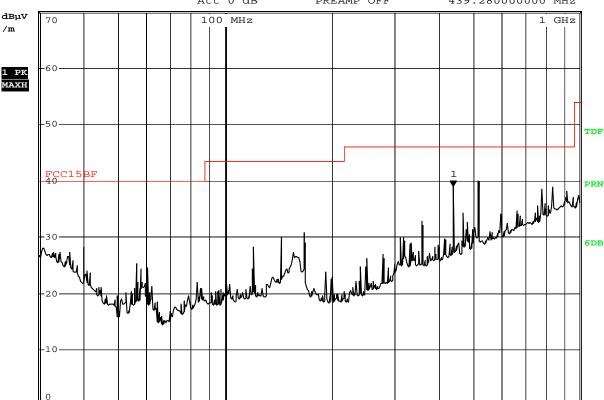

Comment: V

30 MHz

Date: 27.APR.2009 21:39:47

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m (dBµV/m)
439.280	39.02	V	46.00
519.000	39.88	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B **PASS Results:**

Please refer to following diagram for individual

Picture of the test




RBW 120 kHz Marker 1 [T1]

МТ 50 µs

 $37.73 \text{ } dB\mu\text{V/m}$



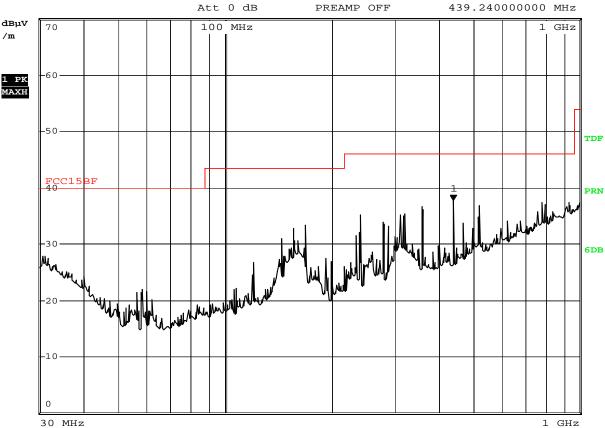

Comment: H

Date: 27.APR.2009 21:37:28

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
359.400	37.81	Н	46.00
439.240	39.24	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



J Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-18C-12N 12018GPCU

Level: Class B
Results: PASS


Please refer to following diagram for individual

Picture of the test

P

RBW 120 kHz Marker 1 [T1]

MT 50 μs 39.02 $dB\mu V/m$

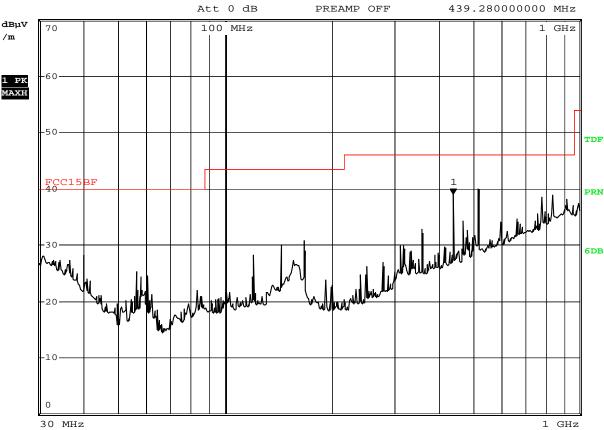

Comment: V

Date: 27.APR.2009 21:39:47

	Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	439.280	39.02	V	46.00
ĺ	519.000	39.88	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



K Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

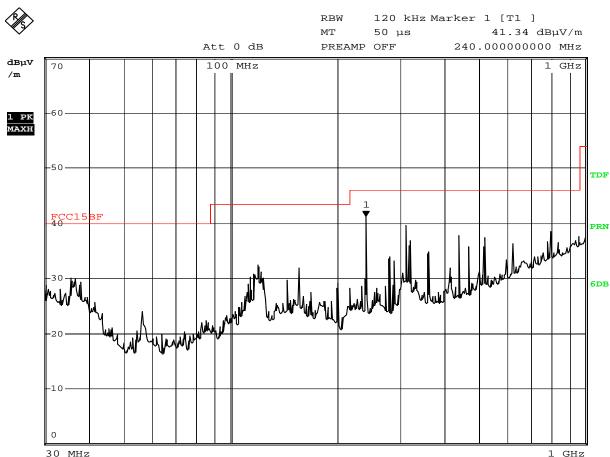

Comment: H

Date: 27.APR.2009 19:21:00

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
119.800	32.44	Н	43.50
240.000	41.32	Н	46.00
312.000	39.56	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



L Radiated Disturbance In Vertical (30MHz---1000MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

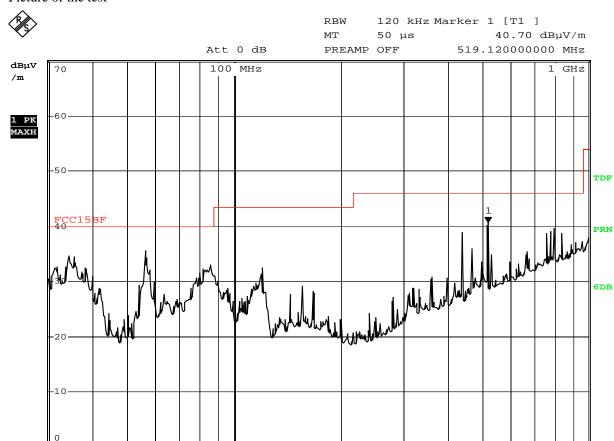

Comment: V

30 MHz

Date: 27.APR.2009 19:23:36

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
56.480	35.50	V	40.00
439.280	38.77	V	46.00
519.120	40.70	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



M Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B
Results: PASS


Please refer to following diagram for individual

Picture of the test

%

RBW 120 kHz Marker 1 [T1]

MT 50 μs 38.96 dBμV/m

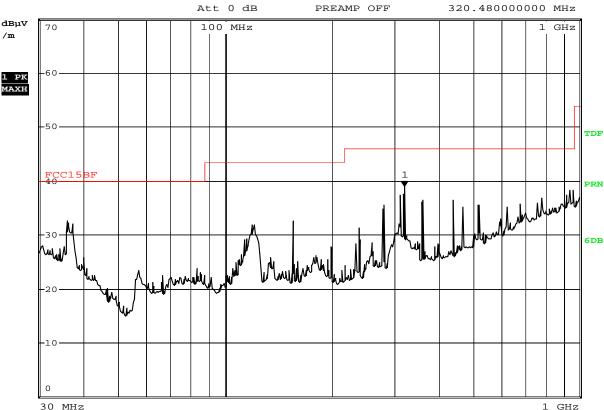

Comment: H

Date: 27.APR.2009 17:40:43

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
280.48	35.52	Н	46.00
320.48	38.96	Н	46.00
360.64	36.41	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



N Radiated Disturbance In Vertical (30MHz---1000MHz

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US


Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test



RBW 120 kHz Marker 1 [T1]
MT 50 µs 40.44 dBµV/m

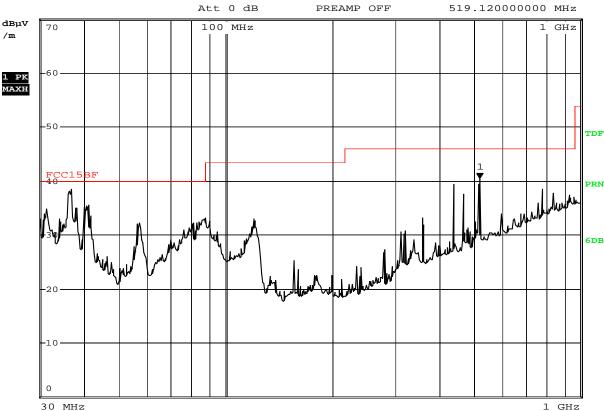

Comment: V

Date: 27.APR.2009 17:35:15

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
36.60	34.20	V	40.00
439.28	39.35	V	46.00
519.12	40.44	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



O Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

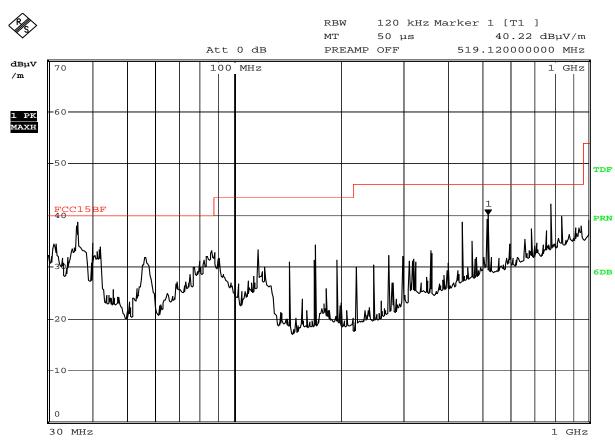

Comment: V

Date: 27.APR.2009 18:27:36

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
36.200	33.27	Н	40.00
169.000	34.84	Н	43.50
229.000	37.92	Н	46.00
663.040	41.48	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

1 GHz

Report No: 0904155 Date: 2009-04-30



P Radiated Disturbance In Vertical (30MHz --- 1000MHz)


EUT set Condition: Play SD


Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

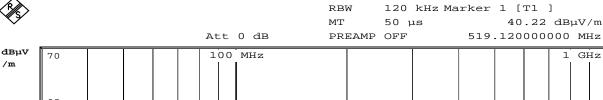

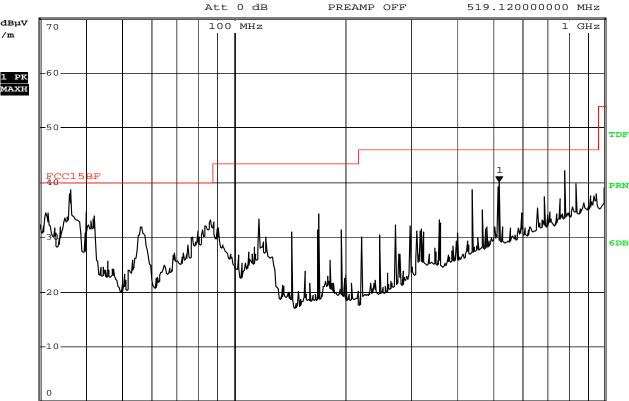

Comment: V

30 MHz

27.APR.2009 18:27:36 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
36.200	34.60	V	40.00
519.120	40.22	V	46.00
780.040	42.21	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Horizontal (30MHz----1000MHz) Q

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B **PASS Results:**

Please refer to following diagram for individual


Picture of the test



RBW 120 kHz Marker 1 [T1] мт 50 µs 38.28 dBµV/m PREAMP OFF



/m

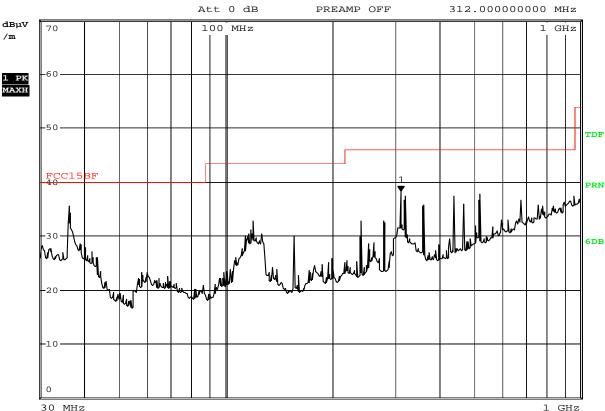

Comment: H

27.APR.2009 18:57:21 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
36.240	35.53	Н	40.00
312.000	38.28	Н	46.00
519.120	37.78	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



R Radiated Disturbance In Vertical (30MHz---1000MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

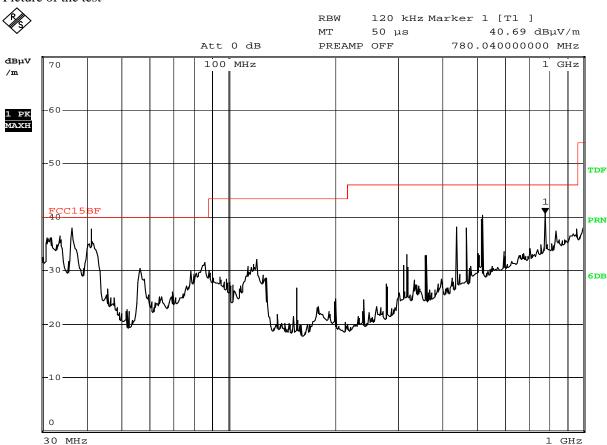

Comment: V

Date: 27.APR.2009 19:00:34

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
36.280	33.60	V	40.00
41.120	33.50	V	40.00
519.120	40.39	V	46.00
780.040	40.69	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



S Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play CF

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

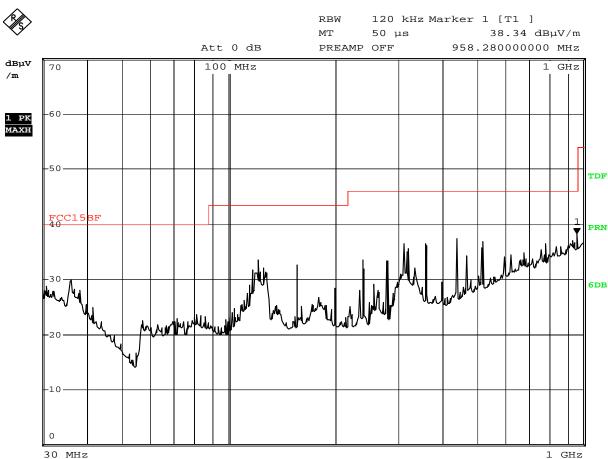

Comment: H

Date: 27.APR.2009 18:19:35

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
120.760	33.50	Н	43.50
312.000	36.47	Н	46.00
439.280	37.40	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



\mathbf{T} Radiated Disturbance In Vertical (30MHz --- 1000MHz

EUT set Condition: Play CF

Adaptor used for test Model No.: XKD-C1500IC12.0-18C-US

Level: Class B **Results: PASS**

Please refer to following diagram for individual


Picture of the test

RBW 120 kHz Marker 1 [T1]

50 µs МТ 40.61 dBµV/m

PREAMP OFF 519.120000000 MHz



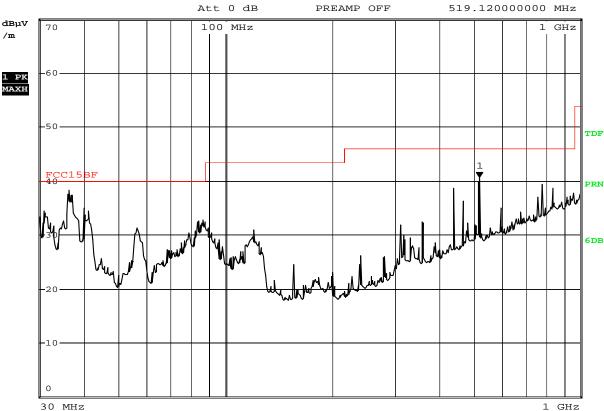

Comment: V

27.APR.2009 18:23:10 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
36.16	34.70	V	40.00
440.760	38.59	V	46.00
519.120	40.16	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 53 of 69

Report No: 0904155 Date: 2009-04-30



6.0 FCC ID Label

FCC ID: V37-6226-104INCH

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

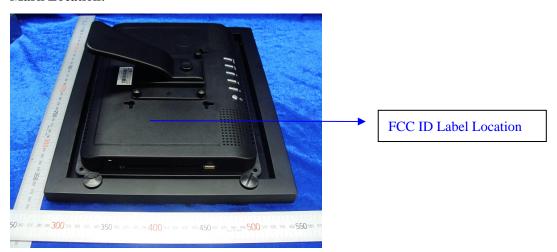




Photo of testing

7.1 Conducted test View—

Connect to PC




Page 55 of 69

Report No: 0904155 Date: 2009-04-30



7.2 Radiated emission test view--

Connect to PC

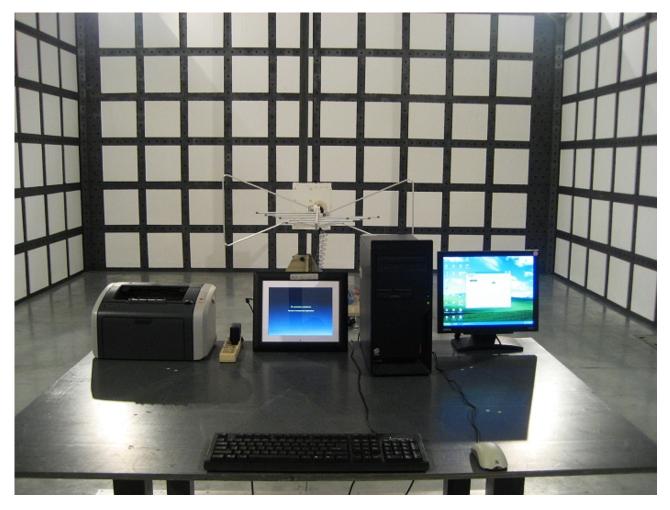

Page 56 of 69

Report No: 0904155 Date: 2009-04-30



7.3 Photo for the EUT



Page 57 of 69

Report No: 0904155 Date: 2009-04-30






The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 58 of 69

Report No: 0904155 Date: 2009-04-30



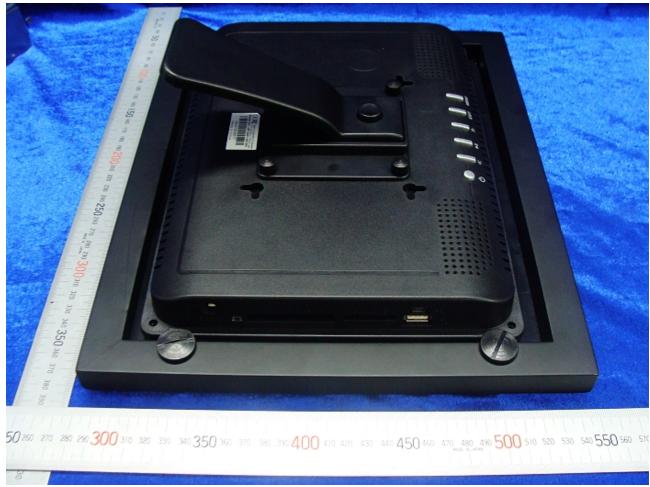

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 59 of 69






Page 60 of 69






Page 61 of 69



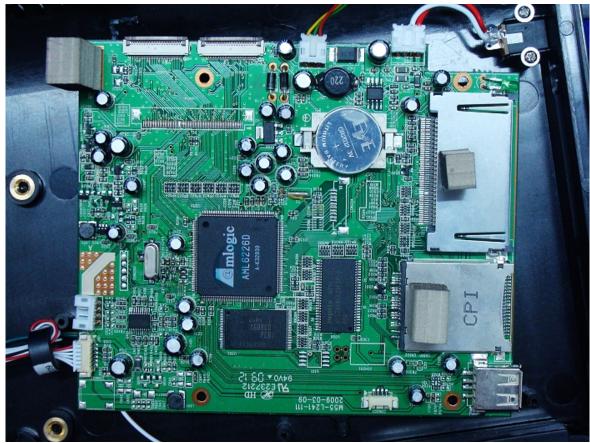


Page 62 of 69



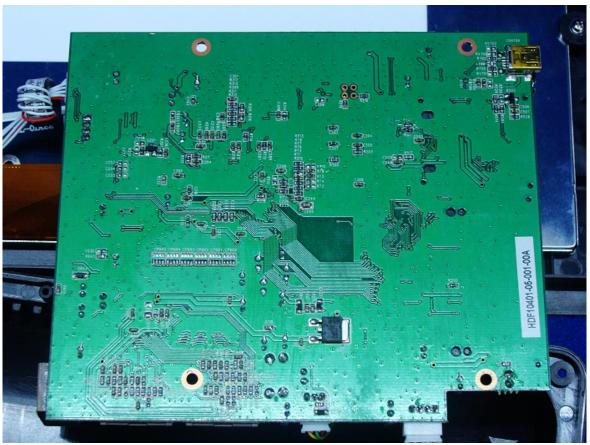


Page 63 of 69



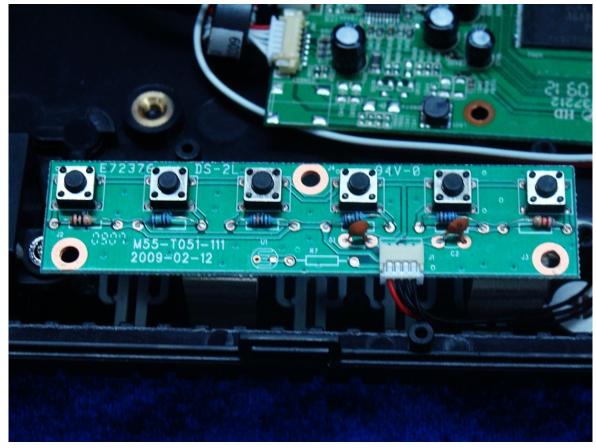


Page 64 of 69



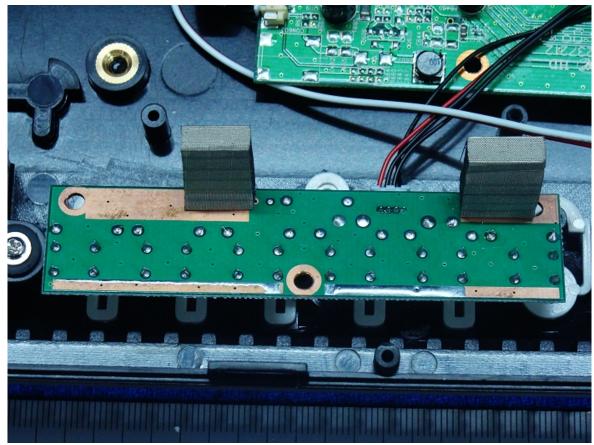


Page 65 of 69



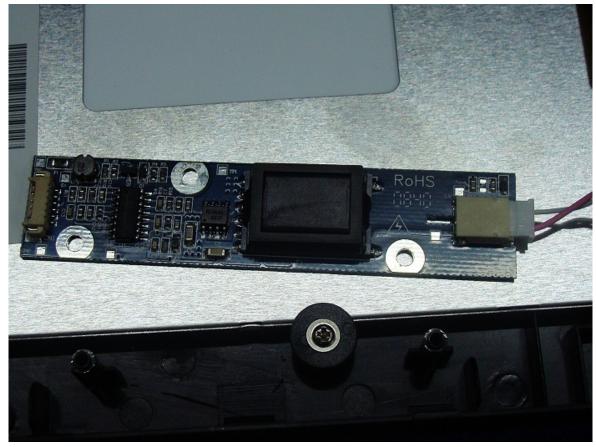

Page 66 of 69



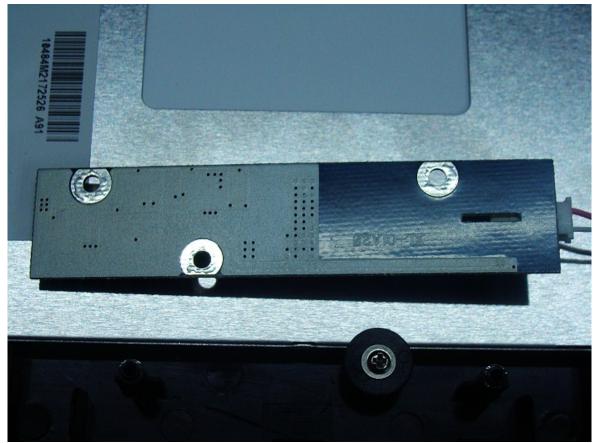

Page 67 of 69





Page 68 of 69





Page 69 of 69





-End of the report-