







ISO/IEC17025 Accredited Lab.

Report No: FCC 0905047 File reference No: 2009-05-13

Applicant: WIN ACCORD LTD.

Product: Digital Photo Frame

Brand Name: N/A

Model No: DF08006-05-XXX (X=A-Z, 0-9, a-z)

Test Standards: FCC Part 15 Subpart B: 2008

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: May 13, 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0905047 Page 2 of 62

Date: 2009-05-13



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 62

Report No: 0905047 Date: 2009-05-13



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration	4
2.0	List of Measurement Equipment.	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test.	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test	25
6.0	FCC ID Label	43
7.0	Photo of testing	44

Date: 2009-05-13



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F, NO. 225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI,

TAIWAN

Telephone: 02-2749 3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame
Manufacturer: WIN ACCORD LTD.

Address: 12F, NO. 225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD,

AIPEI, TAIWAN

Brand Name: N/A

Model Number: DF08006-05-XXX (X=A-Z, 0-9, a-z)

Additional Model Number: D08XXX

The adapter Model No.: XKD-C2000IC5.0-12W (Made by MOSO)

Rating: Input: 100-240V, 0.5A Max, 50/60Hz Output: 5V, 2A The adapter Model No.: ADS-12G-06 05010GPCU (Made by HONOR)
Rating: Input: 100-240V, 0.3A Max, 50/60Hz Output: 5V, 2A

Remark: --

Rating: Input: DC 5V, Current 2A

1.4 Submitted Sample(s): 1 Sample

1.5 Test Duration: 2009-05-08 to 2009-05-13

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 62

Report No: 0905047 Date: 2009-05-13



1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2009.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2009.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2009.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2009.2.23	1Year

2.3 Auxiliary Equipment

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Printer	LaserJet 1015	CNFG029476	HP	Mains cable	DOC

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 6 of 62

Report No: 0905047 Date: 2009-05-13

			₹/		
				Data cable of	f
				1.5m length	ı
				unshielded and	1
				1.8m length AC	
Printer	LaserJet 1022	CNBG591GM7	HP	Mains cable	DOC
				Data cable of	f
				1.5m length	ı
				unshielded and	ı
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC ID
				1.8m length	
PC	8434		IBM	AC Mains cable	FCC DOC
				Data cable of	
Mouse	OM860XC	HM0509	BIGCOW	1.5m length	FCC DOC

3.0 **Technical Details**

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 **Test Standards**

FCC Part 15 Subpart B: 2008



4.0 Conducted Power line Test

4.1 Schematics of the test

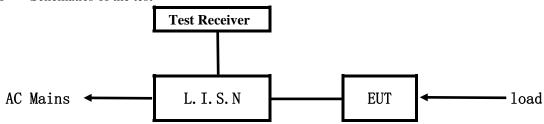


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

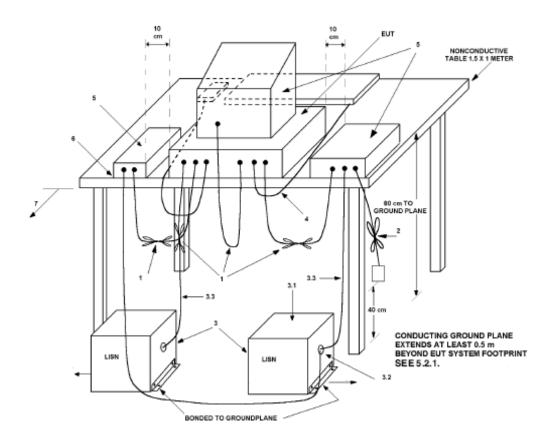

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 8 of 62

Report No: 0905047 Date: 2009-05-13



4.3 Power line conducted Emission Limit

E(MII-)	Class A Li	mits dB(μV)	Class B Lin	nits dB(μV)
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.00	66.00	66.00~56.00*	56.00~46.00*
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00
5.00 ~ 30.00	73.00	60.00	60.00	50.00

Notes:

- 1. *decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.


A: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

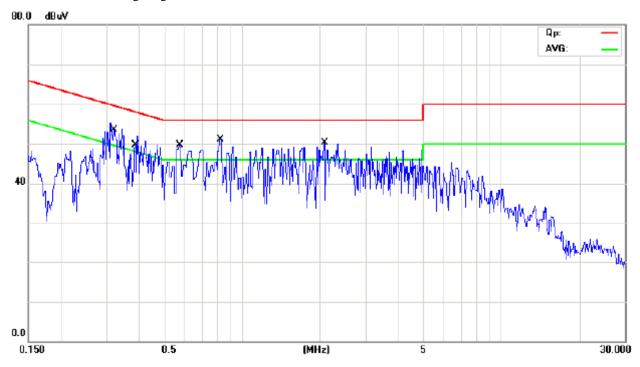

Empayomay		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.317	49.48	21.58			59.79	49.79
0.384	44.95	21.75			58.19	48.19
0.575	44.55	21.15			56.00	46.00
0.821	42.71	20.31			56.00	46.00
2.069	40.63	20.93			56.00	46.00



B: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

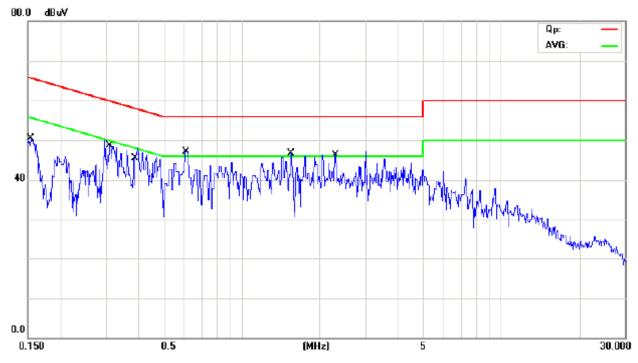

Engayonary	Reading(dB µ V) Limit			t		
Frequency (MHz)	Live	;	Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.152			47.90	22.30	65.85	55.85
0.311			43.27	18.47	59.94	49.94
0.383			40.55	12.65	58.20	48.20
0.607			38.28	9.28	56.00	46.00
1.548			38.92	11.92	56.00	46.00
2.287			37.21	12.81	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


C: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

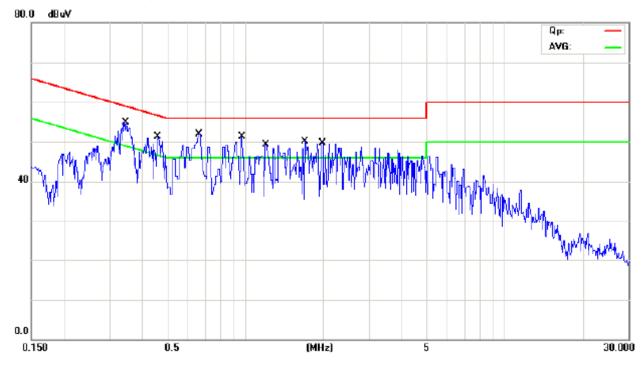

Eraguanav		Reading	Limit			
Frequency (MHz)	Live	2	Neutr	Neutral		V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.343	48.60	31.50			59.12	49.12
0.457	44.53	28.83			56.73	46.73
0.661	44.84	25.94			56.00	46.00
0.967	41.77	22.67			56.00	46.00
1.197	42.68	26.58			56.00	46.00
1.707	41.08	24.08			56.00	46.00
1.970	39.99	23.59			56.00	46.00




D: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU


Working Voltage: 120V~ 60Hz

Results: Pass

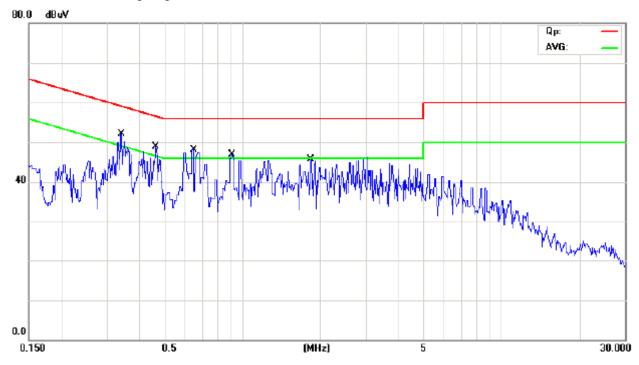

Engguenav		Reading	Limi	t		
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak Averag		Quasi-peak	Average	Quasi-peak	Average
0.339			42.20	21.90	59.22	49.22
0.462			41.03	21.93	56.64	46.64
0.648			40.93	17.93	56.00	46.00
0.905			39.10	16.00	56.00	46.00
1.833			35.23	16.73	56.00	46.00


EUT set Condition:



Play USB (Adapter made by HONOR) Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass Please refer to following diagram for individual

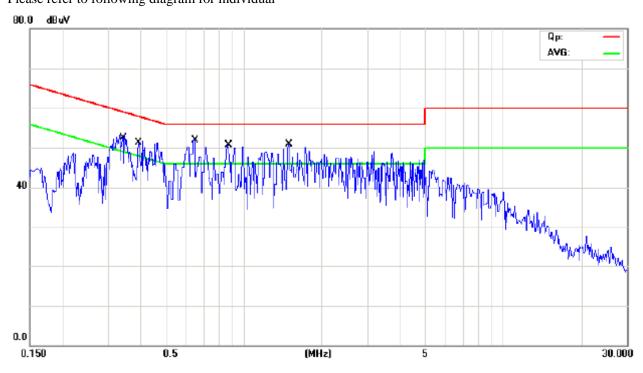

Engavonary		Reading	Limi	t		
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.342	48.00	21.20			59.15	49.15
0.393	42.86	17.06			58.00	48.00
0.641	45.22	23.62			56.00	46.00
0.866	43.86	22.96			56.00	46.00
1.494	21.10	41.50			56.00	46.00




F: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

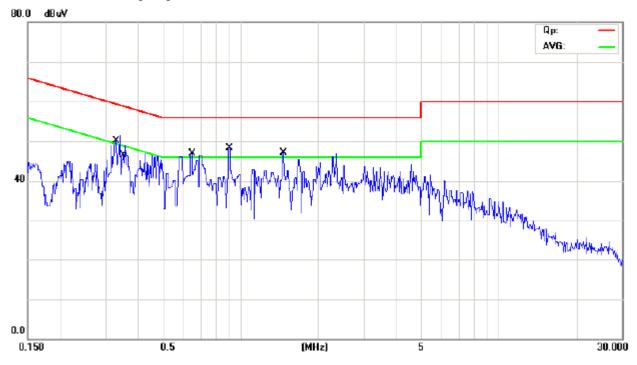

Engavonov		Reading	Limi	t		
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.347			41.61	16.31	59.02	49.02
0.330			42.69	18.99	59.45	49.45
0.903			39.50	12.40	56.00	46.00
1.442			38.18	14.78	56.00	46.00
0.637			40.22	15.72	56.00	46.00


G: Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF (Adapter made by HONOR)
Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

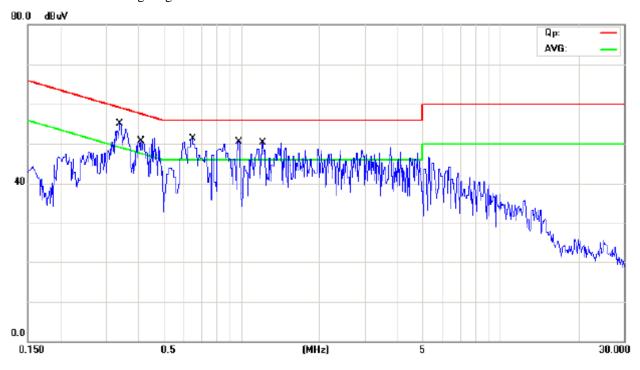

Frequency		Reading	Limit			
	Live		Neutral		$(dB \mu V)$	
(MHz)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.339	49.60	30.40			59.23	49.23
0.408	44.27	29.77			57.68	47.68
0.645	44.92	25.52			56.00	46.00
0.984	43.08	23.68			56.00	46.00
1.206	27.28	42.68			56.00	46.00




H: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

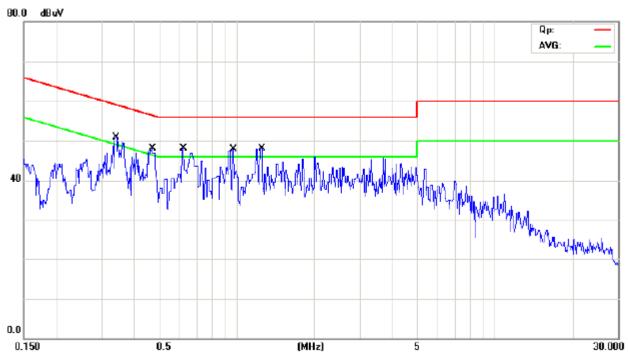

Eng guan av		Reading	Limit			
Frequency (MHz)	Live	;	Neutral		(dB μ	V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.341			42.70	22.40	59.18	49.18
0.468			40.54	22.14	56.54	46.54
0.629			40.21	20.21	56.00	46.00
0.977			38.48	16.48	56.00	46.00
1.243			38.20	16.40	56.00	46.00




I: Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

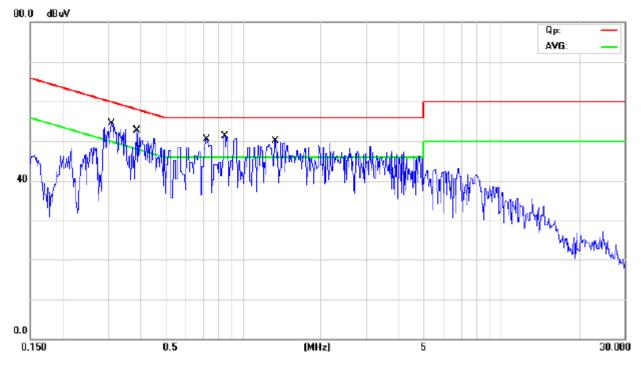

Frequency		Reading	Limit			
	Live		Neutral		(dB μ	V)
(MHz)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.307	48.17	24.07			60.05	50.05
0.384	44.75	21.65			58.18	48.18
0.729	43.51	19.81			56.00	46.00
0.854	43.65	17.15			56.00	46.00
1.321	43.93	19.93			56.00	46.00




J: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

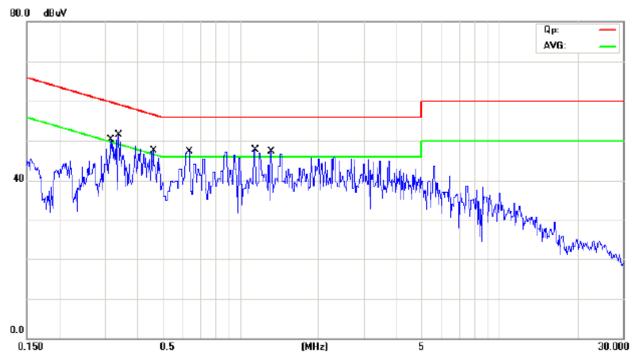

Fraguency		Reading	Limit			
Frequency (MHz)	Live	;	Neutr	Neutral		V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.337			42.00	10.10	59.27	49.27
0.313			44.57	18.27	59.89	49.89
0.457			38.33	8.43	56.74	46.74
0.635			39.41	14.61	56.00	46.00
1.141			39.46	11.46	56.00	46.00
1.306			38.82	14.12	56.00	46.00


K: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

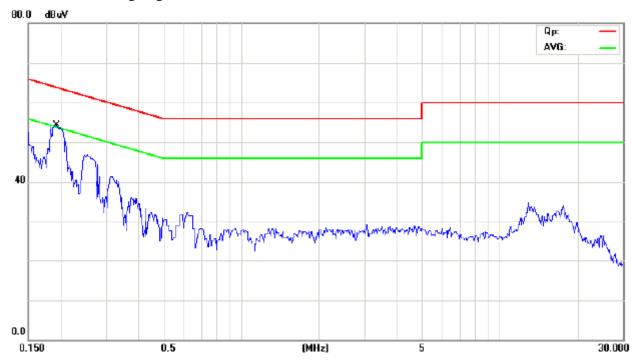

Eraguanav		Reading	Limit			
(MHz)	Frequency		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.192	52.74	17.94			63.95	53.95




L: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

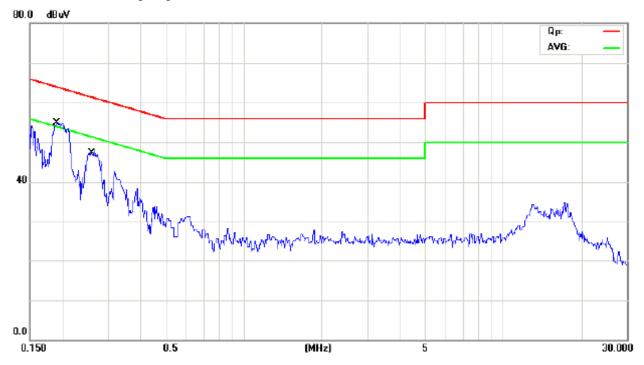

Ema avvam avv		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.192			53.14	21.94	63.95	53.95
0.256			61.54	51.54	61.54	51.54




EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

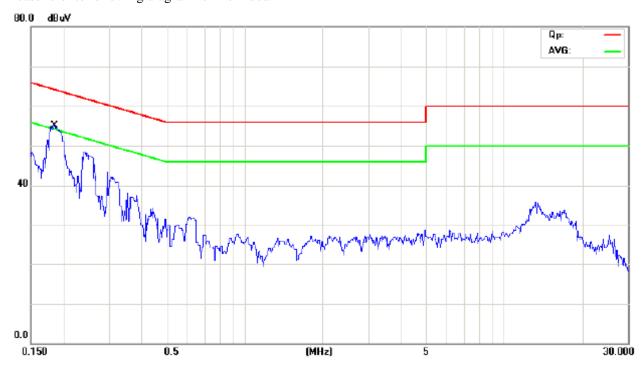

Eroguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.185	53.24	18.34			64.24	54.24




N: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

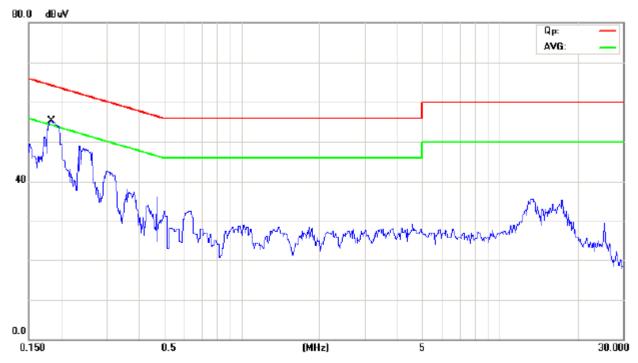

Eraguanay		Reading	Limit			
Frequency (MHz)	Live		Neutr	al	(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.183	-1		52.73	17.13	64.35	54.35




EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

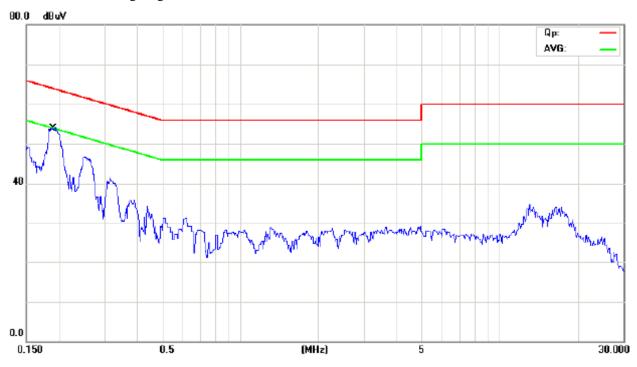

Eroguanav		Reading	Limit			
Frequency Li (MHz)		;	Neutral		$(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.188	52.44	17.64			64.11	54.11




P: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

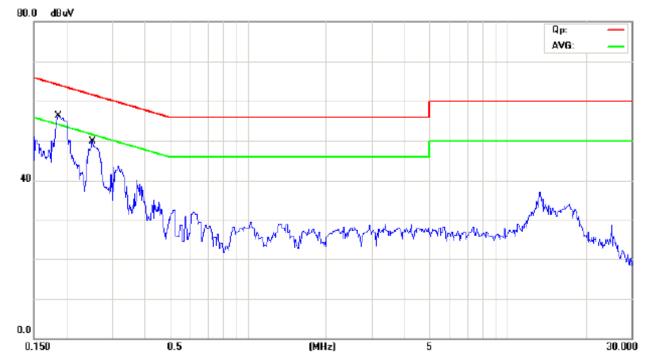

Ema ayyam ayy		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.188			54.44	16.94	64.11	54.11
0.251			46.01	14.81	61.72	51.72




EUT set Condition: Play CF

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

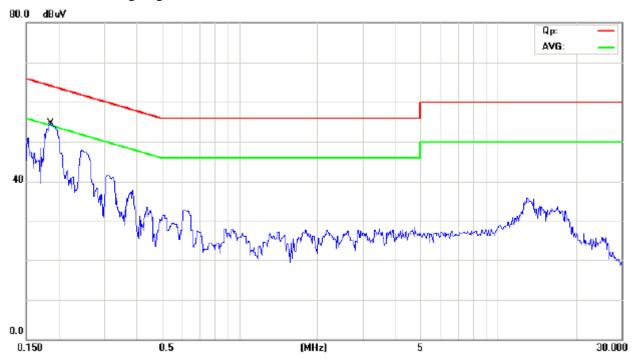

Emagnaman		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.183	49.54	16.64			64.34	54.34




R: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play CF


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

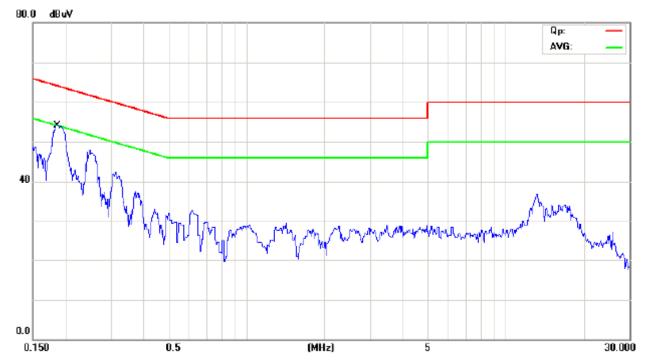

Emaguamay		Reading	Limit			
Frequency (MHz)	Live		Neutr	al	$(dB \mu V)$	
(MITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.185			52.24	17.34	64.26	54.26




EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

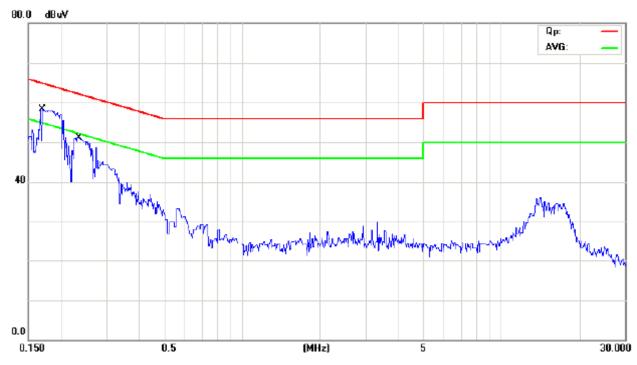

Eraguanay	Reading(dB μ V)			Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WIHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.171	53.72	18.52			64.91	54.91
0.234	48.39	14.69			62.31	52.31




T: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC (Adapter made by MOSO)

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

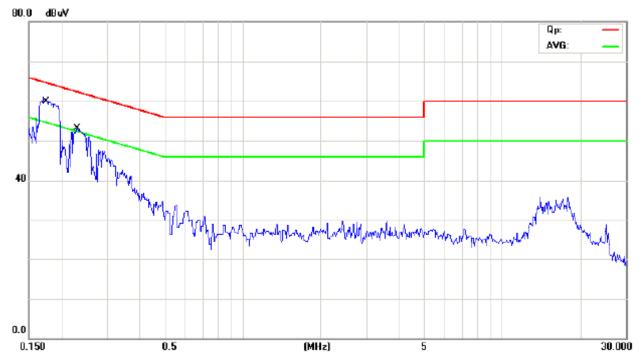

Emagnaman		Reading(dB μ V)			Limit	
Frequency (MHz)	Live	;	Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.173			58.72	19.82	64.80	54.80
0.229			48.68	14.48	62.46	52.46


Page 29 of 62

Report No: 0905047 Date: 2009-05-13



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

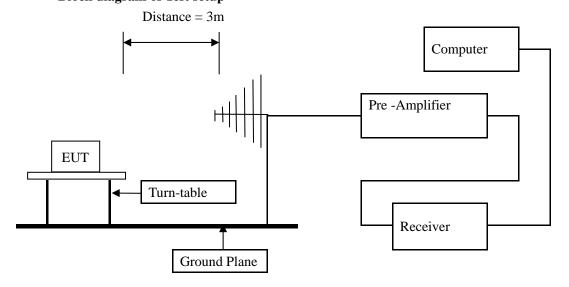



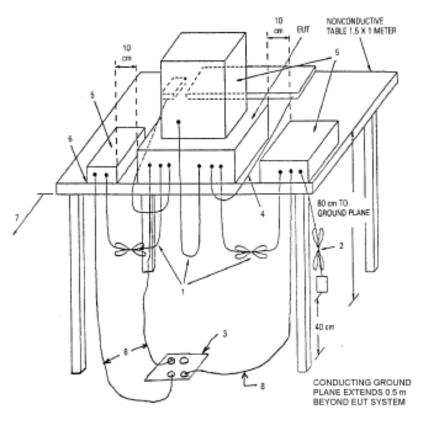


5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.






EUT set Condition: Memory


Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

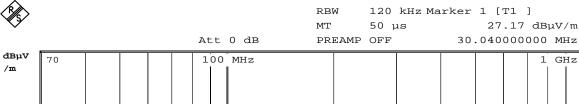

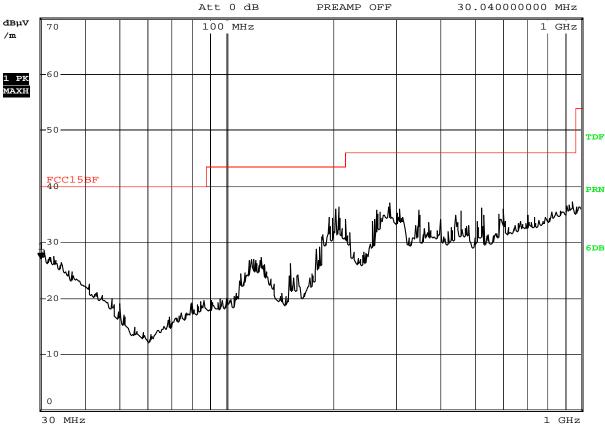

12.MAY.2009 09:36:27 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
207.480	30.50	Н	43.50
203.000	31.10	Н	43.50
289.760	32.20	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 32 of 62

Report No: 0905047 Date: 2009-05-13



B: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]
MT 50 µS 29.22 dBµV/m
Att 0 dB PREAMP OFF 288.640000000 MHz

dBµV/m

FCC15BF

RBW 120 kHz Marker 1 [T1]
MT 50 µS 29.22 dBµV/m
288.640000000 MHz

TDF

FCC15BF

GDB

Date: 12.MAY.2009 09:42:21

30 MHz

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
75.440	26.70	V	40.00
264.280	33.05	V	46.00
443.840	38.18	V	46.00
524.440	37.81	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



C: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

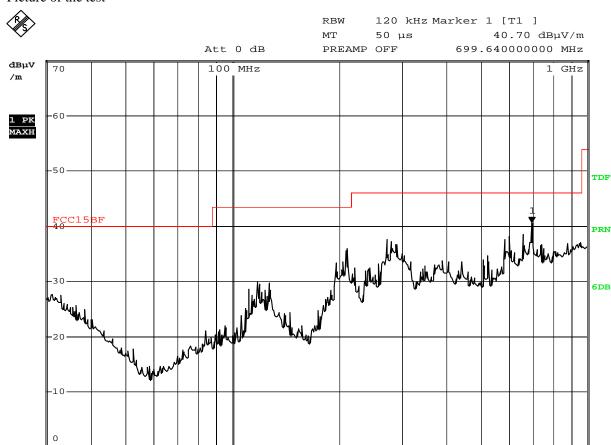

Comment: H

30 MHz

Date: 12.MAY.2009 23:04:23

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
210.960	35.99	Н	43.50
272.880	37.55	Н	46.00
703.240	40.52	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Disturbance In Vertical (30MHz --- 1000MHz

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B **Results: PASS**

Please refer to following diagram for individual


Picture of the test

RBW 120 kHz Marker 1 [T1] МТ 50 µs 41.16 dBµV/m

OFF

Att 0 dB PREAMP



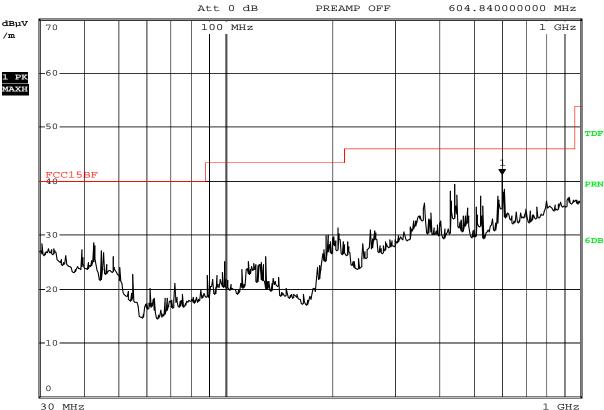

Comment: V

12.MAY.2009 23:07:19 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
208.440	31.30	V	43.50
443.640	39.47	V	46.00
604.840	41.16	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play CF

Adaptor used for test Model No.: ADS-12G-06 05010GPCU


Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]

38.63 dBµV/m 50 µs

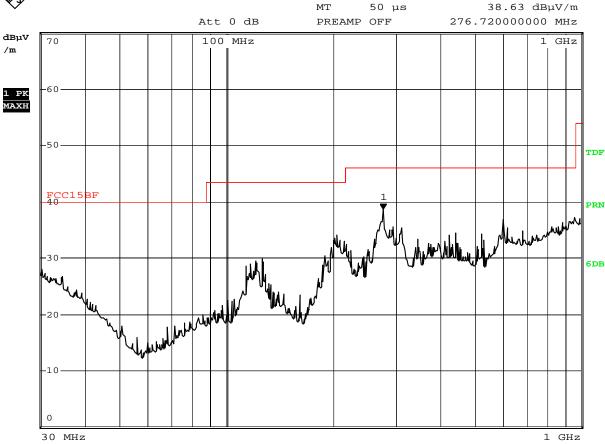

Comment: H

Date: 12.MAY.2009 23:13:07

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
205.560	34.17	Н	43.50
276.720	38.63	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Disturbance In Vertical (30MHz --- 1000MHz

EUT set Condition: Play CF

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B **Results: PASS**


Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] МТ 50 µs 40.96 dBμV/m

PREAMP OFF 605.040000000 MHz



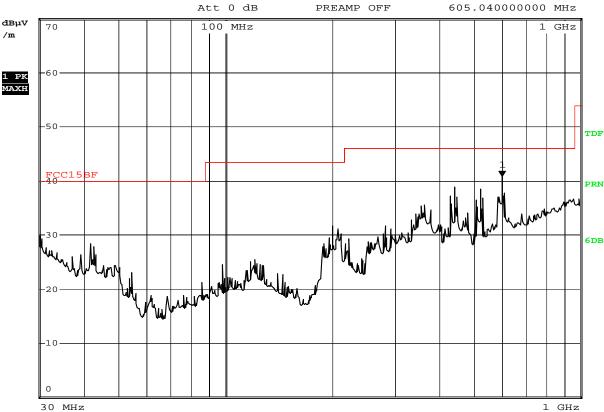

Comment: V

12.MAY.2009 23:10:31 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
208.400	31.09	V	43.50
443.800	38.94	V	46.00
605.040	40.96	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



G: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

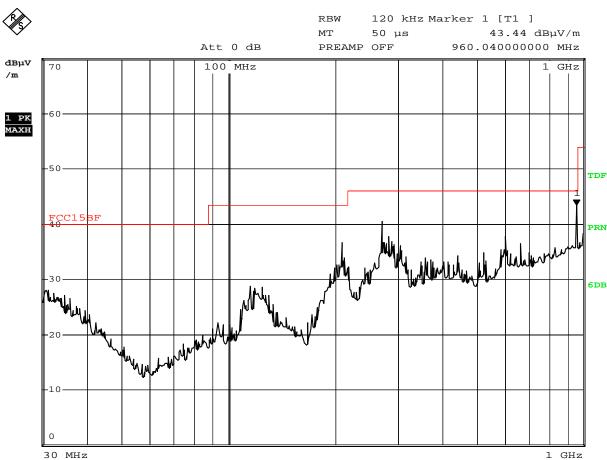

Comment: H

Date: 12.MAY.2009 23:15:47

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
208.560	36.57	Н	43.50
271.360	40.49	Н	46.00
960.040	43.44	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



H: Radiated Disturbance In Vertical (30MHz----1000MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

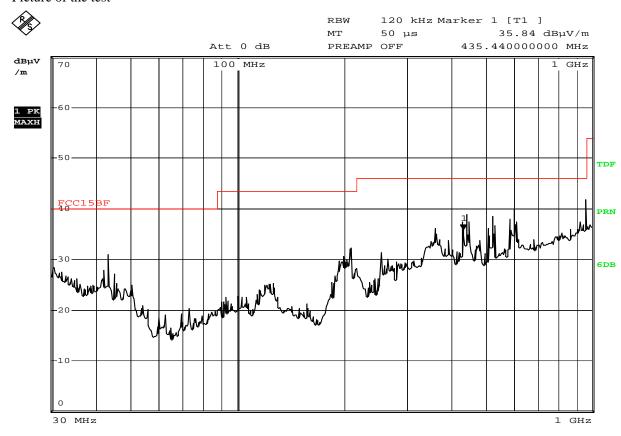

Comment: V

Date: 12.MAY.2009 23:18:27

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
43.280	30.95	V	40.00
208.560	32.24	V	43.50
443.840	38.84	V	46.00
604.840	39.99	V	46.00
960.040	41.72	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



I: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

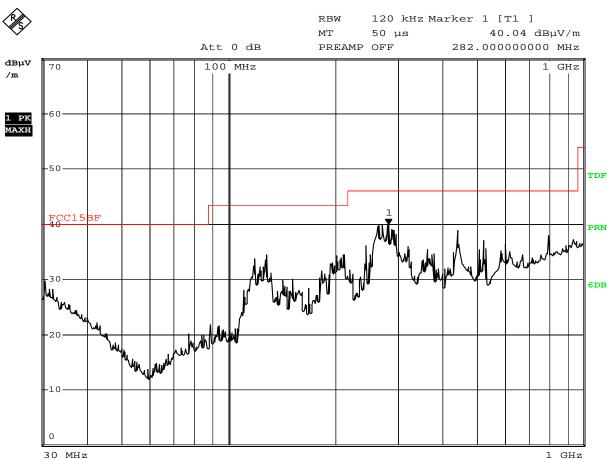

Comment: H

Date: 12.MAY.2009 22:28:03

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
127.800	34.47	Н	43.50
202.080	34.23	Н	43.50
265.080	40.00	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

6DB

Report No: 0905047 Date: 2009-05-13



J: Radiated Disturbance In Vertical (30MHz----1000MHz)


EUT set Condition: Connect to PC


Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

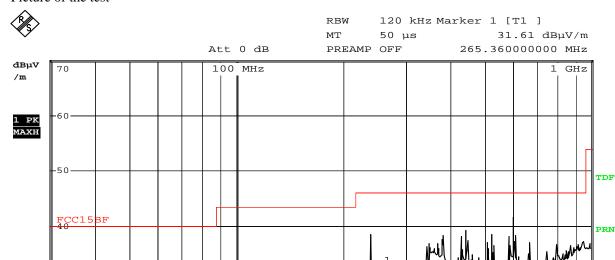

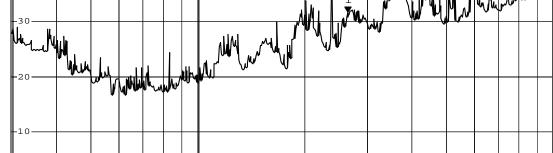

30 MHz


Comment: V

Date: 12.MAY.2009 22:30:43

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
202.680	33.64	V	43.50
239.920	38.47	V	46.00
605.120	41.66	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.





K: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

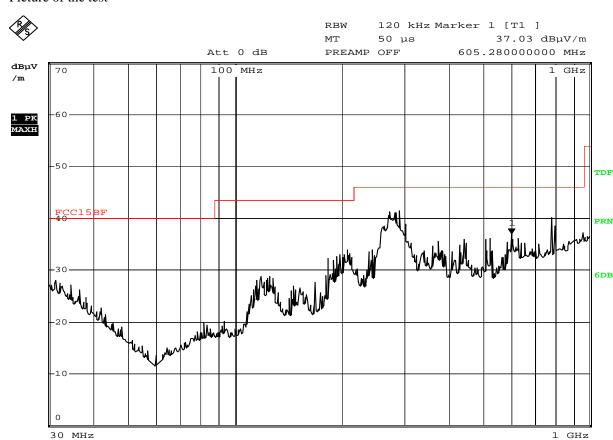

Comment: H

Date: 12.MAY.2009 23:01:21

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
120.000	35.61	Н	43.50
206.440	33.00	Н	43.50
262.400	40.32	Н	46.00
364.080	40.02	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Vertical (30MHz----1000MHz) L:

EUT set Condition: Connect to PC


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B **PASS Results:**


Please refer to following diagram for individual

Picture of the test







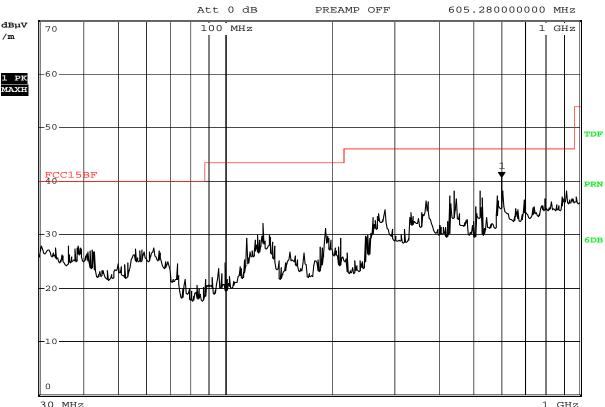

RBW

Comment: V

12.MAY.2009 22:19:25 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
127.800	32.32	V	43.50
192.680	31.19	V	43.50
443.840	38.61	V	46.00
605.280	40.28	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



M: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

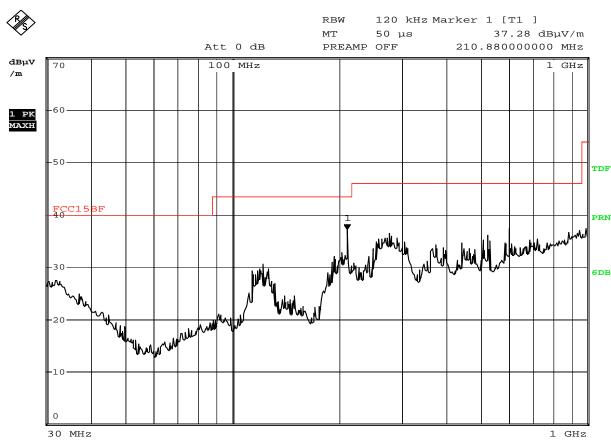

Comment: H

Date: 12.MAY.2009 21:53:53

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m (dBµV/m)
121.720	30.51	Н	43.50
210.880	37.28	Н	43.50
277.760	36.43	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



N: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS


Please refer to following diagram for individual

Picture of the test

%

RBW 120 kHz Marker 1 [T1]

MT 50 μ s 42.34 $dB\mu V/m$

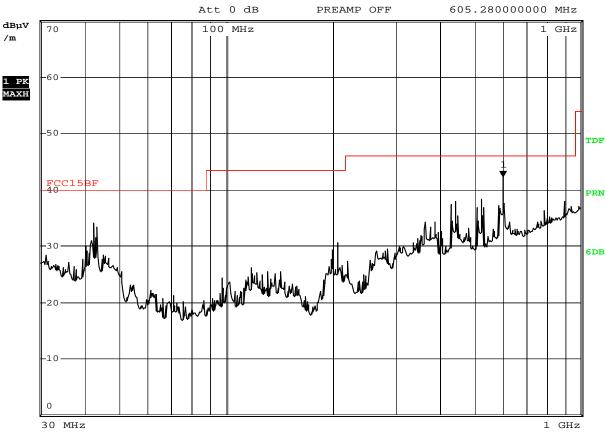

Comment: V

Date: 12.MAY.2009 21:50:52

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	$Limit@3m (dB\mu V/m)$
42.12	34.13	V	40.00
605.280	42.34	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Horizontal (30MHz----1000MHz) $\mathbf{0}$:

EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B **PASS Results:**

Please refer to following diagram for individual

Picture of the test




RBW 120 kHz Marker 1 [T1]

мт 50 µs 37.53 dBµV/m PREAMP OFF 266.280000000 MHz



/m

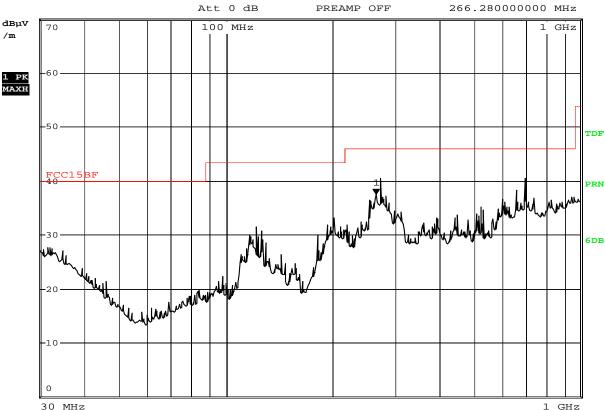

Comment: H

12.MAY.2009 22:11:33 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
121.720	31.54	Н	43.50
201.400	33.10	Н	43.50
273.400	40.54	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Vertical (30MHz----1000MHz) P:

EUT set Condition: Play SD


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B **PASS Results:**

Please refer to following diagram for individual

Picture of the test



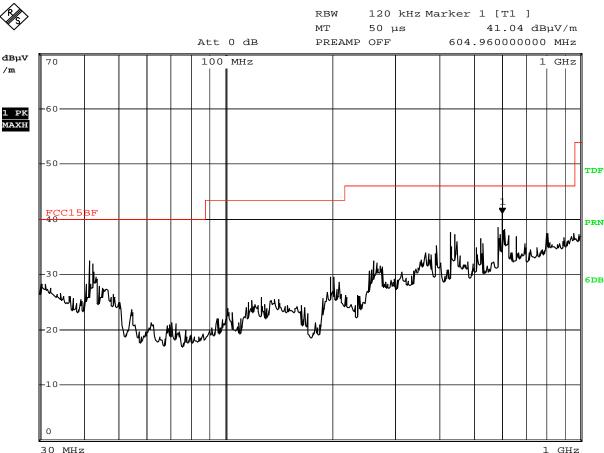

Comment: V

12.MAY.2009 22:14:49

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
41.400	32.41	V	40.00
431.280	37.56	V	46.00
604.960	41.04	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Q: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

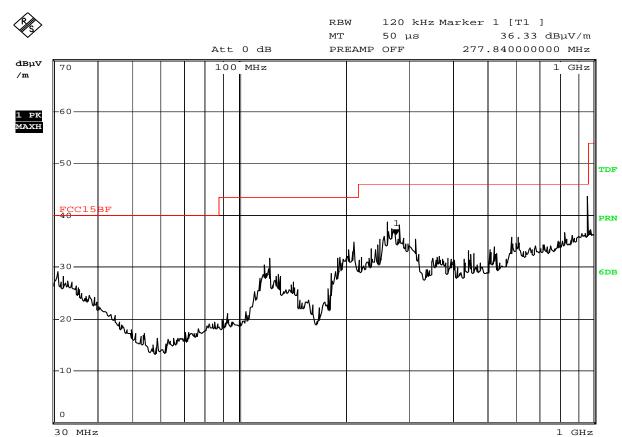

Comment: H

Date: 12.MAY.2009 21:58:17

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
121.680	31.66	Н	43.50
211.080	34.76	Н	43.50
261.600	38.66	Н	46.00
960.000	43.71	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Vertical (30MHz----1000MHz) R:

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Att 0 dB

Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]

50 µs МТ 41.55 dBµV/m PREAMP OFF 960.040000000 MHz

dΒμV 100 MHz -60 -50 PRN 6DB

Comment: V

-20

-10

0 30 MHz

12.MAY.2009 22:01:24

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
42.960	30.86	V	40.00
605.320	40.46	V	46.00
960.040	41.55	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



S: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play CF

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

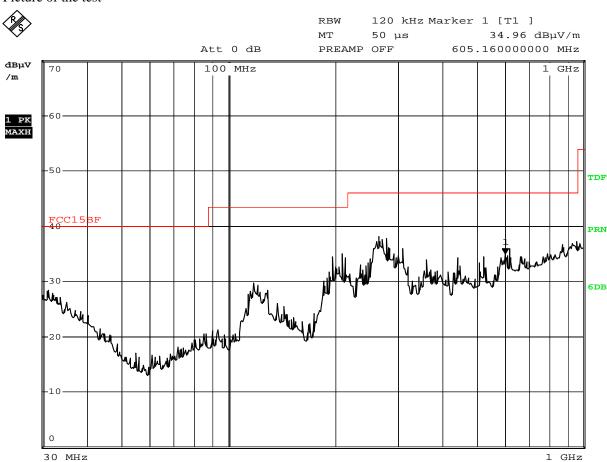

Comment: H

Date: 12.MAY.2009 22:07:54

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
209.120	35.03	Н	43.50
265.400	38.12	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



T: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play CF

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS


Please refer to following diagram for individual

Picture of the test

%

RBW 120 kHz Marker 1 [T1]

MT 50 μs 41.69 $dB\mu V/m$

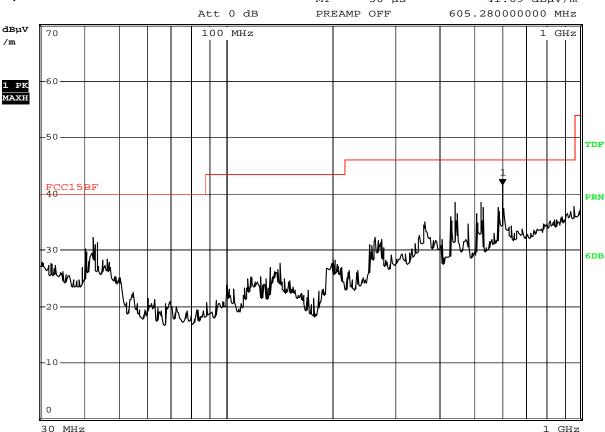

Comment: V

Date: 12.MAY.2009 22:05:16

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
42.160	32.31	V	40.00
605.280	41.69	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 51 of 62

Report No: 0905047 Date: 2009-05-13



6.0 FCC ID Label

FCC ID: V37-6226-8DN

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

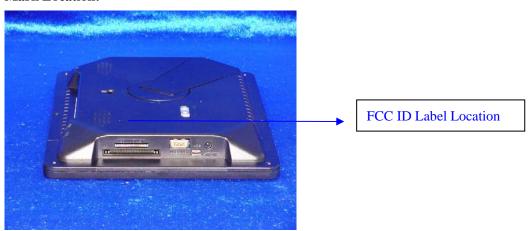




Photo of testing

Conducted test View—

Connect to PC



Page 53 of 62

Report No: 0905047 Date: 2009-05-13



7.2 Radiated emission test view--

Connect to PC




Page 54 of 62

Report No: 0905047 Date: 2009-05-13



7.3 Photo for the EUT

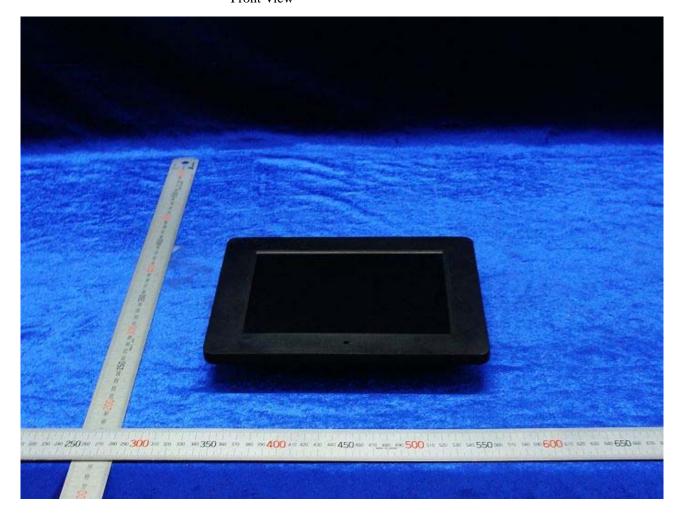

Page 55 of 62






Page 56 of 62





Page 57 of 62



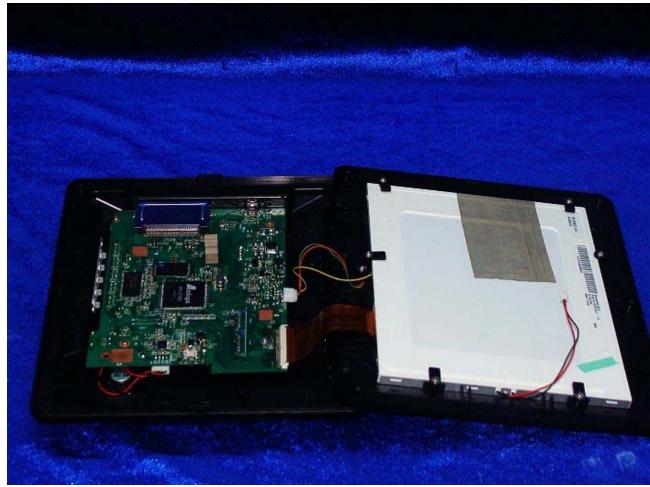

Page 58 of 62





Page 59 of 62





Page 60 of 62





Page 61 of 62





Page 62 of 62

Report No: 0905047 Date: 2009-05-13





-End of the report-