







ISO/IEC17025 Accredited Lab.

Report No: FCC 0904088 File reference No: 2009-04-23

Applicant: WIN ACCORD LTD.

Product: Digital Photo Frame

Brand Name: N/A

Model No: DF07204-13-XXX (X=A-Z, 0-9, a-z)

Test Standards: FCC Part 15 Subpart B: 2008

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 23, 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0904088 Page 2 of 53

Date: 2009-04-23



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 53

Report No: 0904088 Date: 2009-04-23



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration.	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test.	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards.	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test.	25
6.0	FCC ID Label	43
7.0	Photo of testing	44

Date: 2009-04-23



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F, NO.225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI,

TAIWAN

Telephone: 02-2749 3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame
Manufacturer: WIN ACCORD LTD.

Address: 12F, NO.225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI,

TAIWAN

Brand Name: N/A

Model Number: DF07204-13-XXX (X=A-Z, 0-9, a-z)

Additional Model Number: DPF7321, DPF7331

The adapter Model No.: XKD-C2000IC5.0-12W (Made by MOSO)

Rating: Input: 100-240V, 0.5A Max, 50/60Hz Output: 5V, 2A The adapter Model No.: ADS-12G-06 05010GPCU (Made by HONOR)
Rating: Input: 100-240V, 0.3A Max, 50/60Hz Output: 5V, 2A

Remark: Just model names and appearance color are different.

Rating: Input: DC 5V, Current 2A

1.4 Submitted Sample(s): 1 Sample

1.5 Test Duration: 2009-04-14 to 2009-04-23

1.6 Test Uncertainty


Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 5 of 53

Report No: 0904088 Date: 2009-04-23





Print Name: Terry Tang

2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2009.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2009.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2009.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2009.2.23	1Year

2.3 Auxiliary Equipment

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	LaserJet 1015	CNFG029476	HP	AC Mains cable	DOC

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 6 of 53

Report No: 0904088 Date: 2009-04-23



				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	LaserJet 1022	CNBG591GM7	HP	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	FP51G	ET47604175CLO	BENQ	Mains cable	FCC DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC DOC

			1.8m length	
PC	8434	 IBM	AC Mains cable	FCC DOC
			Data cable of	
Mouse	M-F105	 S.SElectron	1.5m length	FCC DOC

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 Test Standards

FCC Part 15 Subpart B: 2008



4.0 Conducted Power line Test

4.1 Schematics of the test

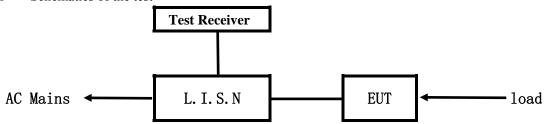


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Block diagram of Test setup

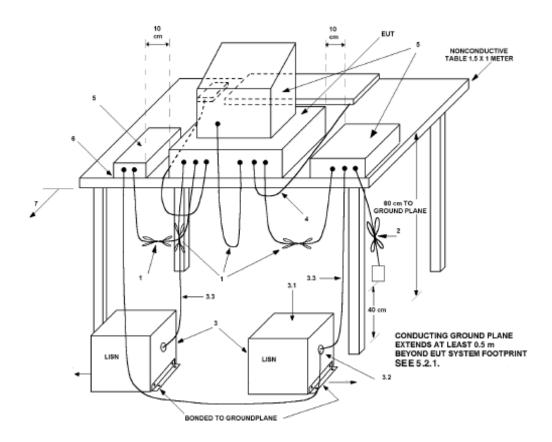

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0904088 Page 8 of 53

Date: 2009-04-23

4.3 Power line conducted Emission Limit

Engagen av (MHz)	Class A Li	mits dB(μV)	Class B Lin	nits dB(µV)
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.00	66.00	66.00~56.00*	56.00~46.00*
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00
5.00 ~ 30.00	73.00	60.00	60.00	50.00

Notes: 1. *decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

A: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

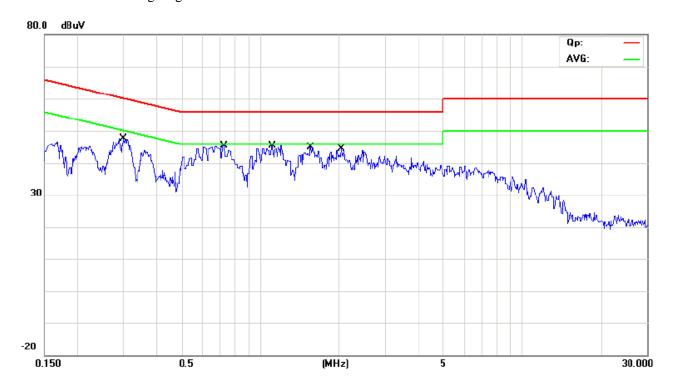

Ето пиот от		Reading	nding(dB \mu V)		Limit		
Frequency (MHz)	Live	;	Neutral		Neutral (dB μ '		V)
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.302	45.46	34.66			60.18	50.18	
0.723	42.61	32.21			56.00	46.00	
1.105	42.24	31.24			56.00	46.00	
1.558	42.02	31.12			56.00	46.00	
2.044	40.12	30.22			56.00	46.00	



B: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

120V∼ 60Hz Working Voltage:

Results: Pass

						Qp: — AVG: —
:0	MMMhw.m.m.h.	A hourt collection	Mithing	~~\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Vhon ^{prok} oon\phq\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	May hour walker

Eraguanav		Reading	Limit			
Frequency (MHz)	Live	;	Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.312			43.37	19.47	59.91	49.91
0.655			43.94	21.24	56.00	46.00
1.103			38.54	18.14	56.00	46.00
1.507			39.50	16.00	56.00	46.00


C: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

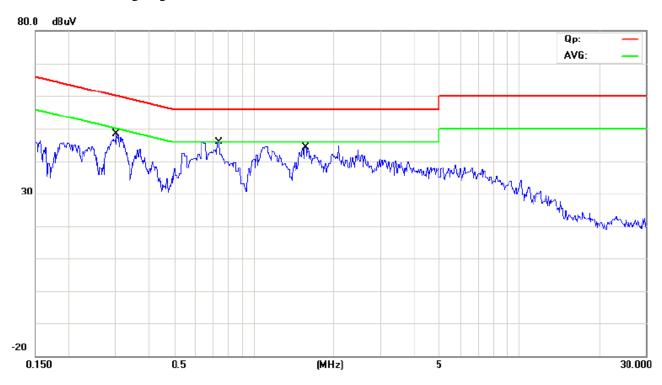

Eraguanav		Reading	Limi	t		
Frequency (MHz)	Live	2	Neutr	al	(dB µ	V)
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.304	45.06	33.96			60.11	50.11
0.735	41.02	30.62			56.00	46.00
1.568	40.43	31.33			56.00	46.00




D: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD


Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

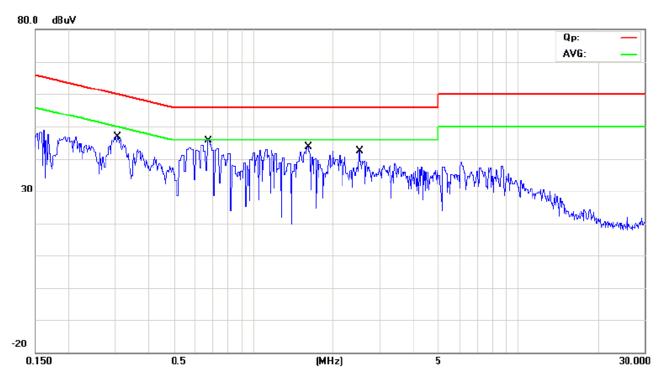

Eraguanav		Reading	Limit			
Frequency (MHz)	Live	;	Neutra		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.308			43.27	17.57	60.01	50.01
0.677			41.66	18.56	56.00	46.00
1.602			37.14	15.34	56.00	46.00
2.498			34.90	10.70	56.00	46.00




EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

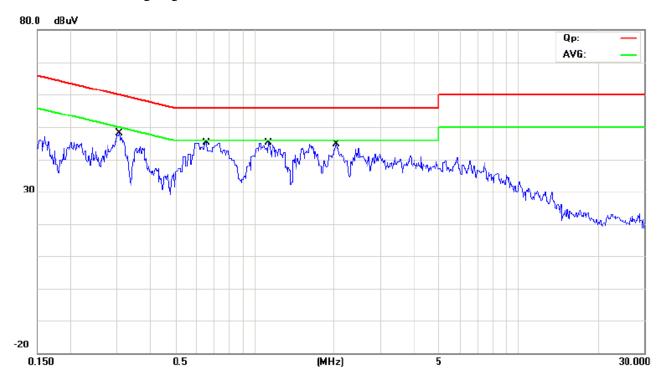

Frequency (MHz)		Reading	Limit			
	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.304	46.76	40.16			60.12	50.12
0.653	43.93	31.83			56.00	46.00
1.128	42.95	30.85			56.00	46.00
2.041	40.42	29.92			56.00	46.00



F: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB


Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

80.0 dBuV

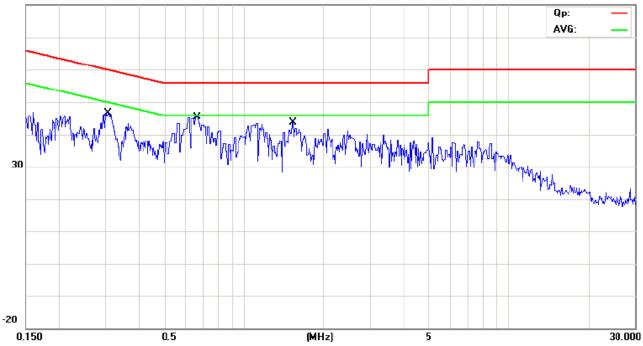

Frequency (MHz)		Reading	Limit			
	Live		Neutral		(dB µ V)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.305			45.76	22.66	60.09	50.09
0.665			42.75	18.05	56.00	46.00
1.534			38.12	15.51	56.00	46.00


G: Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

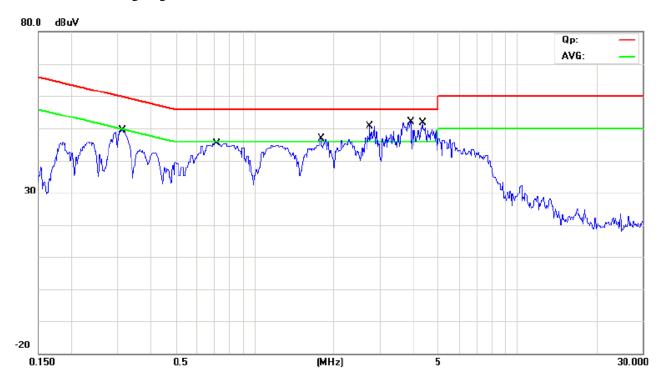

Frequency		Reading	Limit			
Frequency (MHz)	Live	;	Neutral		(dB µ	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.312	49.17	37.17			59.90	49.90
0.712	44.00	35.00			56.00	46.00
1.784	43.01	38.11			56.00	46.00
2.752	43.50	36.80			56.00	46.00
3.897	43.86	33.16			56.00	46.00
4.358	44.84	35.54			56.00	46.00



H: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC


Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass



Frequency (MHz)		Reading	Limit			
	Live		Neutral		$(dB \mu V)$	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.314			41.17	25.67	59.85	49.85
2.794			43.92	30.52	56.00	46.00
3.893			43.36	27.56	56.00	46.00
4.635			45.95	29.65	56.00	46.00
5.179			42.62	29.02	60.00	50.00




EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

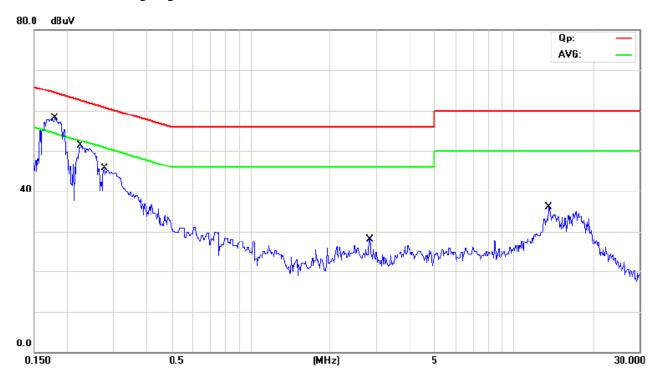

Frequency		Reading	Limit			
	Live		Neutral		$(dB \mu V)$	
(MHz)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.179	56.93	23.93			64.51	54.51
0.223	42.48	23.58			62.68	52.68
0.277	39.74	28.74			60.89	50.89
2.839	19.04	10.44			56.00	46.00
13.669	29.73	23.13			60.00	50.00



J: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass


Please refer to following diagram for individual

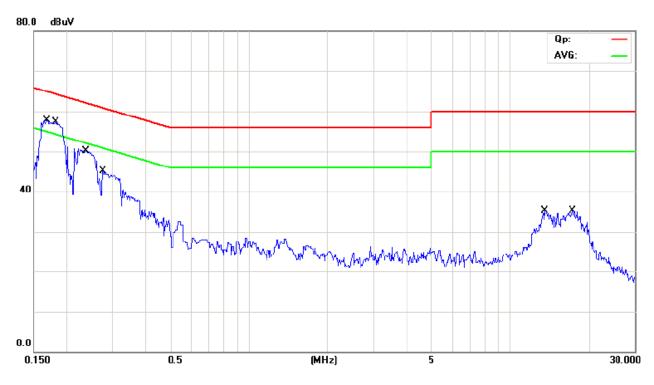

Frequency (MHz)		Reading	Limit			
	Live		Neutral		$(dB \mu V)$	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.168			53.12	11.72	65.05	55.05
0.182			56.93	21.63	64.39	54.39
0.239			3.79	21.09	62.13	52.13
0.275			35.23	16.13	60.94	50.94
13.550			29.43	22.13	60.00	50.00
17.426			28.30	20.40	60.00	50.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

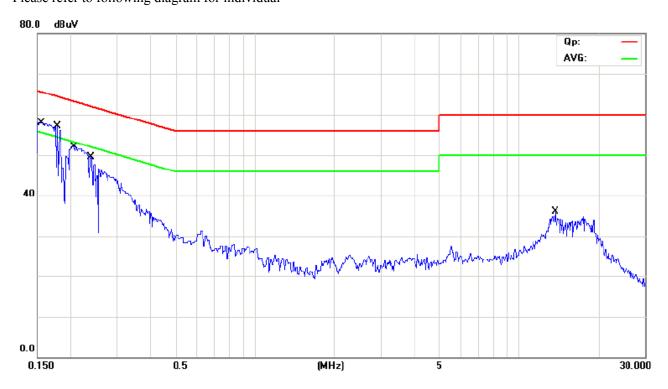

Eroguanav		Reading		Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.157	57.21	25.21			65.61	55.61
0.176	48.73	17.23			64.64	54.64
0.207	43.96	19.16			63.29	53.29
0.239	38.89	13.59			62.12	52.12
13.658	29.03	22.03		-	60.00	50.00




L: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

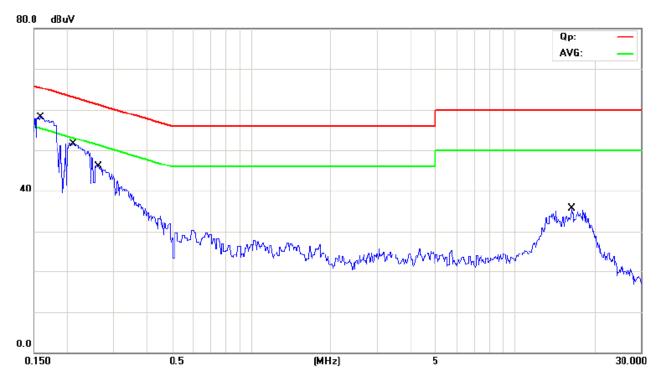

Frequency (MHz)		Reading	Limit			
	Live		Neutral		$(dB \mu V)$	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.160			57.71	27.81	65.43	55.43
0.209			51.46	24.26	63.22	53.22
0.262			50.72	18.92	61.36	51.36
16.438			27.14	18.74	60.00	50.00




EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

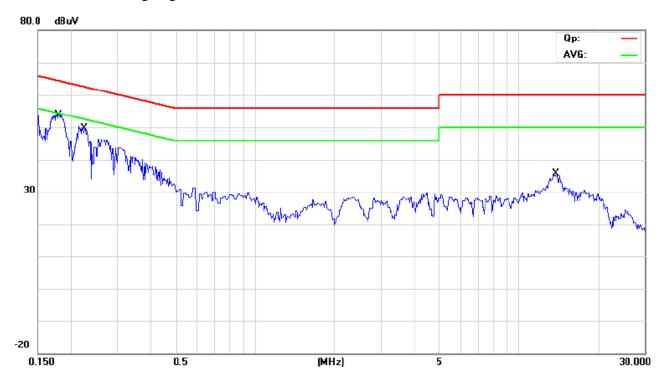

Frequency (MHz)		Reading	Limit			
	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.181	53.33	26.23			64.44	54.44
0.225	47.88	24.28			62.62	52.62
13.960	30.72	23.82			60.00	50.00




N: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

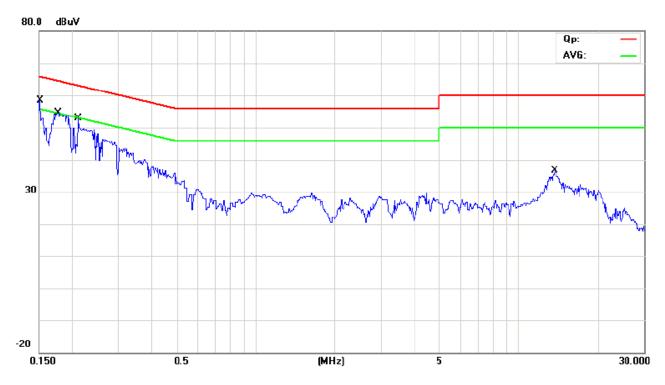

Frequency (MHz)		Reading	Limit			
	Live		Neutral		$(dB \mu V)$	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.150			46.00	16.80	65.96	55.96
0.176			53.63	14.23	64.64	54.64
0.210	-		36.66	13.66	63.20	53.20
13.703			30.93	23.33	60.00	50.00

O: Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

80.0 dBuV

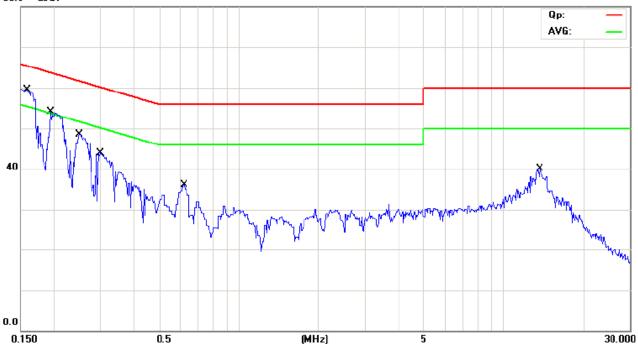

Eraguanav		Reading	(dB µ V)		Limit	
Frequency (MHz)	Live	;	Neutr	Neutral		V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.159	59.11	28.61			65.52	55.52
0.196	49.35	14.95			63.76	53.76
0.250	46.81	17.71			61.76	51.76
0.299	41.26	12.66			60.25	50.25
0.630	36.11	23.41			56.00	46.00
13.640	34.93	26.73			60.00	50.00




P: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC (Adapter made by MOSO)

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

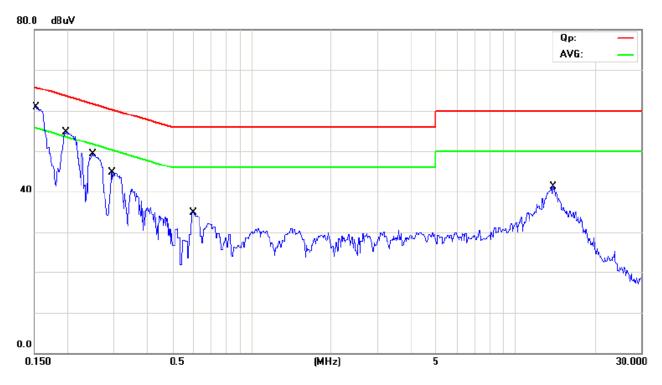

Frequency (MHz)		Reading	Limit			
	Live		Neutral		(dB µ V)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.152			60.70	18.80	65.88	55.88
0.198			51.55	12.95	63.68	53.68
0.248			46.50	12.80	61.80	51.80
0.297			41.16	10.26	60.31	50.31
0.597			30.37	11.47	56.00	46.00
13.907			35.72	27.42	60.00	50.00


Page 25 of 53

Report No: 0904088 Date: 2009-04-23



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Block diagram of Test setup

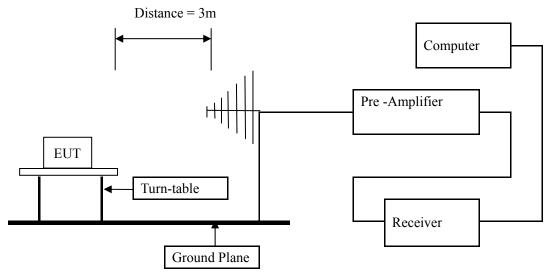



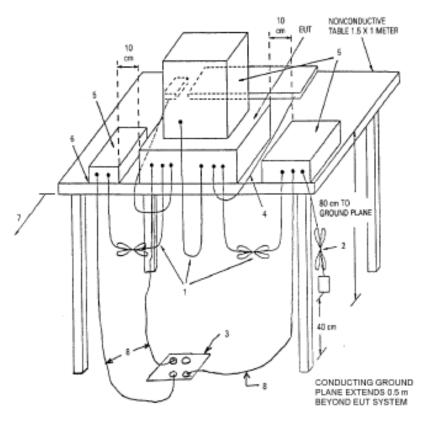

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.



A: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

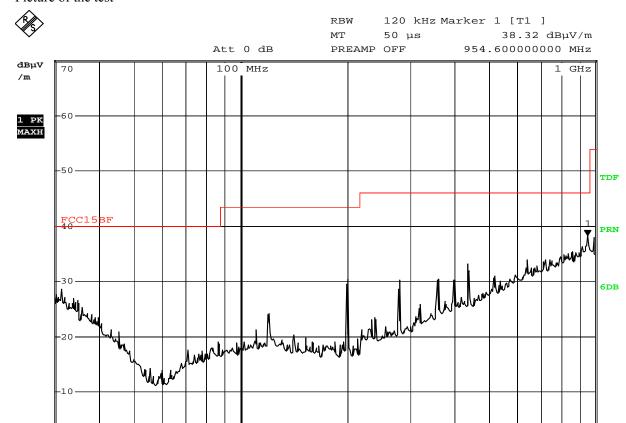

Comment: V

0 30 MHz

Date: 16.APR.2009 19:57:27

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
200.760	30.46	Н	43.50
438.040	33.16	Н	46.00
954.600	38.32	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

1 GHz

Report No: 0904088 Date: 2009-04-23



B: Radiated Disturbance In Vertical (30MHz---1000MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

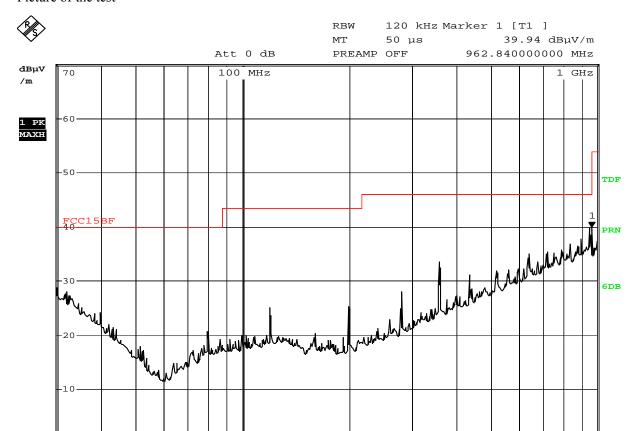

Comment: V

30 MHz

Date: 16.APR.2009 19:55:13

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
199.280	25.30	V	43.50
358.520	33.46	V	46.00
962.840	39.94	V	54.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



C: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

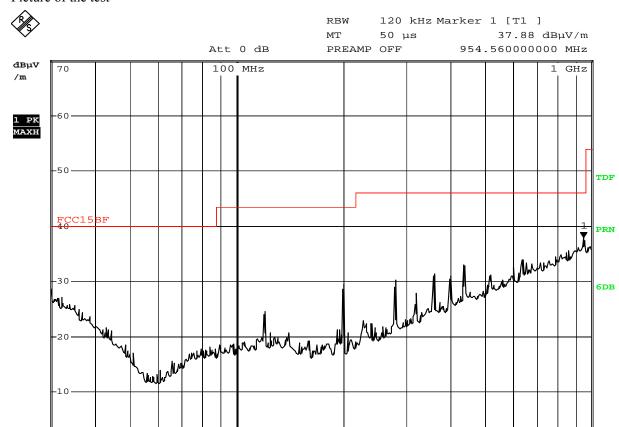

Comment: V

0 30 MHz

Date: 16.APR.2009 20:15:16

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
200.760	29.43	Н	43.50
437.800	33.02	Н	46.00
954.560	37.08	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B **Results: PASS**


Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] МТ 50 µs 39.12 dBµV/m

PREAMP OFF 797.880000000 MHz

1 PK MAXH

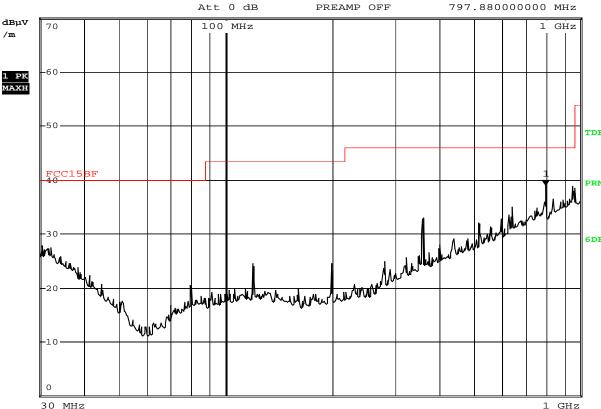

Comment: V

16.APR.2009 20:13:24 Date:

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
119.520	24.61	V	43.50
368.000	33.05	V	46.00
797.880	39.12	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



E: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

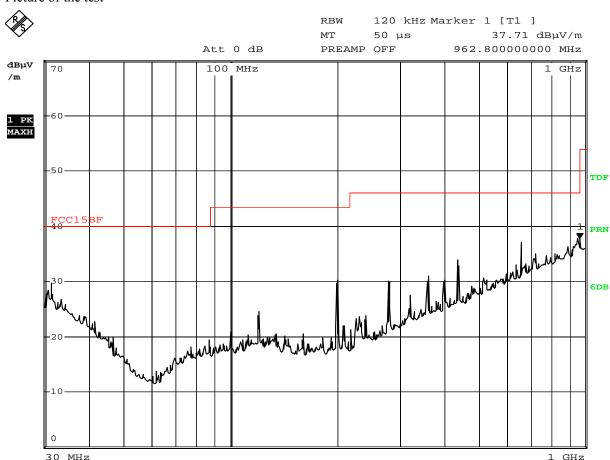

Comment: V

Date: 16.APR.2009 19:50:17

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
200.760	30.20	Н	43.50
438.040	33.97	Н	46.00
962.800	37.71	Н	54.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



F: Radiated Disturbance In Vertical (30MHz --- 1000MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

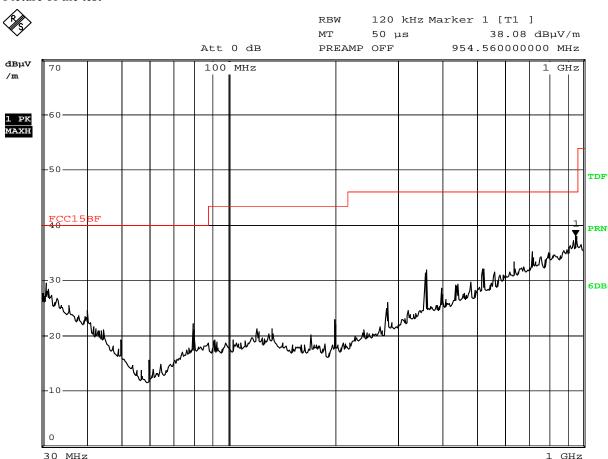

Comment: V

Date: 16.APR.2009 19:52:05

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
361.520	31.83	V	46.00
954.560	38.08	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



G Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

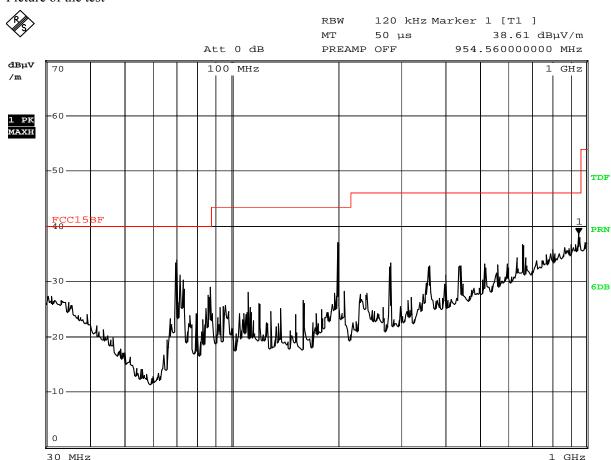

Comment: V

Date: 16.APR.2009 20:08:23

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
70.20	33.90	Н	40.00
199.280	37.11	Н	43.50
954.560	38.61	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Connect to PC


Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B **Results: PASS**


Please refer to following diagram for individual

Picture of the test







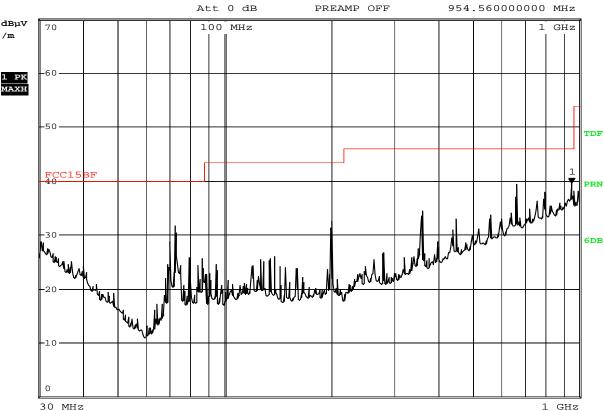

Comment: V

16.APR.2009 20:10:08 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
72.760	31.74	V	40.00
200.760	32.58	V	43.50
954.560	39.50	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



I Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connect to PC


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B **PASS Results:**


Please refer to following diagram for individual

Picture of the test





50 µs МТ $39.44 \text{ dB}\mu\text{V/m}$

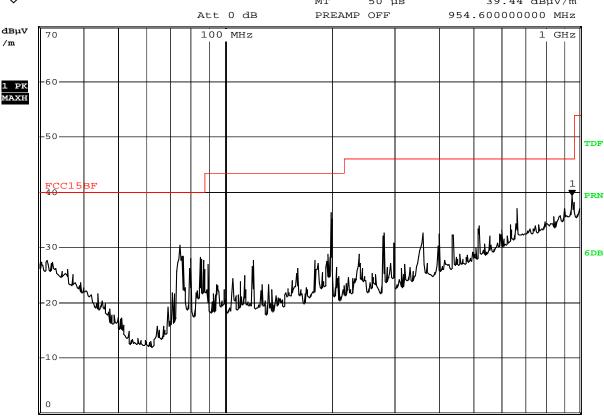

Comment: V

30 MHz

Date: 16.APR.2009 19:02:10

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
74.360	30.43	Н	40.00
199.040	36.22	Н	43.50
954.600	39.44	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Vertical (30MHz --- 1000MHz) J

EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B **Results: PASS**


Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]

МТ 40.24 dBµV/m 100 ms



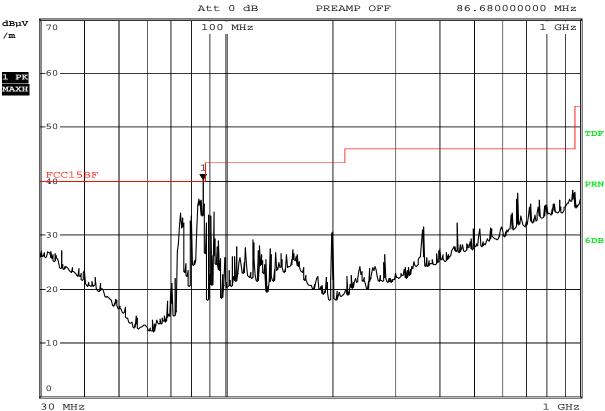

Comment: V

16.APR.2009 19:11:33 Date:

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
86.680	35.40	V	40.00
200.760	30.59	V	43.50
954.560	38.27	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



K Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

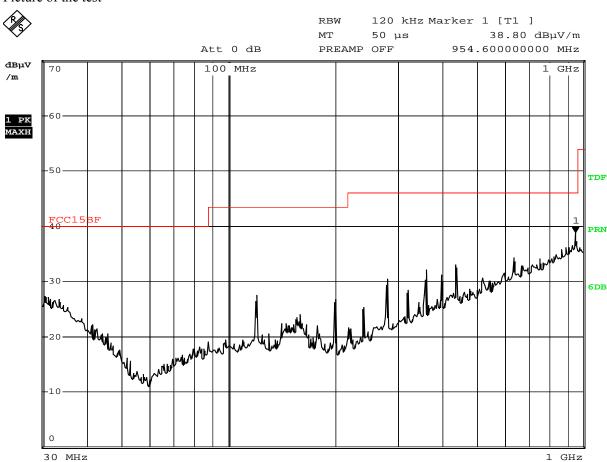

Comment: V

Date: 16.APR.2009 18:52:12

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
120.520	27.55	Н	43.50
638.080	34.29	Н	46.00
954.600	38.80	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B **PASS Results:**


Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1]

МТ 50 µs 38.42 dBµV/m

PREAMP OFF 954.560000000 MHz

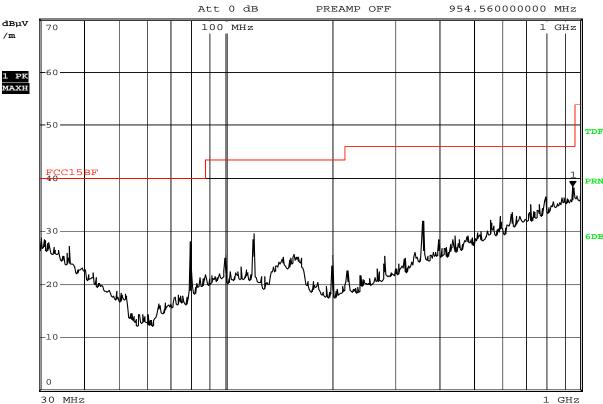

Comment: V

16.APR.2009

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
79.760	28.11	Н	40.00
120.520	29.55	Н	43.50
954.560	38.42	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W


Level: Class B **Results: PASS**

Please refer to following diagram for individual

Picture of the test

RBW 120 kHz Marker 1 [T1] мт 50 µs 38.60 dBµV/m



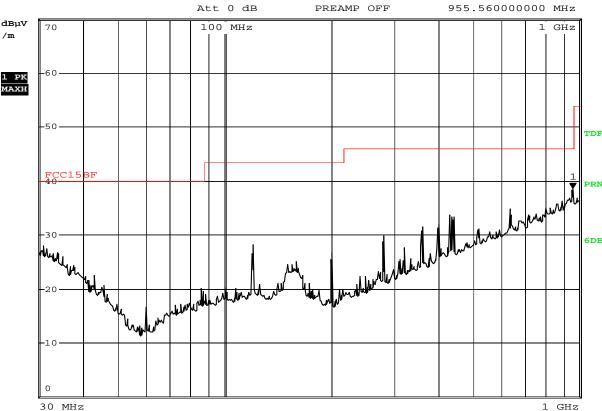

Comment: V

16.APR.2009 19:24:16 Date:

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
120.520	28.29	Н	43.50
430.040	33.74	Н	46.00
955.560	38.60	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



N Radiated Disturbance In Vertical (30MHz---1000MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

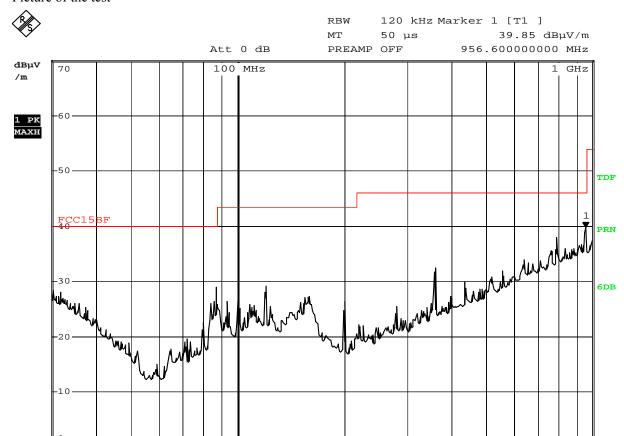

Comment: V

30 MHz

Date: 16.APR.2009 19:26:08

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
87.040	28.88	V	40.00
120.520	29.06	V	43.50
956.600	39.85	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

1 GHz

Report No: 0904088 Date: 2009-04-23



O Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS


Please refer to following diagram for individual

Picture of the test

%

RBW 120 kHz Marker 1 [T1]

MT 50 µs 38.77 dBµV/m

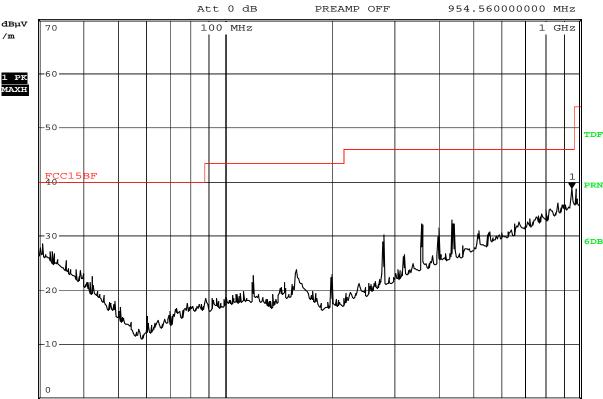

Comment: V

30 MHz

Date: 16.APR.2009 19:39:30

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
159.520	23.81	Н	43.50
438.040	32.93	Н	46.00
954.560	38.77	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



P Radiated Disturbance In Vertical (30MHz --- 1000MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B **Results: PASS**


Please refer to following diagram for individual


Picture of the test



120 kHz Marker 1 [T1] RBW МТ 50 µs 39.43 dBµV/m

PREAMP OFF 954.560000000 MHz

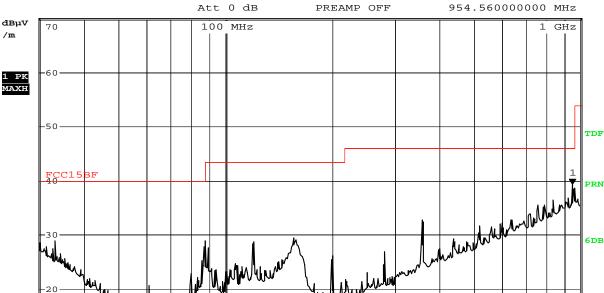



Comment: V

16.APR.2009 19:37:42 Date:

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
155.400	29.41	V	43.50
358.400	32.75	V	46.00
954.560	39.43	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 43 of 53

Report No: 0904088 Date: 2009-04-23



6.0 FCC ID Label

FCC ID: V37-7DNAML7213D

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:


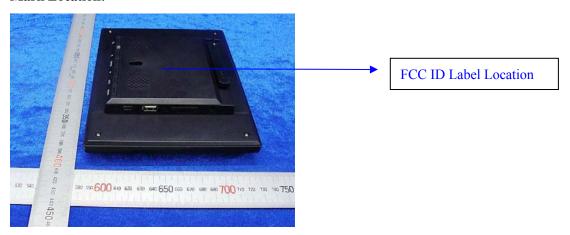




Photo of testing

7.1 Conducted test View—

Connect to PC

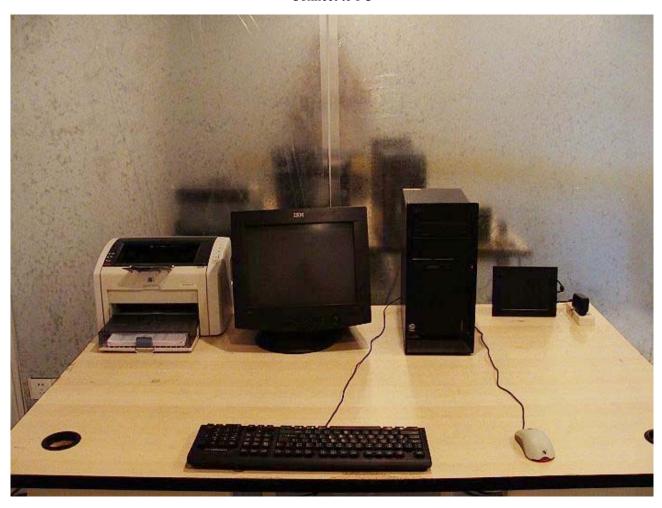

Page 45 of 53

Report No: 0904088 Date: 2009-04-23



7.2 Radiated emission test view--

Connect to PC




Page 46 of 53

Report No: 0904088 Date: 2009-04-23



7.3 Photo for the EUT

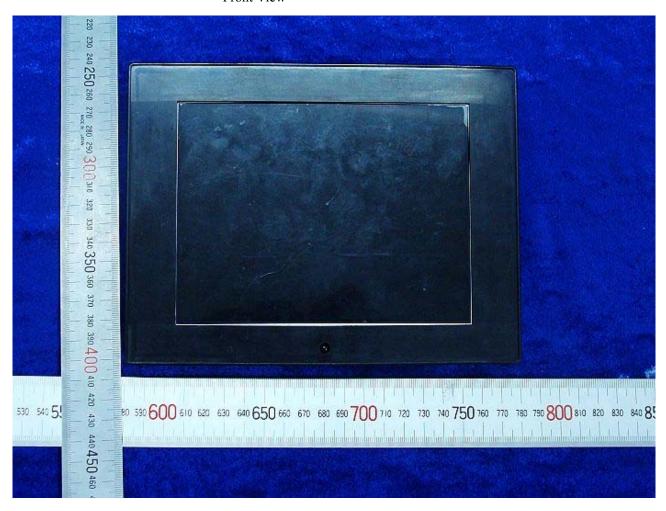


Page 47 of 53






Page 48 of 53



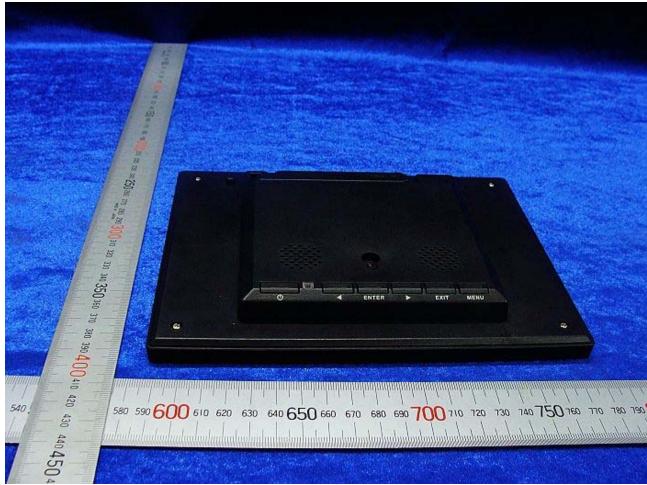

Page 49 of 53



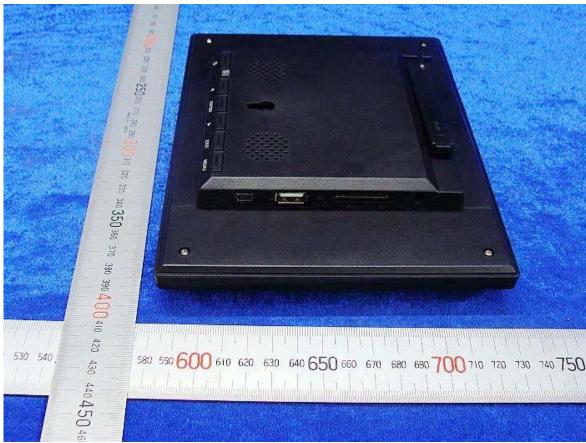

Page 50 of 53






Page 51 of 53





Page 52 of 53



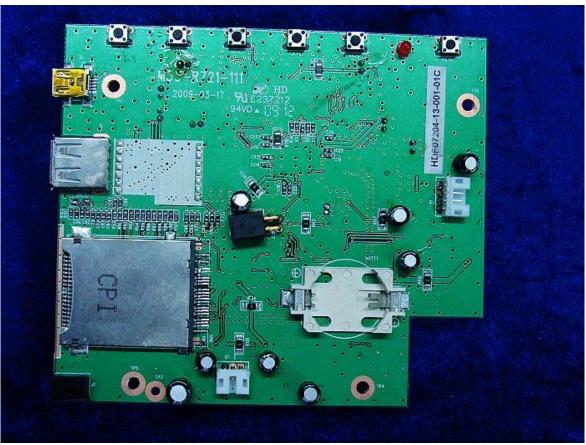

Page 53 of 53





-End of the report-