







ISO/IEC17025 Accredited Lab.

Report No: FCC 0808174 File reference No: 2008-11-15

Applicant: WIN ACCORD LTD.

Product: 8 inch magic DPF Printer

Brand Name: N/A

Model No: DF-U8X

Test Standards: FCC Part 15 Subpart B: 2006

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: Nov 15. 2008

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0808174 Page 2 of 41

Date: 2008-11-15



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 41

Report No: 0808174 Date: 2008-11-15



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty.	4
1.5	Submitted Sample	4
1.6	Test Duration.	4
2.0	List of Measurement Equipment.	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test.	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test	15
6.0	FCC ID Label	23
7.0	Photo of testing	24

Date: 2008-11-15



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F,NO.225,SEC 5,105 SONG SHAN DIST.,NAN JING EAST

ROAD, TAIPEI, TAIWAN, R.O.C

Telephone: 02-2749 3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame
Manufacturer: WIN ACCORD LTD.

Address: Shatou Section. Zhen'an Road, Chang'an, Town, Dongguan City

Brand Name: N/A
Model Number: DF-U8X

Additional Model DPF-807P, DPF-808, DPFPRINTW, SP8PRT, DP-UXX, DPF-RWP08PT,

Number: EL-DPF-PR-8RW(x: A-Z, a-z, 0-9)

Remark: Just model names and appearance colour are different.

Rating: Input: DC 24V, Current 2.5A

1.4 Submitted Sample: 1 Sample

The sample tested by

1.5 Test Duration: 2008-09-26 to 2008-11-14

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

leng lang

Print Name: Terry Tang

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 5 of 41

Report No: 0808174 Date: 2008-11-15



2.0 **List of Measurement Equipment**

2.1 **Conducted Emission Test**

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2008.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2008.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2008.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2008.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2008.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2008.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2008.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2008.2.23	1Year

2.3 **Auxiliary Equipment**

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	BOISB-027-00	CNFG029476	EPSON	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC ID

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 6 of 41

Report No: 0808174 Date: 2008-11-15

SOLOGY DEVELO
TEST REPORT

				1.8m length	
PC	8434		IBM	AC Mains cable	FCC DOC
				Data cable of	
Mouse	OM860XC	HM0509	BIGCOW	1.5m length	FCC DOC

3.0 **Technical Details**

3.1 Investigations Requested Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 **Test Standards**

FCC Part 15 Subpart B: 2006



4.0 Conducted Power line Test

4.1 Schematics of the test

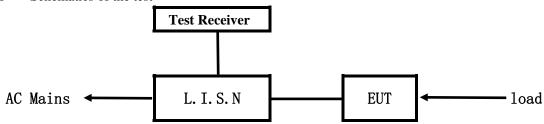


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Block diagram of Test setup

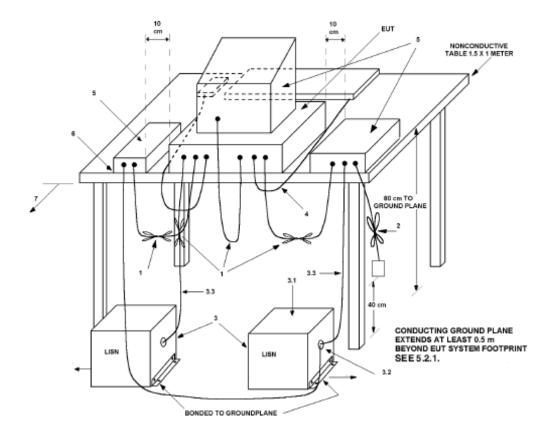

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0808174 Page 8 of 41

Date: 2008-11-15



4.3 Power line conducted Emission Limit


Eroguanay (MHz)	Class A Li	mits dB(μV)	Class B Limits $dB(\mu V)$		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.00	66.00	66.00~56.00*	56.00~46.00*	
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00	
5.00 ~ 30.00	73.00	60.00	60.00	50.00	

Notes: 1. *decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

4.4 Test Results


The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.



EUT set Condition: Playing SD Card Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

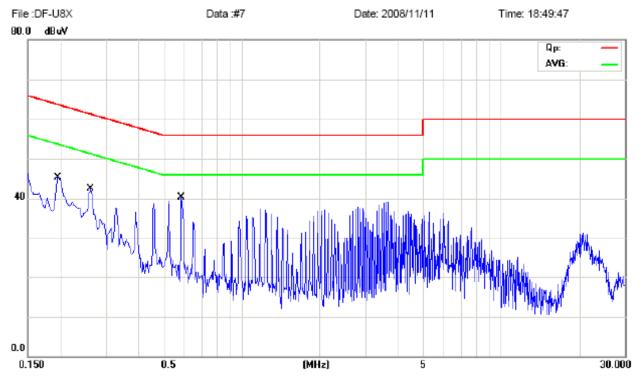


Engguenav		Reading	Limit			
Frequency (MHz)	Live	;	Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.197			43.15	38.25	63.74	53.74
0.2611			40.62	33.82	61.40	51.40
0.5871			39.46	37.75	56.00	46.00



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing SD Card Working Voltage: 120V~ 60Hz

Results: Pass
Please refer to following diagram for individual

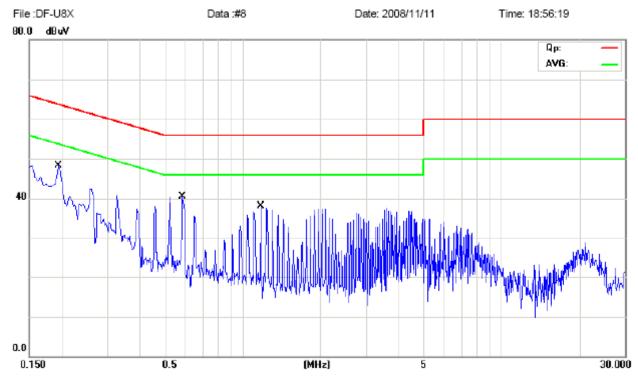

Eraguanay		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1934	41.85	39.65			63.89	63.89
0.5866	39.36	36.26			56.00	56.00
1.1758	38.67	36.37			56.00	56.00




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing USB Working Voltage: 120V~60Hz

Results: Pass

Please refer to following diagram for individual

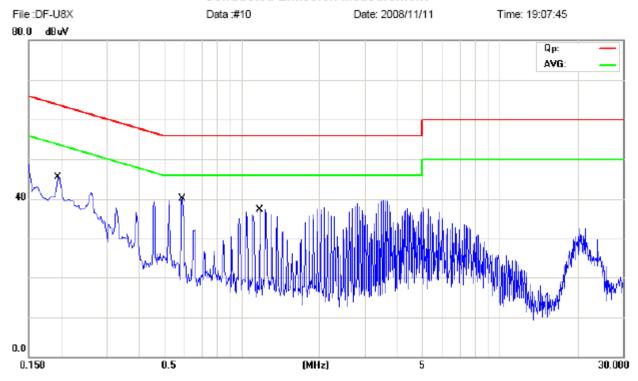


Fraguanay		Reading	Limi	t		
Frequency (MHz)	Live	Live		Neutral		V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1944	-		42.45	36.45	63.85	53.85
0.5907			37.87	35.77	56.00	46.00
1.1742			34.27	32.87	56.00	46.00




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing USB Working Voltage: 120V~ 60Hz

Results: Pass
Please refer to following diagram for individual

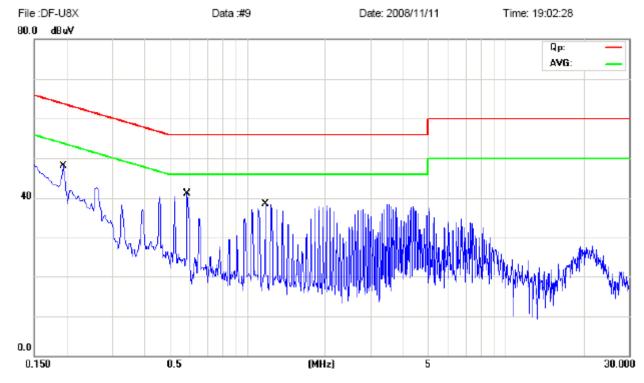


Eraguanay		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB \mu V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1935	42.55	31.75			63.88	53.88
0.5858	39.36	37.26			56.00	46.00
1.1758	39.57	37.27			56.00	46.00



EUT set Condition: Connected to PC Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

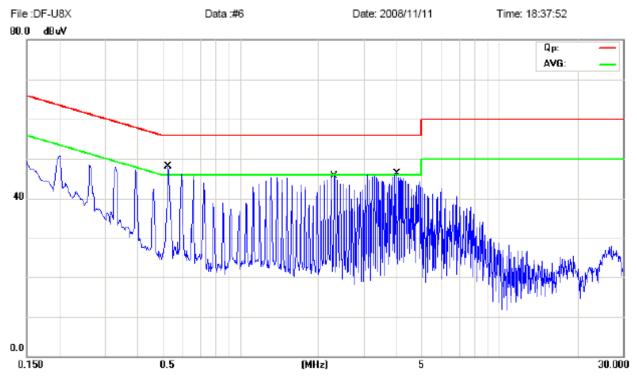


Eraguanay		Reading	Limit			
Frequency (MHz)	Live	;	Neutr	Neutral		V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.5256			48.69	43.80	56.00	46.00
2.3064			44.82	42.22	56.00	46.00
4.0222			43.41	39.41	56.00	46.00



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC Working Voltage: 120V~ 60Hz

Results: Pass
Please refer to following diagram for individual

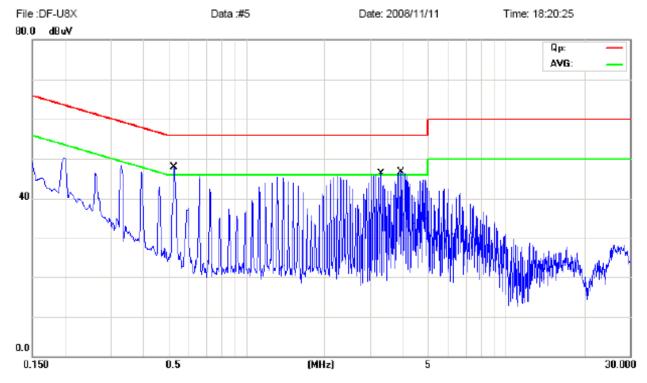

Emaguanay	Reading(dB μ V)			Limit		
Frequency (MHz)	Live Neutral		al	(dB µ V)		
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.5251	48.50	43.60			56.00	46.00
3.2992	48.02	43.32			56.00	46.00
3.9563	44.08	40.98			56.00	46.00


Page 15 of 41

Report No: 0808174 Date: 2008-11-15



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Block diagram of Test setup

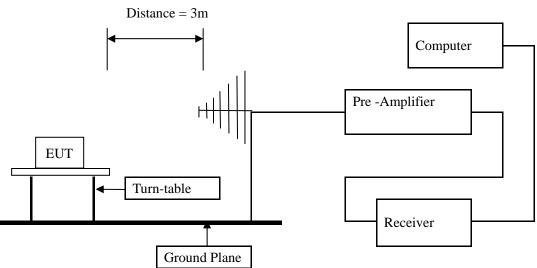



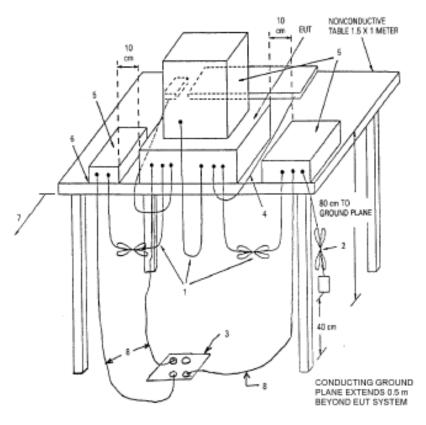

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Page 17 of 41

Report No: 0808174 Date: 2008-11-15




EUT set Condition: Connected to PC

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

Radiated Emission Measurement

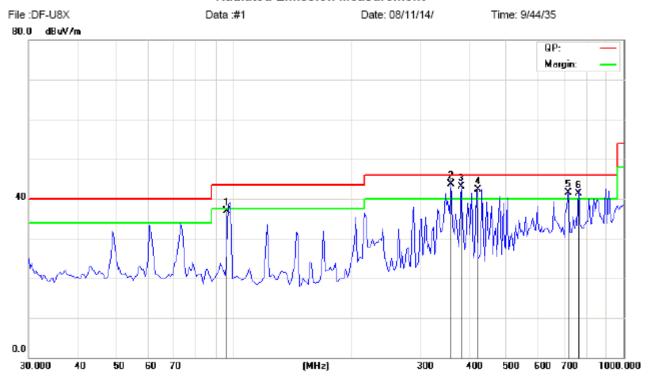

Eroguanov (MIII.z)	Laval@2m (dPuV/m)	Antonno Polority	Limit@2m (dPuV/m)
Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
96.019	36.84	Н	43.50
360.027	43.62	Н	46.00
384.061	43.10	Н	46.00
422.850	42.31	Н	46.00
722.260	41.41	Н	46.00
768.622	41.40	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 18 of 41

Report No: 0808174 Date: 2008-11-15




B: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Connected to PC

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

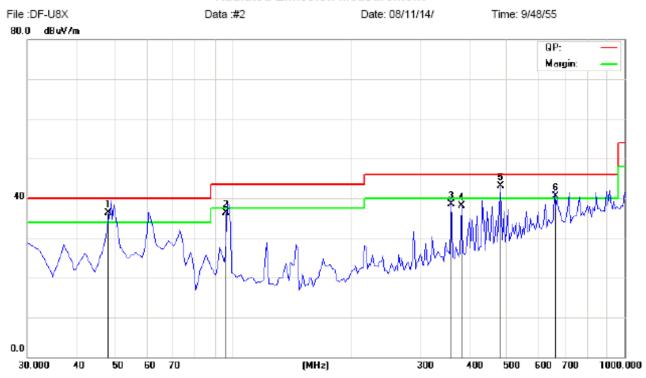

	•		
Frequency (MHz) Level@3m (dBμV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
48.027	36.34	V	40.00
96.034	36.24	V	43.50
360.020	38.59	V	46.00
384.276	38.05	V	46.00
480.071	43.11	V	46.00
664.650	40.47	V	46.00

Page 19 of 41

Report No: 0808174 Date: 2008-11-15




EUT set Condition: Reading SD Card

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

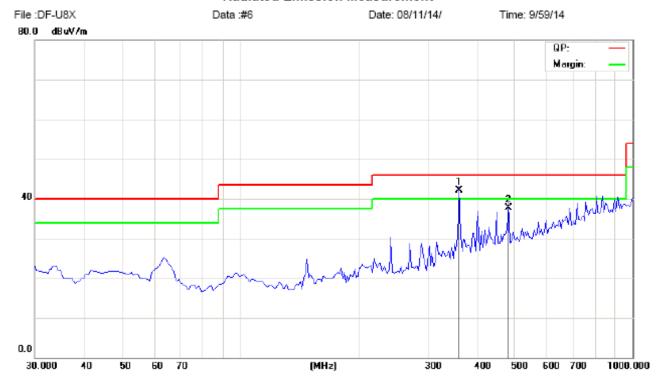

	Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	360.020	42.02	Н	46.00
ĺ	480.032	37.77	Н	46.00

Page 20 of 41

Report No: 0808174 Date: 2008-11-15




D: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Reading SD Card

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

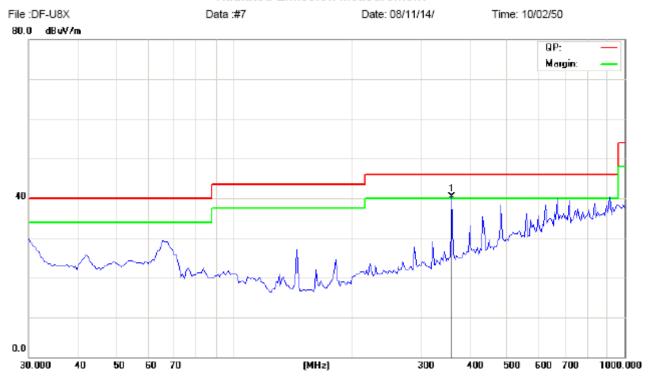

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
360.008	40.21	V	46.00

Page 21 of 41

Report No: 0808174 Date: 2008-11-15




EUT set Condition: Reading USB

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

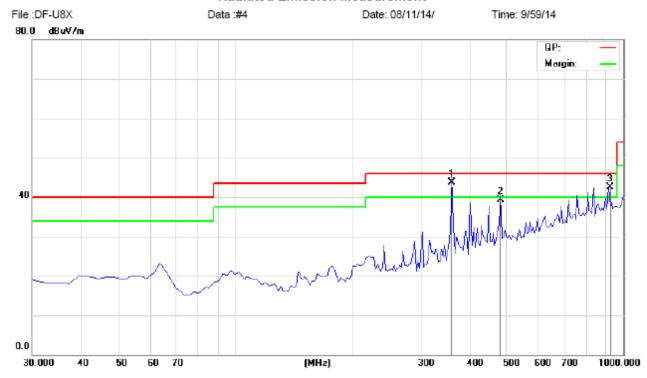

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
360.027	43.62	Н	46.00
480.032	39.36	Н	46.00
920.012	42.47	Н	46.00

Page 22 of 41

Report No: 0808174 Date: 2008-11-15




F: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Reading USB

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

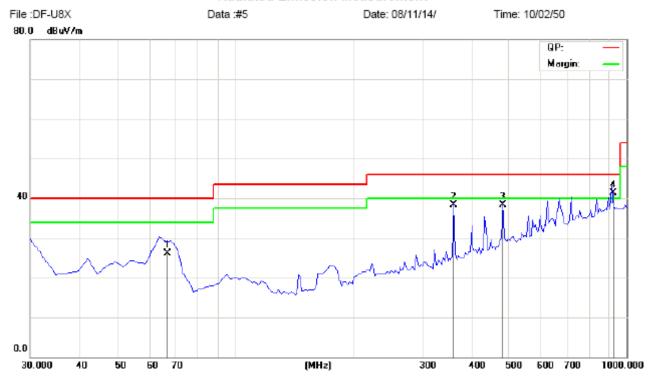

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
67.070	26.17	V	40.00
360.009	38.31	V	46.00
480.034	38.82	V	46.00
920.023	41.31	V	46.00

Page 23 of 41

Report No: 0808174 Date: 2008-11-15



6.0 FCC ID Label

FCC ID: V37-8INCHPRINTER

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 24 of 41

Report No: 0808174 Date: 2008-11-15



7.0 Photo of testing

7.1 Conducted test View-



Page 25 of 41

Report No: 0808174 Date: 2008-11-15



7.2 Radiated emission test view--




Page 26 of 41

Report No: 0808174 Date: 2008-11-15



7.3 Photo for the EUT

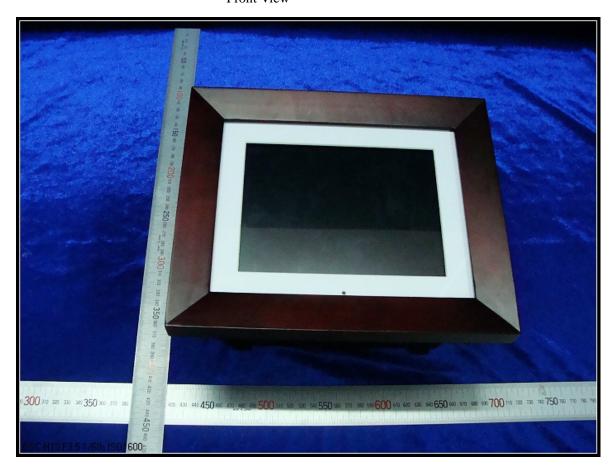

Page 27 of 41





Page 28 of 41





Page 29 of 41



Inside View1




Page 30 of 41






Page 31 of 41



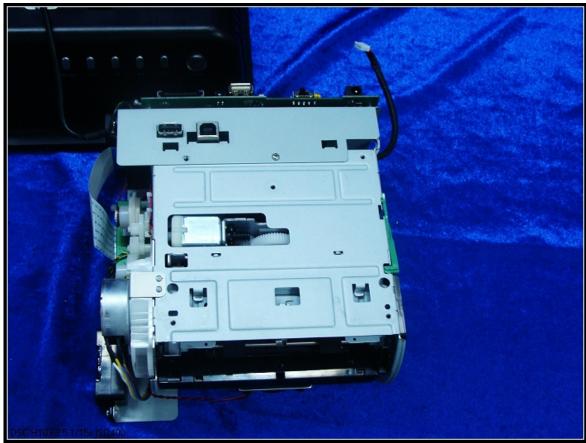


Page 32 of 41



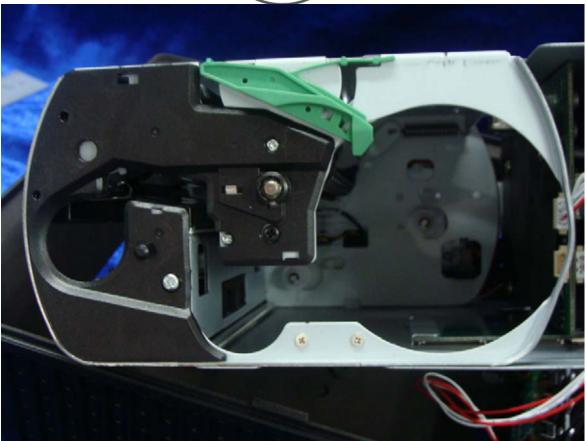

Page 33 of 41



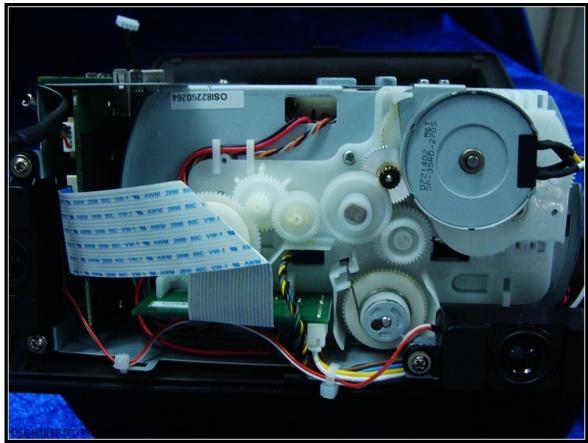

Page 34 of 41



Inside View6



Page 35 of 41



Inside View7



Page 36 of 41



Inside View8



Page 37 of 41




Inside View9



Page 38 of 41




Inside View10

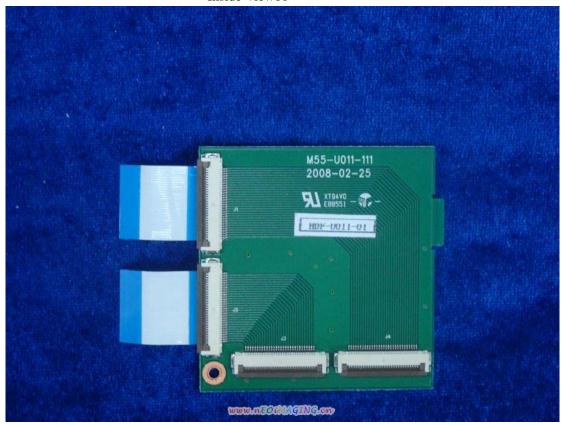

Page 39 of 41



Inside View11

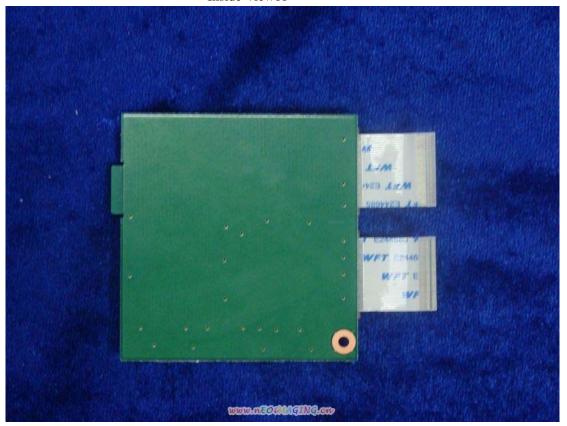

Page 40 of 41



Inside View12







-End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.