







ISO/IEC17025 Accredited Lab.

Report No: FCC 0902089 File reference No: 2009-02-25

Applicant: WIN ACCORD LTD.

Product: Digital Photo Frame

Brand Name: N/A

Model No: DF07204-03-XXX(X=A-Z, 0-9, a-z)

Test Standards: FCC Part 15 Subpart B: 2008

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: February 25, 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0902089 Page 2 of 51

Date: 2009-02-25



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 51

Report No: 0902089 Date: 2009-02-25



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test	17
6.0	FCC ID Label	27
7.0	Photo of testing	28

Report No: 0902089 Page 4 of 51

Date: 2009-02-25



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F, NO.225,SEC 5,105 SONG SHAN DIST.,NAN JING EAST ROAD, TAIPEI,

TAIWAN, R.O.C

Telephone: 02-2749-3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame

Manufacturer: WIN ACCORD LTD.

Address: Shatou Section. Zhen'an Road, Chang'an, Town, Dongguan City

Brand Name: N/A

Model Number: DF07204-03-XXX(X=A-Z, 0-9, a-z)

Additional Model Number: BP07D Rating: Input: DC 5V, 2A

The adapter Model No.: XKD-C2000IC5.0-12W (Made by MOSO)

Rating: Input: 100-240V, 0.5A Max, 50/60Hz Output: 5V, 2A The adapter Model No.: ADS-12G-06 05010GPCU (Made by HONOR)
Rating: Input: 100-240V, 0.3A Max, 50/60Hz Output: 5V, 2A

1.4 Submitted Sample(s): 1 Sample

1.5 Test Duration: 2009-02-18 to 2009-02-25

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2009.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2009.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2009.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2009.2.23	1Year

2.3 Auxiliary Equipment

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	BOISB-027-00	CNFG029476	EPSON	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC ID

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0902089 Page 6 of 51

Date: 2009-02-25

				1.8m length	
PC	8434		IBM	AC Mains cable	FCC DOC
				Data cable of	
Mouse	OM860XC	HM0509	BIGCOW	1.5m length	FCC DOC

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 Test Standards

FCC Part 15 Subpart B: 2008



4.0 Conducted Power line Test

4.1 Schematics of the test

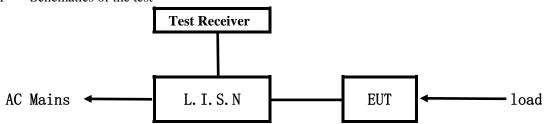


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Actual Working Voltage and Frequency: 120V~, 60Hz

Block diagram of Test setup

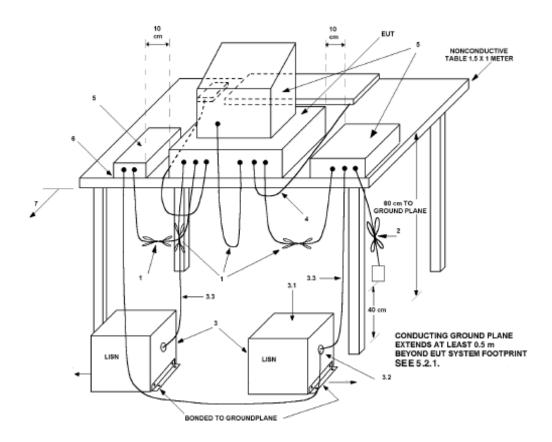

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0902089 Page 8 of 51

Date: 2009-02-25

4.3 Power line conducted Emission Limit


Fraguency (MUz)	Class A Li	mits dB(μV)	Class B Lin	nits dB(μV)
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.00	66.00	66.00~56.00*	56.00~46.00*
0.50 ~ 5.00	73.00	60.00	56.00	46.00
5.00 ~ 30.00	73.00	60.00	60.00	50.00

Notes: 1. *decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

4.4 **Test Results**


The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.



EUT set Condition: Play Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: Pass

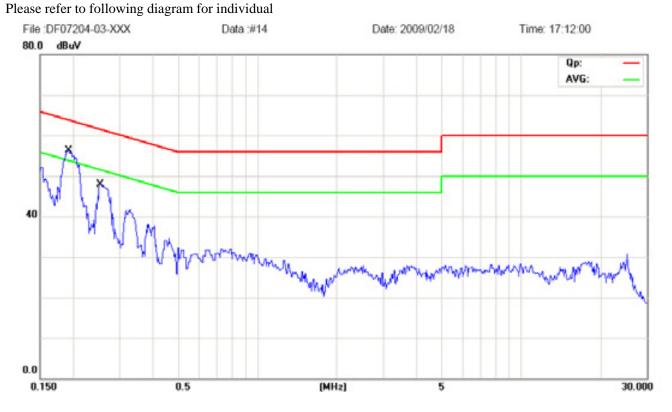


Eraguanay		Reading	Limi	t		
Frequency (MHz)	Live	Live		Neutral		V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.193.	54.25	26.55			63.87	53.87
0.254	44.11	20.21			61.61	51.61

Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: Pass

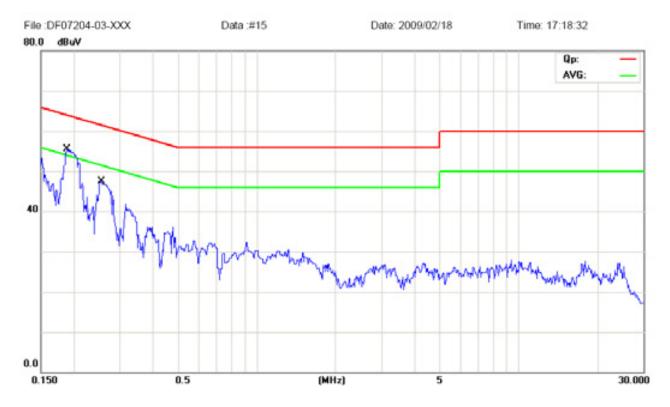

Eraguanav		Reading	Limi	t		
Frequency (MHz)	Live	;	Neutr	al	(dB μ	V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.190			52.84	22.04	64.04	54.04
0.253			44.31	19.11	61.64	51.64




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: Pass

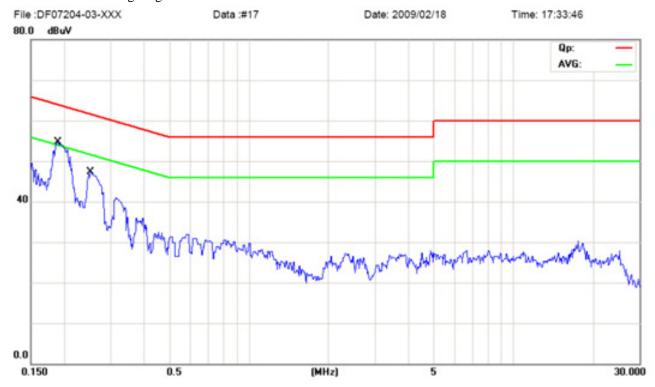

Eraguanay		Reading	Limi	t			
Frequency (MHz)	Live	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.188	52.94	20.44			64.10	54.10	
0.249	42.11	15.41			61.77	51.77	




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: Pass

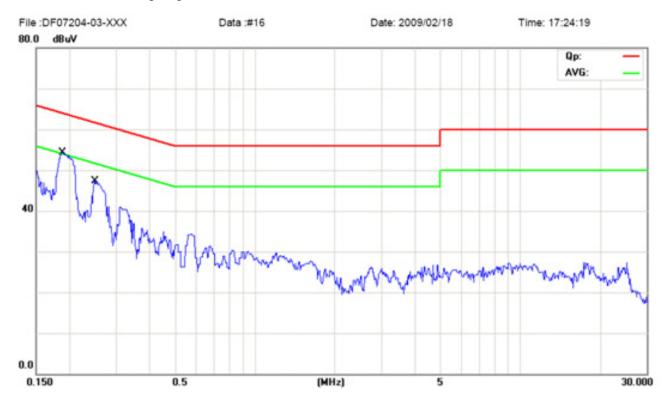

Eraguanay		Reading	Limi	t		
Frequency (MHz)	Live	;	Neutr	al	(dB µ)	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.188			52.24	21.24	64.12	54.12
0.251			43.21	20.41	61.70	51.70

Report No: 0902089


Date: 2009-02-25

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B **Results: Pass**

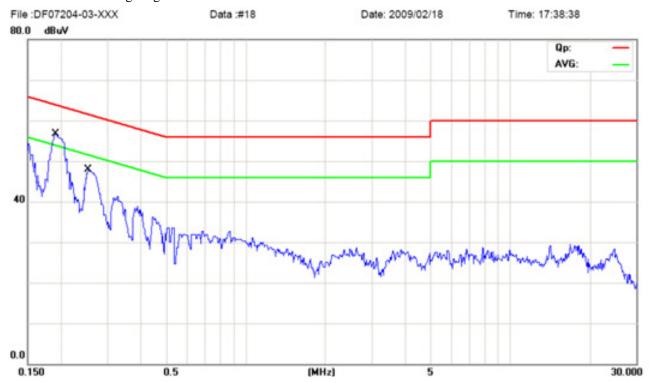

Eraguanay		Reading	Limi	t				
Frequency (MHz)	Live		Neutral (dB l		Neutral		(dB µ)	V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average		
0.189	52.34	20.64			64.06	54.06		
0.254	44.71	18.91			61.63	51.63		





EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: Pass

Please refer to following diagram for individual

File :DF07204-03-XXX Data :#19 Date: 2009/02/18 Time: 17:42:11

80.0 dBuV

Qp:
AVG:

0.0
0.150 0.5 (MHz) 5 30.000

Engguenav		Reading	(dB µ V)		Limi	t
Frequency (MHz)	Live	;	Neutral (e		(dB µ)	V)
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.190			53.74	25.84	64.01	54.01
0.253			44.21	17.51	61.65	51.65

Report No: 0902089


Date: 2009-02-25

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: Pass

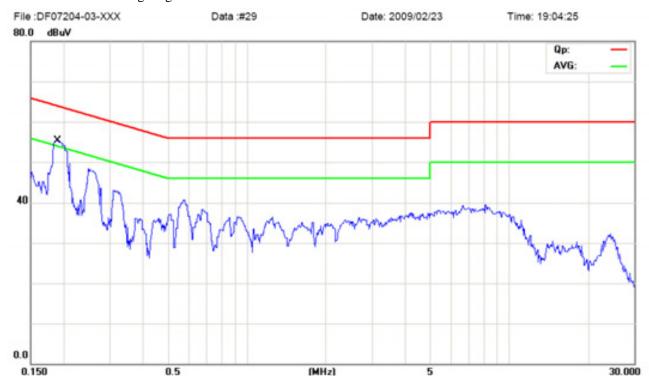


Eraguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.187			52.44	28.24	64.15	54.15

Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: Pass

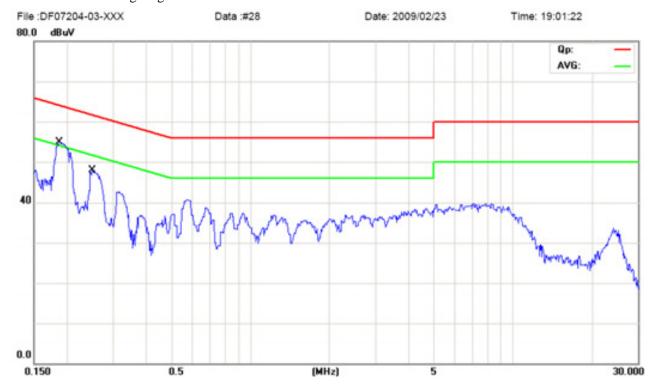

Enaguanav		Reading	Limit			
Frequency (MHz)	Live	;	Neutr	al	(dB µ	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.187	52.44	24.94			64.17	54.17
0.247	40.10	16.10			61.85	51.85



Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: Pass



E		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.494			35.66	11.96	56.09	46.09
0.829			34.92	12.42	56.00	46.00
1.008			33.40	11.10	56.00	46.00
1.559			34.22	9.72	56.00	46.00


Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: Pass


Please refer to following diagram for individual

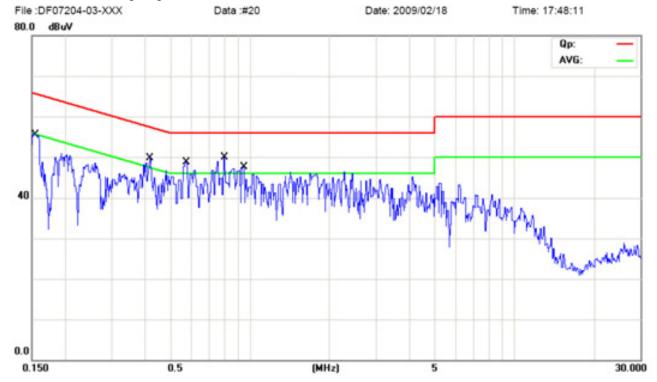

Eraguanav		Reading		Limit		
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.416	34.38	19.98			57.53	47.53
0.582	39.56	15.26			56.00	46.00
0.794	39.78	16.78			56.00	46.00
0.156	45.01	18.41			65.65	55.65
0.938	49.29	33.30			56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: Pass

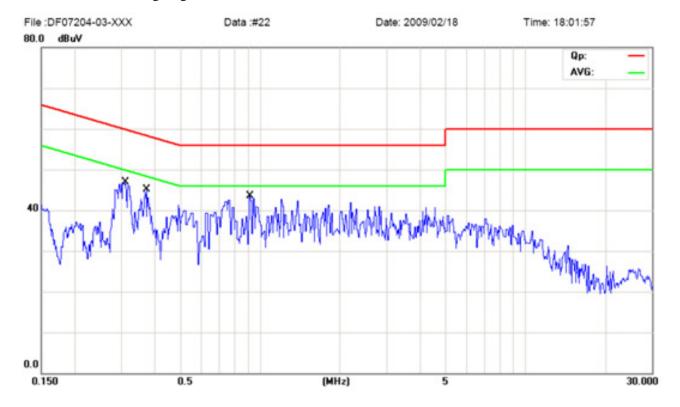

Emagnaman		Reading	Limit				
Frequency (MHz)	Live	Live		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.311			38.37	16.77	59.94	49.94	
0.371			35.64	30.52	58.46	48.46	
0.918			34.21	27.01	56.00	46.00	


Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: Pass

Please refer to following diagram for individual

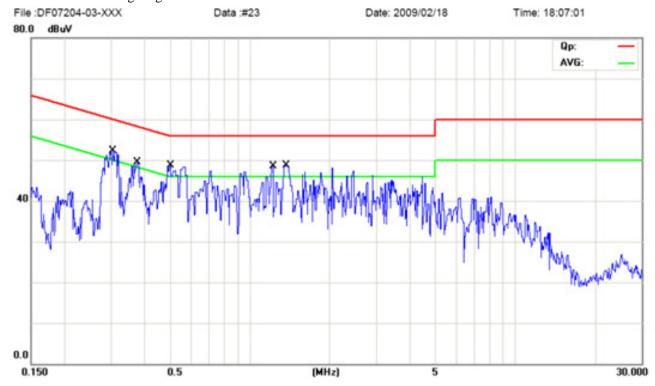

Eraguanav		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.305	44.96	17.86			60.09	50.09
0.373	41.14	13.14			58.42	48.42
0.499	38.47	10.57			56.01	46.01
1.221	39.09	13.99			56.00	46.00
1.370	38.24	15.15			56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: Pass

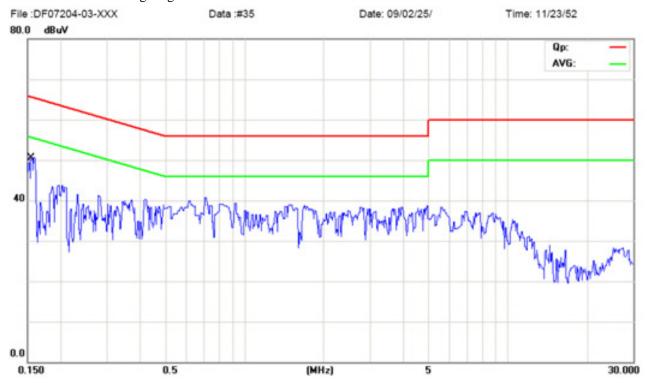

Engguenav	Reading(dB μ V)				Limit	
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.156			39.91	33.81	65.65	55.65


Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: Pass


Please refer to following diagram for individual

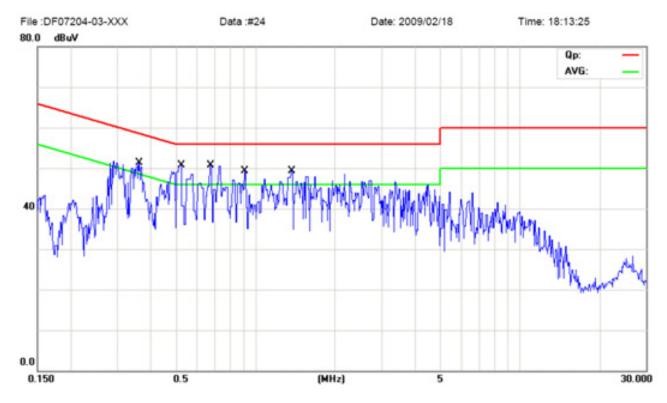

Emagazamaza		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.360	43.32	17.22			58.73	48.73
0.523	42.60	15.80			56.00	46.00
0.672	41.65	18.75			56.00	46.00
0.912	38.31	12.51			56.00	46.00
1.371	39.25	15.15			56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: Pass

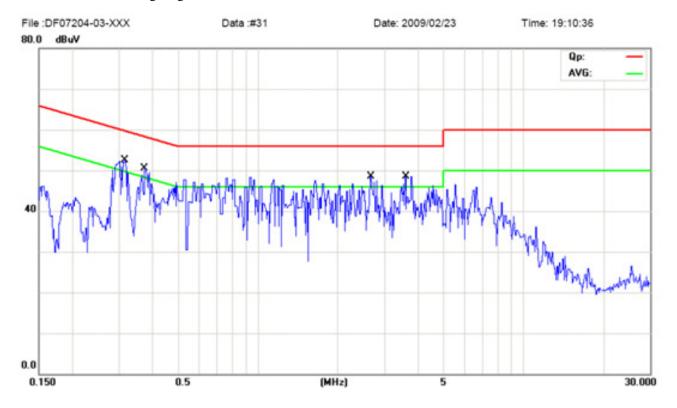

E		Reading	Limit			
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.313			44.27	26.27	59.89	49.89
0.373			41.34	21.44	58.42	48.42
2.642			38.06	24.26	56.00	46.00
3.577			38.53	23.93	56.00	46.00



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: Pass



Frequency (MHz)			Reading	Limit			
		Live	;	Neutr	al	(dB µ	V)
	(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
	0.725	38.41	12.81			56.00	46.00
	4.664	38.67	15.37			56.00	46.00


Page 25 of 51

Report No: 0902089 Date: 2009-02-25



5.0 Radiated Disturbance Test

5.1 Schematics of the test




5.2 Test Method and test Procedure:


The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Actual Working Voltage and Frequency: 120V~, 60Hz

Block diagram of Test setup

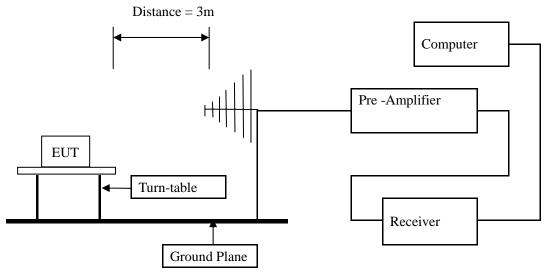



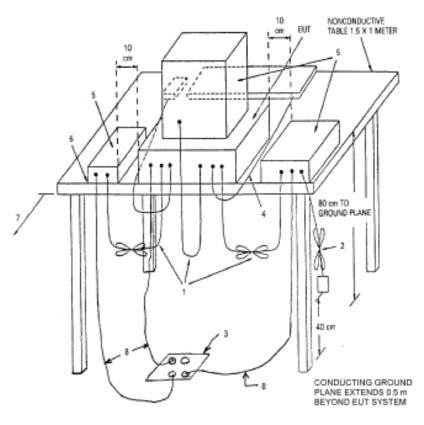

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Page 27 of 51

Report No: 0902089 Date: 2009-02-25




A: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

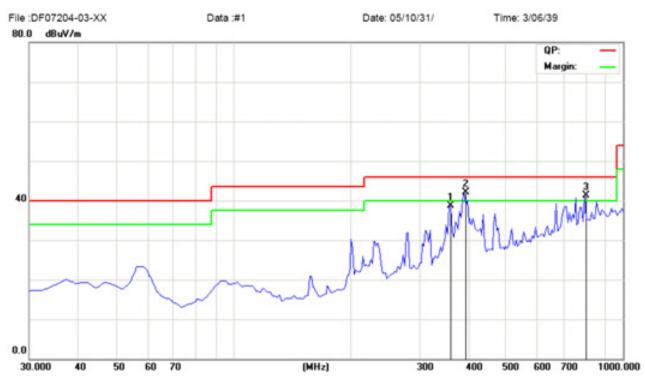

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
359.800	38.77	Н	46.00
393.750	42.14	Н	46.00
796.300	41.26	Н	46.00

Page 28 of 51

Report No: 0902089 Date: 2009-02-25




B: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

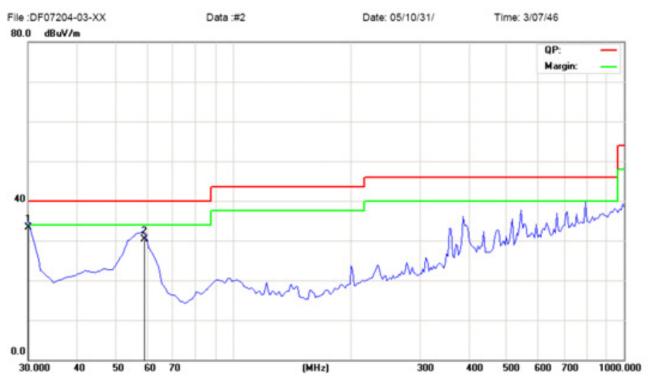

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30.000	33.29	V	40.00
59.100	30.32	V	40.00

Page 29 of 51

Report No: 0902089 Date: 2009-02-25




C: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

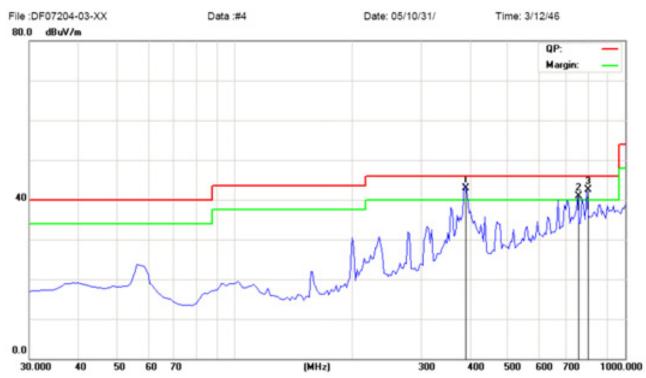

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
389.627	42.96	Н	46.00
759.925	40.93	Н	46.00
798.725	42.49	Н	46.00

Report No: 0902089 Page 30 of 51

Date: 2009-02-25




EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

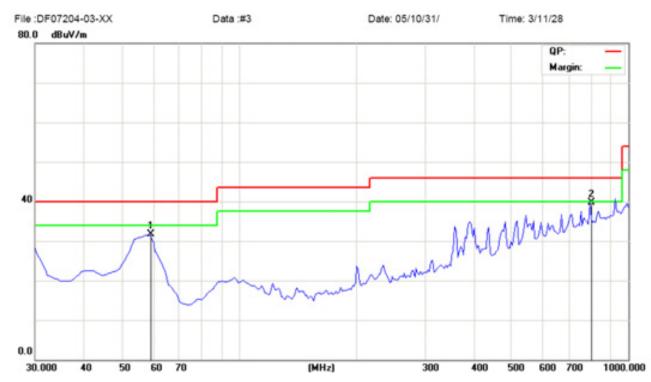

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
59.100	31.71	V	40.00
796.300	39.68	V	46.00

Page 31 of 51

Report No: 0902089 Date: 2009-02-25



E: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual



Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
359.800	39.42	Н	46.00
393.750	38.12	Н	46.00
718.700	40.62	Н	46.00
781.750	43.72	Н	46.00

Page 32 of 51

Report No: 0902089 Date: 2009-02-25




F: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

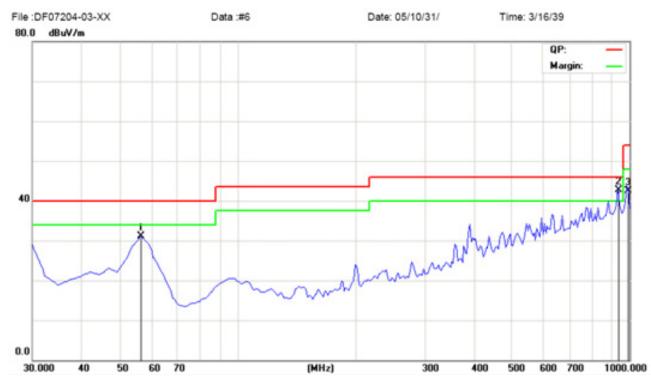

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
56.675	31.08	V	40.00
936.950	42.63	V	46.00
990.300	42.60	V	54.00



G: Radiated Disturbance In Horizontal (30MHz----1000MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

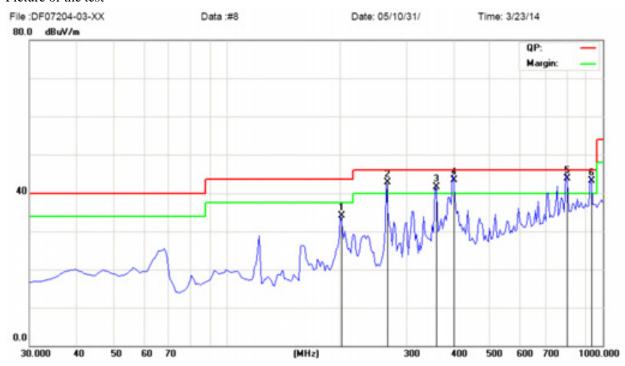

Frequency	Level@3m (dBµV/m)	Antenna	Limit@3m
(MHz)		Polarity	$(dB\mu V/m)$
202.175	34.08	Н	43.50
267.650	42.64	Н	46.00
359.800	41.57	Н	46.00
399.872	43.36	Н	46.00
798.725	43.66	Н	46.00
932.100	43.04	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 34 of 51

Report No: 0902089 Date: 2009-02-25




H: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Level: Class B
Results: PASS

Please refer to following diagram for individual

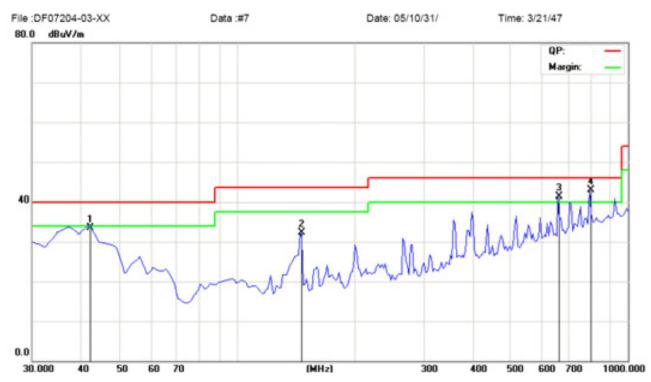

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
42.125	33.49	V	40.00
146.400	32.25	V	43.50
667.775	41.36	V	46.00
801.150	42.86	V	46.00

Page 35 of 51

Report No: 0902089 Date: 2009-02-25



I: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
202175	33.89	Н	43.50
359.800	39.66	Н	46.00
401.025	42.19	Н	46.00
798.725	43.77	Н	46.00
934.525	43.53	Н	46.00

Page 36 of 51

Report No: 0902089 Date: 2009-02-25




J: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

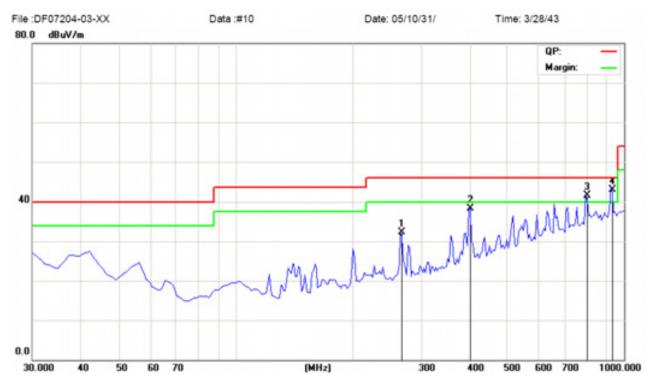

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
267.650	32.22	V	46.00
401.025	38.23	V	46.00
801.150	41.54	V	46.00
932.100	42.92	V	46.00

Page 37 of 51

Report No: 0902089 Date: 2009-02-25




K: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

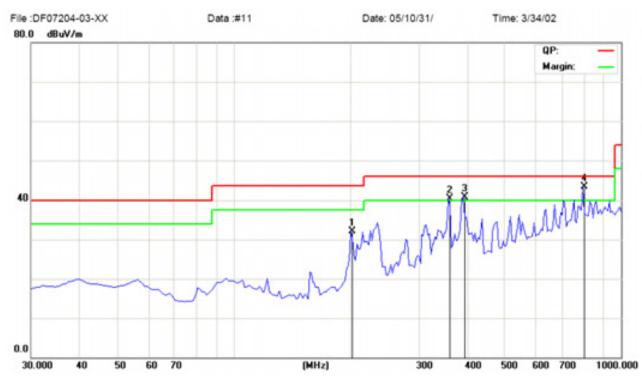

1	Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	202.175	32.01	Н	43.50
	359.800	40.32	Н	46.00
	393.750	40.77	Н	46.00
	798.725	43.38	Н	46.00

Page 38 of 51

Report No: 0902089 Date: 2009-02-25



L: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
32.425	30.83	V	40.00
548.950	41.01	V	46.00
638.675	40.83	V	46.00
796.300	40.98	V	46.00

Page 39 of 51

Report No: 0902089 Date: 2009-02-25




M: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

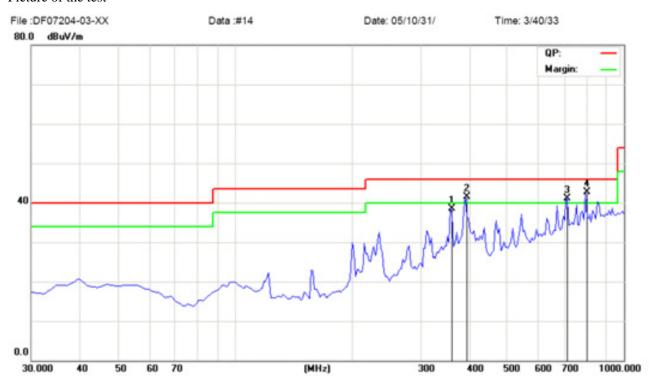

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m (dBµV/m)
359.800	38.58	Н	46.00
393.750	41.50	Н	46.00
716.275	41.05	Н	46.00
796.300	42.72	Н	46.00

Page 40 of 51

Report No: 0902089 Date: 2009-02-25



N: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30.799	31.27	V	40.00
548.950	41.04	V	46.00
796.300	41.23	V	46.00

Page 41 of 51

Report No: 0902089 Date: 2009-02-25




O: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual

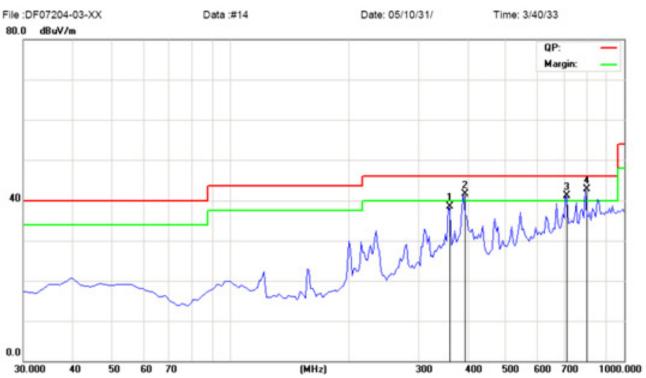

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
359.800	39.42	Н	46.00
393.750	38.12	Н	46.00
718.700	40.62	Н	46.00
781.750	43.72	h	46.00

Page 42 of 51

Report No: 0902089 Date: 2009-02-25



P: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Level: Class B
Results: PASS

Please refer to following diagram for individual



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
548.950	39.49	V	46.00
936.950	43.01	V	46.00
987.875	43.22	V	54.00

Page 43 of 51

Report No: 0902089 Date: 2009-02-25




6.0 FCC ID Label

FCC ID: V37-CD6210D7-43

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

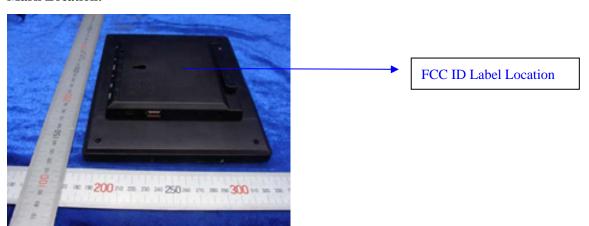

Report No: 0902089 Date: 2009-02-25



Photo of testing

7.1 Conducted test View—



7.2 Radiated emission test view--

Connect to PC



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 45 of 51

Report No: 0902089 Date: 2009-02-25



Photo for the EUT

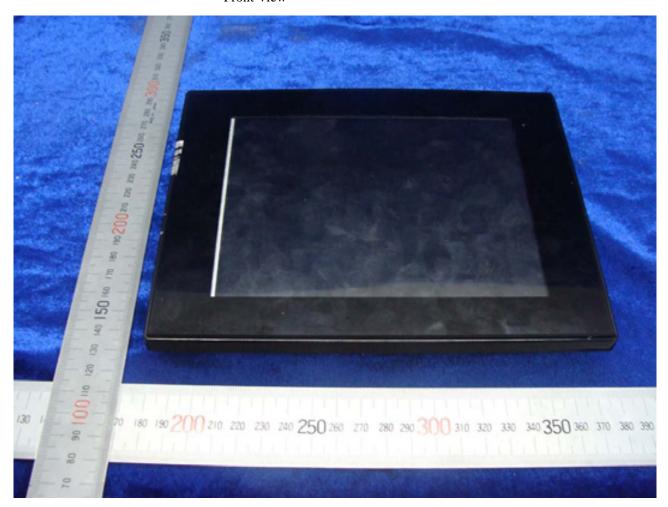

Page 46 of 51





Page 47 of 51





Page 48 of 51

Report No: 0902089 Date: 2009-02-25



Inside View



Page 49 of 51





Page 50 of 51





Page 51 of 51

Report No: 0902089 Date: 2009-02-25





-End of the report-