







ISO/IEC17025 Accredited Lab.

Report No: FCC 0902087 File reference No: 2009-03-11

Applicant: WIN ACCORD LTD.

Product: Digital Photo Frame

Brand Name: N/A

Model No: DF08103-03-XXX (X=A-Z, 0-9,a-z); BP08W

Test Standards: FCC Part 15 Subpart B: 2008

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: March 04, 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0902087 Page 2 of 54

Date: 2009-03-04



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 54

Report No: 0902087 Date: 2009-03-04



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test	5
2.2	Radiated electromagnetic disturbance test	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	7
3.1	Investigations Requested	7
3.2	Test Standards.	7
4.0	Power line Conducted Emission Test.	8
5.0	Radiated Disturbance Test	26
6.0	FCC ID Label	44
7.0	Photo of testing	45

Date: 2009-03-04



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: WIN ACCORD LTD.

Address: 12F, NO. 225, SEC 5, 105 SONG SHAN DIST., NAN JING EAST ROAD, TAIPEI.

TAIWAN. R.O.C

Telephone: 02-2749-3837 Fax: 02-2749-3918

1.3 Description of EUT

Product: Digital Photo Frame

Manufacturer: WIN ACCORD LTD.

Address: Shatou Section. Zhen'an Road, Chang'an Town, Dongguan City

Brand Name: N/A

Model Number: DF08103-03-XXX (X=A-Z, 0-9,a-z)

Additional Model Number: BP08W Rating: Input: DC 5V, 2A

The adapter Model No.: XKD-C2000IC5.0-12W (Made by MOSO)

Rating: Input: 100-240V, 0.5A Max, 50/60Hz Output: 5V, 2A The adapter Model No.: ADS-12G-06 05010GPCU (Made by HONOR)
Rating: Input: 100-240V, 0.3A Max, 50/60Hz Output: 5V, 2A

1.4 Submitted Sample: 1 Sample

1.5 Test Duration: 2009-02-18 to 2009-03-04

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tong

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 54

Report No: 0902087 Date: 2009-03-04



2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2009.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2009.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2009.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2009.2.23	1Year

2.3 Auxiliary Equipment

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	BOISB-027-00	CNFG029476	EPSON	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC ID

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 6 of 54

Report No: 0902087 Date: 2009-03-04

OLOGY DEVELO
TEST REPORT

				1.8m length	
PC	8434		IBM	AC Mains cable	FCC DOC
				Data cable of	
Mouse	OM860XC	HM0509	BIGCOW	1.5m length	FCC DOC

Page 7 of 54

Report No: 0902087 Date: 2009-03-04

3.0 **Technical Details**

3.1 **Investigations Requested** Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 Test Standards

FCC Part 15 Subpart B: 2008



4.0 Conducted Power line Test

4.1 Schematics of the test

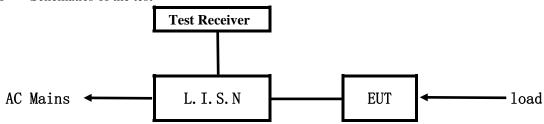


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Actual Working Voltage and Frequency: 120V~, 60Hz

Block diagram of Test setup

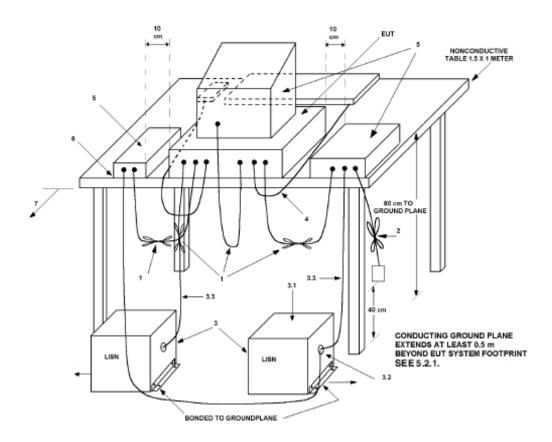

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0902087 Page 9 of 54

Date: 2009-03-04

4.3 Power line conducted Emission Limit

Eroguanay (MHz)	Class A Li	mits dB(μV)	Class B Limits dB(μV)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
0.15 ~ 0.50	79.00	66.00	66.00~56.00*	56.00~46.00*	
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00	
5.00 ~ 30.00	73.00	60.00	60.00	50.00	

Notes: 1. *decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

4.4 **Test Results**

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

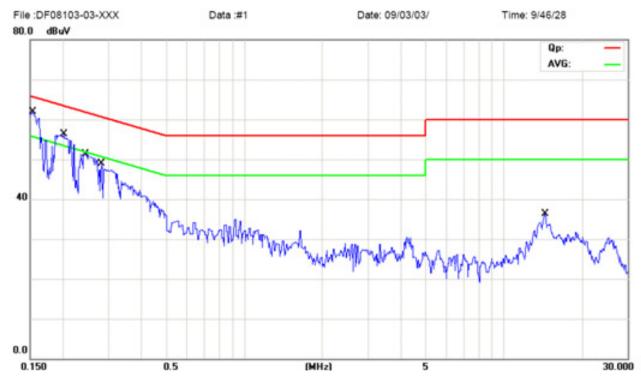

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.153	Live	60.50	27.50	65.81	55.81
0.201	Live	55.25	22.35	63.55	53.55
0.244	Live	49.30	18.40	61.94	51.94
0.281	Live	40.34	18.64	60.78	50.78
14.286	Live	31.31	22.31	60.00	50.00


Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

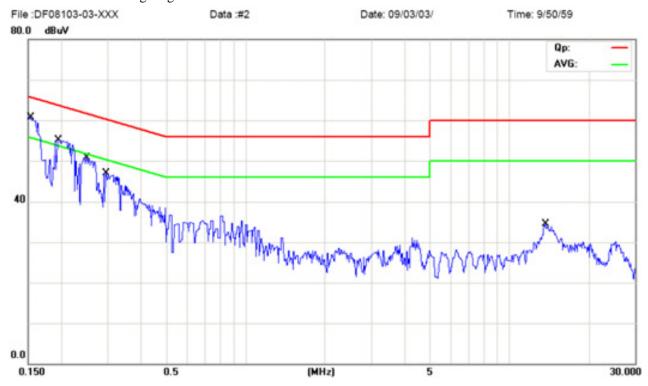

Frequency	Line -	Reading(dBµV)		Limit(dBµV)	
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.151	Neutral	59.10	23.50	65.92	55.92
0.196	Neutral	51.05	25.05	63.75	53.75
0.249	Neutral	49.91	25.71	61.77	51.77
0.297	Neutral	45.56	15.76	60.33	50.33
13.682	Neutral	29.53	22.33	60.00	50.00




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB


Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

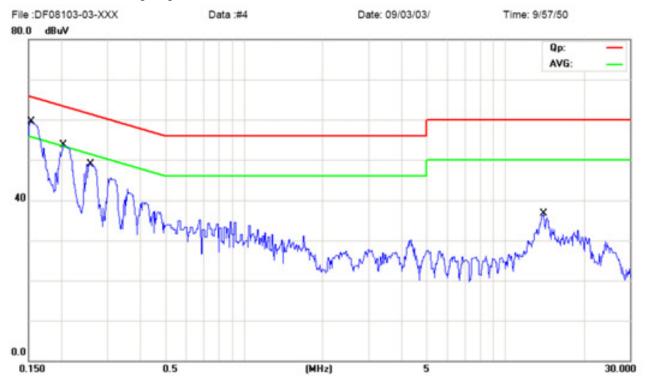

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.154	Live	59.50	28.10	65.77	55.77
0.206	Live	53.56	26.16	63.37	53.37
0.257	Live	48.81	22.81	61.52	51.52
14.002	Live	31.12	23.12	60.00	50.00






Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play USB

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

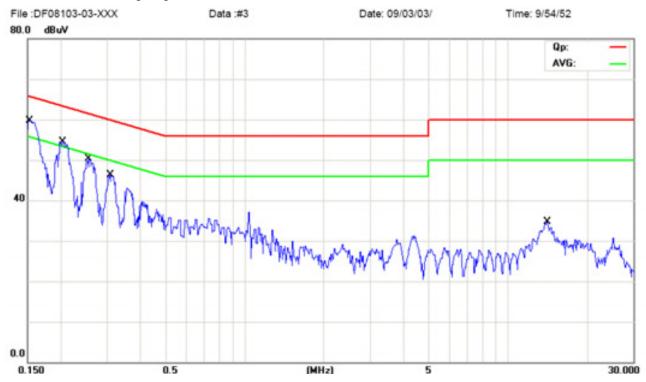

Frequency	Line -	Reading(dBµV)		Limit(dBµV)	
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.153	Neutral	60.10	29.50	65.80	55.80
0.203	Neutral	53.26	26.06	63.45	53.45
0.256	Neutral	49.21	23.91	61.56	51.56
0.309	Neutral	45.47	24.57	59.99	49.99
14.115	Neutral	28.12	20.62	60.00	50.00




EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

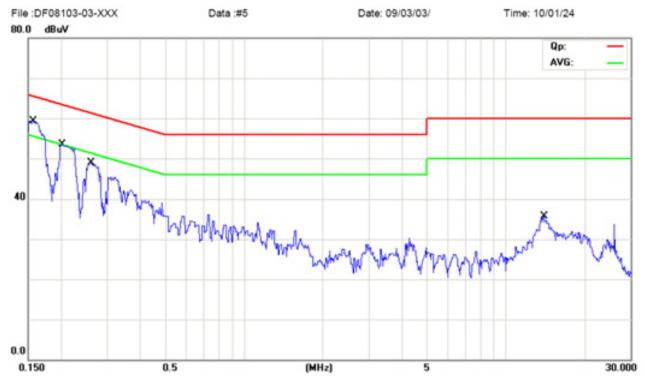

Frequency	Line	Line Reading(dBμV)		Limit(dBµV)	
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.154	Live	57.91	41.51	65.74	55.74
0.201	Live	46.05	19.45	63.55	53.55
0.260	Live	46.32	19.12	61.42	51.42
13.931	Live	30.82	23.32	60.00	50.00


Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play SD

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

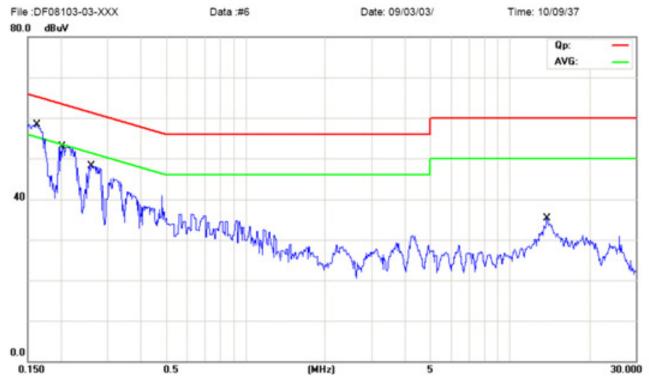

Frequency	Line	$Reading(dB\mu V)$		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.163	Neutral	57.81	24.01	65.27	55.27
0.202	Neutral	47.96	17.76	63.50	53.50
0.260	Neutral	46.72	24.52	61.41	51.41
13.806	Neutral	30.32	23.82	60.00	50.00

Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

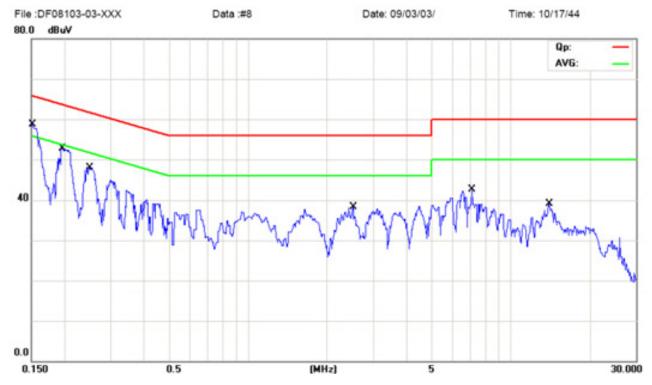

Frequency	Line	Reading(dBμV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.150	Live	58.00	28.60	65.96	55.96
0.196	Live	50.95	18.35	63.77	53.77
0.249	Live	47.71	24.01	61.78	51.78
7.103	Live	29.42	35.22	60.00	50.00
13.963	Live	33.72	25.22	60.00	50.00
2.493	Live	33.30	24.00	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: XKD-C2000IC5.0-12W

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

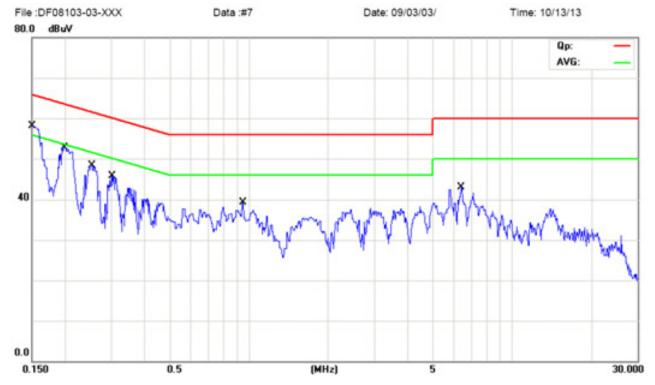

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.151	Neutral	58.10	34.70	65.91	55.91
0.199	Neutral	52.55	32.55	63.62	53.62
0.253	Neutral	48.61	35.01	61.65	51.65
6.420	Neutral	36.50	29.30	60.00	50.00
0.300	Neutral	44.46	28.46	60.23	50.23
0.946	Neutral	34.64	21.34	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.




Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Play Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

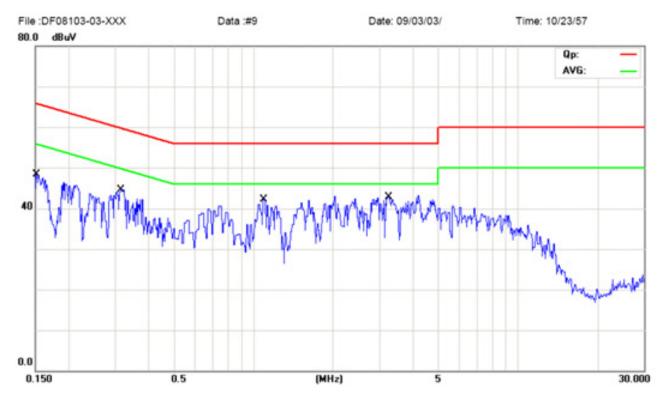

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.153	Live	43.80	20.20	65.82	55.82
0.316	Live	43.18	20.48	59.80	49.80
1.103	Live	39.64	19.04	56.00	46.00
3.245	Live	38.60	20.10	56.00	46.00

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play Memory

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

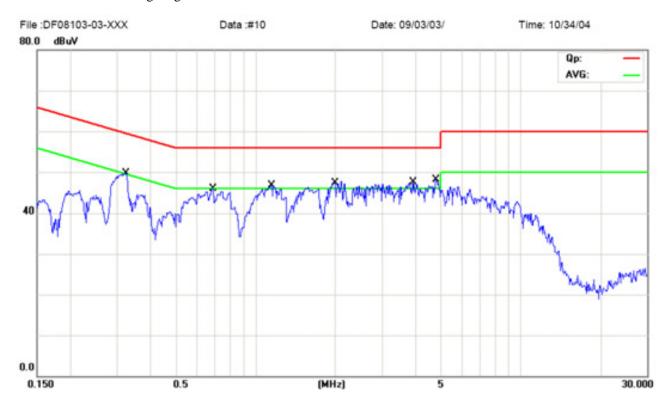

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.322	Neutral	49.58	28.68	59.65	49.65
0.687	Neutral	44.77	26.67	56.00	46.00
1.143	Neutral	45.66	26.26	56.00	46.00
1.981	Neutral	45.99	28.79	56.00	46.00
3.930	Neutral	45.67	26.77	56.00	46.00
4.773	Neutral	41.81	27.71	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

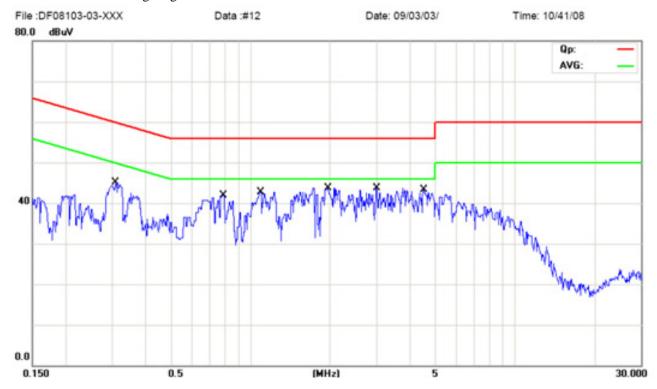

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.310	Live	42.17	22.67	59.97	49.97
0.788	Live	38.98	15.08	56.00	46.00
1.092	Live	39.74	18.84	56.00	46.00
1.956	Live	39.08	21.48	56.00	46.00
3.000	Live	38.90	18.00	56.00	46.00
4.504	Live	37.70	19.20	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play USB

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

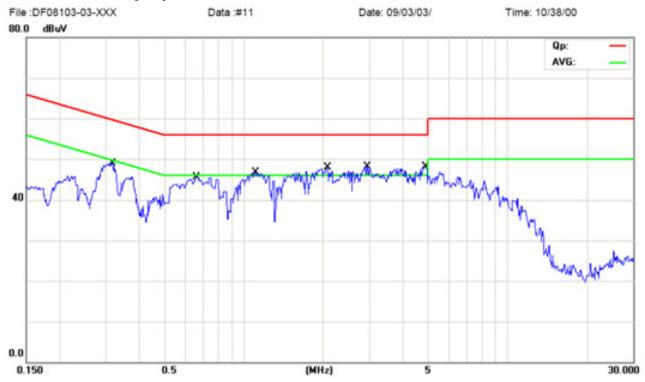

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.314	Neutral	49.47	32.87	59.86	49.86
0.664	Neutral	42.45	20.75	56.00	46.00
1.106	Neutral	46.04	28.14	56.00	46.00
2.080	Neutral	44.43	26.53	56.00	46.00
2.936	Neutral	45.57	28.77	56.00	46.00
4.867	Neutral	42.95	29.85	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.



Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

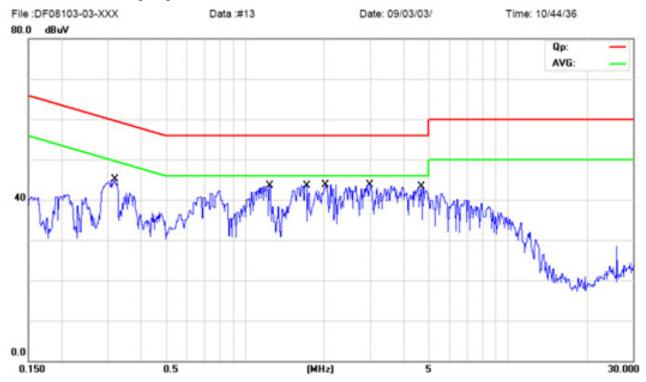

Frequency	Line	Reading(dBμV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.318	Live	42.48	20.08	59.74	49.74
1.239	Live	39.80	14.50	56.00	46.00
1.712	Live	38.58	13.98	56.00	46.00
2.034	Live	39.71	19.21	56.00	46.00
3.008	Live	39.00	14.60	56.00	46.00
4.694	Live	39.48	19.18	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.



Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Play SD

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

120V~60Hz Working Voltage:

Results: Pass

Please refer to following diagram for individual

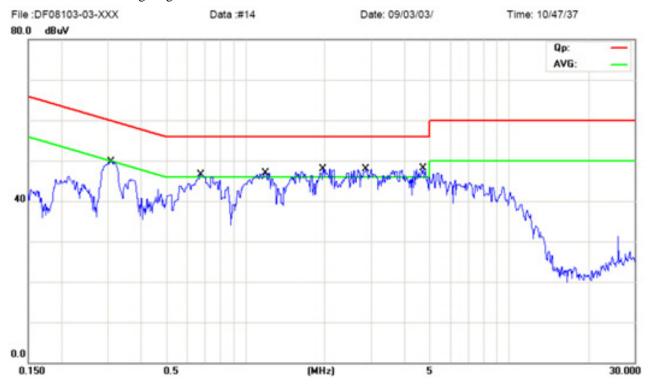

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.308	Neutral	49.57	32.67	60.02	50.02
0.676	Neutral	45.26	25.76	56.00	46.00
1.184	Neutral	45.57	27.27	56.00	46.00
1.969	Neutral	44.09	28.39	56.00	46.00
2.860	Neutral	45.84	24.64	56.00	46.00
4.705	Neutral	40.78	26.28	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.




EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~60Hz

Results: Pass

Please refer to following diagram for individual

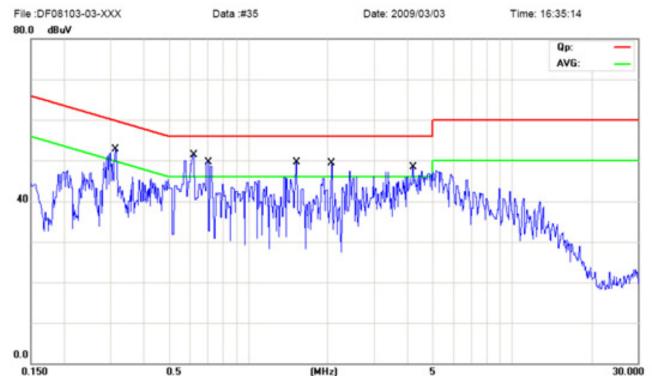


Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.311	Live	43.67	18.77	59.94	49.94
0.621	Live	43.90	19.60	56.00	46.00
0.698	Live	39.28	13.58	56.00	46.00
1.520	Live	38.71	15.51	56.00	46.00
2.063	Live	34.33	12.43	56.00	46.00
4.214	Live	41.69	18.79	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.





Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT set Condition: Connect to PC

Adaptor used for test Model No.: ADS-12G-06 05010GPCU

Working Voltage: 120V~ 60Hz

Results: Pass

Please refer to following diagram for individual

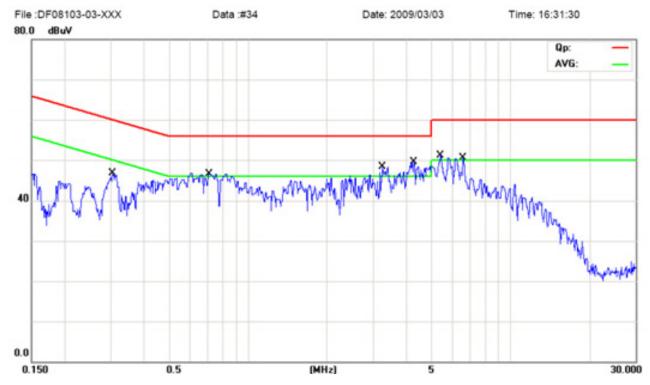

Frequency	Line	Reading(dBμV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.306	Neutral	42.43	28.83	60.07	50.07
0.711	Neutral	41.35	40.62	56.00	46.00
3.252	Neutral	46.90	41.96	56.00	46.00
4.267	Neutral	46.79	26.79	56.00	46.00
5.423	Neutral	44.99	36.63	56.00	46.00
6.623	Neutral	38.37	27.18	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 26 of 54

Report No: 0902087 Date: 2009-03-04



5.0 Radiated Disturbance Test

5.1 Schematics of the test




5.2 Test Method and test Procedure:


The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Actual Working Voltage and Frequency: 120V~, 60Hz

Block diagram of Test setup

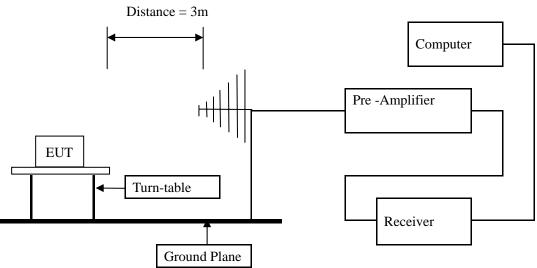



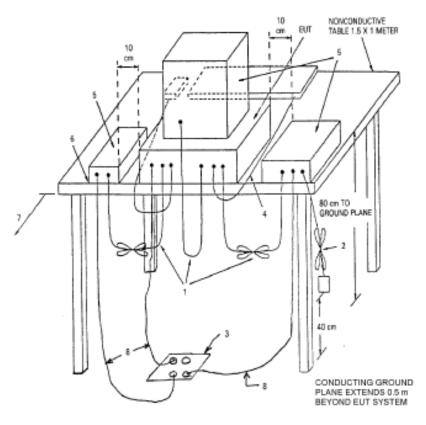

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



A: Radiated Disturbance (30MHz----1000MHz)


EUT Operating Environment

Temperature: 25℃ Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: XKD-C2000IC5.0-12W

EUT set Condition: Play SD Equipment Level: Class B

Results: Pass

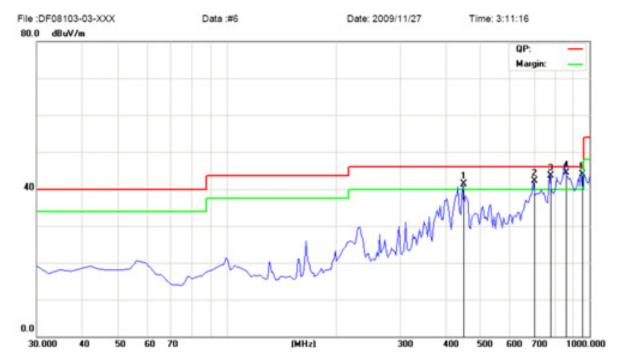

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
449.525	41.26	Н	46.00
704.150	42.09	Н	46.00
779.325	43.48	Н	46.00
859.170	44.29	Н	46.00
951.500	43.88	Н	46.00



B: Radiated Disturbance (30MHz----1000MHz)


EUT Operating Environment

Temperature:25 ℃ Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: XKD-C2000IC5.0-12W

EUT set Condition: Play SD Equipment Level: Class B

Results: Pass

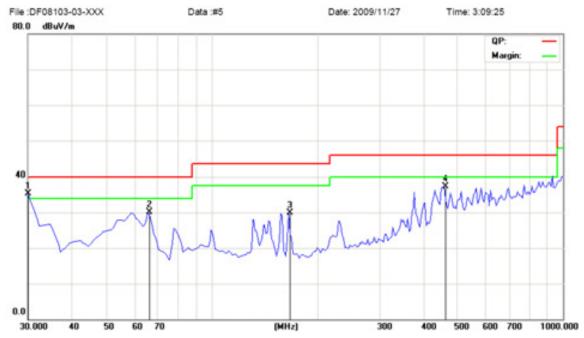

Ī	Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
ľ	30.000	35.22	V	40.00
	66.375	30.10	V	40.00
	165.800	29.81	V	43.50
Ī	459.225	37.35	V	46.00



C: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: XKD-C2000IC5.0-12W

EUT set Condition: Connect to PC

Equipment Level: Class B

Results: Pass

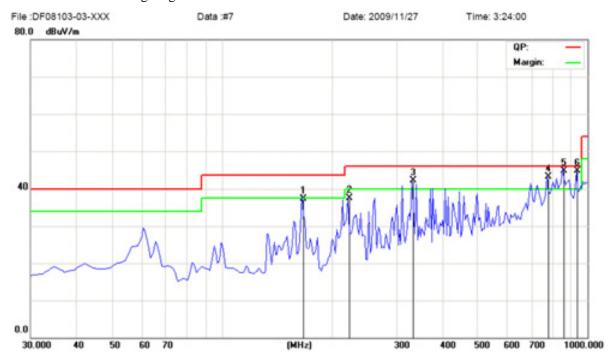

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
165.800	37.26	Н	43.50
221.575	37.49	Н	46.00
333.125	42.14	Н	46.00
781.750	43.01	Н	46.00
859.350	44.65	Н	46.00
934.525	44.79	Н	46.00



D: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature:25 ℃ Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: XKD-C2000IC5.0-12W

EUT set Condition: Connect to PC

Equipment Level: Class B

Results: Pass

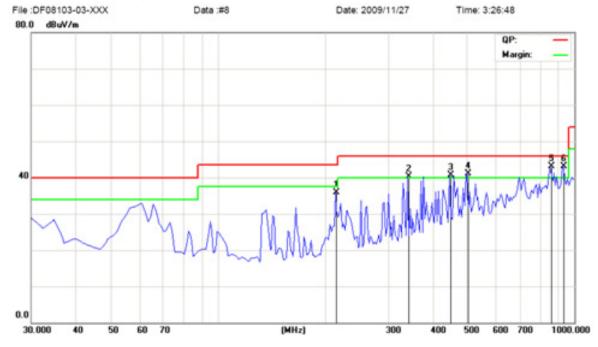

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
214.300	35.85	V	43.50
340.400	40.28	V	46.00
449.525	40.75	V	46.00
500.450	41.08	V	46.00
856.925	43.03	V	46.00
932.100	43.16	V	46.00

Page 32 of 54

Report No: 0902087 Date: 2009-03-04



E: Radiated Disturbance (30MHz----1000MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: XKD-C2000IC5.0-12W

EUT set Condition: Play USB Equipment Level: Class B

Results: Pass

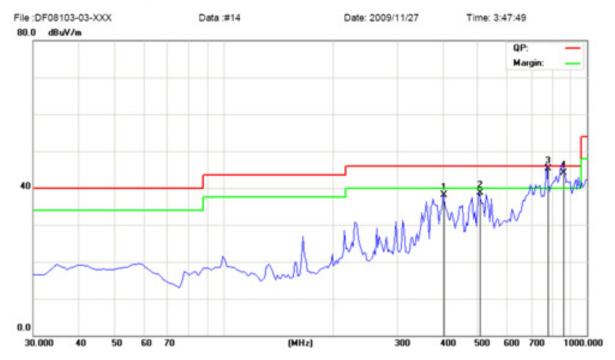

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
403.450	38.20	Н	46.00
507.725	38.79	Н	46.00
779.250	45.37	Н	46.00
856.866	44.06	Н	46.00



F: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment

Temperature:25 ℃ Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: XKD-C2000IC5.0-12W

EUT set Condition: Play USB Equipment Level: Class B

Results: Pass



Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30.000	34.06	V	40.00
156.036	37.01	V	43.50
165.800	35.94	V	43.50
936.950	41.66	V	46.00



G: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: XKD-C2000IC5.0-12W

EUT set Condition: Play Memory

Equipment Level: Class B

Results: Pass

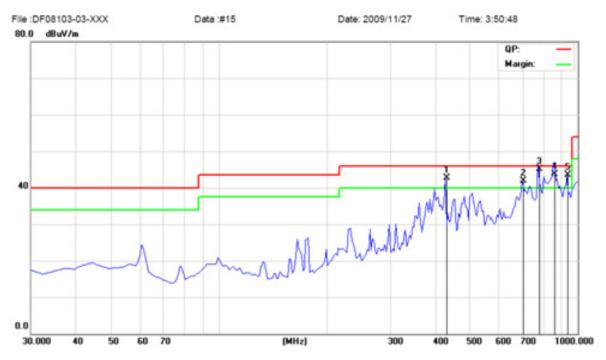

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
430.125	42.61	Н	46.00
701.725	41.92	Н	46.00
778.725	45.17	Н	46.00
856.866	43.67	Н	46.00
934.525	43.56	Н	46.00



H: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature:25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: XKD-C2000IC5.0-12W

EUT set Condition: Play Memory

Equipment Level: Class B

Results: Pass

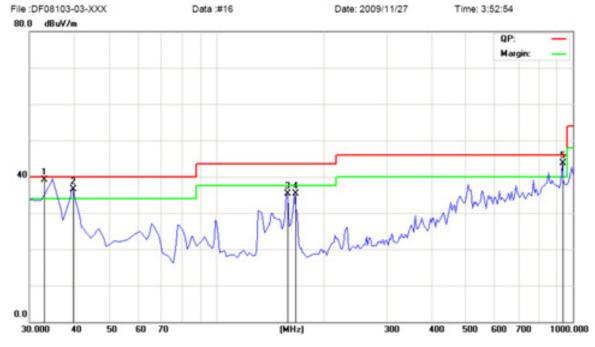

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
32.998	39.17	V	40.00
39.714	36.55	V	40.00
158.525	35.34	V	43.50
165.800	35.29	V	43.50
934.525	43.73	V	46.00



I: Radiated Disturbance (30MHz----1000MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: ADS-12G-06 05010GPCU

EUT set Condition: Memory Equipment Level: Class B

Results: Pass

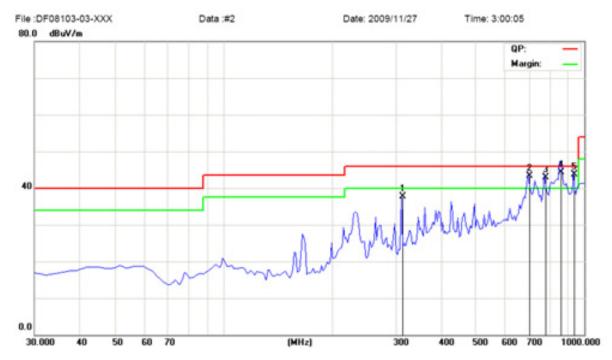

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
313.725	37.67	Н	46.00
701.725	43.32	Н	46.00
781.750	42.99	Н	46.00
856.960	44.28	Н	46.00
934.525	43.70	Н	47.00



J: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment

Temperature:25 ℃ Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: ADS-12G-06 05010GPCU

EUT set Condition: Play Memory

Equipment Level: Class B

Results: Pass



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30.000	30.18	V	40.00
59.100	28.56	V	40.00
66.375	27.92	V	40.00
165.800	27.97	V	43.50
934.525	42.19	V	46.00



K: Radiated Disturbance (30MHz----1000MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: ADS-12G-06 05010GPCU

EUT set Condition: Play USB Equipment Level: Class B

Results: Pass

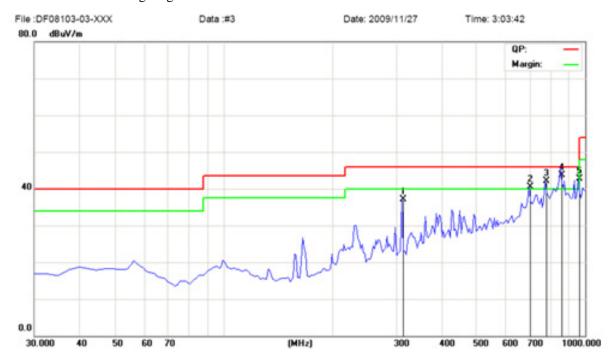

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
313.725	37.20	Н	46.00
704.150	40.44	Н	46.00
781.750	42.14	Н	46.00
856.960	43.66	Н	46.00
961.200	42.74	Н	54.00



L: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment

Temperature:25 ℃ Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: ADS-12G-06 05010GPCU

EUT set Condition: Play USB Equipment Level: Class B

Results: Pass



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30.000	29.60	V	40.00
66.375	27.48	V	40.00
165.800	28.93	V	43.50
859.350	40.62	V	46.00
936.950	42.21	V	46.00



M Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: ADS-12G-06 05010GPCU

EUT set Condition: Connect to PC

Equipment Level: Class B

Results: Pass



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
165.800	34.48	Н	43.50
214.300	37.58	Н	43.50
333.125	41.83	Н	46.00
379.200	40.65	Н	46.00
781.750	42.35	Н	46.00
859.350	44.66	Н	46.00



N: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature:25 ℃ Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: ADS-12G-06 05010GPCU

EUT set Condition: Connect to PC

Equipment Level: Class B

Results: Pass

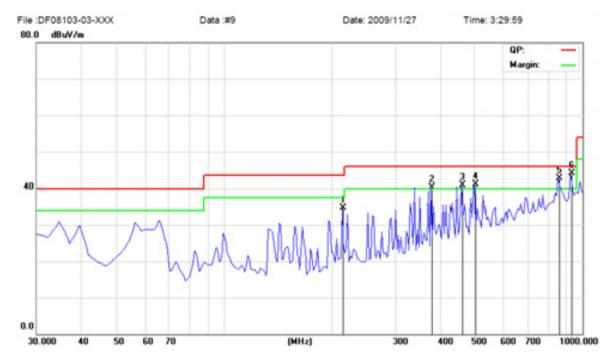

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
214.300	34.70	V	43.50
379.200	40.39	V	46.00
459.225	40.84	V	46.00
500.450	41.01	V	46.00
856.925	42.62	V	46.00
927.250	44.04	V	46.00



O: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: ADS-12G-06 05010GPCU

EUT set Condition: Play SD Equipment Level: Class B

Results: Pass



Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
405.875	37.92	Н	46.00
701.725	42.93	Н	46.00
779.325	43.54	Н	46.00
857.050	44.61	Н	46.00
941.800	42.00	Н	46.00



P: Radiated Disturbance (30MHz----1000MHz)


EUT Operating Environment

Temperature:25 ℃ Humidity: 75%RH Atmospheric Pressure: 101 KPa

Adapter Model No: ADS-12G-06 05010GPCU

EUT set Condition: Play SD Equipment Level: Class B

Results: Pass

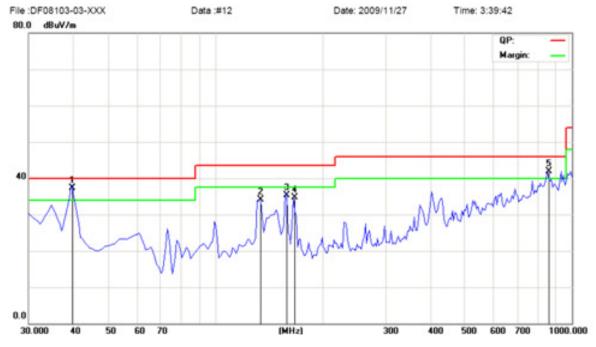

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
39.714	37.40	V	40.00
134.275	34.08	V	43.50
158.667	35.30	V	43.50
165.800	34.62	V	43.50
859.350	41.85	V	46.00

Page 44 of 54

Report No: 0902087 Date: 2009-03-04



6.0 FCC ID Label

FCC ID: V37-CD6210D8W-169

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

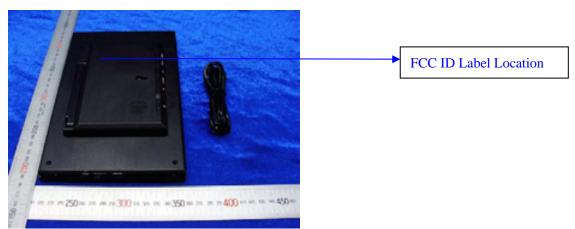




Photo of testing

7.1 Conducted test View--

AC Mains



7.2 Radiated emission test view--

Playing



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 46 of 54

Report No: 0902087 Date: 2009-03-04

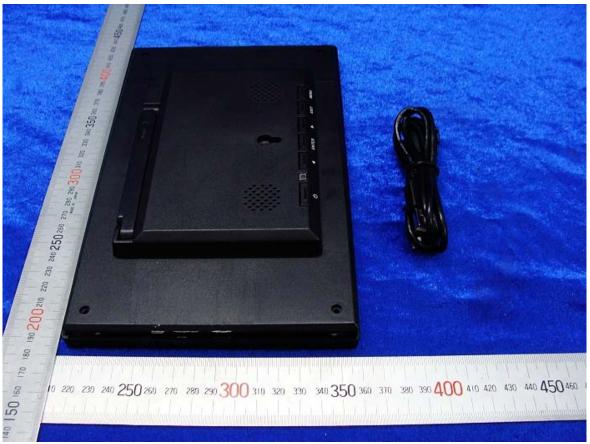


Photo for the EUT



Page 47 of 54






Page 48 of 54





Page 49 of 54



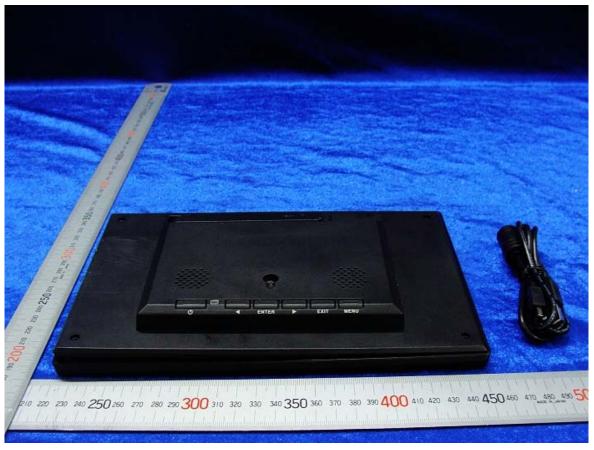

Page 50 of 54






Page 51 of 54





Page 52 of 54



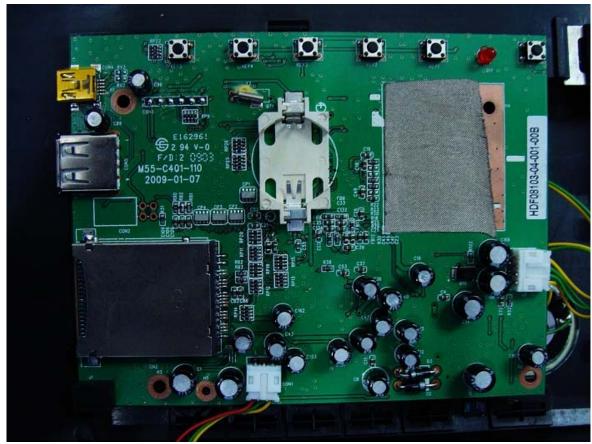

Page 53 of 54

Report No: 0902087 Date: 2009-03-04



Appendix:

Adaptor model 1 No: ADS-12G-06 05010GPCU Front View



Page 54 of 54

Report No: 0902087 Date: 2009-03-04



Appendix:

Adaptor model No: XKD-C2000IC5.0-12W

Front View



-End of the report-