



GPRS 850- Body Worn Up Middle CH190	2
GPRS 850- Body Worn Down Middle CH190	3
EDGE 850- Body Worn Up Middle CH190	5
EDGE 850- Body Worn Down Middle CH190	6
GPRS1900- Body Worn Up Middle CH661	8
GPRS1900- Body Worn Down Middle CH661	9
EDGE1900- Body Worn Up Middle CH661	11
EDGE1900- Body Worn Down Middle CH661	12
WCDMA Band II-Body Worn Up Middle CH9400	14
WCDMA Band II- Body Worn Down Middle CH9400	15
WCDMA Band V- Body Worn Up High CH4233	17
WCDMA Band V- Body Worn Down High CH4233	18
IEEE 802.11b- Body Worn Up Middle CH6	20
IEEE 802.11b- Body Worn Down Middle CH6	21
GPRS850-Body-Hotspot Up Middle CH190	23
GPRS850-Body-Hotspot Down Middle CH190	24
GPRS850-Body-Hotspot Bottom Middle CH190	25
GPRS850-Body-Hotspot Left Middle CH190	26
EDGE850-Body-Hotspot Up Middle CH190	27
EDGE850-Body-Hotspot Down Middle CH190	28
EDGE850-Body-Hotspot Bottom Middle CH190	29
EDGE850-Body-Hotspot Left Middle CH190	30
GPRS-1900-Body-Hotspot Up Middle CH661	31
GPRS-1900-Body-Hotspot Down Middle CH661	32
GPRS-1900-Body-Hotspot Bottom Middle CH661	33
GPRS 1900-Body-Hotspot Left Middle CH661	34
EDGE-1900-Body-Hotspot Up Middle CH661	35
EDGE-1900-Body-Hotspot Down Middle CH661	36
EDGE-1900-Body-Hotspot Bottom Middle CH661	37
EDGE 1900-Body-Hotspot Left Middle CH661	38
WCDMA Band II Body-Hotspot Up Middle CH9400	39
WCDMA Band II Body-Hotspot Down Middle CH9400	40
WCDMA Band II Body-Hotspot Bottom Middle CH9400	41
WCDMA Band II Body-Hotspot Left Middle CH9400	42
WCDMA Band V Body-Hotspot Up High CH4233	43
WCDMA Band V Body-Hotspot Down High CH4233	44
WCDMA Band V Body-Hotspot Bottom High CH4233	45
WCDMA Band V Body-Hotspot Left High CH4233	46
IEEE 802.11b Body-Hotspot UP Middle CH6	47
IEEE 802.11b Body-Hotspot Down Middle CH6	48
IEEE 802.11b Body-Hotspot Top Middle CH6	49



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

GPRS 850- Body Worn Up Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

GPRS 850/GPRS850 Body Up Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.633 mW/g

GPRS 850/GPRS850 Body Up Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.770 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.862 mW/g

SAR(1 g) = 0.486 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.659 W/kg

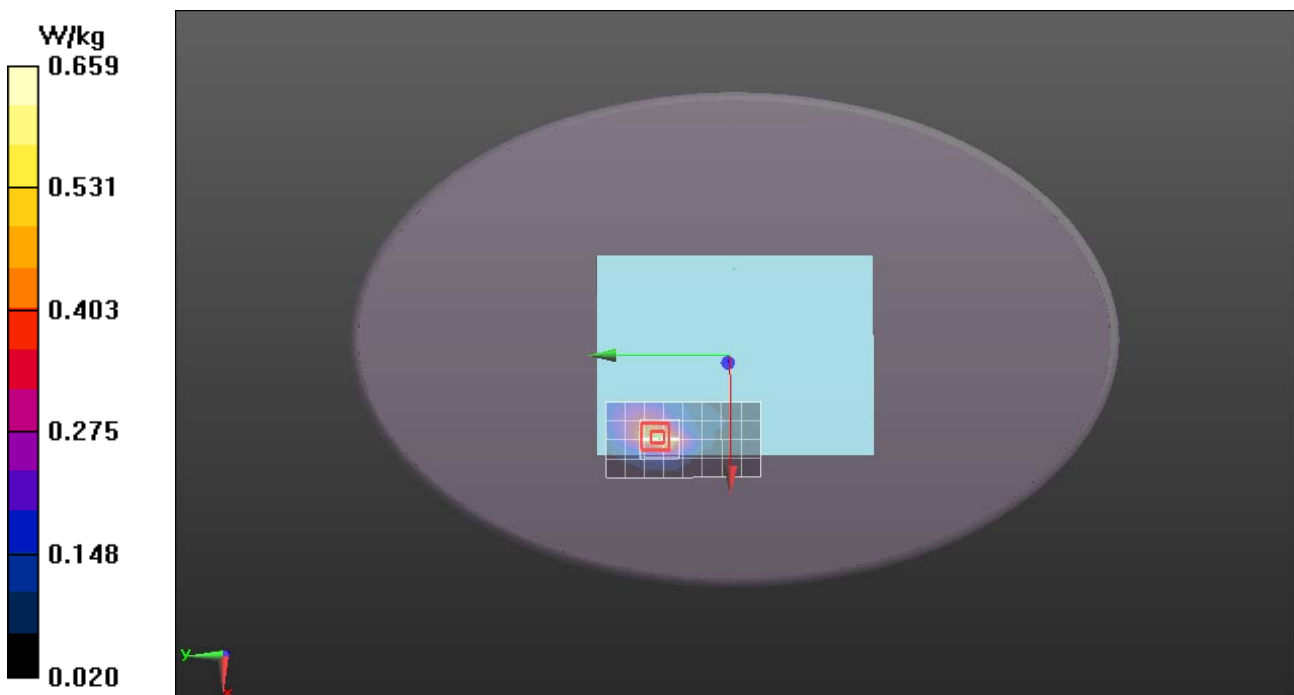



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

GPRS 850- Body Worn Down Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);
Frequency: 836.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

GPRS 850/GPRS850 Body Down Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.846 mW/g

GPRS 850/GPRS850 Body Down Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 5.754 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.934 mW/g

SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.371 mW/g

Maximum value of SAR (measured) = 0.854 mW/g

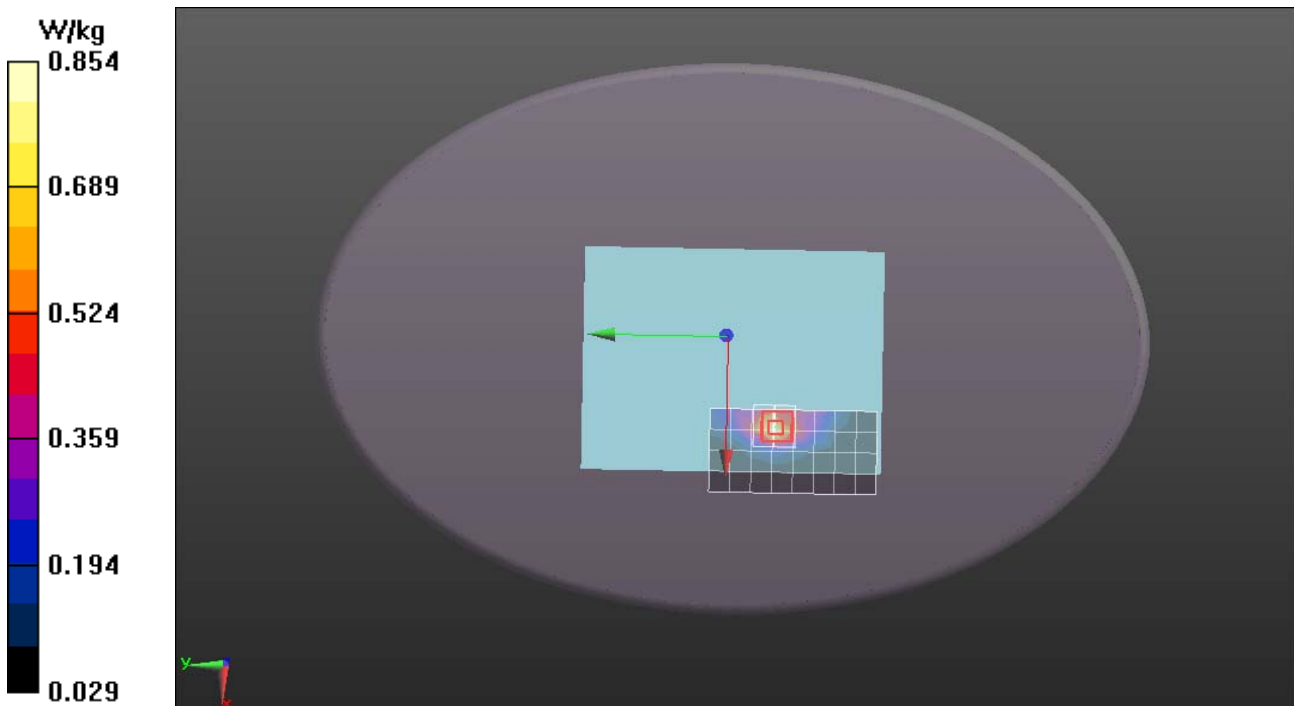

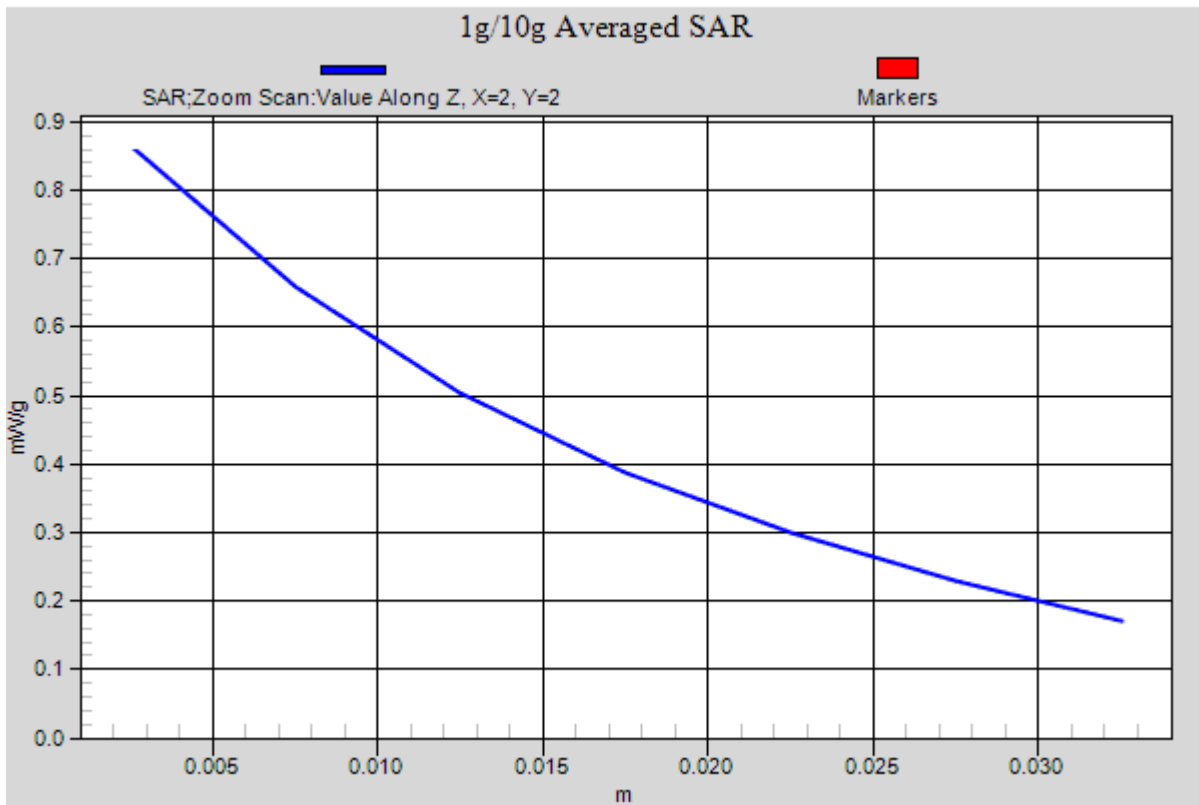



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

EDGE 850- Body Worn Up Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic EDGE; Communication System Band: EDGE 850 (824.0 - 849.0 MHz);
Frequency: 848.8 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE 850/EDGE850 Body Up Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.470 mW/g

EDGE 850/EDGE850 Body Up Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.827 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.646 mW/g

SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.493 W/kg

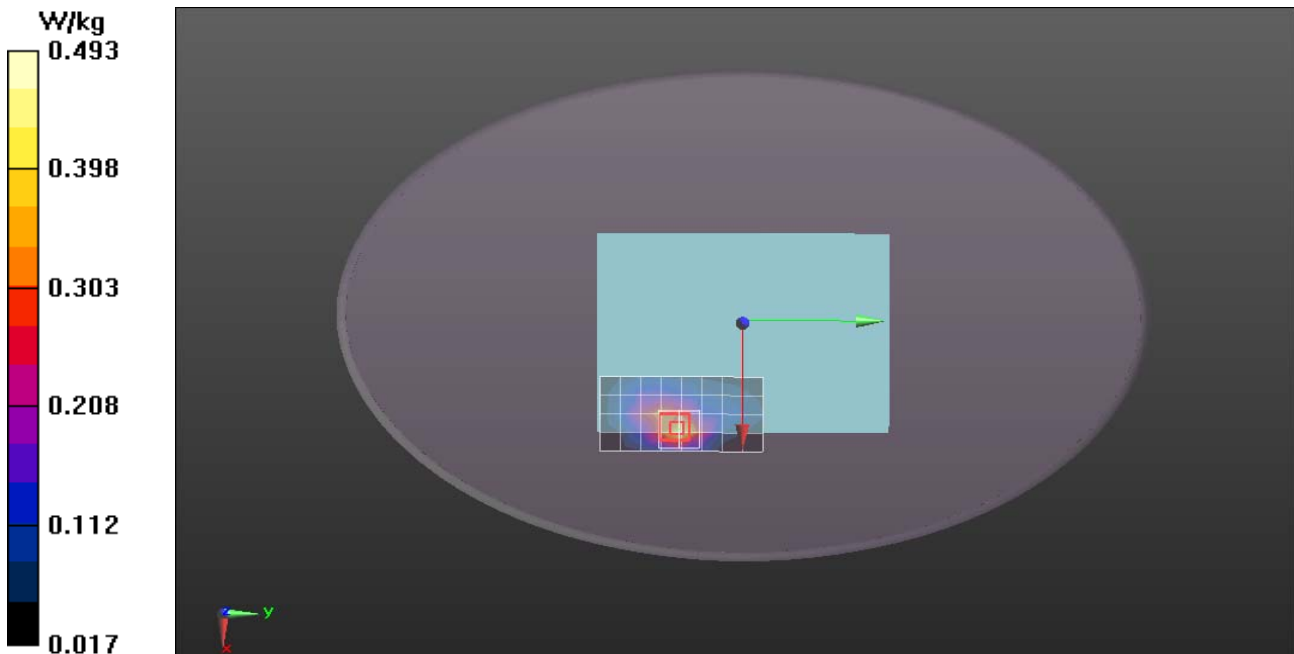



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

EDGE 850- Body Worn Down Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic EDGE; Communication System Band: EDGE 850 (824.0 - 849.0 MHz);
Frequency: 848.8 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE 850/EDGE850 Body Down Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.416 mW/g

EDGE 850/EDGE850 Body Down Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 1.805 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.702 mW/g

SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.511 W/kg

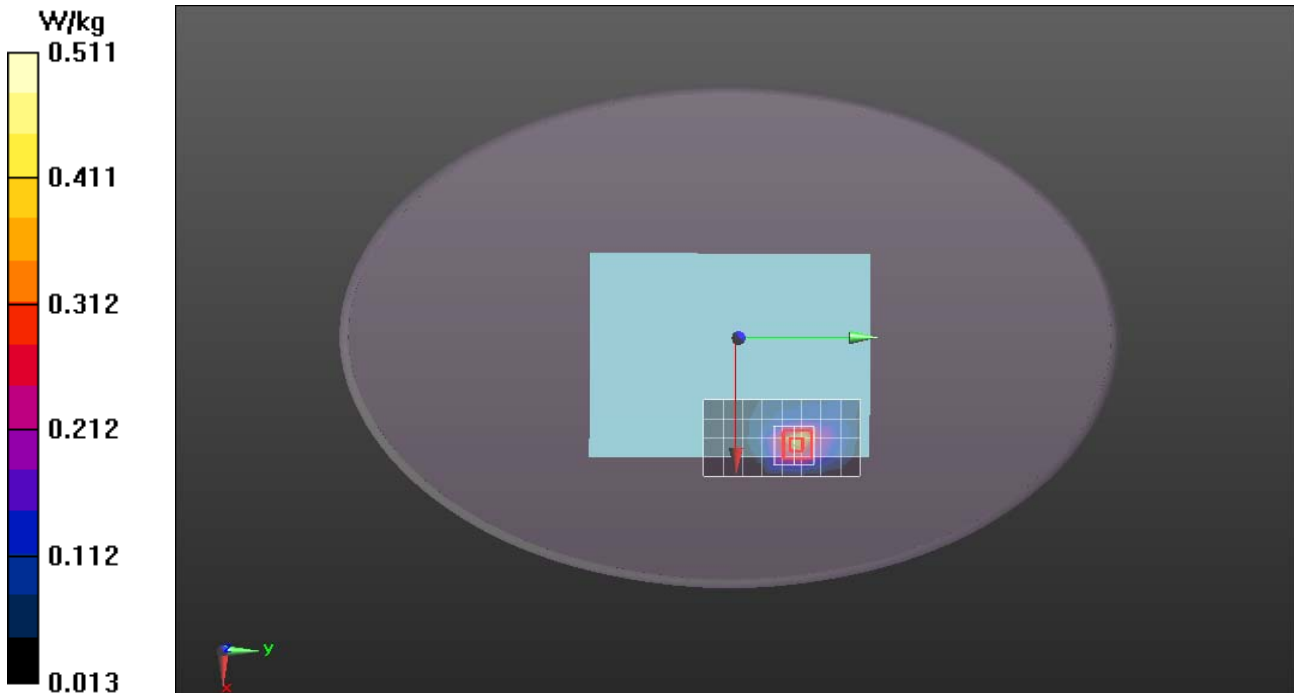

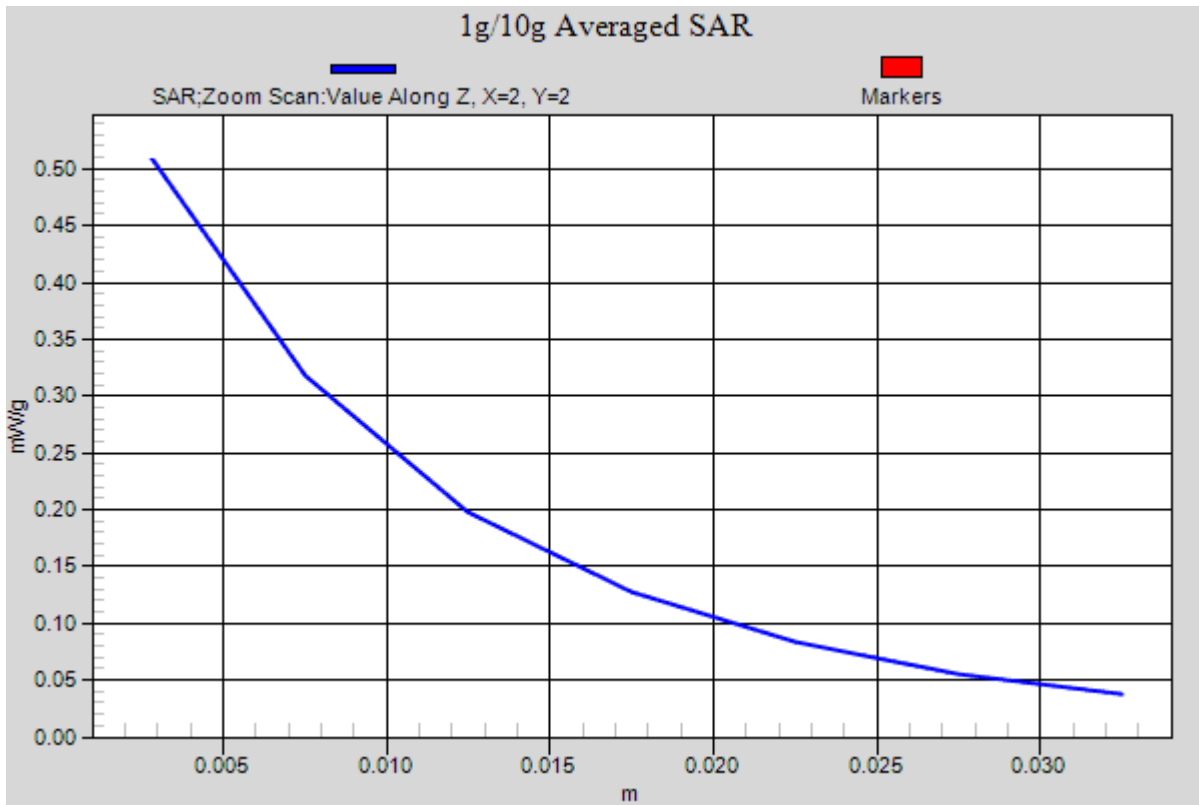



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

GPRS1900- Body Worn Up Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.23, 7.23, 7.23); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

GPRS1900/GPRS1900 Body Up Middle CH661/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.470 mW/g

GPRS1900/GPRS1900 Body Up Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.827 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.646 mW/g

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.493 W/kg

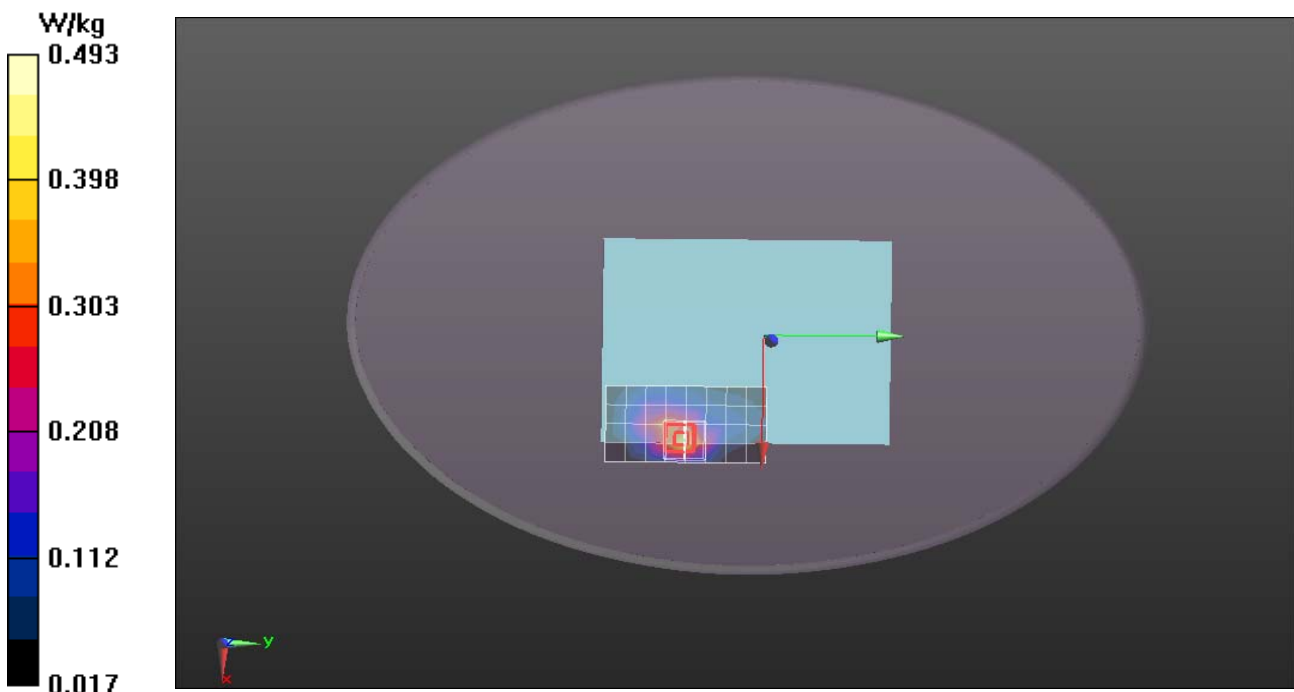



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

GPRS1900- Body Worn Down Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.23, 7.23, 7.23); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

GPRS1900/GPRS1900 Body Down Middle CH661/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.561 mW/g

GPRS1900/GPRS1900 Body Down Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 2.509 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.065 mW/g

SAR(1 g) = 0.503 mW/g; SAR(10 g) = 0.260 mW/g

Maximum value of SAR (measured) = 0.729 W/kg

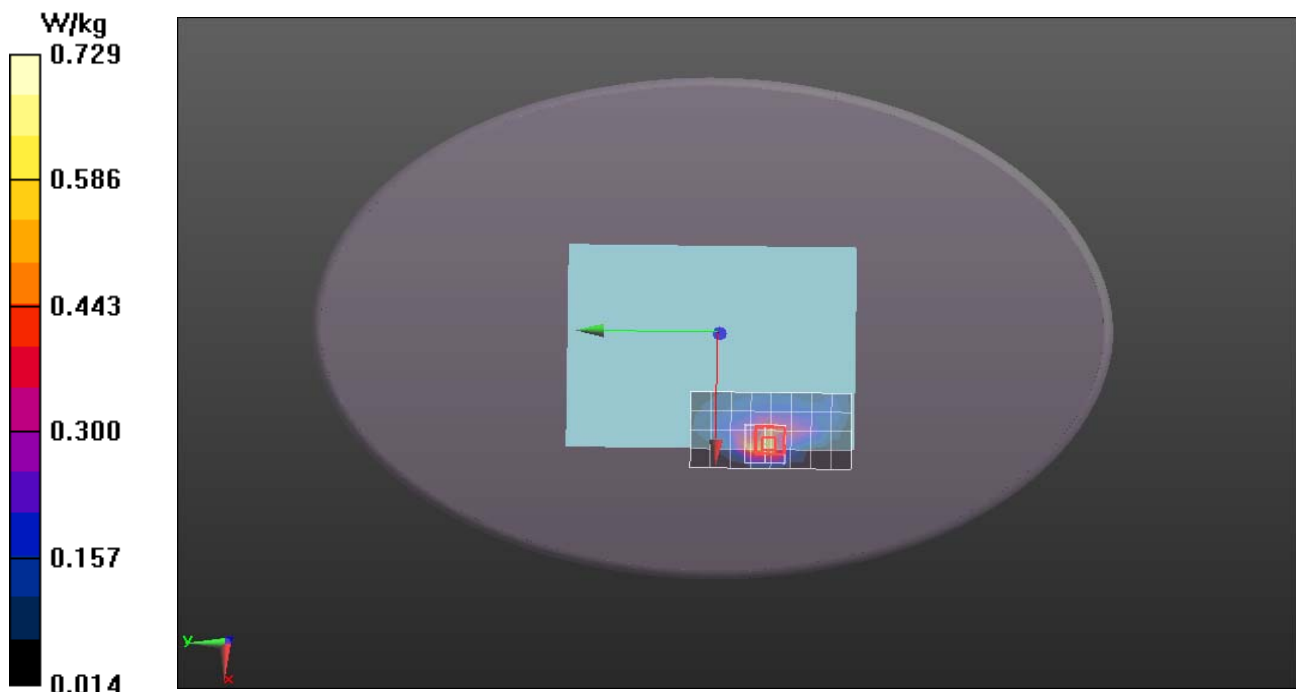

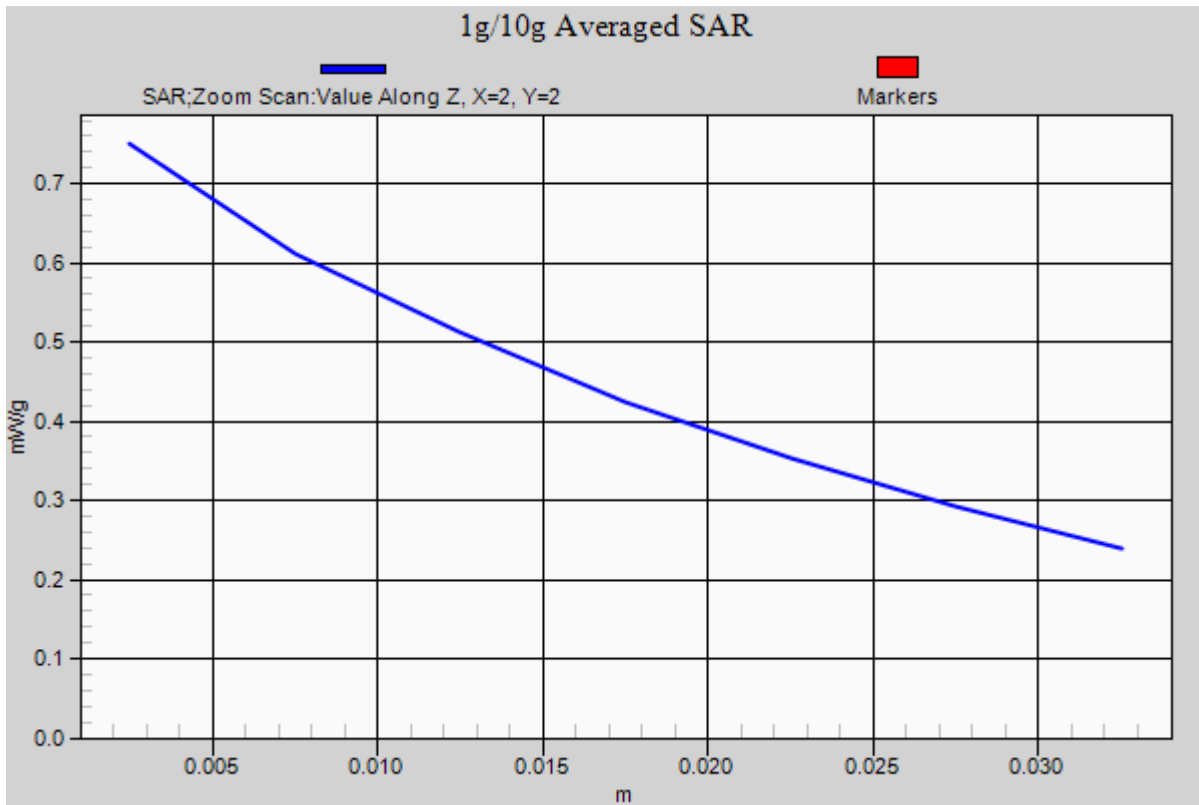



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

EDGE1900- Body Worn Up Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic GSM; Communication System Band: EDGE 1900 (1850.0 - 1910.0 MHz); Frequency: 1880MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.23, 7.23, 7.23); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/EDGE1900 Body Up Middle CH661/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.290 mW/g

EDGE1900/EDGE1900 Body Up Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.062 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.089 mW/g

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.441 W/kg

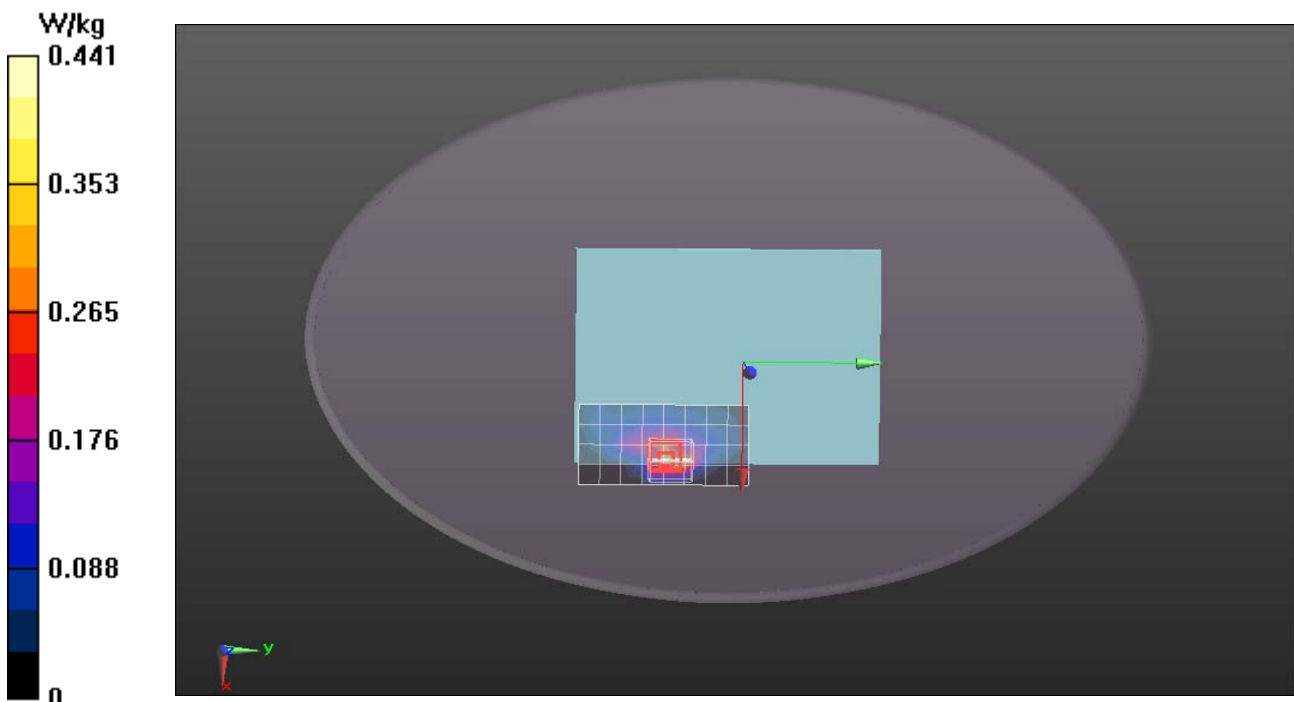



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

EDGE1900- Body Worn Down Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic GSM; Communication System Band: EDGE 1900 (1850.0 - 1910.0 MHz); Frequency: 1880MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.23, 7.23, 7.23); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/EDGE1900 Body Down Middle CH661/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.512 mW/g

EDGE1900/EDGE1900 Body Down Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 2.485 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.989 mW/g

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.650 W/kg

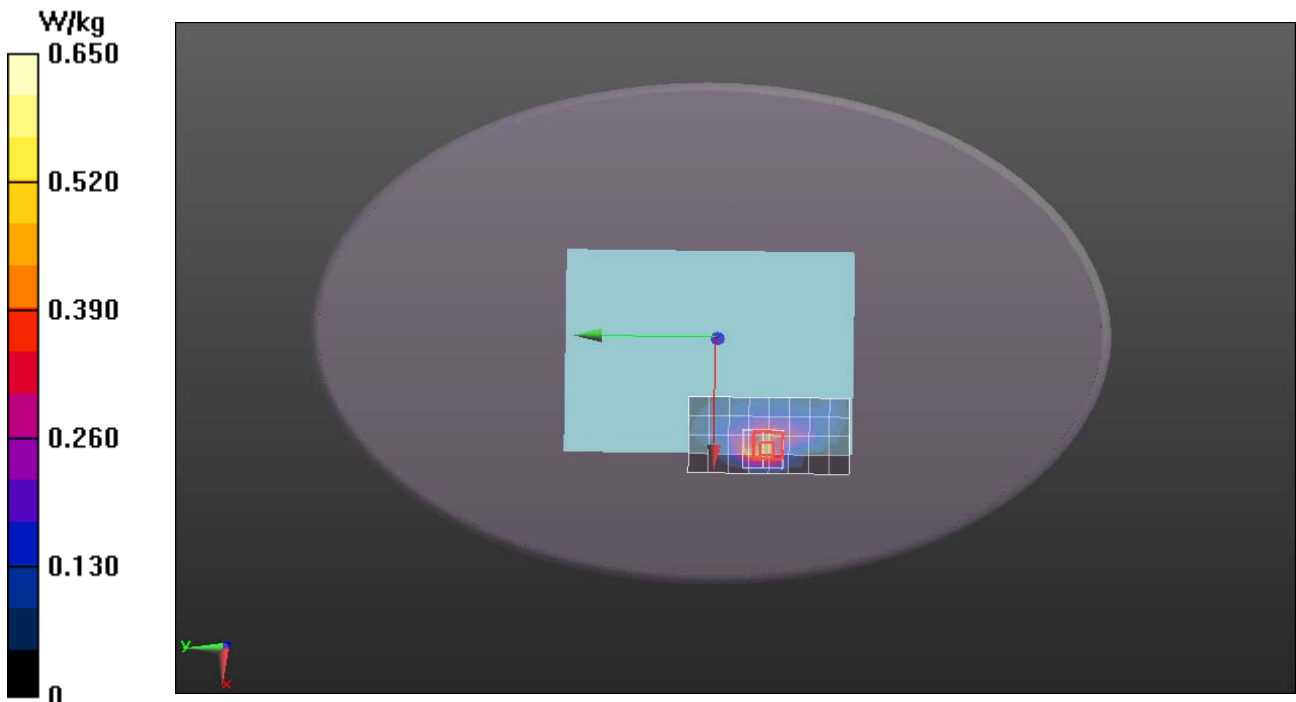

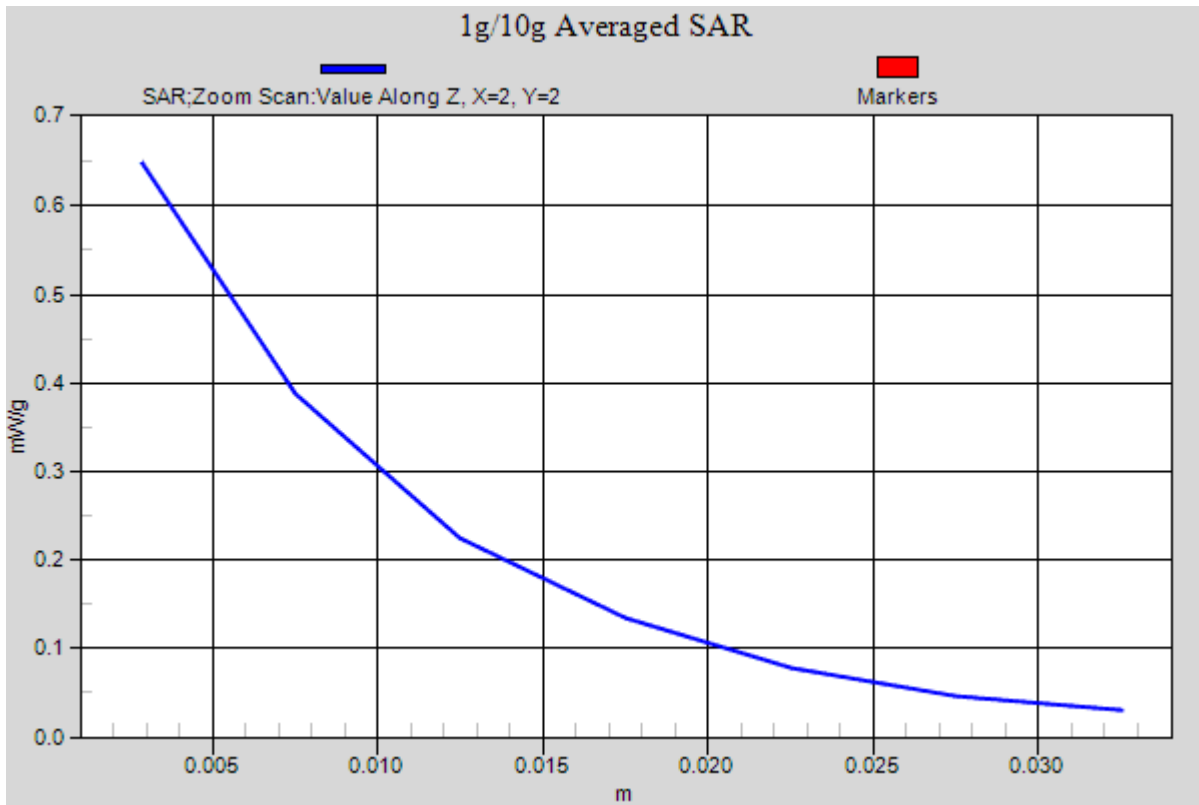



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

WCDMA Band II-Body Worn Up Middle CH9400

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.23, 7.23, 7.23); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body Up Middle CH9400/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.723 mW/g

WCDMA/Body Up Middle CH9400/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.179 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.666 mW/g

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.173 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

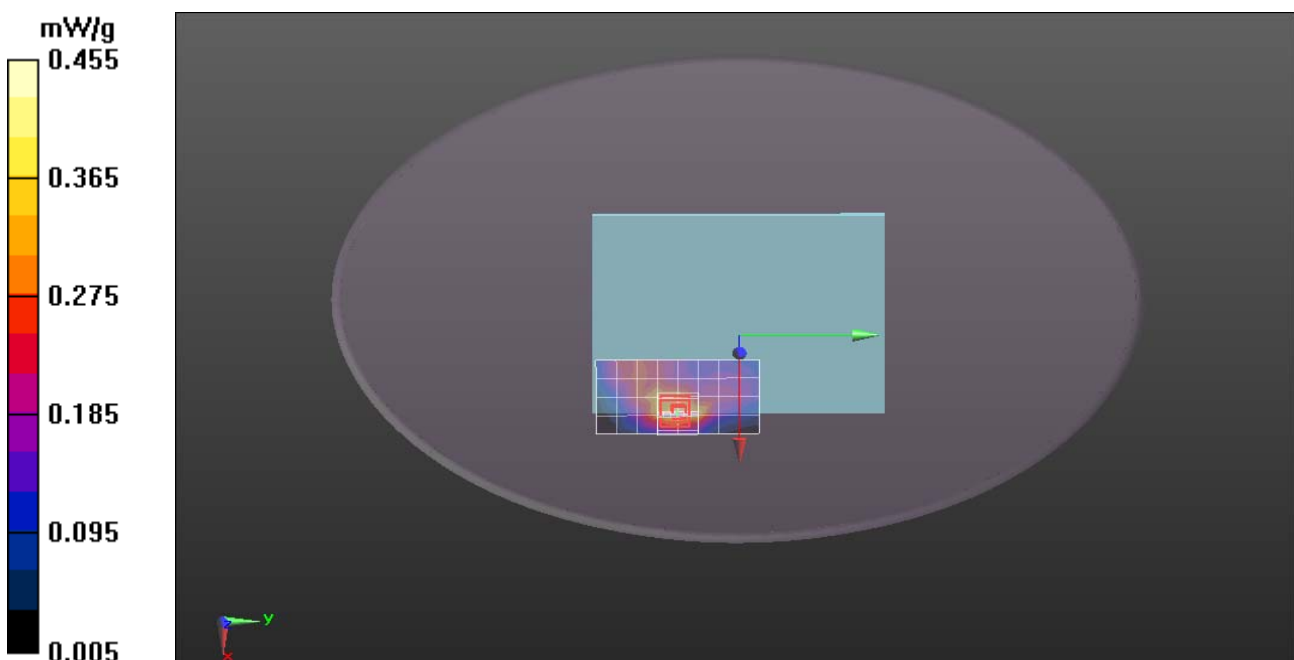



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

WCDMA Band II- Body Worn Down Middle CH9400

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.23, 7.23, 7.23); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body Down Middle CH9400/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.880 mW/g

WCDMA/Body Down Middle CH9400/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.383 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.891 mW/g

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.393 mW/g

Maximum value of SAR (measured) = 0.706 mW/g

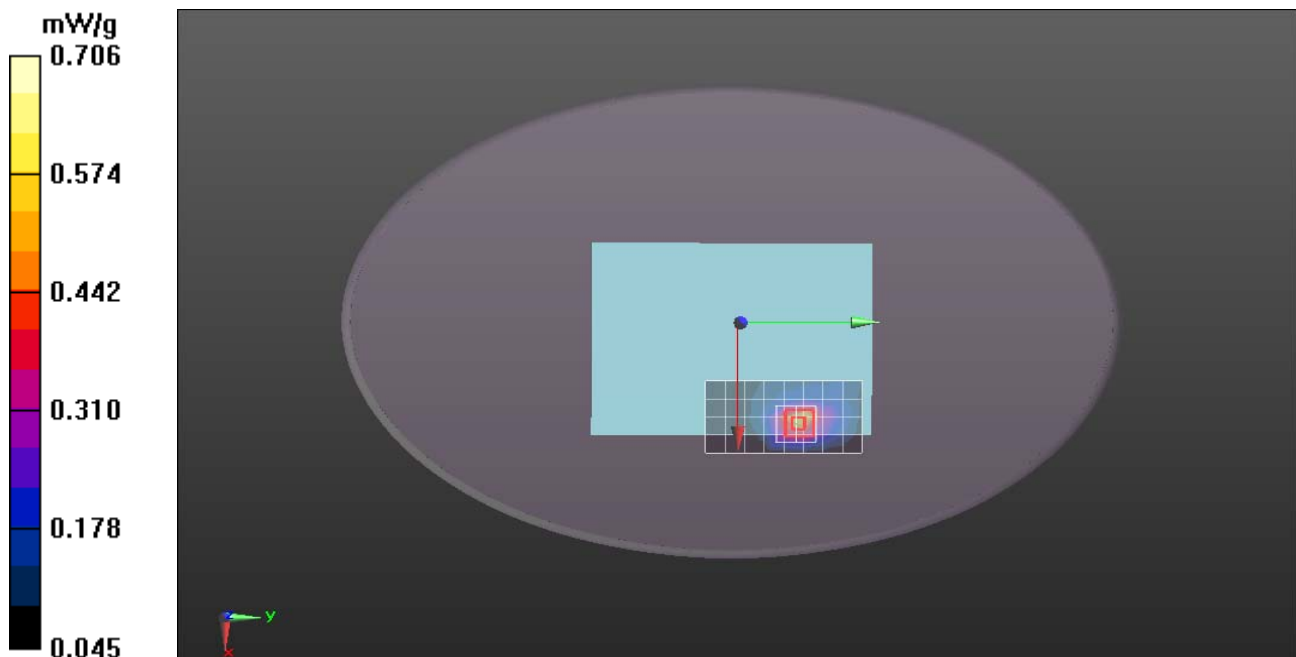

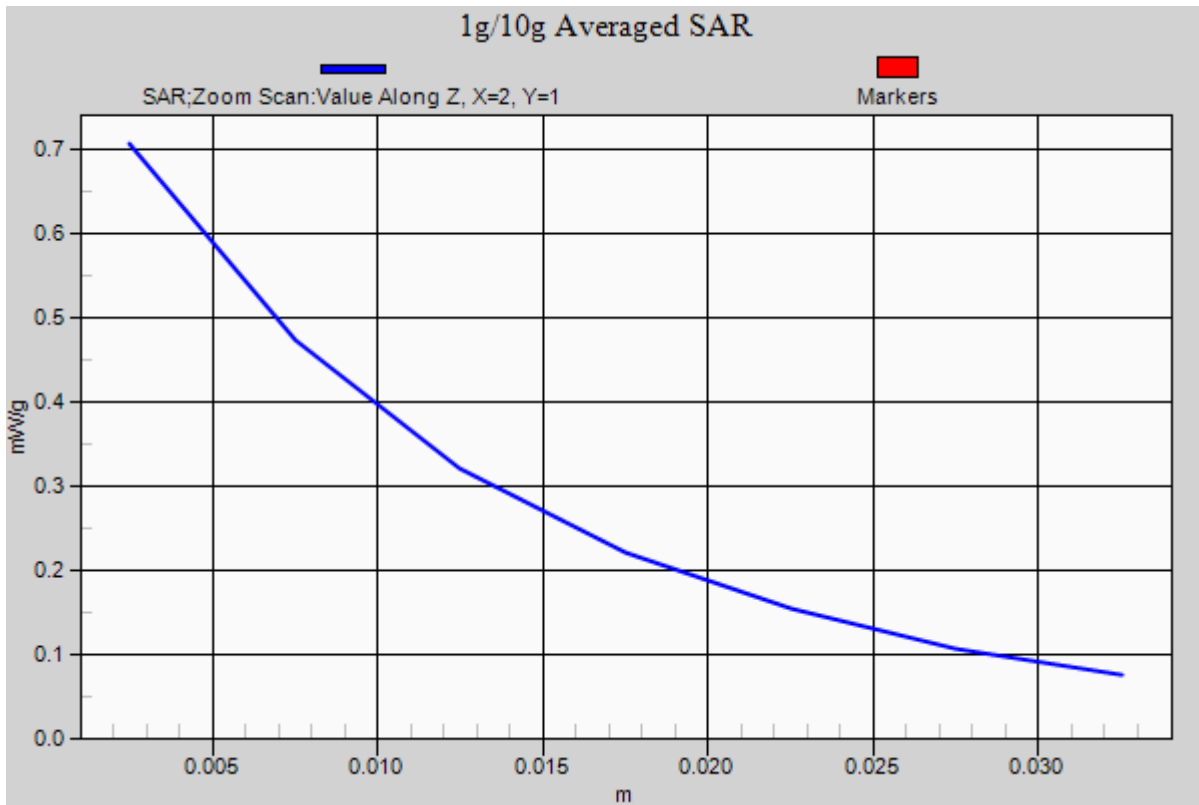



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

WCDMA Band V- Body Worn Up High CH4233

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Communication System PAR: 0 dB;

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C
Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Body Up High CH4233/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.375 mW/g

Band V/Body Up High CH4233/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.621 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.415 mW/g

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.565 mW/g

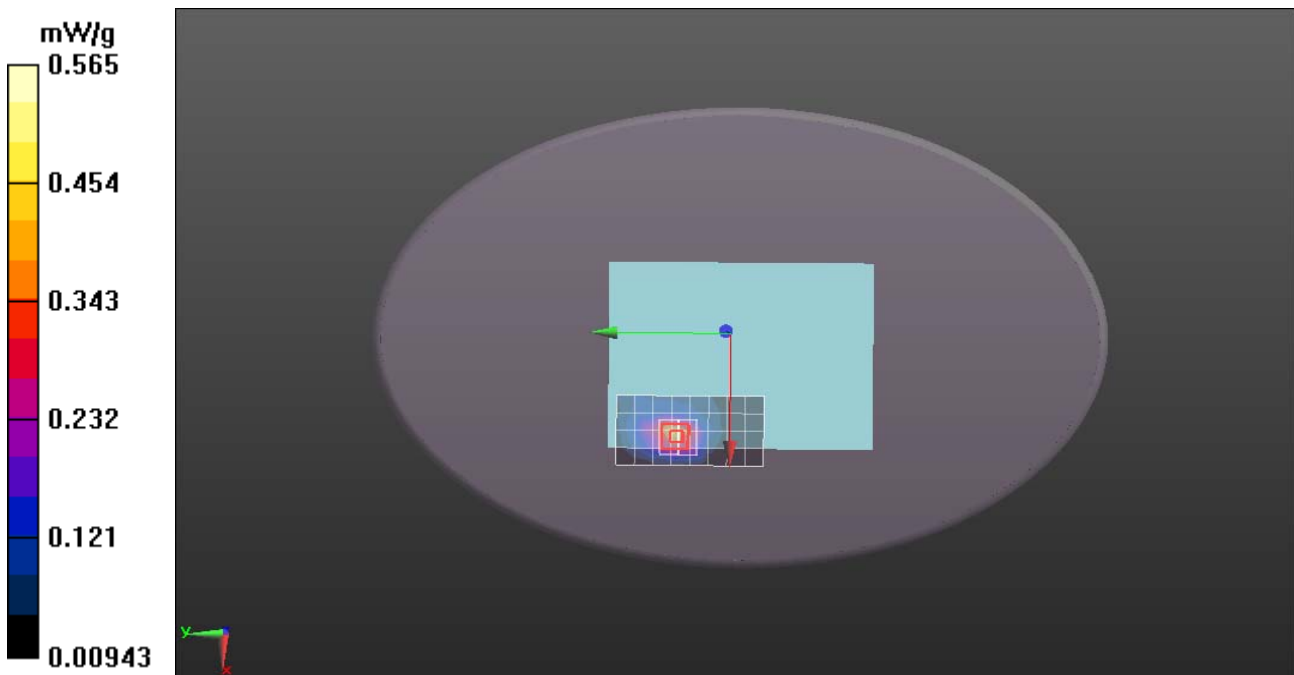



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

WCDMA Band V- Body Worn Down High CH4233

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Body Down High CH4233/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.431 mW/g

Band V/Body Down High CH4233/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.657 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.815 mW/g

SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.308 mW/g

Maximum value of SAR (measured) = 0.780 mW/g

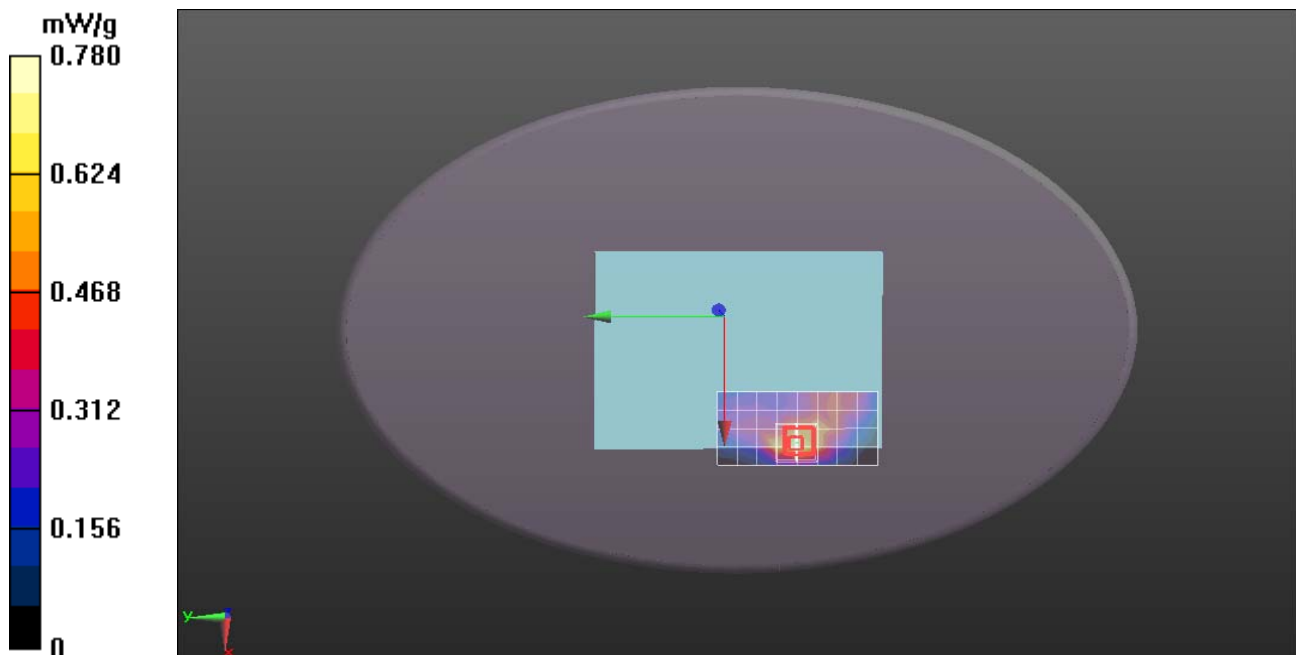

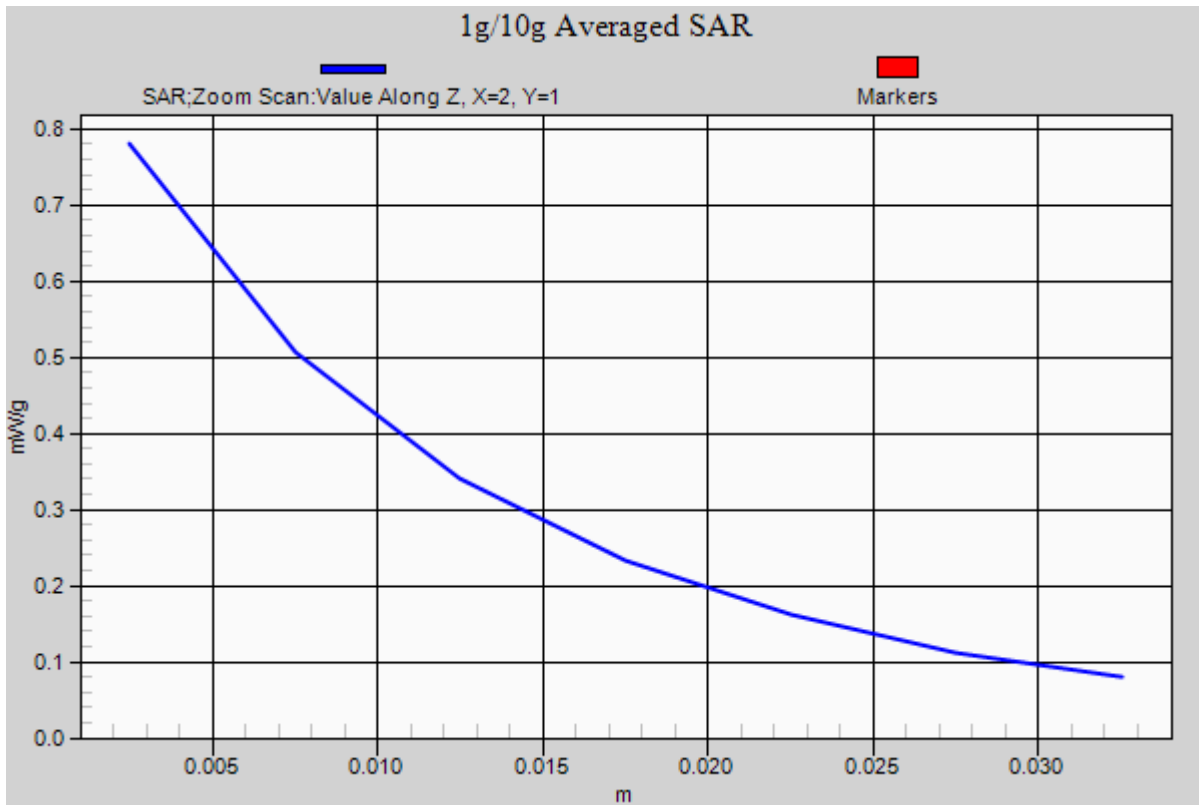



Test Laboratory: Compliance Certification Services Inc.

September 22, 2012

IEEE 802.11b- Body Worn Up Middle CH6

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.948$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

IEEE 802.11b /802.11b Body Up Middle CH6/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.162 mW/g

IEEE 802.11b /802.11b Body Up Middle CH6/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.005 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.297 mW/g

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.167 W/kg

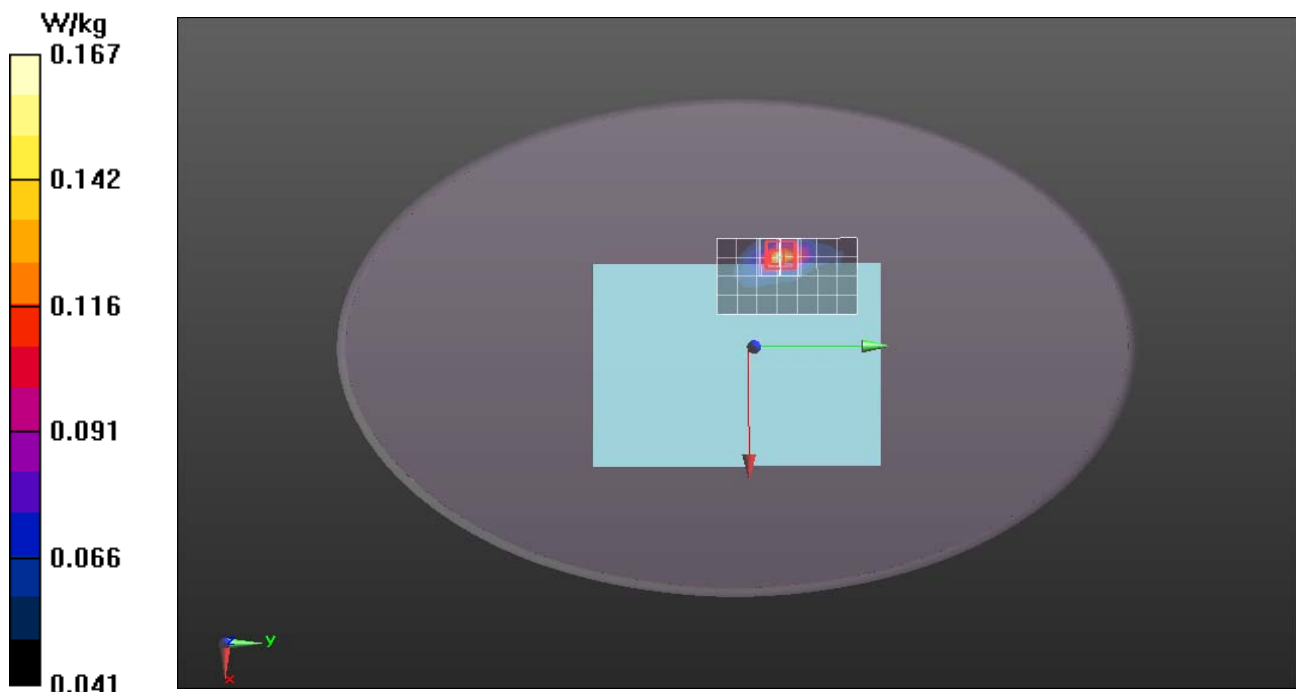



Test Laboratory: Compliance Certification Services Inc.

September 22, 2012

IEEE 802.11b- Body Worn Down Middle CH6

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.948$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

IEEE 802.11b /802.11b Body Down Middle CH6/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.344 mW/g

IEEE 802.11b /802.11b Body Down Middle CH6/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.681 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.566 mW/g

SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.307 W/kg

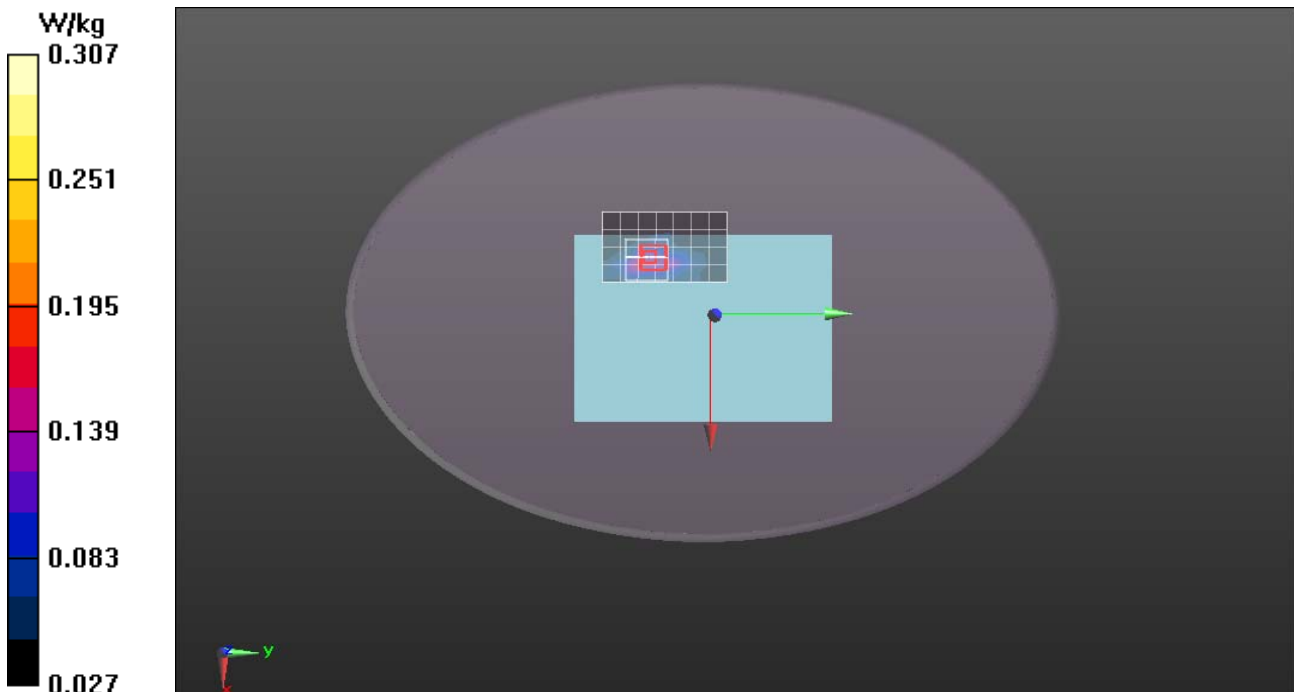

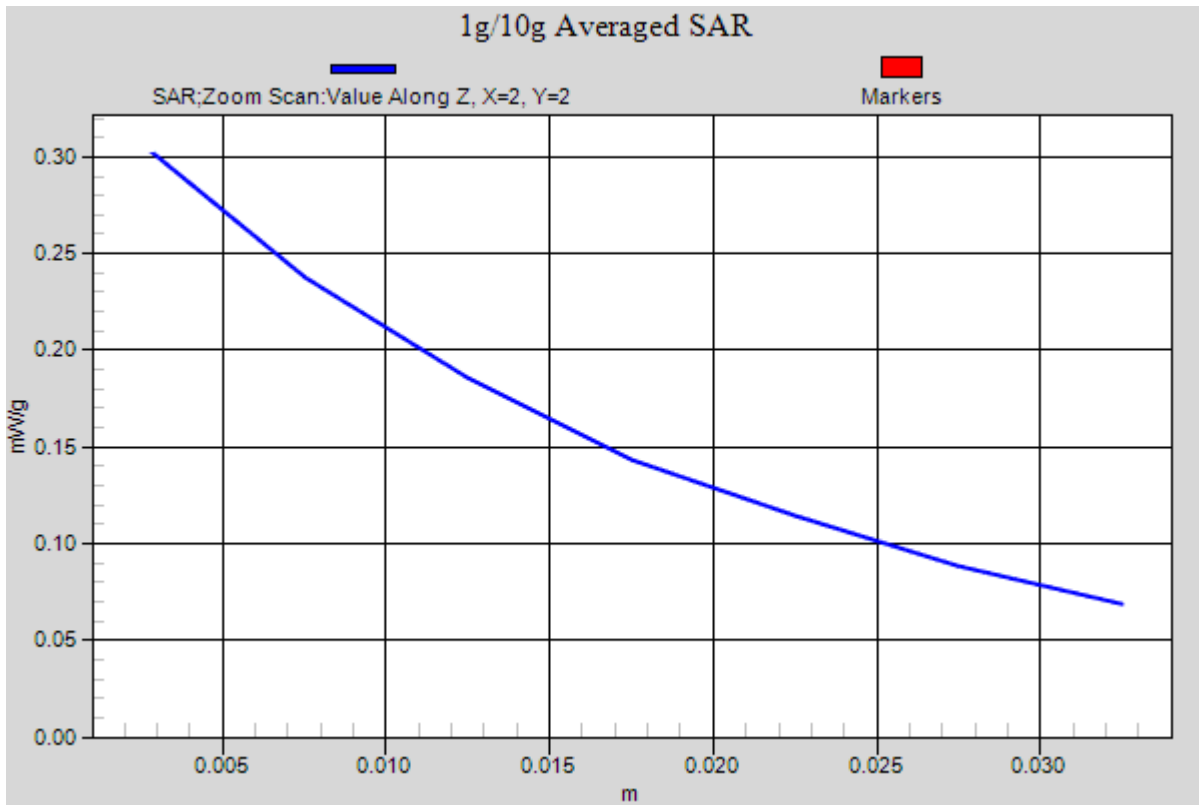



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

GPRS850-Body-Hotspot Up Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 824.2 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Up Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.302 mW/g

GPRS850/ Up Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.303 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.350 mW/g

SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.264 W/kg

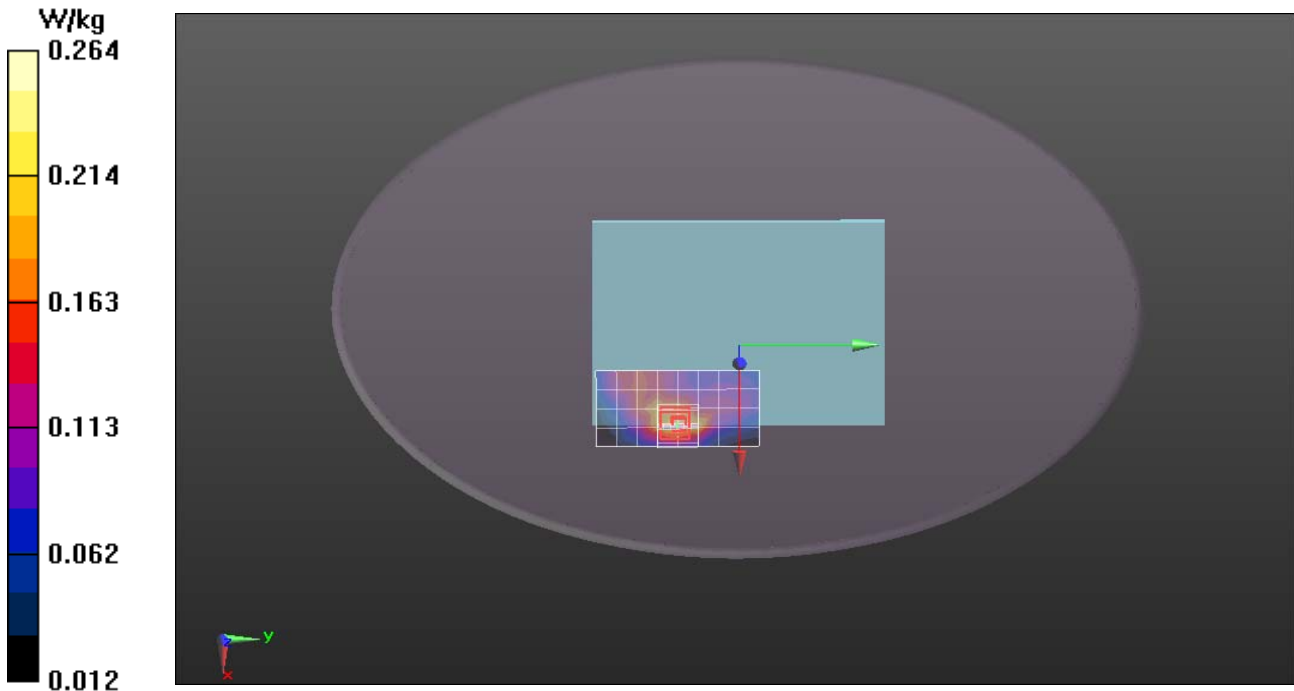



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

GPRS850-Body-Hotspot Down Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 836.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Down Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.498 mW/g

GPRS850/ Down Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.585 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.485 mW/g

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.365 W/kg

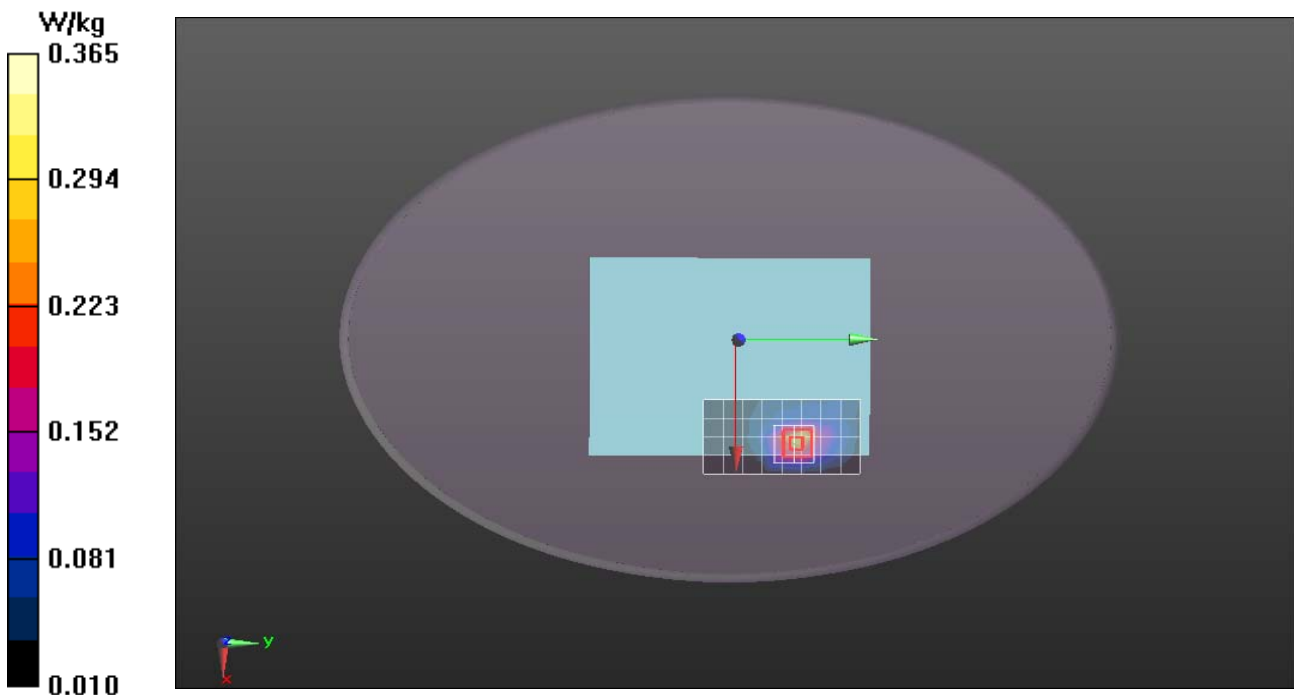



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

GPRS850-Body-Hotspot Bottom Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Bottom Middle CH190/Area Scan (51x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.471 mW/g

GPRS850/ Bottom Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.644 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.301 mW/g

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.240 mW/g

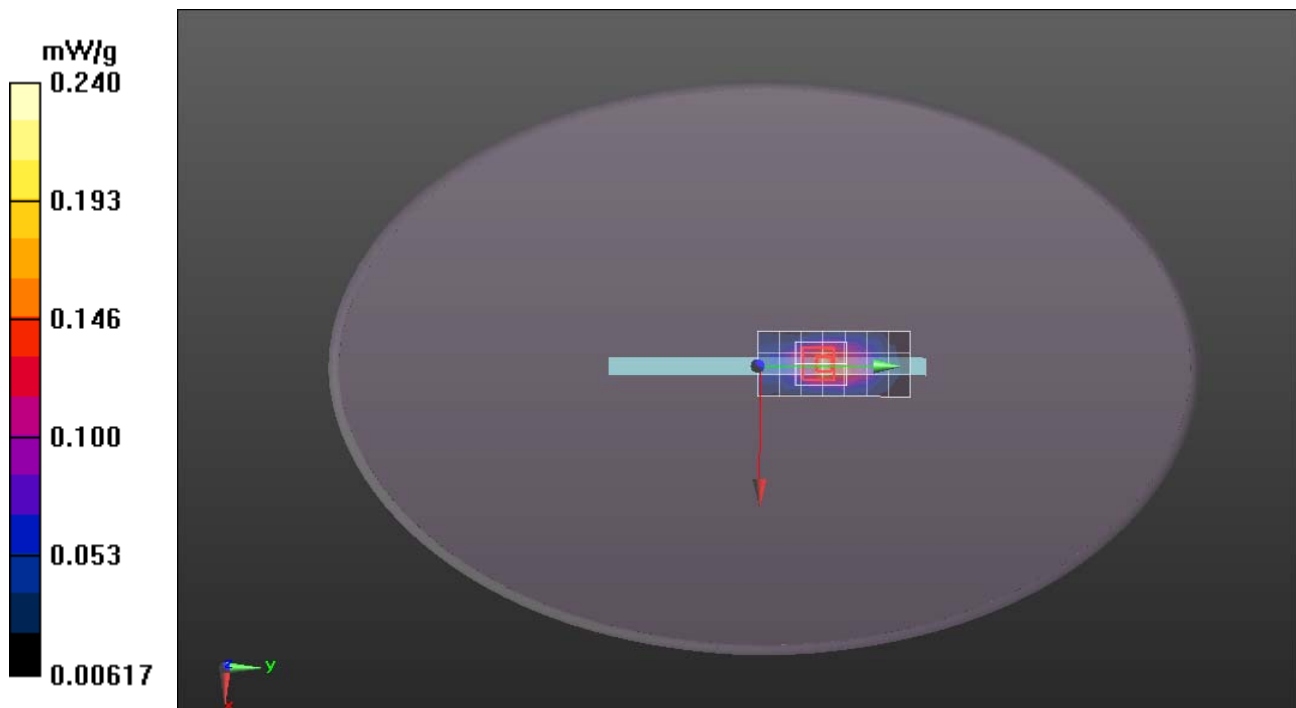



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

GPRS850-Body-Hotspot Left Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Left Middle CH190/Area Scan (81x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.066 mW/g

GPRS850/ Left Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.094 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.158 mW/g

SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.081 W/kg

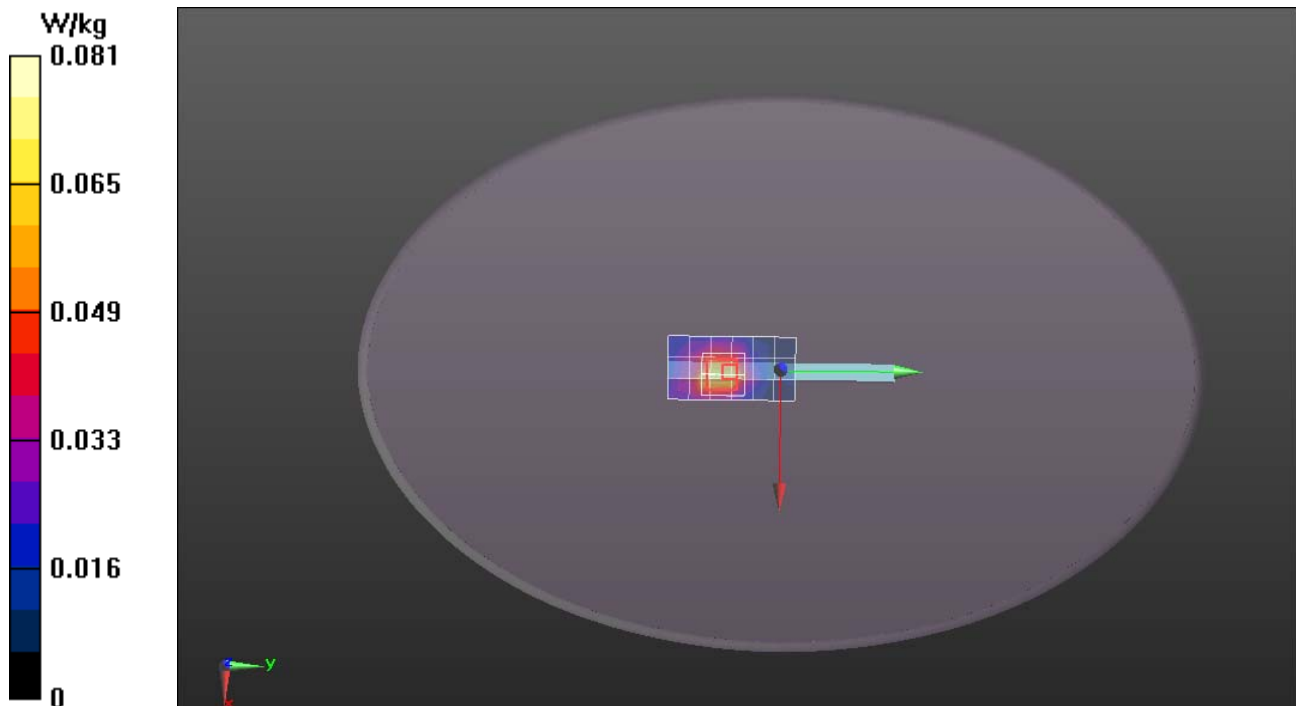



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

EDGE850-Body-Hotspot Up Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic EDGE; Communication System Band: EDGE850 (824.2 - 848.8 MHz);

Frequency: 824.2 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE850/ Up Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.242 mW/g

EDGE850/ Up Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.928 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.119 mW/g

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.111 mW/g

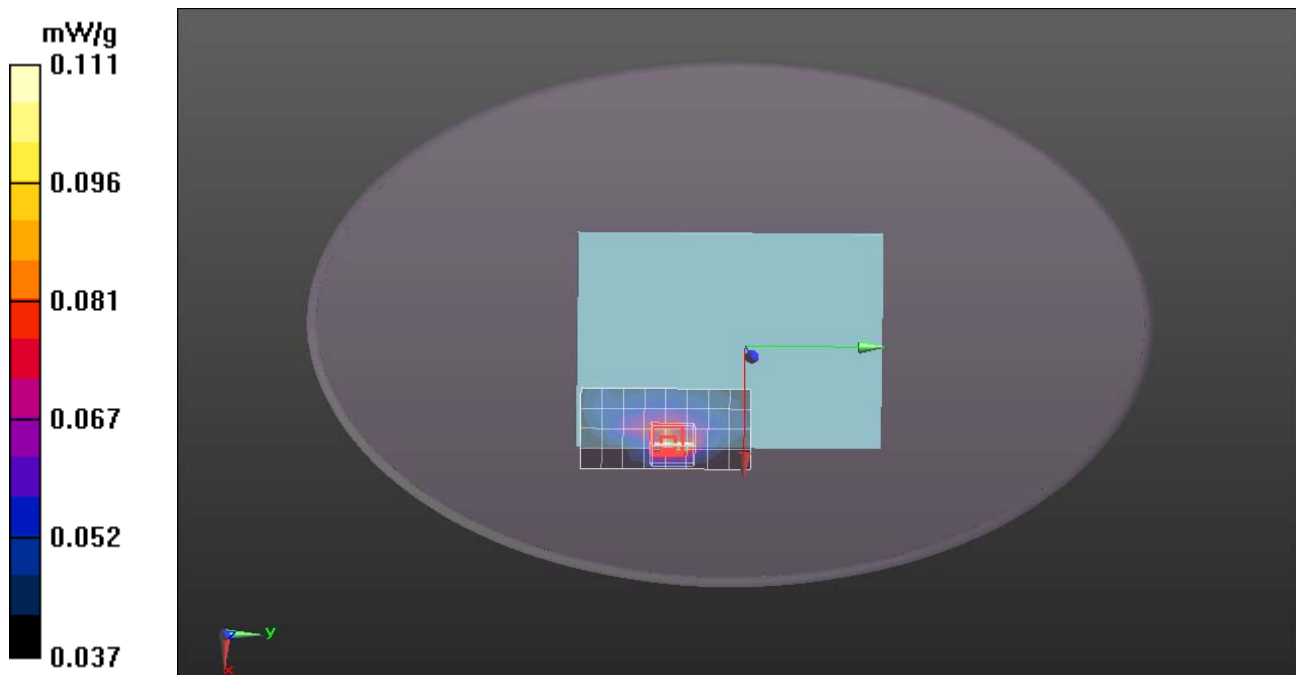



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

EDGE850-Body-Hotspot Down Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic EDGE; Communication System Band: EDGE850 (824.2 - 848.8 MHz);

Frequency: 836.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE850/ Down Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.368 mW/g

EDGE850/ Down Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.585 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.485 mW/g

SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.365 W/kg

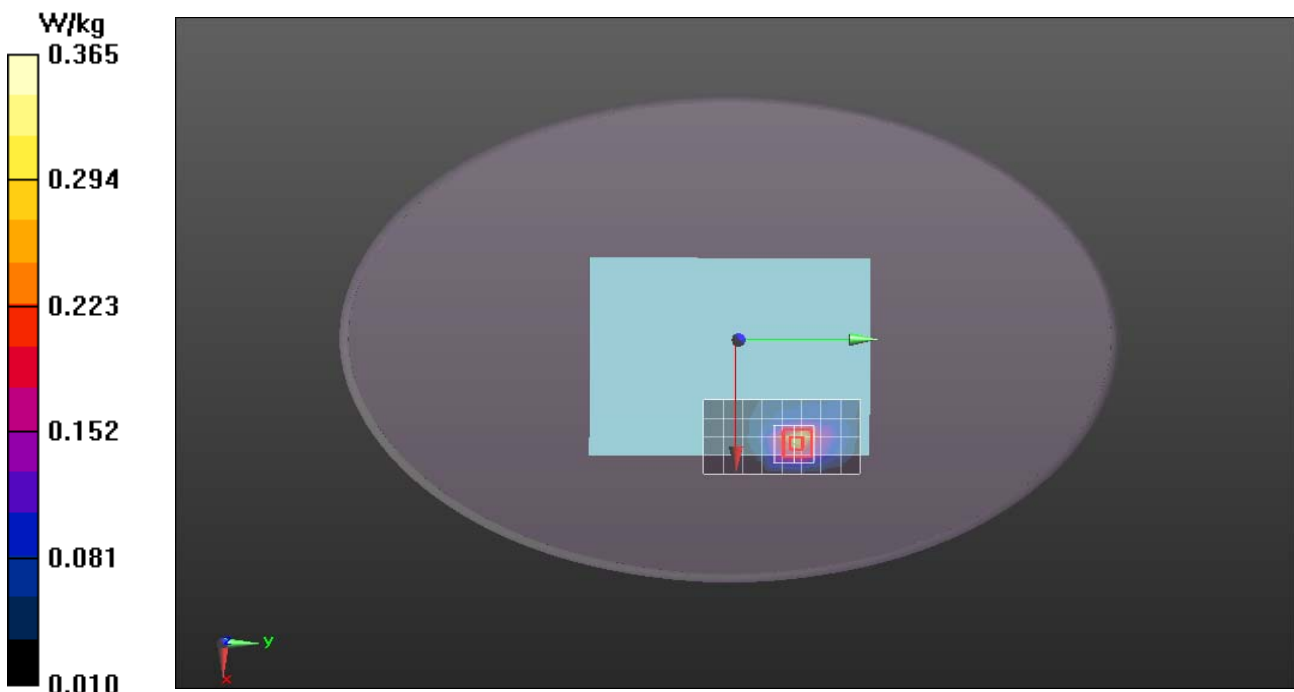



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

EDGE850-Body-Hotspot Bottom Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic EDGE; Communication System Band: EDGE850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE850/ Bottom Middle CH190/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.441 mW/g

EDGE850/ Bottom Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.760 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.128 mW/g

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

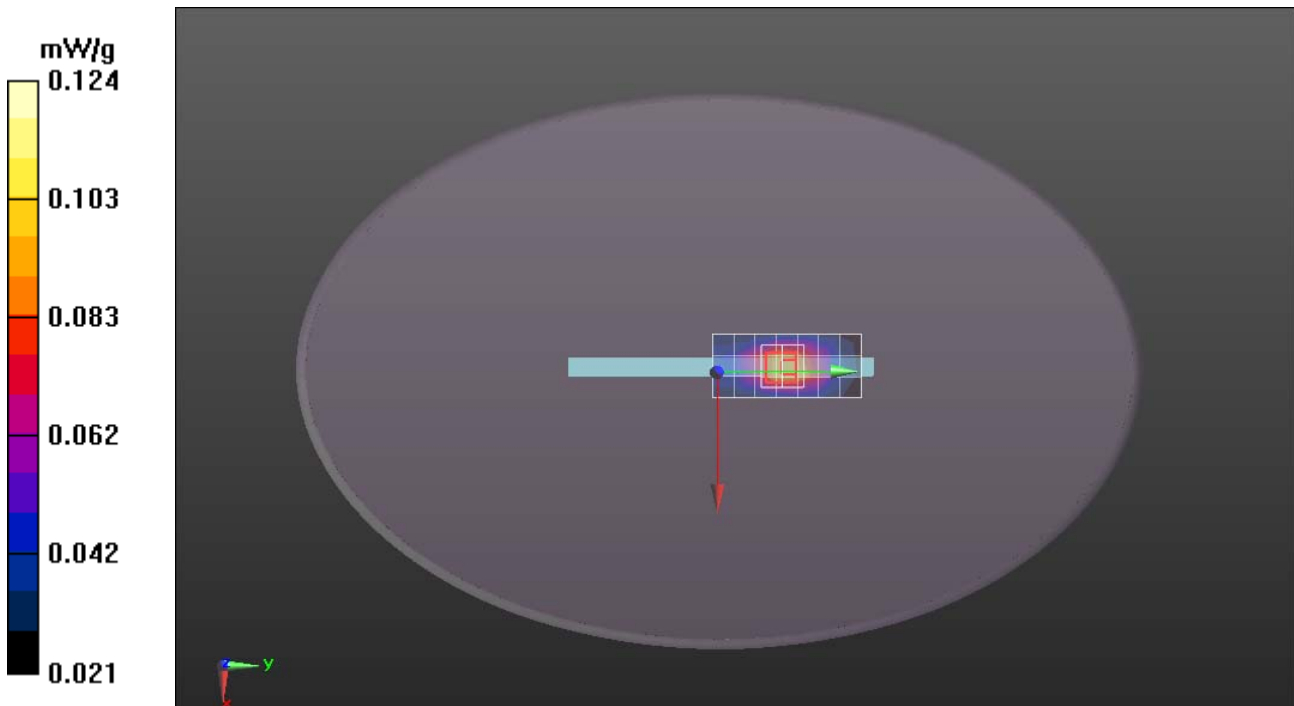



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

EDGE850-Body-Hotspot Left Middle CH190

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: Generic EDGE; Communication System Band: EDGE850 (824.2 - 848.8 MHz);
Frequency: 848.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE850/ Left Middle CH190/Area Scan (81x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.040 mW/g

EDGE850/ Left Middle CH190/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.654 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.047 mW/g

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.021 W/kg

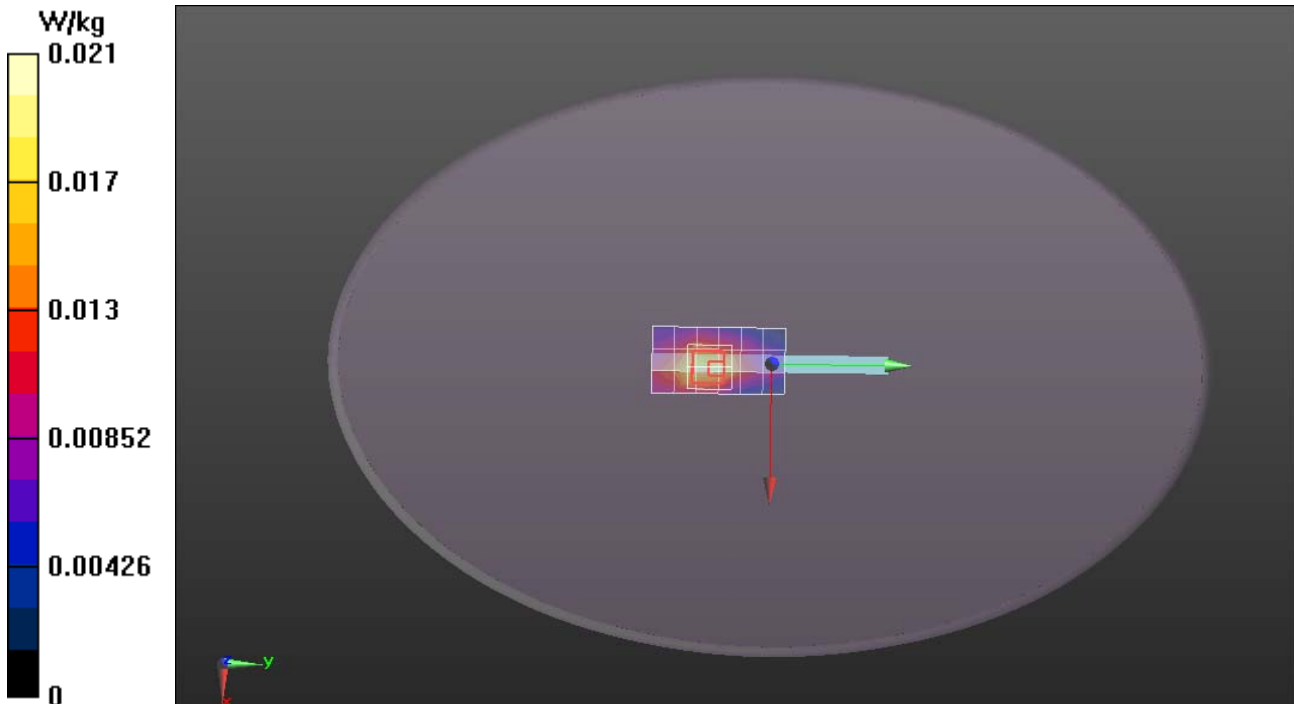



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

GPRS-1900-Body-Hotspot Up Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1880 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Up Middle CH661/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.233 mW/g

GPRS1900/ Up Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.949 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.143 mW/g

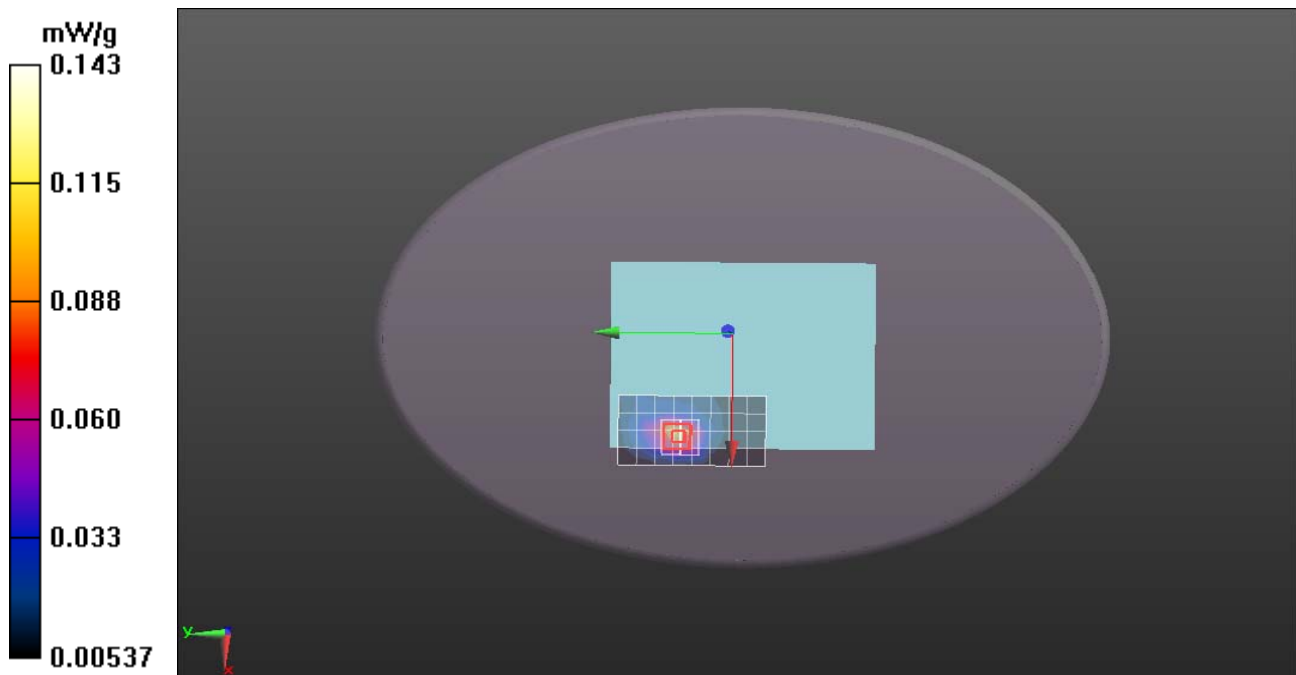



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

GPRS-1900-Body-Hotspot Down Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1880 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Down Middle CH661/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.312 mW/g

GPRS1900/ Down Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.255 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.231 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.290 mW/g

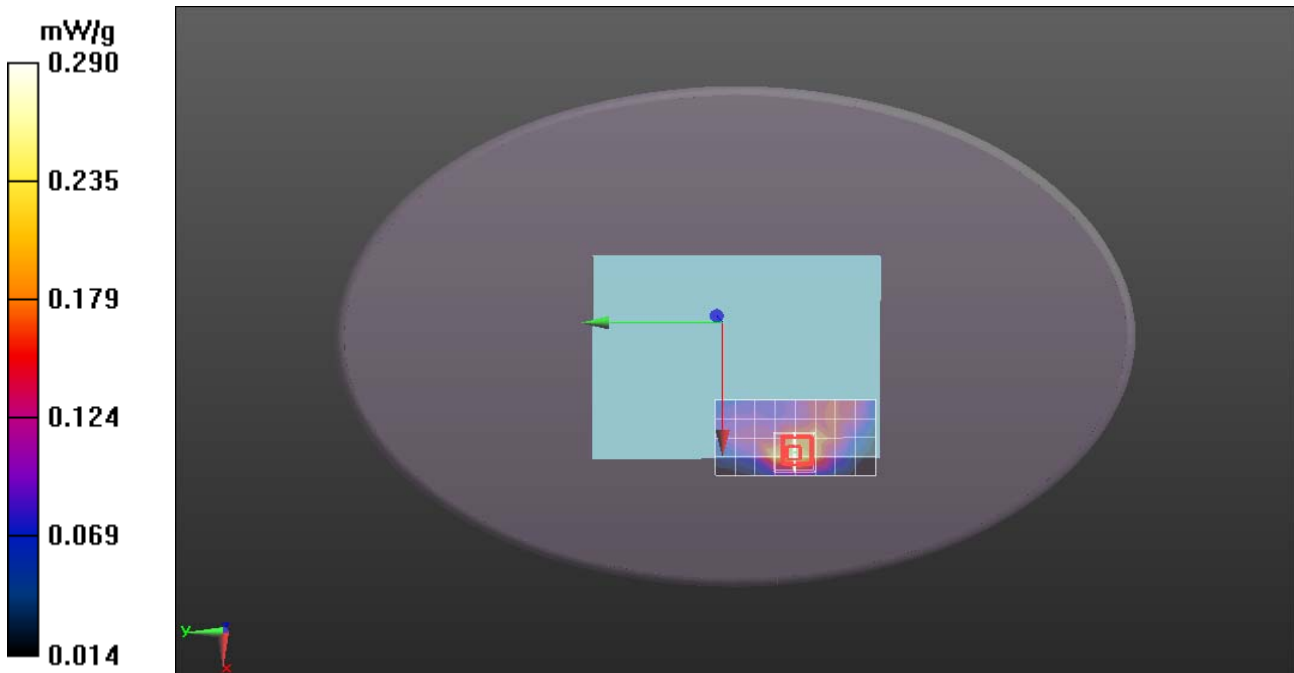



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

GPRS-1900-Body-Hotspot Bottom Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1880 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Bottom Middle CH661/Area Scan (51x31x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.331 mW/g

GPRS1900/ Bottom Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.067 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.277 mW/g

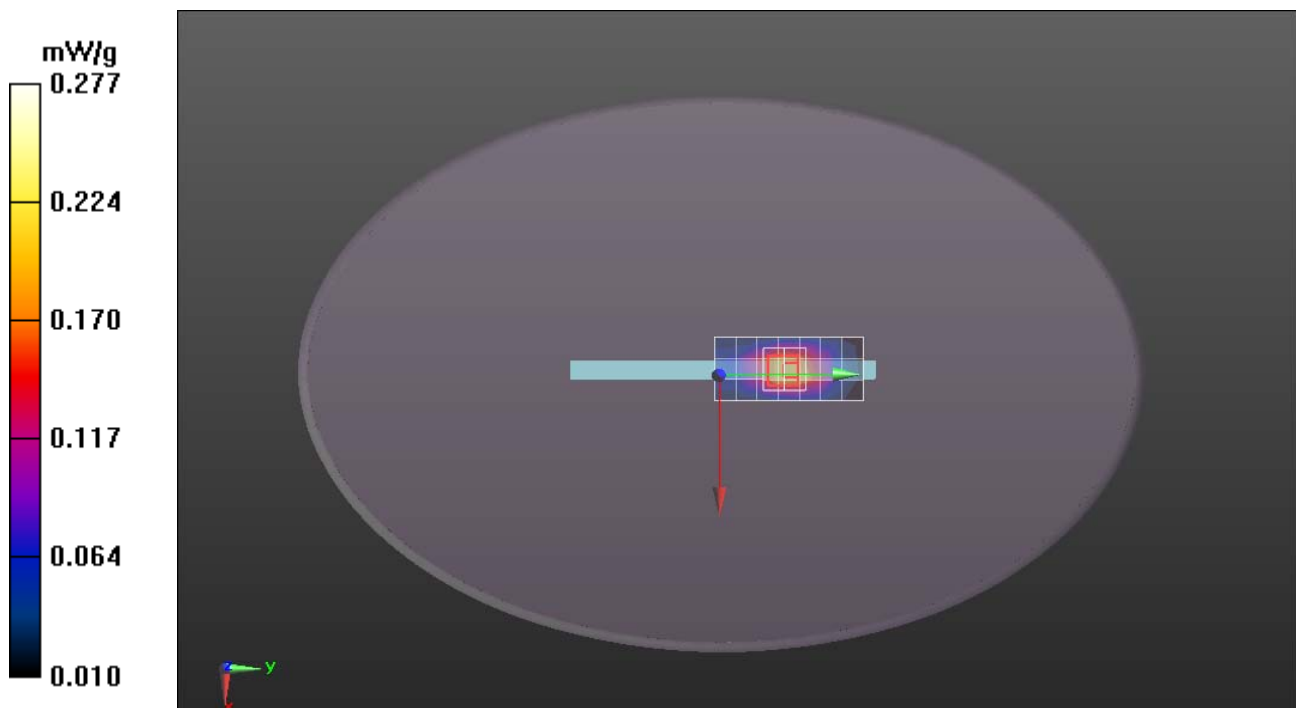



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

GPRS 1900-Body-Hotspot Left Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1880 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Left Middle CH661/Area Scan (81x31x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.032 mW/g

GPRS1900/ Left Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.378 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.090 mW/g

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.0378 W/kg

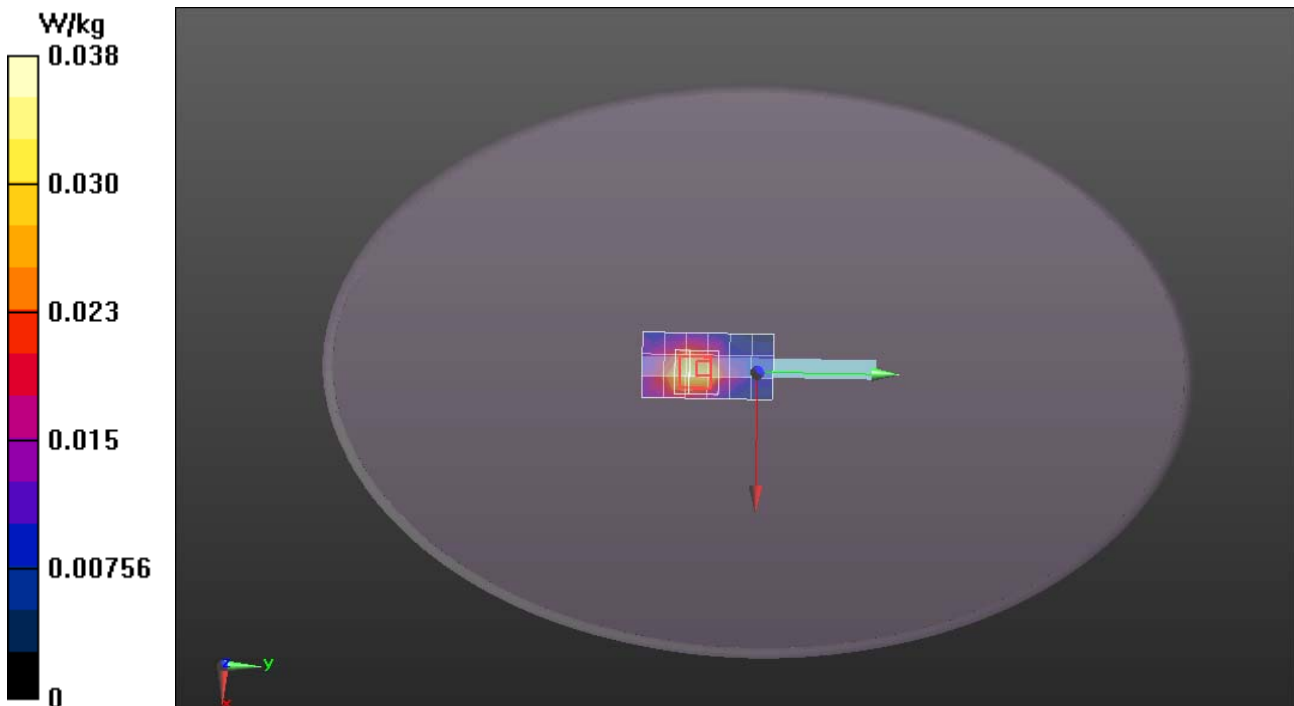



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

EDGE-1900-Body-Hotspot Up Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: EDGE; Communication System Band: EDGE 1900 (1850.2 - 1909.8MHz);
Frequency: 1880 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/ Up Middle CH661/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.343 mW/g

EDGE1900/ Up Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.949 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.537 mW/g

SAR(1 g) = 0.345 mW/g; SAR(10 g) = 0.187 mW/g

Maximum value of SAR (measured) = 0.472 W/kg

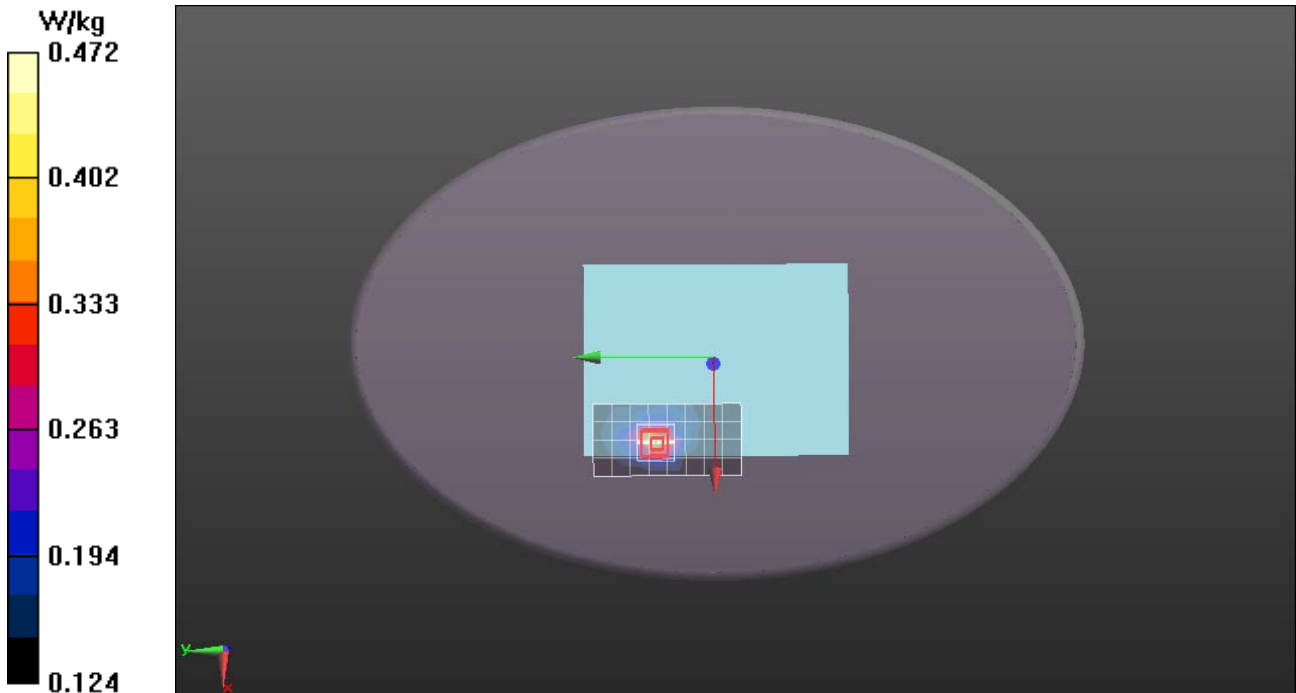



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

EDGE-1900-Body-Hotspot Down Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: EDGE; Communication System Band: EDGE 1900 (1850.2 - 1909.8MHz);

Frequency: 1880 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/ Down Middle CH661/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.492mW/g

EDGE1900/ Down Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.355 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.702 mW/g

SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.511 W/kg

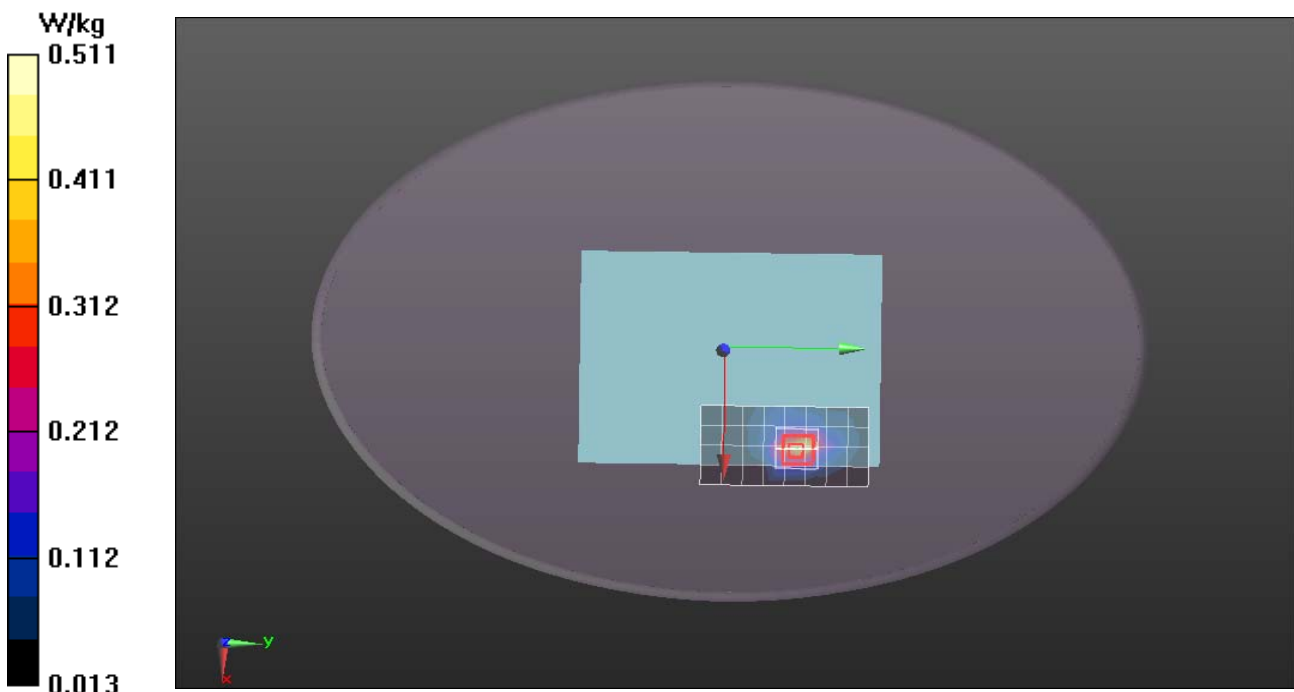



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

EDGE-1900-Body-Hotspot Bottom Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: EDGE; Communication System Band: EDGE 1900 (1850.2 - 1909.8MHz);

Frequency: 1880 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/ Bottom Middle CH661/Area Scan (51x31x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.343 mW/g

EDGE1900/ Bottom Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.367 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.268 mW/g

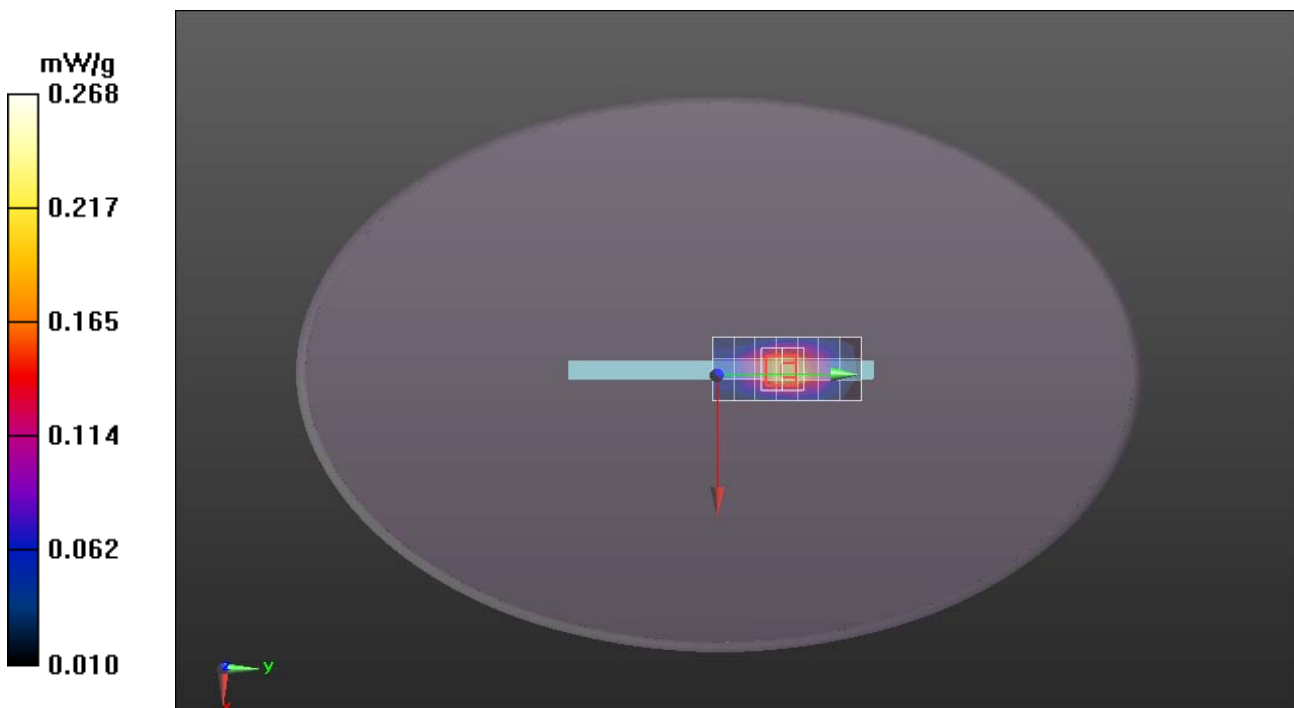



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

EDGE 1900-Body-Hotspot Left Middle CH661

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: EDGE; Communication System Band: EDGE 1900 (1850.2 - 1909.8MHz);

Frequency: 1880 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/ Left Middle CH661/Area Scan (81x31x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.218 mW/g

EDGE1900/ Left Middle CH661/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.372 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.042 mW/g

SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.021 W/kg

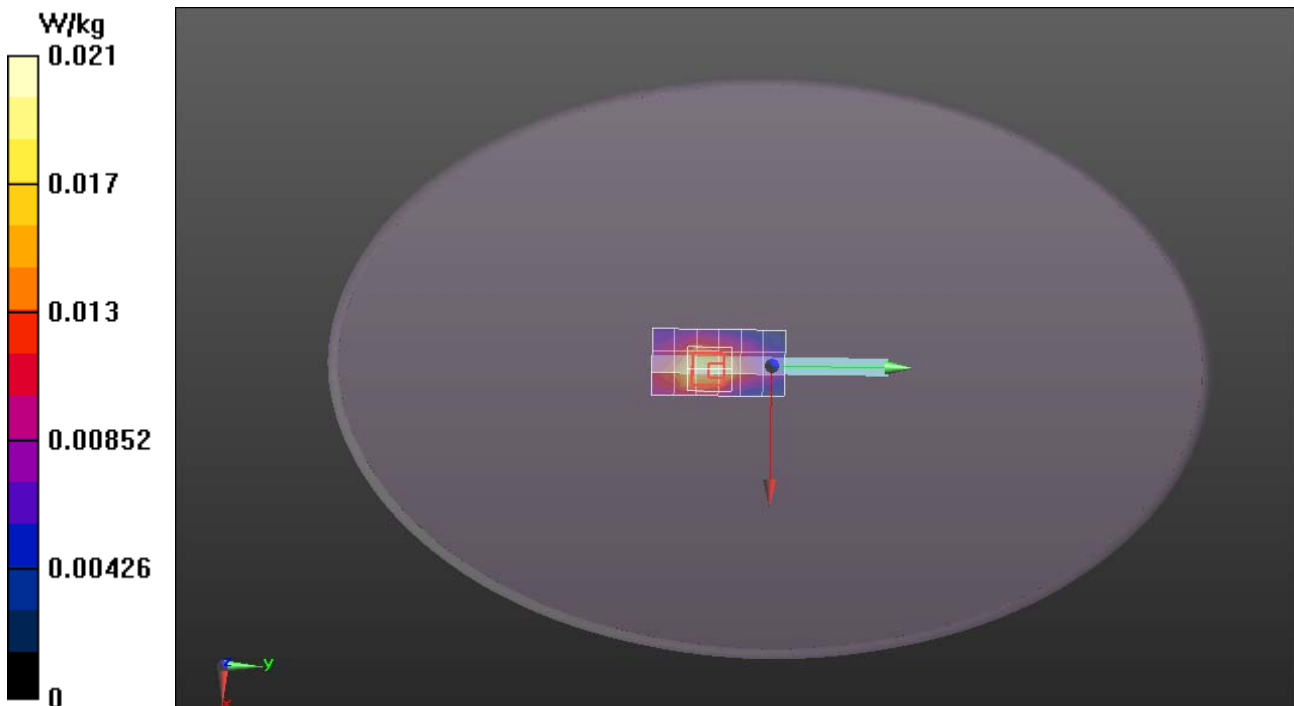



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

WCDMA Band II Body-Hotspot Up Middle CH9400

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II /Body Up Middle CH9400/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.500 mW/g

WCDMA Band II /Body Up Middle CH9400/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.363 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

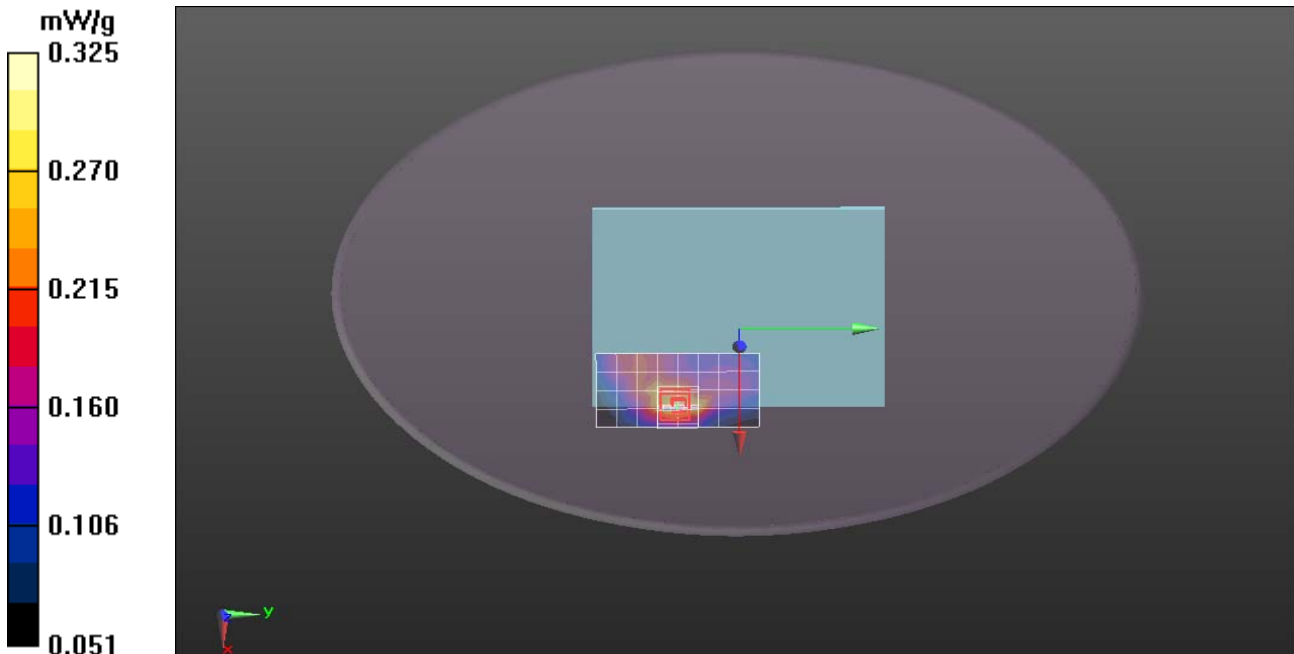



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

WCDMA Band II Body-Hotspot Down Middle CH9400

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DAS52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II /Body Down Middle CH9400/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.608 mW/g

WCDMA Band II /Body Down Middle CH9400/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.426 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.498 mW/g

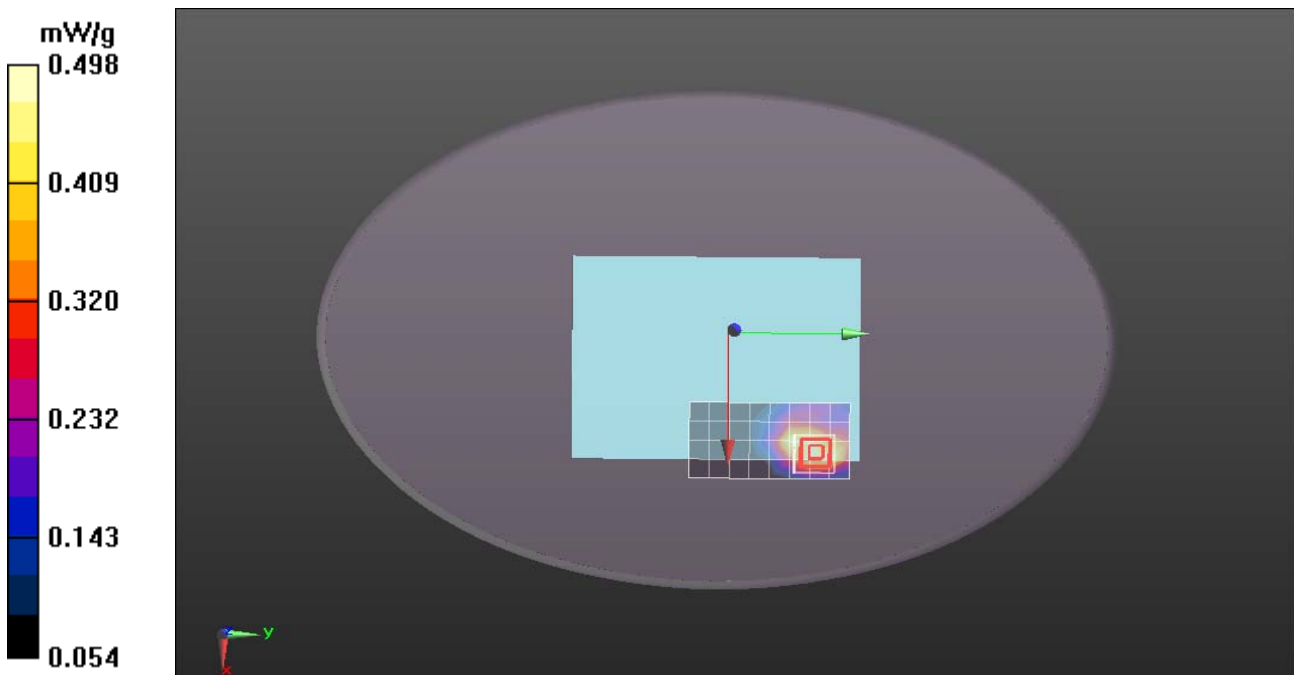



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

WCDMA Band II Body-Hotspot Bottom Middle CH9400

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.527 \text{ mho/m}$; $\epsilon_r = 52.807$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II/ Bottom Middle CH9400/Area Scan (51x31x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.498 mW/g

WCDMA Band II/ Bottom Middle CH9400/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.539 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 0.447 mW/g

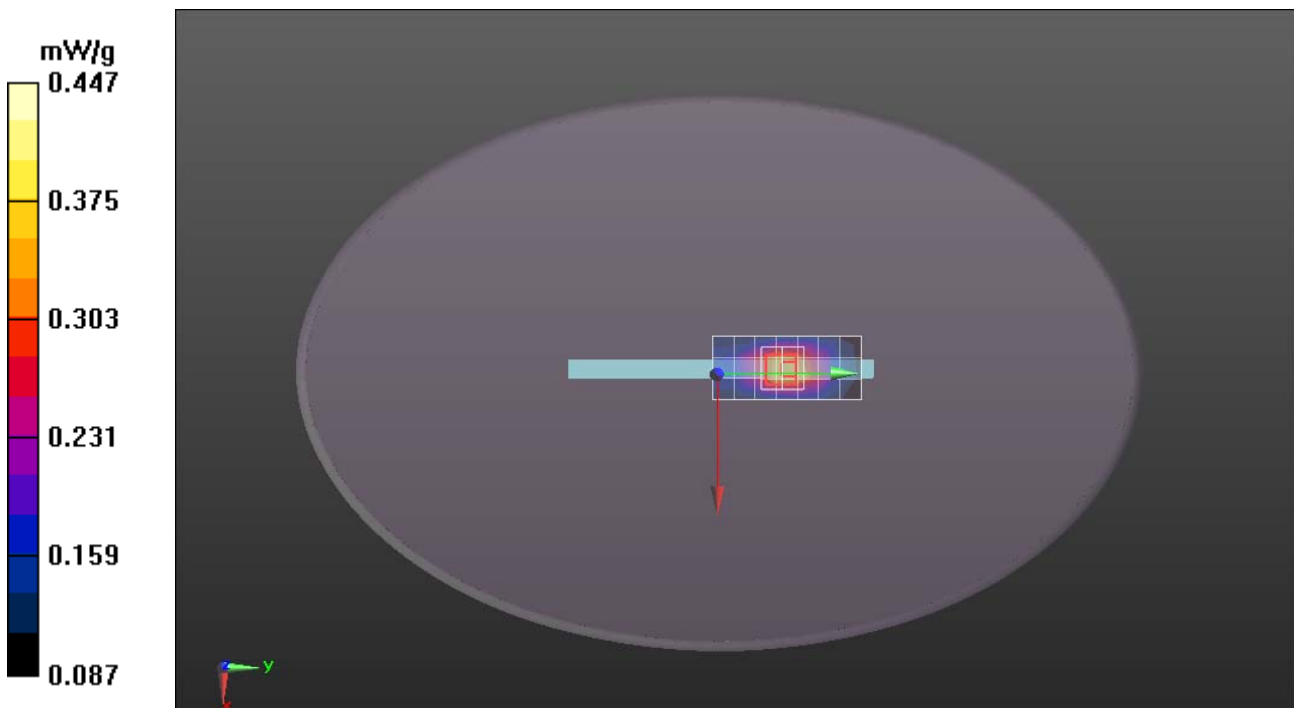



Test Laboratory: Compliance Certification Services Inc.

September 21, 2012

WCDMA Band II Body-Hotspot Left Middle CH9400

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II/ Left Middle CH9400/Area Scan (81x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.379 mW/g

WCDMA Band II/ Left Middle CH9400/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.276 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.394 mW/g

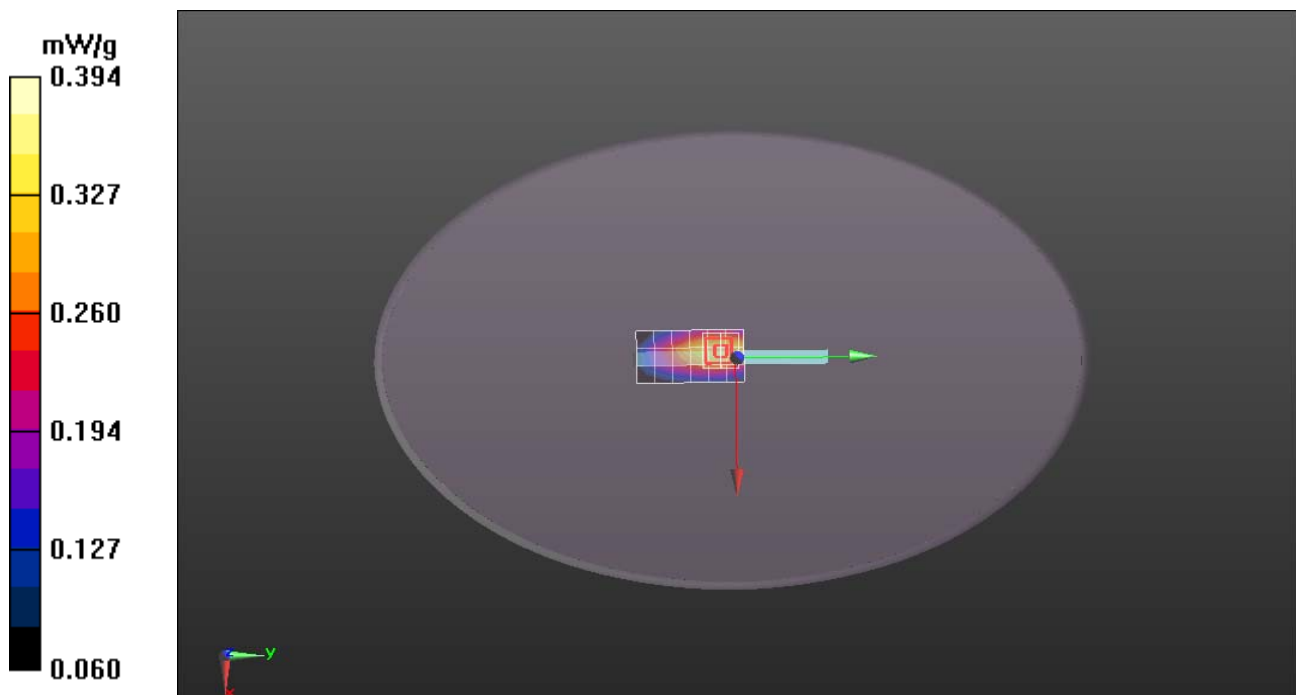



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

WCDMA Band V Body-Hotspot Up High CH4233

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C
Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band V /Body Up High CH4233/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.600 mW/g

WCDMA Band V /Body Up High CH4233/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.363 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

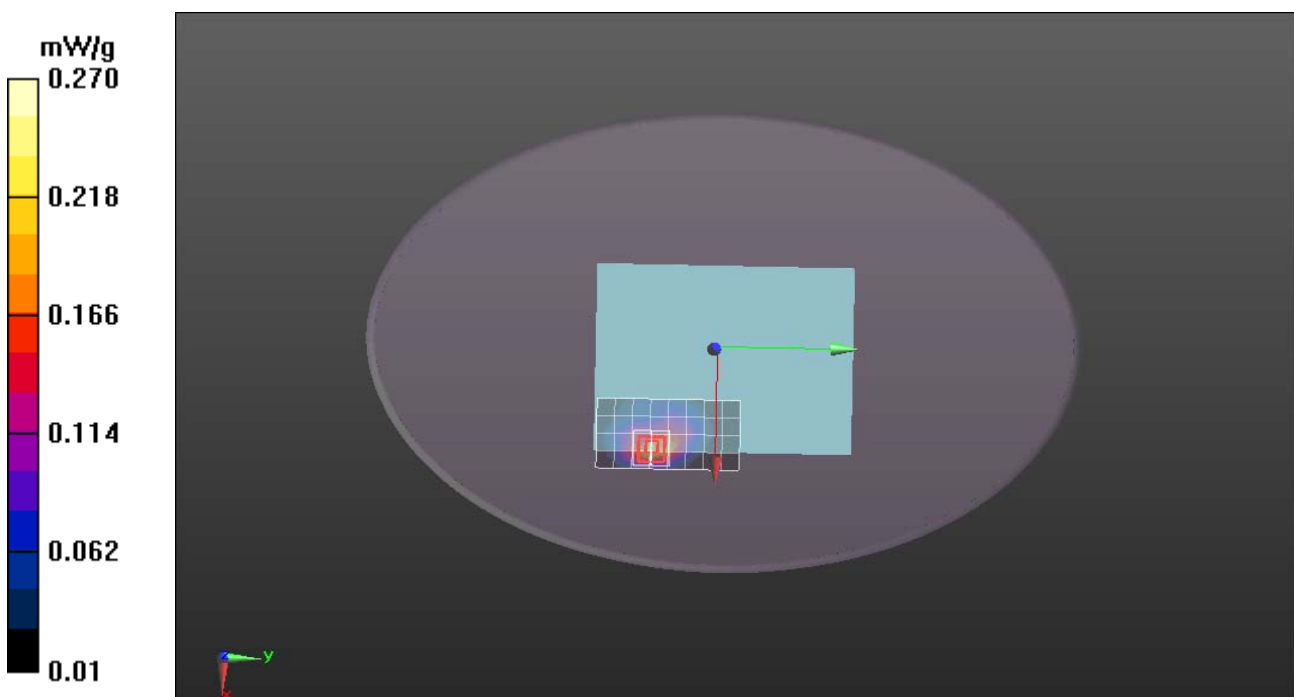



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

WCDMA Band V Body-Hotspot Down High CH4233

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band V /Body Down High CH4233/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.608 mW/g

WCDMA Band V /Body Down High CH4233/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.426 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 0.522 mW/g

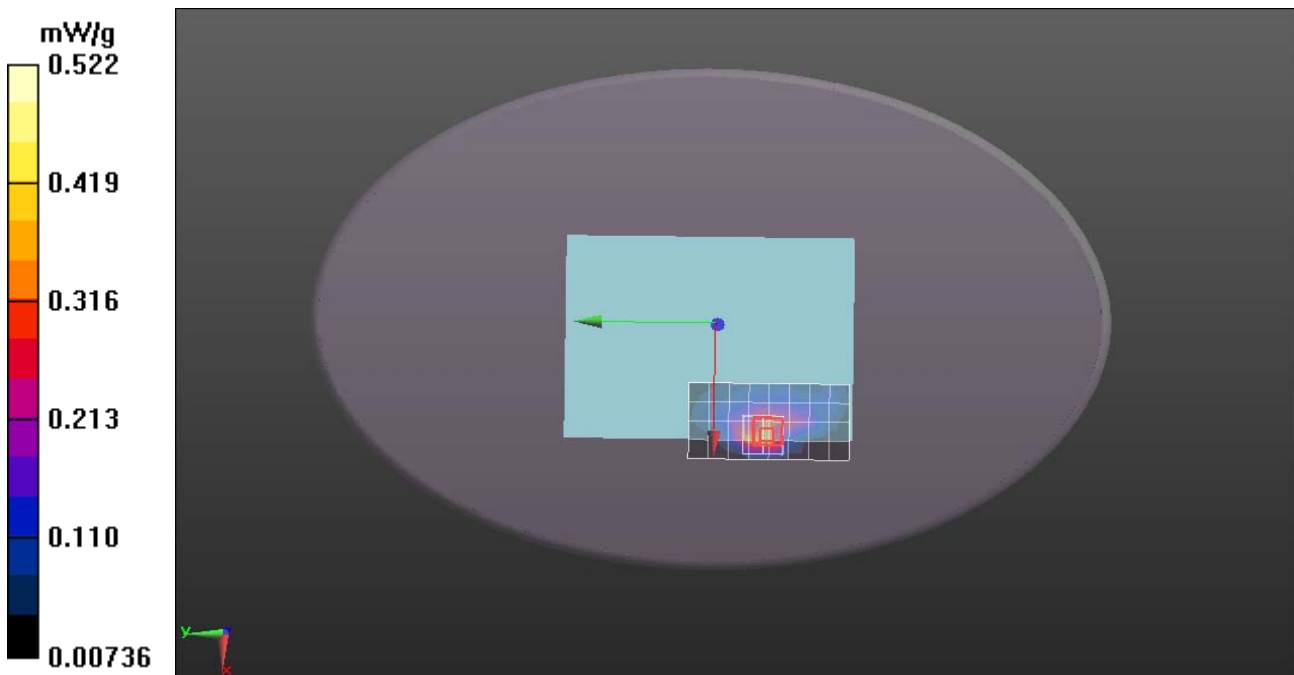



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

WCDMA Band V Body-Hotspot Bottom High CH4233

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band V/ Bottom High CH4233/Area Scan (51x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.572 mW/g

WCDMA Band V/ Bottom High CH4233/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.939 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.401 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.491 mW/g

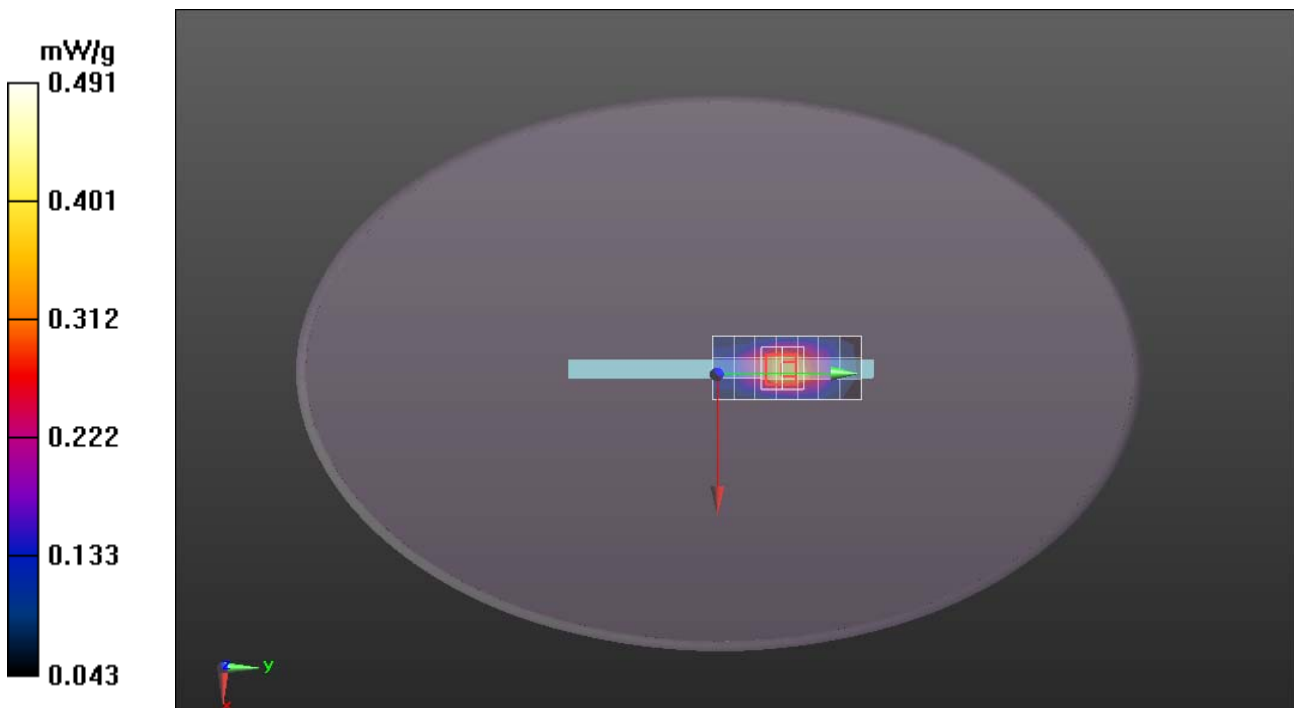



Test Laboratory: Compliance Certification Services Inc.

September 20, 2012

WCDMA Band V Body-Hotspot Left High CH4233

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C
Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.07, 9.07, 9.07); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band V/ Left High CH4233/Area Scan (81x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.383 mW/g

WCDMA Band V/ Left High CH4233/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.276 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.424 mW/g

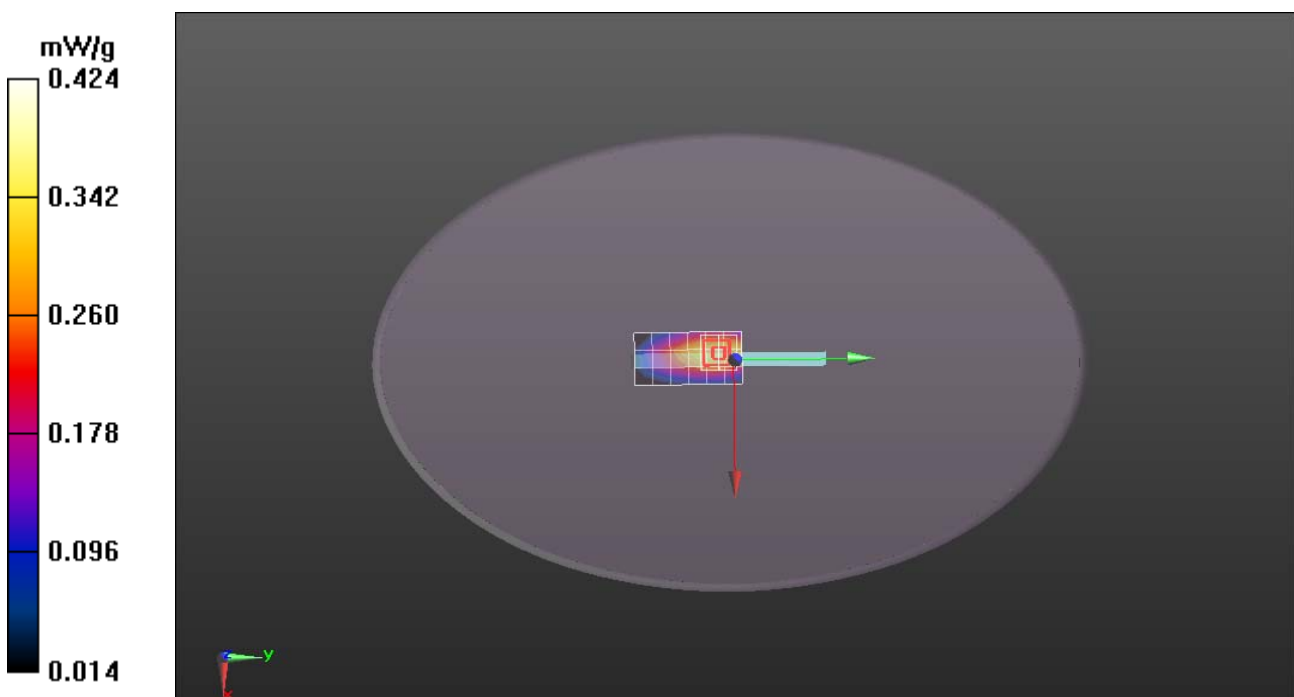



Test Laboratory: Compliance Certification Services Inc.

September 22, 2012

IEEE 802.11b Body-Hotspot UP Middle CH6

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.978$ mho/m; $\epsilon_r = 53.231$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/UP Middle CH7/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 mW/g

IEEE 802.11b/UP Middle CH7/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.022 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.192 mW/g

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.114 W/kg

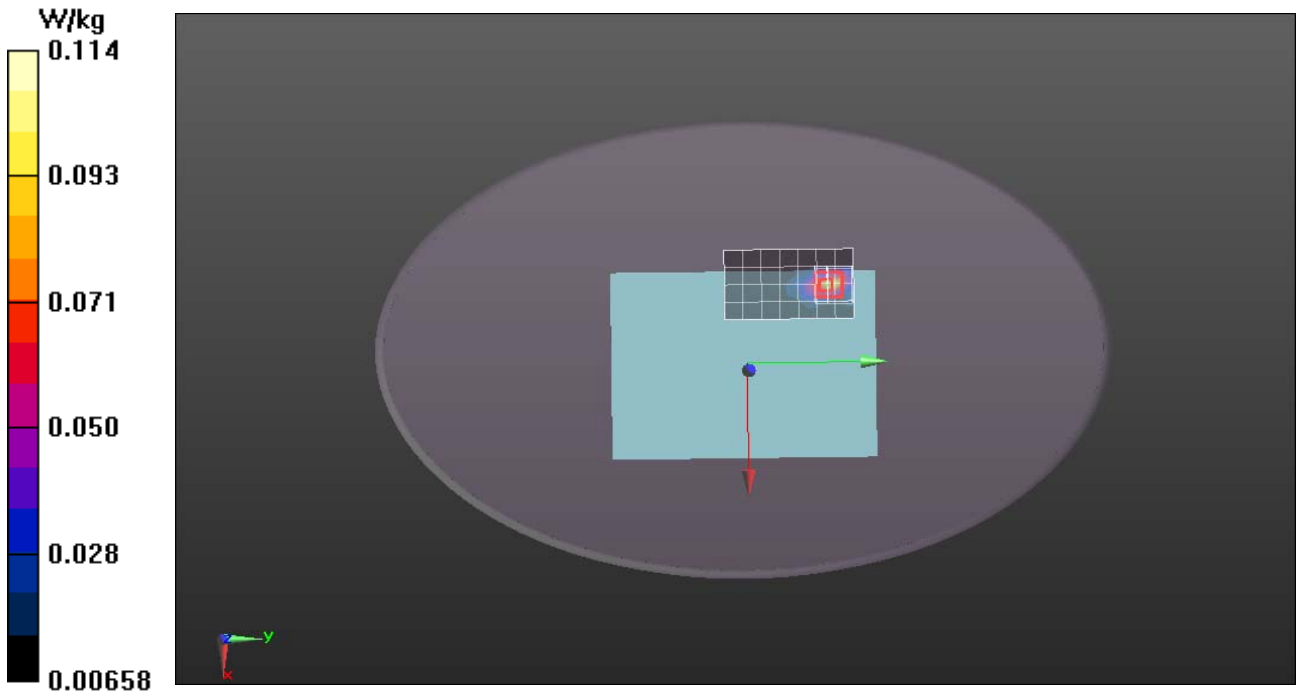



Test Laboratory: Compliance Certification Services Inc.

September 22, 2012

IEEE 802.11b Body-Hotspot Down Middle CH6

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 52.82$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Down Middle CH6/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.138 mW/g

IEEE 802.11b/ Down Cheek Middle CH6/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.372 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.316 mW/g

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.152 W/kg

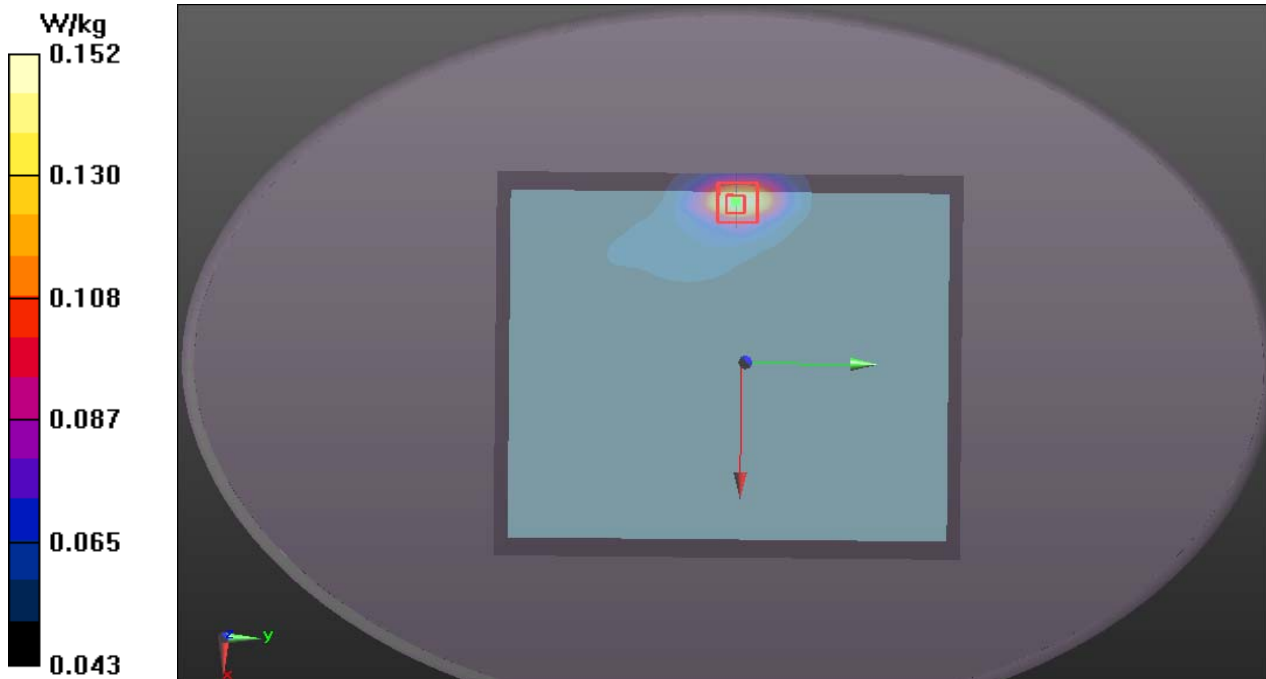



Test Laboratory: Compliance Certification Services Inc.

September 22, 2012

IEEE 802.11b Body-Hotspot Top Middle CH6

DUT: Tablet PC; Type: PTT-826D; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 53.21$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 - SD 000 D04 BJ - SN:1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Top Middle CH7/Area Scan (51x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.144 mW/g

IEEE 802.11b/ Top Middle CH7/ Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.022 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.152 mW/g

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.114 W/kg

