

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEMO09090537201

Email: sgs_internet_operations@sgs.com Page: 1 of 62

FCC REPORT

Application No: SZEMO090905372RF

Applicant: Shenzhen Fuyeda Industry Development Corp.,Ltd

Product Name: MOUSE

Operation Frequency: 2.402GHz to 2.480GHz

FCC ID: V4P-MS175BT

Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2008

Date of Receipt: 14 September 2009

Date of Test: 15 to 24 September 2009

Date of Issue: 25 September 2009

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO09090537201

Page: 2 of 62

2 Contents

			Page
2	cc	ONTENTS	
3		EST SUMMARY	
4	GE	ENERAL INFORMATION	4
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF E.U.T.	4
	4.3	E.U.T OPERATION MODE	
	4.4	TEST FACILITY	7
	4.5	TEST LOCATION	
	4.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.7	TEST INSTRUMENTS LIST	8
5	TE	EST RESULTS AND MEASUREMENT DATA	9
	5.1	ANTENNA REQUIREMENT:	9
	5.2	CONDUCTED PEAK OUTPUT POWER	
	5.3	20DB OCCUPY BANDWIDTH	16
	5.4	CARRIER FREQUENCIES SEPARATION	22
	5.5	HOPPING CHANNEL NUMBER	
	5.6	DWELL TIME	32
	5.7	BAND EDGE	39
	5.8	RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	46
	5.9	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	56
	5.10	RADIATED EMISSION	
	5.1	10.1 Radiated emission below 1GHz	59
	5.1	10.2 Transmitter emission above 1GHz	60-62



Report No.: SZEMO09090537201

Page: 3 of 62

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Passed
Conducted Peak Output Power	15.247 (b)(1)	Passed
20dB Occupied Bandwidth	15.247 (a)(1)	Passed
Carrier Frequencies Separation	15.247 (a)(1)	Passed
Hopping Channel Number	15.247 (b)	Passed
Dwell Time	15.247 (a)(1)	Passed
Pseudo random Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Passed
Radiated Emission	15.205/15.209	Passed
Band Edge	15.247(d)	Passed
RF Antenna Conducted spurious emissions	15.247(d)	Passed

Remark: Passed: The EUT complies with the essential requirements in the standard.

Failed: The EUT does not comply with the essential requirements in the standard.



Report No.: SZEMO09090537201

Page: 4 of 62

4 General Information

4.1 Client Information

Applicant:	Shenzhen Fuyeda Industry Development Corp.,Ltd
Address of Applicant:	No.1 NEWMEN ROAD. TONGSHENG VILLAGE, DALANG STREET, BAO'AN, SHENZHEN, CHINA
Manufacturer/ Factory:	Shenzhen Fuyeda Industry Development Corp.,Ltd
Address of Manufacturer/ Factory:	No.1 NEWMEN ROAD. TONGSHENG VILLAGE, DALANG STREET, BAO'AN, SHENZHEN, CHINA

4.2 General Description of E.U.T.

Product Name:	MOUSE
Trade Name:	N/A
Item No.:	MS-175BT
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	Integral
Antenna gain:	2dBi
Power supply:	2X1.5(AAA)=3.0V



Report No.: SZEMO09090537201

Page: 5 of 62

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz



Report No.: SZEMO09090537201

Page: 6 of 62

4.3 E.U.T Operation mode

Operating Environment:					
Temperature:	24.0 °C				
Humidity:	52 % RH				
Atmospheric Pressure:	1008 mbar				
Test mode:					
Normal operation mode: Keep EUT in communication between EUT and PC					
Transmitting mode: Keep the EUT in transmitting mode with modulation.					



Report No.: SZEMO09090537201

Page: 7 of 62

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab
No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.



Report No.: SZEMO09090537201

Page: 8 of 62

4.7 Test Instruments list

RE i	RE in Chamber							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	16-06-2009	15-06-2010		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	12-12-2009	11-12-2010		
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A		
4	Coaxial cable	SGS	N/A	SEL0028	18-06-2009	17-06-2010		
6	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	12-08-2009	11-08-2010		
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0005	12-08-2009	11-08-2010		
8	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	12-08-2009	11-08-2010		
9	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	18-06-2009	17-06-2010		
10	Pre-amplifier (1-18GHz)	Rohde & Schwarz	AFS42-00101 800-25-S-42	SEL0081	18-06-2009	17-06-2010		
11	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	18-06-2009	17-06-2010		
12	Band filter	Amindeon	82346	SEL0094	18-06-2009	17-06-2010		

RF c	RF conducted							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.		Cal.Due date (dd-mm-yy)		
1	Spectrum Analyzer	Rohde & Schwarz	10336/030	EMC0040	16-06-2009	15-06-2010		
2	Coaxial cable	SGS	N/A	SEL0029	18-06-2009	17-06-2010		



Report No.: SZEMO09090537201

Page: 9 of 62

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO09090537201

Page: 10 of 62

5.2 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)		
Test Method:	ANSI C63.4:2003 and KDB DA00-705		
Limit:	30dBm		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.7 for details		
Test state:	Non-hopping transmitting with modulation.		
Test results:	Passed		

Measurement Data

GFSK mode						
Test channel	Test channel Peak Output Power (dBm)		Result			
Lowest	-10.65	30.00	Pass			
Middle	-11.28	30.00	Pass			
Highest	-13.22	30.00	Pass			
	Pi/4QPSK m	ode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-10.12	30.00	Pass			
Middle	-10.62	30.00	Pass			
Highest -12.68		30.00	Pass			
	8DPSK mo	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-9.81	30.00	Pass			
Middle	-10.36	30.00	Pass			
Highest -12.26		30.00	Pass			




Report No.: SZEMO09090537201

Page: 11 of 62


Test plot as follows:

Test mode: GFSK Test channel: Lowest

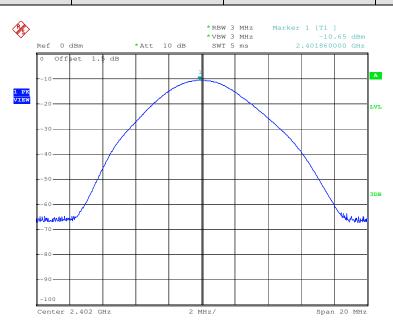

Date: 10.DEC.2009 14:42:31

Test mode: GFSK Test channel: Middle

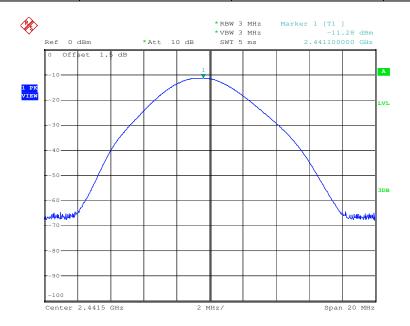


Date: 10.DEC.2009 15:02:42



Report No.: SZEMO09090537201


Page: 12 of 62

Test mode: GFSK Test channel: Highest

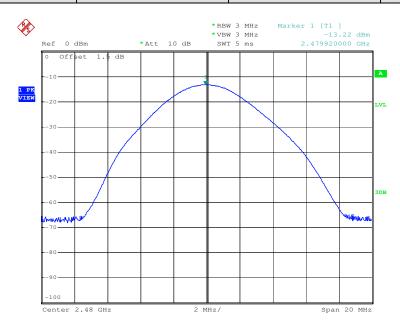

Date: 10.DEC.2009 15:03:44

Test mode: Pi/4QPSK Test channel: Lowest

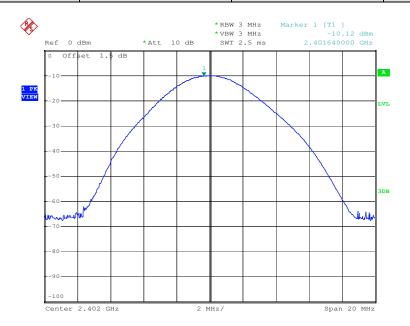


Date: 10.DEC.2009 15:41:49



Report No.: SZEMO09090537201


Page: 13 of 62

Test mode: Pi/4QPSK Test channel: Middle

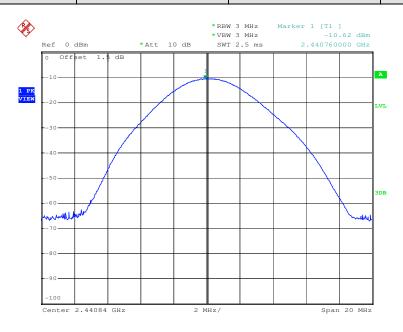

Date: 10.DEC.2009 15:40:58

Test mode: Pi/4QPSK Test channel: Highest

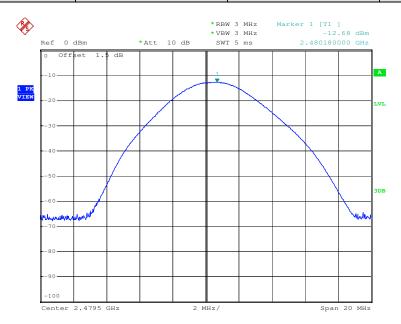


Date: 10.DEC.2009 15:23:44



Report No.: SZEMO09090537201


Page: 14 of 62

Test mode: 8DPSK Test channel: Lowest

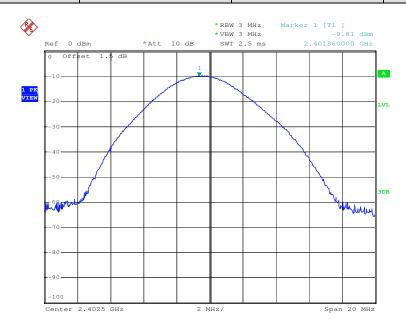

Date: 10.DEC.2009 16:13:02

Test mode: 8DPSK Test channel: Middle

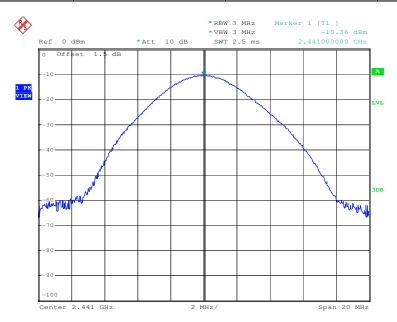


Date: 10.DEC.2009 16:13:40



Report No.: SZEMO09090537201

Page: 15 of 62



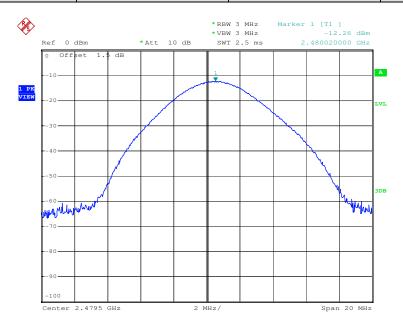


Date: 10.DEC.2009 16:32:42



Report No.: SZEMO09090537201

Page: 16 of 62

5.3 20dB Occupy Bandwidth

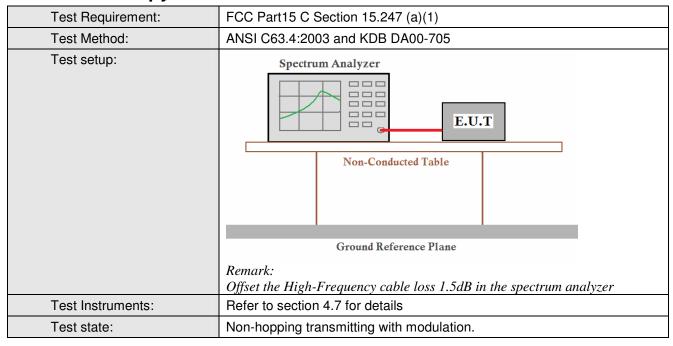

Measurement Data

Tankahaman	20dB Occupy Bandwidth (KHz)			
Test channel	GFSK	Pi/4QPSK	8DPSK 1340 1335	
Lowest	1100	1335	1340	
Middle	1095	1330	1335	
Highest	1100	1332	1335	




Report No.: SZEMO09090537201

Page: 17 of 62


Test plot as follows:

Test mode: GFSK Test channel: Lowest

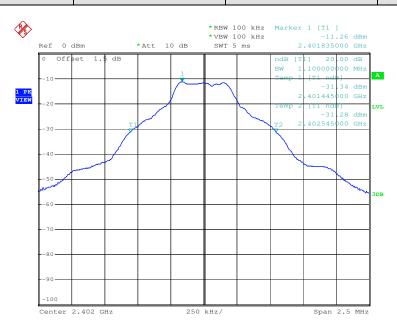

Date: 10.DEC.2009 14:41:48

Test mode: GFSK Test channel: Middle

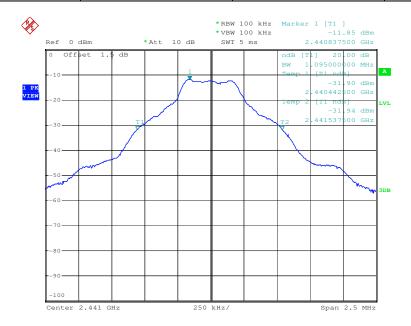


Date: 10.DEC.2009 15:00:13



Report No.: SZEMO09090537201

Page: 18 of 62

Test mode: GFSK Test channel: Highest

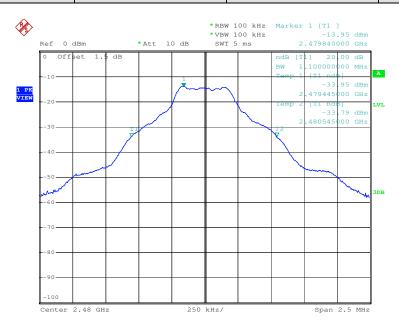

Date: 10.DEC.2009 15:05:02

Test mode: Pi/4QPSK Test channel: Lowest



Date: 10.DEC.2009 15:42:49



Report No.: SZEMO09090537201


Page: 19 of 62

Test mode: Pi/4QPSK Test channel: Middle



Date: 10.DEC.2009 15:38:20

Test mode: Pi/4QPSK Test channel: Highest

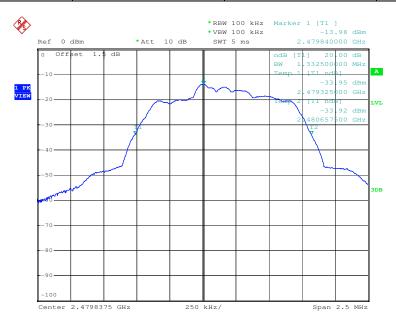


Date: 10.DEC.2009 15:18:57



Report No.: SZEMO09090537201

Page: 20 of 62

Test mode: 8DPSK Test channel: Lowest

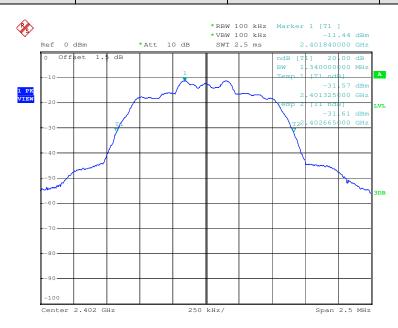

Date: 10.DEC.2009 16:09:30

Test mode: 8DPSK Test channel: Middle




Date: 10.DEC.2009 16:14:31



Report No.: SZEMO09090537201

Page: 21 of 62



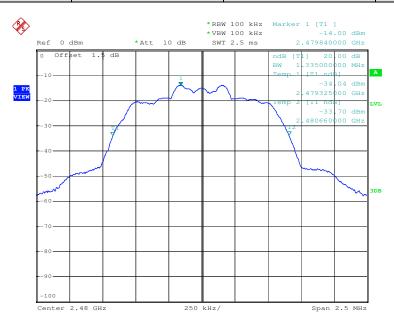


Date: 10.DEC.2009 16:30:55



Report No.: SZEMO09090537201

Page: 22 of 62

5.4 Carrier Frequencies Separation

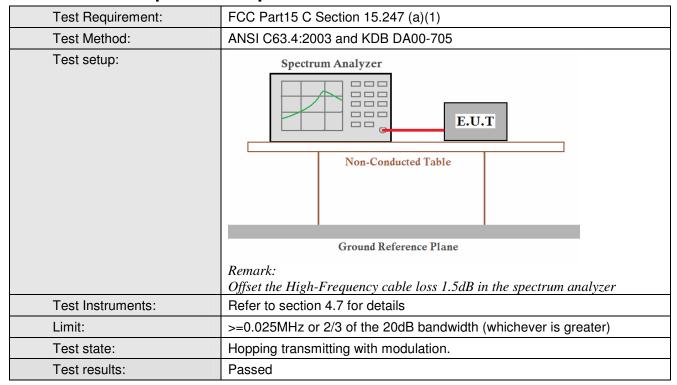



Report No.: SZEMO09090537201

Page: 23 of 62

Measurement Data

Measurement Data				
GFSK mode				
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1002	893	Pass	
Middle	1002	893	Pass	
Highest	1000	893	Pass	
Pi/4QPSK mode				
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1000	893	Pass	
Middle	1000	893	Pass	
Highest	1000	893	Pass	
8DPSK mode				
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1000	893	Pass	
Middle	1005	893	Pass	
Highest	1005	893	Pass	

Note: According to section 5.3

Mode	20dB bandwidth (KHz)	Limit (KHz)
	(worst case)	(Carrier Frequencies Separation)
GFSK	1100	733
PI/4QPSK	1335	890
8DPSK	1340	893




Report No.: SZEMO09090537201

Page: 24 of 62


Test plot as follows:

Test mode: GFSK Test channel: Lowest

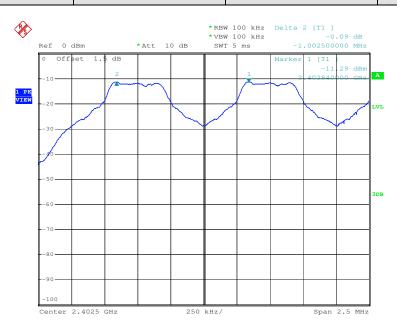

Date: 10.DEC.2009 14:44:43

Test mode: GFSK Test channel: Middle

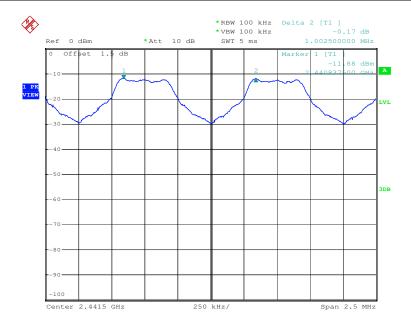


Date: 10.DEC.2009 15:01:48



Report No.: SZEMO09090537201


Page: 25 of 62

Test mode: GFSK Test channel: Highest

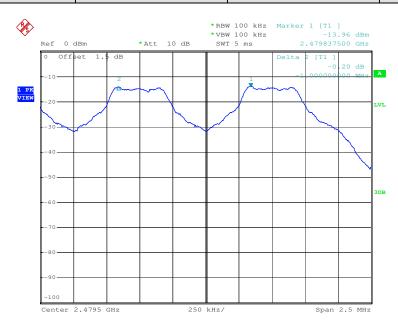

Date: 10.DEC.2009 15:06:34

Test mode: PI/4QPSK Test channel: Lowest

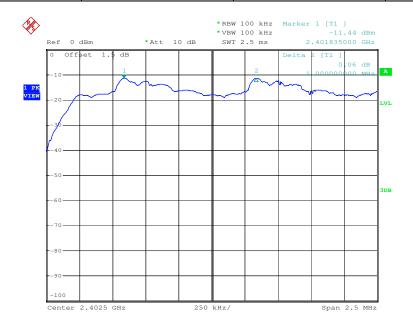


Date: 10.DEC.2009 15:44:33



Report No.: SZEMO09090537201


Page: 26 of 62

Test mode: PI/4QPSK Test channel: Middle

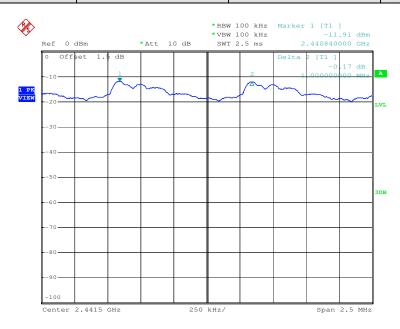

Date: 10.DEC.2009 15:39:58

Test mode: PI/4QPSK Test channel: Highest

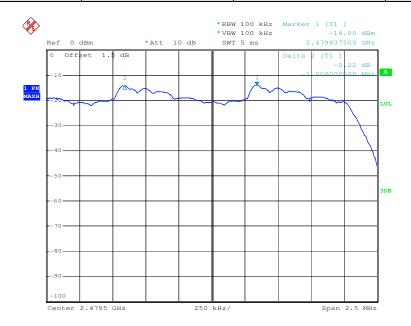


Date: 10.DEC.2009 15:22:08



Report No.: SZEMO09090537201


Page: 27 of 62

Test mode: 8DPSK Test channel: Lowest

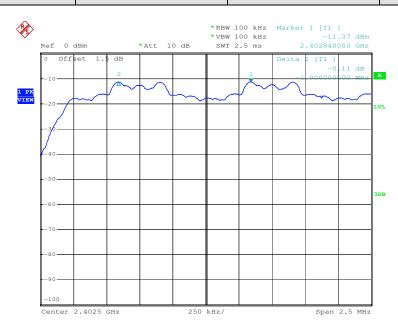

Date: 10.DEC.2009 16:12:28

Test mode: 8DPSK Test channel: Middle

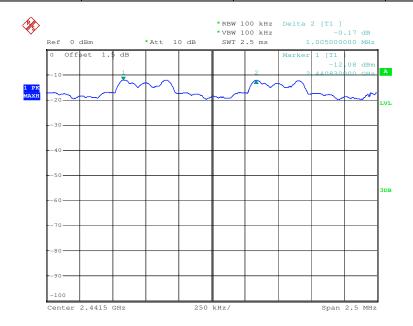


Date: 10.DEC.2009 16:15:59



Report No.: SZEMO09090537201

Page: 28 of 62



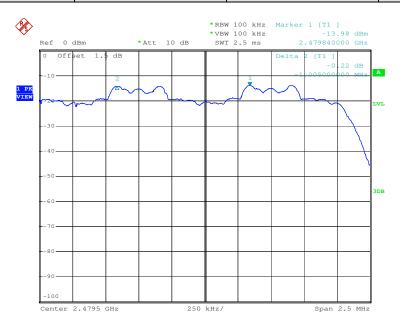


Date: 10.DEC.2009 16:32:15



Report No.: SZEMO09090537201

Page: 29 of 62

5.5 Hopping Channel Number

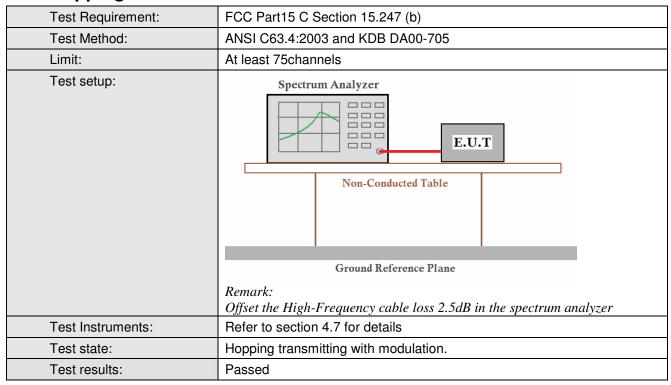

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	75
Pi/4QPSK	79	75
8DPSK	79	75




Report No.: SZEMO09090537201

Page: 30 of 62


Test plot as follows

Test mode: GFSK

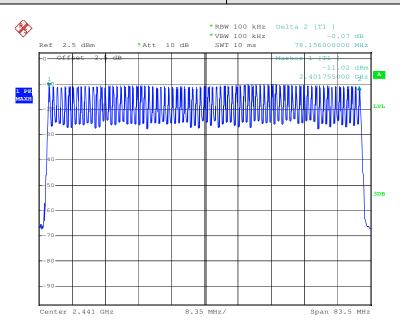

Date: 16.SEP.2009 10:39:38

Test mode: Pi/4QPSK

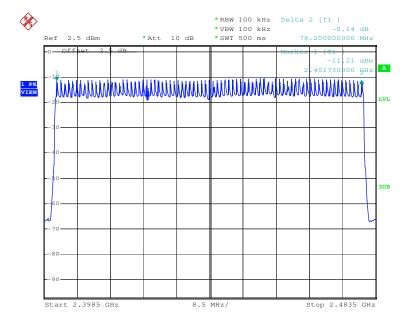


Date: 17.SEP.2009 09:34:47



Report No.: SZEMO09090537201

Page: 31 of 62



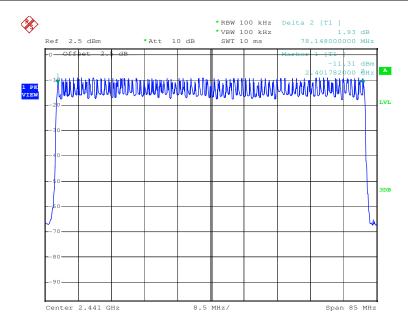


Date: 17.SEP.2009 15:03:20



Report No.: SZEMO09090537201

Page: 32 of 62

5.6 Dwell Time

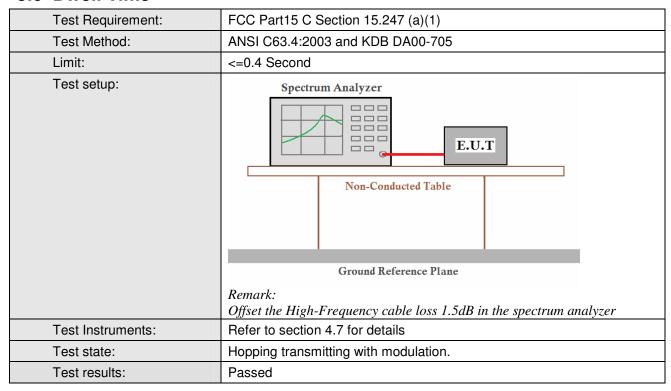



Report No.: SZEMO09090537201

Page: 33 of 62

Measurement Data

Packet	Dwell time (second)	Limit (second)
DH1	0.1280	0.4
DH3	0.2656	0.4
DH5	0.3093	0.4
2-DH1	0.1344	0.4
2-DH3	0.2688	0.4
2-DH5	0.3221	0.4
3-DH1	0.1344	0.4
3-DH3	0.2656	0.4
3-DH5	0.3136	0.4

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

DH1 time slot=0.40(ms)*(1600/ (2*79))*31.6=128.0 ms

DH3 time slot=1.66(ms)*(1600/ (4*79))*31.6=265.6 ms

DH5 time slot=2.90(ms)*(1600/ (6*79))*31.6=309.3ms

2-DH1 time slot=0.42(ms)*(1600/ (2*79))*31.6=134.4 ms

2-DH3 time slot=1.68(ms)*(1600/ (4*79))*31.6=268.8 ms

2-DH5 time slot=3.02(ms)*(1600/ (6*79))*31.6=322.1 ms

3-DH1 time slot=0.42(ms)*(1600/ (2*79))*31.6=134.4 ms

3-DH3 time slot=1.66(ms)*(1600/(4*79))*31.6=265.6 ms

3-DH5 time slot=2.94(ms)*(1600/ (6*79))*31.6=313.6ms




Report No.: SZEMO09090537201

Page: 34 of 62


Test plot as follows

Test mode: GFSK Test Packet: DH1

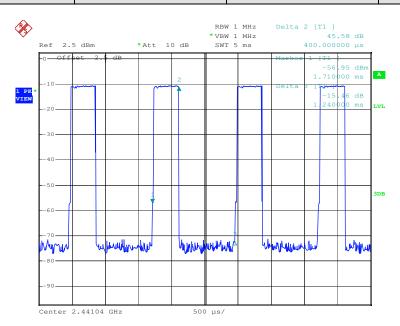

Date: 16.SEP.2009 10:04:16

Test mode: GFSK Test Packet: DH3

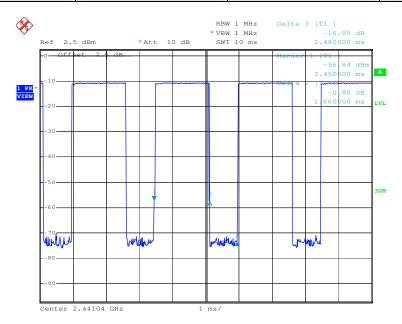


Date: 16.SEP.2009 10:08:12



Report No.: SZEMO09090537201


Page: 35 of 62

Test mode: GFSK Test Packet: DH5

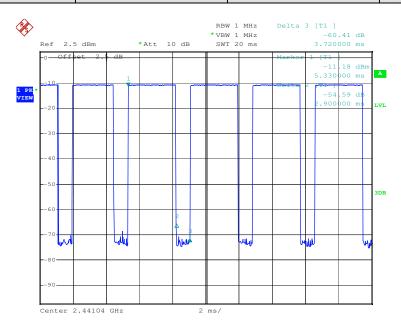

Date: 16.SEP.2009 10:10:37

Test mode: Pi/4QPSK Test Packet: 2-DH1

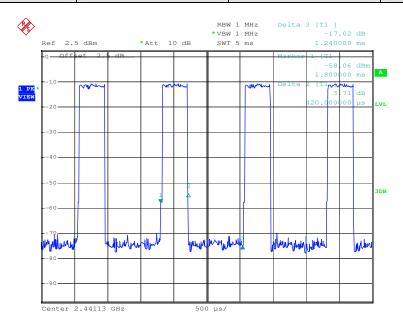


Date: 16.SEP.2009 15:00:21



Report No.: SZEMO09090537201


Page: 36 of 62

Test mode: Pi/4QPSK Test Packet: 2-DH3

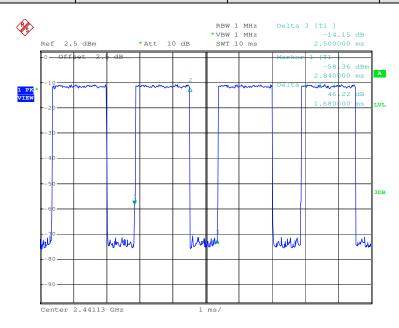

Date: 16.SEP.2009 14:59:24

Test mode: Pi/4QPSK Test Packet: 2-DH5

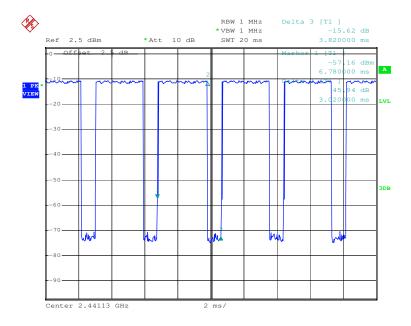


Date: 16.SEP.2009 14:54:16



Report No.: SZEMO09090537201


Page: 37 of 62

Test mode: 8DPSK Test Packet: 3-DH1

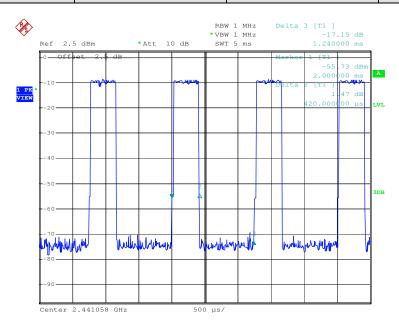

Date: 17.SEP.2009 14:42:43

Test mode: 8DPSK Test Packet: 3-DH3

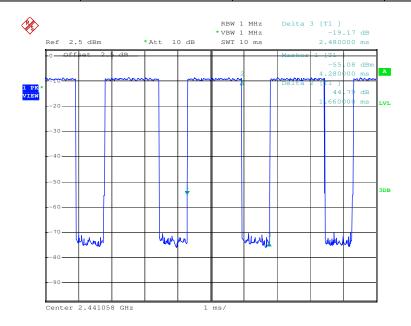


Date: 17.SEP.2009 14:43:23



Report No.: SZEMO09090537201

Page: 38 of 62

Test mode: 8DPSK Test Packet: 3-DH5

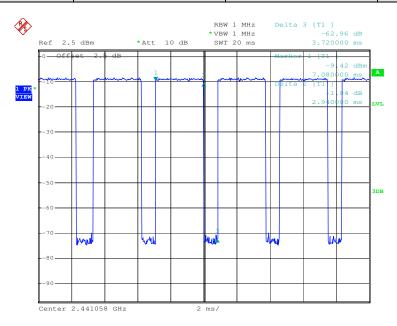

Date: 17.SEP.2009 14:44:08



Report No.: SZEMO09090537201

Page: 39 of 62

5.7 Band Edge

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.4:2003 and KDB DA00-705					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Test Instruments:	Refer to section 4.7 for details					
Test results:	Passed					




Report No.: SZEMO09090537201


Page: 40 of 62

Test plot as follows:

Test mode: GFSK	Test channel:	Lowest
-----------------	---------------	--------

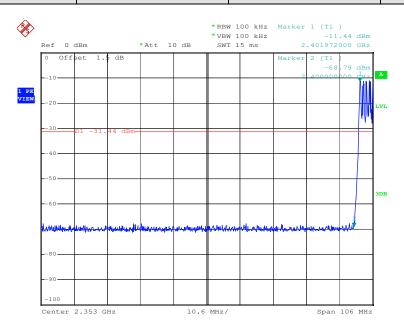

Date: 10.DEC.2009 14:49:02

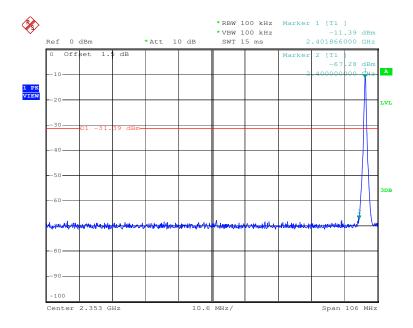


Date: 10.DEC.2009 14:47:05




Report No.: SZEMO09090537201

Page: 41 of 62

Test mode: GFSK Test channel: Highest

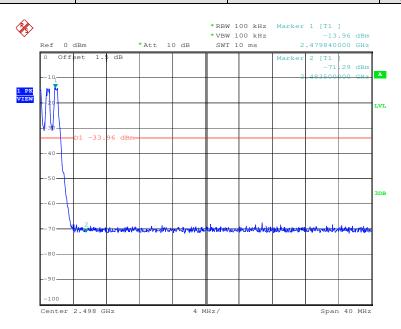

Date: 10.DEC.2009 15:13:29

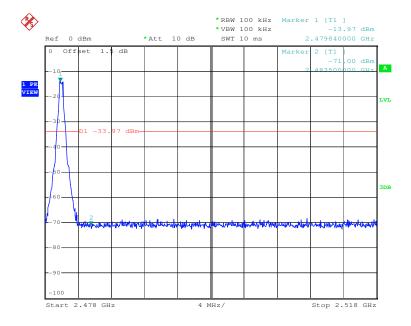


Date: 10.DEC.2009 15:12:14




Report No.: SZEMO09090537201

Page: 42 of 62



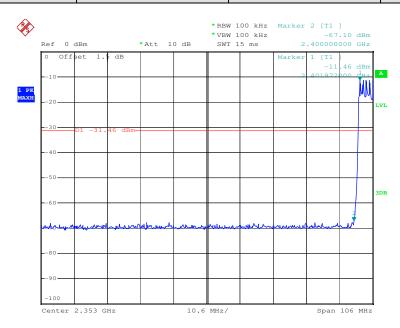

Date: 10.DEC.2009 15:51:49

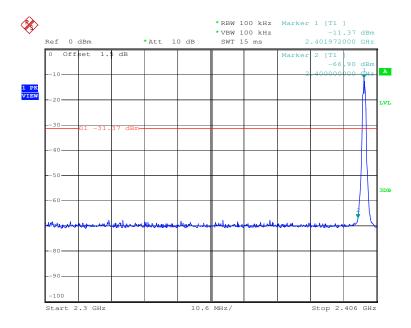


Date: 10.DEC.2009 15:49:47




Report No.: SZEMO09090537201

Page: 43 of 62

Test mode: Pi/4QPSK Test channel: Highest

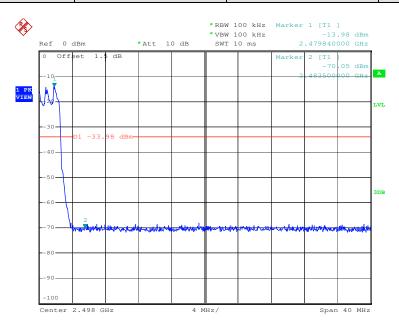

Date: 10.DEC.2009 15:16:30

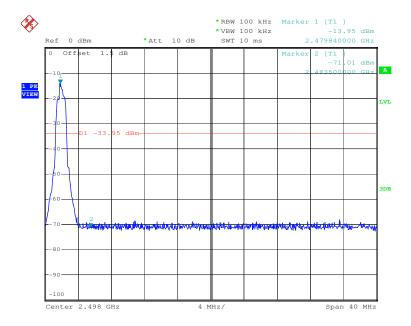


Date: 10.DEC.2009 15:15:17




Report No.: SZEMO09090537201

Page: 44 of 62

Test mode: 8DPSK Test channel: Lowest

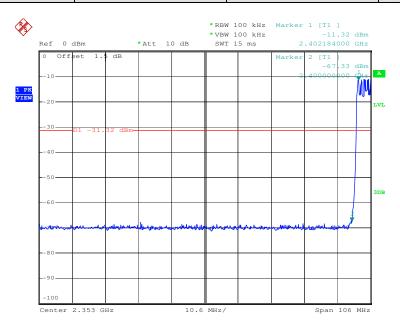

Date: 10.DEC.2009 16:07:53

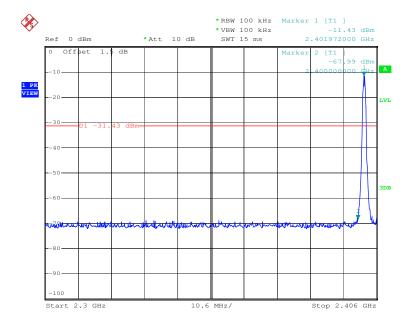


Date: 10.DEC.2009 16:06:45




Report No.: SZEMO09090537201

Page: 45 of 62

Test mode: 8DPSK Test channel: Highest

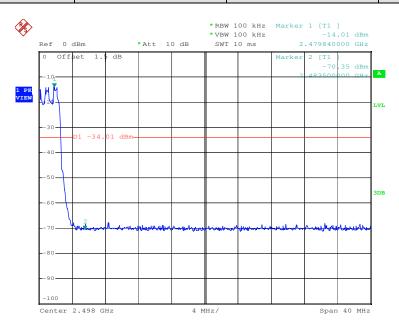

Date: 10.DEC.2009 16:35:27

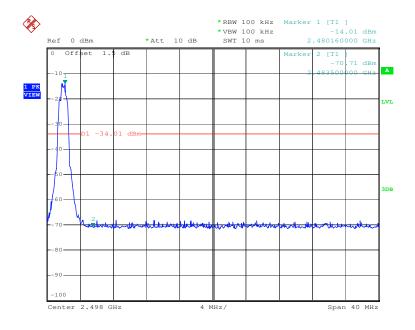

Date: 10.DEC.2009 16:34:26



Report No.: SZEMO09090537201

Page: 46 of 62


5.8 RF Antenna Conducted spurious emissions

Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.4:2003 and KDB DA00-705						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Test Instruments:	Refer to section 4.7 for details						
Test results:	Passed						



Report No.: SZEMO09090537201


Page: 47 of 62

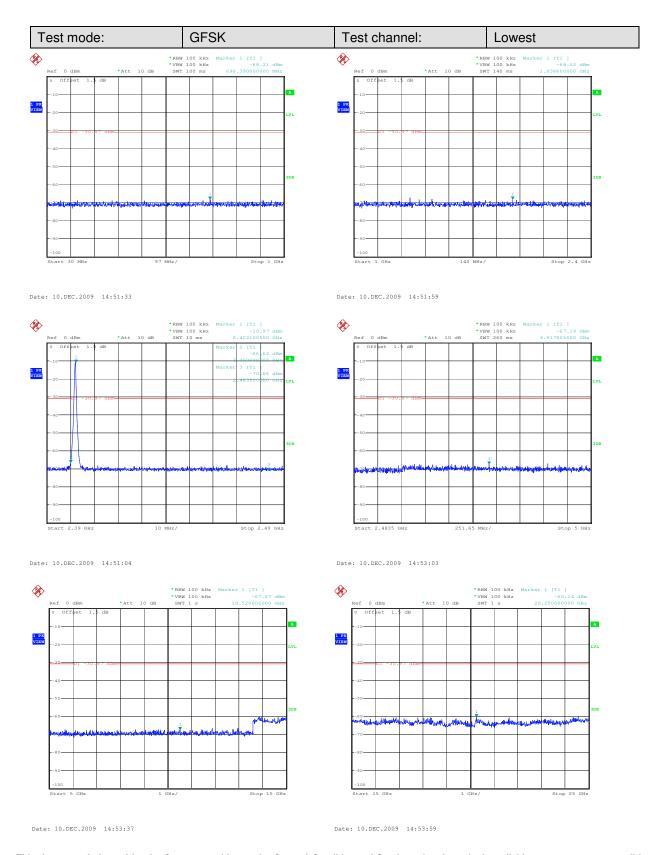



Report No.: SZEMO09090537201


Page: 48 of 62

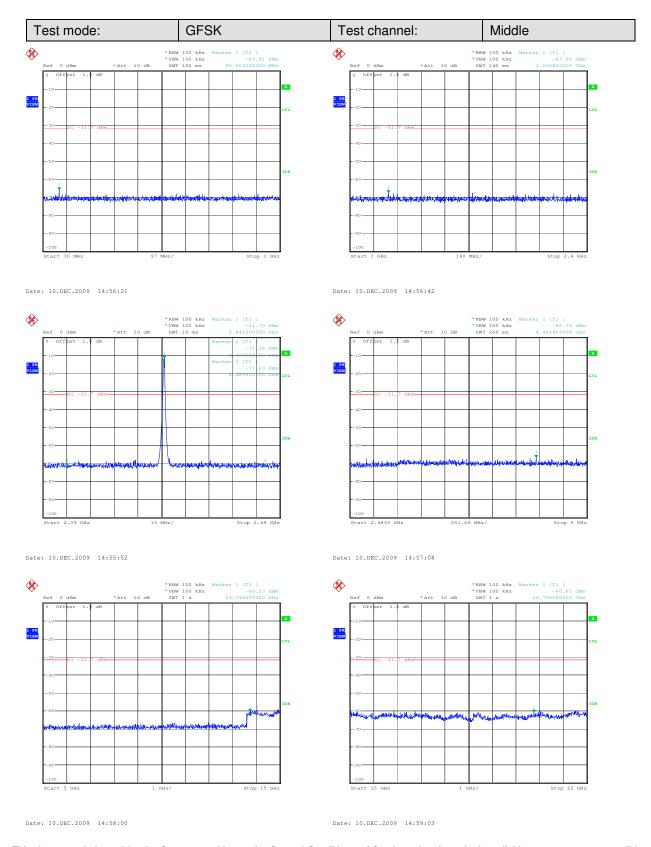



Report No.: SZEMO09090537201


Page: 49 of 62

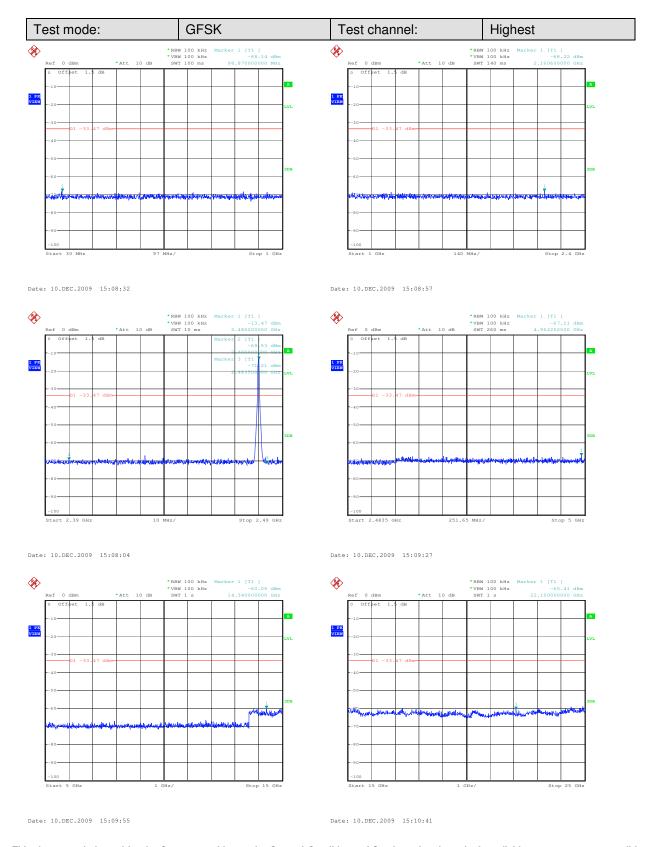



Report No.: SZEMO09090537201


Page: 50 of 62

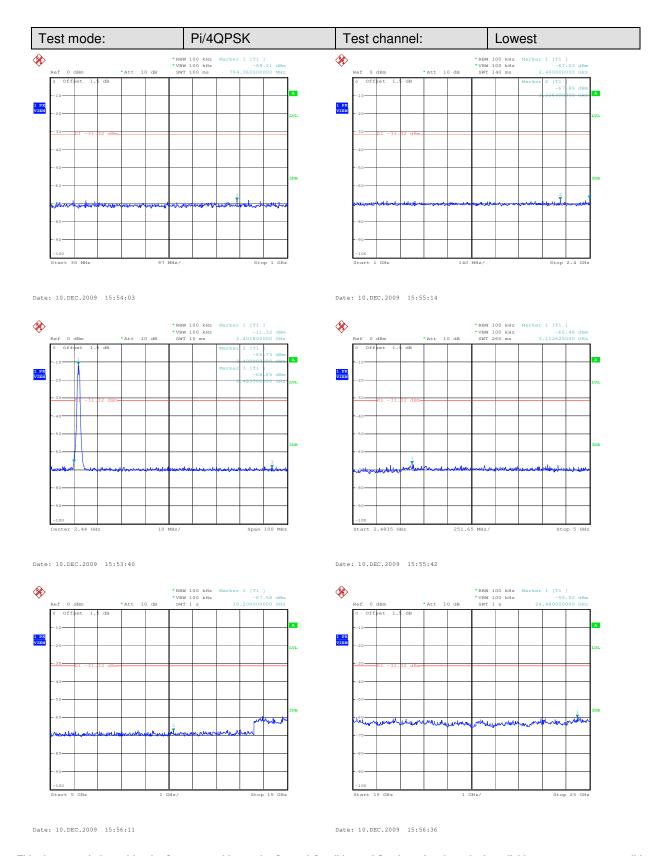



Report No.: SZEMO09090537201


Page: 51 of 62

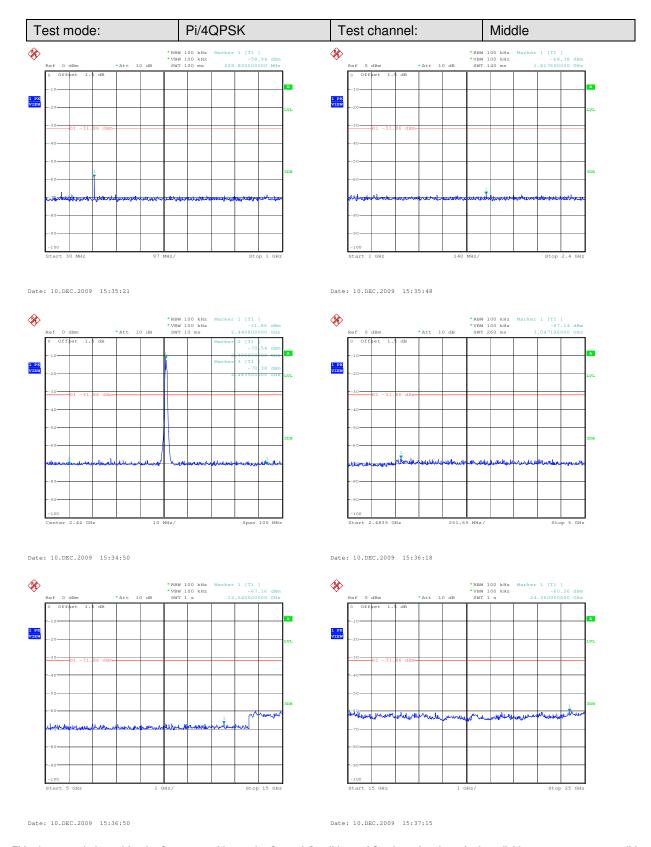



Report No.: SZEMO09090537201


Page: 52 of 62

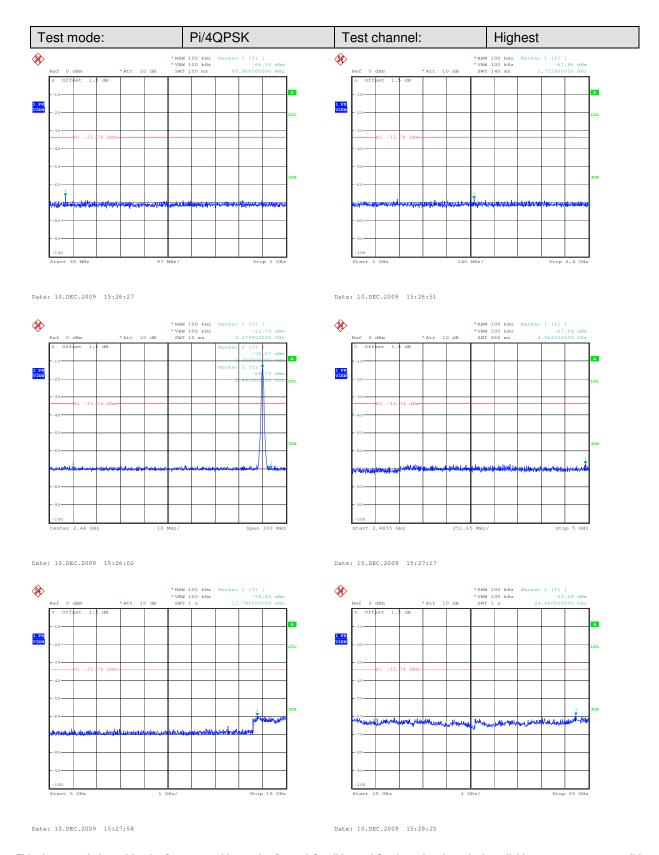



Report No.: SZEMO09090537201


Page: 53 of 62

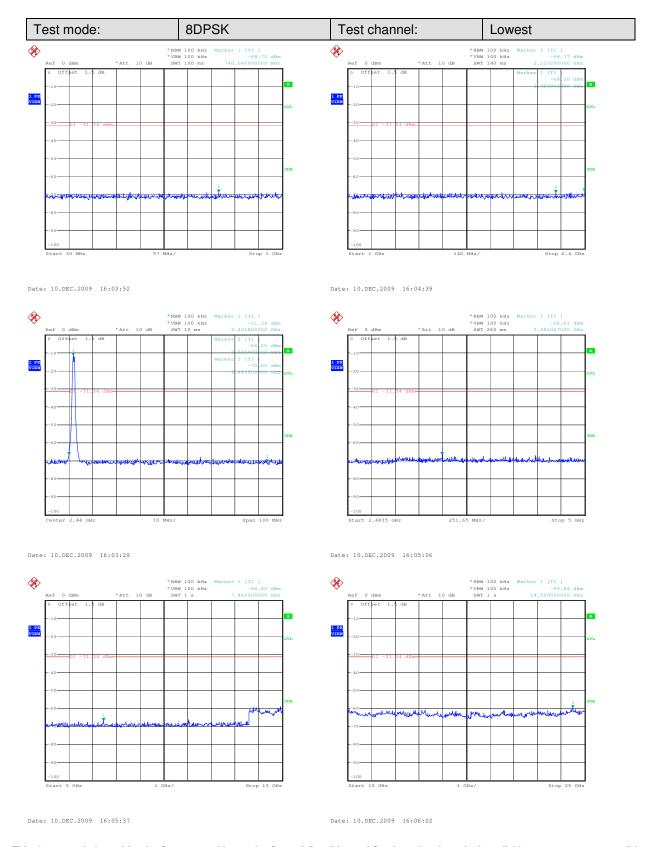



Report No.: SZEMO09090537201


Page: 54 of 62

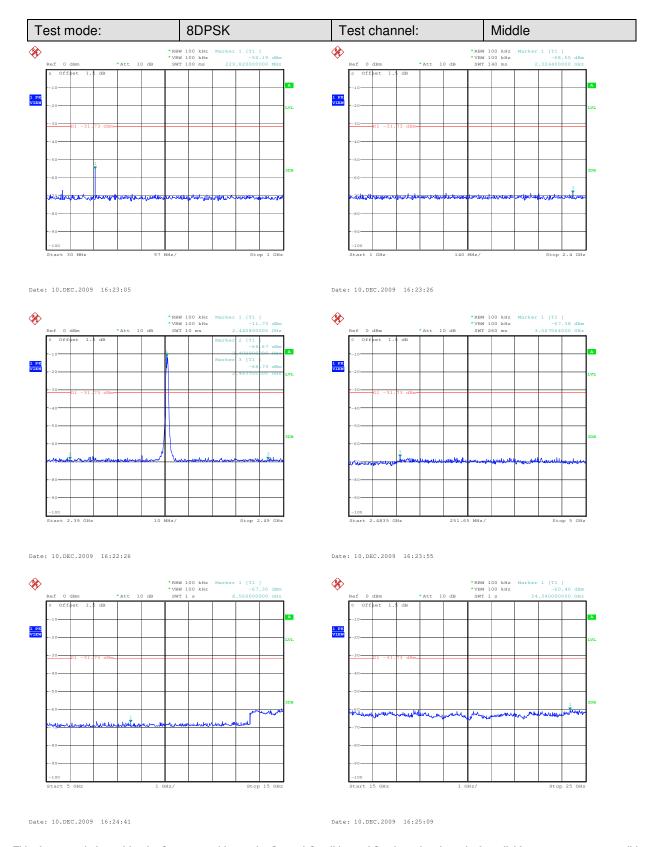



Report No.: SZEMO09090537201

Page: 55 of 62

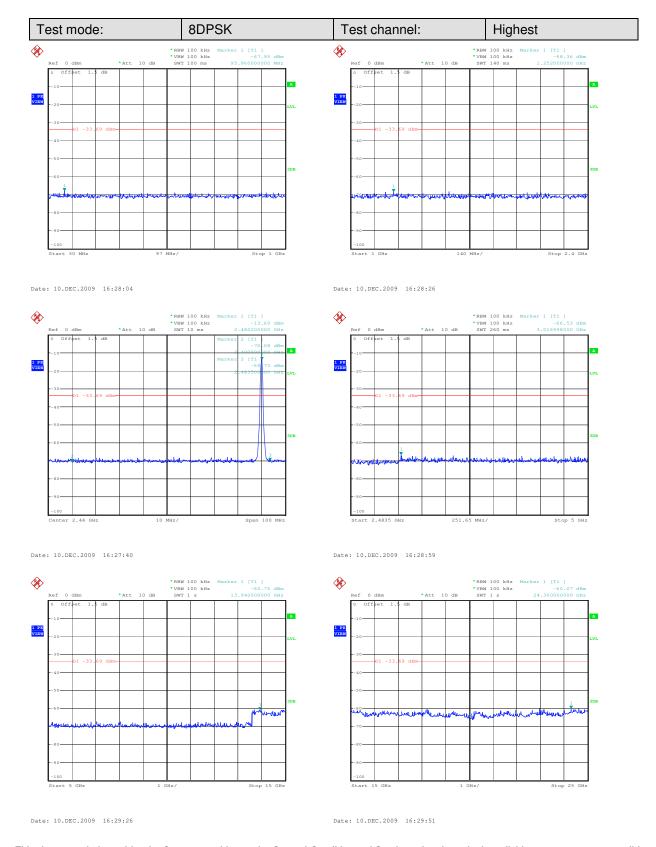



Report No.: SZEMO09090537201

Page: 56 of 62

5.9 Pseudorandom Frequency Hopping Sequence

Test Requirement:

FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEMO09090537201

Page: 57 of 62


5.10 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 , 15.205 and 15.247(d)									
Test Method:	ANSI C63.4: 2003									
Test Frequency Range:	30MHz to 25GHz									
Test site:	Measurement D	istance: 3m (S	emi-Anecho	ic Chambei	r)					
Receiver setup:										
,	Frequency Detector RBW VBW Remark									
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value					
	Above 1GHz	Peak	1MHz	3MHz	Peak Value					
	7	Peak	1MHz	10Hz	Average Value					
Limit:	Frague	nov	Limit (dDu\//	(m, @2m)	Domork					
	Freque 30MHz-8		Limit (dBuV/		Remark Quasi-peak Value					
	88MHz-21		40.0		Quasi-peak Value					
	216MHz-9		46.0		Quasi-peak Value					
	960MHz-		54.0		Quasi-peak Value					
			54.0		Average Value					
					Peak Value					
Test Procedure:	II Above 1(iHz									
Test mode:	Non-hopping tra	_								
	Pre-scan the EUT in GFSK, Pi/4QPSK and 8DPSK modes and find out the worst case is GFSK mode.									
Test Instruments:	Refer to section 4.7 for details									
Test results:	Passed			Passed						



Report No.: SZEMO09090537201

Page: 58 of 62

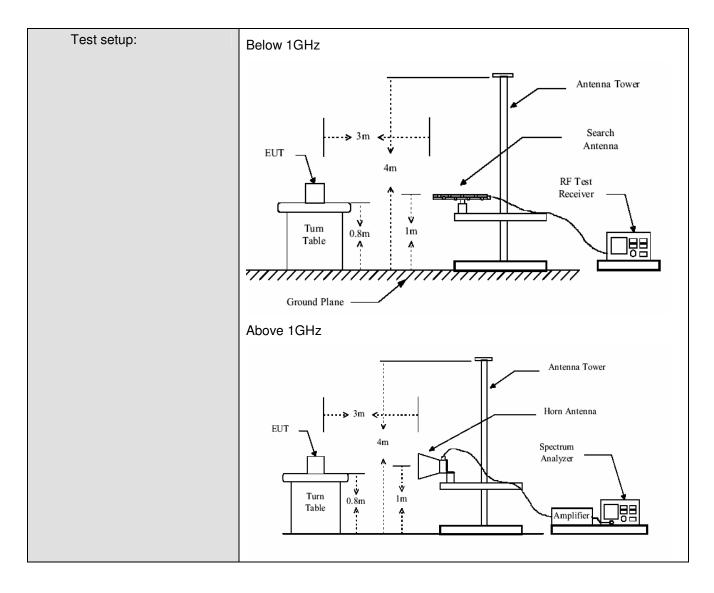

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEMO09090537201

Page: 59 of 62

5.10.1 Radiated emission below 1GHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
52.310	0.80	7.80	28.09	49.99	30.50	40.00	-9.50	Vertical
98.870	1.19	9.06	27.89	44.31	26.67	43.50	-16.83	Vertical
187.140	1.38	10.05	27.22	44.03	28.24	43.50	-15.26	Vertical
230.790	1.58	11.70	27.00	45.55	31.83	46.00	-14.17	Vertical
257.950	1.71	12.47	26.88	41.97	29.27	46.00	-16.73	Vertical
451.950	2.42	16.96	27.57	42.17	33.98	46.00	-12.02	Vertical
55.220	0.80	7.78	28.08	50.54	31.04	40.00	-8.96	Horizontal
70.740	0.83	6.97	28.00	39.96	19.76	40.00	-20.24	Horizontal
121.180	1.26	7.87	27.67	48.77	30.23	43.50	-13.27	Horizontal
184.230	1.38	9.98	27.24	51.35	35.47	43.50	-8.03	Horizontal
230.790	1.58	11.70	27.00	51.30	37.58	46.00	-8.42	Horizontal
296.750	1.88	13.76	26.73	46.40	35.31	46.00	-10.69	Horizontal

Remark: the data above is tested with QP detector mode.



Report No.: SZEMO09090537201

Page: 60 of 62

5.10.2 Transmitter emission above 1GHz

Test mode:		GFSK	Test	channel:	Lowest	Remar	k:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2394	4.97	32.24	37.65	60.08	59.64	74.00	-14.36	Vertical
2389	6.28	29.98	39.03	47.00	44.23	74.00	-29.77	Vertical
2400	4.97	32.25	37.65	66.14	65.71	74.00	-8.29	Vertical
4804	9.36	34.25	41.53	41.12	43.20	74.00	-30.80	Vertical
7206	13.38	37.23	40.98	37.40	47.03	74.00	-26.97	Vertical
9608	13.39	37.99	37.56	35.10	48.92	74.00	-25.08	Vertical
12010	16.45	39.10	39.09	36.20	52.66	74.00	-21.34	Vertical
14412	17.44	41.39	44.77	32.72	46.78	74.00	-27.22	Vertical
2389	6.28	29.98	39.03	51.5	48.73	74.00	-25.27	Horizontal
2394	4.97	32.24	37.65	60.16	59.72	74.00	-14.28	Horizontal
2400	4.97	32.25	37.65	64.51	64.08	74.00	-9.92	Horizontal
4804	9.36	34.25	41.53	39.58	41.66	74.00	-32.34	Horizontal
7206	13.38	37.23	40.98	38.65	48.28	74.00	-25.72	Horizontal
9608	13.39	37.99	37.56	34.62	48.44	74.00	-25.56	Horizontal
12010	16.45	39.10	39.09	34.97	51.43	74.00	-22.57	Horizontal
14412	17.44	41.39	44.77	32.73	46.79	74.00	-27.21	Horizontal

Test mode:		GFSK	Test	channel:	Lowest	Remar	k:	Average
Frequency (MHz)	Cable loss	Antenna factors	Preamp factor	Reading Level	Emission Level	Limit (dBμV/m)	Over limit	Polarization
2394	(dB) 4.97	(dB/m) 32.24	(dB) 37.65	(dBμV) 40.40	(dBμV/m) 39.96	54.00	(dB) -14.04	Vertical
2389	6.28	29.98	39.03	40.00	37.23	54.00	-16.77	Vertical
2400	4.97	32.25	37.65	44.85	44.42	54.00	-9.58	Vertical
4804	9.36	34.25	41.53	29.96	32.04	54.00	-21.96	Vertical
7206	13.38	37.23	40.98	26.34	35.97	54.00	-18.03	Vertical
9608	13.39	37.99	37.56	23.39	37.21	54.00	-16.79	Vertical
12010	16.45	39.10	39.09	23.98	40.44	54.00	-13.56	Vertical
14412	17.44	41.39	44.77	21.75	35.81	54.00	-18.19	Vertical
2394	4.97	32.24	37.65	39.30	38.86	54.00	-15.14	Horizontal
2389	6.28	29.98	39.03	47.22	44.54	54.00	-9.55	Horizontal
2400	4.97	32.25	37.65	46.75	46.32	54.00	-7.68	Horizontal
4804	9.36	34.25	41.53	28.14	30.22	54.00	-23.78	Horizontal
7206	13.38	37.23	40.98	26.41	36.04	54.00	-17.96	Horizontal
9608	13.39	37.99	37.56	23.41	37.23	54.00	-16.77	Horizontal
12010	16.45	39.10	39.09	23.97	40.43	54.00	-13.57	Horizontal
14412	17.44	41.39	44.77	21.76	35.82	54.00	-18.18	Horizontal



Report No.: SZEMO09090537201

Page: 61 of 62

Test mode:	(GFSK	Test	channel:	Middle	Remar	k:	Peak
						1		
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
4882	10.57	34.35	40.33	42.84	47.43	74.00	-26.57	Vertical
7323	12.91	37.31	40.40	36.75	46.57	74.00	-27.43	Vertical
9764	13.89	38.03	37.94	31.46	45.44	74.00	-28.56	Vertical
12205	17.95	39.23	39.30	33.57	51.45	74.00	-22.55	Vertical
14646	17.18	41.27	45.96	31.81	44.30	74.00	-29.70	Vertical
4882	10.57	34.35	40.33	41.52	46.11	74.00	-27.89	Horizontal
7323	12.91	37.31	40.40	39.26	49.08	74.00	-24.92	Horizontal
9764	13.89	38.03	37.94	33.60	47.58	74.00	-26.42	Horizontal
12205	17.95	39.23	39.30	35.45	53.33	74.00	-20.67	Horizontal
14646	17.18	41.27	45.96	34.01	46.50	74.00	-27.50	Horizontal

Test mode:		GFSK	Test	channel:	Middle	Remar	k:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
4882	10.57	34.35	40.33	31.02	35.61	54.00	-18.39	Vertical
7323	12.91	37.31	40.40	26.36	36.18	54.00	-17.82	Vertical
9764	13.89	38.03	37.94	20.38	34.36	54.00	-19.64	Vertical
12205	17.95	39.23	39.30	22.27	40.15	54.00	-13.85	Vertical
14646	17.18	41.27	45.96	20.70	33.19	54.00	-20.81	Vertical
4882	10.57	34.35	40.33	29.34	33.93	54.00	-20.07	Horizontal
7323	12.91	37.31	40.40	27.33	37.15	54.00	-16.85	Horizontal
9764	13.89	38.03	37.94	22.26	36.24	54.00	-17.76	Horizontal
12205	17.95	39.23	39.30	24.21	42.09	54.00	-11.91	Horizontal
14646	17.18	41.27	45.96	22.68	35.17	54.00	-18.83	Horizontal



Report No.: SZEMO09090537201

Page: 62 of 62

Test mode:		GFSK	Test	channel:	Highest	Remar	k:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit (dB)	Polarization
2483.5	5.08	32.29	37.64	59.55	59.28	74.00	-14.72	Vertical
4960	10.43	34.45	41.03	42.42	46.27	74.00	-27.73	Vertical
7440	12.72	37.37	40.01	37.66	47.74	74.00	-26.26	Vertical
9920	14.24	38.08	37.78	30.66	45.20	74.00	-28.80	Vertical
12400	17.55	39.34	39.48	33.21	50.62	74.00	-23.38	Vertical
14880	16.69	41.16	46.61	32.98	44.22	74.00	-29.78	Vertical
2483.5	5.08	32.29	37.64	62.47	62.20	74.00	-11.80	Horizontal
4960	10.43	34.45	41.03	39.10	42.95	74.00	-31.05	Horizontal
7440	12.72	37.37	40.01	37.14	47.22	74.00	-26.78	Horizontal
9920	14.24	38.08	37.78	30.45	44.99	74.00	-29.01	Horizontal
12400	17.55	39.34	39.48	34.21	51.62	74.00	-22.38	Horizontal
14880	16.69	41.16	46.61	32.43	43.67	74.00	-30.33	Horizontal

Test mode:		GFSK	Test	channel:	Highest	Remar	k:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBuV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit (dB)	Polarization
2483.5	5.08	32.29	37.64	44.66	44.39	54.00	-9.61	Vertical
4960	10.43	34.45	41.03	30.98	34.83	54.00	-19.17	Vertical
7440	12.72	37.37	40.01	26.21	36.29	54.00	-17.71	Vertical
9920	14.24	38.08	37.78	18.57	33.11	54.00	-20.89	Vertical
12400	17.55	39.34	39.48	22.21	39.62	54.00	-14.38	Vertical
14880	16.69	41.16	46.61	20.96	32.20	54.00	-21.80	Vertical
2483.5	5.08	32.29	37.64	46.73	46.46	54.00	-7.54	Horizontal
4960	10.43	34.45	41.03	27.88	31.73	54.00	-22.27	Horizontal
7440	12.72	37.37	40.01	26.20	36.28	54.00	-17.72	Horizontal
9920	14.24	38.08	37.78	18.63	33.17	54.00	-20.83	Horizontal
12400	17.55	39.34	39.48	22.20	39.61	54.00	-14.39	Horizontal
14880	16.69	41.16	46.61	20.82	32.06	54.00	-21.94	Horizontal

Remark: The disturbance above 15GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.