

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEMO11030115801

Email: sgs_internet_operations@sgs.com Page : 1 of 67

FCC REPORT

Application No: SZEMO110301158RF

Applicant: Shenzhen Fuyeda Industry Development Corp., Ltd **Manufacturer/Factory:** Shenzhen Fuyeda Industry Development Corp., Ltd

Product Name: MOUSE

Operation Frequency: 2402MHz to 2480MHz

Trade mark: Newmen

FCC ID: V4P-MS223BT

Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2009

Date of Receipt: 2010-10-22

Date of Test: 2010-10-22 to 2010-11-19

Date of Issue: 2011-03-22

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jack Zhang

Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEMO11030115801

Page : 2 of 67

2 Contents

1	CC	OVER PAGE	Page 1					
2								
2		CONTENTS						
3	TE	EST SUMMARY	3					
4	GI	ENERAL INFORMATION	4					
	4.1	CLIENT INFORMATION	4					
	4.2	GENERAL DESCRIPTION OF E.U.T.						
	4.3	E.U.T OPERATION MODE						
	4.4	Test Facility						
	4.5	TEST LOCATION						
	4.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER						
	4.7	TEST INSTRUMENTS LIST						
5	TE	EST RESULTS AND MEASUREMENT DATA	9					
	5.1	Antenna requirement:	9					
	5.2	CONDUCTED PEAK OUTPUT POWER						
	5.3	20DB OCCUPY BANDWIDTH						
	5.4	CARRIER FREQUENCIES SEPARATION	23					
	5.5	HOPPING CHANNEL NUMBER	32					
	5.6	DWELL TIME	35					
	5.7	BAND EDGE	41					
	5.8	RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	48					
	5.9	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	54					
	5.10	RADIATED EMISSION						
	<i>5.</i> '	10.1 Radiated emission below 1GHz						
	<i>5.</i> '	10.2 Transmitter emission above 1GHz						
	<i>5.</i> '	10.3 Band edge (Radiated Emission)						





Report No.: SZEMO11030115801

Page : 3 of 67

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.

This report was based on the report SZEMO10100659901, just changing the Model No., added the trade mark, external and internal photos Since the electrical circuit design, layout, components used and internal wiring for the Item "MS-173BT" in the report SZEMO10100659901 was exactly the same as the Item "MS-223BT" in this report, only different on the applicant information, item No. and appearance.



Report No.: SZEMO11030115801

Page : 4 of 67

4 General Information

4.1 Client Information

Applicant:	Shenzhen Fuyeda Industry Development Corp., Ltd
Manufacturer/Factory:	Shenzhen Fuyeda Industry Development Corp., Ltd
Address of Applicant:	NO.1 NEWMEN ROAD, TONGSHENG VILLAGE, DALANG STREET, BAO'AN, SHENZHEN, CHINA
Address of Manufacturer/ Factory:	NO.1 NEWMEN ROAD, TONGSHENG VILLAGE, DALANG STREET, BAO'AN, SHENZHEN, CHINA

4.2 General Description of E.U.T.

Product Name:	MOUSE
Model No.:	MS-223BT
Trade mark:	Newmen
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi-4QPSK, 8DPSK
Antenna Type:	Integral
Antenna gain:	-2dBi
EUT power supply:	3.0V DC (1.5V x 2"AAA"Size Batteries)



Report No.: SZEMO11030115801

Page : 5 of 67

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel for testing see below:

Channel	Frequency
lowest channel	2402MHz
middle channel	2441MHz
highest channel	2480MHz



Report No.: SZEMO11030115801

Page : 6 of 67

4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1010 mBar
Test mode:	
Normal mode	Keep the EUT in communication between EUT and PC

SGS-CSTC Stand

SGS-CSTC Standards Technical Services Ltd.

Page : 7 of 67

Report No.: SZEMO11030115801

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.



Report No.: SZEMO11030115801

Page : 8 of 67

4.7 Test Instruments list

RE i	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2010-06-17	2011-06-17
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2010-10-05	2011-10-05
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-10-09	2011-10-09
6	6 Double-ridged horn (1-18GHz) ETS-LINDGREN		3117	SEL0006	2010-10-09	2011-10-09
7	7 Horn Antenna (18-26GHz) ETS-LINDGREN 8 Pre-amplifier Agilent Technologies		3160	SEL0076	2010-10-09	2011-10-09
8			8447D	SEL0053	2010-06-02	2011-06-02
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2010-09-27	2011-09-27
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	2010-06-04	2011-06-04
11	Band filter	Amindeon	82346	SEL0094	2010-06-02	2011-06-02

RF c	RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2010-09-27	2011-09-27
2	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18



Report No.: SZEMO11030115801

Page : 9 of 67

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best gain of the antenna is -2dBi.

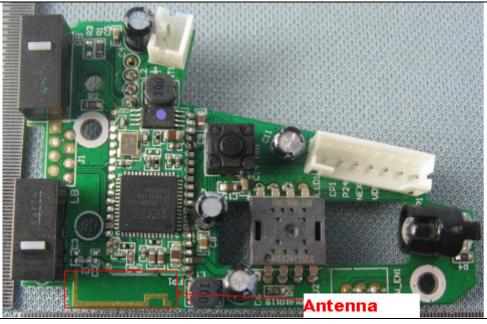



Report No.: SZEMO11030115801

Page : 10 of 67

5.2 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009 and KDB DA00-705	
Receiver setup	RBW=3MHz VBW=3MHz	
Limit:	30dBm	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Test Instruments:	Refer to section 4.7 for details	
Test state:	Non-hopping transmitting with all kinds of modulation.	
Test results:	Pass	



Report No.: SZEMO11030115801

Page : 11 of 67

Measurement Data


weasurement Data						
	GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	3.51	30.00	Pass			
Middle	3.51	30.00	Pass			
Highest	3.08	30.00	Pass			
	Pi-4QPSK m	ode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	3.59	30.00	Pass			
Middle	3.52	30.00	Pass			
Highest	3.11	30.00	Pass			
	8DPSK mo	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	3.94	30.00	Pass			
Middle	3.92	30.00	Pass			
Highest	3.50	30.00	Pass			




Report No.: SZEMO11030115801

Page : 12 of 67

Test plot as follows:

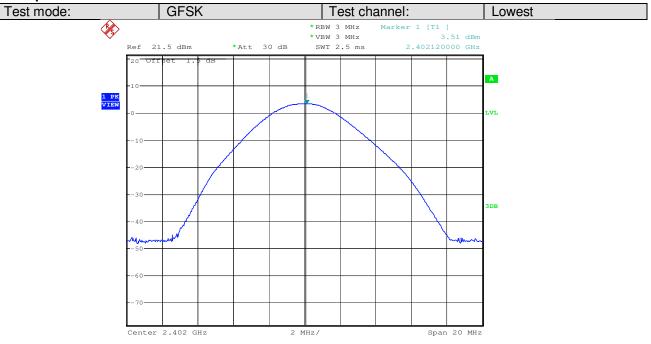

Date: 3.DEC.2010 10:24:47

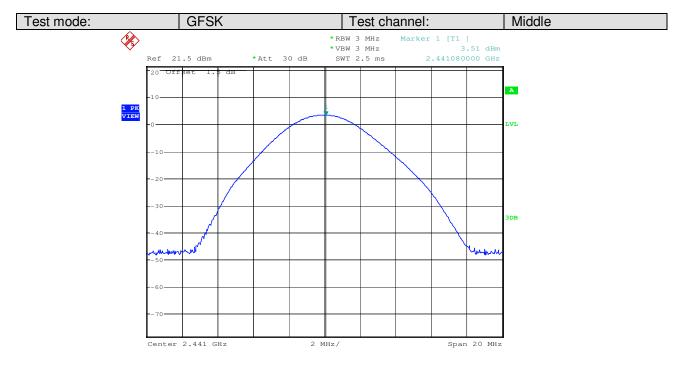


Date: 3.DEC.2010 10:26:34




Report No.: SZEMO11030115801

Page : 13 of 67

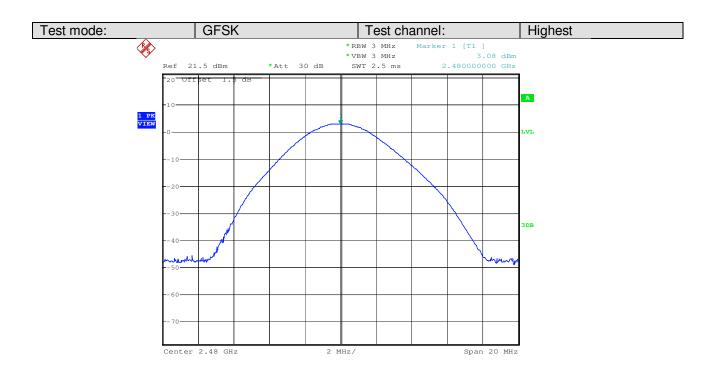

Date: 3.DEC.2010 10:29:19

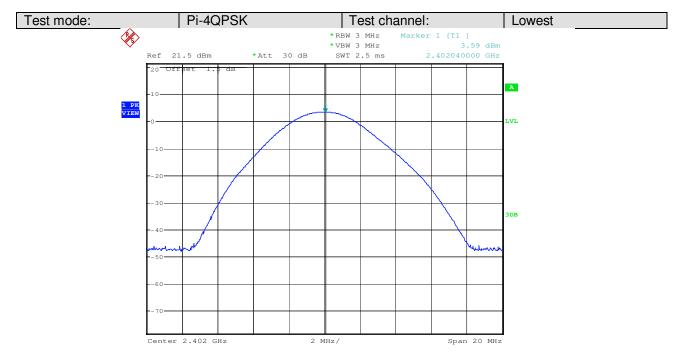


Date: 3.DEC.2010 10:25:23




Report No.: SZEMO11030115801

Page : 14 of 67

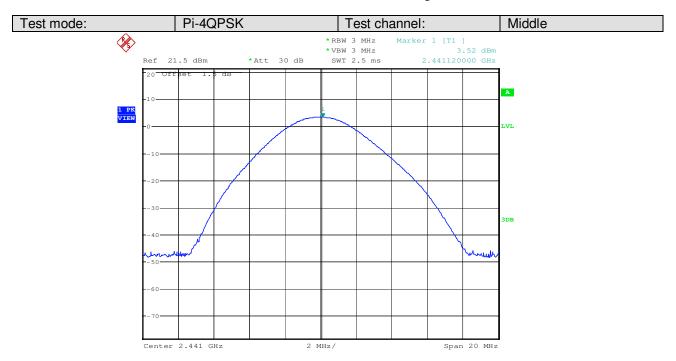

Date: 3.DEC.2010 10:27:01

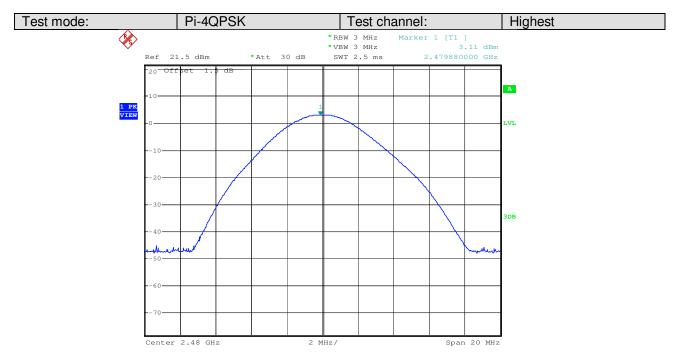


Date: 3.DEC.2010 10:30:00




Report No.: SZEMO11030115801

Page : 15 of 67

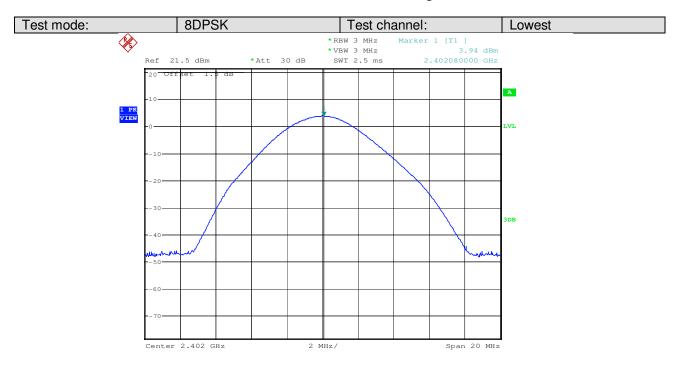

Date: 3.DEC.2010 10:25:57

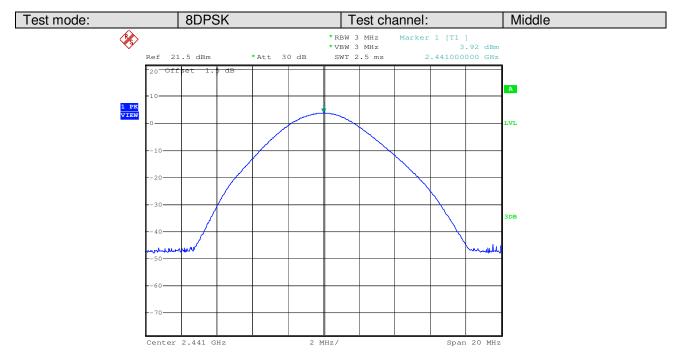


Date: 3.DEC.2010 10:27:39



Report No.: SZEMO11030115801

Page : 16 of 67

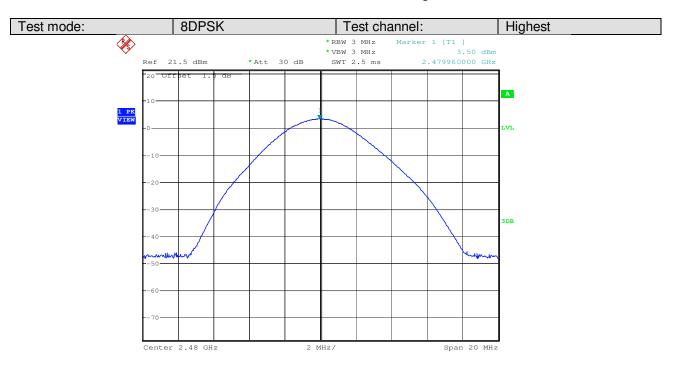

Date: 3.DEC.2010 10:30:38



Report No.: SZEMO11030115801

Page : 17 of 67

5.3 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009 and KDB DA00-705	
Receiver setup	RBW=100KHz VBW=300KHz	
Limit:	NA	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.7 for details	
Test state:	Non-hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

Test channel	20dB Occupy Bandwidth (KHz)		
	Lowest	Middle	Highest
GFSK	1122	1128	1122
Pi-4QPSK	1356	1350	1350
8DPSK	1350	1344	1350




Report No.: SZEMO11030115801

Page : 18 of 67

Test plot as follows:



Date: 3.DEC.2010 07:48:09

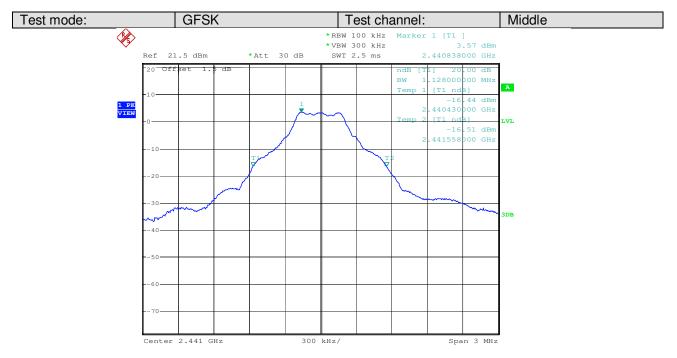

Date: 3.DEC.2010 09:54:21




Report No.: SZEMO11030115801

Page : 19 of 67



Date: 3.DEC.2010 09:57:44

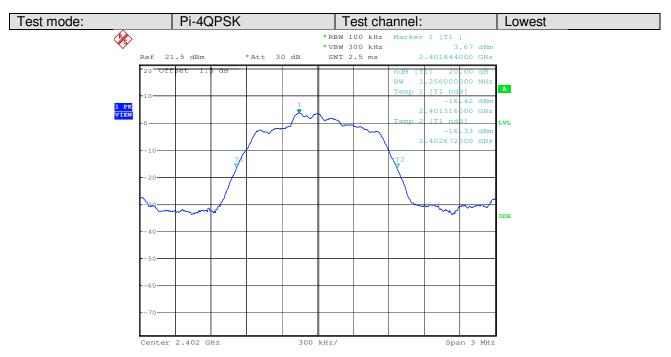


Date: 3.DEC.2010 07:49:27




Report No.: SZEMO11030115801

Page : 20 of 67

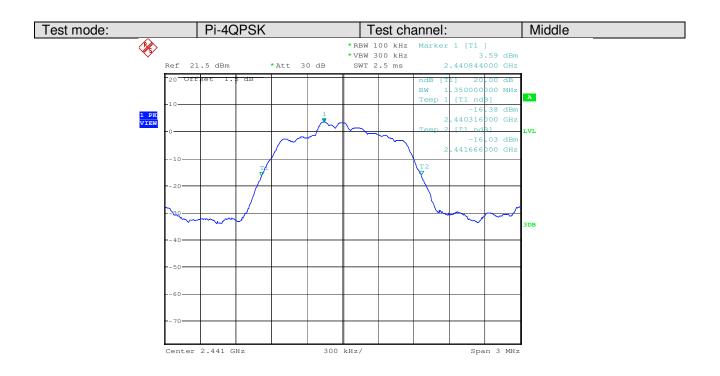

Date: 3.DEC.2010 09:55:29

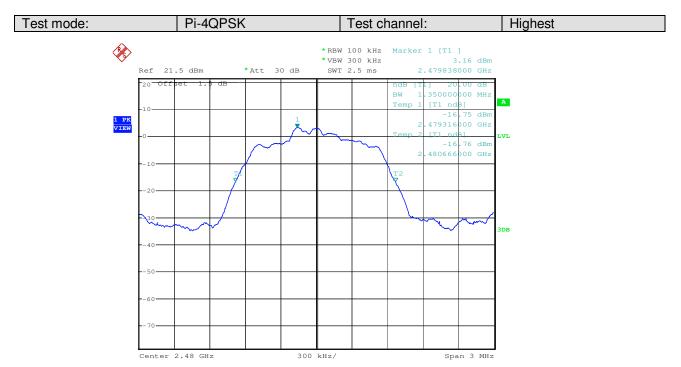


Date: 3.DEC.2010 09:58:57




Report No.: SZEMO11030115801

Page : 21 of 67

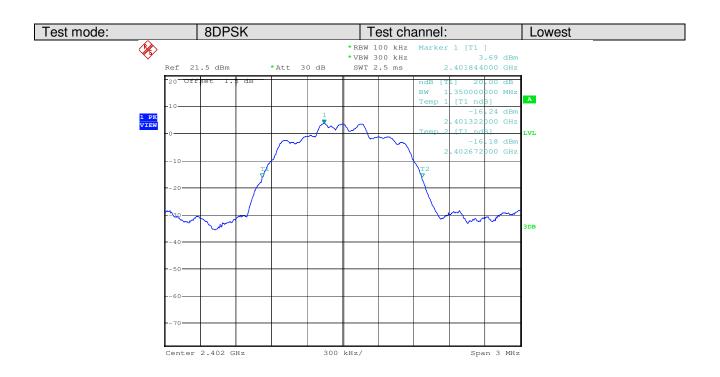

Date: 3.DEC.2010 07:50:26

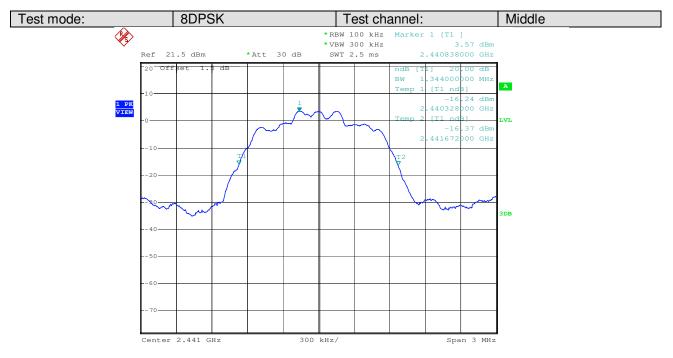


Date: 3.DEC.2010 09:56:36



Report No.: SZEMO11030115801

Page : 22 of 67

Test mode: 8DPSK Test channel: Highest

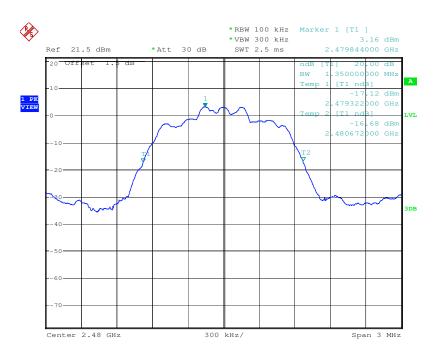

Date: 3.DEC.2010 10:02:41

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030115801

Page : 23 of 67

5.4 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009 and KDB DA00-705		
Receiver setup	RBW=100KHz VBW=300KHz		
Test state:	Hopping transmitting with all kind of modulation.		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Test Instruments:	Refer to section 4.7 for details		
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)		
Test results:	Pass		

Measurement Data

Measurement Data				
GFSK mode				
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1000	904.0	Pass	
Middle	1000	904.0	Pass	
Highest	1000	904.0	Pass	
	Pi-4QPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1000	904.0	Pass	
Middle	1000	904.0	Pass	
Highest	1000	904.0	Pass	
8DPSK mode				
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1000	904.0	Pass	
Middle	1000	904.0	Pass	



Report No.: SZEMO11030115801

Page : 24 of 67

Highest 1000 904.0 Pass



Report No.: SZEMO11030115801

Page : 25 of 67

Note: According to section 5.4,


received and to executive and			
Mode	20dB bandwidth (KHz) Limit (KHz)		
Wiode	(worse case)	(Carrier Frequencies Separation)	
GFSK	1128	752.0	
Pi-4QPSK	1356	904.0	
8DPSK	1350	900.0	




Report No.: SZEMO11030115801

Page : 26 of 67

Test plot as follows:

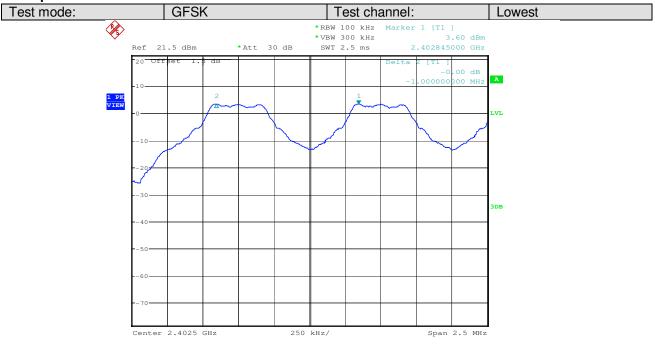

Date: 3.DEC.2010 10:05:48

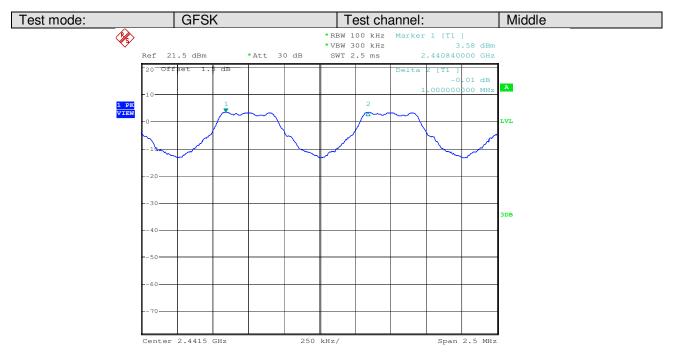


Date: 3.DEC.2010 10:11:38



Report No.: SZEMO11030115801

Page : 27 of 67

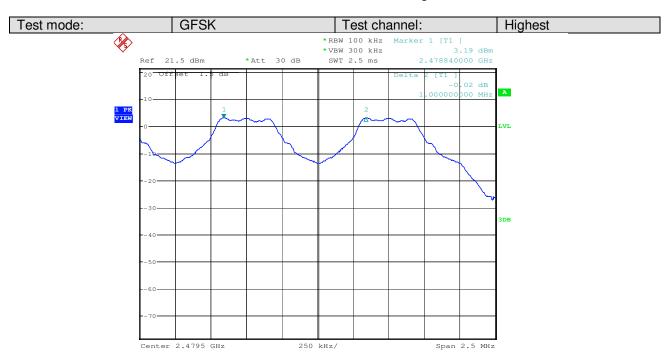


Date: 3.DEC.2010 10:18:26




Report No.: SZEMO11030115801

Page : 28 of 67

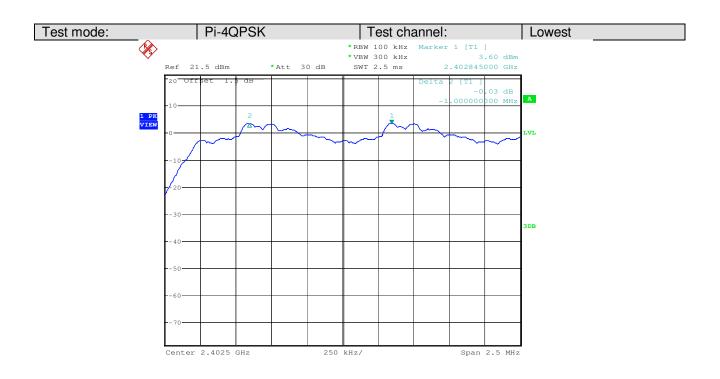

Date: 3.DEC.2010 10:07:35

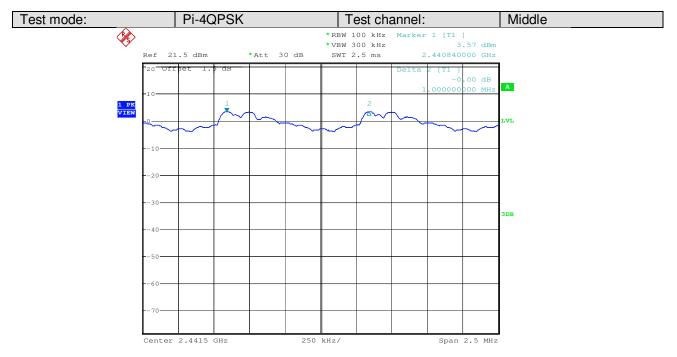


Date: 3.DEC.2010 10:14:11




Report No.: SZEMO11030115801

Page : 29 of 67



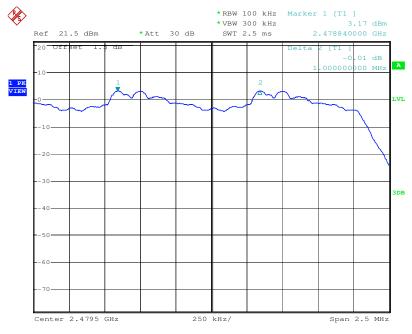

Date: 3.DEC.2010 10:19:54

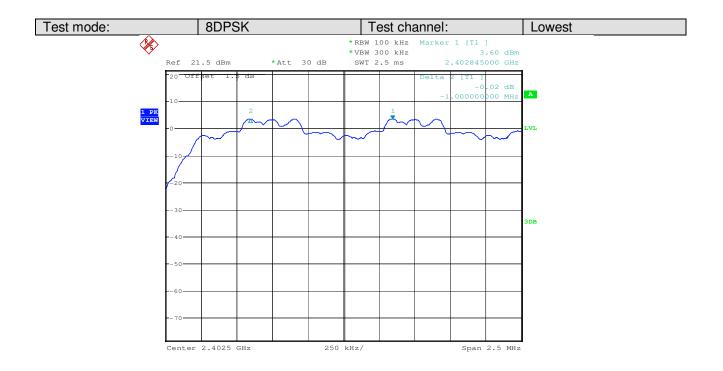


Date: 3.DEC.2010 10:09:38



Report No.: SZEMO11030115801

Page : 30 of 67

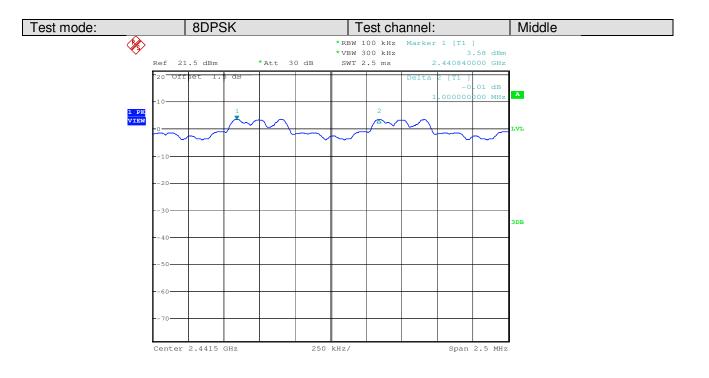


Date: 3.DEC.2010 10:16:10



Report No.: SZEMO11030115801

Page : 31 of 67

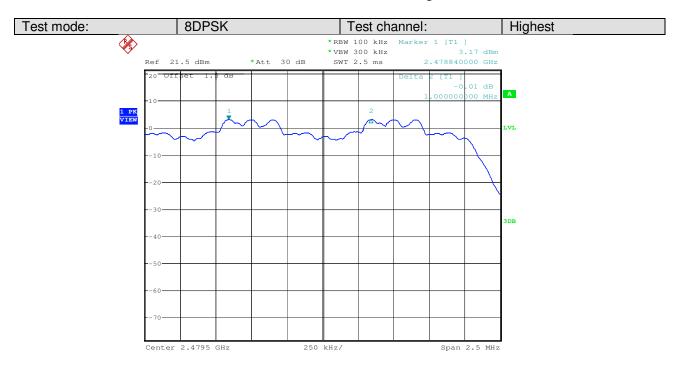

Date: 3.DEC.2010 10:21:46



Report No.: SZEMO11030115801

Page : 32 of 67

5.5 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009 and KDB DA00-705	
Receiver setup	RBW=100KHz VBW=300KHz	
Requirement:	≥75 channels	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.7 for details	
Test state:	Hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data


Mode	Hopping channel	Requirement
GFSK	79	≥75
Pi-4QPSK	79	≥75
8DPSK	79	≥75




Report No.: SZEMO11030115801

Page : 33 of 67

Test plot as follows

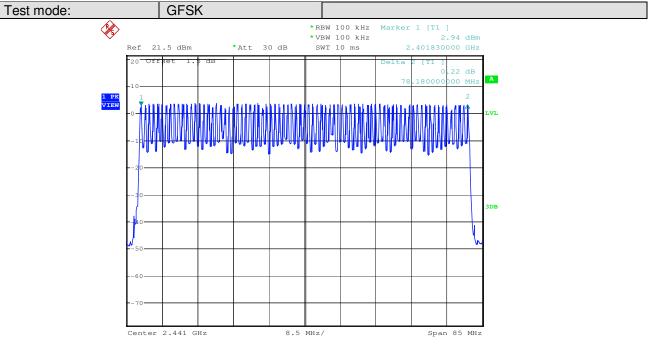

Date: 2.DEC.2010 14:39:04

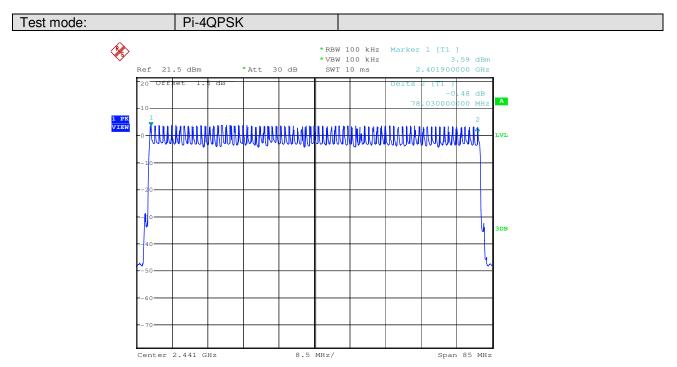


Date: 2.DEC.2010 14:46:20



Report No.: SZEMO11030115801

Page : 34 of 67

Test mode: 8DPSK

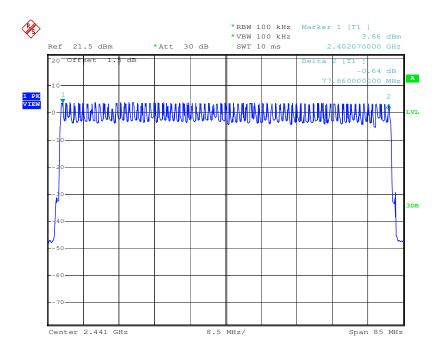

Date: 2.DEC.2010 14:55:15



Report No.: SZEMO11030115801

Page : 35 of 67

5.6 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009 and KDB DA00-705		
Receiver setup	RBW=1MHz VBW=1MHz SPAN=0Hz		
Limit:	≤ 0.4 Second		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Test Instruments:	Refer to section 4.7 for details		
Test state:	Hopping transmitting with all kind of modulation.		
Test results:	Pass		

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.3120	≪0.4
	DH3	0.3304	≪0.4
	DH5	0.3369	≪0.4
Pi-4QPSK	2-DH1	0.2752	≤0.4
	2-DH3	0.3312	≪0.4
	2-DH5	0.3443	≤0.4
8DPSK	3-DH1	0.3072	≪0.4
	3-DH3	0.3184	≤0.4
	3-DH5	0.3592	≤0.4


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEMO11030115801

Page : 36 of 67

Test plot as follows

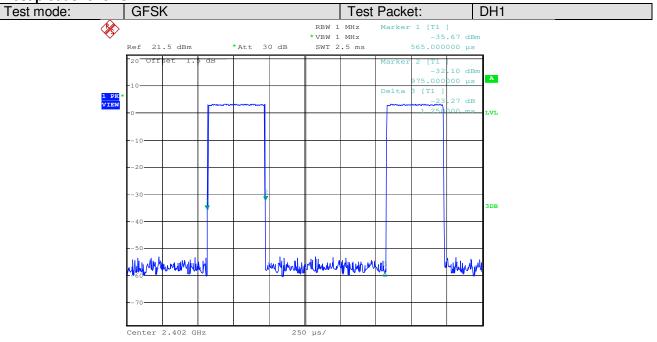

Date: 2.DEC.2010 14:03:36

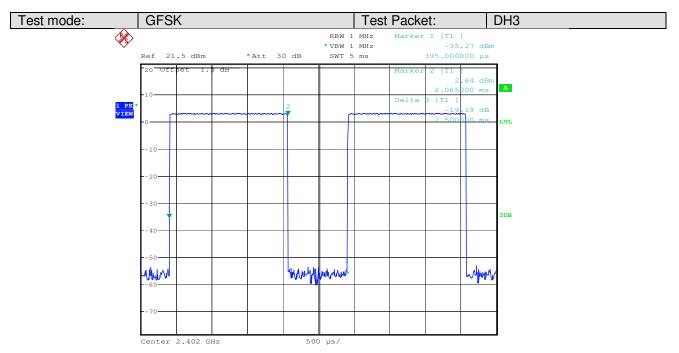


Date: 2.DEC.2010 14:04:29




Report No.: SZEMO11030115801

Page : 37 of 67

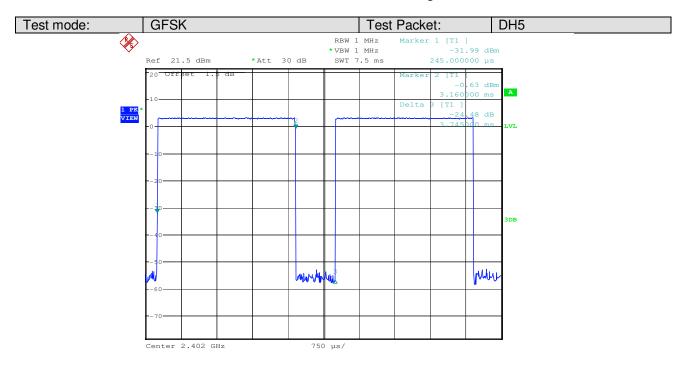

Date: 2.DEC.2010 14:05:23

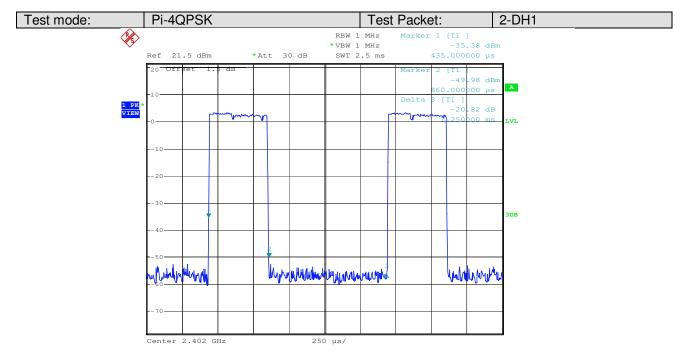


Date: 2.DEC.2010 14:09:24




Report No.: SZEMO11030115801

Page : 38 of 67

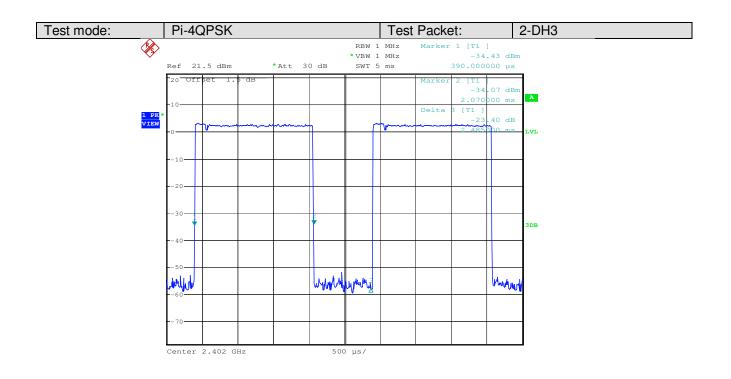

Date: 2.DEC.2010 14:08:30

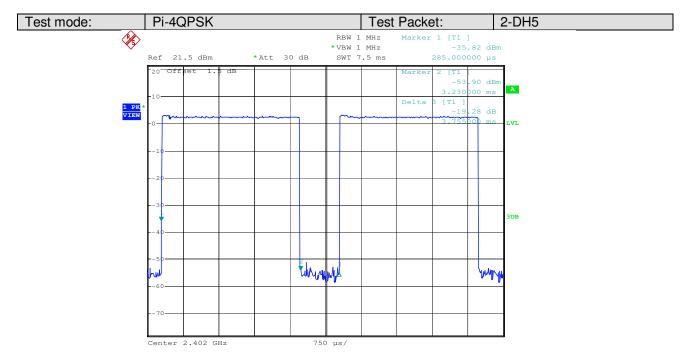


Date: 2.DEC.2010 14:10:30




Report No.: SZEMO11030115801

Page : 39 of 67

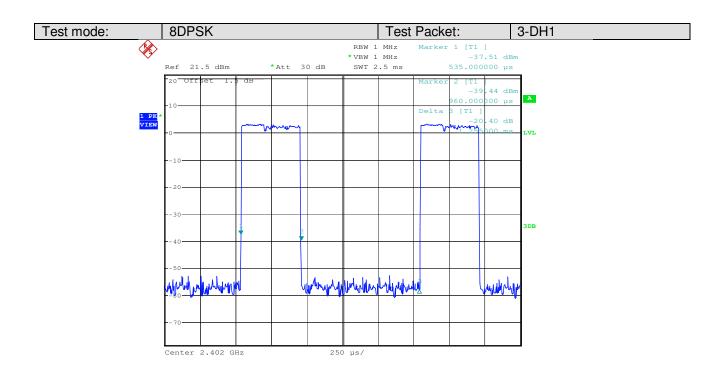

Date: 2.DEC.2010 14:11:14

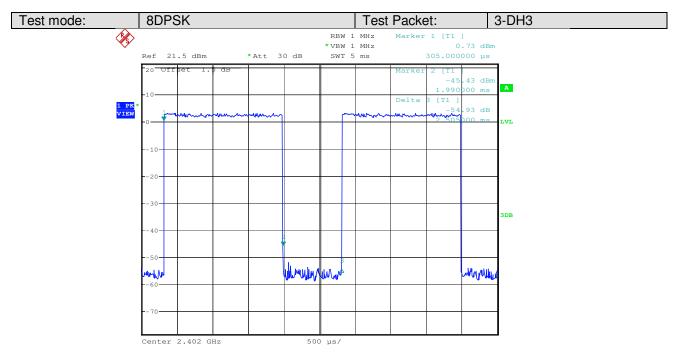


Date: 2.DEC.2010 14:12:02



Report No.: SZEMO11030115801

Page : 40 of 67

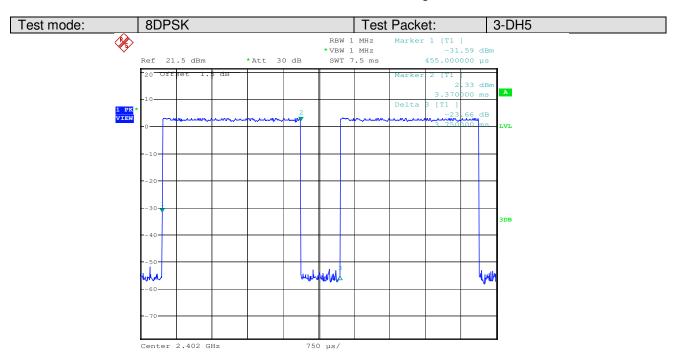

Date: 2.DEC.2010 14:13:48



Report No.: SZEMO11030115801

Page : 41 of 67

5.7 Band Edge


Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.10:2009 and KDB DA00-705				
Receiver setup	RBW=100KHz VBW=300KHz				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:					
	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Test Instruments:	Refer to section 4.7 for details				
Test state:	Hopping transmitting with all kinds of modulation.				
Test results:	Pass				





Report No.: SZEMO11030115801

Page : 42 of 67

Test plot as follows:

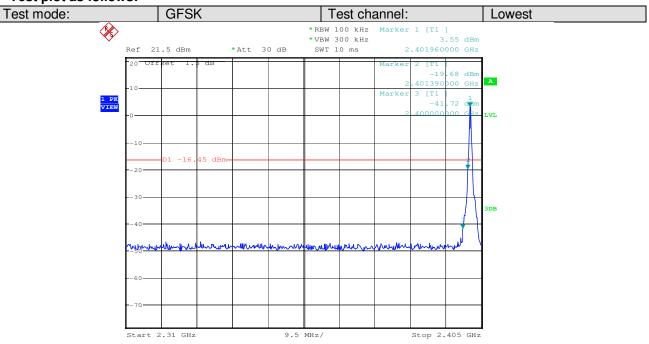



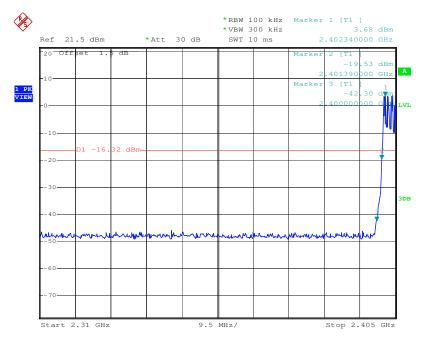


Date: 3.DEC.2010 12:02:43




Report No.: SZEMO11030115801

Page : 43 of 67

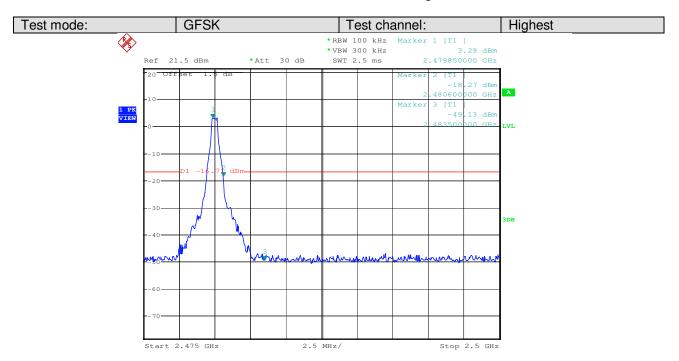

Date: 3.DEC.2010 11:55:20

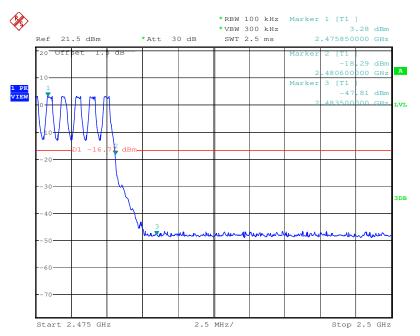


Date: 3.DEC.2010 12:10:31




Report No.: SZEMO11030115801

Page : 44 of 67

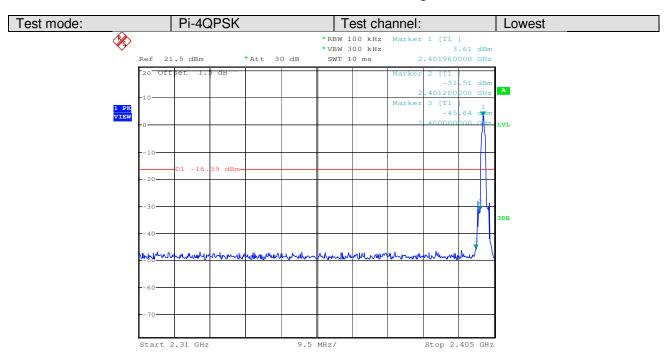

Date: 3.DEC.2010 11:52:51

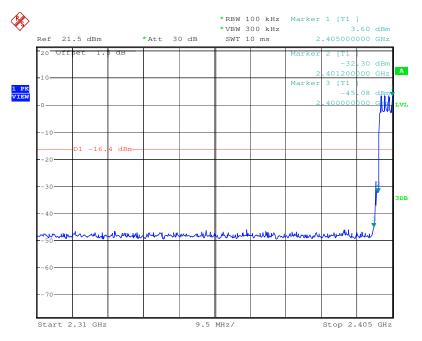


Date: 3.DEC.2010 12:04:10




Report No.: SZEMO11030115801

Page : 45 of 67

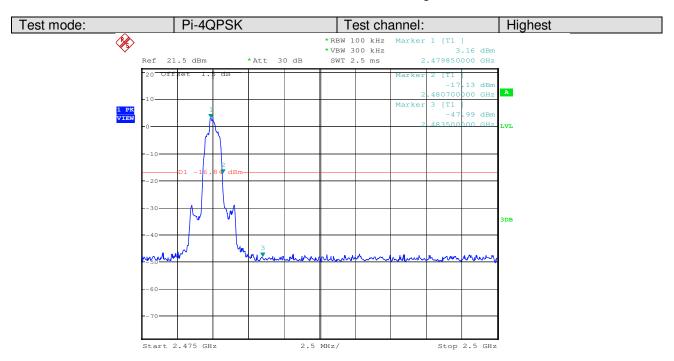

Date: 3.DEC.2010 13:18:19

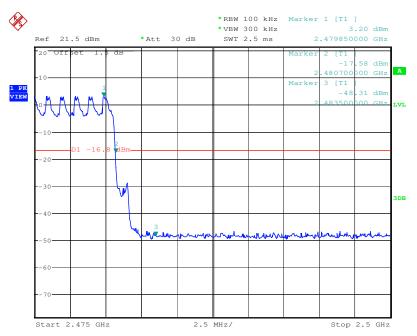


Date: 3.DEC.2010 12:12:51




Report No.: SZEMO11030115801

Page : 46 of 67

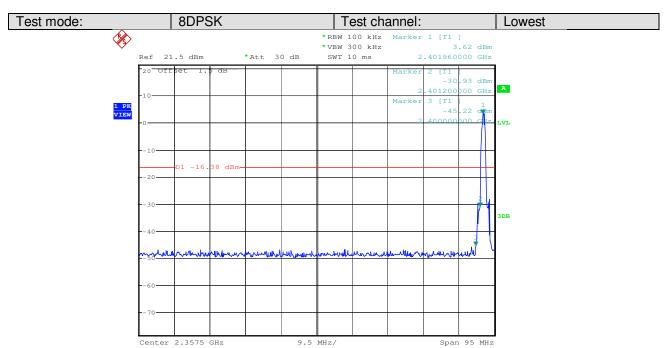

Date: 3.DEC.2010 11:53:56

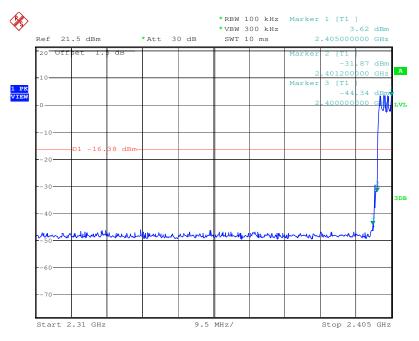


Date: 3.DEC.2010 12:06:16




Report No.: SZEMO11030115801

Page : 47 of 67

Test mode: 8DPSK Test channel: Highest

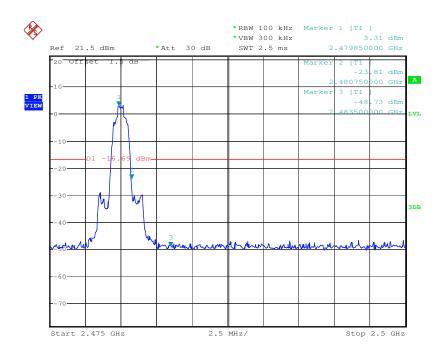

Date: 3.DEC.2010 12:00:28

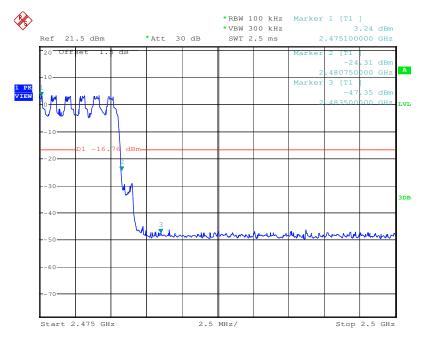

Date: 3.DEC.2010 12:19:18



Report No.: SZEMO11030115801

Page : 48 of 67

5.8 RF Antenna Conducted spurious emissions


Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2009 and KDB DA00-705					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Receiver setup	RBW=100KHz VBW=300KHz					
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Test Instruments:	Refer to section 4.7 for details					
Test results:	Pass					

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEMO11030115801

Page : 49 of 67

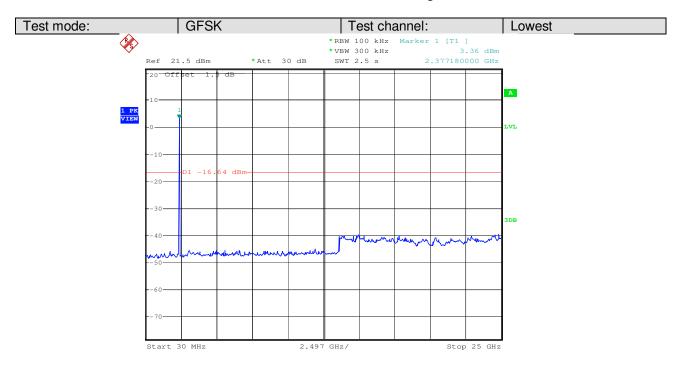

Date: 3.DEC.2010 13:24:25

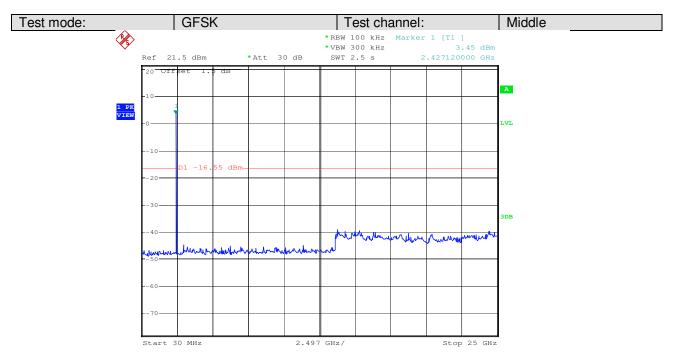


Date: 3.DEC.2010 12:25:36




Report No.: SZEMO11030115801

Page : 50 of 67

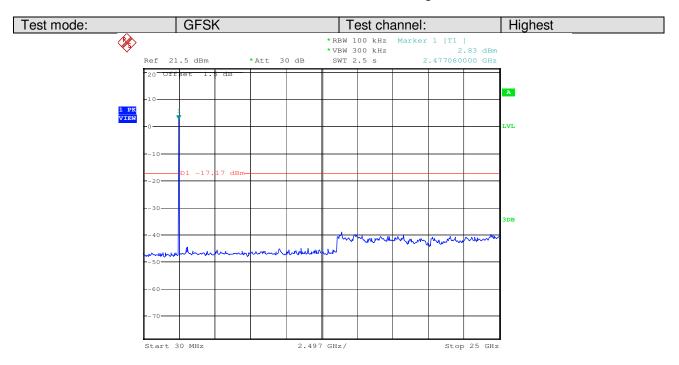

Date: 3.DEC.2010 12:47:45

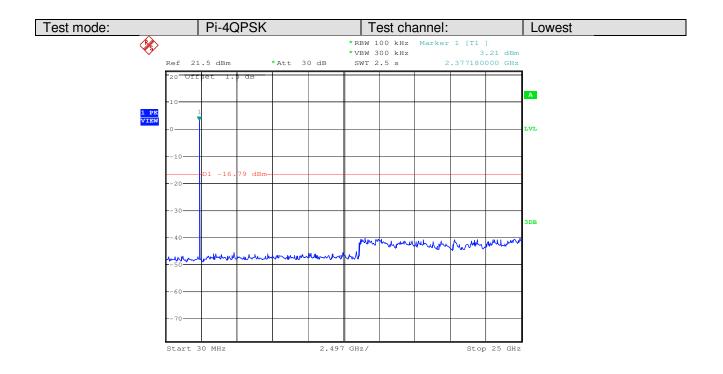


Date: 3.DEC.2010 12:22:07




Report No.: SZEMO11030115801

Page : 51 of 67

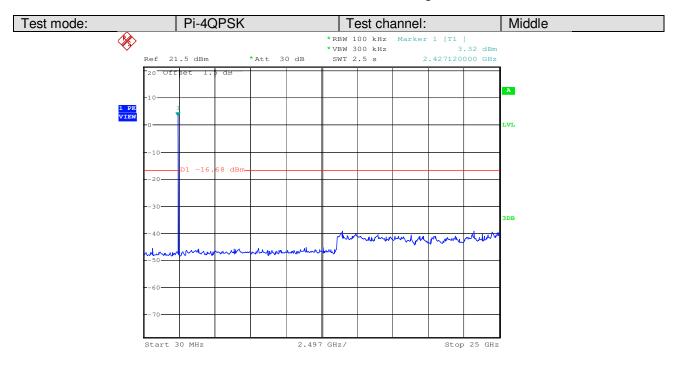

Date: 3.DEC.2010 12:28:17

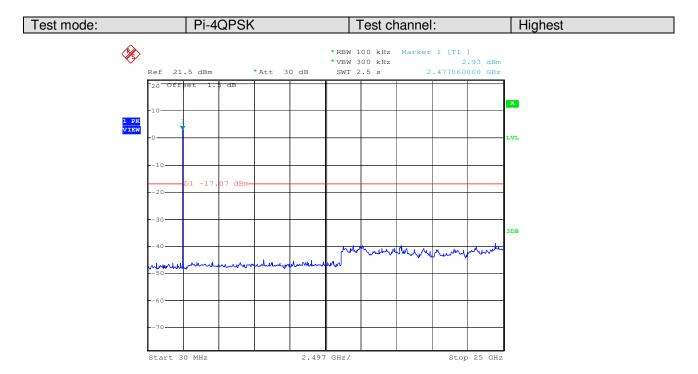


Date: 3.DEC.2010 12:49:32




Report No.: SZEMO11030115801

Page : 52 of 67

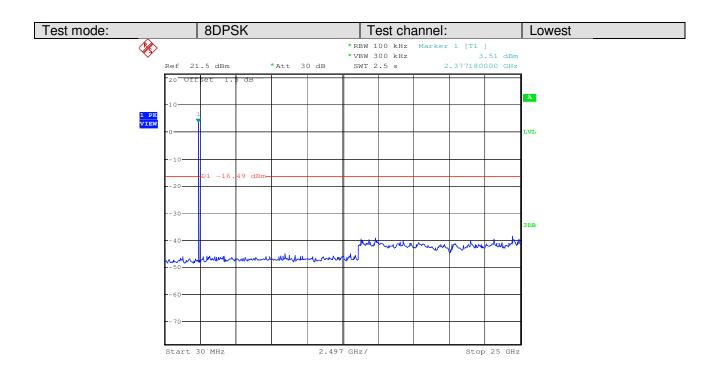

Date: 3.DEC.2010 12:24:04

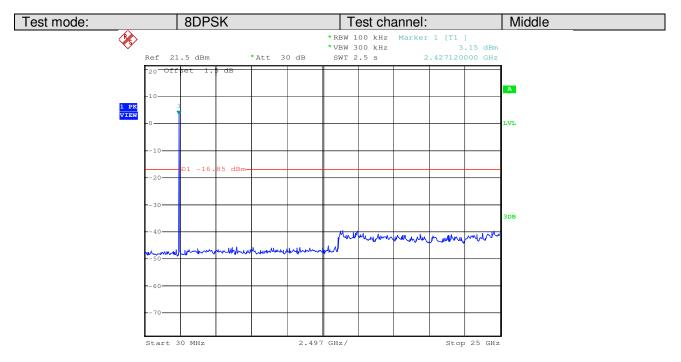


Date: 3.DEC.2010 12:29:37



Report No.: SZEMO11030115801

Page : 53 of 67

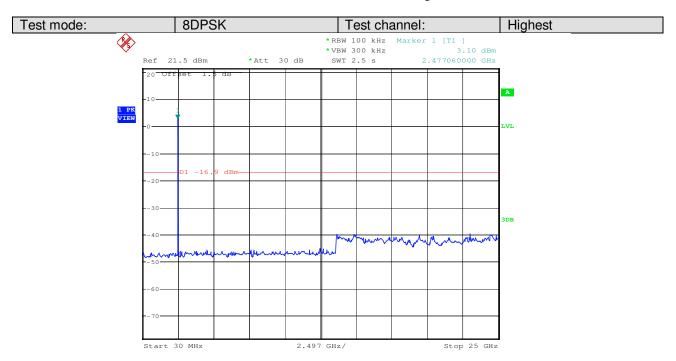

Date: 3.DEC.2010 12:38:57



Report No.: SZEMO11030115801

Page : 54 of 67

5.9 Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEMO11030115801

Page : 55 of 67


5.10 Radiated Emission

Test Method: Test Frequency Range: Measurement Distance: 3m (Semi-Anechoic Chamber) Frequency Detector RBW VBW Remark 30MHz-1GHz Quasi-peak 100KHz 300KHz Quasi-peak Value Peak 1MHz 3MHz Peak Value Peak 1MHz 10Hz Average Value 88MHz-216MHz 40.0 Quasi-peak Value 960MHz-1GHz 44.5 Quasi-peak Value 960MHz-1GHz 45.0 Quasi-peak Value 960MHz-1GHz 54.0 Quasi-peak Value 960MHz-1GHz 54.0 Quasi-peak Value 960MHz-1GHz 54.0 Quasi-peak Value 960MHz-1GHz 54.0 Quasi-peak Value Above 1GHz 54.0 Average Value 960MHz-1GHz 54.0 Average Value 960MHz-1GHz 54.0 Average Value 74.0 Peak Value Above 1GHz 74.0 Peak Value Above 1GHz 74.0 Peak Value 25.0 Average Value 74.0 Peak Value Above 1GHz 74.0 Peak Value Above 1GHz 74.0 Peak Value Above 1GHz 74.0 Peak Value 74.0 Peak Peak Peak Peak Peak Peak Peak Peak	Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)	Test Method:	ANSI C63.10: 2009								
Frequency Detector RBW VBW Remark	Test Frequency Range:									
Frequency Detector RBW VBW Remark 300MHz-1GHz Quasi-peak Value Above 1GHz Peak 1MHz 3MHz Quasi-peak Value Peak 1MHz 3MHz Peak Value Peak 1MHz 10Hz Average Value Peak 1MHz 10Hz Average Value Peak 1MHz 10Hz Average Value B8MHz-216MHz 40.0 Quasi-peak Value 88MHz-216MHz 43.5 Quasi-peak Value 216MHz-960MHz 46.0 Quasi-peak Value 960MHz-1GHz 54.0 Average Value Above 1GHz 74.0 Peak Value Above 1GHz 74.0 Peak Value Accordant at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data	Test site:	Measurement D	istance: 3m (S	Semi-Anecho	ic Chambe	r)				
Frequency Detector RBW VBW Remark 300MHz-1GHz Quasi-peak Value Above 1GHz Peak 1MHz 3MHz Quasi-peak Value Peak 1MHz 3MHz Peak Value Peak 1MHz 10Hz Average Value Peak 1MHz 10Hz Average Value Peak 1MHz 10Hz Average Value B8MHz-216MHz 40.0 Quasi-peak Value 88MHz-216MHz 43.5 Quasi-peak Value 216MHz-960MHz 46.0 Quasi-peak Value 960MHz-1GHz 54.0 Average Value Above 1GHz 74.0 Peak Value Above 1GHz 74.0 Peak Value Accordant at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data	Receiver setup:	meadarement pretarios em (cerm / meanere emaniser)								
Limit: Frequency	·	Frequency Detector RBW VBW Remark								
Limit: Frequency		30MHz-1GHz Quasi-peak 100KHz 300KHz Quasi-peak Va								
Limit: Frequency		Ahove 1GHz	Peak	1MHz	3MHz	Peak Value				
Frequency Limit (dBuV/m @3m) Remark 30MHz-88MHz 40.0 Quasi-peak Value 88MHz-216MHz 43.5 Quasi-peak Value 216MHz-960MHz 46.0 Quasi-peak Value 960MHz-1GHz 54.0 Quasi-peak Value Above 1GHz 54.0 Average Value Above 1GHz 54.0 Average Value Above 1GHz 74.0 Peak Value a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data		Above rariz	Peak	1MHz	10Hz	Average Value				
30MHz-88MHz	Limit:									
B8MHz-216MHz		Freque	ncy	Limit (dBuV/	m @3m)	Remark				
216MHz-960MHz		30MHz-8	8MHz	40.0)	Quasi-peak Value				
Peak Value Above 1GHz Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data				43.5	5					
Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data						·				
Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data		960MHz-	1GHz			•				
Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data		Above 1	GHz –							
the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data										
g. The radiation measurements are performed in X, Y, Z axis		the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.								
Test Instruments: Refer to section 4.7 for details	Test Instruments:	positioning. Only the worst case is shown in the report. Refer to section 4.7 for details								



Report No.: SZEMO11030115801

Page : 56 of 67

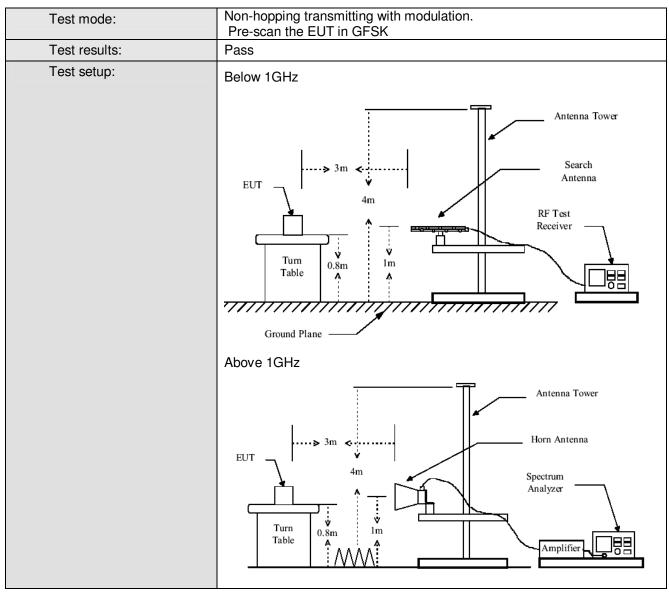

Note

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor






Report No.: SZEMO11030115801

Page : 57 of 67

5.10.1 Radiated emission below 1GHz

Vertical

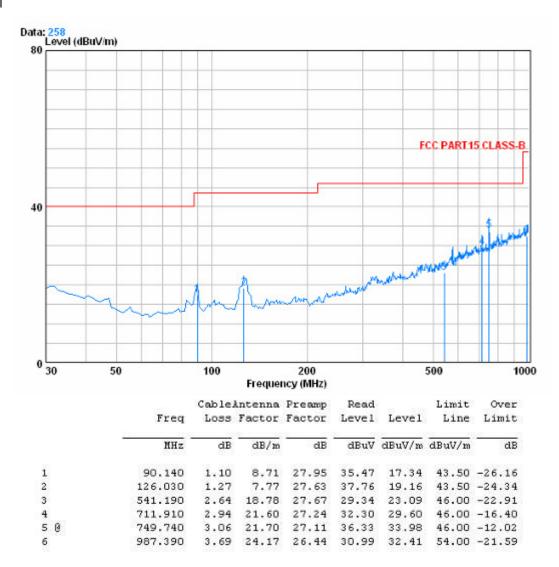


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEMO11030115801

Page : 58 of 67

Horizontal

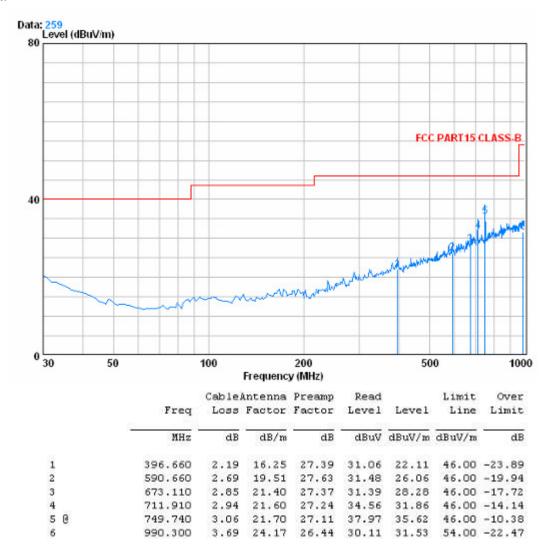

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEMO11030115801

Page : 59 of 67

5.10.2 Transmitter emission above 1GHz

Test mode::		GFSK	Test	channel:	Lowest	Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line Ove Limit (dBuV/m) (dB		Antenna polarization	
4804	9.36	34.04	41.53	47.01	48.88	74.00	-25.12	Vertical	
7206	13.38	36.33	40.98	44.97	53.70	74.00	-20.30	Vertical	
9608	13.39	36.99	37.56	40.40	53.22	74.00	-20.78	Vertical	
12010	16.45	38.80	39.09	35.68	51.84	74.00	-22.16	Vertical	
9608	13.39	36.99	37.56	40.77	53.59	74.00	-20.41	Horizontal	
12010	16.45	38.80	39.09	35.86	52.02	74.00	-21.98	Horizontal	
4804	9.36	34.04	41.53	47.01	48.88	74.00	-25.12	Horizontal	
7206	13.38	36.33	40.98	44.97	53.70	74.00	-20.30	Horizontal	
Test mode::		GFSK	Test	t channel:	Middle	Rem	ark:	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
4882	10.57	34.02	40.33	45.77	50.03	74.00	-23.97	Vertical	
7323	12.91	36.10	40.40	44.23	52.84	74.00	-21.16	Vertical	
9764	13.89	37.10	37.94	39.69	52.74	74.00	-21.26	Vertical	
12205	17.95	38.93	39.30	35.50	53.08	74.00	-20.92	Vertical	
4882	10.57	34.02	40.33	46.35	50.61	74.00	-23.39	Horizontal	
7323	12.91	36.10	40.40	45.72	54.33	74.00	-19.67	Horizontal	
9764	13.89	37.10	37.94	40.31	53.36	74.00 -20.64		Horizontal	
12205	17.95	38.93	39.30	35.42	53.00	74.00 -21.00		Horizontal	
Test mode::		GFSK	Test	t channel:	Highest	Rem	Remark:		
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
4960	10.43	34.01	41.03	46.18	49.59	74.00	-24.41	Vertical	
7440	12.72	35.91	40.01	45.03	53.65	74.00	-20.35	Vertical	
9920	14.24	37.23	37.78	40.15	53.84	74.00	-20.16	Vertical	
12300	17.79	38.97	39.38	36.04	53.42	74.00	-20.58	Vertical	
4960	10.43	34.01	41.03	46.11	49.52	74.00	-24.48	Horizontal	
7440	12.72	35.91	40.01	44.38	53.00	74.00	-21.00	Horizontal	
9920	14.24	37.23	37.78	39.39	53.08	74.00	-20.92	Horizontal	
12400	17.55	39.04	39.48	36.40	53.51	74.00	-20.49	Horizontal	

Remark: 1.The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEMO11030115801

Page : 60 of 67

5.10.3 Band edge (Radiated Emission) Test mode: Transmitting Test channel: Lowest Remark: Peak

Vertical:

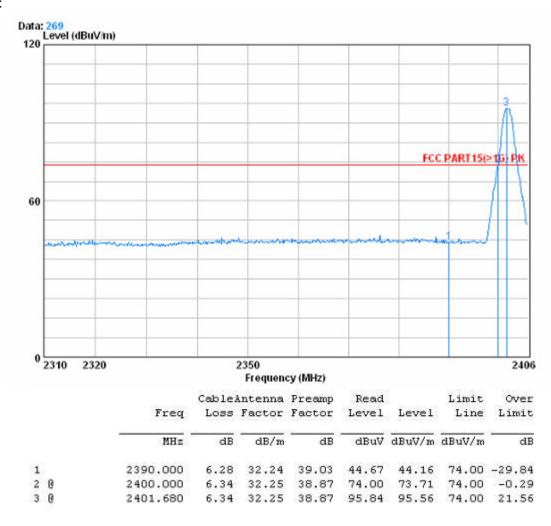


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEMO11030115801

Page : 61 of 67

Horizontal:

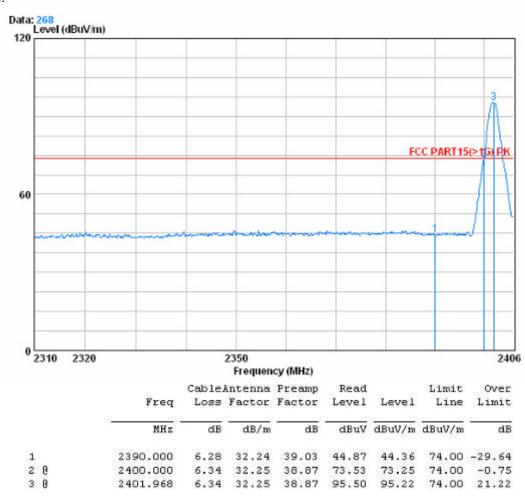

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEMO11030115801

Page : 62 of 67

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average
------------	--------------	---------------	--------	---------	---------

Vertical:

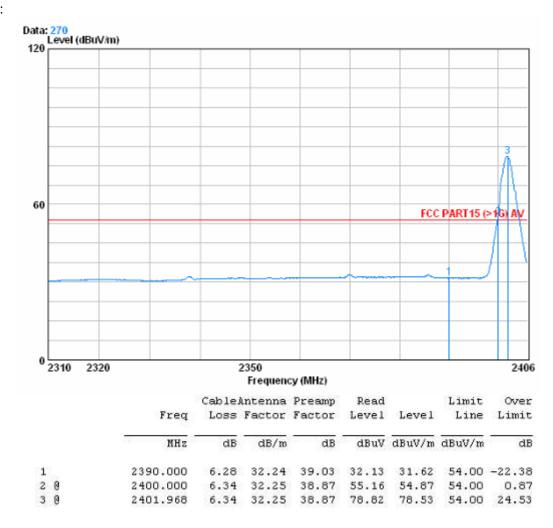


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEMO11030115801

Page : 63 of 67

Horizontal:

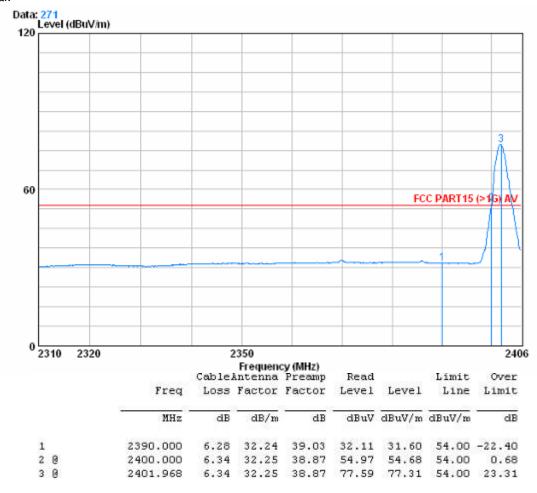

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEMO11030115801

Page : 64 of 67

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak
			9		

Vertical:

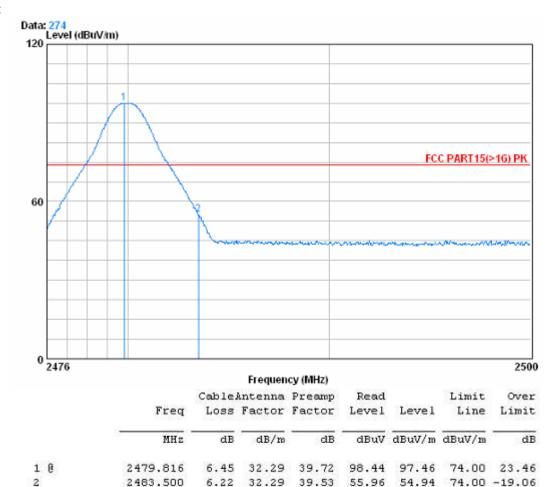




Report No.: SZEMO11030115801

Page : 65 of 67

Horizontal:

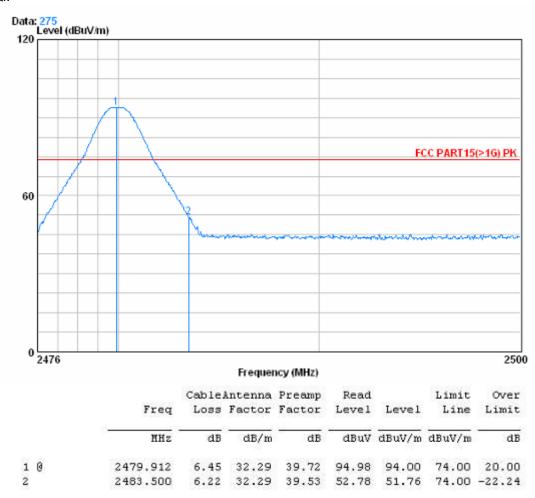

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEMO11030115801

Page : 66 of 67

Test mode: Transmitting Test channel: Highest Remark: Average

Vertical:

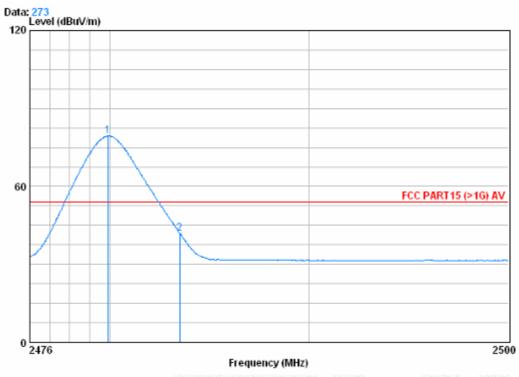


			Cable.	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2479.912	6.45	32.29	39.72	80.38	79.40	54.00	25.40
2	0	2483.500	6.22	32.29	39.53	43.01	41.99	54.00	-12.01



Report No.: SZEMO11030115801

Page : 67 of 67

Horizontal:

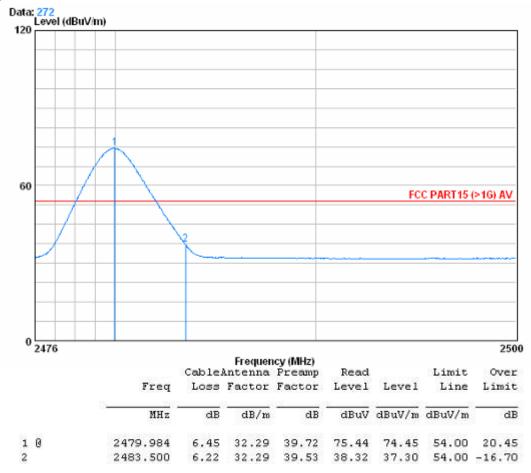

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."