



FCC RF Test Report

APPLICANT : Shenzhen Gongjin Electronics Co.,Ltd.
EQUIPMENT : Nokia Smart Node
BRAND NAME : Nokia
MODEL NAME : Nokia Multi-Standard Smart Node B2B14B66 (SN4IBN)
FCC ID : V4V1SN4IBN
STANDARD : 47 CFR Part 2, 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Sep. 21, 2023 ~ Nov. 07, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY...3
SUMMARY OF TEST RESULT...4
1 GENERAL DESCRIPTION...5
1.1 Applicant...5
1.2 Manufacturer...5
1.3 Product Feature of Equipment Under Test...5
1.4 Product Specification of Equipment Under Test...5
1.5 Modification of EUT...6
1.6 Maximum EIRP Power...6
1.7 Testing Location...7
1.8 Test Software...7
1.9 Applicable Standards...7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST...9
2.1 Test Mode...9
2.2 Connection Diagram of Test System...10
2.3 Support Unit used in test configuration and system...11
2.4 Measurement Results Explanation Example...11
2.5 Frequency List of Low/Middle/High Channels...11
3 CONDUCTED TEST ITEMS...13
3.1 Measuring Instruments...13
3.2 Test Setup...13
3.3 Test Result of Conducted Test...13
3.4 Conducted Output Power and EIRP...14
3.5 Conducted Band Edge...15
3.6 Conducted Spurious Emission...16
4 RADIATED TEST ITEMS...17
4.1 Measuring Instruments...17
4.2 Test Setup...17
4.3 Test Result of Radiated Test...18
4.4 Radiated Spurious Emission...19
5 LIST OF MEASURING EQUIPMENT...20
6 MEASUREMENT UNCERTAINTY...21
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	EIRP < 1640Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 66)	EIRP < 1640Watt		-
3.7	§2.1051 §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 66)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §24.238(a) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 66)	< 43+10log10(P[Watts])	PASS	-
4.4	§2.1053 §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 66)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 32.67 dB at 7836.000 MHz

Note: This is a variant report. The change note could be referred to Nokia Multi-Standard Smart Node B2B14B66 (SN4IBN)_Class II Permissive Change letter which is exhibit separately. According to the change, only the worst case of Coducted Power, Band Edge, CSE and RSE from original test report (Sporton Report Number FG151309A) were verified for the differences.

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Shenzhen Gongjin Electronics Co.,Ltd.

No.2 Danzi North Road, Kengzi Street, Pingshan District, Shenzhen, Guangdong, 518122, P.R. China

1.2 Manufacturer

Shenzhen Gongjin Electronics Co.,Ltd.

No.2 Danzi North Road, Kengzi Street, Pingshan District, Shenzhen, Guangdong, 518122, P.R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Nokia Smart Node
Brand Name	Nokia
Model Name	Nokia Multi-Standard Smart Node B2B14B66 (SN4IBN)
FCC ID	V4V1SN4IBN
HW Version	V03
SW Version	56850
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 66 : 2110 MHz~ 2180 MHz
Rx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz
Bandwidth	LTE: LTE Band 2 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 66 : 5MHz / 10MHz / 15MHz / 20MHz NB-IOT Category NB1: 200kHz
Sub-carrier Speacing	NB-IOT Category NB1: LTE Band 2 : 15kHz LTE Band 66 : 15kHz
NB-IoT Operating Type	Guard-band
Maximum Output Power to Antenna	LTE: <MIMO Ant. 1+2> LTE Band 2 : 24.29 dBm <MIMO Ant. 3+4> LTE Band 66 : 24.58 dBm NB-IOT Category NB1: <MIMO Ant. 1+2> LTE Band 2 : 23.91 dBm <MIMO Ant. 3+4> LTE Band 66 : 24.65 dBm



Antenna Type	WWAN : Dipole Antenna
Antenna Gain	<SISO Ant. 1/2> LTE Band 2 : 3.20 dBi <SISO Ant. 3/4> LTE Band 66 : 2.90 dBi <MIMO Ant. 1+2> LTE Band 2 : 6.21 dBi <MIMO Ant. 3+4> LTE Band 66 : 5.91 dBi
Type of Modulation	LTE: QPSK / 16QAM / 64QAM NB-IOT Category NB1 : QPSK

Note:

1. For SISO & MIMO mode, the RSE testing has assessed only MIMO mode by referring to their higher conducted power.
2. The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP is shown on the report for MIMO mode.
3. LTE Tx is non-signaling mode.
4. LTE only support full RB mode.
5. LTE supports Category NB1 and can only be used with LTE at the same time.
6. MIMO Gain = SISO Gain + Array Gain(10log 2)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power

LTE:

LTE Band 2_UL MIMO		QPSK
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)
20	1940.0 ~ 1980.0	1.1224
LTE Band 66_UL MIMO		QPSK
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)
20	2120.0 ~ 2170.0	1.1187

Note: All modulations have been tested, only the maximum bandwidth and the worst modulation test results are shown in the report.



NB-IOT Category NB1:

LTE Band 2_UL MIMO		QPSK
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)
20	1940.0 ~ 1980.0	1.0282
LTE Band 66_UL MIMO		QPSK
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)
20	2120.0 ~ 2170.0	1.1380

Note: Test combination is LTE Band 2 + NB-IOT, LTE Band 66 + NB-IOT.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	210616

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 24(E), 27(L)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.



2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

The WWAN Tx mode was pre-scanned for harmonics in three orthogonal panels (Y, Z and X planes) for both horizontal and vertical polarizations, and then the worst mode(X planes) was performed the full test and recorded in this report.

LTE:


Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	-	-				v	v			-	-	v	v		
	66	-	-				v	v			-	-	v	v		
Conducted Band Edge	2	-	-	v	v	v	v	v			-	-	v	v		
	66	-	-	v	v	v	v	v			-	-	v	v		
Conducted Spurious Emission	2	-	-	v	v	v	v	v			-	-	v	v		
	66	-	-	v	v	v	v	v			-	-	v	v		
E.I.R.P.	2	-	-				v	v			-	-	v	v		
	66	-	-				v	v			-	-	v	v		
Radiated Spurious Emission	2	Worst Case												v		
	66	Worst Case												v		
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All test items are based on engineering evaluation. 															



NB-IOT Category NB1:

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	-	-	-			v	v	-	-	-	-	v	v		
	66	-	-	-			v	v	-	-	-	-	v	v		
Conducted Band Edge	2	-	-	-	v	v	v	v	-	-	-	-	v	v		
	66	-	-	-	v	v	v	v	-	-	-	-	v	v		
Conducted Spurious Emission	2	-	-	-	v	v	v	v	-	-	-	-	v	v		
	66	-	-	-	v	v	v	v	-	-	-	-	v	v		
E.I.R.P.	2	-	-	-	v	v	v	v	-	-	-	-	v	v		
	66	-	-	-	v	v	v	v	-	-	-	-	v	v		
Radiated Spurious Emission	2	Worst Case												v		
	66	Worst Case												v		
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission. Pretest the power of guard band with LTE L/M/H channel, and only the worst power (Low Location with Low channel) of NB-IOT show in the report. Test combination is LTE Band 2 + NB-IOT, LTE Band 66 + NB-IOT. 															

2.2 Connection Diagram of Test System

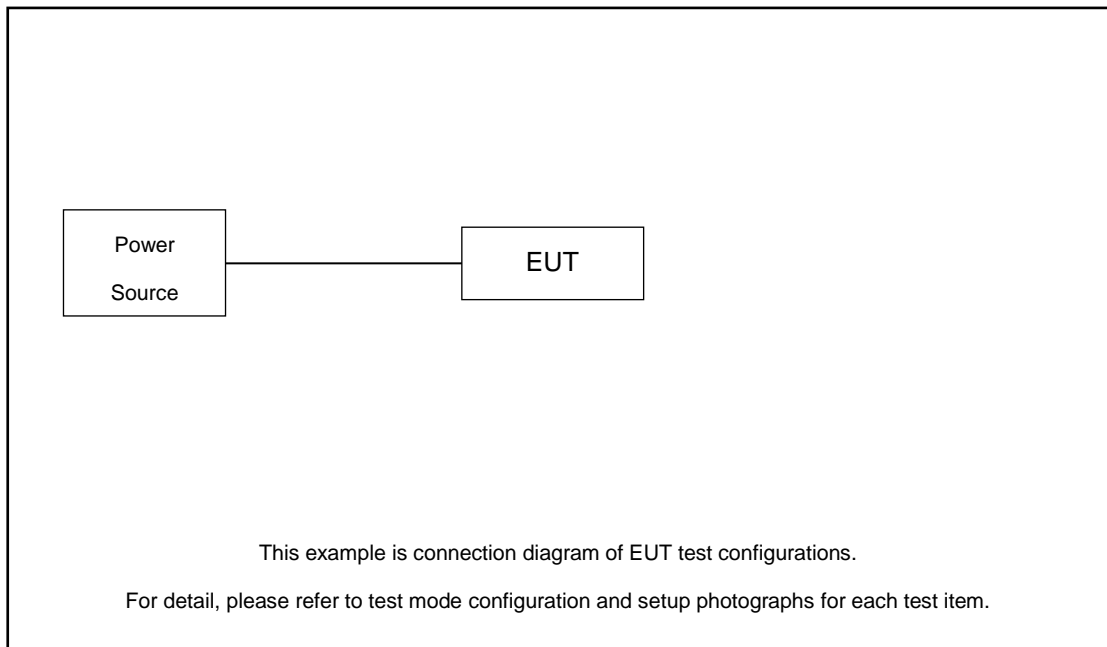



2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 8.51 dB and 20dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 8.51 + 20 = 28.51 \text{ (dB)}
 \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	700	900	1100
	Frequency	1940	1960	1980
15	Channel	675	900	1125
	Frequency	1937.5	1960	1982.5
10	Channel	650	900	1150
	Frequency	1935	1960	1985
5	Channel	625	900	1175
	Frequency	1932.5	1960	1987.5



LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	66536	66786	67036
	Frequency	2120	2145	2170
15	Channel	66511	66786	67061
	Frequency	2117.5	2145	2172.5
10	Channel	66486	66786	67086
	Frequency	2115	2145	2175
5	Channel	66461	66786	67111
	Frequency	2112.5	2145	2177.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Conducted Band-Edge and Conducted Spurious Emission

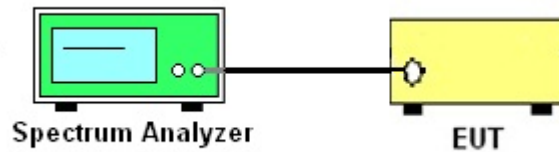

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

LTE Band 2

§24.232 (a)(2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP)

LTE Band 66

§27.50(d)(2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz 2155-2180 MHz band, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:

(ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz;

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the power meter.
3. Set EUT at maximum power perform non-signaling mode.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the power meter.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 2110-2155 MHz and 2155-2180 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and perform non-signaling mode.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}. \end{aligned}$$



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and perform non-signaling mode.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [43 + 10log(P)] (dB)
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
= -13dBm.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

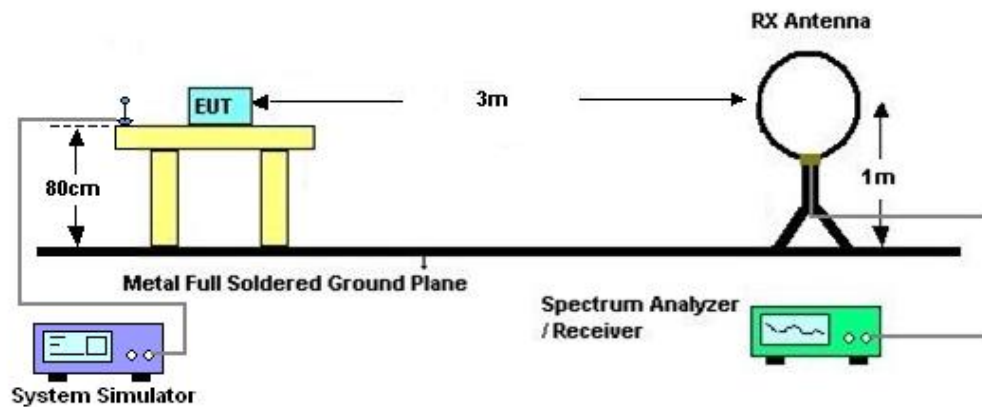

4.2.2 For radiated test from 30MHz to 1GHz

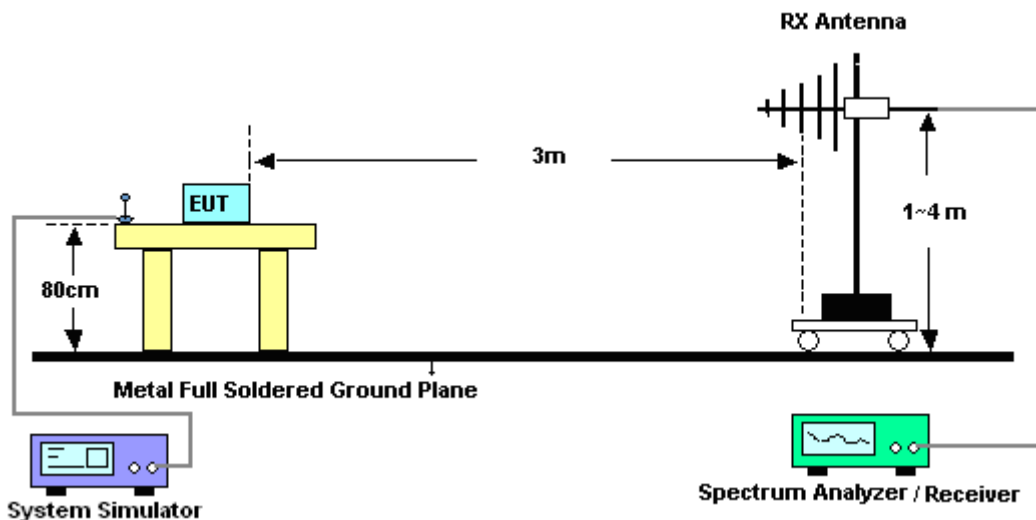

4.2.3 For radiated test above 1GHz

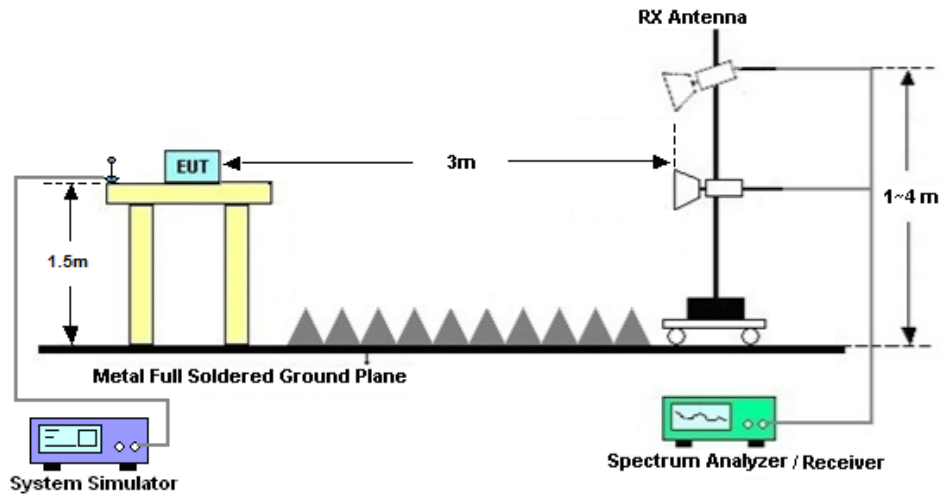

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] (dB)$
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$
 $= -13dBm.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Oct. 09, 2023~ Nov. 07, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023		Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Oct. 09, 2023~ Nov. 07, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Oct. 09, 2023~ Nov. 07, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 06, 2023	Oct. 09, 2023~ Nov. 07, 2023	Jul. 05, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Sep. 21, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11 2023	Sep. 21, 2023	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Sep. 21, 2023	Apr. 08, 2024	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	Sep. 21, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Sep. 21, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul 06, 2023	Sep. 21, 2023	Jul 05, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2023	Sep. 21, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Sep. 21, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Sep. 21, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 21, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 21, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 21, 2023	NCR	Radiation (03CH04-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX12-28 05-3000-180 00-40ST	2	3G High Pass	Jun. 29, 2023	Sep. 21, 2023	Jun. 28, 2024	Radiation (03CH04-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX12-93 5-1000-1500 0-40ST	2	1G High Pass	Jun. 29, 2023	Sep. 21, 2023	Jun. 28, 2024	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±2.26 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.82dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.56dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.54dB
---	--------



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

LTE:

LTE Band 2:

Ant.	BW	Modulation	Channel	Frequency (MHz)	Gain (dB)	Power (dBm)	EIRP (dbm)	EIRP power (W)
1+2	20M	QPSK	700	1940	6.21	24.29	30.50	1.1224
		QPSK	900	1960	6.21	24.05	30.26	1.0606
		QPSK	1100	1980	6.21	23.64	29.85	0.9662

LTE Band 66:

Ant.	BW	Modulation	Channel	Frequency (MHz)	Gain (dB)	Power (dBm)	EIRP (dbm)	EIRP power (W)
3+4	20M	QPSK	66536	2120	5.91	24.17	30.08	1.0175
		QPSK	66786	2145	5.91	24.58	30.49	1.1187
		QPSK	67036	2170	5.91	24.57	30.48	1.1181

NB-IOT Category NB1:

LTE Band 2:

Ant.	BW	Modulation	Channel	Frequency (MHz)	Gain (dB)	Power (dBm)	EIRP (dbm)	EIRP power (W)
1+2	20M	QPSK	700	1940	6.21	23.91	30.12	1.0282
		QPSK	900	1960	6.21	23.89	30.10	1.0224
		QPSK	1100	1980	6.21	23.74	29.95	0.9887


LTE Band 66:

Ant.	BW	Modulation	Channel	Frequency (MHz)	Gain (dB)	Power (dBm)	EIRP (dbm)	EIRP power (W)
3+4	20M	QPSK	66536	2120	5.91	24.64	30.55	1.1341
		QPSK	66786	2145	5.91	24.65	30.56	1.1380
		QPSK	67036	2170	5.91	24.49	30.40	1.0976







For LTE: LTE Band 2 MIMO Ant. 1

Conducted Band Edge

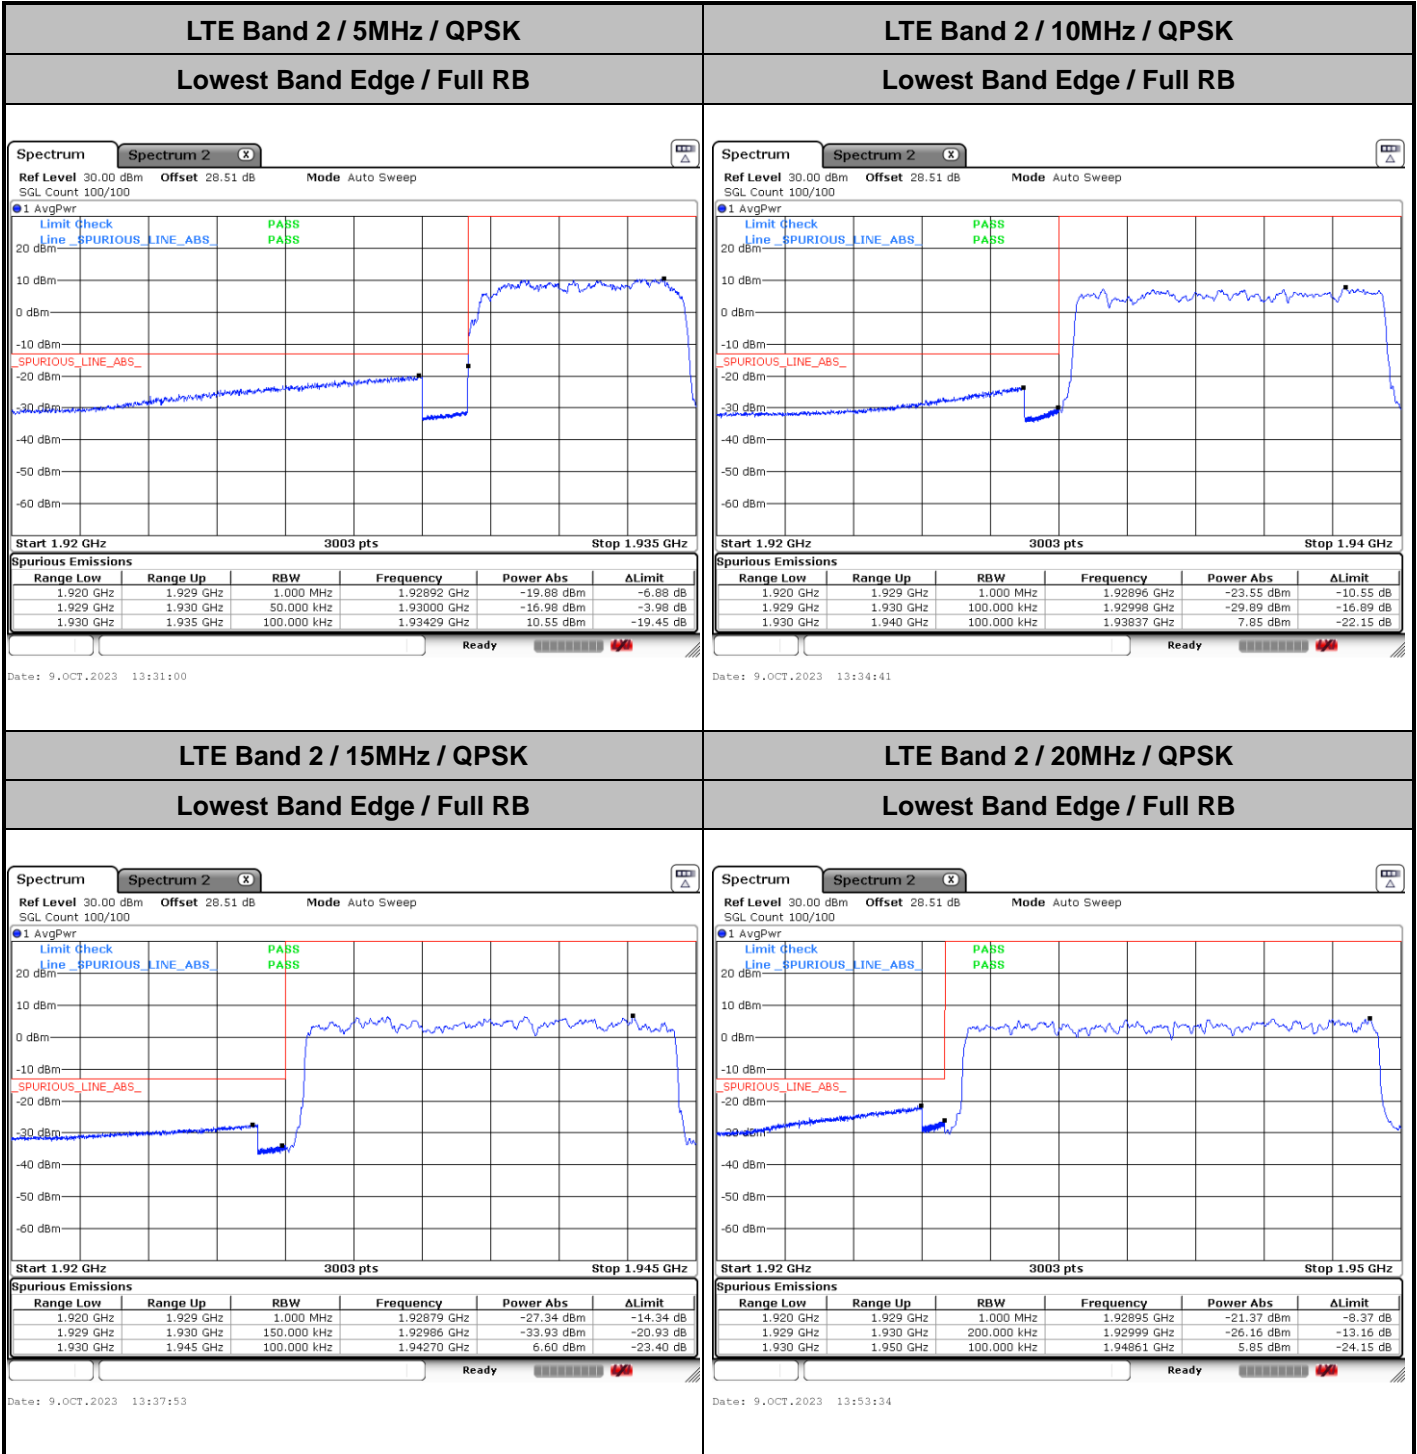







Conducted Spurious Emission

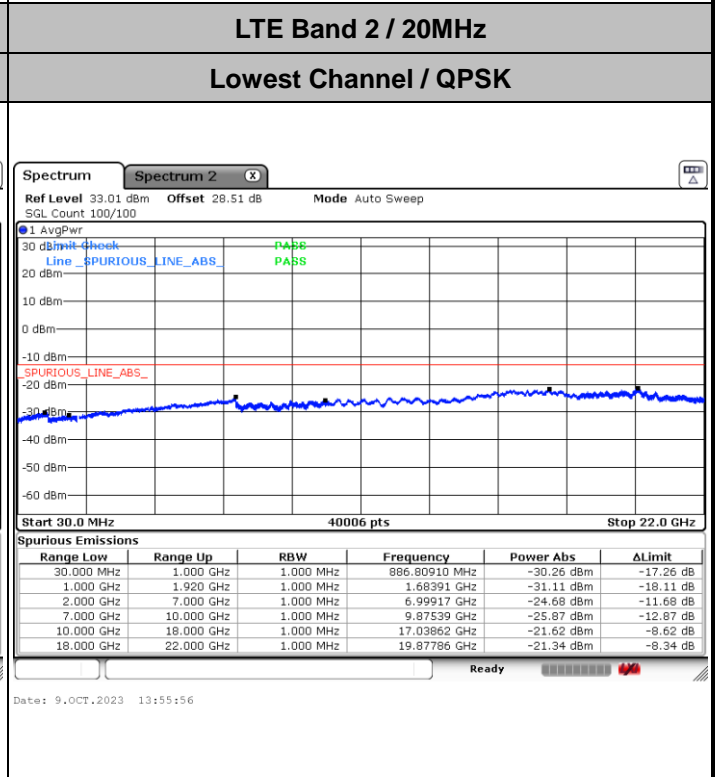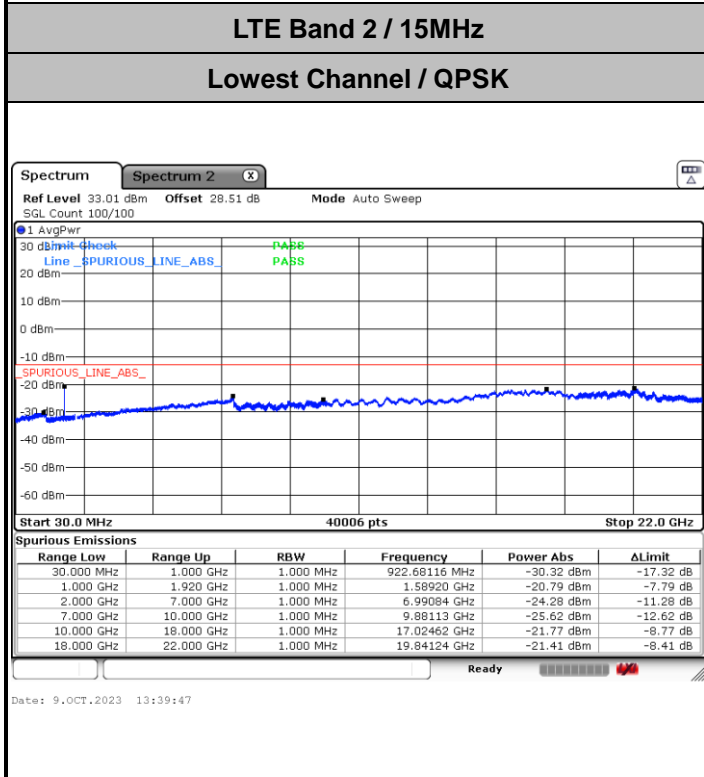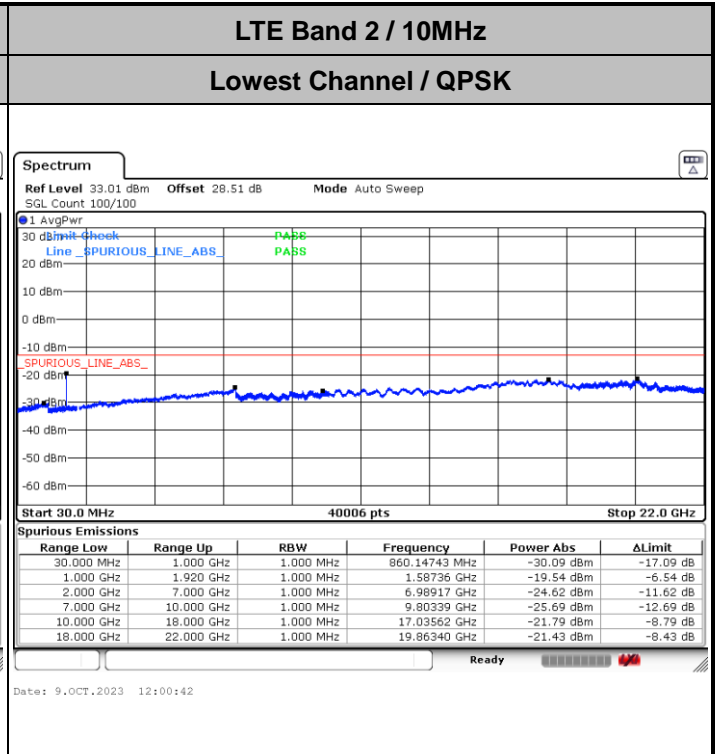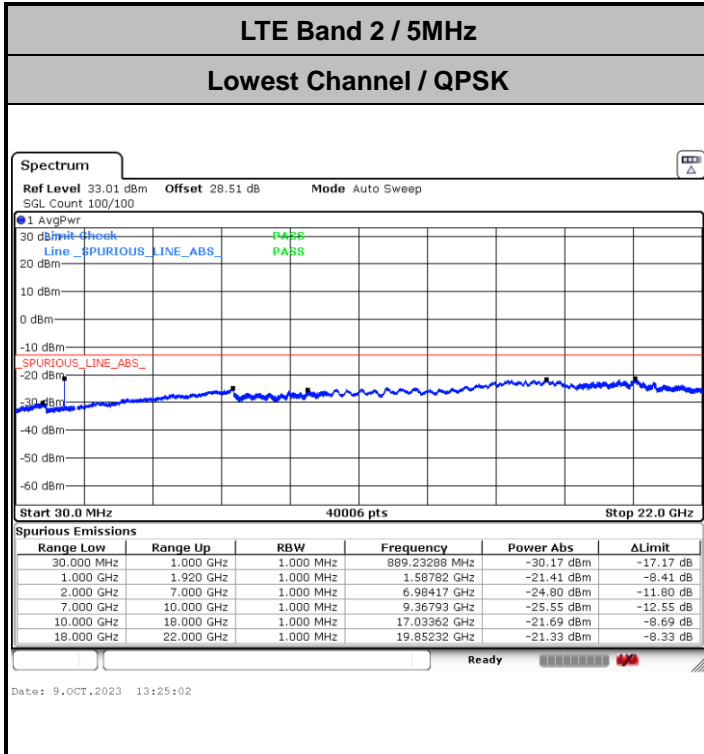







LTE Band 2 MIMO Ant. 2

Conducted Band Edge

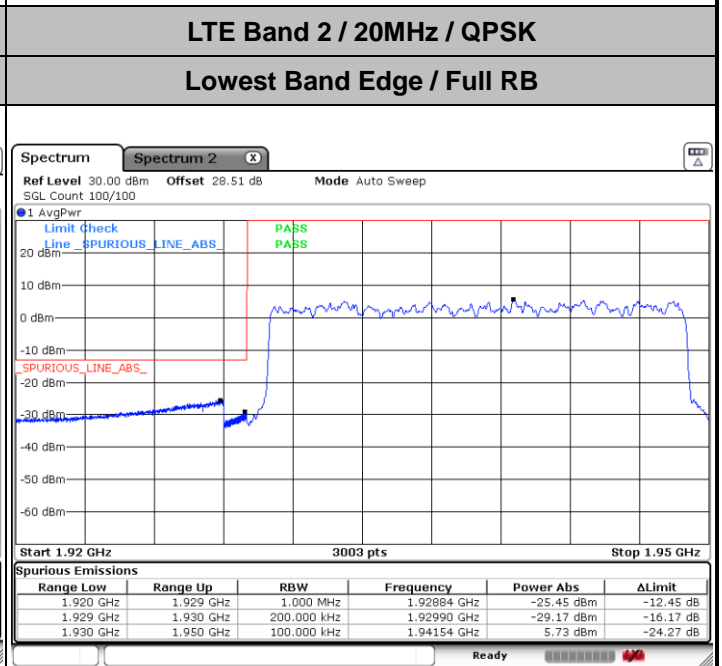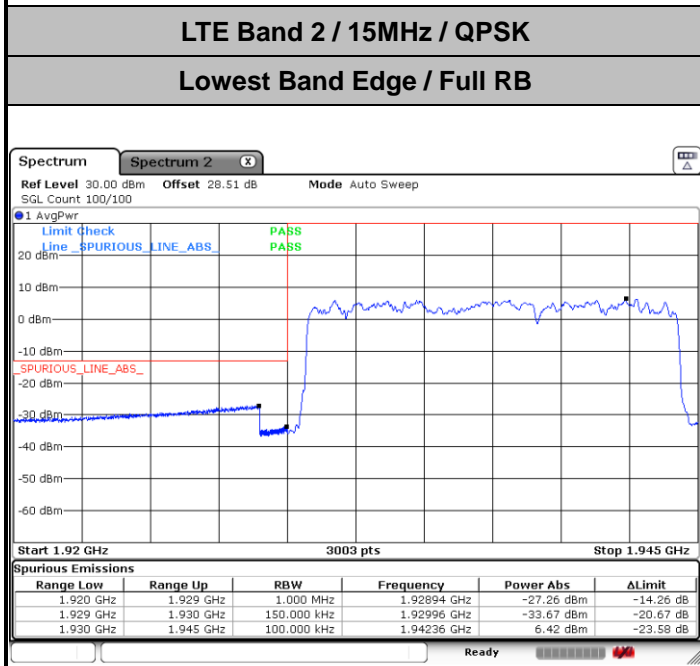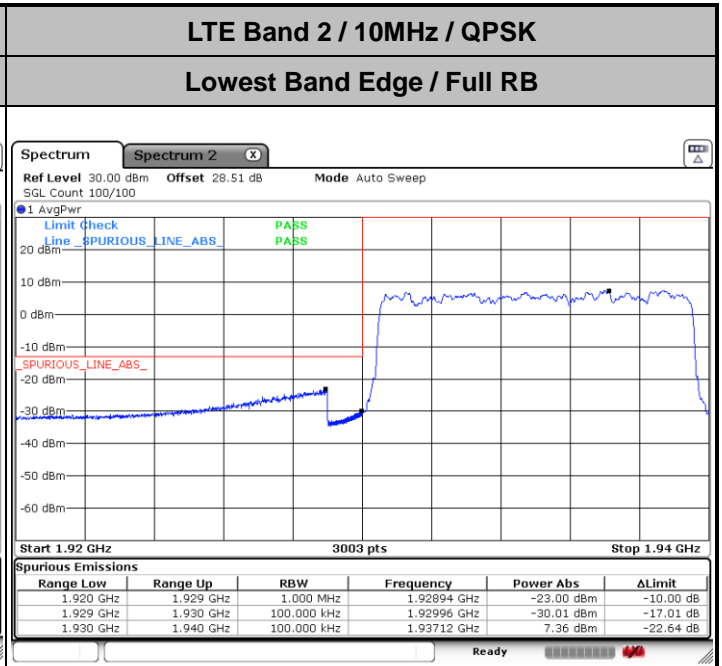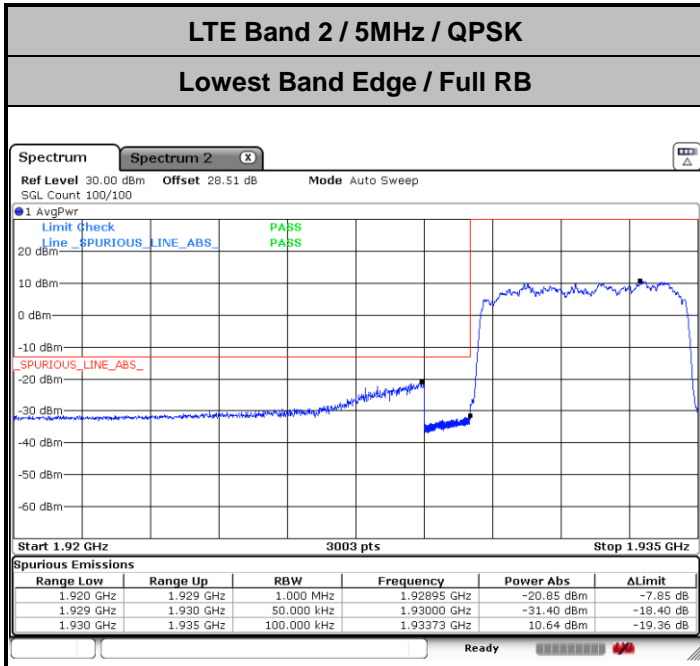




Conducted Spurious Emission

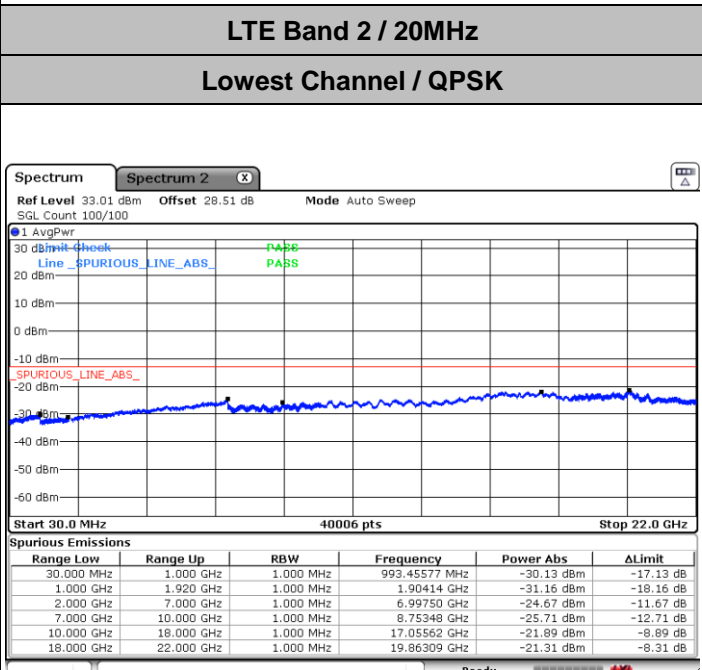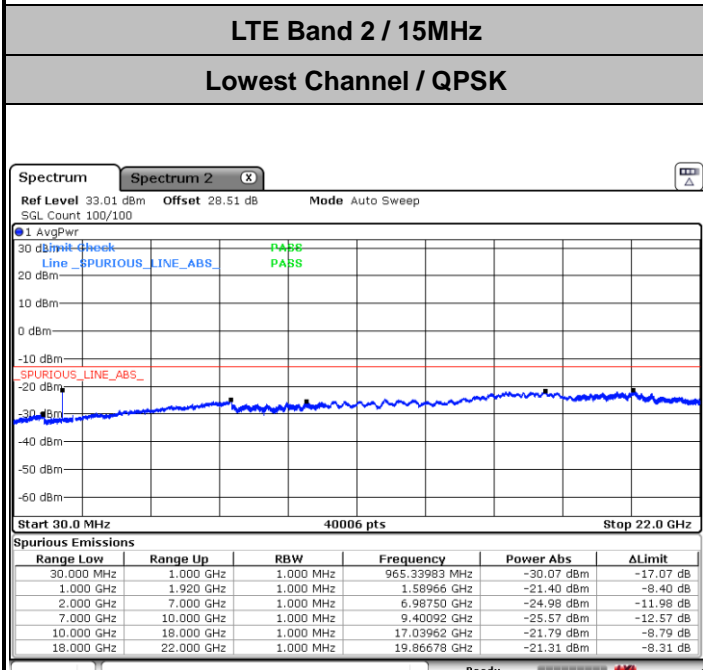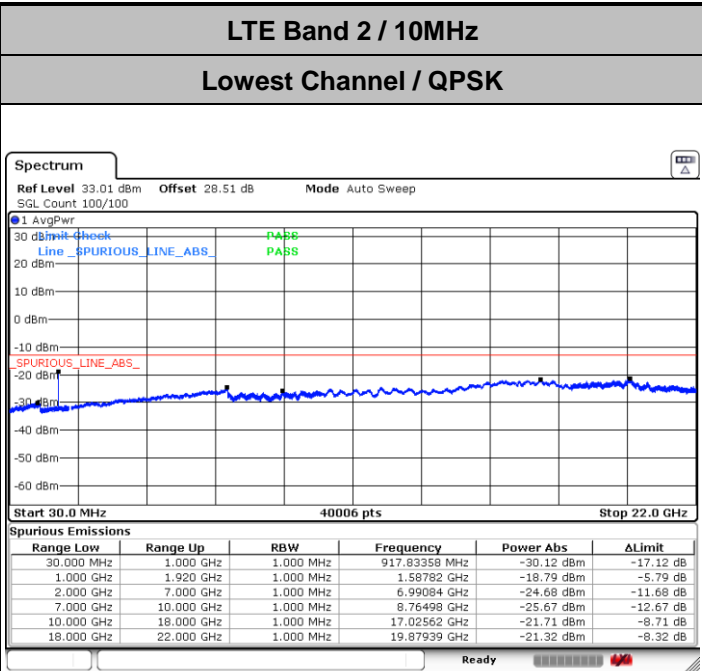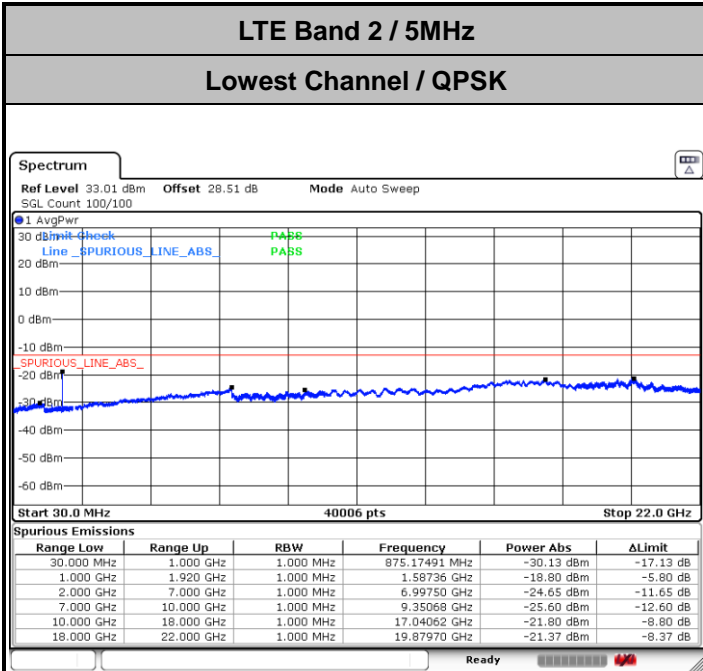




LTE Band 66 MIMO Ant. 3

Conducted Band Edge

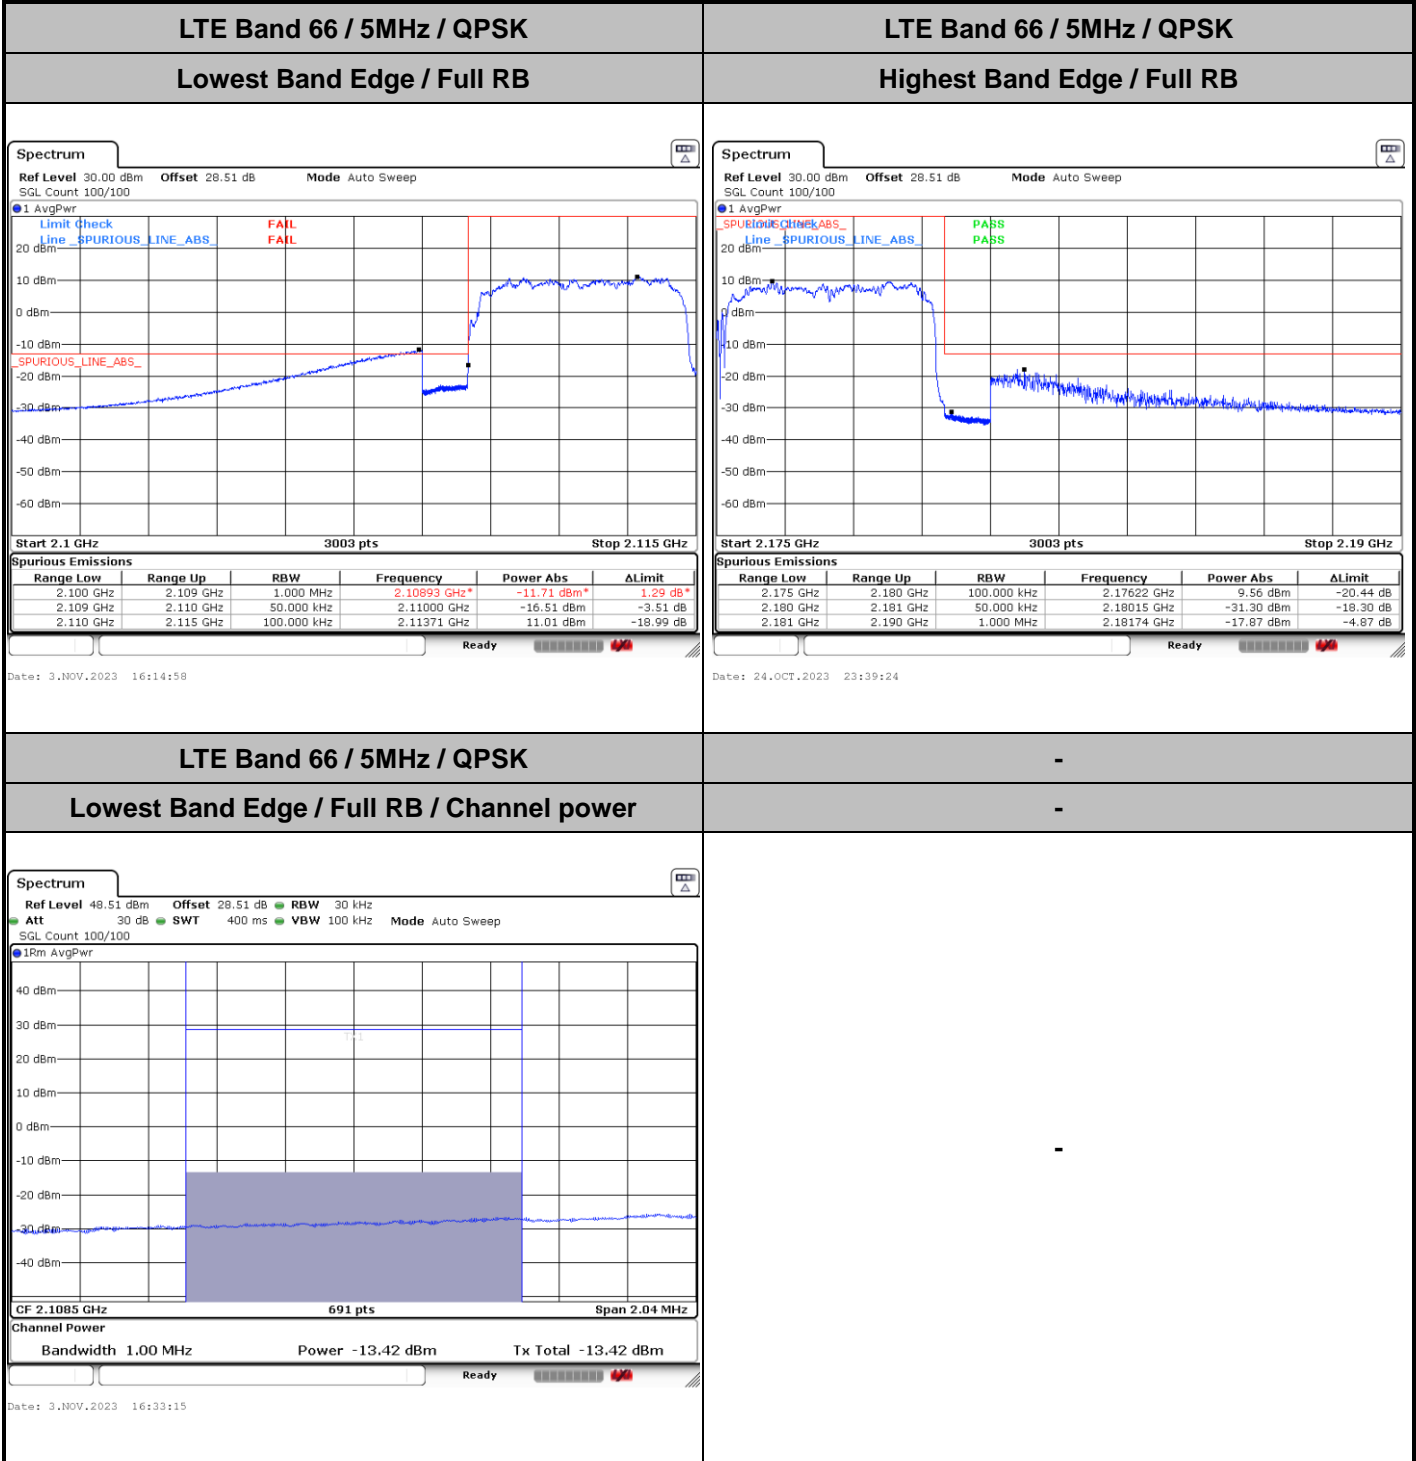




LTE Band 66 / 10MHz / QPSK
Lowest Band Edge / Full RB

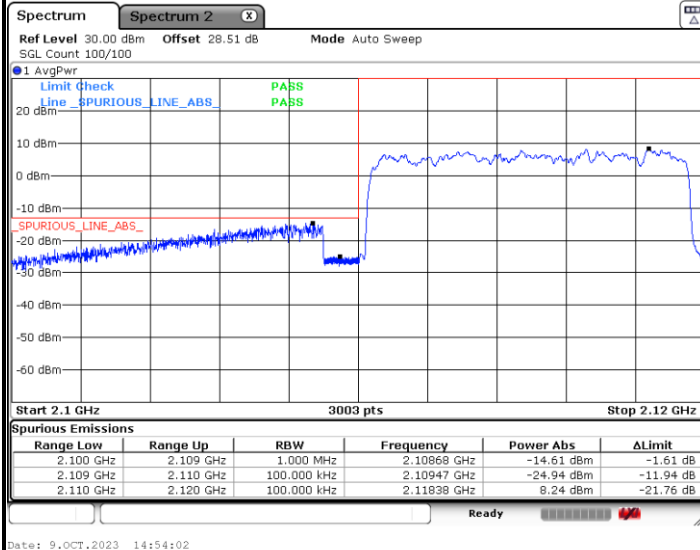


Date: 9.OCT.2023 14:54:02

LTE Band 66 / 15MHz / QPSK
Lowest Band Edge / Full RB

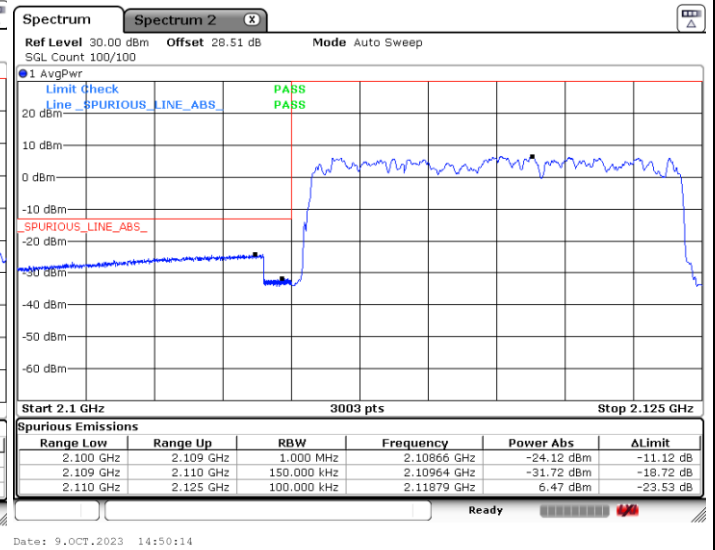

Date: 9.OCT.2023 14:50:14





LTE Band 66 / 20MHz / QPSK
Lowest Band Edge / Full RB

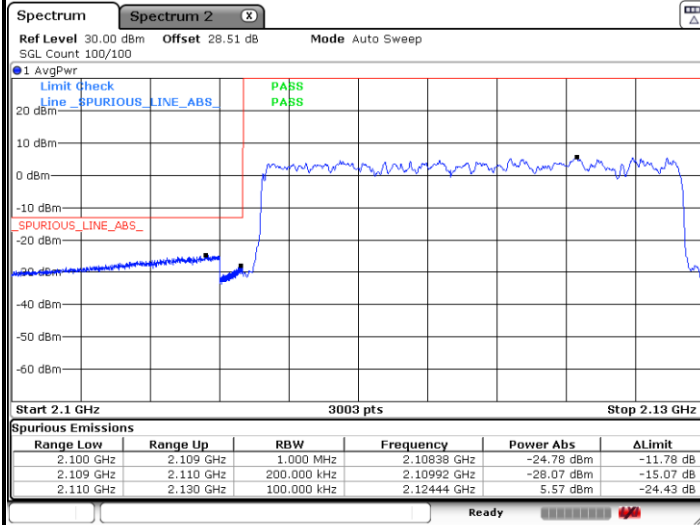

Date: 9.OCT.2023 14:40:36




Conducted Spurious Emission

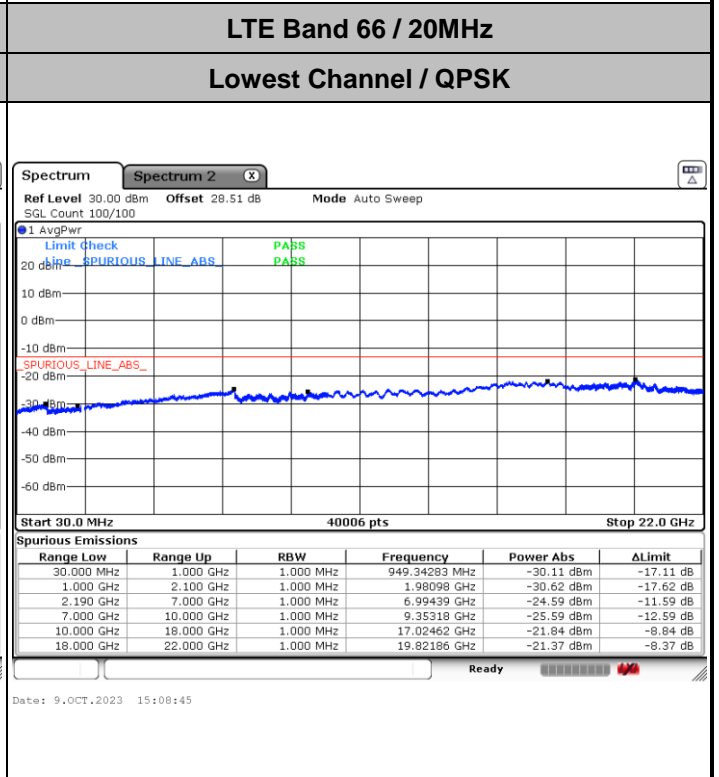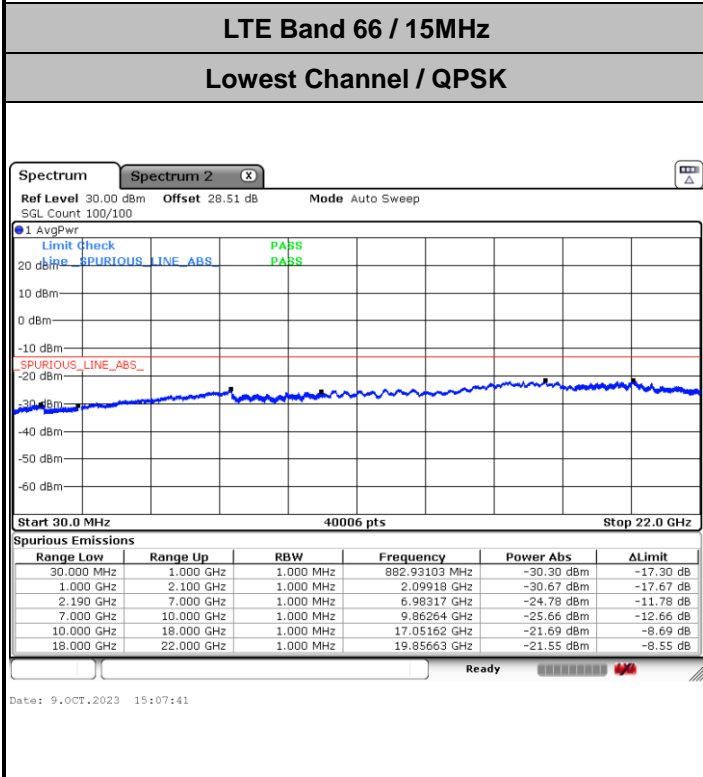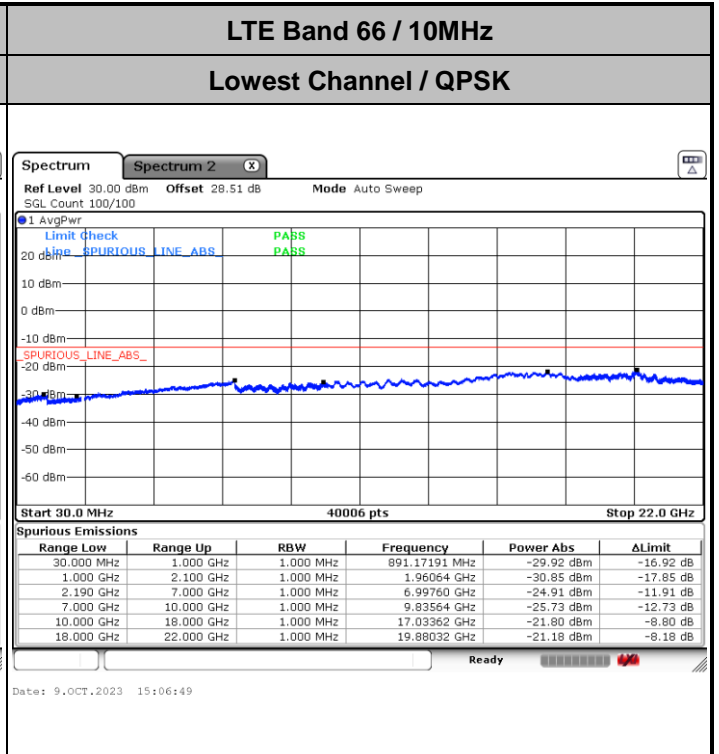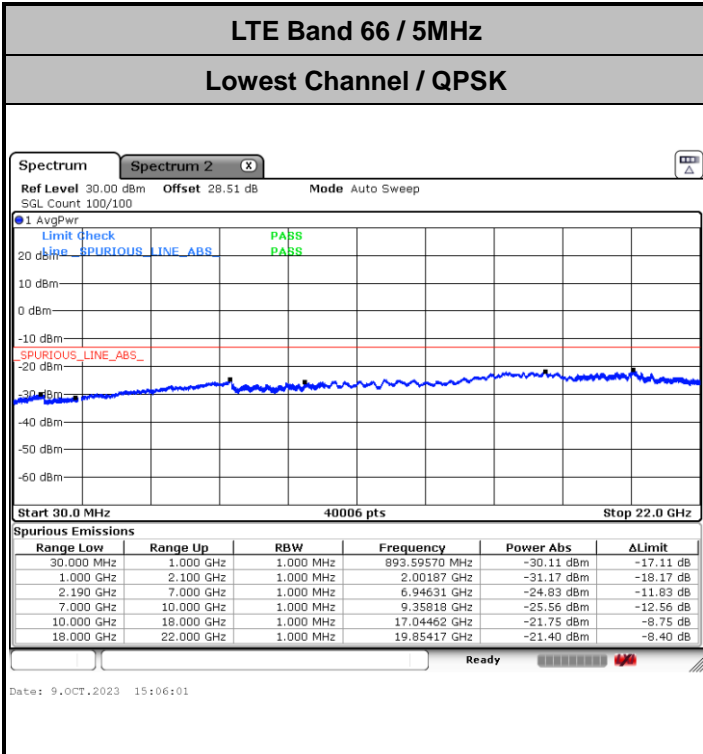




LTE Band 66 MIMO Ant. 4





Conducted Band Edge

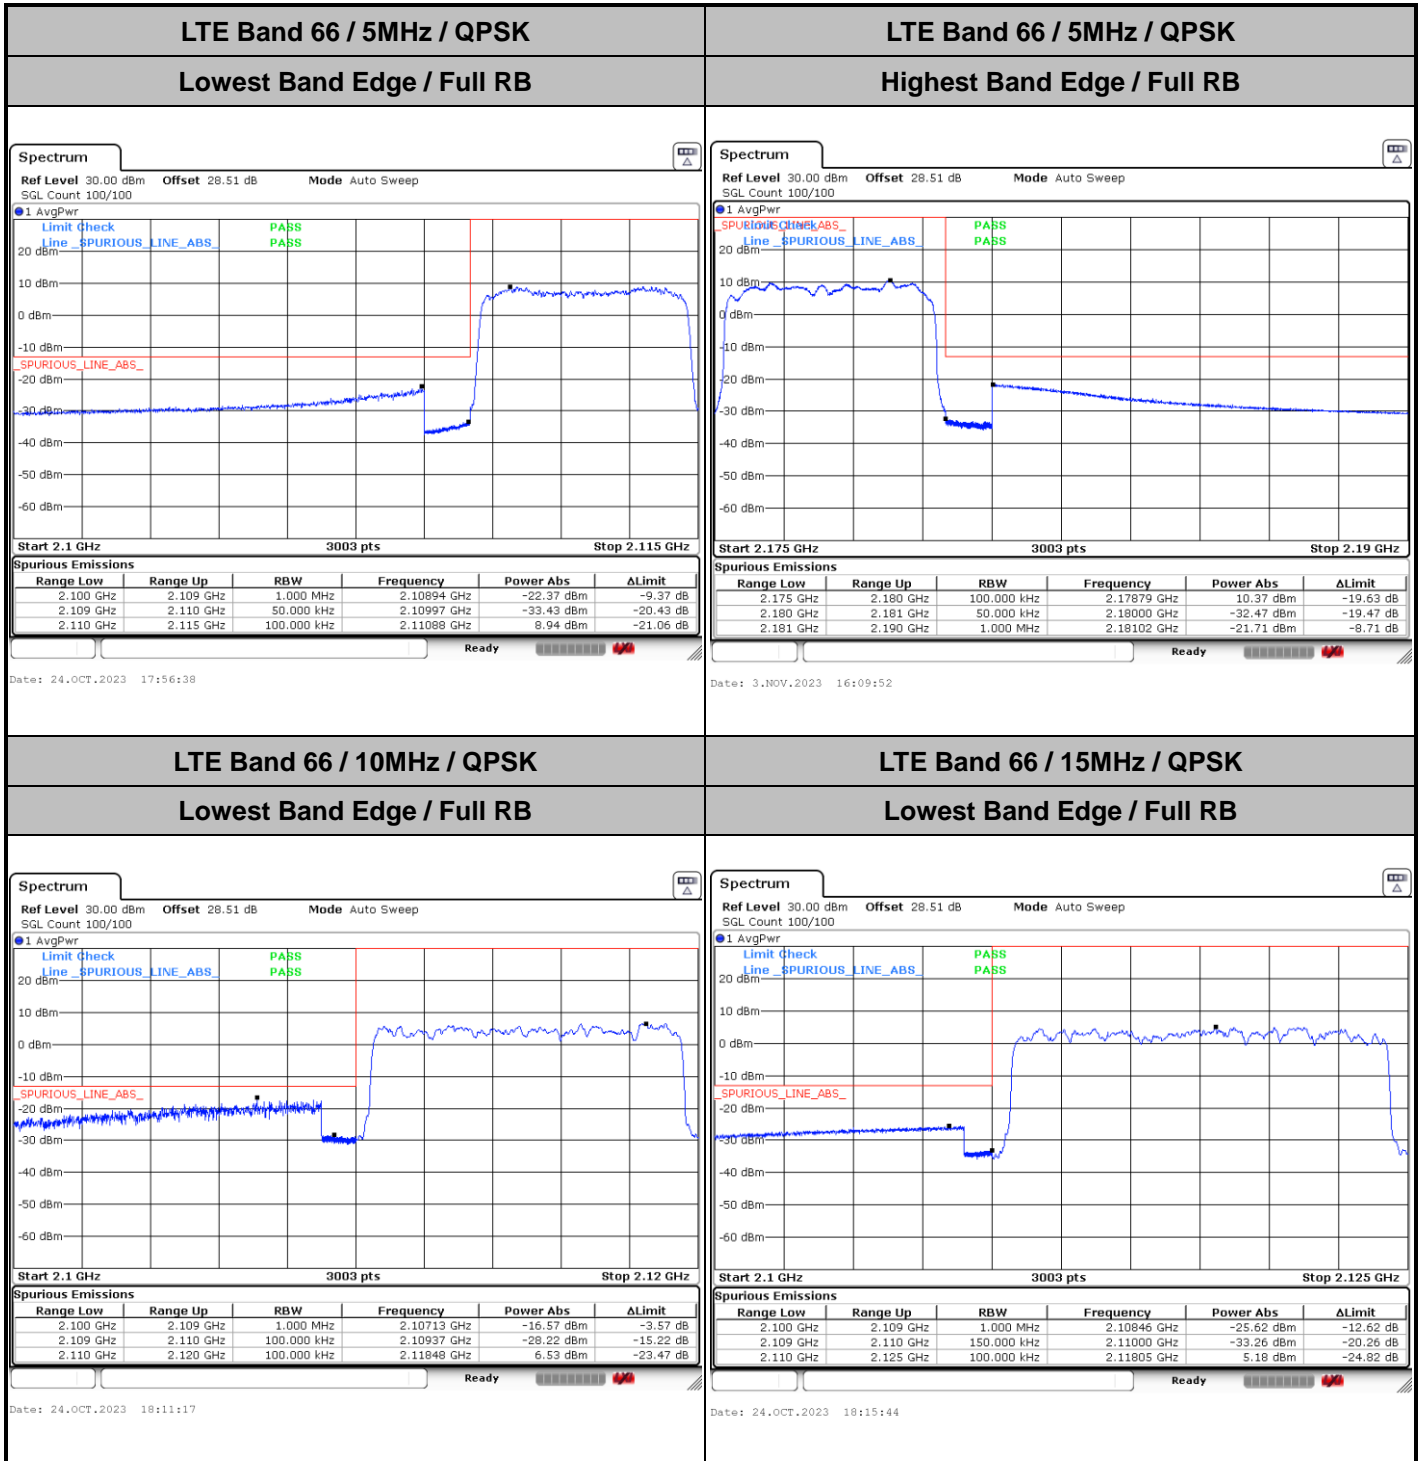

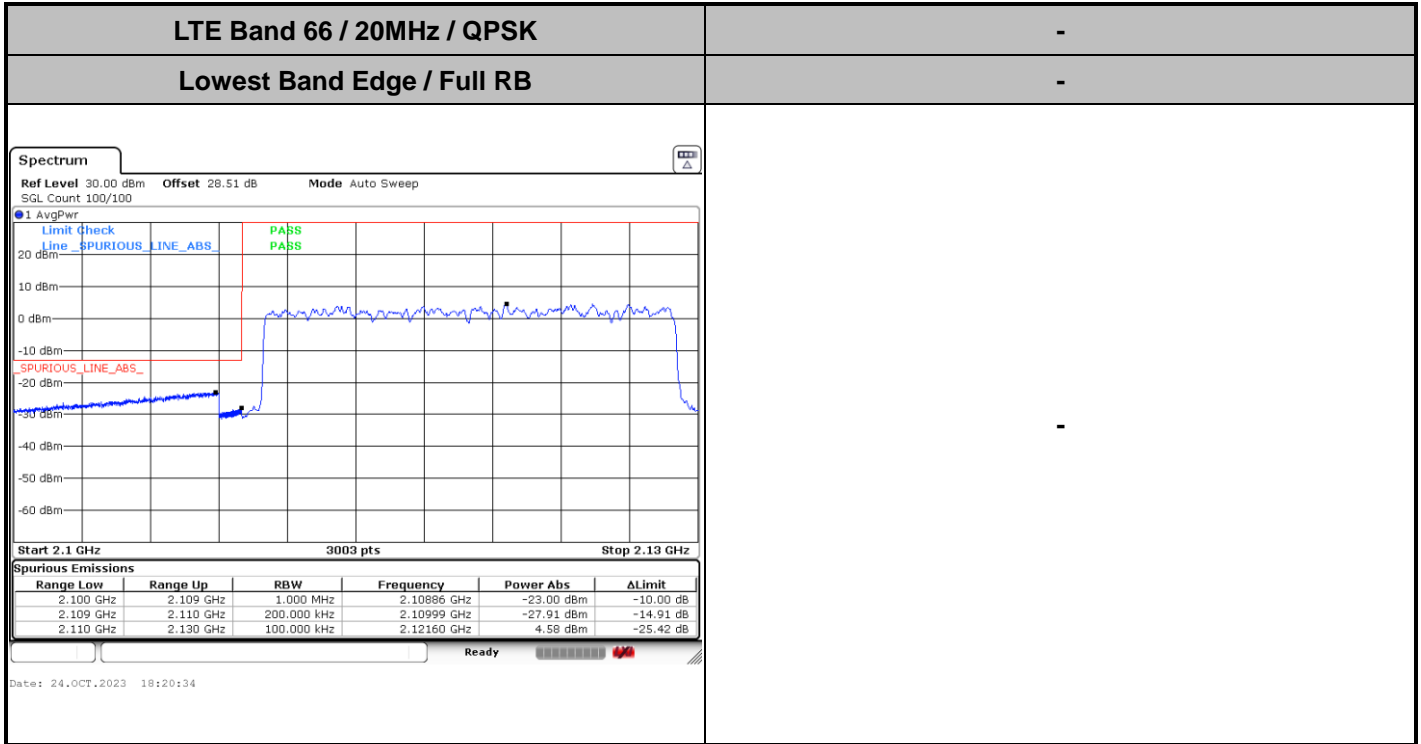




Conducted Spurious Emission

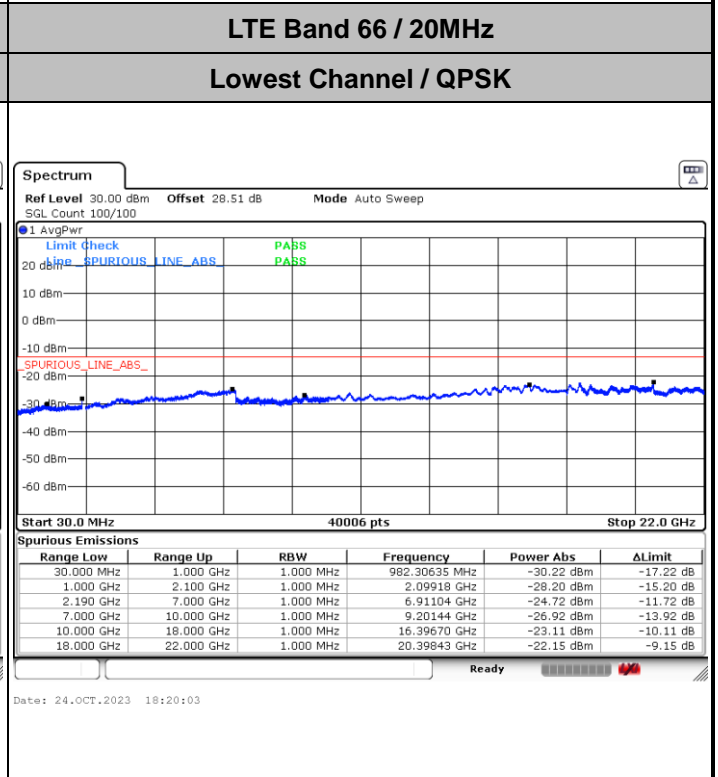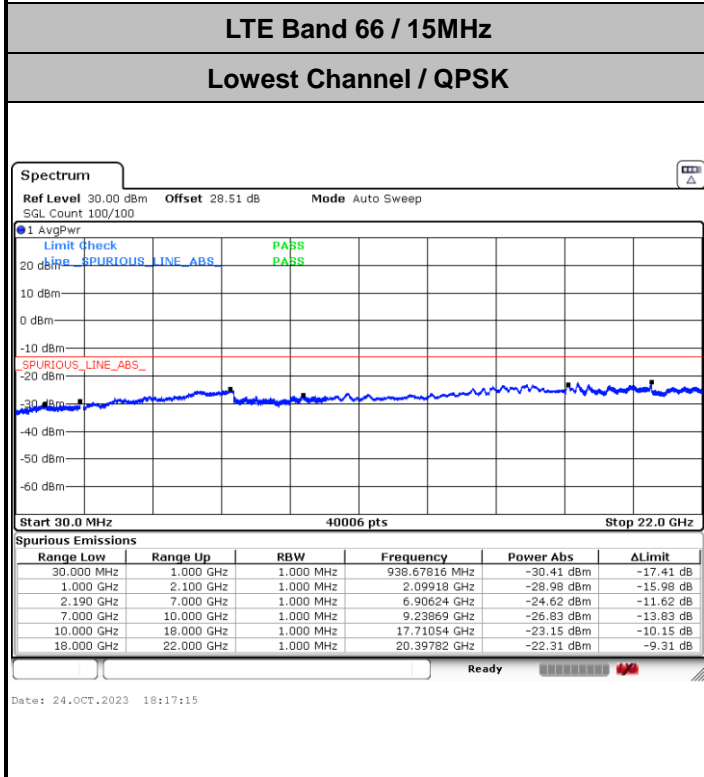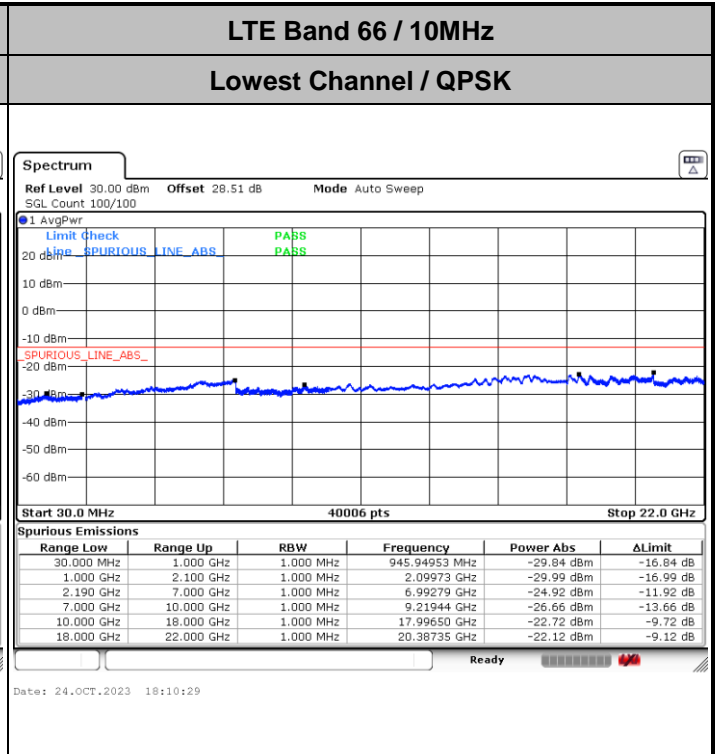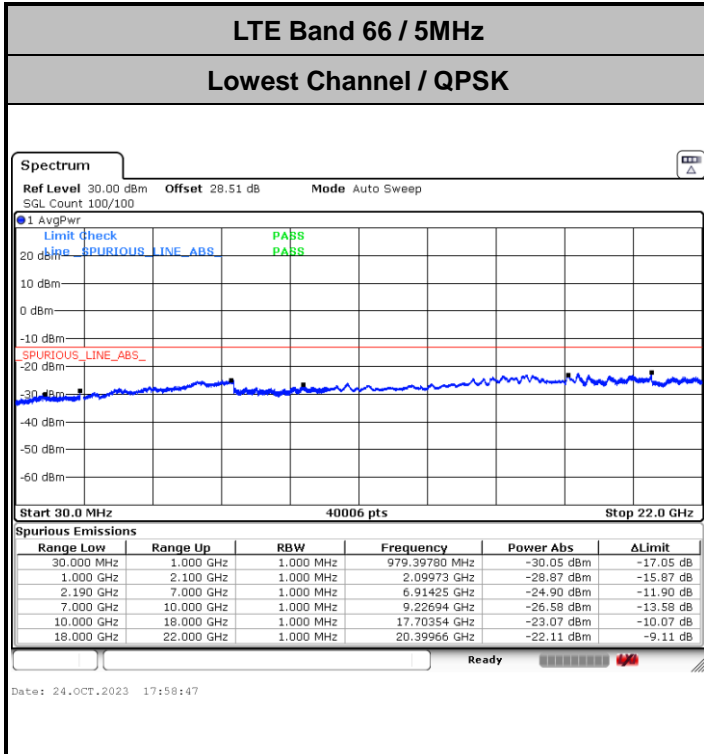




For NB-IOT Category NB1: LTE Band 2 MIMO Ant. 1

Conducted Band Edge

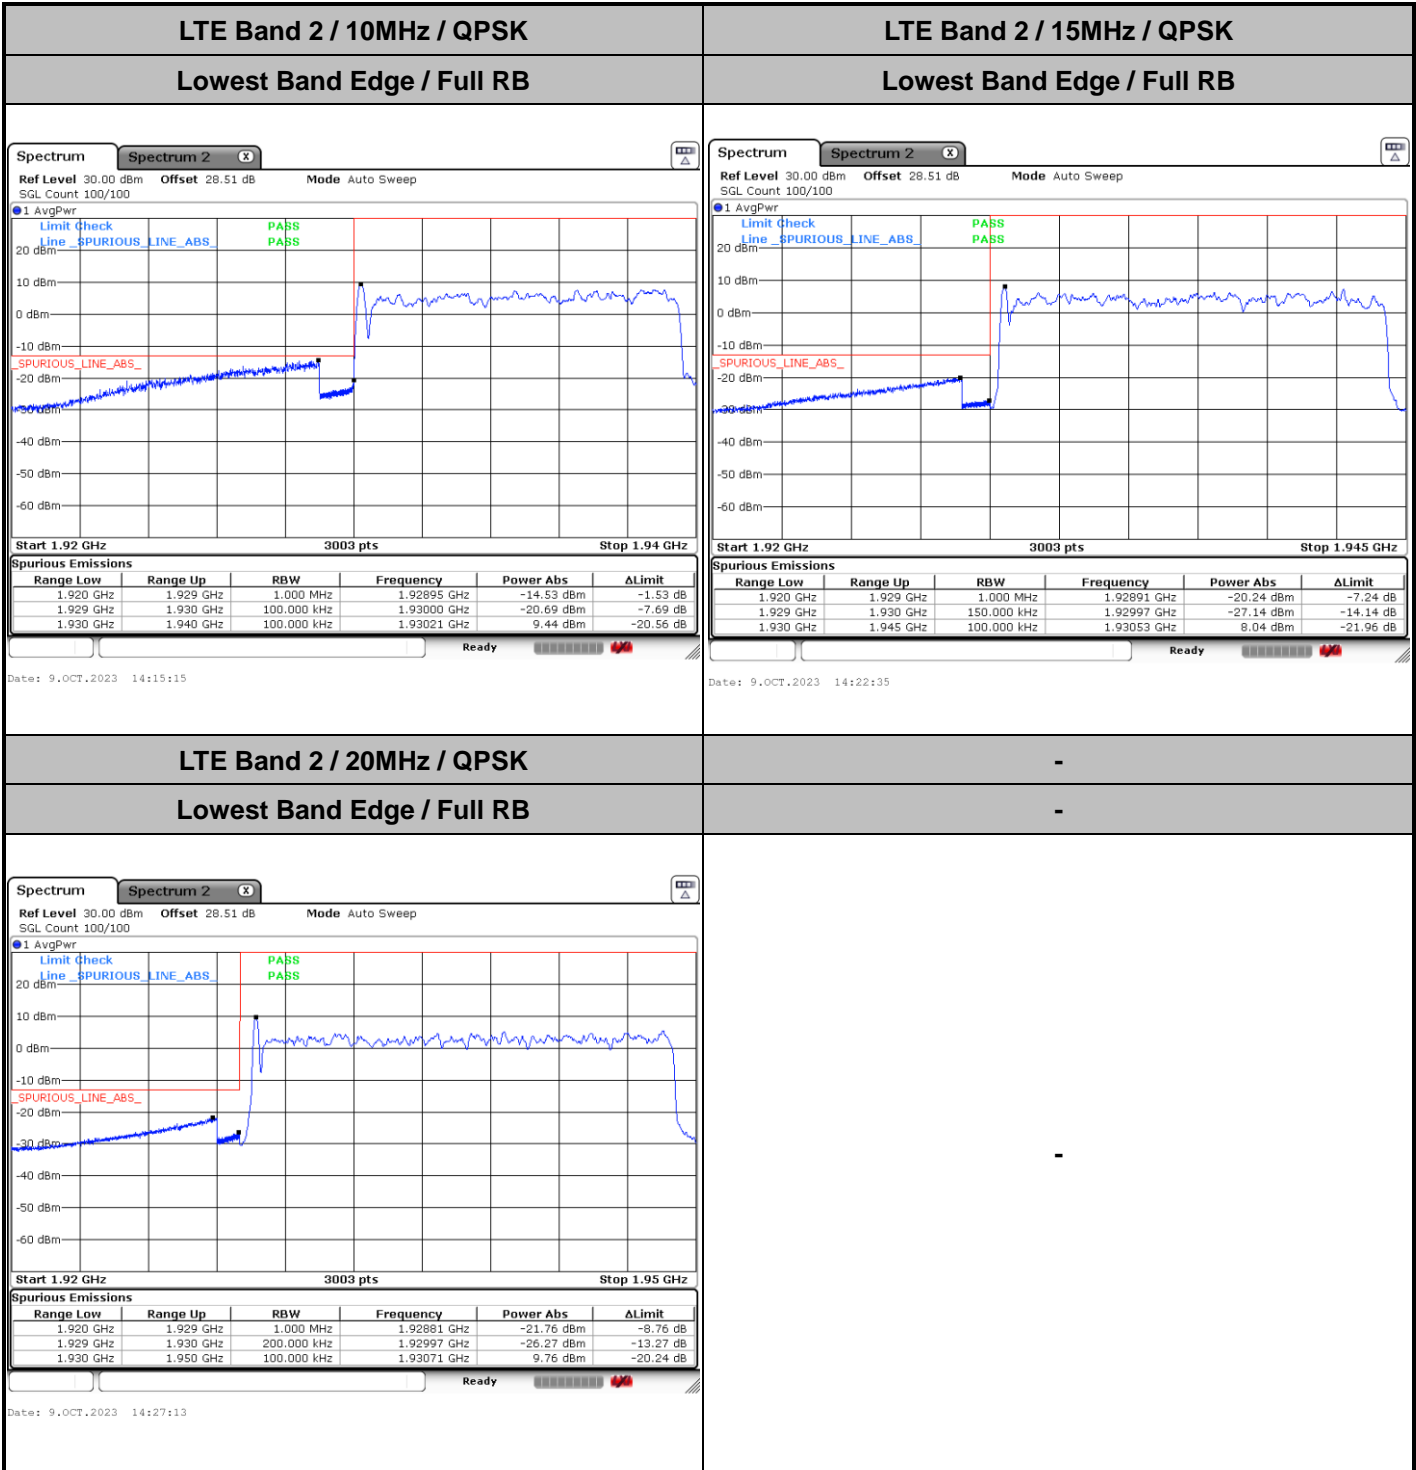




Conducted Spurious Emission

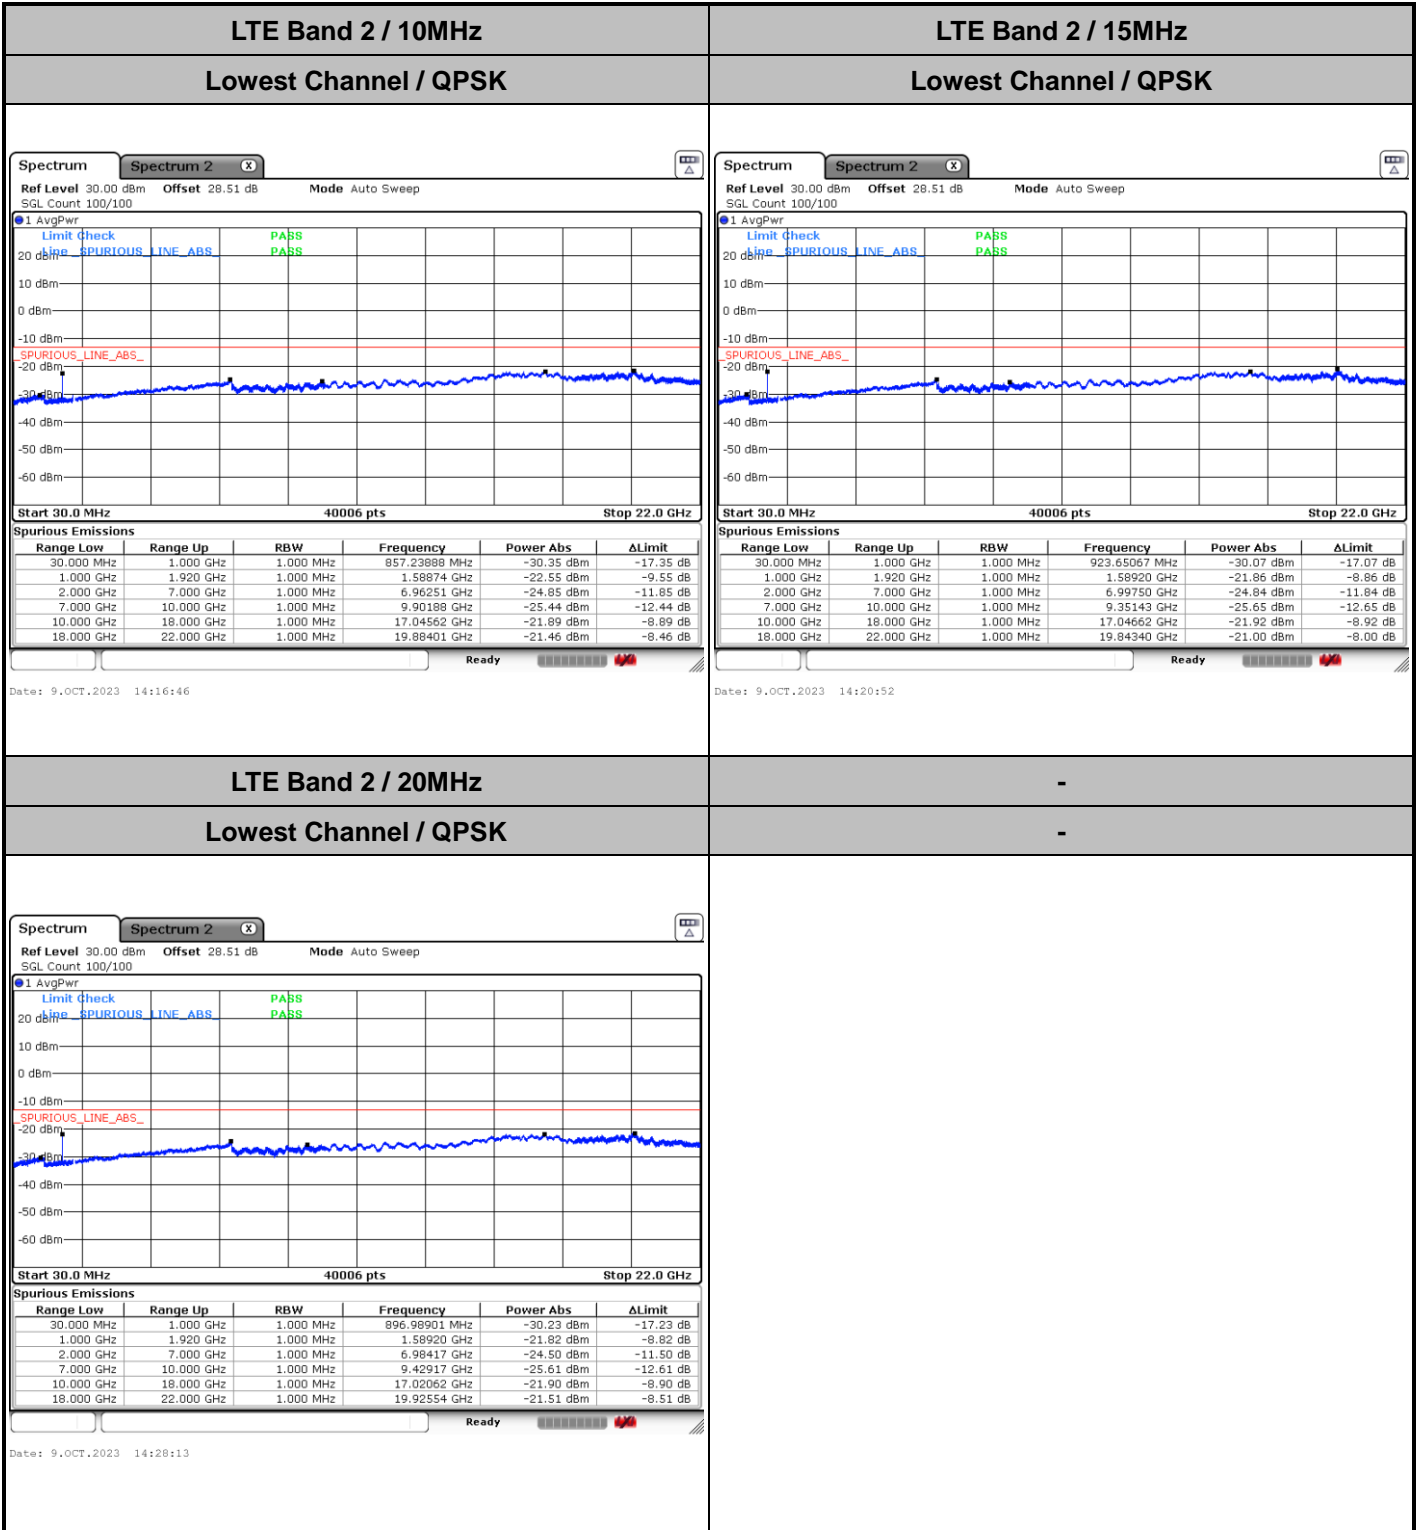




LTE Band 2 MIMO Ant. 2

Conducted Band Edge

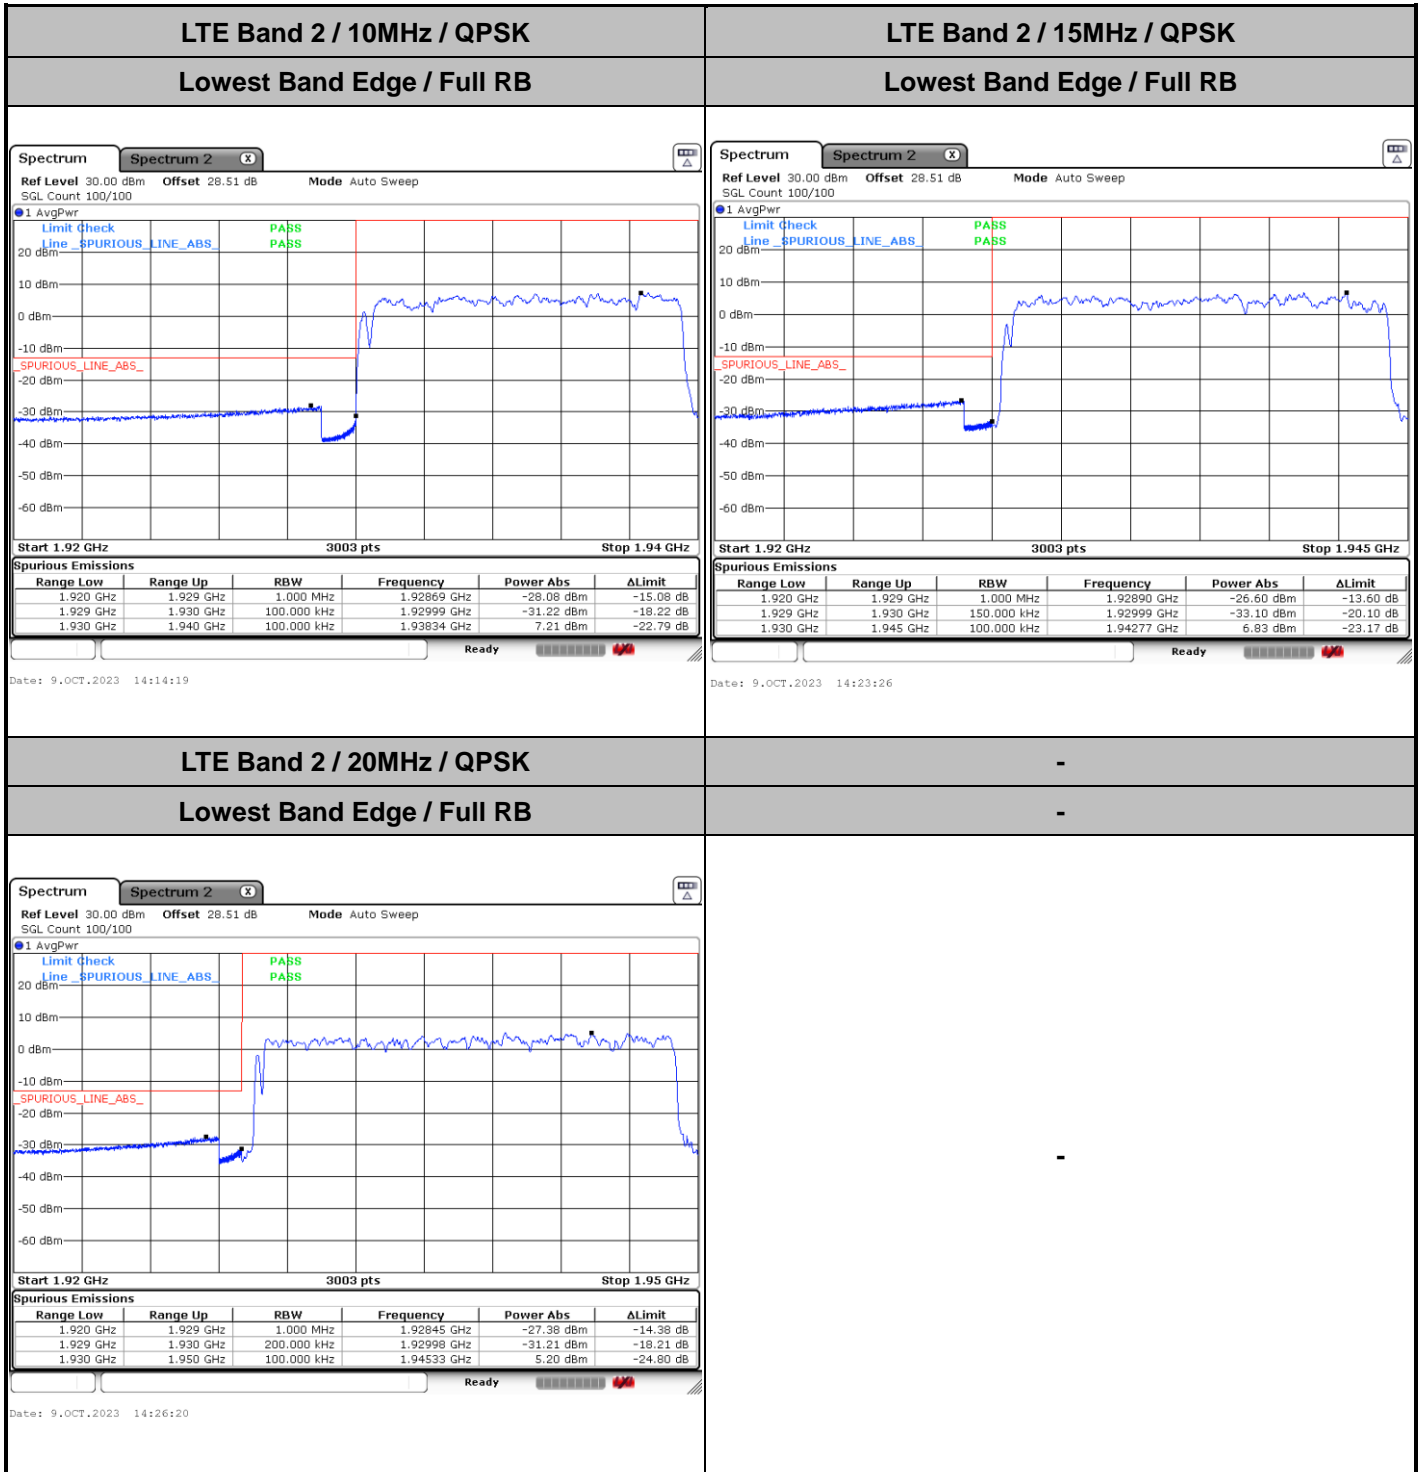




Conducted Spurious Emission

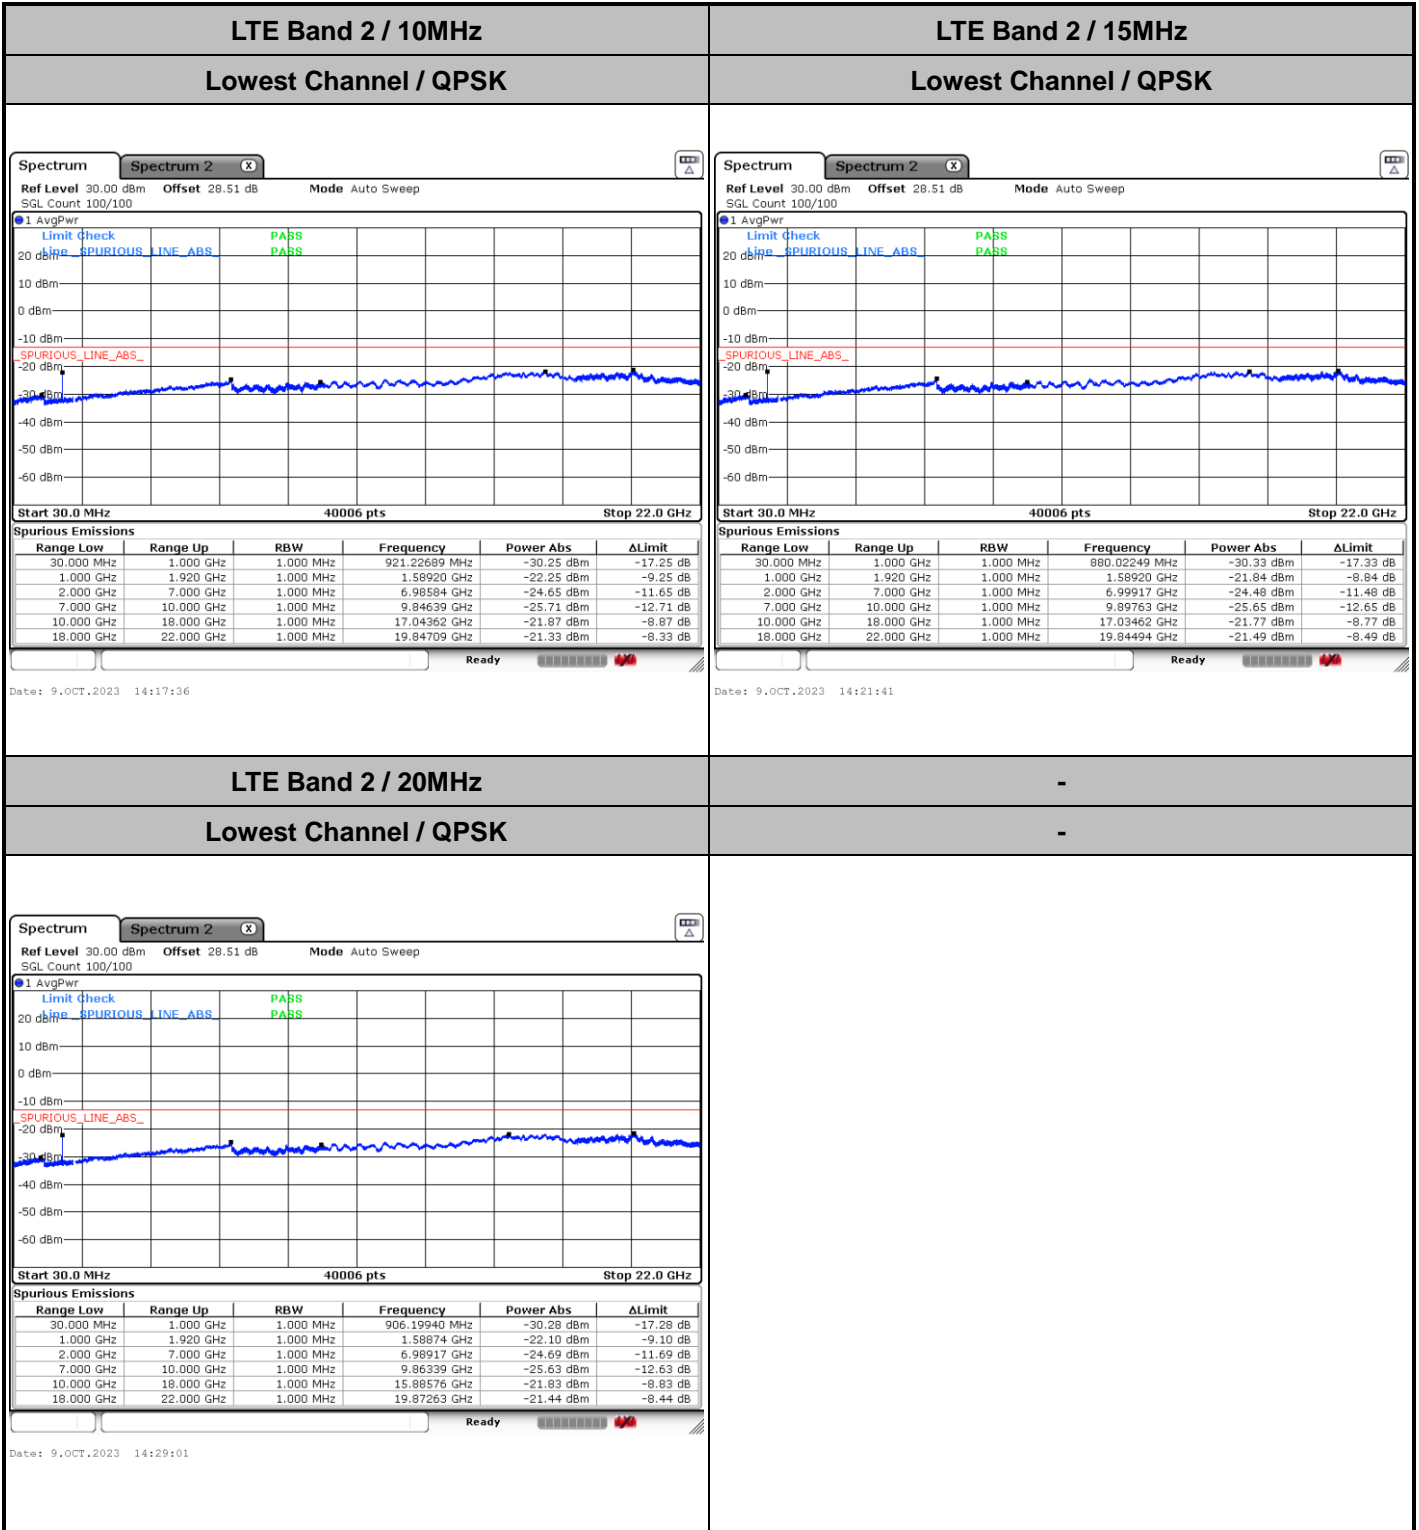




LTE Band 66 MIMO Ant. 3

Conducted Band Edge

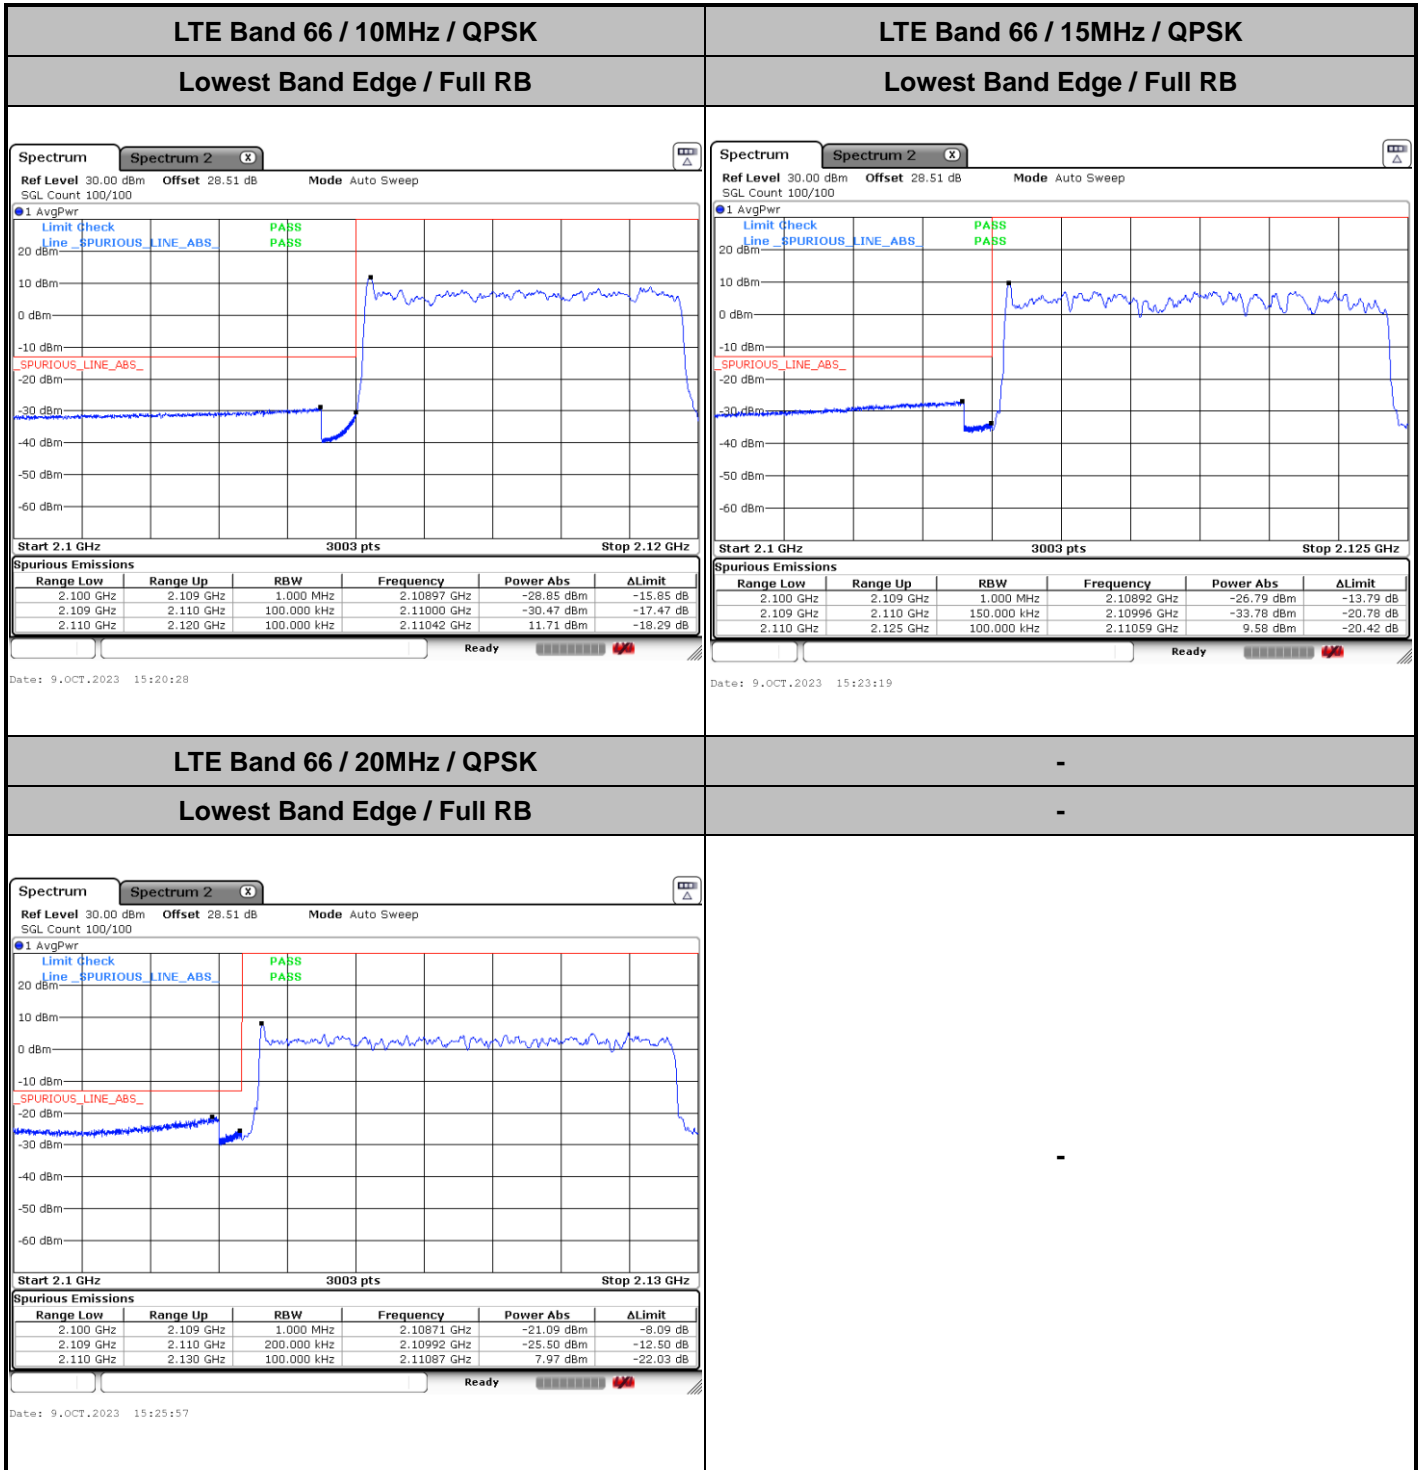




Conducted Spurious Emission

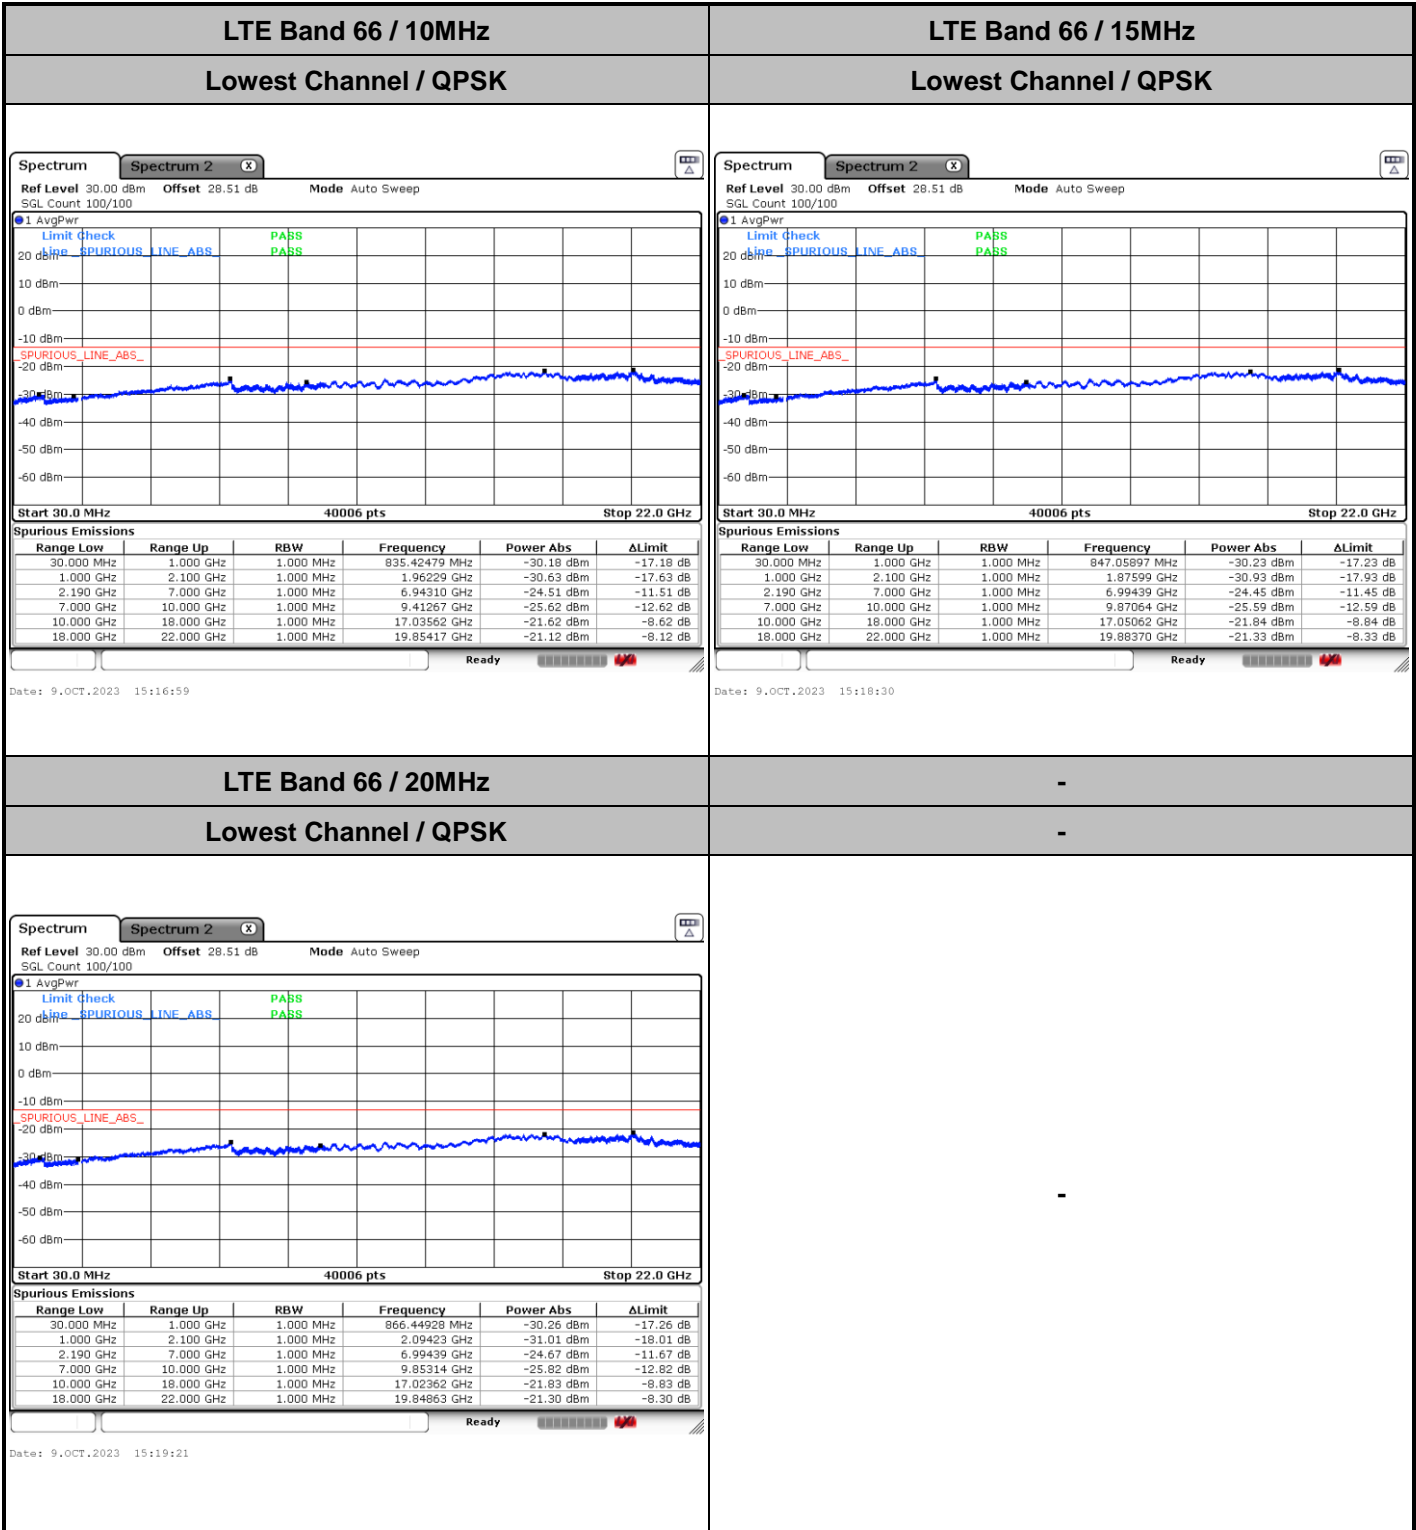




LTE Band 66 MIMO Ant. 4

Conducted Band Edge

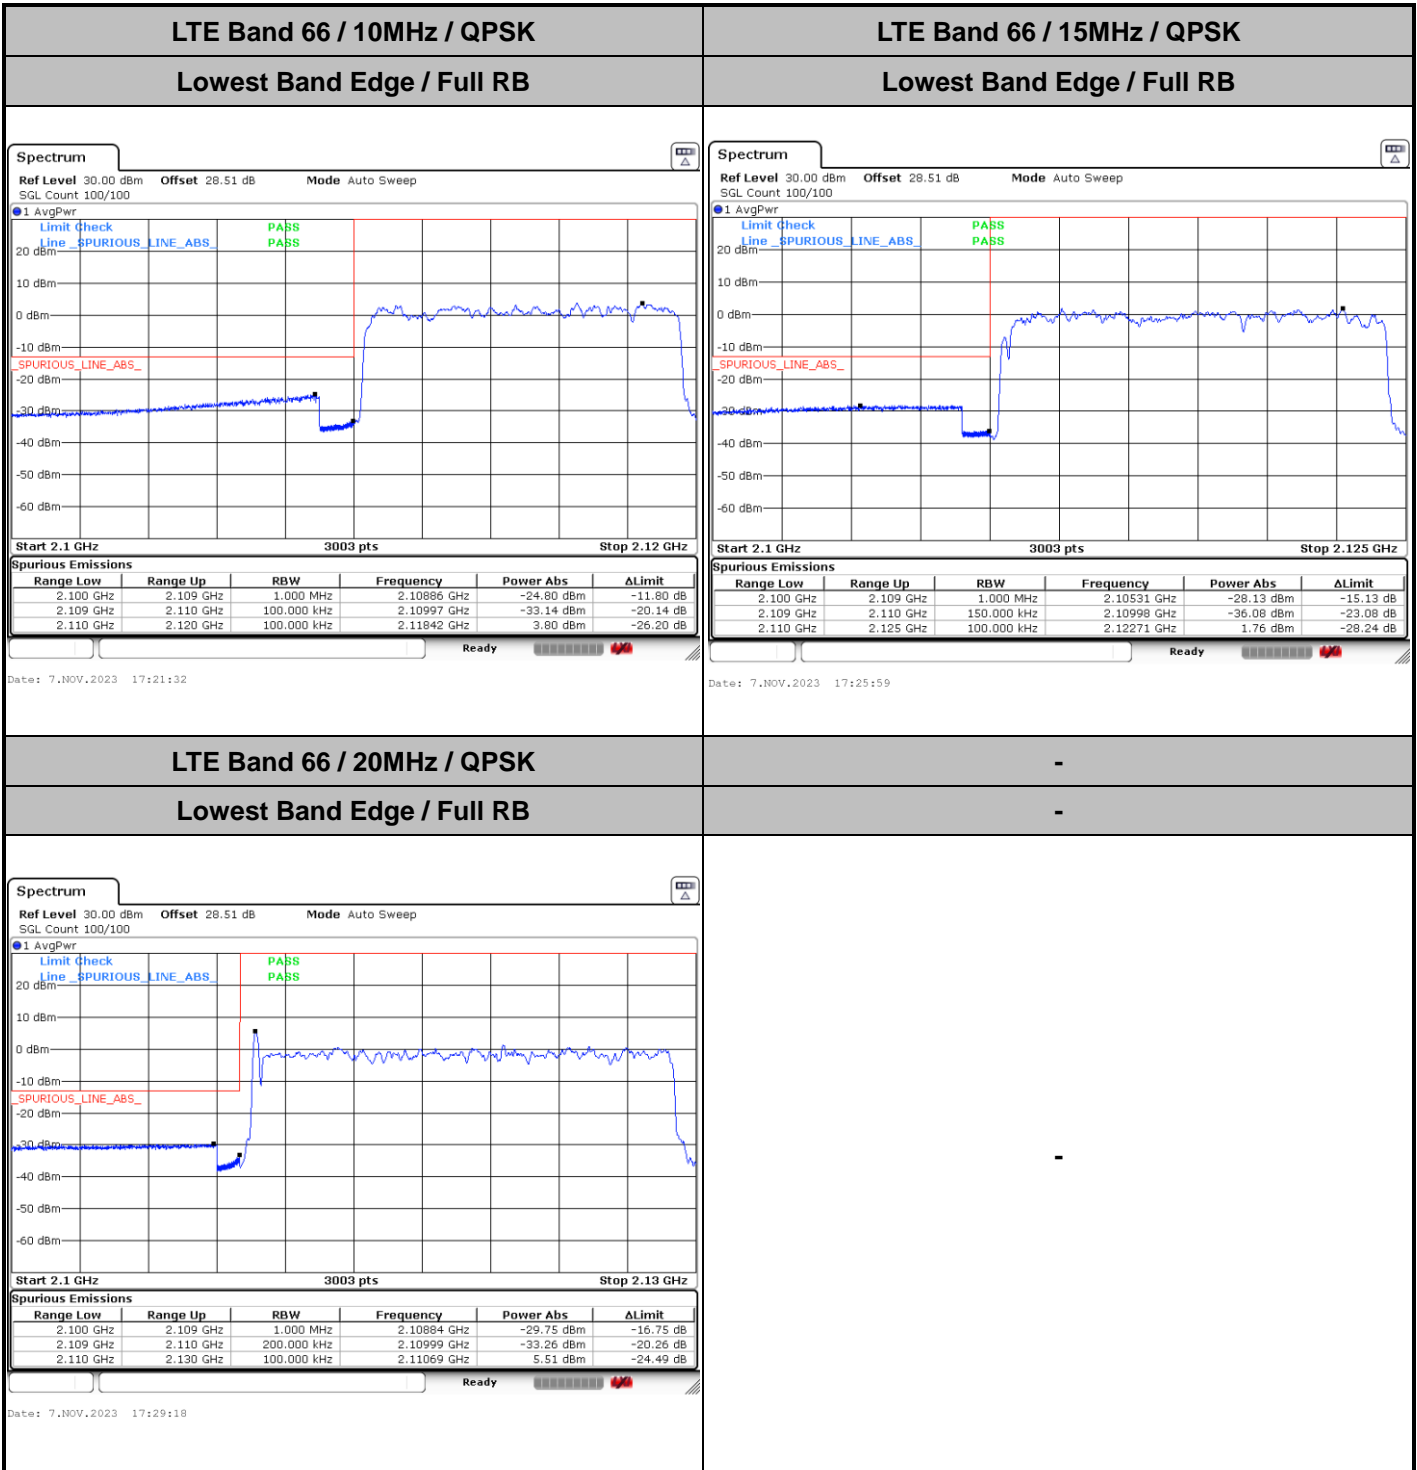



Conducted Spurious Emission

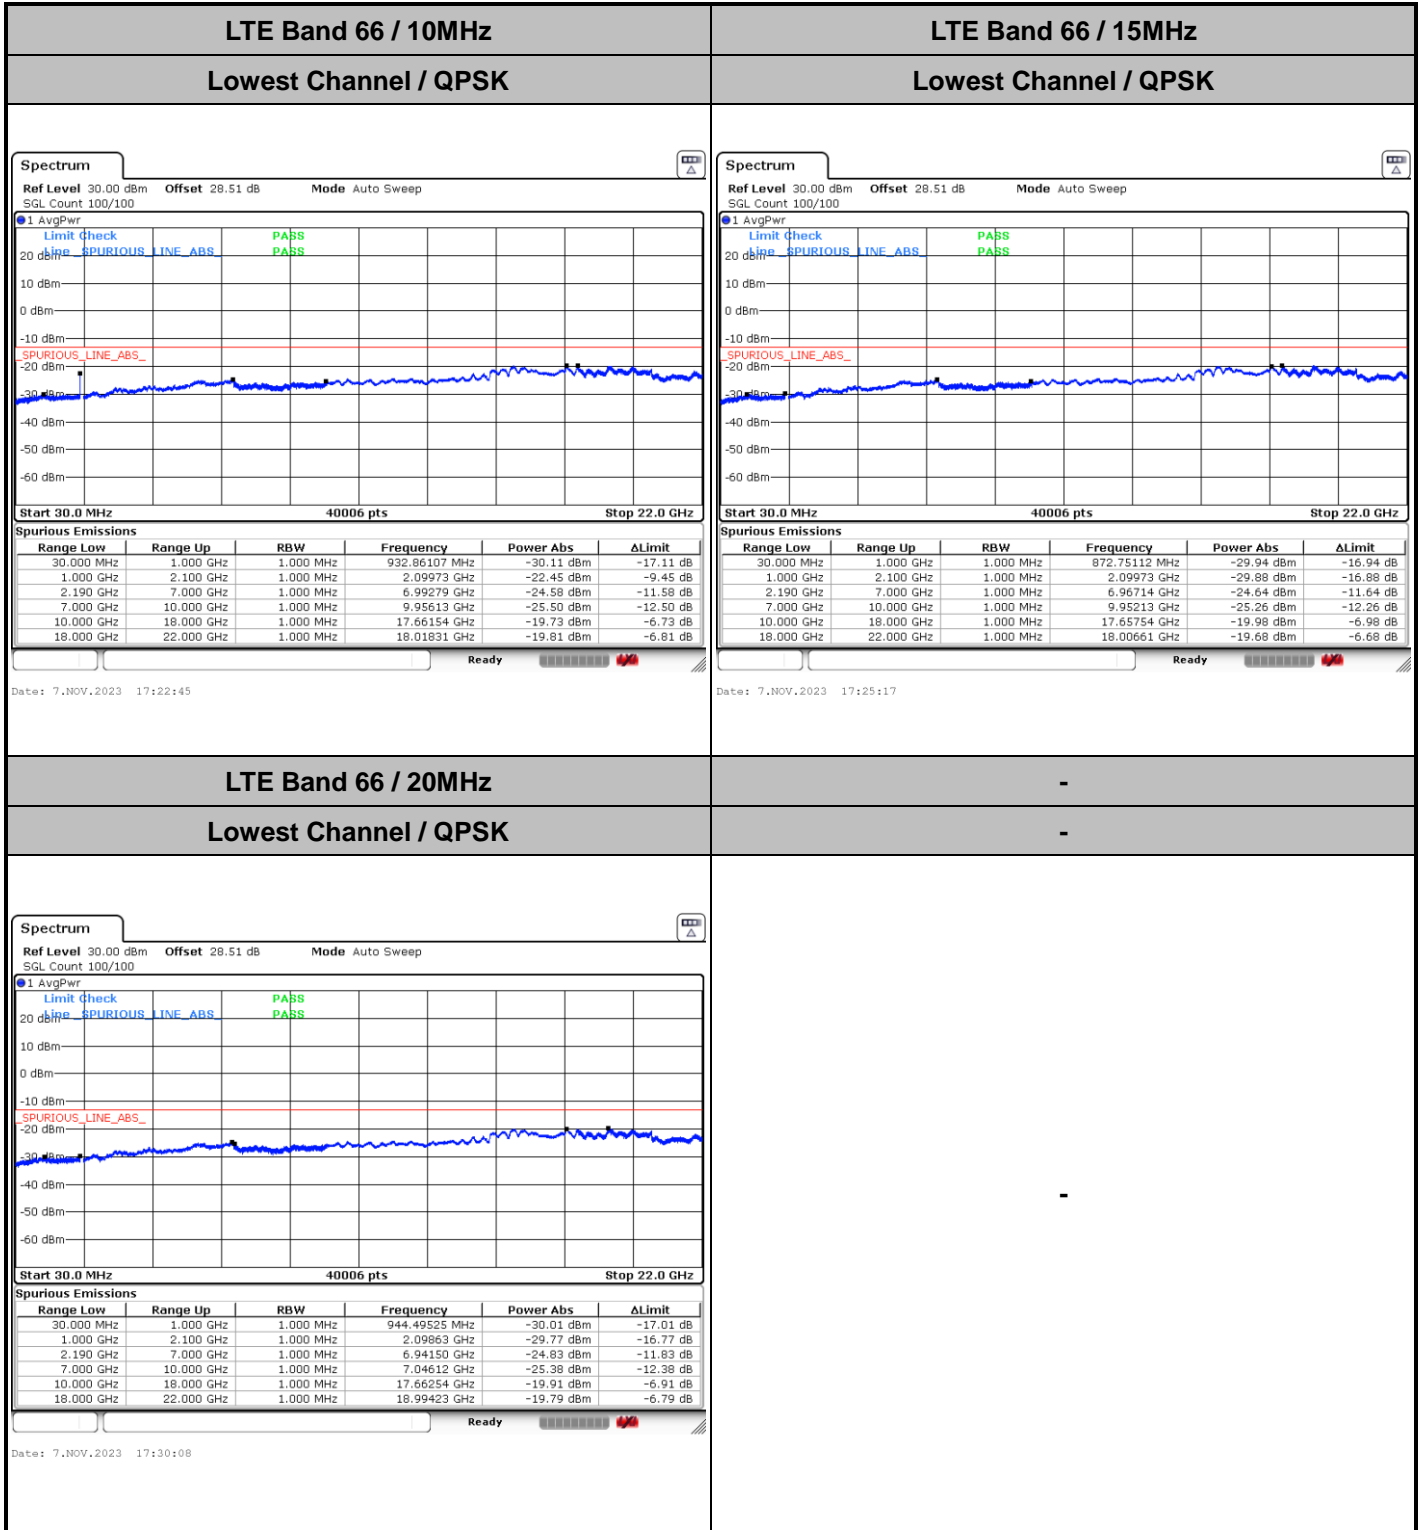



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Carl Ni	Temperature :	22~23°C
		Relative Humidity :	41~42%

LTE:

LTE Band 2 / 20MHz / QPSK								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3921	-55.61	-13	-42.61	-67.87	2.64	14.90	H
	5880	-50.04	-13	-37.04	-61.90	2.94	14.80	H
	7836	-47.73	-13	-34.73	-57.50	3.39	13.16	H
	3921	-57.37	-13	-44.37	-69.63	2.64	14.90	V
	5880	-48.56	-13	-35.56	-60.42	2.94	14.80	V
	7836	-50.15	-13	-37.15	-59.92	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 66 / 20MHz / QPSK								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4312	-51.22	-13	-38.22	-61.96	2.604	13.34	H
	6464	-60.83	-13	-47.83	-71.34	3.011	13.52	H
	8620	-53.30	-13	-40.30	-63.50	3.271	13.47	H
	10780	-54.64	-13	-41.64	-61.61	5.527	12.5	H
	12930	-55.72	-13	-42.72	-62.58	6.038	12.9	H
	15080	-58.07	-13	-45.07	-65.27	6.726	13.93	H
	17240	-55.15	-13	-42.15	-62.59	6.963	14.4	H
	4312	-48.94	-13	-35.94	-59.68	2.604	13.34	V
	6464	-57.23	-13	-44.23	-67.74	3.011	13.52	V
	8620	-47.59	-13	-34.59	-57.79	3.271	13.47	V
	10780	-55.31	-13	-42.31	-62.28	5.527	12.50	V
	12930	-55.92	-13	-42.92	-62.78	6.038	12.90	V
	15080	-55.33	-13	-42.33	-62.53	6.726	13.93	V
	17240	-54.49	-13	-41.49	-61.93	6.963	14.40	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



NB-IOT Category NB1:

NB-IOT Band 2 Upper Location / 20MHz / QPSK								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3921	-56.26	-13	-43.26	-68.52	2.64	14.90	H
	5880	-51.65	-13	-38.65	-63.51	2.94	14.80	H
	7836	-46.55	-13	-33.55	-56.32	3.39	13.16	H
	3921	-55.62	-13	-42.62	-67.88	2.64	14.90	V
	5880	-50.96	-13	-37.96	-62.82	2.94	14.80	V
	7836	-45.67	-13	-32.67	-55.44	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.


NB-IOT Band 66 Upper Location / 20MHz / QPSK								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4312	-50.38	-13	-37.38	-61.12	2.604	13.34	H
	6464	-60.08	-13	-47.08	-70.59	3.011	13.52	H
	8620	-48.28	-13	-35.28	-58.48	3.271	13.47	H
	10780	-54.19	-13	-41.19	-61.16	5.527	12.50	H
	12930	-55.03	-13	-42.03	-61.89	6.038	12.90	H
	15080	-57.36	-13	-44.36	-64.56	6.726	13.93	H
	17240	-55.68	-13	-42.68	-63.12	6.963	14.40	H
	4312	-49.26	-13	-36.26	-60.00	2.604	13.34	V
	6464	-59.78	-13	-46.78	-70.29	3.011	13.52	V
	8620	-46.69	-13	-33.69	-56.89	3.271	13.47	V
	10780	-56.26	-13	-43.26	-63.23	5.527	12.50	V
	12930	-55.86	-13	-42.86	-62.72	6.038	12.90	V
	15080	-58.08	-13	-45.08	-65.28	6.726	13.93	V
	17240	-53.62	-13	-40.62	-61.06	6.963	14.40	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Worst test plots


NB-IOT Band 2 Upper Location / 20MHz / QPSK for middle channel

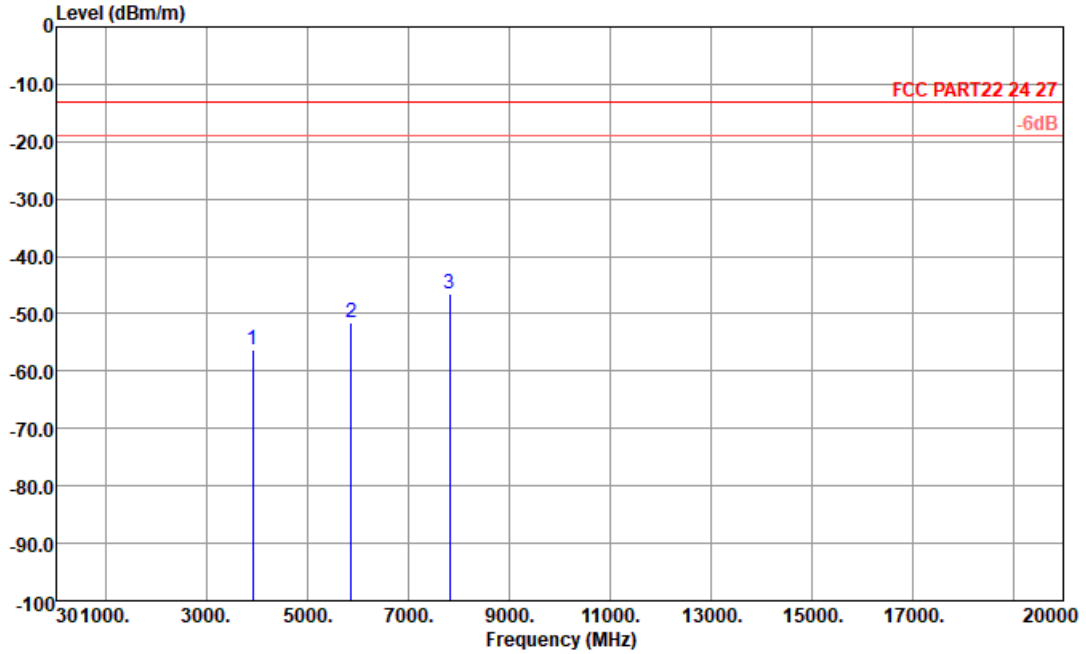

Site : 03CH04-KS
 Condition : FCC PART22 24 27 3m HF PART 22/24/27 HORIZONTAL

: BW 20 QPSK+NB IOT B2 SCS15K QPSK

Freq	Level	Over Limit	Limit Line	Read Level	Pol/Phase
MHz	dBm/m	dB	dBm/m	dBm	
1	3921.00	-56.26	-43.26	-13.00	-73.89 HORIZONTAL
2	5880.00	-51.65	-38.65	-13.00	-73.00 HORIZONTAL
3	7836.00	-46.55	-33.55	-13.00	-71.20 HORIZONTAL

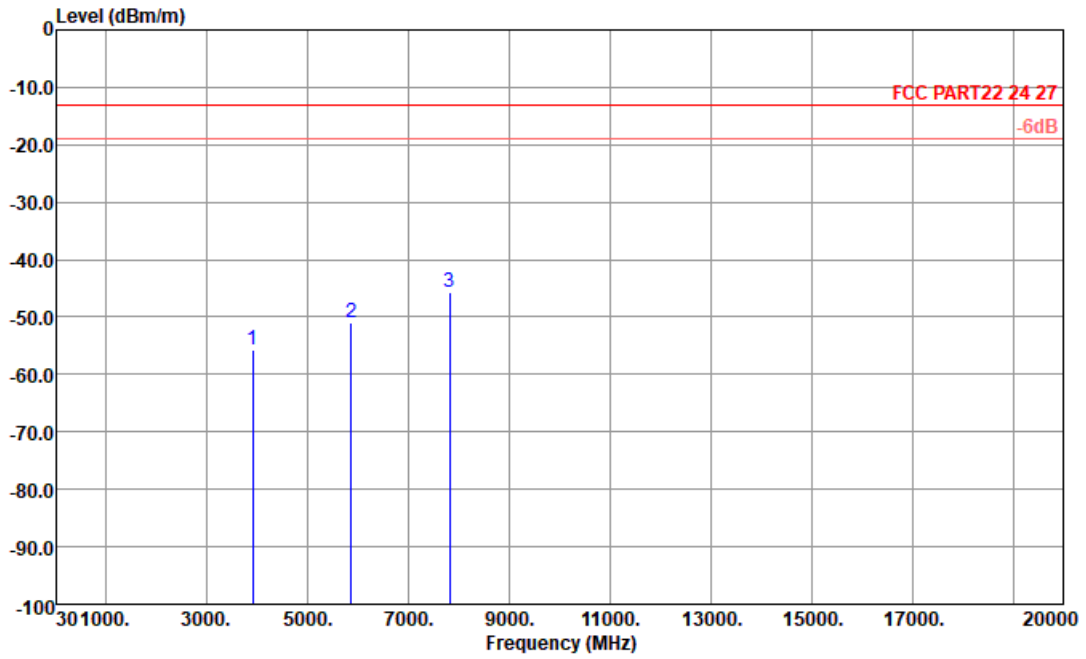

Site : 03CH04-KS
 Condition : FCC PART22 24 27 3m HF PART 22/24/27 VERTICAL

: BW 20 QPSK+NB 10T B2 SCS15K QPSK						
Over	Limit	Read				
Freq	Level	Limit	Line	Level	Pol/Phase	
MHz	dBm/m	dB	dBm/m	dBm		
1	3921.00	-55.62	-42.62	-13.00	-73.75	VERTICAL
2	5880.00	-50.96	-37.96	-13.00	-72.62	VERTICAL
3	7836.00	-45.67	-32.67	-13.00	-70.36	VERTICAL