



FCC PART 15.225

TEST REPORT

For

Advanced Card Systems Ltd.

Units 2010-2013, 20/F, Chevalier Commercial Centre, Kowloon, Hong Kong

FCC ID: V5MACR1283L

| | |
|--|--|
| Report Type: Original Report | Product Type: RFID Card Reader |
| Test Engineer: Henry Ding | <i>Henry Ding</i> |
| Report Number: RSZ120423005-00 | |
| Report Date: 2012-05-02 | |
| Reviewed By: Alvin Huang EMC Manager | <i>Alvin Huang</i> |
| Test Laboratory: | Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn |

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 3 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 3 |
| OBJECTIVE | 3 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 3 |
| TEST METHODOLOGY | 3 |
| TEST FACILITY | 3 |
| SYSTEM TEST CONFIGURATION..... | 5 |
| JUSTIFICATION | 5 |
| EUT EXERCISE SOFTWARE | 5 |
| EQUIPMENT MODIFICATIONS | 5 |
| LOCAL SUPPORT EQUIPMENT..... | 5 |
| EXTERNAL I/O CABLE..... | 5 |
| BLOCK DIAGRAM OF TEST SETUP | 6 |
| SUMMARY OF TEST RESULTS | 7 |
| FCC§15.203 - ANTENNA REQUIREMENT..... | 8 |
| APPLICABLE STANDARD | 8 |
| ANTENNA CONNECTED CONSTRUCTION | 8 |
| FCC §15.207 – AC LINE CONDUCTED EMISSION | 9 |
| MEASUREMENT UNCERTAINTY | 9 |
| EUT SETUP | 9 |
| EMI TEST RECEIVER SETUP..... | 10 |
| TEST EQUIPMENT LIST AND DETAILS..... | 10 |
| TEST PROCEDURE | 10 |
| TEST RESULTS SUMMARY | 10 |
| TEST DATA | 10 |
| FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST | 13 |
| APPLICABLE STANDARD | 13 |
| MEASUREMENT UNCERTAINTY | 13 |
| EUT SETUP..... | 13 |
| EMI TEST RECEIVER SETUP..... | 14 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 14 |
| TEST EQUIPMENT LIST AND DETAILS..... | 14 |
| TEST RESULTS SUMMARY | 14 |
| TEST DATA | 15 |
| FCC§15.225(E) - FREQUENCY STABILITY..... | 17 |
| APPLICABLE STANDARD | 17 |
| TEST PROCEDURE | 17 |
| TEST EQUIPMENT LIST AND DETAILS..... | 17 |
| TEST DATA | 17 |

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Advanced Card Systems Ltd.*'s product, model number: *ACR1283L*, *FCC ID: V5MACR1283L*, the "EUT" in this report is a RFID Card Reader, named as *Contactless Smart Card Reader and Writer by applicant*. The EUT is measured approximately: 13.5 cm (L) x 9.0 cm (W) x 2.0 cm (H). Rated input voltage: DC 5V from USB.

** All measurement and test data in this report was gathered from production sample serial number: 1204060 (Assigned by BACL, Shenzhen). The EUT was received on 2012-04-23.*

Objective

This Type approval report is prepared on behalf of *Advanced Card Systems Ltd.* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

ACR89_CCID_TestProgram

Equipment Modifications

Bay Area Compliance Lab Corp. (Shenzhen) has not done any modification on the EUT.


Local Support Equipment

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-----------|--------------------------|
| DELL | PC | DELL 170L | CN-0TC670-70821-560-F4WQ |
| DELL | LCD Monitor | E178WFPC | CN-OWY564-64180-7C4-2SQH |
| DELL | Mouse | MOC5UO | G1B0096D |
| DELL | Keyboard | L100 | CNORH656658907BL04TY |
| SAST | Modem | AEM-2100 | 0293 |

External I/O Cable

| Cable Description | Length (m) | From/Port | To |
|---|------------|-----------|---------|
| Unshielded Detachable K/B Cable | 1.5 | Host PC | K/B |
| Unshielded Detachable USB Cable | 1.5 | Host PC | Mouse |
| Unshielded Detachable VGA Cable | 1.5 | Host PC | Monitor |
| Shielded Detachable Serial Cable | 1.2 | Host PC | Modem |
| Shielded Detachable USB Cable with a core | 1.6 | EUT | PC |

Block Diagram of Test Setup

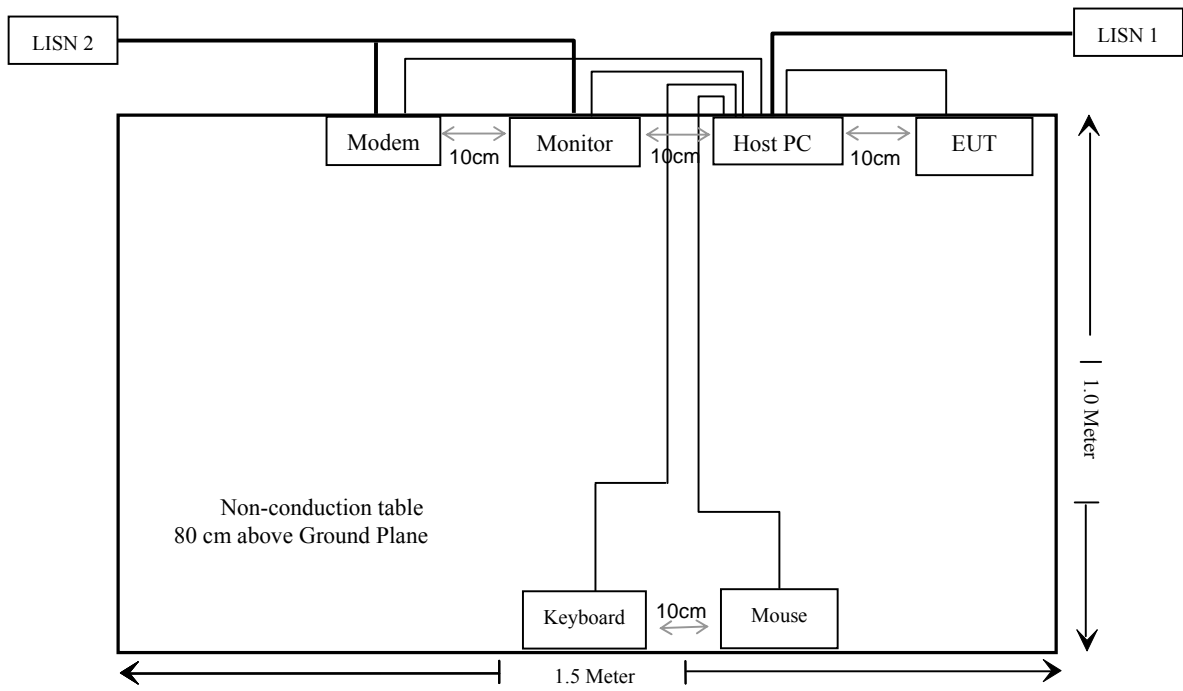

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|----------------------------|----------------------------|---------------|
| §15.203 | Antenna Requirement | Compliance |
| §15.207 | AC Line Conducted Emission | Compliance |
| §15.225 §15.209 §15.205 | Radiated Emission Test | Compliance |
| §15.225(e) | Frequency Stability | Compliance |

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has a printed antenna on PCB, which complies with the Part 15.203. Please see EUT photo for details.


FCC §15.207 – AC LINE CONDUCTED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Lab Corp. (Shenzhen) is 2.4 dB(k=2, 95% level of confidence).

EUT Setup

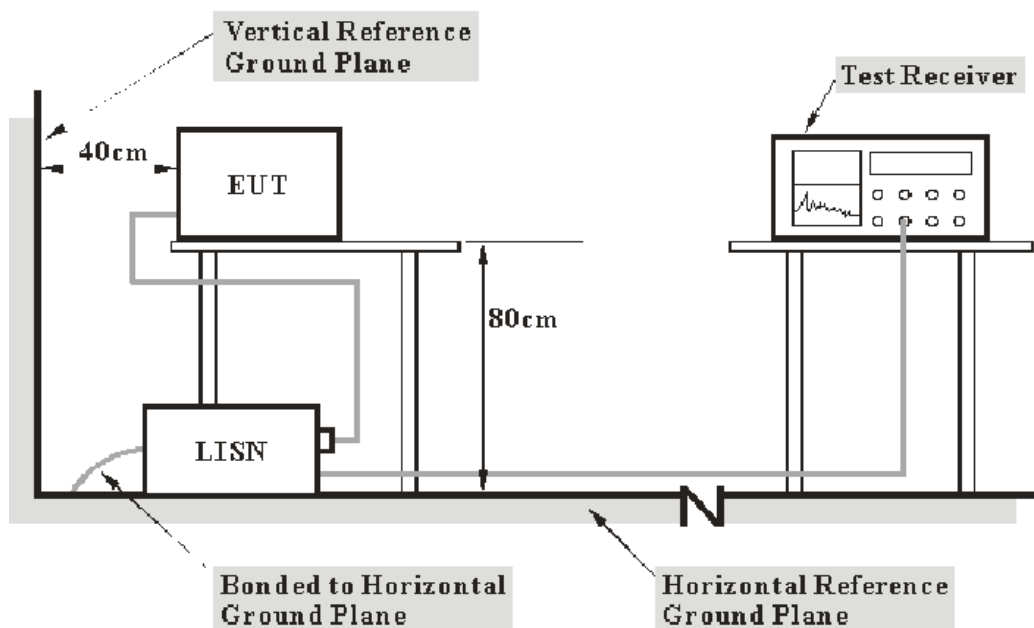

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| <i>Frequency Range</i> | <i>IF B/W</i> |
|------------------------|---------------|
| 150 kHz – 30 MHz | 9 kHz |

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCS30 | 100176 | 2011-11-24 | 2012-11-23 |
| Rohde & Schwarz | L.I.S.N. | ESH2-Z5 | 892107/021 | 2011-11-17 | 2012-11-16 |
| Rohde & Schwarz | Pulse limiter | ESH3Z2 | DE25985 | 2011-07-08 | 2012-07-07 |

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the host PC was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

4.68 dB at 2.700 MHz in the Line conducted mode

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 48 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2012-04-17.


Test Mode: Reading Card

120V, 60 Hz, Line:

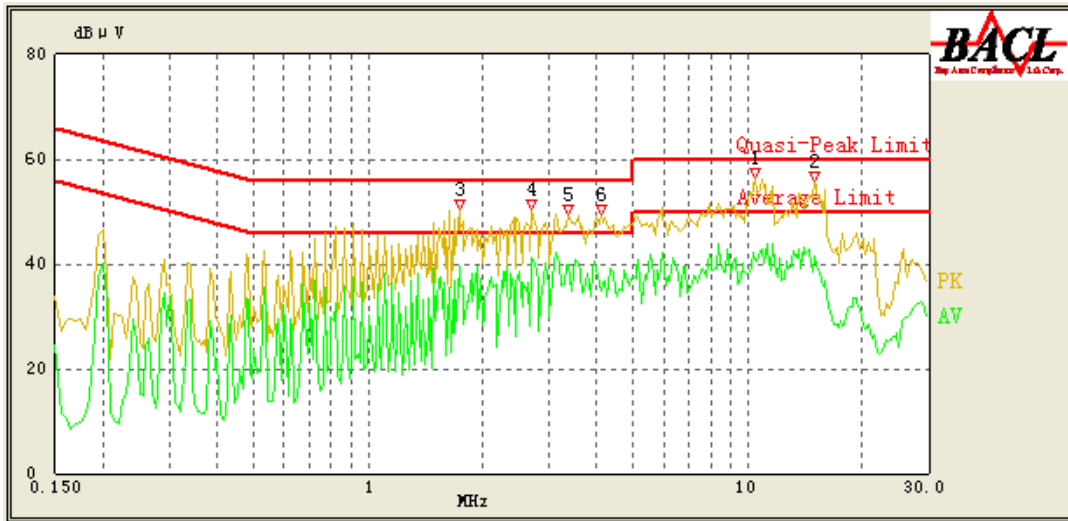

| Conducted Emissions | | | FCC Part 15.207 | | |
|---------------------|-------------------------|------------------------|-----------------|-------------|---------------------|
| Frequency (MHz) | Corrected Result (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Remark (PK/QP/Ave.) |
| 2.700 | 41.32 | 9.80 | 46.00 | 4.68 | Ave. |
| 3.375 | 39.72 | 9.80 | 46.00 | 6.28 | Ave. |
| 1.735 | 39.43 | 9.80 | 46.00 | 6.57 | Ave. |
| 1.735 | 47.59 | 9.80 | 56.00 | 8.41 | QP |
| 14.995 | 41.44 | 11.00 | 50.00 | 8.56 | Ave. |
| 2.700 | 47.08 | 9.80 | 56.00 | 8.92 | QP |
| 10.415 | 40.97 | 10.08 | 50.00 | 9.03 | Ave. |
| 3.375 | 46.70 | 9.80 | 56.00 | 9.30 | QP |
| 10.415 | 50.25 | 10.08 | 60.00 | 9.75 | QP |
| 4.100 | 45.02 | 9.80 | 56.00 | 10.98 | QP |
| 4.100 | 34.96 | 9.80 | 46.00 | 11.04 | Ave. |
| 15.045 | 48.02 | 11.01 | 60.00 | 11.98 | QP |

120V, 60 Hz, Neutral

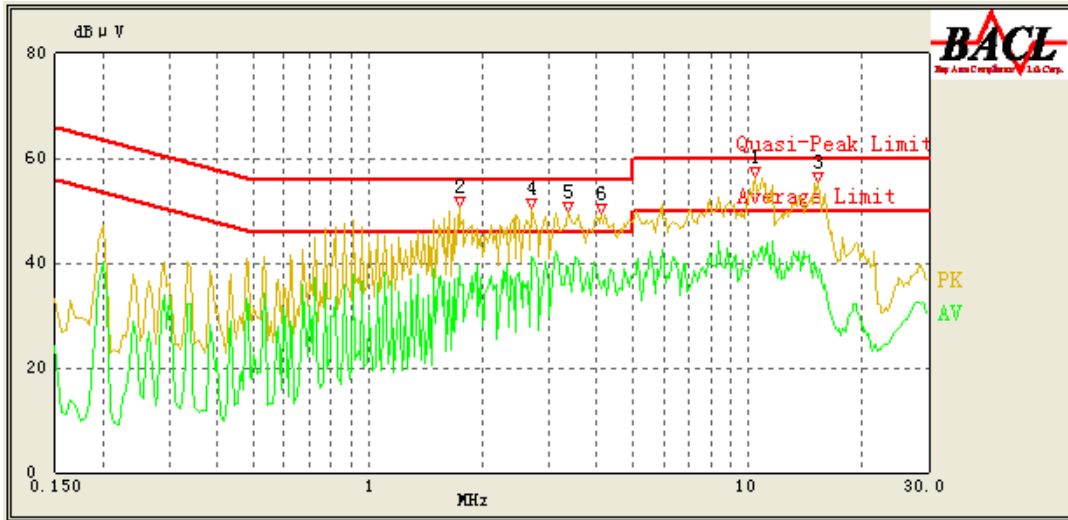

| Conducted Emissions | | | FCC Part 15.207 | | |
|---------------------|-------------------------|------------------------|-----------------|-------------|---------------------|
| Frequency (MHz) | Corrected Result (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Remark (PK/QP/Ave.) |
| 2.700 | 41.11 | 9.80 | 46.00 | 4.89 | Ave. |
| 1.735 | 39.34 | 9.80 | 46.00 | 6.66 | Ave. |
| 3.375 | 39.20 | 9.80 | 46.00 | 6.80 | Ave. |
| 1.735 | 47.44 | 9.80 | 56.00 | 8.56 | QP |
| 10.415 | 41.36 | 10.08 | 50.00 | 8.64 | Ave. |
| 10.415 | 50.85 | 10.08 | 60.00 | 9.15 | QP |
| 4.100 | 35.04 | 9.80 | 46.00 | 10.96 | Ave. |
| 15.430 | 38.36 | 11.13 | 50.00 | 11.64 | Ave. |
| 2.700 | 43.08 | 9.80 | 56.00 | 12.92 | QP |
| 3.375 | 41.92 | 9.80 | 56.00 | 14.08 | QP |
| 4.100 | 40.56 | 9.80 | 56.00 | 15.44 | QP |
| 15.285 | 42.99 | 11.09 | 60.00 | 17.01 | QP |

FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

As per FCC Part 15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Lab Corp. (Shenzhen) is ± 4.0 dB ($k=2$, 95% level of confidence).

The fundamental data was recorded in average detection mode: set the VBW AVE on, and then record the data.

EUT Setup

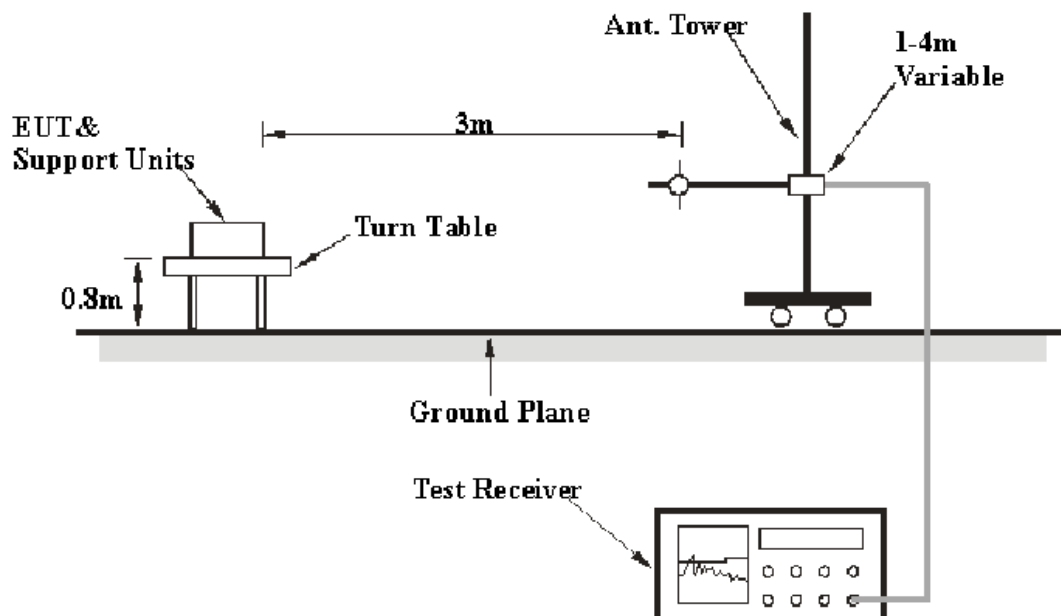

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

| <i>Frequency Range</i> | <i>RBW</i> | <i>Video B/W</i> |
|------------------------|------------|------------------|
| 9 kHz – 150 kHz | 300 Hz | 1 kHz |
| 150 kHz – 30 MHz | 10 kHz | 30 kHz |
| 30 – 1000 MHz | 100 kHz | 300 kHz |

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|----------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2011-11-17 | 2012-11-16 |
| HP | Amplifier | 8447E | 1937A01046 | 2011-11-24 | 2012-11-23 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-1 | 2012-03-17 | 2013-03-16 |
| ETS | Passive Loop Antenna | 6512 | 00029604 | 2011-11-30 | 2012-11-29 |

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 with the worst margin reading of:

9.7 dB at 311.897000 MHz in the Horizontal polarization

Test Data**Environmental Conditions**

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.9 kPa |

The testing was performed by Henry Ding on 2012-04-27.

Test mode: Transmitting

1) Spurious Emissions (9 kHz~30 MHz):

| Indicated | | Table Angle Degree | Antenna Height (m) | Detector PK/QP/Ave. | Correction Factor | | | Corrected Amplitude (dB μ V/m) @3m | FCC Part 15.225 | |
|-----------------|----------------------------------|--------------------|--------------------|---------------------|-------------------|-----------------|--------------------|--|--------------------------|--------|
| Frequency (MHz) | Maximum Reading (dB μ V) @3m | | | | Ant. Factor (dB) | Cable Loss (dB) | Pre-Amp. Gain (dB) | | Limit (dB μ V/m) @3m | Result |
| 0.0129 | 1.91 | 0 | 1.00 | Peak | 87.8 | 0.05 | 0.0 | 89.76 | 125.32 | Pass |
| 27.120 | 23.43 | 0 | 1.00 | Peak | 29.2 | 0.25 | 0.0 | 52.88 | 69.5 | Pass |

2) Fundamental:

| Indicated | | | Table Angle Degree | Antenna Height (m) | Detector PK/QP/Ave | Correction Factor | | | Corrected Amplitude (dB μ V/m) @3m | FCC Part 15.225 | |
|-----------------------|------------------|----------------------------------|--------------------|--------------------|--------------------|-------------------|-----------------|--------------------|--|--------------------------|--------|
| Frequency Range (MHz) | Mark point (MHz) | Maximum Reading (dB μ V) @3m | | | | Ant. Factor (dB) | Cable Loss (dB) | Pre-Amp. Gain (dB) | | Limit (dB μ V/m) @3m | Result |
| 13.110-13.410 | 13.410 | 3.52 | 0 | 1.2 | Peak | 32.1 | 0.20 | 0.0 | 35.42 | 80.5 | Pass |
| 13.410-13.553 | 13.553 | 8.66 | 0 | 1.2 | Peak | 32.1 | 0.20 | 0.0 | 40.56 | 90.5 | Pass |
| 13.553-13.567 | 13.560 | 36.9 | 0 | 1.2 | Peak | 32.1 | 0.20 | 0.0 | 69.20 | 124 | Pass |
| 13.567-13.710 | 13.567 | 8.52 | 0 | 1.2 | Peak | 32.1 | 0.20 | 0.0 | 40.42 | 90.5 | Pass |
| 13.710-14.010 | 13.710 | 2.61 | 0 | 1.2 | Peak | 32.1 | 0.20 | 0.0 | 34.51 | 80.5 | Pass |

3) Spurious Emissions (30 MHz~1 GHz):

| Frequency (MHz) | Corrected Amplitude (dB μ V/m) | Detector PK/QP/Ave | Antenna Height (cm) | Antenna Polarity (H/V) | Turntable Position (deg) | Correction Factor (dB) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|------------------------------------|--------------------|---------------------|------------------------|--------------------------|------------------------|----------------------|-------------|
| 311.897000 | 36.3 | QP | 102.0 | H | 33.0 | -12.1 | 46.0 | 9.7 |
| 162.727000 | 32.7 | QP | 157.0 | H | 246.0 | -14.5 | 43.5 | 10.8 |
| 719.971000 | 33.6 | QP | 123.0 | H | 146.0 | -2.8 | 46.0 | 12.4 |
| 189.896750 | 28.5 | QP | 103.0 | H | 112.0 | -14.8 | 43.5 | 15.0 |
| 36.001000 | 23.7 | QP | 102.0 | V | 197.0 | -9.5 | 40.0 | 16.3 |
| 32.906500 | 22.8 | QP | 103.0 | V | 183.0 | -7.4 | 40.0 | 17.2 |

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to PC, than to an external AC power supply and loop antenna was connected to a f Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable AC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|--------------------------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2011-11-17 | 2012-11-16 |
| WUHUAN | Temperature & Humidity Chamber | HTP205 | 20021115 | 2011-06-04 | 2012-06-03 |

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.9 kPa |

The testing was performed by Henry Ding on 2012-04-27.

Test Mode: Transmitting

Test Result: Pass

| Power Supply | Temperature (°C) | Measured Frequency (MHz) | Frequency Error | Part 15.225 Limit |
|--------------|------------------|--------------------------|-----------------|-------------------|
| USB Port 5V | -20 | 13.56090 | 0.006637% | ±0.01% |
| | -10 | 13.56087 | 0.006416% | ±0.01% |
| | 0 | 13.56085 | 0.006268% | ±0.01% |
| | 10 | 13.56081 | 0.005973% | ±0.01% |
| | 20 | 13.56073 | 0.005383% | ±0.01% |
| | 30 | 13.56068 | 0.005015% | ±0.01% |
| | 40 | 13.56066 | 0.004867% | ±0.01% |
| | 50 | 13.56076 | 0.005605% | ±0.01% |

******* END OF REPORT *******