



NVLAP LAB CODE 200707-0



FCC PART 15.225

EMI MEASUREMENT AND TEST REPORT

For

Advanced Card Systems Limited

Units 2010-2013, 20th Floor, Chevalier Commercial Centre,
8 Wang Hoi Road, Kowloon Bay, Hong Kong.

FCC ID: V5MAET62

Report Type: Original Report	Product Type: Contactless Smart Card Reader with Fingerprint Scanner
Test Engineer: Phoenix Liu	<i>Phoenix Liu</i>
Report Number: RSZ09120302	
Report Date: 2009-12-24	
Reviewed By: EMC Engineer	Merry Zhao <i>Merry Zhao</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.
* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
STANDARD APPLICABLE	9
ANTENNA CONNECTED CONSTRUCTION	9
FCC §15.207 - CONDUCTED EMISSION	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST PROCEDURE	11
TEST RESULTS SUMMARY	11
TEST DATA	12
PLOT(S) OF TEST DATA	12
FCC §15.205 & §15.209 - RADIATED EMISSIONS TEST	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	16
TEST DATA	17
FCC §15.225(A) (B) (C) & §15.31(F) – FIELD STRENGTH OF RADIATED EMISSIONS.....	18
APPLICABLE STANDARD	18
TEST EQUIPMENT LIST AND DETAILS.....	18
EUT SETUP	18
TEST DATA	18
FCC §15.225(D) §15.209 & §15.31(F) - OUT OF BAND EMISSION.....	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS.....	22
EUT SETUP	22
TEST DATA	22

FCC §15.225(E) - FREQUENCY STABILITY.....25
APPLICABLE STANDARD25
TEST EQUIPMENT LIST AND DETAILS.....25
TEST PROCEDURE25
TEST DATA25

FCC §15.215(C) – 20 DB BANDWIDTH TESTING27
REQUIREMENT27
TEST EQUIPMENT LIST AND DETAILS.....27
TEST PROCEDURE27
TEST DATA27

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Advanced Card Systems Limited's* product, model number: *AET62 (FCC ID: V5MAET62)* or the "EUT" as referred to in this report is a *Contactless Smart Card Reader with Fingerprint Scanner*. The EUT is measured approximately 12.152 cm L x 5.396 cm W x 2.837 cm H. rated input voltage: DC 5V from USB port of Laptop.

** All measurement and test data in this report was gathered from production sample serial number: 0912008 (Assigned by BACL, Shenzhen). The EUT was received on 2009-12-03.*

Objective

This Type approval report is prepared on behalf of *Advanced Card Systems Limited* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (ShenZhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.

Equipment Modifications

Bay Area Compliance Laboratories Corp.(Shenzhen) has not done any modification on the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	Laptop	D60	N/A	DOC


External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detachable USB Power Cable With a Core	1.5	Laptop	EUT

Configuration of Test Setup

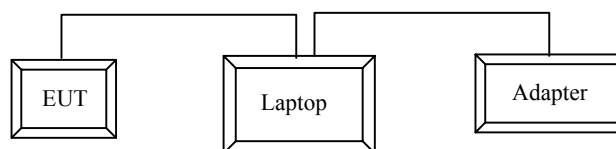

Block Diagram of Test Setup

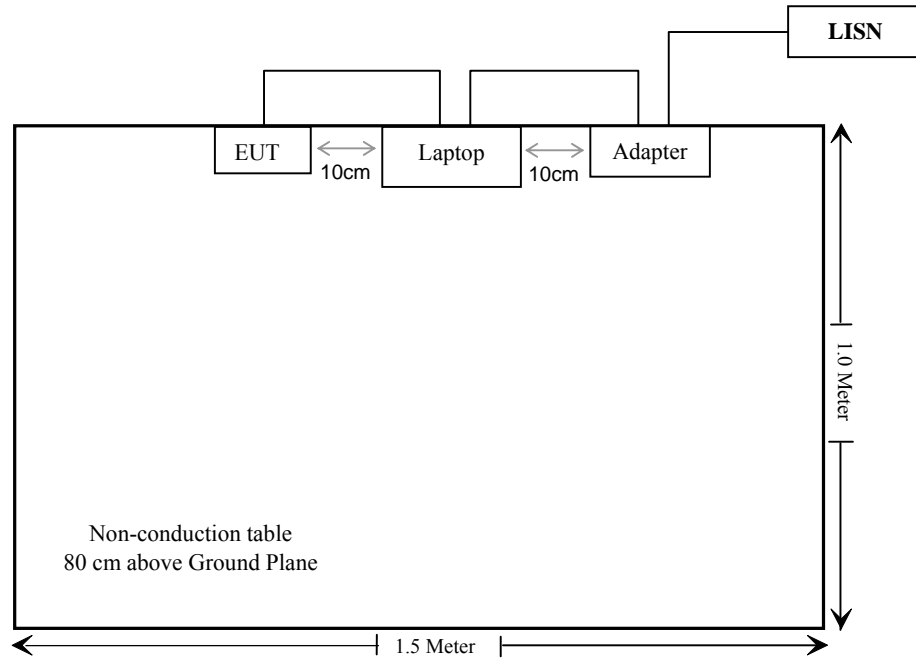

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of operation	Compliant
§15.207	Conducted Emission	Compliant
§15.209	Radiated Emission Test	Compliant*
§15.225(a) (b) (c) §15.31(f)	Field Strength of Radiated Emissions	Compliant
§15.225(d) §15.209, §15.31(f)	Out of Band Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215(c)	20 dB Bandwidth Testing	Compliant

Note:* Within measurement uncertainty.

FCC §15.203 - ANTENNA REQUIREMENT

Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has a printed loop antenna on PCB, which complies with the Part 15.203. Please see EUT photo for details.


FCC §15.207 - CONDUCTED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp.(Shenzhen) is ± 2.4 dB.

EUT Setup

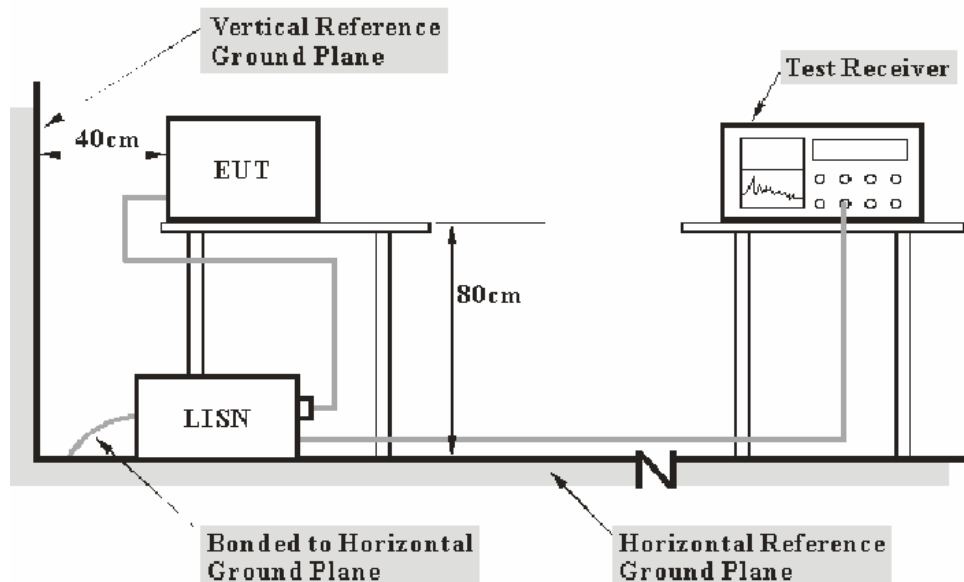

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2009-04-28	2010-04-27
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2009-04-28	2010-04-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

5.10 dB at 27.120 MHz in the **Neutral** conductor mode

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	100.0 kPa

The testing was performed by Phoenix Liu on 2009-12-16.

Test Mode: Reading Card

Line Conducted Emissions				FCC Part 15.207	
Frequency (MHz)	Amplitude (dB μ V)	Detector (QP/AV)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
27.120	44.90	AV	Neutral	50.00	5.10
27.120	44.30	AV	Line	50.00	5.70
0.475	45.50	QP	Neutral	56.40	10.90
0.370	44.60	QP	Neutral	58.50	13.90
27.120	46.00	QP	Neutral	60.00	14.00
0.480	41.90	QP	Line	56.30	14.40
27.120	45.30	QP	Line	60.00	14.70
0.360	33.80	AV	Line	48.70	14.90
0.235	47.00	QP	Line	62.30	15.30
0.360	43.00	QP	Line	58.70	15.70
0.240	46.20	QP	Neutral	62.10	15.90
0.150	49.10	QP	Line	66.00	16.90
0.235	34.40	AV	Line	52.30	17.90
0.480	28.20	AV	Line	46.30	18.10
0.370	29.60	AV	Neutral	48.50	18.90
0.150	46.50	QP	Neutral	66.00	19.50
0.475	26.50	AV	Neutral	46.40	19.90
0.240	30.70	AV	Neutral	52.10	21.40
24.100	38.10	QP	Neutral	60.00	21.90
23.815	37.00	QP	Line	60.00	23.00
23.955	21.00	AV	Neutral	50.00	29.00
0.150	27.00	AV	Line	56.00	29.00
23.755	20.40	AV	Line	50.00	29.60
0.150	24.80	AV	Neutral	56.00	31.20


Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.

Conducted Emission
FCC 15.207

16. Dec 09 01:20


EUT: contactless smart card reader with fingerprint scanner M/N:AET62
Manuf: Advanced Card
Op Cond: reading card
Operator: Phoenix
Test Spec: AC 120V/60Hz L
Comment: Tem: 25 Hum: 50%
BACL

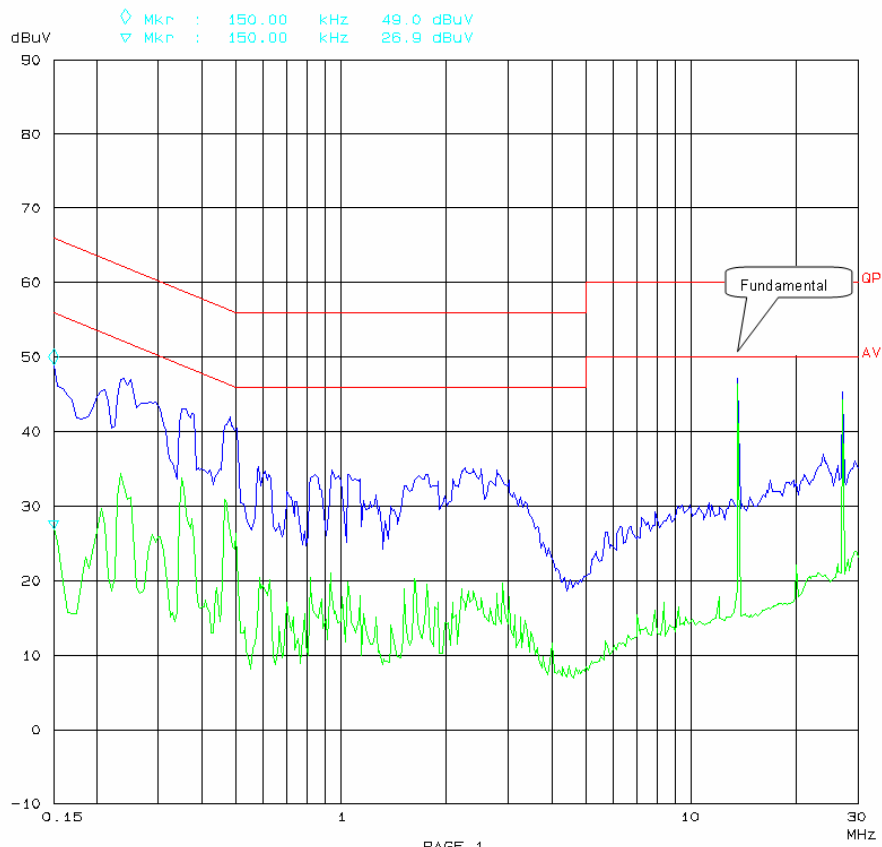

Conducted Emission
FCC 15.207

16. Dec 09 01:48

EUT: contactless smart card reader with fingerprint scanner M/N:AET62
Manuf: Advanced Card
Op Cond: reading card
Operator: Phoenix
Test Spec: AC 120V/60Hz N
Comment: Tem: 25 Hum: 50%
BACL

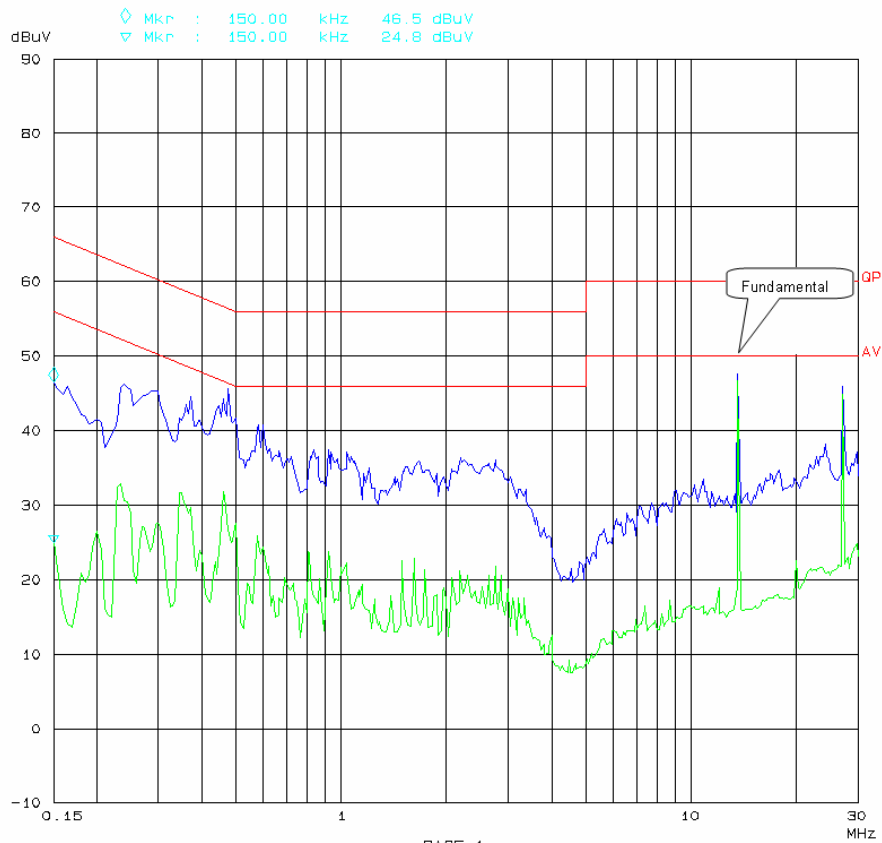

FCC §15.205 & §15.209 - RADIATED EMISSIONS TEST


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp.(Shenzhen) is ± 4.0 dB.

The fundamental data was recorded in average detection mode: set the VBW AVE on, then record the data.

EUT Setup

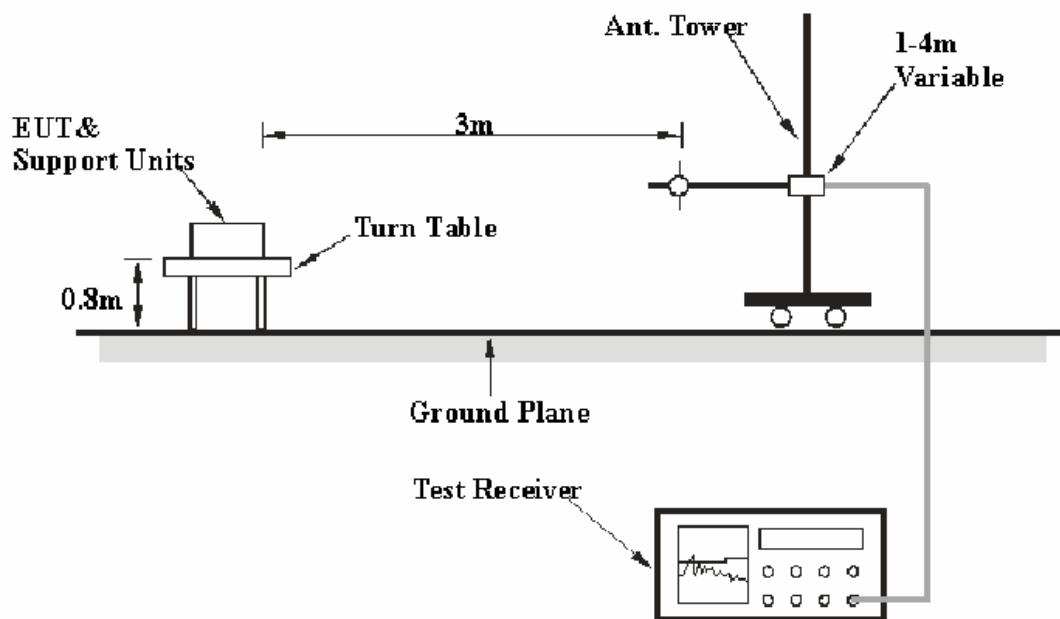

The radiated emission tests were performed in the 3-meter chamber A test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30 – 1000 MHz	100 kHz	300 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	2010-03-11
HP	Amplifier	8449B	3008A00277	2009-09-12	2010-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-05-05	2010-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-08-28	2010-08-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Cord. Amp.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Cord. Amp.}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 with the worst margin reading of:

0.2 dB at 488.141500/515.253750 MHz in the Horizontal polarization


Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Phoenix Liu on 2009-12-16.

Test mode: Reading Card

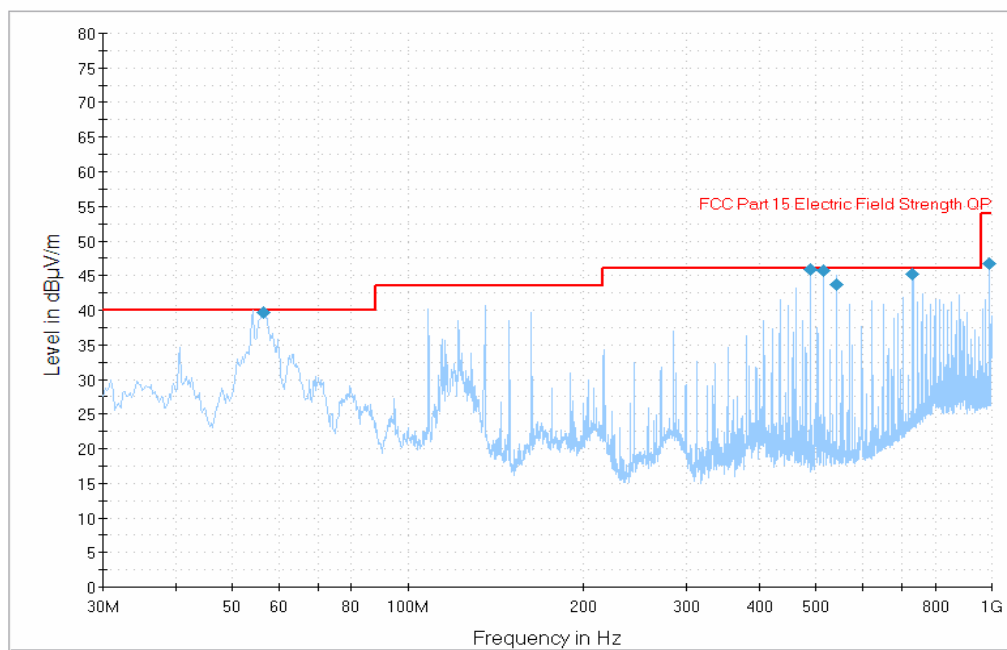

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
488.141500	45.8	100.0	H	79.0	-10.6	46.0	0.2*
515.253750	45.8	101.0	H	275.0	-10.0	46.0	0.2*
56.321020	39.6	120.0	H	60.0	-8.6	40.0	0.4*
542.373750	43.7	101.0	H	291.0	-9.5	46.0	2.3*
732.280000	45.2	118.0	H	335.0	-4.0	46.0	2.6*
990.057500	46.8	116.0	H	337.0	-3.5	54.0	7.2

Note: * Within measurement uncertainty.

The spurious emission above 1 GHz below the limit 20 dB was not recorded.

FCC §15.225(a) (b) (c) & §15.31(f) – FIELD STRENGTH OF RADIATED EMISSIONS

Applicable Standard

As per FCC Part 15.225

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2009-08-02	2010-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
ETS	Passive Loop Antenna	6512	00029604	2009-03-04	2010-03-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

EUT Setup

The field strength of radiated emissions tests were performed in the 3-meter chamber A test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part Subpart C limits.

Test Data

Environmental Conditions



Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Phoenix Liu on 2009-12-20.

Test Mode: Reading Card

Test Result: Pass



Indicated		Table Angle Degree	Antenna Height (m)	Detector PK/QP/AV	Correction Factor			Cord. Amp. (dBµV/m) @ 3m	FCC Part 15.225	
Frequency Range (MHz)	Mark Point (MHz)				Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)		Limit (dBµV/m) @3m	Result
13.110-13.410	13.3478	182	1.02	QP	32.1	0.20	0.0	27.7	80.5	Pass
13.410-13.553	13.5526	180	1.01	QP	32.1	0.20	0.0	42.7	90.5	Pass
13.553-13.567	13.5596	181	1.02	QP	32.1	0.20	0.0	59.3	124	Pass
13.567-13.710	13.567	180	1.00	QP	32.1	0.20	0.0	41.5	90.5	Pass
13.710-14.010	13.7732	182	1.02	QP	32.1	0.20	0.0	26.9	80.5	Pass

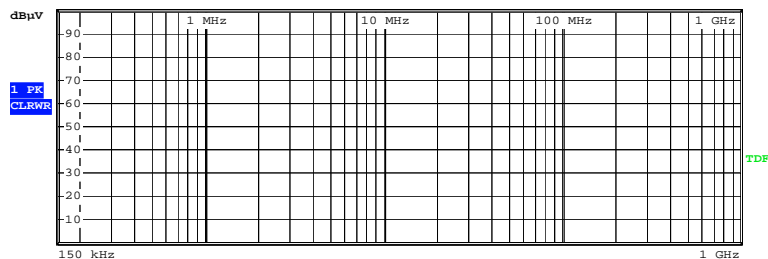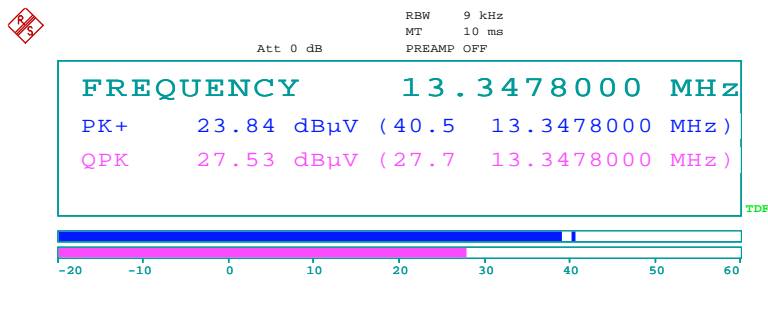

Date: 20.DEC.2009 12:57:29





Att 0 dB RBW 9 kHz
MT 10 ms
PREAMP OFF

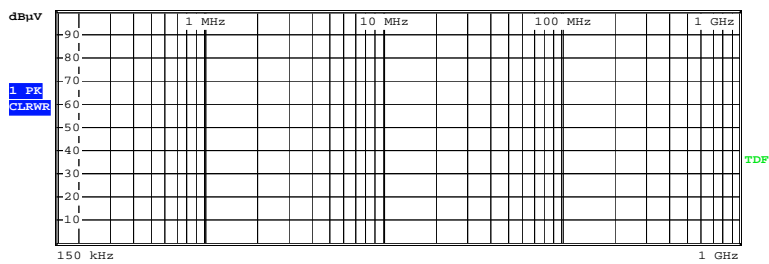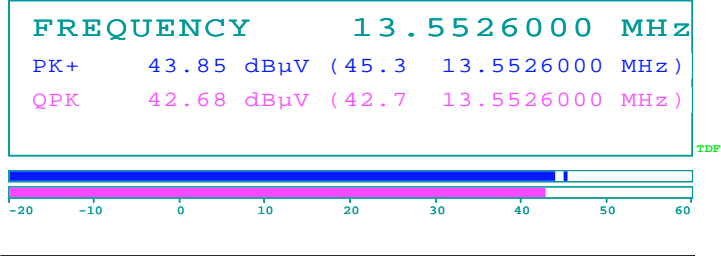

Date: 20.DEC.2009 12:58:16





Att 0 dB RBW 9 kHz
MT 10 ms
PREAMP OFF

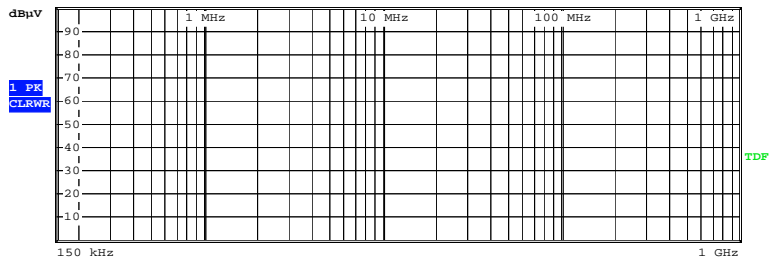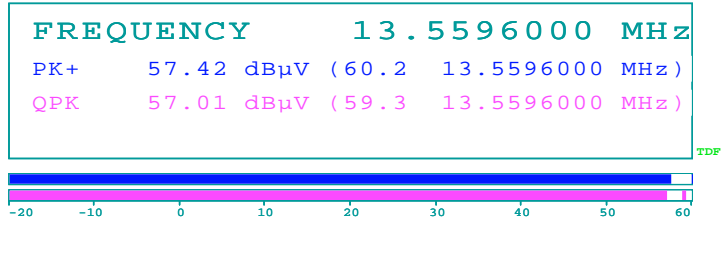

Date: 20.DEC.2009 13:00:08





Att 0 dB RBW 9 kHz
MT 10 ms
PREAMP OFF

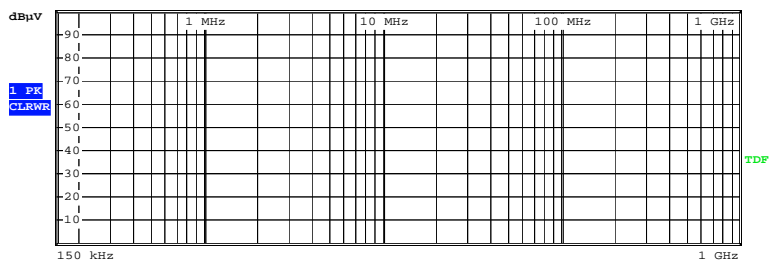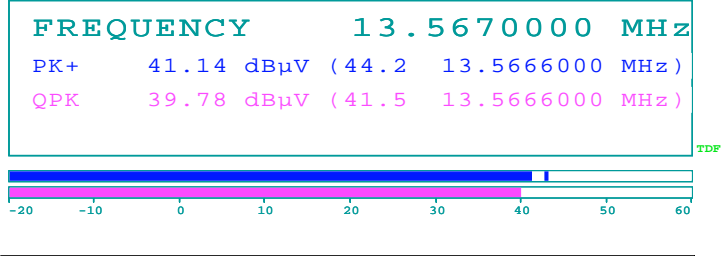

Date: 20.DEC.2009 13:00:56



Att 0 dB RBW 9 kHz
MT 10 ms
PREAMP OFF

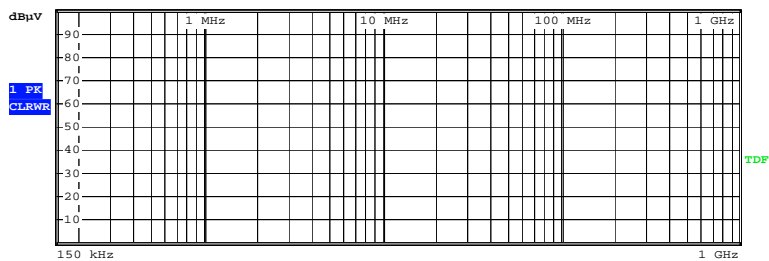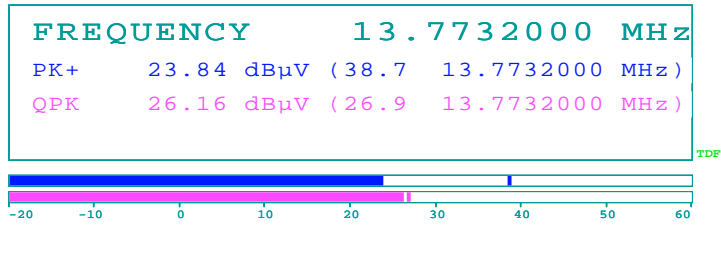

Date: 20.DEC.2009 13:01:55

FCC §15.225(d) §15.209 & §15.31(f) - OUT OF BAND EMISSION

Applicable Standard

As per FCC Part 15.225(d) §15.31(f) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2009-08-02	2010-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
ETS	Passive Loop Antenna	6512	00029604	2009-03-04	2010-03-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

EUT Setup

The out of band emission tests were performed in the 3-meter chamber A test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part Subpart C limits.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Phoenix Liu on 2009-12-20.


Test Mode: Reading Card

Indicated Frequency (MHz)	Table Angle Degree	Antenna Height (m)	Detector (PK/QP/AV)	Corrected Amplitude (dBµV/m) @3m	FCC PART 15.225	
					Limit (dBµV/m) @ 3m	Result
0.011	180	1.52	PK	106.05	126.78	Pass
0.150	180	1.51	PK	72.66	104.00	Pass
16.550	183	1.50	PK	46.84	69.50	Pass
21.720	181	1.52	PK	45.47	69.50	Pass


Test Result: Pass

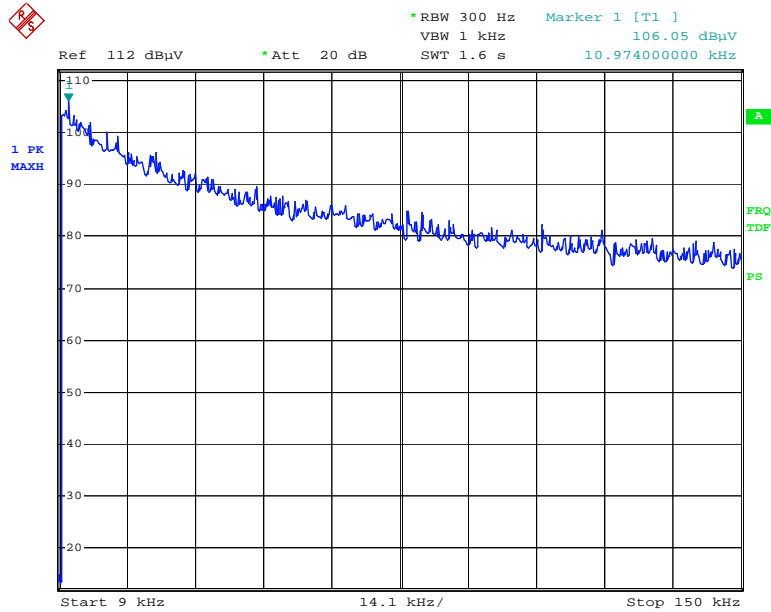


Date: 20.DEC.2009 13:03:07

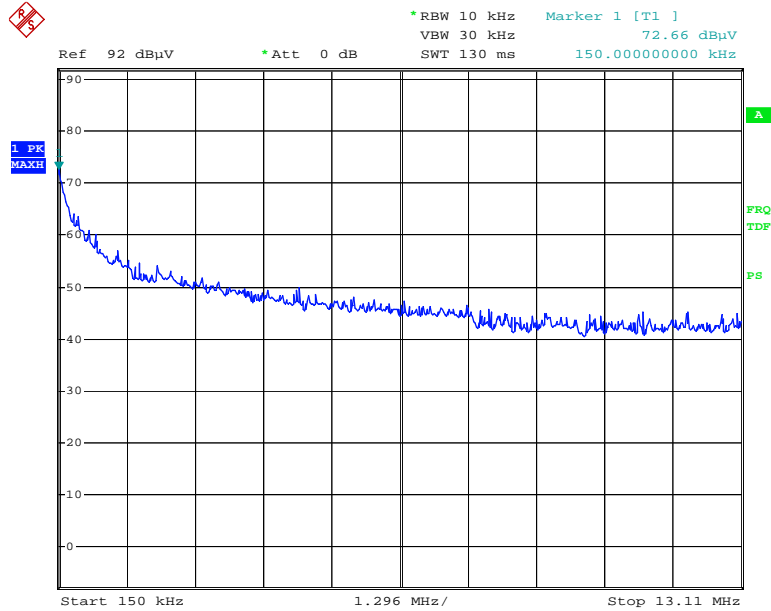

Date: 20.DEC.2009 13:04:46

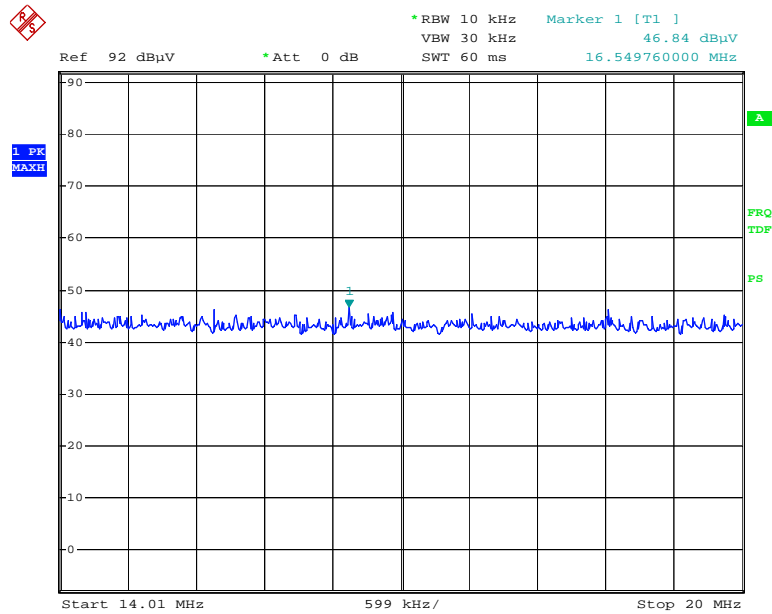

Date: 20.DEC.2009 13:05:23

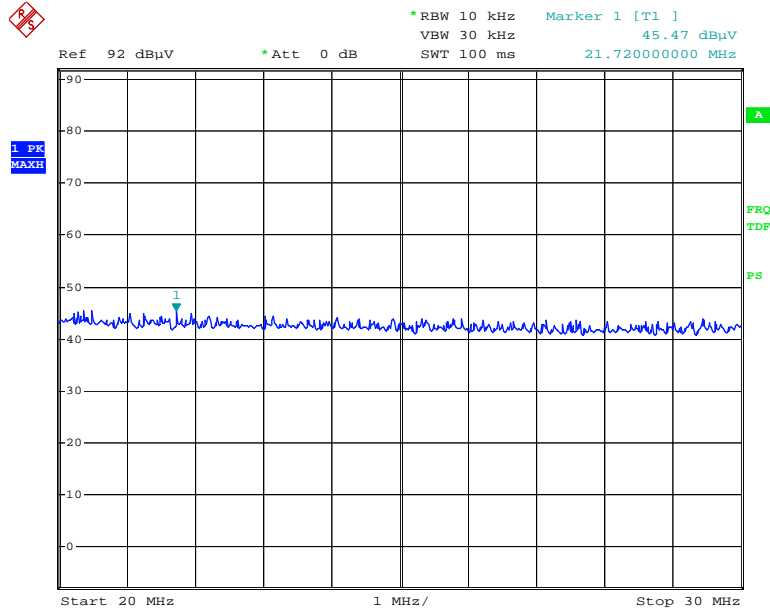

Date: 20.DEC.2009 13:06:12

FCC §15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	2009-05-09	2010-05-09
ETS	Passive Loop Antenna	6512	00029604	2009-03-04	2010-03-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to PC, than to an external AC power supply and loop antenna was connected to a f Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable AC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Phoenix Liu on 2009-12-20.

Test Result: Pass

Test Mode: Reading Card

Test Environment		Frequency Reading (MHz)	Frequency Error	Part 15.225 Limit	Result
Power Supply to Laptop	Temperature (°C)				
AC 120 V	-20	13.55977	-0.0017%	±0.01%	Pass
	-10	13.55966	-0.0025%	±0.01%	Pass
	0	13.55947	-0.0039%	±0.01%	Pass
	10	13.55984	-0.0012%	±0.01%	Pass
	20	13.55960	-0.0029%	±0.01%	Pass
	30	13.55969	-0.0023%	±0.01%	Pass
	40	13.55978	-0.0016%	±0.01%	Pass
	50	13.55958	-0.0031%	±0.01%	Pass
Max. = AC 138 V	25	13.55939	-0.0045%	±0.01%	Pass
Min. = AC 102 V	25	13.55947	-0.0039%	±0.01%	Pass

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
HP	Amplifier	8447E	1937A01046	2009-08-02	2010-08-02
ETS	Passive Loop Antenna	6512	00029604	2009-03-04	2010-03-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Phoenix Liu on 2009-12-20.

Test Mode: Reading Card

20 dB Occupied Bandwidth

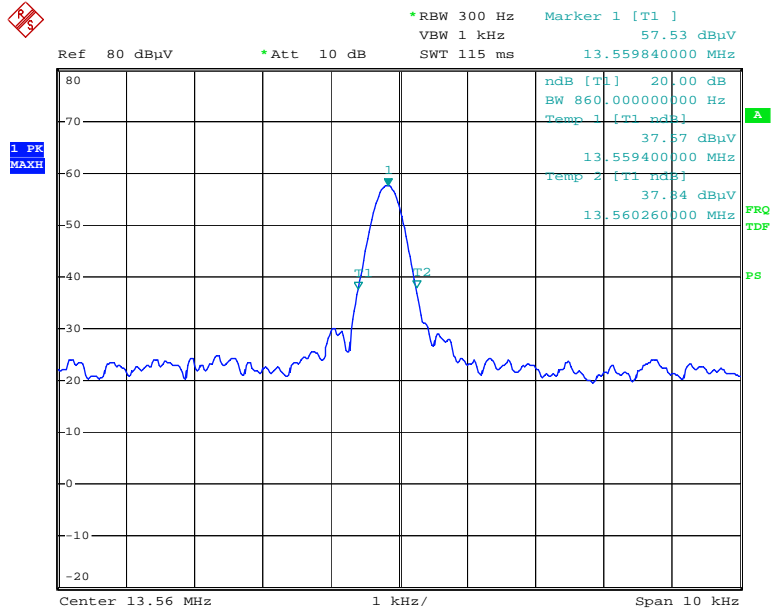

Date: 20.DEC.2009 12:52:50

***** END OF REPORT *****