



**CFR 47 FCC PART 02
CFR 47 FCC PART 22 H
CFR 47 FCC PART 24 E
CFR 47 FCC PART 27
RSS-130, RSS-132, RSS-133
RSS-139**

TEST REPORT

For

Smart Mobile Payment Terminal

MODEL NUMBER: A910S

REPORT NUMBER: 4790824205-1-RF-6

ISSUE DATE: July 14, 2023

FCC ID: V5PA910S

IC: 11689A-A910S

Prepared for

**PAX Technology Limited
Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
<u>V0</u>	<u>July 14, 2023</u>	<u>Initial Issue</u>	<u></u>

Note:

1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 22 H >< CFR 47 FCC PART 24 E>< CFR 47 FCC PART 27 > < RSS-130, RSS-132, RSS-133, RSS-139>when <Accuracy Method> decision rule is applied.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>TEST CHANNEL CONFIGURATION</i>	9
5.3. <i>MAXIMUM AVERAGE OUTPUT POWER</i>	11
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	14
5.5. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	15
5.6. <i>DESCRIPTION OF TEST SETUP</i>	16
6. MEASURING INSTRUMENT AND SOFTWARE USED	17
7. ANTENNA TERMINAL TEST RESULTS	18
7.1. <i>EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER</i>	18
7.2. <i>PEAK TO AVERAGE RADIO</i>	20
7.3. <i>OCCUPIED BANDWIDTH</i>	21
7.4. <i>BAND EDGE EMISSIONS</i>	22
7.5. <i>SPURIOUS EMISSION AT ANTENNA TERMINAL</i>	24
7.6. <i>FREQUENCY STABILITY</i>	26
8. APPENDIX	28
8.1. <i>Appendix A: Effective (Isotropic) Radiated Power Output Data</i>	28
8.1.1. <i>Test Result</i>	28
8.2. <i>Appendix B: Peak-to-Average Ratio(CCDF)</i>	38
8.2.1. <i>Test Result</i>	38
8.2.2. <i>Test Graphs</i>	40
8.3. <i>Appendix C: 26dB Bandwidth and Occupied Bandwidth</i>	48
8.3.1. <i>Test Result</i>	48
8.3.2. <i>Test Graphs</i>	50
8.4. <i>Appendix D: Band Edge</i>	58
8.4.1. <i>Test Graphs</i>	58
8.5. <i>Appendix E: Conducted Spurious Emission</i>	86
8.5.1. <i>Test Graphs</i>	86
8.6. <i>Appendix F: Frequency Stability</i>	135

8.6.1. Test Result	135
9. RADIATED SPURIOUS EMISSIONS	142

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: PAX Technology Limited
Address: Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong

Manufacturer Information


Company Name: PAX Computer Technology (Shenzhen) Co., Ltd.
Address: 401 and 402, Building 3, Shenzhen Software Park, Nanshan District, Shenzhen City, Guangdong Province, P.R.C

EUT Information

EUT Name: Smart Mobile Payment Terminal
Model: A910S
Sample Received Date: April 23, 2023
Sample Status: Normal
Sample ID: 6024466
Date of Tested: May 6, 2023 to July 14, 2023


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 22 H	PASS
CFR 47 FCC PART 24 E	PASS
CFR 47 FCC PART 27	PASS
RSS-132 Issue 4, RSS-133 Issue 6, RSS-130 Issue 2, RSS-139 Issue 4	PASS

Prepared By:



Kebo Zhang
Senior Project Engineer

Checked By:



Denny Huang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26-2015, 971168 D01 Power Meas License Digital Systems v03r01, 971168 D02 Misc Rev Approv License Devices v02r01, 412172 D01 v01r01 Determining ERP and EIRP, CFR 47 FCC Part 2, Part 22 H, Part 24 E, Part 27, RSS-130, RSS-132, RSS-133, RSS-139

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz-18 GHz)
	5.23dB (18 GHz-26 GHz)
	5.64 dB (26 GHz-40 GHz)
Bandwidth	1.1 %

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Smart Mobile Payment Terminal
Model	A910S
Rated Input	DC 5 V, 2 A
Battery	7.2 Vdc

Battery	
Model No.:	YW-001C
Rated Voltage:	7.2 Vdc
Limited Charge Voltage:	8.4 Vdc
Rated Capacity:	2600 mAh/18.72Wh

Battery	
Model No.:	YW-003C
Rated Voltage:	7.2 Vdc
Limited Charge Voltage:	8.4 Vdc
Rated Capacity:	3350 mAh/24.12Wh

Note: the product have two battery(YW-001C and YW-003C), both battery have been tested, but only the worst battery data(YW-001C) recorded in the report.

Item	Accessory	Brand Name	Model Name	Description
1	Type-C Cable	N/A	N/A	Length: 1.0 m No Ferrite Core shield

5.2. TEST CHANNEL CONFIGURATION

Mode	TX	Low	Middle	High
LTE Band 2	TX (1.4 MHz)	18607	18900	19193
		1850.7 MHz	1880 MHz	1909.3 MHz
	TX (3 MHz)	18615	18900	19185
		1851.5 MHz	1880 MHz	1908.5 MHz
	TX (5 MHz)	18625	18900	19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	TX (10 MHz)	18650	18900	19150
		1855 MHz	1880 MHz	1905 MHz
	TX (15 MHz)	18675	18900	19125
		1857.5 MHz	1880 MHz	1902.5 MHz
TX (20 MHz)	18700	18900	19100	
	1860 MHz	1880 MHz	1900 MHz	

Mode	TX/RX	Low	Middle	High
LTE Band 4	TX (1.4 MHz)	19957	20175	20393
		1710.7 MHz	1732.5 MHz	1754.3 MHz
	TX (3 MHz)	19965	20175	20385
		1711.5 MHz	1732.5 MHz	1753.5 MHz
	TX (5 MHz)	19975	20175	20375
		1712.5 MHz	1732.5 MHz	1752.5 MHz
	TX (10 MHz)	20000	20175	20350
		1715 MHz	1732.5 MHz	1750 MHz
	TX (15 MHz)	20025	20175	20325
		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TX (20 MHz)	20050	20175	20300
		1720 MHz	1732.5 MHz	1745 MHz

Mode	TX/RX	Low	Middle	High
LTE Band 5	TX (1.4 MHz)	20407	20525	20643
		824.7 MHz	836.5 MHz	848.3 MHz
	TX (3 MHz)	20415	20525	20635
		825.5 MHz	836.5 MHz	847.5 MHz
	TX (5 MHz)	20425	20525	20625
		826.5 MHz	836.5 MHz	846.5 MHz
TX (10 MHz)	20450	20525	20600	
	829.0 MHz	836.5 MHz	844.0 MHz	

Mode	TX/RX	Low	Middle	High
LTE Band 12	TX (1.4 MHz)	23017	23095	23173
		699.7 MHz	707.5 MHz	715.3 MHz
	TX (3 MHz)	23025	23095	23165
		700.5 MHz	707.5 MHz	714.5 MHz
	TX (5 MHz)	23035	23095	23155
		701.5 MHz	707.5 MHz	713.5 MHz
TX (10 MHz)	23060	23095	23130	
	704.0 MHz	707.5 MHz	711.0 MHz	

Mode	TX/RX	Low	Middle	High
LTE Band 13	TX (5 MHz)	23205	23230	23255
		779.5 MHz	782.0 MHz	784.5 MHz
	TX (10 MHz)	23230	23230	23230
		782.0 MHz	782.0 MHz	782.0 MHz

Mode	TX/RX	Low	Middle	High
LTE Band 17	TX (5 MHz)	23755	23790	23825
		706.5 MHz	710.0 MHz	713.5 MHz
	TX (10 MHz)	23780	23790	23800
		709.0 MHz	710.0 MHz	711.0 MHz

5.3. MAXIMUM AVERAGE OUTPUT POWER

LTE Band 2

Part 24/RSS-133								
EIRP Limit(W)		2						
Antenna Gain (dBi)		0.4						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	1850.7	1909.3	16.82	17.22	0.05	1.087	1M09G7W
	16QAM			15.07	15.47	0.04	1.086	1M09D7W
3	QPSK	1851.5	1908.5	16.8	17.20	0.05	2.686	2M69G7W
	16QAM			15.1	15.50	0.04	2.686	2M69D7W
5	QPSK	1852.5	1907.5	16.84	17.24	0.05	4.489	4M49G7W
	16QAM			14.97	15.37	0.03	4.485	4M49D7W
10	QPSK	1855.0	1905.0	16.93	17.33	0.05	8.981	8M98G7W
	16QAM			15.19	15.59	0.04	8.988	8M99D7W
15	QPSK	1857.5	1902.5	16.87	17.27	0.05	13.483	13M48G7W
	16QAM			15.16	15.56	0.04	13.473	13M47D7W
20	QPSK	1860.0	1900.0	17.5	17.90	0.06	18.069	18M07G7W
	16QAM			16	16.40	0.04	18.049	18M05D7W

LTE Band 4

Part 27/RSS-139								
EIRP Limit(W)		1.00						
Antenna Gain (dBi)		0.2						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	1710.7	1754.3	17.6	17.80	0.06	1.101	1M10G7W
	16QAM			16.35	16.55	0.05	1.093	1M09D7W
3	QPSK	1711.5	1753.5	17.6	17.80	0.06	2.715	2M72G7W
	16QAM			16.35	16.55	0.05	2.716	2M72D7W
5	QPSK	1712.5	1752.5	17.7	17.90	0.06	4.540	4M54G7W
	16QAM			16.46	16.66	0.05	4.528	4M53D7W
10	QPSK	1715.0	1750.0	17.83	18.03	0.06	8.999	9M00G7W
	16QAM			16.6	16.80	0.05	9.009	9M01D7W
15	QPSK	1717.5	1747.5	17.76	17.96	0.06	13.522	13M52G7W
	16QAM			16.56	16.76	0.05	13.503	13M50D7W
20	QPSK	1720.0	1745.0	18.13	18.33	0.07	18.056	18M06G7W
	16QAM			16.78	16.98	0.05	18.133	18M13D7W

LTE Band 5

Part 22H								
ERP Limit(W)		7.00						
Antenna Gain (dBi)		-2.1						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	824.7	848.3	22.76	18.51	0.07	1.100	1M10G7W
	16QAM			21.90	17.65	0.06	1.092	1M09D7W
3	QPSK	825.5	847.5	22.67	18.42	0.07	2.716	2M72G7W
	16QAM			21.50	17.25	0.05	2.715	2M72D7W
5	QPSK	826.5	846.5	22.64	18.39	0.07	4.536	4M54G7W
	16QAM			21.73	17.48	0.06	4.526	4M53D7W
10	QPSK	829.0	844.0	22.56	18.31	0.07	8.996	9M00G7W
	16QAM			21.43	17.18	0.05	8.999	9M00D7W

LTE Band12

Part 27/RSS-130								
ERP Limit(W)		3.00						
Antenna Gain (dBi)		-2.7						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	699.7	715.3	22.81	17.96	0.06	1.097	1M10G7W
	16QAM			22.13	17.28	0.05	1.093	1M09D7W
3	QPSK	700.5	714.5	22.76	17.91	0.06	2.721	2M72G7W
	16QAM			21.92	17.07	0.05	2.709	2M71D7W
5	QPSK	701.5	713.5	22.82	17.97	0.06	4.537	4M54G7W
	16QAM			21.73	16.88	0.05	4.529	4M53D7W
10	QPSK	704.0	711.0	22.70	17.85	0.06	8.995	9M00G7W
	16QAM			21.60	16.75	0.05	8.986	9M00D7W

LTE Band 13

Part 27/RSS-130								
ERP Limit(W)		3.00						
Antenna Gain (dBi)		-1.9						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
5	QPSK	779.5	784.5	22.47	18.42	0.07	4.535	4M54G7W
	16QAM			21.65	17.60	0.06	4.522	4M52D7W
10	QPSK	782	782	22.48	18.43	0.07	8.983	8M98G7W
	16QAM			21.23	17.18	0.05	8.972	8M97G7W

LTE Band 17

Part 27/RSS-130								
ERP Limit(W)		3.00						
Antenna Gain (dBi)		-2.6						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
5	QPSK	706.5	713.5	22.69	17.94	0.06	4.538	4M54G7W
	16QAM			21.48	16.73	0.05	4.527	4M53D7W
10	QPSK	709.0	711.0	22.68	17.93	0.06	8.992	9M00G7W
	16QAM			22.26	17.51	0.06	8.985	8M99D7W

5.4. WORST-CASE CONFIGURATION AND MODE

During all testing, EUT is in link mode with base station emulator at maximum power level. The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM. All testing was performed using QPSK and 16QAM modulations to represent the worst case.

The radiated spurious emissions measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was investigated in three orthogonal orientations X,Y and Z. It was determined that X orientation was the worst-case.

Radiated spurious emissions were investigated below 30 MHz, 30 MHz - 1 GHz and above 1 GHz. There were no emissions found on below 1GHz and above 18 GHz, the emissions between 1 GHz – 18 GHz were tested the highest transmitting power channel and the worse configuration.

Test Items	Worst case test configuration			
Description	Modulation	Channel	Bandwidth (MHz)	RB Configuration
Radiated Spurious Emissions	QPSK	L, M, H	Maximum BW	RB size=1, RB Location=Low


5.5. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Band	Antenna Type	MAX Antenna Gain (dBi)
1	LTE Band 2	FPC	0.4
1	LTE Band 4	FPC	0.2
1	LTE Band 5	FPC	-2.1
1	LTE Band 12	FPC	-2.7
1	LTE Band 13	FPC	-1.9
1	LTE Band 17	FPC	-2.6


Band	Transmit and Receive Mode	Description
LTE Band 2	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LTE Band 4	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LTE Band 5	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LTE Band 12	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LTE Band 13	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LTE Band 17	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.6. DESCRIPTION OF TEST SETUP

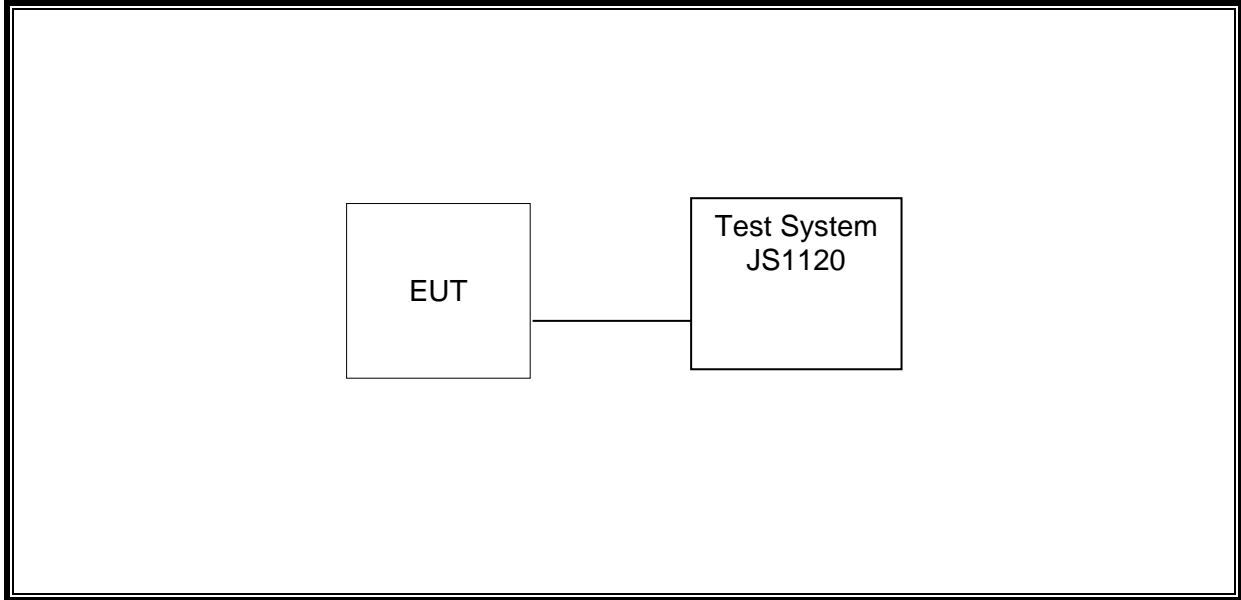

Radiated

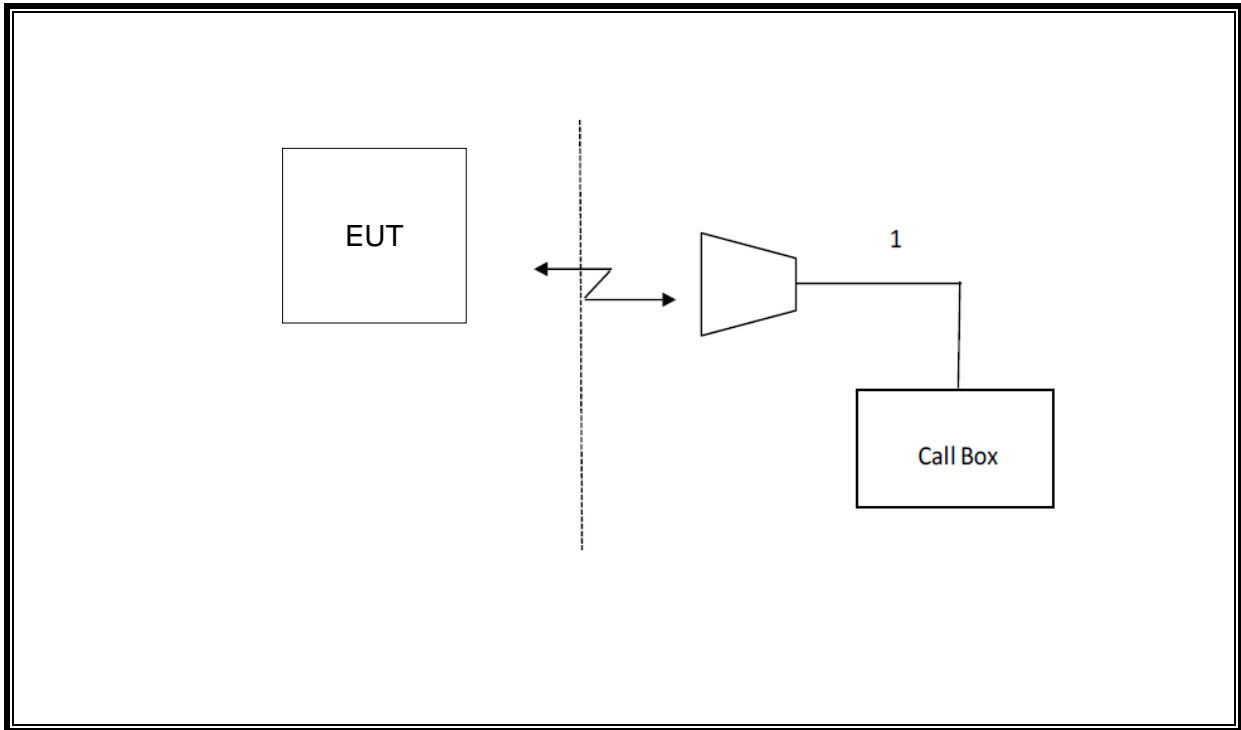

6. MEASURING INSTRUMENT AND SOFTWARE USED

Antenna Terminal Test						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSV40	S422060001	Oct.17, 2022	Oct.16, 2023
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.17, 2022	Oct.16, 2023
<input checked="" type="checkbox"/>	DC Power Supply	Array	3662A	A1512015	Oct.17, 2022	Oct.16, 2023
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Tonsend Cellular Test System	Tonsend	JS1120 RF Auto Test System	3.1.46		
Radiated Test						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.17, 2022	Oct.16, 2023
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Oct.17, 2022	Oct.16, 2023
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Oct.17, 2022	Oct.16, 2023
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
<input checked="" type="checkbox"/>	Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.17, 2022	Oct.16, 2023
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.17, 2022	Oct.16, 2023
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
<input checked="" type="checkbox"/>	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.17, 2022	Oct.16, 2023
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1		

7. ANTENNA TERMINAL TEST RESULTS

7.1. EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50
RSS-130, RSS-132, RSS-133, RSS-139

LIMITS

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(c) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

27.50(d) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watts EIRP.

27.50(h) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

RSS-130

The transmitter output power shall be measured in terms of average power. In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

Frequency bands 617-652 MHz and 663-698 MHz

The e.r.p. shall not exceed 3 watts for mobile equipment, fixed subscriber equipment and portable equipment.

Frequency bands 698-756 MHz and 777-787 MHz

The e.r.p. shall not exceed 30 watts for mobile equipment and outdoor fixed subscriber equipment. The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

RSS-132

The transmitter output power shall be measured in terms of average power. The equivalent radiated power (e.r.p.) shall not exceed 7 watts for mobile equipment and 3 watts for portable equipment.

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

RSS-133

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits 2W.

In addition, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

RSS-139

The equivalent isotropically radiated power (e.i.r.p.) for mobile and portable transmitters shall not exceed one watt.

In addition, the peak to average power ratio (PAPR) of the equipment shall not exceed 13 dB for more than 0.1% of the time, using a signal that corresponds to the highest PAPR during periods of continuous transmission.

TEST PROCEDURE

Refer to ANSI C63.26:2015 and KDB 971168 D01 Section 5.6

$$\text{ERP/ EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where:

ERP or EIRP = effective or equivalent isotropically radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);


PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB

The transmitter has a maximum radiated ERP / EIRP output powers as follows:

TEST SETUP

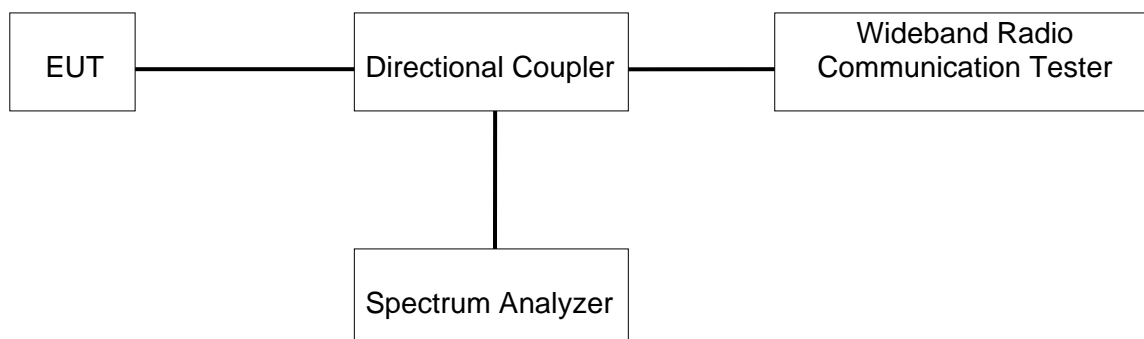

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	57.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

RESULTS

Please refer to Appendix A.

7.2. PEAK TO AVERAGE RADIO

LIMITS


In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR was measured on the Spectrum Analyzer.

TEST SETUP

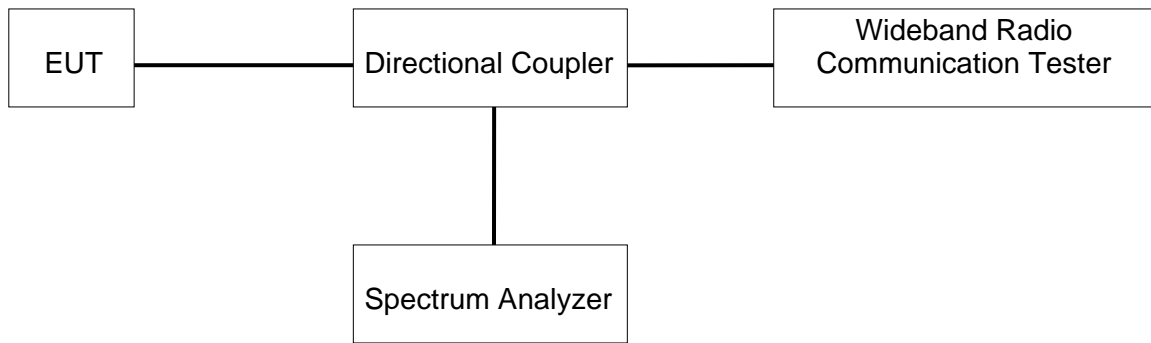

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	57.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

RESULTS

Please refer to Appendix B.

7.3. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049, RSS-130, RSS-132, RSS-133, RSS-139

LIMITS


For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01)

TEST SETUP

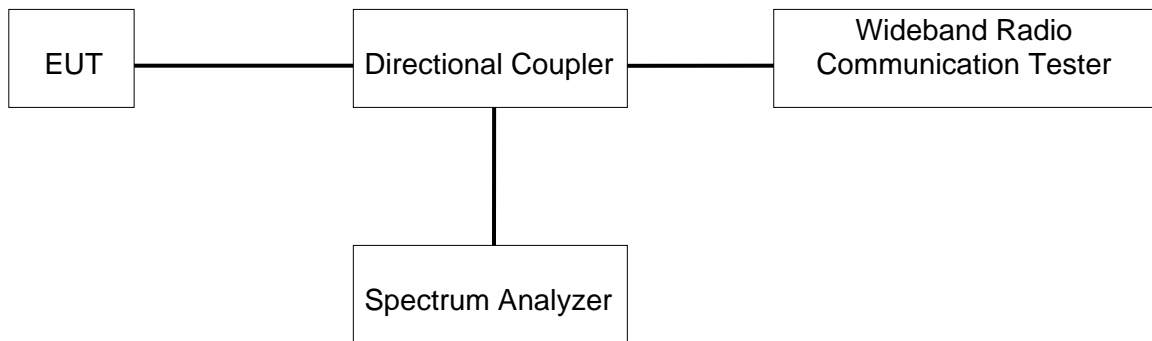

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	57.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

RESULTS

Please refer to Appendix C.

7.4. BAND EDGE EMISSIONS

RULE PART(S)

FCC §2.1051, §22.917, §24.238, §27.53
RSS-130, RSS-132, RSS-133, RSS-139

LIMITS


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

- a) Set the RBW = 1 ~ 1.5 % of OBW (Typically limited to a minimum RBW of 1% of the OBW)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = Auto;
- e) Detector = RMS;
- f) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW;
- g) Trace mode = Average (100);

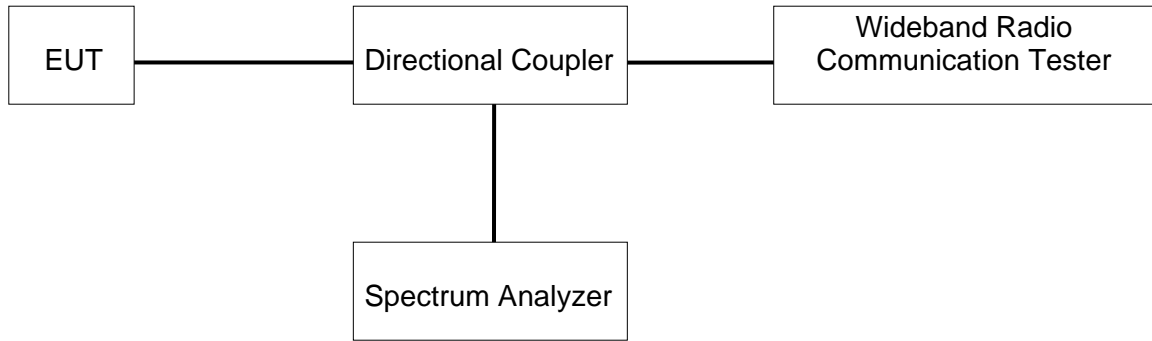TEST SETUP

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	57.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

RESULTS

Please refer to Appendix D.

7.5. SPURIOUS EMISSION AT ANTENNA TERMINAL

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53
RSS-130, RSS-132, RSS-133, RSS-139

LIMITS

FCC: §22.901, §22.917, §24.238

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

RSS-132 section 5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS-133 section 6.5.1

Equipment shall comply with the limits in (i) and (ii) below.

(i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS-139 section 6.6

(i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block,² which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

(ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

TEST PROCEDURE


Per KDB 971168 D01 Power Meas License Digital Systems v03r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

- a) Set the RBW = 100 kHz for emission below 1GHz and 1MHz for emissions above 1GHz (Tests were performed 1 MHz [Worst case], to sweep 1 time for all frequency range)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points = Max (40001);
- g) Trace mode = average (LTE 5), Maxhold (LTE Band7);

Note: Please refer to section 5.4 for bandwidth and RB setting about LTE bands.

TEST SETUP

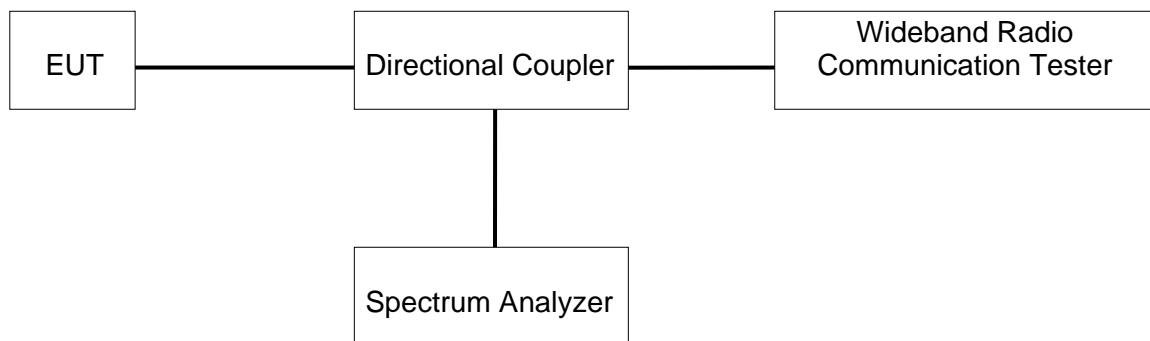

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	57.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

RESULTS

Please refer to Appendix E.

7.6. FREQUENCY STABILITY

Rule Part:

FCC: §2.1055, §22.355, §24.235, §27.54

RSS-130, RSS-132, RSS-133, RSS-139

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 and §27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

RSS-130 section 4.5

For equipment that is capable of transmitting numerous channels simultaneously for different applications (e.g. LTE and narrowband – Internet of Things (IoT)), the occupied bandwidth shall be the bandwidth representing the sum of the occupied bandwidths of these channels.

The frequency stability shall be sufficient to ensure that the occupied bandwidth remains within each frequency block range when tested at the temperature and supply voltage variations specified in RSS-Gen.

RSS-132 section 5.3

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within each of the sub-bands when tested at the temperature and supply voltage variations specified in RSS-Gen.

RSS-133 section 6.3

The carrier frequency shall not depart from the reference frequency, in excess of ± 2.5 ppm for mobile stations and ± 1.0 ppm for base stations.

In lieu of meeting the above stability values, the test report may show that the frequency stability is sufficient to ensure that the emission bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

RSS-139 section 6.4

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.


TEST PROCEDURE

Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	45 % - 75 %	/
Atmospheric Pressure	100 kPa ~102 kPa	/
Temperature	T _N (Normal Temperature): 24.3 °C	T _L (Low Temperature): -30 °C
		T _H (High Temperature): 50 °C
Supply Voltage 1	V _N (Normal Voltage): DC 5V	V _L (Low Voltage): DC 4.25 V
		V _H (High Voltage): DC 5.75 V
Supply Voltage 2	V _N (Normal Voltage): AC 120V	V _L (Low Voltage): AC 102 V
		V _H (High Voltage): AC 138 V

Note: Two ways power supply voltage have been tested, only the worst data supply voltage 1 was recorded in the report.

TEST SETUP

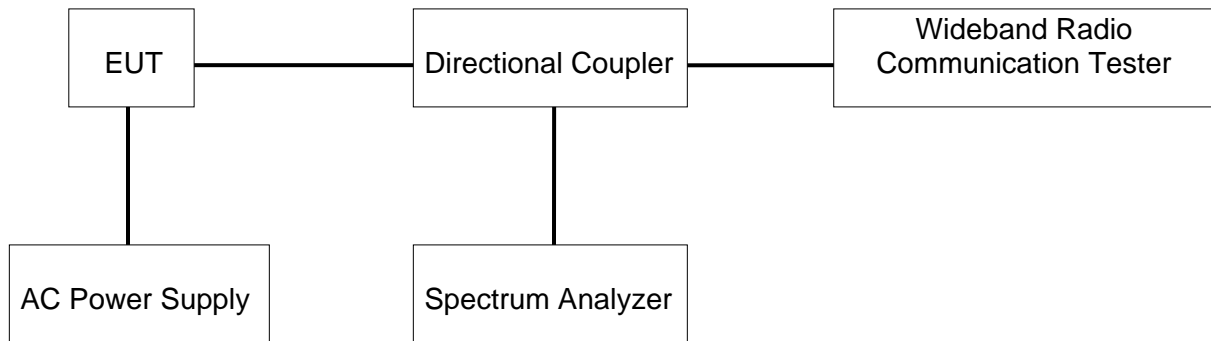

RESULTS

Please refer to Appendix F.

8. APPENDIX

8.1. Appendix A: Effective (Isotropic) Radiated Power Output Data

8.1.1. Test Result

LTE FDD B2				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607	18900	19193
1.4MHz	QPSK	1	0	16.28	16.68	16.21
		1	2	16.63	16.82	16.28
		1	5	16.38	16.56	15.99
		3	0	16.41	16.72	16.25
		3	1	16.47	16.71	16.23
		3	3	16.5	16.68	16.13
		6	0	14.52	14.75	14.31
	16QAM	1	0	14.49	14.87	14.5
		1	2	14.59	15.07	14.61
		1	5	14.31	14.81	14.3
		3	0	14.4	14.72	14.31
		3	1	14.38	14.7	14.3
		3	3	14.38	14.67	14.18
		6	0	13.4	13.8	13.17
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615	18900	19185
3MHz	QPSK	1	0	16.33	16.73	16.43
		1	8	16.57	16.8	16.31
		1	14	16.46	16.64	15.94
		8	0	14.55	14.91	14.55
		8	4	14.55	14.91	14.56
		8	7	14.64	14.89	14.35
		15	0	14.6	14.9	14.46
	16QAM	1	0	14.58	15	14.72
		1	8	14.83	15.1	14.62
		1	14	14.72	14.92	14.24
		8	0	13.58	13.87	13.53
		8	4	13.58	13.86	13.54
		8	7	13.65	13.83	13.31
		15	0	13.58	13.8	13.36
		Bandwidth	Modulation	RB size	RB offset	Channel
18625	18900					19175
5MHz	QPSK	1	0	15.94	16.35	16.3
		1	12	16.64	16.84	16.53
		1	24	16.16	16.23	15.6
		12	0	14.37	14.72	14.6
		12	6	14.37	14.73	14.6
		12	13	14.51	14.68	14.25

	16QAM	25	0	14.45	14.72	14.43		
		1	0	14.01	14.44	14.63		
		1	12	14.74	14.97	14.88		
		1	24	14.25	14.35	13.93		
		12	0	13.34	13.61	13.61		
		12	6	13.34	13.61	13.62		
		12	13	13.47	13.56	13.25		
		25	0	13.45	13.63	13.39		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				18650	18900	19150		
10MHz	QPSK	1	0	15.37	16.5	16.74		
		1	24	16.09	16.8	16.81		
		1	49	16.51	16.93	16.23		
		25	0	13.88	14.86	15.08		
		25	12	13.89	14.86	15.09		
		25	25	14.51	15.06	14.82		
		50	0	14.21	14.96	14.94		
	16QAM	1	0	13.54	14.75	15.02		
		1	24	14.35	15.09	15.14		
		1	49	14.69	15.19	14.52		
		25	0	12.88	13.74	14.07		
		25	12	12.88	13.75	14.05		
		25	25	13.5	13.93	13.8		
		50	0	13.2	13.82	13.94		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
						18675	18900	19125
15MHz	QPSK	1	0	15.62	16.87	15.84		
		1	38	16.3	16.76	15.92		
		1	74	16.29	16.66	14.9		
		36	0	14.07	15.04	14.15		
		36	18	14.07	15.04	14.15		
		36	37	14.07	15.04	14.15		
		75	0	14.31	14.99	13.95		
	16QAM	1	0	13.76	15.16	14.18		
		1	38	14.58	15.06	14.35		
		1	74	14.47	14.99	13.25		
		36	0	13.03	13.89	13.03		
		36	18	13.03	13.89	13.03		
		36	37	13.03	13.89	13.03		
		75	0	13.24	13.81	12.77		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				18700	18900	19100		
20MHz	QPSK	1	0	17.03	17.49	15.82		
		1	49	17.24	17.48	17.5		
		1	99	17.26	17.45	15.51		
		50	0	13.72	14.88	13.93		

		50	25	13.72	14.92	13.94
		50	50	14.4	14.93	14.95
		100	0	14.06	15.17	13.97
	16QAM	1	0	14.15	15.79	14.06
		1	49	14.25	15.07	14.13
		1	99	14.54	16	14.12
		50	0	12.57	13.91	12.79
		50	25	12.57	13.92	12.8
		50	50	13.25	14.16	12.86
		100	0	12.91	14.01	12.78

LTE FDD B4				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957	20175	20393
1.4MHz	QPSK	1	0	15.68	16.38	17.47
		1	2	16.79	16.56	17.6
		1	5	16.72	16.32	17.35
		3	0	16.71	16.43	17.52
		3	1	16.7	16.43	17.52
		3	3	16.78	16.42	17.49
		6	0	15.2	14.98	16.07
	16QAM	1	0	15.26	14.77	16.15
		1	2	15.45	14.99	16.35
		1	5	15.38	14.73	16.09
		3	0	15.13	14.85	16.01
		3	1	15.13	14.85	16
		3	3	15.17	14.8	15.97
		6	0	13.11	12.97	14.14
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
3MHz	QPSK	1	0	16.61	16.37	17.53
		1	8	17.03	16.49	17.6
		1	14	17.04	16.28	17.4
		8	0	15.28	15.02	16.15
		8	4	15.28	15.04	16.16
		8	7	15.56	15.02	16.14
		15	0	15.44	15.03	16.15
	16QAM	1	0	15.27	15.08	16.24
		1	8	15.7	15.23	16.35
		1	14	15.71	15.01	16.15
		8	0	13.37	13.08	14.22
		8	4	13.38	13.08	14.22
		8	7	13.65	13.05	14.19
		15	0	13.48	13.03	14.17
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975	20175	20375

5MHz	QPSK	1	0	16.26	16.12	17.21
		1	12	17.25	16.55	17.7
		1	24	16.87	15.84	17.07
		12	0	15.2	14.83	16
		12	6	15.21	14.84	16.01
		12	13	15.59	14.79	15.97
		25	0	15.43	14.83	16
	16QAM	1	0	14.73	14.49	15.94
		1	12	15.76	15.12	16.46
		1	24	15.37	14.37	15.83
		12	0	13.24	12.84	14.06
		12	6	13.24	12.84	14.06
		12	13	13.62	12.78	14.02
		25	0	13.48	12.86	13.99
Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350
10MHz	QPSK	1	0	16.47	16.15	17.37
		1	24	17.68	16.53	17.74
		1	49	17.83	16.32	17.73
		25	0	15.93	14.94	16.13
		25	12	15.93	14.95	16.14
		25	25	16.5	15.05	16.37
		50	0	16.23	15	16.26
	16QAM	1	0	15.24	15.05	15.74
		1	24	16.48	15.25	16.16
		1	49	16.6	15.12	16.16
		25	0	13.89	13	14.16
		25	12	13.89	13	14.16
		25	25	14.47	13.1	14.39
		50	0	14.18	13.05	14.24
Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325
15MHz	QPSK	1	0	16.81	16.36	17.39
		1	38	17.76	16.46	17.48
		1	74	17.61	16.05	17.24
		36	0	16.15	15.08	16.11
		36	18	16.16	15.1	16.12
		36	37	16.16	15.11	16.12
		75	0	16.28	14.99	16.12
	16QAM	1	0	15.58	15.18	16.15
		1	38	16.56	15.33	16.27
		1	74	16.41	15.06	16.06
		36	0	14.05	13.11	14.01
		36	18	14.05	13.12	14.01
		36	37	14.04	13.12	14.01
		75	0	14.14	12.95	13.98

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050	20175	20300
20MHz	QPSK	1	0	17.97	16.99	18.13
		1	49	17.44	16.52	17.54
		1	99	16.67	16.53	17.86
		50	0	15.63	14.89	16.38
		50	25	15.65	14.91	16.06
		50	50	16.19	14.96	16.37
		100	0	15.91	14.92	16.2
	16QAM	1	0	15.17	15.1	16.47
		1	49	15.96	15.23	16.15
		1	99	16.48	15.13	16.78
		50	0	13.68	12.87	13.94
		50	25	13.68	12.87	13.95
		50	50	14.22	12.89	14.24
		100	0	13.94	12.85	14.09

LTE FDD B5				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407	20525	20643
1.4MHz	QPSK	1	0	22.27	22.49	22.63
		1	2	22.21	22.44	22.68
		1	5	22.16	22.54	22.68
		3	0	22.32	22.49	22.76
		3	1	22.25	22.49	22.7
		3	3	22.36	22.44	22.72
		6	0	21.35	21.41	21.64
	16QAM	1	0	21.81	21.21	21.9
		1	2	21.81	21.37	21.84
		1	5	21.79	21.4	21.83
		3	0	21.01	21.38	21.4
		3	1	20.98	21.37	21.39
		3	3	21.07	21.31	21.37
		6	0	20.52	20.8	20.75
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415	20525	20635
3MHz	QPSK	1	0	22.16	22.51	22.65
		1	8	22.17	22.48	22.58
		1	14	22.28	22.44	22.67
		8	0	21.27	21.39	21.68
		8	4	21.28	21.4	21.7
		8	7	21.38	21.49	21.59
		15	0	21.23	21.36	21.7
	16QAM	1	0	20.93	21.05	21.45

		1	8	20.87	21.06	21.49
		1	14	21.09	21.06	21.5
		8	0	20.5	20.44	20.89
		8	4	20.51	20.44	20.77
		8	7	20.48	20.67	20.61
		15	0	20.38	20.46	20.85
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20625
5MHz	QPSK	1	0	22.2	22.31	22.59
		1	12	22.32	22.39	22.54
		1	24	22.23	22.3	22.64
		12	0	21.18	21.25	21.7
		12	6	21.33	21.27	21.67
		12	13	21.3	21.39	21.7
		25	0	21.34	21.38	21.58
	16QAM	1	0	20.57	21.41	21.08
		1	12	20.72	21.62	21.08
		1	24	20.67	21.73	20.98
		12	0	20.36	20.47	20.69
		12	6	20.35	20.48	20.69
		12	13	20.47	20.68	20.78
		25	0	20.52	20.63	20.88
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0	22.21	22.28	22.37
		1	24	22.33	22.34	22.51
		1	49	22.45	22.31	22.56
		25	0	21.44	21.43	21.59
		25	12	21.29	21.44	21.52
		25	25	21.37	21.55	21.64
		50	0	21.41	21.39	21.43
	16QAM	1	0	21.3	21.12	21.41
		1	24	21.33	21.33	21.41
		1	49	21.32	21.3	21.43
		25	0	20.48	20.47	20.66
		25	12	20.49	20.47	20.67
		25	25	20.49	20.68	20.96
		50	0	20.42	20.57	20.82

LTE FDD B12				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23017	23095	23173
1.4MHz	QPSK	1	0	22.58	22.63	22.68
		1	2	22.56	22.61	22.65
		1	5	22.55	22.59	22.73

		3	0	22.76	22.67	22.71
		3	1	22.76	22.66	22.7
		3	3	22.75	22.64	22.81
		6	0	21.65	21.56	21.79
	16QAM	1	0	22.12	21.38	21.77
		1	2	22.13	21.36	21.88
		1	5	22.09	21.28	21.98
		3	0	21.39	21.41	21.44
		3	1	21.39	21.38	21.48
		3	3	21.3	21.32	21.56
6	0	20.79	20.73	20.8		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23025	23095	23165
3MHz	QPSK	1	0	22.53	22.63	22.72
		1	8	22.56	22.67	22.71
		1	14	22.57	22.58	22.76
		8	0	21.58	21.46	21.61
		8	4	21.6	21.47	21.5
		8	7	21.77	21.42	21.61
		15	0	21.56	21.46	21.57
	16QAM	1	0	21.42	21.14	21.8
		1	8	21.37	21.07	21.85
		1	14	21.41	21.15	21.92
		8	0	20.85	20.77	20.45
		8	4	20.86	20.78	20.5
		8	7	20.7	20.63	20.69
		15	0	20.83	20.5	20.34
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23035	23095	23155
5MHz	QPSK	1	0	22.57	22.51	22.81
		1	12	22.56	22.41	22.8
		1	24	22.56	22.5	22.82
		12	0	21.58	21.33	21.6
		12	6	21.59	21.51	21.77
		12	13	21.71	21.43	21.72
		25	0	21.66	21.46	21.59
	16QAM	1	0	20.94	21.56	21.33
		1	12	21.02	21.54	21.27
		1	24	21	21.73	21.54
		12	0	20.8	20.67	20.68
		12	6	20.81	20.7	20.72
		12	13	20.47	20.57	20.33
		25	0	20.66	20.63	20.41
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23060	23095	23130

10MHz	QPSK	1	0	22.54	22.56	22.63
		1	24	22.53	22.56	22.66
		1	49	22.55	22.66	22.7
		25	0	21.67	21.46	21.46
		25	12	21.68	21.48	21.41
		25	25	21.47	21.53	21.7
		50	0	21.69	21.51	21.54
	16QAM	1	0	21.3	21.54	21.22
		1	24	21.37	21.33	21.53
		1	49	21.09	21.44	21.6
		25	0	20.49	20.79	20.62
		25	12	20.49	20.8	20.63
		25	25	20.54	20.73	20.59
		50	0	20.68	20.63	20.68

LTE FDD B13				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23205	23230	23255
5MHz	QPSK	1	0	21.38	22.47	22.45
		1	12	22.36	22.35	22.43
		1	24	22.44	22.39	22.37
		12	0	21.4	21.45	21.46
		12	6	21.55	21.45	21.5
		12	13	21.38	21.54	21.38
		25	0	21.42	21.53	21.56
	16QAM	1	0	21.64	20.75	21.61
		1	12	21.54	20.96	21.63
		1	24	21.65	20.87	21.58
		12	0	20.89	20.85	20.55
		12	6	20.89	20.85	20.53
		12	13	20.9	20.55	20.51
		25	0	20.84	20.96	20.57
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
10MHz	QPSK			23230		
		1	0	22.48		
		1	24	22.4		
		1	49	22.35		
		25	0	21.32		
		25	12	21.34		
		25	25	21.44		
	16QAM	50	0	21.61		
		1	0	21.23		
		1	24	21.18		
		1	49	21.14		
		25	0	20.86		
		25	12	20.88		
		25	25	20.43		
		50	0	20.86		

LTE FDD B17				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23755	23790	23825
5MHz	QPSK	1	0	22.63	22.59	22.62
		1	12	22.67	22.64	22.59
		1	24	22.64	22.69	22.64
		12	0	21.46	21.4	21.66
		12	6	21.47	21.42	21.67
		12	13	21.55	21.76	21.52
		25	0	21.53	21.56	21.62
	16QAM	1	0	21.11	21.26	20.99
		1	12	20.86	21.4	21.01
		1	24	20.97	21.48	21.03
		12	0	20.6	20.54	20.75
		12	6	20.61	20.55	20.76
		12	13	20.53	20.82	20.49
		25	0	20.67	20.61	20.43
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23780	23790	23800
10MHz	QPSK	1	0	22.51	22.53	22.58
		1	24	22.5	22.62	22.57
		1	49	22.68	22.63	22.63
		25	0	21.52	21.49	21.39
		25	12	21.37	21.4	21.43
		25	25	21.79	21.75	21.56
		50	0	21.38	21.67	21.56
	16QAM	1	0	21.36	21.25	21.97
		1	24	21.07	21.51	22.09
		1	49	21.33	21.43	22.26
		25	0	20.62	20.64	20.63
		25	12	20.53	20.67	20.6
		25	25	20.79	20.91	20.48
		50	0	20.61	20.65	20.49


8.2. Appendix B: Peak-to-Average Ratio(CCDF)


8.2.1. Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	1.4MHz	QPSK	18900	6RB#0	5.70	13	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	6.54	13	PASS
Band2	3MHz	QPSK	18900	15RB#0	5.74	13	PASS
Band2	3MHz	16QAM	18900	15RB#0	6.52	13	PASS
Band2	5MHz	QPSK	18900	25RB#0	5.72	13	PASS
Band2	5MHz	16QAM	18900	25RB#0	6.40	13	PASS
Band2	10MHz	QPSK	18900	50RB#0	5.74	13	PASS
Band2	10MHz	16QAM	18900	50RB#0	6.46	13	PASS
Band2	15MHz	QPSK	18900	75RB#0	6.08	13	PASS
Band2	15MHz	16QAM	18900	75RB#0	6.54	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.86	13	PASS
Band2	20MHz	16QAM	18900	100RB#0	6.56	13	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	5.58	13	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	6.48	13	PASS
Band4	3MHz	QPSK	20175	15RB#0	5.64	13	PASS
Band4	3MHz	16QAM	20175	15RB#0	6.46	13	PASS
Band4	5MHz	QPSK	20175	25RB#0	5.66	13	PASS
Band4	5MHz	16QAM	20175	25RB#0	6.34	13	PASS
Band4	10MHz	QPSK	20175	50RB#0	5.68	13	PASS
Band4	10MHz	16QAM	20175	50RB#0	6.40	13	PASS
Band4	15MHz	QPSK	20175	75RB#0	5.96	13	PASS
Band4	15MHz	16QAM	20175	75RB#0	6.48	13	PASS
Band4	20MHz	QPSK	20175	100RB#0	5.68	13	PASS
Band4	20MHz	16QAM	20175	100RB#0	6.46	13	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	5.32	13	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	6.12	13	PASS
Band5	3MHz	QPSK	20525	15RB#0	5.44	13	PASS
Band5	3MHz	16QAM	20525	15RB#0	6.20	13	PASS
Band5	5MHz	QPSK	20525	25RB#0	5.38	13	PASS
Band5	5MHz	16QAM	20525	25RB#0	6.04	13	PASS
Band5	10MHz	QPSK	20525	50RB#0	5.44	13	PASS
Band5	10MHz	16QAM	20525	50RB#0	6.08	13	PASS
Band12	1.4MHz	QPSK	23095	6RB#0	4.90	13	PASS
Band12	1.4MHz	16QAM	23095	6RB#0	5.74	13	PASS
Band12	3MHz	QPSK	23095	15RB#0	4.94	13	PASS
Band12	3MHz	16QAM	23095	15RB#0	5.84	13	PASS
Band12	5MHz	QPSK	23095	25RB#0	4.94	13	PASS
Band12	5MHz	16QAM	23095	25RB#0	5.74	13	PASS
Band12	10MHz	QPSK	23095	50RB#0	5.06	13	PASS
Band12	10MHz	16QAM	23095	50RB#0	5.76	13	PASS
Band13	5MHz	QPSK	23230	25RB#0	5.60	13	PASS
Band13	5MHz	16QAM	23230	25RB#0	6.22	13	PASS
Band13	10MHz	QPSK	23230	50RB#0	5.62	13	PASS
Band13	10MHz	16QAM	23230	50RB#0	6.32	13	PASS
Band17	5MHz	QPSK	23790	25RB#0	4.66	13	PASS
Band17	5MHz	16QAM	23790	25RB#0	5.58	13	PASS

Band17	10MHz	QPSK	23790	50RB#0	5.02	13	PASS
Band17	10MHz	16QAM	23790	50RB#0	5.82	13	PASS


8.2.2. Test Graphs

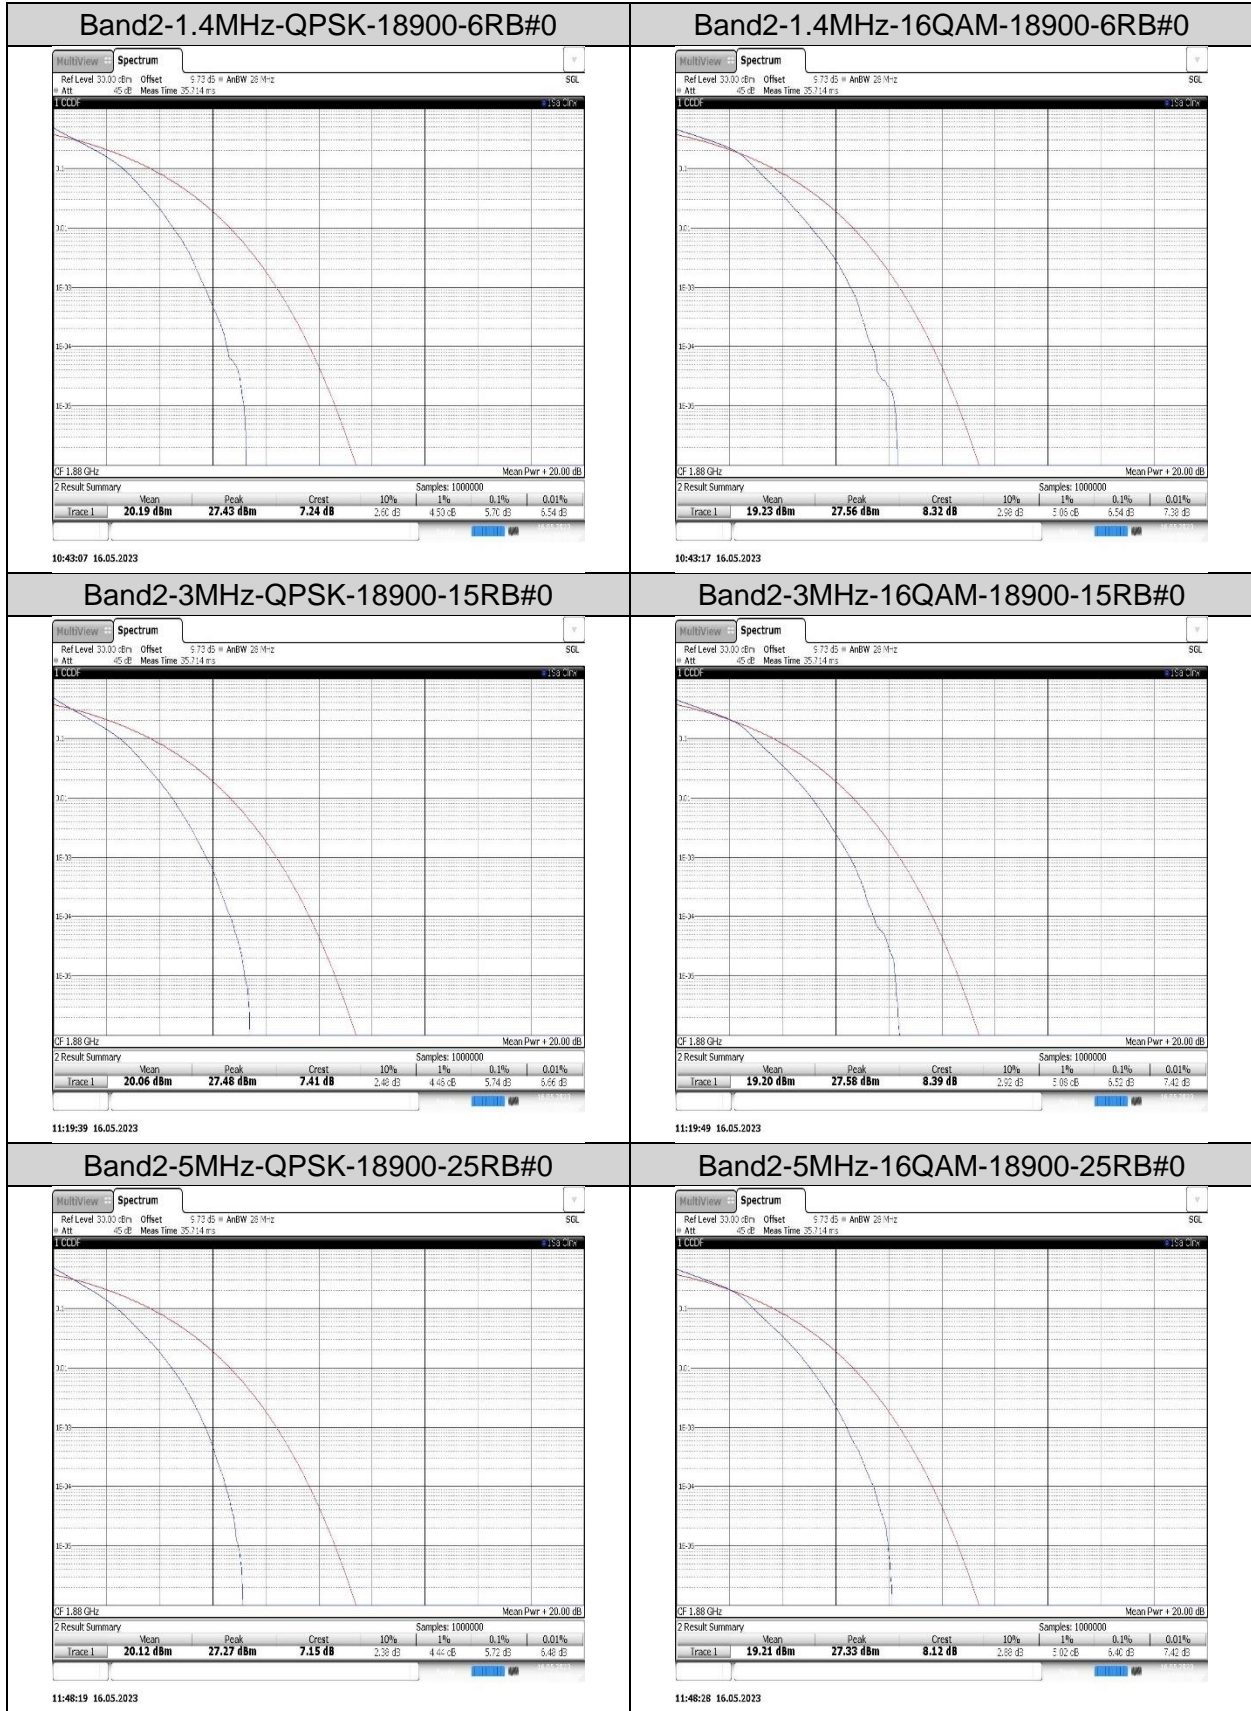

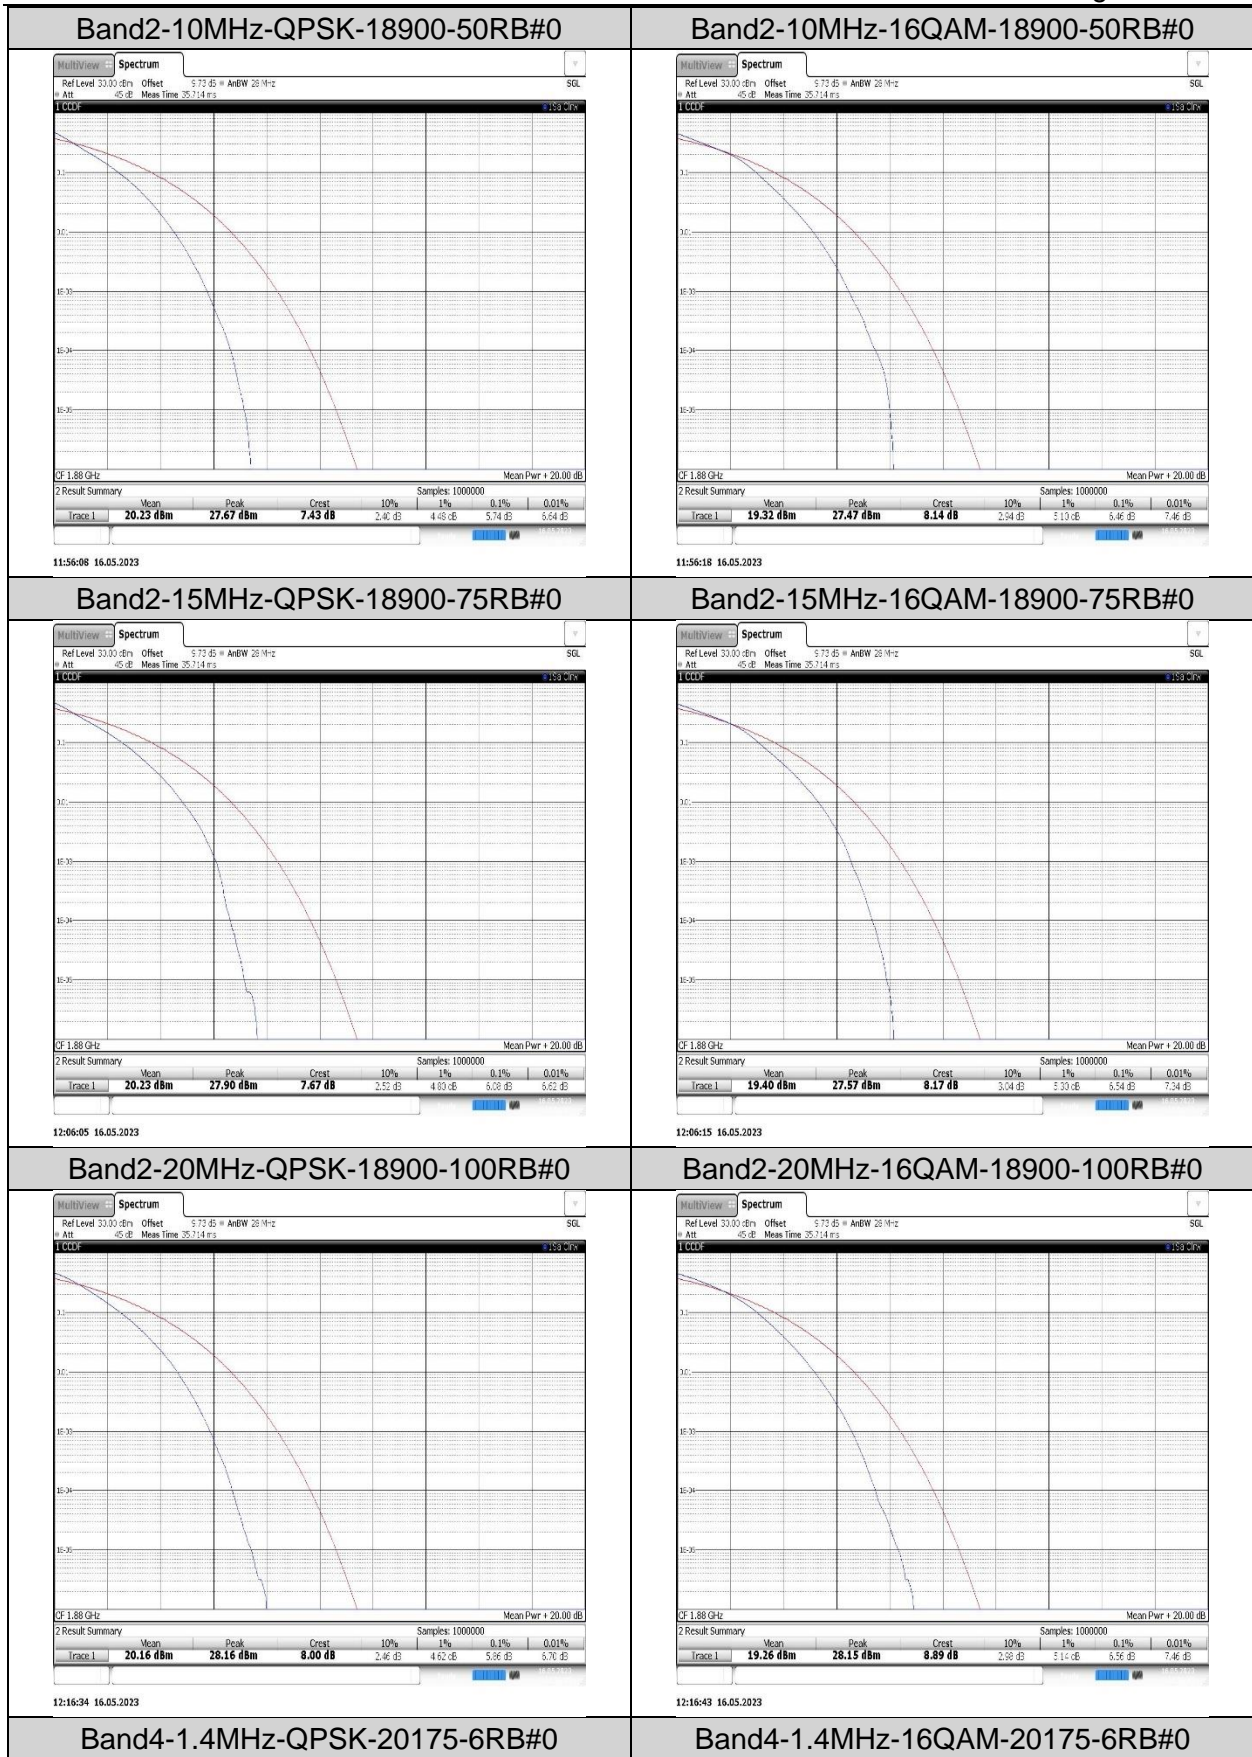


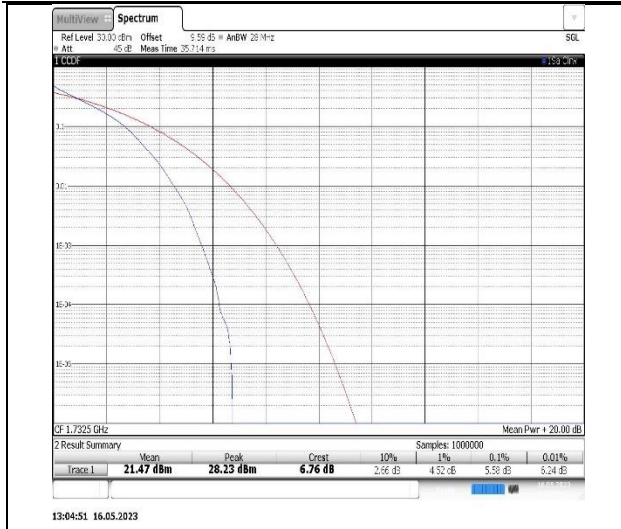


Band4-3MHz-QPSK-20175-15RB#0

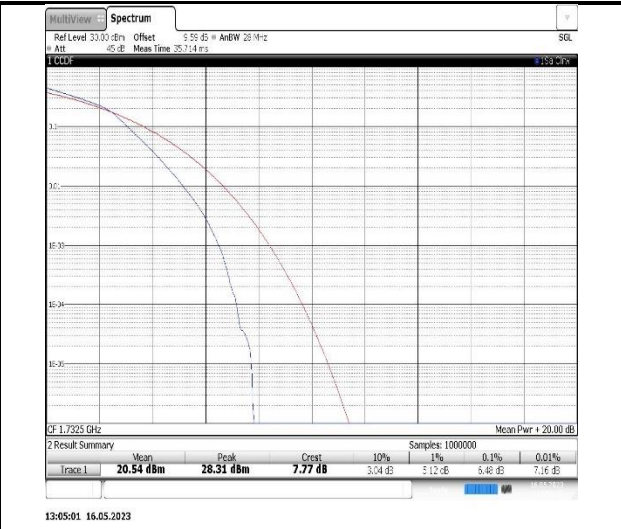


Band4-3MHz-16QAM-20175-15RB#0

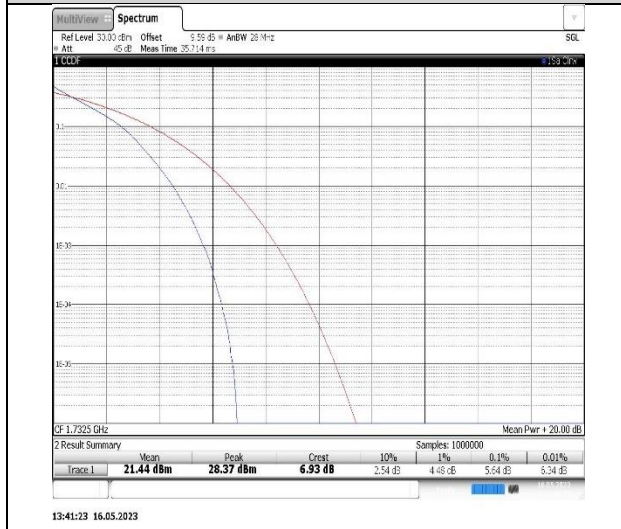


Band4-5MHz-QPSK-20175-25RB#0

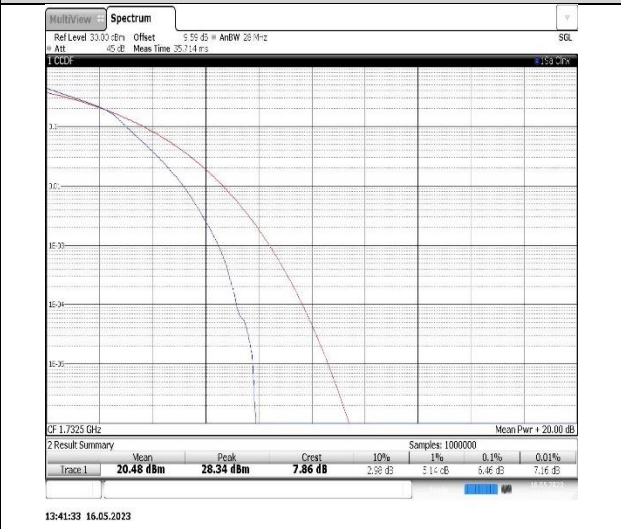


Band4-5MHz-16QAM-20175-25RB#0

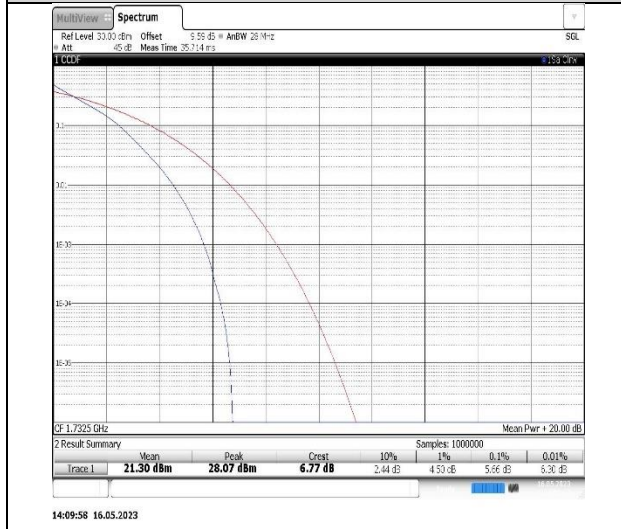


Band4-10MHz-QPSK-20175-50RB#0

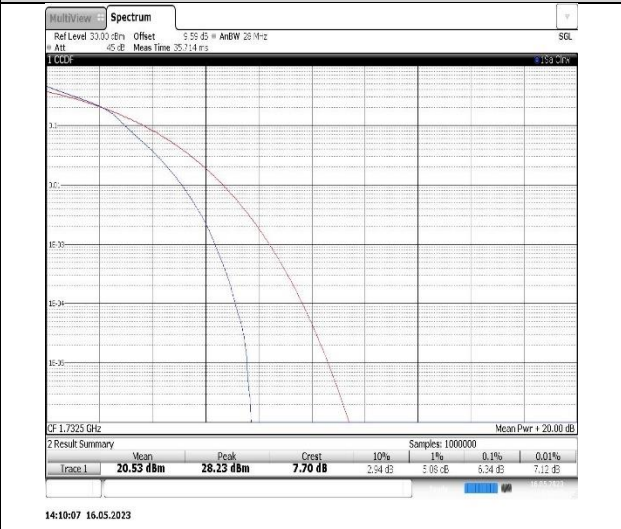


Band4-10MHz-16QAM-20175-50RB#0

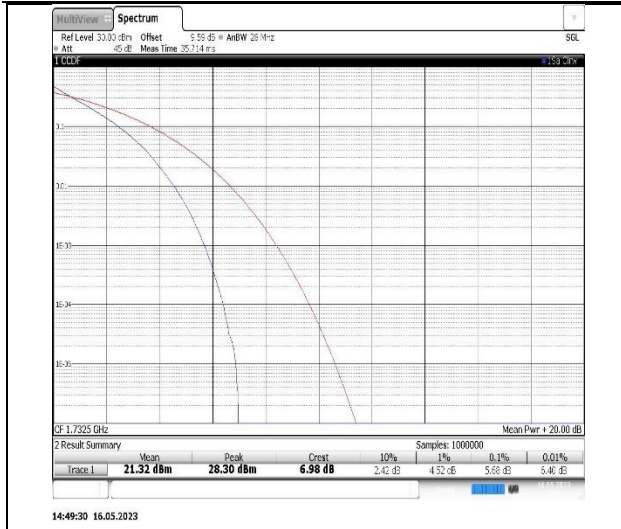


Band4-15MHz-QPSK-20175-75RB#0

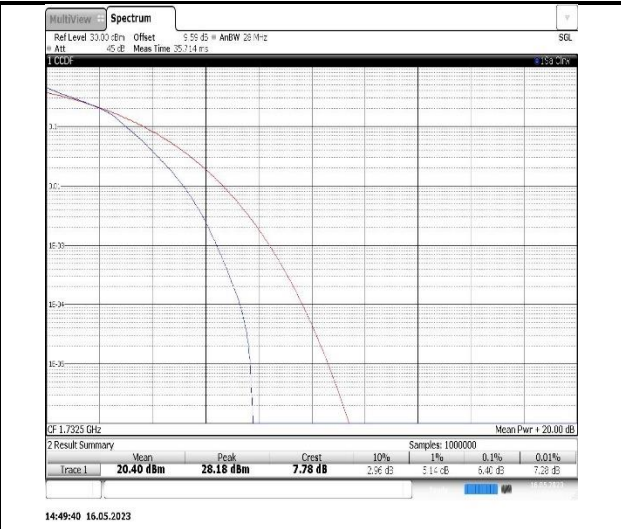


Band4-15MHz-16QAM-20175-75RB#0

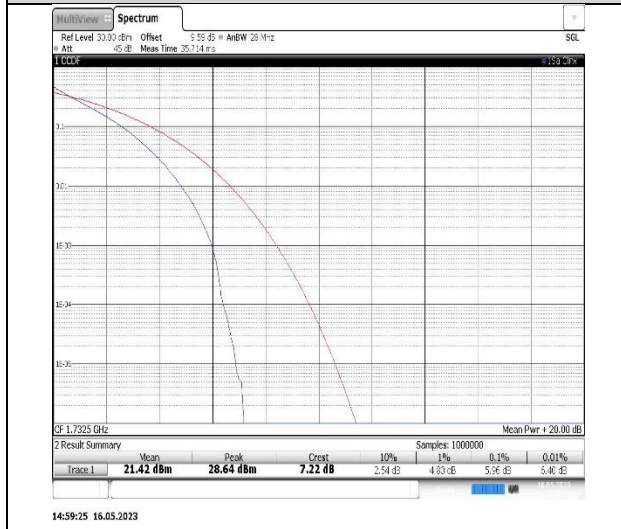


Band4-20MHz-QPSK-20175-100RB#0

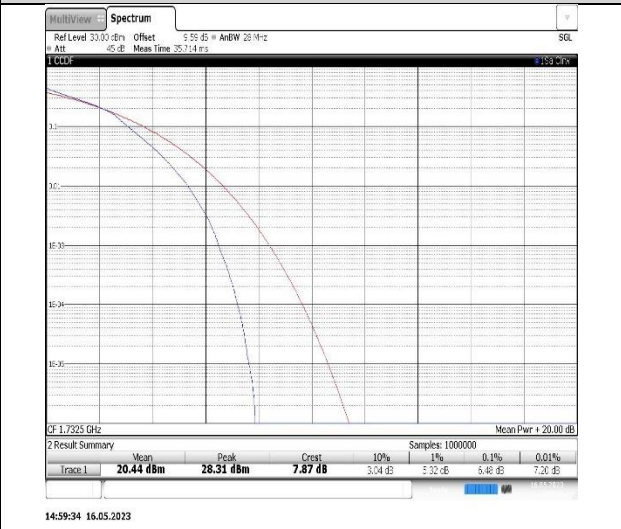


Band4-20MHz-16QAM-20175-100RB#0

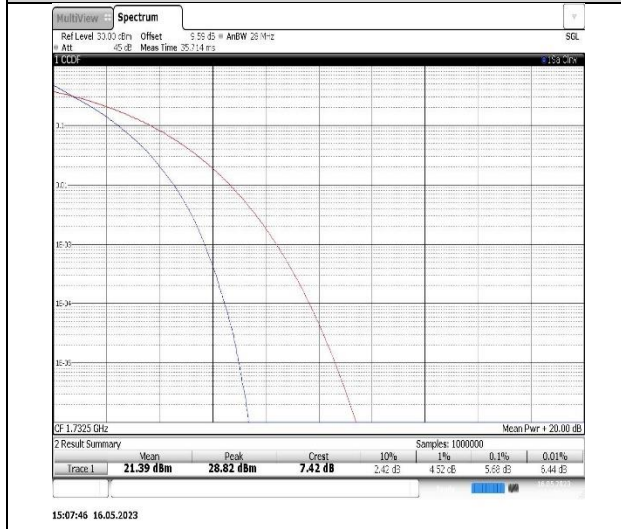


Band5-1.4MHz-QPSK-20525-6RB#0

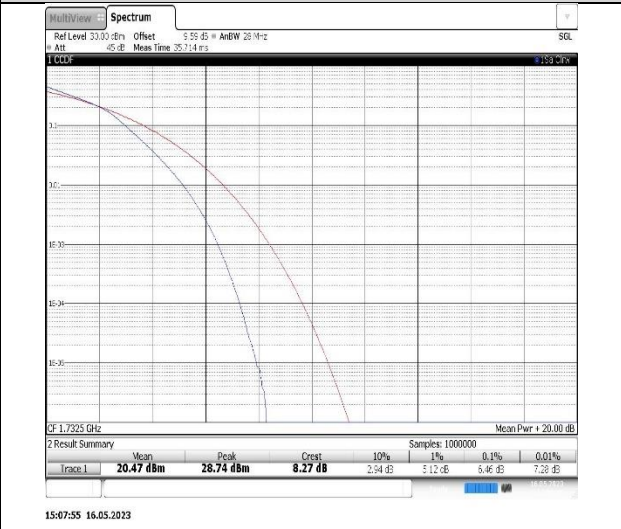


Band5-1.4MHz-16QAM-20525-6RB#0

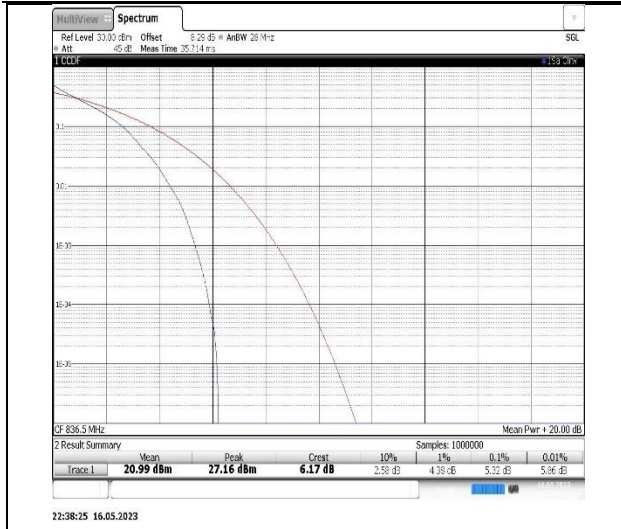


Band5-3MHz-QPSK-20525-15RB#0

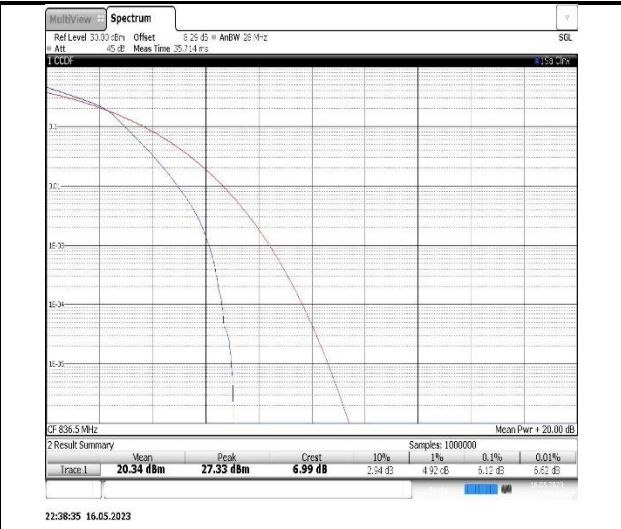


Band5-3MHz-16QAM-20525-15RB#0

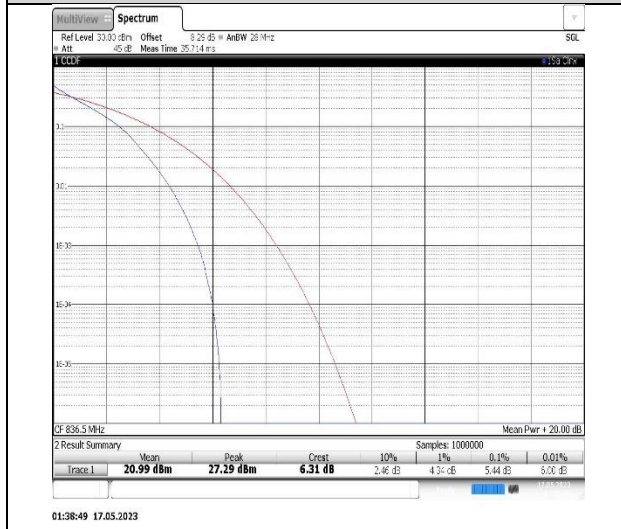


Band5-5MHz-QPSK-20525-25RB#0

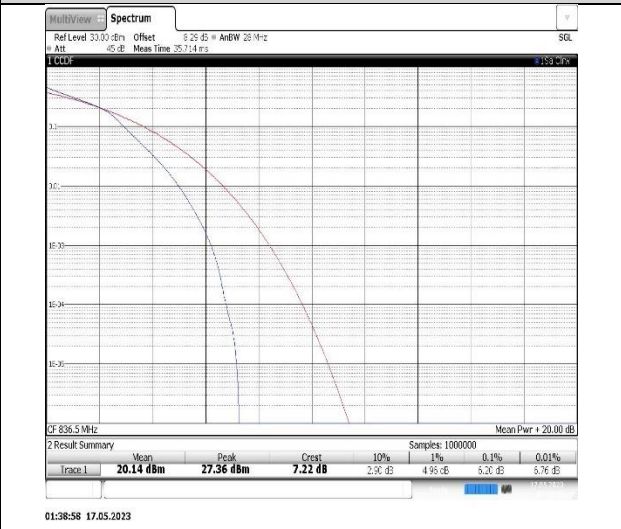


Band5-5MHz-16QAM-20525-25RB#0

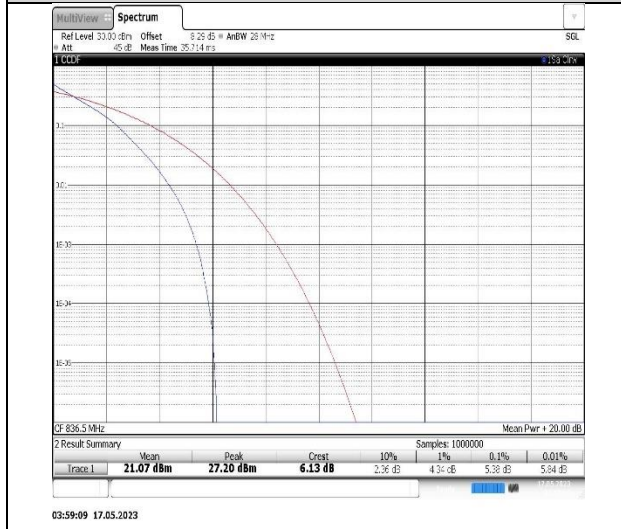


Band5-10MHz-QPSK-20525-50RB#0

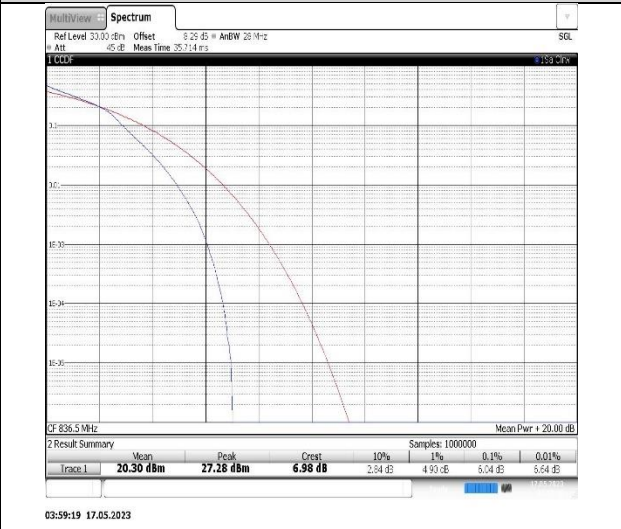


Band5-10MHz-16QAM-20525-50RB#0

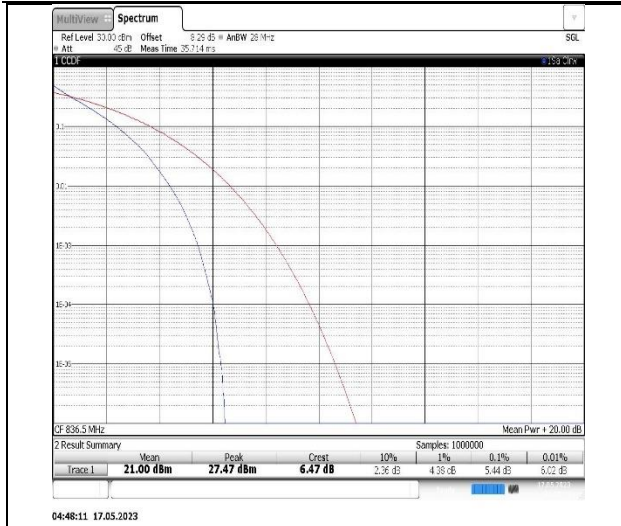


Band12-1.4MHz-QPSK-23095-6RB#0

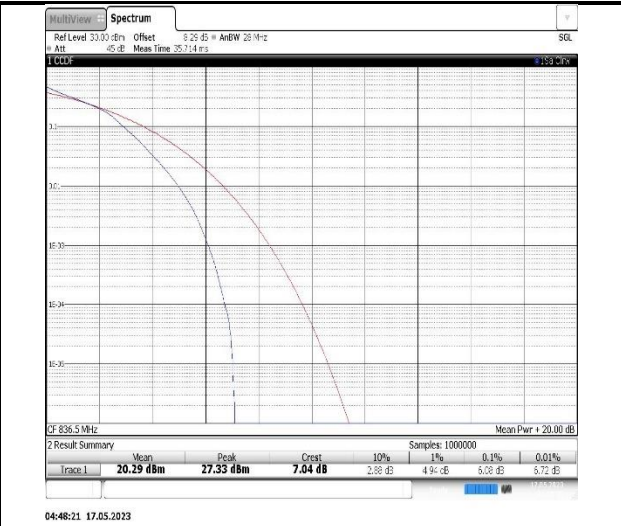


Band12-1.4MHz-16QAM-23095-6RB#0

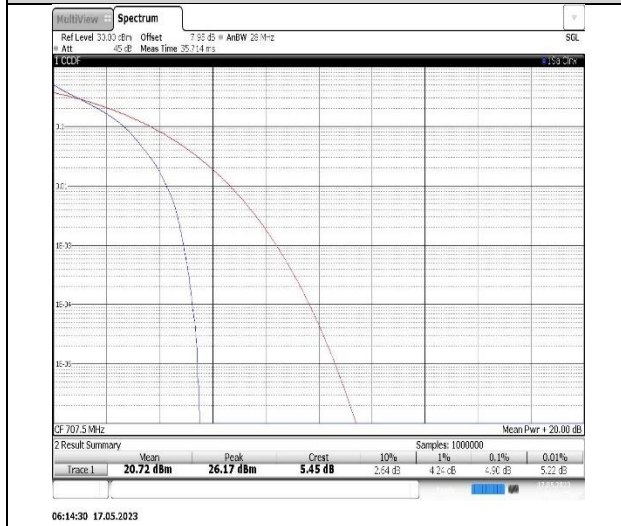


Band12-3MHz-QPSK-23095-15RB#0

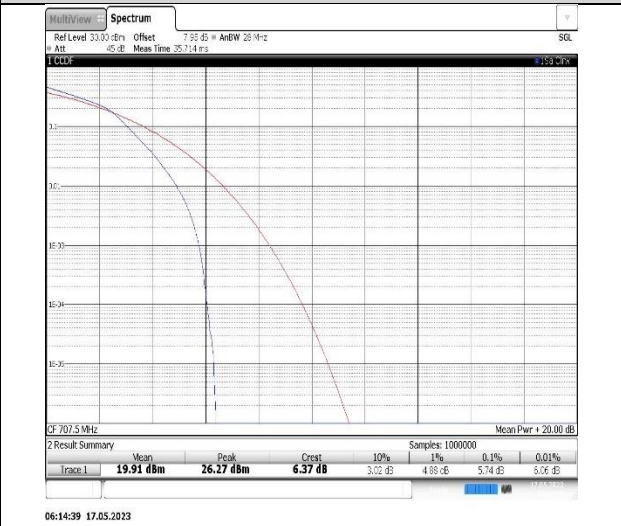


Band12-3MHz-16QAM-23095-15RB#0

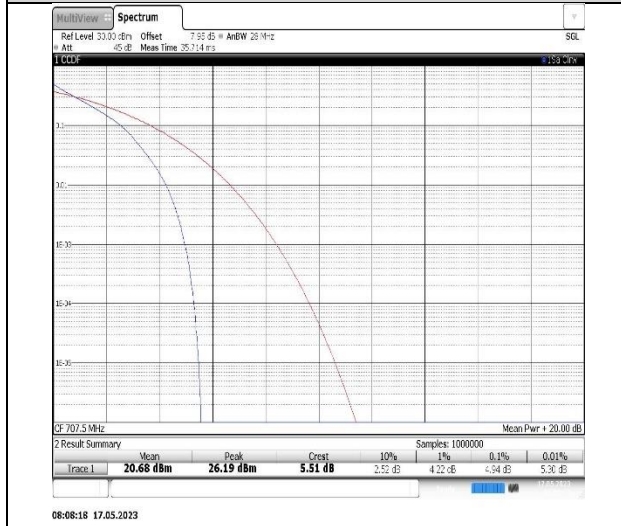


Band12-5MHz-QPSK-23095-25RB#0

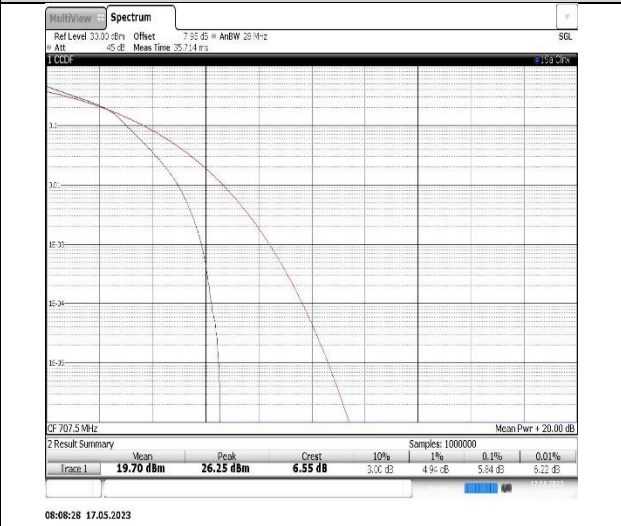


Band12-5MHz-16QAM-23095-25RB#0

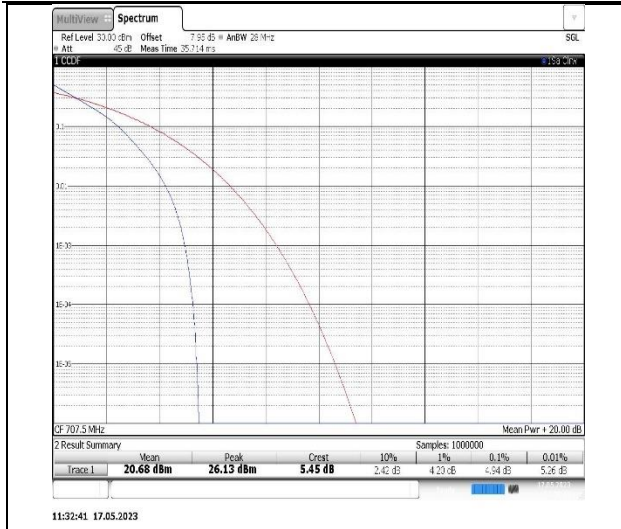


Band12-10MHz-QPSK-23095-50RB#0

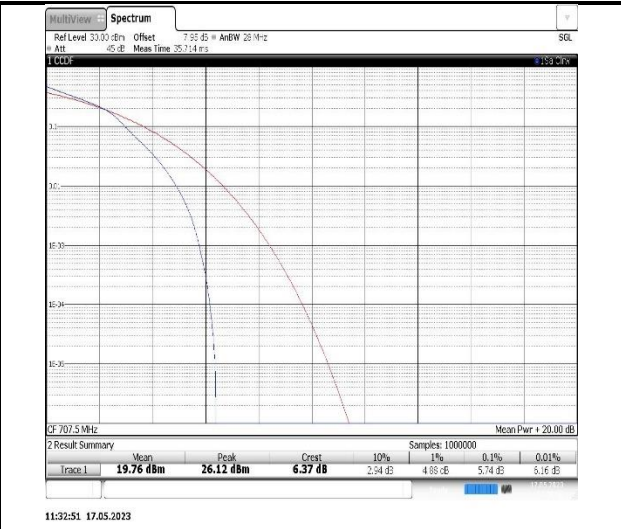


Band12-10MHz-16QAM-23095-50RB#0

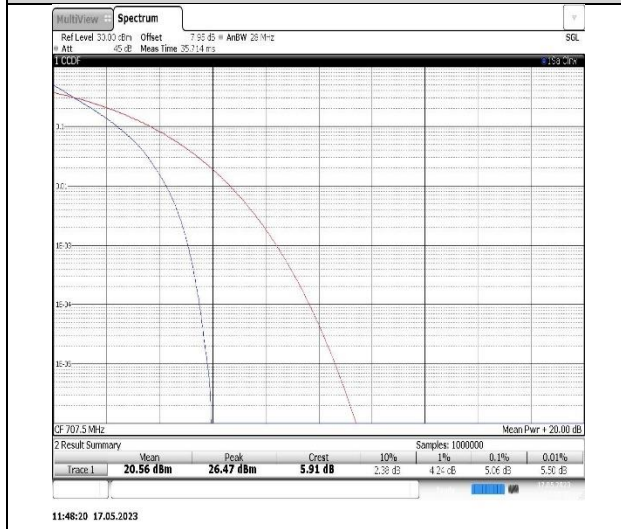


Band13-5MHz-QPSK-23230-25RB#0

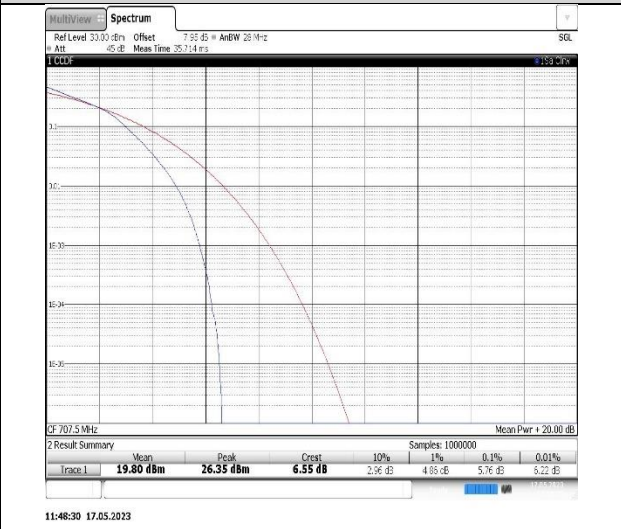


Band13-5MHz-16QAM-23230-25RB#0

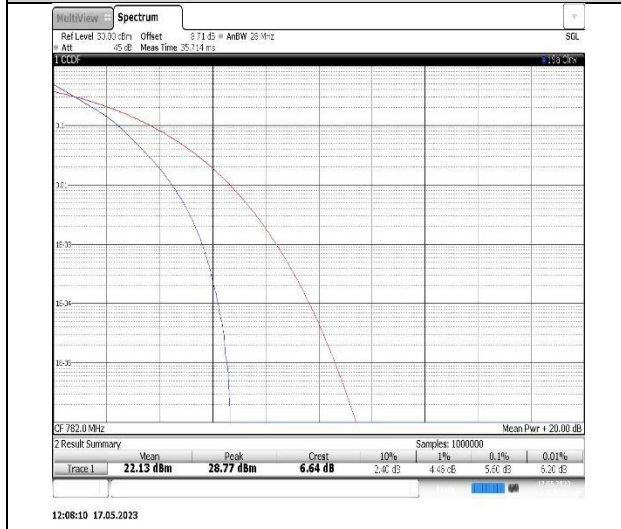


Band13-10MHz-QPSK-23230-50RB#0

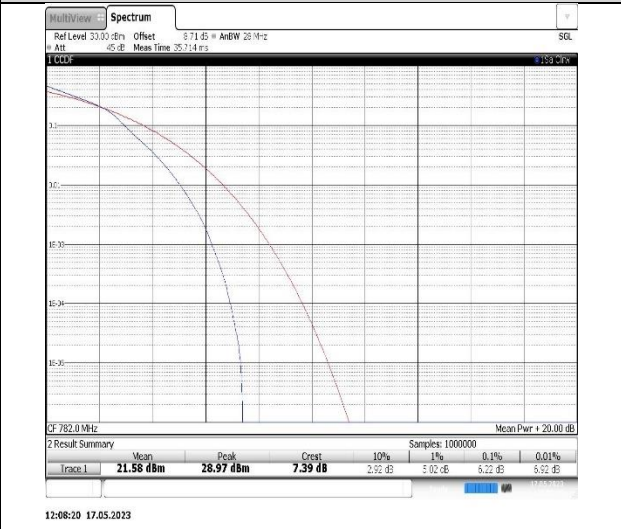


Band13-10MHz-16QAM-23230-50RB#0

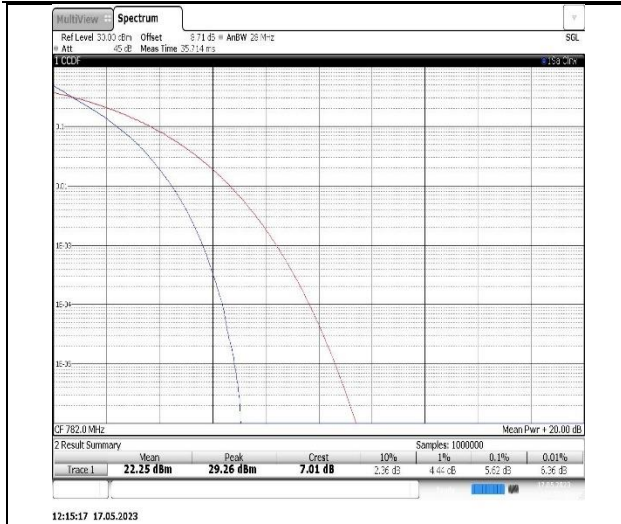


Band17-5MHz-QPSK-23790-25RB#0

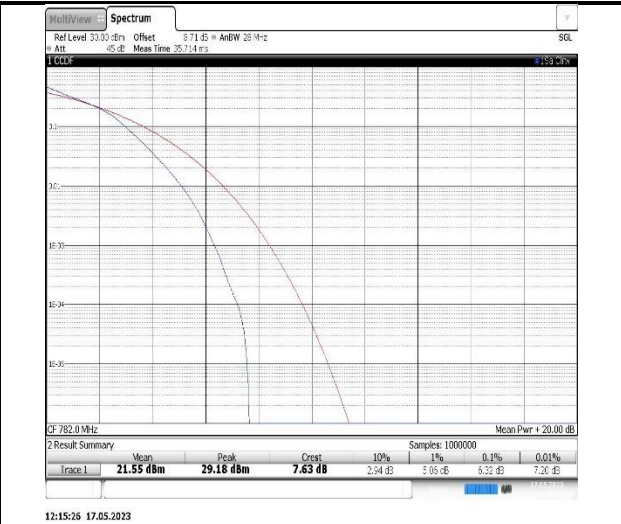



Band17-5MHz-16QAM-23790-25RB#0

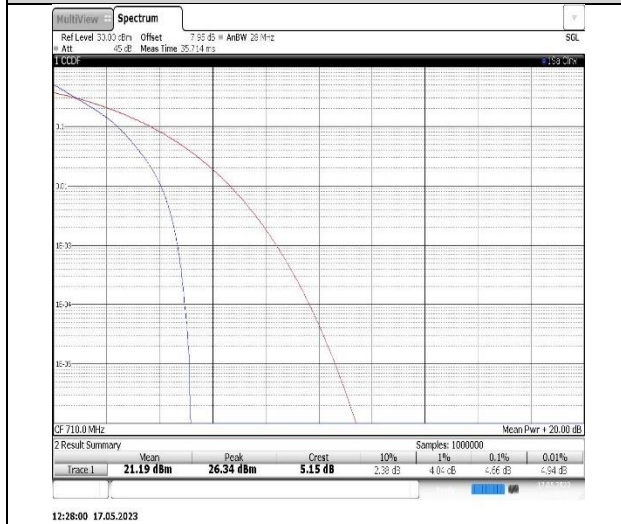

Band17-10MHz-QPSK-23790-50RB#0

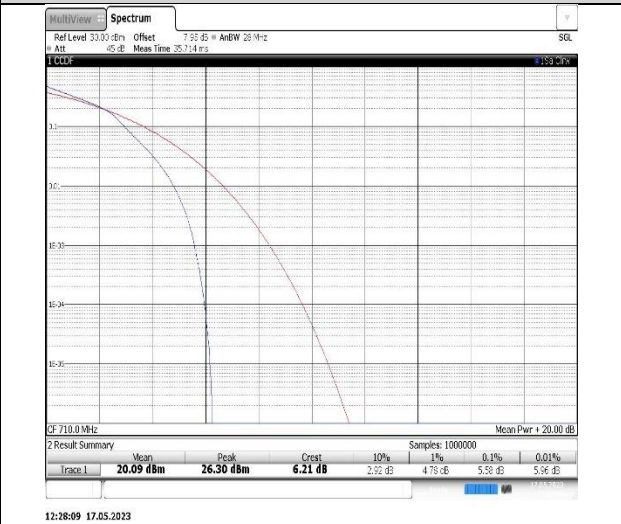

Band17-10MHz-16QAM-23790-50RB#0

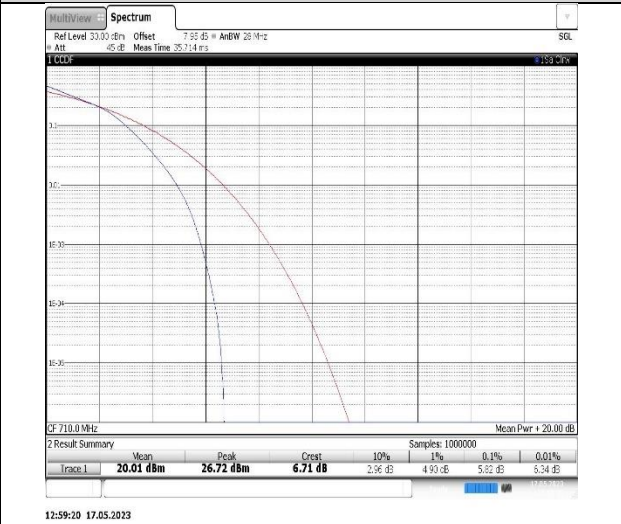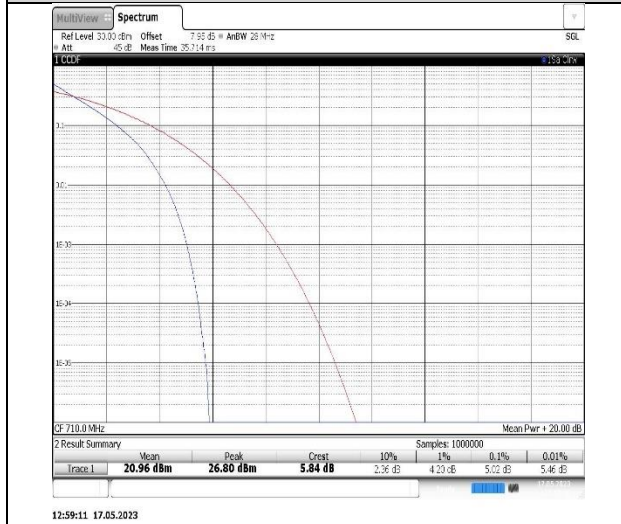

8.3. Appendix C: 26dB Bandwidth and Occupied Bandwidth

8.3.1. Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band2	1.4MHz	QPSK	18900	6RB#0	1.087	1.27	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	1.086	1.26	PASS
Band2	3MHz	QPSK	18900	15RB#0	2.686	3.04	PASS
Band2	3MHz	16QAM	18900	15RB#0	2.686	3.05	PASS
Band2	5MHz	QPSK	18900	25RB#0	4.489	5.00	PASS
Band2	5MHz	16QAM	18900	25RB#0	4.485	5.00	PASS
Band2	10MHz	QPSK	18900	50RB#0	8.981	10.00	PASS
Band2	10MHz	16QAM	18900	50RB#0	8.988	9.97	PASS
Band2	15MHz	QPSK	18900	75RB#0	13.483	15.05	PASS
Band2	15MHz	16QAM	18900	75RB#0	13.473	15.05	PASS
Band2	20MHz	QPSK	18900	100RB#0	18.069	19.93	PASS
Band2	20MHz	16QAM	18900	100RB#0	18.049	19.93	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	1.101	1.30	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	1.093	1.29	PASS
Band4	3MHz	QPSK	20175	15RB#0	2.715	3.07	PASS
Band4	3MHz	16QAM	20175	15RB#0	2.716	3.05	PASS
Band4	5MHz	QPSK	20175	25RB#0	4.54	5.34	PASS
Band4	5MHz	16QAM	20175	25RB#0	4.528	5.30	PASS
Band4	10MHz	QPSK	20175	50RB#0	8.999	10.23	PASS
Band4	10MHz	16QAM	20175	50RB#0	9.009	10.27	PASS
Band4	15MHz	QPSK	20175	75RB#0	13.522	15.40	PASS
Band4	15MHz	16QAM	20175	75RB#0	13.503	15.15	PASS
Band4	20MHz	QPSK	20175	100RB#0	18.056	20.60	PASS
Band4	20MHz	16QAM	20175	100RB#0	18.133	20.67	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	1.1	1.31	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	1.092	1.31	PASS
Band5	3MHz	QPSK	20525	15RB#0	2.716	3.07	PASS
Band5	3MHz	16QAM	20525	15RB#0	2.715	3.05	PASS
Band5	5MHz	QPSK	20525	25RB#0	4.536	5.37	PASS
Band5	5MHz	16QAM	20525	25RB#0	4.526	5.36	PASS
Band5	10MHz	QPSK	20525	50RB#0	8.996	10.23	PASS
Band5	10MHz	16QAM	20525	50RB#0	8.999	10.20	PASS
Band12	1.4MHz	QPSK	23095	6RB#0	1.097	1.31	PASS
Band12	1.4MHz	16QAM	23095	6RB#0	1.093	1.28	PASS
Band12	3MHz	QPSK	23095	15RB#0	2.721	3.09	PASS
Band12	3MHz	16QAM	23095	15RB#0	2.709	3.07	PASS
Band12	5MHz	QPSK	23095	25RB#0	4.537	5.35	PASS
Band12	5MHz	16QAM	23095	25RB#0	4.529	5.30	PASS
Band12	10MHz	QPSK	23095	50RB#0	8.995	10.20	PASS
Band12	10MHz	16QAM	23095	50RB#0	8.986	10.27	PASS
Band13	5MHz	QPSK	23230	25RB#0	4.535	5.31	PASS
Band13	5MHz	16QAM	23230	25RB#0	4.522	5.26	PASS

Band13	10MHz	QPSK	23230	50RB#0	8.983	10.23	PASS
Band13	10MHz	16QAM	23230	50RB#0	8.972	10.13	PASS
Band17	5MHz	QPSK	23790	25RB#0	4.538	5.37	PASS
Band17	5MHz	16QAM	23790	25RB#0	4.527	5.34	PASS
Band17	10MHz	QPSK	23790	50RB#0	8.992	10.23	PASS
Band17	10MHz	16QAM	23790	50RB#0	8.985	10.27	PASS