

FCC TEST REPORT (PART 24)



Applicant:	PAX Technology Limited
Address:	Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Hong Kong China

Manufacturer or Supplier:	PAX Computer Technology (Shenzhen) Co., Ltd.
Address:	4/F, No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen, Guangdong, P.R.C.
Product:	Integrated Smart Terminal
Brand Name:	PAX
Model Name:	E800
FCC ID:	V5PE800GM
Date of tests:	Sep. 01, 2021 ~ Sep. 26, 2021

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E**
 FCC PART 2
 ANSI/TIA/EIA-603-D
 ANSI/TIA/EIA-603-E
 ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Sep. 27, 2021	Date: Sep. 27, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD4

1 SUMMARY OF TEST RESULTS5

1.1 MEASUREMENT UNCERTAINTY6

1.2 TEST SITE AND INSTRUMENTS7

2 GENERAL INFORMATION8

2.1 GENERAL DESCRIPTION OF EUT8

2.2 CONFIGURATION OF SYSTEM UNDER TEST 10

2.3 DESCRIPTION OF SUPPORT UNITS 11

2.4 TEST ITEM AND TEST CONFIGURATION..... 11

2.5 EUT OPERATING CONDITIONS 14

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS 14

3 TEST TYPES AND RESULTS 15

3.1 OUTPUT POWER MEASUREMENT 15

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT 15

3.1.2 TEST PROCEDURES 15

3.1.3 TEST SETUP 16

3.1.4 TEST RESULTS 16

3.2 FREQUENCY STABILITY MEASUREMENT 24

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT 24

3.2.2 TEST PROCEDURE 24

3.2.3 TEST SETUP 24

3.2.4 TEST RESULTS 25

3.3 OCCUPIED BANDWIDTH MEASUREMENT 26

3.3.1 TEST PROCEDURES 26

3.3.2 TEST SETUP 26

3.3.3 TEST RESULTS 27

3.4 BAND EDGE MEASUREMENTC 28

3.4.1 LIMITS OF BAND EDGE MEASUREMENT 28

3.4.2 TEST SETUP 28

3.4.3 TEST PROCEDURES 29

3.4.4. TEST RESULTS 30

3.5 CONDUCTED SPURIOUS EMISSIONS..... 31

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT 31

3.5.2 TEST PROCEDURE 31

3.5.3 TEST SETUP 31

3.5.4 TEST RESULTS 32

3.6 RADIATED EMISSION MEASUREMENT 33

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT 33

3.6.2 TEST PROCEDURES 33

3.6.3 DEVIATION FROM TEST STANDARD 33



BUREAU
VERITAS

Test Report No.: W7L-P21090006RF06

3.6.4 TEST SETUP	34
3.6.5 TEST RESULTS	35
3.7 PEAK TO AVERAGE RATIO	71
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	71
3.7.2 TEST SETUP	71
3.7.3 TEST PROCEDURES	71
3.7.4 TEST RESULTS	72
4 INFORMATION ON THE TESTING LABORATORIES	73
5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	74



BUREAU
VERITAS

Test Report No.: W7L-P21090006RF06

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P21090006RF06	Original release	Sep. 27, 2021



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	1.1.1.1.1 TEST TYPE	RESULT
2.1046 24.232	Equivalent Isotropic Radiated Power	Compliance
2.1055 24.235	Frequency Stability	N/A
2.1049 24.238(b)	Occupied Bandwidth	N/A
24.232(d)	Peak to average ratio	N/A
24.238(b)	Band Edge Measurements	N/A
2.1051 24.238	Conducted Spurious Emissions	N/A
2.1053 24.238	Radiated Spurious Emissions	Compliance

NOTE: N/A refer to original report RF180521W014-2

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions & Radiated Power (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Jun. 03,21	Jun. 02,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 02,21	Apr. 01,22
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 25,21	Feb. 24,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 22,21	Apr. 21,22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
Power Meter	Anritsu	ML2495A	1506002	Apr. 07,21	Apr. 06,22
Power Sensor	Anritsu	MA2411B	1339352	May. 07,21	May. 06,22
Temperature Chamber	ESPEC	SH-242	93000855	Jun. 02,21	Jun. 01,22
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 05,21	Mar. 04,22
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Integrated Smart Terminal	
BRAND NAME	PAX	
MODEL NAME	E800	
NOMINAL VOLTAGE	24Vdc (adapter) 7.2Vdc (Li-ion, battery)	
MODULATION TYPE	GPRS: GMSK EDGE: 8PSK WCDMA: BPSK,QPSK LTE Band 2: QPSK, 16QAM	
FREQUENCY RANGE	GPRS, EDGE	1850.2MHz ~ 1909.8MHz
	WCDMA	1852.4MHz ~ 1907.6MHz
	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	MAX. EIRP POWER	GPRS
EDGE		438.53mW
WCDMA		220.80mW
LTE Band 2 Channel Bandwidth: 1.4MHz		200.45mW
LTE Band 2 Channel Bandwidth: 3MHz		202.77mW
LTE Band 2 Channel Bandwidth: 5MHz		204.17mW
LTE Band 2 Channel Bandwidth: 10MHz		203.70mW
LTE Band 2 Channel Bandwidth: 15MHz		202.30mW



	LTE Band 2 Channel Bandwidth: 20MHz	203.24mW
EMISSION DESIGNATOR	GPRS	245KGXW
	EDGE	246KG7W
	WCDMA	4M13F9W
	LTE Band 2 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M08W7D
	LTE Band 2 Channel Bandwidth: 3MHz	QPSK: 2M69G7D
		16QAM: 2M68W7D
	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 4M48G7D
		16QAM: 4M47W7D
	LTE Band 2 Channel Bandwidth: 10MHz	QPSK: 8M94G7D
16QAM: 8M93W7D		
LTE Band 2 Channel Bandwidth: 15MHz	QPSK: 13M4G7D	
	16QAM: 13M4W7D	
LTE Band 2 Channel Bandwidth: 20MHz	QPSK: 17M9G7D	
	16QAM: 17M8W7D	
ANTENNA TYPE	Fixed Internal Antenna with 0.5dBi gain for GPRS1900/ WCDMA II/ LTE Band 2	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
EXTREME TEMPERATURE	0-50 °C	
EXTREME VOLTAGE	22V- 26V	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.


List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery	VEKEN	YW-006	Capacity : 7.2vdc 2600mAh
AC Adapter	HONOTO	ADS-65HI-19A-3 24065E	I/P:100-240Vac, 1.5A O/P: 24Vdc, 2.7A



2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

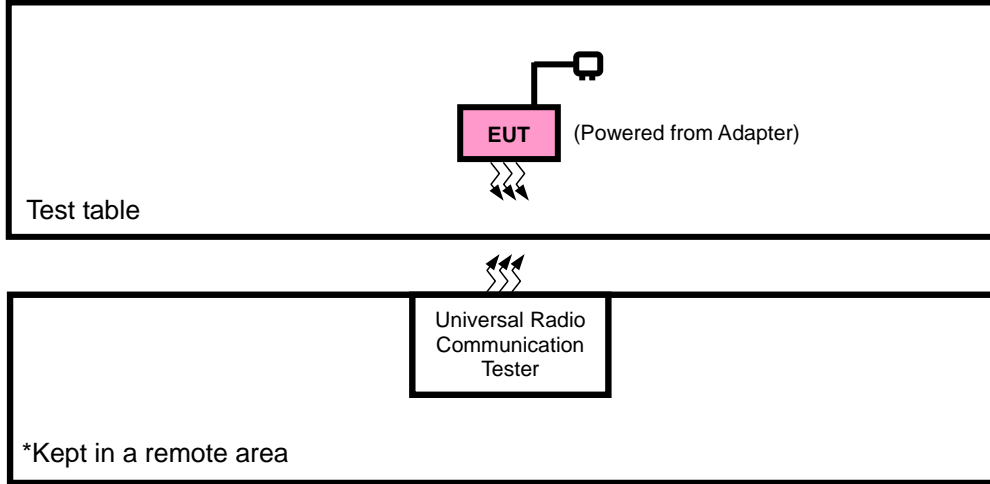



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GPRS/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	1.1.1.1.1.2DESCRIPTION
A	EUT + DC Source with GPRS or WCDMA or LTE link

GPRS MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	512 to 810	512, 661, 810	GPRS, EDGE
B	FREQUENCY STABILITY	512 to 810	512, 810	GPRS, EDGE
B	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GPRS, EDGE
B	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GPRS, EDGE
B	BAND EDGE	512 to 810	512, 810	GPRS, EDGE
B	CONDCUDED EMISSION	512 to 810	512, 661, 810	GPRS, EDGE
A	RADIATED EMISSION	512 to 810	512, 661, 810	GPRS, EDGE



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

WCDMA

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9262, 9538	WCDMA
B	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
B	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
B	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
B	CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

LTE BAND 2

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM,	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



BUREAU
VERITAS

Test Report No.: W7L-P21090006RF06

B	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18615 to 19185	18615	3MHz	QPSK,16QAM	1 RB / 5 RB Offset		
			19185	3MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18625 to 19175	18625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19175	5MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		18650 to 19150	18650	10MHz	QPSK,16QAM	1 RB / 14 RB Offset		
			19150	10MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		18675 to 19125	18675	15MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19125	15MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		18700 to 19100	18700	20MHz	QPSK,16QAM	1 RB / 24 RB Offset		
			19100	20MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		B	CONDCUDETED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
				18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
				18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
				18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
				18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset		
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset		
		18650 to 19150	18607, 18900, 19193	10MHz	QPSK	1 RB / 0 RB Offset		
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset		



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 24V	Jace Hu
RADIATED EMISSION	23deg. C, 70%RH	DC 24V	Jace Hu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band Channel	GPRSMODE 1900			Max. Tune-up Power
	512	661	810	
Frequency	1850.2	1880	1909.8	
GPRS (GMSK, 1Tx-slot)	29.36	29.35	29.30	30.0
GPRS (GMSK, 2Tx-slot)	29.21	29.33	29.21	30.0
GPRS (GMSK, 3Tx-slot)	29.07	29.32	29.09	30.0
GPRS (GMSK, 4Tx-slot)	29.03	29.27	28.94	30.0
EDGE (8PSK, 1Tx-slot)	25.74	25.82	25.92	27.0
EDGE (8PSK, 2Tx-slot)	25.65	25.65	25.67	27.0
EDGE (8PSK, 3Tx-slot)	25.45	25.50	25.46	27.0
EDGE (8PSK, 4Tx-slot)	25.28	25.33	25.30	27.0

Band Channel	WCDMA II			Max. Tune-up Power
	9262	9400	9538	
Frequency	1852.4	1880	1907.6	
RMC 12.2K	22.94	22.91	22.89	23.5
HSDPA Subtest-1	21.92	21.90	21.85	22.5
HSDPA Subtest-2	21.91	21.84	21.83	22.5
HSDPA Subtest-3	21.39	21.42	21.33	22.0
HSDPA Subtest-4	21.43	21.36	21.35	22.0
HSUPA Subtest-1	21.89	21.89	21.83	22.5
HSUPA Subtest-2	19.88	19.89	19.90	20.5
HSUPA Subtest-3	20.90	20.84	20.83	21.5
HSUPA Subtest-4	19.87	19.89	19.85	20.5
HSUPA Subtest-1	20.88	20.87	20.79	22.5



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	22.43	22.50	22.34	0
		1	2	22.48	22.52	22.42	0
		1	5	22.47	22.49	22.37	0
		3	0	22.30	22.35	22.34	0
		3	1	22.39	22.43	22.23	0
		3	3	22.21	22.25	22.21	0
		6	0	21.43	21.41	21.35	1
	16QAM	1	0	21.06	21.12	20.98	1
		1	2	21.31	21.30	21.28	1
		1	5	21.18	21.25	21.20	1
		3	0	21.46	21.45	21.41	1
		3	1	21.44	21.61	21.45	1
		3	3	21.27	21.29	21.26	1
		6	0	20.47	20.53	20.36	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2/ 3	QPSK	1	0	22.49	22.56	22.37	0
		1	7	22.48	22.57	22.46	0
		1	14	22.47	22.53	22.41	0
		8	0	21.33	21.42	21.38	1
		8	3	21.36	21.47	21.29	1
		8	7	21.22	21.36	21.29	1
		15	0	21.44	21.46	21.33	1
	16QAM	1	0	21.07	21.22	21.05	1
		1	7	21.32	21.37	21.30	1
		1	14	21.25	21.29	21.24	1
		8	0	20.46	20.50	20.45	2
		8	3	20.53	20.60	20.52	2
		8	7	20.33	20.31	20.26	2
		15	0	20.51	20.51	20.43	2



Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2/ 5	QPSK	1	0	22.56	22.57	22.44	0
		1	12	22.59	22.60	22.52	0
		1	24	22.54	22.58	22.51	0
		12	0	21.42	21.48	21.41	1
		12	6	21.42	21.54	21.36	1
		12	13	21.32	21.38	21.36	1
		25	0	21.48	21.55	21.42	1
	16QAM	1	0	21.14	21.24	21.11	1
		1	12	21.35	21.46	21.35	1
		1	24	21.31	21.35	21.29	1
		12	0	20.52	20.54	20.48	2
		12	6	20.56	20.70	20.54	2
		12	13	20.34	20.39	20.35	2
		25	0	20.57	20.58	20.46	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2/ 10	QPSK	1	0	22.50	22.57	22.41	0
		1	24	22.56	22.57	22.50	0
		1	49	22.48	22.59	22.44	0
		25	0	21.40	21.44	21.41	1
		25	12	21.45	21.45	21.33	1
		25	25	21.27	21.32	21.32	1
		50	0	21.50	21.52	21.36	1
	16QAM	1	0	21.11	21.18	21.04	1
		1	24	21.37	21.39	21.35	1
		1	49	21.28	21.33	21.23	1
		25	0	20.51	20.49	20.51	2
		25	12	20.57	20.61	20.56	2
		25	25	20.30	20.37	20.29	2
		50	0	20.58	20.54	20.47	2



Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	22.51	22.51	22.32	0
		1	37	22.48	22.56	22.39	0
		1	74	22.48	22.56	22.39	0
		36	0	21.31	21.39	21.36	1
		36	19	21.40	21.44	21.27	1
		36	39	21.19	21.27	21.26	1
		75	0	21.44	21.44	21.35	1
	16QAM	1	0	21.09	21.19	20.98	1
		1	37	21.30	21.34	21.29	1
		1	74	21.18	21.32	21.19	1
		36	0	20.49	20.43	20.46	2
		36	19	20.45	20.59	20.46	2
		36	39	20.29	20.29	20.26	2
		75	0	20.53	20.51	20.34	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	22.51	22.54	22.39	0
		1	50	22.51	22.58	22.44	0
		1	99	22.49	22.56	22.42	0
		50	0	21.36	21.43	21.36	1
		50	25	21.40	21.45	21.31	1
		50	50	21.26	21.33	21.27	1
		100	0	21.44	21.47	21.37	1
	16QAM	1	0	21.11	21.19	21.03	1
		1	50	21.33	21.38	21.30	1
		1	99	21.23	21.33	21.21	1
		50	0	20.50	20.50	20.46	2
		50	25	20.52	20.62	20.50	2
		50	50	20.31	20.34	20.27	2
		100	0	20.53	20.55	20.41	2



BUREAU
VERITAS

Test Report No.: W7L-P21090006RF06

EIRP POWER (dBm)

GPRS

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	29.36	0.5	29.86	968.28	2
661	1880.0	29.35	0.5	29.85	966.05	2
810	1909.8	29.3	0.5	29.8	954.99	2

EDGE

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	25.74	0.5	26.24	420.73	2
661	1880.0	25.82	0.5	26.32	428.55	2
810	1909.8	25.92	0.5	26.42	438.53	2

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9662	1852.4	22.94	0.5	23.44	220.80	2
9800	1880	22.91	0.5	23.41	219.28	2
9938	1907.6	22.89	0.5	23.39	218.27	2



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.48	0.5	22.98	198.61	2
18900	1880.0	22.52	0.5	23.02	200.45	2
19193	1908.3	22.42	0.5	22.92	195.88	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	21.46	0.5	21.96	157.04	2
18900	1880.0	21.61	0.5	22.11	162.55	2
19193	1908.3	21.45	0.5	21.95	156.68	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.49	0.5	22.99	199.07	2
18900	1880.0	22.57	0.5	23.07	202.77	2
19185	1908.5	22.46	0.5	22.96	197.7	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	21.32	0.5	21.82	152.05	2
18900	1880.0	21.37	0.5	21.87	153.82	2
19185	1908.5	21.3	0.5	21.8	151.36	2



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.59	0.5	23.09	203.7	2
18900	1880.0	22.6	0.5	23.1	204.17	2
19175	1907.5	22.52	0.5	23.02	200.45	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	21.35	0.5	21.85	153.11	2
18900	1880.0	21.46	0.5	21.96	157.04	2
19175	1907.5	21.35	0.5	21.85	153.11	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.56	0.5	23.06	202.3	2
18900	1880.0	22.59	0.5	23.09	203.70	2
19150	1905.0	22.5	0.5	23	199.53	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	21.37	0.5	21.87	153.82	2
18900	1880.0	21.39	0.5	21.89	154.53	2
19150	1905.0	21.35	0.5	21.85	153.11	2



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.51	0.5	23.01	199.99	2
18900	1880.0	22.56	0.5	23.06	202.30	2
19125	1902.5	22.39	0.5	22.89	194.54	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	21.3	0.5	21.8	151.36	2
18900	1880.0	21.34	0.5	21.84	152.76	2
19125	1902.5	21.29	0.5	21.79	151.01	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.51	0.5	23.01	199.99	2
18900	1880	22.58	0.5	23.08	203.24	2
19100	1900	22.44	0.5	22.94	196.79	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	21.33	0.5	21.83	152.41	2
18900	1880	21.38	0.5	21.88	154.17	2
19100	1900	21.3	0.5	21.8	151.36	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

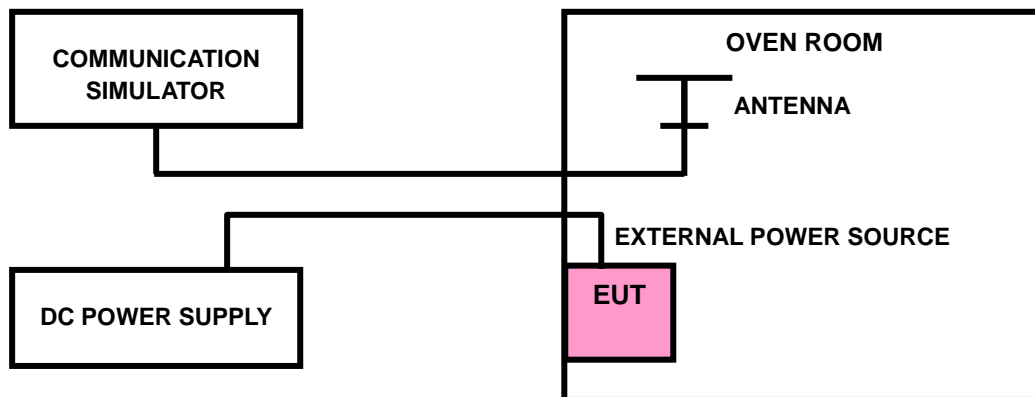



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

3.2.4 TEST RESULTS

NOTE: N/A refer to original report RF180521W014-2




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

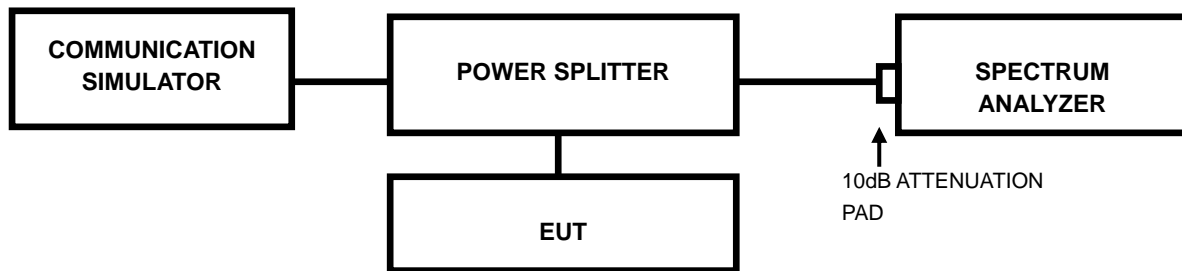



Test Report No.: W7L-P21090006RF06

3.3.3 TEST RESULTS

N/A refer to original report RF180521W014-2




3.4 BAND EDGE MEASUREMENTC

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

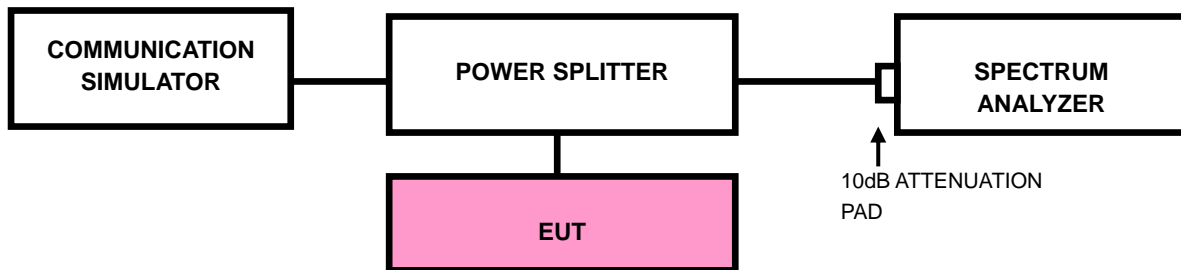



3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GPRS/ EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- i. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- j. Record the max trace plot into the test report.



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

3.4.4. TEST RESULTS

N/A refer to original report RF180521W014-2



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

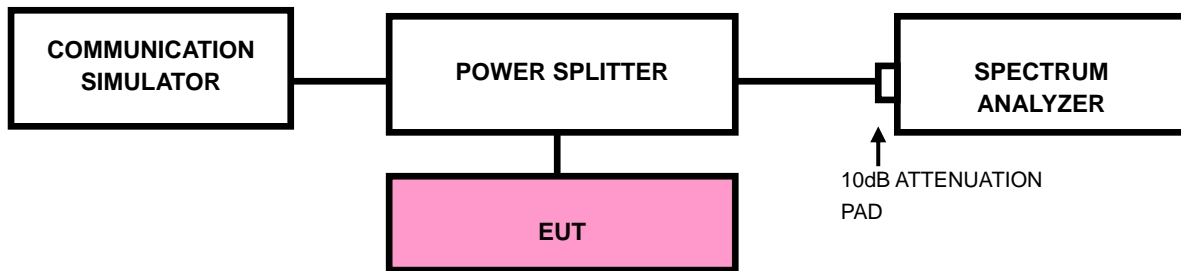



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

3.5.4 TEST RESULTS

N/A refer to original report RF180521W014-2



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation




3.6.4 TEST SETUP

< Frequency Range 30MHz~1GHz >

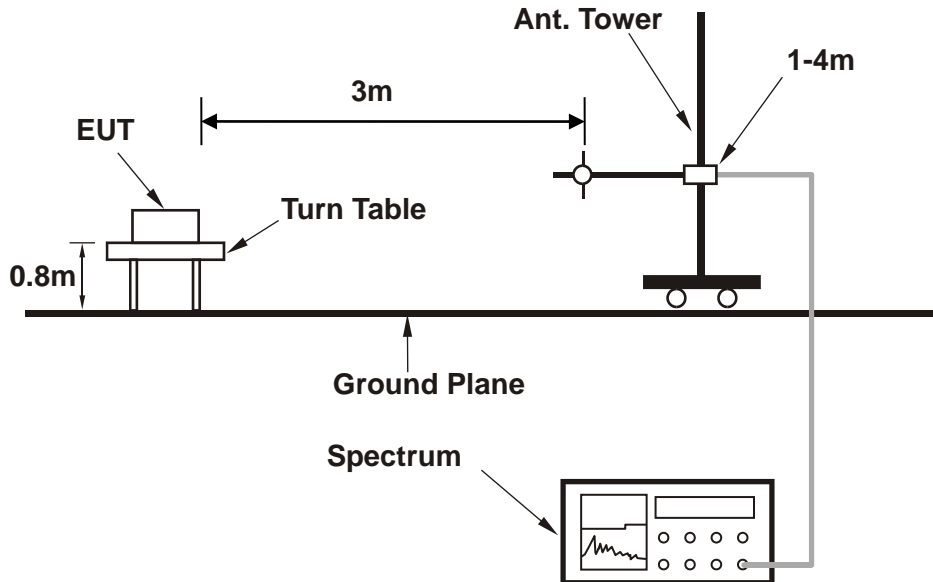

< Frequency Range above 1GHz >

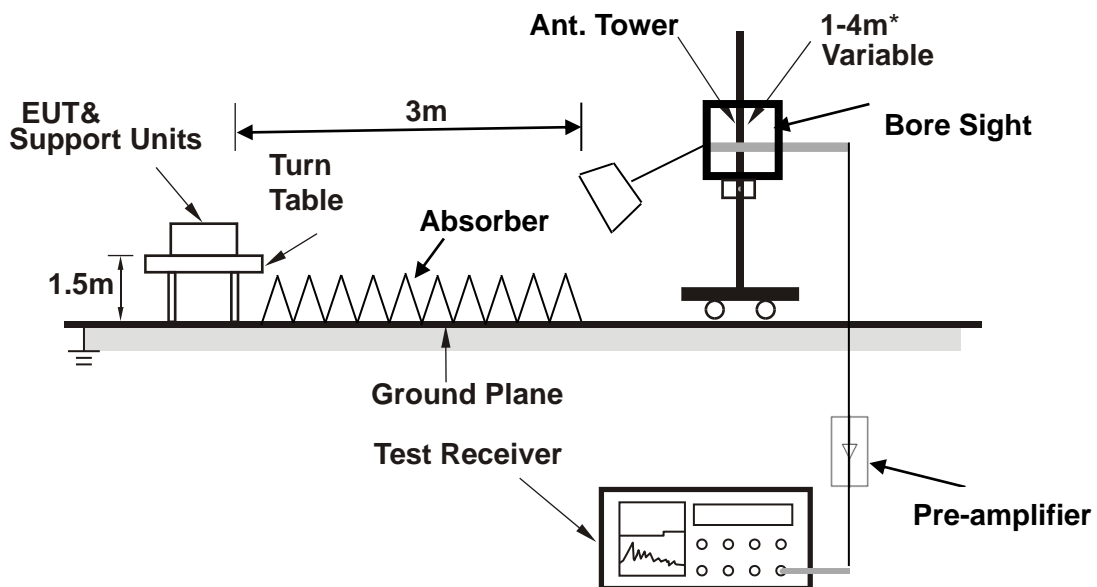

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

3.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

EDGE 1900:

CHANNEL BANDWIDTH: 512 ~ 810

MODE	TX channel 810	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	67.830	-32.43	-40.11	-13.00	-19.43	7.68	Peak	Horizontal
2	164.830	-26.58	-37.31	-13.00	-13.58	10.73	Peak	Horizontal
3 PP	254.070	-22.73	-36.00	-13.00	-9.73	13.27	Peak	Horizontal
4	353.010	-24.38	-39.92	-13.00	-11.38	15.54	Peak	Horizontal
5	490.750	-31.35	-49.88	-13.00	-18.35	18.53	Peak	Horizontal
6	655.650	-29.38	-51.19	-13.00	-16.38	21.81	Peak	Horizontal

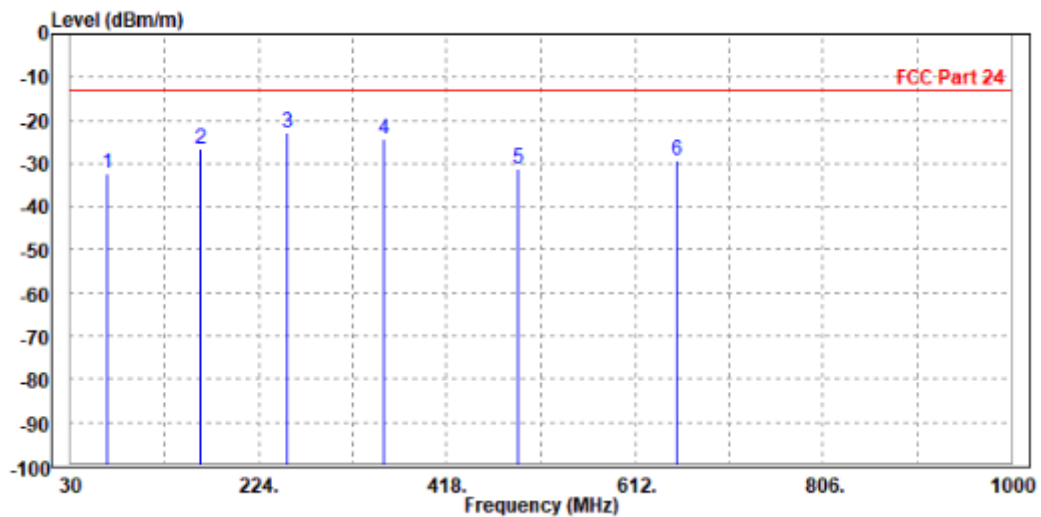




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 810	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	46.490	-27.45	-37.57	-13.00	-14.45	10.12	Peak	Vertical
2	132.820	-24.14	-32.01	-13.00	-11.14	7.87	Peak	Vertical
3 PP	253.100	-21.54	-35.41	-13.00	-8.54	13.87	Peak	Vertical
4	393.750	-23.33	-40.39	-13.00	-10.33	17.06	Peak	Vertical
5	471.350	-26.52	-45.08	-13.00	-13.52	18.56	Peak	Vertical
6	624.610	-31.68	-52.92	-13.00	-18.68	21.24	Peak	Vertical

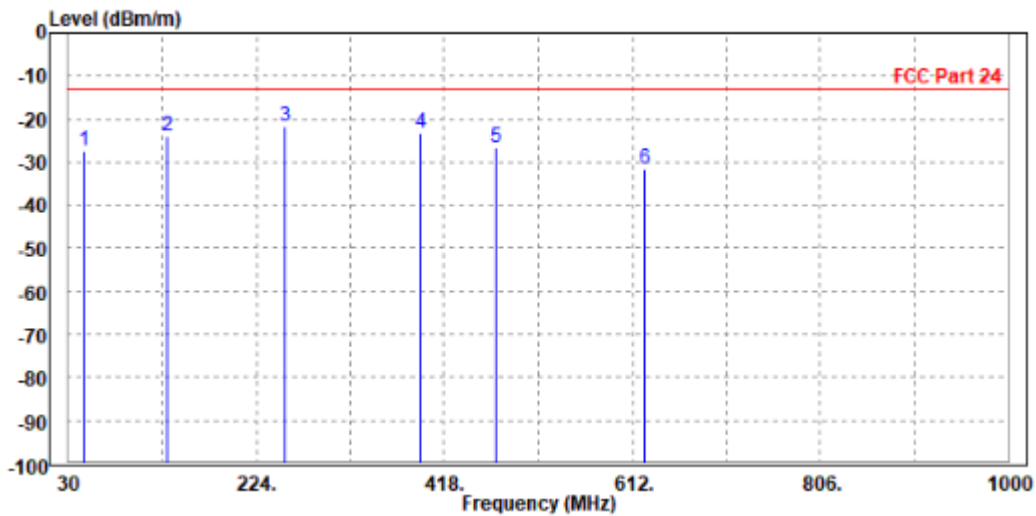



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

GPRS 1900:

CH 512

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-49.24	-58.02	-13.00	-36.24	8.78	Peak	Horizontal
2 PP	5550.600	-49.22	-59.41	-13.00	-36.22	10.19	Peak	Horizontal

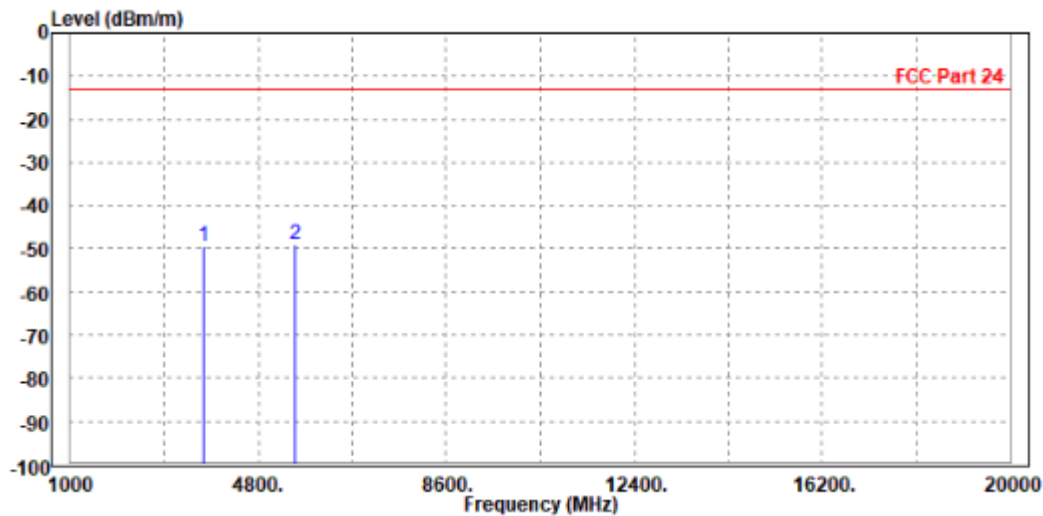




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-49.12	-58.37	-13.00	-36.12	9.25	Peak	Vertical
2	5550.600	-50.32	-60.22	-13.00	-37.32	9.90	Peak	Vertical

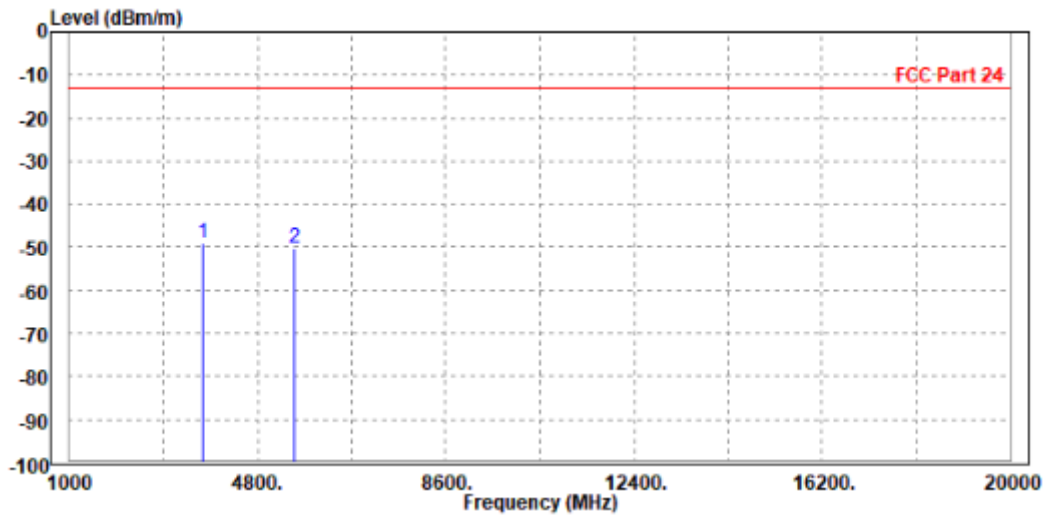




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.77	-58.62	-13.00	-36.77	8.85	Peak	Horizontal
2 PP	5640.000	-48.73	-59.21	-13.00	-35.73	10.48	Peak	Horizontal

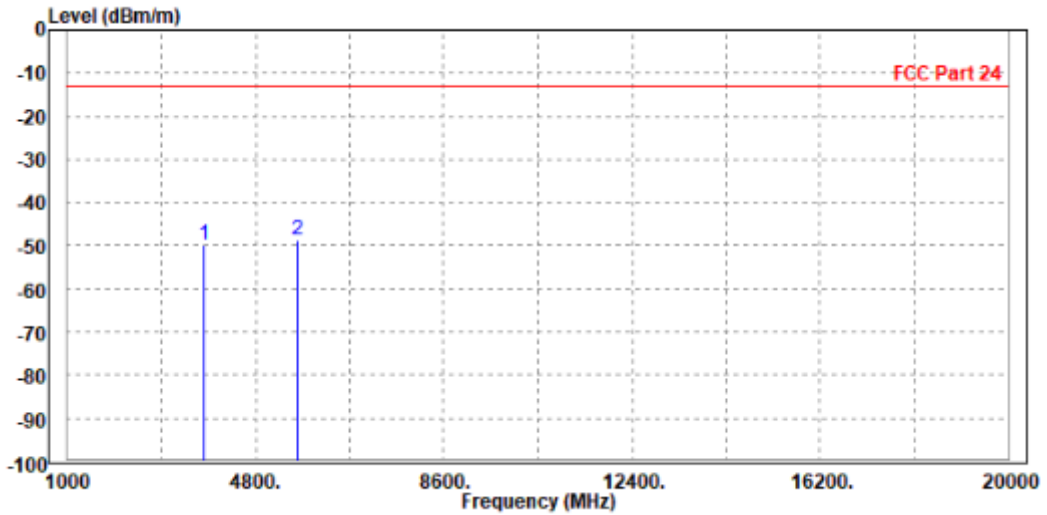




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.78	-58.05	-13.00	-35.78	9.27	Peak	Vertical
2 PP	5640.000	-48.70	-58.95	-13.00	-35.70	10.25	Peak	Vertical

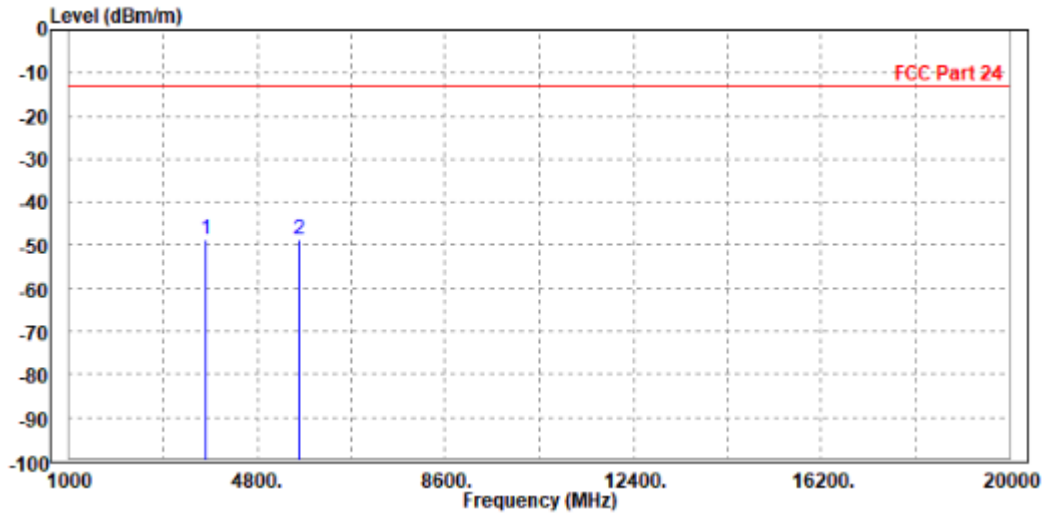




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

CH 810

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.45	-57.36	-13.00	-35.45	8.91	Peak	Horizontal
2 PP	5729.400	-47.23	-58.01	-13.00	-34.23	10.78	Peak	Horizontal

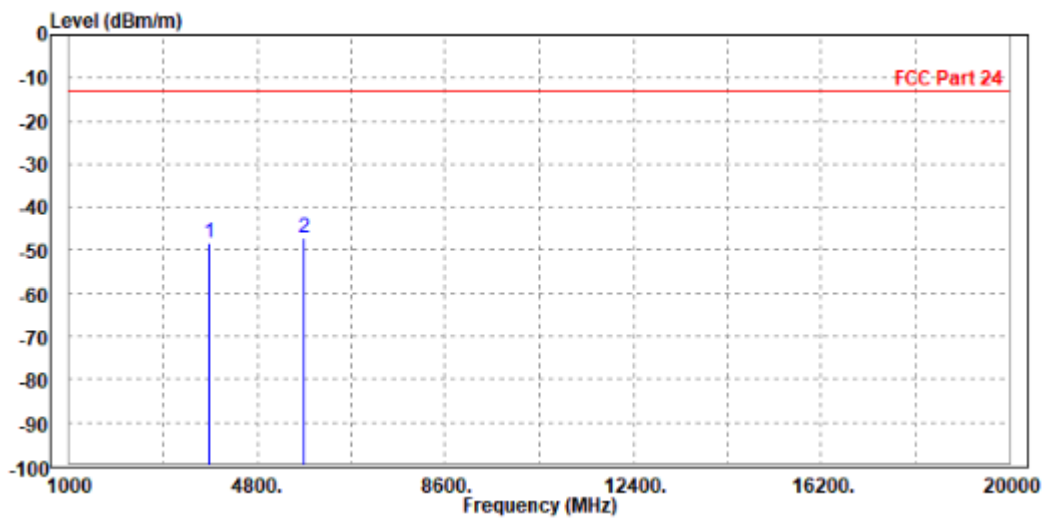




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.25	-57.54	-13.00	-35.25	9.29	Peak	Vertical
2 PP	5729.400	-46.68	-57.27	-13.00	-33.68	10.59	Peak	Vertical

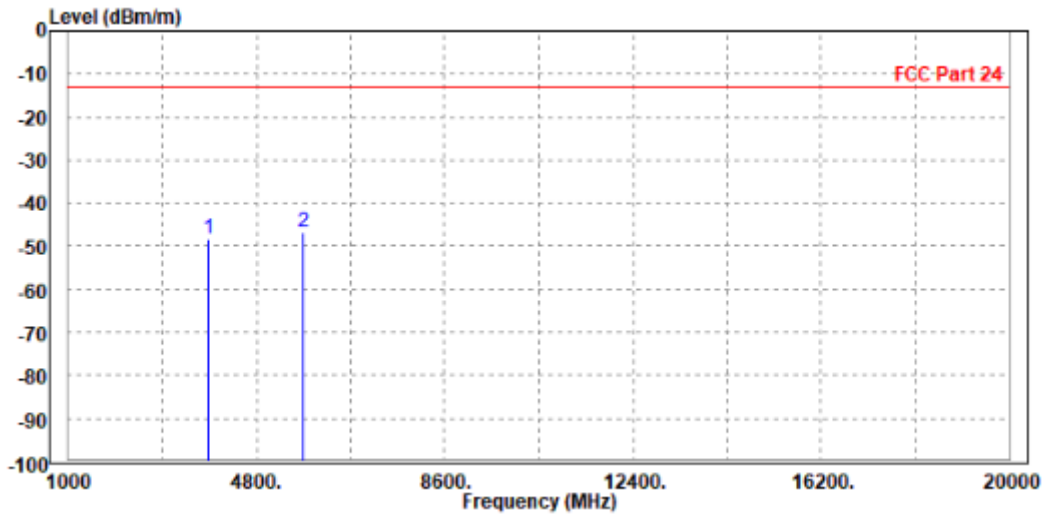



**BUREAU
VERITAS**


Test Report No.: W7L-P21090006RF06

EDGE 1900:

CH 512

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-48.60	-57.38	-13.00	-35.60	8.78	Peak	Horizontal
2	5550.600	-49.69	-59.88	-13.00	-36.69	10.19	Peak	Horizontal

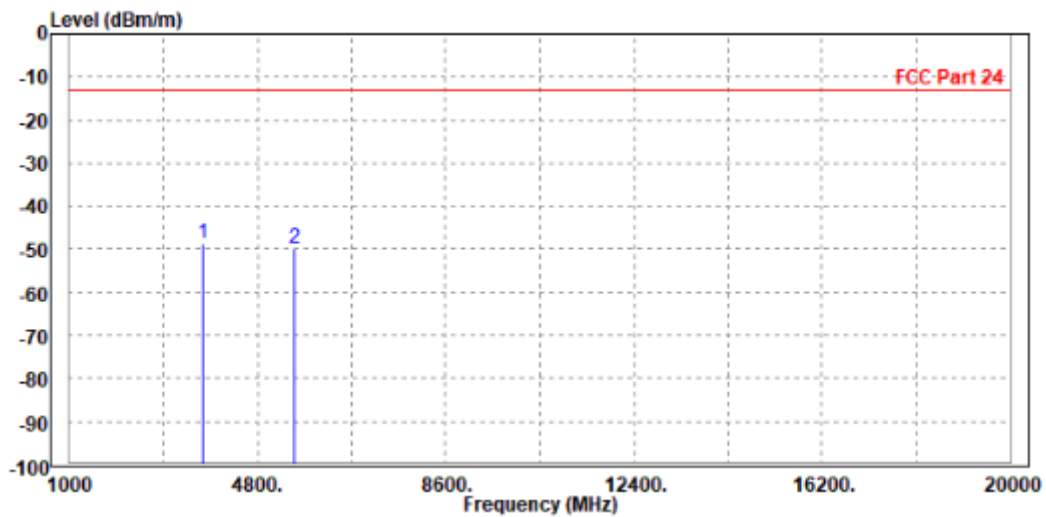




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-48.10	-57.35	-13.00	-35.10	9.25	Peak	Vertical
2	5550.600	-50.17	-60.07	-13.00	-37.17	9.90	Peak	Vertical

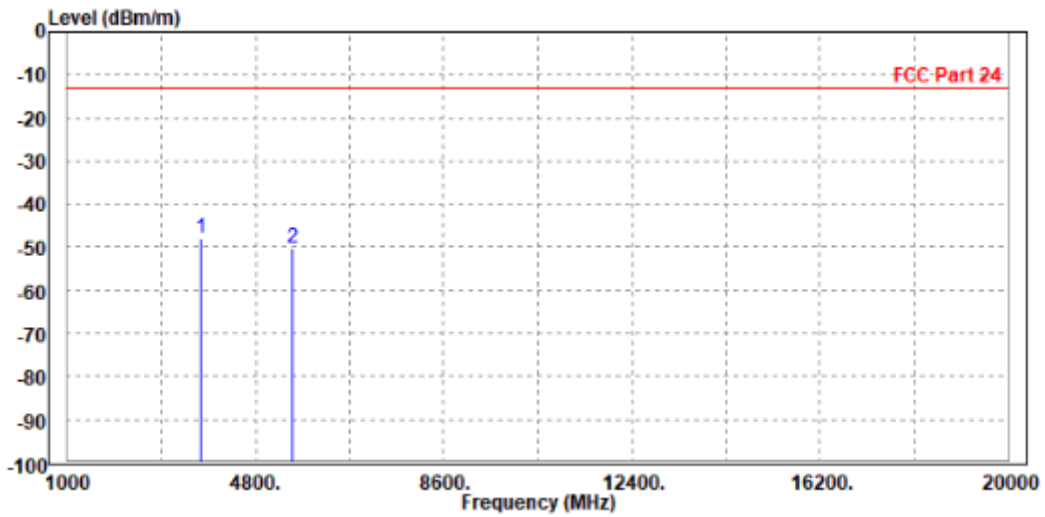




BUREAU VERITAS

Test Report No.: W7L-P21090006RF06

CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.76	-57.61	-13.00	-35.76	8.85	Peak	Horizontal
2	5640.000	-48.87	-59.35	-13.00	-35.87	10.48	Peak	Horizontal

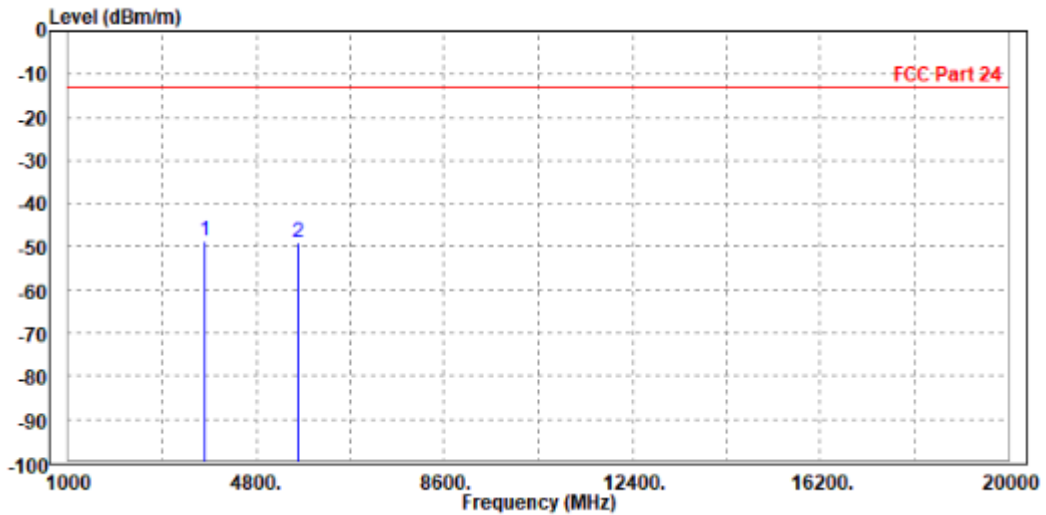




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-49.36	-58.63	-13.00	-36.36	9.27	Peak	Vertical
2	5640.000	-49.46	-59.71	-13.00	-36.46	10.25	Peak	Vertical

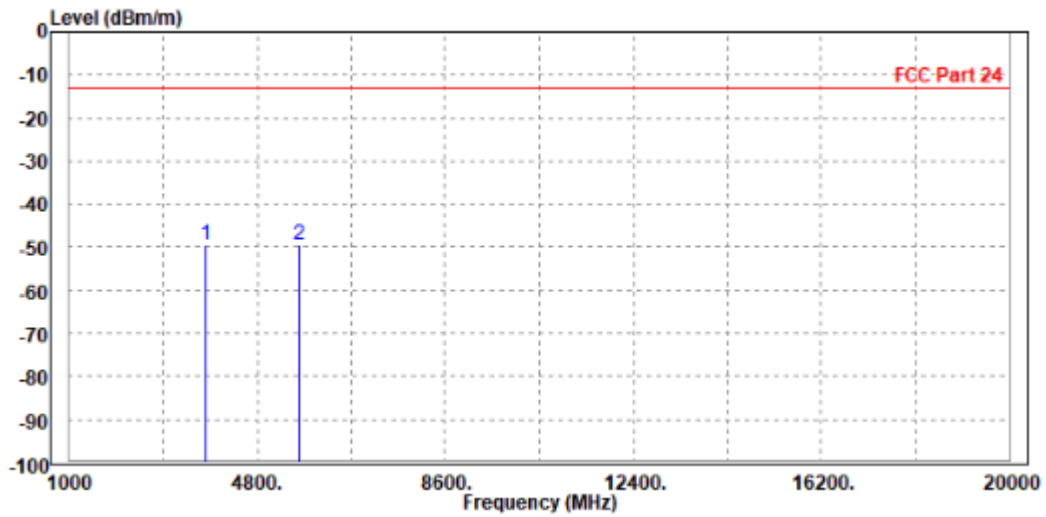




BUREAU VERITAS

Test Report No.: W7L-P21090006RF06

CH 810

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.36	-57.27	-13.00	-35.36	8.91	Peak	Horizontal
2 PP	5729.400	-46.80	-57.58	-13.00	-33.80	10.78	Peak	Horizontal

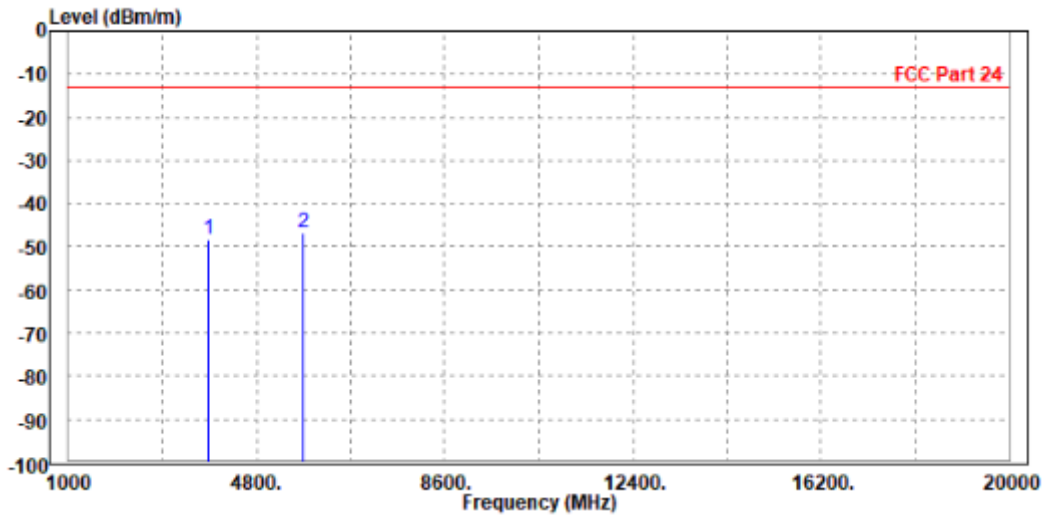




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-47.65	-56.94	-13.00	-34.65	9.29	Peak	Vertical
2 PP	5729.400	-46.88	-57.47	-13.00	-33.88	10.59	Peak	Vertical

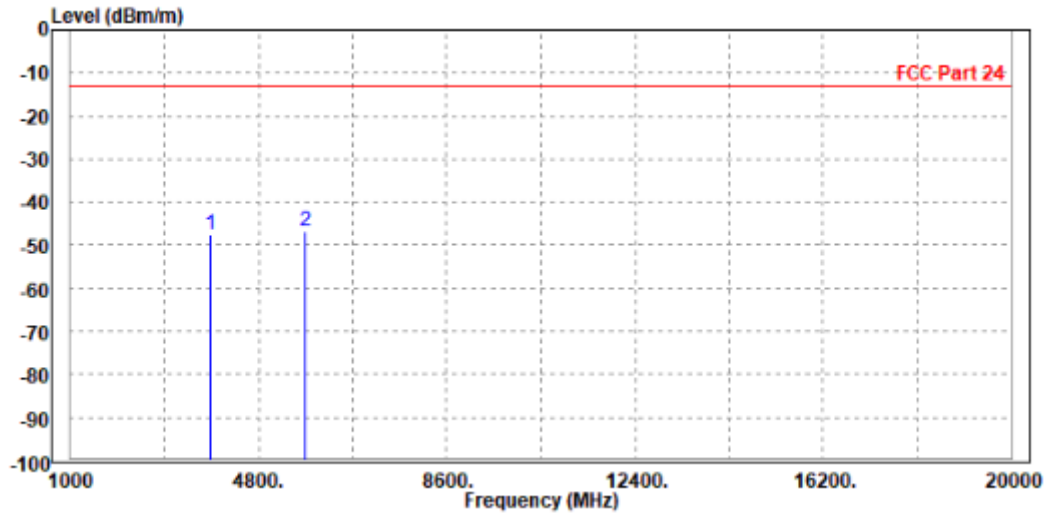



**BUREAU
VERITAS**


Test Report No.: W7L-P21090006RF06

WCDMA Band II

CH 9262

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3698.000	-48.99	-57.77	-13.00	-35.99	8.78	Peak	Horizontal
2	5557.200	-49.90	-60.11	-13.00	-36.90	10.21	Peak	Horizontal

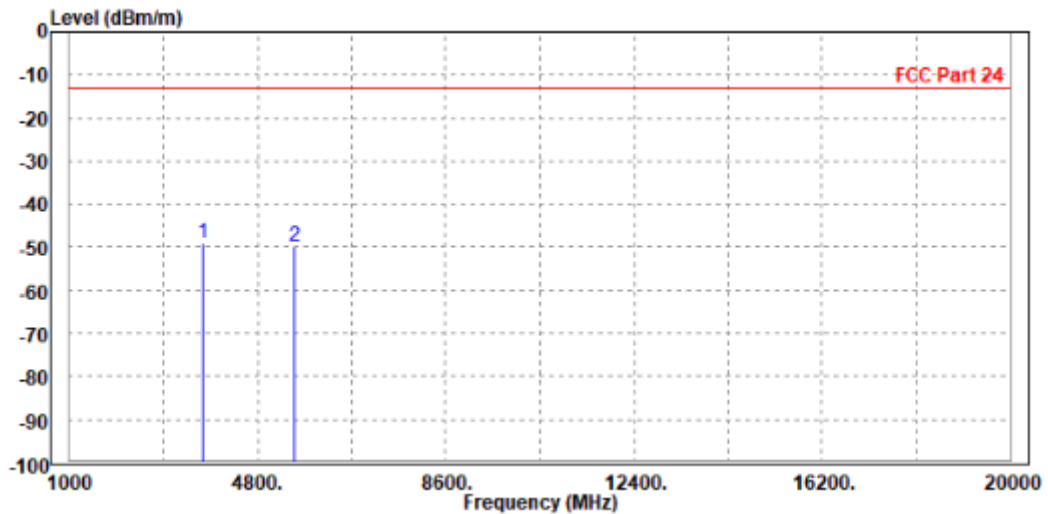




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3704.800	-47.84	-57.09	-13.00	-34.84	9.25	Peak	Vertical
2	5560.000	-49.12	-59.06	-13.00	-36.12	9.94	Peak	Vertical

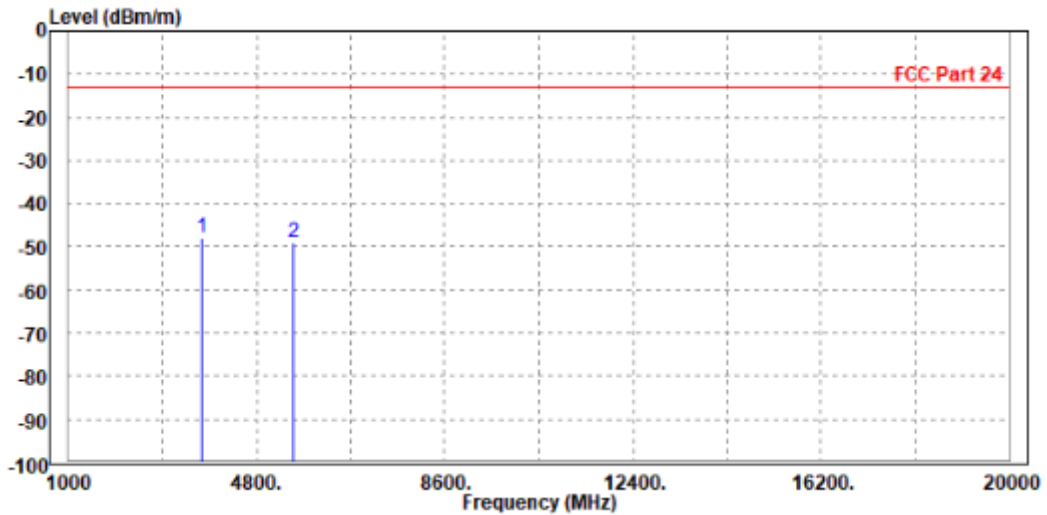




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

CH 9400

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.66	-57.51	-13.00	-35.66	8.85	Peak	Horizontal
2 PP	5640.000	-48.41	-58.89	-13.00	-35.41	10.48	Peak	Horizontal

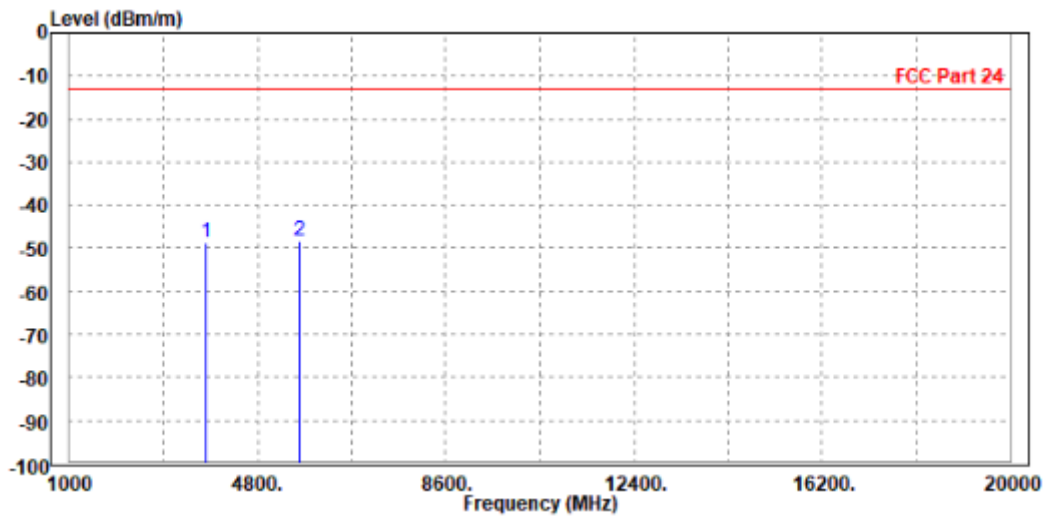




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-47.60	-56.87	-13.00	-34.60	9.27	Peak	Vertical
2	5640.000	-48.96	-59.21	-13.00	-35.96	10.25	Peak	Vertical

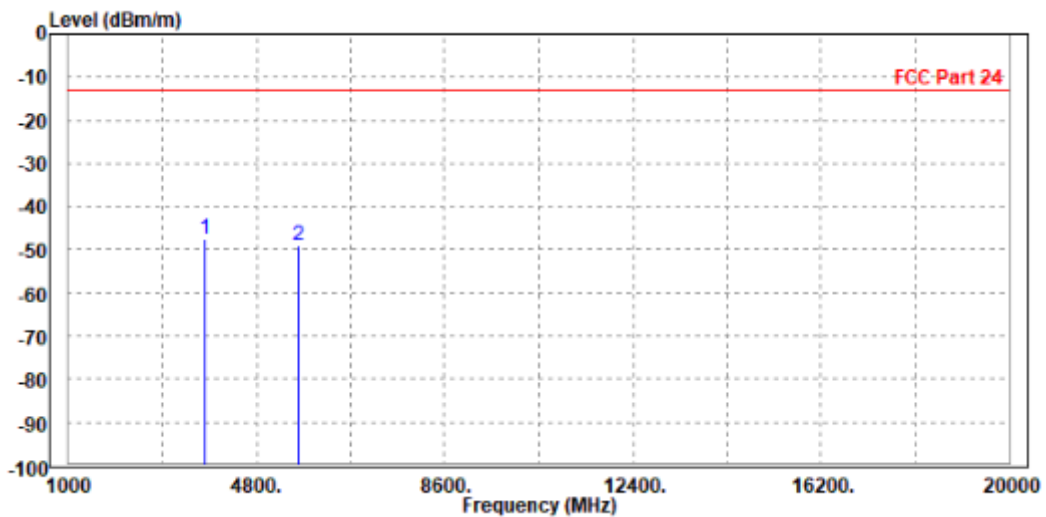




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

CH 9538

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3815.200	-48.98	-57.89	-13.00	-35.98	8.91	Peak	Horizontal
2 PP	5731.000	-42.87	-53.65	-13.00	-29.87	10.78	Peak	Horizontal

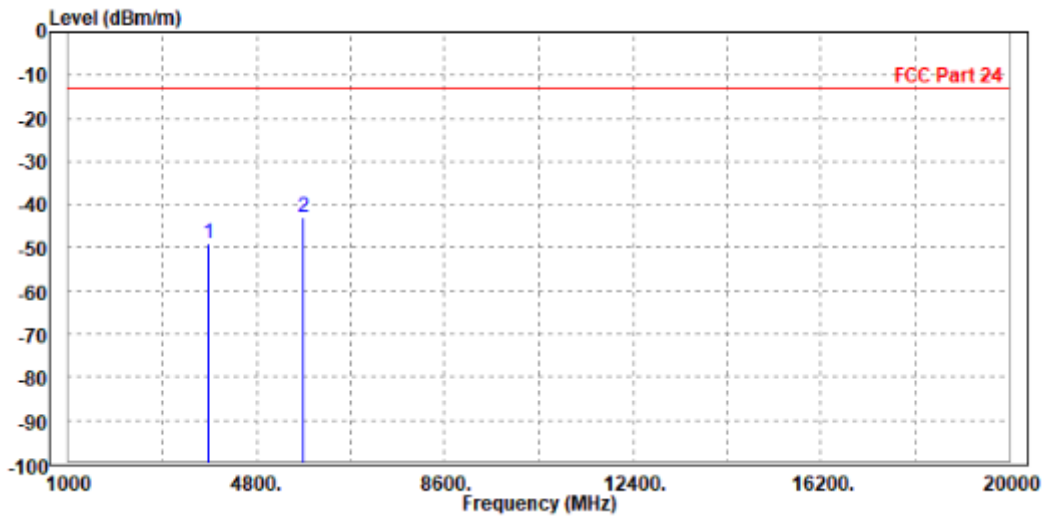




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.07	-57.36	-13.00	-35.07	9.29	Peak	Vertical
2 PP	5722.800	-46.99	-57.56	-13.00	-33.99	10.57	Peak	Vertical

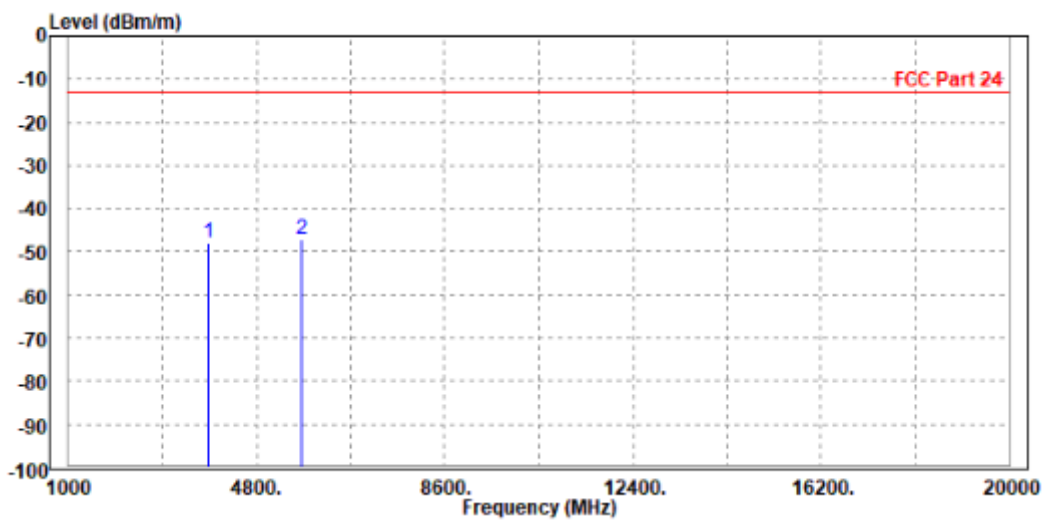




Test Report No.: W7L-P21090006RF06

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.72	-58.57	-13.00	-36.72	8.85	Peak	Horizontal
2 PP	5640.000	-49.66	-60.14	-13.00	-36.66	10.48	Peak	Horizontal

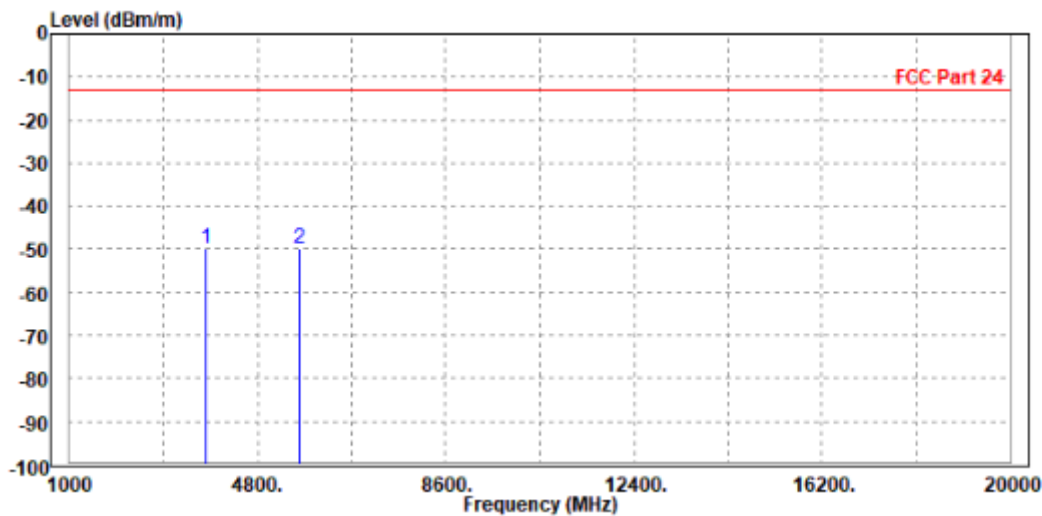




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.47	-58.74	-13.00	-36.47	9.27	Peak	Vertical
2 PP	5640.000	-49.19	-59.44	-13.00	-36.19	10.25	Peak	Vertical

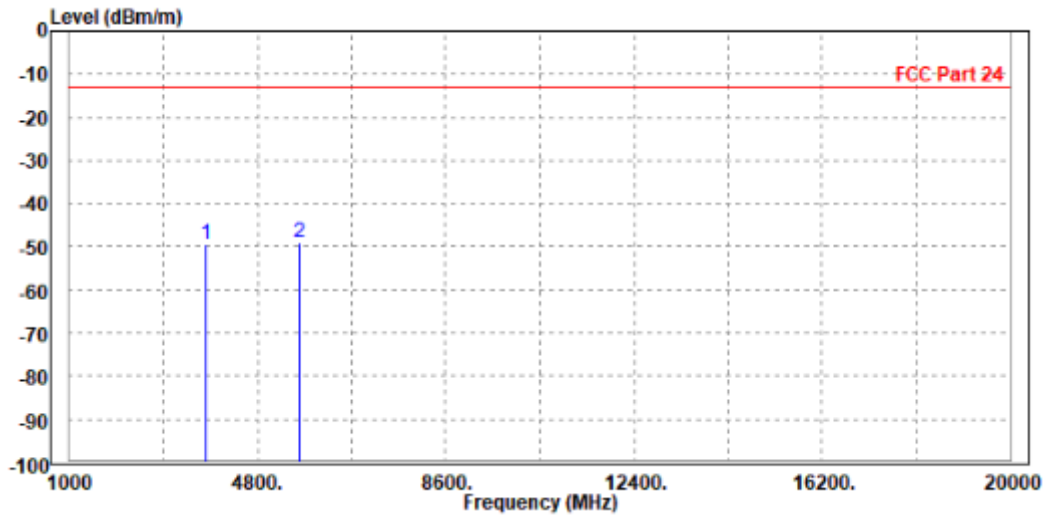




BUREAU VERITAS

Test Report No.: W7L-P21090006RF06

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.75	-57.60	-13.00	-35.75	8.85	Peak	Horizontal
2	5640.000	-49.62	-60.10	-13.00	-36.62	10.48	Peak	Horizontal

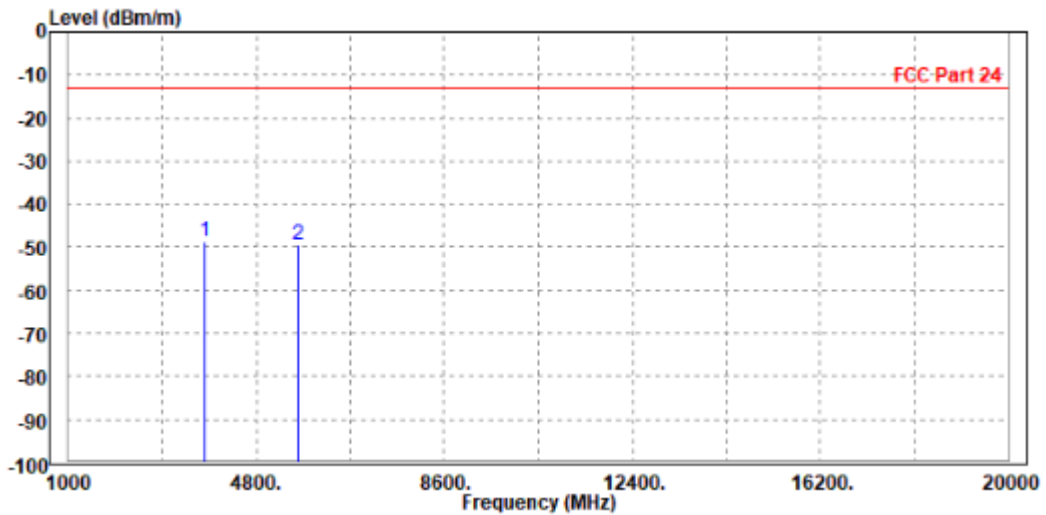




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.47	-57.74	-13.00	-35.47	9.27	Peak	Vertical
2 PP	5640.000	-48.33	-58.58	-13.00	-35.33	10.25	Peak	Vertical

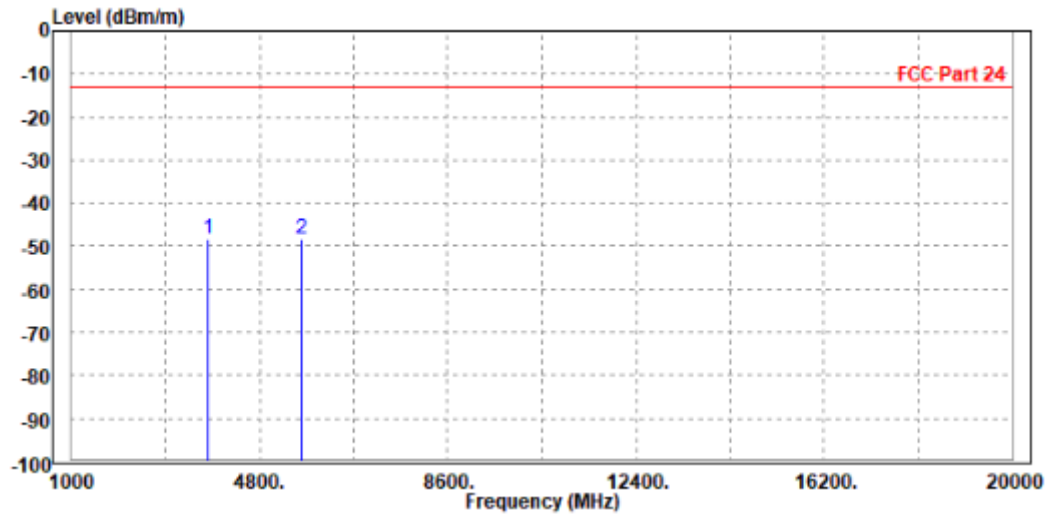




BUREAU VERITAS

Test Report No.: W7L-P21090006RF06

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.50	-57.35	-13.00	-35.50	8.85	Peak	Horizontal
2 PP	5640.000	-48.50	-58.98	-13.00	-35.50	10.48	Peak	Horizontal

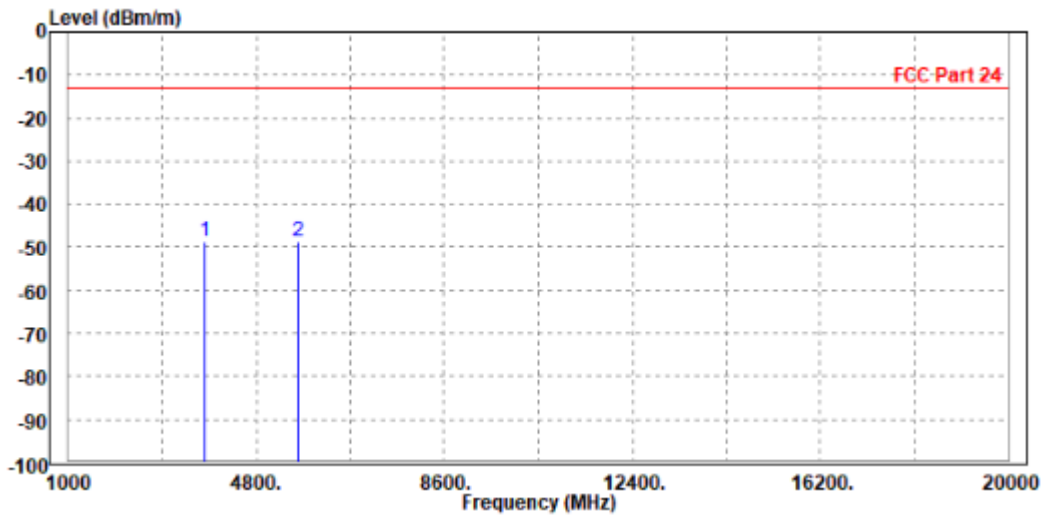




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.75	-58.02	-13.00	-35.75	9.27	Peak	Vertical
2	5640.000	-49.57	-59.82	-13.00	-36.57	10.25	Peak	Vertical

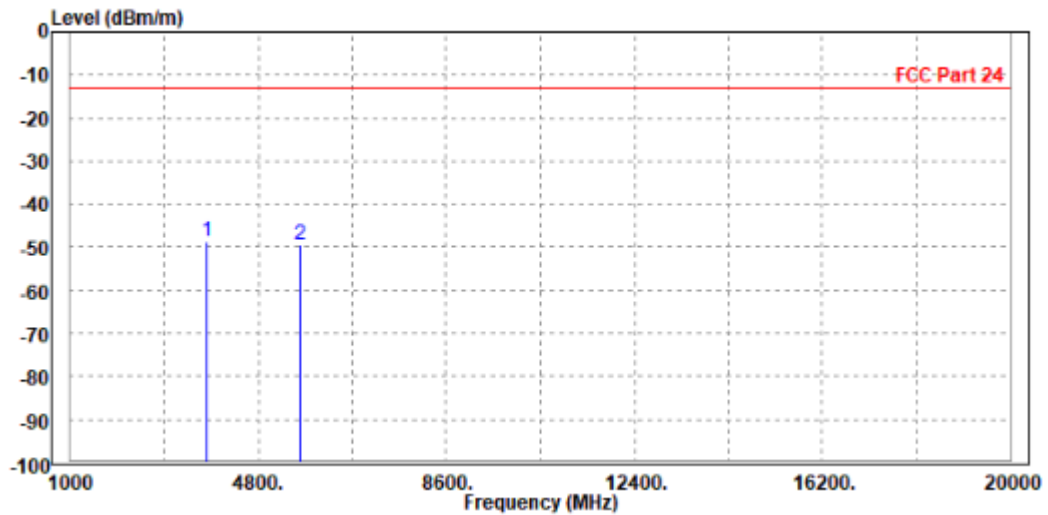




BUREAU VERITAS

Test Report No.: W7L-P21090006RF06

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.95	-57.80	-13.00	-35.95	8.85	Peak	Horizontal
2	5640.000	-49.08	-59.56	-13.00	-36.08	10.48	Peak	Horizontal

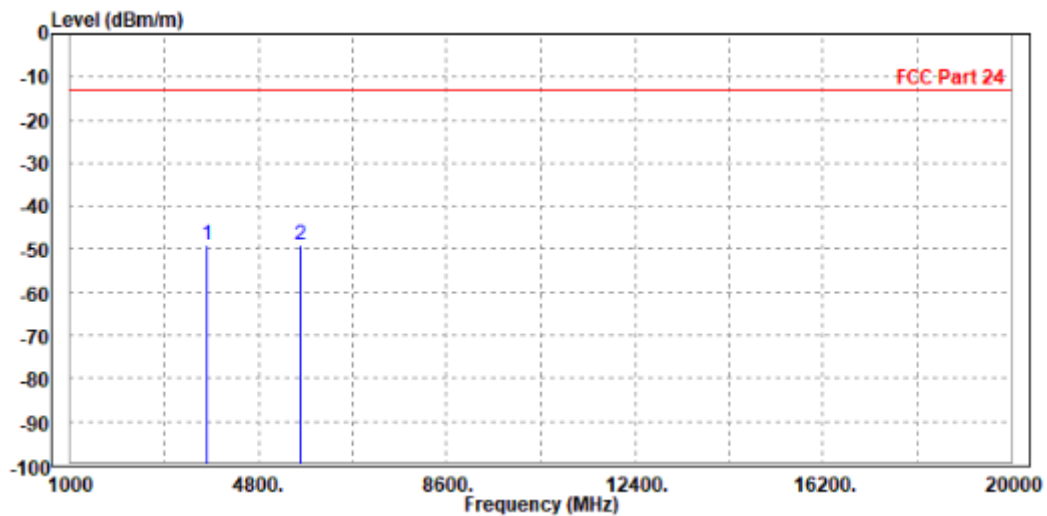




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.26	-57.53	-13.00	-35.26	9.27	Peak	Vertical
2	5640.000	-49.55	-59.80	-13.00	-36.55	10.25	Peak	Vertical

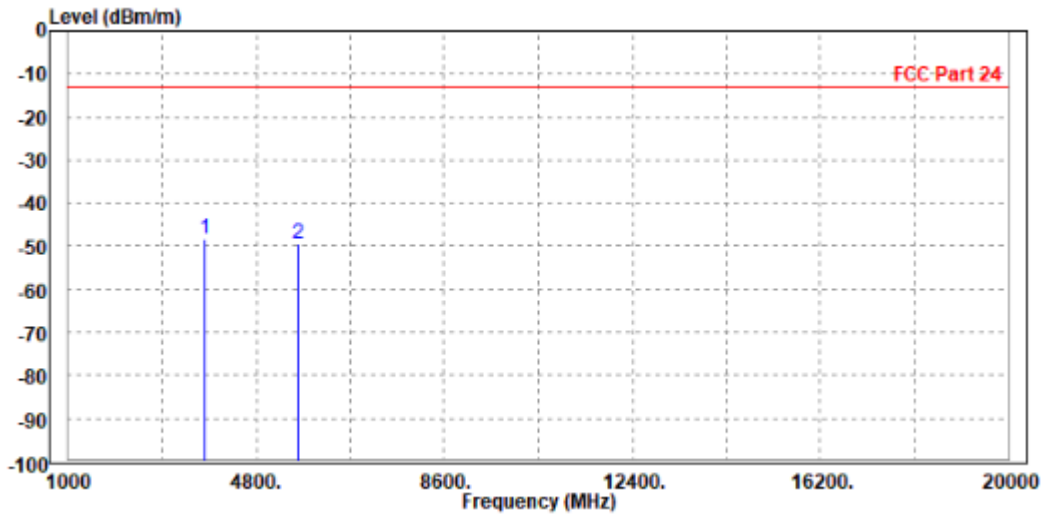



BUREAU VERITAS


Test Report No.: W7L-P21090006RF06

CHANNEL BANDWIDTH: 15MHz / QPSK

CH18675

MODE	TX channel 18675	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Read Level	Limit Level	Over Limit	Factor	Remark	Pol/Phase
	Freq MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	PP 3717.000	-48.82	-57.63	-13.00	-35.82	8.81	Peak Horizontal
2	5572.500	-49.92	-60.18	-13.00	-36.92	10.26	Peak Horizontal

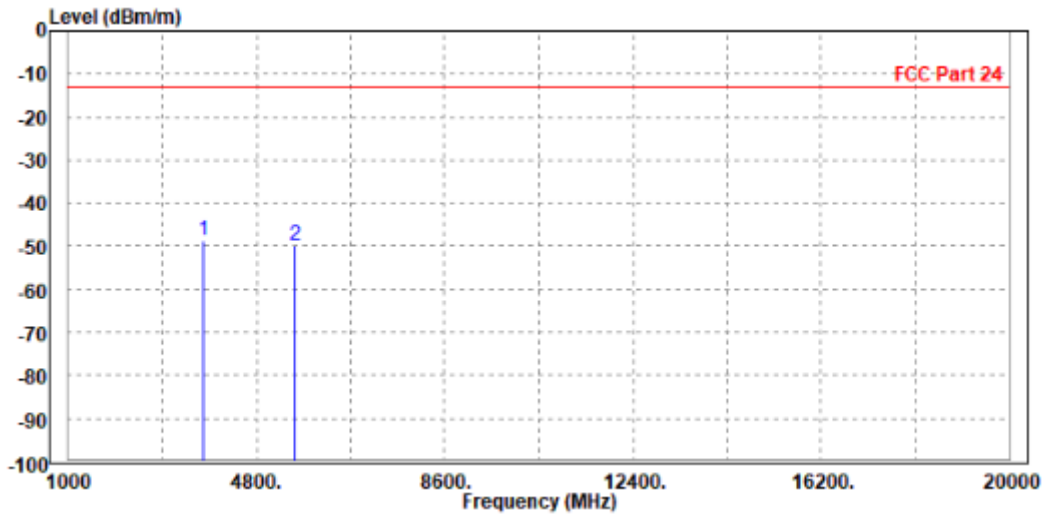




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 18675	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3717.000	-49.28	-58.54	-13.00	-36.28	9.26	Peak	Vertical
2	5572.500	-50.51	-60.50	-13.00	-37.51	9.99	Peak	Vertical

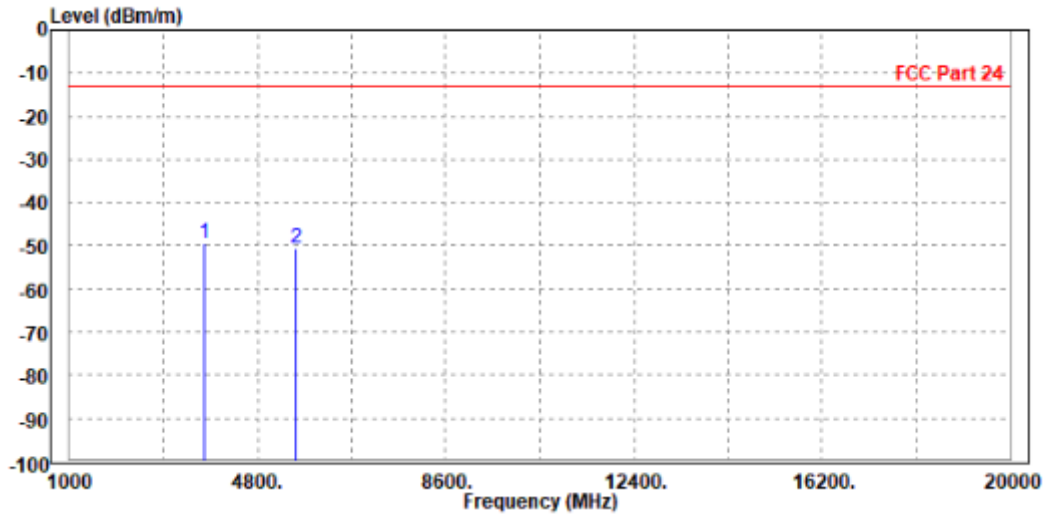




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

CH18900

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.85	-57.70	-13.00	-35.85	8.85	Peak	Horizontal
2 PP	5640.000	-48.51	-58.99	-13.00	-35.51	10.48	Peak	Horizontal

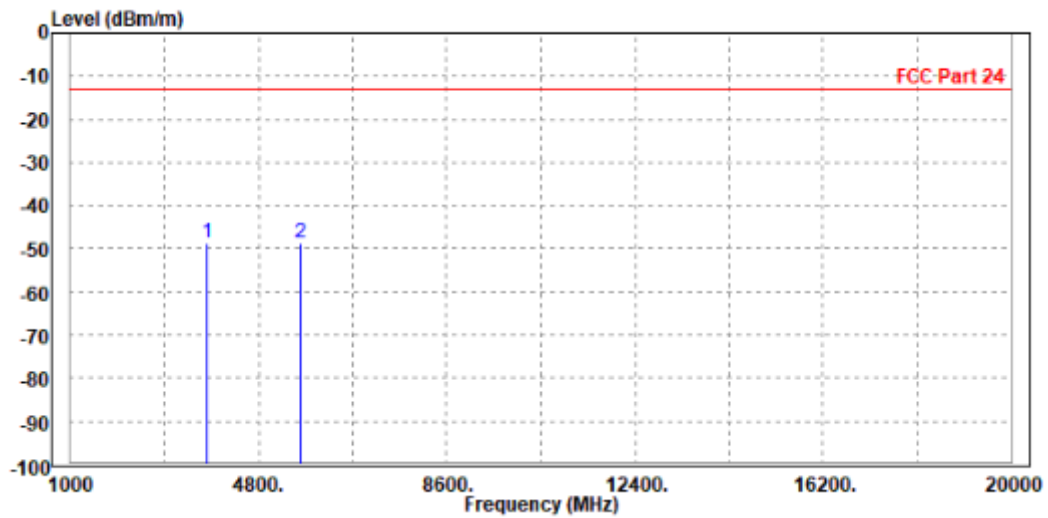




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-47.89	-57.16	-13.00	-34.89	9.27	Peak	Vertical
2	5640.000	-49.61	-59.86	-13.00	-36.61	10.25	Peak	Vertical

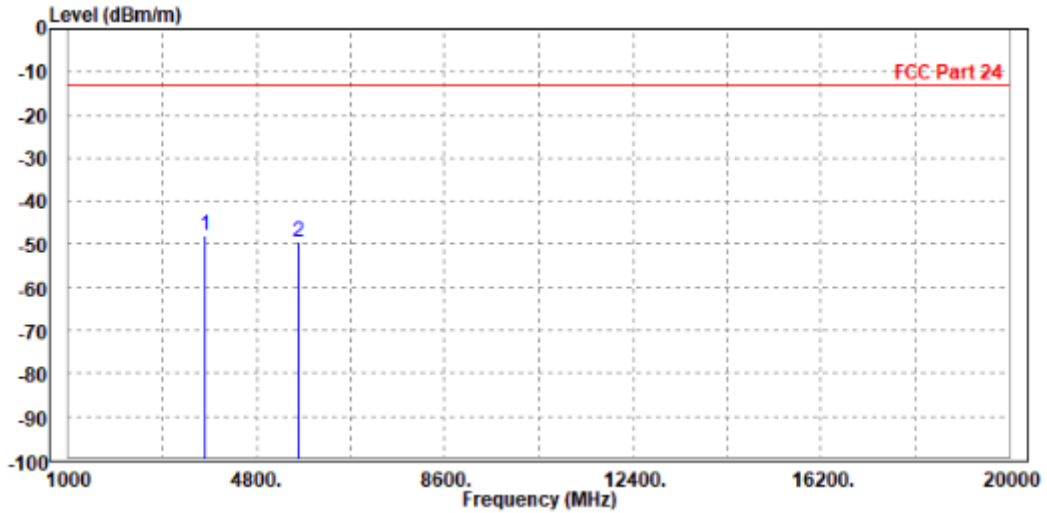




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

CH19125

MODE	TX channel 19125	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.30	-57.21	-13.00	-35.30	8.91	Peak	Horizontal
2 PP	5707.500	-47.59	-58.30	-13.00	-34.59	10.71	Peak	Horizontal

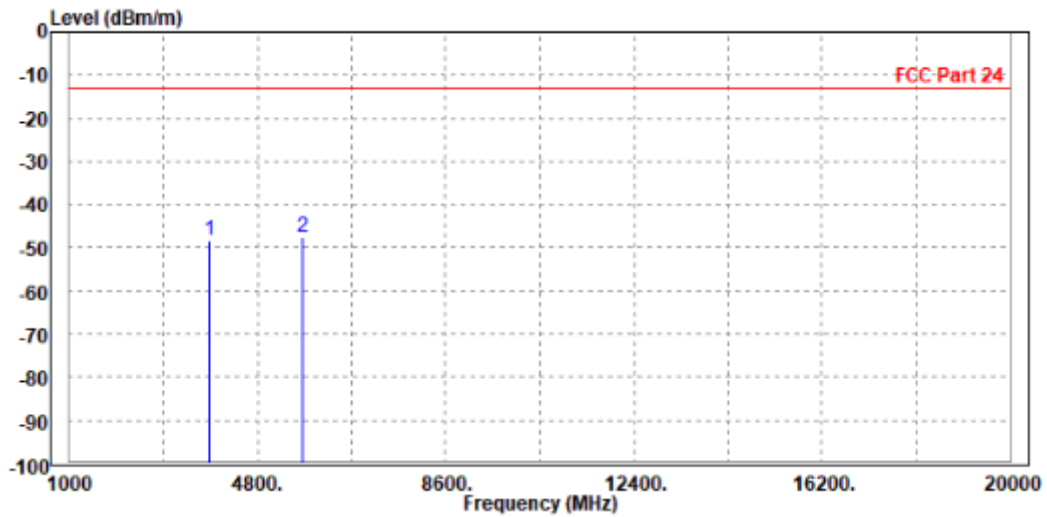




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 19125	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Read	Limit	Over				
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3812.000	-47.57	-56.86	-13.00	-34.57	9.29	Peak	Vertical
2	5707.500	-48.53	-59.04	-13.00	-35.53	10.51	Peak	Vertical

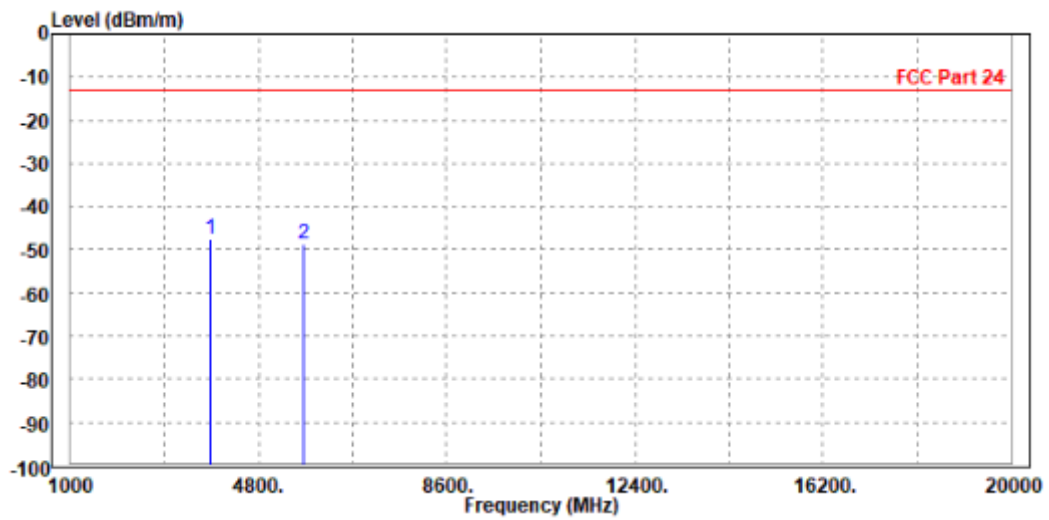




BUREAU VERITAS

Test Report No.: W7L-P21090006RF06

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.39	-58.24	-13.00	-36.39	8.85	Peak	Horizontal
2 PP	5640.000	-48.93	-59.41	-13.00	-35.93	10.48	Peak	Horizontal

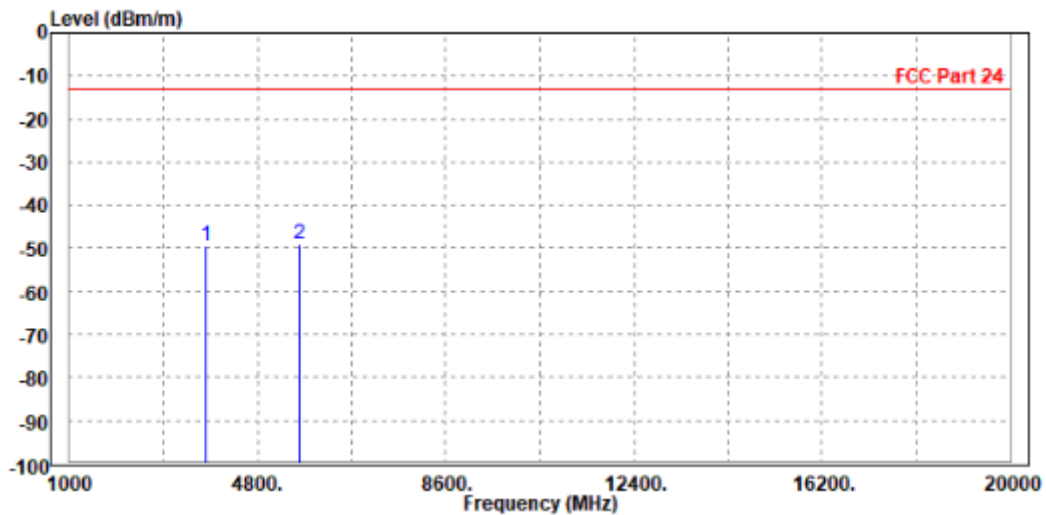




**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.23	-58.50	-13.00	-36.23	9.27	Peak	Vertical
2 PP	5640.000	-49.12	-59.37	-13.00	-36.12	10.25	Peak	Vertical

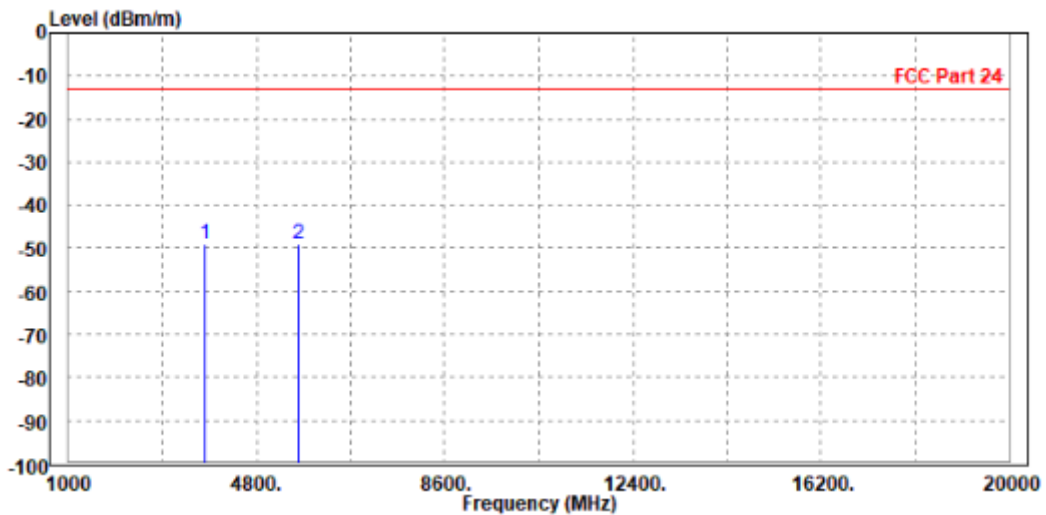




3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

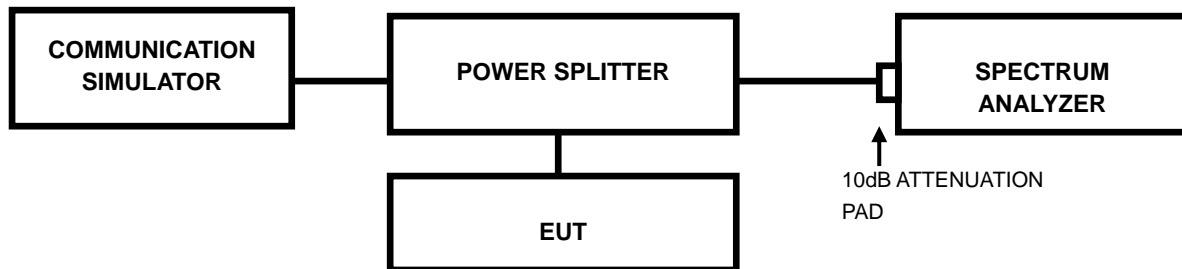

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAR level associated with a probability of 0.1%.



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

3.7.4 TEST RESULTS

N/A refer to original report RF180521W014-2



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



**BUREAU
VERITAS**

Test Report No.: W7L-P21090006RF06

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---