



FCC RF Test Report

APPLICANT : PAX Technology Limited
EQUIPMENT : UNATTENDED PAYMENT TERMINAL
BRAND NAME : PAX
MODEL NAME : IM25
FCC ID : V5PIM254GBW
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(H), 27(F), 27(N)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Jun. 12, 2024 ~ Jun. 13, 2024

This product installed a RF module (Brand Name: Fibocom, Model Name: NL668-AM-00, FCC ID: ZMONL668AM00) during the test, only Conducted Power, ERP/EIRP and RSE test items are tested in this report, all the other test results are leveraged from module RF report. We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	7
1.6 Maximum ERP/EIRP Power	7
1.7 Testing Location	9
1.8 Test Software	9
1.9 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	11
2.4 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST ITEMS	15
3.1 Measuring Instruments	15
3.2 Test Setup	15
3.3 Test Result of Conducted Test	15
3.4 Conducted Output Power and ERP/EIRP	16
4 RADIATED TEST ITEMS	17
4.1 Measuring Instruments	17
4.2 Test Setup	17
4.3 Test Result of Radiated Test	18
4.4 Radiated Spurious Emission	19
5 LIST OF MEASURING EQUIPMENT	20
6 MEASUREMENT UNCERTAINTY	21
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG452701B	Rev. 01	Initial issue of report	Jul. 04, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13) (Band 17) (Band 71)	ERP < 3 Watt		-
	§24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	EIRP < 2Watt		-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4) (Band 66)	EIRP < 1Watt		-
-	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	1
-	§2.1049	Occupied Bandwidth	-	Report Only	1
-	§2.1051 §22.917(a) §24.238(a) §27.53(c)(2)(4) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 17) (Band 66) (Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	1
-	§2.1051 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 17) (Band 66)(Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	1
-	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	1
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(f) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 17) (Band 66)(Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 19.47 dB at 1564.500 MHz

Remark 1: All test results were leveraged from module RF report which can refer to Report No "FG8O1914-01B".

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

PAX Technology Limited

Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong

1.2 Manufacturer

PAX Computer Technology (Shenzhen) Co., Ltd.

Room 701, PAX Technology Building, Shanxia Community, Pinghu Sub-district, Longgang District, Shenzhen, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	UNATTENDED PAYMENT TERMINAL
Brand Name	PAX
Model Name	IM25
FCC ID	V5PIM254GBW
IMEI Code	Radiation: 868862041177571
HW Version	NA
SW Version	NA
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 17 : 704 MHz ~ 716 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 12 : 729 MHz ~ 746 MHz LTE Band 13 : 746 MHz ~ 756 MHz LTE Band 17 : 734 MHz ~ 746 MHz LTE Band 66 : 2110 MHz~ 2180 MHz LTE Band 71 : 617 MHz ~ 652 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz



	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 13 : 5MHz / 10MHz LTE Band 17 : 5MHz / 10MHz LTE Band 66 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 71 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 2 : 23.30 dBm LTE Band 4 : 23.02 dBm LTE Band 5 : 22.44 dBm LTE Band 12 : 22.84 dBm LTE Band 13 : 22.31 dBm LTE Band 17 : 22.66 dBm LTE Band 66 : 23.08 dBm LTE Band 71 : 22.62 dBm
Antenna Gain	Ant 1: LTE Band 2 : 2.01 dBi LTE Band 4 : 3.61 dBi LTE Band 5 : 1.33 dBi LTE Band 12 : 1.00 dBi LTE Band 13 : 1.00 dBi LTE Band 17 : 1.00 dBi LTE Band 66 : 3.61 dBi LTE Band 71 : 1.00 dBi Ant 2: LTE Band 2 : -0.30 dBi LTE Band 4 : 0.85 dBi LTE Band 5 : 0.87 dBi LTE Band 12 : 0.50 dBi LTE Band 13 : 0.50 dBi LTE Band 17 : 0.50 dBi LTE Band 66 : 0.85 dBi LTE Band 71 : 0.50 dBi Ant 3: LTE Band 2 : 2.30 dBi LTE Band 4 : 2.30 dBi LTE Band 5 : 1.10 dBi LTE Band 12 : 1.10 dBi LTE Band 13 : 1.10 dBi LTE Band 17 : 1.10 dBi LTE Band 66 : 2.30 dBi LTE Band 71 : 1.10 dBi
Antenna Type	Ant 1/2: Dipole Antenna Ant 3: Cable Antenna
Type of Modulation	QPSK / 16QAM

Note: The maximum ERP/EIRP is calculated from max output power and antenna gain, only the maximum ERP/EIRP of Ant1 for LTE Band4/5/66 and Ant3 for LTE Band 2/12/13/17/71 are shown in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power

LTE Band 2		QPSK	16QAM
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	0.3483	0.2773
3	1851.5 ~ 1908.5	0.3467	0.2729
5	1852.5 ~ 1907.5	0.3499	0.2767
10	1855.0 ~ 1905.0	0.3491	0.2723
15	1857.5 ~ 1902.5	0.3499	0.2735
20	1860.0 ~ 1900.0	0.3631	0.2799

LTE Band 4		QPSK	16QAM
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	0.4406	0.3412
3	1711.5 ~ 1753.5	0.4406	0.3597
5	1712.5 ~ 1752.5	0.4498	0.3573
10	1715.0 ~ 1750.0	0.4508	0.3556
15	1717.5 ~ 1747.5	0.4426	0.3581
20	1720.0 ~ 1745.0	0.4603	0.3639

LTE Band 5		QPSK	16QAM
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Maximum ERP(W)
1.4	824.7 ~ 848.3	0.1435	0.1059
3	825.5 ~ 847.5	0.1406	0.1069
5	826.5 ~ 846.5	0.1439	0.1081
10	829.0 ~ 844.0	0.1452	0.1094



LTE Band 12		QPSK	16QAM
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Maximum ERP(W)
1.4	699.7 ~ 715.3	0.1393	0.1140
3	700.5 ~ 714.5	0.1393	0.1138
5	701.5 ~ 713.5	0.1352	0.1127
10	704.0 ~ 711.0	0.1510	0.1143

LTE Band 13		QPSK	16QAM
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Maximum ERP(W)
5	779.5 ~ 784.5	0.1327	0.1009
10	782.0	0.1337	0.1026

LTE Band 17		QPSK	16QAM
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Maximum ERP(W)
5	706.5 ~ 713.5	0.1387	0.1138
10	709.0 ~ 711.0	0.1449	0.1148

LTE Band 66		QPSK	16QAM
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Maximum EIRP(W)
1.4	1710.7 ~ 1779.3	0.4365	0.3733
3	1711.5 ~ 1778.5	0.4385	0.3656
5	1712.5 ~ 1777.5	0.4295	0.3715
10	1715.0 ~ 1775.0	0.4406	0.3741
15	1717.5 ~ 1772.5	0.4416	0.3715
20	1720.0 ~ 1770.0	0.4667	0.3776

LTE Band 71		QPSK	16QAM
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Maximum ERP(W)
5	665.5 ~ 695.5	0.1365	0.1114
10	668.0 ~ 693.0	0.1355	0.1172
15	670.5 ~ 690.5	0.1365	0.1153
20	673.0 ~ 688.0	0.1435	0.1140

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(H) , 27(F), 27(N)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X-plane)

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QA M	64QA M	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	-	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	-	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	-	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	-	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v	-	v	v	v	v	v	v
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	-	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	-	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	-	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	-	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v	-	v	v	v	v	v	v
Radiated Spurious Emission	2	Worst Case													v	
	5	Worst Case													v	
	12	Worst Case													v	
	13	Worst Case													v	
	66	Worst Case													v	
	71	Worst Case													v	
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. LTE Band 66 overlaps the entire frequency range of LTE Band 4. Therefore, the test results provided in this report covers Band 66 as well as Band 4. 5. LTE Band 12 overlaps the entire frequency range of LTE Band 17. Therefore, the test results provided in this report covers Band 12 as well as Band 17.															

2.2 Connection Diagram of Test System

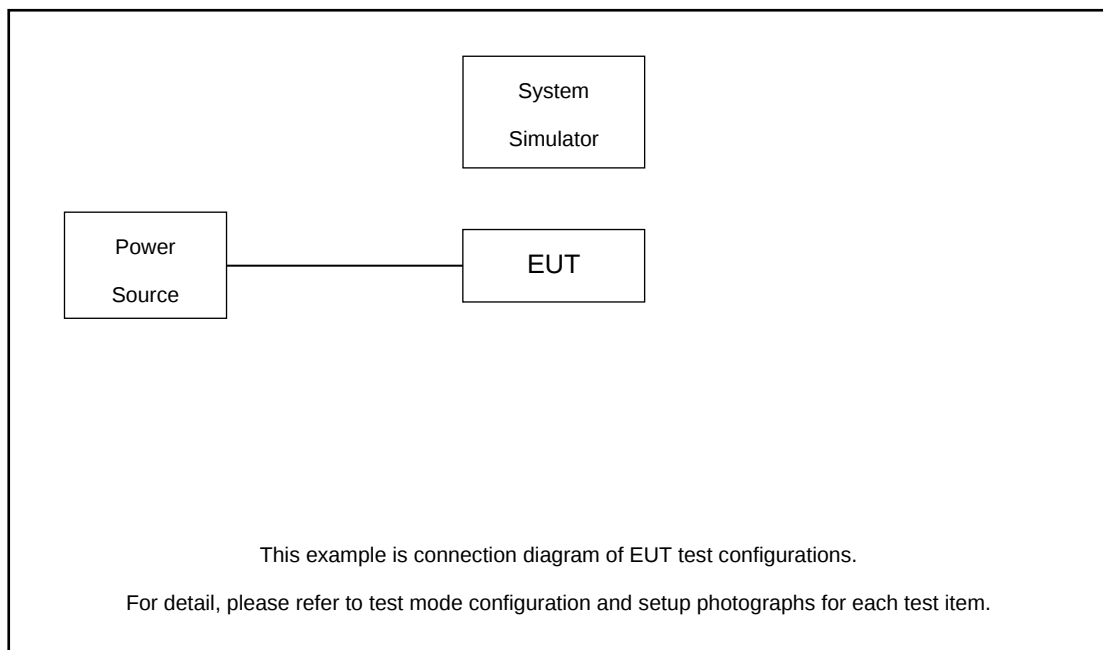

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	AC Adapter	N/A	ADS-65HI-19A-224065E	N/A	N/A	N/A



2.4 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3

LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23230	-
	Frequency	-	782	-
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5



LTE Band 17 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23780	23790	23800
	Frequency	709	710	711
5	Channel	23755	23790	23825
	Frequency	706.5	710	713.5

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3

LTE Band 71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	133222	133322	133372
	Frequency	673.0	680.5	688.0
15	Channel	133197	133297	133397
	Frequency	670.5	680.5	690.5
10	Channel	133172	133272	133422
	Frequency	668.0	678.0	693.0
5	Channel	133147	133247	133447
	Frequency	665.5	675.5	695.5


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12, Band 13 and Band 17 and Band 71.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4 and Band 66.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

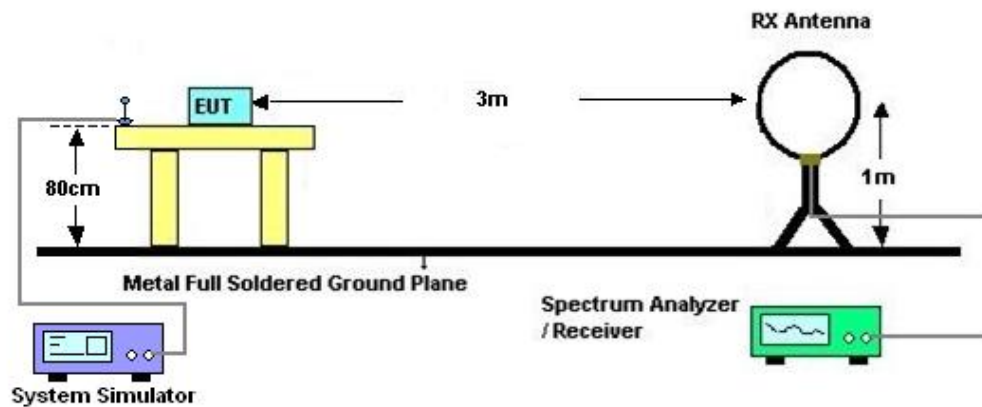

4.2.2 For radiated test from 30MHz to 1GHz

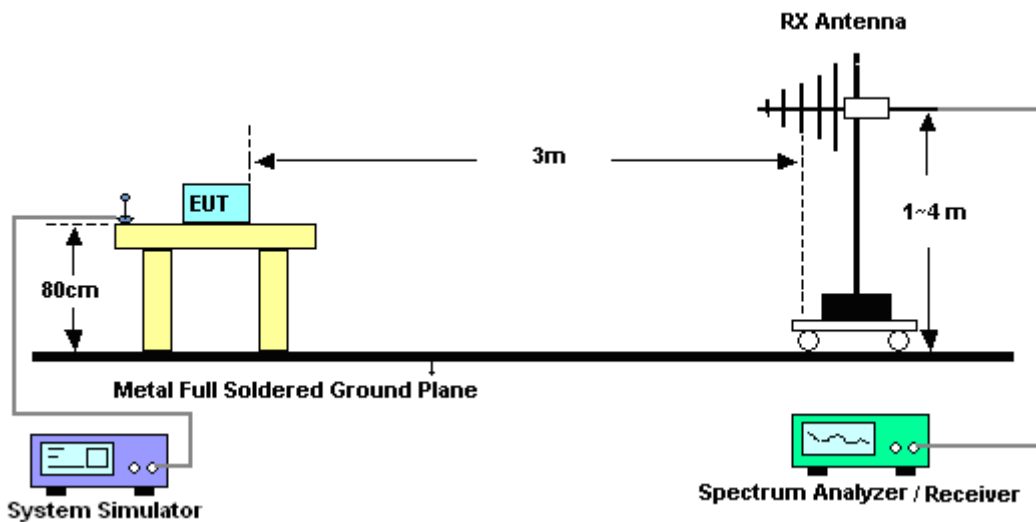

4.2.3 For radiated test above 1GHz

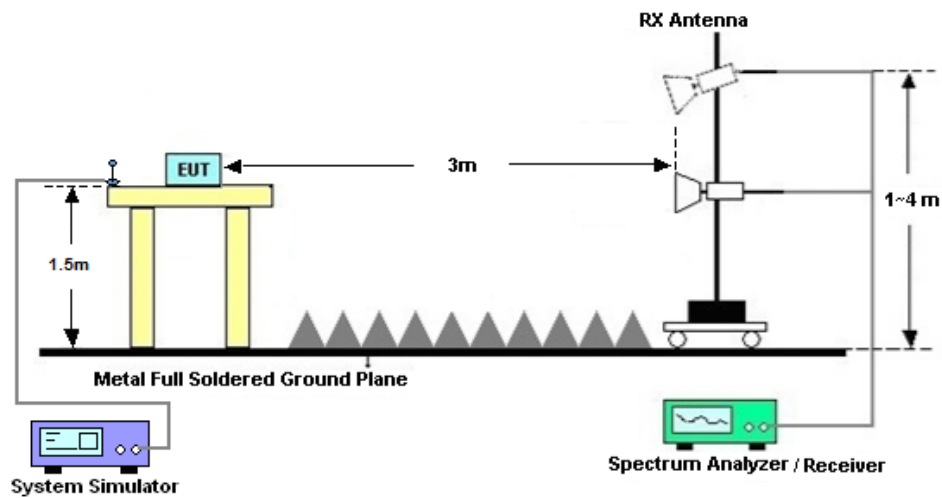

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jun. 12, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Jun. 12, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Jun. 13, 2024	Jul. 06, 2024	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Jun. 13, 2024	Jul. 27, 2024	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Jun. 13, 2024	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Jun. 13, 2024	Jul. 07, 2024	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 07, 2023	Jun. 13, 2024	Jul. 06, 2024	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Jun. 13, 2024	Apr. 08, 2025	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2023	Jun. 13, 2024	Oct. 17, 2024	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Jun. 13, 2024	Oct. 17, 2024	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2023	Jun. 13, 2024	Oct. 17, 2024	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jun. 13, 2024	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jun. 13, 2024	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 1.34 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	± 2.47 dB
---	---------------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	± 3.31 dB
---	---------------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	± 3.72 dB
---	---------------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and ERP/EIRP

LTE Band 2-Ant 3:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				18700	18900	19100			
Frequency (MHz)				1860	1880	1900	L	M	H
20	QPSK	1	0	23.11	22.85	22.67	0.3475	0.3273	0.3141
20	QPSK	1	49	23.30	23.03	22.76	0.3631	0.3412	0.3206
20	QPSK	1	99	22.66	22.35	22.63	0.3133	0.2917	0.3112
20	QPSK	50	0	22.18	21.84	21.74	0.2805	0.2594	0.2535
20	QPSK	50	24	22.10	21.81	21.69	0.2754	0.2576	0.2506
20	QPSK	50	50	21.97	21.65	21.72	0.2673	0.2483	0.2523
20	QPSK	100	0	22.10	21.83	21.73	0.2754	0.2588	0.2529
20	16QAM	1	0	22.17	22.04	21.68	0.2799	0.2716	0.2500
Channel				18675	18900	19125	EIRP(W)		
Frequency (MHz)				1857.5	1880	1902.5	L	M	H
15	QPSK	1	0	23.14	22.75	22.63	0.3499	0.3199	0.3112
15	16QAM	1	0	22.07	22.03	21.62	0.2735	0.2710	0.2466
Channel				18650	18900	19150	EIRP(W)		
Frequency (MHz)				1855	1880	1905	L	M	H
10	QPSK	1	0	23.13	22.78	22.61	0.3491	0.3221	0.3097
10	16QAM	1	0	22.05	21.91	21.64	0.2723	0.2636	0.2477
Channel				18625	18900	19175	EIRP(W)		
Frequency (MHz)				1852.5	1880	1907.5	L	M	H
5	QPSK	1	0	23.14	22.73	22.53	0.3499	0.3184	0.3041
5	16QAM	1	0	22.12	21.92	21.61	0.2767	0.2642	0.2460
Channel				18615	18900	19185	EIRP(W)		
Frequency (MHz)				1851.5	1880	1908.5	L	M	H
3	QPSK	1	0	23.10	22.71	22.63	0.3467	0.3170	0.3112
3	16QAM	1	0	22.06	22.01	21.64	0.2729	0.2698	0.2477
Channel				18607	18900	19193	EIRP(W)		
Frequency (MHz)				1850.7	1880	1909.3	L	M	H
1.4	QPSK	1	0	23.12	22.84	22.52	0.3483	0.3266	0.3034
1.4	16QAM	1	0	22.13	21.98	21.59	0.2773	0.2679	0.2449



LTE Band 4-Ant 1:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				20050	20175	20300			
Frequency (MHz)				1720	1732.5	1745	L	M	H
20	QPSK	1	0	22.97	22.58	22.62	0.4550	0.4159	0.4198
20	QPSK	1	49	23.02	22.97	22.76	0.4603	0.4550	0.4335
20	QPSK	1	99	22.47	22.56	22.26	0.4055	0.4140	0.3864
20	QPSK	50	0	22.15	21.94	21.84	0.3767	0.3589	0.3508
20	QPSK	50	24	22.05	21.91	21.66	0.3681	0.3565	0.3365
20	QPSK	50	50	21.87	21.72	21.54	0.3532	0.3412	0.3273
20	QPSK	100	0	21.98	21.81	21.71	0.3622	0.3483	0.3404
20	16QAM	1	0	22.00	21.83	21.97	0.3639	0.3499	0.3614
Channel				20025	20175	20325	EIRP(W)		
Frequency (MHz)				1717.5	1732.5	1747.5	L	M	H
15	QPSK	1	0	22.85	22.46	22.51	0.4426	0.4046	0.4093
15	16QAM	1	0	21.86	21.74	21.93	0.3524	0.3428	0.3581
Channel				20000	20175	20350	EIRP(W)		
Frequency (MHz)				1715	1732.5	1750	L	M	H
10	QPSK	1	0	22.93	22.51	22.49	0.4508	0.4093	0.4074
10	16QAM	1	0	21.90	21.80	21.88	0.3556	0.3475	0.3540
Channel				19975	20175	20375	EIRP(W)		
Frequency (MHz)				1712.5	1732.5	1752.5	L	M	H
5	QPSK	1	0	22.92	22.55	22.55	0.4498	0.4130	0.4130
5	16QAM	1	0	21.92	21.68	21.89	0.3573	0.3381	0.3548
Channel				19965	20175	20385	EIRP(W)		
Frequency (MHz)				1711.5	1732.5	1753.5	L	M	H
3	QPSK	1	0	22.83	22.44	22.47	0.4406	0.4027	0.4055
3	16QAM	1	0	21.90	21.82	21.95	0.3556	0.3491	0.3597
Channel				19950	20175	20393	EIRP(W)		
Frequency (MHz)				1710	1732.5	1754.3	L	M	H
1.4	QPSK	1	0	22.83	22.57	22.52	0.4406	0.4150	0.4102
1.4	16QAM	1	0	21.72	21.68	21.58	0.3412	0.3381	0.3304



LTE Band 5-Ant 1:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				20450	20525	20600			
Frequency (MHz)				829	836.5	844	L	M	H
10	QPSK	1	0	22.33	22.41	22.41	0.1416	0.1442	0.1442
10	QPSK	1	25	22.35	22.44	22.42	0.1422	0.1452	0.1445
10	QPSK	1	49	22.29	22.31	22.33	0.1403	0.1409	0.1416
10	QPSK	25	0	21.37	21.50	21.35	0.1135	0.1169	0.1130
10	QPSK	25	12	21.31	21.34	21.31	0.1119	0.1127	0.1119
10	QPSK	25	25	21.33	21.32	21.33	0.1125	0.1122	0.1125
10	QPSK	50	0	21.39	21.43	21.33	0.1140	0.1151	0.1125
10	16QAM	1	0	21.07	21.21	21.14	0.1059	0.1094	0.1076
Channel				20425	20525	20625	ERP(W)		
Frequency (MHz)				826.5	836.5	846.5	L	M	H
5	QPSK	1	0	22.24	22.27	22.40	0.1387	0.1396	0.1439
5	16QAM	1	0	21.03	21.16	21.13	0.1050	0.1081	0.1074
Channel				20415	20525	20635	ERP(W)		
Frequency (MHz)				825.5	836.5	847.5	L	M	H
3	QPSK	1	0	22.20	22.29	22.30	0.1374	0.1403	0.1406
3	16QAM	1	0	21.06	21.11	21.03	0.1057	0.1069	0.1050
Channel				20407	20525	20643	ERP(W)		
Frequency (MHz)				824.7	836.5	848.3	L	M	H
1.4	QPSK	1	0	22.31	22.30	22.39	0.1409	0.1406	0.1435
1.4	16QAM	1	0	21.01	21.07	21.04	0.1045	0.1059	0.1052



LTE Band 12-Ant 3:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23060	23095	23130			
Frequency (MHz)				704	707.5	711	L	M	H
10	QPSK	1	0	22.36	22.45	22.50	0.1352	0.1380	0.1396
10	QPSK	1	25	22.55	22.84	22.58	0.1413	0.1510	0.1422
10	QPSK	1	49	22.54	22.40	22.19	0.1409	0.1365	0.1300
10	QPSK	25	0	21.67	21.85	21.70	0.1153	0.1202	0.1161
10	QPSK	25	12	21.61	21.82	21.58	0.1138	0.1194	0.1130
10	QPSK	25	25	21.60	21.75	21.56	0.1135	0.1175	0.1125
10	QPSK	50	0	21.58	21.79	21.69	0.1130	0.1186	0.1159
10	16QAM	1	0	21.28	21.33	21.63	0.1054	0.1067	0.1143
Channel				23035	23095	23155	ERP(W)		
Frequency (MHz)				701.5	707.5	713.5	L	M	H
5	QPSK	1	0	22.21	22.35	22.36	0.1306	0.1349	0.1352
5	16QAM	1	0	21.17	21.10	21.57	0.1028	0.1012	0.1127
Channel				23025	23095	23165	ERP(W)		
Frequency (MHz)				700.5	707.5	714.5	L	M	H
3	QPSK	1	0	22.29	22.25	22.49	0.1330	0.1318	0.1393
3	16QAM	1	0	21.26	21.17	21.61	0.1050	0.1028	0.1138
Channel				23017	23095	23173	ERP(W)		
Frequency (MHz)				699.7	707.5	715.3	L	M	H
1.4	QPSK	1	0	22.29	22.38	22.49	0.1330	0.1358	0.1393
1.4	16QAM	1	0	21.25	21.10	21.62	0.1047	0.1012	0.1140



LTE Band 13-Ant 3:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23230					
Frequency (MHz)				782				M	
10	QPSK	1	0		22.29			0.1330	
10	QPSK	1	25		22.31			0.1337	
10	QPSK	1	49		22.27			0.1324	
10	QPSK	25	0		21.55			0.1122	
10	QPSK	25	12		21.50			0.1109	
10	QPSK	25	25		21.46			0.1099	
10	QPSK	50	0		21.47			0.1102	
10	16QAM	1	0		21.16			0.1026	
Channel				23205	23230	23255	ERP(W)		
Frequency (MHz)				779.5	782	784.5	L	M	H
5	QPSK	1	0	22.25	22.28	22.22	0.1318	0.1327	0.1309
5	16QAM	1	0	21.08	21.06	21.09	0.1007	0.1002	0.1009

LTE Band 17-Ant 3:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23780	23790	23800			
Frequency (MHz)				709	710	711	L	M	H
10	QPSK	1	0	22.39	22.58	22.51	0.1361	0.1422	0.1400
10	QPSK	1	25	22.66	22.60	22.59	0.1449	0.1429	0.1426
10	QPSK	1	49	22.58	22.18	22.14	0.1422	0.1297	0.1285
10	QPSK	25	0	21.73	21.64	21.71	0.1169	0.1146	0.1164
10	QPSK	25	12	21.66	21.62	21.60	0.1151	0.1140	0.1135
10	QPSK	25	25	21.58	21.57	21.46	0.1130	0.1127	0.1099
10	QPSK	50	0	21.70	21.67	21.52	0.1161	0.1153	0.1114
10	16QAM	1	0	21.12	21.28	21.65	0.1016	0.1054	0.1148
Channel				23755	23790	23825	ERP(W)		
Frequency (MHz)				706.5	710	713.5	L	M	H
5	QPSK	1	0	22.30	22.47	22.38	0.1334	0.1387	0.1358
5	16QAM	1	0	21.29	21.14	21.61	0.1057	0.1021	0.1138



LTE Band 66-Ant 1:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				132072	132322	132572			
Frequency (MHz)				1720	1745	1770	L	M	H
20	QPSK	1	0	22.87	22.75	22.35	0.4446	0.4325	0.3945
20	QPSK	1	49	23.08	22.93	22.83	0.4667	0.4508	0.4406
20	QPSK	1	99	22.56	22.46	22.71	0.4140	0.4046	0.4285
20	QPSK	50	0	22.12	21.89	21.91	0.3741	0.3548	0.3565
20	QPSK	50	24	22.03	21.63	21.87	0.3664	0.3342	0.3532
20	QPSK	50	50	22.04	21.41	21.86	0.3673	0.3177	0.3524
20	QPSK	100	0	22.11	21.73	21.85	0.3733	0.3420	0.3516
20	16QAM	1	0	22.16	21.71	21.40	0.3776	0.3404	0.3170
Channel				132047	132322	132597	EIRP(W)		
Frequency (MHz)				1717.5	1745	1772.5	L	M	H
15	QPSK	1	0	22.84	22.64	22.21	0.4416	0.4217	0.3819
15	16QAM	1	0	22.09	21.68	21.39	0.3715	0.3381	0.3162
Channel				132022	132322	132622	EIRP(W)		
Frequency (MHz)				1715	1745	1775	L	M	H
10	QPSK	1	0	22.83	22.64	22.20	0.4406	0.4217	0.3811
10	16QAM	1	0	22.12	21.67	21.39	0.3741	0.3373	0.3162
Channel				131997	132322	132647	EIRP(W)		
Frequency (MHz)				1712.5	1745	1777.5	L	M	H
5	QPSK	1	0	22.72	22.63	22.27	0.4295	0.4207	0.3873
5	16QAM	1	0	22.09	21.58	21.27	0.3715	0.3304	0.3076
Channel				131987	132322	132657	EIRP(W)		
Frequency (MHz)				1711.5	1745	1778.5	L	M	H
3	QPSK	1	0	22.81	22.61	22.28	0.4385	0.4188	0.3882
3	16QAM	1	0	22.02	21.68	21.31	0.3656	0.3381	0.3105
Channel				131979	132322	132665	EIRP(W)		
Frequency (MHz)				1710.7	1745	1779.3	L	M	H
1.4	QPSK	1	0	22.79	22.71	22.24	0.4365	0.4285	0.3846
1.4	16QAM	1	0	22.11	21.68	21.32	0.3733	0.3381	0.3112



LTE Band 71-Ant 3:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				133222	133322	133372			
Frequency (MHz)				673	683	688	L	M	H
20	QPSK	1	0	22.42	22.47	22.49	0.1371	0.1387	0.1393
20	QPSK	1	49	22.53	22.62	22.56	0.1406	0.1435	0.1416
20	QPSK	1	99	22.53	22.54	22.16	0.1406	0.1409	0.1291
20	QPSK	50	0	21.59	21.63	21.59	0.1132	0.1143	0.1132
20	QPSK	50	24	21.55	21.58	21.51	0.1122	0.1130	0.1112
20	QPSK	50	50	21.55	21.46	21.54	0.1122	0.1099	0.1119
20	QPSK	100	0	21.53	21.61	21.54	0.1117	0.1138	0.1119
20	16QAM	1	0	21.20	21.00	21.62	0.1035	0.0989	0.1140
Channel				133197	133297	133397	EIRP(W)		
Frequency (MHz)				670.5	680.5	690.5	L	M	H
15	QPSK	1	0	22.30	22.34	22.40	0.1334	0.1346	0.1365
15	16QAM	1	0	21.20	21.08	21.67	0.1035	0.1007	0.1153
Channel				133172	133272	133422	EIRP(W)		
Frequency (MHz)				668	678	693	L	M	H
10	QPSK	1	0	22.34	22.33	22.37	0.1346	0.1343	0.1355
10	16QAM	1	0	21.36	21.06	21.74	0.1074	0.1002	0.1172
Channel				133147	133247	133447	EIRP(W)		
Frequency (MHz)				665.5	675.5	695.5	L	M	H
5	QPSK	1	0	22.37	22.39	22.40	0.1355	0.1361	0.1365
5	16QAM	1	0	21.07	21.05	21.52	0.1005	0.1000	0.1114



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	LiangPing Zhou	Temperature :	22~25°C
		Relative Humidity :	48~52%

Note: Pre-scanned harmonic for the different antennas, we choose the worst antenna mode to perform final test and record in the report.

LTE Band 2 / 20MHz / QPSK for Ant 1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702.18	-58.76	-13	-45.76	-77.22	-65.52	5.82	12.58	H
	5553.27	-50.69	-13	-37.69	-72.97	-56.41	7.28	13.00	H
	7404.36	-52.00	-13	-39.00	-79.06	-55.16	8.32	11.48	H
	3702.18	-61.13	-13	-48.13	-79.49	-67.89	5.82	12.58	V
	5553.27	-55.21	-13	-42.21	-77.67	-60.93	7.28	13.00	V
	7404.36	-54.38	-13	-41.38	-81.46	-57.54	8.32	11.48	V
Middle	3742.18	-57.40	-13	-44.40	-75.98	-64.15	5.85	12.60	H
	5613.27	-49.98	-13	-36.98	-72.37	-55.78	7.30	13.10	H
	7484.36	-51.14	-13	-38.14	-78.07	-54.29	8.35	11.50	H
	3742.18	-60.84	-13	-47.84	-79.34	-67.59	5.85	12.60	V
	5613.27	-55.20	-13	-42.20	-77.78	-61.00	7.30	13.10	V
	7484.36	-54.49	-13	-41.49	-81.41	-57.64	8.35	11.50	V
Highest	3782.18	-58.80	-13	-45.80	-77.52	-65.54	5.88	12.62	H
	5673.27	-46.66	-13	-33.66	-69.97	-52.47	7.32	13.13	H
	7564.36	-52.68	-13	-39.68	-79.38	-55.84	8.38	11.54	H
	3782.18	-60.51	-13	-47.51	-79.2	-67.25	5.88	12.62	V
	5673.27	-53.20	-13	-40.20	-75.99	-59.01	7.32	13.13	V
	7564.36	-55.07	-13	-42.07	-81.74	-58.23	8.38	11.54	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 5 / 10MHz / QPSK for Ant 1									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1649.18	-60.49	-13	-47.49	-70.41	-63.72	3.98	9.36	H
	2473.77	-53.19	-13	-40.19	-67.66	-56.74	4.85	10.55	H
	3298.36	-60.98	-13	-47.98	-77.48	-65.91	5.50	12.58	H
	1649.18	-63.61	-13	-50.61	-73.27	-66.84	3.98	9.36	V
	2473.77	-62.47	-13	-49.47	-76.91	-66.02	4.85	10.55	V
	3298.36	-61.05	-13	-48.05	-77.36	-65.98	5.50	12.58	V
Middle	1664.18	-61.85	-13	-48.85	-71.79	-65.10	4.00	9.40	H
	2496.27	-58.53	-13	-45.53	-72.97	-62.10	4.88	10.60	H
	3328.36	-61.99	-13	-48.99	-78.15	-66.92	5.52	12.60	H
	1664.18	-65.06	-13	-52.06	-74.60	-68.31	4.00	9.40	V
	2496.27	-62.60	-13	-49.60	-77.00	-66.17	4.88	10.60	V
	3328.36	-61.91	-13	-48.91	-77.83	-66.84	5.52	12.60	V
Highest	1679.18	-58.97	-13	-45.97	-68.93	-62.14	4.10	9.42	H
	2518.77	-59.91	-13	-46.91	-74.32	-63.49	4.90	10.63	H
	3358.36	-61.99	-13	-48.99	-78.10	-66.91	5.55	12.62	H
	1679.18	-61.98	-13	-48.98	-71.39	-65.15	4.10	9.42	V
	2518.77	-62.20	-13	-49.20	-76.57	-65.78	4.90	10.63	V
	3358.36	-62.16	-13	-49.16	-78.13	-67.08	5.55	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 12 / 10MHz / QPSK for Ant 1									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1399	-55.43	-13	-42.43	-66.02	-58.66	3.98	9.36	H
	2098.5	-46.64	-13	-33.64	-59.67	-50.19	4.85	10.55	H
	2798	-61.19	-13	-48.19	-77.17	-66.12	5.50	12.58	H
	1399	-57.31	-13	-44.31	-67.47	-60.54	3.98	9.36	V
	2098.5	-56.48	-13	-43.48	-69.46	-60.03	4.85	10.55	V
	2798	-61.25	-13	-48.25	-77.42	-66.18	5.50	12.58	V
Middle	1406	-55.77	-13	-42.77	-66.50	-59.02	4.00	9.40	H
	2109	-59.27	-13	-46.27	-72.31	-62.84	4.88	10.60	H
	2812	-61.47	-13	-48.47	-77.49	-66.40	5.52	12.60	H
	1406	-58.52	-13	-45.52	-68.81	-61.77	4.00	9.40	V
	2109	-60.94	-13	-47.94	-73.93	-64.51	4.88	10.60	V
	2812	-61.23	-13	-48.23	-77.44	-66.16	5.52	12.60	V
Highest	1413	-53.99	-13	-40.99	-64.74	-57.16	4.10	9.42	H
	2119.5	-47.02	-13	-34.02	-60.39	-50.60	4.90	10.63	H
	2826	-61.54	-13	-48.54	-77.57	-66.46	5.55	12.62	H
	1413	-55.88	-13	-42.88	-66.19	-59.05	4.10	9.42	V
	2119.5	-56.47	-13	-43.47	-69.80	-60.05	4.90	10.63	V
	2826	-61.33	-13	-48.33	-77.55	-66.25	5.55	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 13 / 5MHz / QPSK for Ant 1									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1554.5	-60.36	-13	-47.36	-70.37	-63.59	3.98	9.36	H
	2331.75	-39.97	-13	-26.97	-54.77	-43.52	4.85	10.55	H
	3109	-60.30	-13	-47.30	-77.33	-65.23	5.50	12.58	H
	1554.5	-61.93	-13	-48.93	-72.02	-65.16	3.98	9.36	V
	2331.75	-49.91	-13	-36.91	-64.71	-53.46	4.85	10.55	V
	3109	-60.39	-13	-47.39	-77.48	-65.32	5.50	12.58	V
Middle	1559.5	-64.85	-42.15	-22.70	-74.87	-68.10	4.00	9.40	H
	2339.25	-39.04	-13	-26.04	-53.79	-42.61	4.88	10.60	H
	3119	-60.21	-13	-47.21	-77.34	-65.14	5.52	12.60	H
	1559.5	-64.54	-42.15	-22.39	-74.64	-67.79	4.00	9.40	V
	2339.25	-48.88	-13	-35.88	-63.63	-52.45	4.88	10.60	V
	3119	-60.24	-13	-47.24	-77.41	-65.17	5.52	12.60	V
Highest	1564.5	-61.93	-42.15	-19.78	-71.95	-65.10	4.10	9.42	H
	2346.75	-37.79	-13	-24.79	-52.56	-41.37	4.90	10.63	H
	3129	-60.35	-13	-47.35	-77.48	-65.27	5.55	12.62	H
	1564.5	-61.62	-42.15	-19.47	-71.72	-64.79	4.10	9.42	V
	2346.75	-48.50	-13	-35.50	-63.27	-52.08	4.90	10.63	V
	3129	-60.49	-13	-47.49	-77.66	-65.41	5.55	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 13 / 10MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1559.5	-64.46	-42.15	-22.31	-74.48	-67.71	4.00	9.40	H
	2339.25	-48.55	-13	-35.55	-63.30	-52.12	4.88	10.60	H
	3119	-60.56	-13	-47.56	-77.69	-65.49	5.52	12.60	H
	1559.5	-64.83	-42.15	-22.68	-74.93	-68.08	4.00	9.40	V
	2339.25	-57.61	-13	-44.61	-72.36	-61.18	4.88	10.60	V
	3119	-60.29	-13	-47.29	-77.46	-65.22	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 66 / 20MHz / QPSK for Ant 1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3422	-48.26	-13	-35.26	-64.75	-55.14	5.60	12.48	H
	5133	-46.79	-13	-33.79	-68.67	-52.47	7.10	12.78	H
	6844	-54.64	-13	-41.64	-79.85	-58.03	8.38	11.77	H
	3422	-50.97	-13	-37.97	-67.55	-57.85	5.60	12.48	V
	5133	-51.00	-13	-38.00	-73.1	-56.68	7.10	12.78	V
	6844	-55.47	-13	-42.47	-81.18	-58.86	8.38	11.77	V
Middle	3472	-42.38	-13	-29.38	-59.28	-49.23	5.65	12.50	H
	5208	-53.67	-13	-40.67	-75.40	-59.34	7.13	12.80	H
	6944	-52.37	-13	-39.37	-78.29	-55.77	8.40	11.80	H
	3472	-47.34	-13	-34.34	-64.26	-54.19	5.65	12.50	V
	5208	-57.10	-13	-44.10	-79.08	-62.77	7.13	12.80	V
	6944	-55.49	-13	-42.49	-81.88	-58.89	8.40	11.80	V
Highest	3522	-45.74	-13	-32.74	-63.09	-52.58	5.68	12.52	H
	5283	-59.59	-13	-46.59	-81.28	-65.26	7.15	12.82	H
	7044	-53.29	-13	-40.29	-79.69	-56.72	8.42	11.85	H
	3522	-51.49	-13	-38.49	-68.78	-58.33	5.68	12.52	V
	5283	-59.68	-13	-46.68	-81.5	-65.35	7.15	12.82	V
	7044	-55.01	-13	-42.01	-81.84	-58.44	8.42	11.85	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 71 / 20MHz / QPSK for Ant 1									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-56.38	-13	-43.38	-66.28	-59.61	3.98	9.36	H
	1992	-61.21	-13	-48.21	-72.19	-64.76	4.85	10.55	H
	2656	-61.85	-13	-48.85	-76.89	-66.78	5.50	12.58	H
	1328	-60.23	-13	-47.23	-69.77	-63.46	3.98	9.36	V
	1992	-65.27	-13	-52.27	-76.10	-68.82	4.85	10.55	V
	2656	-61.84	-13	-48.84	-76.85	-66.77	5.50	12.58	V
Middle	1343	-58.15	-13	-45.15	-68.21	-61.40	4.00	9.40	H
	2014.5	-51.81	-13	-38.81	-63.17	-55.38	4.88	10.60	H
	2686	-61.76	-13	-48.76	-77.01	-66.69	5.52	12.60	H
	1343	-59.67	-13	-46.67	-69.36	-62.92	4.00	9.40	V
	2014.5	-61.25	-13	-48.25	-72.50	-64.82	4.88	10.60	V
	2686	-61.81	-13	-48.81	-77.08	-66.74	5.52	12.60	V
Highest	1358	-53.78	-13	-40.78	-64.01	-56.95	4.10	9.42	H
	2037	-48.38	-13	-35.38	-60.08	-51.96	4.90	10.63	H
	2716	-61.64	-13	-48.64	-77.10	-66.56	5.55	12.62	H
	1358	-56.19	-13	-43.19	-66.03	-59.36	4.10	9.42	V
	2037	-57.14	-13	-44.14	-68.74	-60.72	4.90	10.63	V
	2716	-61.66	-13	-48.66	-77.18	-66.58	5.55	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.