



**RADIATED SPURIOUS EMISSIONS PORTIONS OF  
FCC CFR47 PART 24 SUBPART E  
CERTIFICATION TEST REPORT**

**FOR**

**CDMA MOBILE PHONE SINGLE BAND +BT2.1+WIFI (2.4GHZ)**

**MODEL NUMBER: C5155**

**FCC ID: V65C5155A1**

**REPORT NUMBER: 12U14357-1, Revision A**

**ISSUE DATE: MAY 14, 2012**

*Prepared for*

**KYOCERA COMMUNICATIONS, INC.  
8611 BALBOA AVENUE  
SAN DIEGO, CA 92123, USA**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (UL CCS)  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
---	04/05/12	Initial Issue	T. Chan
A	05/14/12	Updated FCC ID	A. Zaffar



# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** KYOCERA COMMUNICATIONS, INC.  
9520 TOWNE CENTER DRIVE  
SAN DIEGO, CA 92121, USA

**EUT DESCRIPTION:** CDMA Mobile Phone Single Band +BT2.1 + WIFI (2.4GHz)

**MODEL:** C5155

**SERIAL NUMBER:** 268435457816726151

**DATE TESTED:** APRIL 05, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 24E	PASS (Radiated Portion)

Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For UL CCS By:

Tested By:



THU CHAN  
ENGINEERING MANAGER  
UL CCS

CHIN PANG  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, and FCC CFR 47 Part 24.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a CDMA Mobile Phone Single Band +BT2.1+WIFI (2.4GHz) that is manufactured by Kyocera Communications, Inc.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter maximum average EIRP output powers are as follows:

Part 24 PCS Band

Channel	Modulation	EIRP	
		dBm	mW
1851.25	CDMA2000	27.89	615.2
1880		29.32	855.1
1908.75		28.82	762.1

### 5.3. SOFTWARE AND FIRMWARE

The EUT is linked with Agilent Communication Test Set.

### 5.4. WORST-CASE CONFIGURATION AND MODE

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT was investigated on X, Y, Z, closed and opened Positions with and without AC Adapter and headset and the worst position was determined to be at Y position with AC adapter and headset.

## PROCEDURE USED TO ESTABLISH TEST SIGNAL

### **3G-CDMA2000 1xRTT**

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobil Test	B.10.11, L

#### 1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 55
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps  
> R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 65535  
> Network ID (NID) > 0

Once "Active Cell" show "Connected " then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

Worst-case Measurement Result @ Low, Middle and High Channel

Worst-case Measurement Result for Low, Middle and High Channel under Radio Configuration RC3 and Service Option 55.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Kyocera	SCP-3QADT	SSW-2001	N/A
Headset	N/A	N/A	N/A	N/A

### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	Mini-USB	Un-shielded	1.9m	N/A
2	Mic	1	Jack	Un-shielded	1.5m	Volume Control on Cable

### TEST SETUP

The EUT is a CDMA phone and is tested as a standalone configuration. Communications Test Set is used to link the device under test.



**SETUP DIAGRAM FOR TESTS**

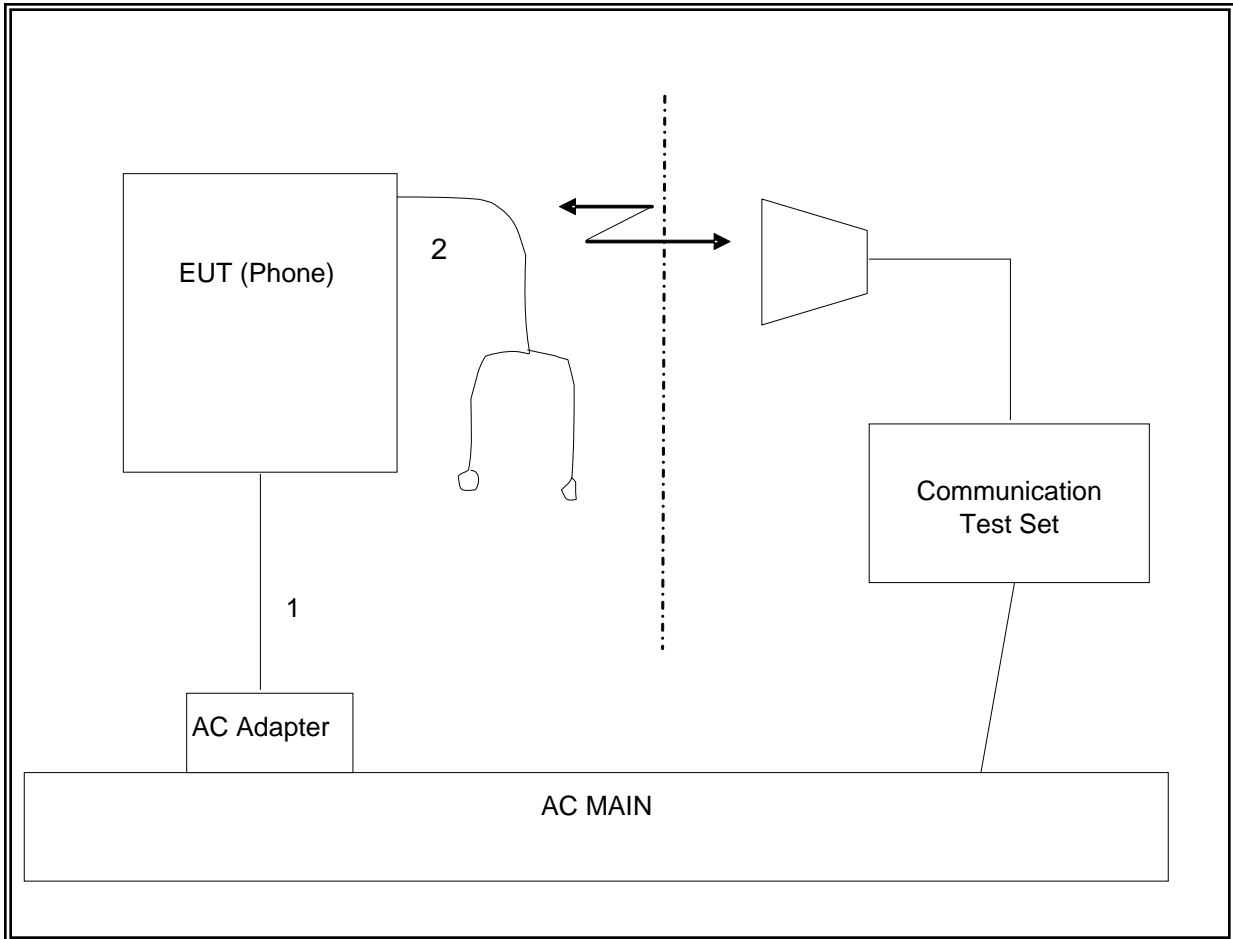

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Communication Test Set	Agilent / HP	E5515C	C01086	06/17/12
Antenna, Horn, 18 GHz	EMCO	3115	C00783	06/29/12
Antenna, Horn, 18 GHz	EMCO	3115	C00872	06/29/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	07/14/12
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01161	06/07/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	11/11/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	03/23/13
Dipole	Speag	D900V2	NA	04/15/13
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Signal Generator, 20 GHz	Agilent / HP	83732B	C00774	07/14/12

## **7. LIMITS AND RESULTS**

### **7.1. RADIATED OUTPUT POWER**

#### **LIMITS**

24.232(b) & RSS133 § 6.4 Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

#### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 2.2.17

#### **RESULTS**

**PCS OUTPUT POWER (EIRP)**

High Frequency Fundamental Measurement Compliance Certification Services Chamber A								
<b>Company:</b>		KYOCERA						
<b>Project #:</b>		12U14357						
<b>Date:</b>		04/05/12						
<b>Test Engineer:</b>		Chin Pang						
<b>Configuration:</b>		EUT with AC Adapter and Headset						
<b>Mode:</b>		TX, PCS BAND CDMA MODE						
<b>Test Equipment:</b>								
Receiving: Horn T73, and Camber A SMA Cables								
Substitution: Horn T60 Substitution, 4ft SMA Cable (SN # 245182002) Warehouse								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.851	20.1	V	0.85	8.62	27.89	33.0	-5.1	
1.851	15.7	H	0.85	8.47	23.31	33.0	-9.7	
Mid Ch								
1.880	21.7	V	0.85	8.46	29.32	33.0	-3.7	
1.880	15.7	H	0.85	8.36	23.23	33.0	-9.8	
High Ch								
1.909	21.4	V	0.85	8.30	28.82	33.0	-4.2	
1.909	16.0	H	0.85	8.25	23.37	33.0	-9.6	
Rev. 3.17.11								

## **7.2. FIELD STRENGTH OF SPURIOUS RADIATION**

### **LIMIT**

§24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 24.238 (b)(g)(1)(2)

### **RESULTS**

**PCS SPURIOUS & HARMONIC (EIRP)**

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b>		KYOCERA							
<b>Project #:</b>		12U14357							
<b>Date:</b>		04/05/12							
<b>Test Engineer:</b>		Chin Pang							
<b>Configuration:</b>		EUT with Headset and AC Adapter							
<b>Mode:</b>		TX, PCS Band CDMA Mode							
<b>Chamber</b>		<b>Pre-amplifier</b>		<b>Filter</b>		<b>Limit</b>			
5m Chamber A		T144 8449B		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1851.25MHz</b>									
3.703	-5.1	V	3.0	36.8	1.0	-40.9	-13.0	-27.9	
5.554	-3.7	V	3.0	36.3	1.0	-39.0	-13.0	-26.0	
7.405	-7.2	V	3.0	36.6	1.0	-42.7	-13.0	-29.7	
3.703	-6.0	H	3.0	36.8	1.0	-41.8	-13.0	-28.8	
5.554	-8.1	H	3.0	36.3	1.0	-43.3	-13.0	-30.3	
7.405	-7.1	H	3.0	36.6	1.0	-42.7	-13.0	-29.7	
<b>Mid Ch, 1880.00MHz</b>									
3.760	-4.9	V	3.0	36.8	1.0	-40.7	-13.0	-27.7	
5.640	-0.6	V	3.0	36.3	1.0	-35.9	-13.0	-22.9	
7.520	-8.0	V	3.0	36.6	1.0	-43.6	-13.0	-30.6	
3.760	-8.8	H	3.0	36.8	1.0	-44.6	-13.0	-31.6	
5.640	-7.9	H	3.0	36.3	1.0	-43.2	-13.0	-30.2	
7.520	-7.9	H	3.0	36.6	1.0	-43.5	-13.0	-30.5	
<b>High Ch, 1908.75MHz</b>									
3.818	-5.3	V	3.0	36.7	1.0	-41.0	-13.0	-28.0	
5.726	-1.5	V	3.0	36.3	1.0	-36.8	-13.0	-23.8	
7.635	-7.9	V	3.0	36.6	1.0	-43.5	-13.0	-30.5	
3.818	-9.7	H	3.0	36.7	1.0	-45.4	-13.0	-32.4	
5.726	-6.8	H	3.0	36.3	1.0	-42.1	-13.0	-29.1	
7.635	-8.8	H	3.0	36.6	1.0	-44.4	-13.0	-31.4	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									