



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

RF Emissions Test Report

FCC Part 15.247
(WLAN)

For

Kyocera Corporation
c/o Kyocera Communication Inc.

Product:	CDMA Mobile Phone
Model:	C5215

TABLE OF CONTENTS

1 SUMMARY OF TESTING 4

2 EQUIPMENT UNDER TEST INFORMATION..... 4

3 TEST FACILITIES..... 5

4 TEST SETUP 5

5 ANTENNA REQUIREMENTS 6

 5.1 Requirements 6

 5.2 Antenna Information 6

6 6dB Bandwidth..... 7

 6.1 Test Configuration 7

 6.2 Results and Limits: 7

7 Peak OUTPUT POWER..... 11

 7.1 Test Configuration 11

 7.2 Maximum Peak Output Power Results and Limits..... 11

8 POWER SPECTRAL DENSITY (PSD)..... 15

 8.1 Test Configuration 15

 8.2 Results and Limits: 15

9 BANDEDGE..... 19

 9.1 Test Configuration 19

 9.2 Results: Bandedge 19

10 SPURIOUS RF CONDUCTED EMISSIONS 23

10.1 Test Configuration 23

10.2 Results: Conducted Spurious Emissions..... 23

11 AC POWER LINE CONDUCTED EMISSIONS..... 33

11.1 Test Configuration & Results 33

12 RADIATED EMISSIONS 33

12.1 Test Configuration & Results 33

13 SAR TEST 33

13.1 Test Configuration & Results 33

14 TEST EQUIPMENT..... 33



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

ATTESTATION

The tested device complies with the requirements in respect of all parameters subject to the test.
 The test results and statements relate only to the items tested.
 The test equipment used was suitable for the tests performed and within manufacturer’s published specifications and operating parameters.
 The test methods were consistent with the methods described in the relevant standards.

Product:	CDMA Cellular Phone with Bluetooth and WLAN
Model #:	C5215
FCC ID:	V65C5215
Tested in accordance with:	FCC Part 15.247
Test performed by:	Comptest Services LLC
Test Requested by:	KYOCERA Corporation C/o KYOCERA Communication Inc. 8611 Balboa Avenue San Diego, CA 92123 United States
Date of Test:	March 25 – April 5, 2013

Responsible Engineer

Reviewed and approved by:

Benjamin Nguyen

Kelly Hill

Benjamin Nguyen
Test Engineer

Kelly Hill
Quality Manager

1 SUMMARY OF TESTING

Section #	Rule Part	Test Description	Verdict
6	FCC § 15.247 a2, IC RSS-210 §A8.2 (1)	6 dB Bandwidth	Pass
7	FCC § 15.247 b3, IC RSS-210 §8.4(4)	Output Power	Pass
8	FCC § 15.247 e, IC RSS-210 §8.2(2)	Power Spectral Density	Pass
9	FCC § 15.247 d, IC RSS-210 §A8.5	Band-edge Compliance of Conducted Emissions	Pass
10	FCC § 15.247 d, IC RSS-210 §A8.5	Spurious RF Conducted Emissions	Pass
11	FCC § 15.107 § 15.207, IC RSS-210 §6.6	AC Power Line Conducted Emissions	Pass
12	FCC § 15.109, § 15.209, IC RSS-210 §A2.9(2)	Spurious Radiated Emissions	Pass
13	FCC § 2.1091/2.1093	SAR Tests	Pass

2 EQUIPMENT UNDER TEST INFORMATION

EUT Serial Number:	268435457816731604
Type:	<input type="checkbox"/> Prototype, <input checked="" type="checkbox"/> Pre-Production, <input type="checkbox"/> Production
Equipment Category:	Portable
TX Frequency (MHz):	2412 to 2462
Modulation Technology:	DSSS, OFDM
Modulation:	DSSS: CCK, DQPSK, DBPSK OFDM: 64QAM, 16QAM, QPSK, BPSK
Channel Numbers:	11
Mode/Data Rate:	<input checked="" type="checkbox"/> 802.11b: 11/5/2/1 Mbps <input checked="" type="checkbox"/> 802.11g: 54/48/36/24/18/12/9/6 Mbps <input checked="" type="checkbox"/> 802.11n: 7/6/5/4/3/2/1/0 MCS
Max. Output Power (dBm)	18.05
WLAN Antenna:	Internal
Antenna Gain (dBi):	-1.0 (Peak)


Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

3 TEST FACILITIES

The test sites and measurement facilities used to collect data are located at 8611 Balboa Ave., San Diego, CA 92123, USA

4 TEST SETUP

The WLAN RF output of the equipment under test (EUT) was connected to the input of the spectrum analyzer through a RF cable with a specialized RF connector. The amplitude of the spectrum analyzer is corrected for the cable insertion loss and any other applicable losses. A fully charged battery was used as power supply voltage.

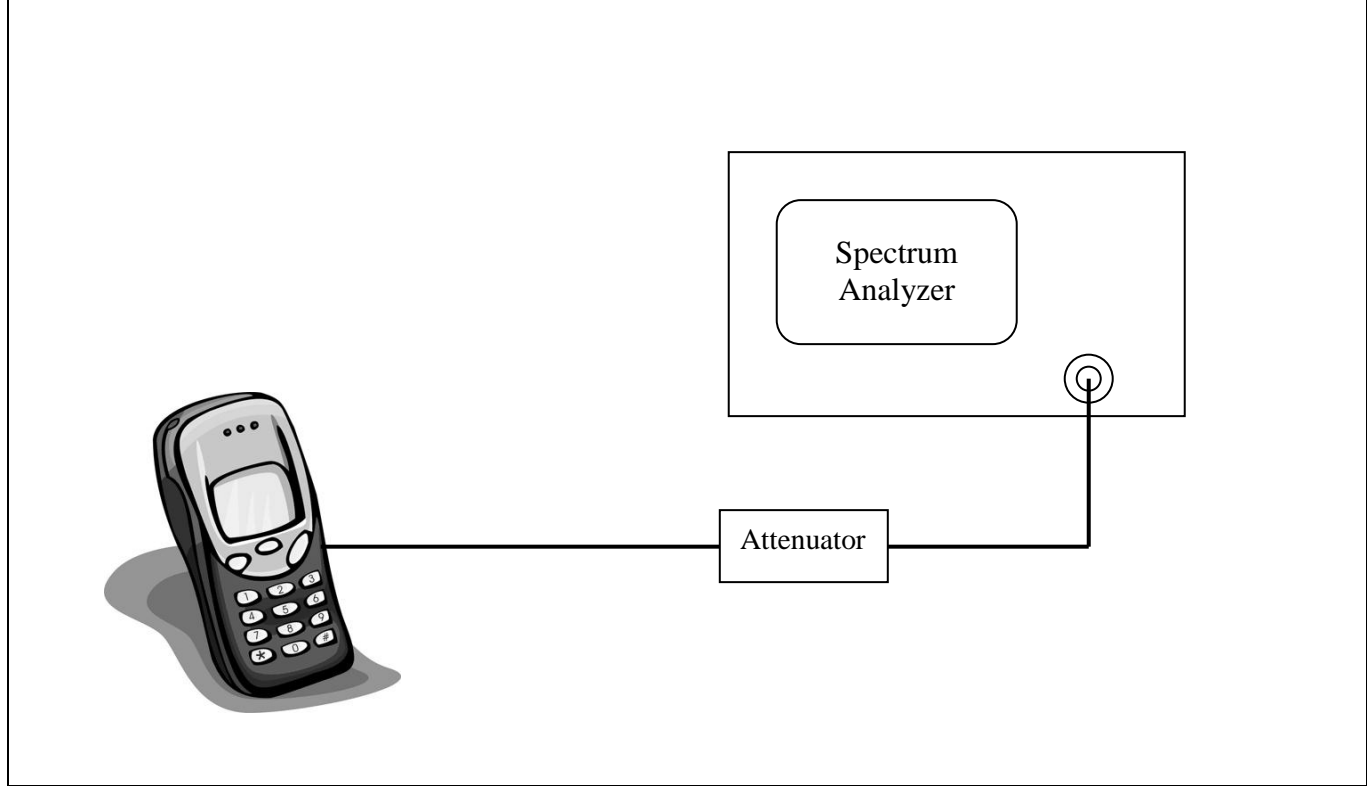

Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

5 ANTENNA REQUIREMENTS

5.1 Requirements

FCC: § 15.203

IC: RSS-210

- 1) For intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- 2) According to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.2 Antenna Information

- a) The Antennas used in this product are permanently attached
 - b) There are no provisions for connection to an external antenna
- This phone unit complies with the requirement of 15.203**

6 6dB BANDWIDTH

6.1 Test Configuration

FCC:	§ 15.247 a2
IC:	RSS-210 §A8.2 (a)
<p>The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low, mid and high channels of transmitter were enabled separately to investigate the 6 dB-bandwidth for each channel. A fully charged battery was used as supply voltage.</p> <p>Spectrum Analyzer Parameters: RBW = 100kHz, VBW = 300kHz, Span=20MHz, Sweep Time = Auto</p> <p>Frequencies of Interest: Spectrum was investigated from 2412 MHz – 2462 MHz.</p>	

6.2 Results and Limits:

Figure	802.11 Mode	Channel	Frequency	Data Rate (Mbps)	Measured BW (MHz)
6-1a	b	1	2412	1	12.96
6-1b		6	2437	1	12.97
6-1c		11	2462	1	13.01
6-2a	g	1	2412	6	16.50
6-2b		6	2437	6	16.53
6-2c		11	2462	6	16.51
6-3a	n	1	2412	6.5/7.2 (MCS0)	17.69
6-3b		6	2437	6.5/7.2 (MCS0)	17.68
6-3c		11	2462	6.5/7.2 (MCS0)	17.71
Limit: >= 500kHz					



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

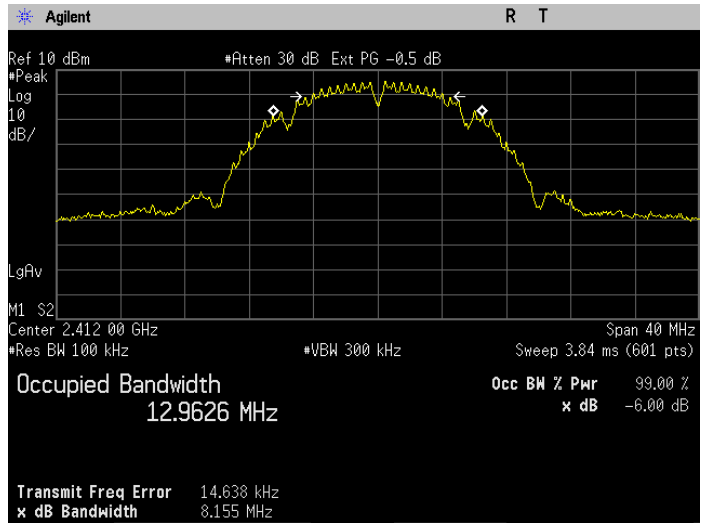


Figure 6-1a: 6 dB Bandwidth, 802.11b 1Mbps, Ch 1.

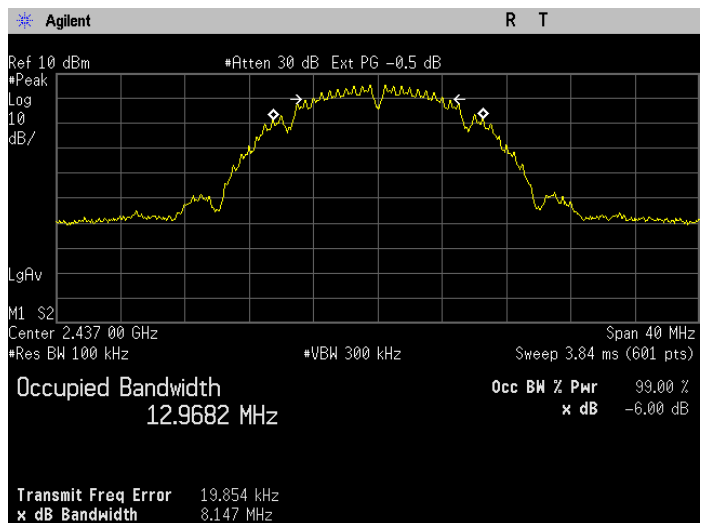


Figure 6-1b: 6 dB Bandwidth, 802.11b 1Mbps, Ch 6.

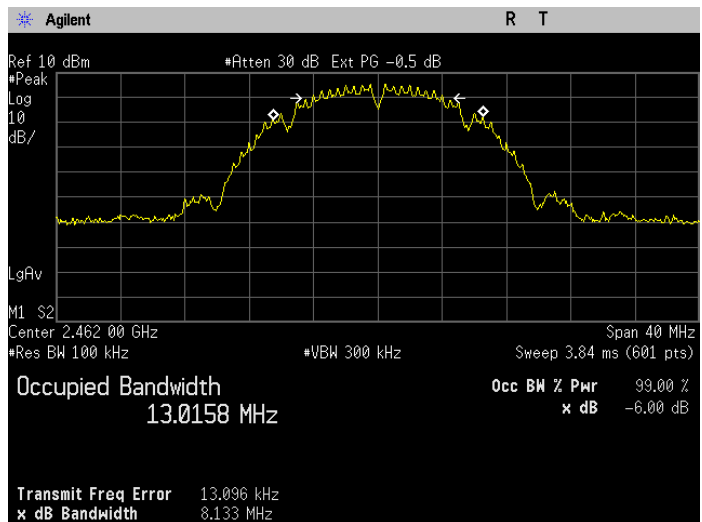


Figure 6-1c: 6 dB Bandwidth, 802.11b 1Mbps, Ch 11.



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

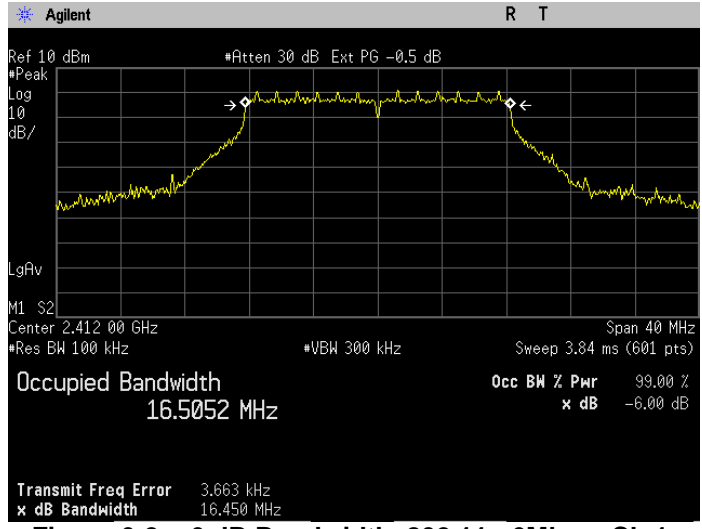


Figure 6-2a: 6 dB Bandwidth, 802.11g 6Mbps, Ch 1.

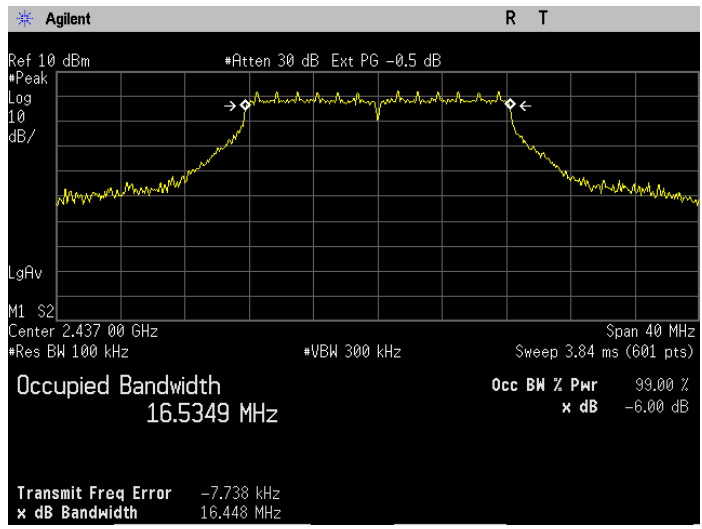


Figure 6-2b: 6 dB Bandwidth, 802.11g 6Mbps, Ch 6.

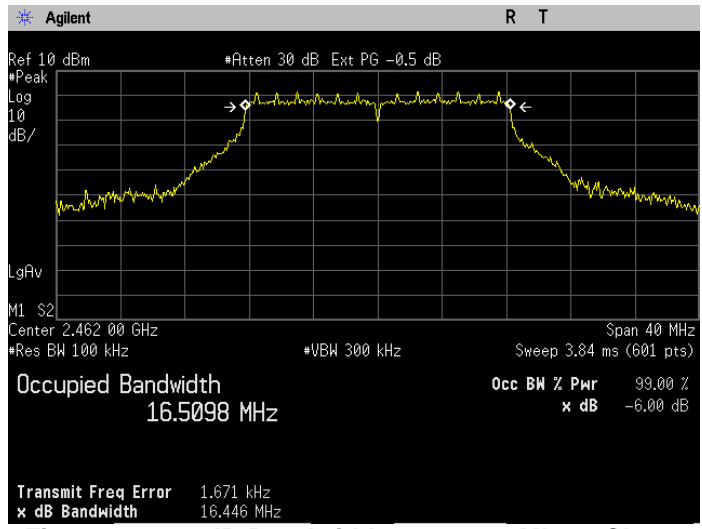


Figure 6-2c: 6 dB Bandwidth, 802.11g 6Mbps, Ch 11.



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

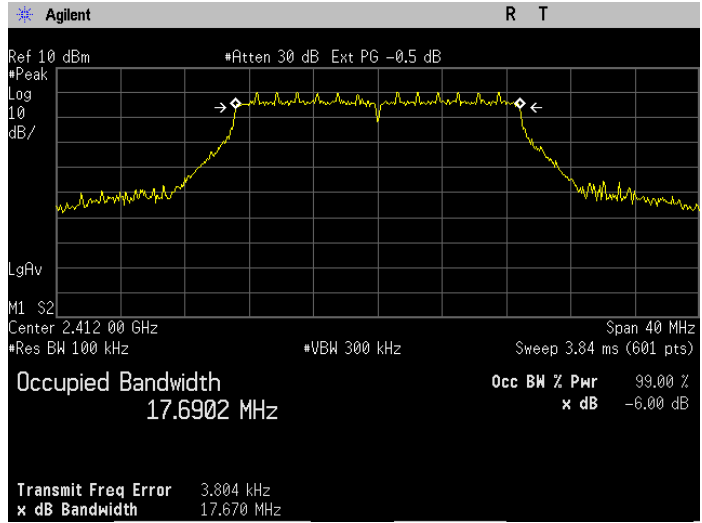


Figure 6-3a: 6 dB Bandwidth, 802.11n MCS0, Ch 1.

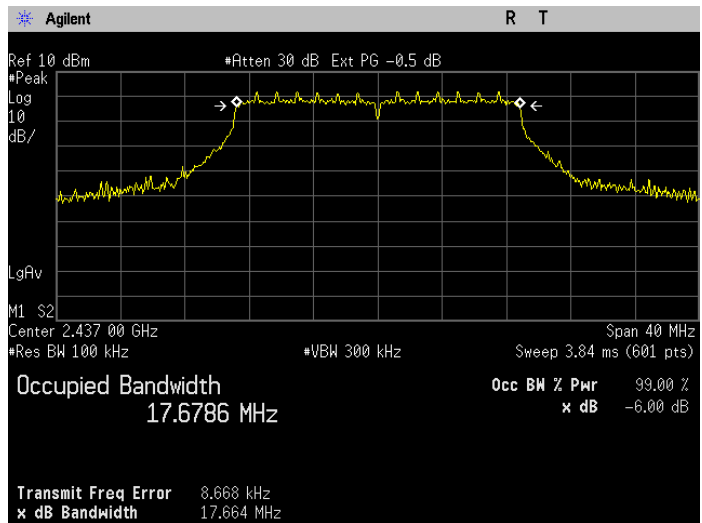


Figure 6-3b: 6 dB Bandwidth, 802.11n MCS0, Ch 6.

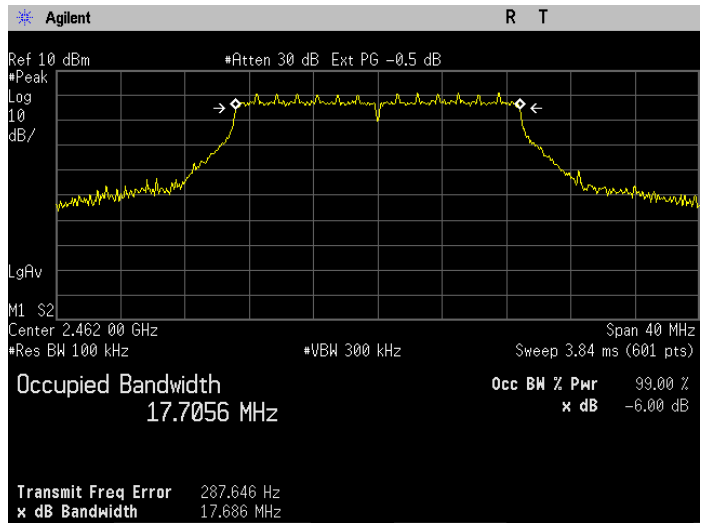


Figure 6-3c: 6 dB Bandwidth, 802.11n MCS0, Ch 11.

7 Peak OUTPUT POWER

7.1 Test Configuration

FCC:	§ 15.247 b3
IC:	RSS-210 §8.4(4)
<p>The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low, mid and high channels of transmitter were enabled separately to investigate the peak output power for each channel. A fully charged battery was used as supply voltage.</p> <p>Spectrum Analyzer Parameters: RBW = 1MHz, VBW = 8MHz, Span=40MHz, Sweep Time = Auto</p> <p>Frequencies of Interest: Spectrum was investigated from 2412 MHz – 2462 MHz.</p>	

7.2 Maximum Peak Output Power Results and Limits

Mode	Data Rate (Mbps)	CONDUCTED POWER (dBm)		
		Ch 01 2412 MHz	Ch 06 2437 MHz	Ch 11 2462 MHz
802.11b	1	15.72	17.35	16.08
	2	15.55	17.02	16.02
	5.5	16.25	17.12	17.75
	11	16.35	17.97	18.05
802.11g	6	16.22	17.74	17.80
	9	15.35	16.91	16.24
	12	15.14	15.68	16.31
	18	15.29	14.66	15.37
	24	14.33	14.84	15.56
	36	13.23	13.92	14.72
	48	12.97	13.38	14.49
	54	13.10	13.11	14.22
802.11n	MCS0	15.50	16.99	16.22
	MCS1	14.68	16.15	15.80
	MCS2	15.31	14.73	15.46
	MCS3	14.80	14.30	15.66
	MCS4	13.60	14.07	14.78
	MCS5	13.22	13.89	14.86
	MCS6	12.65	13.48	14.69
	MCS7	12.90	12.69	13.47

Limit: < 30dBm (1W), for Max. antenna gain =< 6dBi



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

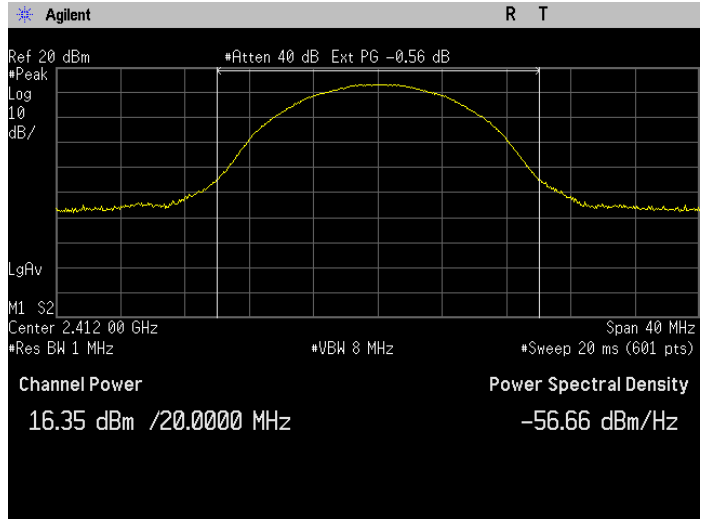


Figure 7-1: Output Power 802.11b, 11Mbps, Ch 1

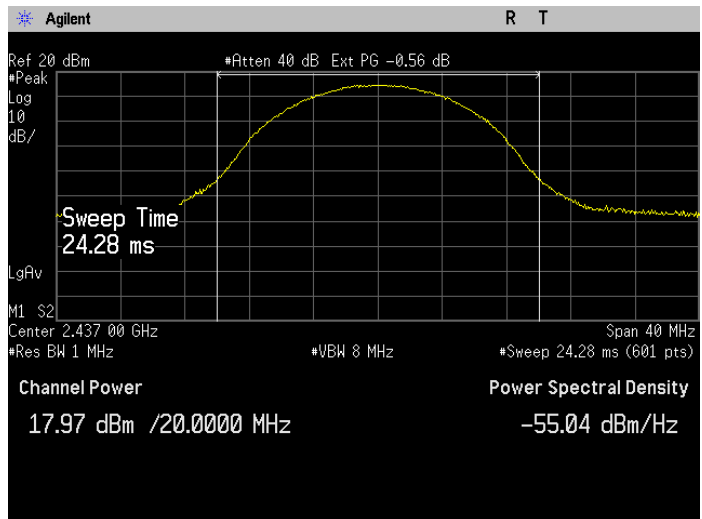


Figure 7-2: Output Power 802.11b, 11Mbps, Ch 6

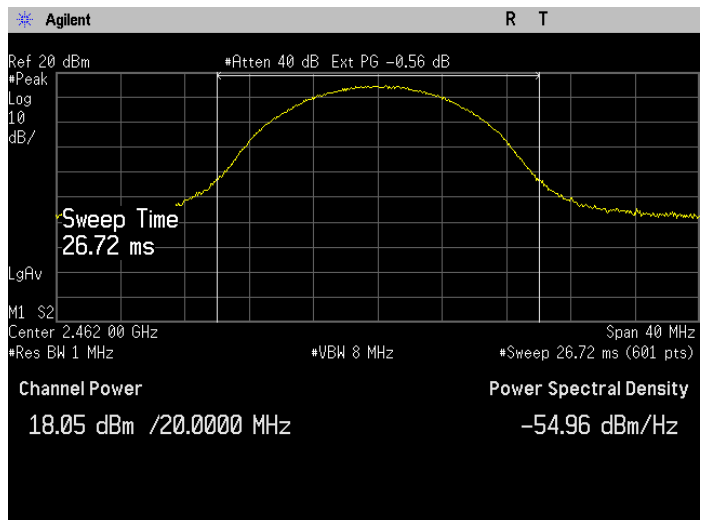


Figure 7-3: Output Power 802.11b, 11Mbps, Ch 11



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

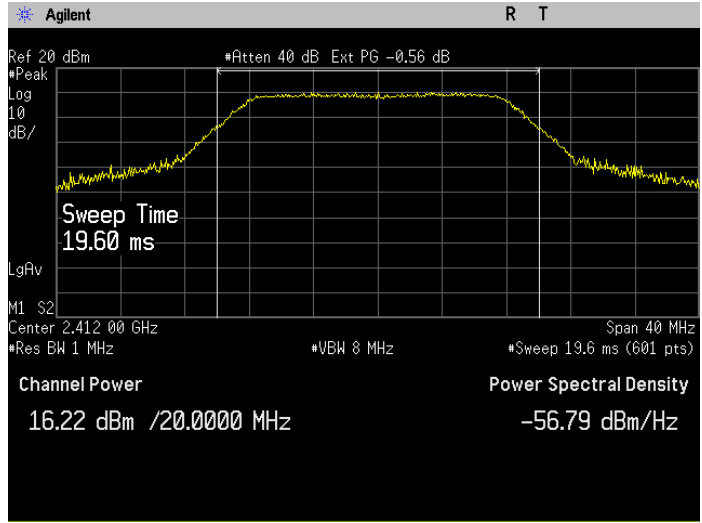


Figure 7-4: Output Power 802.11g, 6Mbps, Ch 1

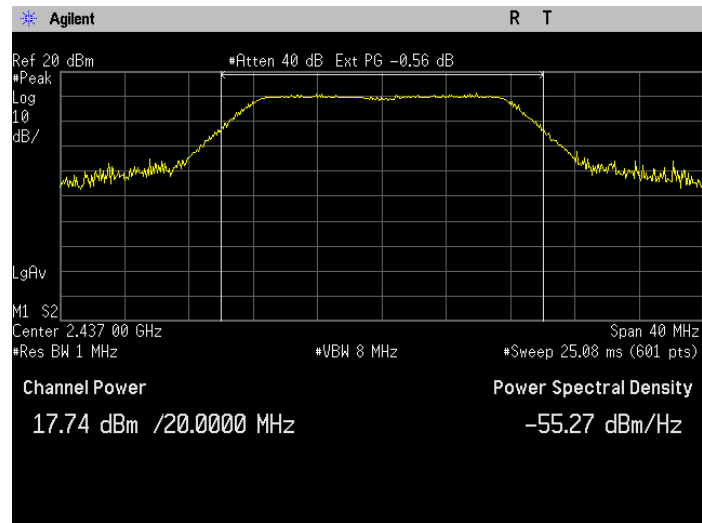


Figure 7-5: Output Power 802.11g, 6Mbps, Ch 6

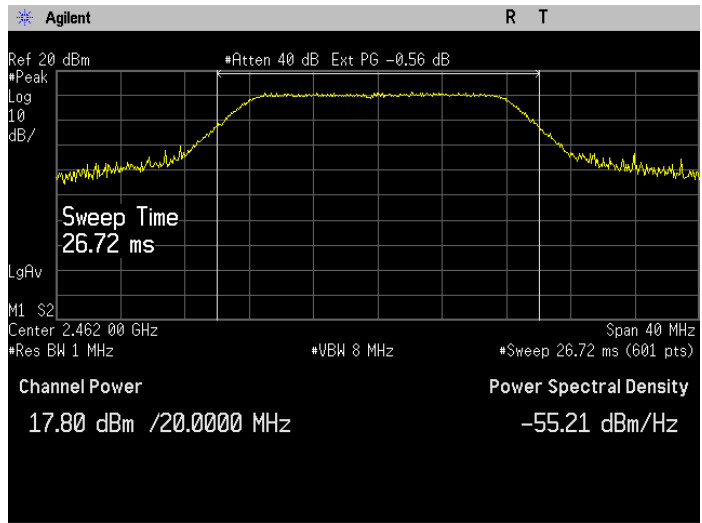


Figure 7-6: Output Power 802.11g, 6 Mbps, Ch 11



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

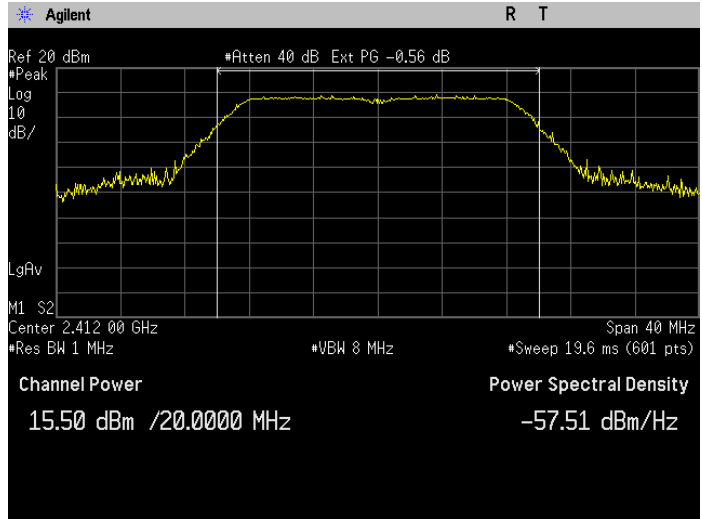


Figure 7-7: Output Power 802.11n, MSC0, Ch 1

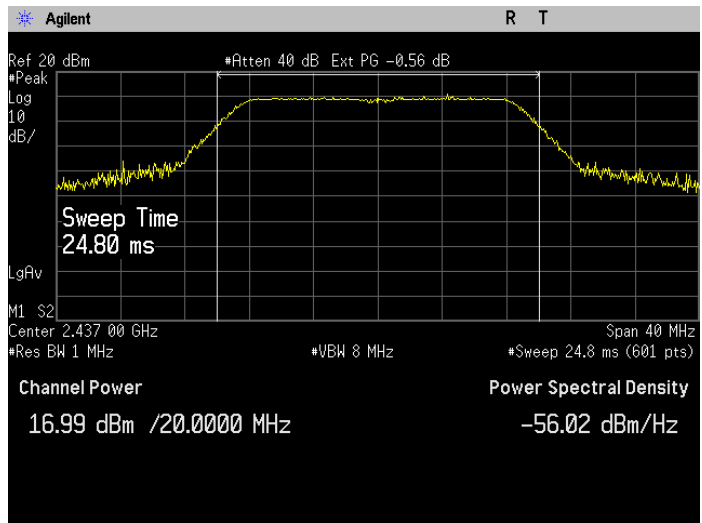


Figure 7-8: Output Power 802.11n, MSC0, Ch 6

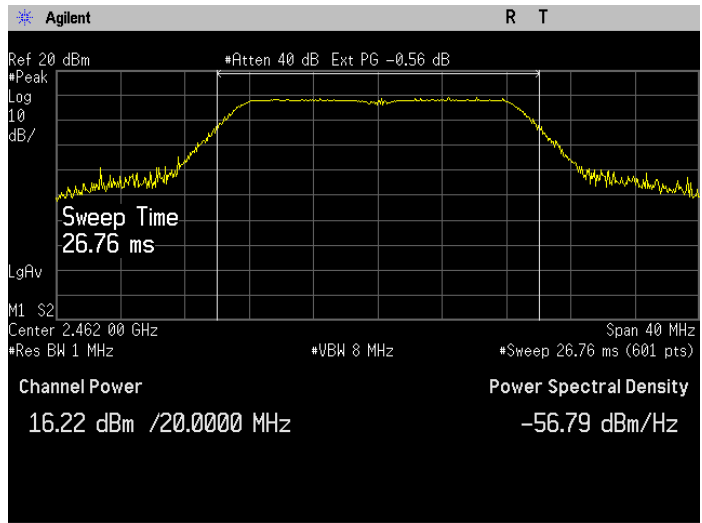


Figure 7-9: Output Power 802.11n, MSC0, Ch 11

8 POWER SPECTRAL DENSITY (PSD)

8.1 Test Configuration

FCC: § 15.247 e

IC: RSS-210 §A8.2(2)

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the transmitter was set in transmission mode at appropriate frequency. A fully charged battery was used as supply voltage.

Spectrum Analyzer Parameters:
 RBW = 3kHz, VBW = 10kHz, Span=300kHz, Sweep Time = 100sec, DL=8dBm

Frequencies of Interest: Spectrum was investigated from 2412 MHz – 2462 MHz.

8.2 Results and Limits:

Figure	Mode	Channel	Frequency	Measured PSD (dBm)
8-1a	802.11 b	1	2412	-15.21
8-1b		6	2437	-13.89
8-1c		11	2462	-14.70
8-2a	802.11 g	1	2412	-19.79
8-2b		6	2437	-18.83
8-2c		11	2462	-20.93
8-3a	802.11 n	1	2412	-21.24
8-3b		6	2437	-19.81
8-3c		11	2462	-20.03

Limit: < 8dBm in any 3 kHz band



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

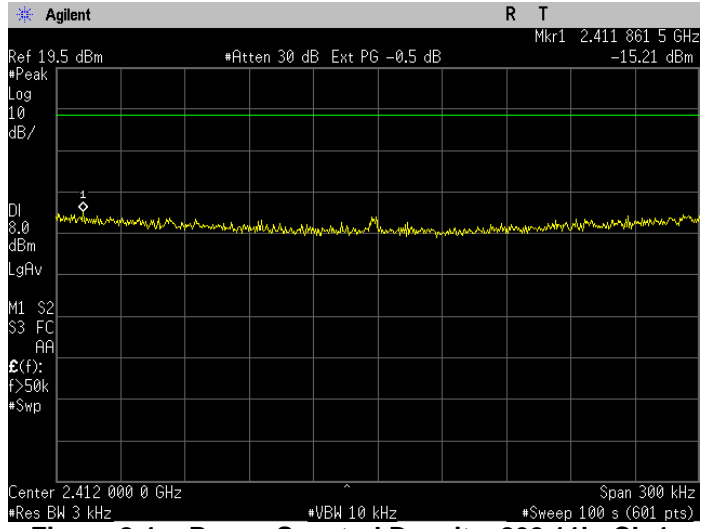


Figure 8-1a: Power Spectral Density, 802.11b, Ch 1.

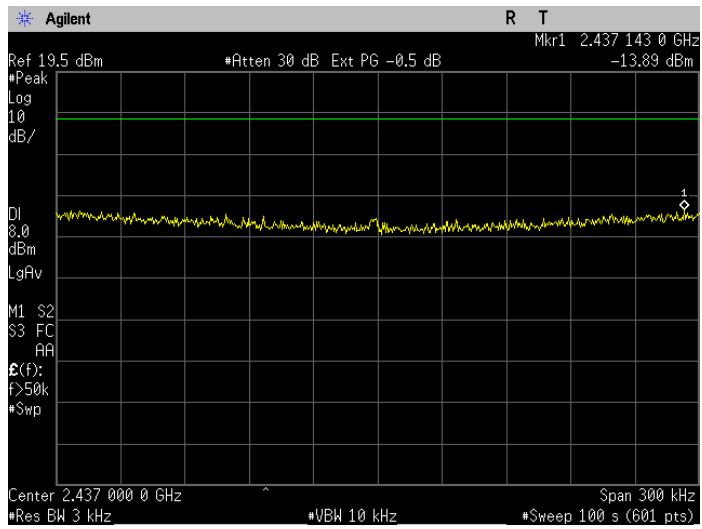


Figure 8-1b: Power Spectral Density, 802.11b, Ch 6.

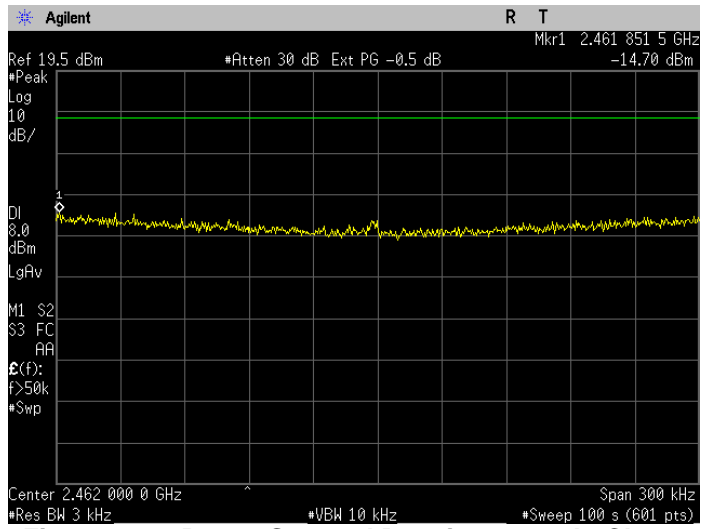


Figure 8-1c: Power Spectral Density, 802.11b, Ch 11.



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

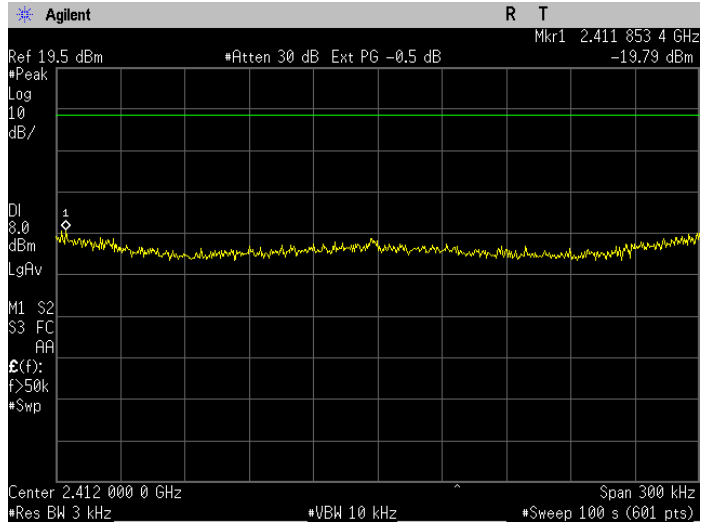


Figure 8-2a: Power Spectral Density, 802.11g, Ch 1.

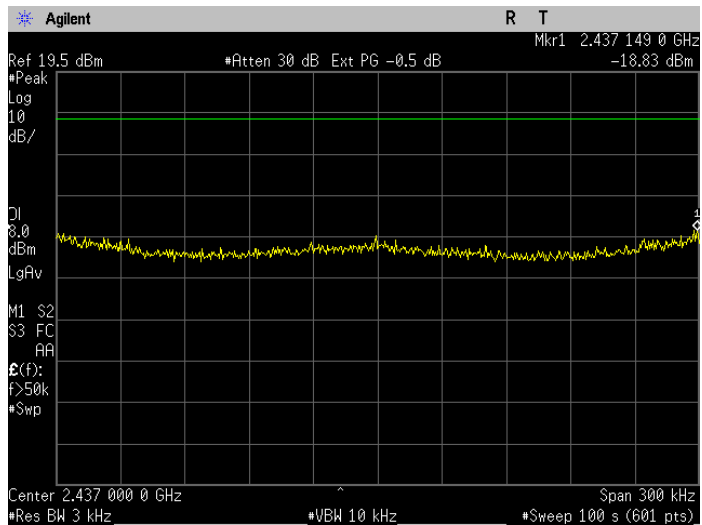


Figure 8-2b: Power Spectral Density, 802.11g, Ch 6.

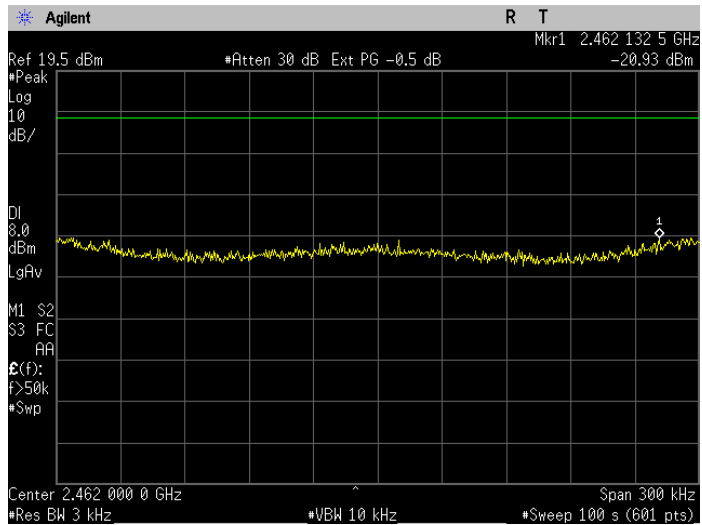


Figure 8-2c: Power Spectral Density, 802.11g, Ch 11.



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

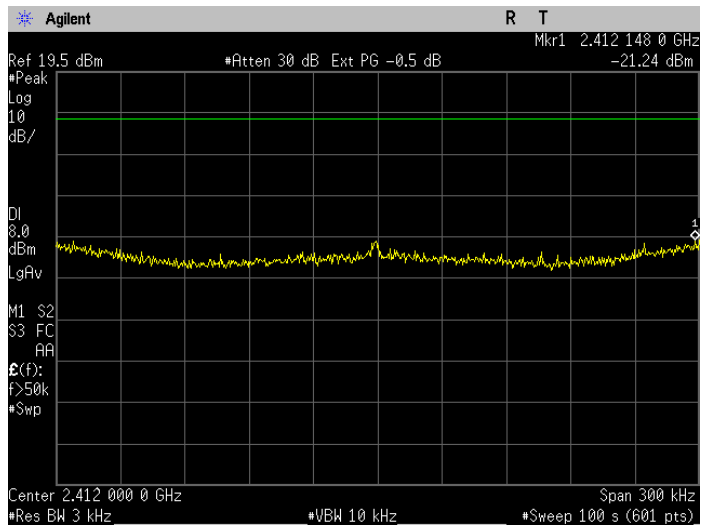


Figure 8-3a: Power Spectral Density, 802.11n, Ch 1.

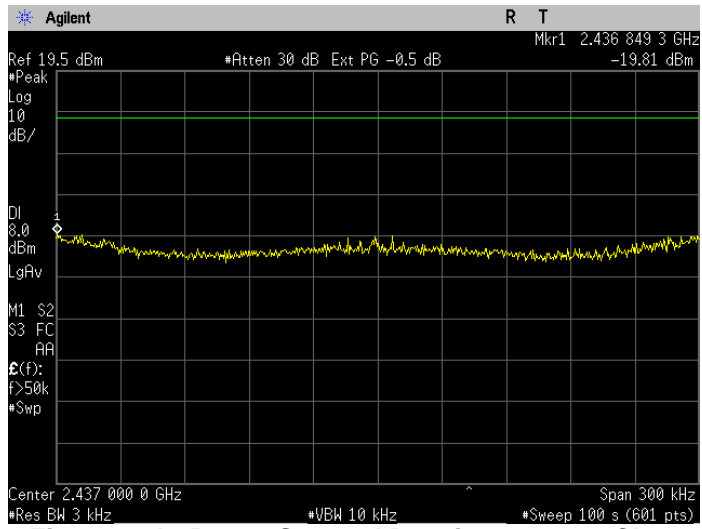


Figure 8-3b: Power Spectral Density, 802.11n, Ch 6.

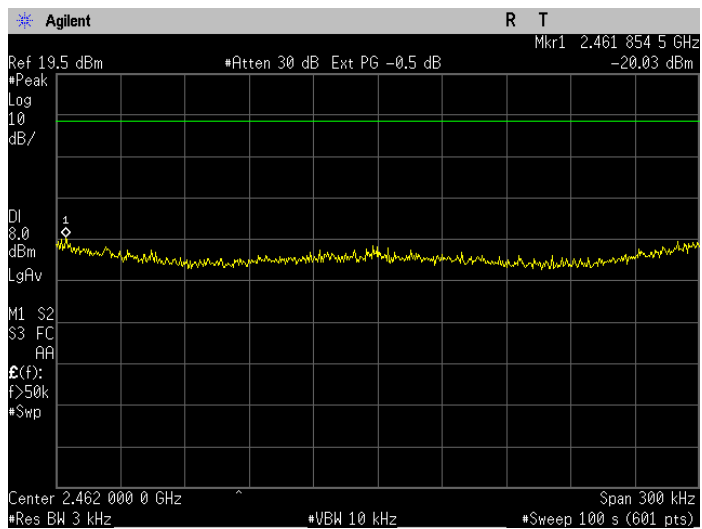


Figure 8-3c: Power Spectral Density, 802.11n, Ch 11.

9 BANDEDGE

9.1 Test Configuration

FCC:	§ 15.247 d
IC:	RSS-210 §A8.5
<p>The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low and high channels of transmitter were enabled separately to investigate the band-edge compliance of conducted emissions. To ensure the band-edge compliance when the channels are hopping, measurements were also conducted at low and high channels in this mode. A fully charged battery was used as supply voltage.</p> <p>Spectrum Analyzer Parameters: RBW = 100kHz, VBW = 300kHz, Span=50MHz, Sweep Time = Auto, DL=-20dBc CF=2390MHz or 2483.5MHz</p> <p>Frequencies of Interest: Spectrum was investigated from 2412 MHz – 2462 MHz.</p>	

9.2 Results: Bandedge

Figure	802.11 Mode	Channel	Frequency	Plot Description
9-1a	b (1Mbps)	1	2412	Low ch band edge
9-1b		11	2462	High ch band edge
9-2a	g (6Mbps)	1	2412	Low ch band edge
9-2b		11	2462	High ch band edge
9-3a	n (6.5/7.2 Mbps)	1	2412	Low ch band edge
9-3b		11	2462	High ch band edge



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

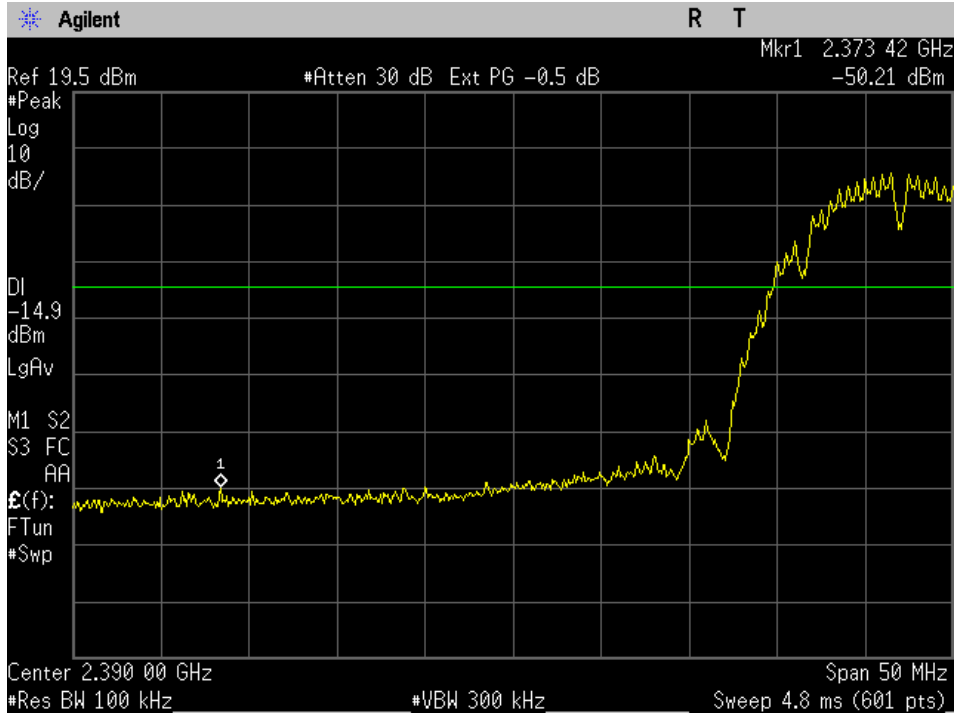


Figure 9-1a: Low band edge, 802.11b, ch1

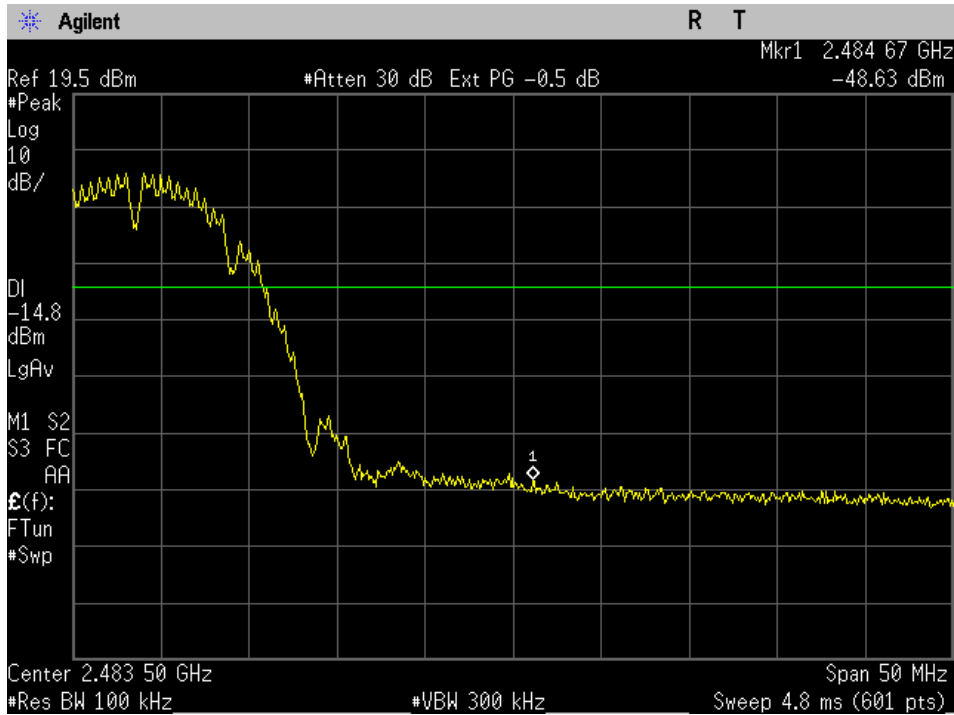


Figure 9-1b: High band edge, 802.11b, ch11.



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

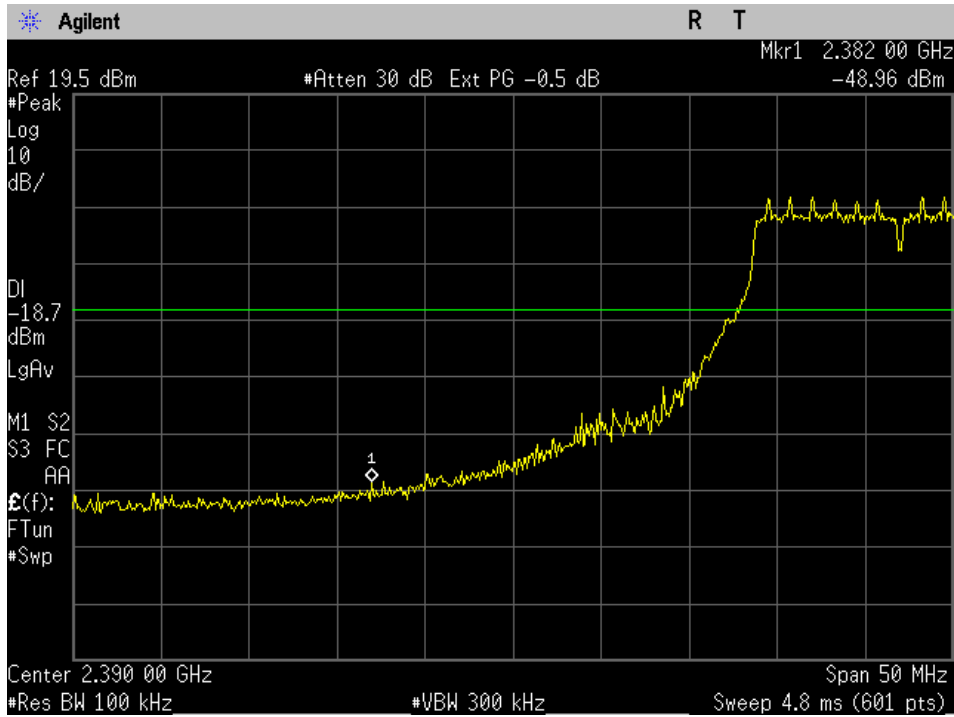


Figure 9-2a: Low band edge, 802.11g, ch1.

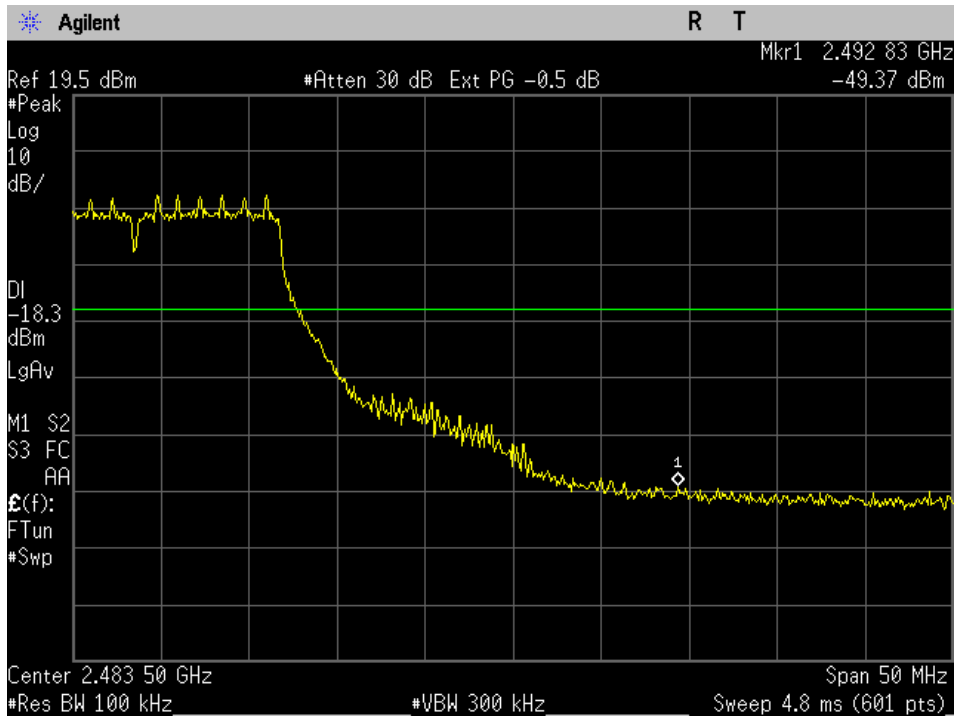


Figure 9-2b: High band edge, 802.11g, ch11.



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

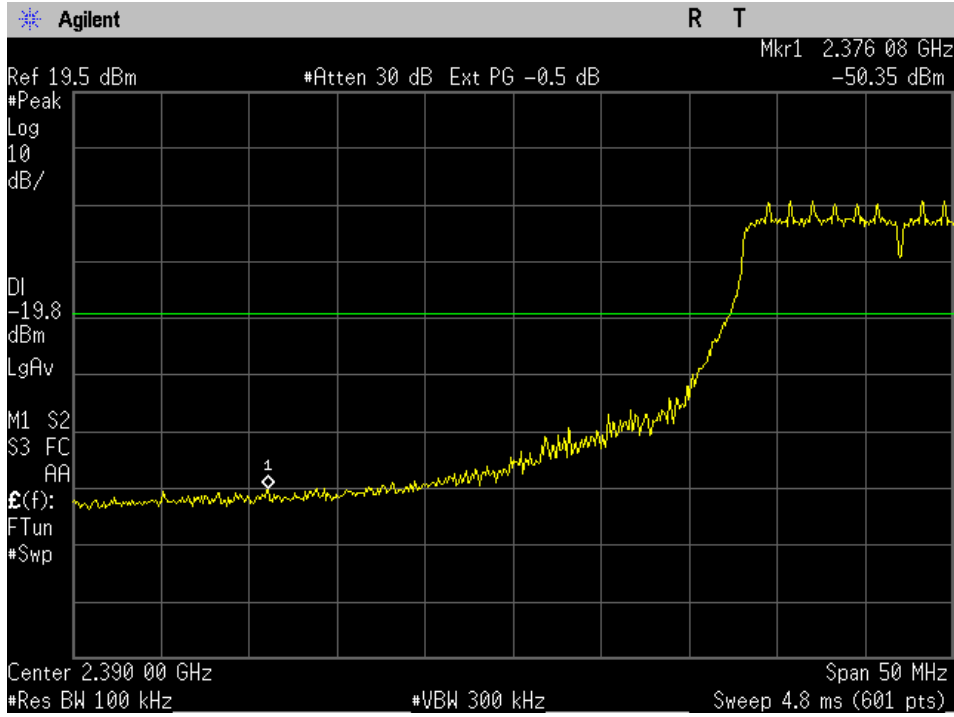


Figure 9-3a: Low band edge, 802.11n, ch1.

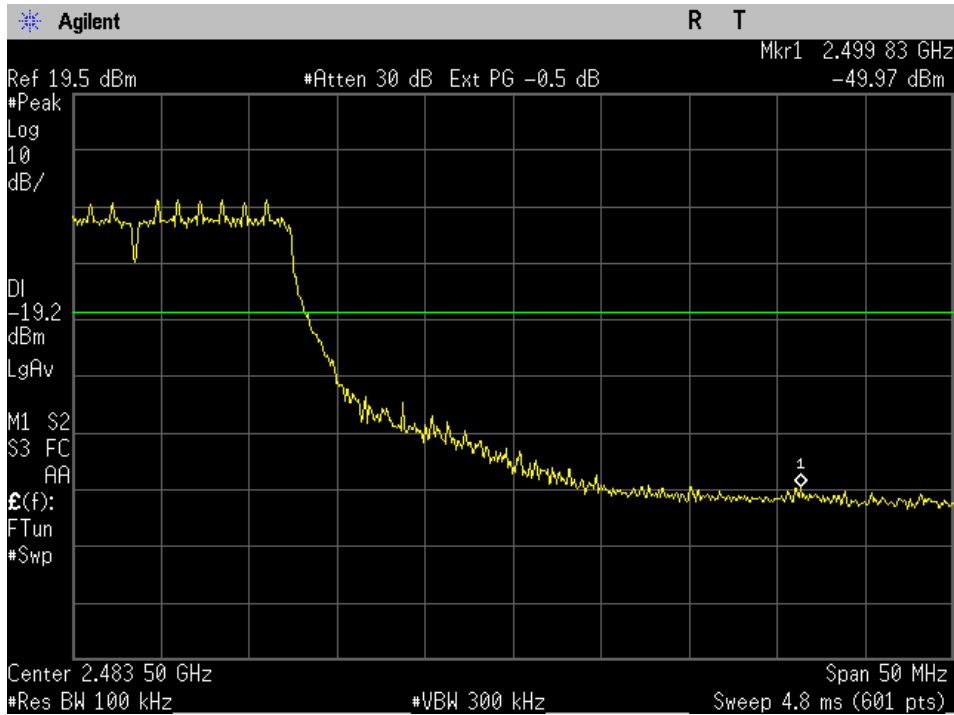


Figure 9-3b: High band edge, 802.11n, ch11.

10 SPURIOUS RF CONDUCTED EMISSIONS

10.1 Test Configuration

FCC:	§ 15.247 d
IC:	RSS-210 §A8.5

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low, mid and high channels of Bluetooth transmitter were enabled separately and the frequency spectrum was investigated for any spurious emissions. A fully charged battery was used as supply voltage.

Spectrum Analyzer Parameters:
 RBW = 100kHz, VBW = 300kHz, Sweep Time = Auto, DL=-20dBc

Frequencies of Interest: Spectrum was investigated from 30MHz – 25 GHz.

10.2 Results: Conducted Spurious Emissions

Figure	Channel	Channel	Frequency	Plot Description
10-1a	b	1	2412	Low ch bandedge, 30MHz to 25GHz
10-1b		6	2437	Mid ch bandedge, 30MHz to 25GHz
10-1c		11	2462	High ch bandedge, 30MHz to 25GHz
10-2a	g	1	2412	Low ch bandedge, 30MHz to 25GHz
10-2b		6	2437	Mid ch bandedge, 30MHz to 25GHz
10-2c		11	2462	High ch bandedge, 30MHz to 25GHz
10-3a	n	1	2412	Low ch bandedge, 30MHz to 25GHz
10-3b		6	2437	Mid ch bandedge, 30MHz to 25GHz
10-3c		11	2462	High ch bandedge, 30MHz to 25GHz

Comments:



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

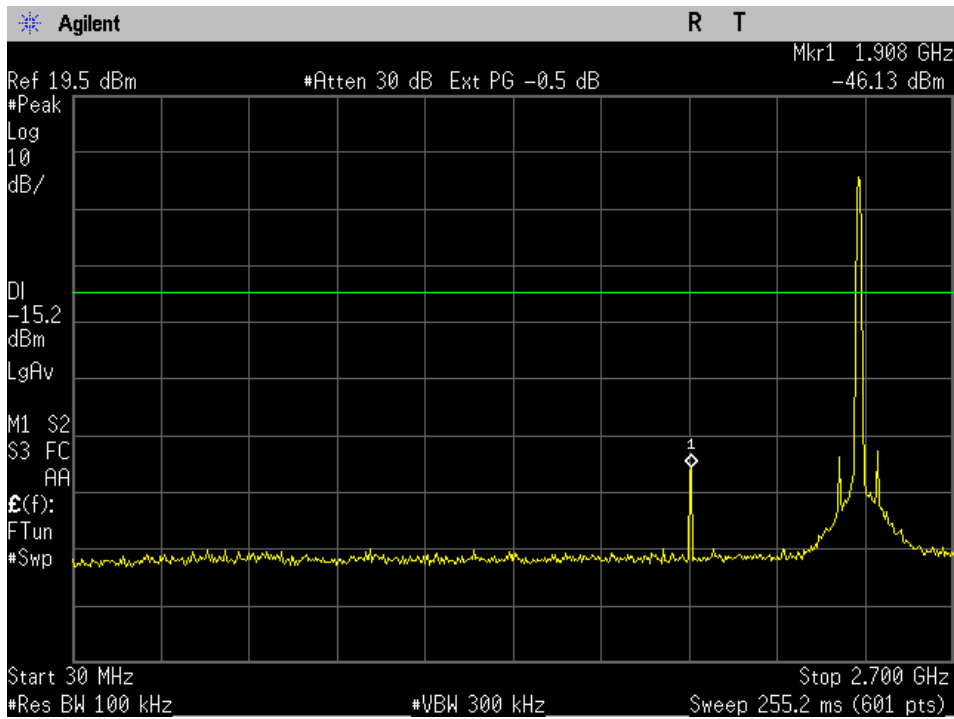


Figure 10-1a1: Conducted Spurious Emissions, 802.11b, Ch 1

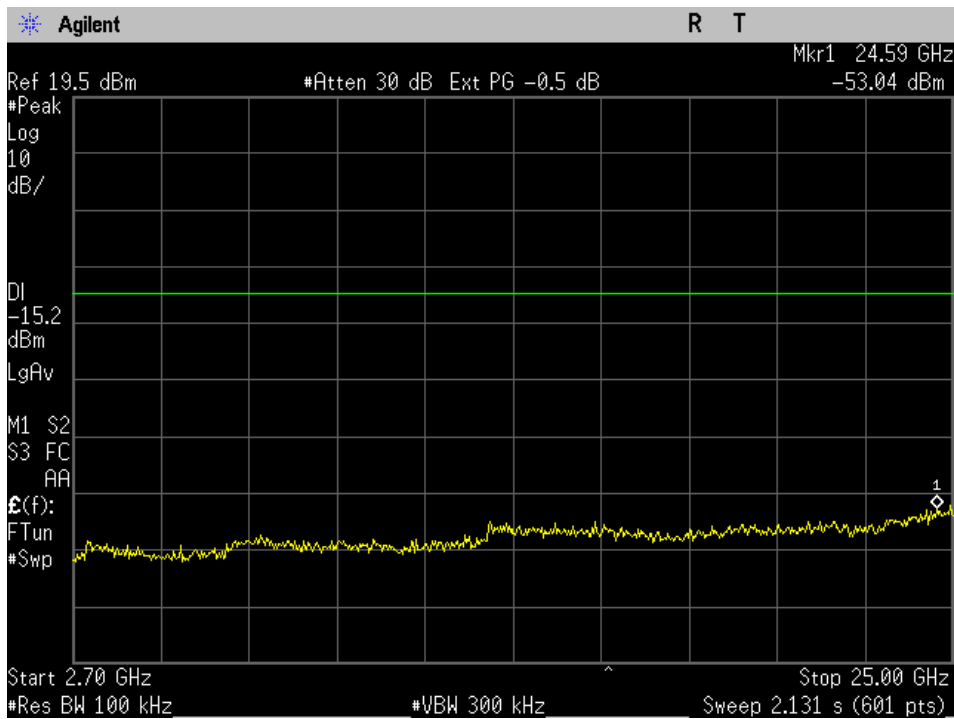


Figure 10-1a2: Conducted Spurious Emissions, 802.11b, Ch 1



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

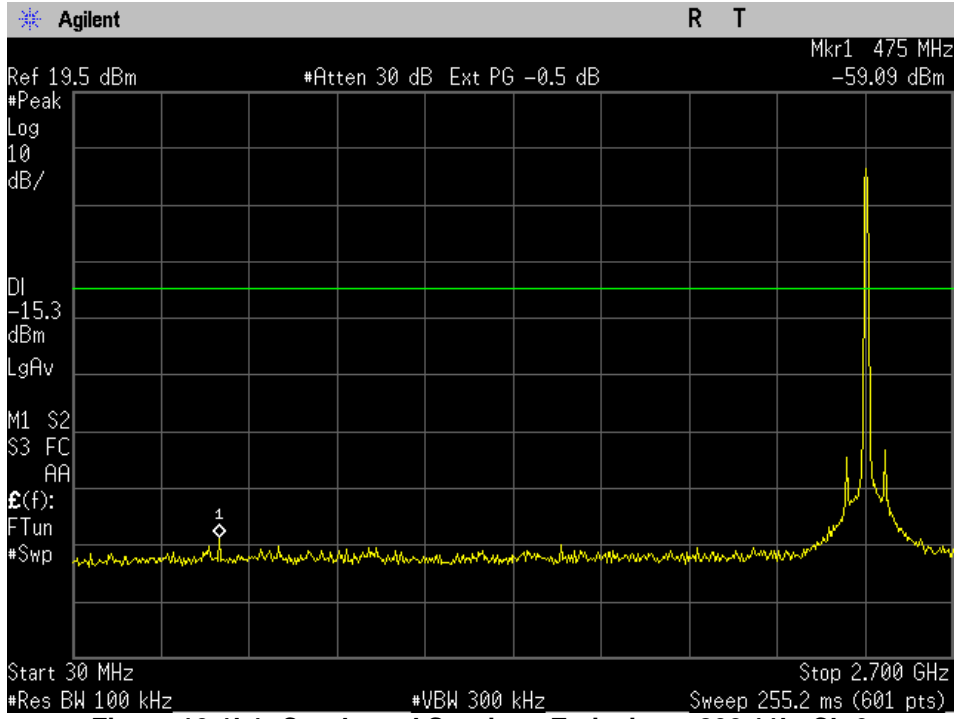


Figure 10-1b1: Conducted Spurious Emissions, 802.11b, Ch 6

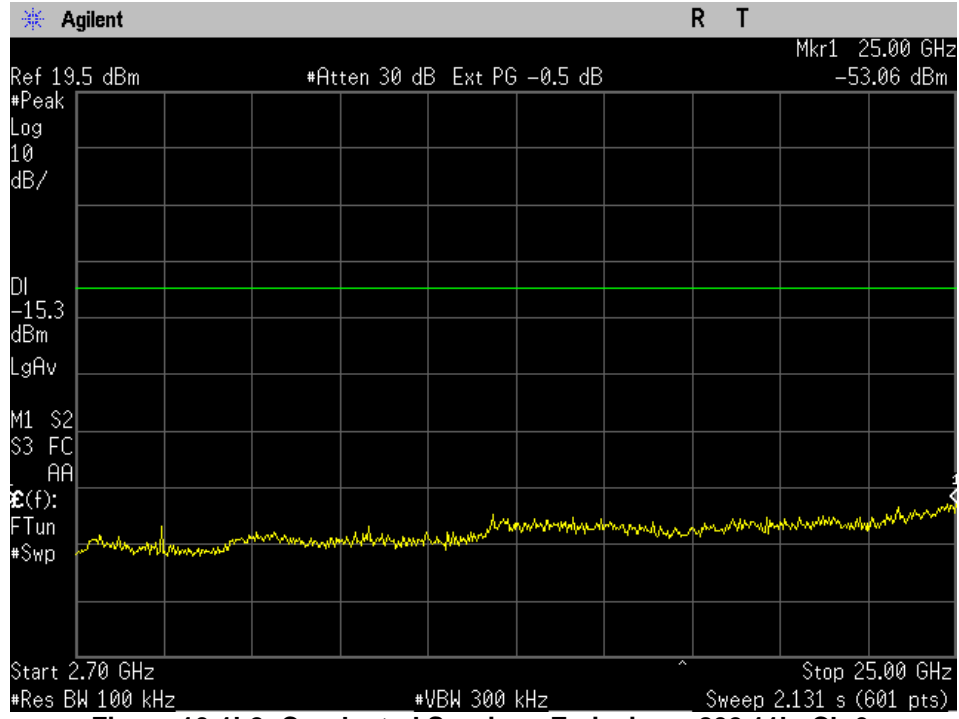


Figure 10-1b2: Conducted Spurious Emissions, 802.11b, Ch 6



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

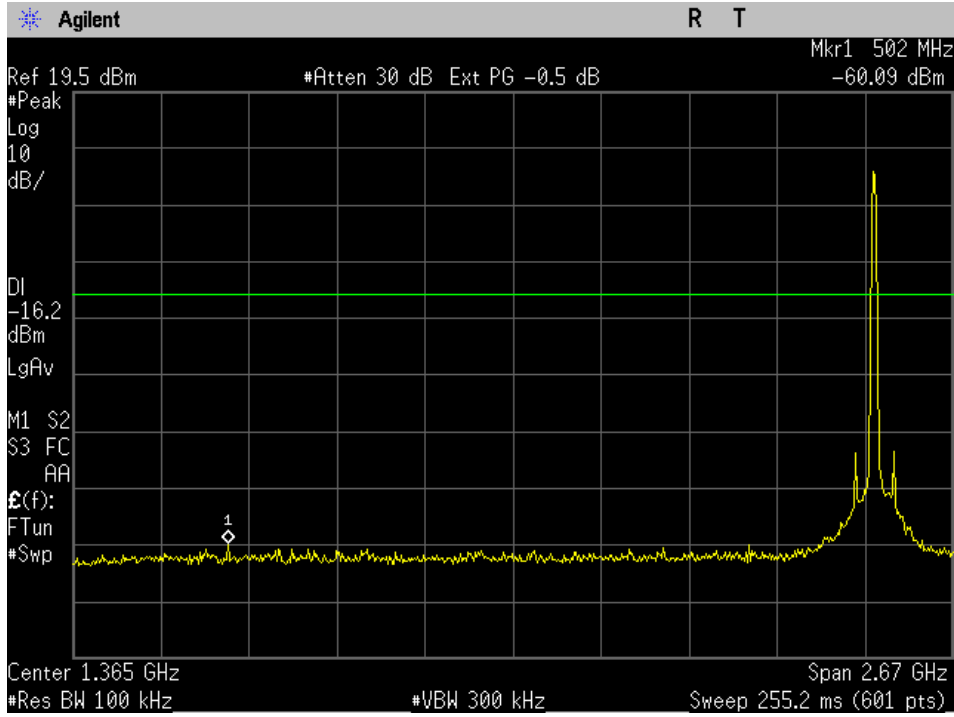


Figure 10-1c1: Conducted Spurious Emissions, 802.11b, Ch 11

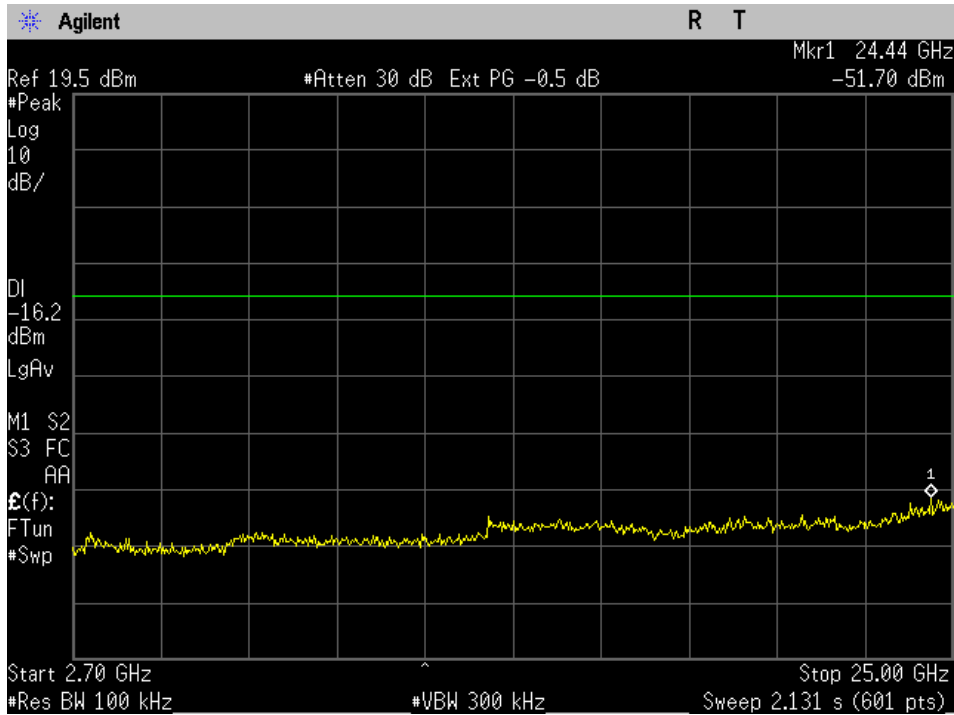


Figure 10-1c2: Conducted Spurious Emissions, 802.11b, Ch 11



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

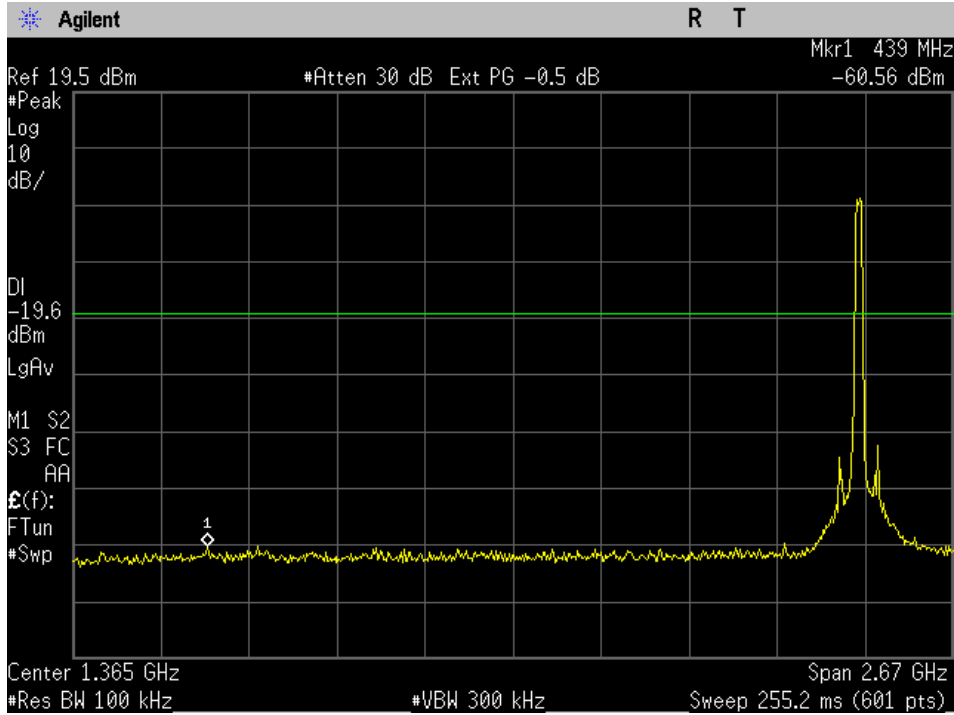


Figure 10-2a1: Conducted Spurious Emissions, 802.11g, Ch 1

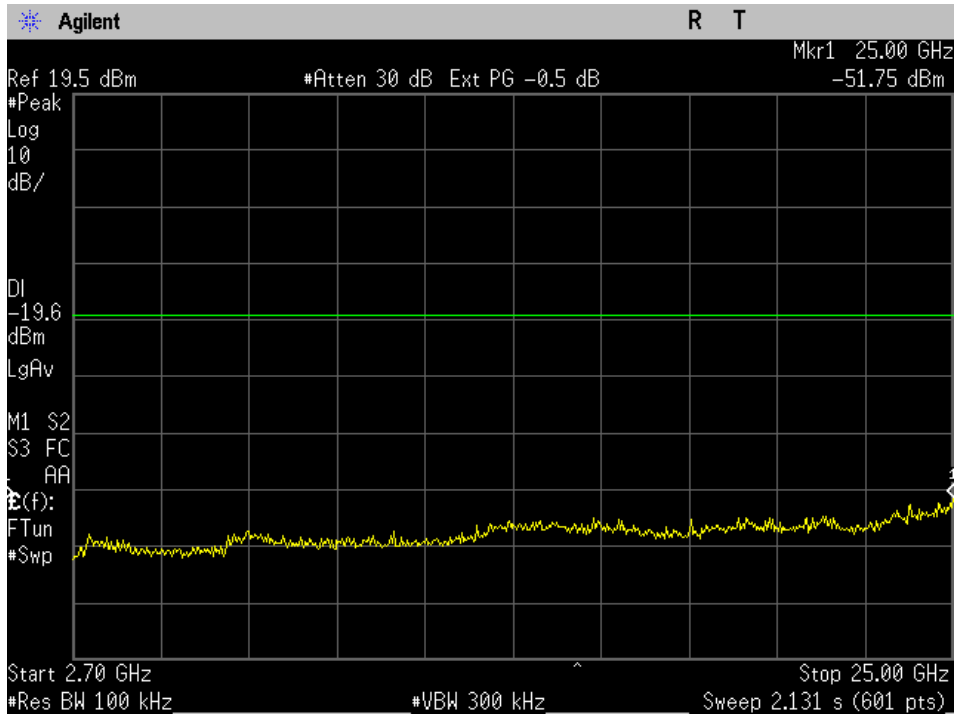


Figure 10-2a2: Conducted Spurious Emissions, 802.11g, Ch 1



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

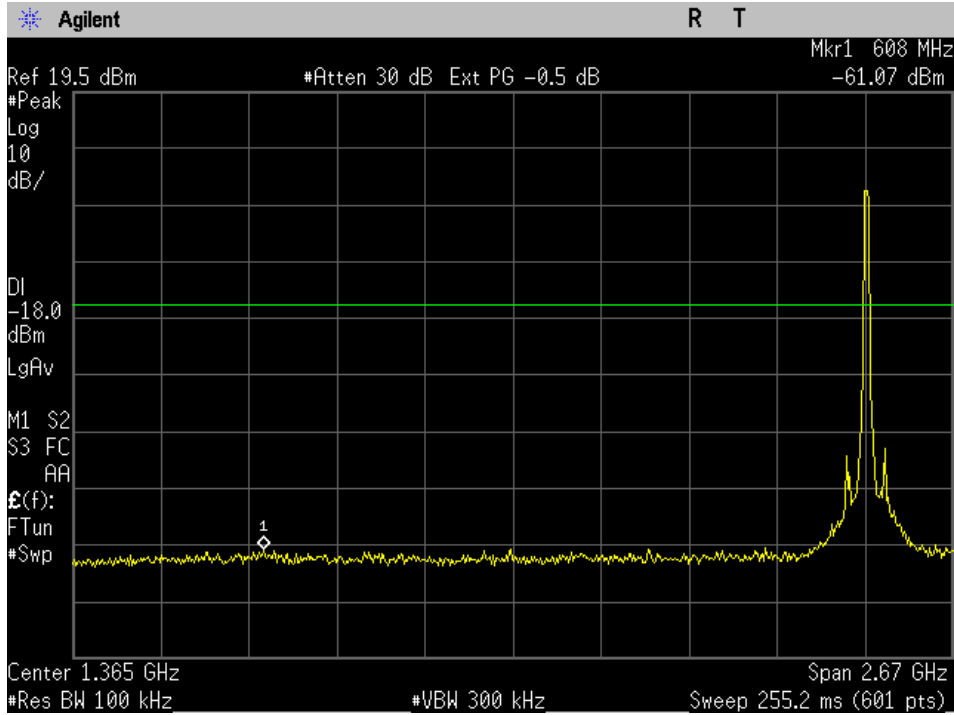


Figure 10-2b1: Conducted Spurious Emissions, 802.11g, Ch 6

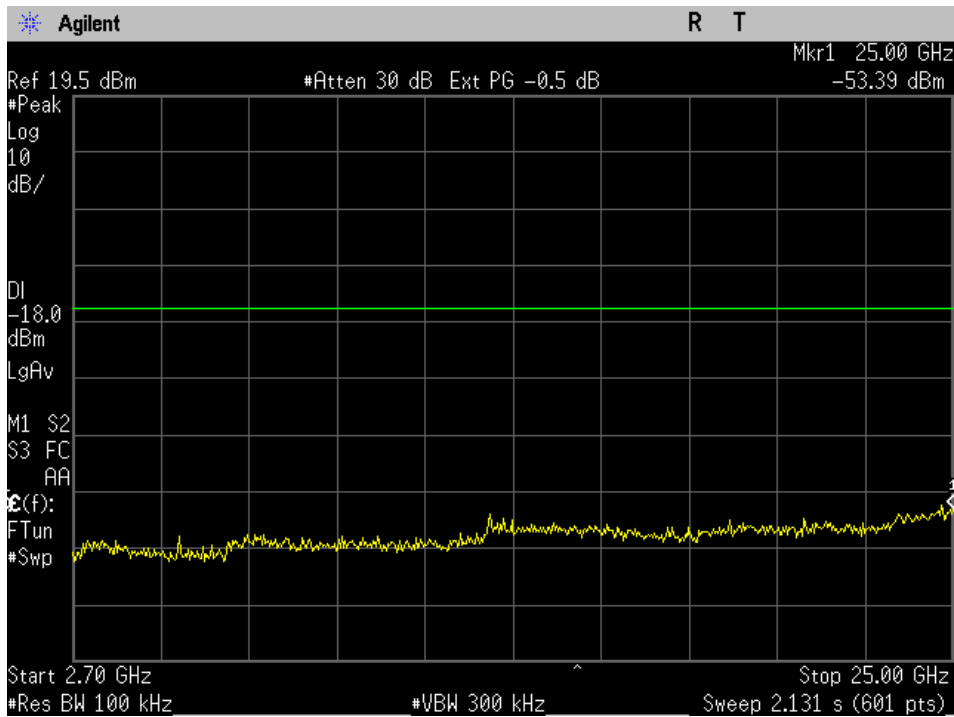


Figure 10-2b2: Conducted Spurious Emissions, 802.11g, Ch 6



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

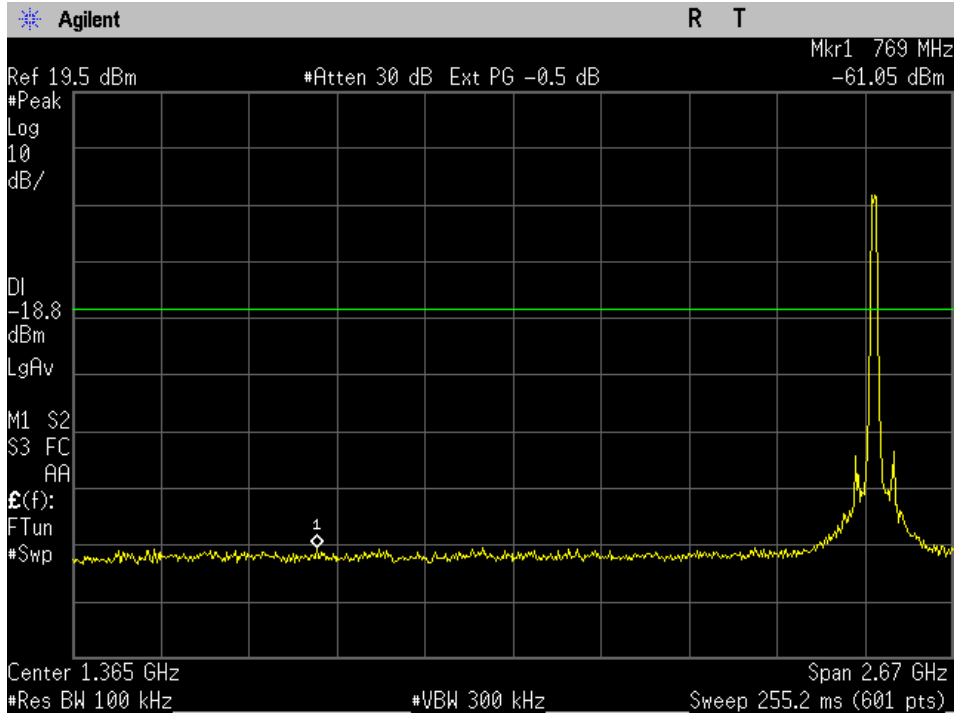


Figure 10-2c1: Conducted Spurious Emissions, 802.11g, Ch 11

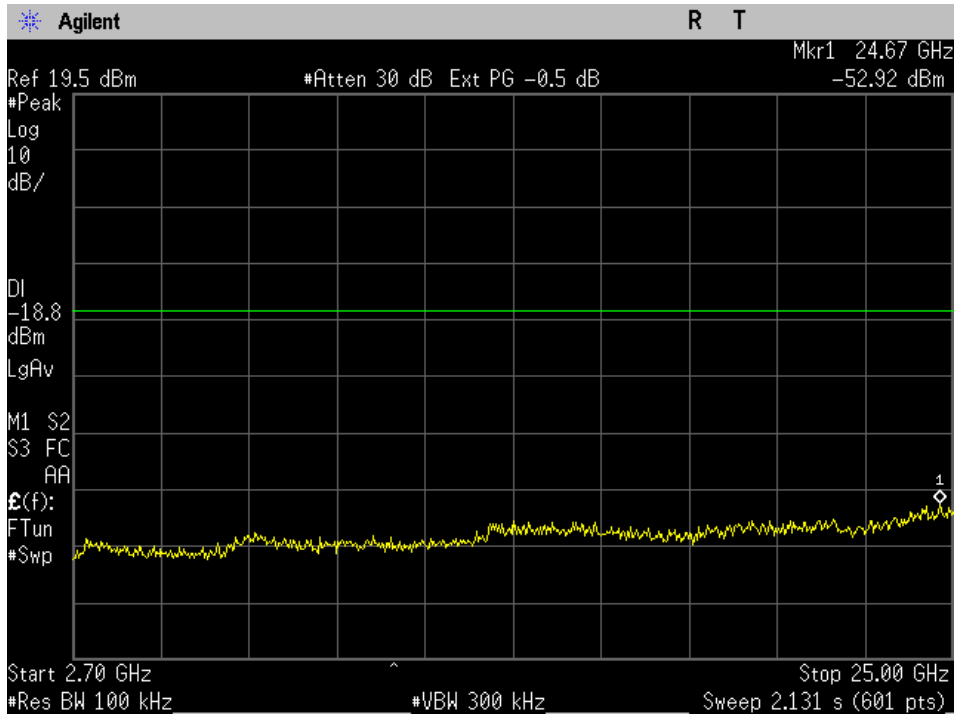


Figure 10-2c2: Conducted Spurious Emissions, 802.11g, Ch 11



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

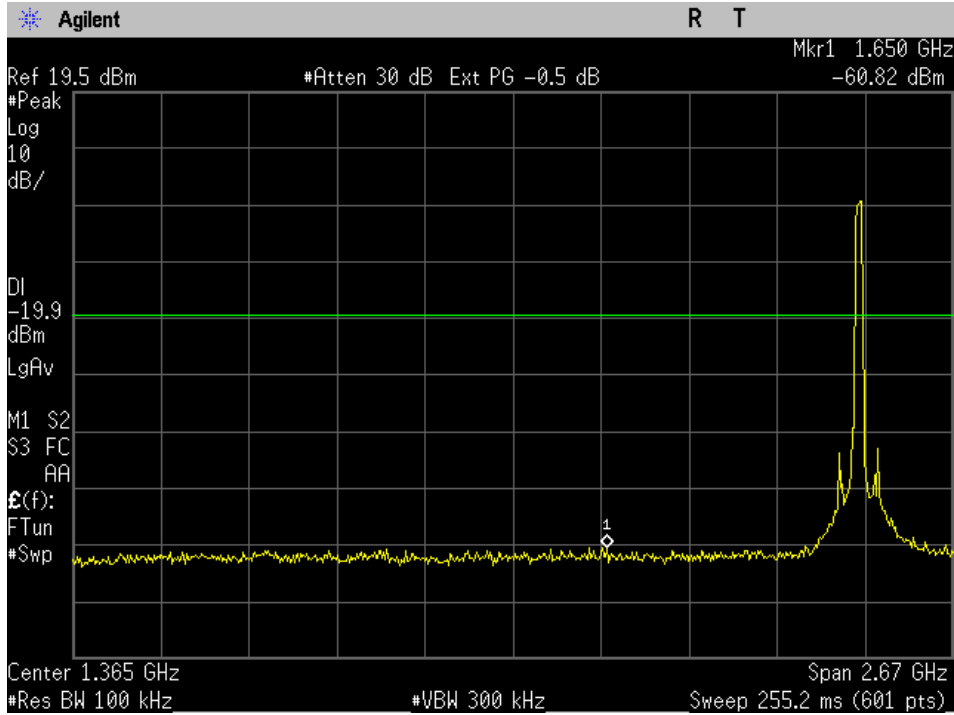


Figure 10-3a1: Conducted Spurious Emissions, 802.11n, Ch 1

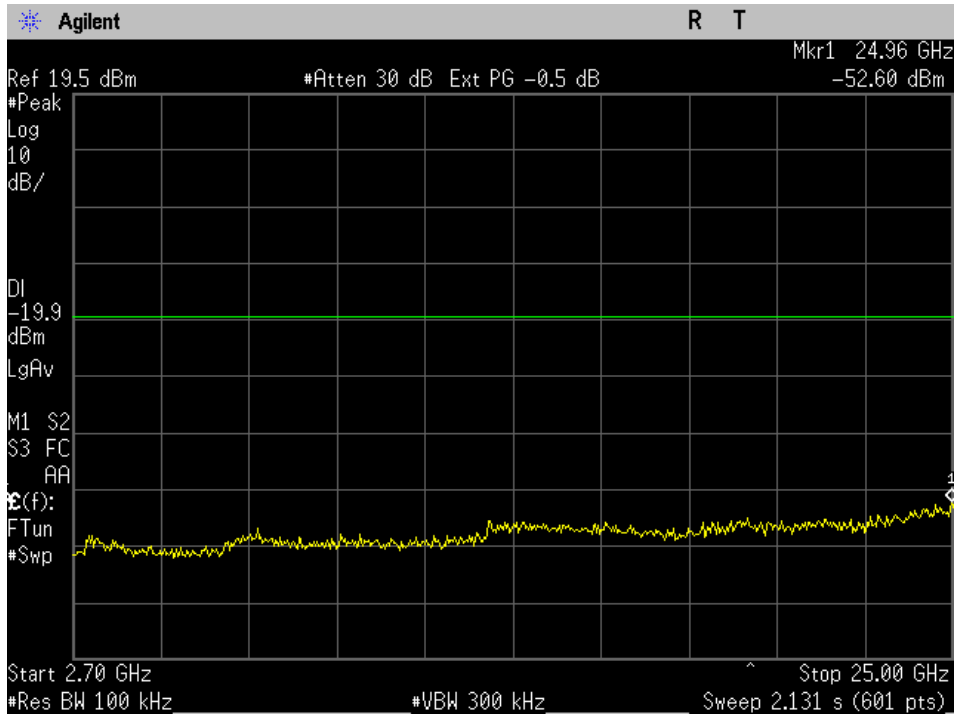


Figure 10-3a2: Conducted Spurious Emissions, 802.11n, Ch 1



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

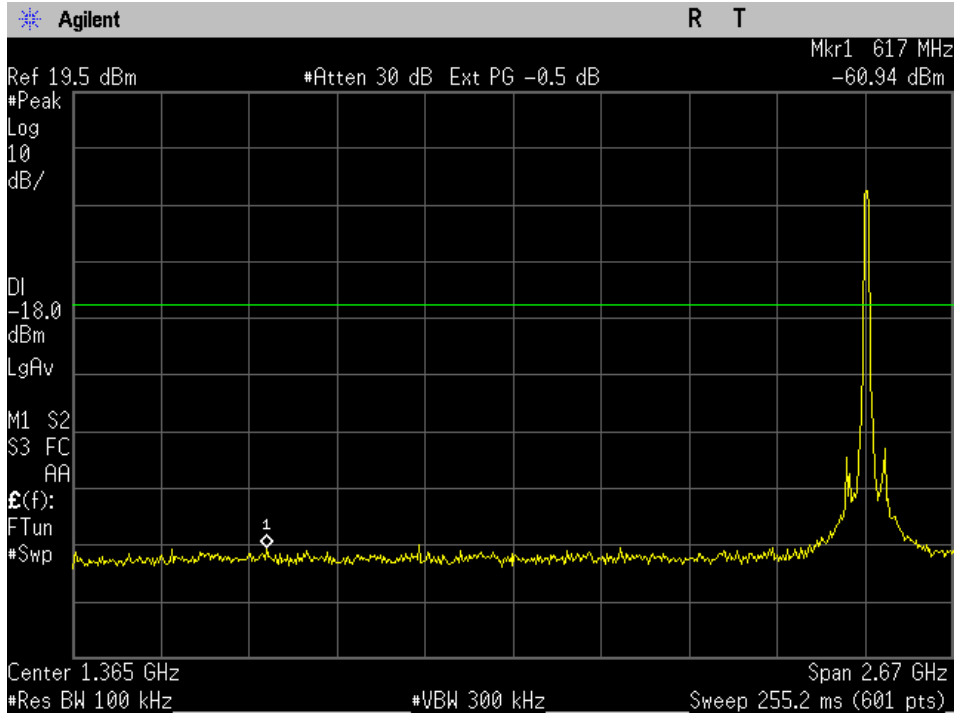


Figure 10-3b1: Conducted Spurious Emissions, 802.11n, Ch 6

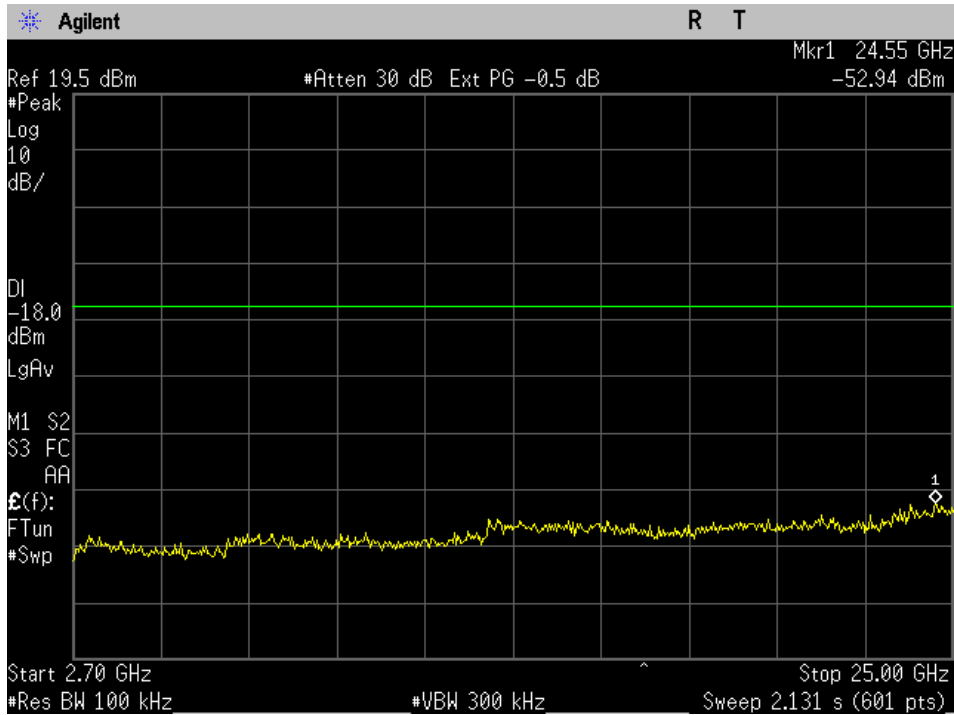


Figure 10-3b2: Conducted Spurious Emissions, 802.11n, Ch 6



Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

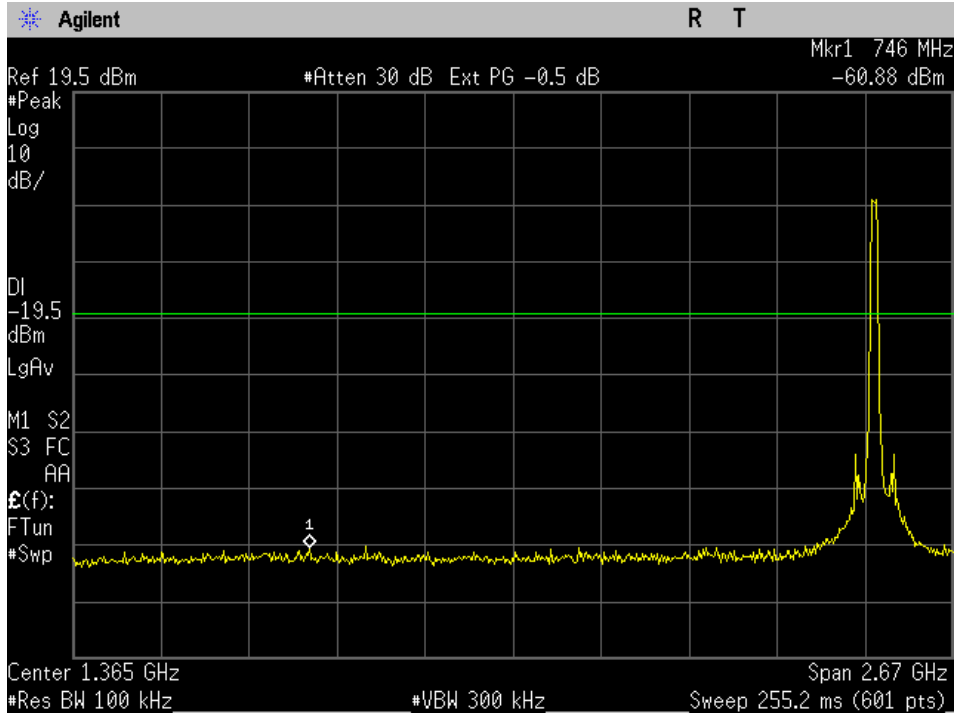


Figure 10-3c1: Conducted Spurious Emissions, 802.11n, Ch 11

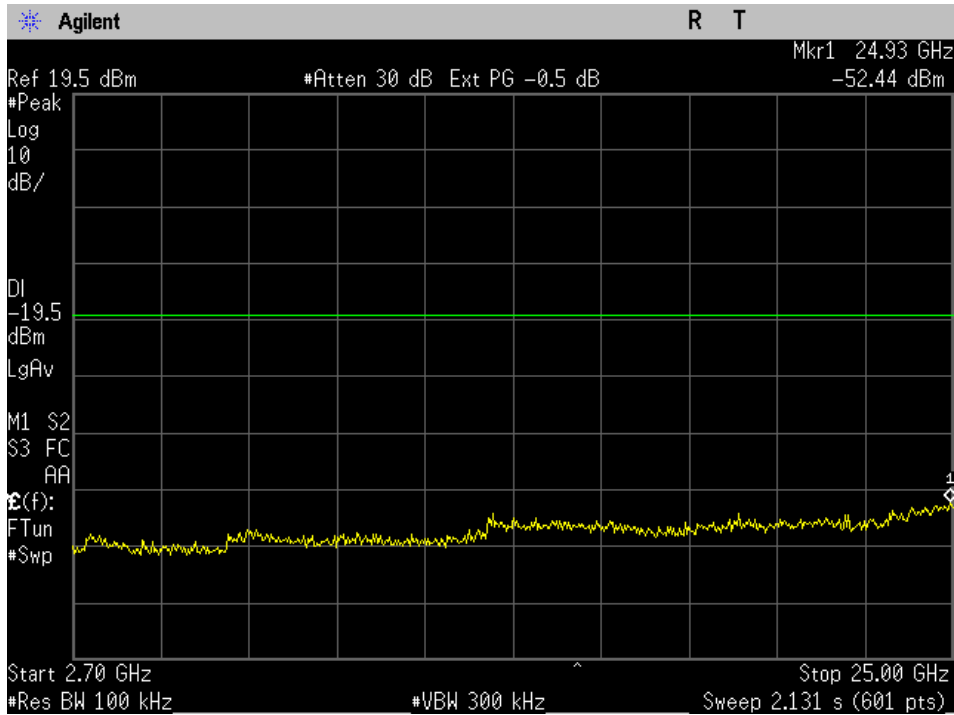


Figure 10-3c2: Conducted Spurious Emissions, 802.11n, Ch 11

Applicant:	Kyocera
FCC ID:	V65C5215
Report #:	CT-C5215-0313-R0

11 AC POWER LINE CONDUCTED EMISSIONS

11.1 Test Configuration & Results

FCC:	§ 15.107 § 15.207
IC:	RSS-210 §6.6
See separate report	

12 RADIATED EMISSIONS

12.1 Test Configuration & Results

FCC:	§ 15.109 § 15.209
IC:	RSS-210 §A2.9 (2)
See separate report	

13 SAR TEST

13.1 Test Configuration & Results

FCC:	§ 2.1091/2.1093
IC:	RSS-102
See separate report	

14 TEST EQUIPMENT

The test equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

Description	Manufacturer	Model No.	Serial No.	Cal Due Date
Spectrum Analyzer	Agilent	E4440A	MY44303130	12/11/13