



MEASUREMENT REPORT FCC Part 22, 24, 27 LTE

Applicant Name:
 KYOCERA Communications, Inc.
 8611 Balboa Ave
 San Diego, CA 92123
 USA

Date of Testing:
 12/12 - 01/08/13, 02/21-03/05/13
Test Site/Location:
 PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
 0Y1212071744.V65

FCC ID :	V65C6721A1
APPLICANT:	KYOCERA COMMUNICATIONS, INC.



FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §22; §24; §27
EUT Type: Portable Handset
Model(s): C6721
Test Device Serial No.: identical prototype [S/N: 256691412905244675
 256691412905244672
 99000051502126]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 12	699.7 - 715.3	1M08G7W	QPSK	0.076	18.83
LTE Band 12	699.7 - 715.4	1M08W7W	16QAM	0.060	17.79
LTE Band 12	700.5 - 714.5	2M68G7W	QPSK	0.074	18.67
LTE Band 12	700.5 - 714.6	2M70W7W	16QAM	0.057	17.56
LTE Band 12	701.5 - 713.5	4M49G7W	QPSK	0.077	18.87
LTE Band 12	701.5 - 713.5	4M48W7W	16QAM	0.062	17.90
LTE Band 12	704 - 711	8M96G7W	QPSK	0.087	19.41
LTE Band 12	704 - 711	8M96W7W	16QAM	0.065	18.13
LTE Band 17	706.5 - 713.5	4M49G7W	QPSK	0.072	18.55
LTE Band 17	706.5 - 713.5	4M48W7W	16QAM	0.058	17.61
LTE Band 17	709 - 711	9M00G7W	QPSK	0.083	19.21
LTE Band 17	709 - 711	8M97W7W	16QAM	0.065	18.10
LTE Band 5	824.7 - 848.3	1M09G7W	QPSK	0.126	21.00
LTE Band 5	824.7 - 848.3	1M09W7W	16QAM	0.100	19.99
LTE Band 5	825.5 - 847.5	2M69G7W	QPSK	0.137	21.36
LTE Band 5	825.5 - 847.5	2M69W7W	16QAM	0.105	20.23
LTE Band 5	826.5 - 846.5	4M48G7W	QPSK	0.160	22.04
LTE Band 5	826.5 - 846.5	4M48W7W	16QAM	0.130	21.13
LTE Band 5	829 - 844	8M99G7W	QPSK	0.146	21.63
LTE Band 5	829 - 844	8M95W7W	16QAM	0.112	20.51
LTE Band 4	1710.7 - 1754.3	1M09G7W	QPSK	0.204	23.10
LTE Band 4	1710.7 - 1754.3	1M10W7W	16QAM	0.170	22.32
LTE Band 4	1711.5 - 1753.5	2M70G7W	QPSK	0.336	25.27
LTE Band 4	1711.5 - 1753.5	2M70W7W	16QAM	0.270	24.32
LTE Band 4	1712.5 - 1752.5	4M49G7W	QPSK	0.339	25.30
LTE Band 4	1712.5 - 1752.5	4M47W7W	16QAM	0.264	24.22
LTE Band 4	1715 - 1750	8M96G7W	QPSK	0.336	25.27
LTE Band 4	1715 - 1750	8M94W7W	16QAM	0.257	24.10
LTE Band 2	1850.7 - 1909.3	1M09G7W	QPSK	0.232	23.65
LTE Band 2	1850.7 - 1909.3	1M10W7W	16QAM	0.182	22.61
LTE Band 2	1851.5 - 1908.5	2M69G7W	QPSK	0.247	23.93
LTE Band 2	1851.5 - 1908.5	2M70W7W	16QAM	0.197	22.95
LTE Band 2	1852.5 - 1907.5	4M49G7W	QPSK	0.236	23.72
LTE Band 2	1852.5 - 1907.5	4M48W7W	16QAM	0.181	22.58
LTE Band 2	1855 - 1905	8M91G7W	QPSK	0.213	23.28
LTE Band 2	1855 - 1905	8M91W7W	16QAM	0.170	22.31

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




 Randy Ortanez
 President




FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 1 of 163

T A B L E O F C O N T E N T S


FCC PART 22, 24, 27 MEASUREMENT REPORT.....		4
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 TESTING FACILITY.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS.....		6
3.1 MEASUREMENT PROCEDURE.....		6
3.2 BLOCK A FREQUENCY RANGE.....		6
3.3 CELLULAR - BASE FREQUENCY BLOCKS.....		6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS.....		6
3.5 PCS - BASE FREQUENCY BLOCKS.....		6
3.6 PCS - MOBILE FREQUENCY BLOCKS.....		7
3.7 AWS - BASE FREQUENCY BLOCKS.....		7
3.8 AWS - MOBILE FREQUENCY BLOCKS.....		7
3.9 OCCUPIED BANDWIDTH.....		7
3.10 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		8
3.11 PEAK-AVERAGE RATIO.....		8
3.12 SVLTE.....		9
3.13 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....		10
3.14 FREQUENCY STABILITY / TEMPERATURE VARIATION.....		11
4.0 TEST EQUIPMENT CALIBRATION DATA.....		12
5.0 SAMPLE CALCULATIONS.....		13
6.0 TEST RESULTS.....		14
6.1 SUMMARY.....		14
6.2 EFFECTIVE RADIATED POWER (ERP).....		15
6.3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP).....		17
6.4 BAND 12 RADIATED SPURIOUS EMISSIONS.....		19
6.5 BAND 17 RADIATED SPURIOUS EMISSIONS.....		22
6.6 BAND 5 RADIATED SPURIOUS EMISSIONS.....		25
6.7 BAND 4 RADIATED SPURIOUS EMISSIONS.....		28
6.8 BAND 2 RADIATED SPURIOUS EMISSIONS.....		31
6.9 BAND 12 FREQUENCY STABILITY MEASUREMENTS.....		34
6.10 BAND 17 FREQUENCY STABILITY MEASUREMENTS.....		36
6.11 BAND 5 FREQUENCY STABILITY MEASUREMENTS.....		38
6.12 BAND 4 FREQUENCY STABILITY MEASUREMENTS.....		40
6.13 BAND 2 FREQUENCY STABILITY MEASUREMENTS.....		42
7.0 BAND 12 PLOTS OF EMISSIONS.....		44
8.0 BAND 17 PLOTS OF EMISSIONS.....		68
9.0 BAND 5 PLOTS OF EMISSIONS.....		80
10.0 BAND 4 PLOTS OF EMISSIONS.....		105
11.0 BAND 2 PLOTS OF EMISSIONS.....		134
12.0 CONCLUSION.....		163

FCC ID: V65C6721A1	 <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 2 of 163	



MEASUREMENT REPORT

FCC Part 22, 24, 27





§2.1033 General Information



APPLICANT: KYOCERA Communications, Inc.
APPLICANT ADDRESS: 8611 Balboa Ave
 San Diego, CA 92123, USA
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22; §24; §27
BASE MODEL: C6721
FCC ID: V65C6721A1
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: 256691412905244675 Production Pre-Production Engineering
 99000051502126
DATE(S) OF TEST: 12/12 - 01/08/13, 02/21-03/05/13
TEST REPORT S/N: 0Y1212071744.V65

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.**



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: V65C6721A1	 FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 3 of 163	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

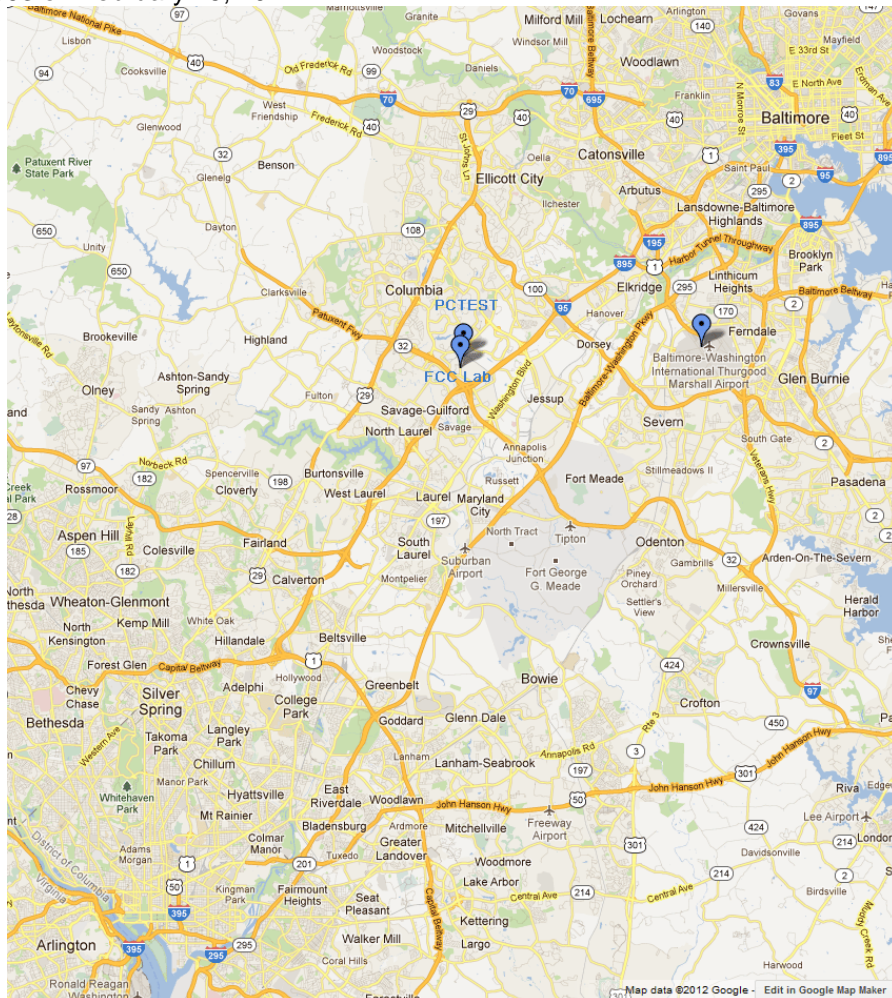




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 4 of 163

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Kyocera Portable Handset FCC ID: V65C6721A1**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 CDMA/EvDO Rev0/A (BC0, BC15, BC1), Band 2 (1.4, 3, 5, 10 MHz BW), Band 4 (1.4, 3, 5, 10 MHz BW), Band 5 (1.4, 3, 5, 10 MHz BW), Band 12 (1.4, 3, 5, 10 MHz BW), Band 17 (5, 10 MHz BW) SVLTE, 802.11b/g/n WLAN, Bluetooth (1x,EDR, LE)



2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 5 of 163	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) was used in the measurement of the **Kyocera Portable Handset FCC ID: V65C6721A1**.

3.2 Block A Frequency Range

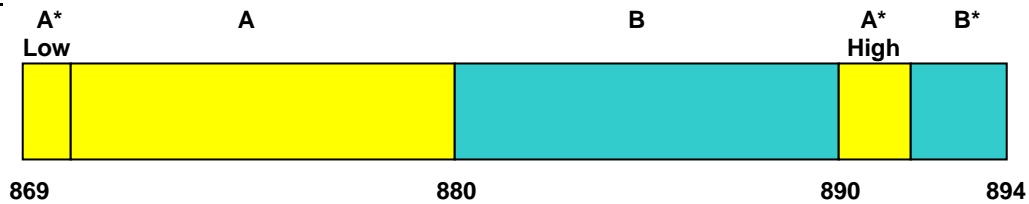
§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.

3.3 Cellular - Base Frequency Blocks

§24.905



BLOCK 1: 869 – 880 MHz (A* Low + A)

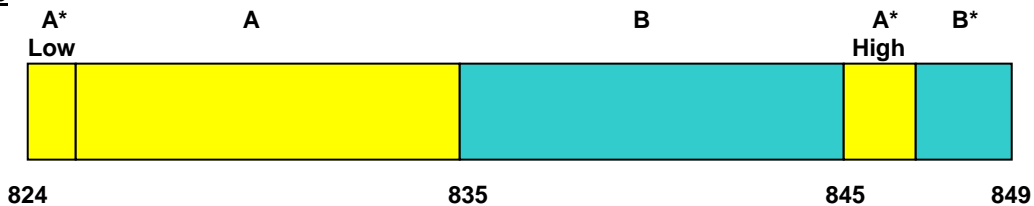
BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.4 Cellular - Mobile Frequency Blocks

§24.905



BLOCK 1: 824 – 835 MHz (A* Low + A)

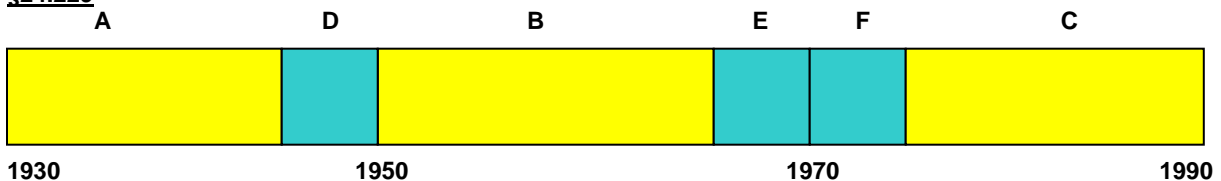
BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.5 PCS - Base Frequency Blocks

§24.229



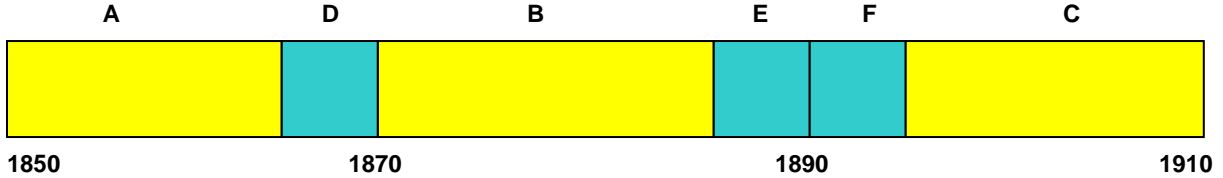
FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 6 of 163

BLOCK 1: 1930 – 1945 MHz (A)
 BLOCK 2: 1945 – 1950 MHz (D)
 BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 4: 1965 – 1970 MHz (E)
 BLOCK 5: 1970 – 1975 MHz (F)
 BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

§24.229

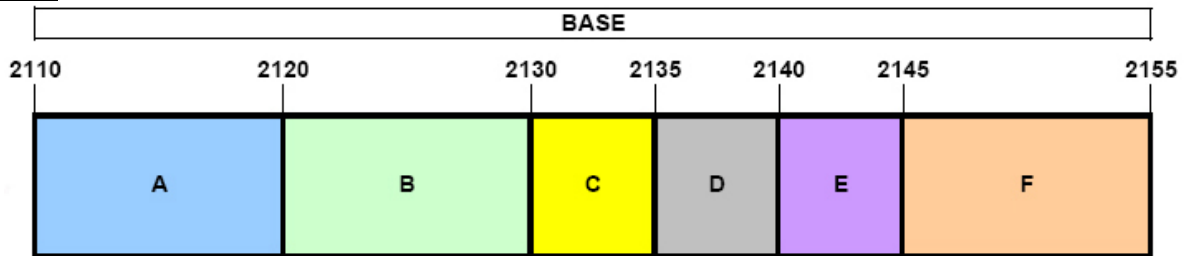


BLOCK 1: 1850 – 1865 MHz (A)
 BLOCK 2: 1865 – 1870 MHz (D)
 BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 4: 1885 – 1890 MHz (E)
 BLOCK 5: 1890 – 1895 MHz (F)
 BLOCK 6: 1895 – 1910 MHz (C)

3.7 AWS - Base Frequency Blocks

§27.5(h)

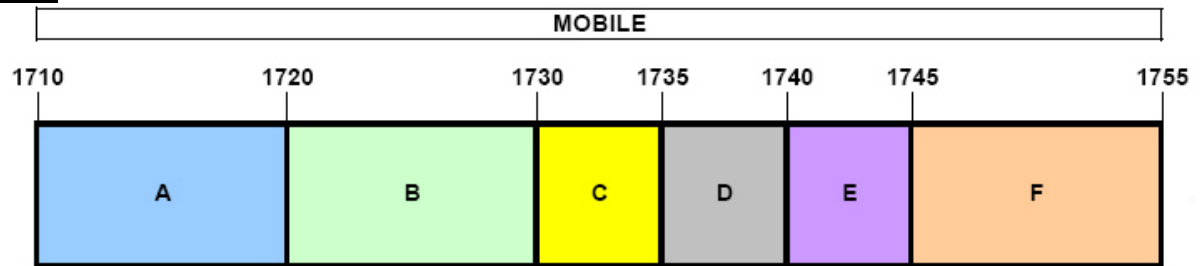


BLOCK 1: 2110 – 2120 MHz (A)
 BLOCK 2: 2120 – 2130 MHz (B)
 BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 4: 2135 – 2140 MHz (D)
 BLOCK 5: 2140 – 2145 MHz (E)
 BLOCK 6: 2145 – 2155 MHz (F)

3.8 AWS - Mobile Frequency Blocks

§27.5(h)



BLOCK 1: 1710 – 1720 MHz (A)
 BLOCK 2: 1720 – 1730 MHz (B)
 BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 4: 1735 – 1740 MHz (D)
 BLOCK 5: 1740 – 1745 MHz (E)
 BLOCK 6: 1745 – 1755 MHz (F)

3.9 Occupied Bandwidth

§2.1049 RSS-Gen(4.6.1) RSS-133(2.3) RSS-139(2.3)

The implementation of this test is performed by the spectrum analyzer's occupied bandwidth function. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 7 of 163

3.10 Spurious and Harmonic Emissions at Antenna Terminal



§2.1051 §22.917(a)(b) §24.238(a)(b) §27.53(g) §27.53(h) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Cell band, 698–746 MHz band, or 1 MHz or greater for PCS band, AWS band. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed for PCS band, AWS band. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.11 Peak-Average Ratio

§24.232(d) §27.50(d.5) RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 8 of 163	

3.12 SVLTE



§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

This device is capable of operating in SVLTE mode in the following cases:

No.	Simultaneous Transmit Configurations	Head	Body-Worn Accessory	Wireless Router	Note
		IEEE 1528, Supp C	Supplement C	FCC KDB 941225 D06 edges/sides	
1	1X CDMA Voice + LTE Data	√	√	N/A	SVLTE

Table 3-1. SVLTE Transmit Configurations

All modes of SVLTE operation were investigated. It was determined that this device did not produce any intermodulation products that were within 25dB of the spurious emission limit so the emissions are not reported herein.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 9 of 163	

3.13 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(c.10) §27.50(d.4) §27.53(g) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1) RSS-139(6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.



The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power} [Watts])$ specified in 22.917(a) and 24.238(a).

FCC ID: V65C6721A1	 FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 10 of 163

3.14 Frequency Stability / Temperature Variation

§2.1055 §22.863 §22.905 §24.229 §24.235 §27.5(c) §27.5(h) §27.54 RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)



The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24 and 27. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: V65C6721A1	 FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 11 of 163

4.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/25/2012	Annual	1/25/2013	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/5/2012	Annual	4/5/2013	MY45470194
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Espec	ESX-2CA	Environmental Chamber	4/4/2012	Annual	4/4/2013	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1200+	High Pass Filter	1/15/2012	Annual	1/15/2013	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/15/2012	Annual	1/15/2013	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/7/2011	Biennial	10/7/2013	103962
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	ESU26	EMI Test Receiver	1/15/2012	Annual	1/15/2013	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-1. Test Equipment (12/12/12 - 01/08/13)

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/5/2012	Annual	4/5/2013	MY45470194
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Espec	ESX-2CA	Environmental Chamber	4/4/2012	Annual	4/4/2013	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1200+	High Pass Filter	1/17/2013	Annual	1/17/2014	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Rohde & Schwarz	CMU200	Base Station Simulator	5/22/2012	Annual	5/22/2013	109892
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/7/2011	Biennial	10/7/2013	103962
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	ESU26	EMI Test Receiver	3/15/2012	Annual	3/15/2013	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	10/3/2011	Biennial	10/3/2013	91052522TX
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-2. Test Equipment (02/21/2013 – 03/05/2013)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 12 of 163

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

16QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: V65C6721A1	 FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 13 of 163

6.0 TEST RESULTS

6.1 Summary



Company Name: KYOCERA Communications, Inc.
 FCC ID: V65C6721A1
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0, 8.0, 9.0, 10.0, 11.0
2.1051 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Band Edge / Conducted Spurious Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Section 7.0, 8.0, 9.0, 10.0, 11.0
24.232(d) 27.50(d.5)	Peak-Average Ratio	< 13 dB		PASS	Section 10.0, 11.0
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
22.913(a.2)	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(c.10)	Effective Radiated Power (Band 12 17)	< 3 Watts max. ERP		PASS	Section 6.2
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 6.3
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Undesirable Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 6.4, 6.5, 6.6, 6.7, 6.8
2.1055.22.355 22.863 22.905 24.229 24.235 27.5(c) 27.5(h) 27.54	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section 6.9, 6.10, 6.11, 6.12, 6.13

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 9.0 10.0 11.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 14 of 163	

6.2 Effective Radiated Power (ERP)



§22.913(a.2) §27.50(c.10) RSS-132(4.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
699.70	1.4	QPSK	Standard	1/5	16.09	2.30	H	18.39	0.069	-16.38
707.50	1.4	QPSK	Standard	1/5	16.35	2.37	H	18.72	0.075	-16.05
715.30	1.4	QPSK	Standard	1/5	16.39	2.44	H	18.83	0.076	-15.94
699.70	1.4	16-QAM	Standard	1/5	15.05	2.30	H	17.35	0.054	-17.42
707.50	1.4	16-QAM	Standard	1/5	15.27	2.37	H	17.64	0.058	-17.13
715.30	1.4	16-QAM	Standard	1/5	15.35	2.44	H	17.79	0.060	-16.98
700.50	3	QPSK	Standard	1/14	16.08	2.30	H	18.38	0.069	-16.39
707.50	3	QPSK	Standard	1/14	16.30	2.37	H	18.67	0.074	-16.10
714.50	3	QPSK	Standard	1/14	15.87	2.44	H	18.31	0.068	-16.46
700.50	3	16-QAM	Standard	1/14	14.97	2.30	H	17.27	0.053	-17.50
707.50	3	16-QAM	Standard	1/14	15.19	2.37	H	17.56	0.057	-17.21
714.50	3	16-QAM	Standard	1/14	14.76	2.44	H	17.20	0.053	-17.57
701.50	5	QPSK	Standard	1/24	15.49	2.30	H	17.79	0.060	-16.98
707.50	5	QPSK	Standard	1/24	16.50	2.37	H	18.87	0.077	-15.90
713.50	5	QPSK	Standard	1/0	16.19	2.44	H	18.63	0.073	-16.14
701.50	5	16-QAM	Standard	1/24	14.51	2.30	H	16.81	0.048	-17.96
707.50	5	16-QAM	Standard	1/24	15.53	2.37	H	17.90	0.062	-16.87
713.50	5	16-QAM	Standard	1/0	15.30	2.44	H	17.74	0.059	-17.03
704.00	10	QPSK	Standard	1/49	16.96	2.30	H	19.26	0.084	-15.51
707.50	10	QPSK	Standard	1/49	17.04	2.37	H	19.41	0.087	-15.36
711.00	10	QPSK	Standard	1/49	16.32	2.44	H	18.76	0.075	-16.01
704.00	10	16-QAM	Standard	1/49	15.83	2.30	H	18.13	0.065	-16.64
707.50	10	16-QAM	Standard	1/49	15.74	2.37	H	18.11	0.065	-16.66
711.00	10	16-QAM	Standard	1/49	15.14	2.44	H	17.58	0.057	-17.19

Table 6-2. ERP Data (Band 12)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1/24	16.20	2.35	H	18.55	0.072	-16.22
710.00	5	QPSK	Standard	1/0	15.90	2.42	H	18.32	0.068	-16.45
713.50	5	QPSK	Standard	1/0	15.98	2.49	H	18.47	0.070	-16.30
706.50	5	16-QAM	Standard	1/24	15.26	2.35	H	17.61	0.058	-17.16
710.00	5	16-QAM	Standard	1/0	14.93	2.42	H	17.35	0.054	-17.42
713.50	5	16-QAM	Standard	1/0	15.09	2.49	H	17.58	0.057	-17.19
709.00	10	QPSK	Standard	1/49	16.71	2.35	H	19.06	0.081	-15.71
710.00	10	QPSK	Standard	1/49	16.79	2.42	H	19.21	0.083	-15.56
711.00	10	QPSK	Standard	1/49	16.69	2.49	H	19.18	0.083	-15.59
709.00	10	16-QAM	Standard	1/49	15.62	2.35	H	17.97	0.063	-16.80
710.00	10	16-QAM	Standard	1/49	15.68	2.42	H	18.10	0.065	-16.67
711.00	10	16-QAM	Standard	1/49	15.56	2.49	H	18.05	0.064	-16.72

Table 6-3. ERP Data (Band 17)



FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 15 of 163	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
824.70	1.4	QPSK	Standard	1/5	15.60	4.68	H	20.28	0.107	-18.17
836.50	1.4	QPSK	Standard	1/0	15.82	4.82	H	20.64	0.116	-17.81
848.30	1.4	QPSK	Standard	1/0	16.04	4.96	H	21.00	0.126	-17.45
824.70	1.4	16-QAM	Standard	1/5	14.64	4.68	H	19.32	0.086	-19.13
836.50	1.4	16-QAM	Standard	1/0	14.75	4.82	H	19.57	0.091	-18.88
848.30	1.4	16-QAM	Standard	1/0	15.03	4.96	H	19.99	0.100	-18.46
825.50	3	QPSK	Standard	1/14	16.19	4.68	H	20.87	0.122	-17.58
836.50	3	QPSK	Standard	1/14	16.03	4.82	H	20.85	0.122	-17.60
847.50	3	QPSK	Standard	1/14	16.40	4.96	H	21.36	0.137	-17.09
825.50	3	16-QAM	Standard	1/14	15.15	4.68	H	19.83	0.096	-18.62
836.50	3	16-QAM	Standard	1/14	14.98	4.82	H	19.80	0.096	-18.65
847.50	3	16-QAM	Standard	1/14	15.27	4.96	H	20.23	0.105	-18.22
826.50	5	QPSK	Standard	1/24	16.70	4.68	H	21.38	0.138	-17.07
836.50	5	QPSK	Standard	1/24	16.27	4.82	H	21.09	0.129	-17.36
846.50	5	QPSK	Standard	1/0	17.08	4.96	H	22.04	0.160	-16.41
826.50	5	16-QAM	Standard	1/24	15.89	4.68	H	20.57	0.114	-17.88
836.50	5	16-QAM	Standard	1/24	15.31	4.82	H	20.13	0.103	-18.32
846.50	5	16-QAM	Standard	1/0	16.17	4.96	H	21.13	0.130	-17.32
829.00	10	QPSK	Standard	1/0	15.85	4.68	H	20.53	0.113	-17.92
836.50	10	QPSK	Standard	1/0	16.25	4.82	H	21.07	0.128	-17.38
844.00	10	QPSK	Standard	1/0	16.67	4.96	H	21.63	0.146	-16.82
829.00	10	16-QAM	Standard	1/0	15.04	4.68	H	19.72	0.094	-18.73
836.50	10	16-QAM	Standard	1/0	15.33	4.82	H	20.15	0.104	-18.30
844.00	10	16-QAM	Standard	1/0	15.55	4.96	H	20.51	0.112	-17.94

Table 6-4. ERP Data (Band 5)

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.



FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 16 of 163	

6.3 Equivalent Isotropic Radiated Power (EIRP)

§24.232(c) §27.50(d.4) RSS-133(6.4) RSS-139(6.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1710.70	1.4	QPSK	Standard	1/0	12.47	9.89	H	22.36	0.172	-7.64
1732.50	1.4	QPSK	Standard	1/5	13.22	9.85	H	23.07	0.203	-6.93
1754.30	1.4	QPSK	Standard	1/5	13.30	9.80	H	23.10	0.204	-6.90
1710.70	1.4	16-QAM	Standard	1/0	11.77	9.89	H	21.66	0.147	-8.34
1732.50	1.4	16-QAM	Standard	1/5	12.47	9.85	H	22.32	0.170	-7.68
1754.30	1.4	16-QAM	Standard	1/5	12.32	9.80	H	22.12	0.163	-7.88
1711.50	3	QPSK	Standard	1/14	14.23	9.89	H	24.12	0.258	-5.88
1732.50	3	QPSK	Standard	1/14	15.42	9.85	H	25.27	0.336	-4.73
1753.50	3	QPSK	Standard	1/14	14.85	9.80	H	24.65	0.292	-5.35
1711.50	3	16-QAM	Standard	1/14	13.30	9.89	H	23.19	0.208	-6.81
1732.50	3	16-QAM	Standard	1/14	14.47	9.85	H	24.32	0.270	-5.68
1753.50	3	16-QAM	Standard	1/14	13.79	9.80	H	23.59	0.229	-6.41
1712.50	5	QPSK	Standard	1/0	13.94	9.89	H	23.83	0.242	-6.17
1732.50	5	QPSK	Standard	1/0	15.45	9.85	H	25.30	0.339	-4.70
1752.50	5	QPSK	Standard	1/0	14.79	9.80	H	24.59	0.288	-5.41
1712.50	5	16-QAM	Standard	1/0	12.89	9.89	H	22.78	0.190	-7.22
1732.50	5	16-QAM	Standard	1/0	14.37	9.85	H	24.22	0.264	-5.78
1752.50	5	16-QAM	Standard	1/0	13.67	9.80	H	23.47	0.223	-6.53
1715.00	10	QPSK	Standard	1/0	13.16	9.89	H	23.05	0.202	-6.95
1732.50	10	QPSK	Standard	1/49	15.42	9.85	H	25.27	0.336	-4.73
1750.00	10	QPSK	Standard	1/0	15.27	9.80	H	25.07	0.322	-4.93
1715.00	10	16-QAM	Standard	1/0	12.12	9.89	H	22.01	0.159	-7.99
1732.50	10	16-QAM	Standard	1/49	14.25	9.85	H	24.10	0.257	-5.90
1750.00	10	16-QAM	Standard	1/0	14.20	9.80	H	24.00	0.251	-6.00

Table 6-5. EIRP Data (Band 4)



FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 17 of 163	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1850.70	1.4	QPSK	Standard	1/5	13.46	9.59	H	23.05	0.202	-9.96
1880.00	1.4	QPSK	Standard	1/0	14.12	9.53	H	23.65	0.232	-9.36
1909.30	1.4	QPSK	Standard	1/0	12.44	9.48	H	21.92	0.156	-11.09
1850.70	1.4	16-QAM	Standard	1/5	12.52	9.59	H	22.11	0.162	-10.90
1880.00	1.4	16-QAM	Standard	1/0	13.08	9.53	H	22.61	0.182	-10.40
1909.30	1.4	16-QAM	Standard	1/0	11.36	9.48	H	20.84	0.121	-12.17
1851.50	3	QPSK	Standard	1/0	13.63	9.59	H	23.22	0.210	-9.79
1880.00	3	QPSK	Standard	1/0	14.40	9.53	H	23.93	0.247	-9.08
1908.50	3	QPSK	Standard	1/0	13.05	9.48	H	22.53	0.179	-10.48
1851.50	3	16-QAM	Standard	1/0	12.62	9.59	H	22.21	0.166	-10.80
1880.00	3	16-QAM	Standard	1/0	13.42	9.53	H	22.95	0.197	-10.06
1908.50	3	16-QAM	Standard	1/0	12.02	9.48	H	21.50	0.141	-11.51
1852.50	5	QPSK	Standard	1/0	13.55	9.59	H	23.14	0.206	-9.87
1880.00	5	QPSK	Standard	1/0	14.19	9.53	H	23.72	0.236	-9.29
1907.50	5	QPSK	Standard	1/0	13.36	9.48	H	22.84	0.192	-10.17
1852.50	5	16-QAM	Standard	1/0	12.44	9.59	H	22.03	0.160	-10.98
1880.00	5	16-QAM	Standard	1/0	13.05	9.53	H	22.58	0.181	-10.43
1907.50	5	16-QAM	Standard	1/0	12.38	9.48	H	21.86	0.153	-11.15
1855.00	10	QPSK	Standard	1/0	13.26	9.59	H	22.85	0.193	-10.16
1880.00	10	QPSK	Standard	1/0	13.75	9.53	H	23.28	0.213	-9.73
1905.00	10	QPSK	Standard	1/0	12.81	9.48	H	22.29	0.169	-10.72
1855.00	10	16-QAM	Standard	1/0	12.23	9.59	H	21.82	0.152	-11.19
1880.00	10	16-QAM	Standard	1/0	12.78	9.53	H	22.31	0.170	-10.70
1905.00	10	16-QAM	Standard	1/0	11.83	9.48	H	21.31	0.135	-11.70

Table 6-6. EIRP Data (Band 2)

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 18 of 163	

6.4 Band 12 Radiated Spurious Emissions

§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 704.00 MHz
 CHANNEL: 23060
 MEASURED OUTPUT POWER: 19.26 dBm = 0.084 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.26 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1408.00	-58.05	3.59	-54.46	H	73.72
2112.00	-82.52	3.88	-78.64	H	97.90
2816.00	-78.91	5.00	-73.90	H	93.17
3520.00	-81.71	6.25	-75.46	H	94.73
4224.00	-80.61	7.21	-73.40	H	92.67

Table 6-7. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 19 of 163	

Band 12 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 19.41 dBm = 0.087 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.41 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1415.00	-58.11	3.64	-54.47	H	73.88
2122.50	-82.51	3.90	-78.61	H	98.02
2830.00	-78.76	5.02	-73.75	H	93.16
3537.50	-81.60	6.25	-75.35	H	94.76
4245.00	-80.68	7.24	-73.44	H	92.85

Table 6-8. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 20 of 163	

Band 12 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 711.00 MHz
 CHANNEL: 23130
 MEASURED OUTPUT POWER: 18.76 dBm = 0.075 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 31.76 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1422.00	-58.37	3.69	-54.68	H	73.44
2133.00	-82.50	3.92	-78.58	H	97.34
2844.00	-78.62	5.03	-73.59	H	92.35
3555.00	-81.48	6.25	-75.23	H	93.99
4266.00	-80.70	7.25	-73.45	H	92.21

Table 6-9. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 21 of 163	

6.5 Band 17 Radiated Spurious Emissions §2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 709.00 MHz
 CHANNEL: 23780
 MEASURED OUTPUT POWER: 19.06 dBm = 0.081 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.06 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1418.00	-57.70	3.63	-54.07	H	73.14
2127.00	-82.52	3.90	-78.62	H	97.68
2836.00	-78.80	5.01	-73.79	H	92.85
3545.00	-81.63	6.25	-75.38	H	94.44
4254.00	-80.66	7.23	-73.43	H	92.49
4963.00	-80.41	7.86	-72.54	H	91.60

Table 6-10. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 22 of 163	

Band 17 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 710.00 MHz
 CHANNEL: 23790
 MEASURED OUTPUT POWER: 19.21 dBm = 0.083 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.21 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1420.00	-57.77	3.68	-54.09	H	73.30
2130.00	-82.51	3.92	-78.59	H	97.80
2840.00	-78.66	5.02	-73.63	H	92.85
3550.00	-81.51	6.25	-75.26	H	94.48
4260.00	-80.70	7.25	-73.45	H	92.66
4970.00	-80.41	7.90	-72.50	H	91.72

Table 6-11. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 23 of 163	

Band 17 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 711.00 MHz
 CHANNEL: 23800
 MEASURED OUTPUT POWER: 19.18 dBm = 0.083 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.18 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1422.00	-58.66	3.73	-54.93	H	74.11
2133.00	-82.50	3.94	-78.56	H	97.74
2844.00	-78.51	5.04	-73.48	H	92.66
3555.00	-81.40	6.25	-75.15	H	94.33
4266.00	-80.70	7.25	-73.45	H	92.63
4977.00	-80.41	7.94	-72.47	H	91.65

Table 6-12. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 24 of 163	

6.6 Band 5 Radiated Spurious Emissions

§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 826.50 MHz
 CHANNEL: 20425
 MEASURED OUTPUT POWER: 21.38 dBm = 0.138 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.38 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1653.00	-52.24	2.50	-49.74	H	71.13
2479.50	-52.32	2.82	-49.50	H	70.88
3306.00	-80.74	5.52	-75.22	H	96.61
4132.50	-80.35	7.08	-73.27	H	94.65
4959.00	-80.41	7.91	-72.50	H	93.88
5785.50	-78.78	8.51	-70.27	H	91.66

Table 6-13. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 25 of 163

Band 5 Radiated Spurious Measurements (continued)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MEASURED OUTPUT POWER: 21.09 dBm = 0.129 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.09 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.00	-46.01	2.34	-43.67	H	64.76
2509.50	-52.77	2.84	-49.93	H	71.03
3346.00	-80.93	5.64	-75.29	H	96.38
4182.50	-80.48	7.14	-73.33	H	94.43
5019.00	-80.39	7.97	-72.42	H	93.51
5855.50	-78.48	8.46	-70.01	H	91.10

Table 6-14. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 26 of 163	

Band 5 Radiated Spurious Measurements (continued)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 846.50 MHz
 CHANNEL: 20625
 MEASURED OUTPUT POWER: 22.04 dBm = 0.160 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.04 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.00	-45.07	2.18	-42.89	H	64.93
2539.50	-52.43	3.04	-49.39	H	71.43
3386.00	-81.11	5.76	-75.35	H	97.39
4232.50	-80.60	7.20	-73.40	H	95.44
5079.00	-80.34	8.00	-72.33	H	94.37
5925.50	-78.17	8.42	-69.75	H	91.79

Table 6-15. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 27 of 163	

6.7 Band 4 Radiated Spurious Emissions

§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1712.50 MHz
 CHANNEL: 19975
 MEASURED OUTPUT POWER: 23.83 dBm = 0.242 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.83 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3425.00	-52.67	8.09	-44.58	H	68.41
5137.50	-83.75	10.21	-73.55	H	97.38
6850.00	-82.51	11.31	-71.19	H	95.02
8562.50	-82.93	13.02	-69.91	H	93.74
10275.00	-79.78	13.01	-66.77	H	90.60
11987.50	-76.91	13.21	-63.70	H	87.53

Table 6-16. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 28 of 163	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1732.50 MHz
CHANNEL: 20175
MEASURED OUTPUT POWER: 25.30 dBm = 0.339 W
MODULATION SIGNAL: QPSK
BANDWIDTH: 5 MHz
DISTANCE: 3 meters
LIMIT: $43 + 10 \log_{10}(W) =$ 38.30 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-52.66	8.26	-44.39	H	69.69
5197.50	-83.73	10.26	-73.47	H	98.77
6930.00	-82.63	11.42	-71.21	H	96.51
8662.50	-82.78	13.07	-69.71	H	95.01
10395.00	-79.82	13.12	-66.70	H	92.00
12127.50	-76.41	13.25	-63.16	H	88.46

Table 6-17. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 29 of 163	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1752.50 MHz
 CHANNEL: 20375
 MEASURED OUTPUT POWER: 24.59 dBm = 0.288 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.59 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3505.00	-54.18	8.40	-45.78	H	70.37
5257.50	-83.71	10.32	-73.40	H	97.99
7010.00	-82.72	11.51	-71.21	H	95.80
8762.50	-82.62	13.11	-69.51	H	94.10
10515.00	-79.67	13.20	-66.47	H	91.07
12267.50	-75.91	13.31	-62.60	H	87.19

Table 6-18. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 30 of 163	

6.8 Band 2 Radiated Spurious Emissions

§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1851.50 MHz
 CHANNEL: 18615
 MEASURED OUTPUT POWER: 23.22 dBm = 0.210 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.22 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3703.00	-49.25	8.40	-40.85	H	64.07
5554.50	-56.96	10.63	-46.33	H	69.55
7406.00	-82.54	11.84	-70.70	H	93.92
9257.50	-82.05	13.29	-68.76	H	91.97
11109.00	-75.28	13.50	-61.78	H	85.00
12960.50	-74.83	13.68	-61.15	H	84.37

Table 6-19. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 31 of 163

Band 2 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 23.93 dBm = 0.247 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.93 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-49.45	8.42	-41.03	H	64.96
5640.00	-56.47	10.66	-45.81	H	69.75
7520.00	-82.49	11.92	-70.57	H	94.50
9400.00	-81.88	13.24	-68.64	H	92.57
11280.00	-77.66	13.49	-64.17	H	88.11
13160.00	-74.53	13.83	-60.70	H	84.63

Table 6-20. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 32 of 163	

Band 2 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1908.50 MHz
 CHANNEL: 19185
 MEASURED OUTPUT POWER: 22.53 dBm = 0.179 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.53 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3817.00	-50.02	8.55	-41.47	H	64.00
5725.50	-57.02	10.69	-46.33	H	68.86
7634.00	-82.54	12.05	-70.49	H	93.02
9542.50	-81.65	13.20	-68.45	H	90.98
11451.00	-78.12	13.43	-64.69	H	87.22
13359.50	-74.25	14.00	-60.25	H	82.78

Table 6-21. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 33 of 163	

6.9 Band 12 Frequency Stability Measurements

\$2.1055 \$22.355 \$27.5(c) \$27.54



OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,499,990	-10	-0.00000144
100 %		- 30	707,499,997	-3	-0.00000049
100 %		- 20	707,499,987	-13	-0.00000186
100 %		- 10	707,499,981	-19	-0.00000262
100 %		0	707,499,986	-14	-0.00000198
100 %		+ 10	707,499,987	-13	-0.00000188
100 %		+ 20	707,499,990	-10	-0.00000135
100 %		+ 30	707,499,997	-3	-0.00000049
100 %		+ 40	707,499,992	-8	-0.00000113
100 %		+ 50	707,499,988	-12	-0.00000164
115 %	4.37	+ 20	707,499,992	-8	-0.00000120
85 %	3.23	+ 20	707,499,998	-2	-0.00000028

Table 6-22. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 34 of 163	

Band 12 Frequency Stability Measurements (Cont'd)
§2.1055 §22.355 §27.5(c) §27.54

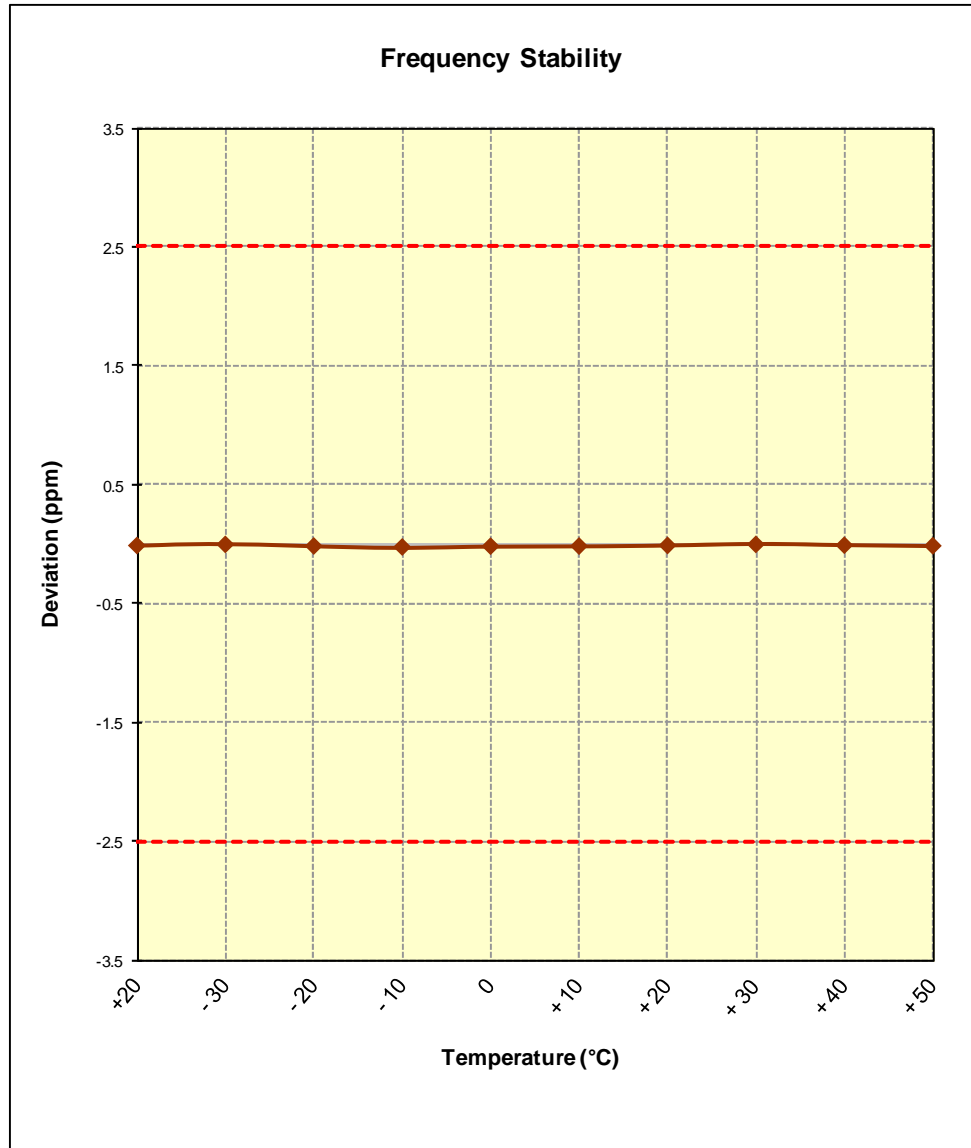




Figure 6-1. Frequency Stability Graph (Band 12)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 35 of 163

6.10 Band 17 Frequency Stability Measurements

\$2.1055 \$22.355 \$27.5(c) \$27.54



OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23090
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	709,999,997	-3	-0.00000037
100 %		- 30	709,999,985	-15	-0.00000215
100 %		- 20	709,999,991	-9	-0.00000121
100 %		- 10	709,999,995	-5	-0.00000075
100 %		0	709,999,990	-10	-0.00000136
100 %		+ 10	709,999,997	-3	-0.00000044
100 %		+ 20	709,999,990	-10	-0.00000141
100 %		+ 30	709,999,988	-12	-0.00000167
100 %		+ 40	709,999,992	-8	-0.00000106
100 %		+ 50	709,999,991	-9	-0.00000126
115 %	4.37	+ 20	709,999,980	-20	-0.00000279
85 %	3.23	+ 20	709,999,991	-9	-0.00000131

Table 6-23. Frequency Stability Data (Band 17)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 36 of 163	

Band 17 Frequency Stability Measurements (Cont'd)
§2.1055 §22.355 §27.5(c) §27.54

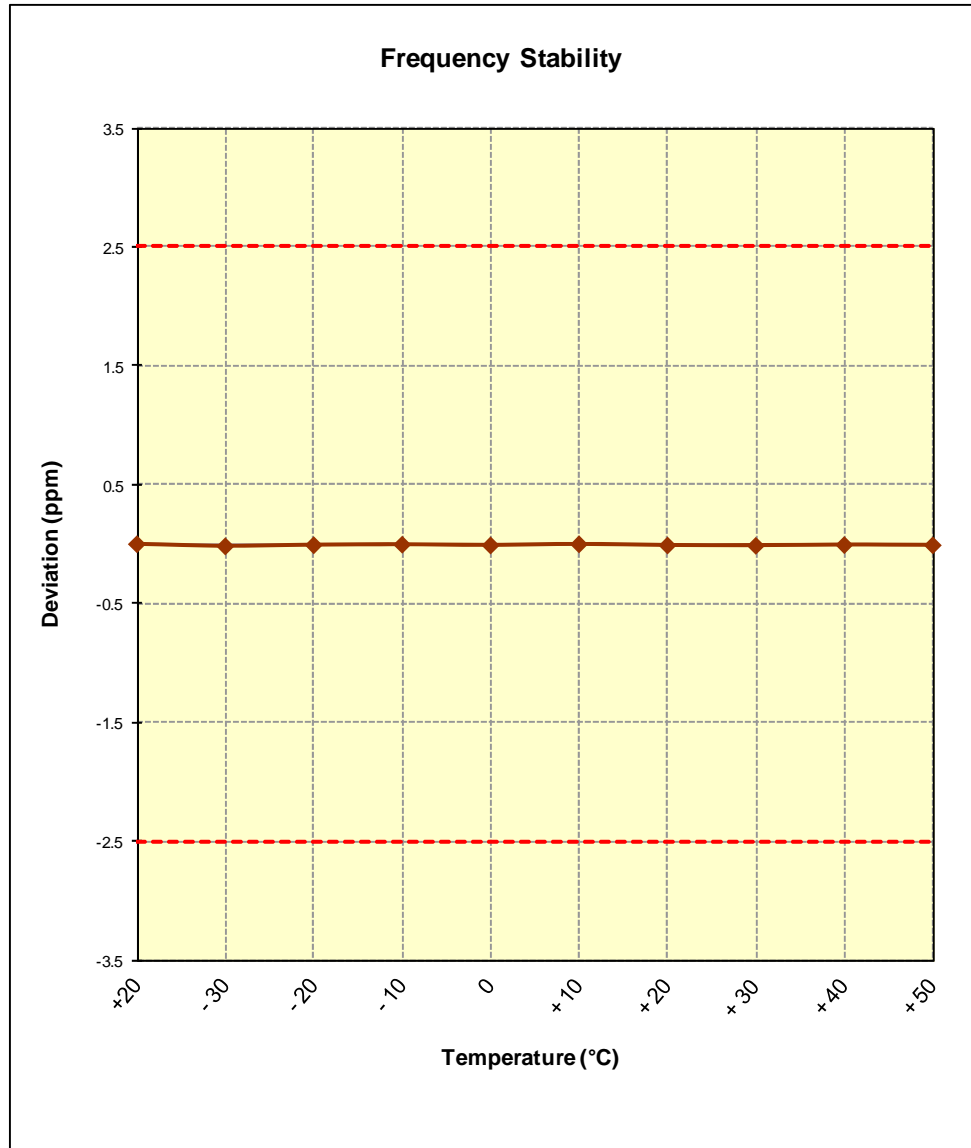




Figure 6-2. Frequency Stability Graph (Band 17)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 37 of 163	

6.11 Band 5 Frequency Stability Measurements

§2.1055 §22.355 §22.863 §22.905 RSS-132(4.3)



OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,499,990	-10	-0.00000114
100 %		- 30	836,499,981	-19	-0.00000227
100 %		- 20	836,499,991	-9	-0.00000107
100 %		- 10	836,499,991	-9	-0.00000113
100 %		0	836,499,999	-1	-0.00000014
100 %		+ 10	836,499,989	-11	-0.00000130
100 %		+ 20	836,499,989	-11	-0.00000127
100 %		+ 30	836,500,000	0	-0.00000001
100 %		+ 40	836,499,997	-3	-0.00000037
100 %		+ 50	836,499,983	-17	-0.00000208
115 %	4.37	+ 20	836,499,996	-4	-0.00000052
85 %	3.23	+ 20	836,499,999	-1	-0.00000010

Table 6-24. Frequency Stability Data (Band 5)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 38 of 163	

Band 5 Frequency Stability Measurements (Cont'd)
§2.1055 §2.355 §22.863 §22.905 RSS-132(4.3)

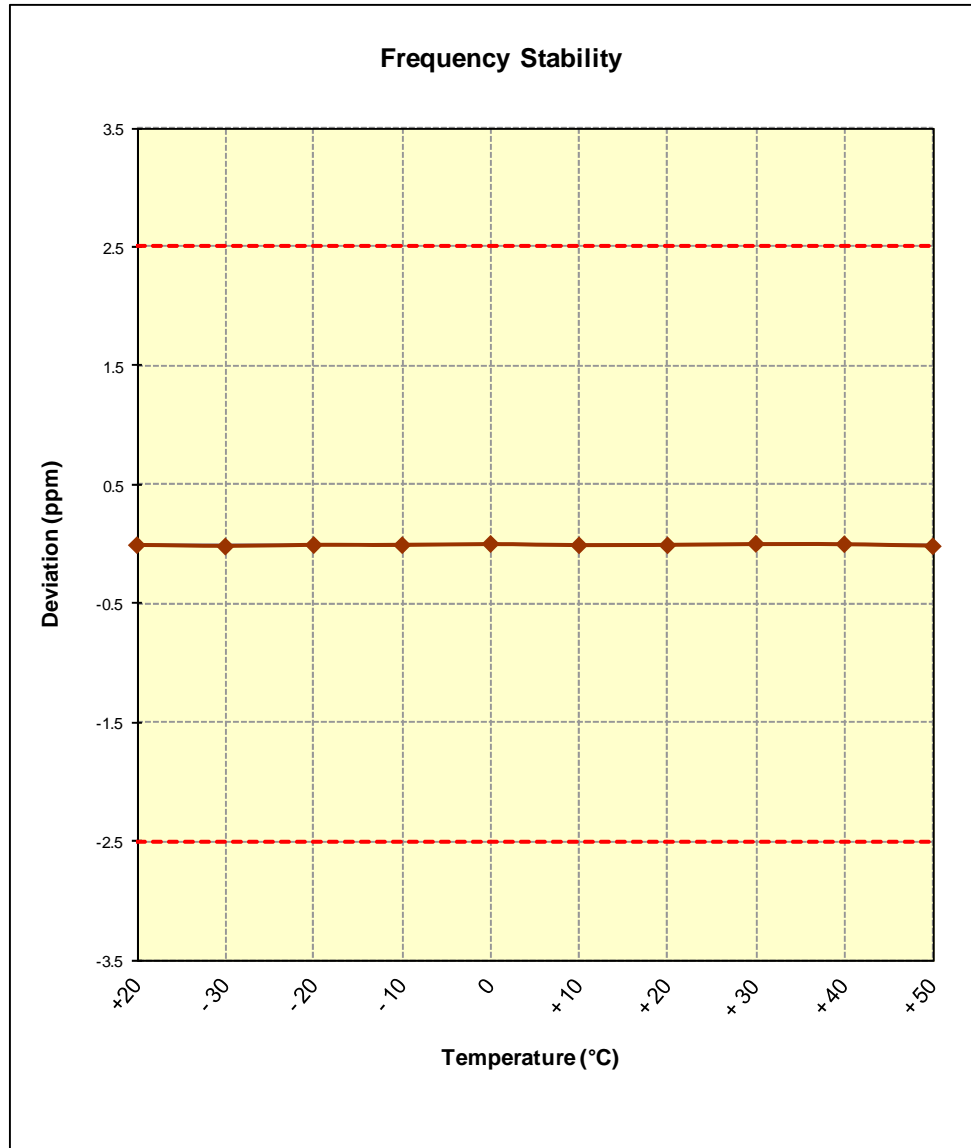




Figure 6-3. Frequency Stability Graph (Band 5)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 39 of 163	

6.12 Band 4 Frequency Stability Measurements

§2.1055 §22.355 §27.5(h) §27.54 RSS-139(6.3)

OPERATING FREQUENCY: 1,732,500,000 Hz

CHANNEL: 20175



REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,990	-10	-0.00000057
100 %		- 30	1,732,499,997	-3	-0.00000015
100 %		- 20	1,732,499,994	-6	-0.00000036
100 %		- 10	1,732,499,995	-5	-0.00000028
100 %		0	1,732,499,985	-15	-0.00000085
100 %		+ 10	1,732,499,981	-19	-0.00000111
100 %		+ 20	1,732,499,988	-12	-0.00000069
100 %		+ 30	1,732,499,991	-9	-0.00000049
100 %		+ 40	1,732,499,999	-1	-0.00000004
100 %		+ 50	1,732,499,993	-7	-0.00000039
115 %	4.37	+ 20	1,732,499,994	-6	-0.00000035
85 %	3.23	+ 20	1,732,499,993	-7	-0.00000038

Table 6-25. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 40 of 163	

Band 4 Frequency Stability Measurements (Cont'd)

§2.1055 §22.355 §27.5(h) §27.54 RSS-139(6.3)

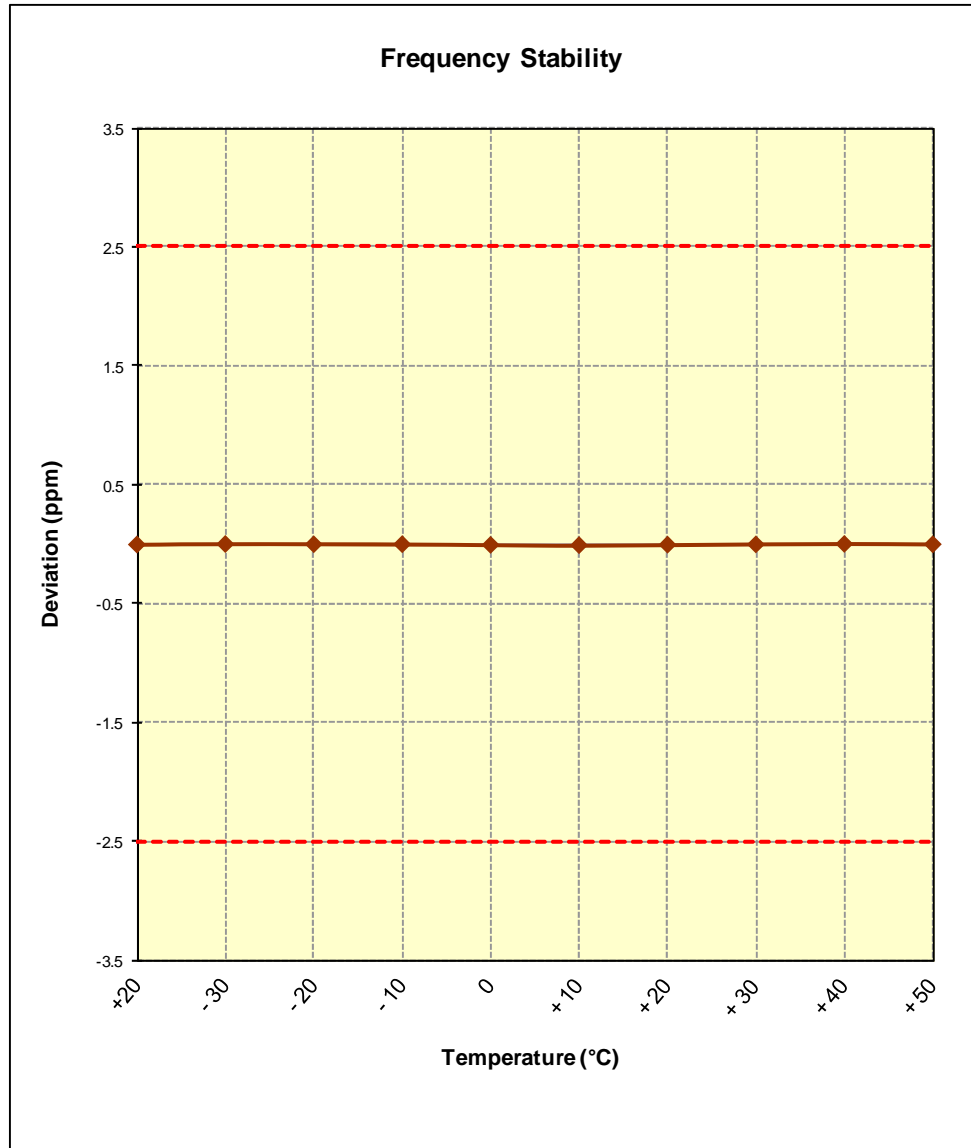




Figure 6-4. Frequency Stability Graph (Band 4)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 41 of 163

6.13 Band 2 Frequency Stability Measurements

§2.1055 §22.355 §24.229 §24.235 RSS-133(6.3)



OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,998	-2	-0.00000011
100 %		- 30	1,879,999,999	-1	-0.00000004
100 %		- 20	1,879,999,991	-9	-0.00000047
100 %		- 10	1,879,999,985	-15	-0.00000081
100 %		0	1,879,999,993	-7	-0.00000037
100 %		+ 10	1,879,999,987	-13	-0.00000070
100 %		+ 20	1,879,999,984	-16	-0.00000083
100 %		+ 30	1,879,999,987	-13	-0.00000067
100 %		+ 40	1,879,999,997	-3	-0.00000017
100 %		+ 50	1,879,999,983	-17	-0.00000089
115 %	4.37	+ 20	1,879,999,995	-5	-0.00000026
85 %	0.00	+ 20	1,879,999,980	-20	-0.00000106

Table 6-26. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 42 of 163	

Band 2 Frequency Stability Measurements (Cont'd)

§2.1055 §22.355 §22.229 §24.235 RSS-133(6.3)

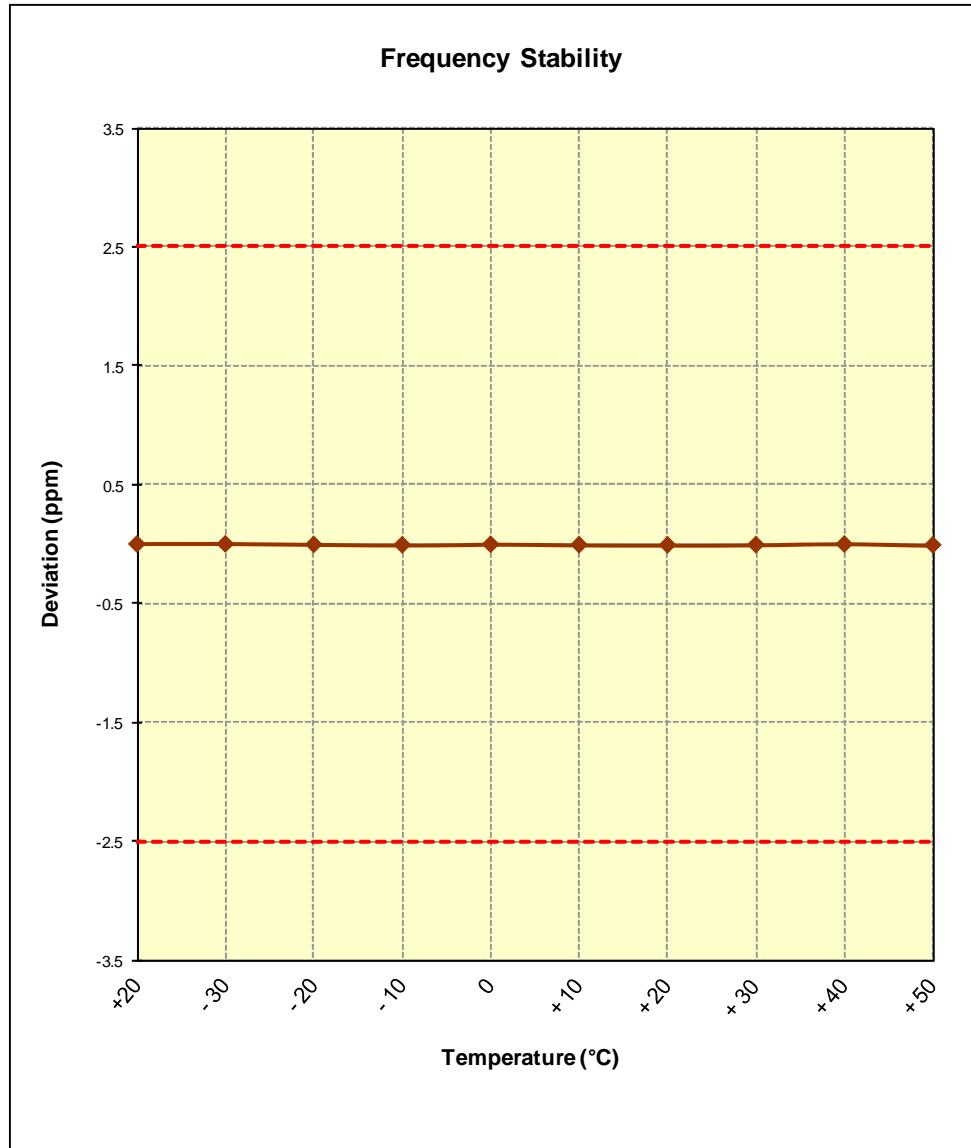


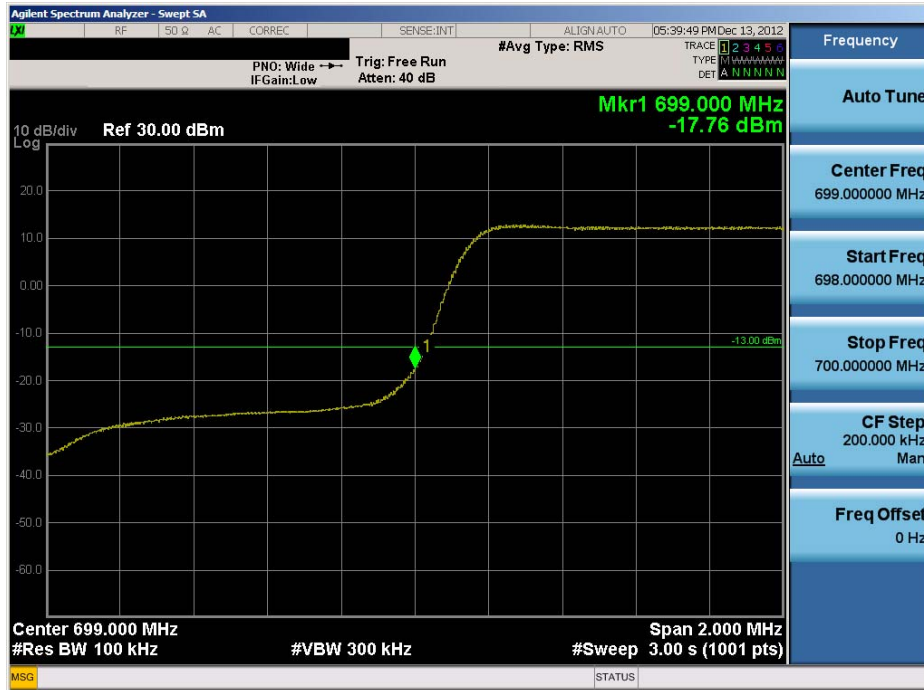


Figure 6-5. Frequency Stability Graph (Band 2)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 43 of 163	

7.0 BAND 12 PLOTS OF EMISSIONS

Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

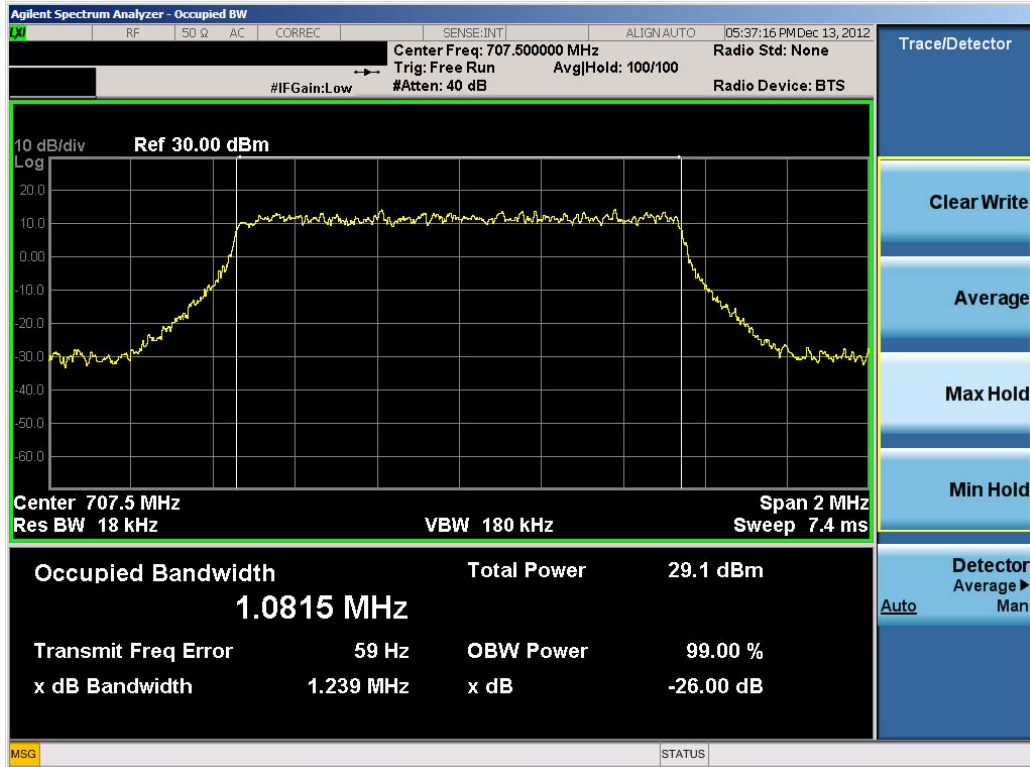


Plot 7-1. Lower Band Edge Plot (1.4MHz QPSK – RB Size 6)

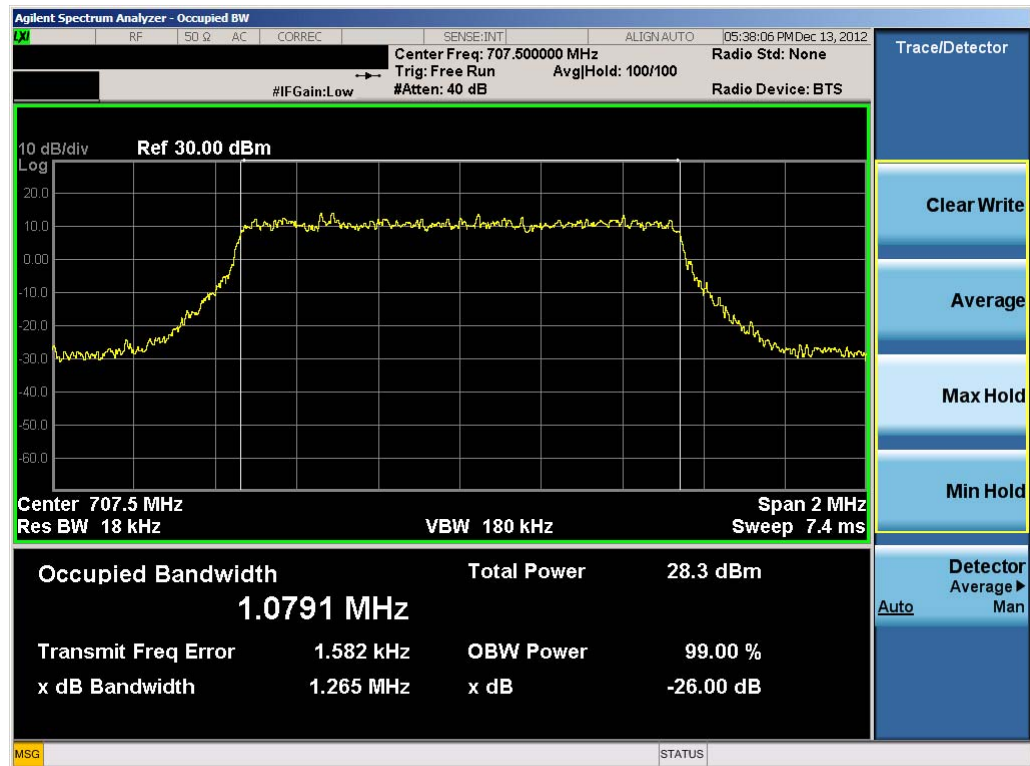


Plot 7-2. Lower Extended Band Edge Plot (1.4MHz QPSK – RB Size 6)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 44 of 163

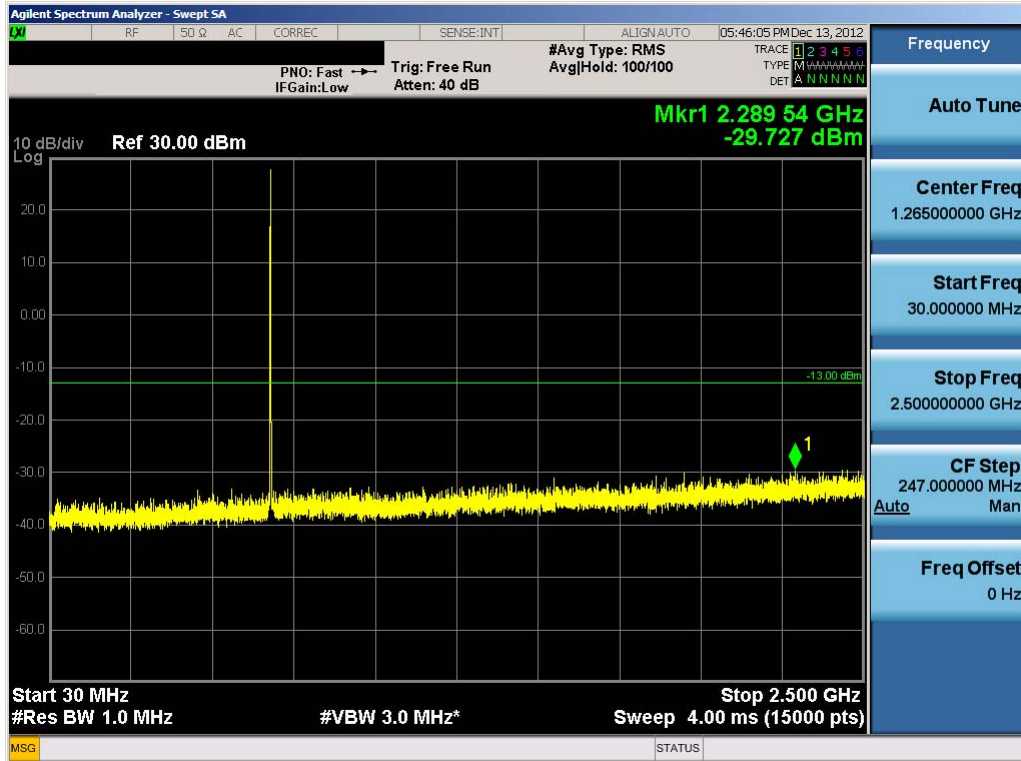


Plot 7-3. Occupied Bandwidth Plot (1.4MHz QPSK – RB Size 6)

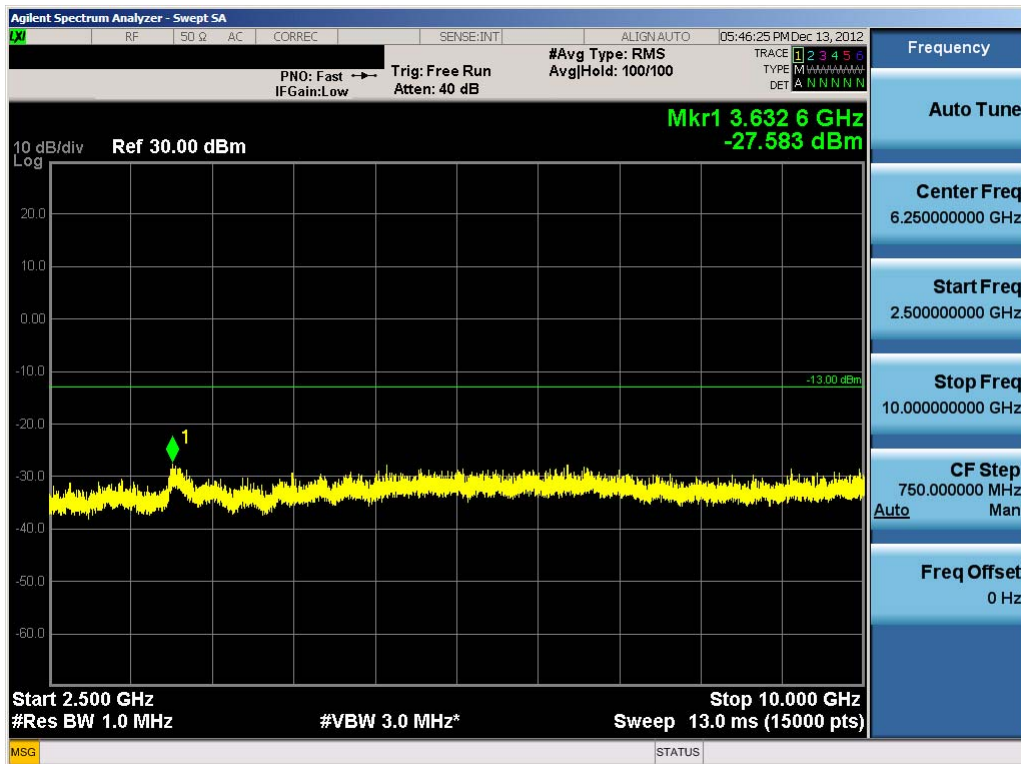


Plot 7-4. Occupied Bandwidth Plot (1.4MHz 16-QAM – RB Size 6)



FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 45 of 163

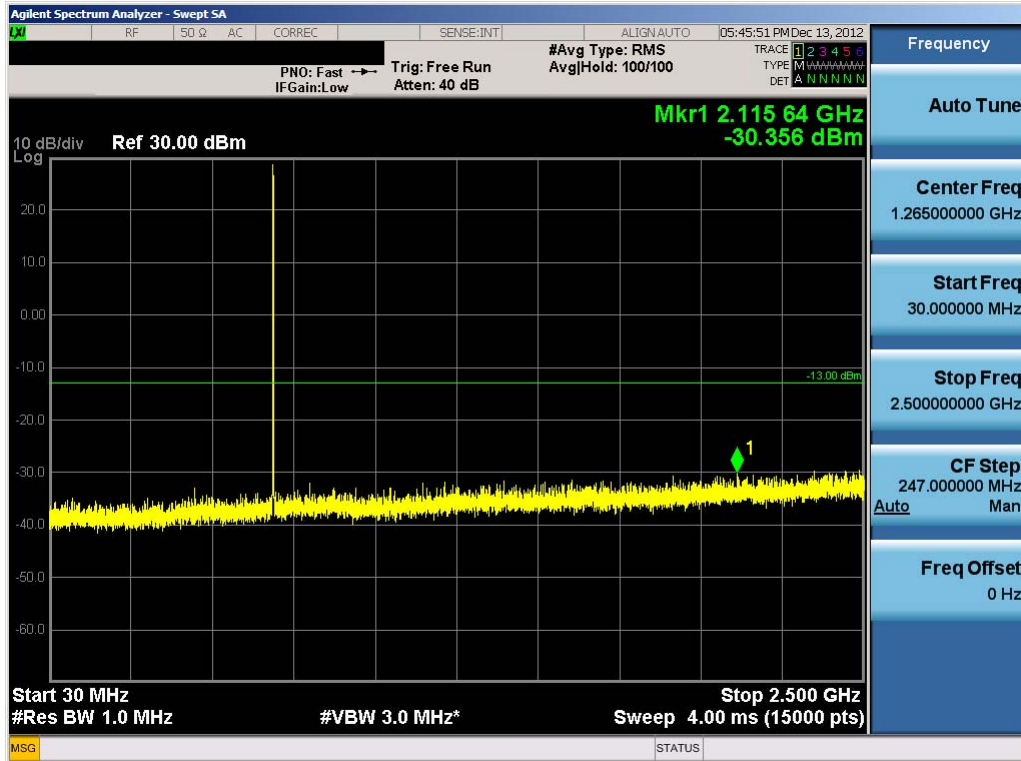


Plot 7-5. Conducted Spurious Plot (1.4MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

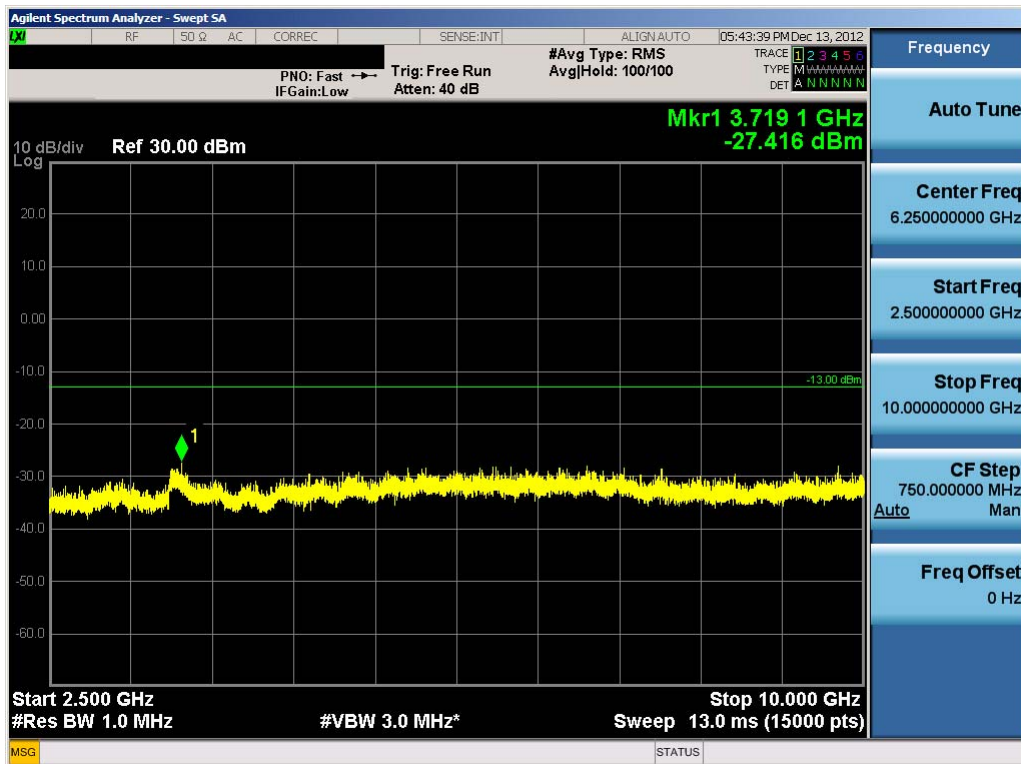


Plot 7-6. Conducted Spurious Plot (1.4MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 46 of 163

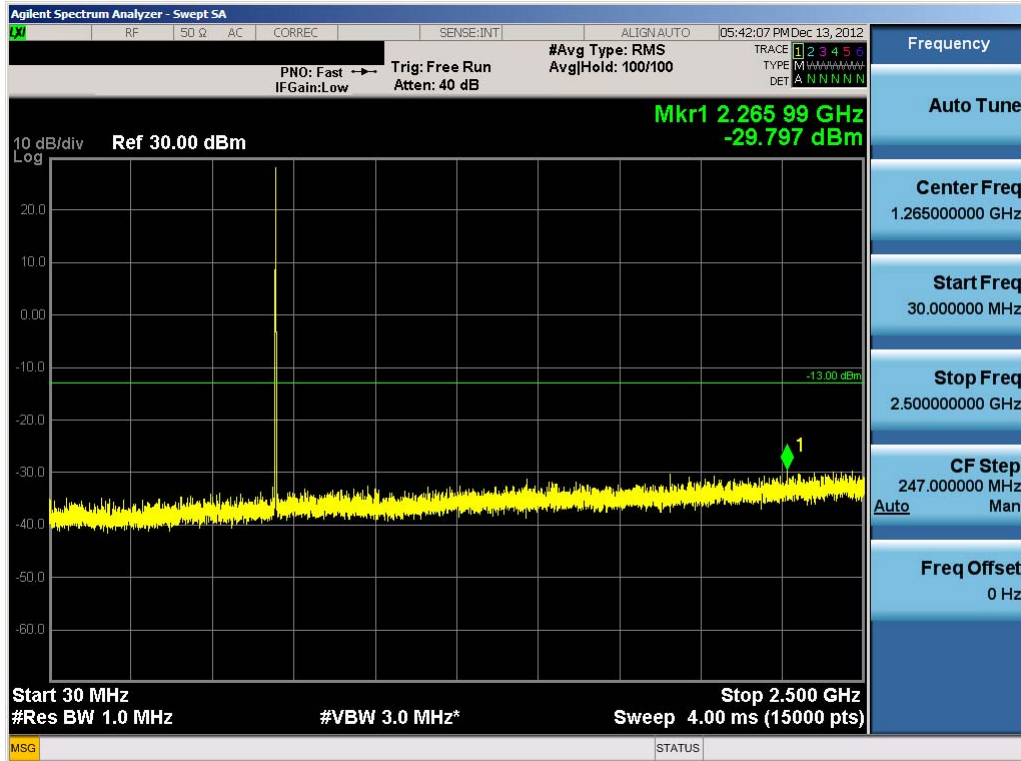


Plot 7-7. Conducted Spurious Plot (1.4MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

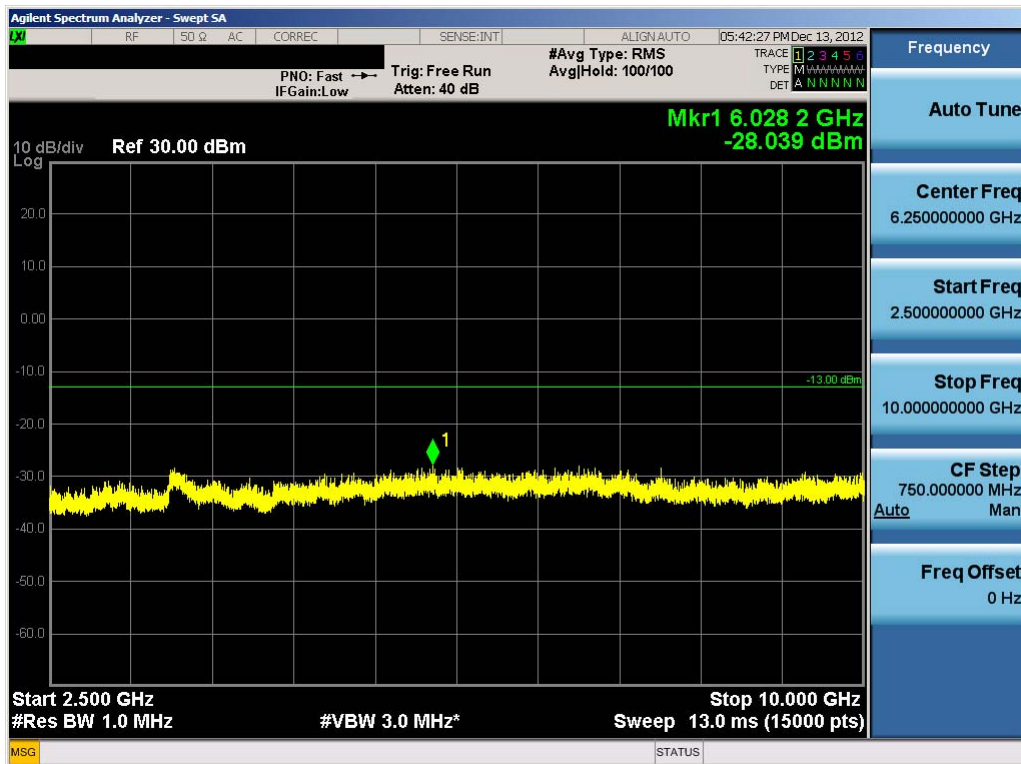


Plot 7-8. Conducted Spurious Plot (1.4MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)



FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 47 of 163



Plot 7-9. Conducted Spurious Plot (1.4MHz QPSK – RB Size 1, RB Offset 0 – High Channel)



Plot 7-10. Conducted Spurious Plot (1.4MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 48 of 163

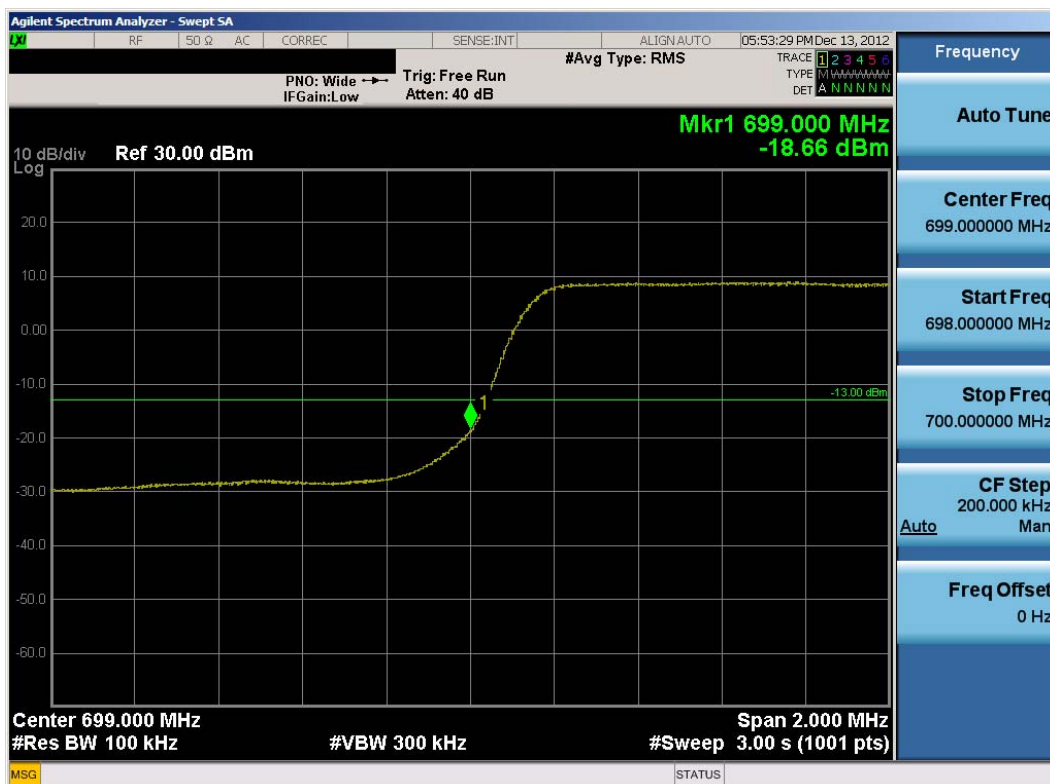


Plot 7-11. Upper Band Edge Plot (1.4MHz QPSK – RB Size 6)

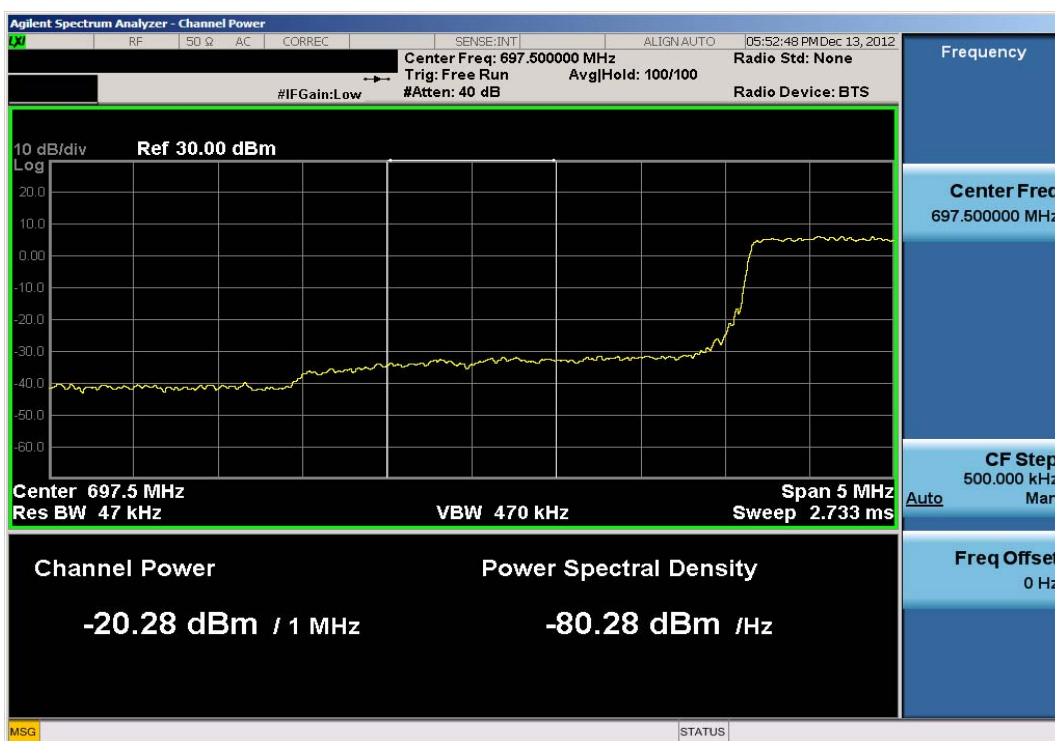


Plot 7-12. Upper Extended Band Edge Plot (1.4MHz QPSK – RB Size 6)

FCC ID: V65C6721A1	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	KYOCERA	Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 49 of 163

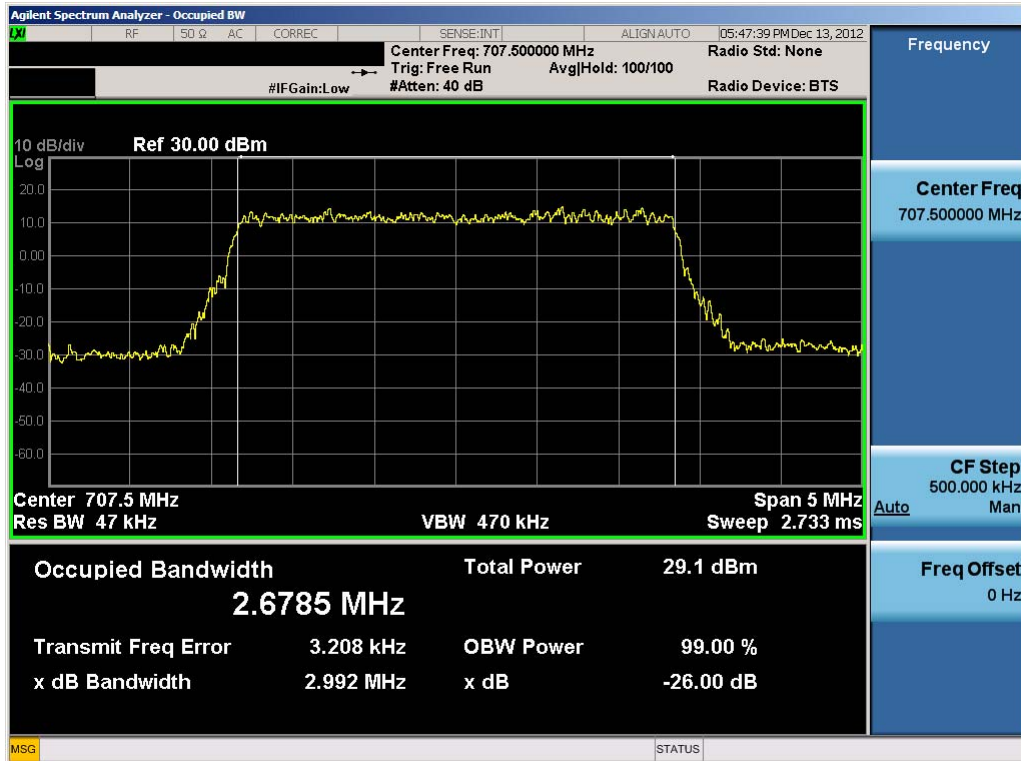


Plot 7-13. Lower Band Edge Plot (3.0MHz QPSK – RB Size 15)

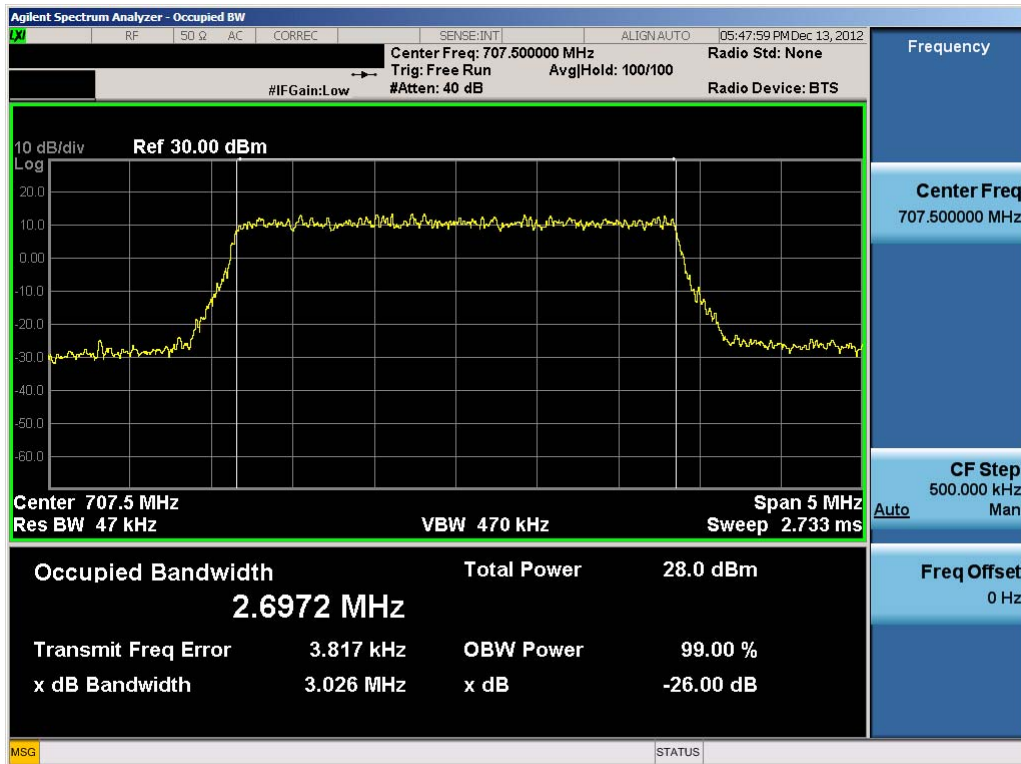


Plot 7-14. Lower Extended Band Edge Plot (3.0MHz QPSK – RB Size 15)

FCC ID: V65C6721A1	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	KYOCERA	Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset	Page 50 of 163	

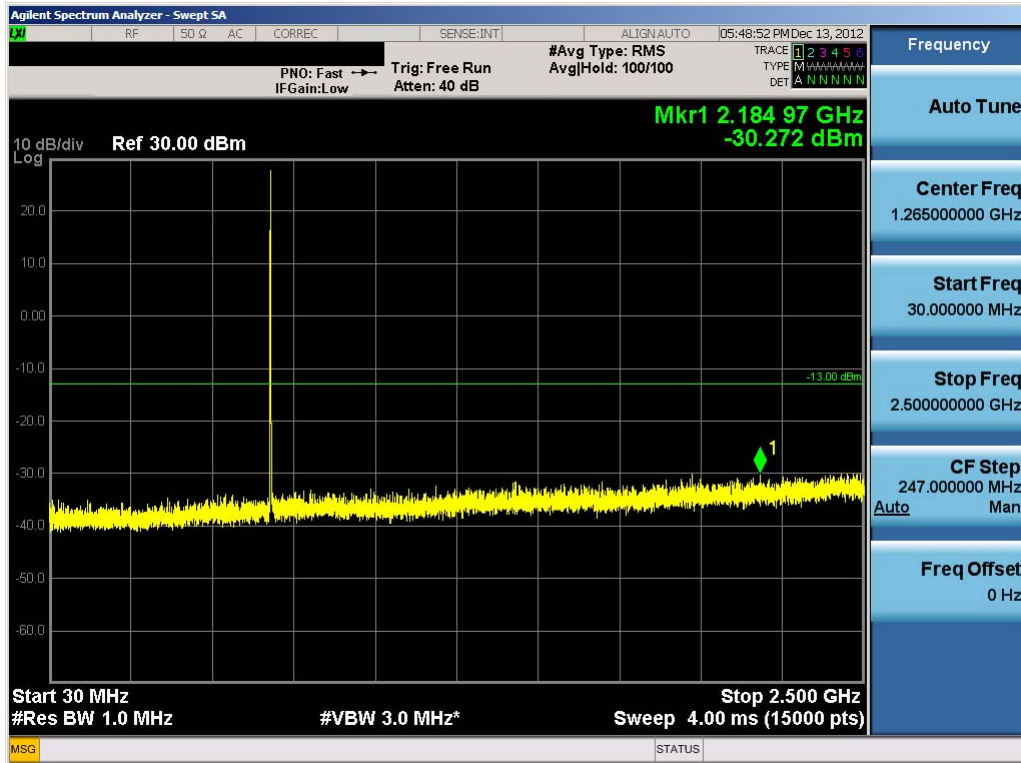


Plot 7-15. Occupied Bandwidth Plot (3.0MHz QPSK – RB Size 15)

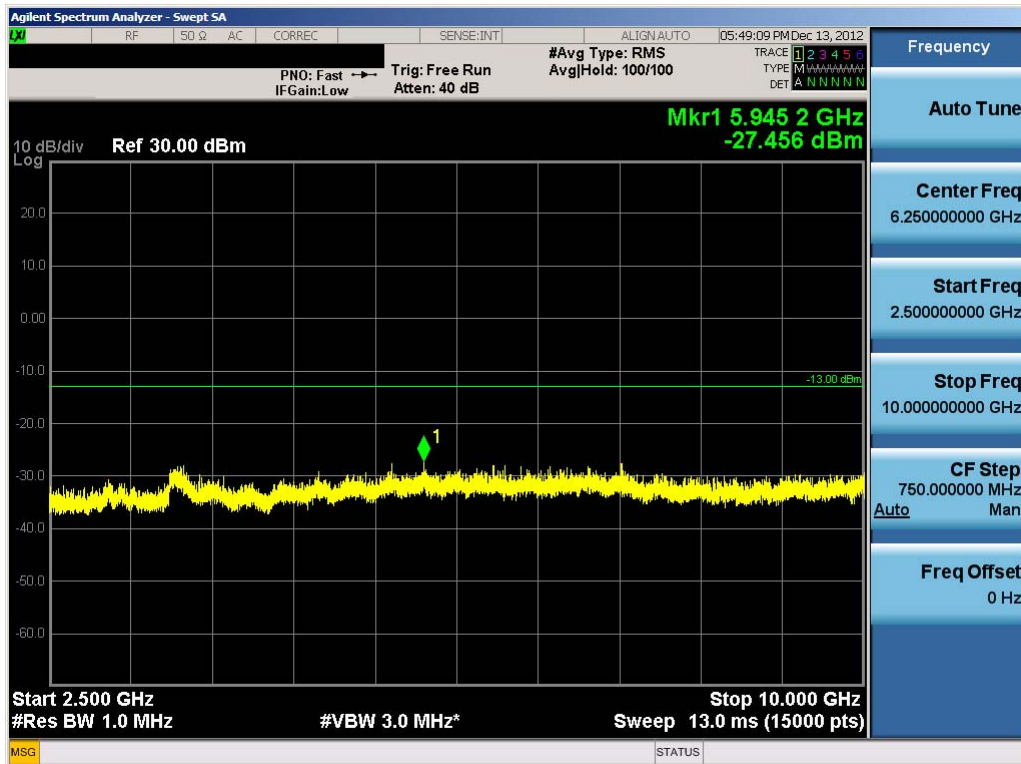


Plot 7-16. Occupied Bandwidth Plot (3.0MHz 16-QAM – RB Size 15)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 51 of 163

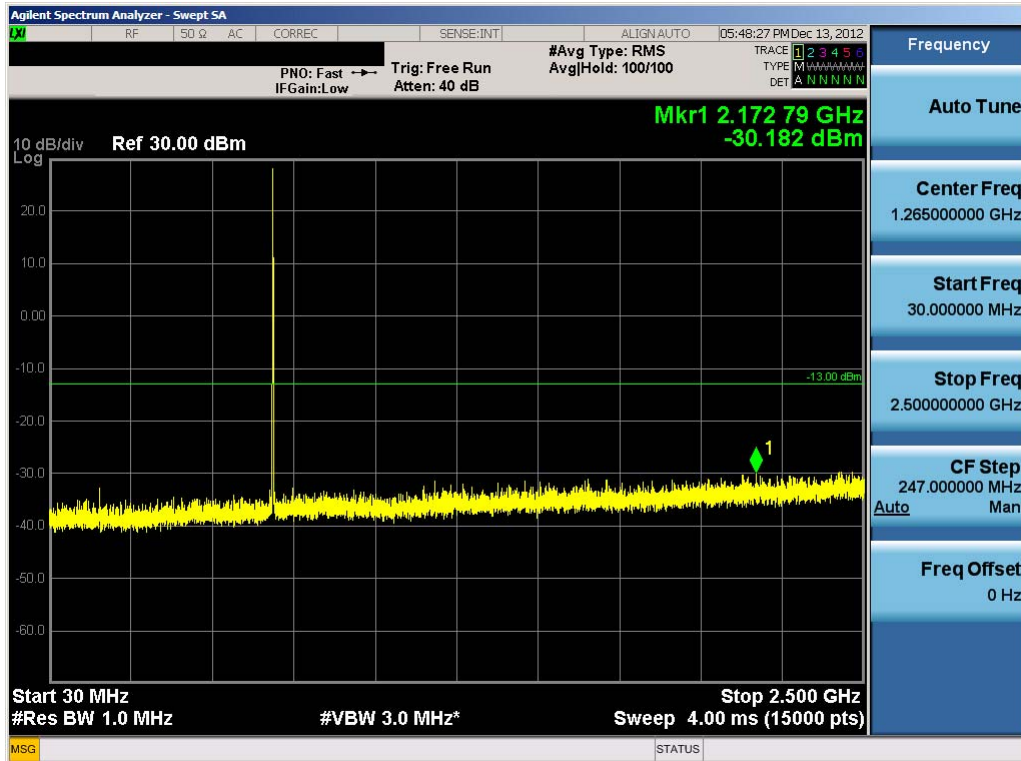


Plot 7-17. Conducted Spurious Plot (3.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

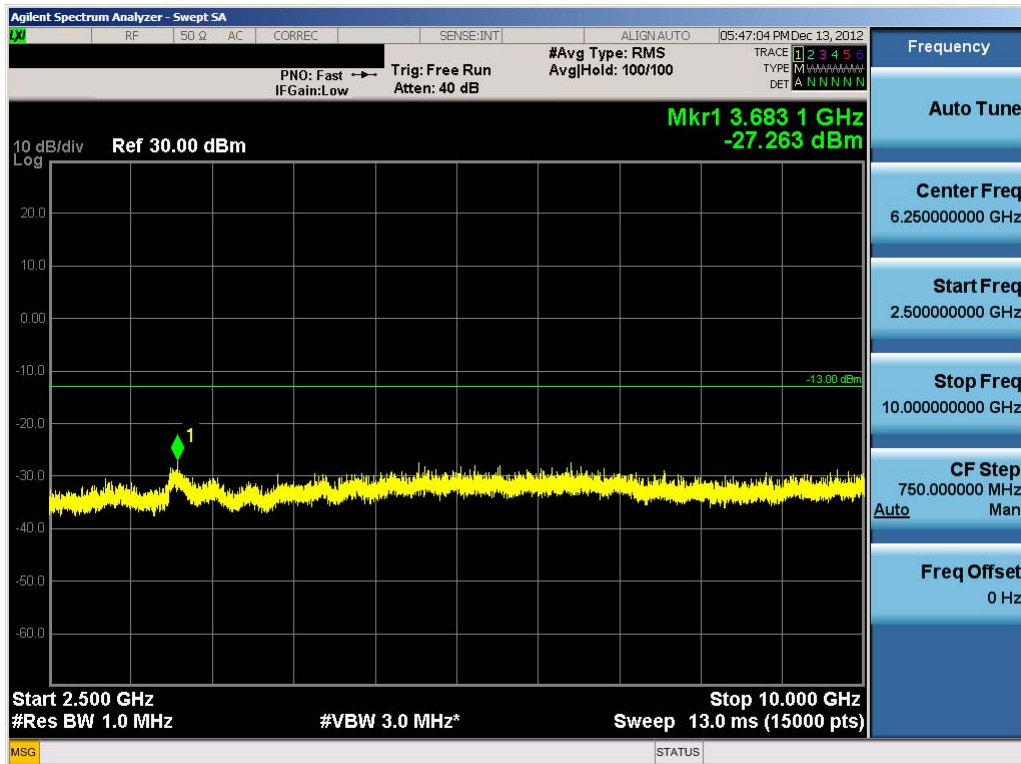


Plot 7-18. Conducted Spurious Plot (3.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 52 of 163

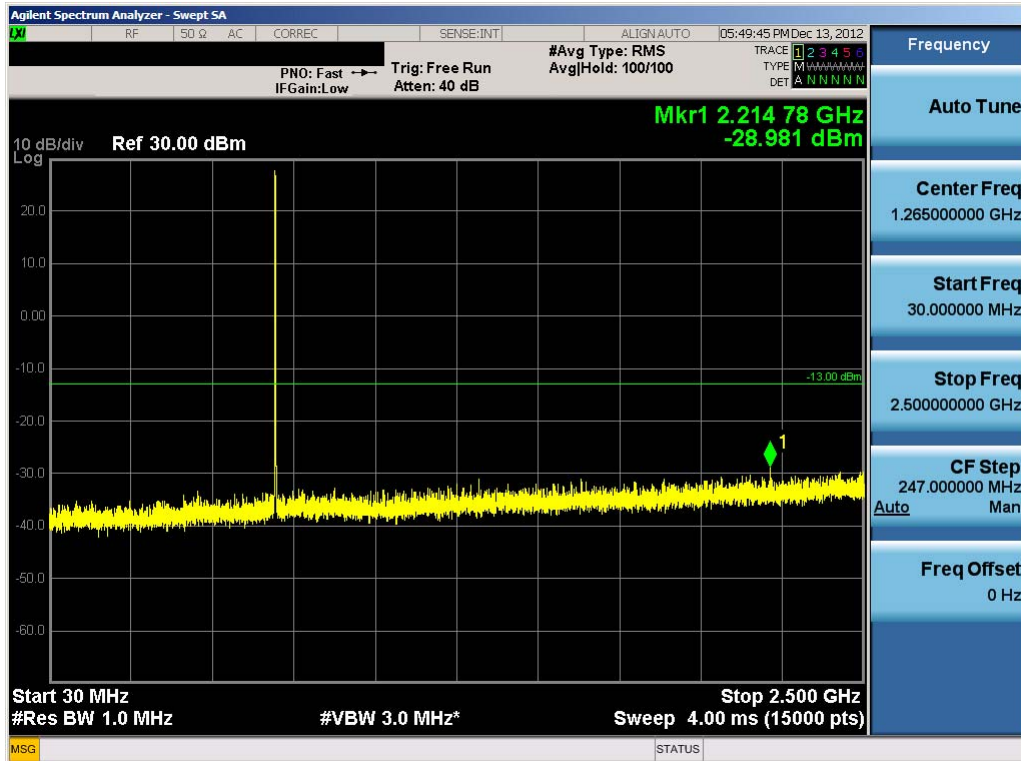


Plot 7-19. Conducted Spurious Plot (3.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

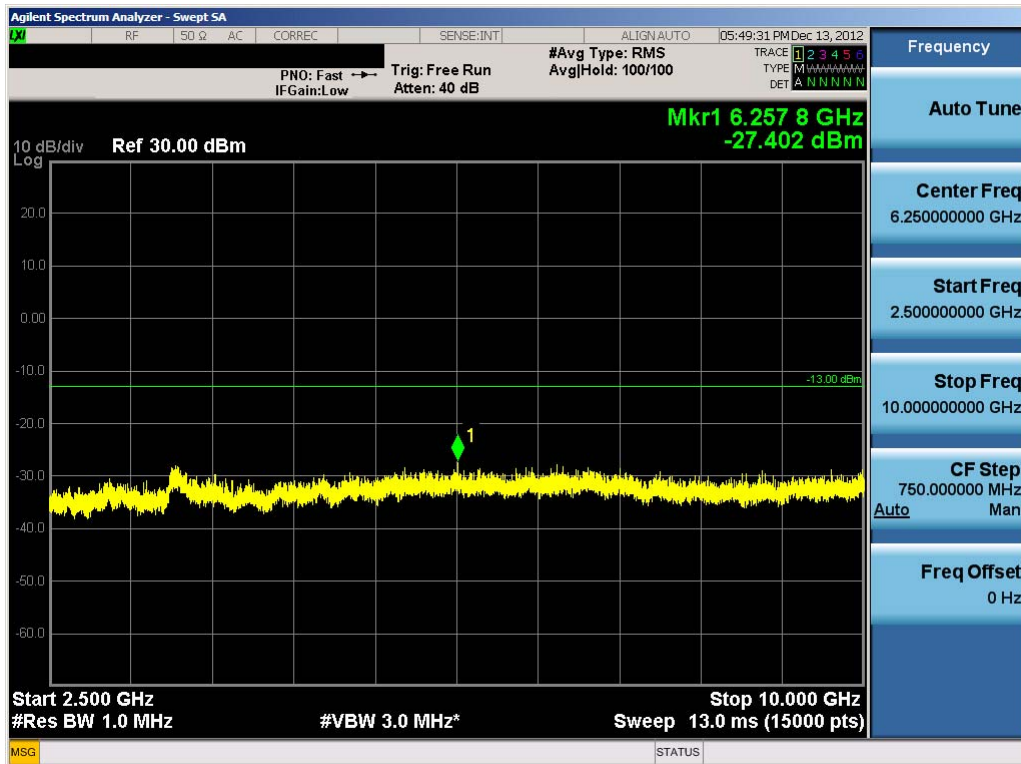


Plot 7-20. Conducted Spurious Plot (3.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 53 of 163



Plot 7-21. Conducted Spurious Plot (3.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

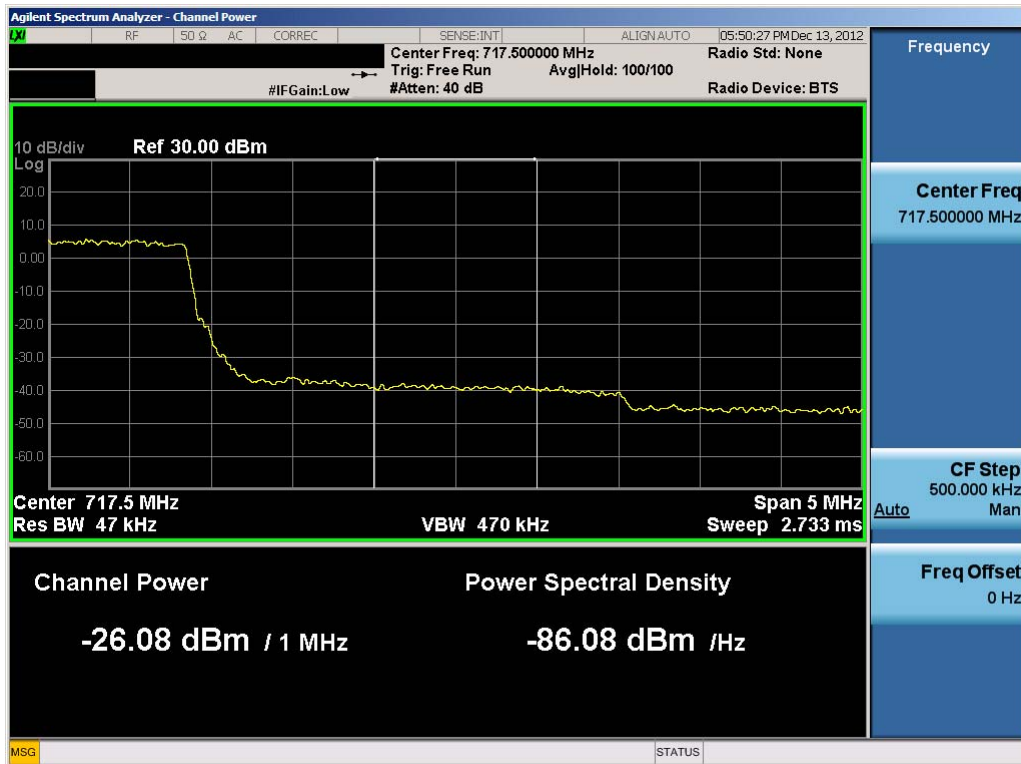


Plot 7-22. Conducted Spurious Plot (3.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 54 of 163



Plot 7-23. Upper Band Edge Plot (3.0MHz QPSK – RB Size 15)



Plot 7-24. Upper Extended Band Edge Plot (3.0MHz QPSK – RB Size 15)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 55 of 163

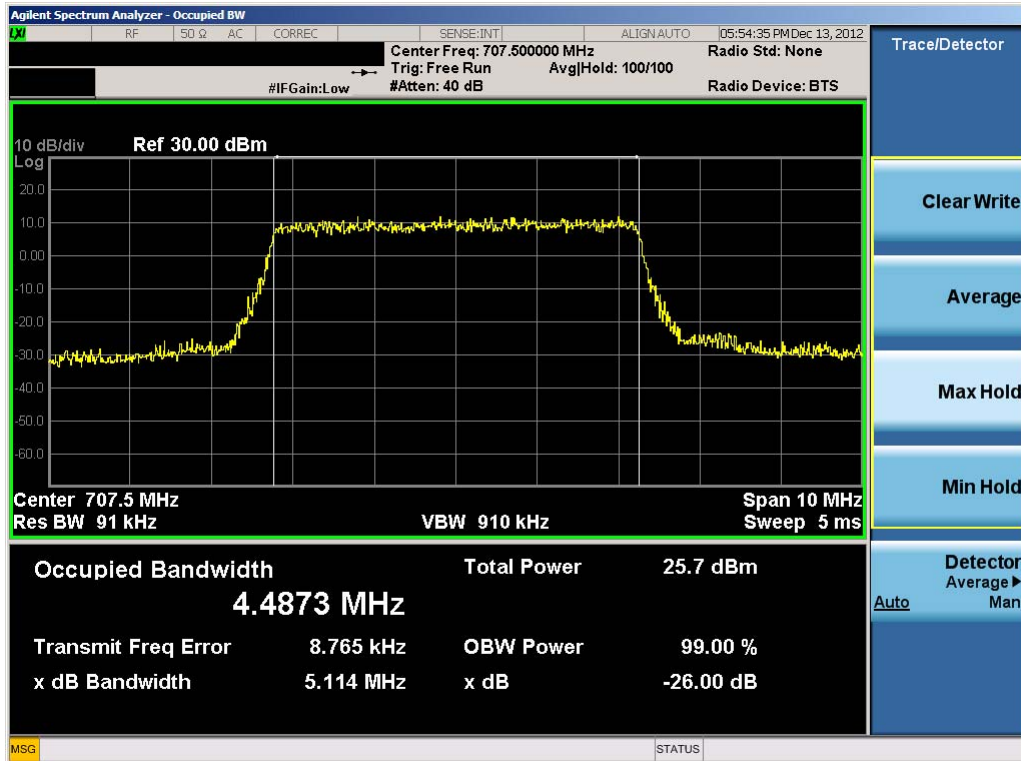


Plot 7-25. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

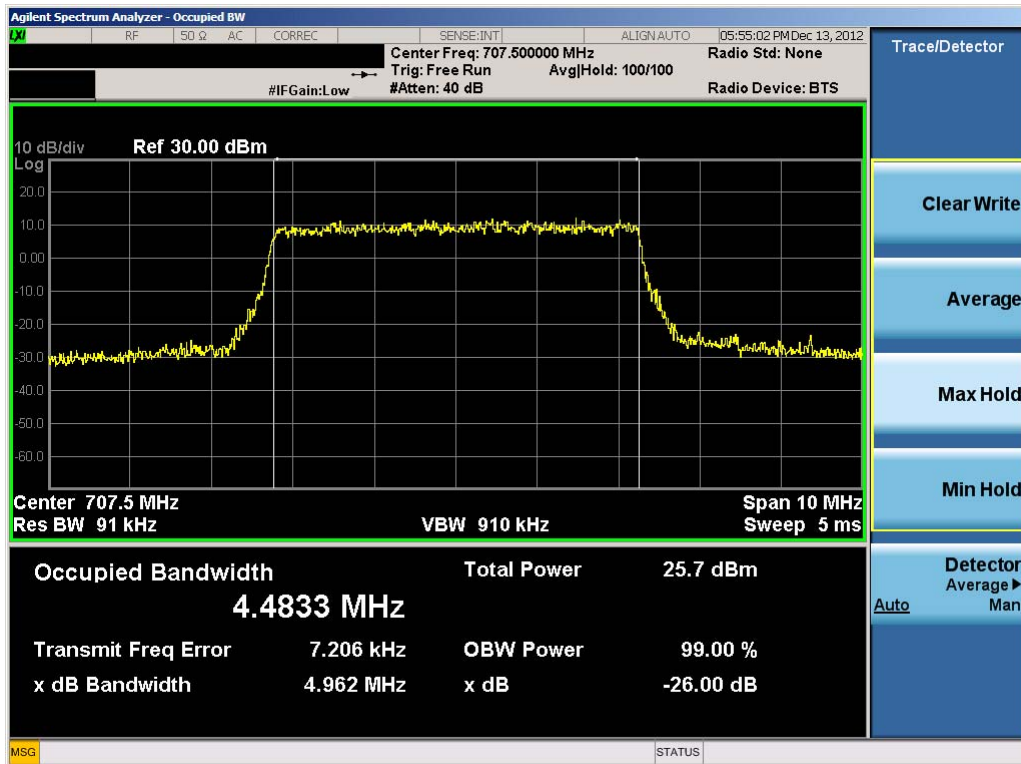


Plot 7-26. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 56 of 163

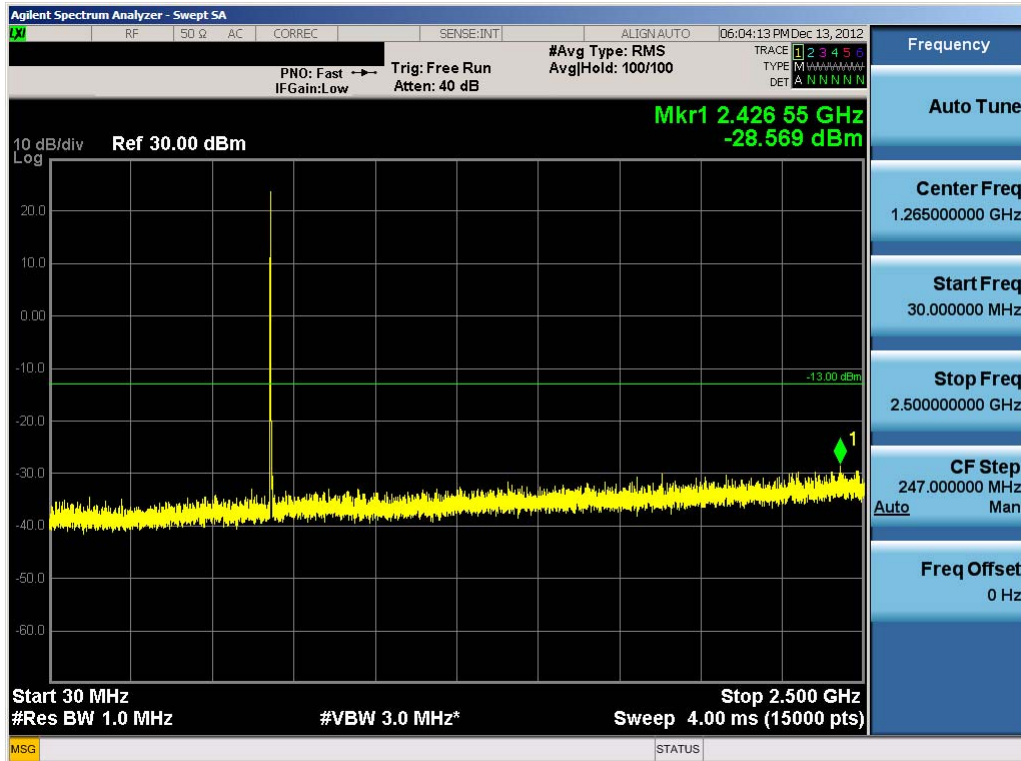


Plot 7-27. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

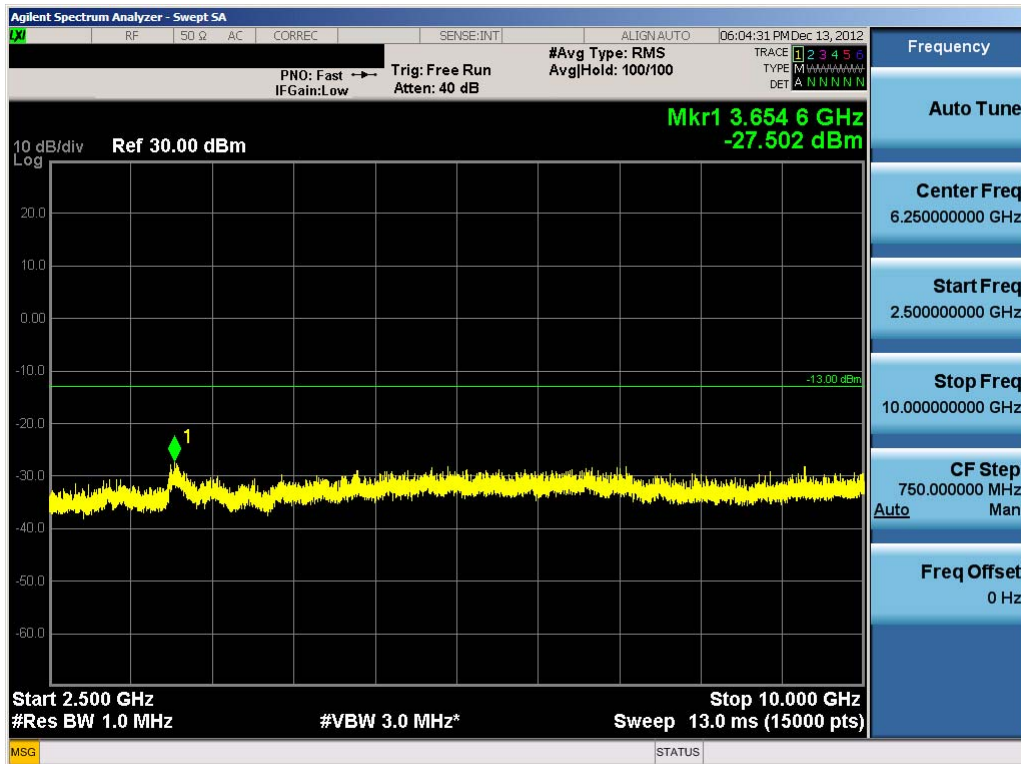


Plot 7-28. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: V65C6721A1	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	KYOCERA	Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 57 of 163

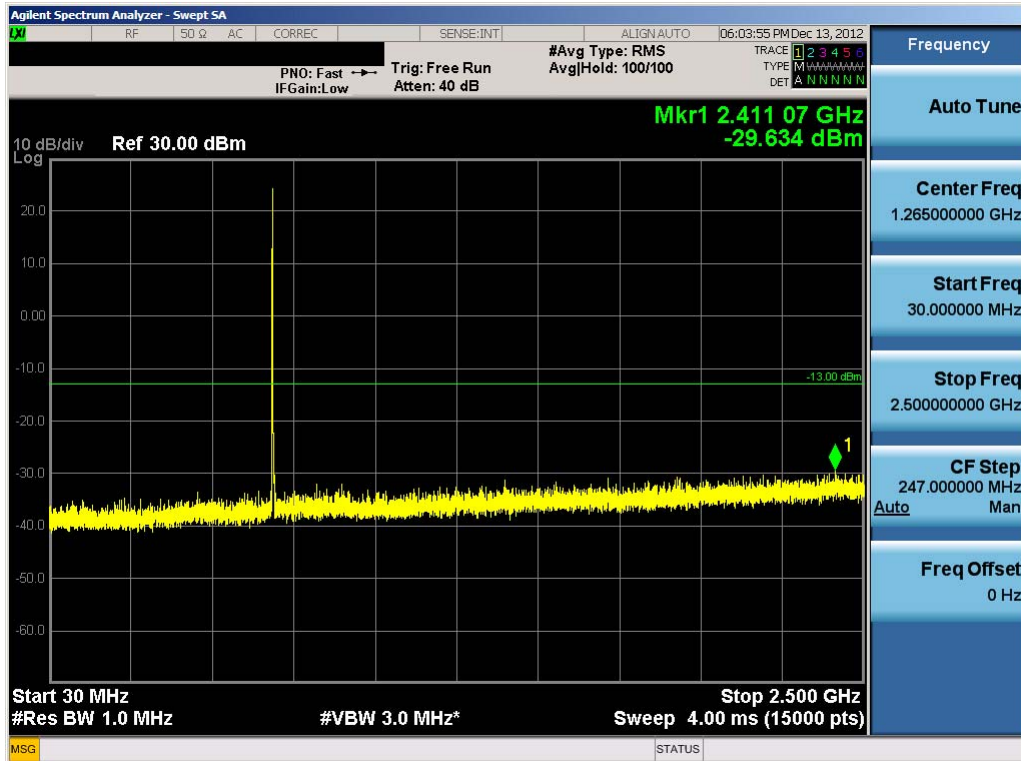


Plot 7-29. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

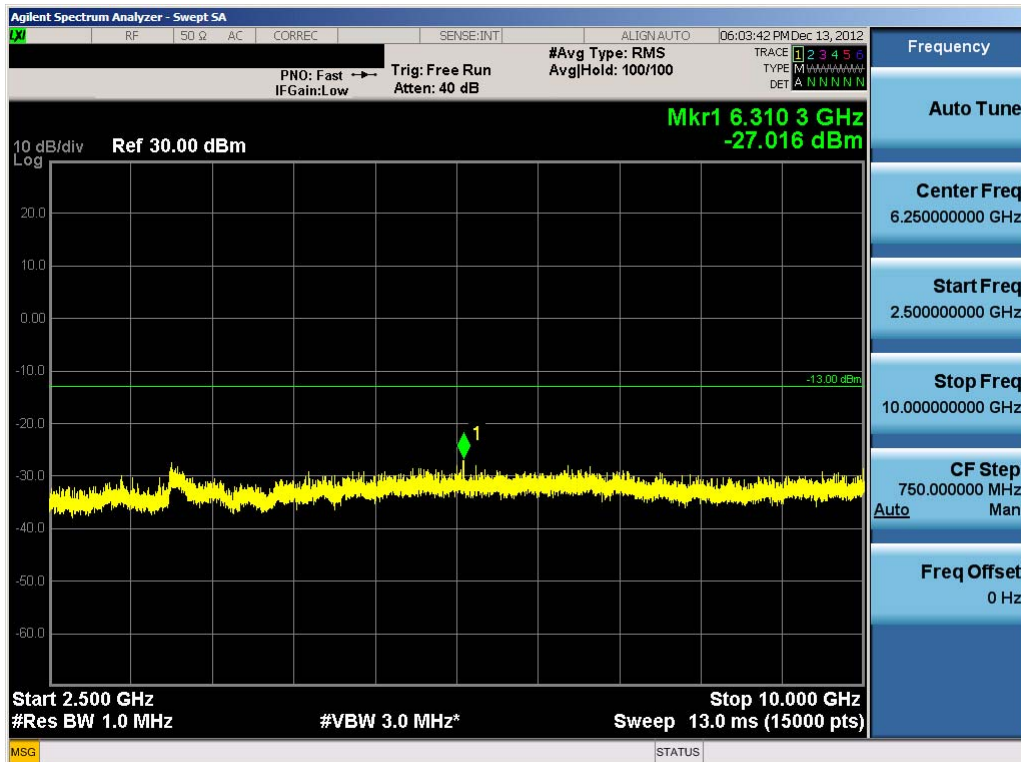


Plot 7-30. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 58 of 163

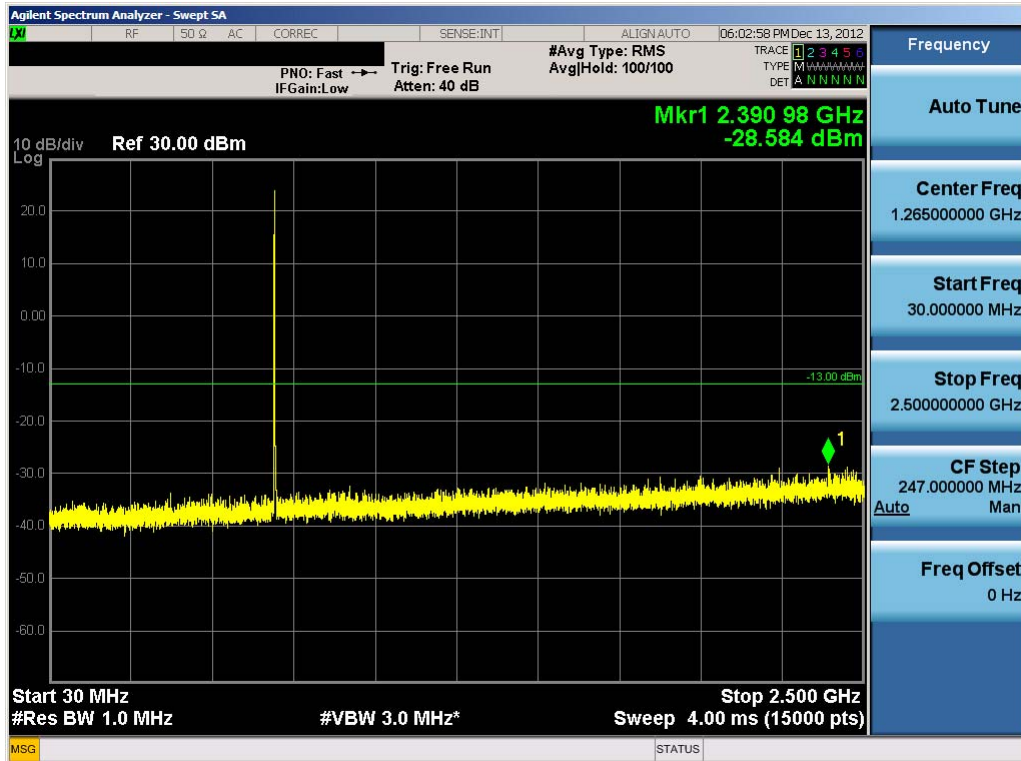


Plot 7-31. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

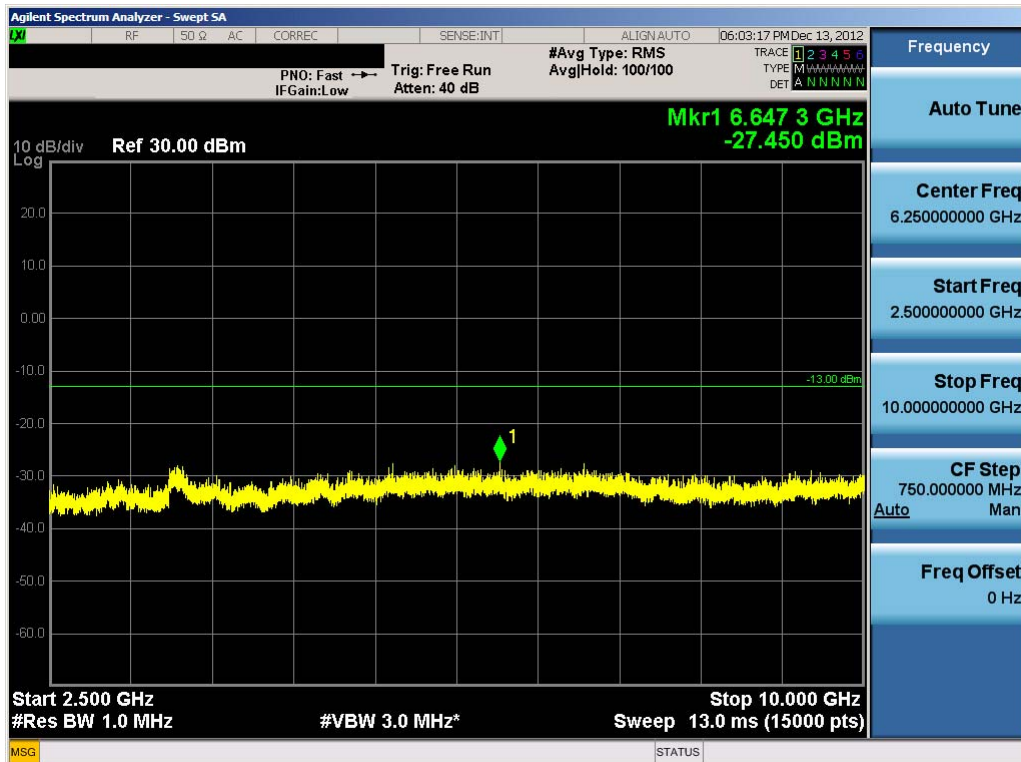


Plot 7-32. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 59 of 163

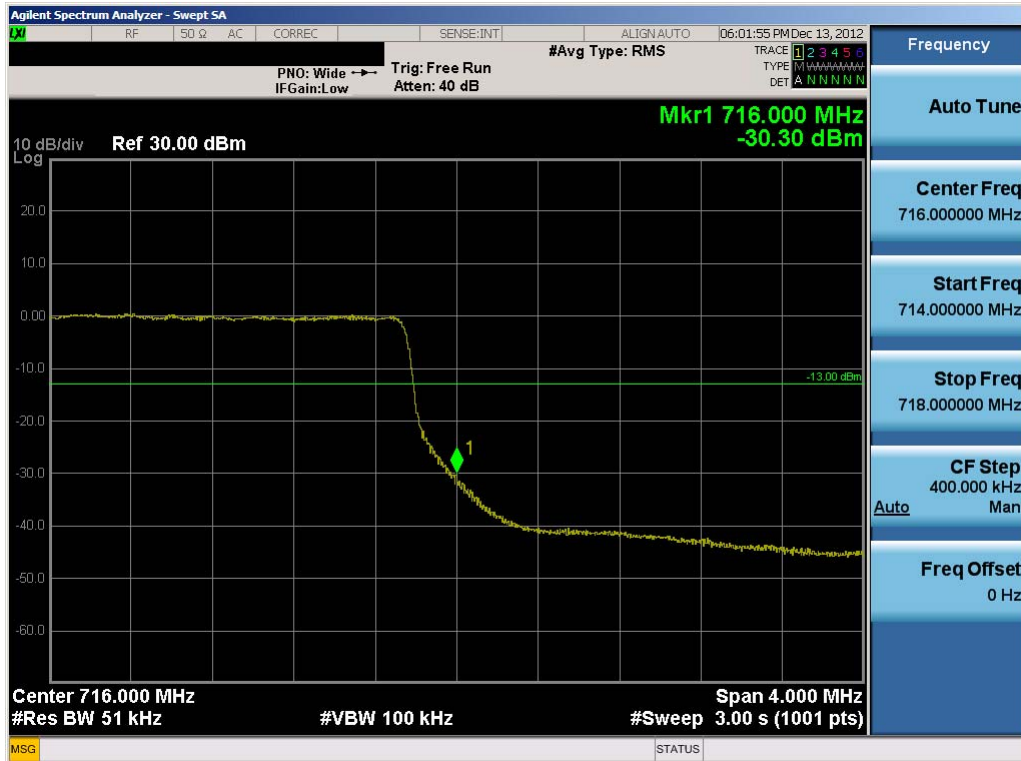


Plot 7-33. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)



Plot 7-34. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)



FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 60 of 163

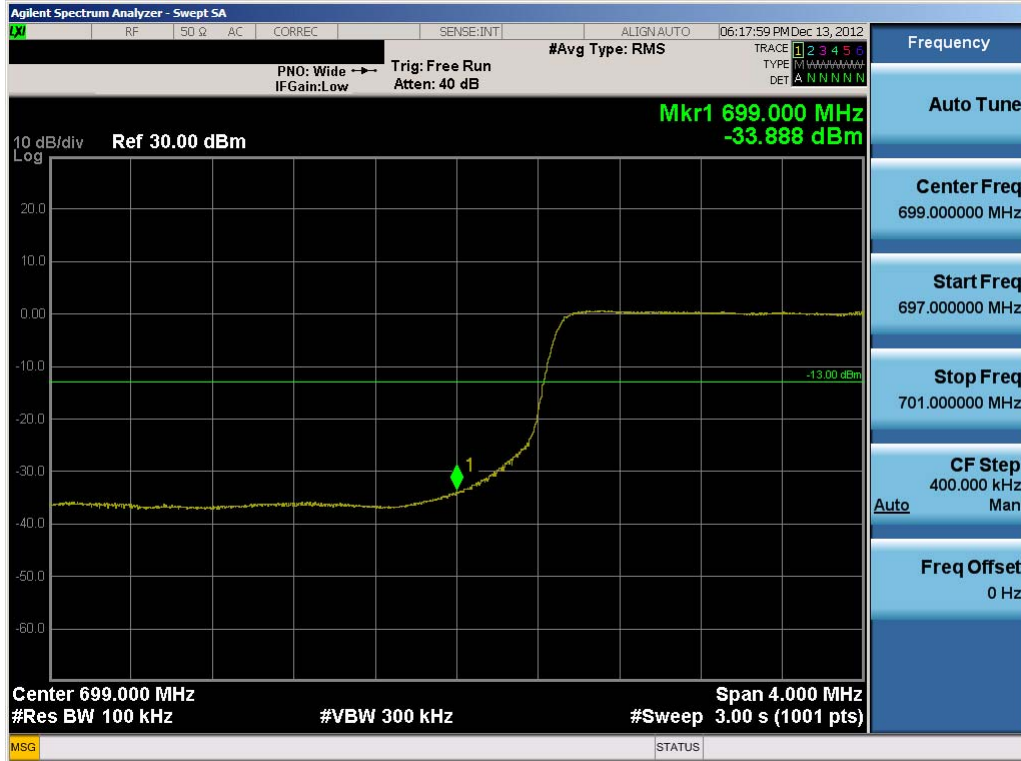


Plot 7-35. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)



Plot 7-36. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 61 of 163

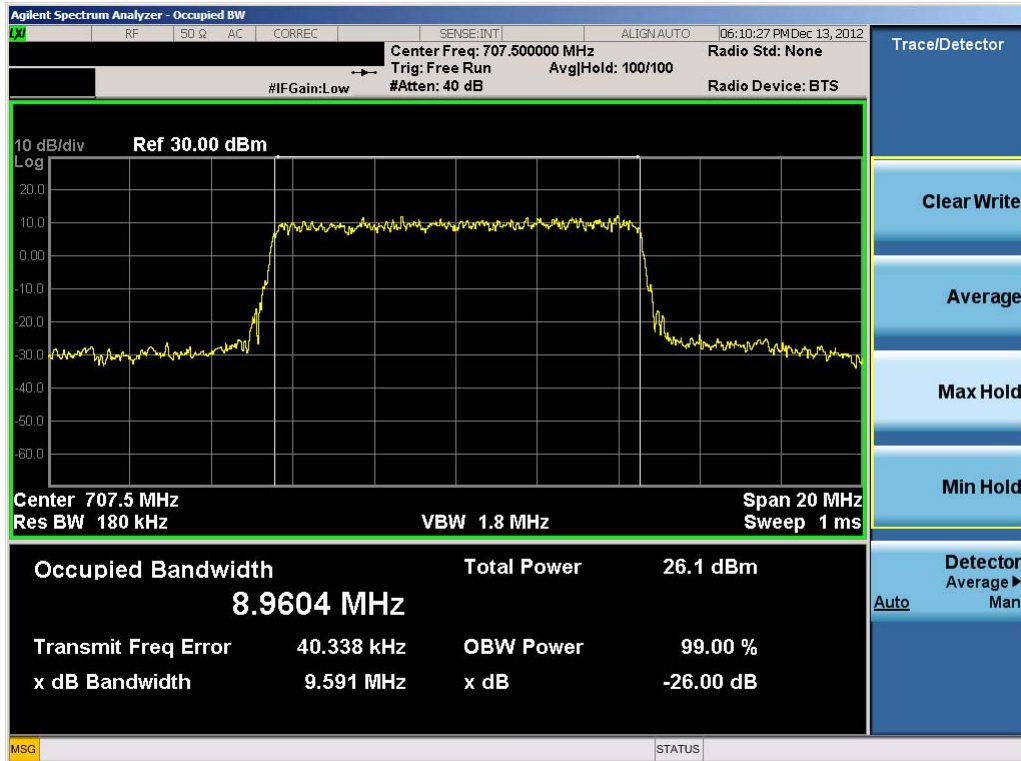


Plot 7-37. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

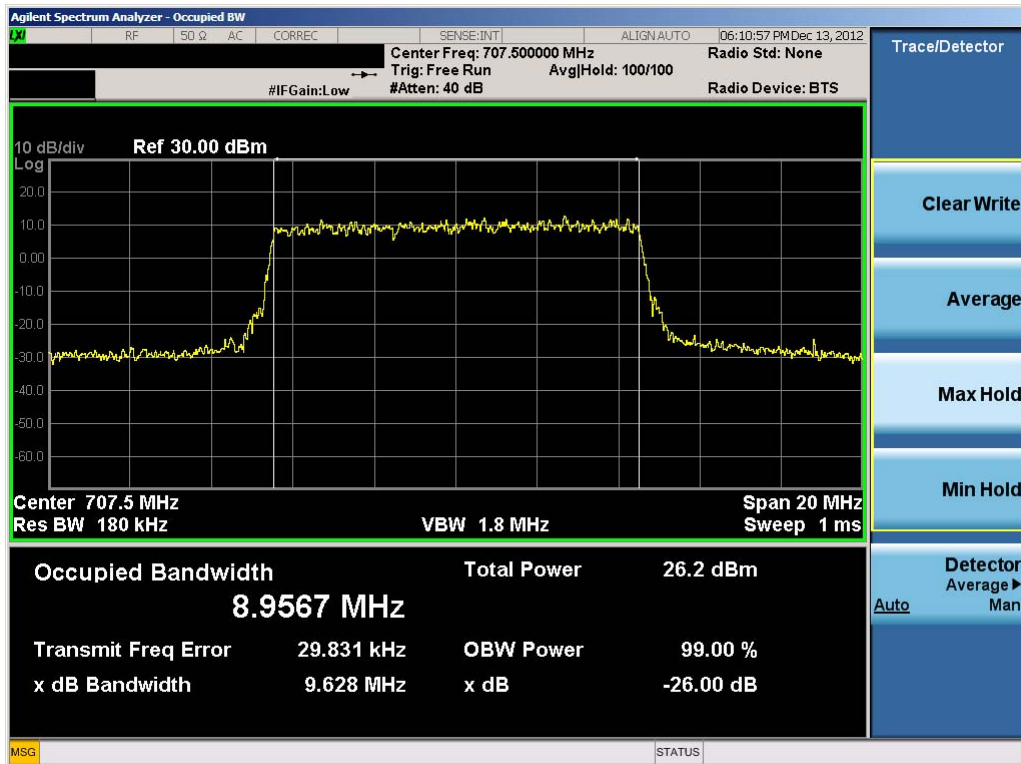


Plot 7-38. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: V65C6721A1		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 62 of 163



Plot 7-39. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)



Plot 7-40. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: V65C6721A1	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	KYOCERA	Reviewed by: Quality Manager
Test Report S/N: 0Y1212071744.V65	Test Dates: 12/12 - 01/08/13, 02/21-03/05/13	EUT Type: Portable Handset		Page 63 of 163