




A D T

FCC SAR Test Report

Report No. : SA130223C16
Applicant : Kyocera Communications, Inc.
Address : 8611 Balboa Ave., San Diego, CA 92123, USA
Product : PDA Phone
FCC ID : V65C6750
Brand : Kyocera
Model No. : C6750
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1991 / IEEE 1528:2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)
KDB 248227 D01 v01r02 / KDB 447498 D01 v05 / KDB 648474 D04 v01
KDB 941225 D01 v02 / KDB 941225 D02 v02r01 / KDB 941225 D03 v01
KDB 941225 D04 v01 / KDB 941225 D05 v02r01 / KDB 941225 D06 v01
Date of Testing : Mar. 04, 2013 ~ Mar. 15, 2013

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch - Taiwan HwaYa Lab**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By : 
Vera Huang / Specialist

Approved By : 
Roy Wu / Manager



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement System	6
3.1 Definition of Specific Absorption Rate (SAR).....	6
3.2 SPEAG DASY System	6
3.2.1 Robot.....	7
3.2.2 Probes.....	8
3.2.3 Data Acquisition Electronics (DAE)	8
3.2.4 Phantoms	9
3.2.5 Device Holder.....	10
3.2.6 System Validation Dipoles	10
3.2.7 Tissue Simulating Liquids.....	11
3.3 SAR System Verification	14
3.4 SAR Measurement Procedure	15
3.4.1 Area & Zoom Scan Procedure	15
3.4.2 Volume Scan Procedure.....	15
3.4.3 Power Drift Monitoring.....	16
3.4.4 Spatial Peak SAR Evaluation	16
3.4.5 SAR Averaged Methods	16
4. SAR Measurement Evaluation	17
4.1 EUT Configuration and Setting.....	17
4.2 EUT Testing Position	20
4.2.1 Head Exposure Conditions.....	20
4.2.2 Body-Worn Accessory Exposure Conditions	22
4.2.3 Hotspot Mode Exposure conditions.....	23
4.3 Tissue Verification	24
4.4 System Validation.....	25
4.5 System Verification.....	26
4.6 Maximum Output Power.....	27
4.6.1 Nominal Conducted Power.....	27
4.6.2 Measured Conducted Power Result.....	28
4.7 SAR Testing Results.....	33
4.7.1 SAR Results for Head	33
4.7.2 SAR Results for Body-Worn (Separation Distance is 1.0 cm)	36
4.7.3 SAR Results for Hotspot (Separation Distance is 1.0 cm).....	38
4.7.4 SAR Measurement Variability.....	41
4.7.5 Simultaneous Multi-band Transmission Evaluation	42
5. Calibration of Test Equipment.....	59
6. Measurement Uncertainty	60
7. Information on the Testing Laboratories	62

Appendix A. SAR Plots of System Verification

Appendix B. SAR Plots of SAR Measurement

Appendix C. Calibration Certificate for Probe and Dipole

Appendix D. Photographs of EUT and Setup



Release Control Record

Issue No.	Reason for Change	Date Issued
R01	Initial release	Mar. 25, 2013

1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest Reported Head SAR _{1g} (W/kg)	Highest Reported Body-Worn SAR _{1g} (1.0 cm Gap) (W/kg)	Highest Reported Hotspot SAR _{1g} (1.0 cm Gap) (W/kg)
PCE	GSM850	0.31	0.43	0.41
	GSM1900	0.61	0.32	0.52
	WCDMA II	0.88	0.50	0.68
	WCDMA V	0.22	0.33	0.33
	CDMA BC0	0.54	0.64	0.78
	CDMA BC1	1.39	0.75	1.23
	LTE 4	0.72	0.60	0.60
	LTE 13	0.54	0.57	0.57
DTS	2.4G WLAN	0.45	0.15	0.15
	5.8G WLAN	0.14	0.41	N/A
NII	5.2G WLAN	0.03	0.11	N/A
	5.3G WLAN	0.03	0.13	N/A
	5.5G WLAN	0.06	0.14	N/A
DSS	Bluetooth	0.01	0.00	N/A
Highest Simultaneous Transmission SAR		Head (W/kg)	Body-Worn (W/kg)	Hotspot (W/kg)
PCE+DTS		1.50	1.50	1.53
PCE+NII		1.45	1.49	N/A
PCE+DSS		1.40	1.35	N/A

Note:

- The SAR limit (Head & Body: SAR_{1g} 1.6 W/kg, Extremity: SAR_{10g} 4.0 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991.

2. Description of Equipment Under Test

EUT Type	PDA Phone
FCC ID	V65C6750
Brand Name	Kyocera
Model Name	C6750
Tx Frequency Bands (Unit: MHz)	GSM850 : 824.2 ~ 848.8 GSM1900 : 1850.2 ~ 1909.8 WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band V : 826.4 ~ 846.6 CDMA BC0 : 824.7 ~ 848.31 CDMA BC1 : 1851.25 ~ 1908.75 LTE Band 4 : 1712.5 ~ 1752.5 LTE Band 13 : 779.5 ~ 784.5 WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
Uplink Modulations	GSM & GPRS : GMSK EDGE : 8PSK WCDMA : QPSK CDMA : QPSK LTE : QPSK, 16QAM, 64QAM 802.11b : DSSS 802.11a/g/n : OFDM Bluetooth : GFSK
Maximum Tune-up Conducted Power (Unit: dBm)	GSM850 : 34.4 GSM1900 : 31.6 WCDMA Band II : 23.5 WCDMA Band V : 23.5 CDMA BC0 : 24.3 CDMA BC1 : 24.1 LTE Band 4 : 24.2 LTE Band 13 : 24.1 WLAN 2.4G : 17.60 WLAN 5.2G : 13.00 WLAN 5.3G : 13.00 WLAN 5.5G : 13.00 WLAN 5.8G : 13.00 Bluetooth : 0.55
Antenna Type	Fixed Internal Antenna
EUT Stage	Identical Prototype

Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

List of Accessory:

Battery	Brand Name	Kyocera
	Model Name	SCP-53LBPS
	Power Rating	3.8Vdc, 2000mAh
	Type	Li-ion

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

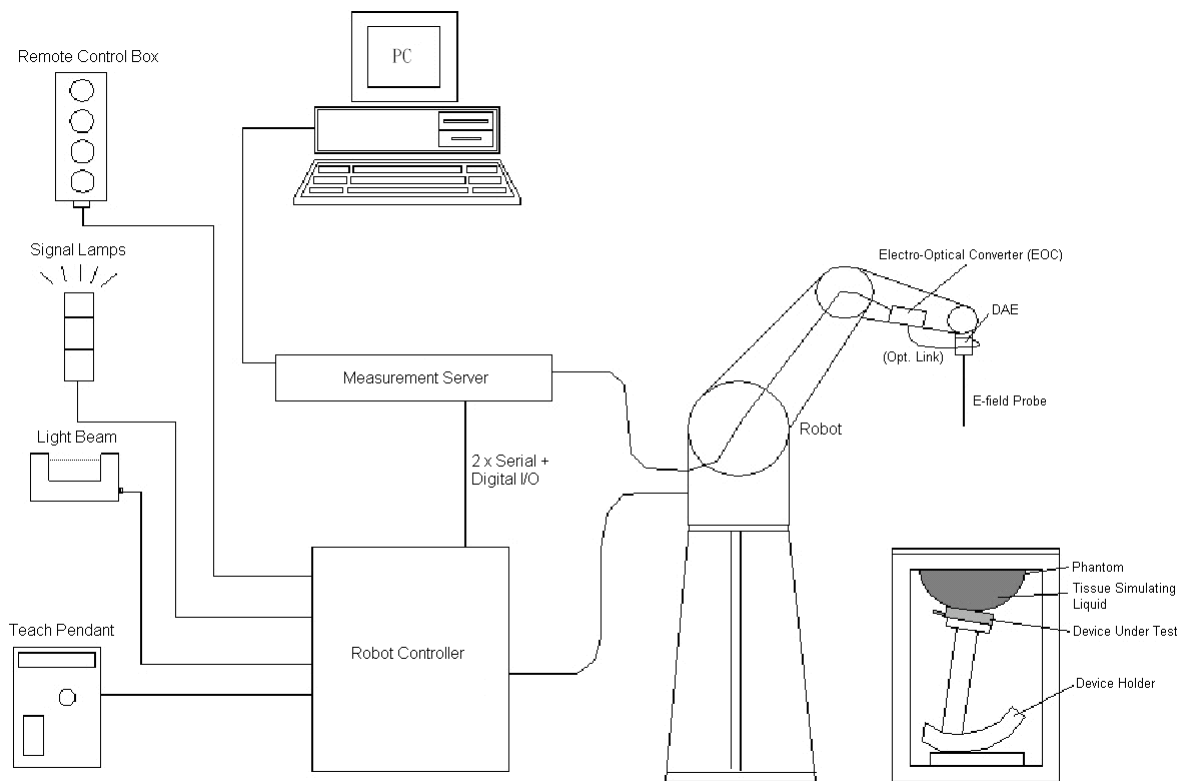


Fig-3.1 DASY System Setup

3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig-3.2 DASY4





Fig-3.3 DASY5

FCC SAR Test Report


3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	


Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	


3.2.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

FCC SAR Test Report


3.2.4 Phantoms


Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	


FCC SAR Test Report

3.2.5 Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	

Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	


3.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

FCC SAR Test Report

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

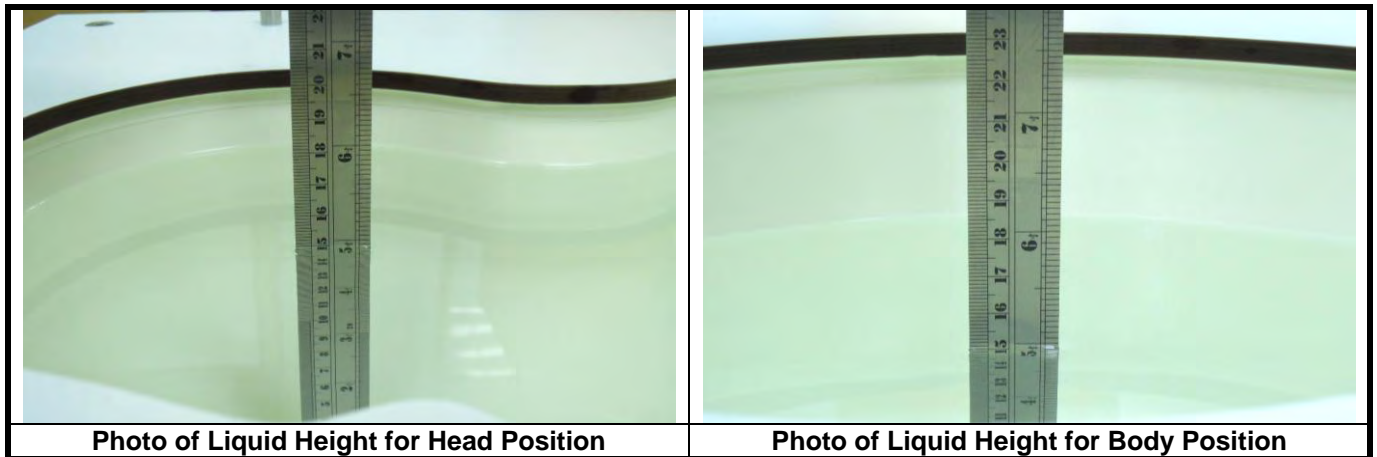

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528 and FCC OET 65 Supplement C Appendix C. For the body tissue simulating liquids, the dielectric properties are defined in FCC OET 65 Supplement C Appendix C. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.



FCC SAR Test Report

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of ±5%	Target Conductivity	Range of ±5%
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53
For Body				
750	55.5	52.7 ~ 58.3	0.96	0.91 ~ 1.01
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
900	55.0	52.3 ~ 57.8	1.05	1.00 ~ 1.10
1450	54.0	51.3 ~ 56.7	1.30	1.24 ~ 1.37
1640	53.8	51.1 ~ 56.5	1.40	1.33 ~ 1.47
1750	53.4	50.7 ~ 56.1	1.49	1.42 ~ 1.56
1800	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2000	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2300	52.9	50.3 ~ 55.5	1.81	1.72 ~ 1.90
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05
2600	52.5	49.9 ~ 55.1	2.16	2.05 ~ 2.27
3500	51.3	48.7 ~ 53.9	3.31	3.14 ~ 3.48
5200	49.0	46.6 ~ 51.5	5.30	5.04 ~ 5.57
5300	48.9	46.5 ~ 51.3	5.42	5.15 ~ 5.69
5500	48.6	46.2 ~ 51.0	5.65	5.37 ~ 5.93
5600	48.5	46.1 ~ 50.9	5.77	5.48 ~ 6.06
5800	48.2	45.8 ~ 50.6	6.00	5.70 ~ 6.30



The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3
B750	0.2	-	0.2	0.8	48.8	-	50.0	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B900	0.2	-	0.2	0.9	48.2	-	50.5	-
B1450	-	34.0	-	0.3	-	-	65.7	-
B1640	-	32.5	-	0.3	-	-	67.2	-
B1750	-	31.0	-	0.2	-	-	68.8	-
B1800	-	29.5	-	0.4	-	-	70.1	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2000	-	30.0	-	0.2	-	-	69.8	-
B2300	-	31.0	-	0.1	-	-	68.9	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B2600	-	31.8	-	0.1	-	-	68.1	-
B3500	-	28.8	-	0.1	-	-	71.1	-
B5G	-	-	-	-	-	10.7	78.6	10.7

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

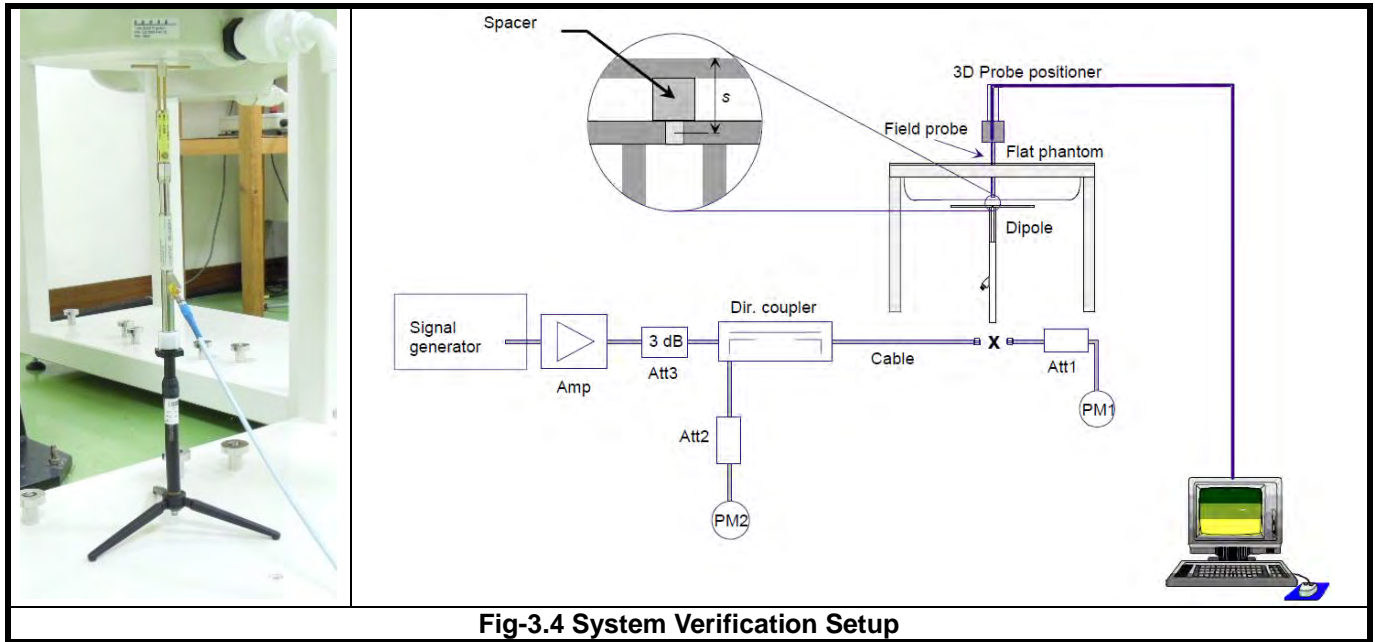


Fig-3.4 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664D01v01, the resolution for Area and Zoom scan is specified in the table below.

Items	<= 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	<= 15 mm	<= 12 mm	<= 12 mm	<= 10 mm	<= 10 mm
Zoom Scan ($\Delta x, \Delta y$)	<= 8 mm	<= 5 mm	<= 5 mm	<= 4 mm	<= 4 mm
Zoom Scan (Δz)	<= 5 mm	<= 5 mm	<= 4 mm	<= 3 mm	<= 2 mm
Zoom Scan Volume	>= 30 mm	>= 30 mm	>= 28 mm	>= 25 mm	>= 22 mm

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

FCC SAR Test Report

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

The EUT is a voice/data transmitter device that contains two WWAN transmitters. Confirming the LTE transmitter follows 3GPP standards, is category 3, band 4/13, band 4 supports BW 5/10/15/20 MHz, band 13 supports BW 5/10 MHz, supports QPSK / 16QAM modulations, and supports data transmission only. Tested per 3GPP 36.521 maximum transmit procedures for both QPSK / 16QAM.

LTE Maximum Power Reduction in accordance with 3GPP 36.101: Power Reduction in accordance to 3GPP is active all times during LTE operation.

Modulation	Channel Bandwidth / RB Configurations				LTE MPR Setting (dB)
	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 8	> 12	> 16	> 18	1
16QAM	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 8	> 12	> 16	> 18	2

Note: MPR is according to the standard and implemented in the circuit (mandatory).


In addition, the device is compliant with A-MPR requirements defined in 36.101 section 6.2.4 that may be required to meet 3GPP Adjacent Channel Leakage Ratio ("ACLR") requirements. A-MPR was disabled for all FCC compliance testing.

This device has two WWAN antennas and one WLAN/BT antenna design. The capabilities of antenna are shown as below. The EUT adopts so-called Circuit Switch Fallback (CSFB) approach. The definition of CSFB is when using LTE to download data and a voice call coming, this scenario (CSFB) will drop the LTE connection then switching link to voice path (GSM) smoothly. In other words, it is impossible to transmit simultaneously under GSM/WCDMA and LTE network at the same time. Since only one WWAN wireless technology (GSM/WCDMA and LTE) can be used at the same time, LTE band 13 cannot transmit simultaneously with GSM850/1900, and WCDMA Band V/II. The details please refer to the operational description document.

A simultaneous CDMA 1xRTT voice and LTE data connection is referred to as "SVLTE". The transmitters are independent in respect to the RF chains as each transmitter has dedicated RF circuitry (PA and RF filtering) and a unique transmit antenna. The device also contains an additional antenna associated with receiver diversity or unlicensed transmitters. The LTE Uplink MIMO configuration is 1x2 (1 Uplink antenna and 2 Downlink antennas).

Although the RF circuits are independent for both transmitters, the chipset solution incorporated SVLTE implementation does include electrical connections between the voice and data transmitters such that the device can coordinate the transmit power of both transmitters. That said the transmitters operate independently in the sense that they independently support voice or data connection without interaction between the modems or signaling from the WWAN network.

<Antenna Location>

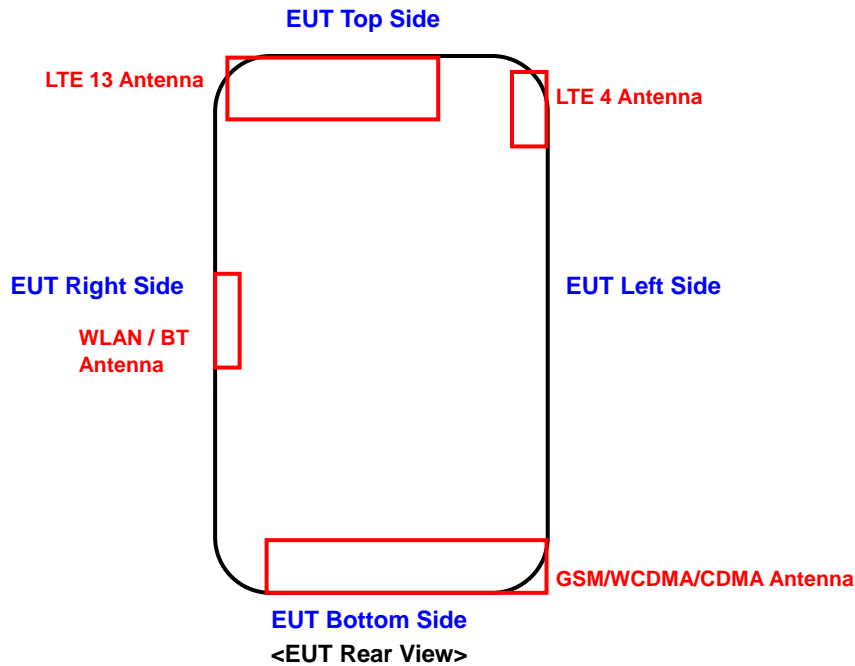

The separation distance for antenna to edge:

Antenna	To Left Side (mm)	To Right Side (mm)	To Top Side (mm)	To Bottom Side (mm)
GSM/WCDMA/CDMA	< 5	5	113	< 5
LTE 4	< 5	50	< 5	108
LTE 13	10	< 5	< 5	100
WLAN / BT	55	< 5	46	65

Note:

1. The LTE transmission can only use either LTE 4 antenna or LTE 13 antenna at a time.
2. The WLAN and BT cannot transmit simultaneously.

The simultaneous transmission possibilities are listed as below.

Simultaneous TX Combination	Configuration	Head (Voice / VoIP)	Body Worn (Voice / VoIP)	Hotspot (Data)
1	GSM850 (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
2	GSM1900 (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
3	WCDMA II (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
4	WCDMA V (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
5	CDMA2000 BC0 (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
6	CDMA2000 BC1 (Voice / Data) + WLAN / BT (Data)	Yes	Yes	Yes
7	LTE 4 (Data) + WLAN / BT (Data)	Yes	Yes	Yes
8	LTE 13 (Data) + WLAN / BT (Data)	Yes	Yes	Yes
9	CDMA2000 BC0 (Voice) + LTE 4 (Data) + WLAN / BT (Data)	Yes	Yes	Yes
10	CDMA2000 BC1 (Voice) + LTE 4 (Data) + WLAN / BT (Data)	Yes	Yes	Yes
11	CDMA2000 BC0 (Voice) + LTE 13 (Data) + WLAN / BT (Data)	Yes	Yes	Yes
12	CDMA2000 BC1 (Voice) + LTE 13 (Data) + WLAN / BT (Data)	Yes	Yes	Yes

Note : In the SVLTE mode, CDMA 1xRTT and LTE can transmit at maximum power level simultaneously.

FCC SAR Test Report

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (Agilent E5515C is used for GSM/WCDMA/CDMA2000, and Anritsu MT8820C is used for LTE). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

For GSM850, the power control level is set to 5. For GPRS850 (GMSK, CS1), the power control level is set to 5. For EDGE850 (8PSK:MCS9), the power control level is set to 8. For GSM1900, the power control level is set to 0. For GPRS1900 (GMSK, CS1), the power control level is set to 0. For EDGE1900 (8PSK:MCS9), the power control level is set to 2.

For WCDMA, head and body SAR is tested under 12.2k RMC mode with power control set all up bits. SAR for AMR is not required since its power is less than 1/4 dB higher than RMC. SAR for HSDPA/HSUPA is not required since its power is less than 1/4 dB higher than RMC without HSDPA/HSUPA and SAR for 12.2 kbps RMC is less than 75% of the SAR limit (1.2 W/kg).

For CDMA, SAR is tested under 1xRTT mode using RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55 on head position, and RC3 with the EUT configured using TDSO/SO32, to transmit at full rate on FCH with all other code channels disabled on body position. SAR for RC1 is not required when the maximum power is less than 1/4 dB higher than RC3. SAR for multiple code channels (FCH+SCH_n) is not required when the maximum power is less than 1/4 dB higher than that measured with FCH only. SAR for EVDO Rev.0 is not required when the maximum power is less than 1/4 dB higher than RC3 (1xRTT). SAR for EVDO Rev.A is not required when the maximum power is less than Rev.0 or less than 1/4 dB higher than RC3. The steps for system simulator (Agilent E5515C) setup are as below.

1. Set the System ID and Network ID
2. Set the Cell Band and connecting Channel
3. Set the power control to All Up Bits
4. Press "Originate Call" button

For LTE, set the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB in base station simulator. When the EUT has registered and communicated to base station simulator, set the simulator to make EUT transmitting the maximum radiated power. The steps for system simulator (Anritsu MT8820C) setup are as below.

1. Press the "Std" button to select "LTE 22.20S" function
2. Choose the "Screen Select" item to "Fundamental Measurement"
3. Enter the "Common" item
4. Set the Operating Band
5. Set the Channel Bandwidth
6. Set the UL Channel & Frequency
7. Set the Modulation
8. Set the RB number and RB shift
9. Press "Start Call" button when EUT register to the system simulator
10. Set the TX-1 Max. Power to make the EUT transmit maximum output power

FCC SAR Test Report

For WLAN SAR testing, the EUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. According to KDB 248227 D01, WLAN SAR should be tested at the lowest data rate, and testing at higher data rate is not required when the maximum average output power is less than 1/4 dB higher than those measured at the lowest data rate. Since the WLAN power at lowest data rate has highest output power, WLAN SAR for this device was performed at the lowest data rate as set in 1 Mbps for 802.11b, and 6 Mbps for 802.11a. This RF signal utilized in SAR measurement has 74% duty cycle for 802.11b, 31% for 802.11a 5.2G, 38% for 802.11a 5.3G, 36% for 802.11a 5.6G, and 81% for 802.11a 5.8G. The duty factor is 1.36 for 802.11b, 3.21 for 802.11a 5.2G, 2.61 for 802.11a 5.3G, 2.79 for 802.11a 5.6G, and 1.23 for 802.11a 5.8G during WLAN SAR testing.

4.2 EUT Testing Position

According to KDB 648474 D04v01, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

4.2.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2003 using the SAM phantom illustrated as below.

1. Define two imaginary lines on the handset
 - (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
 - (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
 - (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

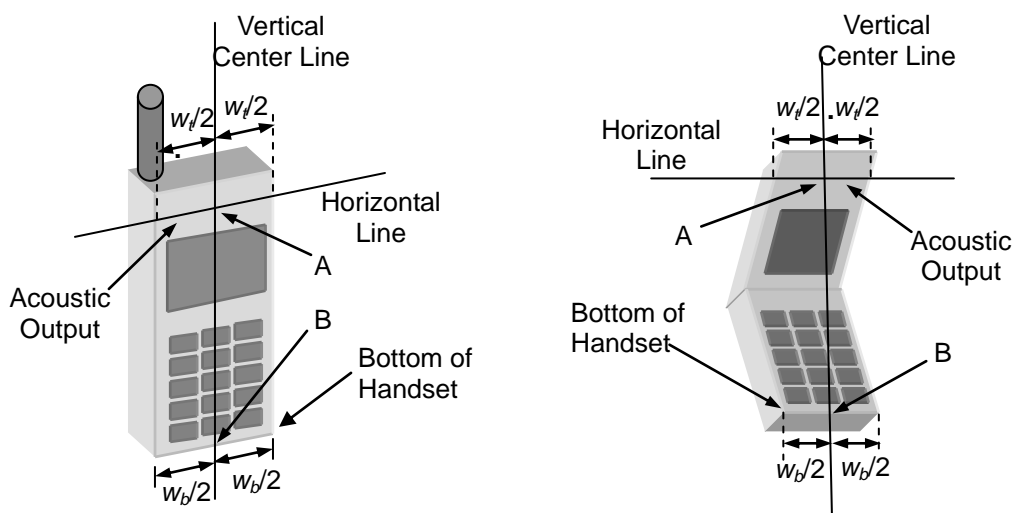


Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines

FCC SAR Test Report

2. Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).

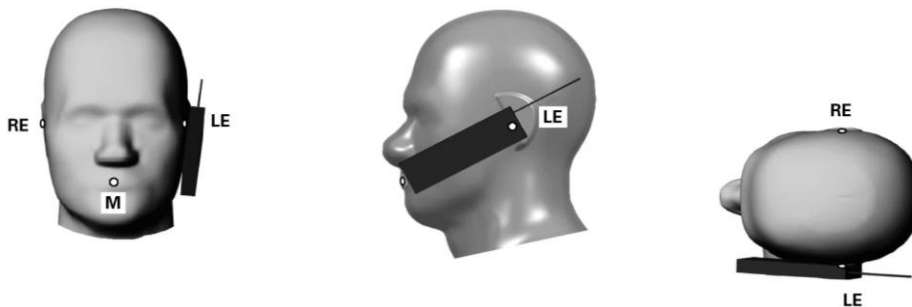


Fig-4.2 Illustration for Cheek Position

3. Tilted Position

- (a) To position the device in the "cheek" position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).

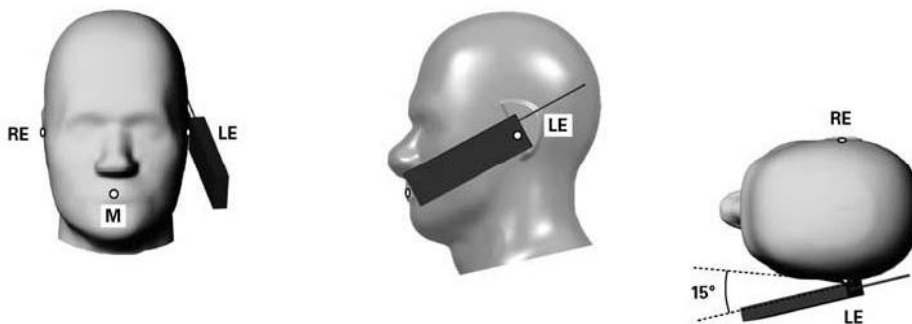


Fig-4.3 Illustration for Tilted Position

4.2.2 Body-Worn Accessory Exposure Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required.

A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.


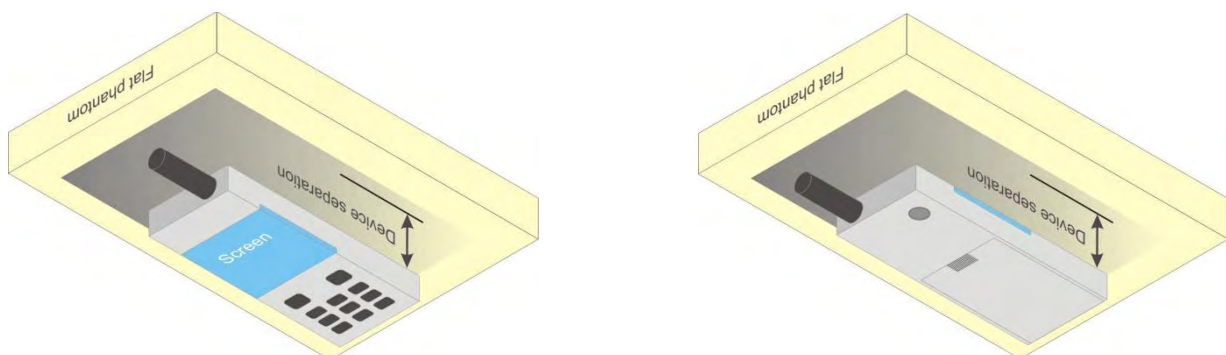


Fig-4.4 Illustration for Body Worn Position

FCC SAR Test Report

4.2.3 Hotspot Mode Exposure conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

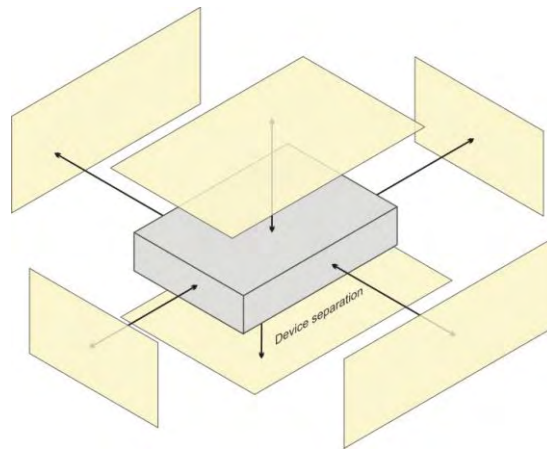

Based on the antenna location shown on section 4.1 of this report, the SAR testing required for hotspot mode is listed as below.

Antenna	Front Face	Rear Face	Left Side	Right Side	Top Side	Bottom Side
GSM/WCDMA/CDMA	√	√	√	√		√
LTE 4	√	√	√		√	
LTE 13	√	√	√	√	√	
WLAN / BT	√	√		√		



FCC SAR Test Report

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Test Date	Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ε _r)	Target Conductivity (σ)	Target Permittivity (ε _r)	Conductivity Deviation (%)	Permittivity Deviation (%)
Mar. 04, 2013	Head	750	20.8	0.892	41.077	0.89	41.9	0.22	-1.96
Mar. 04, 2013	Head	835	20.8	0.905	42.368	0.90	41.5	0.56	2.09
Mar. 13, 2013	Head	835	20.5	0.903	42.371	0.90	41.5	0.33	2.10
Mar. 04, 2013	Head	1750	20.6	1.348	38.858	1.37	40.1	-1.61	-3.10
Mar. 04, 2013	Head	1900	20.6	1.424	40.347	1.40	40.0	1.71	0.87
Mar. 13, 2013	Head	1900	20.6	1.405	40.805	1.40	40.0	0.36	2.01
Mar. 15, 2013	Head	1900	20.3	1.447	38.505	1.40	40.0	3.36	-3.74
Mar. 11, 2013	Head	2450	20.7	1.886	37.408	1.80	39.2	4.78	-4.57
Mar. 15, 2013	Head	2450	20.6	1.879	38.687	1.80	39.2	4.39	-1.31
Mar. 12, 2013	Head	5200	20.7	4.767	35.944	4.66	36.0	2.30	-0.16
Mar. 10, 2013	Head	5300	20.3	4.861	35.499	4.76	35.9	2.12	-1.12
Mar. 10, 2013	Head	5600	20.3	5.197	35.011	5.07	35.5	2.50	-1.38
Mar. 12, 2013	Head	5800	20.7	5.296	33.998	5.27	35.3	0.49	-3.69
Mar. 08, 2013	Body	750	20.2	0.966	55.257	0.96	55.5	0.63	-0.44
Mar. 05, 2013	Body	835	20.5	0.962	54.724	0.97	55.2	-0.82	-0.86
Mar. 14, 2013	Body	835	20.4	0.993	56.706	0.97	55.2	2.37	2.73
Mar. 05, 2013	Body	1750	20.8	1.469	53.127	1.49	53.4	-1.41	-0.51
Mar. 05, 2013	Body	1900	20.8	1.552	51.225	1.52	53.3	2.11	-3.89
Mar. 14, 2013	Body	1900	20.3	1.544	51.872	1.52	53.3	1.58	-2.68
Mar. 11, 2013	Body	2450	20.7	1.952	50.922	1.95	52.7	0.10	-3.37
Mar. 12, 2013	Body	5200	20.5	5.347	47.581	5.30	49.0	0.89	-2.90
Mar. 12, 2013	Body	5300	20.5	5.481	47.409	5.42	48.9	1.13	-3.05
Mar. 12, 2013	Body	5600	20.5	5.912	46.863	5.77	48.5	2.46	-3.38
Mar. 12, 2013	Body	5800	20.5	6.202	46.48	6.00	48.2	3.37	-3.57

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within ±5% of the target values. Liquid temperature during the SAR testing must be within ±2 °C.



FCC SAR Test Report

4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01v01. The validation status in tabulated summary is as below.

Test Date	Probe S/N	Calibration Point		Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Validation for CW			Validation for Modulation		
						Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
Mar. 04, 2013	3650	Head	750	0.892	41.077	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 04, 2013	3650	Head	835	0.905	42.368	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 13, 2013	3864	Head	835	0.903	42.371	Pass	Pass	Pass	GMSK	Pass	N/A
Mar. 04, 2013	3650	Head	1750	1.348	38.858	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 04, 2013	3650	Head	1900	1.424	40.347	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 13, 2013	3864	Head	1900	1.405	40.805	Pass	Pass	Pass	GMSK	Pass	N/A
Mar. 15, 2013	3801	Head	1900	1.447	38.505	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 11, 2013	3801	Head	2450	1.886	37.408	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 15, 2013	3864	Head	2450	1.879	38.687	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 12, 2013	3590	Head	5200	4.767	35.944	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 10, 2013	3650	Head	5300	4.861	35.499	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 10, 2013	3650	Head	5600	5.197	35.011	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 12, 2013	3590	Head	5800	5.296	33.998	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 08, 2013	3801	Body	750	0.966	55.257	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 05, 2013	3864	Body	835	0.962	54.724	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 14, 2013	3864	Body	835	0.993	56.706	Pass	Pass	Pass	GMSK	Pass	N/A
Mar. 05, 2013	3650	Body	1750	1.469	53.127	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 05, 2013	3650	Body	1900	1.552	51.225	Pass	Pass	Pass	N/A	N/A	N/A
Mar. 14, 2013	3864	Body	1900	1.544	51.872	Pass	Pass	Pass	GMSK	Pass	N/A
Mar. 11, 2013	3801	Body	2450	1.952	50.922	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 12, 2013	3590	Body	5200	5.347	47.581	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 12, 2013	3590	Body	5300	5.481	47.409	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 12, 2013	3590	Body	5600	5.912	46.863	Pass	Pass	Pass	OFDM	N/A	Pass
Mar. 12, 2013	3590	Body	5800	6.202	46.48	Pass	Pass	Pass	OFDM	N/A	Pass



FCC SAR Test Report

4.5 System Verification

The measuring result for system verification is tabulated as below.

Test Date	Mode	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Mar. 04, 2013	Head	750	8.44	2.13	8.52	0.95	1013	3650	579
Mar. 04, 2013	Head	835	9.46	2.26	9.04	-4.44	4d021	3650	579
Mar. 13, 2013	Head	835	9.46	2.45	9.80	3.59	4d021	3864	910
Mar. 04, 2013	Head	1750	36.00	8.44	33.76	-6.22	1055	3650	579
Mar. 04, 2013	Head	1900	40.60	9.61	38.44	-5.32	5d036	3650	579
Mar. 13, 2013	Head	1900	40.60	9.50	38.00	-6.40	5d036	3864	910
Mar. 15, 2013	Head	1900	40.60	9.69	38.76	-4.53	5d036	3801	1277
Mar. 11, 2013	Head	2450	52.50	13.0	52.00	-0.95	737	3801	1277
Mar. 15, 2013	Head	2450	52.50	13.3	53.20	1.33	737	3864	910
Mar. 12, 2013	Head	5200	79.00	7.35	73.50	-6.96	1019	3590	679
Mar. 10, 2013	Head	5300	82.20	8.43	84.30	2.55	1019	3650	579
Mar. 10, 2013	Head	5600	83.80	7.90	79.00	-5.73	1019	3650	579
Mar. 12, 2013	Head	5800	78.90	7.73	77.30	-2.03	1019	3590	679
Mar. 08, 2013	Body	750	8.76	2.16	8.64	-1.37	1013	3801	1277
Mar. 05, 2013	Body	835	9.60	2.37	9.96	3.75	4d021	3864	910
Mar. 14, 2013	Body	835	9.60	2.44	9.76	1.67	4d021	3864	910
Mar. 05, 2013	Body	1750	37.20	9.20	36.80	-1.08	1055	3650	579
Mar. 05, 2013	Body	1900	41.00	9.79	39.16	-4.49	5d036	3650	579
Mar. 14, 2013	Body	1900	41.00	9.68	38.72	-5.56	5d036	3864	910
Mar. 11, 2013	Body	2450	49.60	12.8	51.20	3.23	737	3801	1277
Mar. 12, 2013	Body	5200	73.00	7.54	75.40	3.29	1019	3590	679
Mar. 12, 2013	Body	5300	74.60	7.14	71.40	-4.29	1019	3590	679
Mar. 12, 2013	Body	5600	79.90	7.66	76.60	-4.13	1019	3590	679
Mar. 12, 2013	Body	5800	73.40	6.76	67.60	-7.90	1019	3590	679

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.



FCC SAR Test Report

4.6 Maximum Output Power

4.6.1 Nominal Conducted Power

The nominal conducted power (Unit: dBm) including tune-up tolerance is shown as below.

Mode	GSM850	GSM1900
GSM (GMSK, 1 Uplink)	34.4	31.6
GPRS 8 (GMSK, 1 Uplink)	34.3	31.6
GPRS 10 (GMSK, 2 Uplink)	31	28
GPRS 11 (GMSK, 3 Uplink)	29.2	26.2
GPRS 12 (GMSK, 4 Uplink)	28	25
EDGE 8 (8PSK, 1 Uplink)	28	27
EDGE 10 (8PSK, 2 Uplink)	25	26
EDGE 11 (8PSK, 3 Uplink)	23.2	22.2
EDGE 12 (8PSK, 4 Uplink)	22	21
DTM 9 (GMSK, 2 Uplink)	31.0	28.0
DTM 11 (GMSK, 3 Uplink)	28.7	26.0
DTM 9 (8PSK, 2 Uplink)	24.2	23.8
DTM 11 (8PSK, 3 Uplink)	22.3	21.9

Mode	WCDMA Band II	WCDMA Band V
RMC 12.2K	23.5	23.5

Mode	CDMA BC0	CDMA BC1
1xRTT	24.3	24.1
1xEVDO Rev.0	24.3	24.1
1xEVDO Rev.A	24.3	24.1

Mode	LTE 4	LTE 13
QPSK / 16QAM	24.2	24.1

Mode	2.4G WLAN	5.2G WLAN	5.3G WLAN	5.5G WLAN	5.8G WLAN
802.11b	17.6	N/A	N/A	N/A	N/A
802.11g	14.0	N/A	N/A	N/A	N/A
802.11a	N/A	13.0	13.0	13.0	13.0
802.11n HT20	13.0	12.0	12.0	12.0	12.0
802.11n HT40	N/A	11.5	11.5	11.5	11.5

Mode	Bluetooth
All	0.55

4.6.2 Measured Conducted Power Result

The measuring conducted power (Unit: dBm) is shown as below.

Band Channel	GSM850			GSM1900		
	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power						
GSM (GMSK, 1 Uplink)	34.19	34.32	34.16	31.58	31.59	31.27
GPRS 8 (GMSK, 1 Uplink)	34.11	34.24	34.08	31.57	31.58	31.26
GPRS 10 (GMSK, 2 Uplink)	30.63	30.76	30.60	27.86	27.87	27.55
GPRS 11 (GMSK, 3 Uplink)	28.47	28.60	28.44	25.93	25.94	25.62
GPRS 12 (GMSK, 4 Uplink)	27.00	27.13	26.97	24.69	24.70	24.38
EDGE 8 (8PSK, 1 Uplink)	27.61	27.74	27.58	26.79	26.80	26.48
EDGE 10 (8PSK, 2 Uplink)	24.53	24.66	24.50	23.74	23.79	23.43
EDGE 11 (8PSK, 3 Uplink)	22.59	22.72	22.56	21.90	21.91	21.59
EDGE 12 (8PSK, 4 Uplink)	21.27	21.40	21.24	20.64	20.65	20.33
DTM 9 (GMSK, 2 Uplink)	30.79	30.92	30.76	27.99	28.00	27.69
DTM 11 (GMSK, 3 Uplink)	28.52	28.65	28.49	25.99	26.00	25.69
DTM 9 (8PSK, 2 Uplink)	24.18	24.20	24.21	23.75	23.78	23.76
DTM 11 (8PSK, 3 Uplink)	22.20	22.24	22.22	21.74	21.83	21.70
Maximum Frame-Averaged Output Power						
GSM (GMSK, 1 Uplink)	25.19	25.32	25.16	22.58	22.59	22.27
GPRS 8 (GMSK, 1 Uplink)	25.11	25.24	25.08	22.57	22.58	22.26
GPRS 10 (GMSK, 2 Uplink)	24.63	24.76	24.60	21.86	21.87	21.55
GPRS 11 (GMSK, 3 Uplink)	24.21	24.34	24.18	21.67	21.68	21.36
GPRS 12 (GMSK, 4 Uplink)	24.00	24.13	23.97	21.69	21.70	21.38
EDGE 8 (8PSK, 1 Uplink)	18.61	18.74	18.58	17.79	17.80	17.48
EDGE 10 (8PSK, 2 Uplink)	18.53	18.66	18.50	17.74	17.79	17.43
EDGE 11 (8PSK, 3 Uplink)	18.33	18.46	18.30	17.64	17.65	17.33
EDGE 12 (8PSK, 4 Uplink)	18.27	18.40	18.24	17.64	17.65	17.33
DTM 9 (GMSK, 2 Uplink)	24.79	24.92	24.76	21.99	22.00	21.69
DTM 11 (GMSK, 3 Uplink)	24.26	24.39	24.23	21.73	21.74	21.43
DTM 9 (8PSK, 2 Uplink)	18.18	18.20	18.21	17.75	17.78	17.76
DTM 11 (8PSK, 3 Uplink)	17.94	17.98	17.96	17.48	17.57	17.44

Note:

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

$$\text{Frame-averaged power} = 10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$$

Band Channel	WCDMA Band II			WCDMA Band V			3PGG MPR (dB)
	9262	9400	9538	4132	4182	4233	
Frequency (MHz)	1852.4	1880.0	1907.6	826.4	836.4	846.6	
RMC 12.2K	23.15	23.16	23.21	23.14	23.24	23.26	-
HSDPA Subtest-1	22.26	22.27	22.32	22.20	22.30	22.32	0
HSDPA Subtest-2	22.24	22.25	22.30	22.19	22.29	22.31	0
HSDPA Subtest-3	22.26	22.27	22.32	22.17	22.27	22.29	0.5
HSDPA Subtest-4	21.87	21.88	21.93	21.70	21.80	21.82	0.5
HSUPA Subtest-1	22.15	22.16	22.21	21.55	21.65	21.67	0
HSUPA Subtest-2	21.23	21.24	21.29	21.19	21.29	21.31	2
HSUPA Subtest-3	20.80	20.81	20.86	20.83	20.93	20.95	1
HSUPA Subtest-4	21.26	21.27	21.32	21.64	21.74	21.76	1
HSUPA Subtest-5	22.16	22.17	22.22	22.16	22.26	22.28	0



FCC SAR Test Report

A D T

Band Channel	CDMA BC0			CDMA BC1		
	1013	384	777	25	600	1175
Frequency (MHz)	824.70	836.52	848.31	1851.25	1880.00	1908.75
1xRTT RC1+SO55	24.14	23.98	23.94	23.64	23.78	23.65
1xRTT RC3+SO55	24.28	24.12	24.08	24.10	23.96	23.85
1xRTT RC3+SO32 (FCH)	24.11	23.95	23.91	23.90	23.84	23.81
1xRTT RC3+SO32 (SCH)	24.07	23.91	23.87	23.67	23.81	23.61
1xEVDO Rev.0 RTAP 153.6	24.08	23.92	23.88	23.95	23.81	23.61
1xEVDO Rev.A RETAP 4096	24.27	24.11	24.07	24.04	23.90	23.70

Band / BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375	3PGG MPR (dB)
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz	
4 / 5M	QPSK	1	0	23.89	23.97	23.91	0
		1	12	23.86	23.94	23.88	0
		1	24	23.71	23.79	23.73	0
		12	0	22.84	22.92	22.86	0
		12	6	22.61	22.69	22.63	0
		12	13	22.63	22.71	22.65	0
		25	0	22.69	22.77	22.71	1
	16QAM	1	0	22.80	22.88	22.82	1
		1	12	22.78	22.86	22.80	1
		1	24	22.61	22.69	22.63	1
		12	0	21.78	21.86	21.80	1
		12	6	21.68	21.76	21.70	1
		12	13	21.63	21.71	21.65	1
		25	0	21.74	21.82	21.76	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350	3PGG MPR (dB)
				Frequency 1715.0 MHz	Frequency 1732.5 MHz	Frequency 1750.0 MHz	
4 / 10M	QPSK	1	0	23.95	24.03	23.97	0
		1	24	23.92	24.00	23.94	0
		1	49	23.77	23.85	23.79	0
		25	0	22.90	22.98	22.92	0
		25	12	22.67	22.75	22.69	0
		25	25	22.69	22.77	22.71	0
		50	0	22.75	22.83	22.77	1
	16QAM	1	0	22.86	22.94	22.88	1
		1	24	22.84	22.92	22.86	1
		1	49	22.67	22.75	22.69	1
		25	0	21.84	21.92	21.86	1
		25	12	21.74	21.82	21.76	1
		25	25	21.69	21.77	21.71	1
		50	0	21.80	21.88	21.82	2



FCC SAR Test Report

A D T

Band / BW	Modulation	RB Size	RB Offset	Low CH 20025	Mid CH 20175	High CH 20325	3PGG MPR (dB)
				Frequency 1717.5 MHz	Frequency 1732.5 MHz	Frequency 1747.5 MHz	
4 / 15M	QPSK	1	0	24.02	24.10	24.04	0
		1	37	23.99	24.07	24.01	0
		1	74	23.84	23.92	23.86	0
		36	0	22.97	23.05	22.99	0
		36	19	22.74	22.82	22.76	0
		36	39	22.76	22.84	22.78	0
		75	0	22.82	22.90	22.84	1
	16QAM	1	0	22.93	23.01	22.95	1
		1	37	22.91	22.99	22.93	1
		1	74	22.74	22.82	22.76	1
		36	0	21.91	21.99	21.93	1
		36	19	21.81	21.89	21.83	1
		36	39	21.76	21.84	21.78	1
		75	0	21.87	21.95	21.89	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 20050	Mid CH 20175	High CH 20300	3PGG MPR (dB)
				Frequency 1720.0 MHz	Frequency 1732.5 MHz	Frequency 1745.0 MHz	
4 / 20M	QPSK	1	0	24.08	24.16	24.10	0
		1	50	24.05	24.13	24.07	0
		1	99	23.90	23.98	23.92	0
		50	0	23.03	23.11	23.05	0
		50	25	22.80	22.88	22.82	0
		50	50	22.82	22.90	22.84	0
		100	0	22.88	22.96	22.90	1
	16QAM	1	0	22.99	23.07	23.01	1
		1	50	22.97	23.05	22.99	1
		1	99	22.80	22.88	22.82	1
		50	0	21.97	22.05	21.99	1
		50	25	21.87	21.95	21.89	1
		50	50	21.82	21.90	21.84	1
		100	0	21.93	22.01	21.95	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 23205	Mid CH 23230	High CH 23255	3PGG MPR (dB)
				Frequency 779.5 MHz	Frequency 782.0 MHz	Frequency 784.5 MHz	
13 / 5M	QPSK	1	0	24.06	24.01	23.90	0
		1	12	23.99	23.94	23.83	0
		1	24	23.56	23.51	23.40	0
		12	0	22.93	22.88	22.77	0
		12	6	22.86	22.81	22.70	0
		12	13	22.71	22.66	22.55	0
		25	0	22.67	22.62	22.51	1
	16QAM	1	0	22.97	22.92	22.81	1
		1	12	22.83	22.78	22.67	1
		1	24	22.47	22.42	22.31	1
		12	0	21.99	21.94	21.83	1
		12	6	21.88	21.83	21.72	1
		12	13	21.74	21.69	21.58	1
		25	0	21.66	21.61	21.50	2



FCC SAR Test Report

A D T

Band / BW	Modulation	RB Size	RB Offset	Mid CH 23230	3PGG MPR (dB)
				Frequency 782.0 MHz	
13 / 10M	QPSK	1	0	24.08	0
		1	24	24.01	0
		1	49	23.58	0
		25	0	22.95	0
		25	12	22.88	0
		25	25	22.73	0
		50	0	22.69	1
	16QAM	1	0	22.99	1
		1	24	22.85	1
		1	49	22.49	1
		25	0	22.01	1
		25	12	21.90	1
		25	25	21.76	1
		50	0	21.68	2

<WLAN 2.4G>

Mode	802.11b		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	17.51	16.78	16.52
Mode	802.11g		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	13.20	12.84	12.54
Mode	802.11n (HT20)		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	12.42	12.67	11.86

<WLAN 5.2G>

Mode	802.11a			
Channel / Frequency (MHz)	36 (5180)	40 (5200)	44 (5220)	48 (5240)
Average Power	11.86	11.98	11.96	12.03
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	36 (5180)	40 (5200)	44 (5220)	48 (5240)
Average Power	11.43	10.96	11.09	11.09
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	38 (5190)		46 (5230)	
Average Power	10.73		11.37	

<WLAN 5.3G>

Mode	802.11a			
Channel / Frequency (MHz)	52 (5260)	56 (5280)	60 (5300)	64 (5320)
Average Power	12.03	11.82	12.01	11.96
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	52 (5260)	56 (5280)	60 (5300)	64 (5320)
Average Power	11.56	11.22	11.27	11.20
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	54 (5270)		62 (5310)	
Average Power	11.36		11.55	



FCC SAR Test Report

<WLAN 5.5G>

Mode	802.11a							
Channel / Frequency (MHz)	100 (5500)	104 (5520)	108 (5540)	112 (5560)	116 (5580)	132 (5660)	136 (5680)	140 (5700)
Average Power	12.05	11.22	11.66	11.73	11.89	11.72	11.72	12.11
Mode	802.11n (HT20)							
Channel / Frequency (MHz)	100 (5500)	104 (5520)	108 (5540)	112 (5560)	116 (5580)	132 (5660)	136 (5680)	140 (5700)
Average Power	11.36	11.15	11.14	11.14	11.41	11.20	11.06	11.48
Mode	802.11n (HT40)							
Channel / Frequency (MHz)	102 (5510)				134 (5670)			
Average Power	10.92				11.26			

<WLAN 5.8G>

Mode	802.11a				
Channel / Frequency (MHz)	149 (5745)	153 (5765)	157 (5785)	161 (5805)	165 (5825)
Average Power	11.21	12.11	12.16	12.00	12.02
Mode	802.11n (HT20)				
Channel / Frequency (MHz)	149 (5745)	153 (5765)	157 (5785)	161 (5805)	165 (5825)
Average Power	10.43	11.42	11.80	11.75	11.61
Mode	802.11n (HT40)				
Channel / Frequency (MHz)	151 (5755)		159 (5795)		
Average Power	10.39		10.60		



FCC SAR Test Report

4.7 SAR Testing Results

4.7.1 SAR Results for Head

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	GSM850	GSM	Right Cheek	189	34.4	34.32	1.02	-0.17	0.301	0.31
	GSM850	GSM	Right Tilted	189	34.4	34.32	1.02	-0.11	0.266	0.27
01	GSM850	GSM	Left Cheek	189	34.4	34.32	1.02	-0.04	0.302	0.31
	GSM850	GSM	Left Tilted	189	34.4	34.32	1.02	-0.01	0.249	0.25
	GSM1900	GSM	Right Cheek	661	31.6	31.59	1.00	-0.15	0.444	0.45
	GSM1900	GSM	Right Tilted	661	31.6	31.59	1.00	-0.07	0.245	0.25
02	GSM1900	GSM	Left Cheek	661	31.6	31.59	1.00	0.06	0.614	0.61
	GSM1900	GSM	Left Tilted	661	31.6	31.59	1.00	-0.04	0.284	0.28
	WCDMA II	RMC12.2K	Right Cheek	9538	23.5	23.21	1.07	0.01	0.533	0.57
	WCDMA II	RMC12.2K	Right Tilted	9538	23.5	23.21	1.07	-0.06	0.308	0.33
	WCDMA II	RMC12.2K	Left Cheek	9538	23.5	23.21	1.07	0.11	0.753	0.81
	WCDMA II	RMC12.2K	Left Tilted	9538	23.5	23.21	1.07	-0.06	0.381	0.41
03	WCDMA II	RMC12.2K	Left Cheek	9262	23.5	23.15	1.08	-0.128	0.818	0.88
	WCDMA II	RMC12.2K	Left Cheek	9400	23.5	23.16	1.08	0.08	0.723	0.78
	WCDMA II	RMC12.2K	Left Cheek	9262	23.5	23.15	1.08	0.06	0.814	0.88
04	WCDMA V	RMC12.2K	Right Cheek	4233	23.5	23.26	1.06	0.14	0.212	0.22
	WCDMA V	RMC12.2K	Right Tilted	4233	23.5	23.26	1.06	0.10	0.181	0.19
	WCDMA V	RMC12.2K	Left Cheek	4233	23.5	23.26	1.06	0.16	0.203	0.22
	WCDMA V	RMC12.2K	Left Tilted	4233	23.5	23.26	1.06	0.13	0.173	0.18
05	CDMA BC0	RC3+SO55	Right Cheek	1013	24.3	24.28	1.00	0.17	0.541	0.54
	CDMA BC0	RC3+SO55	Right Tilted	1013	24.3	24.28	1.00	0.13	0.382	0.38
	CDMA BC0	RC3+SO55	Left Cheek	1013	24.3	24.28	1.00	0.05	0.509	0.51
	CDMA BC0	RC3+SO55	Left Tilted	1013	24.3	24.28	1.00	0.00	0.362	0.36
	CDMA BC1	RC3+SO55	Right Cheek	25	24.1	24.10	1.00	-0.11	0.475	0.48
	CDMA BC1	RC3+SO55	Right Tilted	25	24.1	24.10	1.00	0.12	0.27	0.27
	CDMA BC1	RC3+SO55	Left Cheek	25	24.1	24.10	1.00	0.18	0.953	0.95
	CDMA BC1	RC3+SO55	Left Tilted	25	24.1	24.10	1.00	-0.01	0.338	0.34
	CDMA BC1	RC3+SO55	Left Cheek	600	24.1	23.96	1.03	0.13	1.01	1.04
06	CDMA BC1	RC3+SO55	Left Cheek	1175	24.1	23.85	1.06	0.16	1.31	1.39
	CDMA BC1	RC3+SO55	Left Cheek	1175	24.1	23.85	1.06	-0.04	1.27	1.35

Note:

1. Since GPRS/EDGE, WCDMA, and CDMA of this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for head SAR.
2. SAR is performed on the highest power channel. When the reported SAR value of highest power channel is <= 0.8 W/kg, SAR testing for optional channel is not required.



FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
07	LTE 4	QPSK_20M	Right Cheek	20175	1	0	24.2	24.16	1.01	0.06	0.69	0.70
	LTE 4	QPSK_20M	Right Tilted	20175	1	0	24.2	24.16	1.01	-0.03	0.71	0.72
	LTE 4	QPSK_20M	Left Cheek	20175	1	0	24.2	24.16	1.01	0.13	0.501	0.51
	LTE 4	QPSK_20M	Left Tilted	20175	1	0	24.2	24.16	1.01	0.02	0.649	0.66
	LTE 4	QPSK_20M	Right Cheek	20175	50	0	23.2	23.11	1.02	0.13	0.529	0.54
	LTE 4	QPSK_20M	Right Tilted	20175	50	0	23.2	23.11	1.02	0.06	0.545	0.56
08	LTE 4	QPSK_20M	Left Cheek	20175	50	0	23.2	23.11	1.02	-0.10	0.381	0.39
	LTE 4	QPSK_20M	Left Tilted	20175	50	0	23.2	23.11	1.02	0.15	0.503	0.51
	LTE 13	QPSK_10M	Right Cheek	23230	1	0	24.1	24.08	1.00	-0.03	0.46	0.46
	LTE 13	QPSK_10M	Right Tilted	23230	1	0	24.1	24.08	1.00	-0.18	0.406	0.41
	LTE 13	QPSK_10M	Left Cheek	23230	1	0	24.1	24.08	1.00	-0.03	0.536	0.54
	LTE 13	QPSK_10M	Left Tilted	23230	1	0	24.1	24.08	1.00	0.11	0.384	0.38
	LTE 13	QPSK_10M	Right Cheek	23230	25	0	23.1	22.95	1.04	0.01	0.349	0.36
	LTE 13	QPSK_10M	Right Tilted	23230	25	0	23.1	22.95	1.04	0.16	0.302	0.31
	LTE 13	QPSK_10M	Left Cheek	23230	25	0	23.1	22.95	1.04	0.10	0.409	0.43
	LTE 13	QPSK_10M	Left Tilted	23230	25	0	23.1	22.95	1.04	0.07	0.292	0.30

Note:

1. Since LTE of this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for head SAR.
2. SAR is performed on the highest power channel. When the reported SAR value of highest power channel is <= 0.8 W/kg, SAR testing for optional channel is not required.
3. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 1RB configuration is less than 0.8 W/kg.
4. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 50% RB configuration is less than 0.8 W/kg.
5. According to KDB 941225, LTE SAR testing for 100% RB is not required when the maximum power of 100% RB is less than the maximum power of 1RB and 50% RB, and the highest reported SAR for 1RB and 50% RB is less than 0.8 W/kg.
6. According to KDB 941225, LTE SAR testing for 16QAM is not required when the maximum power of 16QAM is less 1/2 dB higher than QPSK, and the highest reported SAR of QPSK is less than 1.45 W/kg.
7. According to KDB 941225, LTE SAR testing for smaller channel bandwidth is not required when the maximum power of smaller channel bandwidth is less 1/2 dB higher than largest channel bandwidth, and the highest reported SAR of largest channel bandwidth is less than 1.45 W/kg.



FCC SAR Test Report

Plot No.	Band	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	802.11b	Right Cheek	1	17.6	17.51	1.02	0.13	0.134	0.14
	802.11b	Right Tilted	1	17.6	17.51	1.02	0.09	0.07	0.07
09	802.11b	Left Cheek	1	17.6	17.51	1.02	-0.07	0.437	0.45
	802.11b	Left Tilted	1	17.6	17.51	1.02	-0.16	0.111	0.11
	802.11a	Right Cheek	48	13.0	12.03	1.25	N/A	N/A	N/A
	802.11a	Right Tilted	48	13.0	12.03	1.25	N/A	N/A	N/A
10	802.11a	Left Cheek	48	13.0	12.03	1.25	0.12	0.025	0.03
	802.11a	Left Tilted	48	13.0	12.03	1.25	N/A	N/A	N/A
	802.11a	Right Cheek	52	13.0	12.03	1.25	0.02	0.000246	0.01
	802.11a	Right Tilted	52	13.0	12.03	1.25	N/A	N/A	N/A
11	802.11a	Left Cheek	52	13.0	12.03	1.25	0.00	0.026	0.03
	802.11a	Left Tilted	52	13.0	12.03	1.25	0.01	0.000000069	0.01
	802.11a	Right Cheek	140	13.0	12.11	1.23	N/A	N/A	N/A
	802.11a	Right Tilted	140	13.0	12.11	1.23	N/A	N/A	N/A
12	802.11a	Left Cheek	140	13.0	12.11	1.23	0.00	0.049	0.06
	802.11a	Left Tilted	140	13.0	12.11	1.23	0.01	0.011	0.01
	802.11a	Right Cheek	157	13.0	12.16	1.21	0.00	0.026	0.03
	802.11a	Right Tilted	157	13.0	12.16	1.21	N/A	N/A	N/A
13	802.11a	Left Cheek	157	13.0	12.16	1.21	0.00	0.119	0.14
	802.11a	Left Tilted	157	13.0	12.16	1.21	-0.01	0.00667	0.01
	BT	Right Cheek	78	0.55	0.50	1.01	0.00	0.0000472	0.01
14	BT	Right Tilted	78	0.55	0.50	1.01	0.00	0.000176	0.01
	BT	Left Cheek	78	0.55	0.50	1.01	N/A	N/A	N/A
	BT	Left Tilted	78	0.55	0.50	1.01	0.00	0.0000292	0.01

Note:

1. Since WLAN of this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for head SAR.
2. According to KDB 248227, when the extrapolated maximum peak SAR for the maximum output power channel is ≤ 1.6 W/kg and the 1g averaged SAR is ≤ 0.8 W/kg, WLAN SAR testing for other channels is not required.
3. SAR testing for 802.11g/n is not required because its maximum power is less than 1/4 dB higher than 802.11b.
4. SAR testing for 802.11n is not required when its maximum power is less than 1/4 dB higher than 802.11a.
5. The "N/A" means there is no SAR value or the SAR is too low to be measured.



FCC SAR Test Report

4.7.2 SAR Results for Body-Worn (Separation Distance is 1.0 cm)

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	GSM850	GSM	Front Face	189	34.4	34.32	1.02	0.03	0.399	0.41
15	GSM850	GSM	Rear Face	189	34.4	34.32	1.02	-0.03	0.421	0.43
	GSM1900	GSM	Front Face	661	31.6	31.59	1.00	0.04	0.303	0.30
16	GSM1900	GSM	Rear Face	661	31.6	31.59	1.00	0.08	0.324	0.32
	WCDMA II	RMC12.2K	Front Face	9538	23.5	23.21	1.07	-0.18	0.463	0.50
	WCDMA II	RMC12.2K	Rear Face	9538	23.5	23.21	1.07	-0.16	0.441	0.47
	WCDMA V	RMC12.2K	Front Face	4233	23.5	23.26	1.06	-0.11	0.28	0.30
18	WCDMA V	RMC12.2K	Rear Face	4233	23.5	23.26	1.06	0.01	0.312	0.33
	CDMA BC0	RC3+SO55	Front Face	1013	24.3	24.28	1.00	0.02	0.644	0.64
	CDMA BC0	RC3+SO55	Rear Face	1013	24.3	24.28	1.00	0.67	0.492	0.49
	CDMA BC1	RC3+SO55	Front Face	25	24.1	24.1	1.00	0.13	0.595	0.60
20	CDMA BC1	RC3+SO55	Rear Face	25	24.1	24.1	1.00	-0.15	0.754	0.75

Note:

1. Since GPRS/EDGE, WCDMA, and CDMA of this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for body-worn SAR.
2. SAR is performed on the highest power channel. When the reported SAR value of highest power channel is \leq 0.8 W/kg, SAR testing for optional channel is not required.

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 4	QPSK_20M	Front Face	20175	1	0	24.2	24.16	1.01	0.18	0.302	0.31
21	LTE 4	QPSK_20M	Rear Face	20175	1	0	24.2	24.16	1.01	0.17	0.593	0.60
	LTE 4	QPSK_20M	Front Face	20175	50	0	23.2	23.11	1.02	0.02	0.243	0.25
	LTE 4	QPSK_20M	Rear Face	20175	50	0	23.2	23.11	1.02	0.14	0.474	0.48
	LTE 13	QPSK_10M	Front Face	23230	1	0	24.1	24.08	1.00	0.1	0.306	0.31
22	LTE 13	QPSK_10M	Rear Face	23230	1	0	24.1	24.08	1.00	-0.09	0.567	0.57
	LTE 13	QPSK_10M	Front Face	23230	25	0	23.1	22.95	1.04	0.07	0.228	0.24
	LTE 13	QPSK_10M	Rear Face	23230	25	0	23.1	22.95	1.04	-0.05	0.425	0.44

Note:

1. Since LTE of this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for body-worn SAR.
2. SAR is performed on the highest power channel. When the reported SAR value of highest power channel is \leq 0.8 W/kg, SAR testing for optional channel is not required.
3. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 1RB configuration is less than 0.8 W/kg.
4. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 50% RB configuration is less than 0.8 W/kg.
5. According to KDB 941225, LTE SAR testing for 100% RB is not required when the maximum power of 100% RB is less than the maximum power of 1RB and 50% RB, and the highest reported SAR for 1RB and 50% RB is less than 0.8 W/kg.
6. According to KDB 941225, LTE SAR testing for 16QAM is not required when the maximum power of 16QAM is less 1/2 dB higher than QPSK, and the highest reported SAR of QPSK is less than 1.45 W/kg.
7. According to KDB 941225, LTE SAR testing for smaller channel bandwidth is not required when the maximum power of smaller channel bandwidth is less 1/2 dB higher than largest channel bandwidth, and the highest reported SAR of largest channel bandwidth is less than 1.45 W/kg.

Plot No.	Band	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	802.11b	Front Face	1	17.6	17.51	1.02	-0.03	0.064	0.07
23	802.11b	Rear Face	1	17.6	17.51	1.02	0.10	0.147	0.15
	802.11a	Front Face	48	13	12.03	1.25	0.02	0.00000376	0.01
24	802.11a	Rear Face	48	13	12.03	1.25	0.13	0.091	0.11
	802.11a	Front Face	52	13	12.03	1.25	0.12	0.00262	0.01
25	802.11a	Rear Face	52	13	12.03	1.25	-0.13	0.1	0.13
	802.11a	Front Face	140	13	12.11	1.23	-0.11	0.00031	0.01
26	802.11a	Rear Face	140	13	12.11	1.23	0.12	0.113	0.14
	802.11a	Front Face	157	13	12.16	1.21	0.14	0.02	0.02
27	802.11a	Rear Face	157	13	12.16	1.21	0.14	0.339	0.41
	BT	Front Face	78	0.55	0.5	1.01	N/A	N/A	N/A
	BT	Rear Face	78	0.55	0.5	1.01	N/A	N/A	N/A

Note:

1. Since WLAN of this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for body-worn SAR.
2. According to KDB 248227, when the extrapolated maximum peak SAR for the maximum output power channel is ≤ 1.6 W/kg and the 1g averaged SAR is ≤ 0.8 W/kg, WLAN SAR testing for other channels is not required.
3. SAR testing for 802.11g/n is not required because its maximum power is less than 1/4 dB higher than 802.11b.
4. SAR testing for 802.11n is not required when its maximum power is less than 1/4 dB higher than 802.11a.
5. The "N/A" means there is no SAR value or the SAR is too low to be measured.

4.7.3 SAR Results for Hotspot (Separation Distance is 1.0 cm)

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
28	GSM850	GPRS8	Front Face	189	34.3	34.24	1.01	-0.07	0.398	0.40
	GSM850	GPRS8	Rear Face	189	34.3	34.24	1.01	-0.12	0.406	0.41
	GSM850	GPRS8	Left Side	189	34.3	34.24	1.01	-0.15	0.327	0.33
	GSM850	GPRS8	Right Side	189	34.3	34.24	1.01	-0.17	0.31	0.31
	GSM850	GPRS8	Bottom Side	189	34.3	34.24	1.01	0.11	0.042	0.04
	GSM1900	GPRS8	Front Face	661	31.6	31.58	1.00	0.04	0.371	0.37
	GSM1900	GPRS8	Rear Face	661	31.6	31.58	1.00	-0.10	0.448	0.45
	GSM1900	GPRS8	Left Side	661	31.6	31.58	1.00	-0.11	0.265	0.27
	GSM1900	GPRS8	Right Side	661	31.6	31.58	1.00	-0.14	0.054	0.05
	GSM1900	GPRS8	Bottom Side	661	31.6	31.58	1.00	0.19	0.519	0.52
30	WCDMA II	RMC12.2K	Front Face	9538	23.5	23.21	1.07	-0.18	0.463	0.50
	WCDMA II	RMC12.2K	Rear Face	9538	23.5	23.21	1.07	-0.16	0.441	0.47
	WCDMA II	RMC12.2K	Left Side	9538	23.5	23.21	1.07	0.07	0.358	0.38
	WCDMA II	RMC12.2K	Right Side	9538	23.5	23.21	1.07	-0.03	0.078	0.08
	WCDMA II	RMC12.2K	Bottom Side	9538	23.5	23.21	1.07	0.15	0.634	0.68
18	WCDMA V	RMC12.2K	Front Face	4233	23.5	23.26	1.06	-0.11	0.28	0.30
	WCDMA V	RMC12.2K	Rear Face	4233	23.5	23.26	1.06	0.01	0.312	0.33
	WCDMA V	RMC12.2K	Left Side	4233	23.5	23.26	1.06	-0.01	0.264	0.28
	WCDMA V	RMC12.2K	Right Side	4233	23.5	23.26	1.06	-0.11	0.242	0.26
	WCDMA V	RMC12.2K	Bottom Side	4233	23.5	23.26	1.06	0.16	0.033	0.03
31	CDMA BC0	RC3+SO32	Front Face	1013	24.3	24.11	1.04	0.01	0.66	0.69
	CDMA BC0	RC3+SO32	Rear Face	1013	24.3	24.11	1.04	-0.01	0.753	0.78
	CDMA BC0	RC3+SO32	Left Side	1013	24.3	24.11	1.04	-0.01	0.541	0.56
	CDMA BC0	RC3+SO32	Right Side	1013	24.3	24.11	1.04	-0.03	0.477	0.50
	CDMA BC0	RC3+SO32	Bottom Side	1013	24.3	24.11	1.04	0.139	0.078	0.08
	CDMA BC1	RC3+SO32	Front Face	25	24.1	23.90	1.05	0.10	0.617	0.65
	CDMA BC1	RC3+SO32	Rear Face	25	24.1	23.90	1.05	-0.03	0.853	0.90
	CDMA BC1	RC3+SO32	Left Side	25	24.1	23.90	1.05	-0.09	0.412	0.43
	CDMA BC1	RC3+SO32	Right Side	25	24.1	23.90	1.05	0.176	0.069	0.07
	CDMA BC1	RC3+SO32	Bottom Side	25	24.1	23.90	1.05	0.17	1.09	1.14
32	CDMA BC1	RC3+SO32	Rear Face	600	24.1	23.84	1.06	-0.06	0.776	0.82
	CDMA BC1	RC3+SO32	Rear Face	1175	24.1	23.81	1.07	0.07	0.89	0.95
	CDMA BC1	RC3+SO32	Bottom Side	600	24.1	23.84	1.06	0.14	0.953	1.01
	CDMA BC1	RC3+SO32	Bottom Side	1175	24.1	23.81	1.07	0.126	1.15	1.23
	CDMA BC1	RC3+SO32	Bottom Side	1175	24.1	23.81	1.07	0.126	1.15	1.23

Note:

- SAR is performed on the highest power channel. When the reported SAR value of highest power channel is <= 0.8 W/kg, SAR testing for optional channel is not required.



FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
21	LTE 4	QPSK_20M	Front Face	20175	1	0	24.2	24.16	1.01	0.18	0.302	0.31
	LTE 4	QPSK_20M	Rear Face	20175	1	0	24.2	24.16	1.01	0.17	0.593	0.60
	LTE 4	QPSK_20M	Left Side	20175	1	0	24.2	24.16	1.01	0.04	0.201	0.20
	LTE 4	QPSK_20M	Right Side	20175	1	0	24.2	24.16	1.01	-0.04	0.039	0.04
	LTE 4	QPSK_20M	Top Side	20175	1	0	24.2	24.16	1.01	0.12	0.242	0.24
	LTE 4	QPSK_20M	Bottom Side	20175	1	0	24.2	24.16	1.01	0.01	0.018	0.02
	LTE 4	QPSK_20M	Front Face	20175	50	0	23.2	23.11	1.02	0.02	0.243	0.25
	LTE 4	QPSK_20M	Rear Face	20175	50	0	23.2	23.11	1.02	0.14	0.474	0.48
	LTE 4	QPSK_20M	Left Side	20175	50	0	23.2	23.11	1.02	0.06	0.155	0.16
	LTE 4	QPSK_20M	Right Side	20175	50	0	23.2	23.11	1.02	-0.05	0.03	0.03
22	LTE 4	QPSK_20M	Top Side	20175	50	0	23.2	23.11	1.02	0.09	0.183	0.19
	LTE 4	QPSK_20M	Bottom Side	20175	50	0	23.2	23.11	1.02	-0.06	0.014	0.01
	LTE 13	QPSK_10M	Front Face	23230	1	0	24.1	24.08	1.00	0.10	0.306	0.31
	LTE 13	QPSK_10M	Rear Face	23230	1	0	24.1	24.08	1.00	-0.09	0.567	0.57
	LTE 13	QPSK_10M	Left Side	23230	1	0	24.1	24.08	1.00	0.10	0.171	0.17
	LTE 13	QPSK_10M	Right Side	23230	1	0	24.1	24.08	1.00	0.05	0.185	0.19
	LTE 13	QPSK_10M	Top Side	23230	1	0	24.1	24.08	1.00	0.02	0.163	0.16
	LTE 13	QPSK_10M	Bottom Side	23230	1	0	24.1	24.08	1.00	0.09	0.00949	0.01
	LTE 13	QPSK_10M	Front Face	23230	25	0	23.1	22.95	1.04	0.07	0.228	0.24
	LTE 13	QPSK_10M	Rear Face	23230	25	0	23.1	22.95	1.04	-0.05	0.425	0.44
	LTE 13	QPSK_10M	Left Side	23230	25	0	23.1	22.95	1.04	0.04	0.129	0.13
	LTE 13	QPSK_10M	Right Side	23230	25	0	23.1	22.95	1.04	-0.19	0.14	0.15
	LTE 13	QPSK_10M	Top Side	23230	25	0	23.1	22.95	1.04	0.05	0.123	0.13
	LTE 13	QPSK_10M	Bottom Side	23230	25	0	23.1	22.95	1.04	0.03	0.00682	0.01

Note:

- SAR is performed on the highest power channel. When the reported SAR value of highest power channel is <= 0.8 W/kg, SAR testing for optional channel is not required.
- According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 1RB configuration is less than 0.8 W/kg.
- According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 50% RB configuration is less than 0.8 W/kg.
- According to KDB 941225, LTE SAR testing for 100% RB is not required when the maximum power of 100% RB is less than the maximum power of 1RB and 50% RB, and the highest reported SAR for 1RB and 50% RB is less than 0.8 W/kg.
- According to KDB 941225, LTE SAR testing for 16QAM is not required when the maximum power of 16QAM is less 1/2 dB higher than QPSK, and the highest reported SAR of QPSK is less than 1.45 W/kg.
- According to KDB 941225, LTE SAR testing for smaller channel bandwidth is not required when the maximum power of smaller channel bandwidth is less 1/2 dB higher than largest channel bandwidth, and the highest reported SAR of largest channel bandwidth is less than 1.45 W/kg.



FCC SAR Test Report

A D T

Plot No.	Band	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	802.11b	Front Face	1	17.6	17.51	1.02	-0.03	0.064	0.07
23	802.11b	Rear Face	1	17.6	17.51	1.02	0.10	0.147	0.15
	802.11b	Right Side	1	17.6	17.51	1.02	0.00	0.118	0.12
	802.11b	Bottom Side	1	17.6	17.51	1.02	-0.03	0.00657	0.01

Note:

1. According to KDB 248227, when the extrapolated maximum peak SAR for the maximum output power channel is ≤ 1.6 W/kg and the 1g averaged SAR is ≤ 0.8 W/kg, WLAN SAR testing for other channels is not required.
2. SAR testing for 802.11g/n is not required because its maximum power is less than 1/4 dB higher than 802.11b.
3. Only WLAN 2.4G support wireless hotspot mode.

FCC SAR Test Report

4.7.4 SAR Measurement Variability

According to KDB 865664 D01v01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
CDMA BC1	RC3+SO55	Left Cheek	1175	1.31	1.27	1.03	N/A	N/A	N/A	N/A
CDMA BC1	RC3+SO32	Bottom Side	1175	1.15	1.15	1.00	N/A	N/A	N/A	N/A

FCC SAR Test Report

4.7.5 Simultaneous Multi-band Transmission Evaluation

<Estimated SAR Calculation>

According to KDB 447498 D01v05, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(mW)}}{\text{Min. Test Separation Distance}_{(mm)}} \times \frac{\sqrt{f_{(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

Mode / Band	Frequency (GHz)	Max. Tune-up Power (dBm)	Test Position	Separation Distance (mm)	Estimated SAR (W/kg)
GSM850	0.835	25.4	Top Side	113	0.4
GSM1900	1.909	22.6	Top Side	113	0.4
WCDMA II	1.907	23.5	Top Side	113	0.4
WCDMA V	0.846	23.5	Top Side	113	0.4
CDMA BC0	0.848	24.3	Top Side	113	0.4
CDMA BC1	1.908	24.1	Top Side	113	0.4
WLAN (DTS)	2.462	17.6	Left Side	55	0.4
WLAN (DTS)	2.462	17.6	Top Side	46	0.3

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR_{1g} is greater than the SAR limit (SAR_{1g} 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
1	GSM850 + WLAN (DTS)	Head	Right Cheek	0.31	0.14	0.45	N/A
			Right Tilted	0.27	0.07	0.34	N/A
			Left Cheek	0.31	0.45	0.76	N/A
			Left Tilted	0.25	0.11	0.36	N/A
		Body-Worn	Front Face	0.41	0.07	0.48	N/A
			Rear Face	0.43	0.41	0.84	N/A
		Hotspot	Front Face	0.40	0.07	0.47	N/A
			Rear Face	0.41	0.15	0.56	N/A
			Left Side	0.33	0.4	0.73	N/A
			Right Side	0.31	0.12	0.43	N/A
			Top Side	0.4	0.3	0.70	N/A
			Bottom Side	0.04	0.01	0.05	N/A
2	GSM850 + WLAN (NII)	Head	Right Cheek	0.31	0.01	0.32	N/A
			Right Tilted	0.27	0.00	0.27	N/A
			Left Cheek	0.31	0.06	0.37	N/A
			Left Tilted	0.25	0.01	0.26	N/A
		Body-Worn	Front Face	0.41	0.01	0.42	N/A
			Rear Face	0.43	0.14	0.57	N/A
3	GSM850 + BT (DSS)	Head	Right Cheek	0.31	0.01	0.32	N/A
			Right Tilted	0.27	0.01	0.28	N/A
			Left Cheek	0.31	0.00	0.31	N/A
			Left Tilted	0.25	0.01	0.26	N/A
		Body-Worn	Front Face	0.41	0.00	0.41	N/A
			Rear Face	0.43	0.00	0.43	N/A
No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
4	GSM1900 + WLAN (DTS)	Head	Right Cheek	0.45	0.14	0.59	N/A
			Right Tilted	0.25	0.07	0.32	N/A
			Left Cheek	0.61	0.45	1.06	N/A
			Left Tilted	0.28	0.11	0.39	N/A
		Body-Worn	Front Face	0.30	0.07	0.37	N/A
			Rear Face	0.32	0.41	0.73	N/A
		Hotspot	Front Face	0.37	0.07	0.44	N/A
			Rear Face	0.45	0.15	0.60	N/A
			Left Side	0.27	0.4	0.67	N/A
			Right Side	0.05	0.12	0.17	N/A
			Top Side	0.4	0.3	0.70	N/A
			Bottom Side	0.52	0.01	0.53	N/A
5	GSM1900 + WLAN (NII)	Head	Right Cheek	0.45	0.01	0.46	N/A
			Right Tilted	0.25	0.00	0.25	N/A
			Left Cheek	0.61	0.06	0.67	N/A
			Left Tilted	0.28	0.01	0.29	N/A
		Body-Worn	Front Face	0.30	0.01	0.31	N/A
			Rear Face	0.32	0.14	0.46	N/A
6	GSM1900 + BT (DSS)	Head	Right Cheek	0.45	0.01	0.46	N/A
			Right Tilted	0.25	0.01	0.26	N/A
			Left Cheek	0.61	0.00	0.61	N/A
			Left Tilted	0.28	0.01	0.29	N/A
		Body-Worn	Front Face	0.30	0.00	0.30	N/A
			Rear Face	0.32	0.00	0.32	N/A



FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
7	WCDMA II + WLAN (DTS)	Head	Right Cheek	0.57	0.14	0.71	N/A
			Right Tilted	0.33	0.07	0.40	N/A
			Left Cheek	0.88	0.45	1.33	N/A
			Left Tilted	0.41	0.11	0.52	N/A
		Body-Worn	Front Face	0.50	0.07	0.57	N/A
			Rear Face	0.47	0.41	0.88	N/A
		Hotspot	Front Face	0.50	0.07	0.57	N/A
			Rear Face	0.47	0.15	0.62	N/A
			Left Side	0.38	0.4	0.78	N/A
			Right Side	0.08	0.12	0.20	N/A
			Top Side	0.4	0.3	0.70	N/A
			Bottom Side	0.68	0.01	0.69	N/A
8	WCDMA II + WLAN (NII)	Head	Right Cheek	0.57	0.01	0.58	N/A
			Right Tilted	0.33	0.00	0.33	N/A
			Left Cheek	0.88	0.06	0.94	N/A
			Left Tilted	0.41	0.01	0.42	N/A
		Body-Worn	Front Face	0.50	0.01	0.51	N/A
			Rear Face	0.47	0.14	0.61	N/A
9	WCDMA II + BT (DSS)	Head	Right Cheek	0.57	0.01	0.58	N/A
			Right Tilted	0.33	0.01	0.34	N/A
			Left Cheek	0.88	0.00	0.88	N/A
			Left Tilted	0.41	0.01	0.42	N/A
		Body-Worn	Front Face	0.50	0.00	0.50	N/A
			Rear Face	0.47	0.00	0.47	N/A
No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
10	WCDMA V + WLAN (DTS)	Head	Right Cheek	0.22	0.14	0.36	N/A
			Right Tilted	0.19	0.07	0.26	N/A
			Left Cheek	0.22	0.45	0.67	N/A
			Left Tilted	0.18	0.11	0.29	N/A
		Body-Worn	Front Face	0.30	0.07	0.37	N/A
			Rear Face	0.33	0.41	0.74	N/A
		Hotspot	Front Face	0.30	0.07	0.37	N/A
			Rear Face	0.33	0.15	0.48	N/A
			Left Side	0.28	0.4	0.68	N/A
			Right Side	0.26	0.12	0.38	N/A
			Top Side	0.4	0.3	0.70	N/A
			Bottom Side	0.03	0.01	0.04	N/A
11	WCDMA V + WLAN (NII)	Head	Right Cheek	0.22	0.01	0.23	N/A
			Right Tilted	0.19	0.00	0.19	N/A
			Left Cheek	0.22	0.06	0.28	N/A
			Left Tilted	0.18	0.01	0.19	N/A
		Body-Worn	Front Face	0.30	0.01	0.31	N/A
			Rear Face	0.33	0.14	0.47	N/A
12	WCDMA V + BT (DSS)	Head	Right Cheek	0.22	0.01	0.23	N/A
			Right Tilted	0.19	0.01	0.20	N/A
			Left Cheek	0.22	0.00	0.22	N/A
			Left Tilted	0.18	0.01	0.19	N/A
		Body-Worn	Front Face	0.30	0.00	0.30	N/A
			Rear Face	0.33	0.00	0.33	N/A



FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
13	CDMA BC0 + WLAN (DTS)	Head	Right Cheek	0.54	0.14	0.68	N/A
			Right Tilted	0.38	0.07	0.45	N/A
			Left Cheek	0.51	0.45	0.96	N/A
			Left Tilted	0.36	0.11	0.47	N/A
		Body-Worn	Front Face	0.64	0.07	0.71	N/A
			Rear Face	0.49	0.41	0.90	N/A
		Hotspot	Front Face	0.69	0.07	0.76	N/A
			Rear Face	0.78	0.15	0.93	N/A
			Left Side	0.56	0.4	0.96	N/A
			Right Side	0.50	0.12	0.62	N/A
			Top Side	0.4	0.3	0.70	N/A
			Bottom Side	0.08	0.01	0.09	N/A
14	CDMA BC0 + WLAN (NII)	Head	Right Cheek	0.54	0.01	0.55	N/A
			Right Tilted	0.38	0.00	0.38	N/A
			Left Cheek	0.51	0.06	0.57	N/A
			Left Tilted	0.36	0.01	0.37	N/A
		Body-Worn	Front Face	0.64	0.01	0.65	N/A
			Rear Face	0.49	0.14	0.63	N/A
15	CDMA BC0 + BT (DSS)	Head	Right Cheek	0.54	0.01	0.55	N/A
			Right Tilted	0.38	0.01	0.39	N/A
			Left Cheek	0.51	0.00	0.51	N/A
			Left Tilted	0.36	0.01	0.37	N/A
		Body-Worn	Front Face	0.64	0.00	0.64	N/A
			Rear Face	0.49	0.00	0.49	N/A
No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
16	CDMA BC1 + WLAN (DTS)	Head	Right Cheek	0.48	0.14	0.62	N/A
			Right Tilted	0.27	0.07	0.34	N/A
			Left Cheek	1.39	0.45	1.84	Analyzed as below
			Left Tilted	0.34	0.11	0.45	N/A
		Body-Worn	Front Face	0.60	0.07	0.67	N/A
			Rear Face	0.75	0.41	1.16	N/A
		Hotspot	Front Face	0.65	0.07	0.72	N/A
			Rear Face	0.95	0.15	1.10	N/A
			Left Side	0.43	0.4	0.83	N/A
			Right Side	0.07	0.12	0.19	N/A
			Top Side	0.4	0.3	0.70	N/A
			Bottom Side	1.23	0.01	1.24	N/A
17	CDMA BC1 + WLAN (NII)	Head	Right Cheek	0.48	0.01	0.49	N/A
			Right Tilted	0.27	0.00	0.27	N/A
			Left Cheek	1.39	0.06	1.45	N/A
			Left Tilted	0.34	0.01	0.35	N/A
		Body-Worn	Front Face	0.60	0.01	0.61	N/A
			Rear Face	0.75	0.14	0.89	N/A
18	CDMA BC1 + BT (DSS)	Head	Right Cheek	0.48	0.01	0.49	N/A
			Right Tilted	0.27	0.01	0.28	N/A
			Left Cheek	1.39	0.00	1.39	N/A
			Left Tilted	0.34	0.01	0.35	N/A
		Body-Worn	Front Face	0.60	0.00	0.60	N/A
			Rear Face	0.75	0.00	0.75	N/A



FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR
19	LTE 4 + WLAN (DTS)	Head	Right Cheek	0.70	0.14	0.84	N/A
			Right Tilted	0.72	0.07	0.79	N/A
			Left Cheek	0.51	0.45	0.96	N/A
			Left Tilted	0.66	0.11	0.77	N/A
		Body-Worn	Front Face	0.31	0.07	0.38	N/A
			Rear Face	0.60	0.41	1.01	N/A
		Hotspot	Front Face	0.31	0.07	0.38	N/A
			Rear Face	0.60	0.15	0.75	N/A
			Left Side	0.20	0.4	0.60	N/A
			Right Side	0.04	0.12	0.16	N/A
			Top Side	0.19	0.3	0.49	N/A
			Bottom Side	0.02	0.01	0.03	N/A
20	LTE 4 + WLAN (NII)	Head	Right Cheek	0.70	0.01	0.71	N/A
			Right Tilted	0.72	0.00	0.72	N/A
			Left Cheek	0.51	0.06	0.57	N/A
			Left Tilted	0.66	0.01	0.67	N/A
		Body-Worn	Front Face	0.31	0.01	0.32	N/A
			Rear Face	0.60	0.14	0.74	N/A
21	LTE 4 + BT (DSS)	Head	Right Cheek	0.70	0.01	0.71	N/A
			Right Tilted	0.72	0.01	0.73	N/A
			Left Cheek	0.51	0.00	0.51	N/A
			Left Tilted	0.66	0.01	0.67	N/A
		Body-Worn	Front Face	0.31	0.00	0.31	N/A
			Rear Face	0.60	0.00	0.60	N/A
22	LTE 13 + WLAN (DTS)	Head	Right Cheek	0.46	0.14	0.60	N/A
			Right Tilted	0.41	0.07	0.48	N/A
			Left Cheek	0.54	0.45	0.99	N/A
			Left Tilted	0.38	0.11	0.49	N/A
		Body-Worn	Front Face	0.31	0.07	0.38	N/A
			Rear Face	0.57	0.41	0.98	N/A
		Hotspot	Front Face	0.31	0.07	0.38	N/A
			Rear Face	0.57	0.15	0.72	N/A
			Left Side	0.17	0.4	0.57	N/A
			Right Side	0.19	0.12	0.31	N/A
			Top Side	0.13	0.3	0.43	N/A
			Bottom Side	0.01	0.01	0.02	N/A
23	LTE 13 + WLAN (NII)	Head	Right Cheek	0.46	0.01	0.47	N/A
			Right Tilted	0.41	0.00	0.41	N/A
			Left Cheek	0.54	0.06	0.60	N/A
			Left Tilted	0.38	0.01	0.39	N/A
		Body-Worn	Front Face	0.31	0.01	0.32	N/A
			Rear Face	0.57	0.14	0.71	N/A
24	LTE 13 + BT (DSS)	Head	Right Cheek	0.46	0.01	0.47	N/A
			Right Tilted	0.41	0.01	0.42	N/A
			Left Cheek	0.54	0.00	0.54	N/A
			Left Tilted	0.38	0.01	0.39	N/A
		Body-Worn	Front Face	0.31	0.00	0.31	N/A
			Rear Face	0.57	0.00	0.57	N/A



FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR
25	CDMA BC0 + LTE 4 + WLAN (DTS)	Head	Right Cheek	0.54	0.70	0.14	1.38	N/A
			Right Tilted	0.38	0.72	0.07	1.17	N/A
			Left Cheek	0.51	0.51	0.45	1.47	N/A
			Left Tilted	0.36	0.66	0.11	1.13	N/A
		Body-Worn	Front Face	0.64	0.31	0.07	1.02	N/A
			Rear Face	0.49	0.60	0.41	1.50	N/A
		Hotspot	Front Face	0.69	0.31	0.07	1.07	N/A
			Rear Face	0.78	0.60	0.15	1.53	N/A
			Left Side	0.56	0.20	0.4	1.16	N/A
			Right Side	0.50	0.04	0.12	0.66	N/A
			Top Side	0.4	0.19	0.3	0.89	N/A
			Bottom Side	0.08	0.02	0.01	0.11	N/A
26	CDMA BC0 + LTE 4 + WLAN (NII)	Head	Right Cheek	0.54	0.70	0.01	1.25	N/A
			Right Tilted	0.38	0.72	0.00	1.10	N/A
			Left Cheek	0.51	0.51	0.06	1.08	N/A
			Left Tilted	0.36	0.66	0.01	1.03	N/A
		Body-Worn	Front Face	0.64	0.31	0.01	0.96	N/A
			Rear Face	0.49	0.60	0.14	1.23	N/A
27	CDMA BC0 + LTE 4 + BT (DSS)	Head	Right Cheek	0.54	0.70	0.01	1.25	N/A
			Right Tilted	0.38	0.72	0.01	1.11	N/A
			Left Cheek	0.51	0.51	0.00	1.02	N/A
			Left Tilted	0.36	0.66	0.01	1.03	N/A
		Body-Worn	Front Face	0.64	0.31	0.00	0.95	N/A
			Rear Face	0.49	0.60	0.00	1.09	N/A
No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR
28	CDMA BC1 + LTE 4 + WLAN (DTS)	Head	Right Cheek	0.48	0.70	0.14	1.32	N/A
			Right Tilted	0.27	0.72	0.07	1.06	N/A
			Left Cheek	1.39	0.51	0.45	2.35	Analyzed as below
			Left Tilted	0.34	0.66	0.11	1.11	N/A
		Body-Worn	Front Face	0.60	0.31	0.07	0.98	N/A
			Rear Face	0.75	0.60	0.41	1.76	Analyzed as below
		Hotspot	Front Face	0.65	0.31	0.07	1.03	N/A
			Rear Face	0.95	0.60	0.15	1.70	Analyzed as below
			Left Side	0.43	0.20	0.4	1.03	N/A
			Right Side	0.07	0.04	0.12	0.23	N/A
			Top Side	0.4	0.19	0.3	0.89	N/A
			Bottom Side	1.23	0.02	0.01	1.26	N/A
29	CDMA BC1 + LTE 4 + WLAN (NII)	Head	Right Cheek	0.48	0.70	0.01	1.19	N/A
			Right Tilted	0.27	0.72	0.00	0.99	N/A
			Left Cheek	1.39	0.51	0.06	1.96	Analyzed as below
			Left Tilted	0.34	0.66	0.01	1.01	N/A
		Body-Worn	Front Face	0.60	0.31	0.01	0.92	N/A
			Rear Face	0.75	0.60	0.14	1.49	N/A
30	CDMA BC1 + LTE 4 + BT (DSS)	Head	Right Cheek	0.48	0.70	0.01	1.19	N/A
			Right Tilted	0.27	0.72	0.01	1.00	N/A
			Left Cheek	1.39	0.51	0.00	1.90	Analyzed as below
			Left Tilted	0.34	0.66	0.01	1.01	N/A
		Body-Worn	Front Face	0.60	0.31	0.00	0.91	N/A
			Rear Face	0.75	0.60	0.00	1.35	N/A



FCC SAR Test Report

A D T

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR
31	CDMA BC0 + LTE 13 + WLAN (DTS)	Head	Right Cheek	0.54	0.46	0.14	1.14	N/A
			Right Tilted	0.38	0.41	0.07	0.86	N/A
			Left Cheek	0.51	0.54	0.45	1.50	N/A
			Left Tilted	0.36	0.38	0.11	0.85	N/A
		Body-Worn	Front Face	0.64	0.31	0.07	1.02	N/A
			Rear Face	0.49	0.57	0.41	1.47	N/A
		Hotspot	Front Face	0.69	0.31	0.07	1.07	N/A
			Rear Face	0.78	0.57	0.15	1.50	N/A
			Left Side	0.56	0.17	0.4	1.13	N/A
			Right Side	0.50	0.19	0.12	0.81	N/A
			Top Side	0.4	0.13	0.3	0.83	N/A
			Bottom Side	0.08	0.01	0.01	0.10	N/A
32	CDMA BC0 + LTE 13 + WLAN (NII)	Head	Right Cheek	0.54	0.46	0.01	1.01	N/A
			Right Tilted	0.38	0.41	0.00	0.79	N/A
			Left Cheek	0.51	0.54	0.06	1.11	N/A
			Left Tilted	0.36	0.38	0.01	0.75	N/A
		Body-Worn	Front Face	0.64	0.31	0.01	0.96	N/A
			Rear Face	0.49	0.57	0.14	1.20	N/A
33	CDMA BC0 + LTE 13 + BT (DSS)	Head	Right Cheek	0.54	0.46	0.01	1.01	N/A
			Right Tilted	0.38	0.41	0.01	0.80	N/A
			Left Cheek	0.51	0.54	0.00	1.05	N/A
			Left Tilted	0.36	0.38	0.01	0.75	N/A
		Body-Worn	Front Face	0.64	0.31	0.00	0.95	N/A
			Rear Face	0.49	0.57	0.00	1.06	N/A
No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR
34	CDMA BC1 + LTE 13 + WLAN (DTS)	Head	Right Cheek	0.48	0.46	0.14	1.08	N/A
			Right Tilted	0.27	0.41	0.07	0.75	N/A
			Left Cheek	1.39	0.54	0.45	2.38	Analyzed as below
			Left Tilted	0.34	0.38	0.11	0.83	N/A
		Body-Worn	Front Face	0.60	0.31	0.07	0.98	N/A
			Rear Face	0.75	0.57	0.41	1.73	Analyzed as below
		Hotspot	Front Face	0.65	0.31	0.07	1.03	N/A
			Rear Face	0.95	0.57	0.15	1.67	Analyzed as below
			Left Side	0.43	0.17	0.4	1.00	N/A
			Right Side	0.07	0.19	0.12	0.38	N/A
			Top Side	0.4	0.13	0.3	0.83	N/A
			Bottom Side	1.23	0.01	0.01	1.25	N/A
35	CDMA BC1 + LTE 13 + WLAN (NII)	Head	Right Cheek	0.48	0.46	0.01	0.95	N/A
			Right Tilted	0.27	0.41	0.00	0.68	N/A
			Left Cheek	1.39	0.54	0.06	1.99	Analyzed as below
			Left Tilted	0.34	0.38	0.01	0.73	N/A
		Body-Worn	Front Face	0.60	0.31	0.01	0.92	N/A
			Rear Face	0.75	0.57	0.14	1.46	N/A
36	CDMA BC1 + LTE 13 + BT (DSS)	Head	Right Cheek	0.48	0.46	0.01	0.95	N/A
			Right Tilted	0.27	0.41	0.01	0.69	N/A
			Left Cheek	1.39	0.54	0.00	1.93	Analyzed as below
			Left Tilted	0.34	0.38	0.01	0.73	N/A
		Body-Worn	Front Face	0.60	0.31	0.00	0.91	N/A
			Rear Face	0.75	0.57	0.00	1.32	N/A

FCC SAR Test Report

<SAR to Peak Location Separation Ratio Analysis>

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.


The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

Where SAR_1 and SAR_2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.


When the SPLSR is ≤ 0.04 , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R_i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch1175	Head	Left Cheek	1.39	10 6.65	25.42	-17.39	66.3	0.038
802.11b Ch1			0.45	219 5.29	31.90	-17.60		

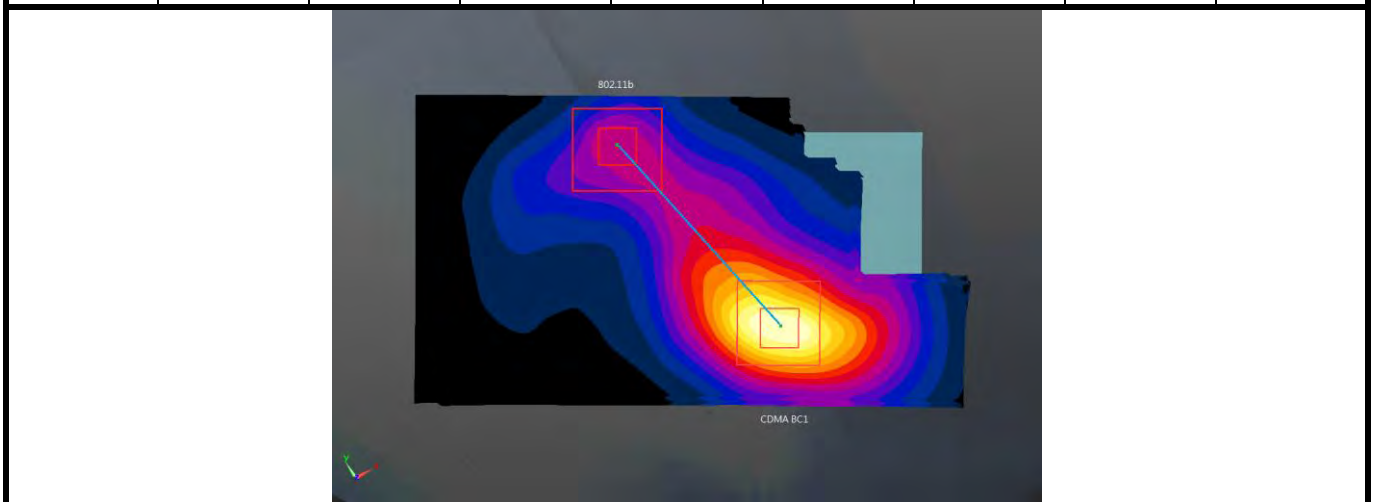


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch1175	Head	Left Cheek	1.39	10 6.65	25.42	-17.39	74.1	0.035
LTE 4 Ch20175			0.51	203 1.24	30.47	-17.25		

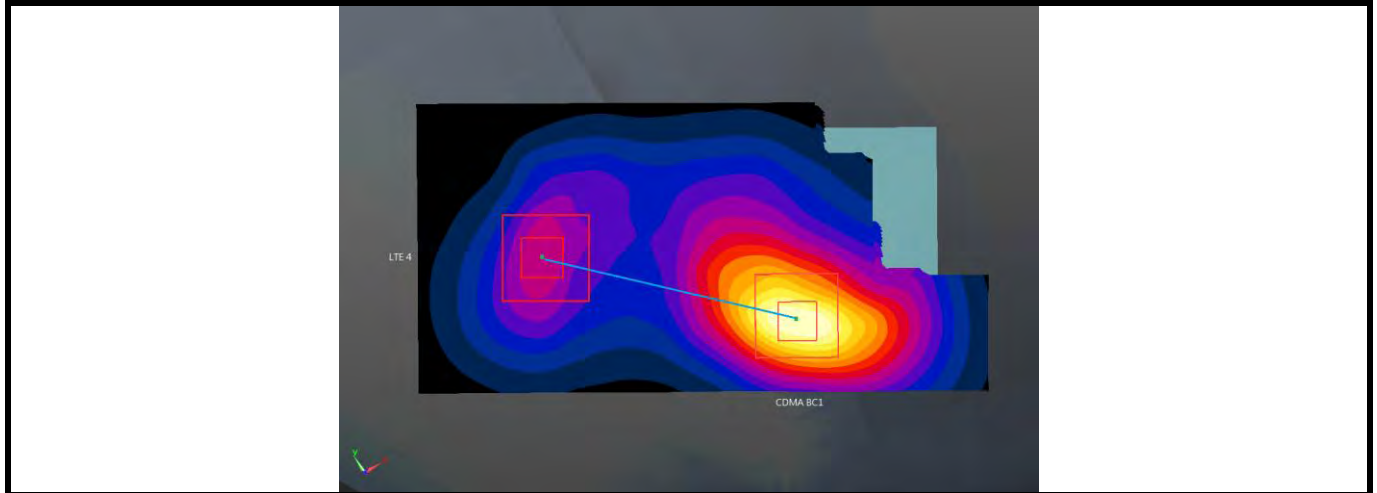


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
LTE 4 Ch20175	Head	Left Cheek	0.51	203 1.24	30.47	-17.25	43.1	0.022
802.11b Ch1			0.45	219 5.29	31.90	-17.60		

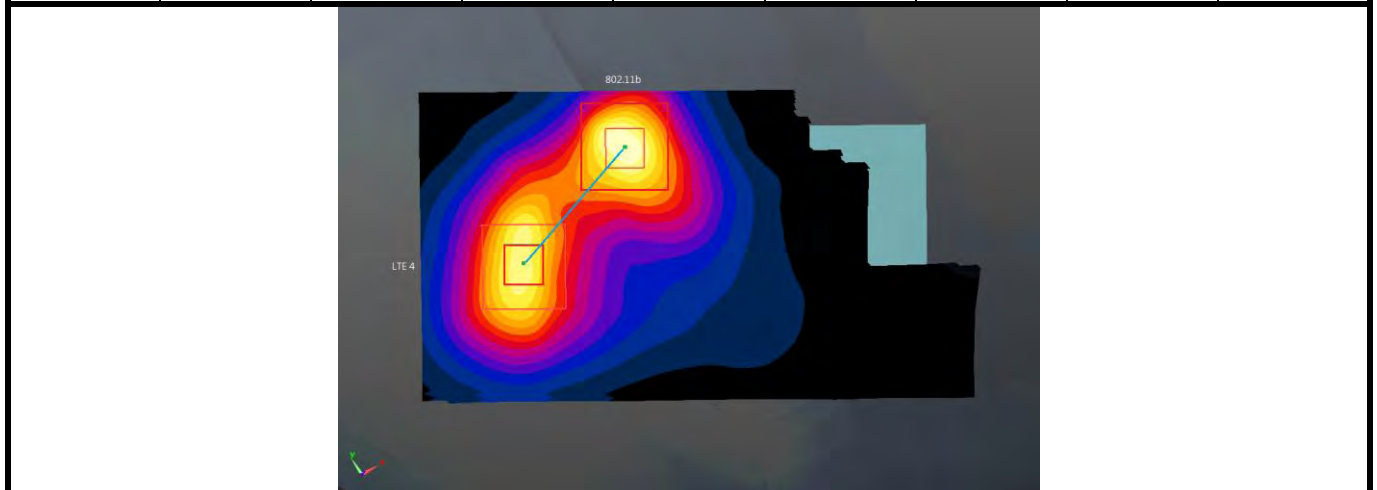


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch25	Body-worn	Rear Face	0.75	31	-5.86	-20.54	100.8	0.016
LTE 4 Ch20175			0.60	221	4.21	-20.55		

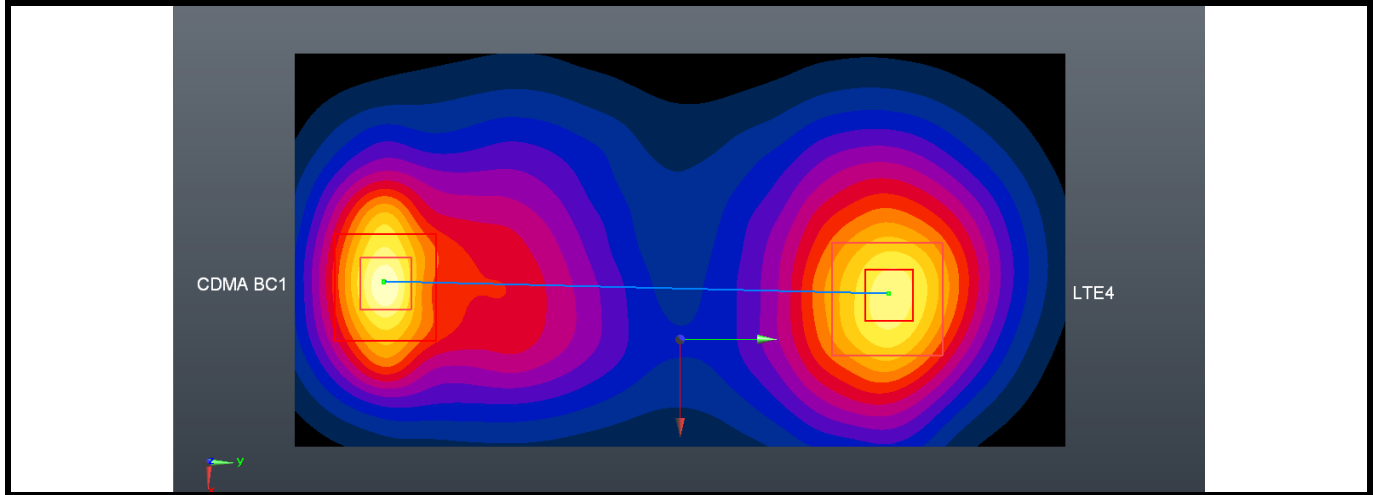


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch25	Body-worn	Rear Face	0.75	31	-5.86	-20.54	79.7	0.016
802.11a Ch157			0.41	407	1.25	-20.54		

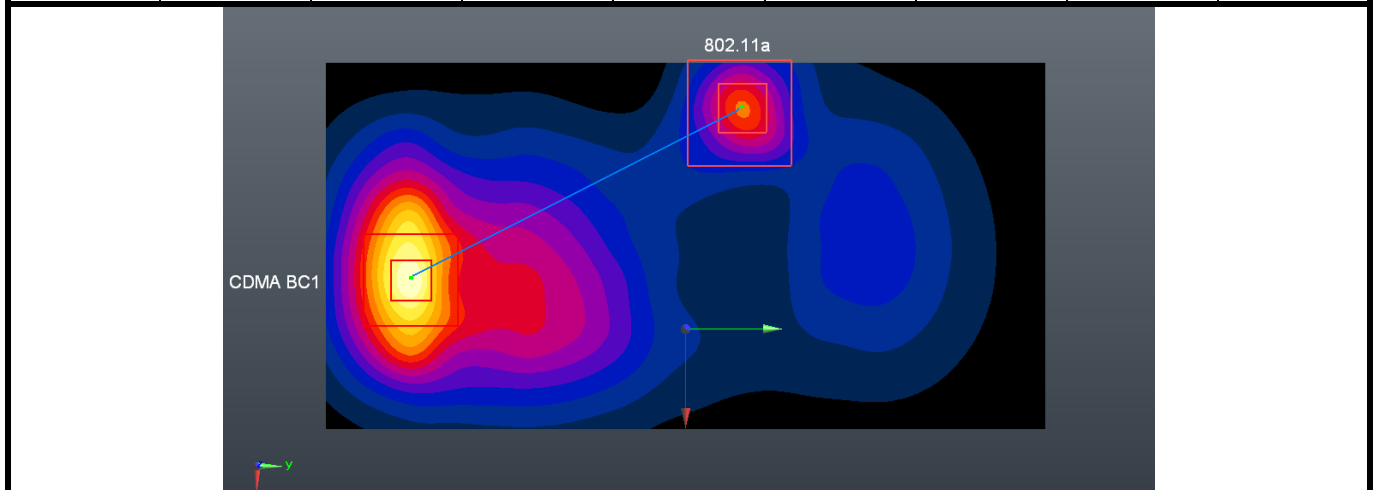


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
LTE 4 Ch20175	Body-worn	Rear Face	0.60	221	4.21	-20.55	50.2	0.020
802.11a Ch157			0.41	407	1.25	-20.54		

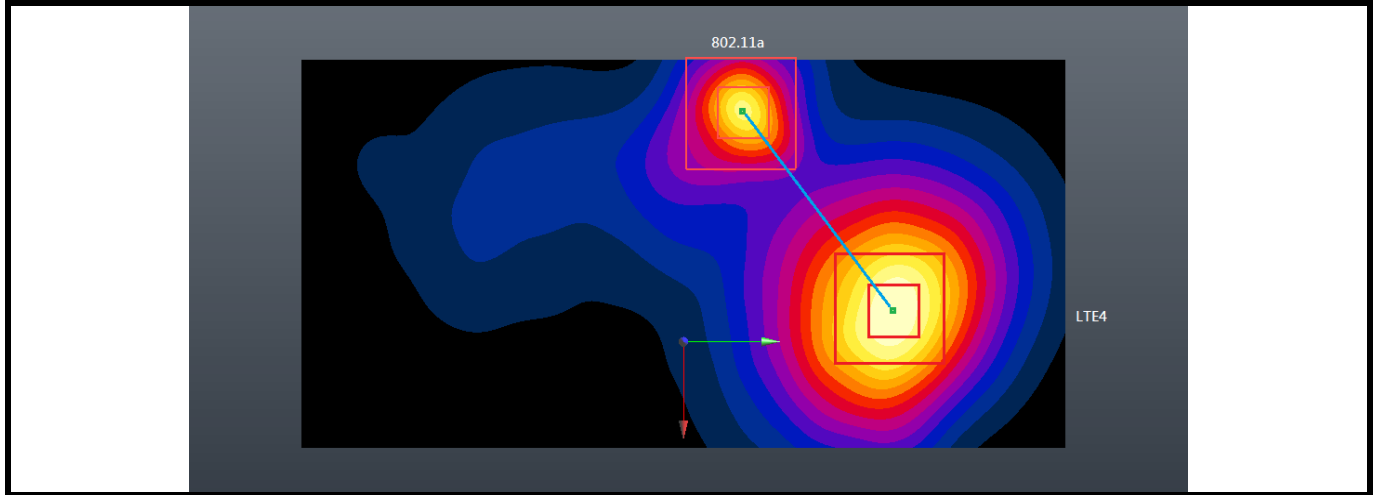


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch1175	Hotspot	Rear Face	0.95	26	-6.18	-20.54	104	0.019
LTE 4 Ch20175			0.60	221	4.21	-20.55		

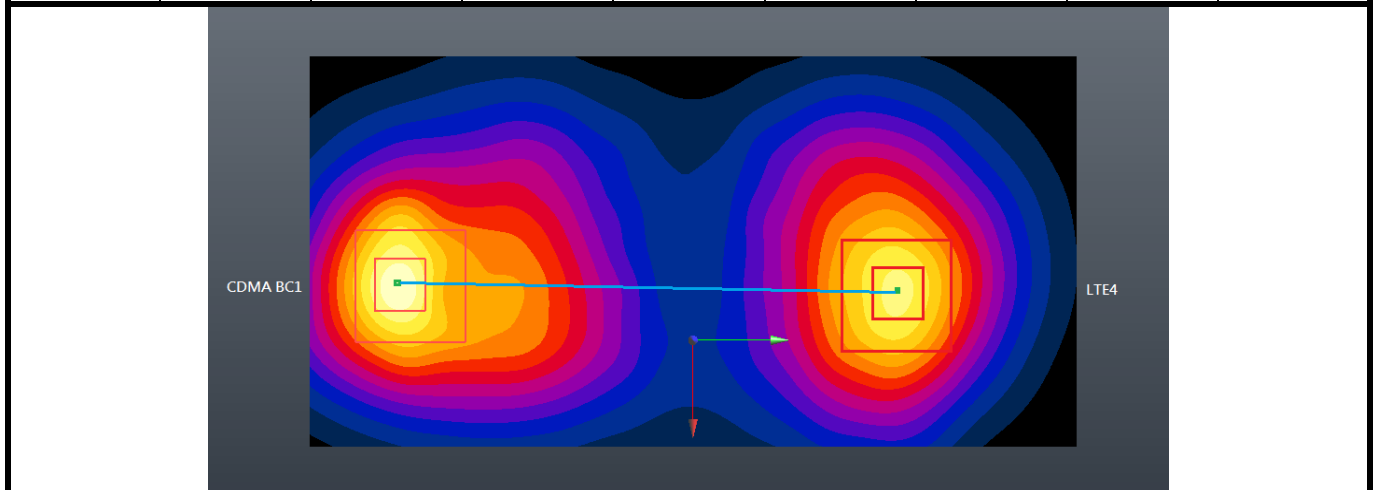


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch1175	Hotspot	Rear Face	0.95	26	-6.18	-20.54	88.3	0.013
802.11b Ch1			0.15	331	2.04	-20.56		

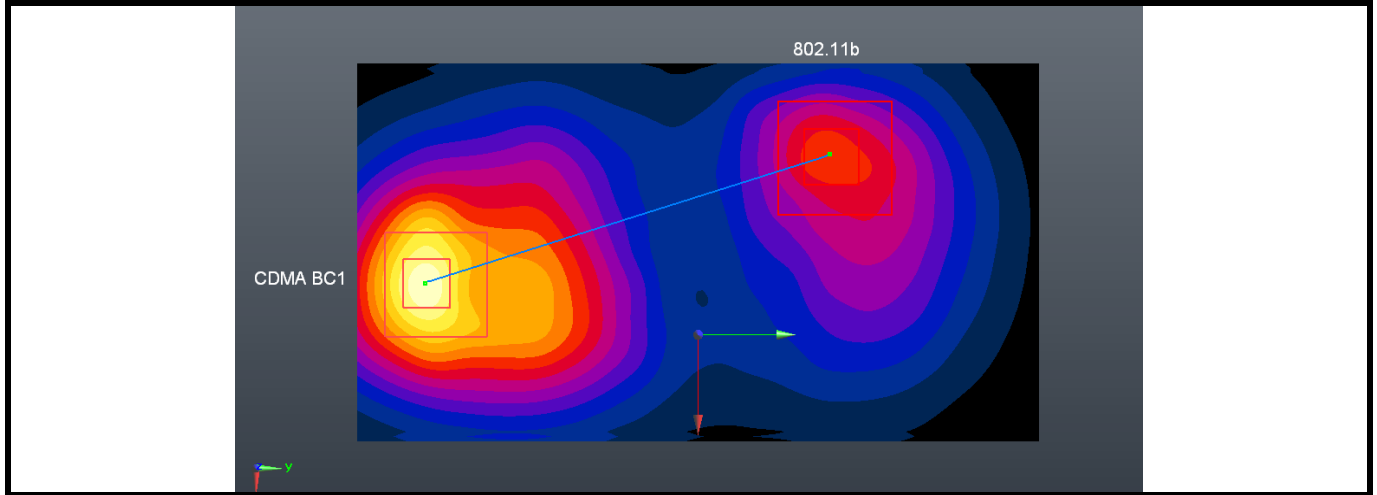


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
LTE 4 Ch20175	Hotspot	Rear Face	0.60	221	4.21	-20.55	42.8	0.015
802.11b Ch1			0.15	331	2.04	-20.56		

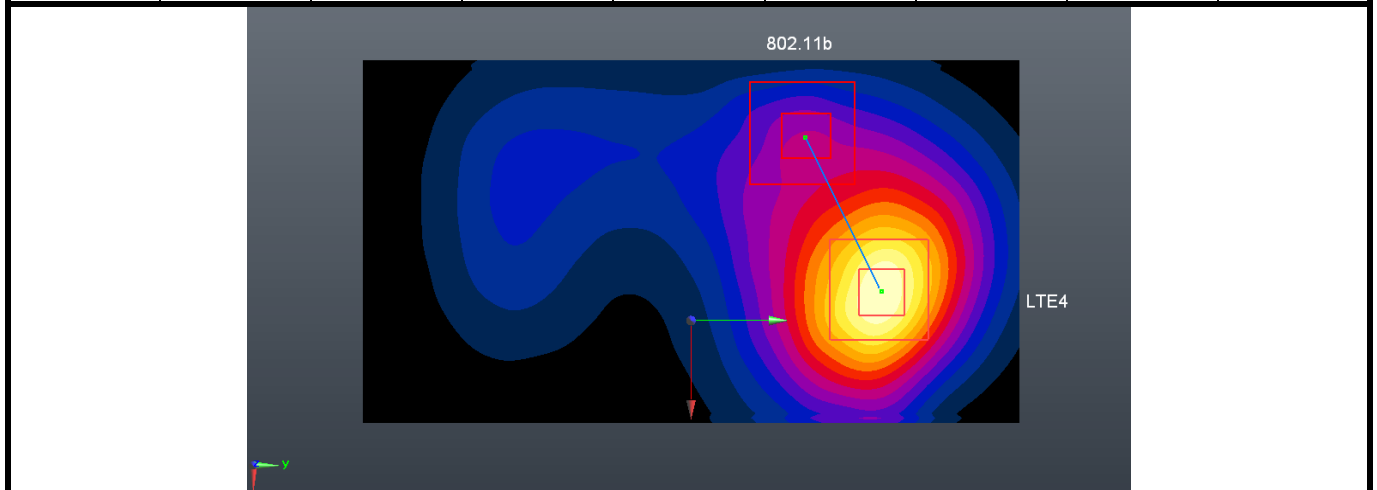


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch1175	Head	Left Cheek	1.39	10 6.65	25.42	-17.39	72.6	0.024
802.11a Ch140			0.06	313 5.66	32.60	-17.54		

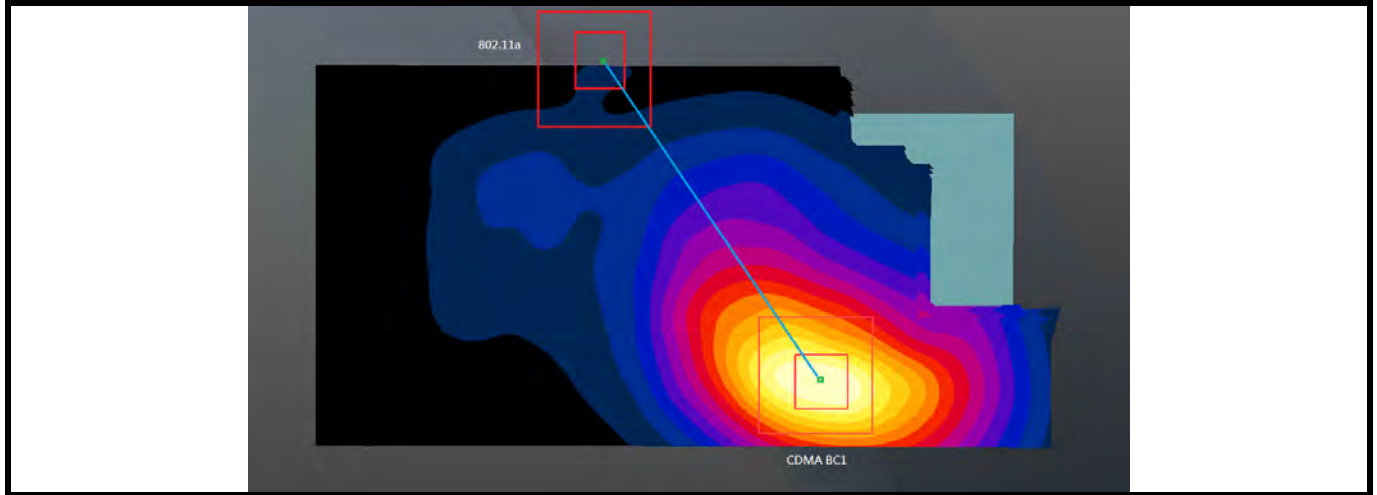


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
LTE 4 Ch20175	Head	Left Cheek	0.51	203 1.24	30.47	-17.25	49.2	0.009
802.11a Ch140			0.06	313 5.66	32.60	-17.54		

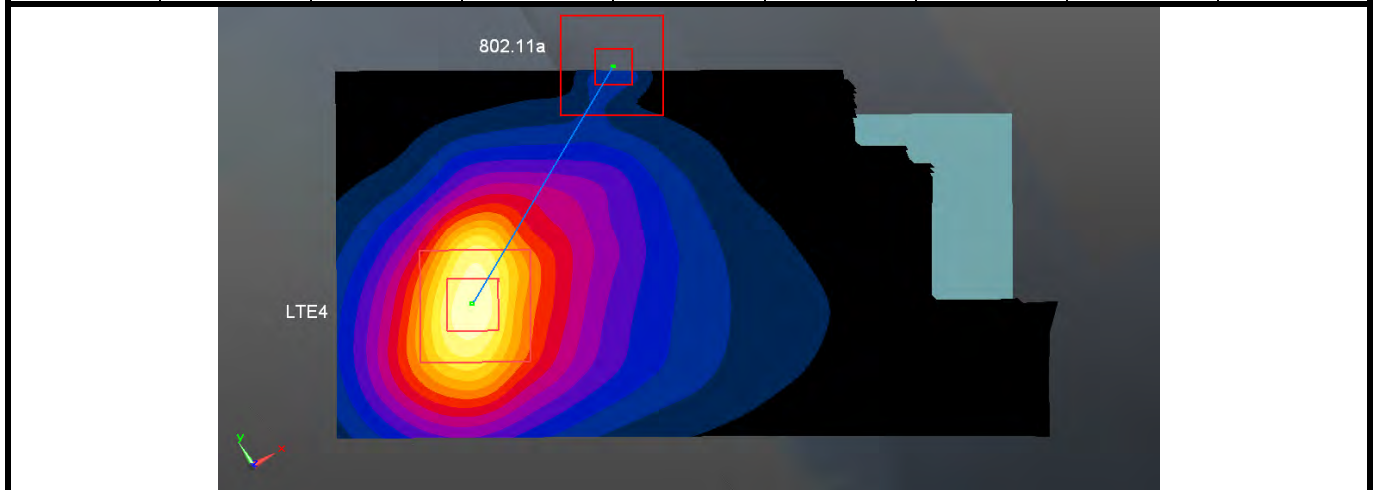


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch1175	Head	Left Cheek	1.39	10 6.65	25.42	-17.39	83.1	0.032
LTE 13 Ch23230			0.54	211 1.74	32.12	-17.43		

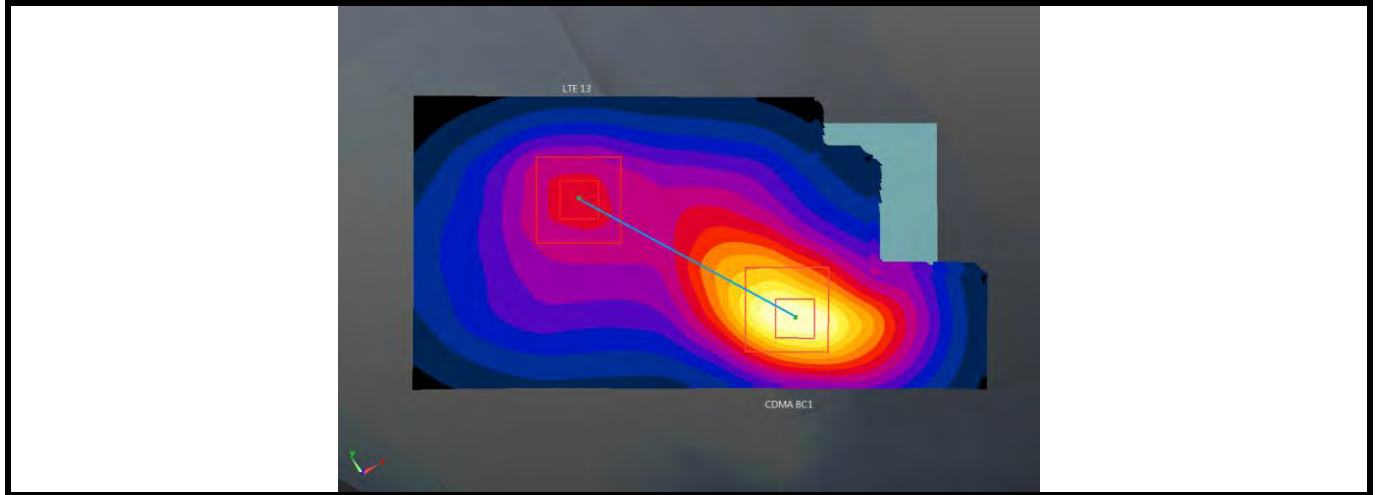


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
LTE 13 Ch23230	Head	Left Cheek	0.54	211 1.74	32.12	-17.43	35.6	0.028
802.11b Ch1			0.45	219 5.29	31.90	-17.60		

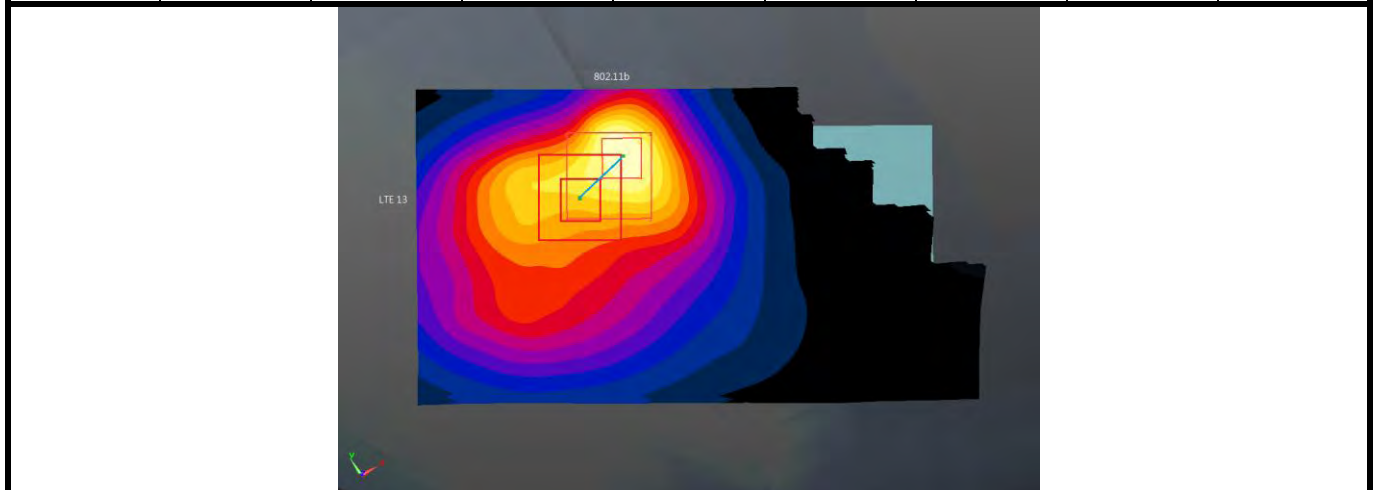


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch25	Body-worn	Rear Face	0.75	31	-5.86	-20.54	114.4	0.013
LTE 13 Ch23230			0.57	241	5.58	-20.64		

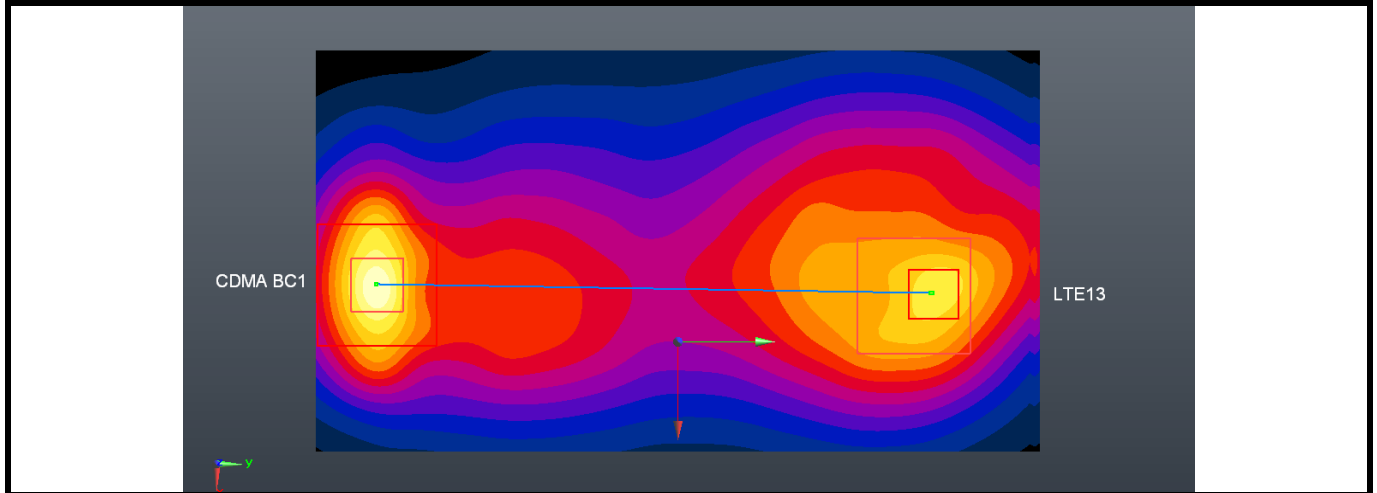


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
LTE 13 Ch23230	Body-worn	Rear Face	0.57	241	5.58	-20.64	57.4	0.017
802.11a Ch157			0.41	407	1.25	-20.54		

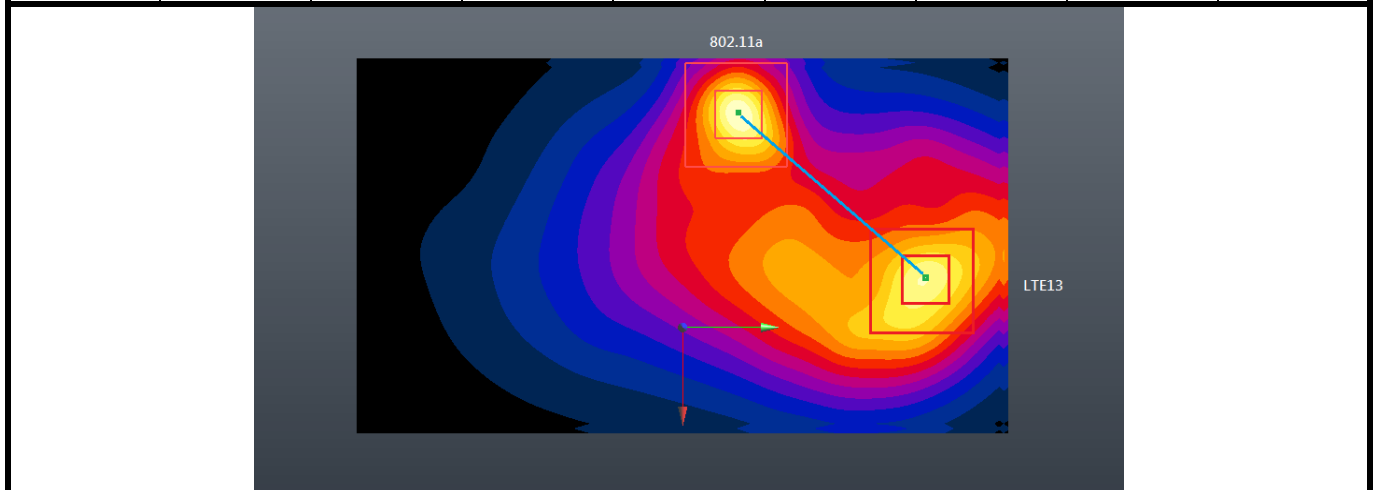


FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
CDMA BC1 Ch1175	Hotspot	Rear Face	0.95	26	-6.18	-20.54	117.6	0.016
LTE 13 Ch23230			0.57	241	5.58	-20.64		

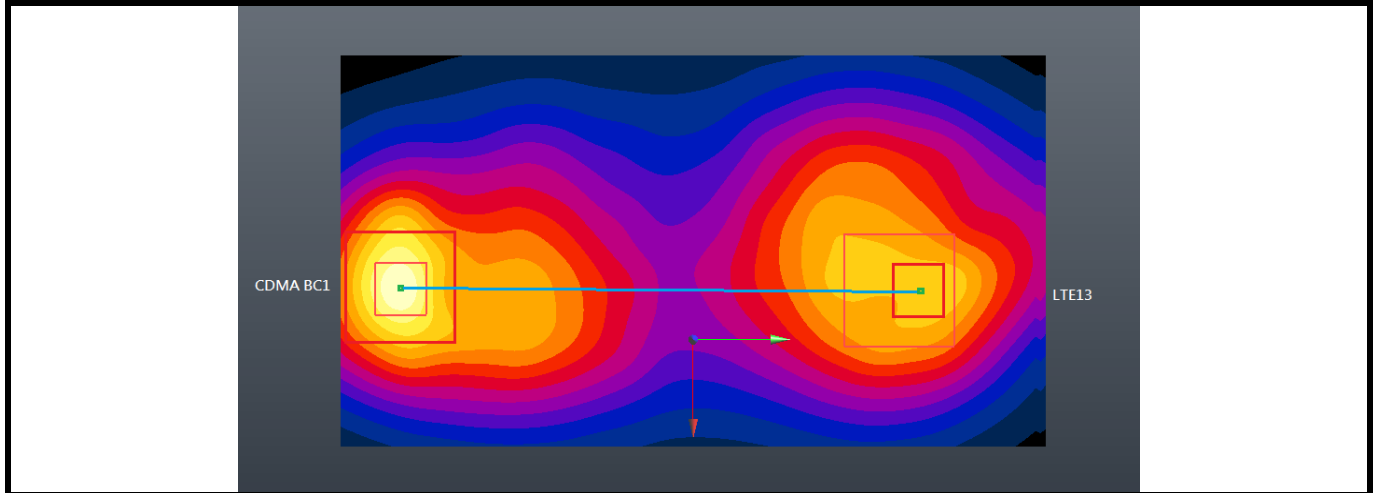

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
LTE 13 Ch23230	Hotspot	Rear Face	0.57	241	5.58	-20.64	49	0.012
802.11b Ch1			0.15	331	2.04	-20.56		

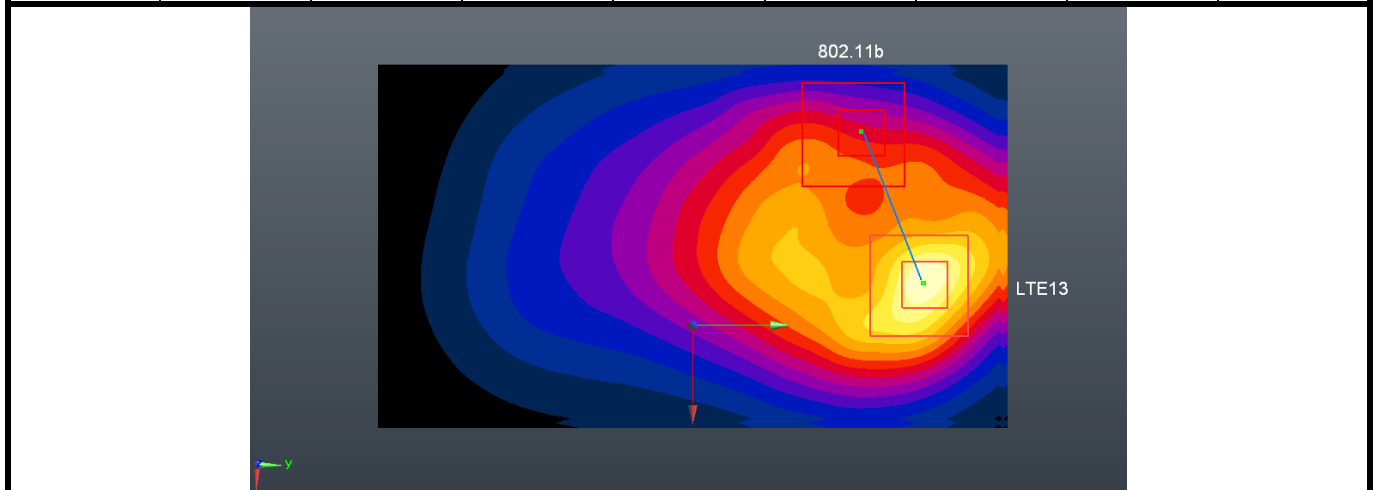

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR
				x	y	z		
LTE 13 Ch23230	Head	Left Cheek	0.54	211	32.12	-17.43	39.5	0.012
802.11a Ch140			0.06	313 5.66	32.60	-17.54		

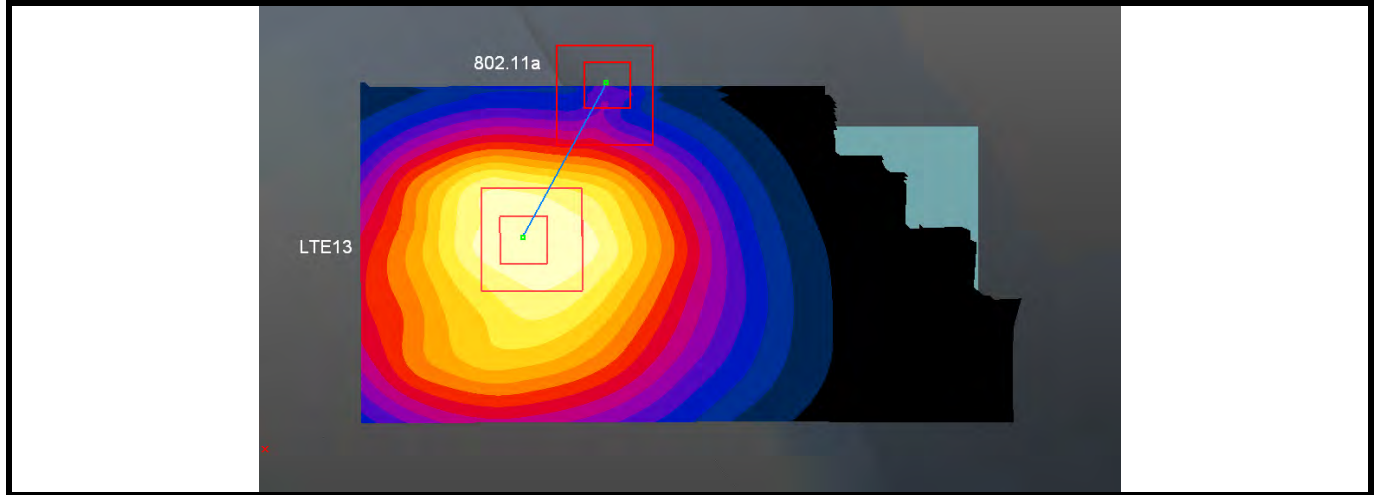

Test Engineer : Isaac Liao, and Mars Chang



5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Kit	SPEAG	D750V3	1013	Apr. 25, 2012	Annual
System Validation Kit	SPEAG	D835V2	4d021	Apr. 20, 2012	Annual
System Validation Kit	SPEAG	D1750V2	1055	Aug. 23, 2012	Annual
System Validation Kit	SPEAG	D1900V2	5d036	Jan. 21, 2013	Annual
System Validation Kit	SPEAG	D2450V2	737	Jan. 21, 2013	Annual
System Validation Kit	SPEAG	D5GHzV2	1019	Nov. 16, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3590	Feb. 20, 2013	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3650	Oct. 26, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3801	Jun. 22, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3864	Jul. 19, 2012	Annual
Data Acquisition Electronics	SPEAG	DAE3	579	Apr. 27, 2012	Annual
Data Acquisition Electronics	SPEAG	DAE4	679	Jan. 16, 2013	Annual
Data Acquisition Electronics	SPEAG	DAE4	910	Dec. 05, 2012	Annual
Data Acquisition Electronics	SPEAG	DAE4	1277	Jul. 19, 2012	Annual
SAM Phantom	SPEAG	QD000P40CD	TP-1127	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1202	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1485	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1652	N/A	N/A
Radio Communication Tester	Agilent	E5515C	MY50260642	Nov. 02, 2012	Biennial
Radio Communication Analyzer	Anritsu	MT8820C	6201010284	Aug. 18, 2012	Biennial
ENA Series Network Analyzer	Agilent	E5071C	MY46214281	May 14, 2012	Annual
MXG Analog Signal Generator	Agilent	N5181A	MY50143868	May 06, 2012	Annual
Power Meter	Anritsu	ML2495A	1218009	May 07, 2012	Annual
Power Sensor	Anritsu	MA2411B	1207252	May 07, 2012	Annual
EXA Spectrum Analyzer	Agilent	N9010A	MY52100136	Apr. 23, 2012	Annual
Dielectric Probe Kit	Agilent	85070D	E2-020018	May 14, 2012	Annual
Thermometer	YFE	YF-160A	110600361	Feb. 20, 2013	Annual
Directional Coupler	Woken	0110A056020-10	11122702	Apr. 19, 2012	Annual
Power Amplifier	AR	5S1G4	0339656	Apr. 23, 2012	Annual
Attenuator	Woken	00800A1G01L-03	N/A	Apr. 19, 2012	Annual

6. Measurement Uncertainty

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)	Vi
Measurement System						
Probe Calibration	6.0	Normal	1	1	± 6.0 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.6	Normal	1	1	± 0.6 %	∞
Response Time	0.0	Rectangular	√3	1	± 0.0 %	∞
Integration Time	1.7	Rectangular	√3	1	± 1.0 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.5	Rectangular	√3	1	± 0.3 %	∞
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %	∞
Max. SAR Eval.	2.3	Rectangular	√3	1	± 1.3 %	∞
Test Sample Related						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
Phantom and Setup						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	29
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	29
Combined Standard Uncertainty					± 11.7 %	
Expanded Uncertainty (K=2)					± 23.4 %	

Uncertainty budget for frequency range 300 MHz to 3 GHz



FCC SAR Test Report

A D T

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)	Vi
Measurement System						
Probe Calibration	6.55	Normal	1	1	± 6.55 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	2.0	Rectangular	√3	1	± 1.2 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.3	Normal	1	1	± 0.3 %	∞
Response Time	0.8	Rectangular	√3	1	± 0.5 %	∞
Integration Time	2.6	Rectangular	√3	1	± 1.5 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.8	Rectangular	√3	1	± 0.5 %	∞
Probe Positioning	9.9	Rectangular	√3	1	± 5.7 %	∞
Max. SAR Eval.	4.0	Rectangular	√3	1	± 2.3 %	∞
Test Sample Related						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
Phantom and Setup						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	30
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	30
Combined Standard Uncertainty					± 13.4 %	
Expanded Uncertainty (K=2)					± 26.8 %	

Uncertainty budget for frequency range 3 GHz to 6 GHz



7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

Taiwan LinKo EMC/RF Lab:

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The road map of all our labs can be found in our web site also.

---END---



Appendix A. SAR Plots of System Verification

The plots for system verification are shown as follows.

System Check_H750_130304

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H750_0304 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.892 \text{ S/m}$; $\epsilon_r = 41.077$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $21.7 \text{ }^\circ\text{C}$; Liquid Temperature : $20.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.15, 9.15, 9.15); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.67 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.813 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 2.13 W/kg ; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.67 W/kg

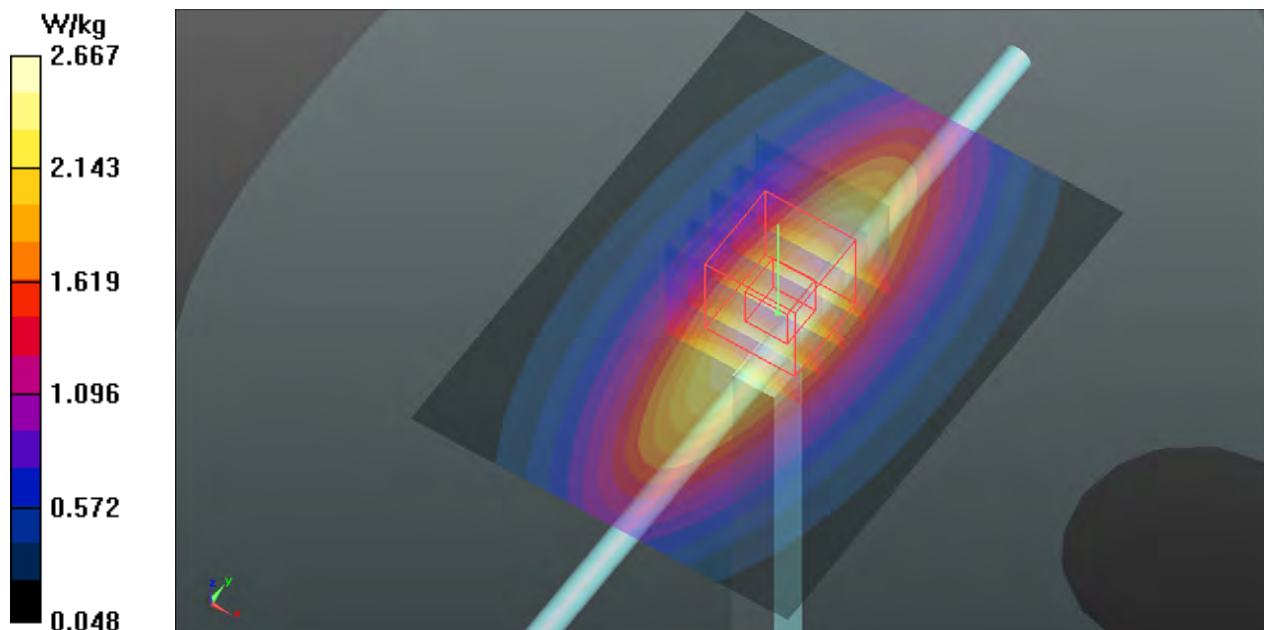

System Check_H835_130304

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d021

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H835_0304 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 42.368$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $21.7 \text{ }^\circ\text{C}$; Liquid Temperature : $20.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.89, 8.89, 8.89); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.87 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.566 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.26 W/kg ; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 2.86 W/kg

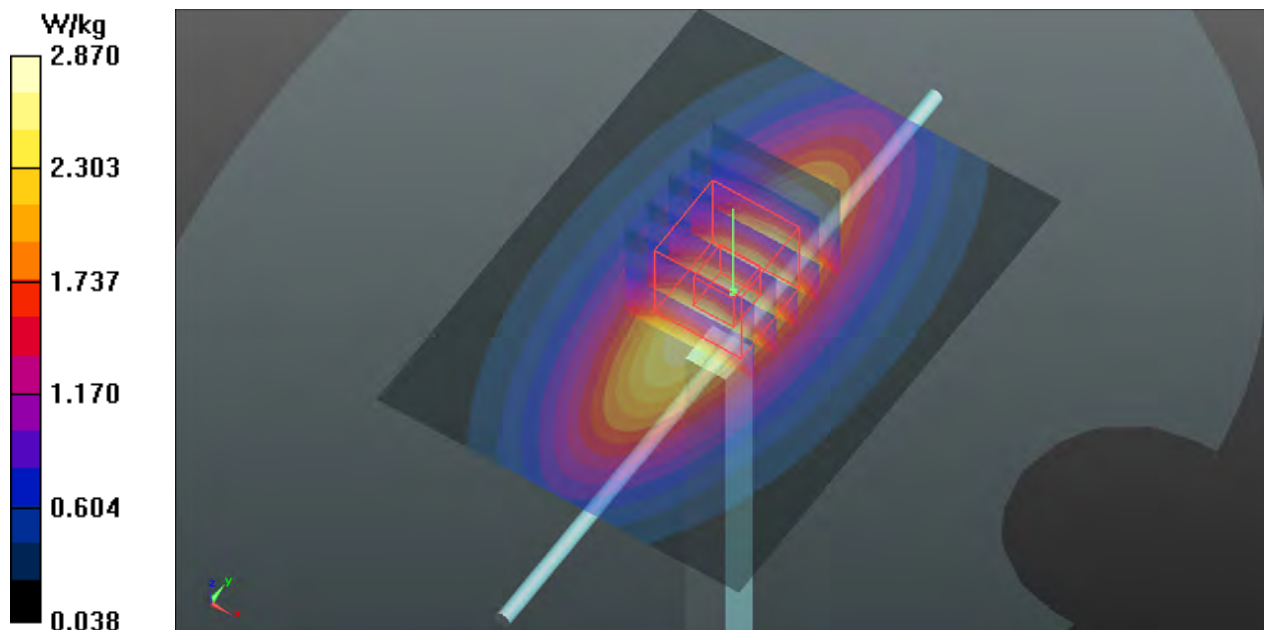

System Check_H835_130313

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d021

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H835_0313 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 42.371$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(9.8, 9.8, 9.8); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.06 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.942 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 3.13 W/kg

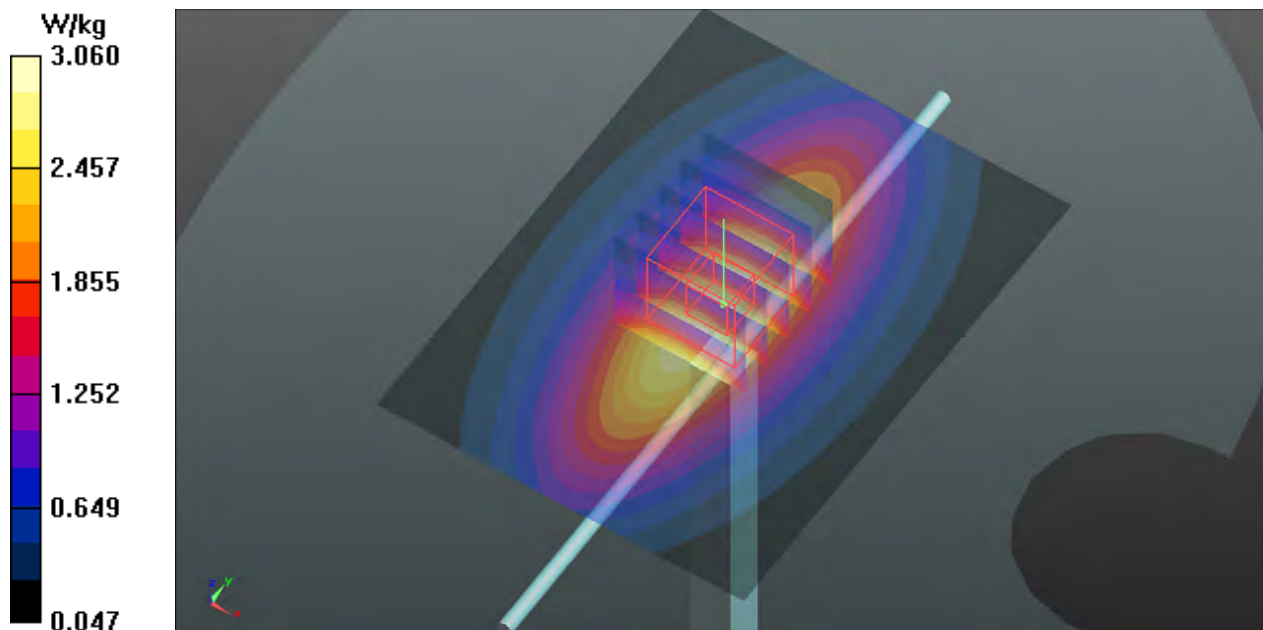

System Check_H1750_130304

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H1750_0304 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 38.858$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.8 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 96.353 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 8.44 W/kg; SAR(10 g) = 4.47 W/kg

Maximum value of SAR (measured) = 12.0 W/kg

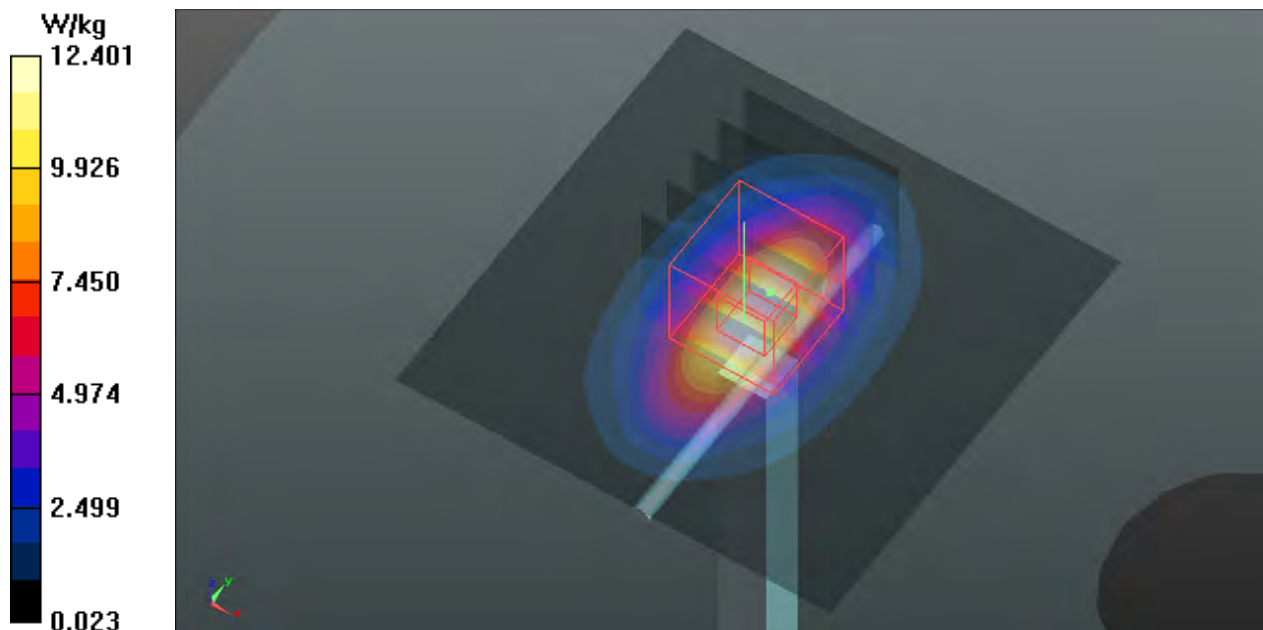

System Check_H1900_130304

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900_0304 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 40.347$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.8 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.61, 7.61, 7.61); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.1 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 100.6 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 9.61 W/kg; SAR(10 g) = 4.93 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

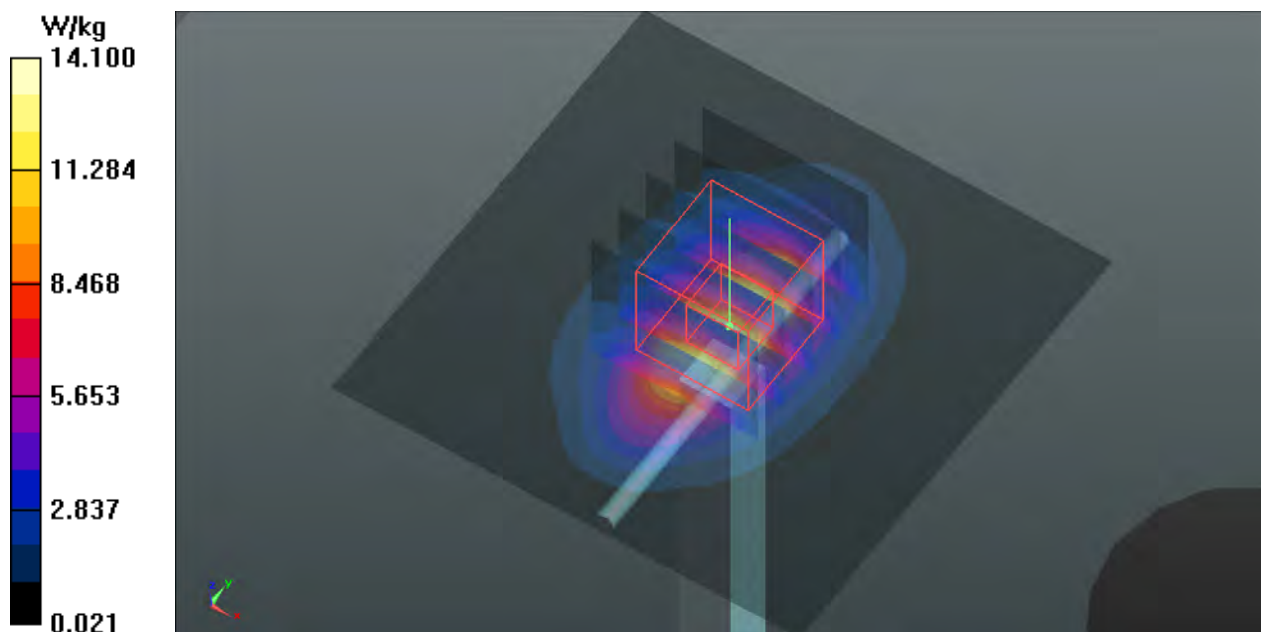

System Check_H1900_130313

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900_0313 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.805$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(8.13, 8.13, 8.13); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.7 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 100.6 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 9.5 W/kg; SAR(10 g) = 4.93 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

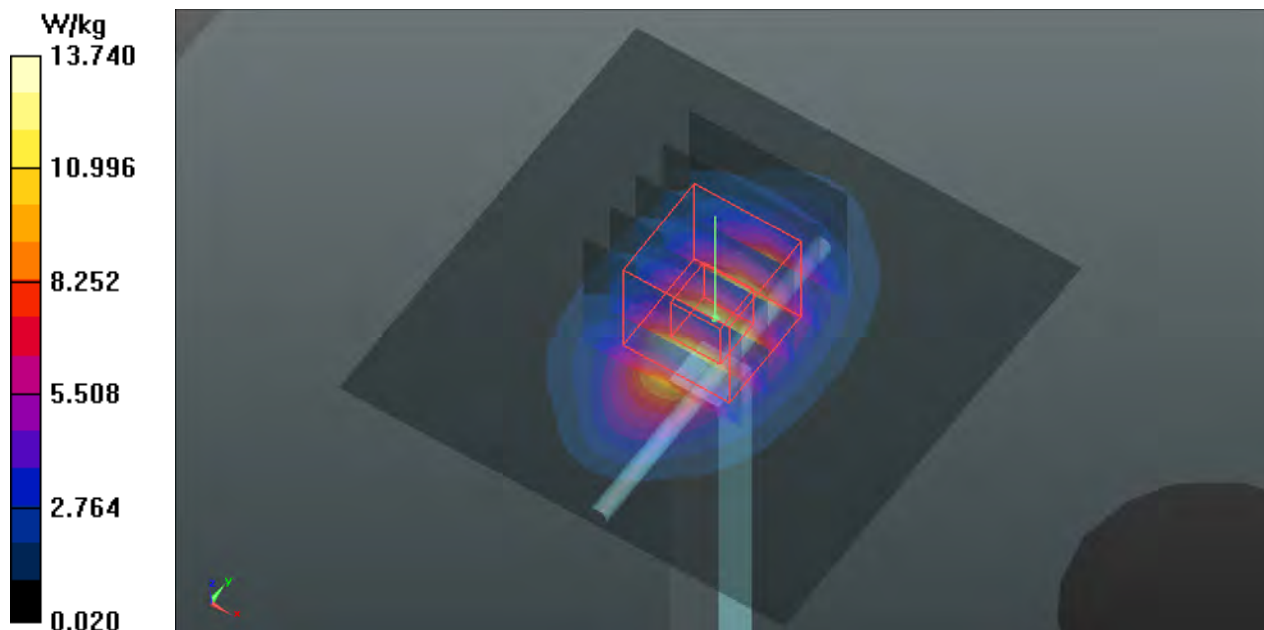

System Check_H1900_130315

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900_0315 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 38.505$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.5 °C ; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.42, 7.42, 7.42); Calibrated: 2012/06/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2012/07/19
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.7 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 99.413 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 9.69 W/kg; SAR(10 g) = 4.87 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

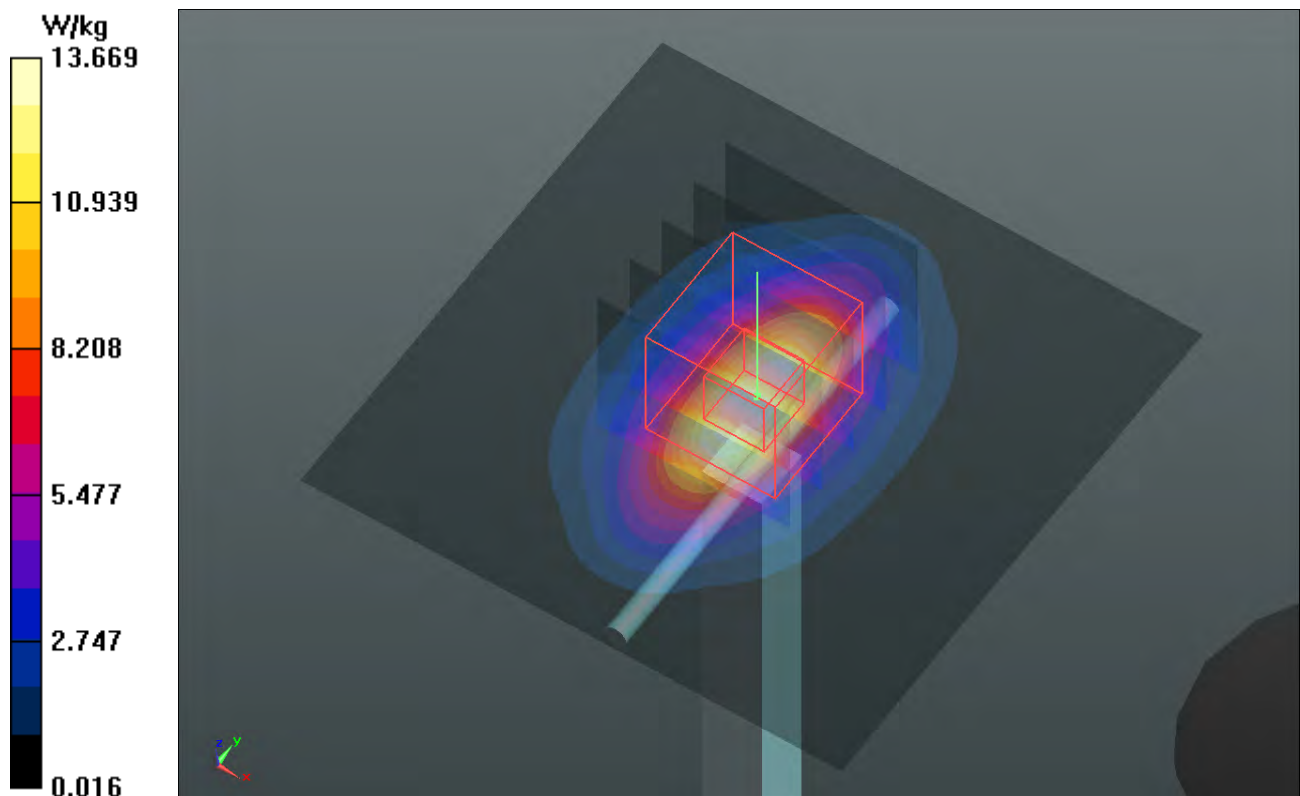

System Check_H2450_130311

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H2450_0311 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 37.408$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(6.7, 6.7, 6.7); Calibrated: 2012/06/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2012/07/19
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.2 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.1 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 27.7 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 5.89 W/kg

Maximum value of SAR (measured) = 20.3 W/kg

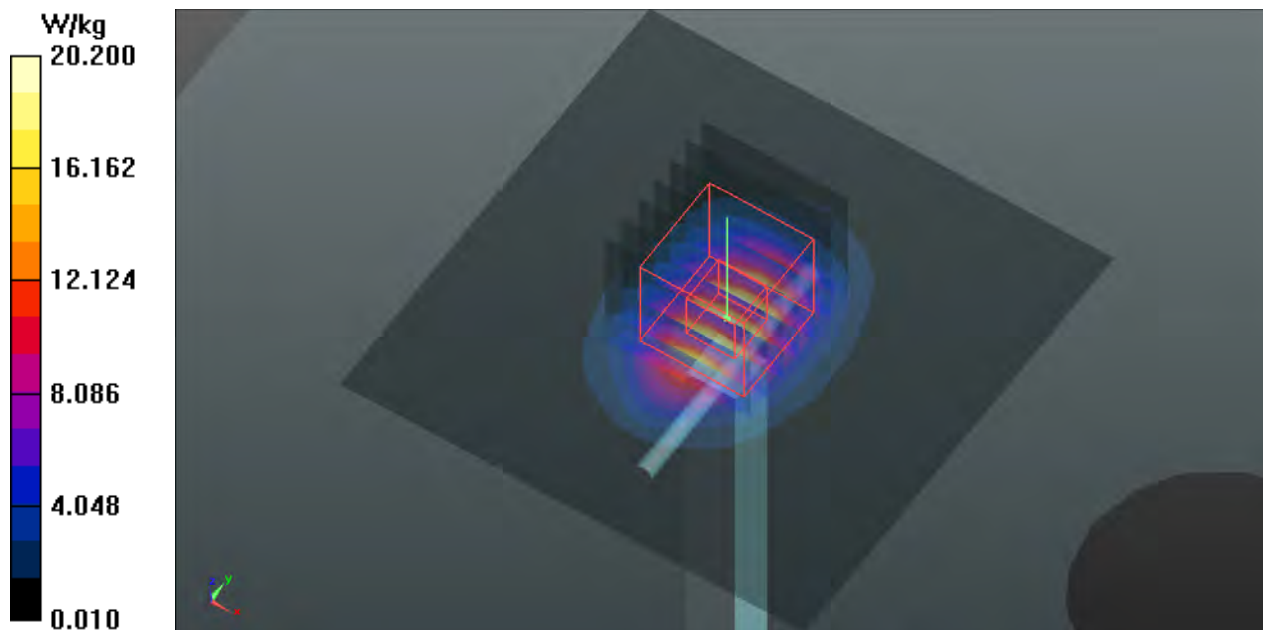

System Check_H2450_130315

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H2450_0315 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 38.687$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.5 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(7.28, 7.28, 7.28); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.7 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.0 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.08 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

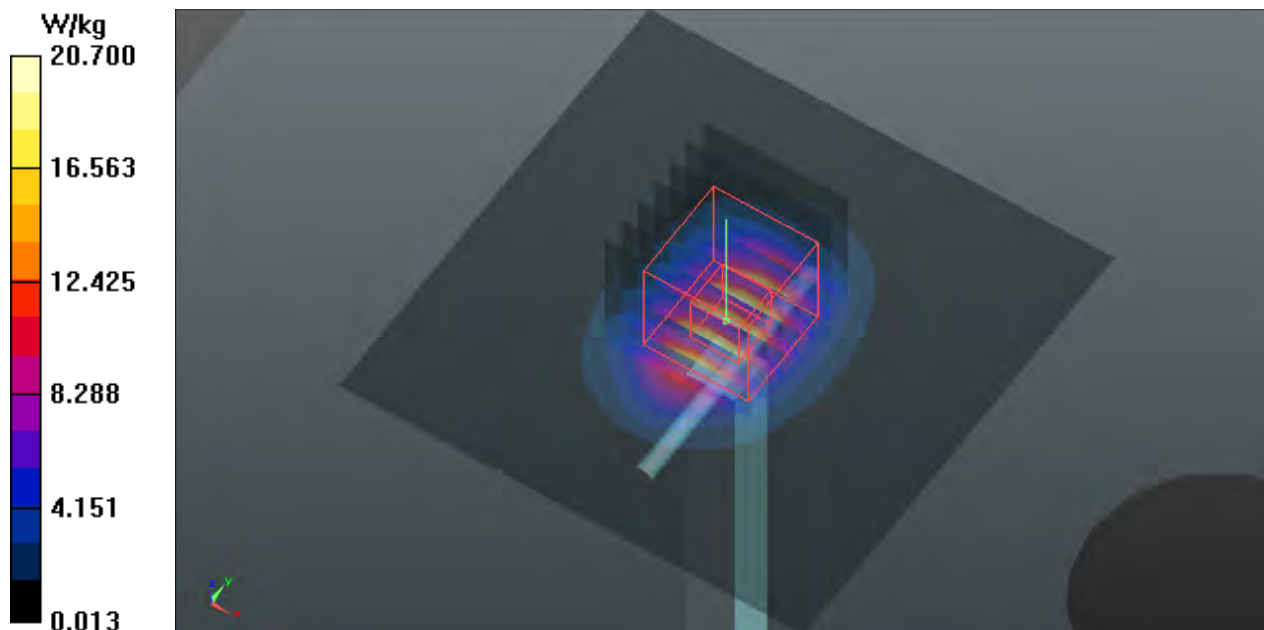

System Check_H5200_130312

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: H5G_0312 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.767$ S/m; $\epsilon_r = 35.944$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(5.79, 5.79, 5.79); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.4 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 60.161 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 7.35 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

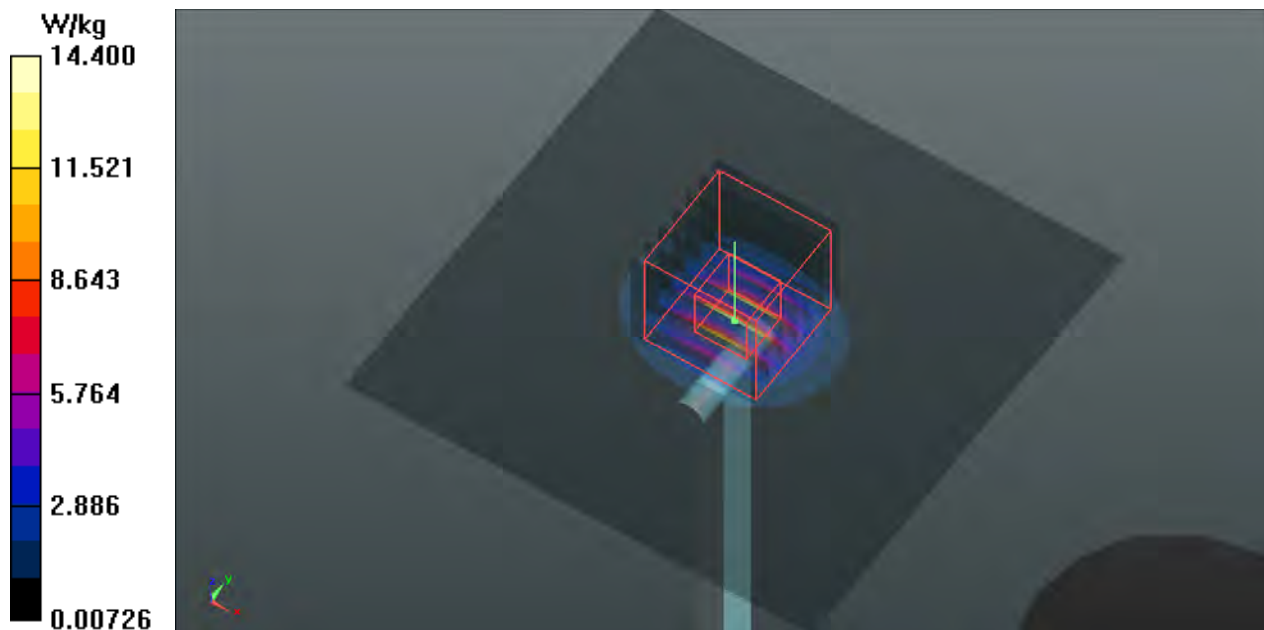

System Check_H5300_130310

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: H5G_0310 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.861$ S/m; $\epsilon_r = 35.499$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.83, 4.83, 4.83); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.5 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 64.467 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 8.43 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

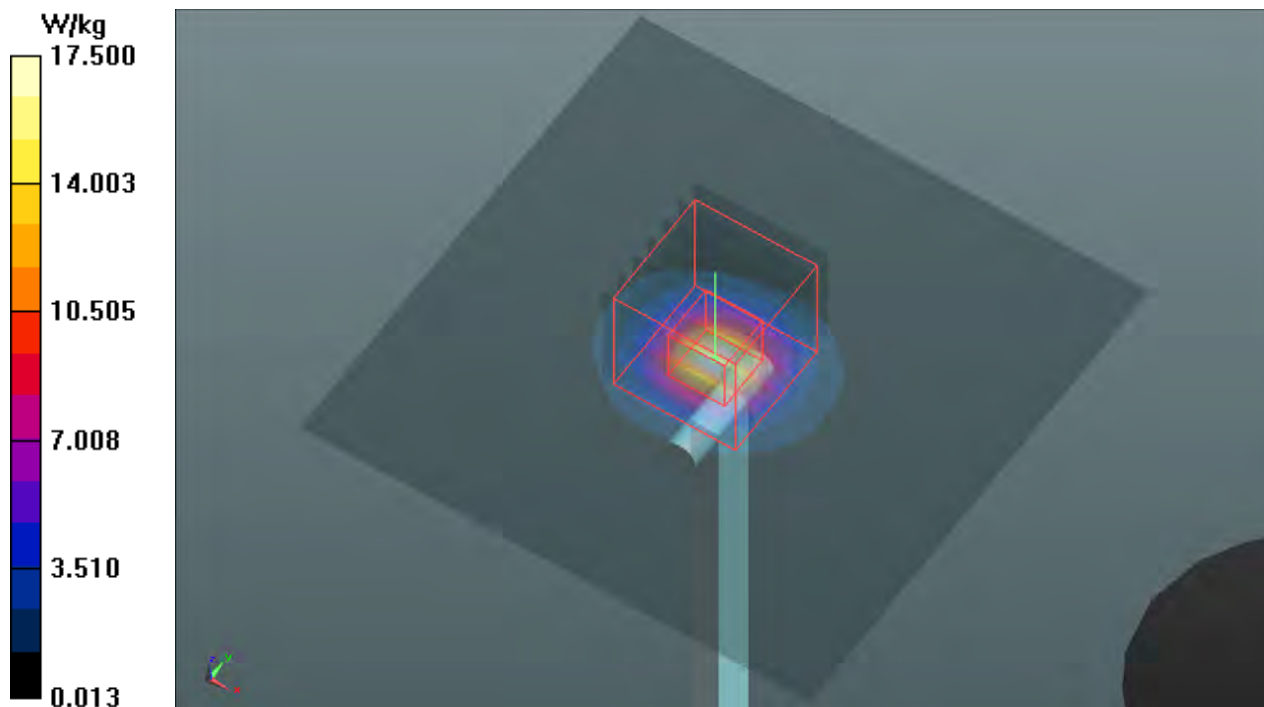

System Check_H5600_130310

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H5G_0310 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.197$ S/m; $\epsilon_r = 35.011$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.22, 4.22, 4.22); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.4 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 61.150 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 32.9 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 16.7 W/kg

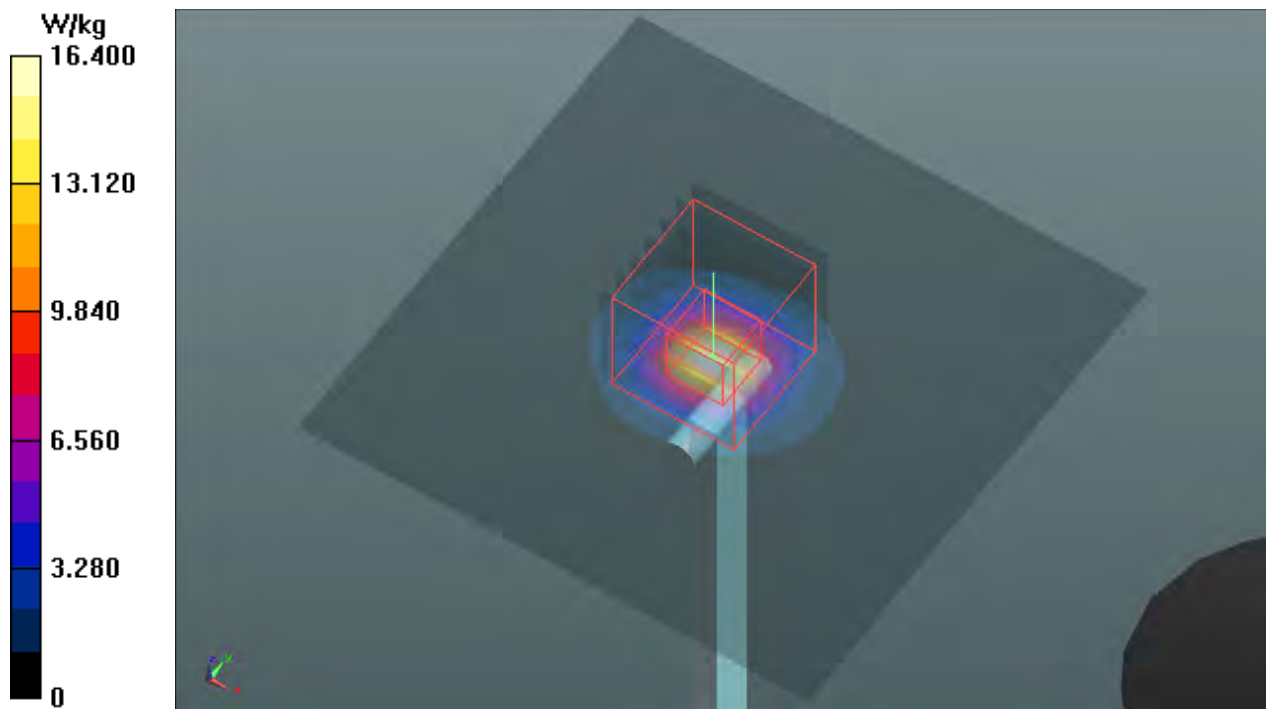

System Check_H5800_130312

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: H5G_0312 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.296$ S/m; $\epsilon_r = 33.998$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(4.92, 4.92, 4.92); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.4 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.080 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 37.3 W/kg

SAR(1 g) = 7.73 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 16.5 W/kg

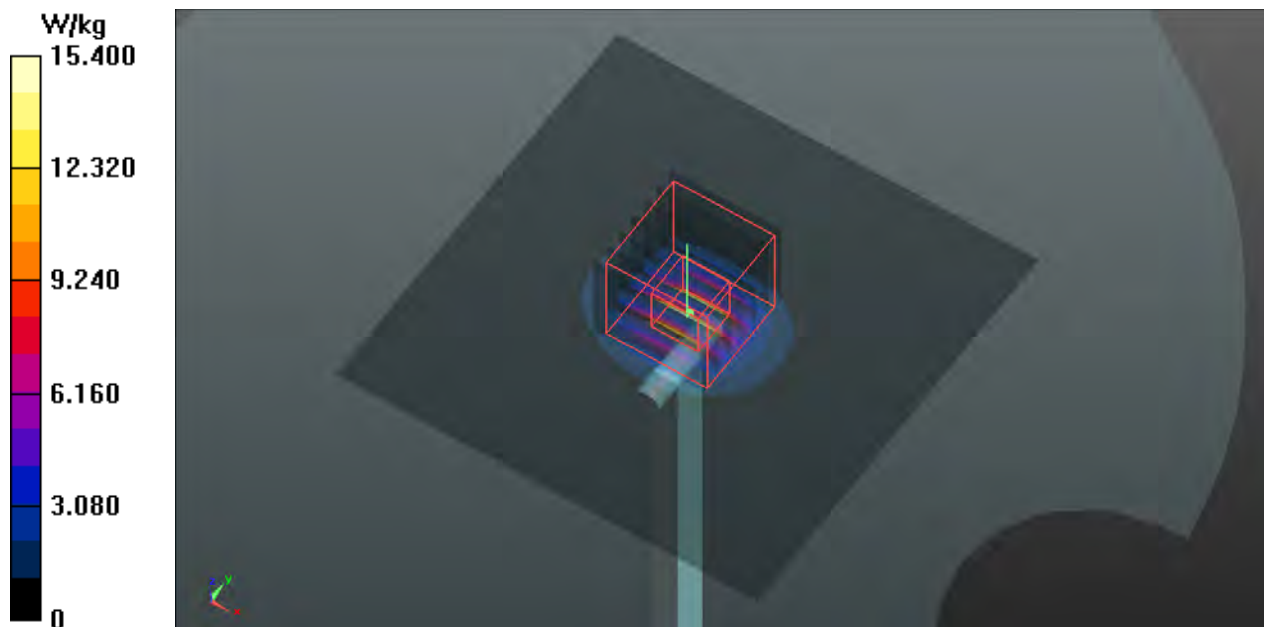

System Check_B750_130308

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: B750_0308 Medium parameters used: $f = 750$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 55.257$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9, 9, 9); Calibrated: 2012/06/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2012/07/19
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.71 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.805 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.45 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

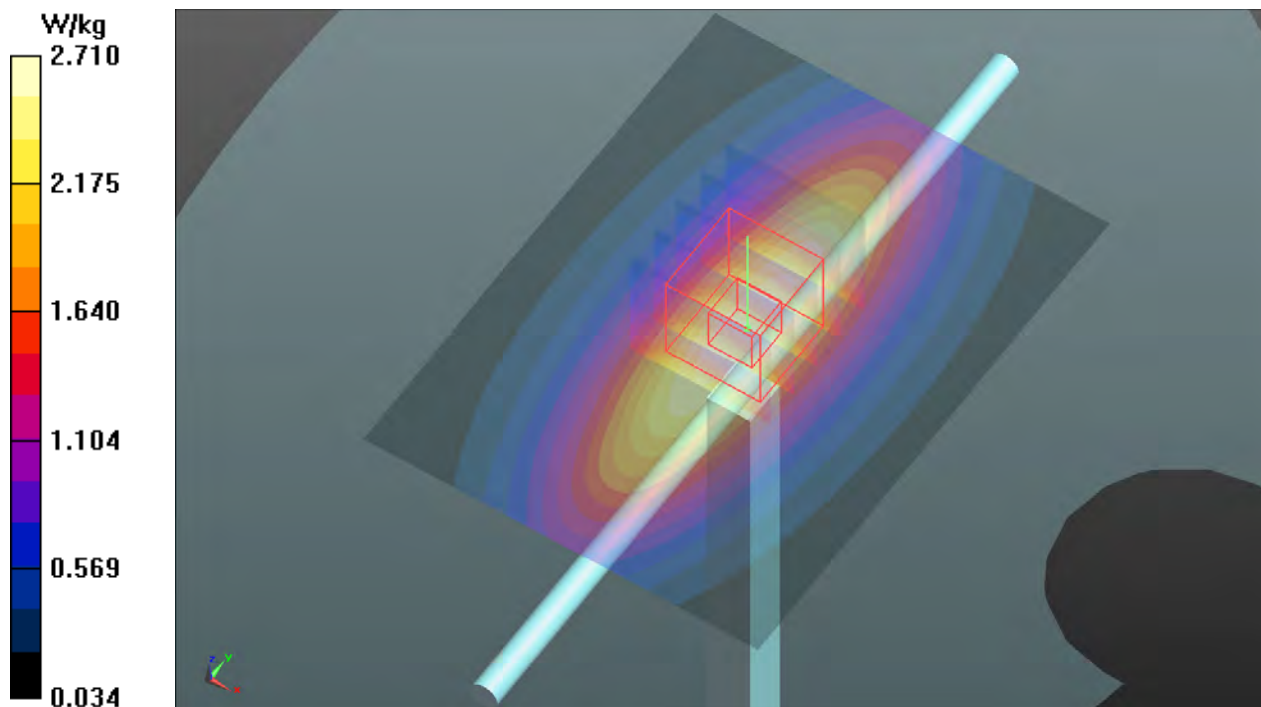

System Check_B835_130305

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d021

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: B835_0305 Medium parameters used: $f = 835$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 54.724$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.06, 9.06, 9.06); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.94 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.276 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.57 W/kg

Maximum value of SAR (measured) = 2.98 W/kg

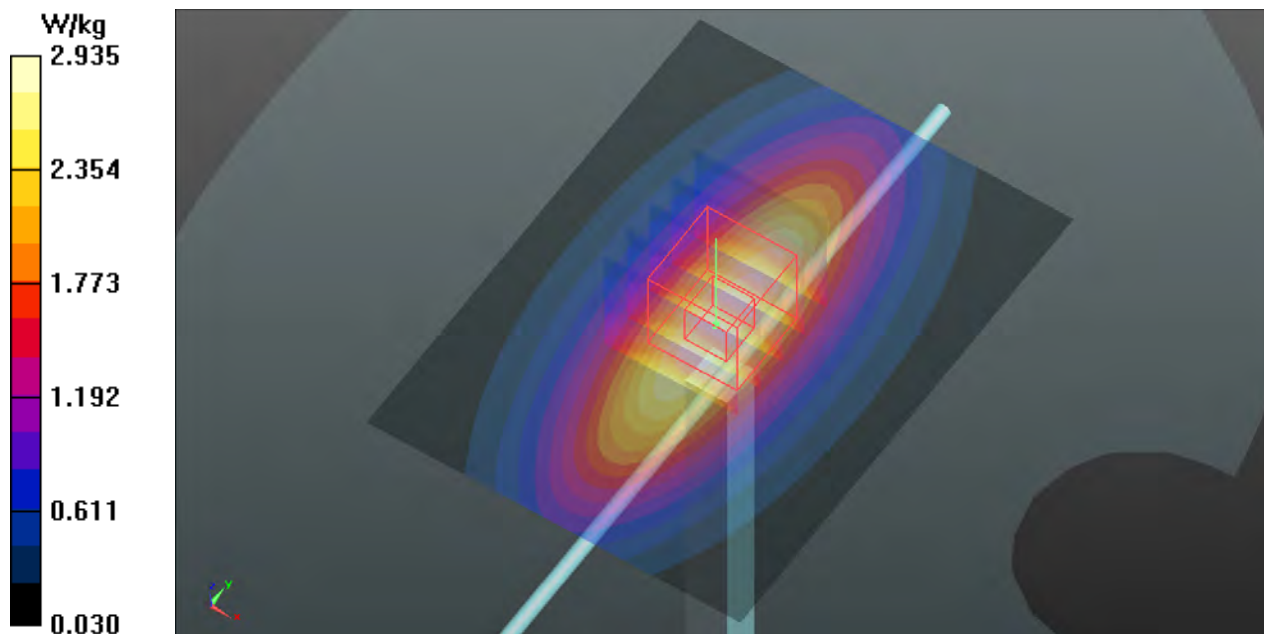

System Check_B835_130314

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d021

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: B835_0314 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.993 \text{ S/m}$; $\epsilon_r = 56.706$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $21.1 \text{ }^\circ\text{C}$; Liquid Temperature : $20.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(9.94, 9.94, 9.94); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.09 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.648 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.44 W/kg ; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 3.10 W/kg

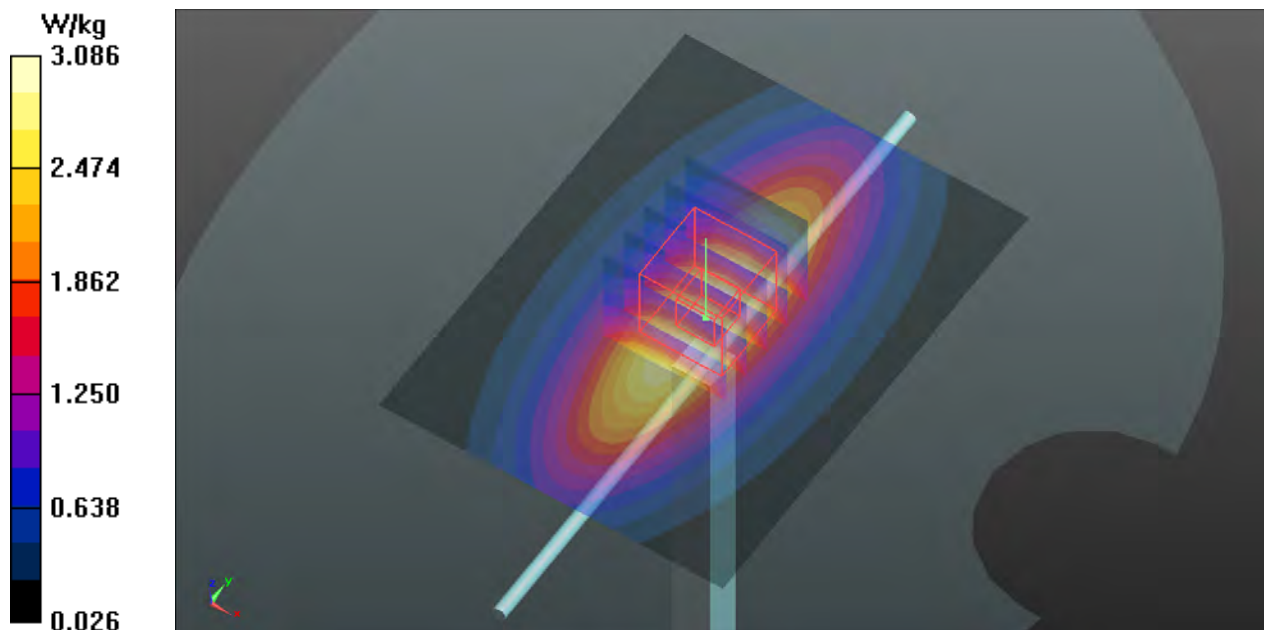

System Check_B1750_130305

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: B1750_0305 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.469$ S/m; $\epsilon_r = 53.127$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.31, 7.31, 7.31); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.9 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.380 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.2 W/kg; SAR(10 g) = 4.9 W/kg

Maximum value of SAR (measured) = 13.0 W/kg

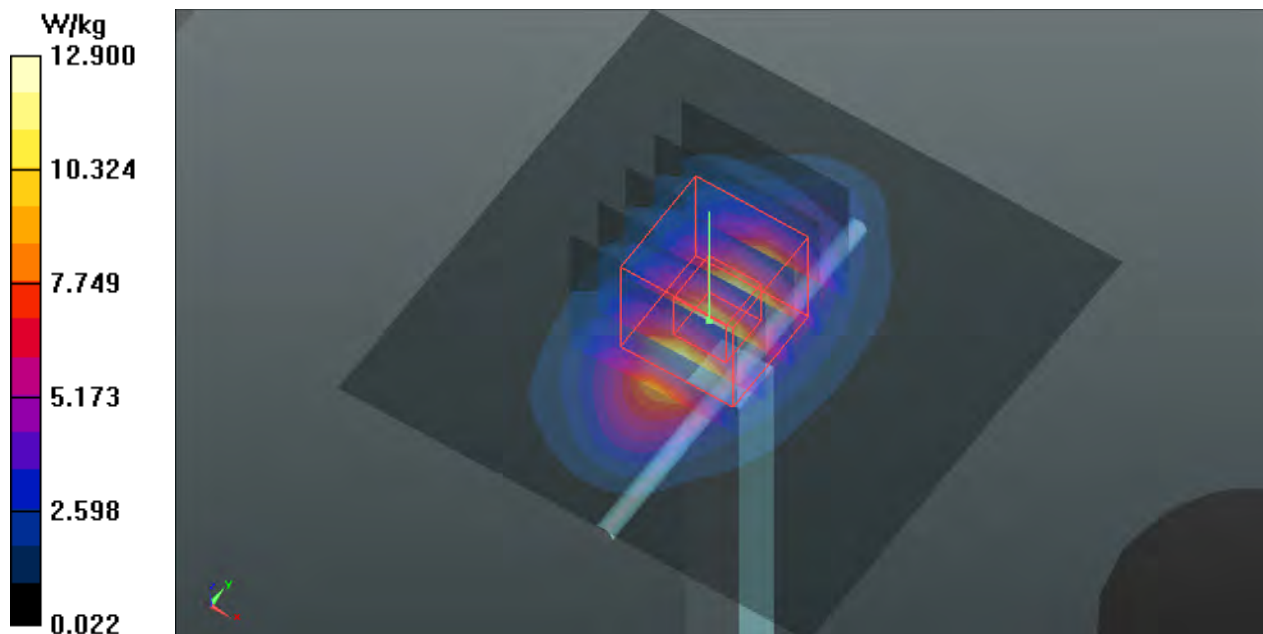

System Check_B1900_130305

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: B1900_0305 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.552$ S/m; $\epsilon_r = 51.225$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.8 °C; Liquid Temperature : 20.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(6.94, 6.94, 6.94); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.614 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.79 W/kg; SAR(10 g) = 5.04 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

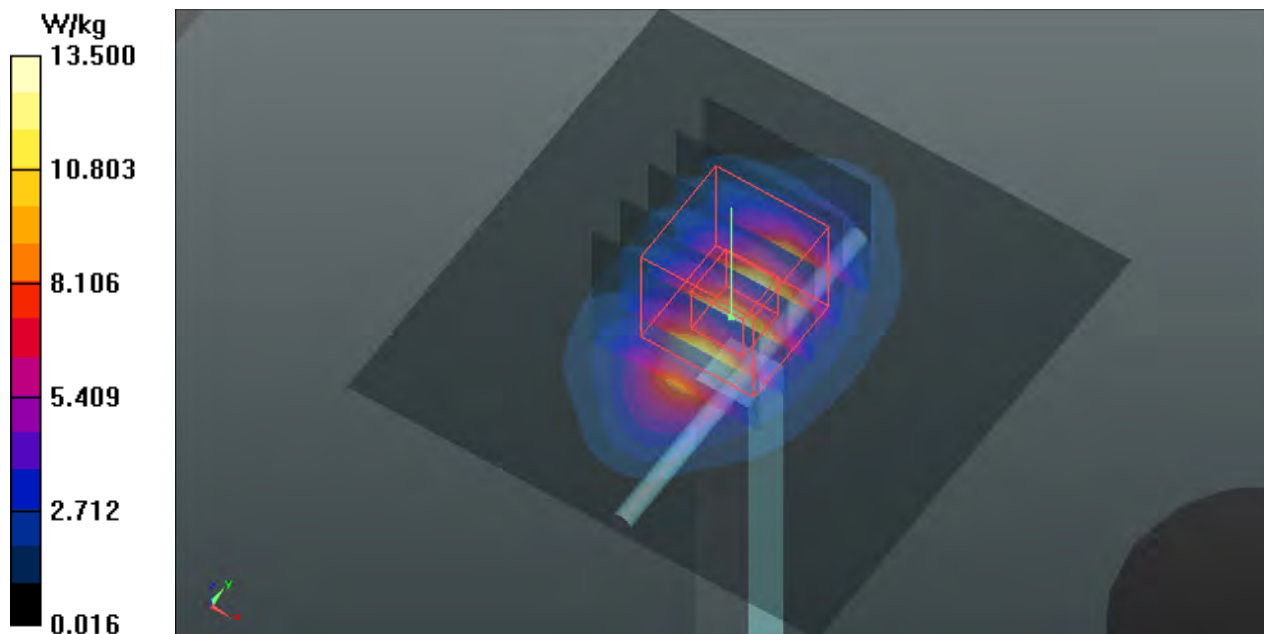

System Check_B1900_130314

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: B1900_0314 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 96.187 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 9.68 W/kg; SAR(10 g) = 5.01 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

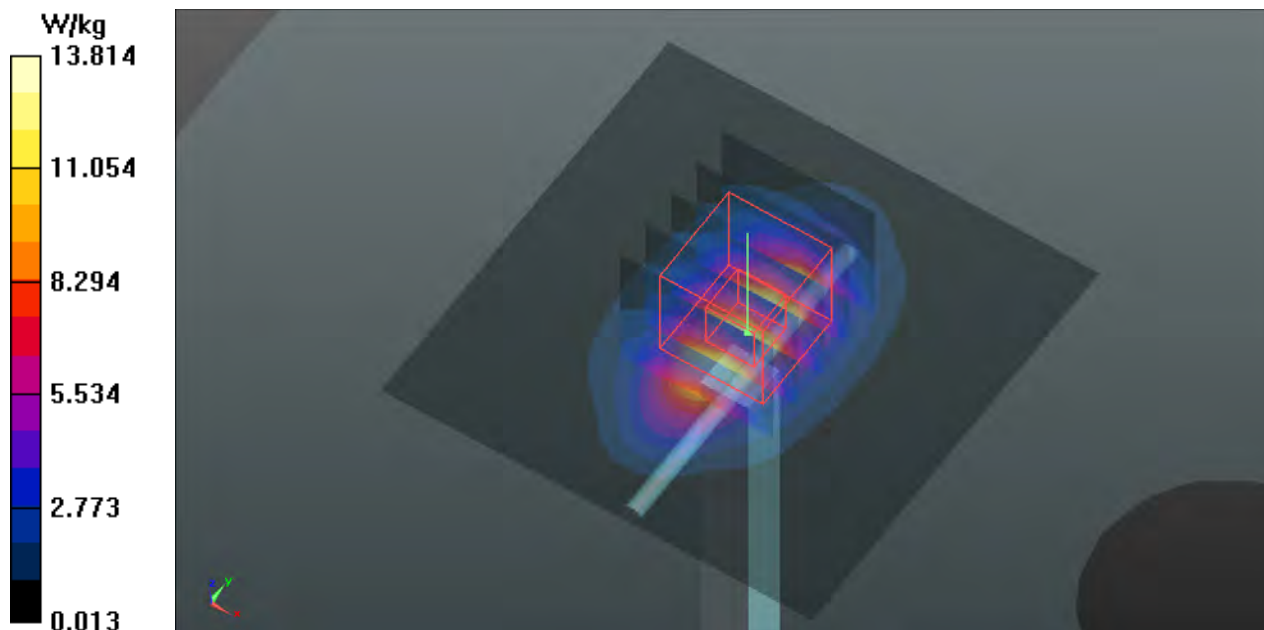

System Check_B2450_130311

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: B2450_0311 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 50.922$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(6.59, 6.59, 6.59); Calibrated: 2012/06/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2012/07/19
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.6 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.7 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.8 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.87 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

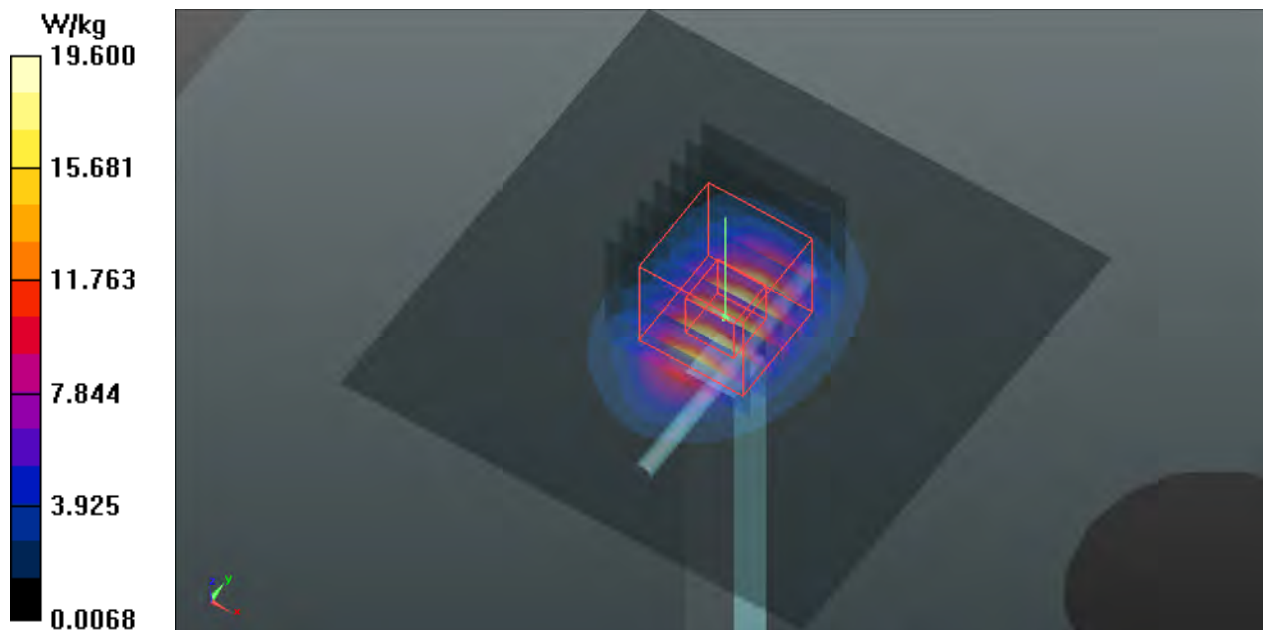

System Check_B5200_130312

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: B5G_0312 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.347$ S/m; $\epsilon_r = 47.581$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 20.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(5.15, 5.15, 5.15); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.3 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.199 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 15.6 W/kg

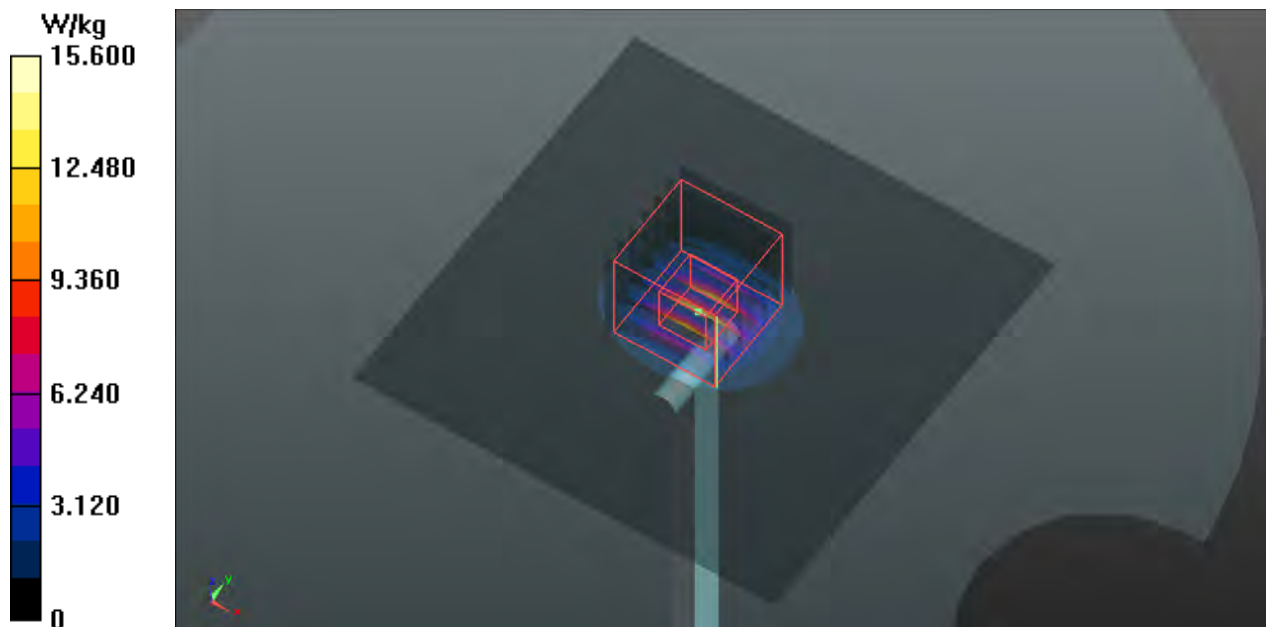

System Check_B5300_130312

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: B5G_0312 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.481$ S/m; $\epsilon_r = 47.409$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(4.94, 4.94, 4.94); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.0 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.267 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 7.14 W/kg; SAR(10 g) = 1.99 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

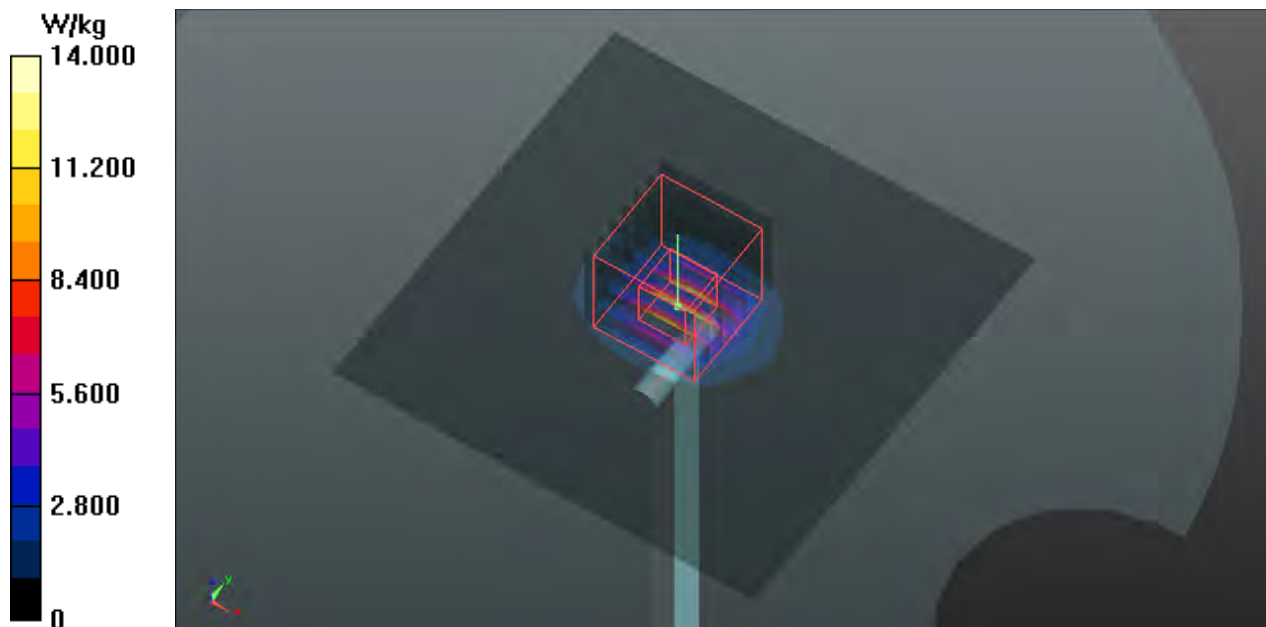

System Check_B5600_130312

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: B5G_0312 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.912$ S/m; $\epsilon_r = 46.863$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(4.46, 4.46, 4.46); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.1 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.212 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 34.0 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

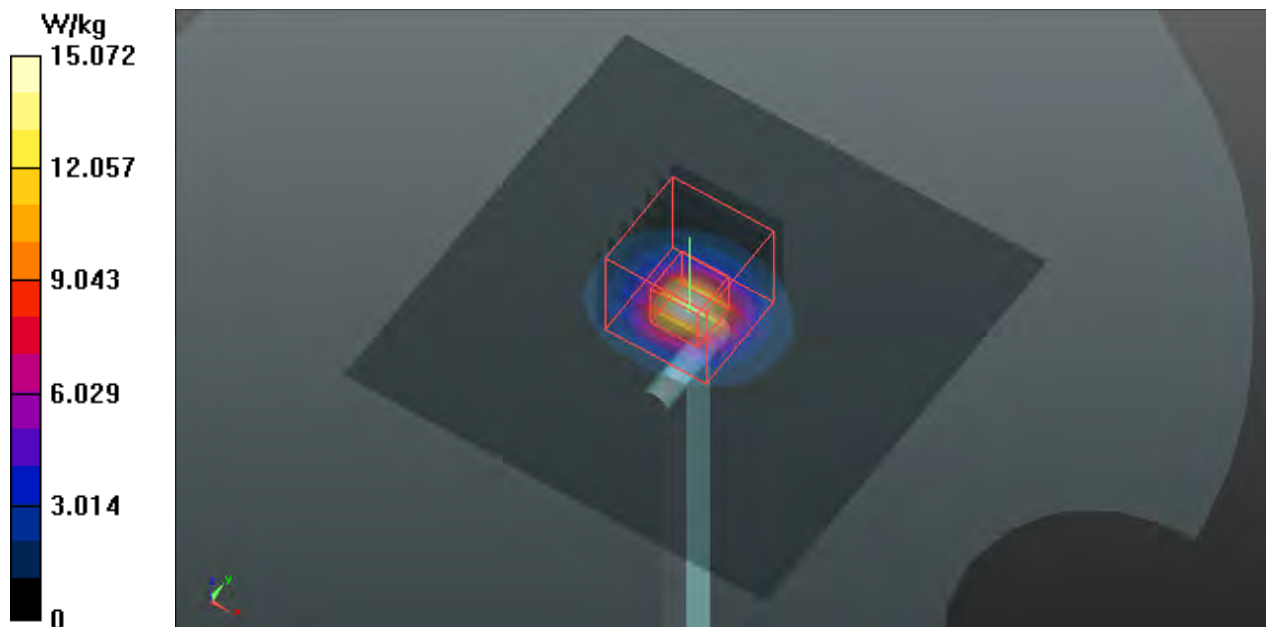

System Check_B5800_130312

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: B5G_0312 Medium parameters used: $f = 5800$ MHz; $\sigma = 6.202$ S/m; $\epsilon_r = 46.48$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(4.72, 4.72, 4.72); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn687; Calibrated: 2012/08/23
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 13.6 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 51.582 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 6.76 W/kg; SAR(10 g) = 1.89 W/kg

Maximum value of SAR (measured) = 14.6 W/kg

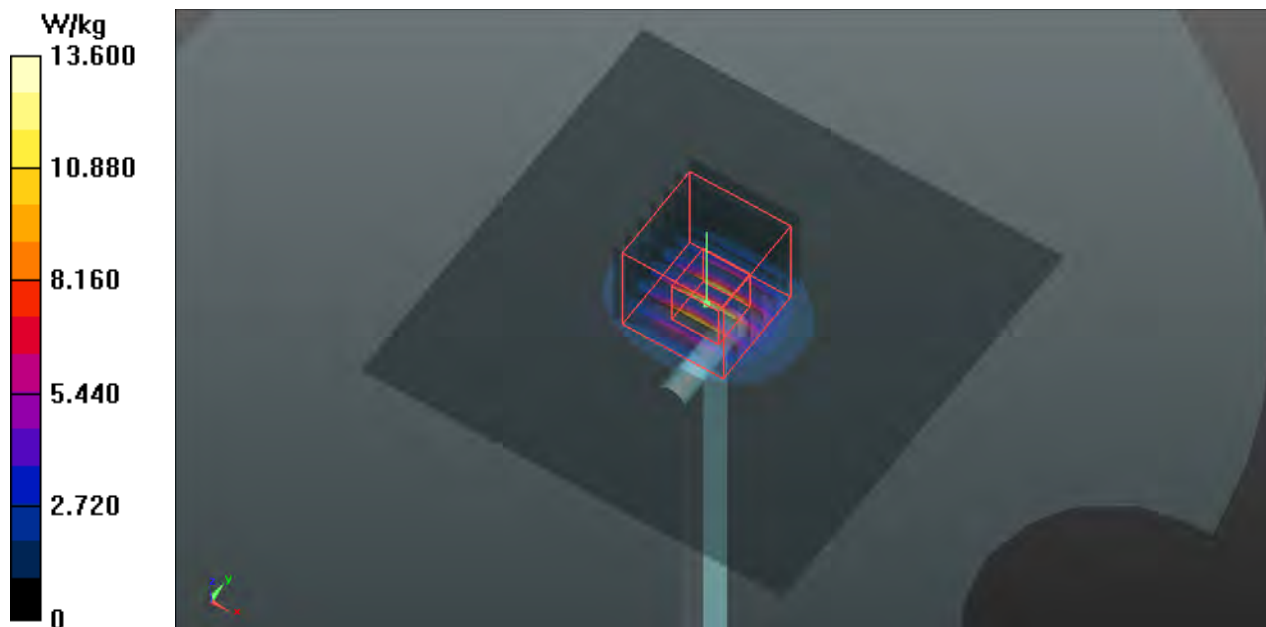



Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR and measured SAR > 1.5 W/kg are shown as follows.

P23 GSM850_GSM_Left Cheek_Ch189

DUT: 130223C16

Communication System: GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: H835_0313 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.353$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(9.8, 9.8, 9.8); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch189/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.373 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.034 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.354 W/kg

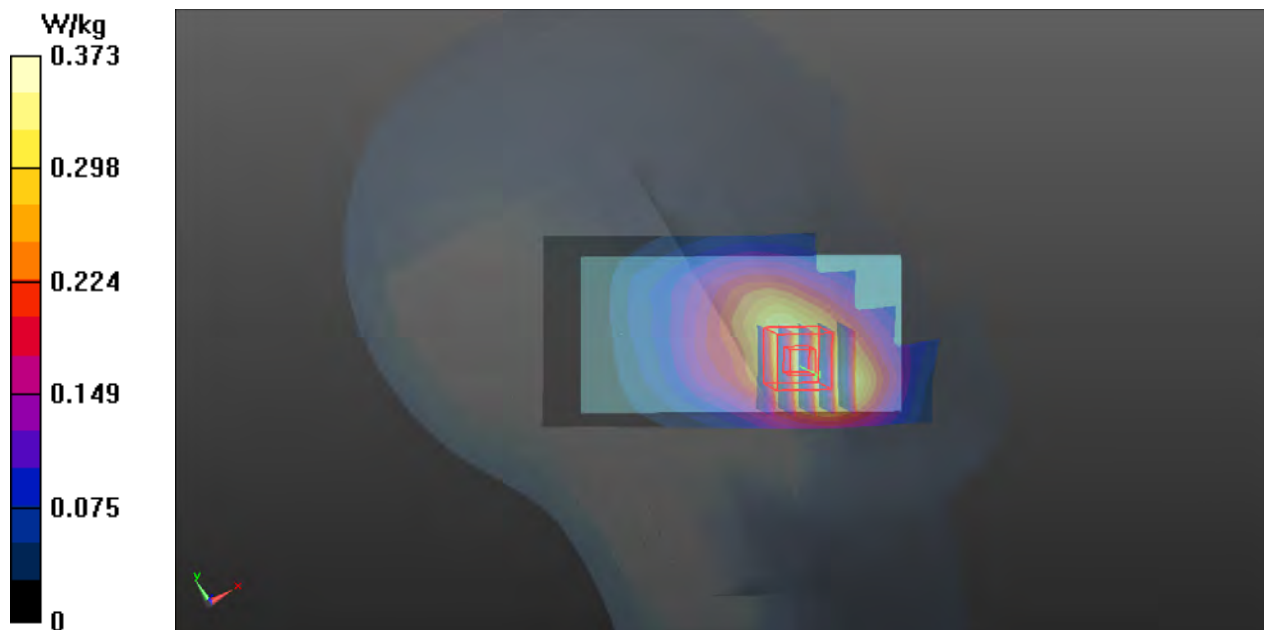

P24 GSM1900_GSM_Left Cheek_Ch661

DUT: 130223C16

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: H1900_0313 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.906$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(8.13, 8.13, 8.13); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch661/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.808 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.156 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 0.789 W/kg

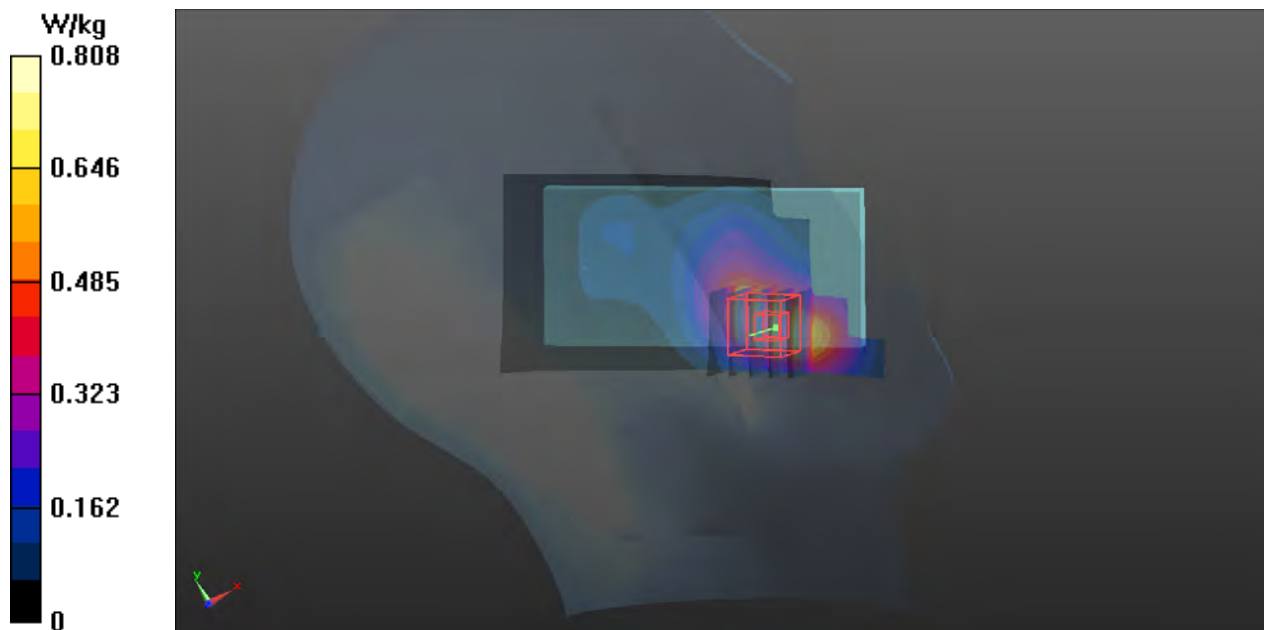

P03 WCDMA II_RMC12.2K_Left Cheek_Ch9262

DUT: 130223C16

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: H1900_0315 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 38.756$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.5 °C ; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.42, 7.42, 7.42); Calibrated: 2012/06/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2012/07/19
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Configuration/Ch9262/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.05 W/kg


Configuration/Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.116 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.494 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

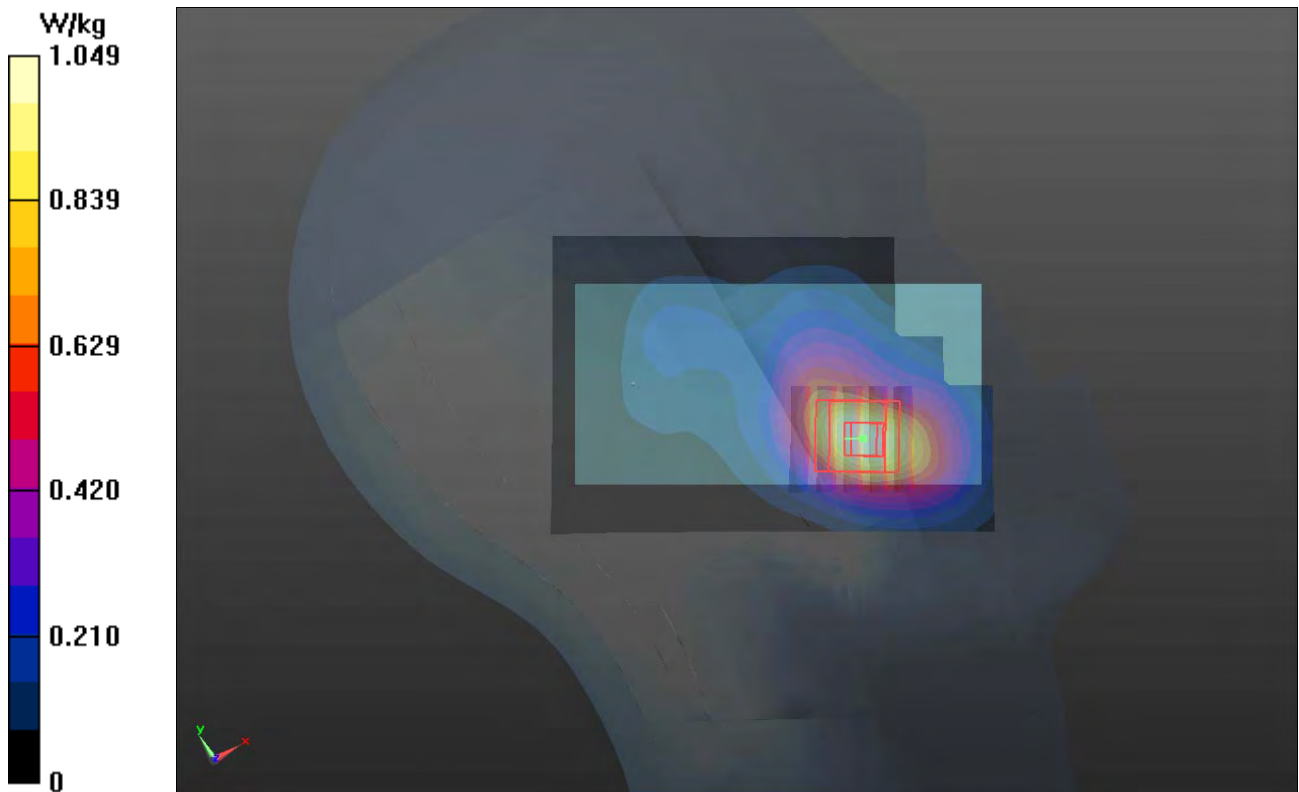

P26 WCDMA V_RMC12.2K_Right Cheek_Ch4233

DUT: 130223C16

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835_0313 Medium parameters used: $f = 847$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.229$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(9.8, 9.8, 9.8); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch4233/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.247 W/kg


Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.304 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.239 W/kg

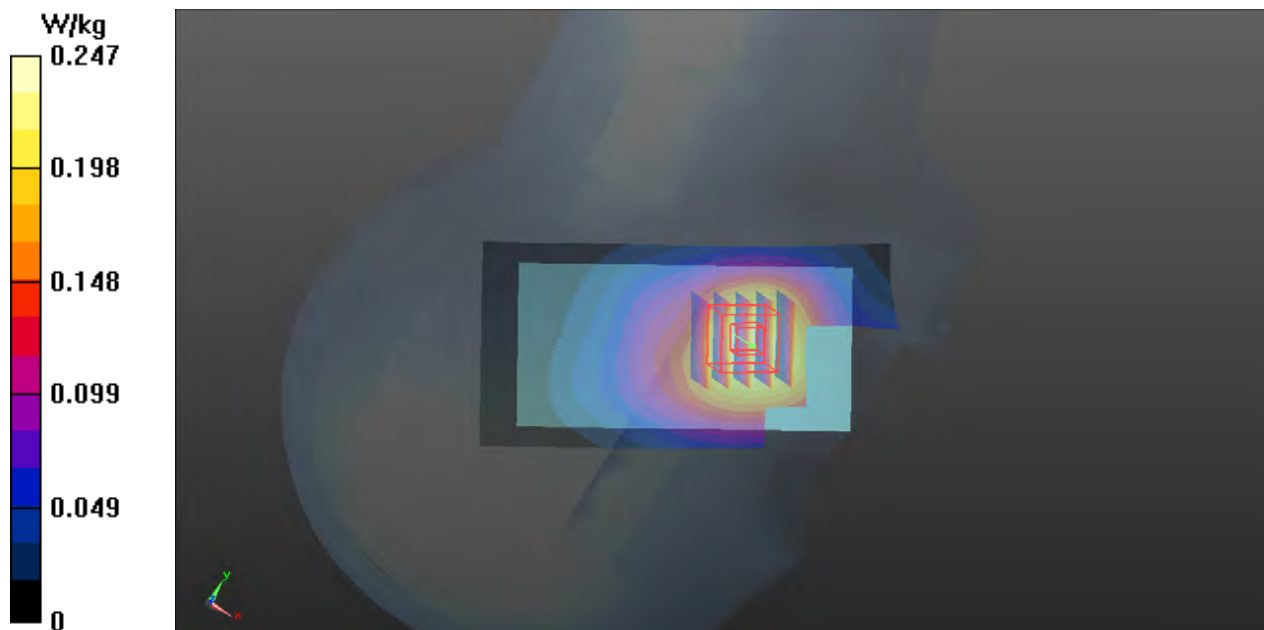

P07 CDMA2000_BC0_RC3+SO55_Right Cheek_Ch1013

DUT: 130223C16

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: H835_0304 Medium parameters used: $f = 825$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.491$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 20.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.89, 8.89, 8.89); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch1013/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.635 W/kg


Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.186 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.405 W/kg

Maximum value of SAR (measured) = 0.608 W/kg

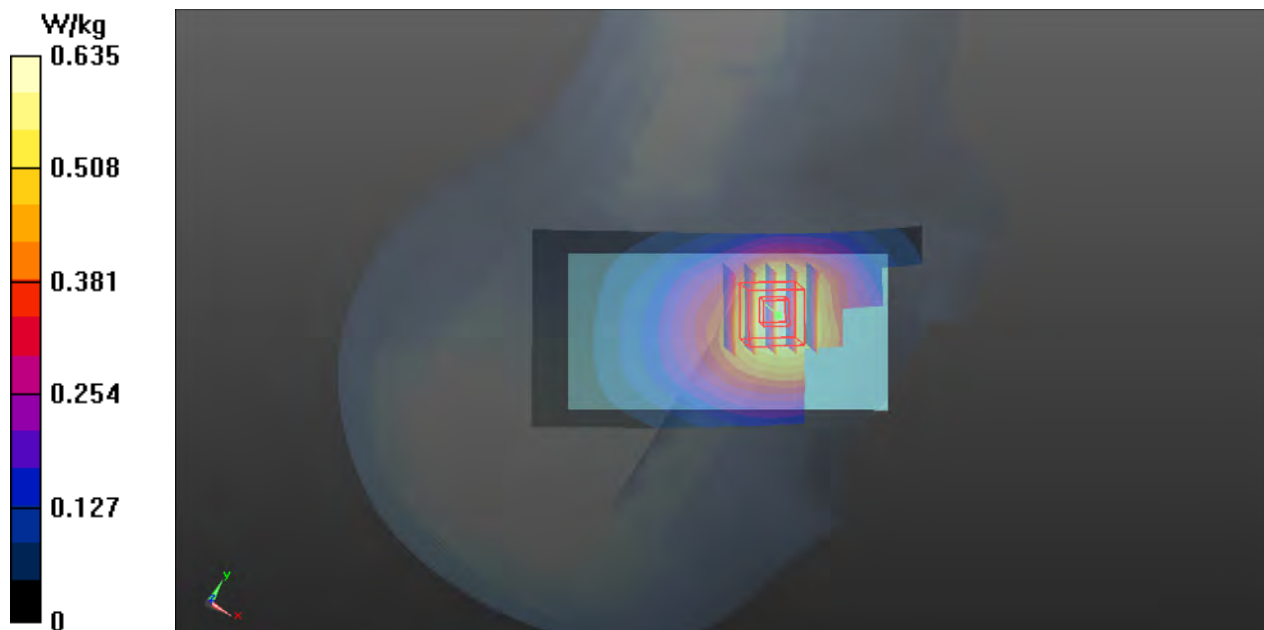

P28 CDMA2000_BC1_RC3+SO55_Left Cheek_Ch1175

DUT: 130223C16


Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium: H1900_0304 Medium parameters used: $f = 1909$ MHz; $\sigma = 1.433$ S/m; $\epsilon_r = 40.321$; $\rho = 1000$ kg/m³
Ambient Temperature : 21.8 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.61, 7.61, 7.61); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch1175/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.72 W/kg

Ch1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.842 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.793 W/kg
Maximum value of SAR (measured) = 1.71 W/kg

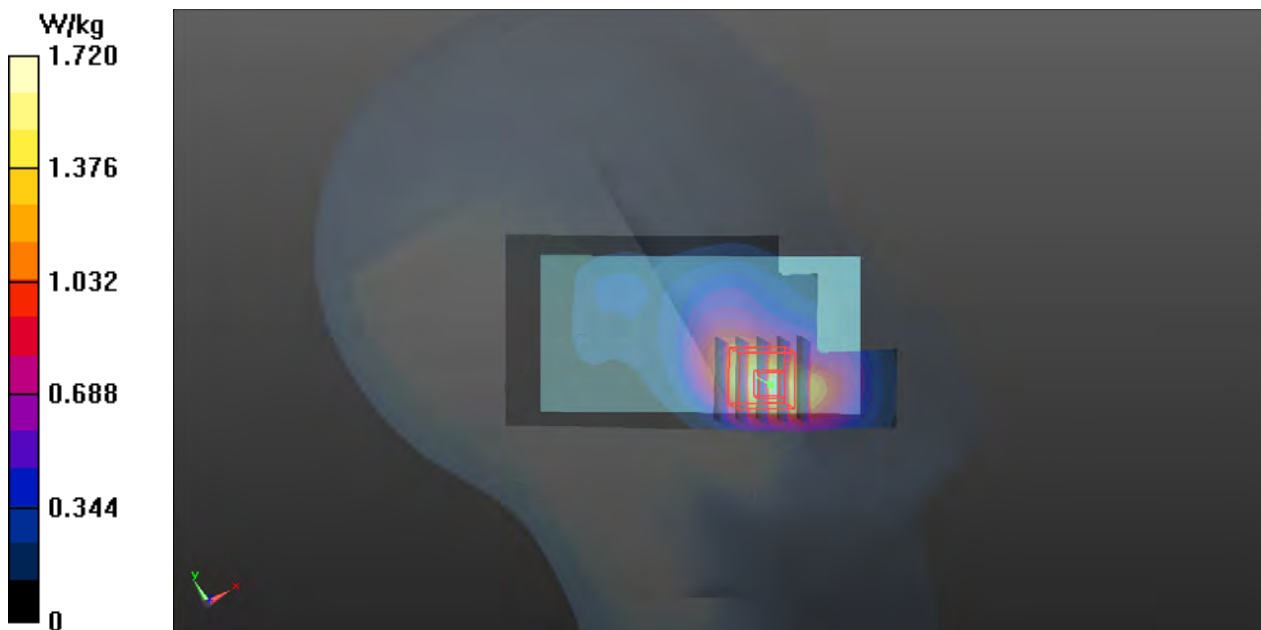

P29 LTE 4_QPSK_20M_Right Tilted_Ch20175_1RB_Offset 0

DUT: 130223C16

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: H1750_0304 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 38.943$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.8 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch20175/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.942 W/kg


Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.091 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.433 W/kg

Maximum value of SAR (measured) = 0.914 W/kg

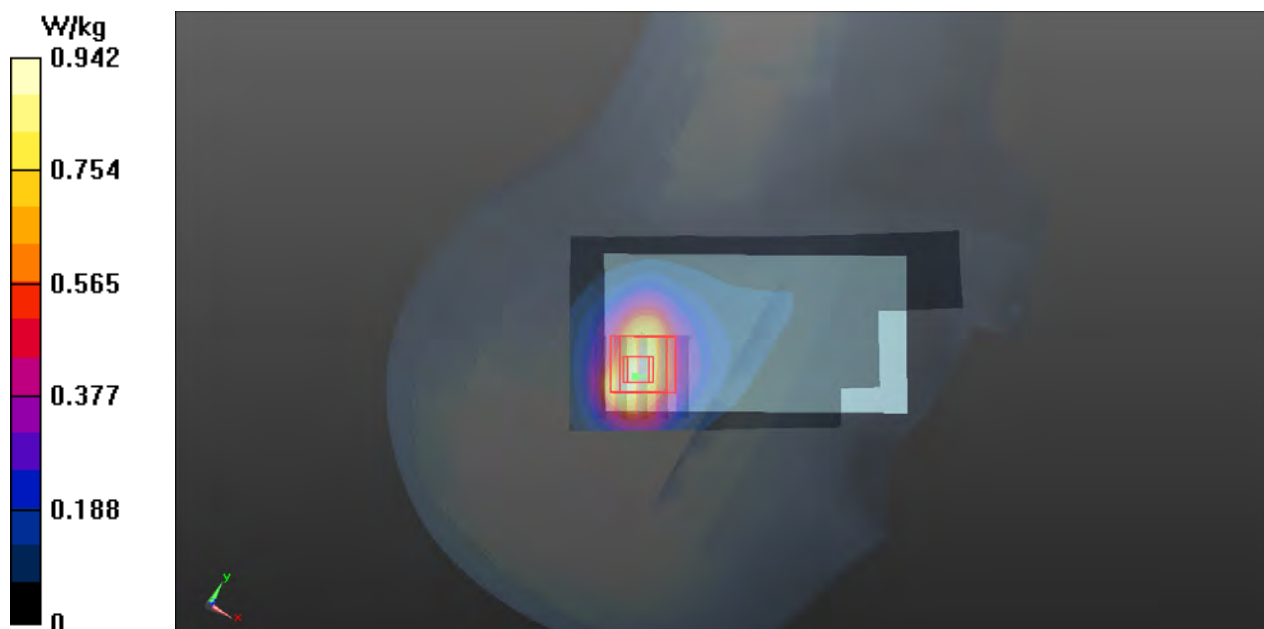

P2: LTE 13_QPSK_10M_Left Cheek_Ch23230_1RB_Offset 0

DUT: 130223C16

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750_0304 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.075$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $21.7 \text{ }^\circ\text{C}$; Liquid Temperature : $20.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.15, 9.15, 9.15); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch23230/Area Scan (51x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.614 W/kg


Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.502 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.536 W/kg ; SAR(10 g) = 0.403 W/kg

Maximum value of SAR (measured) = 0.610 W/kg

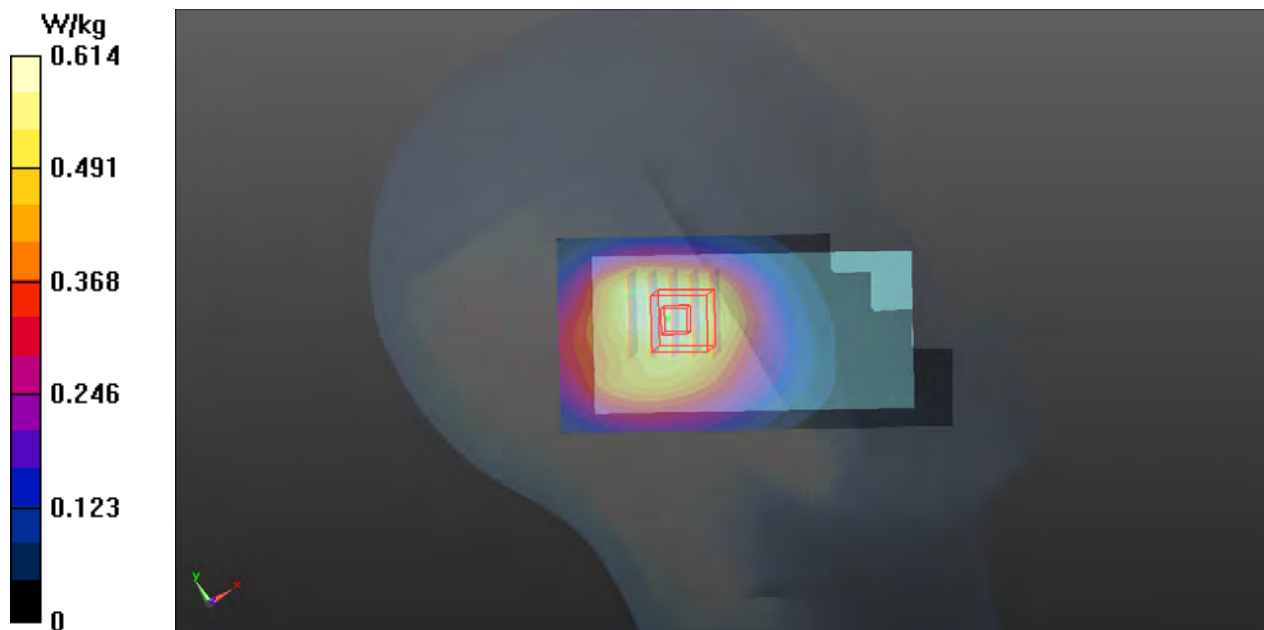

P29_802.11b_Left Cheek_Ch1

DUT: 130223C16


Communication System: WLAN_2.4G; Frequency: 2412 MHz; Duty Cycle: 1:1.36
Medium: H2450_0311 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 37.561$; $\rho = 1000$ kg/m³
Ambient Temperature : 21.6 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(6.7, 6.7, 6.7); Calibrated: 2012/06/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2012/07/19
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch1/Area Scan (71x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.693 W/kg

Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.239 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.974 W/kg
SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.206 W/kg
Maximum value of SAR (measured) = 0.692 W/kg

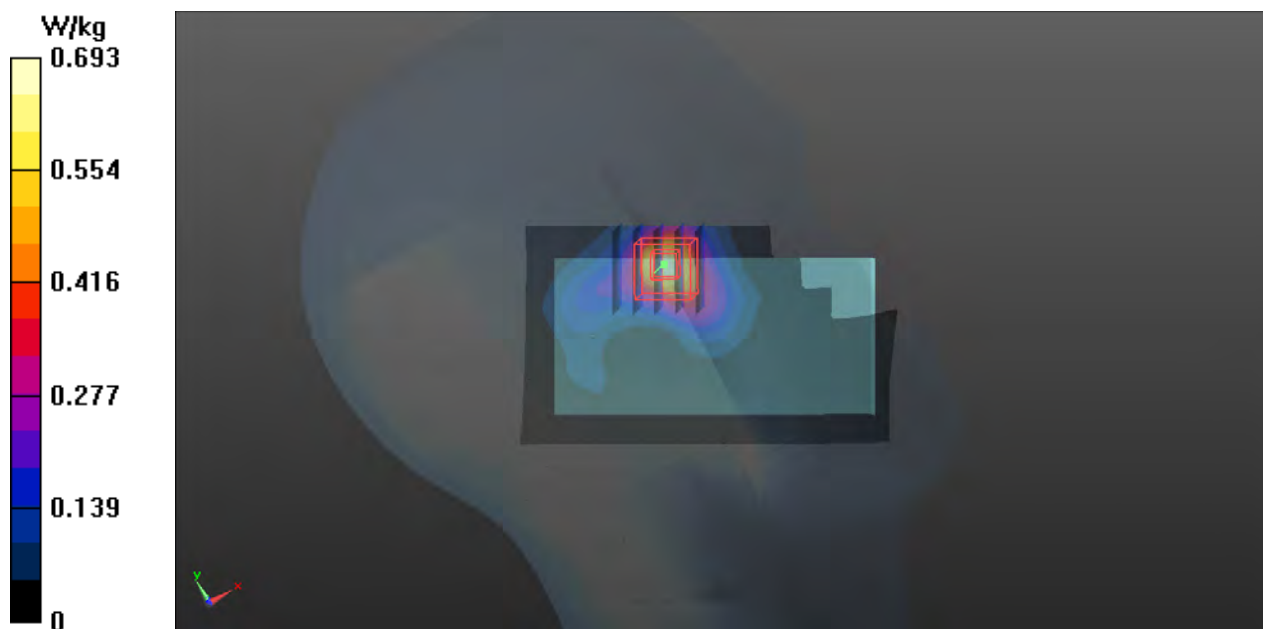

P32 802.11a_Left Cheek_Ch48

DUT: 130223C16

Communication System: WLAN_5G; Frequency: 5240 MHz; Duty Cycle: 1:3.21

Medium: H5G_0312 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.821$ S/m; $\epsilon_r = 35.91$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(5.79, 5.79, 5.79); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch48/Area Scan (81x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0920 W/kg

Ch48/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.00555 W/kg

Maximum value of SAR (measured) = 0.0657 W/kg



P33 802.11a_Left Cheek_Ch52

DUT: 130223C16

Communication System: WLAN_5G; Frequency: 5260 MHz; Duty Cycle: 1:2.61

Medium: H5G_0310 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.828$ S/m; $\epsilon_r = 35.594$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.83, 4.83, 4.83); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch52/Area Scan (91x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0893 W/kg


Ch52/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.00624 W/kg

Maximum value of SAR (measured) = 0.0650 W/kg

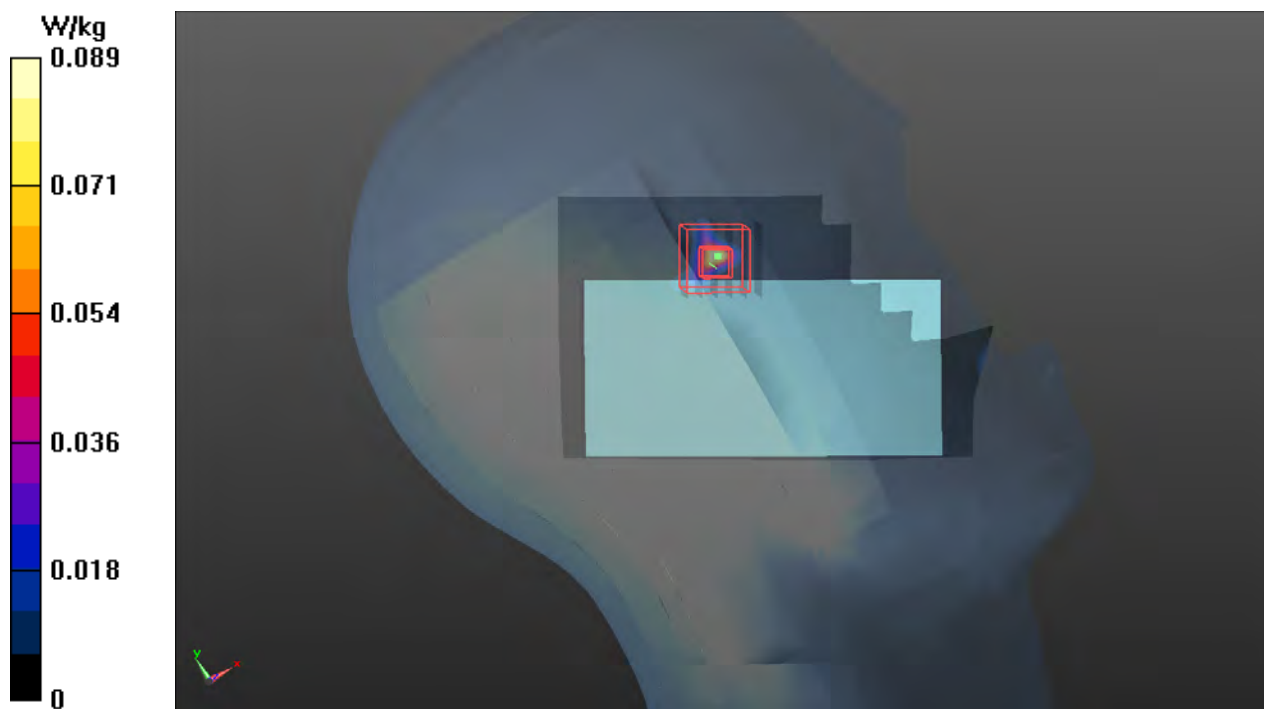

P34 802.11a_Left Cheek_Ch140

DUT: 130223C16

Communication System: WLAN_5G; Frequency: 5700 MHz; Duty Cycle: 1:2.79

Medium: H5G_0310 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.312$ S/m; $\epsilon_r = 34.838$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.22, 4.22, 4.22); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch140/Area Scan (91x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.154 W/kg


Ch140/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.0074 W/kg

Maximum value of SAR (measured) = 0.532 W/kg

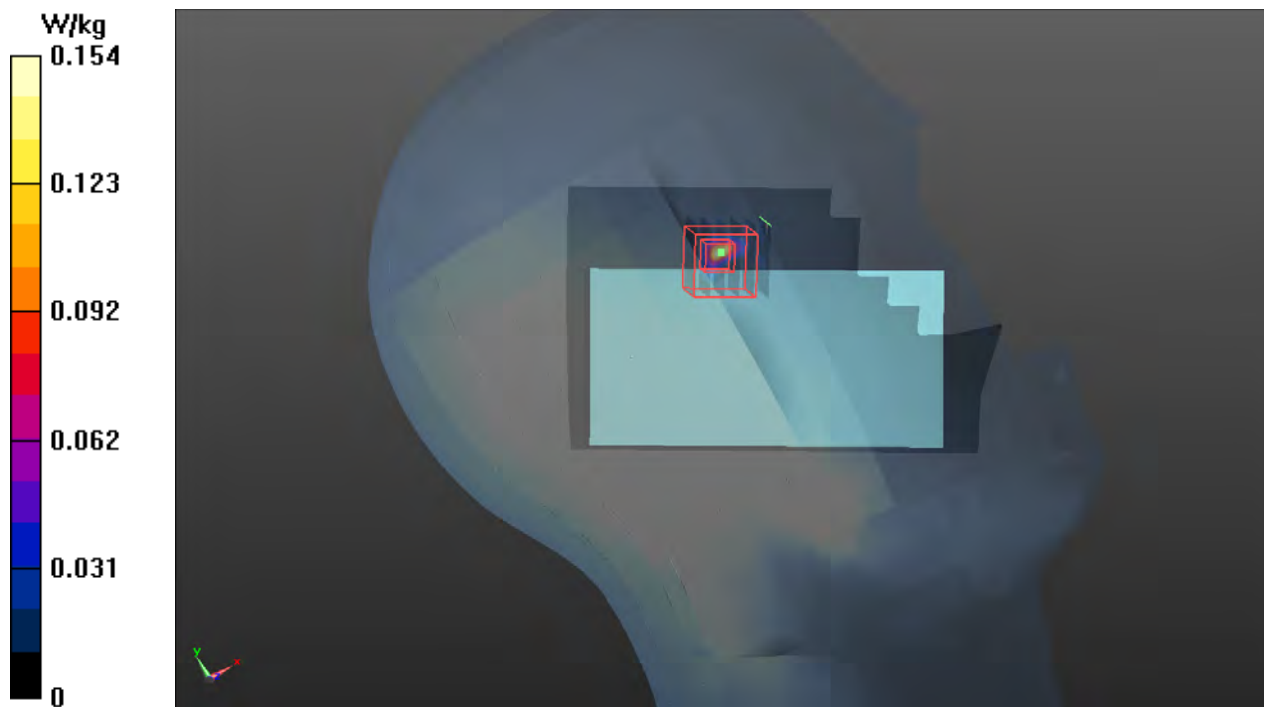

P35 802.11a_Left Cheek_Ch157

DUT: 130223C16

Communication System: WLAN_5G; Frequency: 5785 MHz; Duty Cycle: 1:1.23

Medium: H5G_0312 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.282$ S/m; $\epsilon_r = 33.997$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(4.92, 4.92, 4.92); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch157/Area Scan (81x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.635 W/kg


Ch157/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

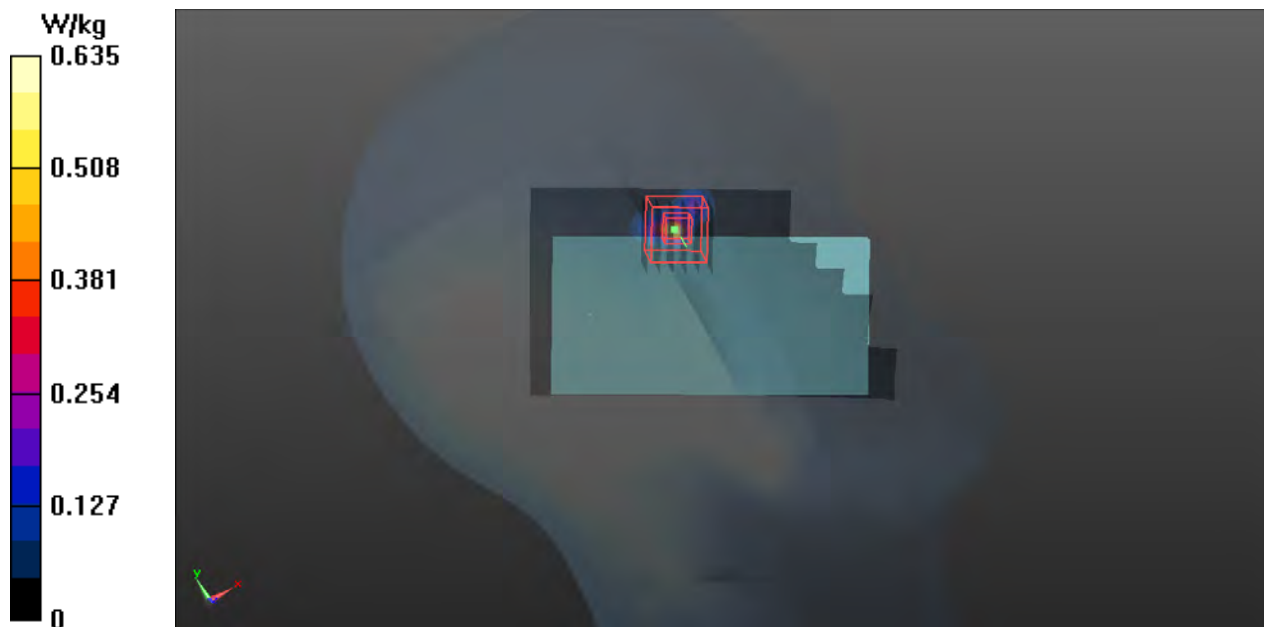

P36_BT_Right Tilted_Ch78

DUT: 130223C16

Communication System: BT; Frequency: 2480 MHz; Duty Cycle: 1:3.09

Medium: H2450_0315 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 38.559$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.5 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(7.28, 7.28, 7.28); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch78/Area Scan (71x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.000128 W/kg

Ch78/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.00562 W/kg

SAR(1 g) = 0.000176 W/kg; SAR(10 g) = 1.88e-005 W/kg

Maximum value of SAR (measured) = 0.00562 W/kg



P37 GSM850_GSM_Rear Face_1cm_Ch189

DUT: 130223C16

Communication System: GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.30042

Medium: B835_0314 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 56.697$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.1 °C; Liquid Temperature : 20.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(9.94, 9.94, 9.94); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch189/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.497 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.218 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 0.490 W/kg

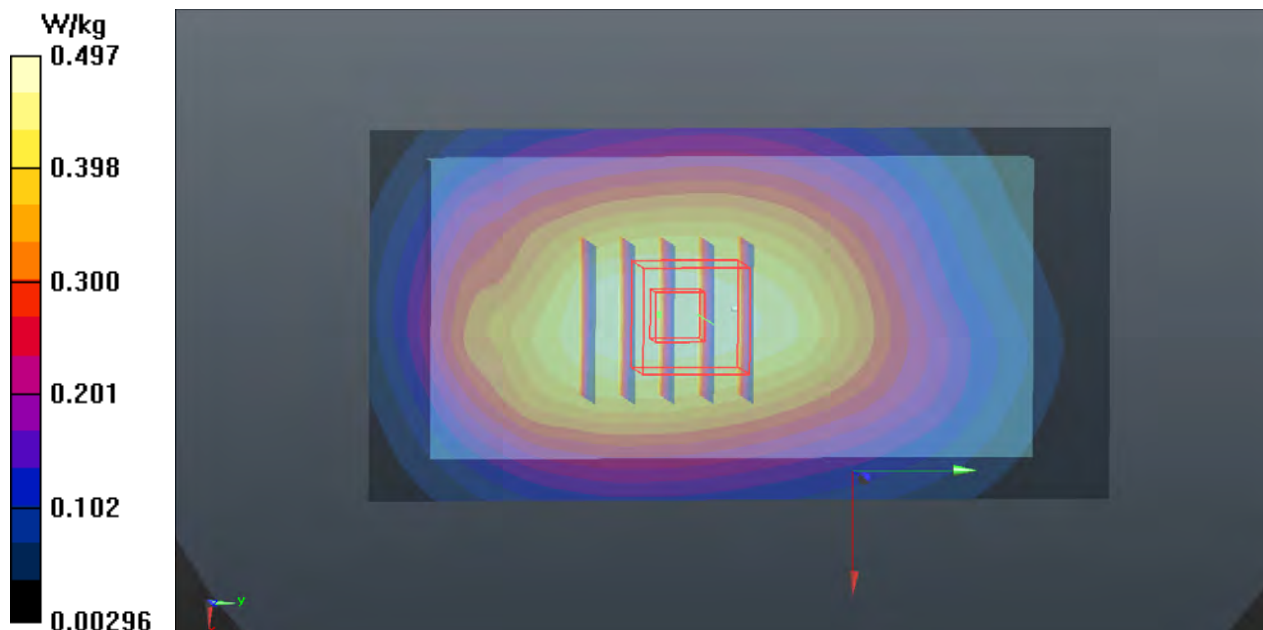

P38 GSM1900_GSM_Rear Face_1cm_Ch661

DUT: 130223C16


Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: B1900_0314 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 51.953$; $\rho = 1000$ kg/m³
Ambient Temperature : 21.2 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch661/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.512 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.294 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.599 W/kg
SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.184 W/kg
Maximum value of SAR (measured) = 0.448 W/kg

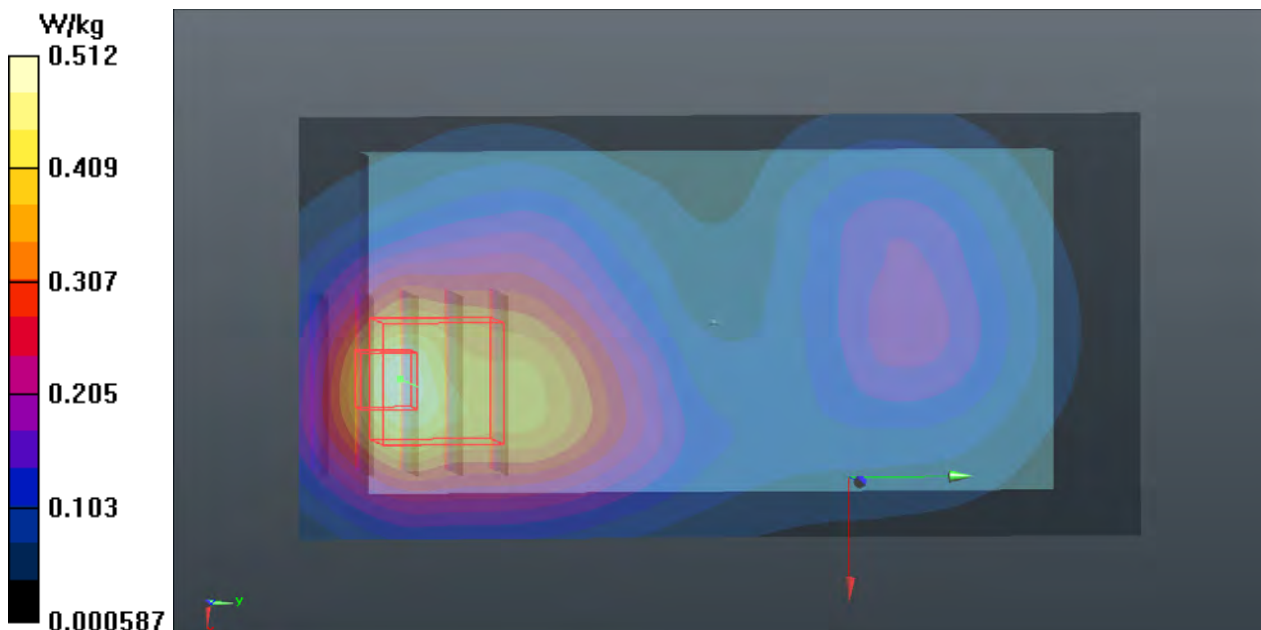

P39 WCDMA II_RMC12.2K_Front Face_1cm_Ch9538

DUT: 130223C16


Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: B1900_0314 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.554$ S/m; $\epsilon_r = 51.851$; $\rho = 1000$ kg/m³
Ambient Temperature : 21.2 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch9538/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.600 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.951 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.719 W/kg
SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.280 W/kg
Maximum value of SAR (measured) = 0.592 W/kg

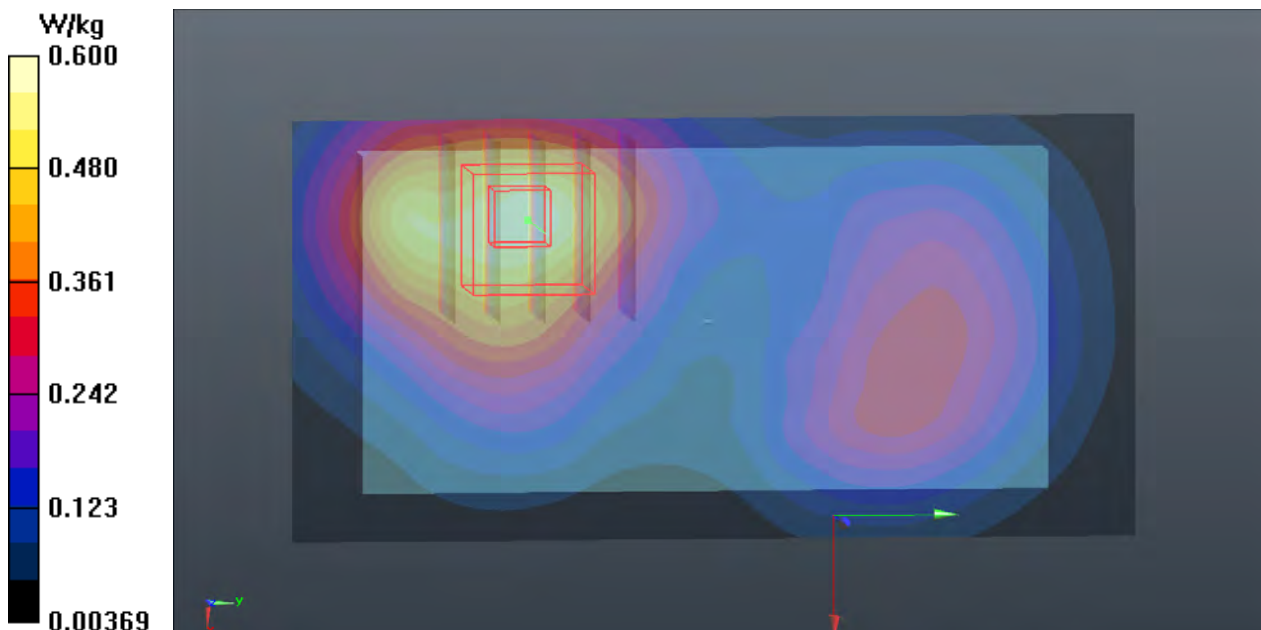

P3: WCDMA V_RMC12.2K_Rear Face_1cm_Ch4233

DUT: 130223C16

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835_0314 Medium parameters used: $f = 847$ MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 56.609$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.1 °C; Liquid Temperature : 20.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(9.94, 9.94, 9.94); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch4233/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.366 W/kg


Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.766 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.365 W/kg

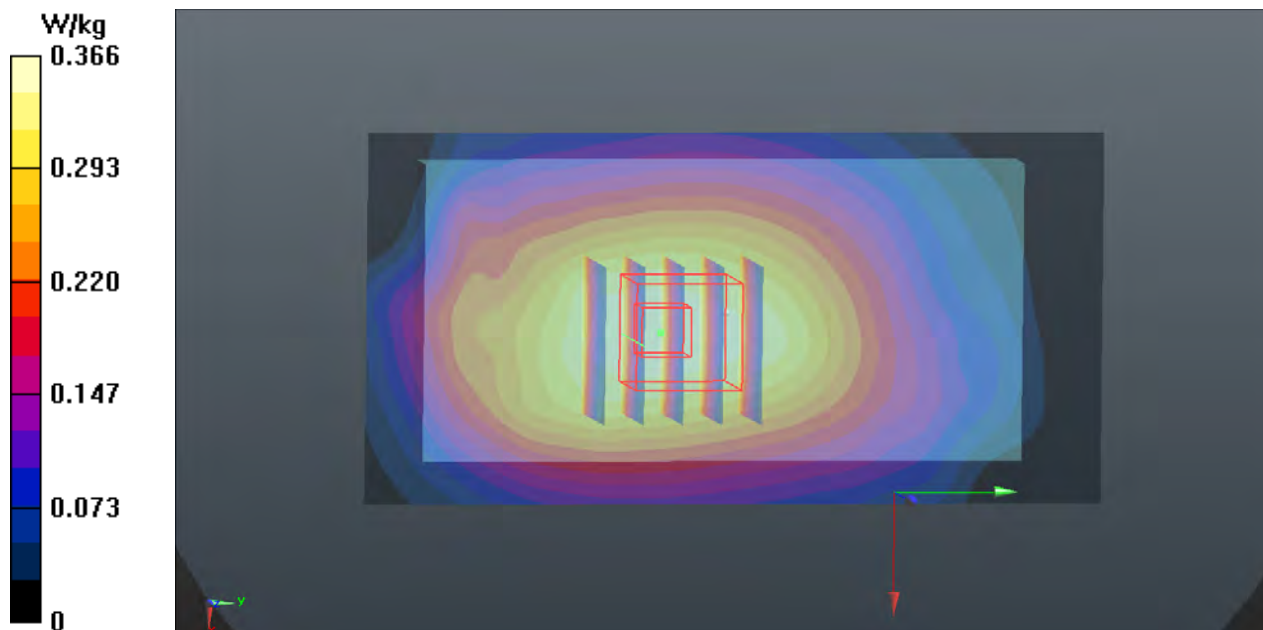

P19 CDMA2000 BC0_RC3+SO55_Front Face_1cm_Ch1013

DUT: 130223C16


Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1
 Medium: B835_0305 Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.952 \text{ S/m}$; $\epsilon_r = 54.81$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $21.6 \text{ }^\circ\text{C}$; Liquid Temperature : $20.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.06, 9.06, 9.06); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch1013/Area Scan (51x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.753 W/kg

Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 26.463 V/m ; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.833 W/kg
SAR(1 g) = 0.644 W/kg ; SAR(10 g) = 0.480 W/kg
 Maximum value of SAR (measured) = 0.750 W/kg

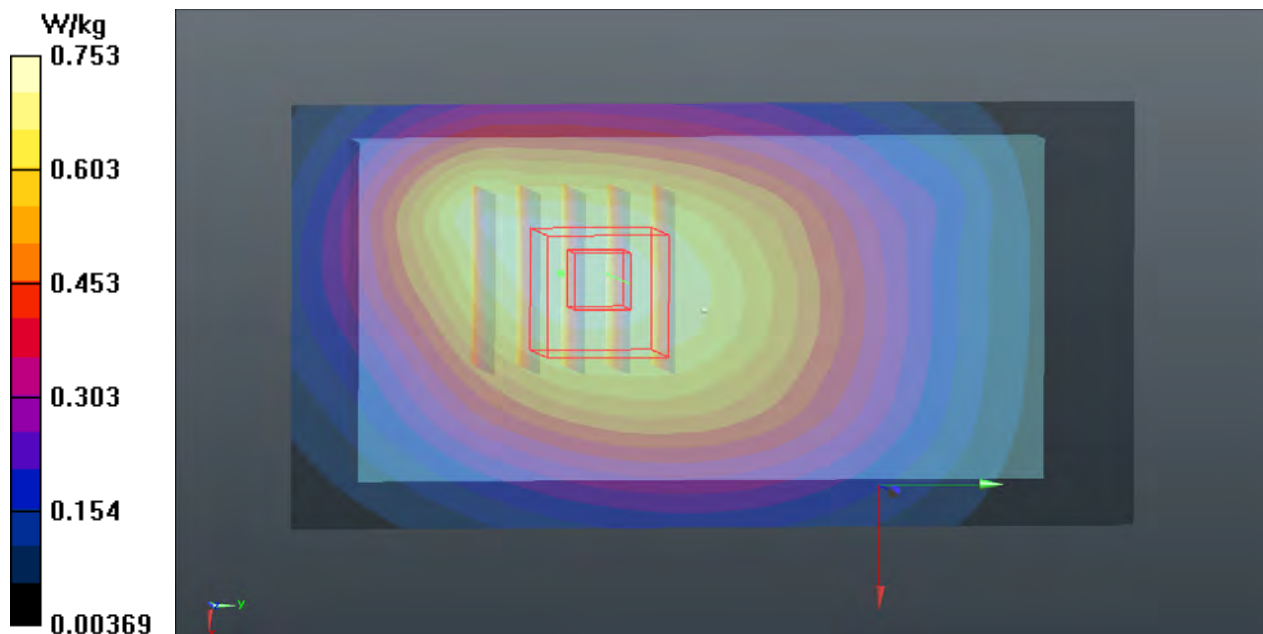

P20 CDMA2000 BC1_RC3+SO55_Rear Face_1cm_Ch25

DUT: 130223C16

Communication System: CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: B1900_0305 Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 51.441$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.8 °C; Liquid Temperature : 20.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(6.94, 6.94, 6.94); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch25/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.07 W/kg


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.305 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.754 W/kg; SAR(10 g) = 0.406 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

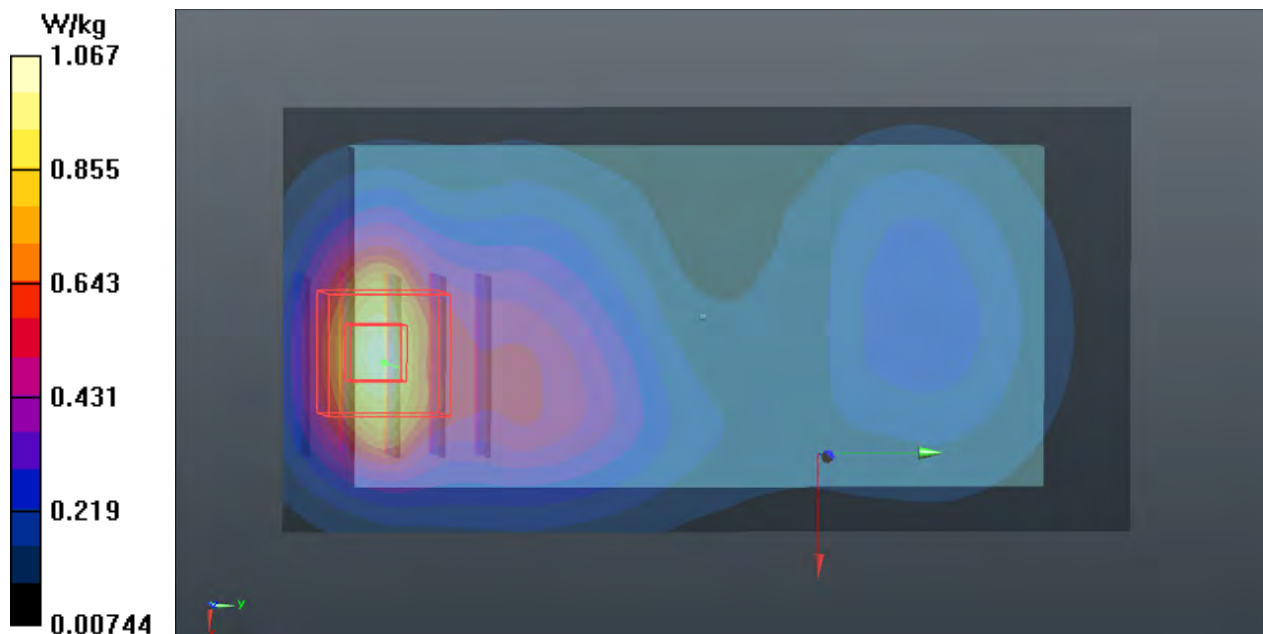

P21 LTE 4_QPSK_20M_Rear Face_1cm_Ch20175_1RB_Offset 0

DUT: 130223C16

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: B1750_0305 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 53.198$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.31, 7.31, 7.31); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch20175/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.779 W/kg


Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.500 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 0.749 W/kg

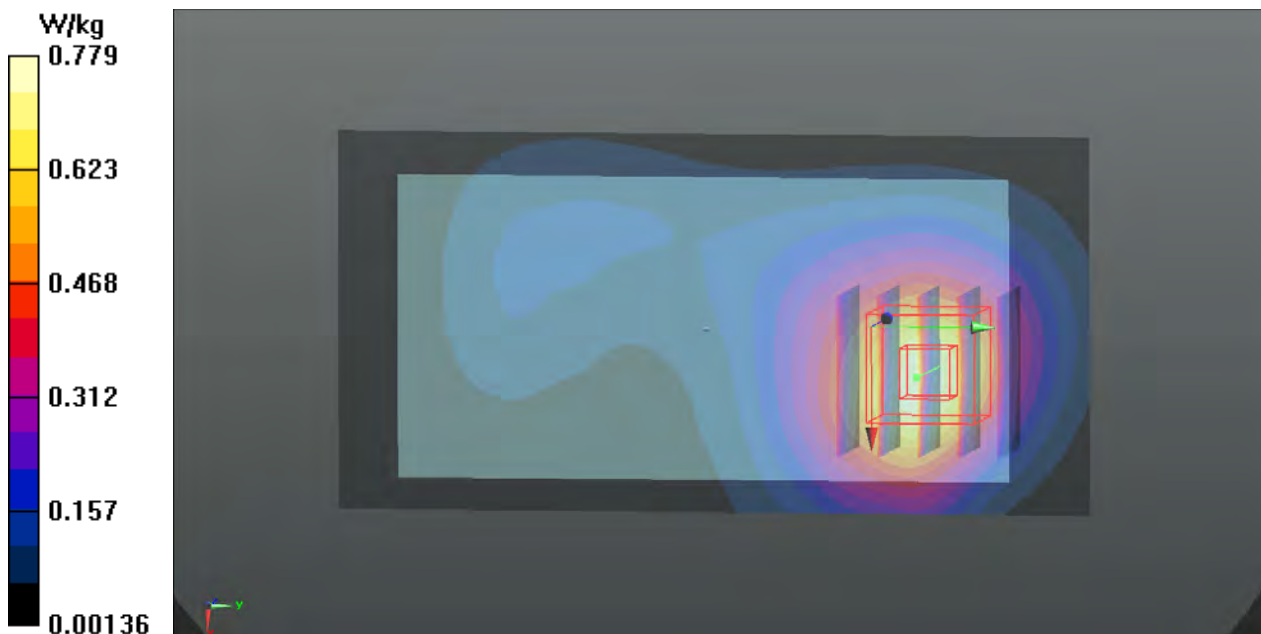

P22 LTE 13_QPSK_10M_Rear Face_1cm_Ch23230_1RB_offset 0**DUT: 130223C16**

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: B750_0308 Medium parameters used: $f = 782$ MHz; $\sigma = 0.992$ S/m; $\epsilon_r = 54.936$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9, 9, 9); Calibrated: 2012/06/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2012/07/19
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch23230/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.768 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.251 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 0.770 W/kg


Ch23230/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.251 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.666 W/kg

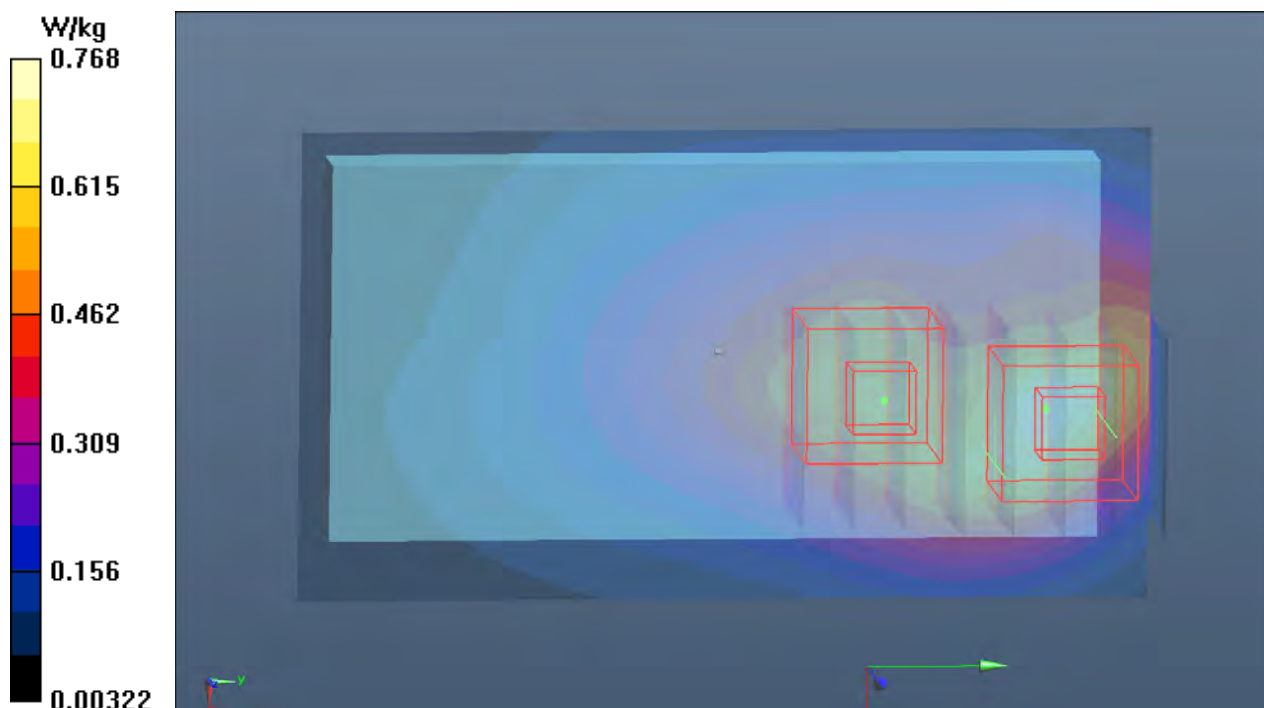

P23 802.11b_Rear Face_1cm_Ch1

DUT: 130223C16


Communication System: WLAN_2.4G; Frequency: 2412 MHz; Duty Cycle: 1:1.36
Medium: B2450_0311 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 51.104$; $\rho = 1000$ kg/m³
Ambient Temperature : 21.7 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(6.59, 6.59, 6.59); Calibrated: 2012/06/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2012/07/19
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch1/Area Scan (71x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.217 W/kg

Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.470 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.303 W/kg
SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.072 W/kg
Maximum value of SAR (measured) = 0.214 W/kg

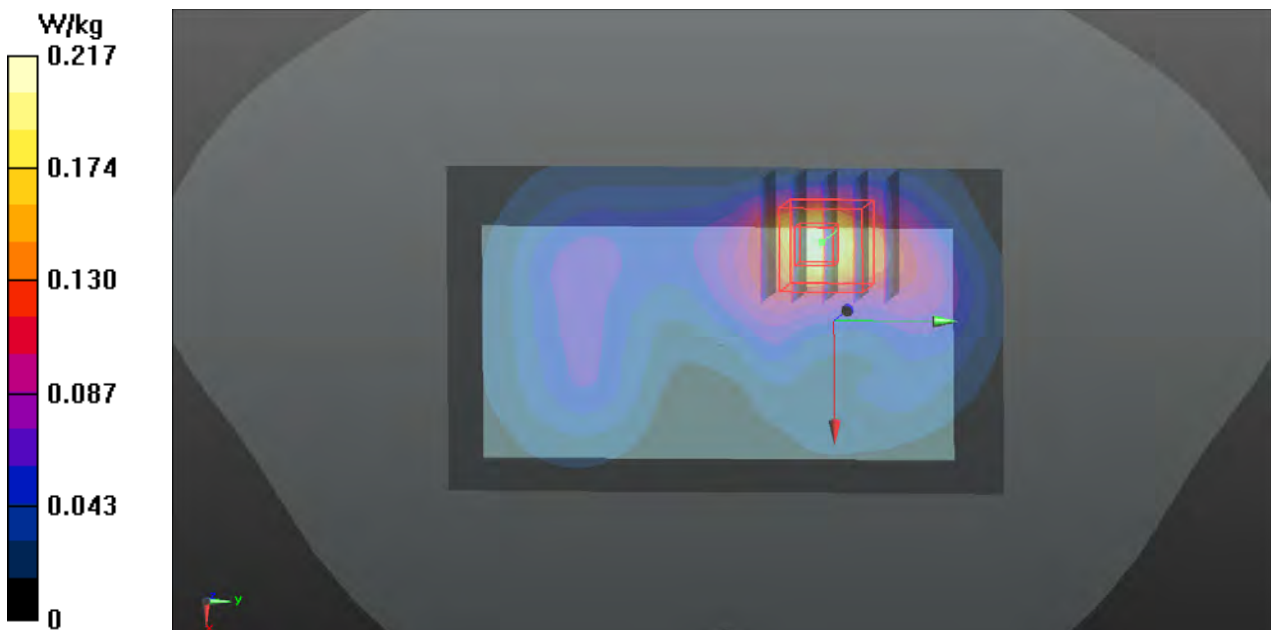

P24 802.11a_Rear Face_1cm_Ch48

DUT: 130223C16

Communication System: WLAN_5G; Frequency: 5240 MHz; Duty Cycle: 1:2.88

Medium: B5G_0312 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.421$ S/m; $\epsilon_r = 47.539$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(5.15, 5.15, 5.15); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch48/Area Scan (81x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.185 W/kg


Ch48/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 0.907 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

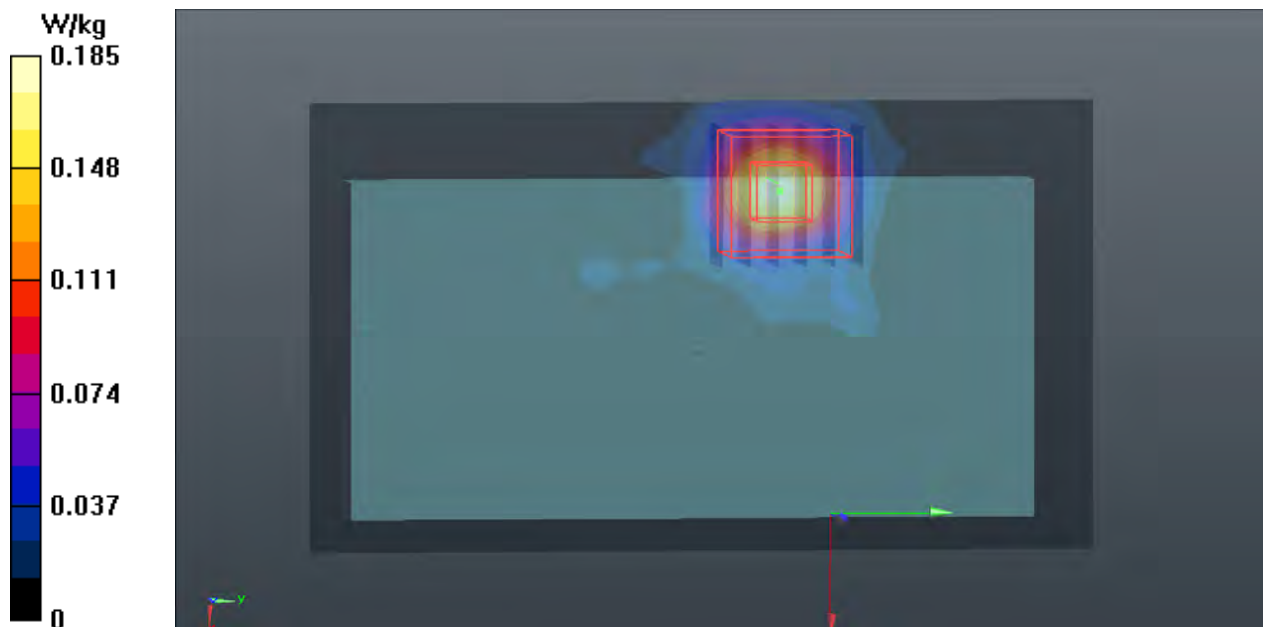

P25 802.11a_Rear Face_1cm_Ch52

DUT: 130223C16

Communication System: WLAN_5G; Frequency: 5260 MHz; Duty Cycle: 1:2.6

Medium: B5G_0312 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.445$ S/m; $\epsilon_r = 47.525$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(4.94, 4.94, 4.94); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch52/Area Scan (121x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0902 W/kg


Ch52/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.296 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

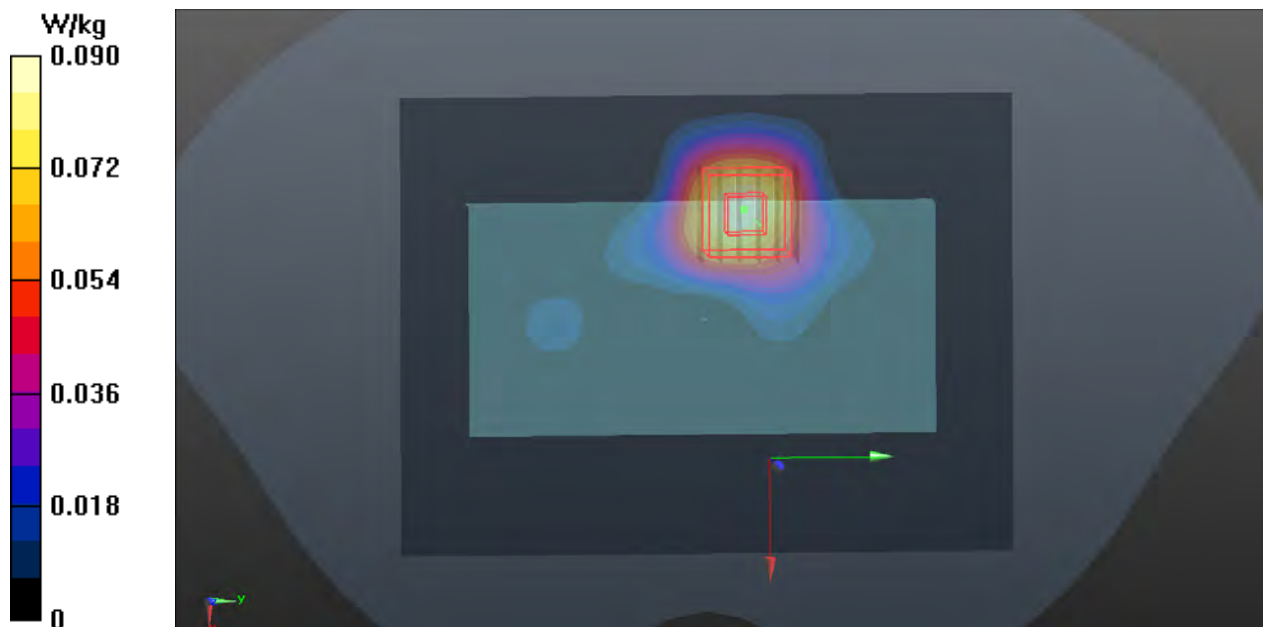

P26 802.11a_Rear Face_1cm_Ch140

DUT: 130223C16

Communication System: WLAN_5G; Frequency: 5700 MHz; Duty Cycle: 1:2.79

Medium: B5G_0312 Medium parameters used: $f = 5700$ MHz; $\sigma = 6.057$ S/m; $\epsilon_r = 46.674$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(4.46, 4.46, 4.46); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch140/Area Scan (121x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.314 W/kg

Ch140/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.556 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.226 W/kg



P27 802.11a_Rear Face_1cm_Ch157

DUT: 130223C16

Communication System: WLAN_5G; Frequency: 5785 MHz; Duty Cycle: 1:1.23

Medium: B5G_0312 Medium parameters used: $f = 5785$ MHz; $\sigma = 6.18$ S/m; $\epsilon_r = 46.486$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.3 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(4.72, 4.72, 4.72); Calibrated: 2013/02/20;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013/01/16
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch157/Area Scan (121x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.857 W/kg


Ch157/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.353 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.625 W/kg

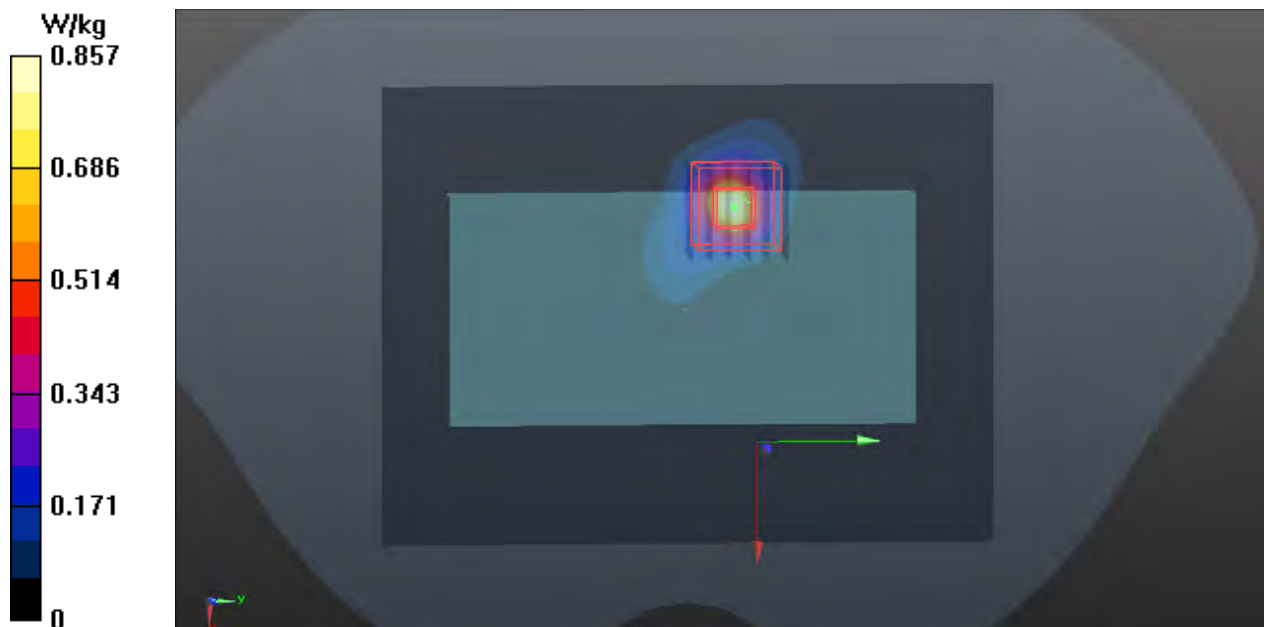

P4: GSM850_GPRS8_Rear Face_1cm_Ch189

DUT: 130223C16

Communication System: GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: B835_0314 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 56.697$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.1 °C; Liquid Temperature : 20.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(9.94, 9.94, 9.94); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch189/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.478 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.616 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.475 W/kg

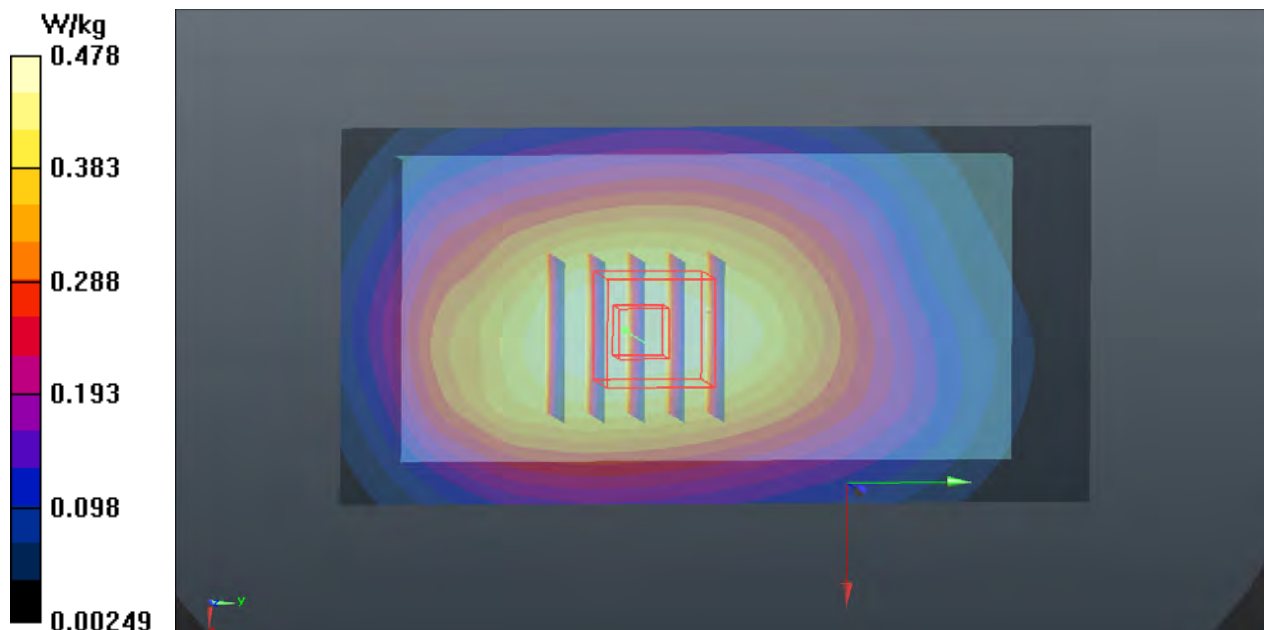

P29 GSM1900_GPRS8_Bottom Side_1cm_Ch661

DUT: 130223C16

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: B1900_0314 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 51.953$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch661/Area Scan (151x81x1): Interpolated grid: dx=0.4000 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.784 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.301 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.951 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.747 W/kg

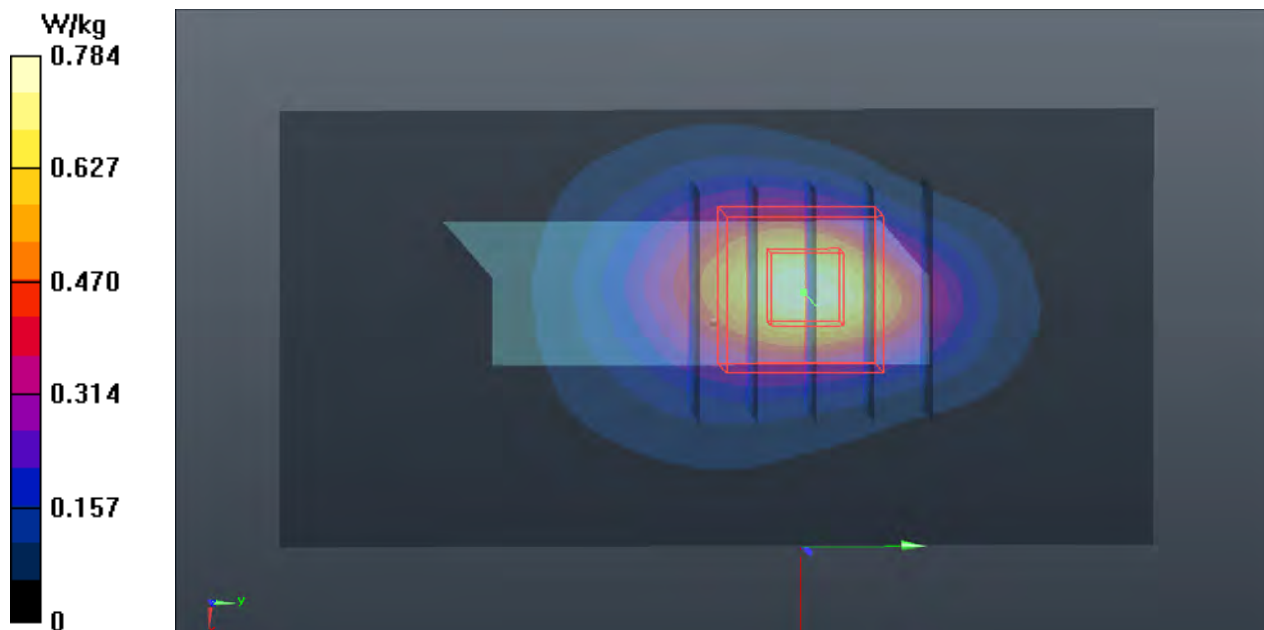

P30 WCDMA II_RMC12.2K_Bottom Side_1cm_Ch9538

DUT: 130223C16

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900_0314 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.554$ S/m; $\epsilon_r = 51.851$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch9538/Area Scan (151x81x1): Interpolated grid: dx=0.4000 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.969 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.126 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 0.914 W/kg

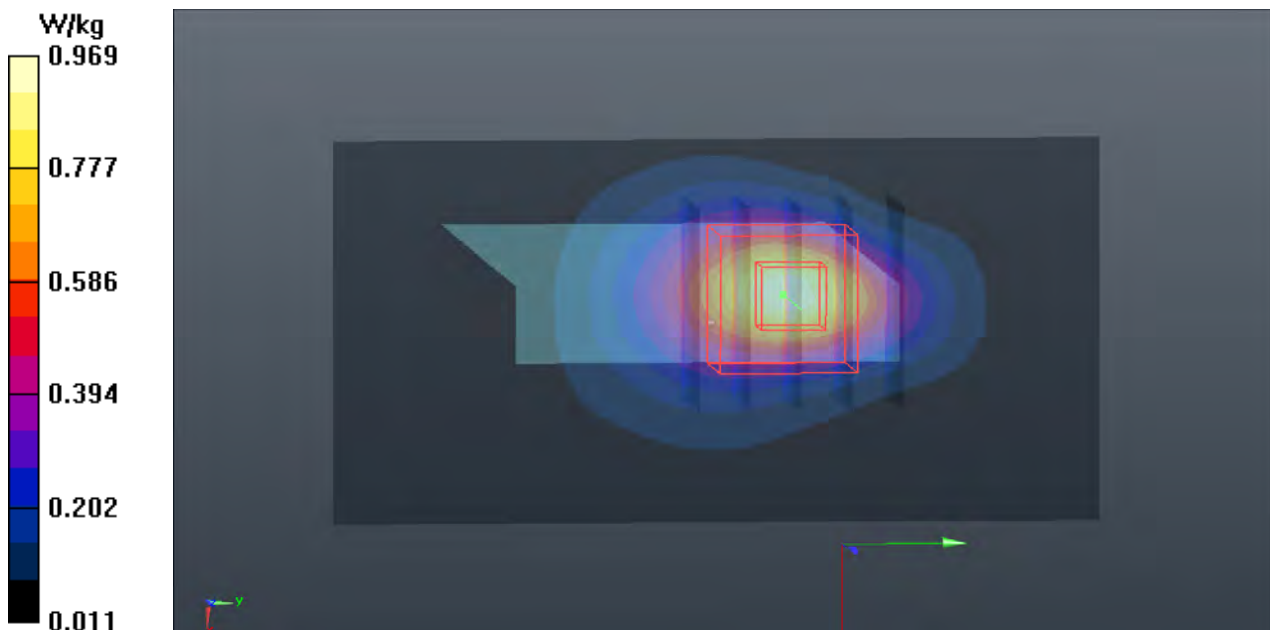

P53 CDMA2000 BC0_RC3+SO32_Rear Face_1cm_Ch1013**DUT: 130223C16**

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: B835_0305 Medium parameters used: $f = 825$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.81$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3864; ConvF(9.94, 9.94, 9.94); Calibrated: 2012/07/19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/05
- Phantom: SAM Phantom_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch1013/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.895 W/kg

Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.869 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.552 W/kg

Maximum value of SAR (measured) = 0.878 W/kg


Ch1013/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.869 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.999 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.388 W/kg

Maximum value of SAR (measured) = 0.855 W/kg

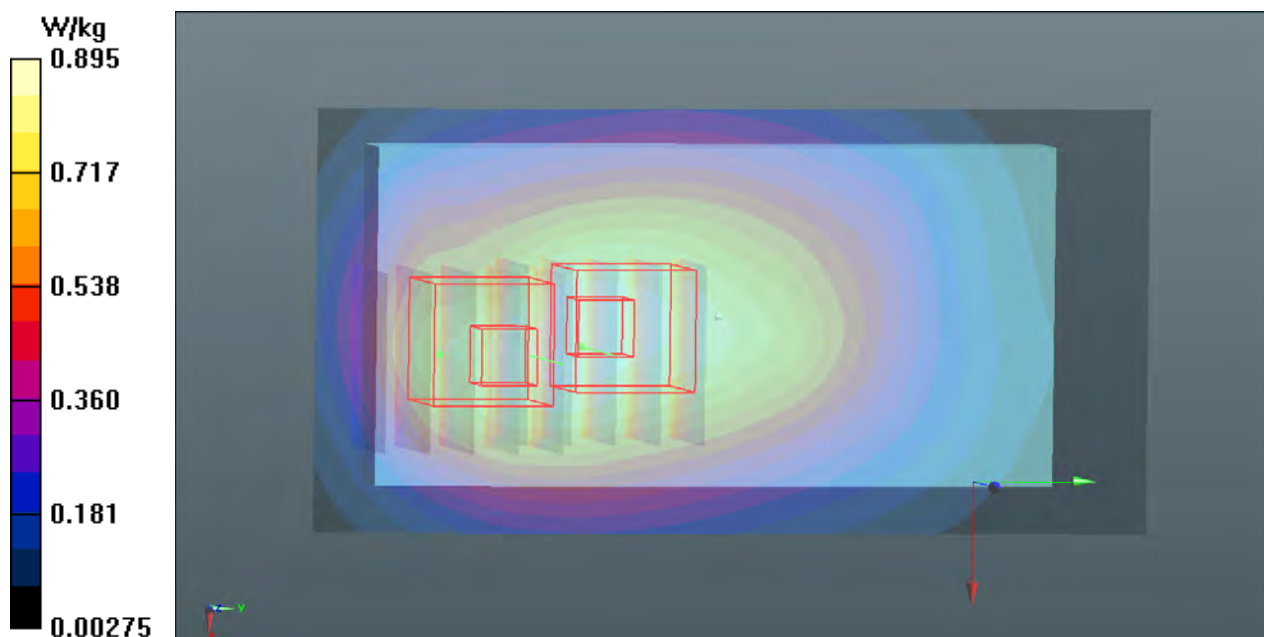

P32 CDMA2000 BC1_RC3+SO32_Bottom Side_1cm_Ch1175

DUT: 130223C16

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1
 Medium: B1900_0305 Medium parameters used: $f = 1909$ MHz; $\sigma = 1.563$ S/m; $\epsilon_r = 51.197$; $\rho = 1000$ kg/m³
 Ambient Temperature : 21.8 °C; Liquid Temperature : 20.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(6.94, 6.94, 6.94); Calibrated: 2012/10/26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2012/04/27
- Phantom: SAM Phantom_Left; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

Ch1175/Area Scan (91x61x1): Interpolated grid: dx=0.4000 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.72 W/kg

Ch1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 28.401 V/m; Power Drift = 0.126 dB
 Peak SAR (extrapolated) = 2.02 W/kg
SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.588 W/kg
 Maximum value of SAR (measured) = 1.62 W/kg

