



**RADIATED SPURIOUS EMISSIONS PORTIONS OF  
FCC CFR47 PART 22 SUBPART H  
FCC CFR47 PART 24 SUBPART E  
CERTIFICATION TEST REPORT  
FOR**

**Dual Band 1xRTT CDMA with Bluetooth**

**MODEL NUMBER: E4255**

**FCC ID: V65E4255**

**REPORT NUMBER: 11U13905-3**

**ISSUE DATE: AUGUST 4, 2011**

*Prepared for*

**KYOCERA COMMUNICATIONS, INC.  
9520 TOWNE CENTER DRIVE  
SAN DIEGO, CA 92121, USA**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (UL CCS)  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
---	08/04/11	Initial Issue	T. Chan

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>4</b>
<b>2. TEST METHODOLOGY</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
<b>5. EQUIPMENT UNDER TEST</b>	<b>6</b>
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. SOFTWARE AND FIRMWARE	6
5.4. WORST-CASE CONFIGURATION AND MODE	6
5.5. DESCRIPTION OF TEST SETUP	8
<b>6. TEST AND MEASUREMENT EQUIPMENT</b>	<b>10</b>
<b>7. LIMITS AND RESULTS</b>	<b>11</b>
7.1. RADIATED OUTPUT POWER	11
7.2. FIELD STRENGTH OF SPURIOUS RADIATION	14
<b>8. SETUP PHOTOS</b>	<b>17</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** KYOCERA COMMUNICATIONS, INC.  
9520 TOWNE CENTER DRIVE  
SAN DIEGO, CA 92121, USA

**EUT DESCRIPTION:** Dual Band 1xRTT CDMA with Bluetooth

**MODEL:** E4255

**SERIAL NUMBER:** 2684354578167222935

**DATE TESTED:** AUGUST 1 - 4, 2011


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H AND 24E	PASS(Radiated Portion)

Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For UL CCS By:

Tested By:



---

THU CHAN  
ENGINEERING MANAGER  
UL CCS

---

MENGISTU MEKURIA  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47 Part 22, and FCC CFR Part 24.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth featured dual band CDMA Phone that manufactured by Kyocera Corporations.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter maximum peak ERP and average EIRP output powers are as follows:

824 to 849 MHz Authorized Band

Frequency Range (MHz)	Modulation	ERP Output Power (dBm)	ERP Output Power (mW)
Low CH - 824.70	CDMA2000	30.94	1241.7
Mid CH - 836.52		32.46	1762.0
High CH - 848.31		30.82	1207.8

1850 to 1910 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Output Power (dBm)	EIRP Output Power (mW)
Low CH - 1851.25	CDMA2000	26.87	486.4
Mid CH - 1880.00		26.86	485.3
High CH - 1908.75		26.03	400.9

### 5.3. SOFTWARE AND FIRMWARE

The EUT is linked with Agilent Communication Test Set.

### 5.4. WORST-CASE CONFIGURATION AND MODE

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT was investigated on X, Y, and Z Positions, and the worst position among X, Y, and Z with an AC Adapter and headset. After the investigations the worst-cases were turned out to be Y position with AC/DC adapter and headset for both cell and PCS bands.

## PROCEDURE USED TO ESTABLISH TEST SIGNAL

### **3G-CDMA2000 1xRTT**

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
CDMA2000 Mobil Test	B.10.11, L

#### 1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 55
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps  
> R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 2  
> Network ID (NID) > 0

Once "Active Cell" show "Connected " then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

Worst-case Measurement Result @ Low, Middle and High Channel

Worst-case Measurement Result for Low, Middle and High Channel under Radio Configuration RC3 and Service Option 55.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Kyocera	SCP-31ADT	SSW 2001	N/A
Headset	N/A	N/A	N/A	N/A

### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	NA
2	DC	1	DC	Un-shielded	2m	NA
3	Jack	1	Headset	Un-shielded	2m	NA
4	RF in/Out	1	Horn	Shielded	2m	NA

### TEST SETUP

The EUT is a CDMA phone and is tested as a standalone configuration. Communications Test Set is used to link the device under test.



**SETUP DIAGRAM FOR TESTS**

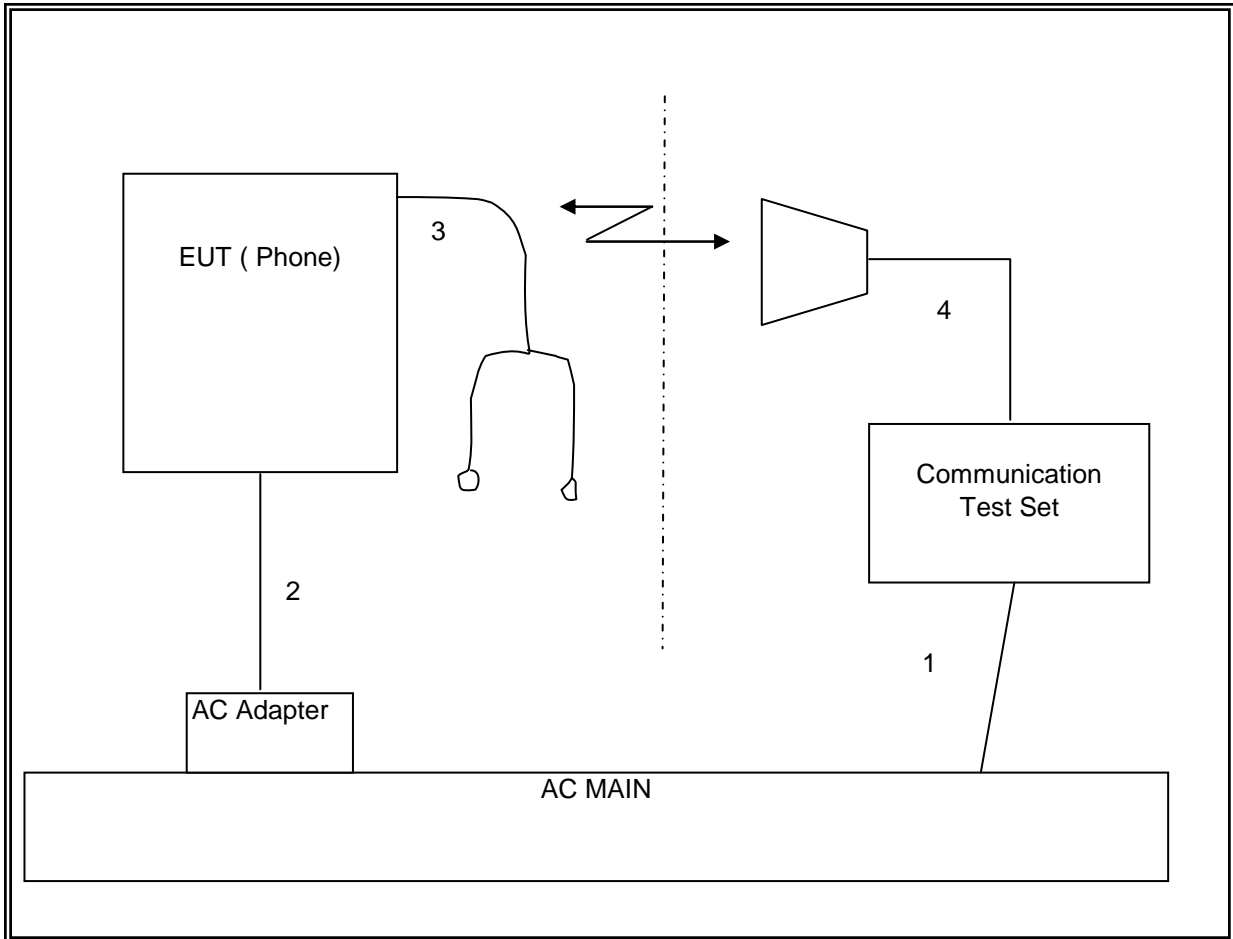

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	1/19/2011	4/28/2012
Communications Test Set	Rohde & Schwarz	CMU200	A0U268074	6/4/2011	CNR
Antenna, Horn, 18 GHz	EMCO	3115	C00945	6/29/2011	6/29/2012
Antenna, Horn, 18 GHz	EMCO	3115	C01218	CNR	CNR
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	40371	07/16/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	7/12/2011	7/12/2012
Dipole	EMCO	3121C-DB4	00-22117	7/17/11	7/16/12
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	--	CNR	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02686	CNR	CNR
Signal Generator, 20 GHz	Agilent / HP	83732B	C00774	7/14/2010	7/14/2012

## **7. LIMITS AND RESULTS**

### **7.1. RADIATED OUTPUT POWER**

#### **LIMITS**

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(b) & RSS133 § 6.4 Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

#### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 2.2.17

#### **RESULTS**

**CELL OUTPUT POWER (ERP)**

High Frequency Substitution Measurement Compliance Certification Services Chamber A								
<b>Company:</b>		KYOCERA						
<b>Project #:</b>		11U13905						
<b>Date:</b>		08/04/11						
<b>Test Engineer:</b>		MENGISTU MEKURIA						
<b>Configuration:</b>		EUT ALONE						
<b>Mode:</b>		TX, CELL BAND CDMA MODE						
<b>Test Equipment:</b>								
Receiving: Sunol T122, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 193961002) Warehouse.								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
824.70	31.44	V	0.5	0.0	30.94	38.5	-7.5	
824.70	21.13	H	0.5	0.0	20.63	38.5	-17.8	
836.52	32.96	V	0.5	0.0	32.46	38.5	-6.0	
836.52	22.86	H	0.5	0.0	22.36	38.5	-16.1	
848.31	31.32	V	0.5	0.0	30.82	38.5	-7.6	
848.31	20.86	H	0.5	0.0	20.36	38.5	-18.1	
Rev. 3.17.11								

**PCS OUTPUT POWER (EIRP)**

High Frequency Fundamental Measurement Compliance Certification Services Chamber A								
<b>Company:</b>		KYOCERA						
<b>Project #:</b>		11U13905						
<b>Date:</b>		08/04/11						
<b>Test Engineer:</b>		MENGI STU MEKURIA						
<b>Configuration:</b>		EUT ALONE						
<b>Mode:</b>		TX, PCS BAND CDMA MODE						
<b>Test Equipment:</b>								
Receiving: Horn T72, and Camber A SMA Cables								
Substitution: Horn T60 Substitution, 4ft SMA Cable (193961002) Warehouse								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
1.851	14.3	V	0.85	8.01	21.43	33.0	-11.6	
1.851	19.7	H	0.85	8.01	26.87	33.0	-6.1	
1.880	12.9	V	0.85	8.13	20.15	33.0	-12.9	
1.880	19.6	H	0.85	8.13	26.86	33.0	-6.1	
1.909	12.5	V	0.85	8.13	19.76	33.0	-13.2	
1.909	18.8	H	0.85	8.13	26.03	33.0	-7.0	
Rev. 3.17.11								

## **7.2. FIELD STRENGTH OF SPURIOUS RADIATION**

### **LIMIT**

§22.917 (e) and §24.238 (a), RSS-132 § 4.5.1, & RSS-133 § 6.5.1 (a) (i) & (b): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 22.917 (b) & FCC 24.238 (b)(g)(1)(2)

### **RESULTS**

**CELL SPURIOUS & HARMONIC (ERP)**

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b>		KYOCERA							
<b>Project #:</b>		11U13905							
<b>Date:</b>		08/01/11							
<b>Test Engineer:</b>		STEVE AGUILAR							
<b>Configuration:</b>		EUT WITH AC ADAPTER AND HEADPHONE							
<b>Mode:</b>		TX, CELL BAND CDMA MODE							
<b>Chamber</b>		<b>Pre-amplifier</b>			<b>Filter</b>		<b>Limit</b>		
5m Chamber A		T144 8449B			Filter 1		FCC Part 22		
f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
<b>Low Channel (824.7MHz)</b>									
1.649	-4.7	V	3.0	38.2	1.0	-41.8	-13.0	-28.8	
2.474	-20.4	V	3.0	37.5	1.0	-56.9	-13.0	-43.9	
3.299	-19.1	V	3.0	37.1	1.0	-55.2	-13.0	-42.2	
1.649	-8.1	H	3.0	38.2	1.0	-45.2	-13.0	-32.2	
2.474	-18.6	H	3.0	37.5	1.0	-55.1	-13.0	-42.1	
3.299	-22.0	H	3.0	37.1	1.0	-58.2	-13.0	-45.2	
<b>Mid Channel (836.52MHz)</b>									
1.673	-3.6	V	3.0	38.1	1.0	-40.7	-13.0	-27.7	
2.510	-7.2	V	3.0	37.5	1.0	-43.7	-13.0	-30.7	
3.346	-21.8	V	3.0	37.1	1.0	-57.9	-13.0	-44.9	
1.673	-5.2	H	3.0	38.1	1.0	-42.3	-13.0	-29.3	
2.510	-12.2	H	3.0	37.5	1.0	-48.6	-13.0	-35.6	
3.346	-23.2	H	3.0	37.1	1.0	-59.3	-13.0	-46.3	
<b>High Channel (848.31MHz)</b>									
1.697	4.0	V	3.0	38.1	1.0	-33.1	-13.0	-20.1	
2.545	-18.0	V	3.0	37.5	1.0	-54.5	-13.0	-41.5	
3.393	-21.4	V	3.0	37.1	1.0	-57.5	-13.0	-44.5	
1.697	0.6	H	3.0	38.1	1.0	-36.5	-13.0	-23.5	
2.545	-11.8	H	3.0	37.5	1.0	-48.3	-13.0	-35.3	
3.393	-21.9	H	3.0	37.1	1.0	-58.0	-13.0	-45.0	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

**PCS SPURIOUS & HARMONIC (EIRP)**

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b>		KYOCERA							
<b>Project #:</b>		11U13905							
<b>Date:</b>		8/1/2011 TO 8/2/2011							
<b>Test Engineer:</b>		STEVE AGUILAR							
<b>Configuration:</b>		EUT WITH AC ADAPTER AND HEADPHONE							
<b>Mode:</b>		TX, PCS BAND CDMA MODE							
<b>Chamber</b>		<b>Pre-amplifier</b>			<b>Filter</b>		<b>Limit</b>		
5m Chamber A		T144 8449B			Filter 1		Part 24		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1851.25MHz</b>									
3.702	0.8	V	3.0	36.8	1.0	-35.0	-13.0	-22.0	
5.554	0.7	V	3.0	36.3	1.0	-34.6	-13.0	-21.6	
7.405	-13.6	V	3.0	36.6	1.0	-49.1	-13.0	-36.1	
3.702	-0.7	H	3.0	36.8	1.0	-36.5	-13.0	-23.5	
5.554	-3.0	H	3.0	36.3	1.0	-38.3	-13.0	-25.3	
7.405	-12.7	H	3.0	36.6	1.0	-48.3	-13.0	-35.3	
<b>Mid Ch, 1880MHz</b>									
3.760	2.3	V	3.0	36.8	1.0	-33.5	-13.0	-20.5	
5.640	-10.8	V	3.0	36.3	1.0	-46.1	-13.0	-33.1	
7.520	-14.2	V	3.0	36.6	1.0	-49.8	-13.0	-36.8	
3.760	-4.8	H	3.0	36.8	1.0	-40.6	-13.0	-27.6	
5.640	-11.4	H	3.0	36.3	1.0	-46.7	-13.0	-33.7	
9.400	-12.1	H	3.0	37.0	1.0	-48.1	-13.0	-35.1	
<b>High Ch, 1908.75MHz</b>									
3.818	1.8	V	3.0	36.7	1.0	-33.9	-13.0	-20.9	
5.726	-13.8	V	3.0	36.3	1.0	-49.1	-13.0	-36.1	
7.635	-14.1	V	3.0	36.6	1.0	-49.7	-13.0	-36.7	
3.818	-2.5	H	3.0	36.7	1.0	-38.2	-13.0	-25.2	
5.726	-16.3	H	3.0	36.3	1.0	-51.6	-13.0	-38.6	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									