

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Report No.: RFBFJZ-WTW-P22040598-2

FCC ID: V65E4811

Model No.: E4811

Series Model: E4811NC (refer to item 3.1 for more details)

Received Date: 2022/4/22

Test Date: 2022/5/20 ~ 2022/6/9

Issued Date: 2022/7/22

Applicant: Kyocera Corporation % Kyocera International, Inc.

Address: 8611 Balboa Avenue, San Diego, CA 92123

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

Test Location (2): B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

FCC Registration / 788550 / TW0003

Designation Number: 427177 / TW0011

Approved by: _____

Jeremy Lin

, **Date:** _____

2022/7/22

Jeremy Lin / Project Engineer

This test report consists of 48 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vera Huang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	7
3.3 Channel List	8
3.4 Test Mode Applicability and Tested Channel Detail	8
3.5 Duty Cycle of Test Signal	9
3.6 Description of Support Units	10
3.6.1 Configuration of System under Test	10
4 Test Instruments	11
4.1 RF Output Power	11
4.2 Power Spectral Density	11
4.3 6 dB Bandwidth	11
4.4 Conducted Out of Band Emissions	11
4.5 AC Power Conducted Emissions	12
4.6 Unwanted Emissions below 1 GHz	13
4.7 Unwanted Emissions above 1 GHz	14
5 Limits of Test Items	15
5.1 RF Output Power	15
5.2 Power Spectral Density	15
5.3 6 dB Bandwidth	15
5.4 Conducted Out of Band Emissions	15
5.5 AC Power Conducted Emissions	15
5.6 Unwanted Emissions below 1 GHz	16
5.7 Unwanted Emissions above 1 GHz	16
6 Test Arrangements	17
6.1 RF Output Power	17
6.1.1 Test Setup	17
6.1.2 Test Procedure	17
6.2 Power Spectral Density	17
6.2.1 Test Setup	17
6.2.2 Test Procedure	17
6.3 6 dB Bandwidth	18
6.3.1 Test Setup	18
6.3.2 Test Procedure	18
6.4 Conducted Out of Band Emissions	18
6.4.1 Test Setup	18
6.4.2 Test Procedure	18
6.5 AC Power Conducted Emissions	19
6.5.1 Test Setup	19
6.5.2 Test Procedure	19
6.6 Unwanted Emissions below 1 GHz	20
6.6.1 Test Setup	20
6.6.2 Test Procedure	21
6.7 Unwanted Emissions above 1 GHz	22
6.7.1 Test Setup	22
6.7.2 Test Procedure	22
7 Test Results of Test Item	23
7.1 RF Output Power	23



7.2	Power Spectral Density	24
7.3	6 dB Bandwidth	26
7.4	Conducted Out of Band Emissions	28
7.5	AC Power Conducted Emissions	31
7.6	Unwanted Emissions below 1 GHz	33
7.7	Unwanted Emissions above 1 GHz.....	35
7.8	Band Edge Measurement.....	44
8	Pictures of Test Arrangements	47
9	Information of the Testing Laboratories	48



Release Control Record

Issue No.	Description	Date Issued
RFBFJZ-WTW-P22040598-2	Original release.	2022/7/22

1 Certificate

Product: Feature Phone

Brand: Kyocera

Test Model: E4811

Series Model: E4811NC (refer to item 3.1 for more details)

Sample Status: Identical Prototype

Applicant: Kyocera Corporation % Kyocera International, Inc.

Test Date: 2022/5/20 ~ 2022/6/9

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -6.99 dB at 0.35400 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -3.97 dB at 51.26 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -1.04 dB at 4824.00 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.79 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 1 GHz	2.02 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.01 dB
	18 GHz ~ 40 GHz	1.15 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Feature Phone
Brand	Kyocera
Test Model	E4811
Series Model	E4811NC
Status of EUT	Identical Prototype
Power Supply Rating	5 Vdc (from adapter) 3.8 Vdc (from Li-ion battery)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 72.2 Mbps
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11
Output Power	82.414 mW (19.16 dBm)

Note:

- All models are listed as below. The model of E4811 was chosen for final test.

Brand	Model	Difference
Kyocera	E4811	with Camera function
	E4811NC	without Camera function

- The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	Kyocera	SCP-47ADT	I/P: 100-240 Vac, 50/60 Hz, 200 mA O/P: 5 Vdc, 1000 mA
Battery	Kyocera	SCP-73LBPS	3.8 Vdc, 1770 mAh, 6.8Wh
USB Cable	Kyocera	SCP-24SDC	1 m shielded Type A to Type C USB cable w/o core

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

- The antenna information is listed as below.

Gain (dBi)	Antenna Type	Connector Type
-1.05	Internal fixed monopole	N/A

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

- The EUT provides 1 completed transmitter and 1 receiver.

Modulation Mode	Tx Function
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX

3.3 Channel List

11 channels are provided for 802.11b, 802.11g, and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan in these ways and find the worst case as a representative test condition.
Worst Case:	Z-axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
AC Power Conducted Emissions	802.11b	6	DBPSK	1Mb/s
Unwanted Emissions below 1 GHz	802.11b	6	DBPSK	1Mb/s
Unwanted Emissions above 1 GHz	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0
RF Output Power / Power Spectral Density	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0
6 dB Bandwidth / Conducted Out of Band Emissions	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0

Note: For unwanted emissions below 1 GHz and AC power conducted emission test items chosen the worst maximum power.


3.5 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.
Duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $0.992 \text{ ms} / 1.032 \text{ ms} \times 100\% = 96.1\%$, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.17 \text{ dB}$

802.11g: Duty cycle = $1.39 \text{ ms} / 1.458 \text{ ms} \times 100\% = 95.3\%$, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.21 \text{ dB}$

802.11n (HT20): Duty cycle = $1.307 \text{ ms} / 1.38 \text{ ms} \times 100\% = 94.7\%$, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.24 \text{ dB}$

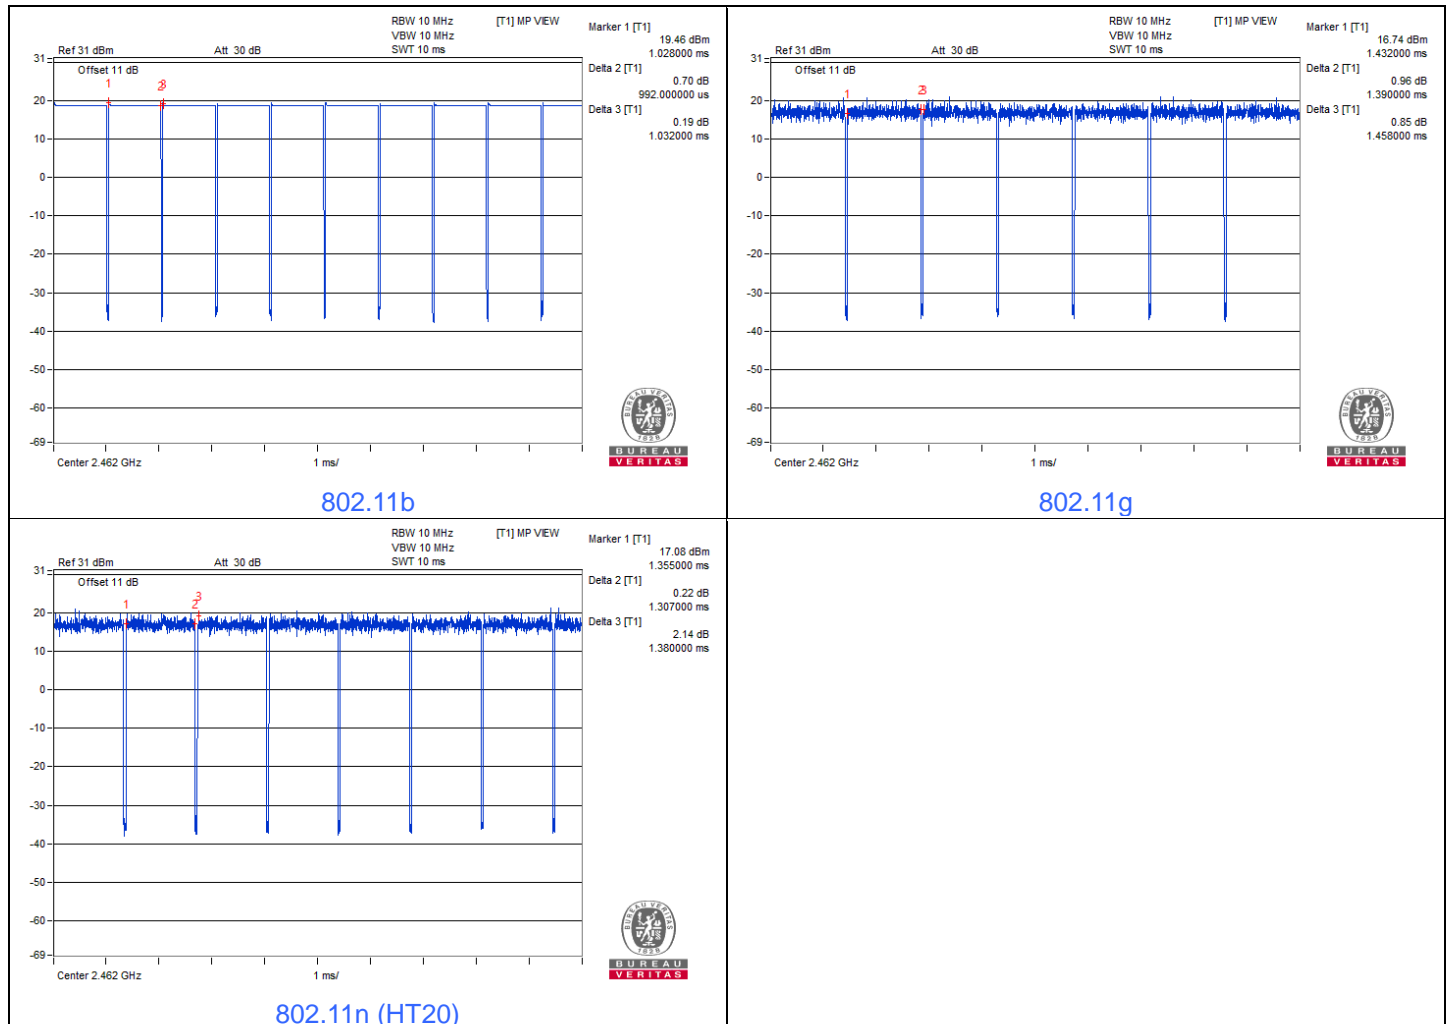

3.6 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Earphone	Funkey	FK-130102	NA	N/A	Supplied by applicant

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	1	No	0	Accessory of the EUT
2.	Earphone Cable	1	1	No	0	Supplied by applicant

Note: The core(s) is(are) originally attached to the cable(s).

3.6.1 Configuration of System under Test

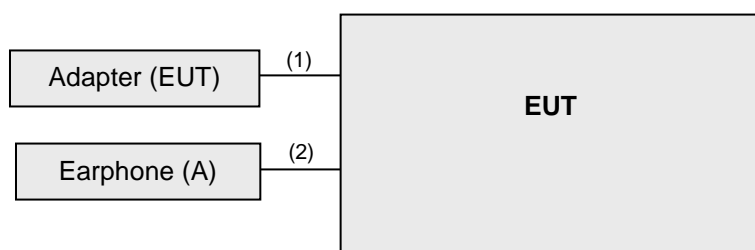

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	2022/1/18	2023/1/17
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004/ MY55190007/MY55210005	2021/7/12	2022/7/11
Wideband Power Sensor(N1923A) KEYSIGHT	N1923A	MY58020002	2022/1/17	2023/1/16

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2022/6/7

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSV40	100979	2022/3/25	2023/3/24

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2022/6/7

4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
DC LISN R&S	ESH3-Z6	100219	2021/7/25	2022/7/24
		844950/018	2021/7/25	2022/7/24
DC-LISN SCHWARZBECK MESS- ELETRONIK	NNBM 8126G	8126G-069	2021/11/10	2022/11/9
LISN R&S	ESH2-Z5	100100	2022/2/17	2023/2/16
	ESH3-Z5	100312	2021/9/17	2022/9/16
	ENV216	100072	2021/6/16	2022/6/15
RF Coaxial Cable WORKEN	5D-FB	Cable-cond2-01	2021/9/4	2022/9/3
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
Test Receiver R&S	ESR3	102783	2021/12/20	2022/12/19
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2021/8/20	2022/8/19

Notes:

1. The test was performed in HY - Conduction 2.
2. Tested Date: 2022/6/9

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB9168	9168-616	2021/10/27	2022/10/26
Loop Antenna TESEQ	HLA 6121	45745	2021/7/21	2022/7/20
Loop Antenna EMCI	EM-6879	269	2021/9/16	2022/9/15
Preamplifier Agilent	310N	187226	2021/6/17	2022/6/16
Pre-amplifier EMCI	EMC001340	980201	2021/9/15	2022/9/14
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2022/1/15	2023/1/14
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4	2021/6/17	2022/6/16
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2021/6/17	2022/6/16
Software BV ADT	ADT_Radiated_V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2021/9/1	2022/8/31
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2022/6/2

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	8	N/A	N/A
Horn Antenna ETS-Lindgren	3117	00143293	2021/11/14	2022/11/13
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170241	2021/10/26	2022/10/25
Pre-Amplifier EMCI	EMC 184045	980116	2021/10/5	2022/10/4
Preamplifier Agilent	83017A	MY39501373	2021/6/17	2022/6/16
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4	2021/6/17	2022/6/16
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2021/6/17	2022/6/16
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2022/1/15	2023/1/14
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2022/1/15	2023/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2021/9/1	2022/8/31
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2022/5/20

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup




6.1.2 Test Procedure

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to at least 1.5 times the OBW.
- d. Set RBW to: 3 kHz.
- e. Set VBW $\geq 3 \times$ RBW.
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- h. Sweep time = auto couple.
- i. Do not use sweep triggering. Allow sweep to "free run".
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.

Note: If Duty cycle $< 98\%$, Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

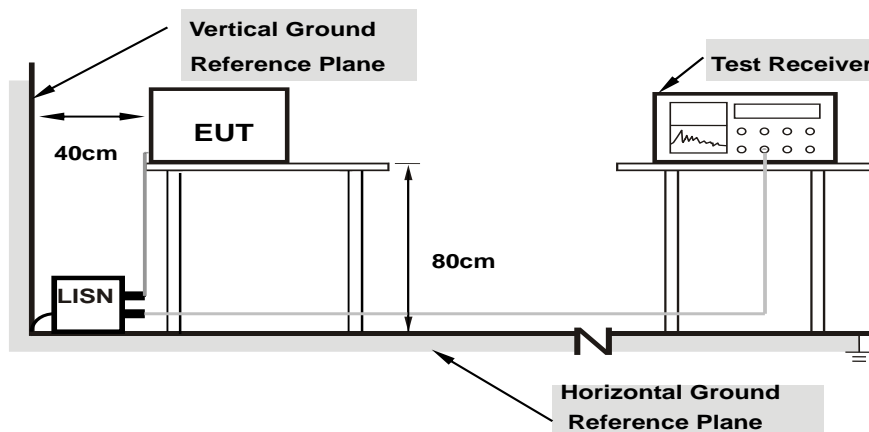

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


Note:

The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

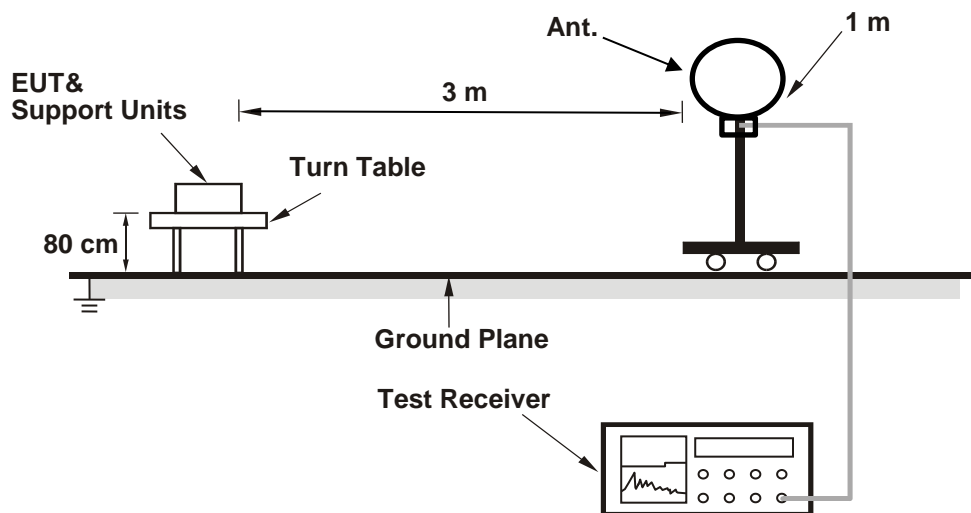

For Radiated emission above 30 MHz

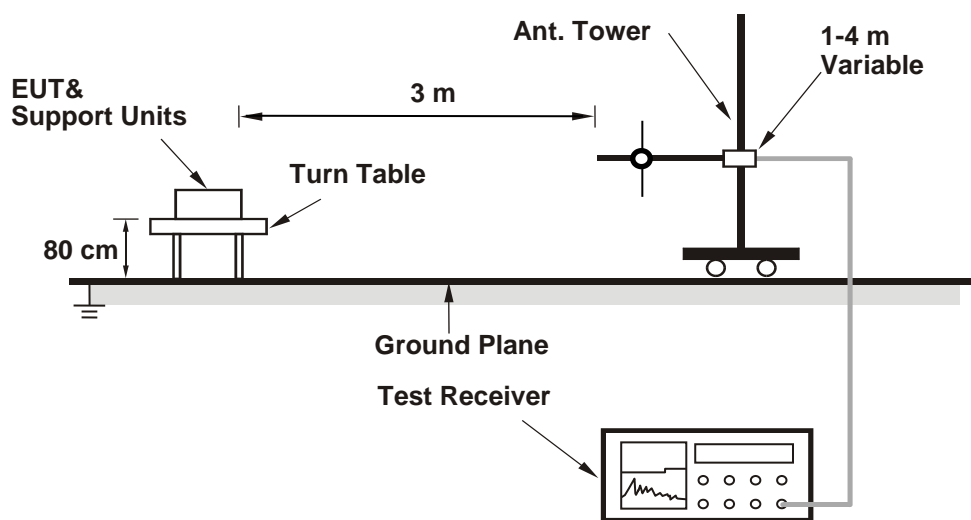

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.


Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

For Radiated emission above 1 GHz

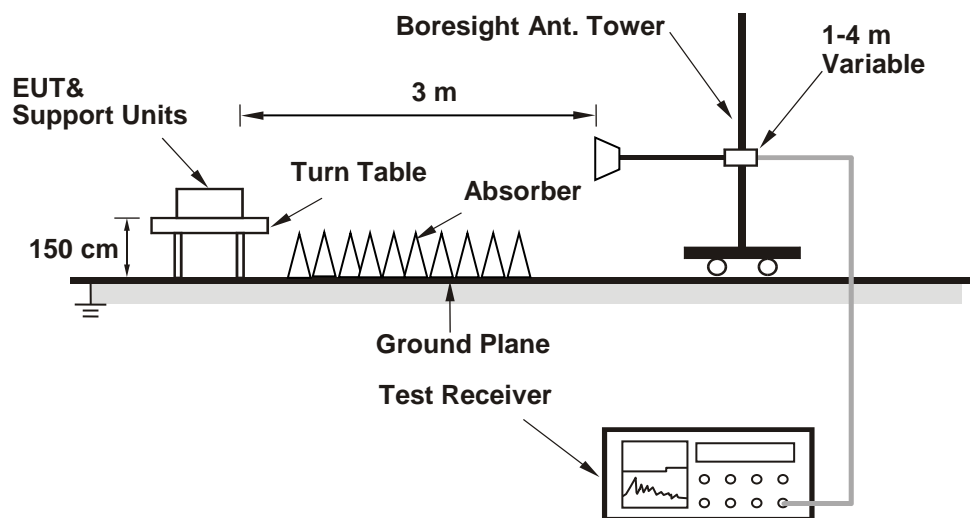

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.8 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Chun Wu
--------------	---------	---------------------------	--------------	------------	---------

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	76.913	18.86	30	Pass
6	2437	82.414	19.16	30	Pass
11	2462	82.035	19.14	30	Pass

Note: The antenna gain is -1.05 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	23.933	13.79	30	Pass
6	2437	51.88	17.15	30	Pass
11	2462	26.122	14.17	30	Pass

Note: The antenna gain is -1.05 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	25.704	14.10	30	Pass
6	2437	49.545	16.95	30	Pass
11	2462	25.061	13.99	30	Pass

Note: The antenna gain is -1.05 dBi < 6 dBi, so the output power limit shall not be reduced.

7.2 Power Spectral Density

Input Power:	3.8 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Chun Wu
--------------	---------	---------------------------	--------------	------------	---------

802.11b

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)	Duty Factor (dB)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-12.06	0.17	-11.89	8.00	Pass
6	2437	-11.77	0.17	-11.60	8.00	Pass
11	2462	-11.78	0.17	-11.61	8.00	Pass

Note: The antenna gain is -1.05 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)	Duty Factor (dB)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-20.91	0.21	-20.70	8.00	Pass
6	2437	-17.64	0.21	-17.43	8.00	Pass
11	2462	-20.19	0.21	-19.98	8.00	Pass

Note: The antenna gain is -1.05 dBi < 6 dBi, so the power density limit shall not be reduced.


802.11n (HT20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)	Duty Factor (dB)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-21.49	0.24	-21.25	8.00	Pass
6	2437	-18.01	0.24	-17.77	8.00	Pass
11	2462	-21.35	0.24	-21.11	8.00	Pass


Note: The antenna gain is -1.05 dBi < 6 dBi, so the power density limit shall not be reduced.




Spectrum Plot of Maximum Value

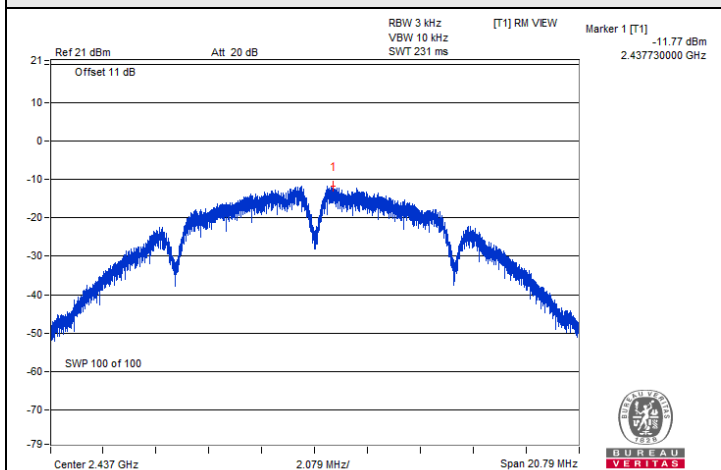

802.11b : CH 6

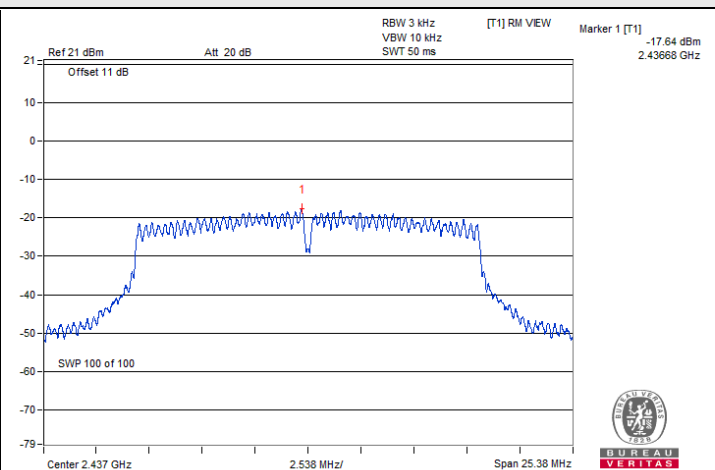

802.11g : CH 6

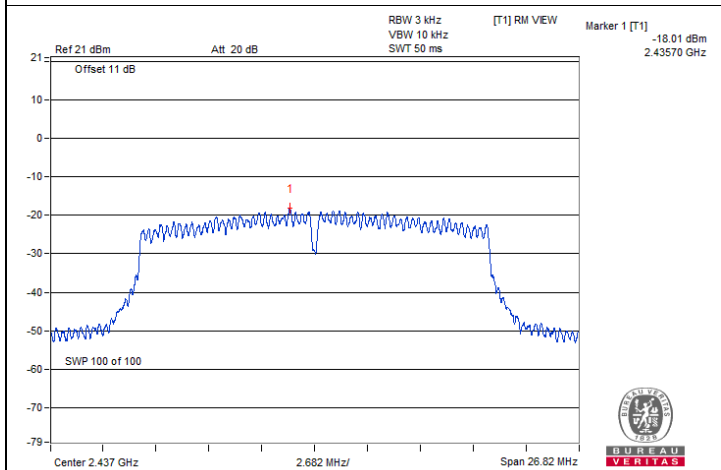

802.11n (HT20) : CH 6

7.3 6 dB Bandwidth

Input Power:	3.8 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Chun Wu
--------------	---------	---------------------------	--------------	------------	---------

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	8.09	0.5	Pass
6	2437	9.05	0.5	Pass
11	2462	8.59	0.5	Pass




802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	15.49	0.5	Pass
6	2437	15.35	0.5	Pass
11	2462	15.20	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	15.20	0.5	Pass
6	2437	15.18	0.5	Pass
11	2462	15.49	0.5	Pass

Spectrum Plot of Minimum Value

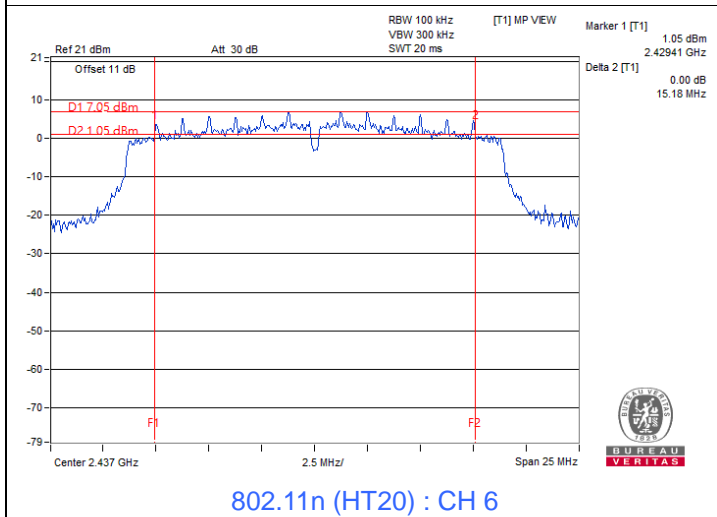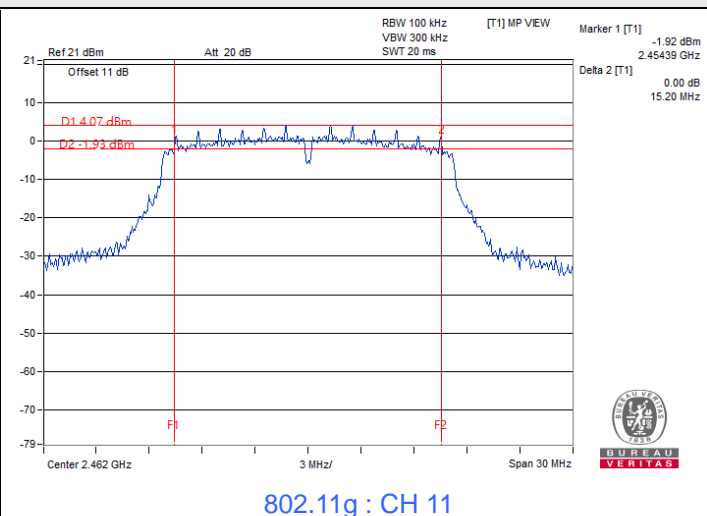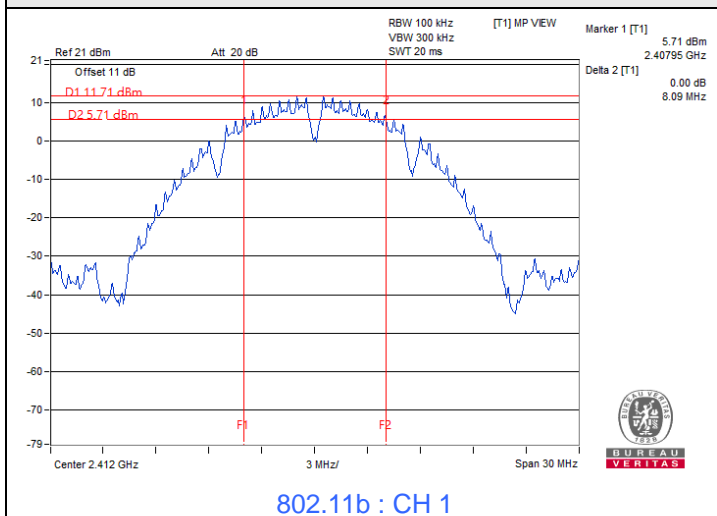

7.4 Conducted Out of Band Emissions


Input Power:	3.8 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Chun Wu
--------------	---------	---------------------------	--------------	------------	---------

802.11b







802.11g

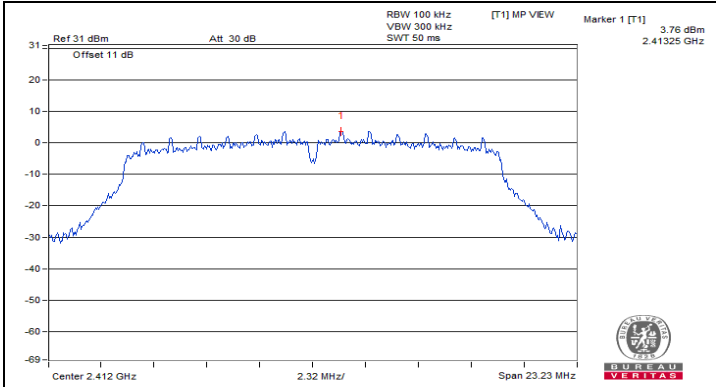


CH 1

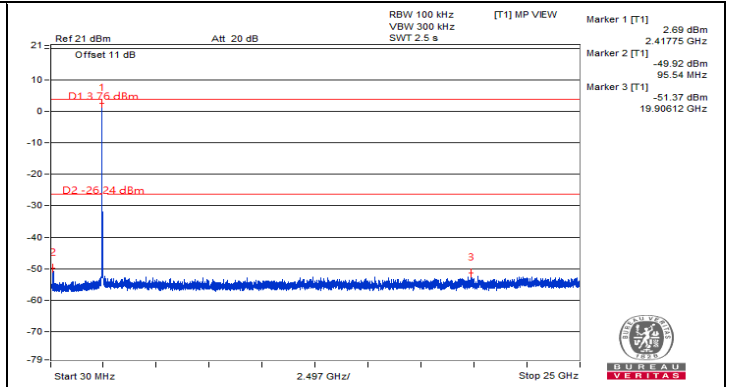


CH 1

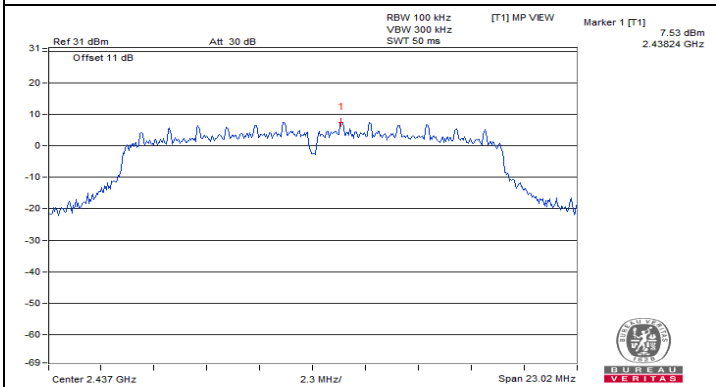


CH 6

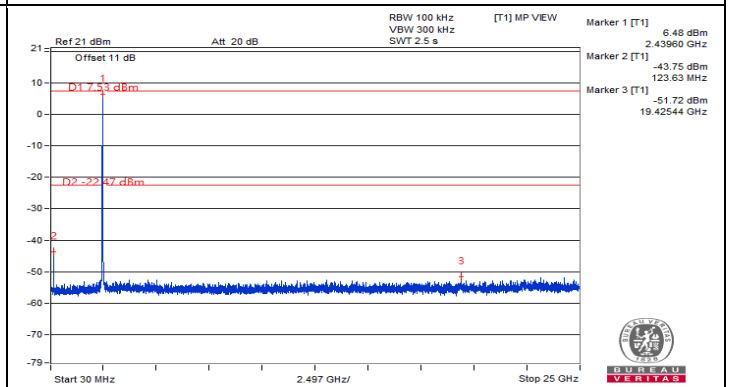


CH 6

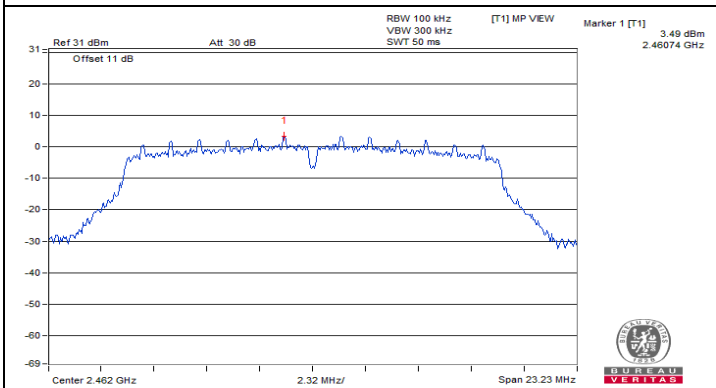


CH 11

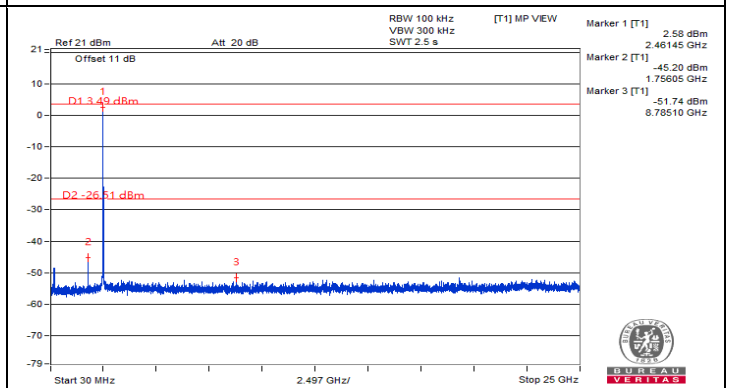

CH 11

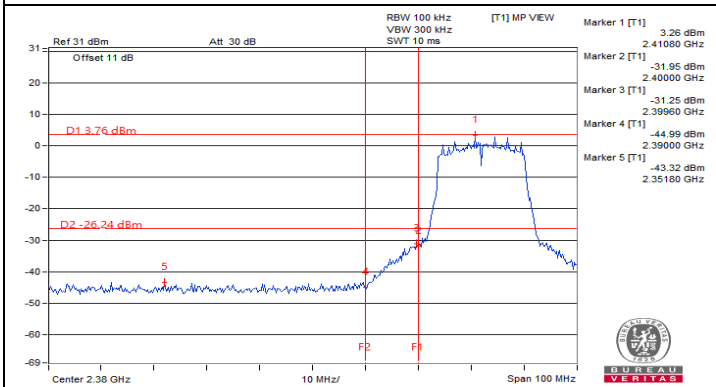

CH 1 Band edge

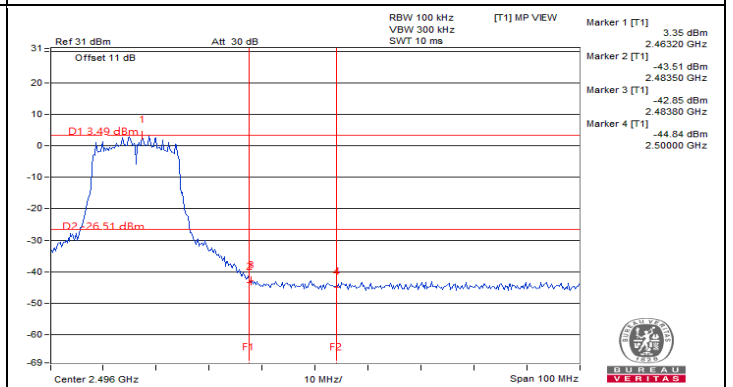

CH 11 Band edge



802.11n (HT20)




7.5 AC Power Conducted Emissions

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Thomas Cheng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.32600	10.21	34.06	27.77	44.27	37.98	59.55	49.55	-15.28	-11.57
2	0.39000	10.24	31.73	21.88	41.97	32.12	58.06	48.06	-16.09	-15.94
3	0.69000	10.27	25.45	16.14	35.72	26.41	56.00	46.00	-20.28	-19.59
4	1.98600	10.37	23.29	14.31	33.66	24.68	56.00	46.00	-22.34	-21.32
5	5.51800	10.42	33.96	20.88	44.38	31.30	60.00	50.00	-15.62	-18.70
6	15.93800	10.54	22.54	13.76	33.08	24.30	60.00	50.00	-26.92	-25.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

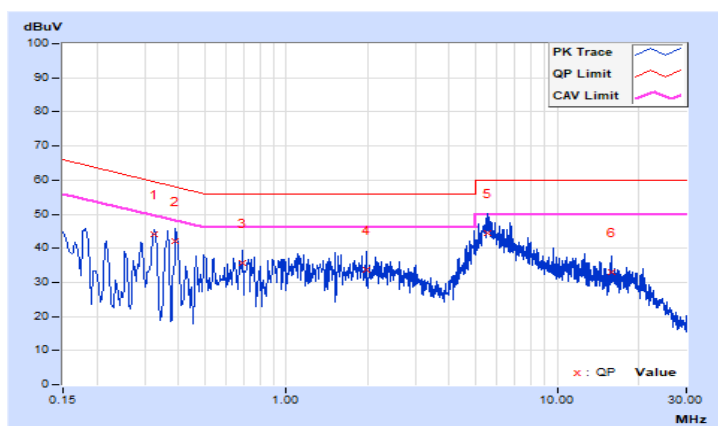


RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Thomas Cheng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.35400	10.24	37.78	31.64	48.02	41.88	58.87	48.87	-10.85	-6.99
2	0.37800	10.25	31.30	25.88	41.55	36.13	58.32	48.32	-16.77	-12.19
3	0.57796	10.27	26.08	20.07	36.35	30.34	56.00	46.00	-19.65	-15.66
4	1.51400	10.34	26.48	18.26	36.82	28.60	56.00	46.00	-19.18	-17.40
5	5.52200	10.43	34.13	23.12	44.56	33.55	60.00	50.00	-15.44	-16.45
6	18.99400	10.72	24.42	9.79	35.14	20.51	60.00	50.00	-24.86	-29.49

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

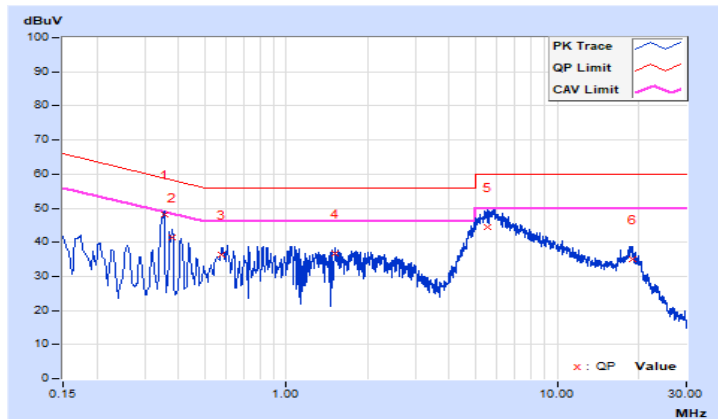


7.6 Unwanted Emissions below 1 GHz

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	92.04	30.32 QP	43.50	-13.18	1.12 H	157	52.94	-22.62
2	189.63	24.75 QP	43.50	-18.75	2.41 H	84	44.10	-19.35
3	211.80	26.15 QP	43.50	-17.35	1.31 H	216	46.05	-19.90
4	372.55	39.58 QP	46.00	-6.42	1.36 H	119	53.52	-13.94
5	442.16	31.78 QP	46.00	-14.22	1.15 H	305	43.69	-11.91
6	815.25	23.29 QP	46.00	-22.71	2.04 H	127	28.89	-5.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

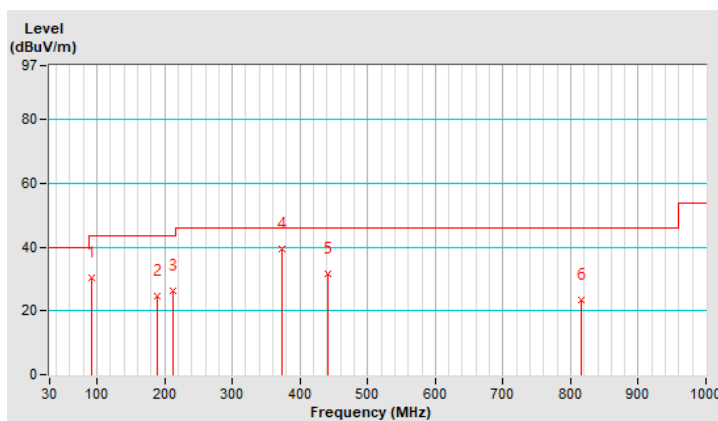


RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.26	36.03 QP	40.00	-3.97	2.63 V	38	53.23	-17.20
2	88.74	29.66 QP	43.50	-13.84	2.32 V	161	52.55	-22.89
3	192.59	20.84 QP	43.50	-22.66	2.11 V	105	40.43	-19.59
4	375.29	36.29 QP	46.00	-9.71	2.36 V	204	50.22	-13.93
5	524.81	27.11 QP	46.00	-18.89	1.14 V	209	37.63	-10.52
6	706.44	21.06 QP	46.00	-24.94	2.26 V	147	28.41	-7.35

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

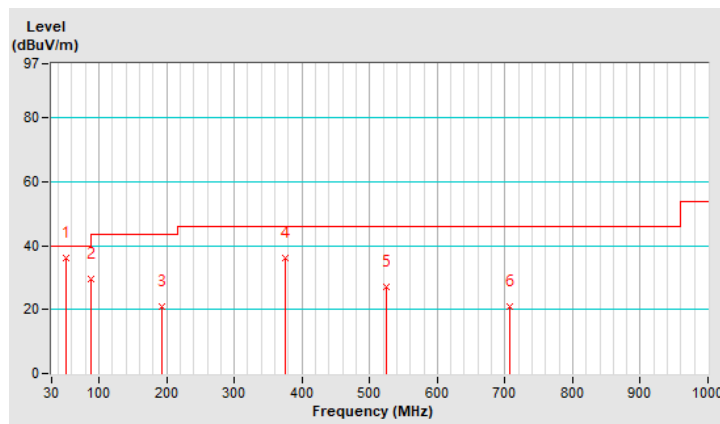

7.7 Unwanted Emissions above 1 GHz

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.61 PK	74.00	-21.39	1.78 H	159	16.15	36.46
2	2390.00	41.53 AV	54.00	-12.47	1.78 H	159	5.07	36.46
3	*2412.00	102.48 PK			1.78 H	159	65.89	36.59
4	*2412.00	100.41 AV			1.78 H	159	63.82	36.59
5	4824.00	55.19 PK	74.00	-18.81	2.19 H	105	46.17	9.02
6	4824.00	52.96 AV	54.00	-1.04	2.19 H	105	43.94	9.02
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.02 PK	74.00	-21.98	1.81 V	96	15.56	36.46
2	2390.00	41.33 AV	54.00	-12.67	1.81 V	96	4.87	36.46
3	*2412.00	100.74 PK			1.81 V	96	64.15	36.59
4	*2412.00	98.59 AV			1.81 V	96	62.00	36.59
5	4824.00	51.70 PK	74.00	-22.30	1.84 V	100	42.68	9.02
6	4824.00	48.13 AV	54.00	-5.87	1.84 V	100	39.11	9.02

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.54 PK			1.78 H	159	67.82	36.72
2	*2437.00	102.19 AV			1.78 H	159	65.47	36.72
3	4874.00	50.42 PK	74.00	-23.58	2.19 H	105	40.93	9.49
4	4874.00	47.98 AV	54.00	-6.02	2.19 H	105	38.49	9.49

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.33 PK			1.81 V	96	65.61	36.72
2	*2437.00	100.50 AV			1.81 V	96	63.78	36.72
3	4874.00	49.17 PK	74.00	-24.83	1.84 V	100	39.68	9.49
4	4874.00	42.98 AV	54.00	-11.02	1.84 V	100	33.49	9.49

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.95 PK			1.55 H	107	68.15	36.80
2	*2462.00	102.48 AV			1.55 H	107	65.68	36.80
3	2483.50	55.40 PK	74.00	-18.60	1.55 H	107	18.56	36.84
4	2483.50	47.34 AV	54.00	-6.66	1.55 H	107	10.50	36.84
5	4924.00	50.76 PK	74.00	-23.24	2.15 H	104	41.22	9.54
6	4924.00	45.60 AV	54.00	-8.40	2.15 H	104	36.06	9.54
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.61 PK			1.81 V	96	66.81	36.80
2	*2462.00	101.14 AV			1.81 V	96	64.34	36.80
3	2483.50	54.84 PK	74.00	-19.16	1.81 V	96	18.00	36.84
4	2483.50	47.46 AV	54.00	-6.54	1.81 V	96	10.62	36.84
5	4924.00	49.92 PK	74.00	-24.08	1.45 V	100	40.38	9.54
6	4924.00	44.55 AV	54.00	-9.45	1.45 V	100	35.01	9.54

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.34 PK	74.00	-18.66	1.78 H	159	18.88	36.46
2	2390.00	43.92 AV	54.00	-10.08	1.78 H	159	7.46	36.46
3	*2412.00	102.72 PK			1.78 H	159	66.13	36.59
4	*2412.00	95.45 AV			1.78 H	159	58.86	36.59
5	4824.00	49.10 PK	74.00	-24.90	1.03 H	300	40.08	9.02
6	4824.00	41.60 AV	54.00	-12.40	1.03 H	300	32.58	9.02

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.22 PK	74.00	-21.78	1.81 V	96	15.76	36.46
2	2390.00	42.18 AV	54.00	-11.82	1.81 V	96	5.72	36.46
3	*2412.00	100.83 PK			1.81 V	96	64.24	36.59
4	*2412.00	93.66 AV			1.81 V	96	57.07	36.59
5	4824.00	48.66 PK	74.00	-25.34	1.04 V	111	39.64	9.02
6	4824.00	41.57 AV	54.00	-12.43	1.04 V	111	32.55	9.02

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.62 PK			1.94 H	106	69.90	36.72
2	*2437.00	99.58 AV			1.94 H	106	62.86	36.72
3	4874.00	49.06 PK	74.00	-24.94	1.20 H	220	39.57	9.49
4	4874.00	41.64 AV	54.00	-12.36	1.20 H	220	32.15	9.49
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.20 PK			1.81 V	96	67.48	36.72
2	*2437.00	97.48 AV			1.81 V	96	60.76	36.72
3	4874.00	48.18 PK	74.00	-25.82	1.01 V	122	38.69	9.49
4	4874.00	41.42 AV	54.00	-12.58	1.01 V	122	31.93	9.49

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.30 PK			1.55 H	107	65.50	36.80
2	*2462.00	95.36 AV			1.55 H	107	58.56	36.80
3	2483.50	57.99 PK	74.00	-16.01	1.55 H	107	21.15	36.84
4	2483.50	45.70 AV	54.00	-8.30	1.55 H	107	8.86	36.84
5	4924.00	49.14 PK	74.00	-24.86	1.00 H	141	39.60	9.54
6	4924.00	41.57 AV	54.00	-12.43	1.00 H	141	32.03	9.54

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.51 PK			1.81 V	96	64.71	36.80
2	*2462.00	94.53 AV			1.81 V	96	57.73	36.80
3	2483.50	57.63 PK	74.00	-16.37	1.81 V	96	20.79	36.84
4	2483.50	44.51 AV	54.00	-9.49	1.81 V	96	7.67	36.84
5	4924.00	48.86 PK	74.00	-25.14	1.18 V	21	39.32	9.54
6	4924.00	41.41 AV	54.00	-12.59	1.18 V	21	31.87	9.54

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.01 PK	74.00	-13.99	1.78 H	159	23.55	36.46
2	2390.00	46.45 AV	54.00	-7.55	1.78 H	159	9.99	36.46
3	*2412.00	102.50 PK			1.78 H	159	65.91	36.59
4	*2412.00	95.33 AV			1.78 H	159	58.74	36.59
5	4824.00	48.90 PK	74.00	-25.10	1.02 H	110	39.88	9.02
6	4824.00	41.54 AV	54.00	-12.46	1.02 H	110	32.52	9.02

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.23 PK	74.00	-15.77	1.81 V	96	21.77	36.46
2	2390.00	43.33 AV	54.00	-10.67	1.81 V	96	6.87	36.46
3	*2412.00	100.66 PK			1.81 V	96	64.07	36.59
4	*2412.00	93.44 AV			1.81 V	96	56.85	36.59
5	4824.00	48.77 PK	74.00	-25.23	1.11 V	14	39.75	9.02
6	4824.00	41.40 AV	54.00	-12.60	1.11 V	14	32.38	9.02

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.74 PK			1.94 H	106	69.02	36.72
2	*2437.00	98.59 AV			1.94 H	106	61.87	36.72
3	4874.00	49.07 PK	74.00	-24.93	1.14 H	154	39.58	9.49
4	4874.00	41.61 AV	54.00	-12.39	1.14 H	154	32.12	9.49

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.75 PK			1.81 V	96	67.03	36.72
2	*2437.00	96.45 AV			1.81 V	96	59.73	36.72
3	4874.00	48.93 PK	74.00	-25.07	1.45 V	5	39.44	9.49
4	4874.00	41.43 AV	54.00	-12.57	1.45 V	5	31.94	9.49

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.35 PK			1.55 H	107	65.55	36.80
2	*2462.00	95.57 AV			1.55 H	107	58.77	36.80
3	2483.50	61.24 PK	74.00	-12.76	1.55 H	107	24.40	36.84
4	2483.50	46.84 AV	54.00	-7.16	1.55 H	107	10.00	36.84
5	4924.00	49.21 PK	74.00	-24.79	1.00 H	104	39.67	9.54
6	4924.00	41.55 AV	54.00	-12.45	1.00 H	104	32.01	9.54


Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.01 PK			1.81 V	96	64.21	36.80
2	*2462.00	94.70 AV			1.81 V	96	57.90	36.80
3	2483.50	62.00 PK	74.00	-12.00	1.81 V	96	25.16	36.84
4	2483.50	46.60 AV	54.00	-7.40	1.81 V	96	9.76	36.84
5	4924.00	49.05 PK	74.00	-24.95	1.32 V	222	39.51	9.54
6	4924.00	41.47 AV	54.00	-12.53	1.32 V	222	31.93	9.54



Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



7.8 Band Edge Measurement

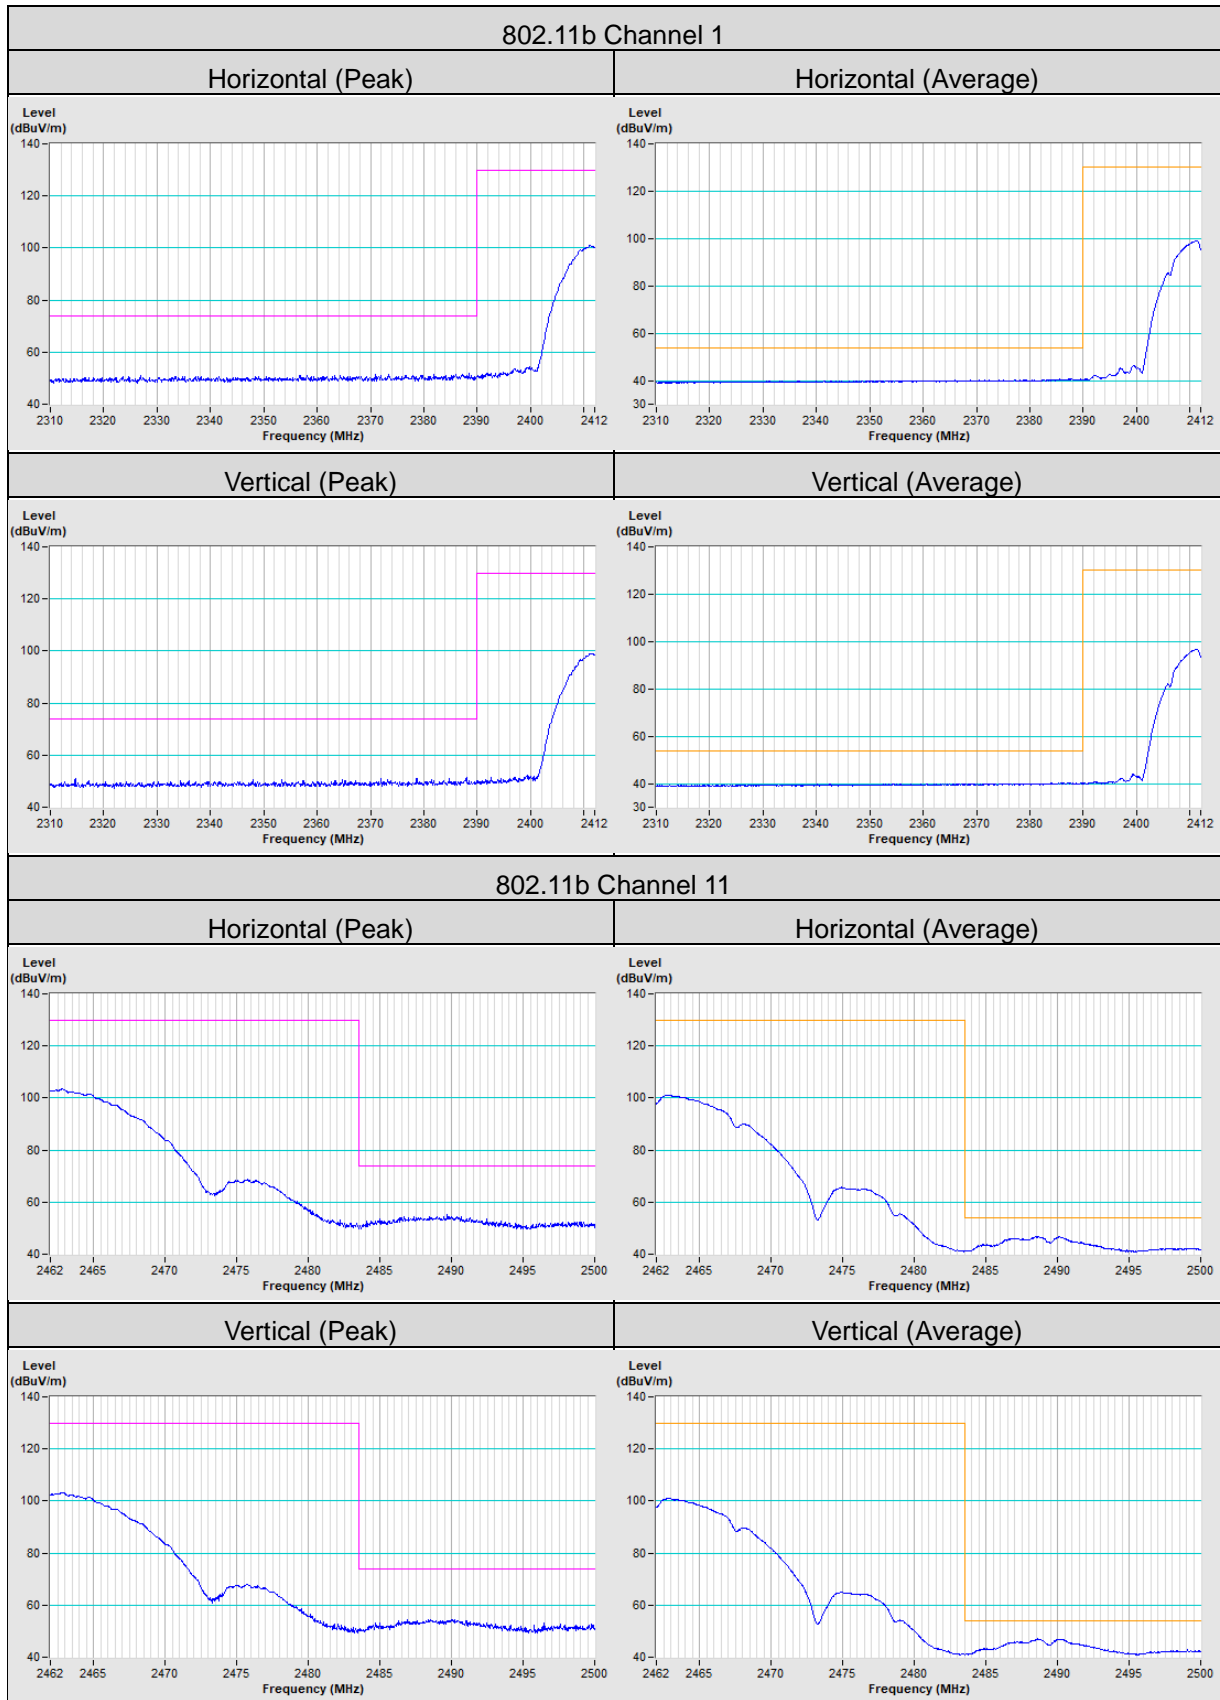

802.11n (HT20) Channel 1

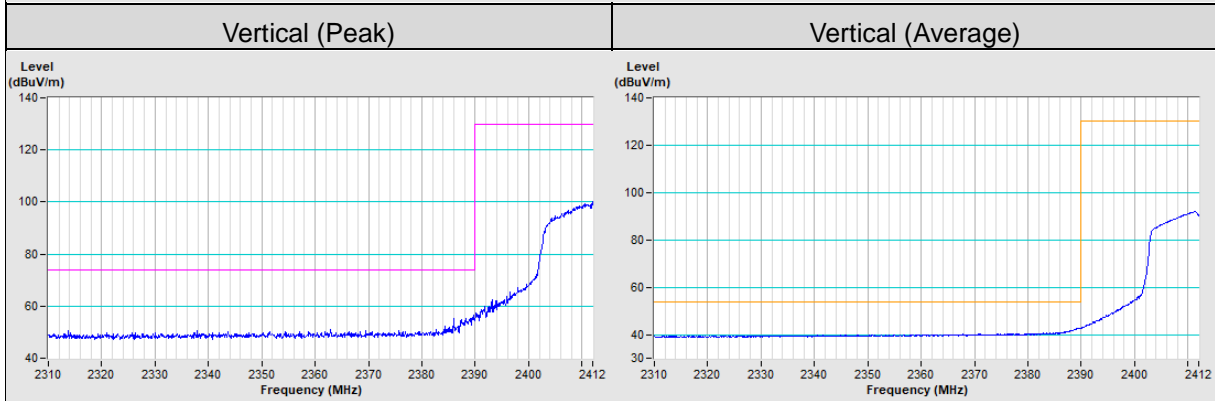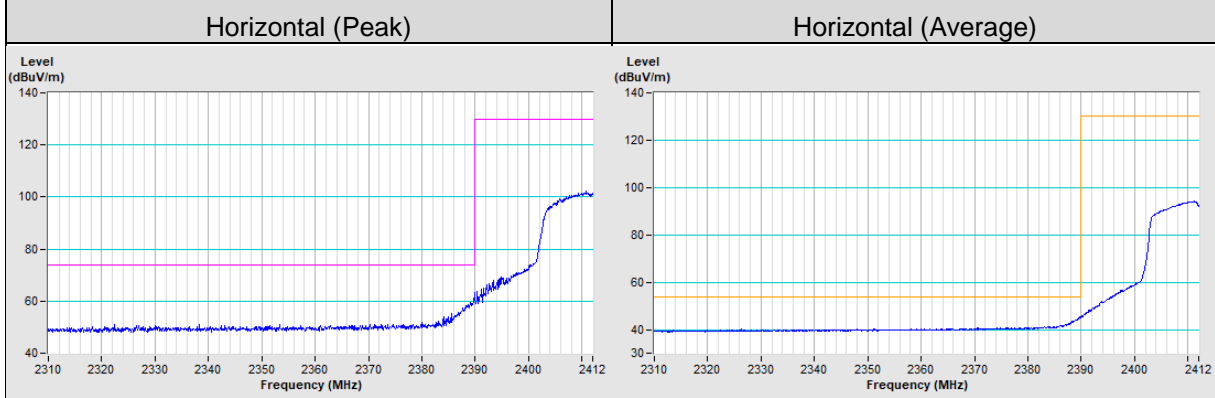

802.11n (HT20) Channel 11

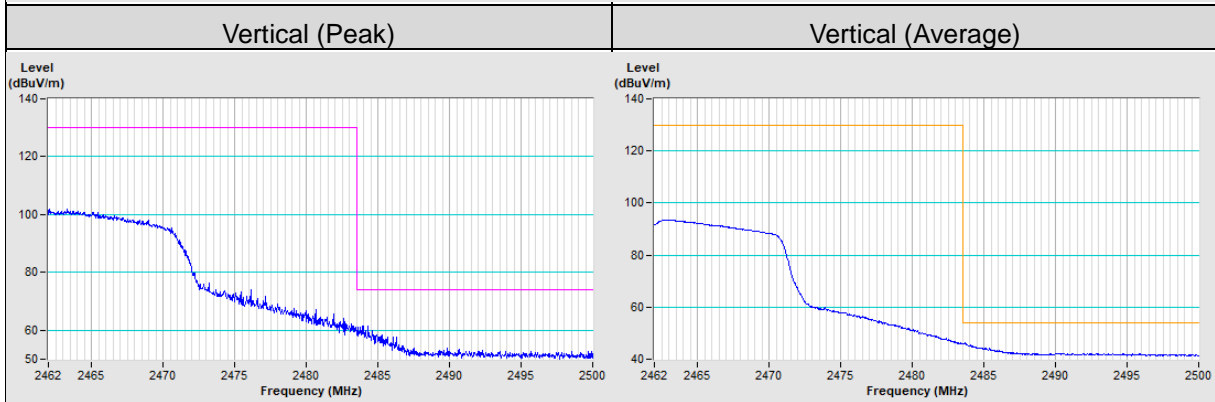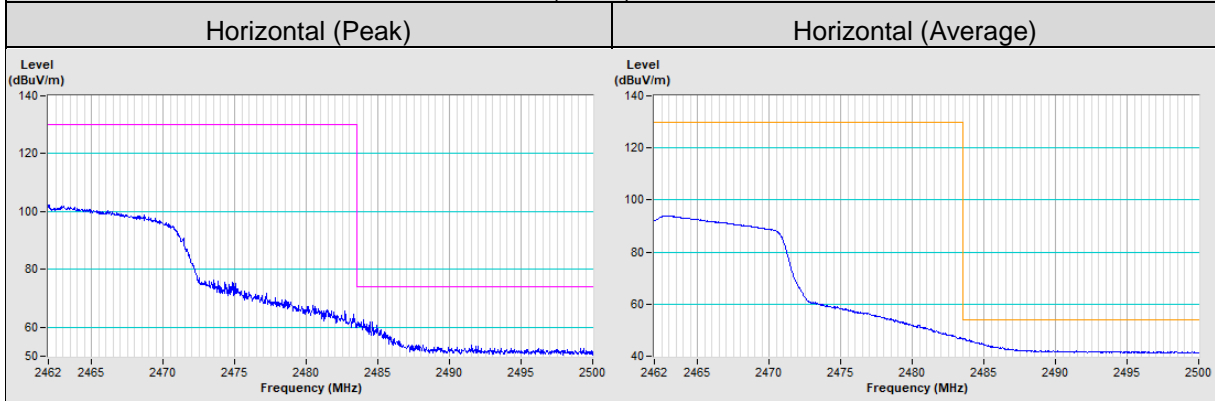

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---