

# SAR Test Report

Report No. : SF200902C02

Applicant : Kyocera Corporation c/o Kyocera International, Inc.

Address : 8611 Balboa Avenue, San Diego, CA 92123

Product : Feature Phone

FCC ID : V65E4830

Brand : Kyocera

Model No. : E4830, E4830NC

Standards : FCC 47 CFR Part 2 (2.1093), IEEE C95.1:1992, IEEE Std 1528:2013  
 KDB 865664 D01 v01r04, KDB 865664 D02 v01r02  
 KDB 248227 D01 v02r02 , KDB 447498 D01 v06  
 KDB 648474 D04 v01r03, KDB 941225 D01 v03r01  
 KDB 941225 D05 v02r05, KDB 941225 D06 v02r01

Sample Received Date : Sep. 09, 2020

Date of Testing : Sep. 21, 2020 ~ Oct. 14, 2020

Lab Address : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location : No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City, Taiwan

**CERTIFICATION:** The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch–Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample’s SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By : Shelly Hsueh  
 Shelly Hsueh / Specialist

Approved By : Gordon Lin  
 Gordon Lin / Manager



FCC Accredited No.: TW0003

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

Release Control Record .....	3
<b>1. Summary of Maximum SAR Value .....</b>	<b>4</b>
<b>2. Description of Equipment Under Test .....</b>	<b>5</b>
<b>3. SAR Measurement System .....</b>	<b>6</b>
3.1 Definition of Specific Absorption Rate (SAR) .....	6
3.2 SPEAG DASY6 System .....	6
3.2.1 Robot .....	7
3.2.2 Probes .....	8
3.2.3 Data Acquisition Electronics (DAE) .....	8
3.2.4 Phantoms .....	8
3.2.5 Device Holder .....	9
3.2.6 System Validation Dipoles .....	10
3.2.7 Power Source .....	10
3.2.8 Tissue Simulating Liquids .....	11
3.3 SAR System Verification .....	13
3.4 SAR Measurement Procedure .....	14
3.4.1 Area Scan and Zoom Scan Procedure .....	14
3.4.2 Volume Scan Procedure .....	15
3.4.3 Power Drift Monitoring .....	16
3.4.4 Spatial Peak SAR Evaluation .....	16
3.4.5 SAR Averaged Methods .....	16
<b>4. SAR Measurement Evaluation .....</b>	<b>17</b>
4.1 EUT Configuration and Setting .....	17
4.2 EUT Testing Position .....	23
4.2.1 Head Exposure Conditions .....	23
4.2.2 Body-worn Accessory Exposure Conditions .....	25
4.2.3 Hotspot Mode Exposure Conditions .....	26
4.3 Tissue Verification .....	27
4.4 System Validation .....	28
4.5 System Verification .....	29
4.6 Maximum Output Power .....	29
4.6.1 Maximum Target Conducted Power .....	29
4.6.2 Measured Conducted Power Result .....	29
4.7 SAR Testing Results .....	30
4.7.1 SAR Test Reduction Considerations .....	30
4.7.2 SAR Results for Head Exposure Condition .....	32
4.7.3 SAR Results for Body-worn Exposure Condition (Test Separation Distance is 15 mm) .....	35
4.7.4 SAR Results for Hotspot Exposure Condition (Test Separation Distance is 10 mm) .....	38
4.7.5 SAR Measurement Variability .....	42
4.7.6 Simultaneous Multi-band Transmission Evaluation .....	43
<b>5. Calibration of Test Equipment .....</b>	<b>44</b>
<b>6. Measurement Uncertainty .....</b>	<b>45</b>
<b>7. Information of the Testing Laboratories .....</b>	<b>46</b>
<b>Appendix A. SAR Plots of System Verification</b>	
<b>Appendix B. SAR Plots of SAR Measurement</b>	
<b>Appendix C. Calibration Certificate for Probe and Dipole</b>	
<b>Appendix D. Photographs of EUT and Setup</b>	
<b>Appendix E. Maximum Target Conducted Power</b>	
<b>Appendix F. Measured Conducted Power Result</b>	
<b>Appendix G. Analysis of Simultaneous Transmission SAR</b>	



**1. Summary of Maximum SAR Value**

Equipment Class	Mode	Highest SAR-1g Head (W/kg)	Highest SAR-1g Body-worn Tested at 15 mm (W/kg)	Highest SAR-1g Hotspot Tested at 10 mm (W/kg)
PCE	WCDMA II	0.56	1.06	1.10
	WCDMA IV	0.60	1.14	1.08
	WCDMA V	0.32	0.76	1.05
	LTE 2	0.59	1.04	0.95
	LTE 5	0.34	0.74	0.98
	LTE 12	0.29	0.49	0.61
	LTE 14	0.44	0.63	0.76
	LTE 66 & 4	0.56	1.10	1.10
DTS	2.4G WLAN	0.06	0.15	0.24
NII	5.2G WLAN	N/A	N/A	N/A
	5.3G WLAN	0.14	0.25	N/A
	5.6G WLAN	0.13	0.23	N/A
	5.8G WLAN	0.12	0.23	N/A
DSS	Bluetooth	0.02	0.03	0.04

Highest Simultaneous Transmission SAR	Highest SAR-1g Head (W/kg)	Highest SAR-1g Body-worn Tested at 15 mm (W/kg)	Highest SAR-1g Hotspot Tested at 10 mm (W/kg)
	0.76	1.42	1.34

**Note:**

1. The SAR criteria (**Head & Body: SAR-1g1.6 W/kg, and Extremity: SAR-10g 4.0 W/kg**)for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
2. This device supports both LTE band 66 and band 4. The frequency span of LTE band 66 can completely cover LTE band 4, and they has the same tune-up power. SAR was tested for LTE band 66 only.
3. The N/A means there is no need to test per KDB 248227 D01.

# SAR Test Report

## 2. Description of Equipment Under Test

<b>EUT Type</b>	Feature Phone
<b>FCC ID</b>	V65E4830
<b>Brand Name</b>	Kyocera
<b>Model Name</b>	E4830, E4830NC
<b>Tx Frequency Bands (Unit: MHz)</b>	WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 4 : 1710.7 ~ 1754.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 5 : 824.7 ~ 848.3 (BW: 1.4M, 3M, 5M, 10M) LTE Band 12 : 699.7 ~ 715.3 (BW: 1.4M, 3M, 5M, 10M) LTE Band 14 : 790.5 ~ 795.5 (BW: 5M, 10M) LTE Band 66 : 1710.7 ~ 1779.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
<b>Uplink Modulations</b>	WCDMA : QPSK LTE : QPSK, 16QAM 802.11b : DSSS 802.11a/g/n : OFDM Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK
<b>Maximum Tune-up Conducted Power (Unit: dBm)</b>	Please refer to section 4.6.1 of this report
<b>Antenna Type</b>	Fixed Internal Antenna
<b>EUT Stage</b>	Identical Prototype

### Note:

- All models are listed as below.

Sample	Brand	Model	Description
1	Kyocera	E4830	With Camera function and Main LCD
2		E4830	With Camera function and 2 <sup>nd</sup> LCD
3		E4830NC	Without Camera function and Main LCD
4		E4830NC	Without Camera function and 2 <sup>nd</sup> LCD

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

### List of Accessory:

<b>Battery</b>	<b>Brand Name</b>	Kyocera
	<b>Model Name</b>	SCP-73LBPS
	<b>Power Rating</b>	3.8Vdc, 1770mAh, 6.8 Wh
	<b>Type</b>	Li-ion
<b>USB Cable</b>	<b>Brand Name</b>	Kyocera
	<b>Model Name</b>	SCP-26SDC
	<b>Signal Line Type</b>	1 meter shielded cable without ferrite core

### **3. SAR Measurement System**

#### **3.1 Definition of Specific Absorption Rate (SAR)**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### **3.2 SPEAG DASY6 System**

DASY6 system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY6 software defined. The DASY6 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

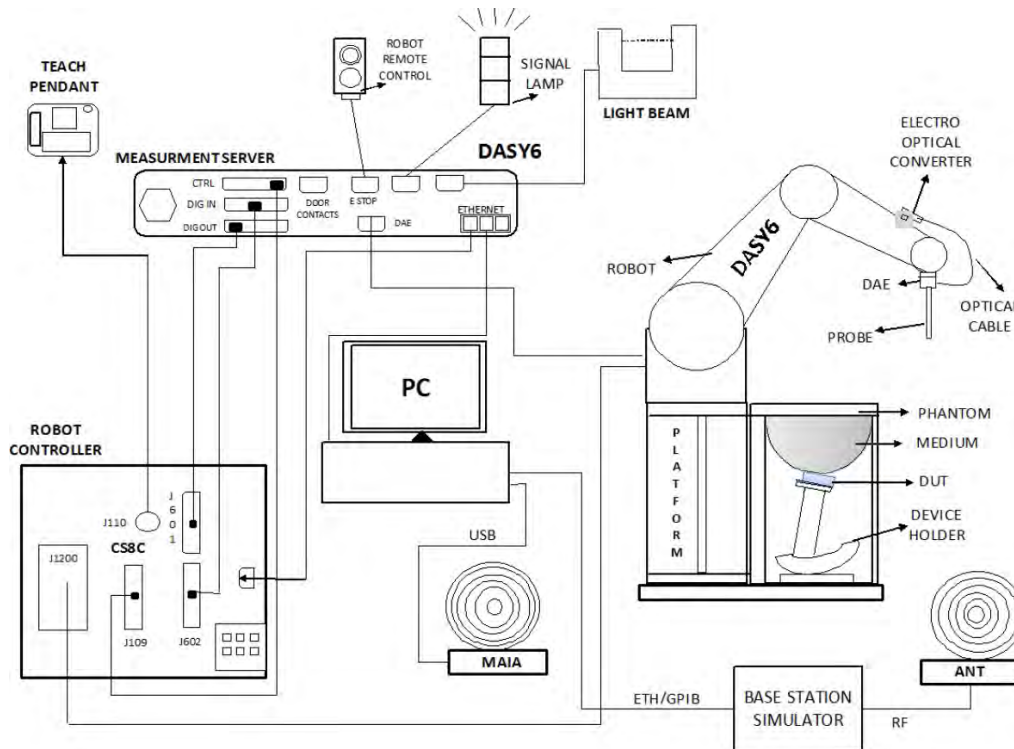

**Fig-3.1 SPEAG DASY6 System Setup**

### 3.2.1 Robot

The DASY6 systems use the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version of CS8c from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)




**Fig-3.2 SPEAG DASY6 System**


## SAR Test Report

### 3.2.2 Probes


The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

<b>Model</b>	EX3DV4	
<b>Construction</b>	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
<b>Frequency</b>	4 MHz to 10 GHz Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.1$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

### 3.2.3 Data Acquisition Electronics (DAE)


<b>Model</b>	DAE3, DAE4	
<b>Construction</b>	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
<b>Input Offset Voltage</b>	$< 5\mu$ V (with auto zero)	
<b>Input Bias Current</b>	$< 50$ fA	
<b>Dimensions</b>	60 x 60 x 68 mm	

### 3.2.4 Phantoms


<b>Model</b>	SAM-Twin Phantom	
<b>Construction</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE Std 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
<b>Material</b>	Vinylester, fiberglass reinforced (VE-GF)	
<b>Shell Thickness</b>	$2 \pm 0.2$ mm ( $6 \pm 0.2$ mm at ear point)	
<b>Dimensions</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet	
<b>Filling Volume</b>	approx. 25 liters	



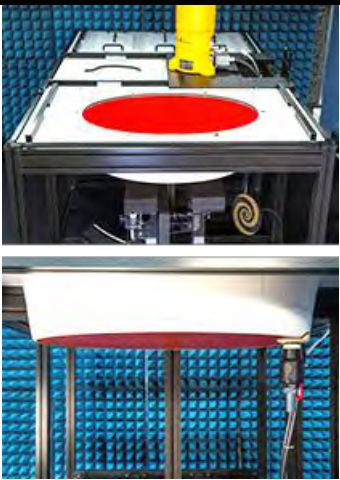

## SAR Test Report

<b>Model</b>	ELI	
<b>Construction</b>	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
<b>Material</b>	Vinylester, fiberglass reinforced (VE-GF)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	


### 3.2.5 Device Holder

<b>Model</b>	MD4HHTV5 - Mounting Device for Hand-Held Transmitters	
<b>Construction</b>	In combination with the Twin SAM or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
<b>Material</b>	Polyoxymethylene (POM)	


<b>Model</b>	MDA4WTV5 - Mounting Device Adaptor for Ultra Wide Transmitters	
<b>Construction</b>	An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.	
<b>Material</b>	Polyoxymethylene (POM)	

<b>Model</b>	MDA4SPV6 - Mounting Device Adaptor for Smart Phones	
<b>Construction</b>	The solid low-density MDA4SPV6 adaptor assuring no impact on the DUT radiation performance and is conform with any DUT design and shape.	
<b>Material</b>	ROHACELL	


# SAR Test Report

<b>Model</b>	MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters	
<b>Construction</b>	In combination with the Twin SAM or ELI phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at a flat phantom section.	
<b>Material</b>	Polyoxymethylene (POM), PET-G, Foam	

### 3.2.6 System Validation Dipoles

<b>Model</b>	D-Serial	
<b>Construction</b>	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
<b>Frequency</b>	750 MHz to 5800 MHz	
<b>Return Loss</b>	> 20 dB	
<b>Power Capability</b>	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	


### 3.2.7 Power Source

<b>Model</b>	Powersource1	
<b>Signal Type</b>	Continuous Wave	
<b>Operating Frequencies</b>	600 MHz to 5850 MHz	
<b>Output Power</b>	-5.0 dBm to +17.0 dBm	
<b>Power Supply</b>	5V DC, via USB jack	
<b>Power Consumption</b>	<3 W	
<b>Applications</b>	System performance check and validation with a CW signal.	

# SAR Test Report

## 3.2.8 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 10 % are listed in Table-3.1.

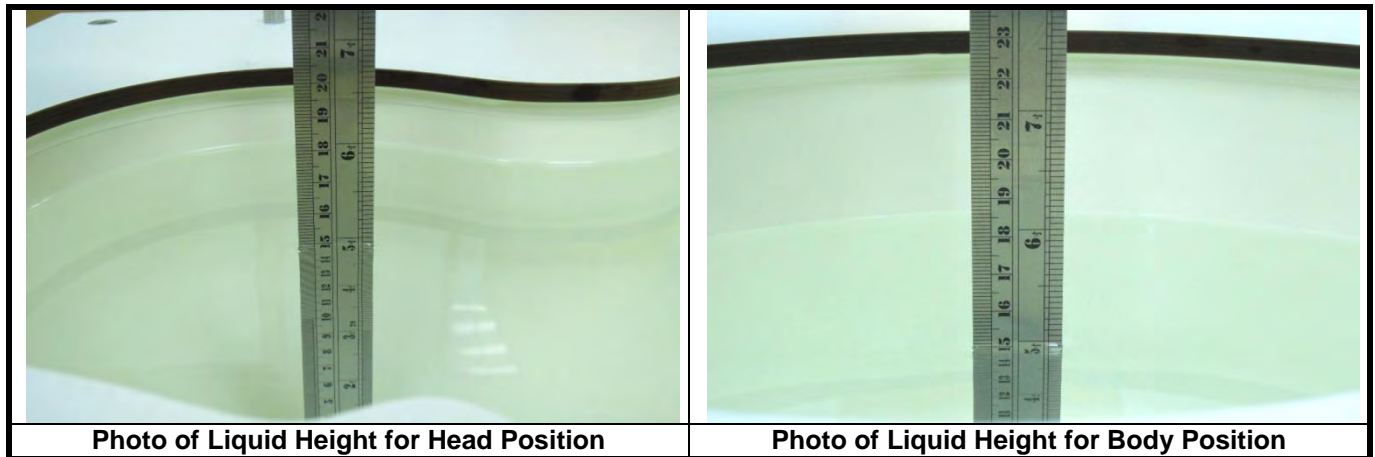

**Table-3.1 Targets of Tissue Simulating Liquid**

Frequency (MHz)	Target Permittivity	Range of $\pm 10\%$	Target Conductivity	Range of $\pm 10\%$
450	43.5	39.2 ~ 47.9	0.87	0.78 ~ 0.96
750	41.9	37.7 ~ 46.1	0.89	0.80 ~ 0.98
835	41.5	37.4 ~ 45.7	0.90	0.81 ~ 0.99
900	41.5	37.4 ~ 45.7	0.97	0.87 ~ 1.07
1450	40.5	36.5 ~ 44.6	1.20	1.08 ~ 1.32
1500	40.4	36.4 ~ 44.4	1.23	1.11 ~ 1.35
1640	40.2	36.2 ~ 44.2	1.31	1.18 ~ 1.44
1750	40.1	36.1 ~ 44.1	1.37	1.23 ~ 1.51
1800	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
1900	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
2000	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
2100	39.8	35.8 ~ 43.8	1.49	1.34 ~ 1.64
2300	39.5	35.6 ~ 43.5	1.67	1.50 ~ 1.84
2450	39.2	35.3 ~ 43.1	1.80	1.62 ~ 1.98
2600	39.0	35.1 ~ 42.9	1.96	1.76 ~ 2.16
3000	38.5	34.7 ~ 42.4	2.40	2.16 ~ 2.64
3500	37.9	34.1 ~ 41.7	2.91	2.62 ~ 3.20
4000	37.4	33.7 ~ 41.1	3.43	3.09 ~ 3.77
4500	36.8	33.1 ~ 40.5	3.94	3.55 ~ 4.33
5000	36.2	32.6 ~ 39.8	4.45	4.01 ~ 4.90
5200	36.0	32.4 ~ 39.6	4.66	4.19 ~ 5.13
5400	35.8	32.2 ~ 39.4	4.86	4.37 ~ 5.35
5600	35.5	32.0 ~ 39.1	5.07	4.56 ~ 5.58
5800	35.3	31.8 ~ 38.8	5.27	4.74 ~ 5.80
6000	35.1	31.6 ~ 38.6	5.48	4.93 ~ 6.03

# SAR Test Report

The dielectric properties of the tissue simulating liquids are defined in IEC 62209-1 and IEC 62209-2. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

Since the range of  $\pm 10\%$  of the required target values is used to measure relative permittivity and conductivity, the SAR correction procedure is applied to correct measured SAR for the deviations in permittivity and conductivity. Only positive correction has been used to scale up the measured SAR, and SAR result would not be corrected if the correction  $\Delta$  SAR has a negative sign.


The following table gives the recipes for tissue simulating liquids.

**Table-3.2 Recipes of Tissue Simulating Liquid**

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3

**3.3 SAR System Verification**

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

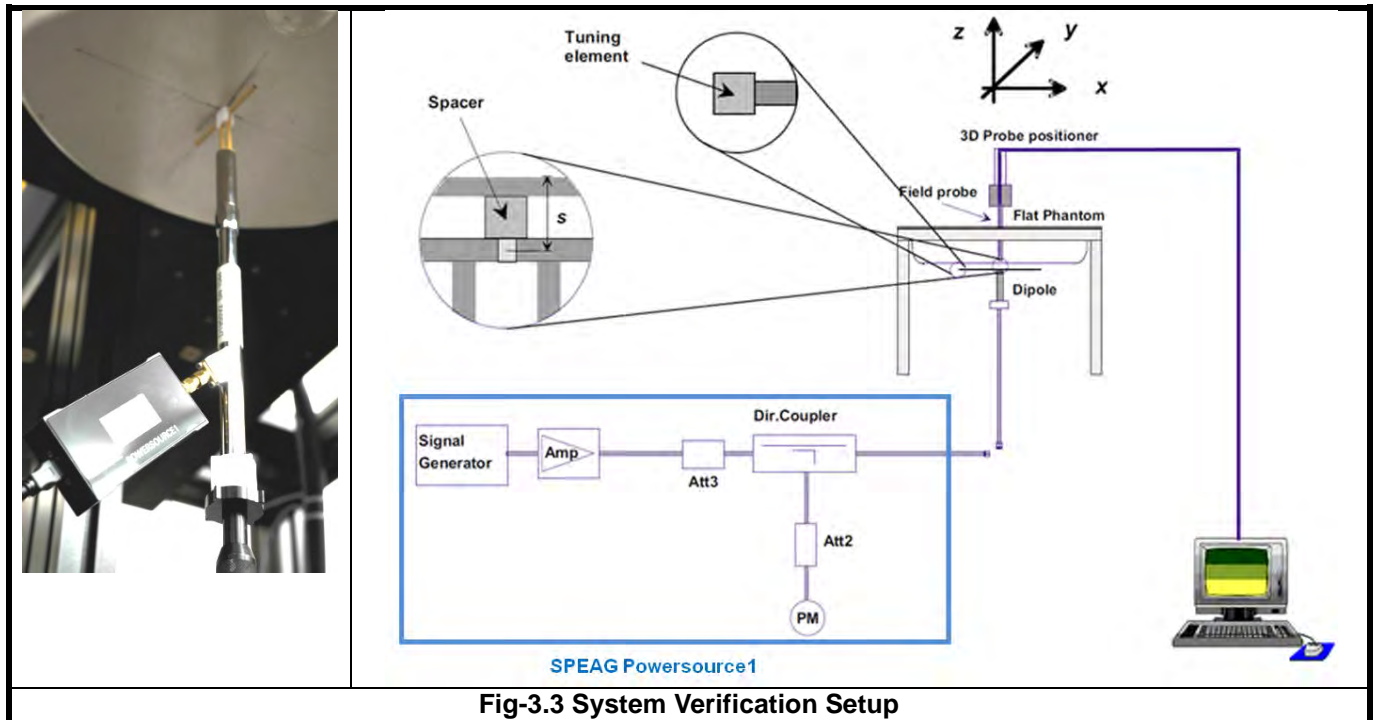

**Fig-3.3 System Verification Setup**

The SPEAG Powersource1 is a portable and very stable RF source providing a continuous wave (CW) signal. It is designed for conducting SAR system checks and SAR system validation of DASY and is compatible with IEC 62209-1, IEC 62209-2 and IEEE Std 1528 standards. The Powersource1 has been calibrated by SPEAG's ISO/IEC 17025-accredited calibration center. When using Powersource1, the setup can be simplified, as shown in Fig-3.3. The signal purity is warranted by design. Since the Powersource1 is calibrated, no additional equipment is needed and the Powersource1 can directly be connected to the SMA connector of the dipole without a cable as all separate components (signal generator, amplifier, coupler and power meter) are built into the unit.

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The Powersource1 is adjusted for the desired forward power of 17 dBm at the dipole connector and the RF output power would be turned on. After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

## 3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

### 3.4.1 Area Scan and Zoom Scan Procedure

First area scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an area scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, zoom scan is required. The zoom scan is performed around the highest E-field value to determine the averaged SAR-distribution.

Measure the local SAR at a test point at 1.4 mm of the inner surface of the phantom recommended by SEPAG. The area scan (two-dimensional SAR distribution) is performed cover at least an area larger than the projection of the EUT or antenna. The measurement resolution and spatial resolution for interpolation shall be chosen to allow identification of the local peak locations to within one-half of the linear dimension of the corresponding side of the zoom scan volume. Following table provides the measurement parameters required for the area scan.

Parameter	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 6 \text{ GHz}$
Maximum distance from closest measurement point to phantom surface	$5 \pm 1$	$\delta \ln(2)/2 \pm 0.5$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g. 1 W/kg for 1.6 W/kg, 1 g limit; or 1.26 W/kg for 2 W/kg, 10 g limit).

The zoom scan (three-dimensional SAR distribution) is performed at the local maxima locations identified in previous area scan procedure. The zoom scan volume must be larger than the required minimum dimensions. When graded grids are used, which only applies in the direction normal to the phantom surface, the initial grid separation closest to the phantom surface and subsequent graded grid increment ratios must satisfy the required protocols. The 1-g SAR averaging volume must be fully contained within the zoom scan measurement volume boundaries; otherwise, the measurement must be repeated by shifting or expanding the zoom scan volume. The similar requirements also apply to 10-g SAR measurements. Following table provides the measurement parameters required for the zoom scan.

Parameter		$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 6$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm	3 – 4 GHz: $\leq 5$ mm 4 – 6 GHz: $\leq 4$ mm
Maximum zoom scan spatial resolution, normal to phantom surface	<i>uniform grid:</i> $\Delta z_{\text{Zoom}}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	<i>graded grids:</i> $\Delta z_{\text{Zoom}}(1)$	$\leq 4$ mm	3 – 4 GHz: $\leq 3.0$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2.0$ mm
	$\Delta z_{\text{Zoom}}(n>1)$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$ mm	
Minimum zoom scan volume (x, y, z)		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm

Per IEC 62209-2 AMD1, the successively higher resolution zoom scan is required if the zoom scan measured as defined above complies with both of the following criteria, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- (1) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions ( $\Delta x, \Delta y$ ). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance  $z_{M1}$ .
- (2) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %.

If one or both of the above criteria are not met, the zoom scan measurement shall be repeated using a finer resolution. New horizontal and vertical grid steps shall be determined from the measured SAR distribution so that the above criteria are met. Compliance with the above two criteria shall be demonstrated for the new measured zoom scan.

### 3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



## 4. SAR Measurement Evaluation

### 4.1 EUT Configuration and Setting

#### <Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

#### <Considerations Related to WCDMA for Setup and Testing>

##### **WCDMA Handsets Head SAR**

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

##### **WCDMA Handsets Body-worn SAR**

SAR for body-worn configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode.

##### **Handsets with Release 5 HSDPA**

The 3G SAR test reduction procedure is applied to HSDPA body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices", for the highest reported SAR body-worn exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

##### **Handsets with Release 6 HSUPA**

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices", for the highest reported body-worn exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn measurements is tested for next to the ear head exposure.

## SAR Test Report

### Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}^{(1)(2)}$	CM <sup>(3)</sup> (dB)	MPR <sup>(3)</sup> (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	12/15 <sup>(4)</sup>	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .  
 Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .  
 Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.  
 Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

## SAR Test Report

### Release 6 HSUPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in below.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_d/\beta_c$	$\beta_{HS}^{(1)}$	$\beta_{ec}$	$\beta_{ed}^{(4)(5)}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM <sup>(2)</sup> (dB)	MPR <sup>(2)(6)</sup> (dB)	AG <sup>(5)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{COI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{COI} = 5/15$  with  $\beta_{HS} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

### DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

### <Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and QAM modulation. The results please refer to section 4.6 of this report.

EUT Supported LTE Band and Channel Bandwidth						
LTE Band	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz
2	V	V	V	V	V	V
4	V	V	V	V	V	V
5	V	V	V	V		
12	V	V	V	V		
14			V	V		
66	V	V	V	V	V	V

## SAR Test Report

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

**Note:** MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

### <Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

## SAR Test Report

---

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

### Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

### Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

### SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

### Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

## <Considerations Related to Bluetooth for Setup and Testing>

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the EUT was set to DH5 mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.



**Time-domain plot for Bluetooth transmission signal**

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = 2.87 / 3.75 = 76.53 \%$$


## 4.2 EUT Testing Position

According to KDB 648474 D04, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

### 4.2.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2003 using the SAM phantom illustrated as below.

1. Define two imaginary lines on the handset
  - (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
  - (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
  - (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

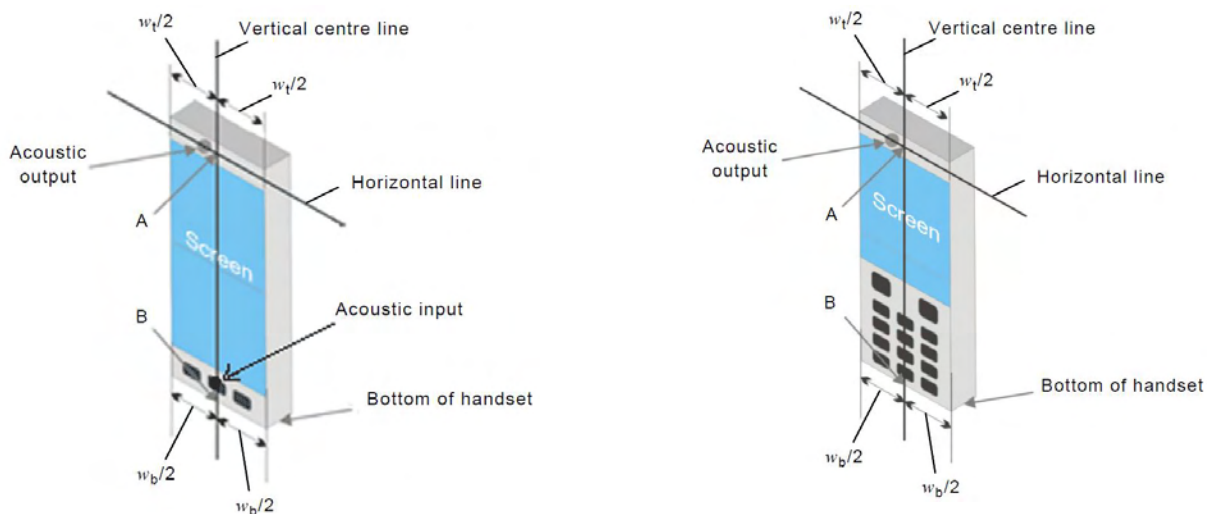


**Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines**

## SAR Test Report

### 2. Cheek Position


- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).

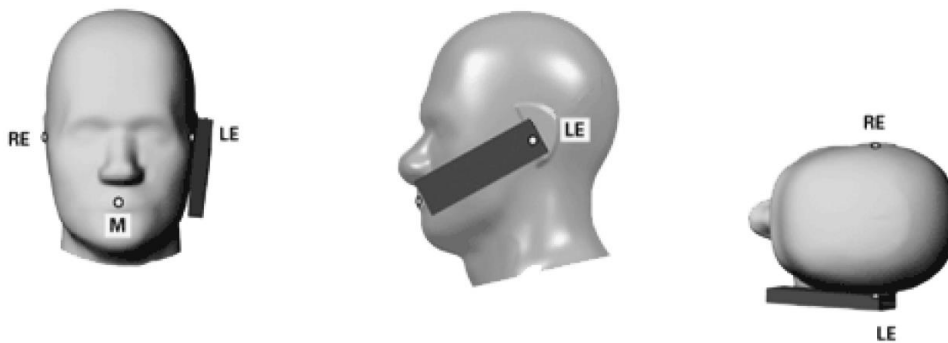

**Fig-4.2 Illustration for Cheek Position**

### 3. Tilted Position

- (a) To position the device in the "cheek" position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).

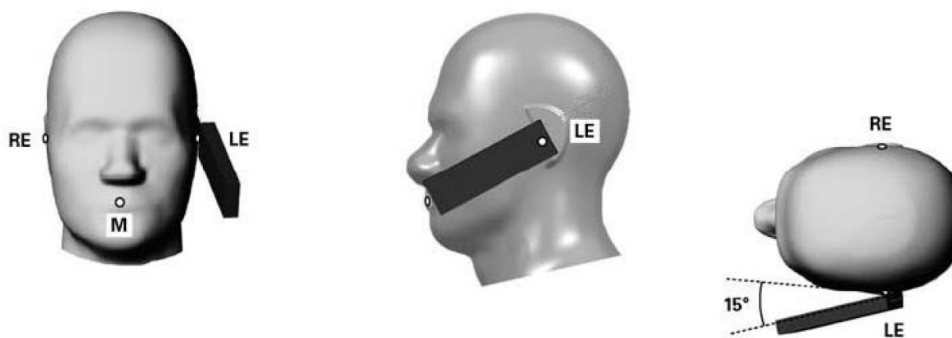

**Fig-4.3 Illustration for Tilted Position**




**4.2.2 Body-worn Accessory Exposure Conditions**

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 D01 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required.


A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance  $\leq 5 \text{ mm}$  to support compliance.

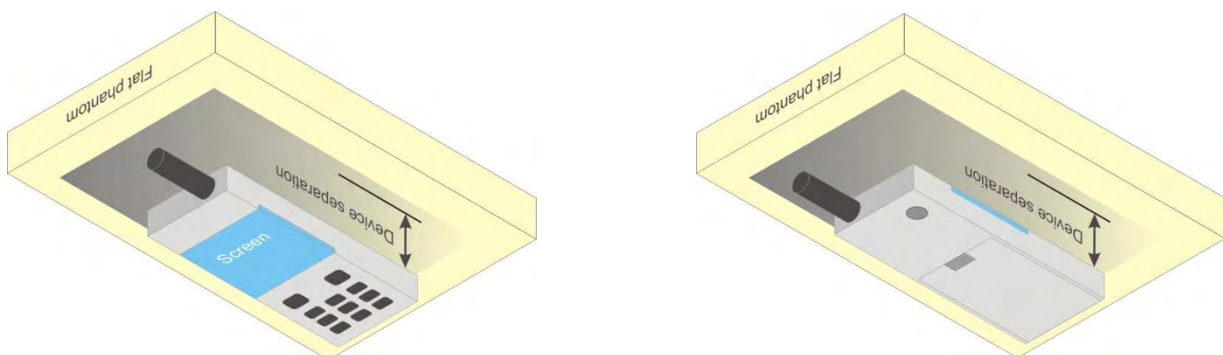

**Fig-4.4 Illustration for Body Worn Position**

**4.2.3 Hotspot Mode Exposure Conditions**

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225 D06. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

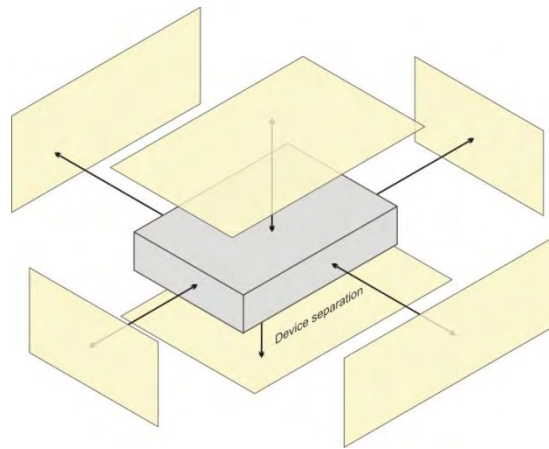

Based on the antenna location shown on appendix D of this report, the SAR testing required for hotspot mode is listed as below.

Antenna	Front Face	Rear Face	Left Side	Right Side	Top Side	Bottom Side
WWAN	V	V	V	V		V
WLAN/BT	V	V		V		V

## SAR Test Report

### 4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity ( $\sigma$ )	Measured Permittivity ( $\epsilon_r$ )	Target Conductivity ( $\sigma$ )	Target Permittivity ( $\epsilon_r$ )	Conductivity Deviation (%)	Permittivity Deviation (%)	Test Date
750	23.2	0.893	43.384	0.89	41.9	0.34	3.54	Sep. 21, 2020
750	23	0.892	42.799	0.89	41.9	0.22	2.15	Sep. 23, 2020
750	23.2	0.887	42.758	0.89	41.9	-0.34	2.05	Sep. 24, 2020
750	23.2	0.898	42.812	0.89	41.9	0.90	2.18	Sep. 25, 2020
835	23.2	0.918	41.678	0.9	41.5	2.00	0.43	Sep. 21, 2020
835	23.2	0.901	42.725	0.9	41.5	0.11	2.95	Sep. 22, 2020
835	23	0.932	42.889	0.9	41.5	3.56	3.35	Sep. 23, 2020
835	23.2	0.945	43.009	0.9	41.5	5.00	3.64	Sep. 24, 2020
835	23.2	0.931	42.907	0.9	41.5	3.44	3.39	Sep. 25, 2020
1750	23.2	1.324	40.161	1.37	40.1	-3.36	0.15	Sep. 21, 2020
1750	23.2	1.309	40.104	1.37	40.1	-4.45	0.01	Sep. 22, 2020
1750	23	1.332	38.428	1.37	40.1	-2.77	-4.17	Sep. 23, 2020
1750	23.2	1.322	40.39	1.37	40.1	-3.50	0.72	Sep. 24, 2020
1750	23.2	1.317	40.22	1.37	40.1	-3.87	0.30	Sep. 25, 2020
1750	23.4	1.325	39.061	1.37	40.1	-3.28	-2.59	Oct. 14, 2020
1900	23.2	1.453	39.621	1.4	40	3.79	-0.95	Sep. 21, 2020
1900	23.2	1.471	39.697	1.4	40	5.07	-0.76	Sep. 22, 2020
1900	23	1.446	39.768	1.4	40	3.29	-0.58	Sep. 23, 2020
1900	23.2	1.457	39.83	1.4	40	4.07	-0.43	Sep. 24, 2020
1900	23.2	1.463	39.889	1.4	40	4.50	-0.28	Sep. 25, 2020
2450	23.2	1.866	38.343	1.8	39.2	3.67	-2.19	Oct. 06, 2020
5250	23.2	4.688	37.645	4.71	35.9	-0.47	4.86	Oct. 06, 2020
5600	23.2	5.175	34.802	5.07	35.5	2.07	-1.97	Oct. 07, 2020
5750	23.2	5.337	34.453	5.22	35.4	2.24	-2.68	Oct. 07, 2020

**Note:**

The dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within  $\pm 10\%$  of the target values. Liquid temperature during the SAR testing has kept within  $\pm 2^\circ\text{C}$ .

# SAR Test Report

## 4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

Test Date	Probe S/N	Calibration Point	Measured Conductivity ( $\sigma$ )	Measured Permittivity ( $\epsilon_r$ )	Validation for CW			Validation for Modulation		
					Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
Sep. 21, 2020	3650	750	0.893	43.384	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 23, 2020	7537	750	0.892	42.799	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 24, 2020	7537	750	0.887	42.758	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 25, 2020	7537	750	0.898	42.812	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 21, 2020	3650	835	0.918	41.678	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 22, 2020	3650	835	0.901	42.725	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 23, 2020	7537	835	0.932	42.889	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 24, 2020	7537	835	0.945	43.009	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 25, 2020	7537	835	0.931	42.907	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 21, 2020	3650	1750	1.324	40.161	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 22, 2020	3650	1750	1.309	40.104	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 23, 2020	7537	1750	1.332	38.428	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 24, 2020	7537	1750	1.322	40.39	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 25, 2020	7537	1750	1.317	40.22	Pass	Pass	Pass	N/A	N/A	N/A
Oct. 14, 2020	7537	1750	1.325	39.061	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 21, 2020	3650	1900	1.453	39.621	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 22, 2020	3650	1900	1.471	39.697	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 23, 2020	7537	1900	1.446	39.768	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 24, 2020	7537	1900	1.457	39.83	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 25, 2020	7537	1900	1.463	39.889	Pass	Pass	Pass	N/A	N/A	N/A
Oct. 06, 2020	7472	2450	1.866	38.343	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 06, 2020	7472	5250	4.688	37.645	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 07, 2020	7472	5600	5.175	34.802	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 07, 2020	7472	5750	5.337	34.453	Pass	Pass	Pass	OFDM	N/A	Pass

## 4.5 System Verification

The measuring result for system verification is tabulated as below.

Test Date	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Sep. 21, 2020	750	8.49	0.43	8.60	1.30	1106	3650	861
Sep. 23, 2020	750	8.49	0.392	7.84	-7.66	1106	7537	1277
Sep. 24, 2020	750	8.49	0.397	7.94	-6.48	1106	7537	1277
Sep. 25, 2020	750	8.49	0.402	8.04	-5.30	1106	7537	1277
Sep. 21, 2020	835	9.44	0.519	10.38	9.96	4d166	3650	861
Sep. 22, 2020	835	9.44	0.509	10.18	7.84	4d166	3650	861
Sep. 23, 2020	835	9.44	0.454	9.08	-3.81	4d166	7537	1277
Sep. 24, 2020	835	9.44	0.45	9.00	-4.66	4d166	7537	1277
Sep. 25, 2020	835	9.44	0.444	8.88	-5.93	4d166	7537	1277
Sep. 21, 2020	1750	35.50	1.95	39.00	9.86	1111	3650	861
Sep. 22, 2020	1750	35.50	1.91	38.20	7.61	1111	3650	861
Sep. 23, 2020	1750	35.50	1.84	36.80	3.66	1111	7537	1277
Sep. 24, 2020	1750	35.50	1.83	36.60	3.10	1111	7537	1277
Sep. 25, 2020	1750	35.50	1.85	37.00	4.23	1111	7537	1277
Oct. 14, 2020	1750	35.50	1.84	36.80	3.66	1111	7537	1277
Sep. 21, 2020	1900	40.30	2.21	44.20	9.68	5d036	3650	861
Sep. 22, 2020	1900	40.30	2.11	42.20	4.71	5d036	3650	861
Sep. 23, 2020	1900	40.30	2	40.00	-0.74	5d036	7537	1277
Sep. 24, 2020	1900	40.30	2.03	40.60	0.74	5d036	7537	1277
Sep. 25, 2020	1900	40.30	2.01	40.20	-0.25	5d036	7537	1277
Oct. 06, 2020	2450	51.10	2.66	53.20	4.11	903	7472	1585
Oct. 06, 2020	5250	79.70	3.93	78.60	-1.38	1019	7472	1585
Oct. 07, 2020	5600	83.80	3.99	79.80	-4.77	1019	7472	1585
Oct. 07, 2020	5750	80.40	3.71	74.20	-7.71	1019	7472	1585

**Note:**

Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Appendix A of this report.

## 4.6 Maximum Output Power

### 4.6.1 Maximum Target Conducted Power

Refer to Appendix E.

### 4.6.2 Measured Conducted Power Result

Refer to Appendix F.

### **4.7 SAR Testing Results**

#### **4.7.1 SAR Test Reduction Considerations**

##### **<KDB 447498 D01, General RF Exposure Guidance>**

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1)  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- (2)  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3)  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

When SAR is not measured at the maximum power level allowed for production units, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance. The scaling factor for the tune-up power is defined as maximum tune-up limit (mW) / measured conducted power (mW). The reported SAR would be calculated by measured SAR x tune-up power scaling factor.

The SAR has been measured with highest transmission duty factor supported by the test mode tools for WLAN and/or Bluetooth. When the transmission duty factor could not achieve 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up power. The scaling factor for the duty factor is defined as 100% / transmission duty cycle (%). The reported SAR would be calculated by measured SAR x tune-up power scaling factor x duty cycle scaling factor.

##### **<KDB 941225 D01, 3G SAR Measurement Procedures>**

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

##### **<KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>**

- (1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

## SAR Test Report

---

### (2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

### (3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $>1/2$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

### (4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is  $>1/2$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

### <KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is  $\leq 0.4$  W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is  $\leq 0.8$  W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is  $>1.2$  W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$  W/kg.
- (3) For WLAN 5GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is  $> 0.8$  W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is  $\leq 1.2$  W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is  $\leq 1.2$  W/kg.

# SAR Test Report

## 4.7.2 SAR Results for Head Exposure Condition

Plot No.	Band	Mode	Test Position	Ch.	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA II	RMC12.2K	Right Cheek	9262	1	w/	24.90	24.40	1.12	0.02	0.446	0.50
	WCDMA II	RMC12.2K	Right Tilted	9262	1	w/	24.90	24.40	1.12	-0.02	0.158	0.18
	WCDMA II	RMC12.2K	Left Cheek	9262	1	w/	24.90	24.40	1.12	-0.05	0.450	0.50
	WCDMA II	RMC12.2K	Left Tilted	9262	1	w/	24.90	24.40	1.12	0.12	0.167	0.19
	WCDMA II	RMC12.2K	Left Cheek	9400	1	w/	24.90	24.10	1.20	0.01	0.416	0.50
	WCDMA II	RMC12.2K	Left Cheek	9538	1	w/	24.90	24.23	1.17	0.04	0.394	0.46
01	WCDMA II	RMC12.2K	Left Cheek	9262	2	w/	24.90	24.40	1.12	0.06	0.503	0.56
	WCDMA II	RMC12.2K	Left Cheek	9262	3	w/o	24.90	24.40	1.12	0.11	0.431	0.48
	WCDMA II	RMC12.2K	Left Cheek	9262	4	w/o	24.90	24.40	1.12	0.14	0.490	0.55
	WCDMA IV	RMC12.2K	Right Cheek	1312	1	w/	24.90	24.02	1.22	0.04	0.429	0.52
	WCDMA IV	RMC12.2K	Right Tilted	1312	1	w/	24.90	24.02	1.22	-0.02	0.098	0.12
	WCDMA IV	RMC12.2K	Left Cheek	1312	1	w/	24.90	24.02	1.22	0.08	0.432	0.53
	WCDMA IV	RMC12.2K	Left Tilted	1312	1	w/	24.90	24.02	1.22	0.1	0.137	0.17
	WCDMA IV	RMC12.2K	Left Cheek	1413	1	w/	24.90	24.01	1.23	0.06	0.404	0.50
	WCDMA IV	RMC12.2K	Left Cheek	1513	1	w/	24.90	23.99	1.23	-0.1	0.454	0.56
02	WCDMA IV	RMC12.2K	Left Cheek	1513	2	w/	24.90	23.99	1.23	-0.15	0.486	0.60
	WCDMA IV	RMC12.2K	Left Cheek	1513	3	w/o	24.90	23.99	1.23	-0.12	0.453	0.56
	WCDMA IV	RMC12.2K	Left Cheek	1513	4	w/o	24.90	23.99	1.23	0.08	0.482	0.59
	WCDMA V	RMC12.2K	Right Cheek	4233	1	w/	24.90	24.01	1.23	-0.02	0.247	0.30
	WCDMA V	RMC12.2K	Right Tilted	4233	1	w/	24.90	24.01	1.23	0.14	0.160	0.20
	WCDMA V	RMC12.2K	Left Cheek	4233	1	w/	24.90	24.01	1.23	-0.06	0.252	0.31
	WCDMA V	RMC12.2K	Left Tilted	4233	1	w/	24.90	24.01	1.23	0.04	0.186	0.23
	WCDMA V	RMC12.2K	Left Cheek	4132	1	w/	24.90	23.94	1.25	-0.01	0.228	0.29
	WCDMA V	RMC12.2K	Left Cheek	4182	1	w/	24.90	23.99	1.23	0.02	0.211	0.26
03	WCDMA V	RMC12.2K	Left Cheek	4233	2	w/	24.90	24.01	1.23	0.08	0.260	0.32
	WCDMA V	RMC12.2K	Left Cheek	4233	3	w/o	24.90	24.01	1.23	-0.03	0.252	0.31
	WCDMA V	RMC12.2K	Left Cheek	4233	4	w/o	24.90	24.01	1.23	0.02	0.257	0.32

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Right Cheek	18900	1	0	1	w/	24.90	23.68	1.32	-0.05	0.344	0.45
	LTE 2	QPSK20M	Right Tilted	18900	1	0	1	w/	24.90	23.68	1.32	-0.07	0.115	0.15
	LTE 2	QPSK20M	Left Cheek	18900	1	0	1	w/	24.90	23.68	1.32	0.04	0.367	0.48
	LTE 2	QPSK20M	Left Tilted	18900	1	0	1	w/	24.90	23.68	1.32	0.11	0.089	0.12
	LTE 2	QPSK20M	Right Cheek	18900	50	0	1	w/	23.90	22.53	1.37	-0.06	0.254	0.35
	LTE 2	QPSK20M	Right Tilted	18900	50	0	1	w/	23.90	22.53	1.37	0.04	0.093	0.13
	LTE 2	QPSK20M	Left Cheek	18900	50	0	1	w/	23.90	22.53	1.37	0.08	0.268	0.37
	LTE 2	QPSK20M	Left Tilted	18900	50	0	1	w/	23.90	22.53	1.37	-0.02	0.071	0.10
	LTE 2	QPSK20M	Left Cheek	18700	1	0	1	w/	24.90	23.57	1.36	0.06	0.383	0.52
	LTE 2	QPSK20M	Left Cheek	19100	1	0	1	w/	24.90	23.49	1.38	0.03	0.357	0.49
04	LTE 2	QPSK20M	Left Cheek	18700	1	0	2	w/	24.90	23.57	1.36	-0.1	0.436	0.59
	LTE 2	QPSK20M	Left Cheek	18700	1	0	3	w/o	24.90	23.57	1.36	0.14	0.394	0.54
	LTE 2	QPSK20M	Left Cheek	18700	1	0	4	w/o	24.90	23.57	1.36	-0.11	0.419	0.57



# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 5	QPSK10M	Right Cheek	20600	1	0	1	w/	25.40	24.41	1.26	0.14	0.256	0.32
	LTE 5	QPSK10M	Right Tilted	20600	1	0	1	w/	25.40	24.41	1.26	-0.03	0.204	0.26
	LTE 5	QPSK10M	Left Cheek	20600	1	0	1	w/	25.40	24.41	1.26	0.07	0.265	0.33
	LTE 5	QPSK10M	Left Tilted	20600	1	0	1	w/	25.40	24.41	1.26	0.06	0.154	0.19
	LTE 5	QPSK10M	Right Cheek	20600	25	0	1	w/	24.40	23.42	1.25	0.11	0.215	0.27
	LTE 5	QPSK10M	Right Tilted	20600	25	0	1	w/	24.40	23.42	1.25	-0.05	0.153	0.19
	LTE 5	QPSK10M	Left Cheek	20600	25	0	1	w/	24.40	23.42	1.25	-0.02	0.229	0.29
	LTE 5	QPSK10M	Left Tilted	20600	25	0	1	w/	24.40	23.42	1.25	0.08	0.120	0.15
	LTE 5	QPSK10M	Left Cheek	20450	1	0	1	w/	25.40	24.29	1.29	0.01	0.222	0.29
	LTE 5	QPSK10M	Left Cheek	20525	1	0	1	w/	25.40	24.32	1.28	-0.06	0.246	0.31
05	LTE 5	QPSK10M	Left Cheek	20600	1	0	2	w/	25.40	24.41	1.26	0.01	0.268	0.34
	LTE 5	QPSK10M	Left Cheek	20600	1	0	3	w/o	25.40	24.41	1.26	0.19	0.254	0.32
	LTE 5	QPSK10M	Left Cheek	20600	1	0	4	w/o	25.40	24.41	1.26	-0.02	0.261	0.33
	LTE 12	QPSK10M	Right Cheek	23130	1	0	1	w/	24.90	23.95	1.24	0	<0.001	0.00
	LTE 12	QPSK10M	Right Tilted	23130	1	0	1	w/	24.90	23.95	1.24	0	<0.001	0.00
	LTE 12	QPSK10M	Left Cheek	23130	1	0	1	w/	24.90	23.95	1.24	-0.04	0.214	0.27
	LTE 12	QPSK10M	Left Tilted	23130	1	0	1	w/	24.90	23.95	1.24	0.04	0.056	0.07
	LTE 12	QPSK10M	Right Cheek	23130	25	0	1	w/	23.90	22.83	1.28	0	<0.001	0.00
	LTE 12	QPSK10M	Right Tilted	23130	25	0	1	w/	23.90	22.83	1.28	0	<0.001	0.00
	LTE 12	QPSK10M	Left Cheek	23130	25	0	1	w/	23.90	22.83	1.28	0.02	0.205	0.26
	LTE 12	QPSK10M	Left Tilted	23130	25	0	1	w/	23.90	22.83	1.28	0	<0.001	0.00
	LTE 12	QPSK10M	Left Cheek	23060	1	0	1	w/	24.90	23.89	1.26	-0.04	0.213	0.27
	LTE 12	QPSK10M	Left Cheek	23095	1	0	1	w/	24.90	23.81	1.29	0.04	0.185	0.24
06	LTE 12	QPSK10M	Left Cheek	23130	1	0	2	w/	24.90	23.95	1.24	-0.04	0.231	0.29
	LTE 12	QPSK10M	Left Cheek	23130	1	0	3	w/o	24.90	23.95	1.24	-0.11	0.220	0.27
	LTE 12	QPSK10M	Left Cheek	23130	1	0	4	w/o	24.90	23.95	1.24	-0.18	0.206	0.26
	LTE 14	QPSK10M	Right Cheek	23330	1	0	1	w/	24.90	23.69	1.32	-0.02	0.300	0.40
	LTE 14	QPSK10M	Right Tilted	23330	1	0	1	w/	24.90	23.69	1.32	0.02	0.148	0.20
	LTE 14	QPSK10M	Left Cheek	23330	1	0	1	w/	24.90	23.69	1.32	-0.03	0.305	0.40
	LTE 14	QPSK10M	Left Tilted	23330	1	0	1	w/	24.90	23.69	1.32	0.12	0.159	0.21
	LTE 14	QPSK10M	Right Cheek	23330	25	0	1	w/	23.90	22.58	1.36	0.16	0.251	0.34
	LTE 14	QPSK10M	Right Tilted	23330	25	0	1	w/	23.90	22.58	1.36	0.07	0.119	0.16
	LTE 14	QPSK10M	Left Cheek	23330	25	0	1	w/	23.90	22.58	1.36	0.04	0.225	0.31
	LTE 14	QPSK10M	Left Tilted	23330	25	0	1	w/	23.90	22.58	1.36	-0.07	0.137	0.19
07	LTE 14	QPSK10M	Left Cheek	23330	1	0	2	w/	24.90	23.69	1.32	-0.07	0.334	0.44
	LTE 14	QPSK10M	Left Cheek	23330	1	0	3	w/o	24.90	23.69	1.32	-0.03	0.323	0.43
	LTE 14	QPSK10M	Left Cheek	23330	1	0	4	w/o	24.90	23.69	1.32	0.01	0.328	0.43
	LTE 66	QPSK20M	Right Cheek	132322	1	0	1	w/	24.90	23.87	1.27	0.02	0.353	0.45
	LTE 66	QPSK20M	Right Tilted	132322	1	0	1	w/	24.90	23.87	1.27	0.12	0.123	0.16
	LTE 66	QPSK20M	Left Cheek	132322	1	0	1	w/	24.90	23.87	1.27	0.1	0.362	0.46
	LTE 66	QPSK20M	Left Tilted	132322	1	0	1	w/	24.90	23.87	1.27	0.02	0.138	0.18
	LTE 66	QPSK20M	Right Cheek	132322	50	0	1	w/	23.90	22.82	1.28	-0.04	0.291	0.37
	LTE 66	QPSK20M	Right Tilted	132322	50	0	1	w/	23.90	22.82	1.28	-0.06	0.100	0.13
	LTE 66	QPSK20M	Left Cheek	132322	50	0	1	w/	23.90	22.82	1.28	0.01	0.310	0.40
	LTE 66	QPSK20M	Left Tilted	132322	50	0	1	w/	23.90	22.82	1.28	0.14	0.112	0.14
	LTE 66	QPSK20M	Left Cheek	132072	1	0	1	w/	24.90	23.60	1.35	0.16	0.294	0.40
	LTE 66	QPSK20M	Left Cheek	132572	1	0	1	w/	24.90	23.74	1.31	-0.03	0.408	0.53
08	LTE 66	QPSK20M	Left Cheek	132572	1	0	2	w/	24.90	23.74	1.31	-0.09	0.431	0.56
	LTE 66	QPSK20M	Left Cheek	132572	1	0	3	w/o	24.90	23.74	1.31	0.14	0.401	0.53
	LTE 66	QPSK20M	Left Cheek	132572	1	0	4	w/o	24.90	23.74	1.31	0.16	0.399	0.52

**Note:** The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	Sample	Camera	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Right Cheek	6	1	w/	100.00	1.00	19.20	18.87	1.08	0.12	0.045	0.05
	WLAN2.4G	802.11b	Right Tilted	6	1	w/	100.00	1.00	19.20	18.87	1.08	0	<0.001	0.00
	WLAN2.4G	802.11b	Left Cheek	6	1	w/	100.00	1.00	19.20	18.87	1.08	0.06	0.05	0.05
	WLAN2.4G	802.11b	Left Tilted	6	1	w/	100.00	1.00	19.20	18.87	1.08	0	<0.001	0.00
09	WLAN2.4G	802.11b	Left Cheek	1	1	w/	100.00	1.00	19.20	18.86	1.08	-0.01	0.059	0.06
	WLAN2.4G	802.11b	Left Cheek	11	1	w/	100.00	1.00	19.20	18.79	1.10	0.14	0.049	0.05
	WLAN2.4G	802.11b	Left Cheek	1	2	w/	100.00	1.00	19.20	18.86	1.08	-0.19	0.015	0.02
	WLAN2.4G	802.11b	Left Cheek	1	3	w/o	100.00	1.00	19.20	18.86	1.08	0	<0.001	0.00
	WLAN2.4G	802.11b	Left Cheek	1	4	w/o	100.00	1.00	19.20	18.86	1.08	0	<0.001	0.00
	WLAN5.3G	802.11a	Right Cheek	60	1	w/	92.40	1.08	15.70	15.58	1.03	0.05	0.093	0.10
	WLAN5.3G	802.11a	Right Tilted	60	1	w/	92.40	1.08	15.70	15.58	1.03	0.13	0.028	0.03
10	WLAN5.3G	802.11a	Left Cheek	60	1	w/	92.40	1.08	15.70	15.58	1.03	0.02	0.126	0.14
	WLAN5.3G	802.11a	Left Tilted	60	1	w/	92.40	1.08	15.70	15.58	1.03	-0.09	0.069	0.08
	WLAN5.3G	802.11a	Left Cheek	52	1	w/	92.40	1.08	15.70	15.53	1.04	-0.03	0.114	0.13
	WLAN5.3G	802.11a	Left Cheek	56	1	w/	92.40	1.08	15.70	15.45	1.06	0.18	0.121	0.14
	WLAN5.3G	802.11a	Left Cheek	64	1	w/	92.40	1.08	13.80	13.75	1.01	-0.17	0.063	0.07
	WLAN5.3G	802.11a	Left Cheek	60	2	w/	92.40	1.08	15.70	15.58	1.03	-0.08	0.088	0.10
	WLAN5.3G	802.11a	Left Cheek	60	3	w/o	92.40	1.08	15.70	15.58	1.03	-0.05	0.078	0.09
	WLAN5.3G	802.11a	Left Cheek	60	4	w/o	92.40	1.08	15.70	15.58	1.03	0.01	0.076	0.08
	WLAN5.6G	802.11a	Right Cheek	116	1	w/	92.40	1.08	15.70	15.61	1.02	-0.11	0.059	0.06
	WLAN5.6G	802.11a	Right Tilted	116	1	w/	92.40	1.08	15.70	15.61	1.02	0.04	0.031	0.03
11	WLAN5.6G	802.11a	Left Cheek	116	1	w/	92.40	1.08	15.70	15.61	1.02	0.04	0.121	0.13
	WLAN5.6G	802.11a	Left Tilted	116	1	w/	92.40	1.08	15.70	15.61	1.02	-0.14	0.049	0.05
	WLAN5.6G	802.11a	Left Cheek	100	1	w/	92.40	1.08	13.20	12.96	1.06	0.12	0.051	0.06
	WLAN5.6G	802.11a	Left Cheek	120	1	w/	92.40	1.08	15.70	15.50	1.05	-0.03	0.112	0.13
	WLAN5.6G	802.11a	Left Cheek	124	1	w/	92.40	1.08	15.70	15.46	1.06	0.19	0.114	0.13
	WLAN5.6G	802.11a	Left Cheek	132	1	w/	92.40	1.08	15.70	15.50	1.05	-0.05	0.113	0.13
	WLAN5.6G	802.11a	Left Cheek	140	1	w/	92.40	1.08	12.80	12.77	1.01	0.16	0.088	0.10
	WLAN5.6G	802.11a	Left Cheek	116	2	w/	92.40	1.08	15.70	15.61	1.02	0.09	0.098	0.11
	WLAN5.6G	802.11a	Left Cheek	116	3	w/o	92.40	1.08	15.70	15.61	1.02	-0.07	0.065	0.07
	WLAN5.6G	802.11a	Left Cheek	116	4	w/o	92.40	1.08	15.70	15.61	1.02	0.03	0.064	0.07
	WLAN5.8G	802.11a	Right Cheek	165	1	w/	92.40	1.08	15.70	15.63	1.02	0.19	0.083	0.09
	WLAN5.8G	802.11a	Right Tilted	165	1	w/	92.40	1.08	15.70	15.63	1.02	0.13	0.071	0.08
12	WLAN5.8G	802.11a	Left Cheek	165	1	w/	92.40	1.08	15.70	15.63	1.02	-0.16	0.109	0.12
	WLAN5.8G	802.11a	Left Tilted	165	1	w/	92.40	1.08	15.70	15.63	1.02	-0.11	0.098	0.11
	WLAN5.8G	802.11a	Left Cheek	149	1	w/	92.40	1.08	13.20	13.09	1.03	-0.1	0.071	0.08
	WLAN5.8G	802.11a	Left Cheek	153	1	w/	92.40	1.08	15.70	15.41	1.07	-0.14	0.105	0.12
	WLAN5.8G	802.11a	Left Cheek	157	1	w/	92.40	1.08	15.70	15.56	1.03	0.19	0.107	0.12
	WLAN5.8G	802.11a	Left Cheek	161	1	w/	92.40	1.08	15.70	15.58	1.03	-0.14	0.103	0.11
	WLAN5.8G	802.11a	Left Cheek	165	2	w/	92.40	1.08	15.70	15.63	1.02	-0.11	0.085	0.09
	WLAN5.8G	802.11a	Left Cheek	165	3	w/o	92.40	1.08	15.70	15.63	1.02	0.07	0.100	0.11
	WLAN5.8G	802.11a	Left Cheek	165	4	w/o	92.40	1.08	15.70	15.63	1.02	0.15	0.105	0.12
	BT	BR	Right Cheek	0	1	w/	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00
	BT	BR	Right Tilted	0	1	w/	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00
13	BT	BR	Left Cheek	0	1	w/	76.53	1.31	10.40	8.78	1.45	-0.13	0.00863	0.02
	BT	BR	Left Tilted	0	1	w/	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00
	BT	BR	Left Cheek	39	1	w/	76.53	1.31	10.40	8.64	1.50	0	<0.001	0.00
	BT	BR	Left Cheek	78	1	w/	76.53	1.31	10.40	8.41	1.58	0	<0.001	0.00
	BT	BR	Left Cheek	0	2	w/	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00
	BT	BR	Left Cheek	0	3	w/o	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00
	BT	BR	Left Cheek	0	4	w/o	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00

**Note:** The “< 0.001” means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

## 4.7.3 SAR Results for Body-worn Exposure Condition (Test Separation Distance is 15 mm)

Plot No.	Band	Mode	Test Position	Ch.	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA II	RMC12.2K	Front Face	9262	1	w/	24.90	24.40	1.12	0.02	0.201	0.23
	WCDMA II	RMC12.2K	Rear Face	9262	1	w/	24.90	24.40	1.12	0.03	0.535	0.60
	WCDMA II	RMC12.2K	Rear Face	9400	1	w/	24.90	24.10	1.20	-0.05	0.534	0.64
	WCDMA II	RMC12.2K	Rear Face	9538	1	w/	24.90	24.23	1.17	-0.02	0.543	0.64
14	WCDMA II	RMC12.2K	Rear Face	9538	2	w/	24.90	24.23	1.17	-0.01	0.902	1.06
	WCDMA II	RMC12.2K	Rear Face	9538	3	w/o	24.90	24.23	1.17	0.18	0.631	0.74
	WCDMA II	RMC12.2K	Rear Face	9538	4	w/o	24.90	24.23	1.17	0.19	0.748	0.88
	WCDMA II	RMC12.2K	Rear Face	9262	2	w/	24.90	24.40	1.12	0.01	0.635	0.71
	WCDMA II	RMC12.2K	Rear Face	9400	2	w/	24.90	24.10	1.20	0.07	0.660	0.79
	WCDMA II	RMC12.2K	Rear Face	9262	4	w/	24.90	24.40	1.12	0.19	0.678	0.76
	WCDMA II	RMC12.2K	Rear Face	9400	4	w/	24.90	24.10	1.20	0.11	0.674	0.81
	WCDMA II	RMC12.2K	Rear Face	9538	2	w/	24.90	24.23	1.17	-0.01	0.891	1.04
	WCDMA IV	RMC12.2K	Front Face	1312	1	w/	24.90	24.02	1.22	0.02	0.292	0.36
	WCDMA IV	RMC12.2K	Rear Face	1312	1	w/	24.90	24.02	1.22	0.03	0.607	0.74
	WCDMA IV	RMC12.2K	Rear Face	1413	1	w/	24.90	24.01	1.23	0.04	0.595	0.73
	WCDMA IV	RMC12.2K	Rear Face	1513	1	w/	24.90	23.99	1.23	0.01	0.580	0.71
15	WCDMA IV	RMC12.2K	Rear Face	1312	2	w/	24.90	24.02	1.22	0.04	0.938	1.14
	WCDMA IV	RMC12.2K	Rear Face	1312	3	w/o	24.90	24.02	1.22	0.18	0.696	0.85
	WCDMA IV	RMC12.2K	Rear Face	1312	4	w/o	24.90	24.02	1.22	0.14	0.824	1.01
	WCDMA IV	RMC12.2K	Rear Face	1413	2	w/	24.90	24.01	1.23	-0.07	0.658	0.81
	WCDMA IV	RMC12.2K	Rear Face	1513	2	w/	24.90	23.99	1.23	-0.05	0.612	0.75
	WCDMA IV	RMC12.2K	Rear Face	1413	3	w/	24.90	24.01	1.23	-0.06	0.634	0.78
	WCDMA IV	RMC12.2K	Rear Face	1513	3	w/	24.90	23.99	1.23	-0.15	0.580	0.71
	WCDMA IV	RMC12.2K	Rear Face	1413	4	w/	24.90	24.01	1.23	0.03	0.764	0.94
	WCDMA IV	RMC12.2K	Rear Face	1513	4	w/	24.90	23.99	1.23	-0.13	0.694	0.85
	WCDMA IV	RMC12.2K	Rear Face	1312	2	w/	24.90	24.02	1.22	0.04	0.921	1.12
	WCDMA V	RMC12.2K	Front Face	4233	1	w/	24.90	24.01	1.23	0.02	0.173	0.21
	WCDMA V	RMC12.2K	Rear Face	4233	1	w/	24.90	24.01	1.23	-0.1	0.582	0.72
	WCDMA V	RMC12.2K	Rear Face	4132	1	w/	24.90	23.94	1.25	-0.06	0.204	0.26
	WCDMA V	RMC12.2K	Rear Face	4182	1	w/	24.90	23.99	1.23	0.04	0.269	0.33
16	WCDMA V	RMC12.2K	Rear Face	4233	2	w/	24.90	24.01	1.23	-0.17	0.614	0.76
	WCDMA V	RMC12.2K	Rear Face	4233	3	w/o	24.90	24.01	1.23	0.17	0.465	0.57
	WCDMA V	RMC12.2K	Rear Face	4233	4	w/o	24.90	24.01	1.23	0.16	0.455	0.56

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Front Face	18900	1	0	1	w/	24.90	23.68	1.32	0.02	0.122	0.16
	LTE 2	QPSK20M	Rear Face	18900	1	0	1	w/	24.90	23.68	1.32	0.01	0.433	0.57
	LTE 2	QPSK20M	Front Face	18900	50	0	1	w/	23.90	22.53	1.37	-0.06	0.102	0.14
	LTE 2	QPSK20M	Rear Face	18900	50	0	1	w/	23.90	22.53	1.37	0.03	0.345	0.47
	LTE 2	QPSK20M	Rear Face	18700	1	0	1	w/	24.90	23.57	1.36	-0.01	0.427	0.58
	LTE 2	QPSK20M	Rear Face	19100	1	0	1	w/	24.90	23.49	1.38	-0.04	0.446	0.62
17	LTE 2	QPSK20M	Rear Face	19100	1	0	2	w/	24.90	23.49	1.38	-0.19	0.754	1.04
	LTE 2	QPSK20M	Rear Face	19100	1	0	3	w/o	24.90	23.49	1.38	0.01	0.739	1.02
	LTE 2	QPSK20M	Rear Face	19100	1	0	4	w/o	24.90	23.49	1.38	0.06	0.706	0.97
	LTE 2	QPSK20M	Rear Face	18700	1	0	2	w/	24.90	23.57	1.36	-0.01	0.731	0.99
	LTE 2	QPSK20M	Rear Face	18900	1	0	2	w/	24.90	23.68	1.32	0.01	0.742	0.98
	LTE 2	QPSK20M	Rear Face	18700	1	0	3	w/	24.90	23.57	1.36	-0.01	0.697	0.95
	LTE 2	QPSK20M	Rear Face	18900	1	0	3	w/	24.90	23.68	1.32	0.06	0.682	0.90
	LTE 2	QPSK20M	Rear Face	18700	1	0	4	w/	24.90	23.57	1.36	-0.01	0.669	0.91
	LTE 2	QPSK20M	Rear Face	18900	1	0	4	w/	24.90	23.68	1.32	0.06	0.679	0.90

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 5	QPSK10M	Front Face	20600	1	0	1	w/	25.40	24.41	1.26	-0.02	0.209	0.26
	LTE 5	QPSK10M	Rear Face	20600	1	0	1	w/	25.40	24.41	1.26	-0.06	0.545	0.69
	LTE 5	QPSK10M	Front Face	20600	25	0	1	w/	24.40	23.42	1.25	0.02	0.163	0.20
	LTE 5	QPSK10M	Rear Face	20600	25	0	1	w/	24.40	23.42	1.25	0.14	0.427	0.53
	LTE 5	QPSK10M	Rear Face	20450	1	0	1	w/	25.40	24.29	1.29	0.06	0.474	0.61
	LTE 5	QPSK10M	Rear Face	20525	1	0	1	w/	25.40	24.32	1.28	-0.01	0.440	0.56
18	LTE 5	QPSK10M	Rear Face	20600	1	0	2	w/	25.40	24.41	1.26	0.08	0.589	0.74
	LTE 5	QPSK10M	Rear Face	20600	1	0	3	w/o	25.40	24.41	1.26	0.12	0.512	0.65
	LTE 5	QPSK10M	Rear Face	20600	1	0	4	w/o	25.40	24.41	1.26	0.15	0.558	0.70
	LTE 12	QPSK10M	Front Face	23130	1	0	1	w/	24.90	23.95	1.24	-0.02	0.171	0.21
	LTE 12	QPSK10M	Rear Face	23130	1	0	1	w/	24.90	23.95	1.24	-0.06	0.379	0.47
	LTE 12	QPSK10M	Front Face	23130	25	0	1	w/	23.90	22.83	1.28	0.04	0.132	0.17
	LTE 12	QPSK10M	Rear Face	23130	25	0	1	w/	23.90	22.83	1.28	0.06	0.326	0.42
	LTE 12	QPSK10M	Rear Face	23060	1	0	1	w/	24.90	23.89	1.26	0.16	0.365	0.46
	LTE 12	QPSK10M	Rear Face	23095	1	0	1	w/	24.90	23.81	1.29	0.06	0.373	0.48
19	LTE 12	QPSK10M	Rear Face	23095	1	0	2	w/	24.90	23.81	1.29	0.04	0.377	0.49
	LTE 12	QPSK10M	Rear Face	23095	1	0	3	w/o	24.90	23.81	1.29	0.01	0.322	0.42
	LTE 12	QPSK10M	Rear Face	23095	1	0	4	w/o	24.90	23.81	1.29	0.05	0.350	0.45
	LTE 14	QPSK10M	Front Face	23330	1	0	1	w/	24.90	23.69	1.32	-0.02	0.214	0.28
	LTE 14	QPSK10M	Rear Face	23330	1	0	1	w/	24.90	23.69	1.32	-0.04	0.456	0.60
	LTE 14	QPSK10M	Front Face	23330	25	0	1	w/	23.90	22.58	1.36	0.03	0.172	0.23
	LTE 14	QPSK10M	Rear Face	23330	25	0	1	w/	23.90	22.58	1.36	0.08	0.384	0.52
20	LTE 14	QPSK10M	Rear Face	23330	1	0	2	w/	24.90	23.69	1.32	-0.04	0.477	0.63
	LTE 14	QPSK10M	Rear Face	23330	1	0	3	w/o	24.90	23.69	1.32	0.05	0.389	0.51
	LTE 14	QPSK10M	Rear Face	23330	1	0	4	w/o	24.90	23.69	1.32	0.07	0.419	0.55
	LTE 66	QPSK20M	Front Face	132322	1	0	1	w/	24.90	23.87	1.27	0.01	0.222	0.28
	LTE 66	QPSK20M	Rear Face	132322	1	0	1	w/	24.90	23.87	1.27	0.02	0.564	0.72
	LTE 66	QPSK20M	Front Face	132322	50	0	1	w/	23.90	22.82	1.28	-0.04	0.168	0.22
	LTE 66	QPSK20M	Rear Face	132322	50	0	1	w/	23.90	22.82	1.28	-0.09	0.439	0.56
	LTE 66	QPSK20M	Rear Face	132072	1	0	1	w/	24.90	23.60	1.35	-0.04	0.576	0.78
	LTE 66	QPSK20M	Rear Face	132572	1	0	1	w/	24.90	23.74	1.31	0.03	0.447	0.59
21	LTE 66	QPSK20M	Rear Face	132072	1	0	2	w/	24.90	23.60	1.35	0.02	0.817	1.10
	LTE 66	QPSK20M	Rear Face	132072	1	0	3	w/o	24.90	23.60	1.35	0.08	0.680	0.92
	LTE 66	QPSK20M	Rear Face	132072	1	0	4	w/o	24.90	23.60	1.35	0.15	0.433	0.58
	LTE 66	QPSK20M	Rear Face	132322	1	0	2	w/	24.90	23.87	1.27	0.04	0.814	1.03
	LTE 66	QPSK20M	Rear Face	132572	1	0	2	w/	24.90	23.74	1.31	-0.01	0.695	0.91
	LTE 66	QPSK20M	Rear Face	132322	1	0	3	w/	24.90	23.87	1.27	-0.12	0.627	0.80
	LTE 66	QPSK20M	Rear Face	132572	1	0	3	w/	24.90	23.74	1.31	0.11	0.559	0.73
	LTE 66	QPSK20M	Rear Face	132072	1	0	2	w/	24.90	23.59	1.35	0.02	0.802	1.08

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	Sample	Camera	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Front Face	6	1	w/	100.00	1.00	19.20	18.87	1.08	0	<0.001	0.00
22	WLAN2.4G	802.11b	Rear Face	6	1	w/	100.00	1.00	19.20	18.87	1.08	-0.17	0.139	0.15
	WLAN2.4G	802.11b	Rear Face	1	1	w/	100.00	1.00	19.20	18.86	1.08	-0.13	0.137	0.15
	WLAN2.4G	802.11b	Rear Face	11	1	w/	100.00	1.00	19.20	18.79	1.10	0.19	0.137	0.15
	WLAN2.4G	802.11b	Rear Face	6	2	w/	100.00	1.00	19.20	18.87	1.08	-0.11	0.137	0.15
	WLAN2.4G	802.11b	Rear Face	6	3	w/o	100.00	1.00	19.20	18.87	1.08	0.09	0.084	0.09
	WLAN2.4G	802.11b	Rear Face	6	4	w/o	100.00	1.00	19.20	18.87	1.08	0.04	0.121	0.13
	WLAN5.3G	802.11a	Front Face	60	1	w/	92.40	1.08	15.70	15.58	1.03	0.09	0.122	0.14
	WLAN5.3G	802.11a	Rear Face	60	1	w/	92.40	1.08	15.70	15.58	1.03	0.06	0.216	0.24
	WLAN5.3G	802.11a	Rear Face	52	1	w/	92.40	1.08	15.70	15.53	1.04	-0.09	0.219	0.25
23	WLAN5.3G	802.11a	Rear Face	56	1	w/	92.40	1.08	15.70	15.45	1.06	-0.03	0.222	0.25
	WLAN5.3G	802.11a	Rear Face	64	1	w/	92.40	1.08	13.80	13.75	1.01	0.17	0.117	0.13
	WLAN5.3G	802.11a	Rear Face	56	2	w/	92.40	1.08	15.70	15.45	1.06	-0.16	0.207	0.24
	WLAN5.3G	802.11a	Rear Face	56	3	w/o	92.40	1.08	15.70	15.45	1.06	0.05	0.201	0.23
	WLAN5.3G	802.11a	Rear Face	56	4	w/o	92.40	1.08	15.70	15.45	1.06	0.03	0.180	0.21
	WLAN5.6G	802.11a	Front Face	116	1	w/	92.40	1.08	15.70	15.61	1.02	0.13	0.077	0.08
24	WLAN5.6G	802.11a	Rear Face	116	1	w/	92.40	1.08	15.70	15.61	1.02	-0.14	0.208	0.23
	WLAN5.6G	802.11a	Rear Face	100	1	w/	92.40	1.08	13.20	12.96	1.06	-0.17	0.098	0.11
	WLAN5.6G	802.11a	Rear Face	120	1	w/	92.40	1.08	15.70	15.50	1.05	0.04	0.179	0.20
	WLAN5.6G	802.11a	Rear Face	124	1	w/	92.40	1.08	15.70	15.46	1.06	-0.19	0.184	0.21
	WLAN5.6G	802.11a	Rear Face	132	1	w/	92.40	1.08	15.70	15.50	1.05	-0.11	0.189	0.21
	WLAN5.6G	802.11a	Rear Face	140	1	w/	92.40	1.08	12.80	12.77	1.01	0.12	0.101	0.11
	WLAN5.6G	802.11a	Rear Face	116	2	w/	92.40	1.08	15.70	15.61	1.02	-0.1	0.205	0.23
	WLAN5.6G	802.11a	Rear Face	116	3	w/o	92.40	1.08	15.70	15.61	1.02	0.07	0.188	0.21
	WLAN5.6G	802.11a	Rear Face	116	4	w/o	92.40	1.08	15.70	15.61	1.02	-0.11	0.203	0.22
	WLAN5.8G	802.11a	Front Face	165	1	w/	92.40	1.08	15.70	15.63	1.02	-0.11	0.086	0.09
	WLAN5.8G	802.11a	Rear Face	165	1	w/	92.40	1.08	15.70	15.63	1.02	0.06	0.200	0.22
	WLAN5.8G	802.11a	Rear Face	149	1	w/	92.40	1.08	13.20	13.09	1.03	-0.06	0.121	0.13
	WLAN5.8G	802.11a	Rear Face	153	1	w/	92.40	1.08	15.70	15.41	1.07	-0.02	0.189	0.22
	WLAN5.8G	802.11a	Rear Face	157	1	w/	92.40	1.08	15.70	15.56	1.03	0.12	0.205	0.23
25	WLAN5.8G	802.11a	Rear Face	161	1	w/	92.40	1.08	15.70	15.58	1.03	0.03	0.208	0.23
	WLAN5.8G	802.11a	Rear Face	161	2	w/	92.40	1.08	15.70	15.58	1.03	-0.02	0.204	0.23
	WLAN5.8G	802.11a	Rear Face	161	3	w/o	92.40	1.08	15.70	15.58	1.03	0.12	0.206	0.23
	WLAN5.8G	802.11a	Rear Face	161	4	w/o	92.40	1.08	15.70	15.58	1.03	-0.15	0.205	0.23
	BT	BR	Front Face	0	1	w/	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00
26	BT	BR	Rear Face	0	1	w/	76.53	1.31	10.40	8.78	1.45	-0.15	0.015	0.03
	BT	BR	Rear Face	39	1	w/	76.53	1.31	10.40	8.64	1.50	0	<0.001	0.00
	BT	BR	Rear Face	78	1	w/	76.53	1.31	10.40	8.41	1.58	0	<0.001	0.00
	BT	BR	Rear Face	0	2	w/	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00
	BT	BR	Rear Face	0	3	w/o	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00
	BT	BR	Rear Face	0	4	w/o	76.53	1.31	10.40	8.78	1.45	0	<0.001	0.00

**Note:** The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

## 4.7.4 SAR Results for Hotspot Exposure Condition (Test Separation Distance is 10 mm)

Plot No.	Band	Mode	Test Position	Ch.	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA II	RMC12.2K	Front Face	9262	1	w/	23.40	23.01	1.09	-0.02	0.289	0.32
	WCDMA II	RMC12.2K	Rear Face	9262	1	w/	23.40	23.01	1.09	0.17	0.931	1.01
	WCDMA II	RMC12.2K	Left Side	9262	1	w/	23.40	23.01	1.09	0.05	0.481	0.52
	WCDMA II	RMC12.2K	Right Side	9262	1	w/	23.40	23.01	1.09	0.06	0.079	0.09
	WCDMA II	RMC12.2K	Bottom Side	9262	1	w/	23.40	23.01	1.09	-0.12	0.226	0.25
	WCDMA II	RMC12.2K	Rear Face	9400	1	w/	23.40	22.97	1.10	-0.14	0.957	1.05
	WCDMA II	RMC12.2K	Rear Face	9538	1	w/	23.40	22.99	1.10	0.02	0.946	1.04
27	WCDMA II	RMC12.2K	Rear Face	9400	2	w/	23.40	22.97	1.10	-0.04	1.00	1.10
	WCDMA II	RMC12.2K	Rear Face	9400	3	w/o	23.40	22.97	1.10	0.04	0.997	1.10
	WCDMA II	RMC12.2K	Rear Face	9400	4	w/o	23.40	22.97	1.10	0.06	0.935	1.03
	WCDMA II	RMC12.2K	Rear Face	9262	2	w/	23.40	23.01	1.09	0.06	0.989	1.08
	WCDMA II	RMC12.2K	Rear Face	9538	2	w/	23.40	22.99	1.10	0.02	0.957	1.05
	WCDMA II	RMC12.2K	Rear Face	9262	3	w/	23.40	23.01	1.09	0.08	0.924	1.01
	WCDMA II	RMC12.2K	Rear Face	9538	3	w/	23.40	22.99	1.10	0.16	0.843	0.93
	WCDMA II	RMC12.2K	Rear Face	9262	4	w/	23.40	23.01	1.09	0.14	0.867	0.95
	WCDMA II	RMC12.2K	Rear Face	9538	4	w/	23.40	22.99	1.10	0.17	0.935	1.03
	WCDMA II	RMC12.2K	Rear Face	9400	2	w/	23.40	22.97	1.10	-0.04	0.996	1.10
	WCDMA IV	RMC12.2K	Front Face	1513	1	w/	23.40	22.64	1.19	-0.06	0.266	0.32
	WCDMA IV	RMC12.2K	Rear Face	1513	1	w/	23.40	22.64	1.19	0.02	0.758	0.90
	WCDMA IV	RMC12.2K	Left Side	1513	1	w/	23.40	22.64	1.19	0.01	0.370	0.44
	WCDMA IV	RMC12.2K	Right Side	1513	1	w/	23.40	22.64	1.19	-0.02	0.058	0.07
	WCDMA IV	RMC12.2K	Bottom Side	1513	1	w/	23.40	22.64	1.19	-0.15	0.145	0.17
	WCDMA IV	RMC12.2K	Rear Face	1312	1	w/	23.40	22.62	1.20	0.03	0.862	1.03
	WCDMA IV	RMC12.2K	Rear Face	1413	1	w/	23.40	22.57	1.21	0.05	0.810	0.98
28	WCDMA IV	RMC12.2K	Rear Face	1312	2	w/	23.40	22.62	1.20	-0.09	0.897	1.08
	WCDMA IV	RMC12.2K	Rear Face	1312	3	w/o	23.40	22.62	1.20	0.14	0.799	0.96
	WCDMA IV	RMC12.2K	Rear Face	1312	4	w/o	23.40	22.62	1.20	0.06	0.833	1.00
	WCDMA IV	RMC12.2K	Rear Face	1413	2	w/	23.40	22.57	1.21	0.02	0.831	1.01
	WCDMA IV	RMC12.2K	Rear Face	1513	2	w/	23.40	22.64	1.19	-0.04	0.769	0.92
	WCDMA IV	RMC12.2K	Rear Face	1413	3	w/	23.40	22.57	1.21	-0.13	0.752	0.91
	WCDMA IV	RMC12.2K	Rear Face	1513	3	w/	23.40	22.64	1.19	-0.15	0.694	0.83
	WCDMA IV	RMC12.2K	Rear Face	1413	4	w/	23.40	22.57	1.21	0.01	0.810	0.98
	WCDMA IV	RMC12.2K	Rear Face	1513	4	w/	23.40	22.64	1.19	-0.09	0.741	0.88
	WCDMA IV	RMC12.2K	Rear Face	1312	2	w/	23.40	22.62	1.20	0.01	0.821	0.99
	WCDMA V	RMC12.2K	Front Face	4233	1	w/	24.90	24.01	1.23	-0.06	0.302	0.37
	WCDMA V	RMC12.2K	Rear Face	4233	1	w/	24.90	24.01	1.23	0.01	0.783	0.96
	WCDMA V	RMC12.2K	Left Side	4233	1	w/	24.90	24.01	1.23	0.14	0.291	0.36
	WCDMA V	RMC12.2K	Right Side	4233	1	w/	24.90	24.01	1.23	0.12	0.159	0.20
	WCDMA V	RMC12.2K	Bottom Side	4233	1	w/	24.90	24.01	1.23	0	<0.001	0.00
	WCDMA V	RMC12.2K	Rear Face	4132	1	w/	24.90	23.94	1.25	0.01	0.491	0.61
	WCDMA V	RMC12.2K	Rear Face	4182	1	w/	24.90	23.99	1.23	0.06	0.672	0.83
29	WCDMA V	RMC12.2K	Rear Face	4233	2	w/	24.90	24.01	1.23	-0.01	0.851	1.05
	WCDMA V	RMC12.2K	Rear Face	4233	3	w/o	24.90	24.01	1.23	0.01	0.761	0.94
	WCDMA V	RMC12.2K	Rear Face	4233	4	w/o	24.90	24.01	1.23	0.17	0.575	0.71
	WCDMA V	RMC12.2K	Rear Face	4132	2	w/	24.90	23.94	1.25	0.09	0.805	1.01
	WCDMA V	RMC12.2K	Rear Face	4182	2	w/	24.90	23.99	1.23	0.02	0.817	1.00
	WCDMA V	RMC12.2K	Rear Face	4132	3	w/	24.90	23.94	1.25	-0.14	0.707	0.88
	WCDMA V	RMC12.2K	Rear Face	4182	3	w/	24.90	23.99	1.23	-0.19	0.723	0.89
	WCDMA V	RMC12.2K	Rear Face	4233	2	w/	24.90	24.01	1.23	-0.01	0.836	1.03

**Note:** The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Front Face	18900	1	0	1	w/	23.40	22.21	1.32	0.08	0.177	0.23
	LTE 2	QPSK20M	Rear Face	18900	1	0	1	w/	23.40	22.21	1.32	0.02	0.713	0.94
	LTE 2	QPSK20M	Left Side	18900	1	0	1	w/	23.40	22.21	1.32	-0.02	0.336	0.44
	LTE 2	QPSK20M	Right Side	18900	1	0	1	w/	23.40	22.21	1.32	0.01	0.076	0.10
	LTE 2	QPSK20M	Bottom Side	18900	1	0	1	w/	23.40	22.21	1.32	0.06	0.121	0.16
	LTE 2	QPSK20M	Front Face	18900	50	0	1	w/	22.40	21.09	1.35	-0.05	0.137	0.18
	LTE 2	QPSK20M	Rear Face	18900	50	0	1	w/	22.40	21.09	1.35	-0.03	0.570	0.77
	LTE 2	QPSK20M	Left Side	18900	50	0	1	w/	22.40	21.09	1.35	0.04	0.313	0.42
	LTE 2	QPSK20M	Right Side	18900	50	0	1	w/	22.40	21.09	1.35	0.02	0.056	0.08
	LTE 2	QPSK20M	Bottom Side	18900	50	0	1	w/	22.40	21.09	1.35	-0.01	0.095	0.13
	LTE 2	QPSK20M	Rear Face	18900	100	0	1	w/	22.40	21.11	1.35	0.08	0.581	0.78
30	LTE 2	QPSK20M	Rear Face	18700	1	0	1	w/	23.40	22.19	1.32	0.11	0.719	0.95
	LTE 2	QPSK20M	Rear Face	19100	1	0	1	w/	23.40	22.12	1.34	0.01	0.684	0.92
	LTE 2	QPSK20M	Rear Face	18700	1	0	2	w/	23.40	22.19	1.32	0.02	0.706	0.93
	LTE 2	QPSK20M	Rear Face	18700	1	0	3	w/o	23.40	22.19	1.32	-0.03	0.706	0.93
	LTE 2	QPSK20M	Rear Face	18700	1	0	4	w/o	23.40	22.19	1.32	0.08	0.700	0.92
	LTE 2	QPSK20M	Rear Face	18900	1	0	2	w/	23.40	22.21	1.32	0.11	0.703	0.93
	LTE 2	QPSK20M	Rear Face	19100	1	0	2	w/	23.40	22.12	1.34	0.07	0.691	0.93
	LTE 2	QPSK20M	Rear Face	18900	1	0	3	w/	23.40	22.21	1.32	0.1	0.705	0.93
	LTE 2	QPSK20M	Rear Face	19100	1	0	3	w/	23.40	22.12	1.34	-0.12	0.682	0.91
	LTE 2	QPSK20M	Rear Face	18900	1	0	4	w/	23.40	22.21	1.32	-0.01	0.694	0.92
	LTE 2	QPSK20M	Rear Face	19100	1	0	4	w/	23.40	22.12	1.34	-0.1	0.710	0.95
	LTE 5	QPSK10M	Front Face	20600	1	0	1	w/	25.40	24.41	1.26	0.02	0.244	0.31
	LTE 5	QPSK10M	Rear Face	20600	1	0	1	w/	25.40	24.41	1.26	0.01	0.700	0.88
	LTE 5	QPSK10M	Left Side	20600	1	0	1	w/	25.40	24.41	1.26	-0.06	0.311	0.39
	LTE 5	QPSK10M	Right Side	20600	1	0	1	w/	25.40	24.41	1.26	0.02	0.101	0.13
	LTE 5	QPSK10M	Bottom Side	20600	1	0	1	w/	25.40	24.41	1.26	0.07	0.123	0.15
	LTE 5	QPSK10M	Front Face	20600	25	0	1	w/	24.40	23.42	1.25	-0.09	0.189	0.24
	LTE 5	QPSK10M	Rear Face	20600	25	0	1	w/	24.40	23.42	1.25	0.03	0.543	0.68
	LTE 5	QPSK10M	Left Side	20600	25	0	1	w/	24.40	23.42	1.25	0.02	0.218	0.27
	LTE 5	QPSK10M	Right Side	20600	25	0	1	w/	24.40	23.42	1.25	0.07	0.077	0.10
	LTE 5	QPSK10M	Bottom Side	20600	25	0	1	w/	24.40	23.42	1.25	0.09	0.085	0.11
	LTE 5	QPSK10M	Rear Face	20600	50	0	1	w/	24.40	23.37	1.27	0.01	0.531	0.67
31	LTE 5	QPSK10M	Rear Face	20450	1	0	1	w/	25.40	24.29	1.29	-0.06	0.756	0.98
	LTE 5	QPSK10M	Rear Face	20525	1	0	1	w/	25.40	24.32	1.28	0.01	0.671	0.86
	LTE 5	QPSK10M	Rear Face	20450	1	0	2	w/	25.40	24.29	1.29	-0.05	0.721	0.93
	LTE 5	QPSK10M	Rear Face	20450	1	0	3	w/o	25.40	24.29	1.29	0.08	0.746	0.96
	LTE 5	QPSK10M	Rear Face	20450	1	0	4	w/o	25.40	24.29	1.29	0.03	0.739	0.95
	LTE 5	QPSK10M	Rear Face	20525	1	0	2	w/	25.40	24.32	1.28	-0.15	0.609	0.78
	LTE 5	QPSK10M	Rear Face	20600	1	0	2	w/	25.40	24.41	1.26	0.12	0.600	0.76
	LTE 5	QPSK10M	Rear Face	20525	1	0	3	w/	25.40	24.32	1.28	-0.08	0.739	0.95
	LTE 5	QPSK10M	Rear Face	20600	1	0	3	w/	25.40	24.41	1.26	-0.03	0.740	0.93
	LTE 5	QPSK10M	Rear Face	20525	1	0	4	w/	25.40	24.32	1.28	-0.13	0.735	0.94
	LTE 5	QPSK10M	Rear Face	20600	1	0	4	w/	25.40	24.41	1.26	-0.1	0.723	0.91

Note: The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 12	QPSK10M	Front Face	23130	1	0	1	w/	24.90	23.95	1.24	0.01	0.183	0.23
	LTE 12	QPSK10M	Rear Face	23130	1	0	1	w/	24.90	23.95	1.24	-0.1	0.478	0.59
	LTE 12	QPSK10M	Left Side	23130	1	0	1	w/	24.90	23.95	1.24	0.03	0.223	0.28
	LTE 12	QPSK10M	Right Side	23130	1	0	1	w/	24.90	23.95	1.24	0.02	0.063	0.08
	LTE 12	QPSK10M	Bottom Side	23130	1	0	1	w/	24.90	23.95	1.24	-0.05	0.108	0.13
	LTE 12	QPSK10M	Front Face	23130	25	0	1	w/	23.90	22.83	1.28	0.03	0.148	0.19
	LTE 12	QPSK10M	Rear Face	23130	25	0	1	w/	23.90	22.83	1.28	-0.04	0.402	0.51
	LTE 12	QPSK10M	Left Side	23130	25	0	1	w/	23.90	22.83	1.28	-0.08	0.171	0.22
	LTE 12	QPSK10M	Right Side	23130	25	0	1	w/	23.90	22.83	1.28	0.06	0.063	0.08
	LTE 12	QPSK10M	Bottom Side	23130	25	0	1	w/	23.90	22.83	1.28	0.01	0.034	0.04
	LTE 12	QPSK10M	Rear Face	23060	1	0	1	w/	24.90	23.89	1.26	-0.05	0.468	0.59
	LTE 12	QPSK10M	Rear Face	23095	1	0	1	w/	24.90	23.81	1.29	0.07	0.460	0.59
32	LTE 12	QPSK10M	Rear Face	23130	1	0	2	w/	24.90	23.95	1.24	0.05	0.488	0.61
	LTE 12	QPSK10M	Rear Face	23130	1	0	3	w/o	24.90	23.95	1.24	0.03	0.411	0.51
	LTE 12	QPSK10M	Rear Face	23130	1	0	4	w/o	24.90	23.95	1.24	0.1	0.414	0.51
	LTE 14	QPSK10M	Front Face	23330	1	0	1	w/	24.90	23.69	1.32	-0.01	0.251	0.33
	LTE 14	QPSK10M	Rear Face	23330	1	0	1	w/	24.90	23.69	1.32	0.08	0.524	0.69
	LTE 14	QPSK10M	Left Side	23330	1	0	1	w/	24.90	23.69	1.32	-0.01	0.246	0.32
	LTE 14	QPSK10M	Right Side	23330	1	0	1	w/	24.90	23.69	1.32	0.06	0.135	0.18
	LTE 14	QPSK10M	Bottom Side	23330	1	0	1	w/	24.90	23.69	1.32	0.04	0.099	0.13
	LTE 14	QPSK10M	Front Face	23330	25	0	1	w/	23.90	22.58	1.36	-0.03	0.206	0.28
	LTE 14	QPSK10M	Rear Face	23330	25	0	1	w/	23.90	22.58	1.36	0.04	0.507	0.69
	LTE 14	QPSK10M	Left Side	23330	25	0	1	w/	23.90	22.58	1.36	0.01	0.234	0.32
	LTE 14	QPSK10M	Right Side	23330	25	0	1	w/	23.90	22.58	1.36	-0.03	0.087	0.12
	LTE 14	QPSK10M	Bottom Side	23330	25	0	1	w/	23.90	22.58	1.36	0.04	0.067	0.09
33	LTE 14	QPSK10M	Rear Face	23330	1	0	2	w/	24.90	23.69	1.32	-0.11	0.573	0.76
	LTE 14	QPSK10M	Rear Face	23330	1	0	3	w/o	24.90	23.69	1.32	0.11	0.513	0.68
	LTE 14	QPSK10M	Rear Face	23330	1	0	4	w/o	24.90	23.69	1.32	0.07	0.509	0.67

Note: The "< 0.001" means there is no SAR value or the SAR is too low to be measured.



# SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Sample	Camera	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 66	QPSK20M	Front Face	132322	1	0	1	w/	23.40	22.57	1.21	0.07	0.301	0.36
	LTE 66	QPSK20M	Rear Face	132322	1	0	1	w/	23.40	22.57	1.21	-0.12	0.893	1.08
	LTE 66	QPSK20M	Left Side	132322	1	0	1	w/	23.40	22.57	1.21	0.01	0.401	0.49
	LTE 66	QPSK20M	Right Side	132322	1	0	1	w/	23.40	22.57	1.21	0.07	0.070	0.08
	LTE 66	QPSK20M	Bottom Side	132322	1	0	1	w/	23.40	22.57	1.21	0.05	0.150	0.18
	LTE 66	QPSK20M	Front Face	132322	50	0	1	w/	22.40	21.36	1.27	-0.06	0.229	0.29
	LTE 66	QPSK20M	Rear Face	132322	50	0	1	w/	22.40	21.36	1.27	0.01	0.687	0.87
	LTE 66	QPSK20M	Left Side	132322	50	0	1	w/	22.40	21.36	1.27	0.08	0.294	0.37
	LTE 66	QPSK20M	Right Side	132322	50	0	1	w/	22.40	21.36	1.27	0.01	0.070	0.09
	LTE 66	QPSK20M	Bottom Side	132322	50	0	1	w/	22.40	21.36	1.27	-0.01	0.162	0.21
	LTE 66	QPSK20M	Rear Face	132072	1	0	1	w/	23.40	22.29	1.29	-0.06	0.822	1.06
	LTE 66	QPSK20M	Rear Face	132572	1	0	1	w/	23.40	22.41	1.26	0.04	0.756	0.95
	LTE 66	QPSK20M	Rear Face	132072	50	0	1	w/	22.40	21.08	1.36	-0.01	0.695	0.95
	LTE 66	QPSK20M	Rear Face	132572	50	0	1	w/	22.40	21.20	1.32	0.06	0.601	0.79
	LTE 66	QPSK20M	Rear Face	132322	100	0	1	w/	22.40	21.19	1.32	0.01	0.648	0.86
34	LTE 66	QPSK20M	Rear Face	132322	1	0	2	w/	23.40	22.57	1.21	0.09	0.910	1.10
	LTE 66	QPSK20M	Rear Face	132322	1	0	3	w/o	23.40	22.57	1.21	0.13	0.867	1.05
	LTE 66	QPSK20M	Rear Face	132322	1	0	4	w/o	23.40	22.57	1.21	-0.01	0.901	1.09
	LTE 66	QPSK20M	Rear Face	132072	1	0	2	w/	23.40	22.29	1.29	-0.06	0.831	1.07
	LTE 66	QPSK20M	Rear Face	132572	1	0	2	w/	23.40	22.41	1.26	0.04	0.758	0.96
	LTE 66	QPSK20M	Rear Face	132072	1	0	3	w/	23.40	22.29	1.29	-0.1	0.846	1.09
	LTE 66	QPSK20M	Rear Face	132572	1	0	3	w/	23.40	22.41	1.26	-0.09	0.798	1.01
	LTE 66	QPSK20M	Rear Face	132072	1	0	4	w/	23.40	22.29	1.29	-0.17	0.852	1.10
	LTE 66	QPSK20M	Rear Face	132572	1	0	4	w/	23.40	22.41	1.26	0.05	0.812	1.02
	LTE 66	QPSK20M	Rear Face	132322	1	0	2	w/	23.40	22.57	1.21	0.02	0.868	1.05

Plot No.	Band	Mode	Test Position	Ch.	Sample	Camera	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Front Face	6	1	w/	100.00	1.00	19.20	18.87	1.08	0	<0.001	0.00
35	WLAN2.4G	802.11b	Rear Face	6	1	w/	100.00	1.00	19.20	18.87	1.08	-0.14	0.221	0.24
	WLAN2.4G	802.11b	Right Side	6	1	w/	100.00	1.00	19.20	18.87	1.08	0.13	0.045	0.05
	WLAN2.4G	802.11b	Bottom Side	6	1	w/	100.00	1.00	19.20	18.87	1.08	0	<0.001	0.00
	WLAN2.4G	802.11b	Rear Face	1	1	w/	100.00	1.00	19.20	18.86	1.08	-0.06	0.21	0.23
	WLAN2.4G	802.11b	Rear Face	11	1	w/	100.00	1.00	19.20	18.79	1.10	-0.14	0.218	0.24
	WLAN2.4G	802.11b	Rear Face	6	2	w/	100.00	1.00	19.20	18.87	1.08	-0.18	0.219	0.24
	WLAN2.4G	802.11b	Rear Face	6	3	w/o	100.00	1.00	19.20	18.87	1.08	0.04	0.137	0.15
	WLAN2.4G	802.11b	Rear Face	6	4	w/o	100.00	1.00	19.20	18.87	1.08	0.16	0.183	0.20
	BT	BR	Front Face	0	1	w/	76.53	1.31	10.40	8.78	1.45	-0.06	<0.001	0.00
36	BT	BR	Rear Face	0	1	w/	76.53	1.31	10.40	8.78	1.45	0.01	0.019	0.04
	BT	BR	Right Side	0	1	w/	76.53	1.31	10.40	8.78	1.45	0.13	0.00387	0.01
	BT	BR	Bottom Side	0	1	w/	76.53	1.31	10.40	8.78	1.45	-0.07	<0.001	0.00
	BT	BR	Rear Face	39	1	w/	76.53	1.31	10.40	8.64	1.50	0.06	0.018	0.04
	BT	BR	Rear Face	78	1	w/	76.53	1.31	10.40	8.41	1.58	-0.07	0.018	0.04
	BT	BR	Rear Face	0	2	w/	76.53	1.31	10.40	8.78	1.45	0.12	0.017	0.03
	BT	BR	Rear Face	0	3	w/o	76.53	1.31	10.40	8.78	1.45	-0.14	0.011	0.02
	BT	BR	Rear Face	0	4	w/o	76.53	1.31	10.40	8.78	1.45	0.14	0.015	0.03

Note: The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

# SAR Test Report

## 4.7.5 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium maybe used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

### Body-worn

Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
WCDMA II	RMC12.2K	Rear Face	9538	0.902	0.891	1.01	N/A	N/A	N/A	N/A
WCDMA IV	RMC12.2K	Rear Face	1312	0.938	0.921	1.02	N/A	N/A	N/A	N/A
LTE 66	QPSK20M	Rear Face	132072	0.817	0.802	1.02	N/A	N/A	N/A	N/A

### Hotspot

Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
WCDMA II	RMC12.2K	Rear Face	9400	1.00	0.996	1.00	N/A	N/A	N/A	N/A
WCDMA IV	RMC12.2K	Rear Face	1312	0.897	0.821	1.09	N/A	N/A	N/A	N/A
WCDMA V	RMC12.2K	Rear Face	4233	0.851	0.836	1.02	N/A	N/A	N/A	N/A
LTE 66	QPSK20M	Rear Face	132322	0.910	0.868	1.05	N/A	N/A	N/A	N/A

# SAR Test Report

## 4.7.6 Simultaneous Multi-band Transmission Evaluation

### <Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Head Exposure Condition	Body-worn Exposure Condition	Hotspot Exposure Condition
1	WWAN + WLAN2.4G	Yes	Yes	Yes
2	WWAN + WLAN5G	Yes	Yes	No
3	WWAN + BT	Yes	Yes	No
4	WLAN5G + BT	Yes	Yes	No
5	WWAN + WLAN5G + BT	Yes	Yes	No

### Note :

1. The WLAN 2.4G and WLAN 5G cannot transmit simultaneously.
2. Combination 2 is covered by Combination 5
3. Combination 3 is covered by Combination 5
4. Combination 4 is covered by Combination 5

### <SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR<sub>1g</sub> of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit(SAR<sub>1g</sub> 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR<sub>1g</sub> is greater than the SAR limit (SAR<sub>1g</sub> 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

Refer to Appendix G

Test Engineer : Matt Cheng, and Isaac Liao

**5. Calibration of Test Equipment**

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1106	Apr. 30, 2020	1 Year
System Validation Dipole	SPEAG	D835V2	4d166	Apr. 29, 2020	1 Year
System Validation Dipole	SPEAG	D1750V2	1111	Apr. 29, 2020	1 Year
System Validation Dipole	SPEAG	D1900V2	5d036	Jan. 21, 2020	1 Year
System Validation Dipole	SPEAG	D2450V2	903	Oct. 15, 2019	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1019	Mar. 13, 2020	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	3650	Mar. 25, 2020	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7472	Aug. 24, 2020	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7537	May. 29, 2020	1 Year
Data Acquisition Electronics	SPEAG	DAE4	861	May. 27, 2020	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1277	Jan. 24, 2020	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1585	May. 28, 2020	1 Year
Universal Radio Communication Tester	Anritsu	MT8821C	6201381727	Jun. 11, 2020	1 Year
Universal Radio Communication Tester	R&S	CMW500	164864	Apr. 16, 2020	1 Year
Spectrum Analyzer	R&S	FSL6	102006	Mar. 26, 2020	1 Year
Power Meter	Anritsu	ML2495A	1218009	Jun. 24, 2020	1 Year
Power Sensor	Anritsu	MA2411B	1207252	Jun. 24, 2020	1 Year
Universal Wireless Test Set	Anritsu	MT8870A/MU8 87000A	6201699387	Oct. 07, 2019	1 Year
Thermometer	YFE	YF-160A	150601220	May. 25, 2020	1 Year
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1092	May. 26, 2020	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4230	Jun. 25, 2020	1 Year

## 6. Measurement Uncertainty

According to KDB 865664 D01, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR, and  $\geq 3.75$  W/kg for 10-g SAR. The procedures described in IEEE Std 1528-2013 should be applied. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . When the highest measured SAR within a frequency band is  $< 1.5$  W/kg for 1-g and  $< 3.75$  W/kg for 10-g, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. Hence, the measurement uncertainty analysis is not required in this SAR report because the test result met the condition.

### 7. Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Taiwan Huaya Lab:**

Add: No. 19, Huaya 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan

Tel: +886-(0)3-318-3232

Fax: +886-(0)3-211-5834

**Taiwan Linkou Lab:**

Add: No. 47-2, Baodoucuokeng, Linkou Dist., New Taipei City 244, Taiwan

Tel: +886-(0)2-2605-2180

Fax: +886-(0)2-2605-2943

**Taiwan Hsinchu Lab1:**

Add: E-2, No. 1, Lixing 1st Rd., East Dist., Hsinchu City 300, Taiwan

Tel: +886-(0)3-666-8565

Fax: +886-(0)3-666-8323

**Taiwan Hsinchu Lab2:**

Add: No. 49, Ln. 206, Wende Rd., Qionglin Township, Hsinchu County 307, Taiwan

Tel: +886-(0)3-512-0595

Fax: +886-(0)3-512-0568

**Taiwan Xindian Lab:**

Add: B2F., No. 215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

Tel: +886-(0)2-8914-5882

Fax: +886-(0)2-8914-5840

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** <https://ee.bureauveritas.com.tw/BVInternet/Default>

The road map of all our labs can be found in our web site also.

---END---

## Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

## System Check\_H750\_200923

**DUT: Dipole 750 MHz; Type: D750V3; SN: 1106**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1\_0923 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.892$  S/m;  $\epsilon_r = 42.799$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 750 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.507 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.96 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.571 W/kg

**SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.253 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.507 W/kg

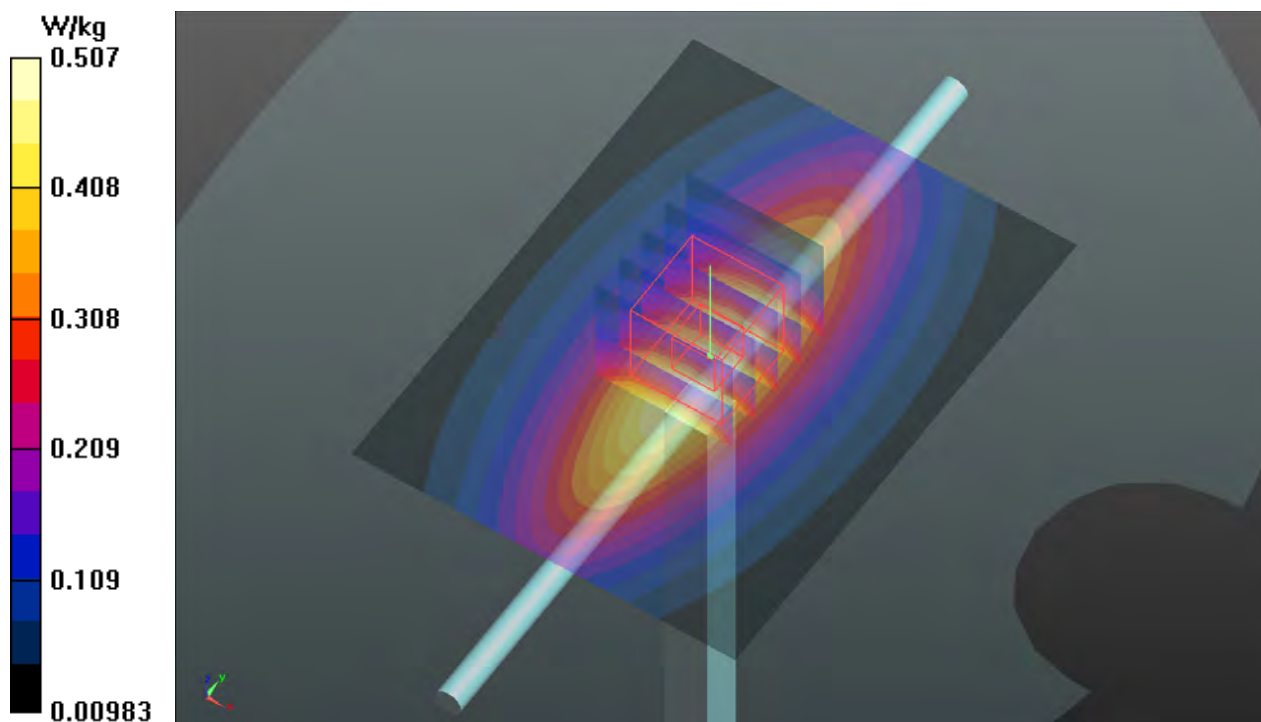



## System Check\_H835\_200921

**DUT: Dipole 835 MHz; Type: D835V2; SN: 4d166**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1\_0921 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.918$  S/m;  $\epsilon_r = 41.678$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.69, 9.69, 9.69) @ 835 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.697 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.18 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.786 W/kg

**SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.344 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.714 W/kg

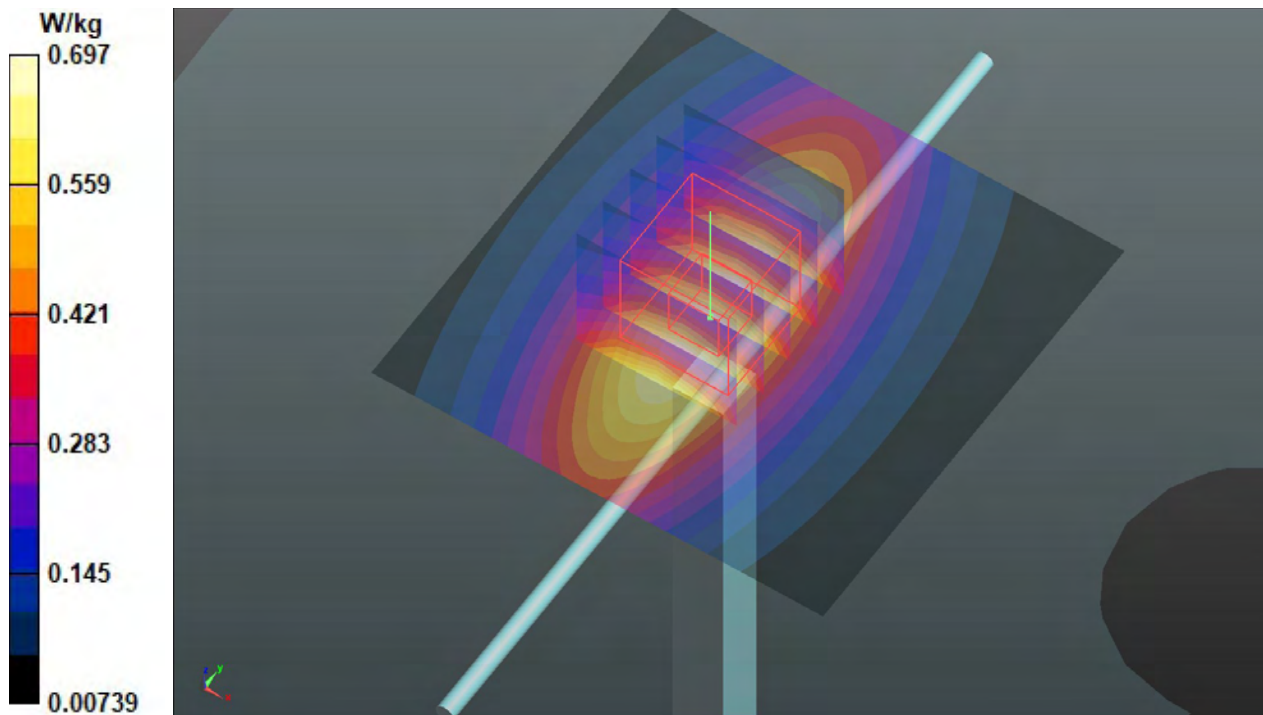

## System Check\_H1750\_200921

**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0921 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.324$  S/m;  $\epsilon_r = 40.161$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.54, 8.54, 8.54) @ 1750 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.91 W/kg

**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 46.85 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 3.47 W/kg  
**SAR(1 g) = 1.95 W/kg; SAR(10 g) = 1.04 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 2.93 W/kg

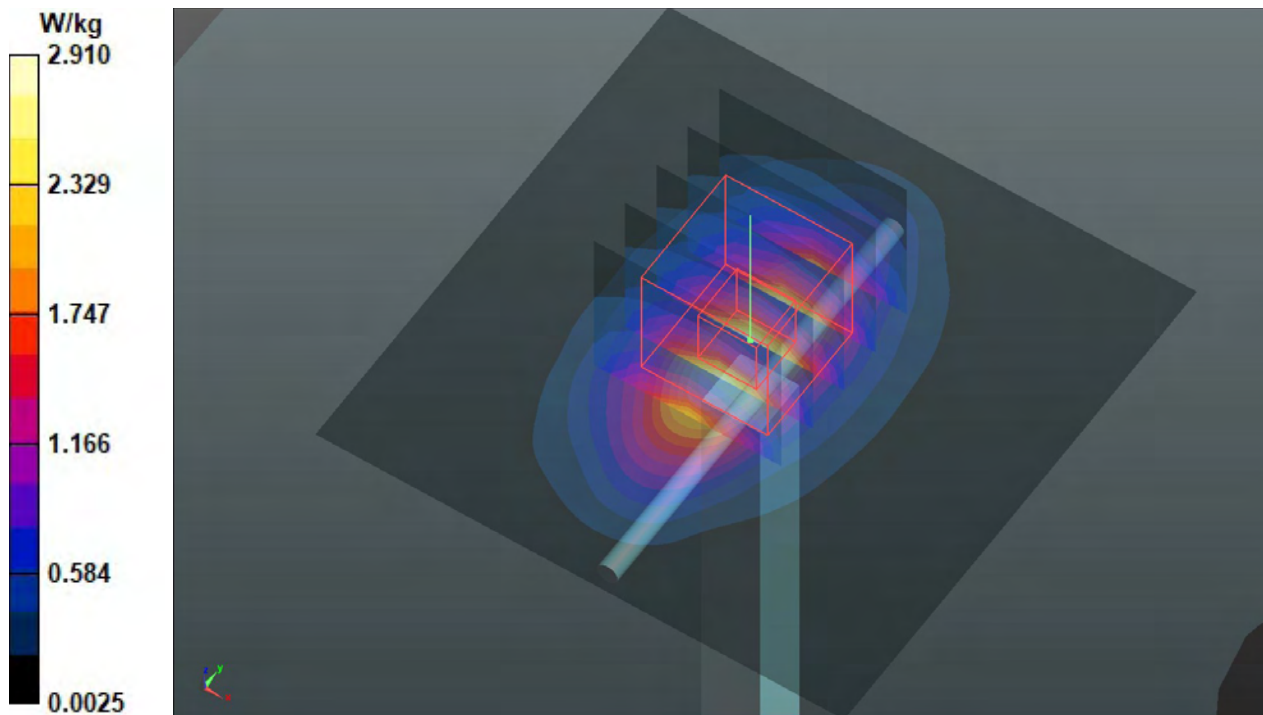

## System Check\_H1900\_200921

**DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1\_0921 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.453$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.23, 8.23, 8.23) @ 1900 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.41 W/kg


**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.85 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.93 W/kg

**SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.2 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.36 W/kg

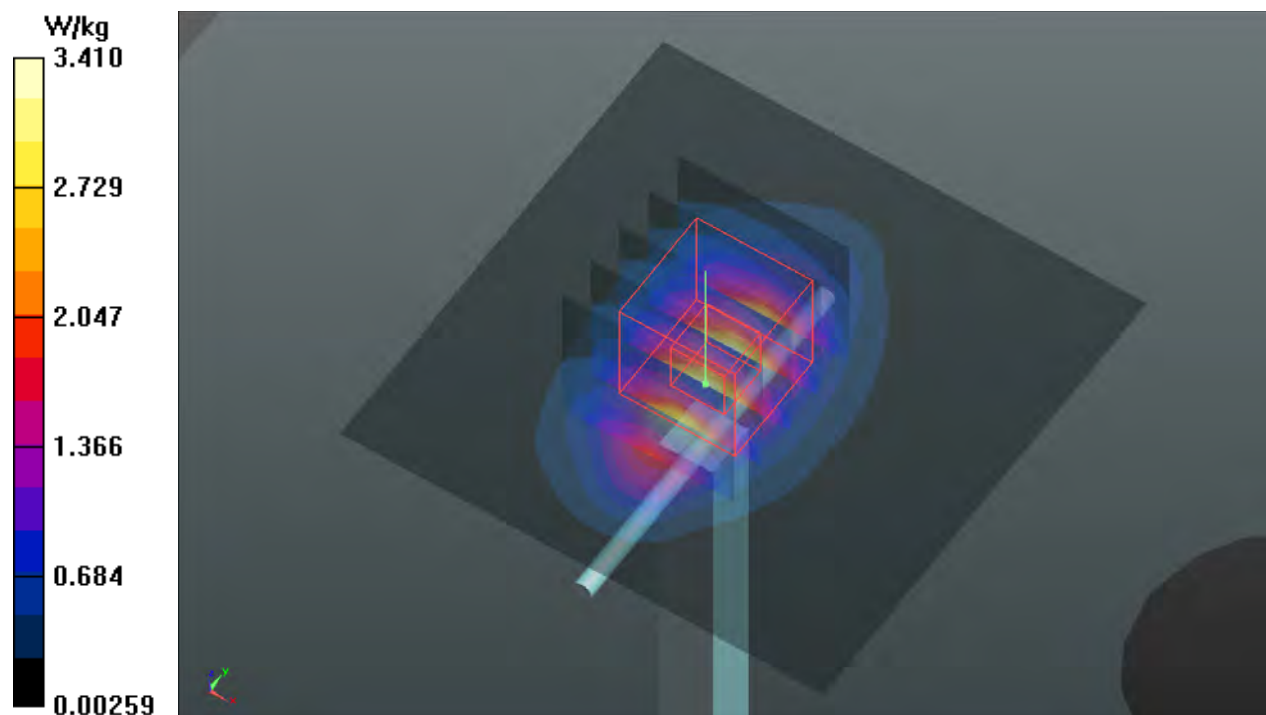

## System Check\_H2450\_201006

**DUT: Dipole 2450 MHz; Type: D2450V2; SN: 903**


Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: H19T27N1\_1006 Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.866$  S/m;  
 $\epsilon_r = 38.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 4.51 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 50.45 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 5.46 W/kg  
**SAR(1 g) = 2.66 W/kg; SAR(10 g) = 1.27 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 4.48 W/kg

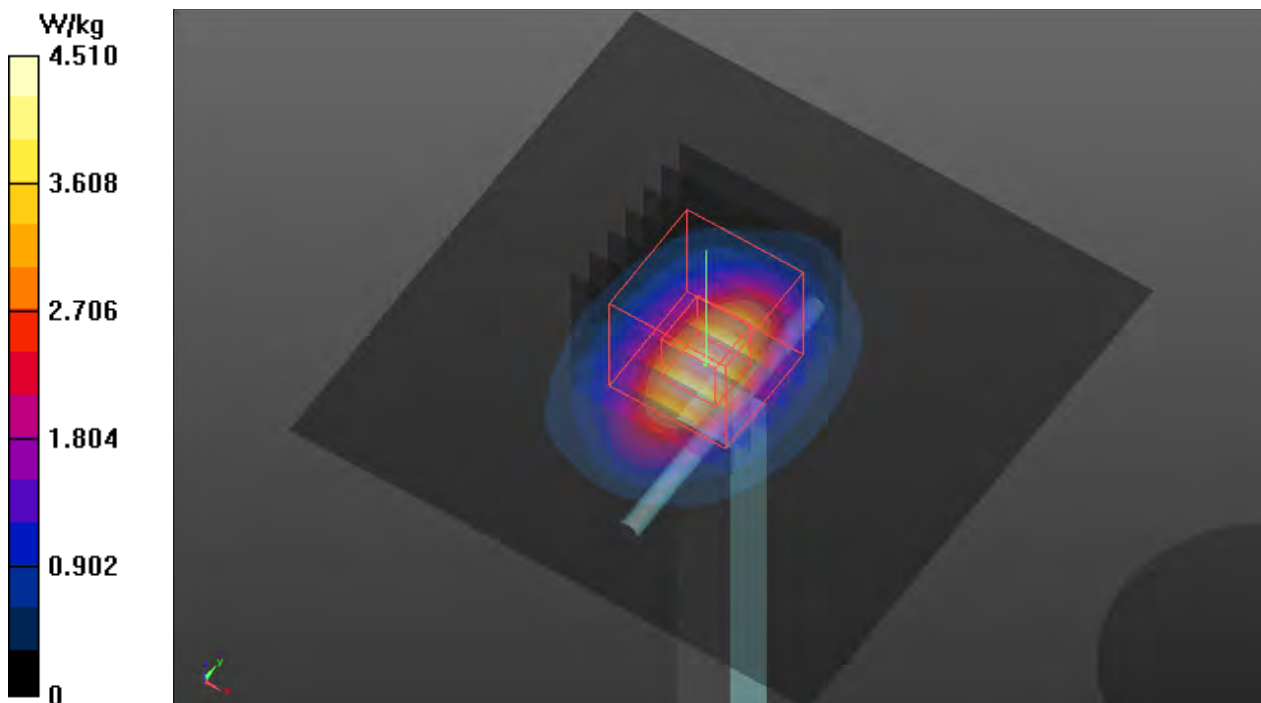

## System Check\_H5250\_201006

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**


Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: H34T60N1\_1006 Medium parameters used (interpolated):  $f = 5250$  MHz;  $\sigma = 4.688$  S/m;  
 $\epsilon_r = 37.645$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.72, 5.72, 5.72) @ 5250 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 8.93 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 48.80 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 14.4 W/kg  
**SAR(1 g) = 3.93 W/kg; SAR(10 g) = 1.16 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 9.42 W/kg

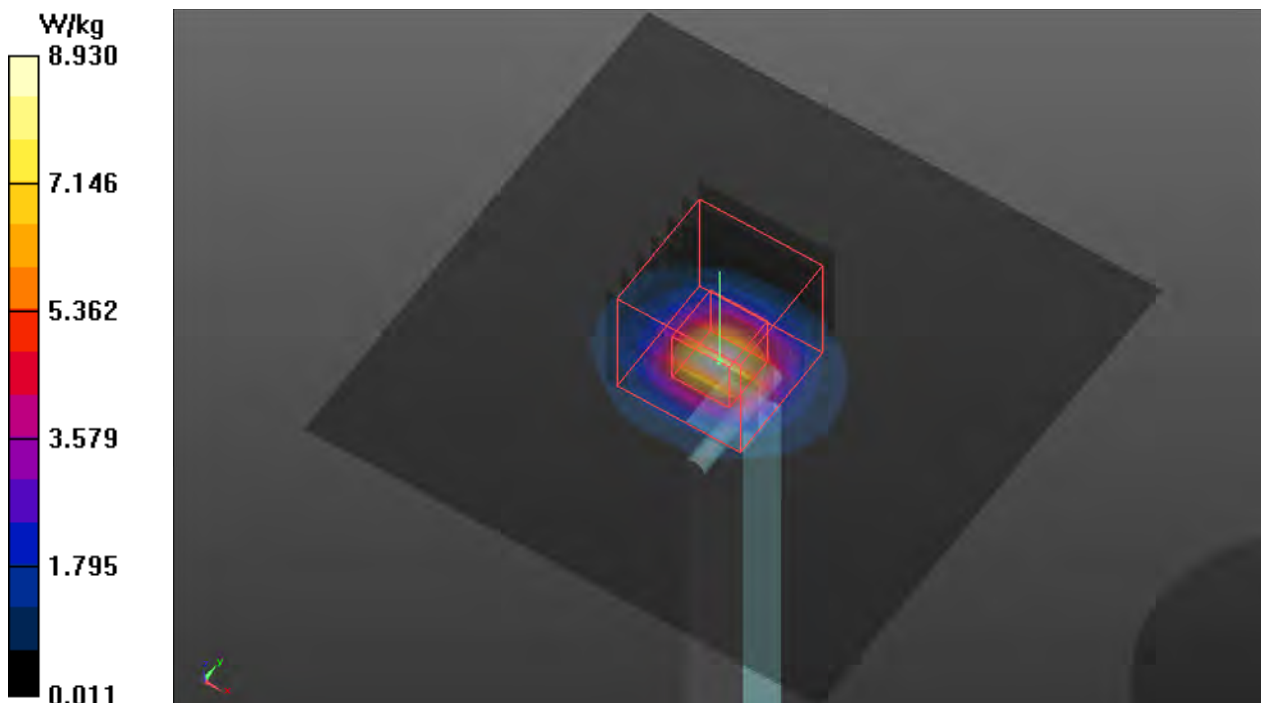

## System Check\_H5600\_201007

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**


Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium: H34T60N1\_1007 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.175$  S/m;  $\epsilon_r = 34.802$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.04, 5.04, 5.04) @ 5600 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 9.66 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 44.05 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 17.0 W/kg  
**SAR(1 g) = 3.99 W/kg; SAR(10 g) = 1.15 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 10.2 W/kg

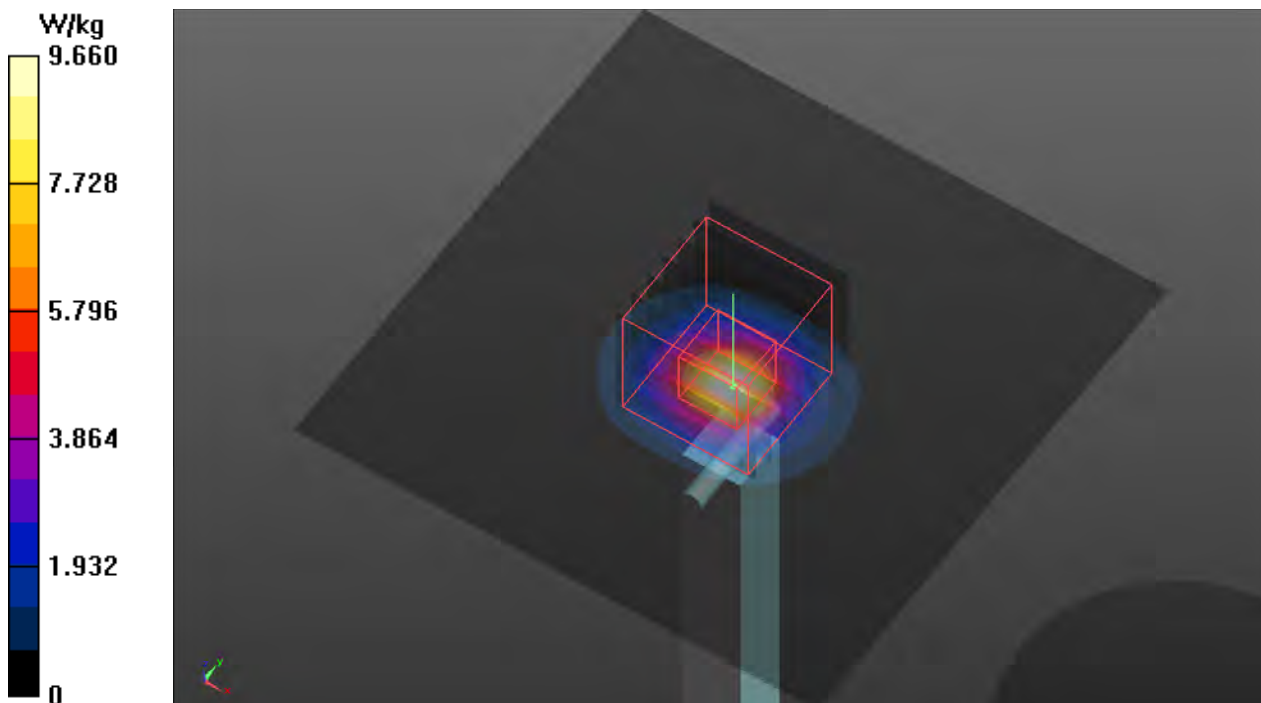

## System Check\_H5750\_201007

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1\_1007 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.337$  S/m;  $\epsilon_r = 34.453$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.25, 5.25, 5.25) @ 5750 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 9.20 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 37.89 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 16.4 W/kg  
**SAR(1 g) = 3.71 W/kg; SAR(10 g) = 1.09 W/kg** (SAR corrected for target medium)  
Maximum value of SAR (measured) = 9.41 W/kg

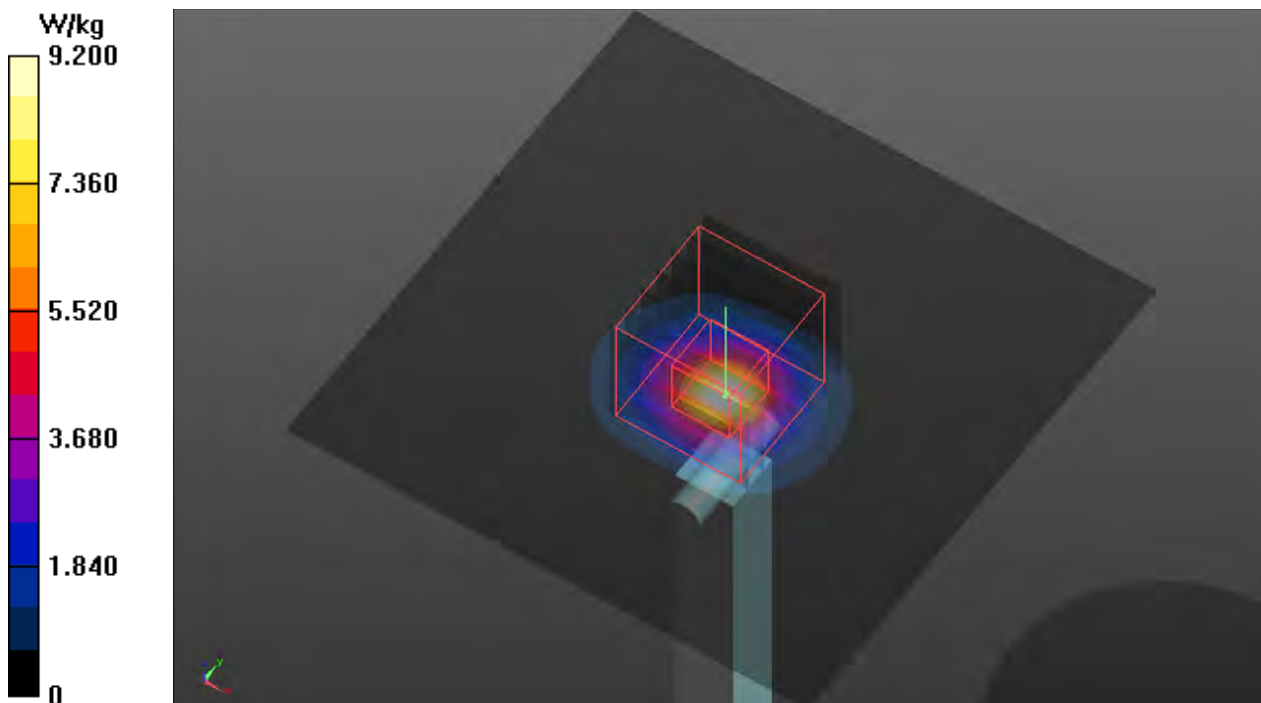

## Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.



## P01 WCDMA II\_RMC12.2K\_Left Cheek\_Ch9262\_Sample 2

**DUT: 200902C02**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1\_0925 Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.415$  S/m;  $\epsilon_r = 39.991$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1852.4 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.649 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.82 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.894 W/kg

**SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.266 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 0.742 W/kg

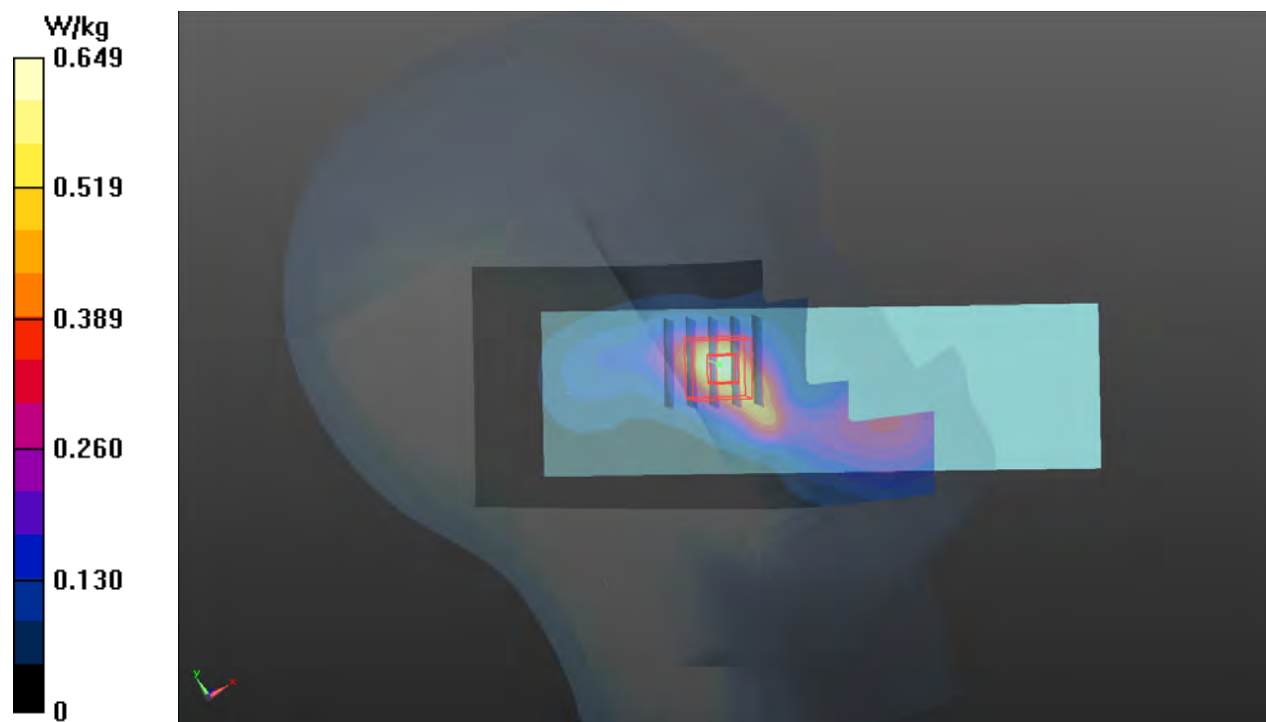

## P02 WCDMA IV\_RMC12.2K\_Left Cheek\_Ch1513\_Sample 2

**DUT: 200902C02**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1\_0925 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.325$  S/m;  $\epsilon_r = 40.377$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1752.6 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.604 W/kg

**Zoom Scan (6x6x8)/Cube 0:** Measurement grid: dx=6.4mm, dy=6.4mm, dz=1.4mm

Reference Value = 21.59 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.292 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.9%

Maximum value of SAR (measured) = 0.774 W/kg

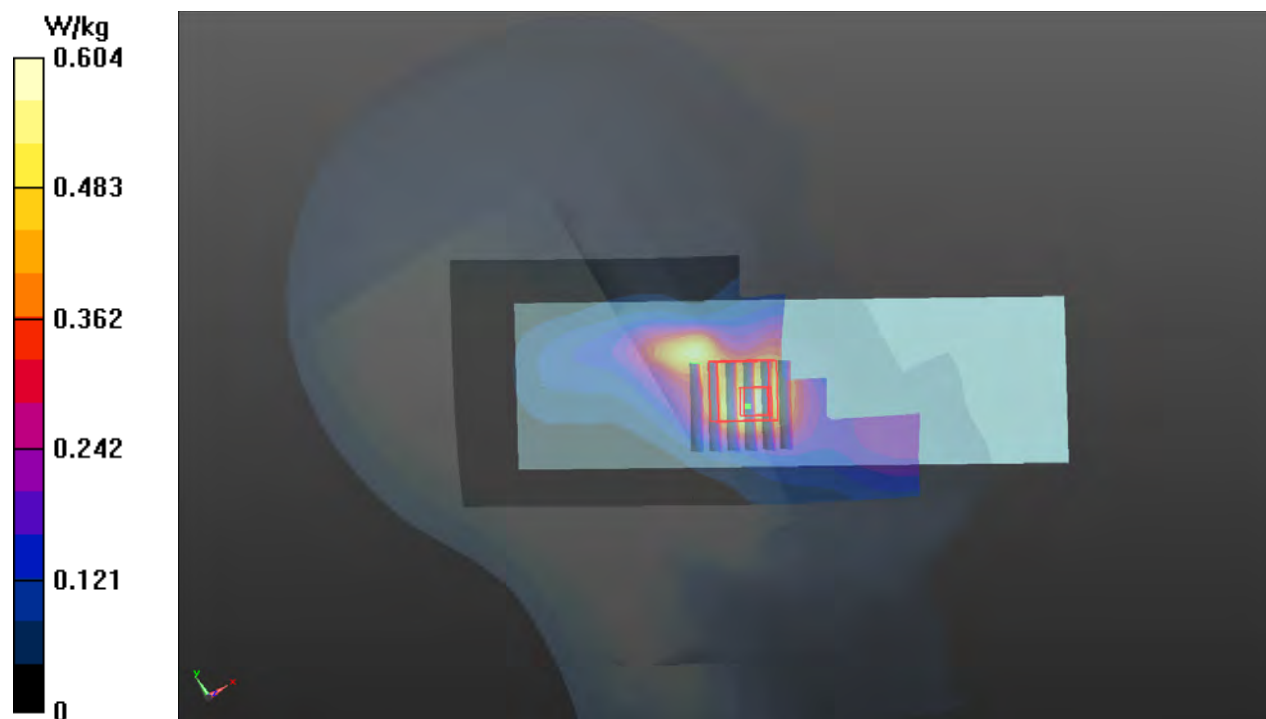

## P03 WCDMA V\_RMC12.2K\_Left Cheek\_Ch4233\_Sample 2

**DUT: 200902C02**


Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:1.95  
Medium: H07T10N1\_0925 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 42.857$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.34, 10.34, 10.34) @ 846.6 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.315 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.02 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 0.414 W/kg  
**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.174 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 12.9 mm  
Ratio of SAR at M2 to SAR at M1 = 65%  
Maximum value of SAR (measured) = 0.379 W/kg

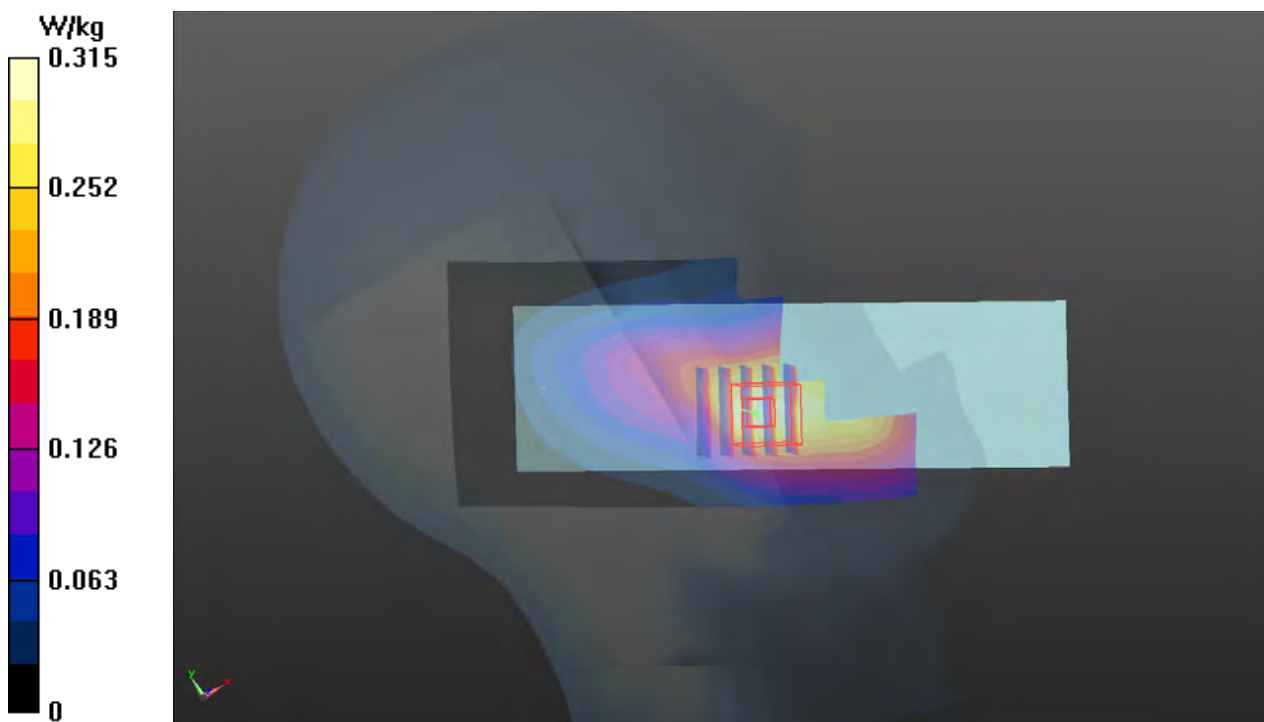

## P04 LTE 2\_QPSK20M\_Left Cheek\_Ch18700\_1RB\_OS0\_Sample 2

**DUT: 200902C02**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1860 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0924 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r = 39.964$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1860 MHz; Calibrated: 2020/05/29

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24

- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.597 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.39 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.785 W/kg

**SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.226 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 0.679 W/kg

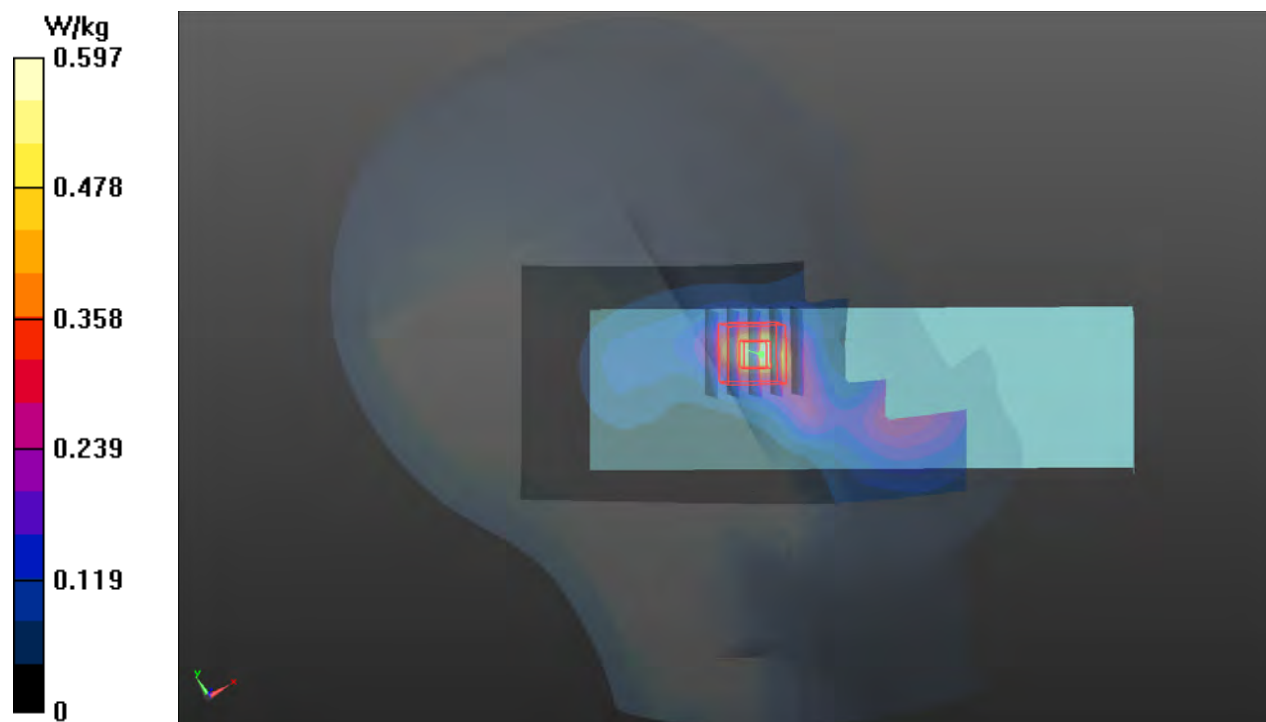

## P05 LTE 5\_QPSK10M\_Left Cheek\_Ch20600\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 844 MHz; Duty Cycle: 1:3.74  
Medium: H07T10N1\_0924 Medium parameters used:  $f = 844$  MHz;  $\sigma = 0.954$  S/m;  $\epsilon_r = 42.893$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.34, 10.34, 10.34) @ 844 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.308 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.28 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.398 W/kg  
**SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.187 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 12.5 mm  
Ratio of SAR at M2 to SAR at M1 = 69.2%  
Maximum value of SAR (measured) = 0.356 W/kg

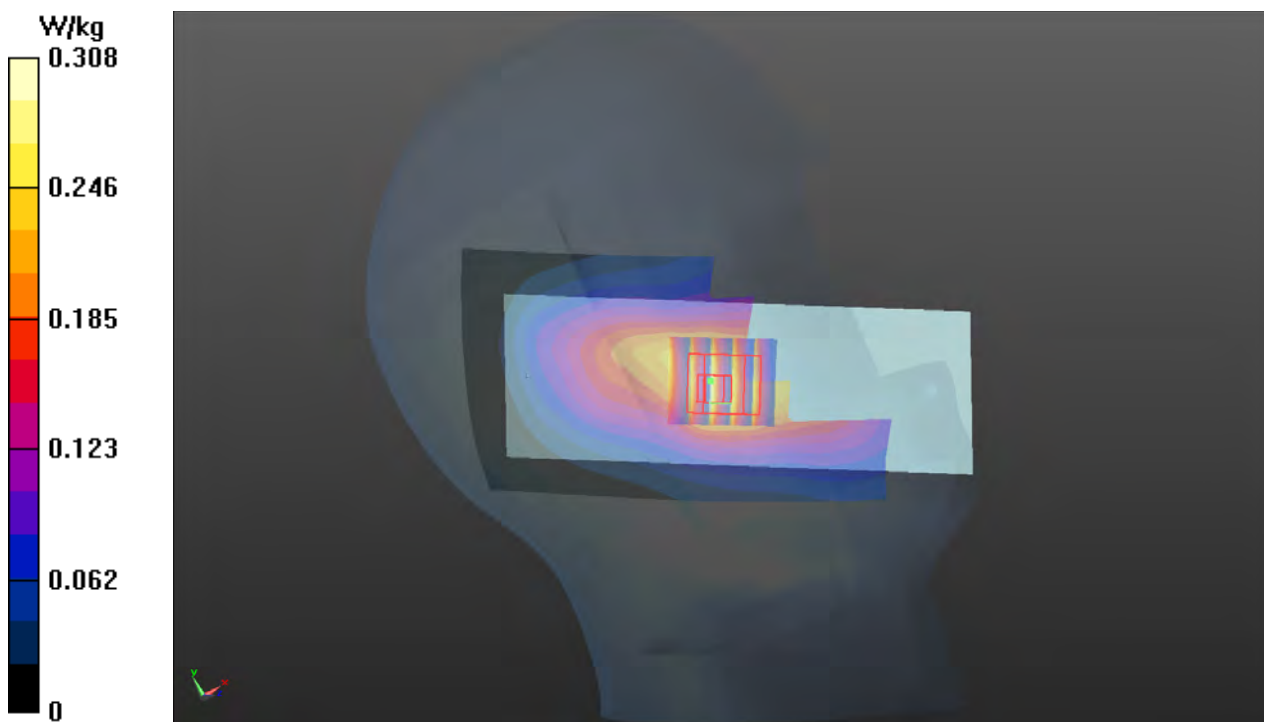

## P06 LTE 12\_QPSK10M\_Left Cheek\_Ch23130\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 711 MHz; Duty Cycle: 1:3.74  
Medium: H06T09N1\_0925 Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 43.338$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 711 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.395 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.97 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 0.492 W/kg  
**SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.139 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 8.2 mm  
Ratio of SAR at M2 to SAR at M1 = 47%  
Maximum value of SAR (measured) = 0.396 W/kg

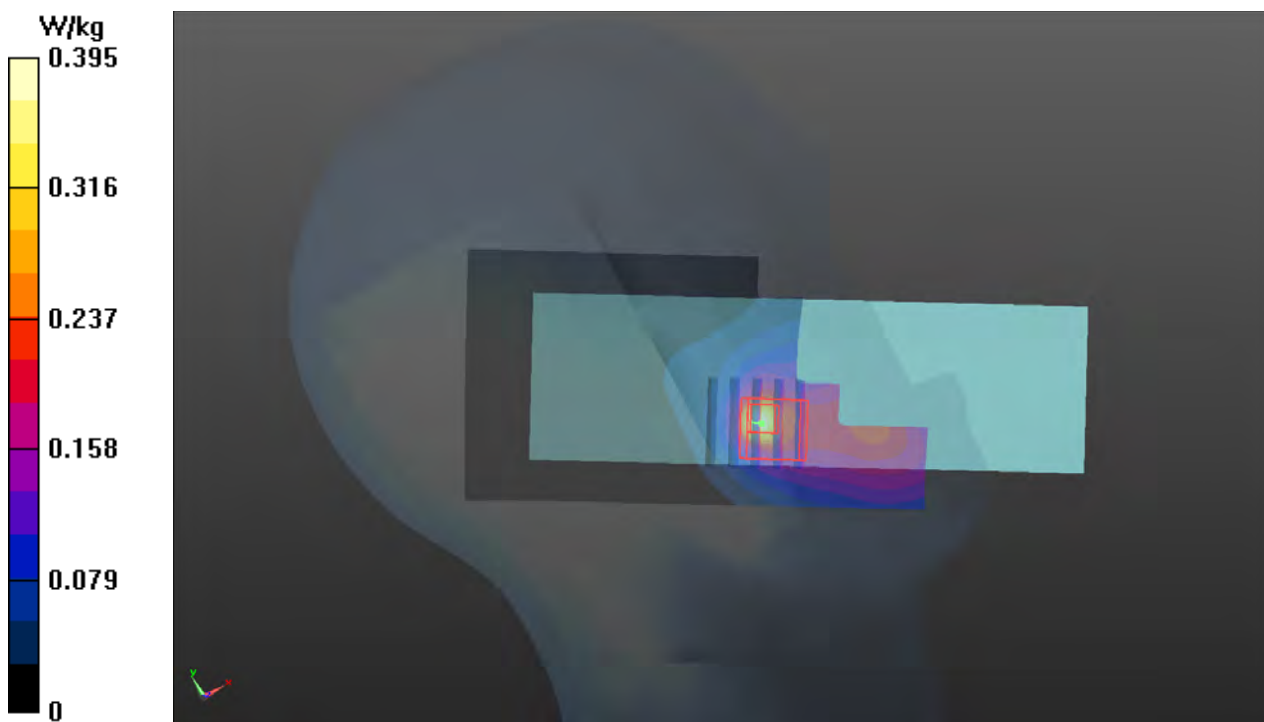

## P07 LTE 14\_QPSK10M\_Left Cheek\_Ch23330\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 793 MHz; Duty Cycle: 1:3.74  
Medium: H06T09N1\_0924 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.933$  S/m;  $\epsilon_r = 42.255$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 793 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.518 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 25.44 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.644 W/kg  
**SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.211 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 9.4 mm  
Ratio of SAR at M2 to SAR at M1 = 54.2%  
Maximum value of SAR (measured) = 0.561 W/kg

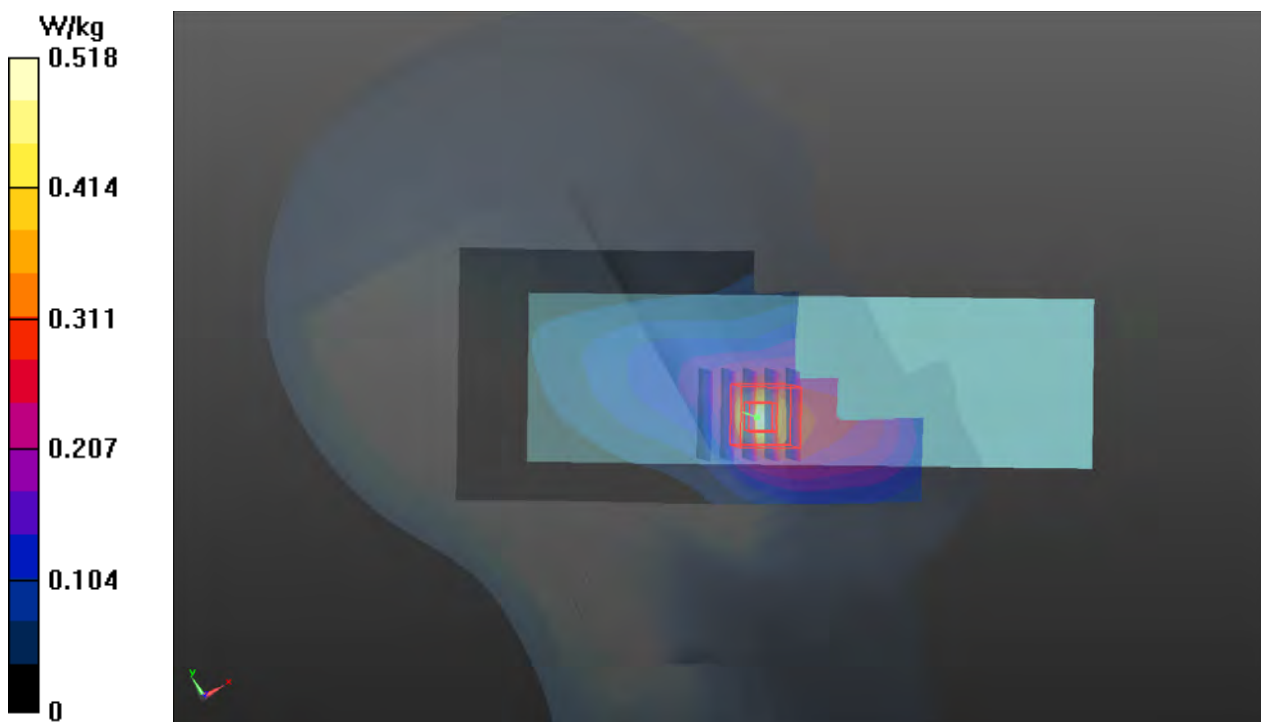

## P08 LTE 66\_QPSK20M\_Left Cheek\_Ch132572\_1RB\_OS0\_Sample 2

**DUT: 200902C02**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1770 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0924 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 40.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1770 MHz; Calibrated: 2020/05/29

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24

- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.610 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.51 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.884 W/kg

**SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.255 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 0.732 W/kg

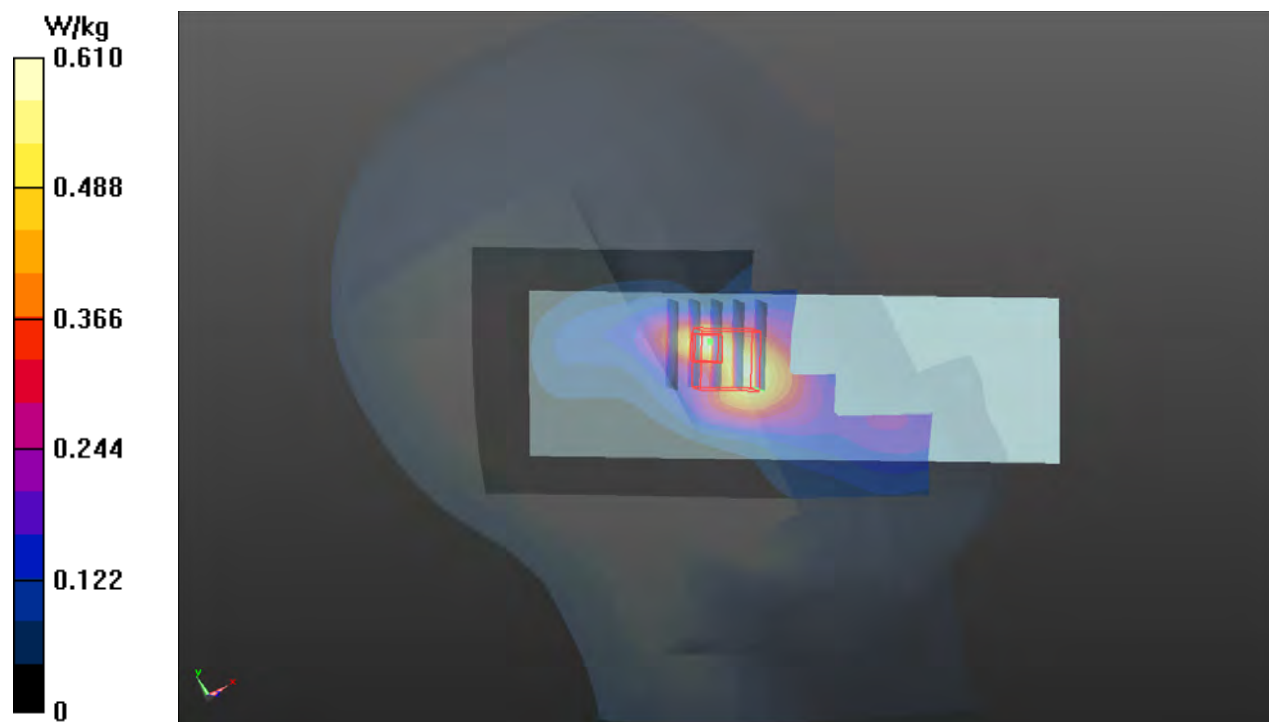



## P09 WLAN2.4G\_802.11b\_Left Cheek\_Ch1\_Sample 1

**DUT: 200902C02**


Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);  
Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: H19T27N1\_1006 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.83$  S/m;  $\epsilon_r = 38.504$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.69, 7.69, 7.69) @ 2412 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x201x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.0930 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 7.044 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 0.113 W/kg  
**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.031 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 57.2%  
Maximum value of SAR (measured) = 0.0916 W/kg

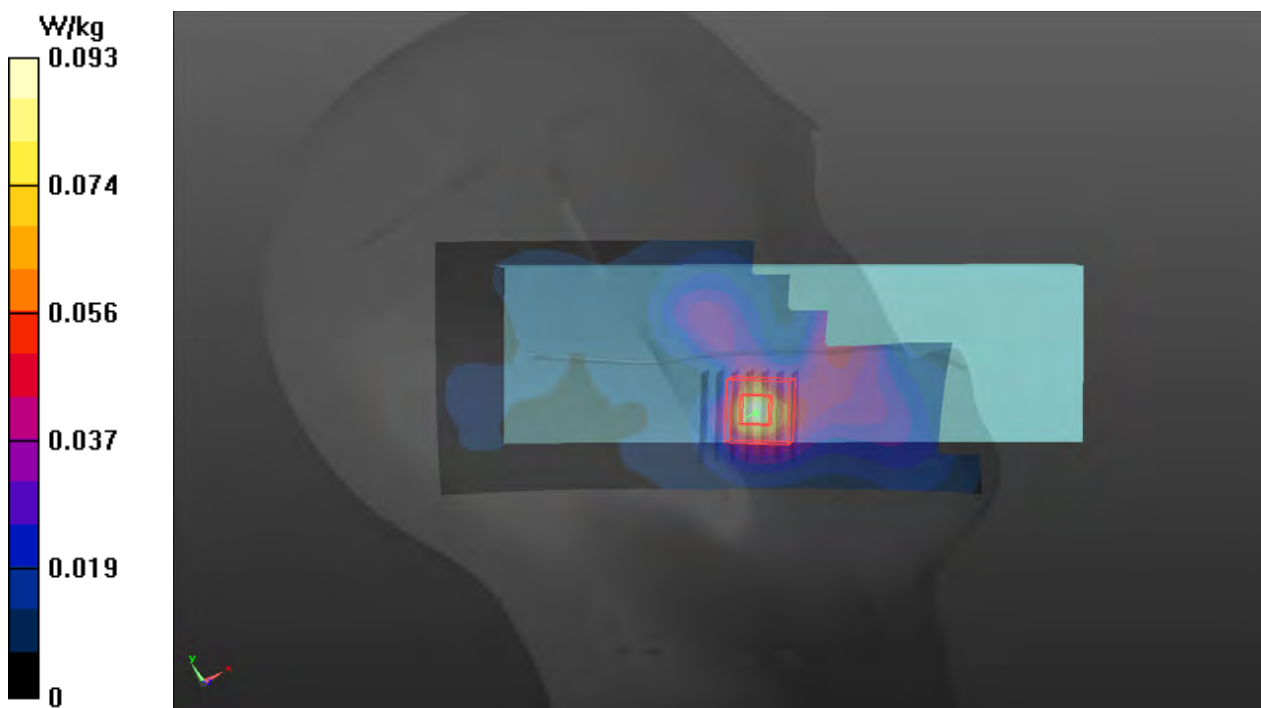

# P10 WLAN5.3G\_802.11a\_Left Cheek\_Ch60\_Sample 1

**DUT: 200902C02**


Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps);  
Frequency: 5300 MHz; Duty Cycle: 1:1.08  
Medium: H34T60N1\_1006 Medium parameters used (interpolated):  $f = 5300 \text{ MHz}$ ;  $\sigma = 4.736 \text{ S/m}$ ;  
 $\epsilon_r = 37.579$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.7 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $23.2 \text{ }^\circ\text{C}$

## DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.72, 5.72, 5.72) @ 5300 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x241x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.228 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$   
Reference Value =  $6.998 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$   
Peak SAR (extrapolated) =  $0.335 \text{ W/kg}$   
**SAR(1 g) =  $0.126 \text{ W/kg}$ ; SAR(10 g) =  $0.064 \text{ W/kg}$**  (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below =  $20.4 \text{ mm}$   
Ratio of SAR at M2 to SAR at M1 =  $87\%$   
Maximum value of SAR (measured) =  $0.238 \text{ W/kg}$

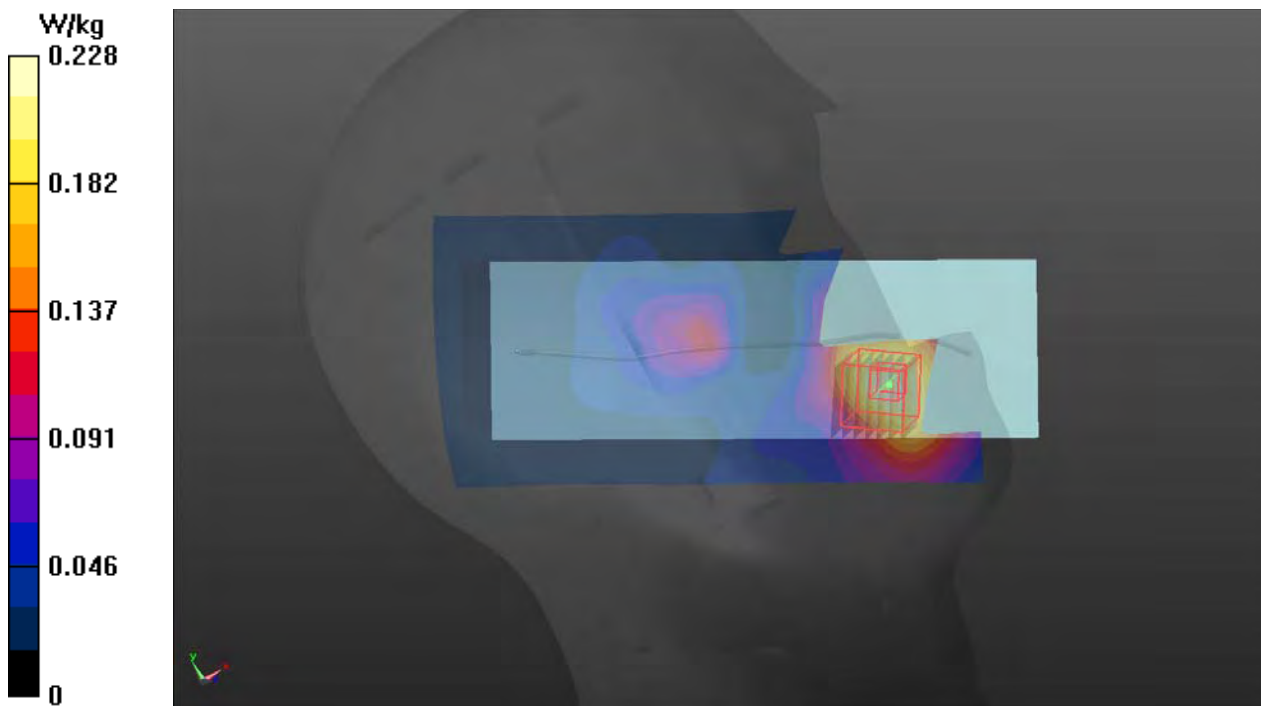

# P11 WLAN5.6G\_802.11a\_Left Cheek\_Ch116\_Sample 1

**DUT: 200902C02**


Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps);  
Frequency: 5580 MHz; Duty Cycle: 1:1.08  
Medium: H34T60N1\_1007 Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.16$  S/m;  $\epsilon_r = 34.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.04, 5.04, 5.04) @ 5580 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x241x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.230 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 6.982 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 4.41 W/kg  
**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.060 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 20.2 mm  
Ratio of SAR at M2 to SAR at M1 = 82.5%  
Maximum value of SAR (measured) = 0.238 W/kg

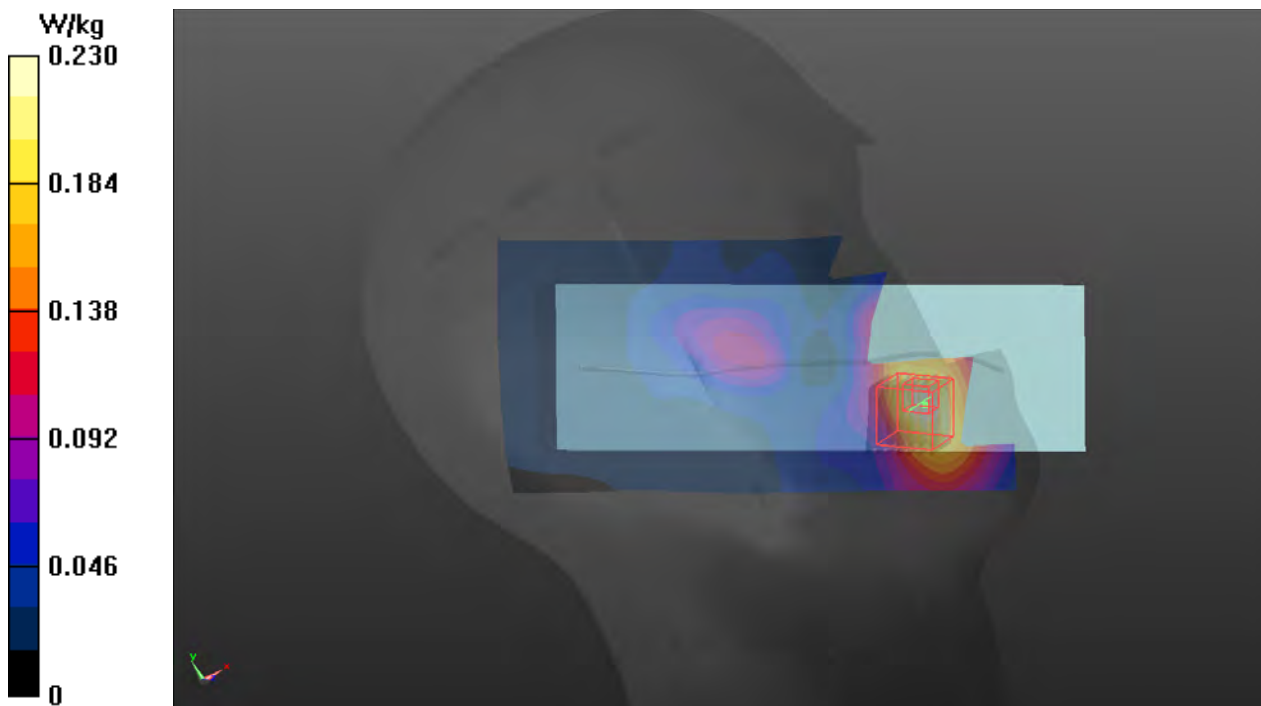

## P12 WLAN5.8G\_802.11a\_Left Cheek\_Ch165\_Sample 1

**DUT: 200902C02**

Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps);

Frequency: 5825 MHz; Duty Cycle: 1:1.08

Medium: H34T60N1\_1007 Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.418$  S/m;  $\epsilon_r = 34.428$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.25, 5.25, 5.25) @ 5825 MHz; Calibrated: 2020/08/24

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28

- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (91x241x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.231 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.902 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.375 W/kg

**SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.057 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 0.224 W/kg

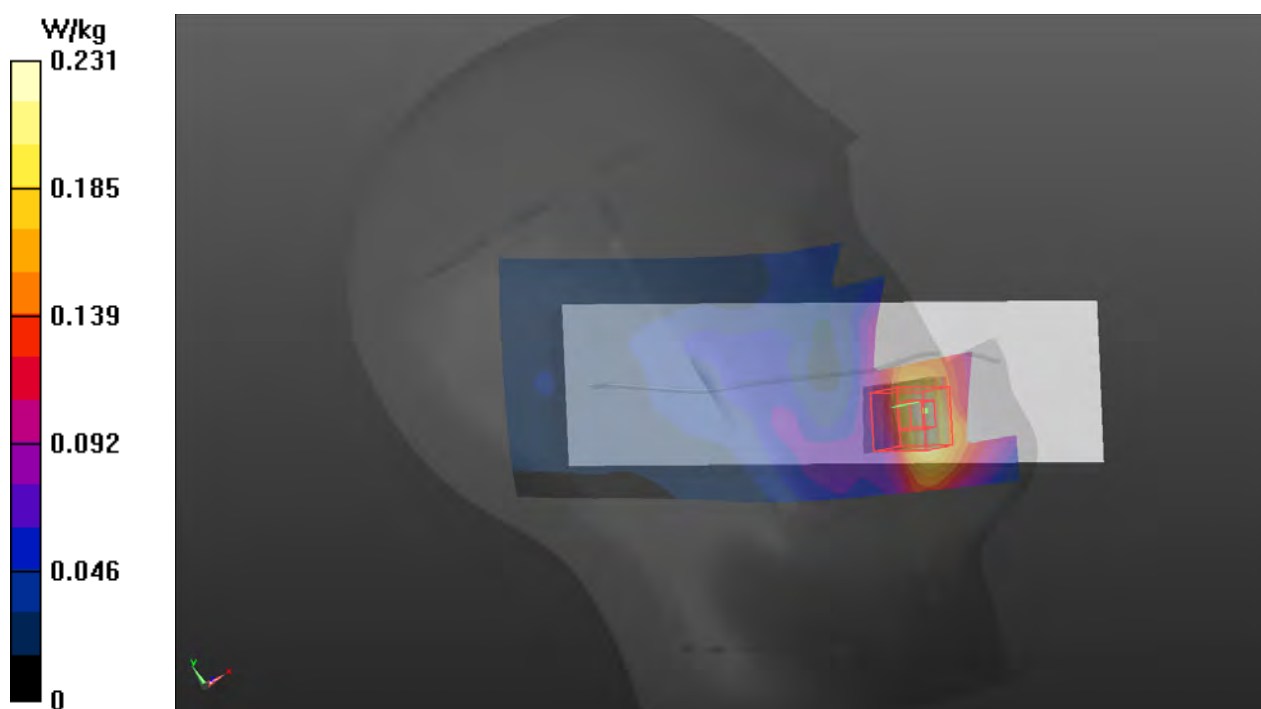

## P13 BT\_BR\_Left Cheek\_Ch0\_Sample 1

**DUT: 200902C02**

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.31

Medium: H19T27N1\_1006 Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.816$  S/m;  $\epsilon_r = 38.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.69, 7.69, 7.69) @ 2402 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x201x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0163 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.730 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.0280 W/kg

**SAR(1 g) = 0.00863 W/kg; SAR(10 g) = 0.00589 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 39.1%

Maximum value of SAR (measured) = 0.0159 W/kg

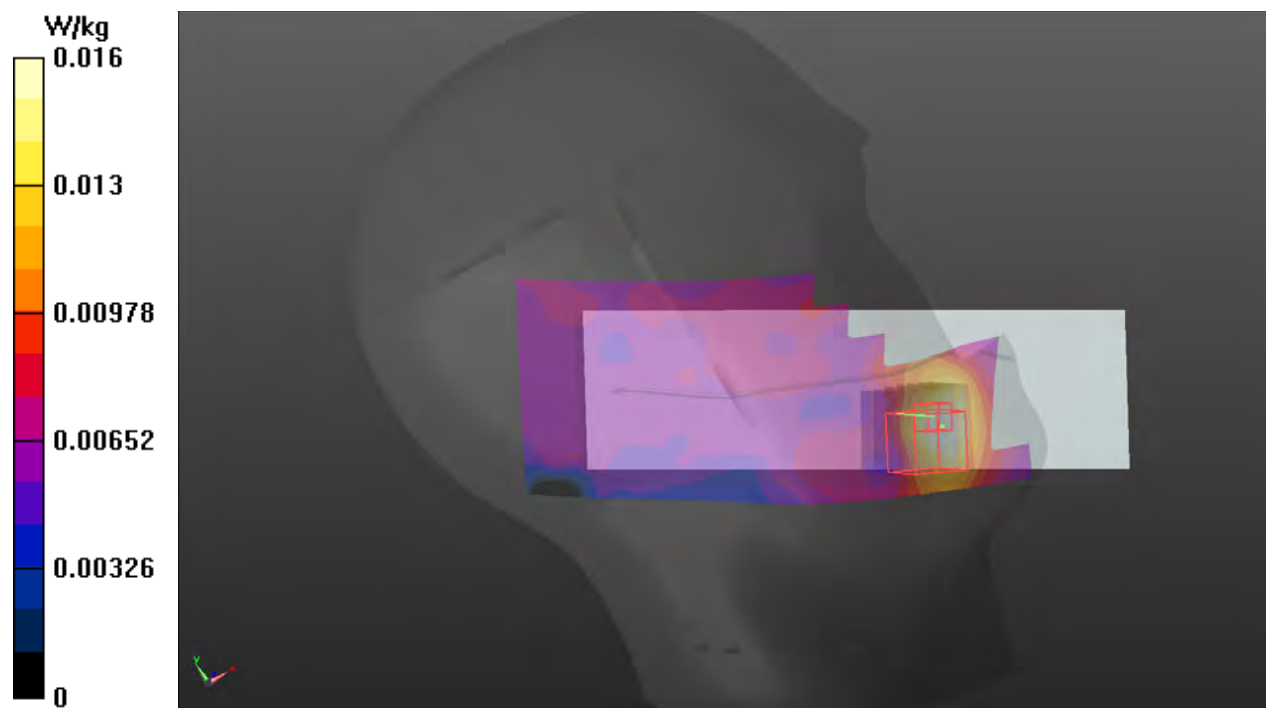

## P14 WCDMA II\_RMC12.2K\_Rear Face\_15mm\_Ch9538\_Sample 2

### DUT: P200902C02

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1\_0921 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.46$  S/m;  $\epsilon_r = 39.608$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.23, 8.23, 8.23) @ 1907.6 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.08 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.600 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 22.7 mm

Ratio of SAR at M2 to SAR at M1 = 67.8%

Maximum value of SAR (measured) = 1.21 W/kg

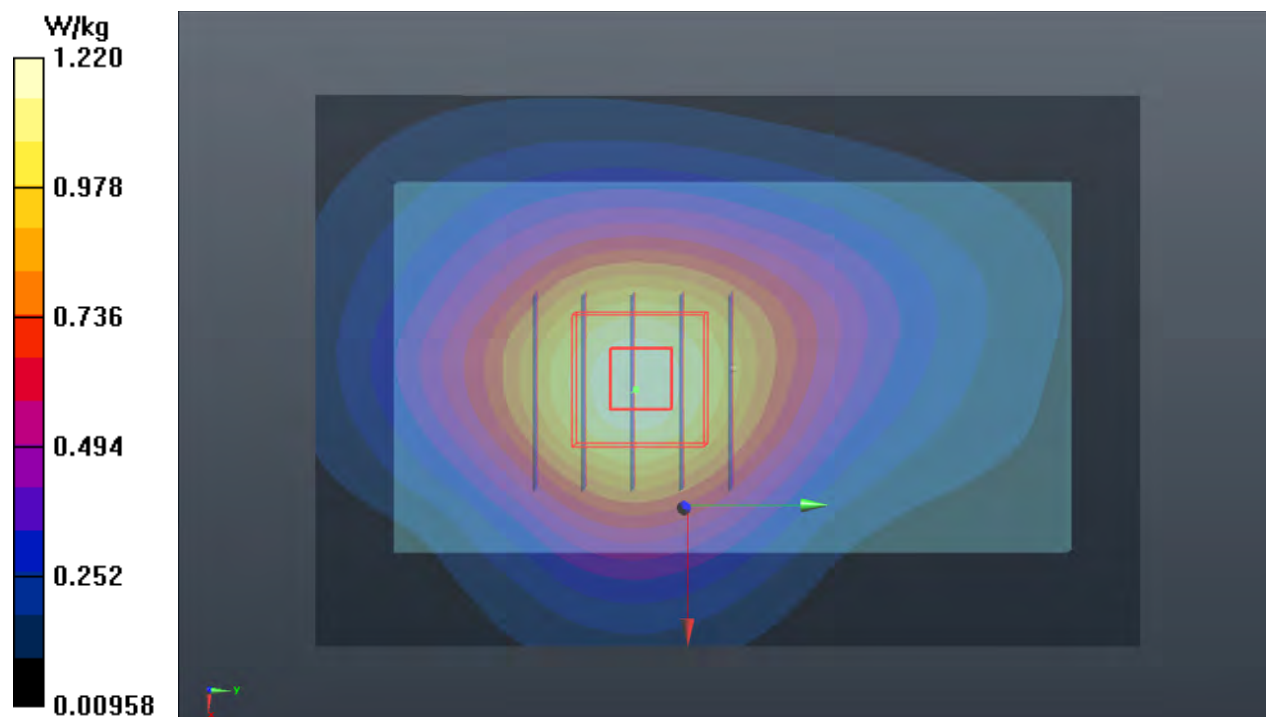

## P15 WCDMA IV\_RMC12.2K\_Rear Face\_15mm\_Ch1312\_Sample 2

### DUT: P200902C02

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1\_0921 Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.291$  S/m;  $\epsilon_r = 40.324$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.54, 8.54, 8.54) @ 1712.4 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.95 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.602 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 66.1%

Maximum value of SAR (measured) = 1.22 W/kg

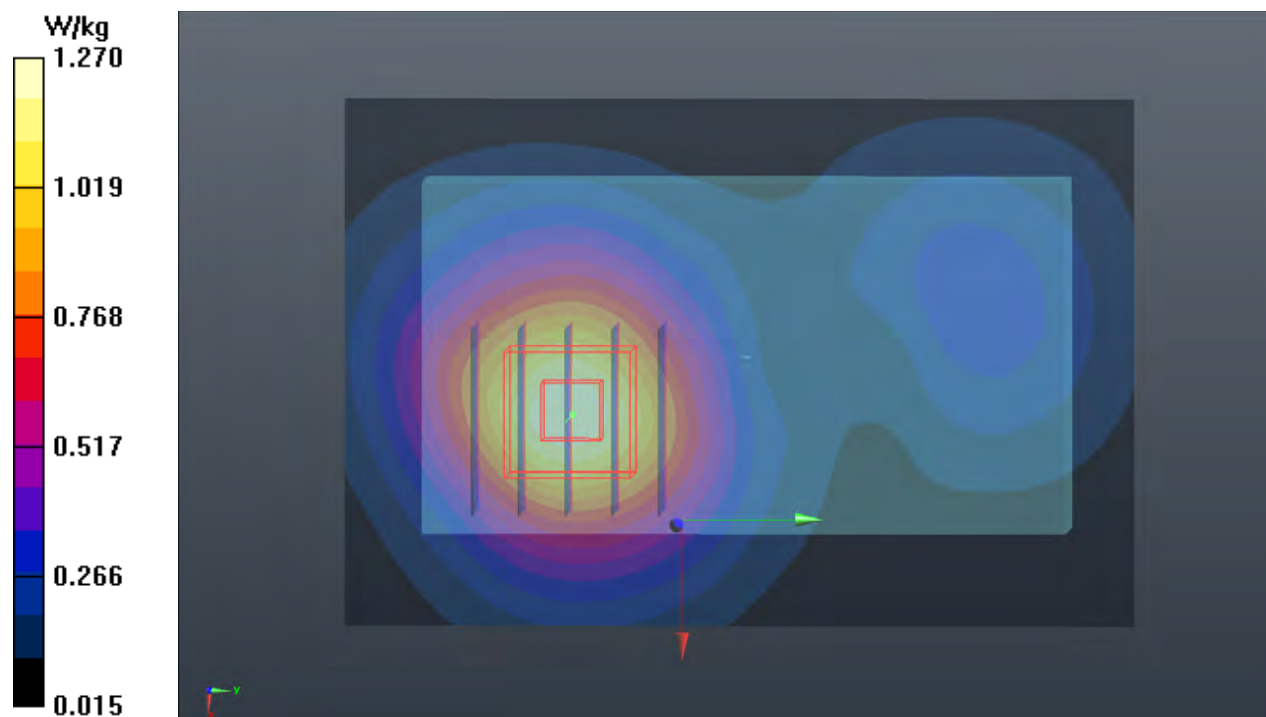

## P16 WCDMA V\_RMC12.2K\_Rear Face\_15mm\_Ch4233\_Sample 2

### DUT: P200902C02

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:1.95

Medium: H07T10N1\_0921 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.928$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.69, 9.69, 9.69) @ 846.6 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.758 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.02 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.826 W/kg

**SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.456 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 75.4%

Maximum value of SAR (measured) = 0.759 W/kg

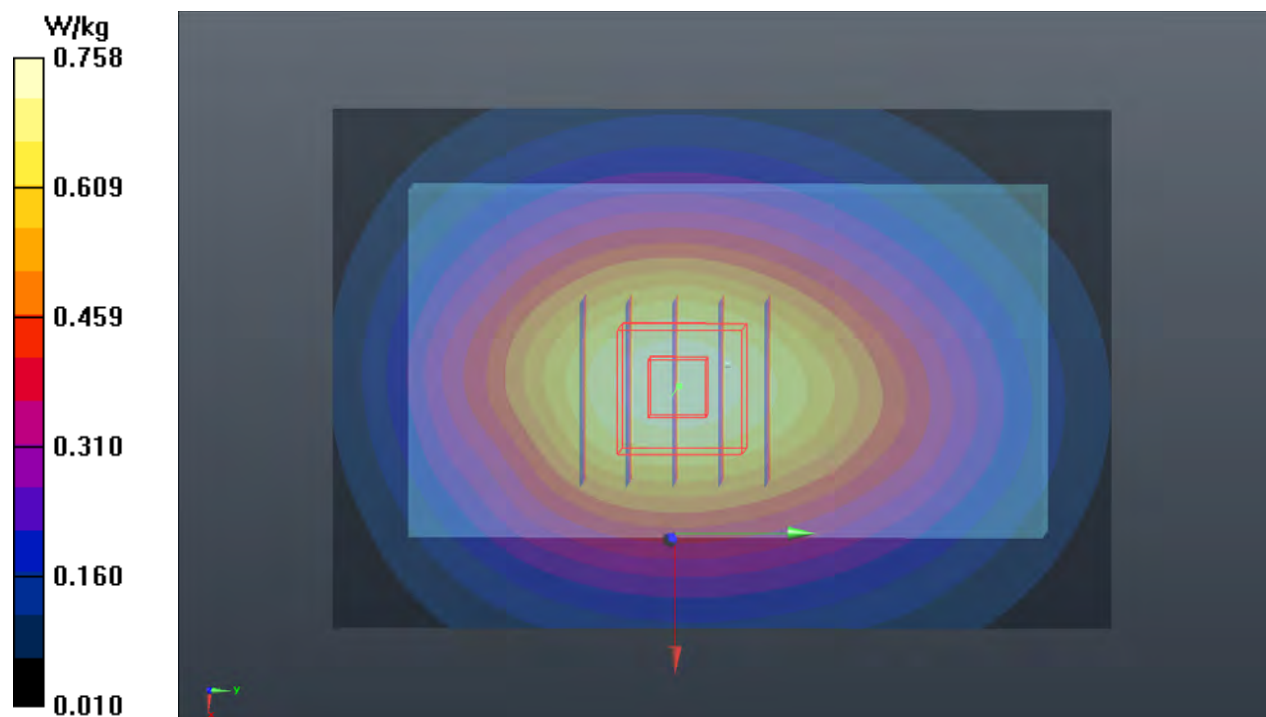



## P17 LTE 2\_QPSK20M\_Rear Face\_15mm\_Ch19100\_1RB\_OS0\_Sample 2

### DUT: P200902C02

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1900 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0921 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.453$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.23, 8.23, 8.23) @ 1900 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.80 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.754 W/kg; SAR(10 g) = 0.501 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 1.02 W/kg

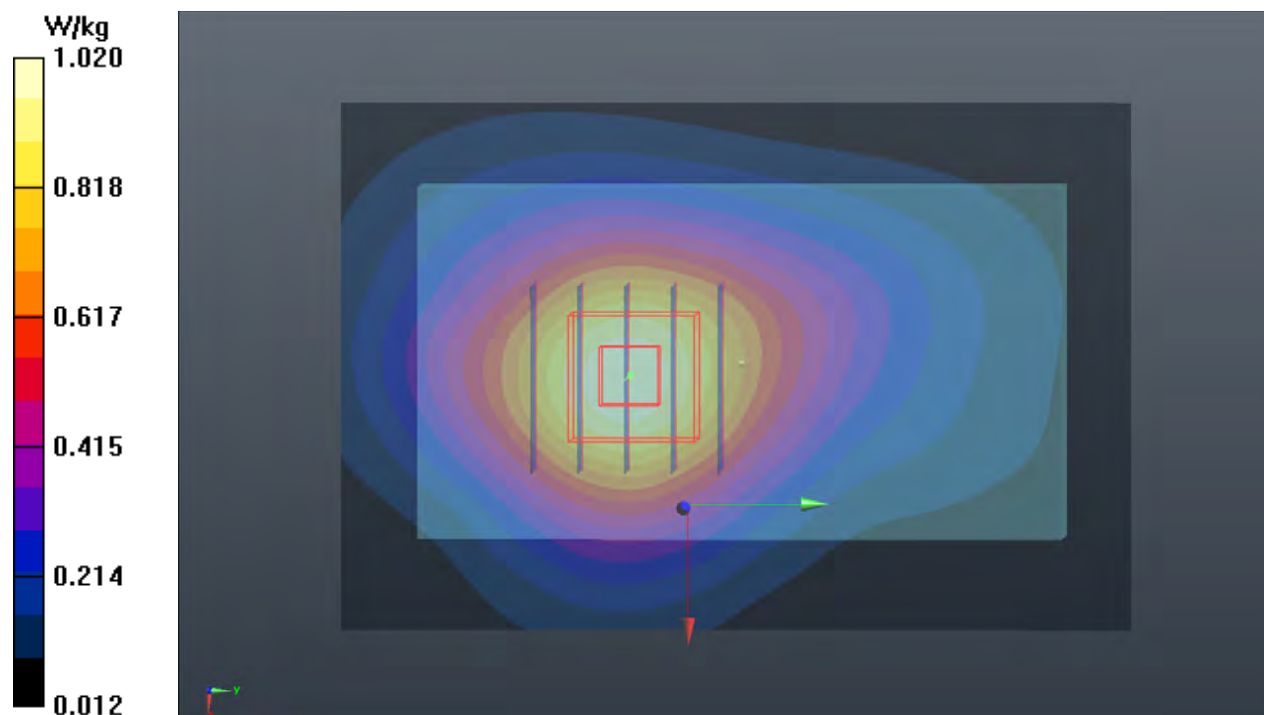

## P18 LTE 5\_QPSK10M\_Rear Face\_15mm\_Ch20600\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 844 MHz; Duty Cycle: 1:3.74  
Medium: H07T10N1\_0921 Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 0.926 \text{ S/m}$ ;  $\epsilon_r = 41.57$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $23.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.69, 9.69, 9.69) @ 844 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.720 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $29.46 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$   
Peak SAR (extrapolated) =  $0.787 \text{ W/kg}$   
**SAR(1 g) =  $0.589 \text{ W/kg}$ ; SAR(10 g) =  $0.435 \text{ W/kg}$**  (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 =  $75.5\%$   
Maximum value of SAR (measured) =  $0.722 \text{ W/kg}$

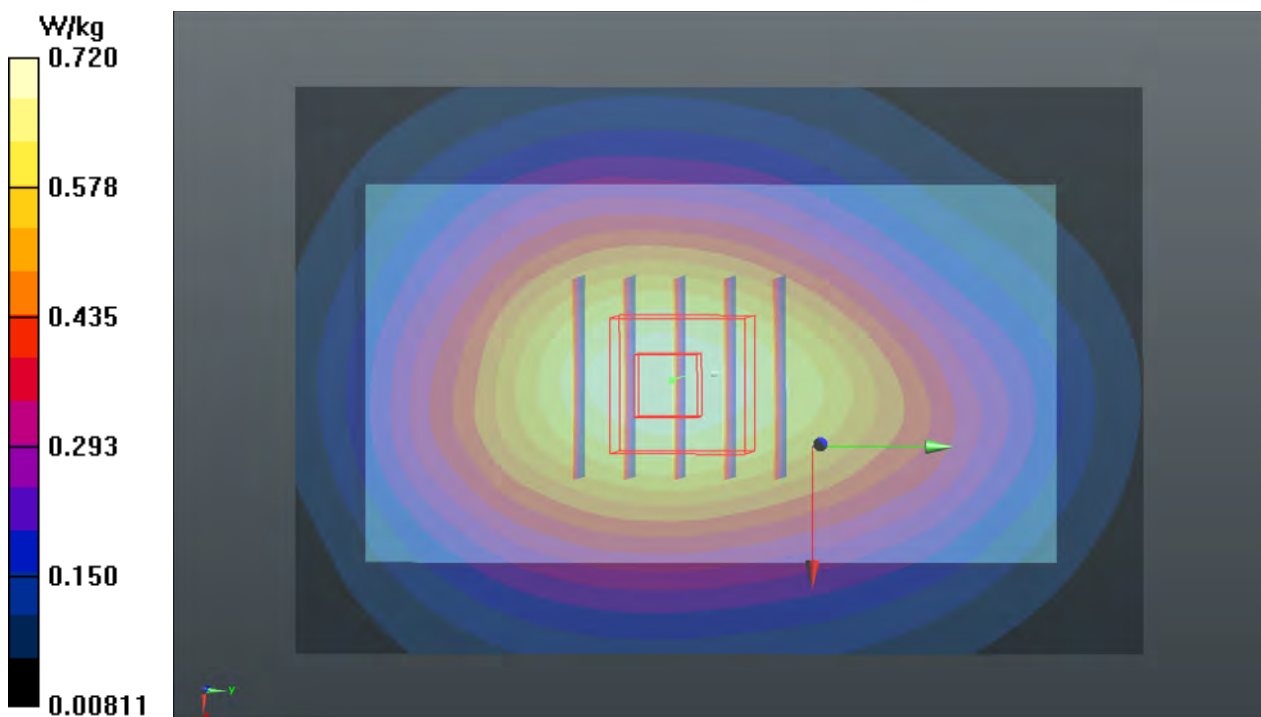

## P19 LTE 12\_QPSK10M\_Rear Face\_15mm\_Ch23095\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 707.5 MHz; Duty Cycle: 1:3.74  
Medium: H06T09N1\_0921 Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.854$  S/m;  
 $\epsilon_r = 43.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.83, 9.83, 9.83) @ 707.5 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.444 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 23.67 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.498 W/kg  
**SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.273 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 74.3%  
Maximum value of SAR (measured) = 0.449 W/kg

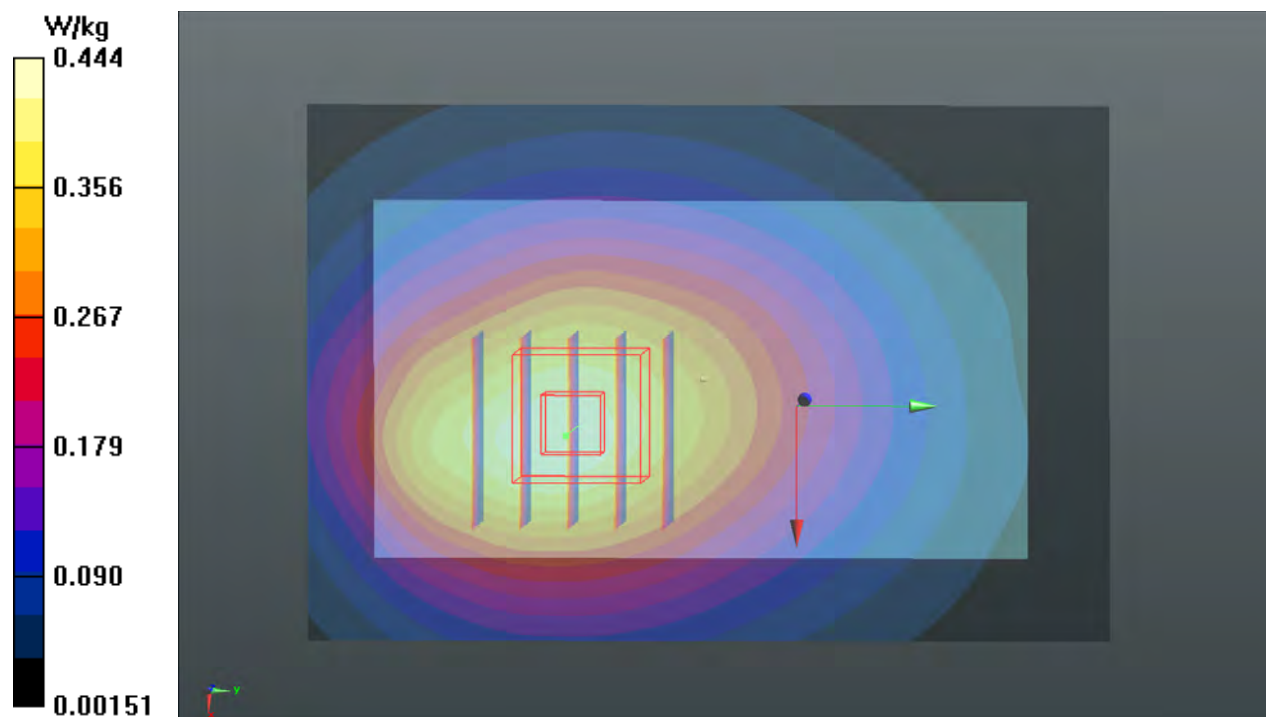

## P20 LTE 14\_QPSK10M\_Rear Face\_15mm\_Ch23330\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 793 MHz; Duty Cycle: 1:3.74  
Medium: H07T10N1\_0921 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.193$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.83, 9.83, 9.83) @ 793 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.562 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.55 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 0.632 W/kg  
**SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.349 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 75.2%  
Maximum value of SAR (measured) = 0.571 W/kg

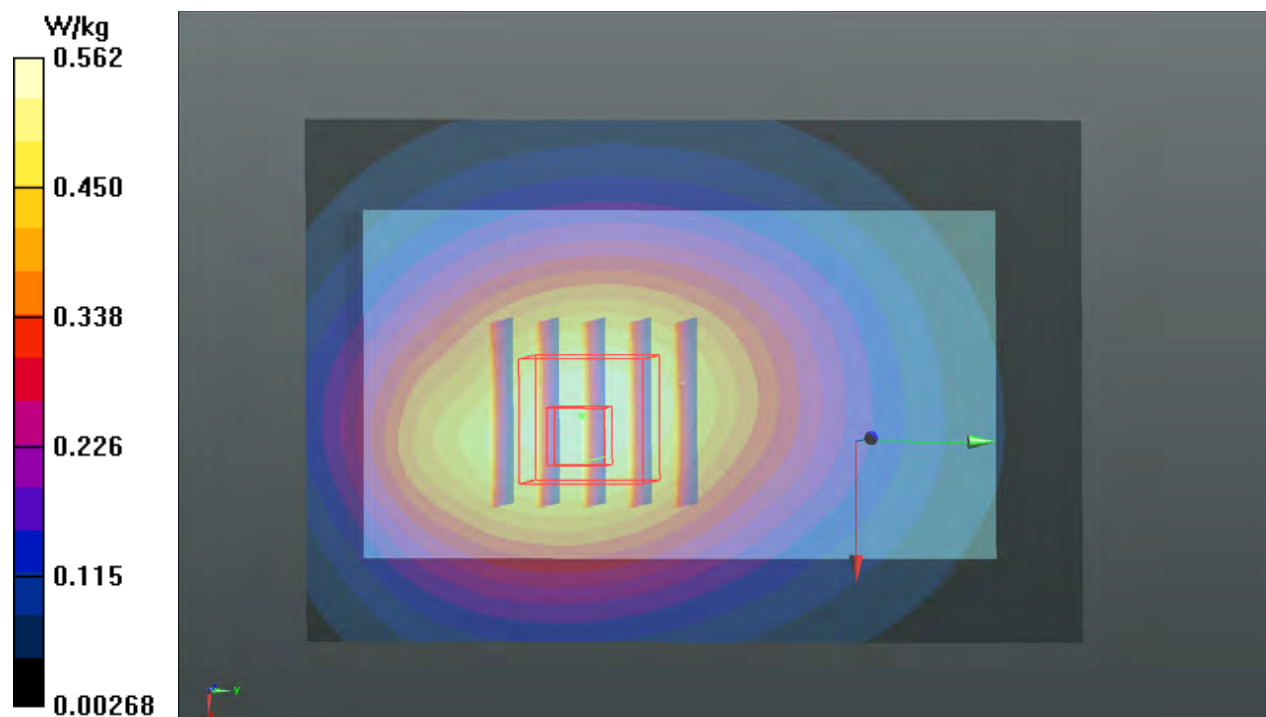

## P21 LTE 66\_QPSK20M\_Rear Face\_15mm\_Ch132072\_1RB\_OS0\_Sample 2

### DUT: P200902C02

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1720 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0921 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.298$  S/m;  $\epsilon_r = 40.291$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.54, 8.54, 8.54) @ 1720 MHz; Calibrated: 2020/03/25

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2020/05/27

- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.66 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.527 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 20.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 1.06 W/kg

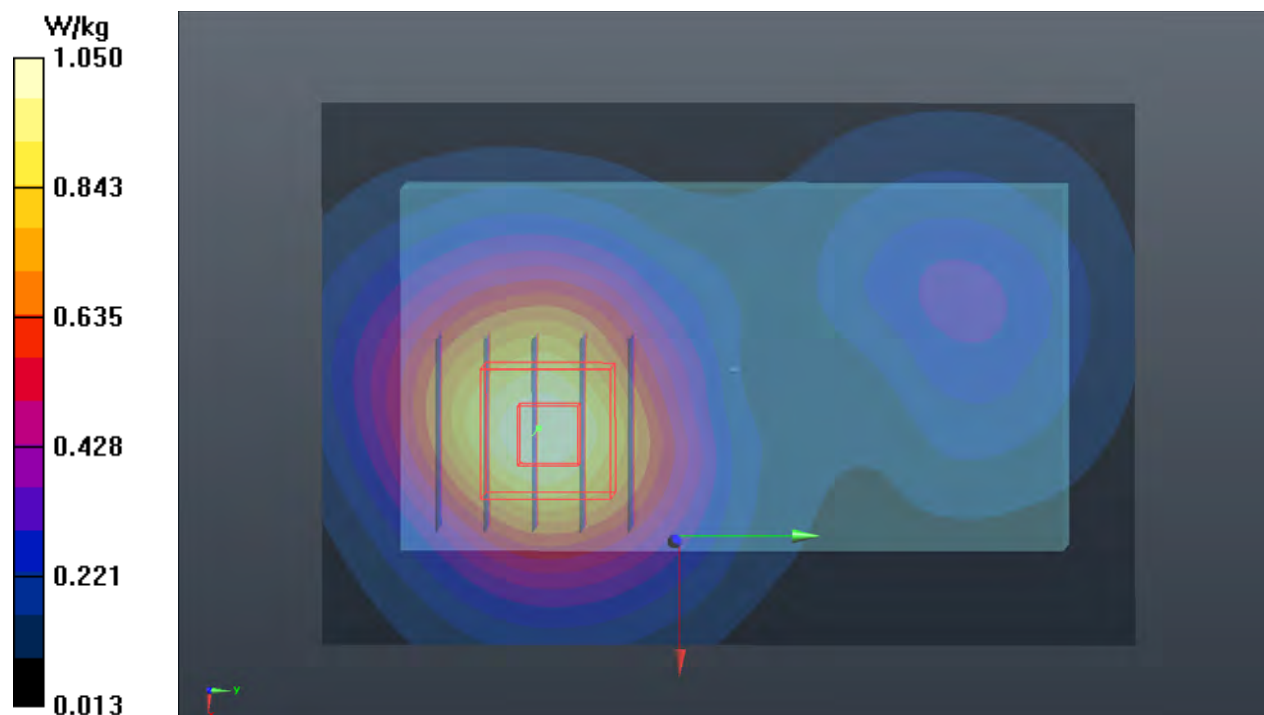

## P22 WLAN2.4G\_802.11b\_Rear Face\_15mm\_Ch6\_Sample 1

**DUT: P200902C02**


Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);  
Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: H19T27N1\_1006 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.854$  S/m;  
 $\epsilon_r = 38.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.69, 7.69, 7.69) @ 2437 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.210 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 10.67 V/m; Power Drift = -0.17 dB  
Peak SAR (extrapolated) = 0.238 W/kg  
**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.083 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 19.2 mm  
Ratio of SAR at M2 to SAR at M1 = 59.1%  
Maximum value of SAR (measured) = 0.201 W/kg

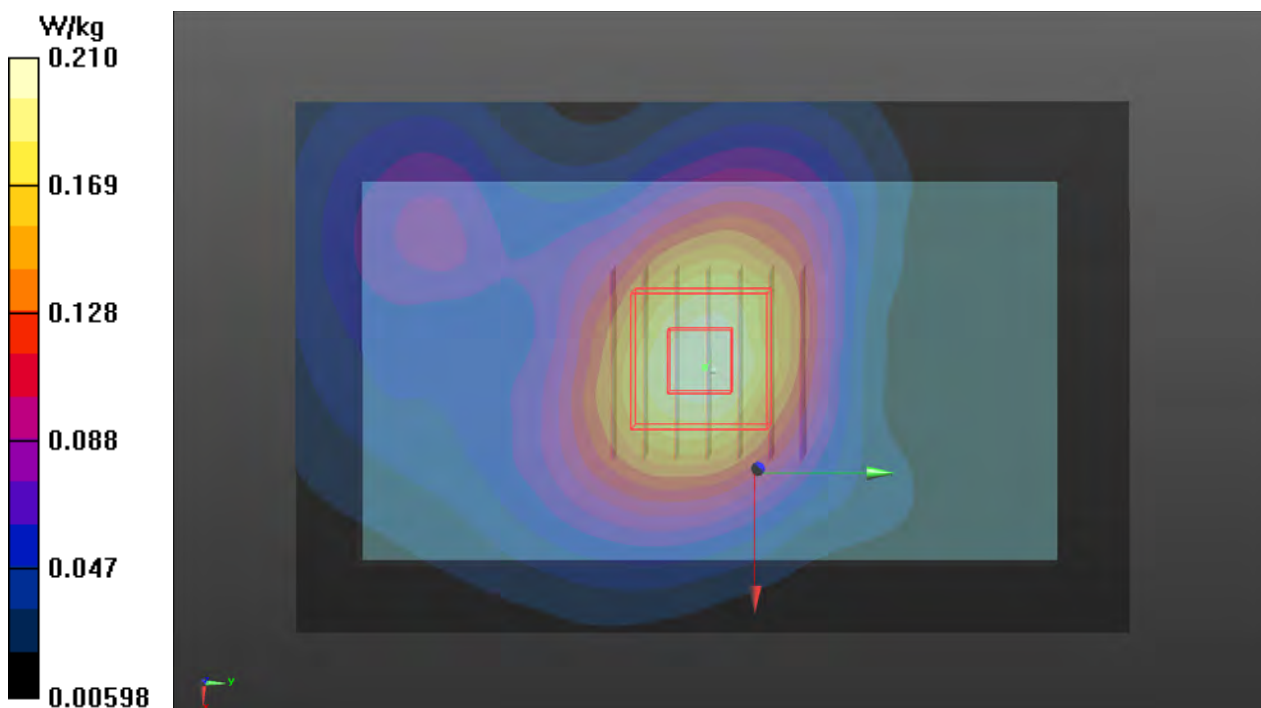

## P23 WLAN5.3G\_802.11a\_Rear Face\_15mm\_Ch56\_Sample 1

**DUT: P200902C02**

Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps);

Frequency: 5280 MHz; Duty Cycle: 1:1.08

Medium: H34T60N1\_1006 Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.72$  S/m;  $\epsilon_r = 37.609$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.72, 5.72, 5.72) @ 5280 MHz; Calibrated: 2020/08/24

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28

- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.459 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.49 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.651 W/kg

**SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.101 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 0.443 W/kg

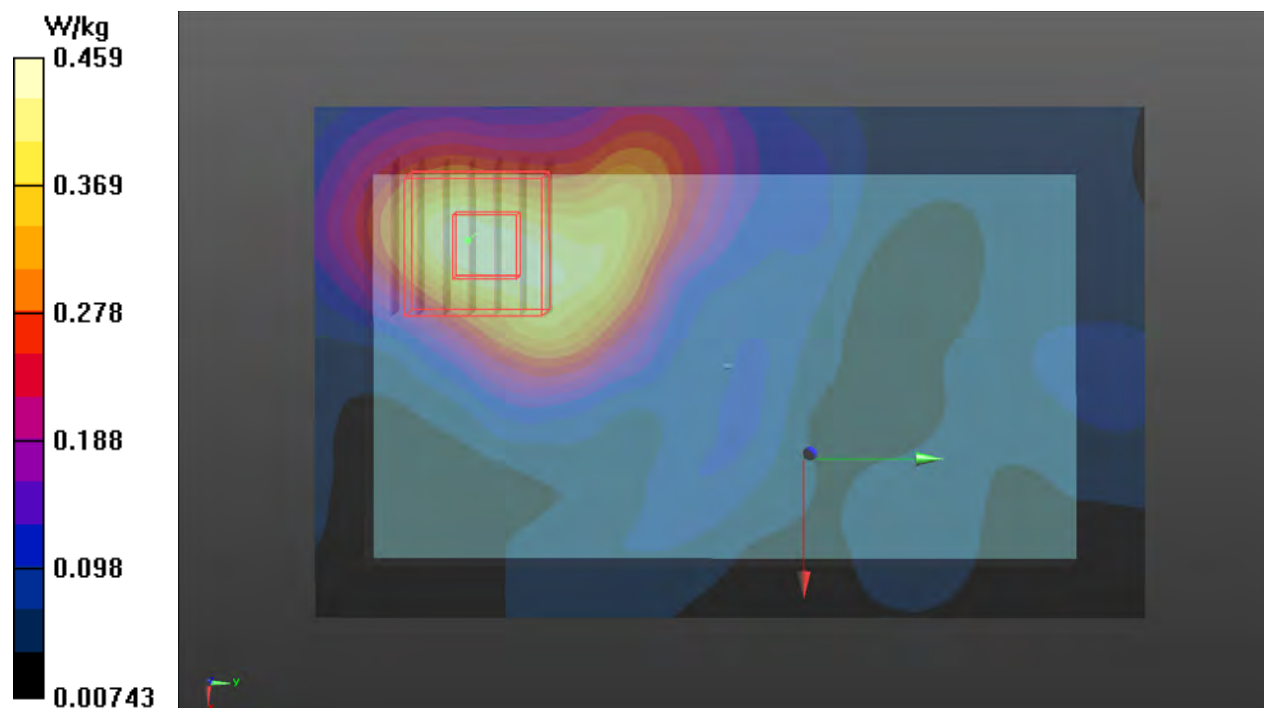

## P24 WLAN5.6G\_802.11a\_Rear Face\_15mm\_Ch116\_Sample 1

### DUT: P200902C02


Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps);  
Frequency: 5580 MHz; Duty Cycle: 1:1.08  
Medium: H34T60N1\_1007 Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.16$  S/m;  $\epsilon_r = 34.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.04, 5.04, 5.04) @ 5580 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.463 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 9.905 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 0.662 W/kg  
**SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.098 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 12.9 mm  
Ratio of SAR at M2 to SAR at M1 = 67.2%  
Maximum value of SAR (measured) = 0.422 W/kg

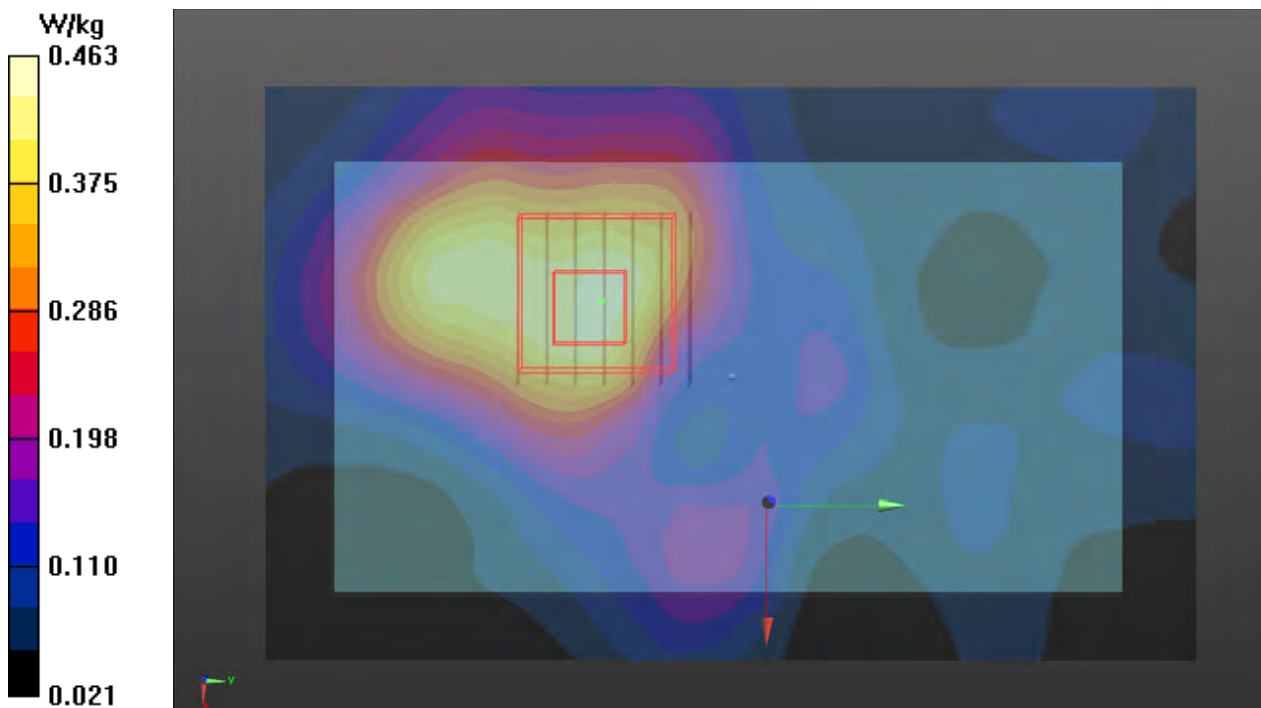



## P25 WLAN5.8G\_802.11a\_Rear Face\_15mm\_Ch161\_Sample 1

### DUT: P200902C02

Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps);

Frequency: 5805 MHz; Duty Cycle: 1:1.08

Medium: H34T60N1\_1007 Medium parameters used:  $f = 5805$  MHz;  $\sigma = 5.411$  S/m;  $\epsilon_r = 34.452$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(5.25, 5.25, 5.25) @ 5805 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.468 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.670 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.733 W/kg

**SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.093 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 0.454 W/kg

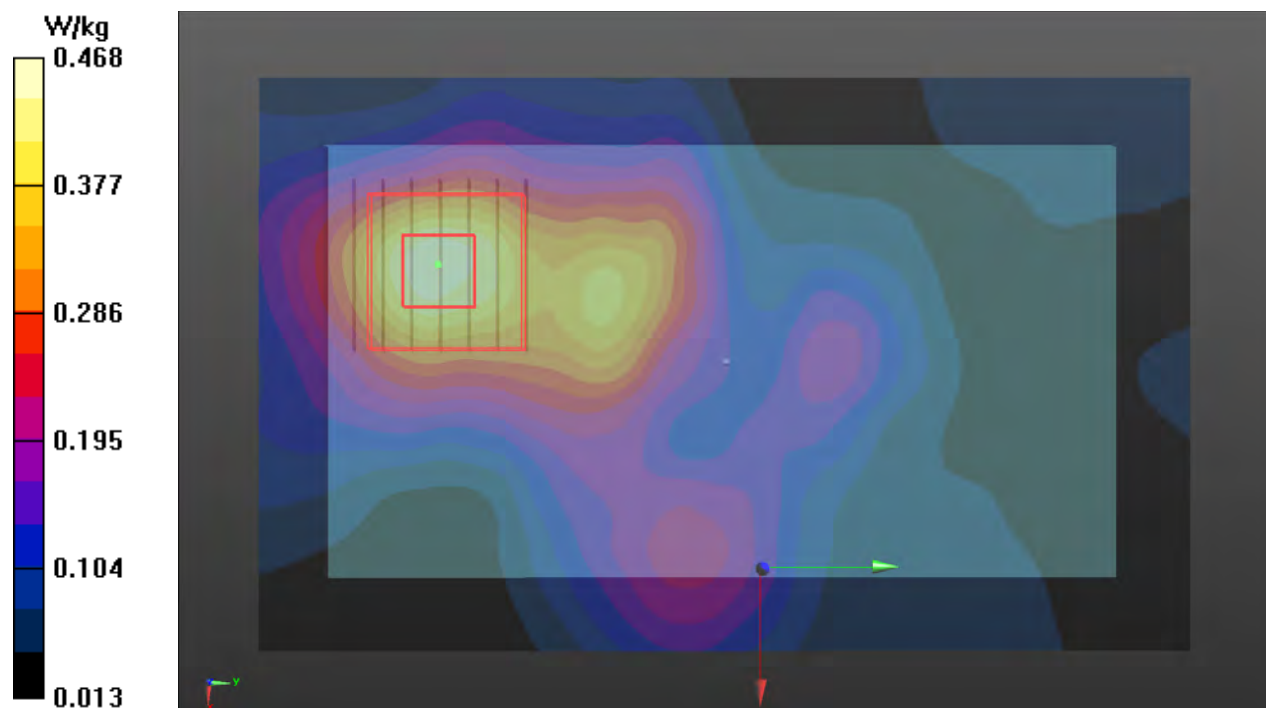

## P26 BT\_BR\_Rear Face\_15mm\_Ch0\_Sample 1

### DUT: P200902C02

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.31

Medium: H19T27N1\_1006 Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.816$  S/m;  $\epsilon_r = 38.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.69, 7.69, 7.69) @ 2402 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0407 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.199 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00788 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 24.9%

Maximum value of SAR (measured) = 0.0328 W/kg

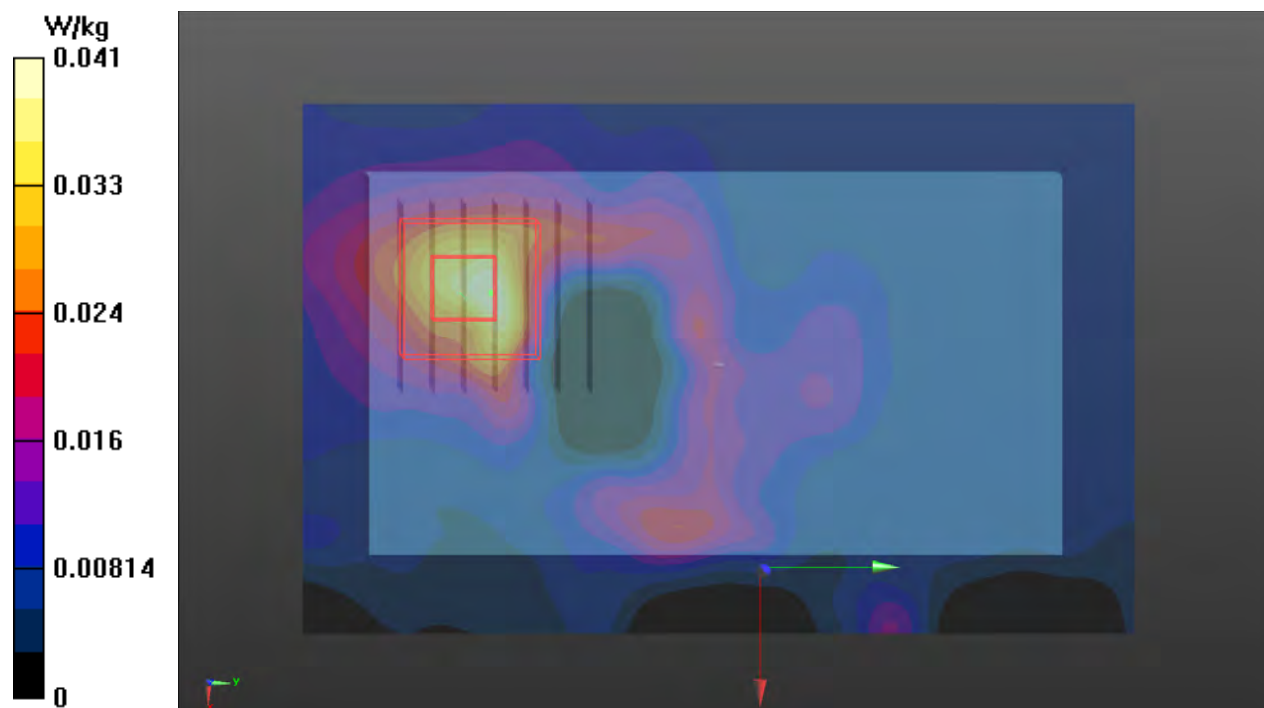

## P27 WCDMA II\_RMC12.2K\_Rear Face\_10mm\_Ch9400\_Sample 2

### DUT: 200902C02

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1\_0922 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.436$  S/m;  $\epsilon_r = 39.679$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.23, 8.23, 8.23) @ 1880 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.40 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.04 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.57 W/kg

**SAR(1 g) = 1 W/kg; SAR(10 g) = 0.647 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.4%

Maximum value of SAR (measured) = 1.39 W/kg

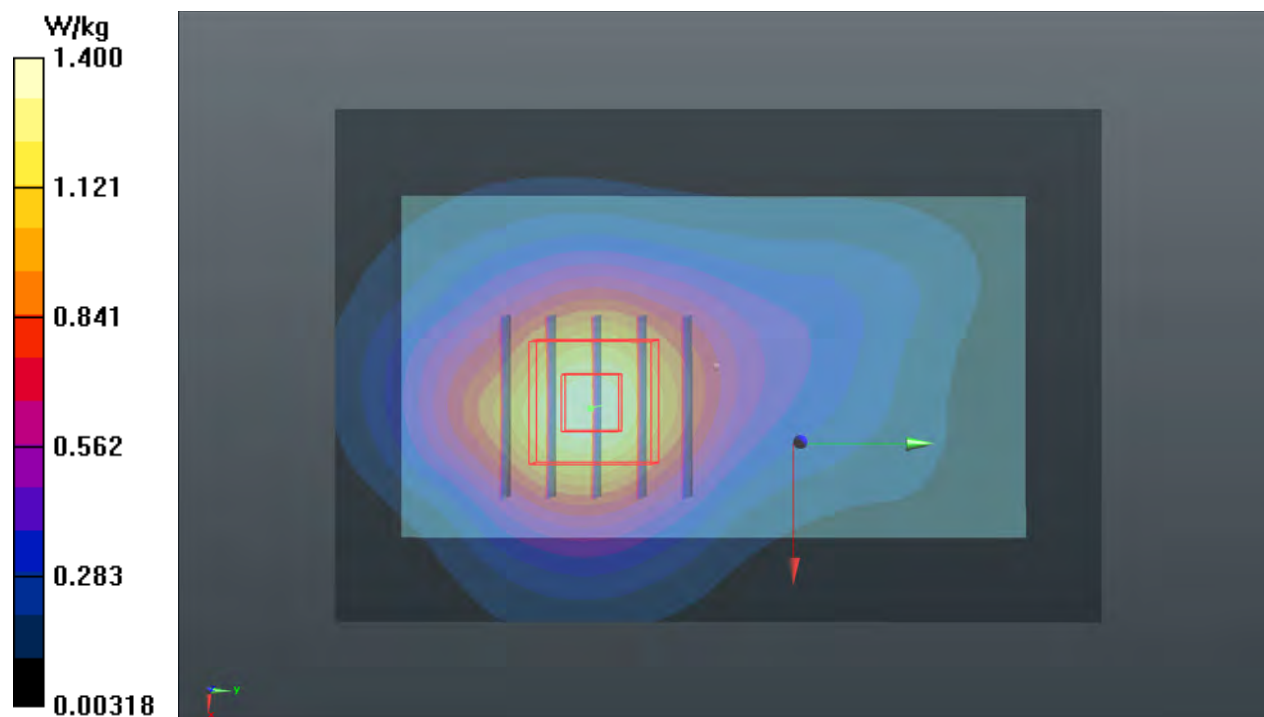

## P28 WCDMA IV\_RMC12.2K\_Rear Face\_10mm\_Ch1312\_Sample 2

**DUT: 200902C02**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1\_1014 Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.292$

S/m;  $\epsilon_r = 39.158$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5°C; Liquid Temperature : 23.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1712.4 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin-SAM V8.0\_1988; Type: QD 000 P41 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.38 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.551 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 1.19 W/kg

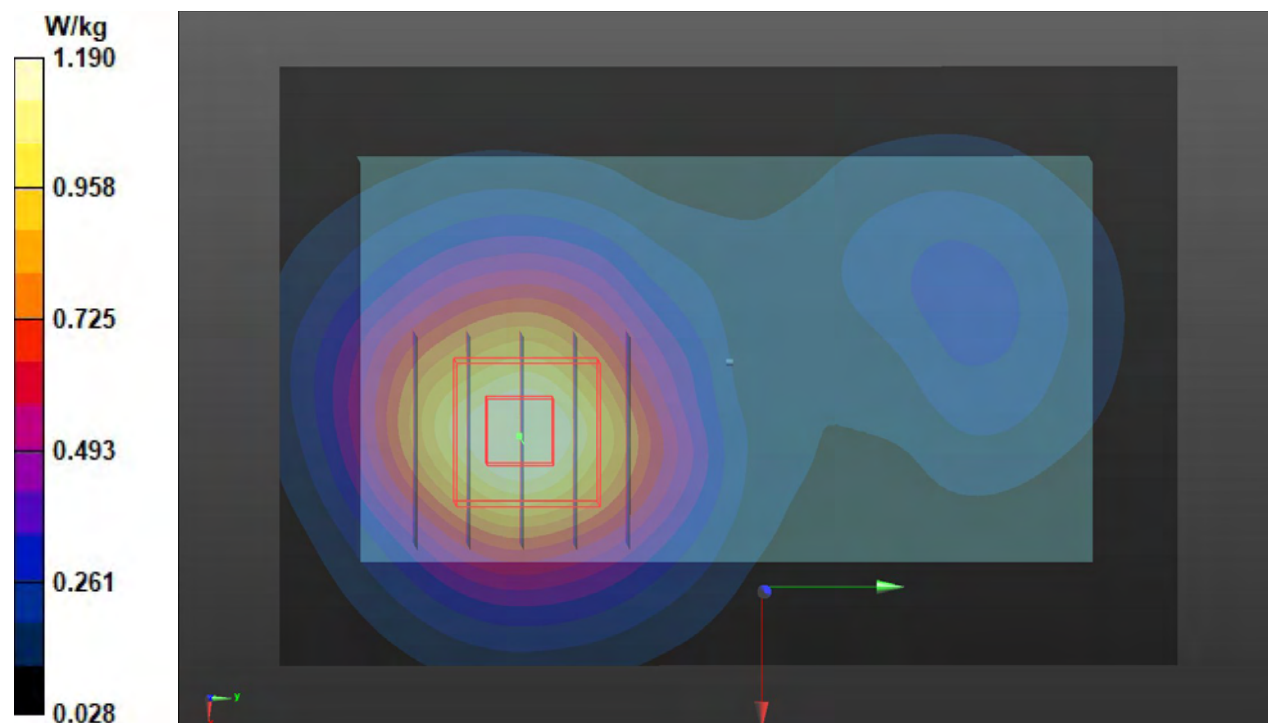

## P29 WCDMA V\_RMC12.2K\_Rear Face\_10mm\_Ch4233\_Sample 2

### DUT: 200902C02

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:1.95

Medium: H07T10N3\_0922 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 42.577$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.69, 9.69, 9.69) @ 846.6 MHz; Calibrated: 2020/03/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom\_1653; Type: QD000P40CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.03 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.618 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.6%

Maximum value of SAR (measured) = 1.04 W/kg

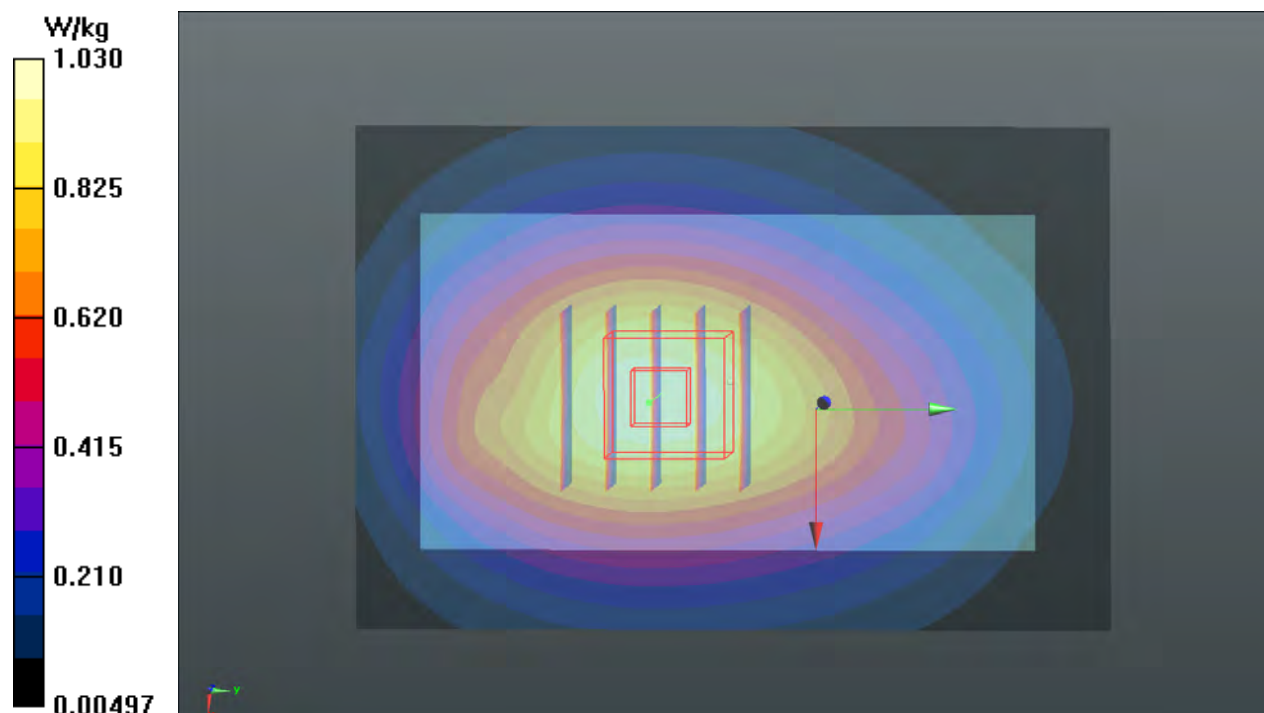

# P30 LTE 2\_QPSK20M\_Rear Face\_10mm\_Ch18700\_1RB\_OS0\_Sample 1

**DUT: 200902C02**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);  
Frequency: 1860 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1\_0923 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r = 39.905$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.02, 8.02, 8.02) @ 1860 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.993 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.15 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.442 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 19.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 1.00 W/kg

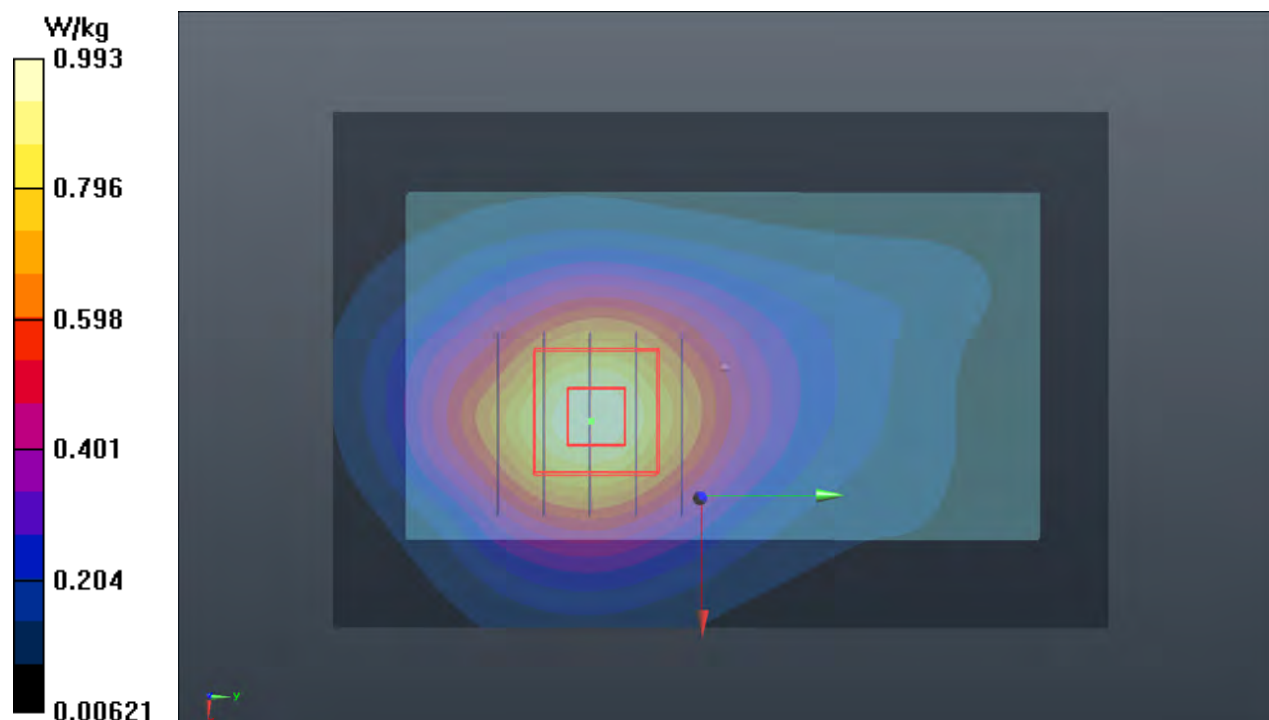

# P31 LTE 5\_QPSK10M\_Rear Face\_10mm\_Ch20450\_1RB\_OS0\_Sample 1

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 829 MHz; Duty Cycle: 1:3.74  
Medium: H07T10N1\_0923 Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.939$  S/m;  $\epsilon_r = 43.086$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.0 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7537; ConvF(10.34, 10.34, 10.34) @ 829 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.979 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 33.09 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 1.06 W/kg  
**SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.537 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 72.7%  
Maximum value of SAR (measured) = 0.963 W/kg

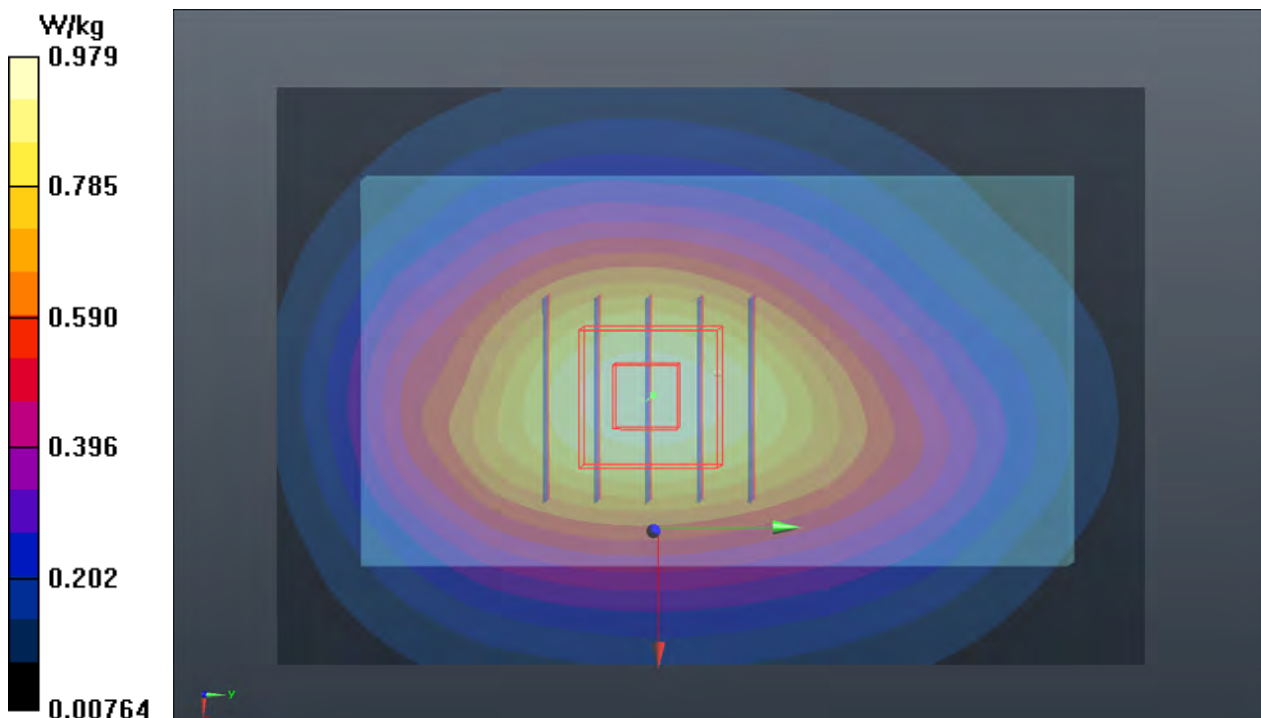

## P32 LTE 12\_QPSK10M\_Rear Face\_10mm\_Ch23130\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 711 MHz; Duty Cycle: 1:3.74  
Medium: H06T09N1\_0923 Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 43.338$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 711 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.590 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.86 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.657 W/kg  
**SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.343 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 71.7%  
Maximum value of SAR (measured) = 0.590 W/kg

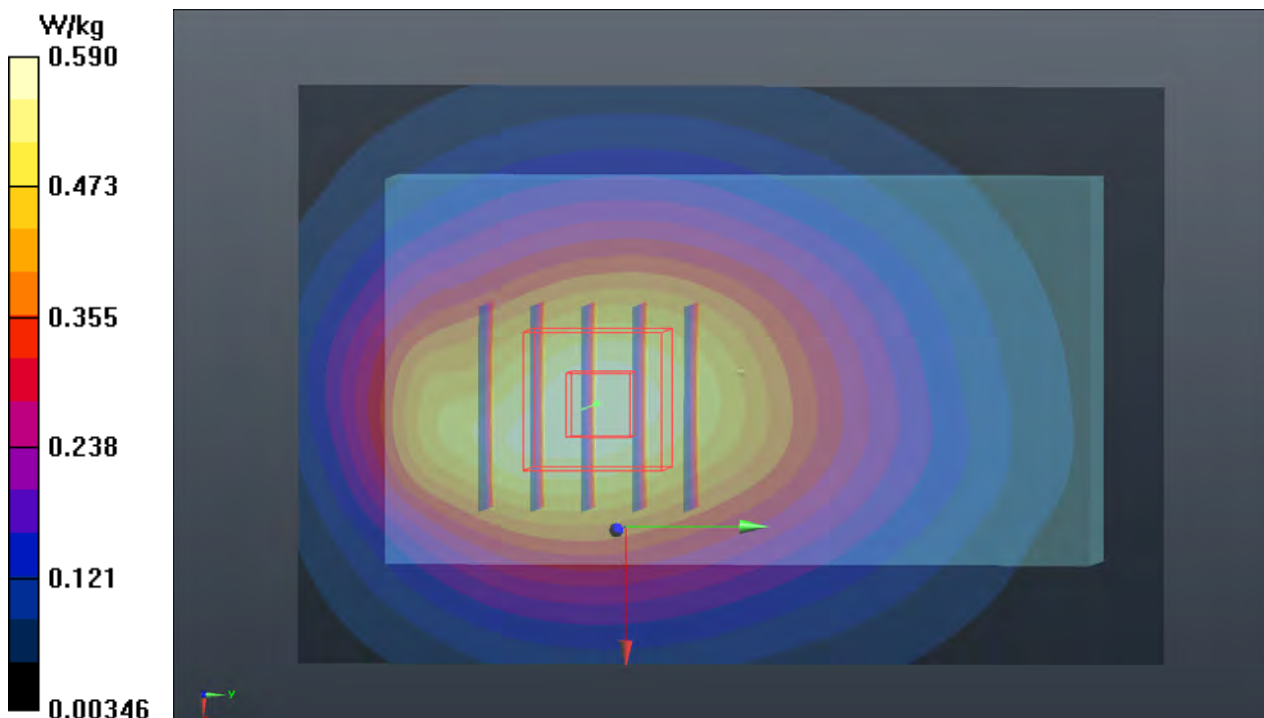



## P33 LTE 14\_QPSK10M\_Rear Face\_10mm\_Ch23330\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);  
Frequency: 793 MHz; Duty Cycle: 1:3.74  
Medium: H06T09N1\_0923 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.933$  S/m;  $\epsilon_r = 42.255$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.66, 10.66, 10.66) @ 793 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.747 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.95 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 0.823 W/kg  
**SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.410 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 72.3%  
Maximum value of SAR (measured) = 0.728 W/kg

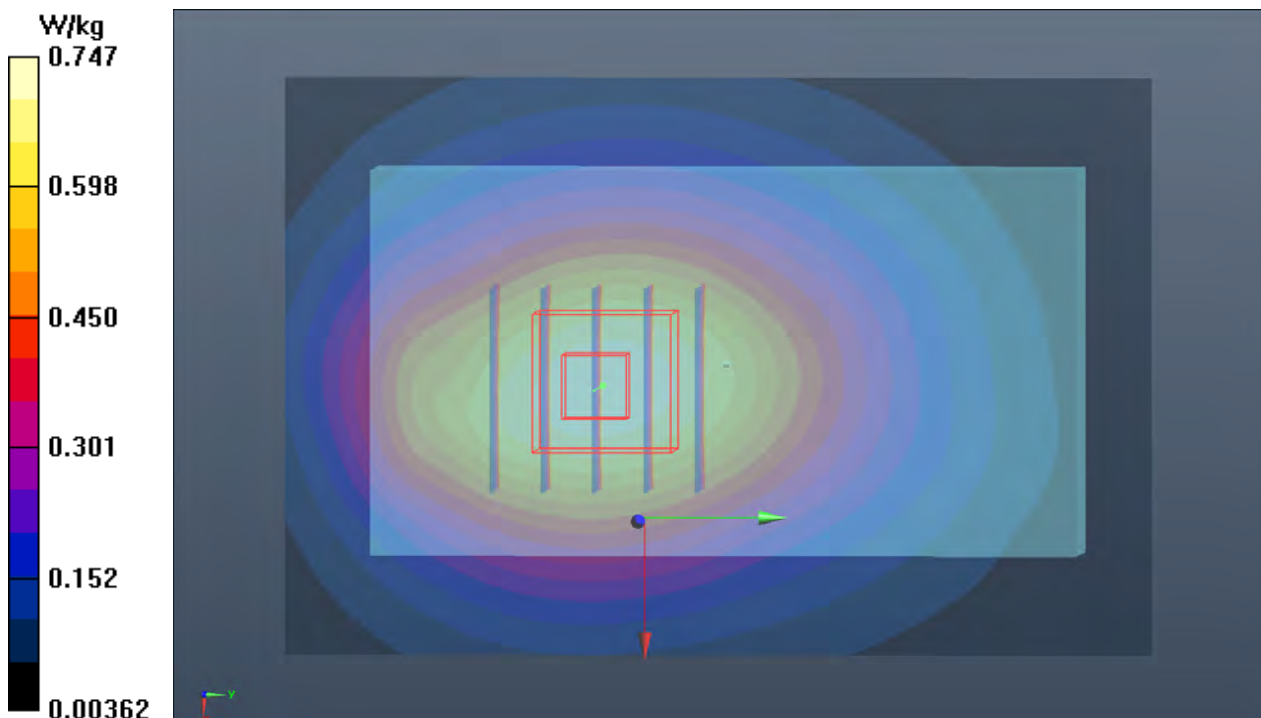

## P34 LTE 66\_QPSK20M\_Rear Face\_10mm\_Ch132322\_1RB\_OS0\_Sample 2

**DUT: 200902C02**


Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);  
Frequency: 1745 MHz; Duty Cycle: 1:3.74  
Medium: H16T20N1\_0924 Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.318$  S/m;  
 $\epsilon_r = 40.409$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.47, 8.47, 8.47) @ 1745 MHz; Calibrated: 2020/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2020/01/24
- Phantom: Twin SAM Phantom\_1822; Type: QD000P40;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.31 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 29.29 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 1.41 W/kg  
**SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.550 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 17.9 mm  
Ratio of SAR at M2 to SAR at M1 = 64.1%  
Maximum value of SAR (measured) = 1.23 W/kg

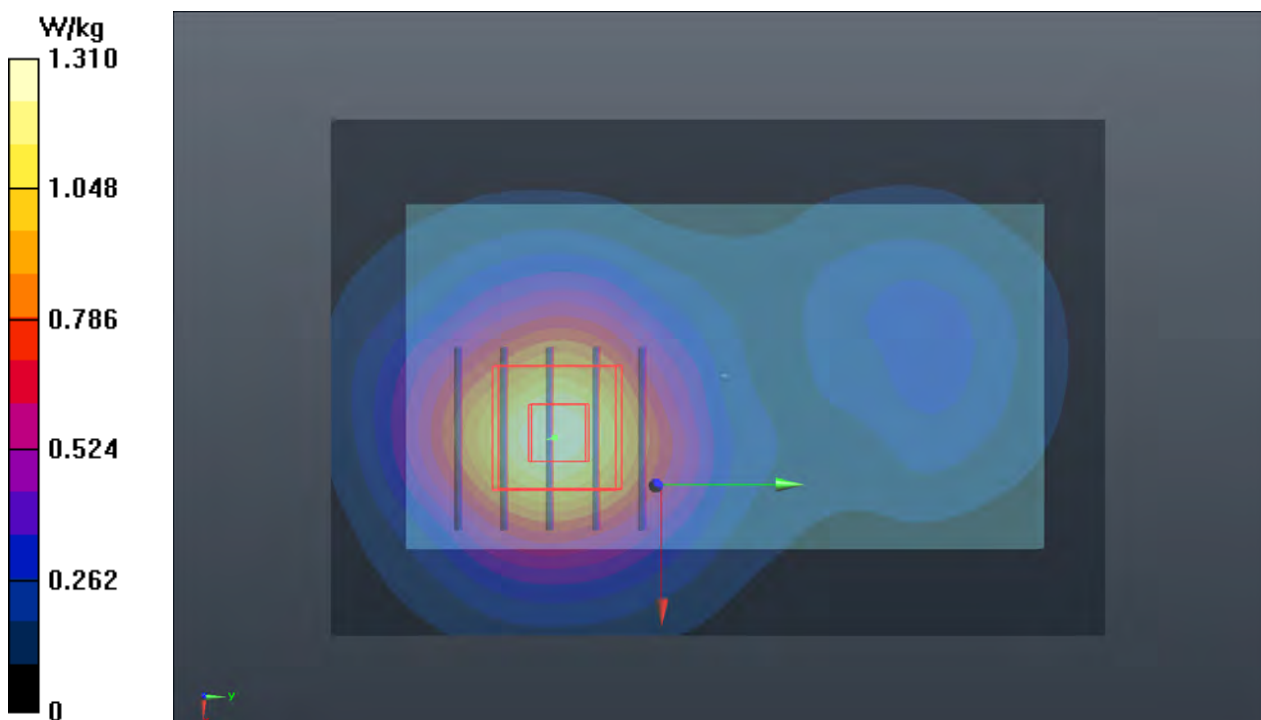

## P35 WLAN2.4G\_802.11b\_Rear Face\_10mm\_Ch6\_Sample 1

**DUT: P200902C02**


Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);  
Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: H19T27N1\_1006 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.854$  S/m;  
 $\epsilon_r = 38.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.69, 7.69, 7.69) @ 2437 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.341 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 13.63 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 0.380 W/kg  
**SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.120 W/kg** (SAR corrected for target medium)  
Smallest distance from peaks to all points 3 dB below = 19 mm  
Ratio of SAR at M2 to SAR at M1 = 59.8%  
Maximum value of SAR (measured) = 0.324 W/kg

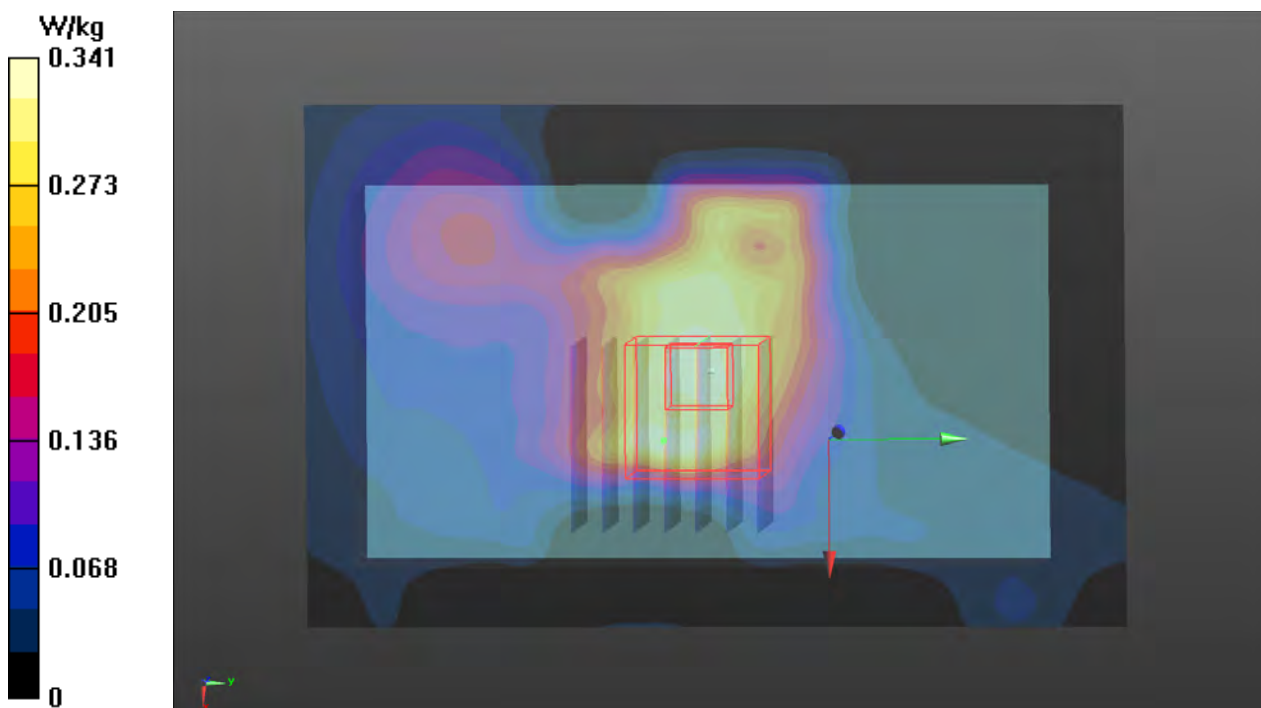

### P36 BT\_BR\_EDR\_Rear Face\_10mm\_Ch0\_Sample 1

**DUT: P200902C02**

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.31

Medium: H19T27N1\_1006 Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.816$  S/m;

$\epsilon_r = 38.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.69, 7.69, 7.69) @ 2402 MHz; Calibrated: 2020/08/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2020/05/28
- Phantom: Twin SAM Phantom\_1986; Type: QD 000 P40 CD;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0134 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.378 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0160 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00851 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 0.0100 W/kg

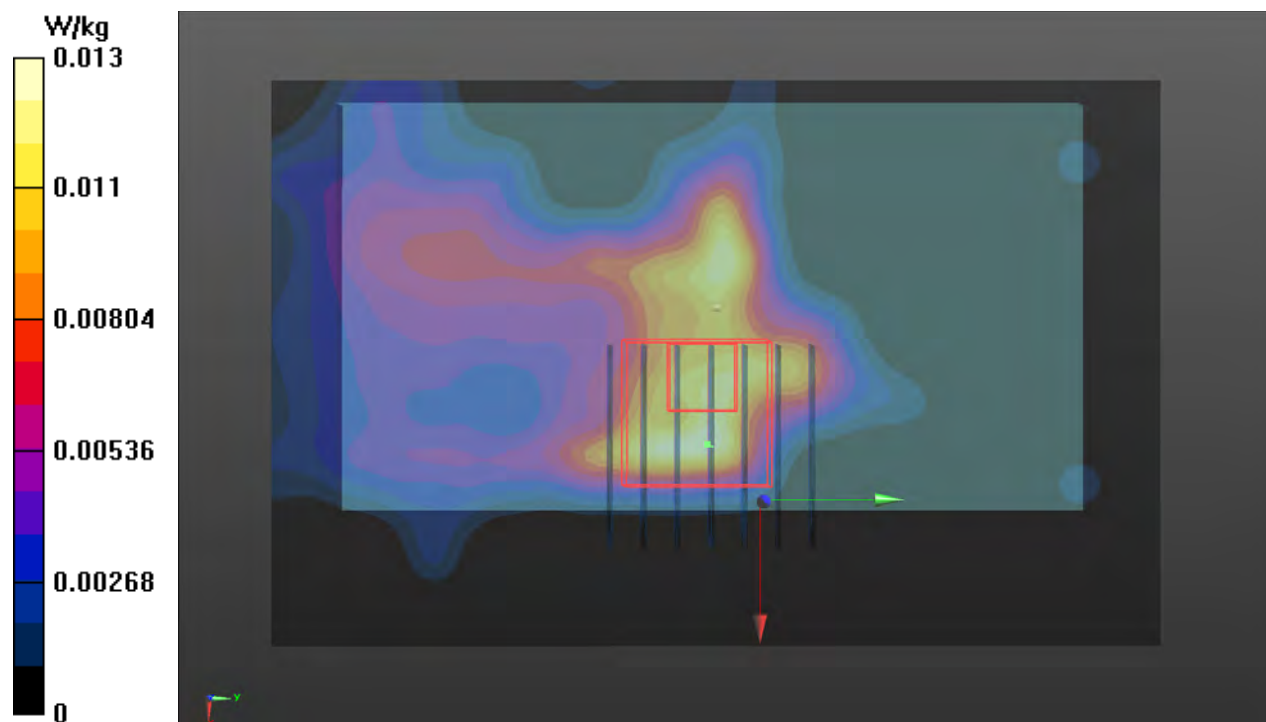

### Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.



In Collaboration with  
**s p e a g**  
 CALIBRATION LABORATORY



中国认可  
 国际互认  
 校准  
 CALIBRATION  
 CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **AUDEN**

Certificate No: **Z20-60152**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1106**

Calibration Procedure(s) **FF-Z11-003-01**  
 Calibration Procedures for dipole validation kits

Calibration date: **April 30, 2020**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	04-Sep-19 (CTTL, No.J19X07825)	Sep-20
Power sensor NRP8S	104291	04-Sep-19 (CTTL, No.J19X07825)	Sep-20
ReferenceProbe EX3DV4	SN 7307	24-May-19(SPEAG,No.EX3-7307_May19)	May-20
DAE4	SN 1555	22-Aug-19(CTTL-SPEAG,No.Z19-60295)	Aug-20
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	25-Feb-20 (CTTL, No.J20X00516)	Feb-21
NetworkAnalyzer E5071C	MY46110673	10-Feb-20 (CTTL, No.J20X00515)	Feb-21

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: May 5, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY52	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Triple Flat Phantom 5.1C	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	750 MHz ± 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.9	0.89 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	42.5 ± 6 %	0.87 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	<1.0 °C	----	----

### SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>8.49 W/kg ± 18.8 % (k=2)</b>
<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	1.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>5.67 W/kg ± 18.7 % (k=2)</b>





In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.7 $\Omega$ - 1.33j $\Omega$
Return Loss	- 26.7dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	0.901 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## DASY5 Validation Report for Head TSL

Date: 04.30.2020

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1106**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.865$  S/m;  $\epsilon_r = 42.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7307; ConvF(10.58, 10.58, 10.58) @ 750 MHz; Calibrated: 2019-05-24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1555; Calibrated: 2019-08-22
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.06 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.95 W/kg

**SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.39 W/kg**

Smallest distance from peaks to all points 3 dB below = 19.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.9%

Maximum value of SAR (measured) = 2.68 W/kg

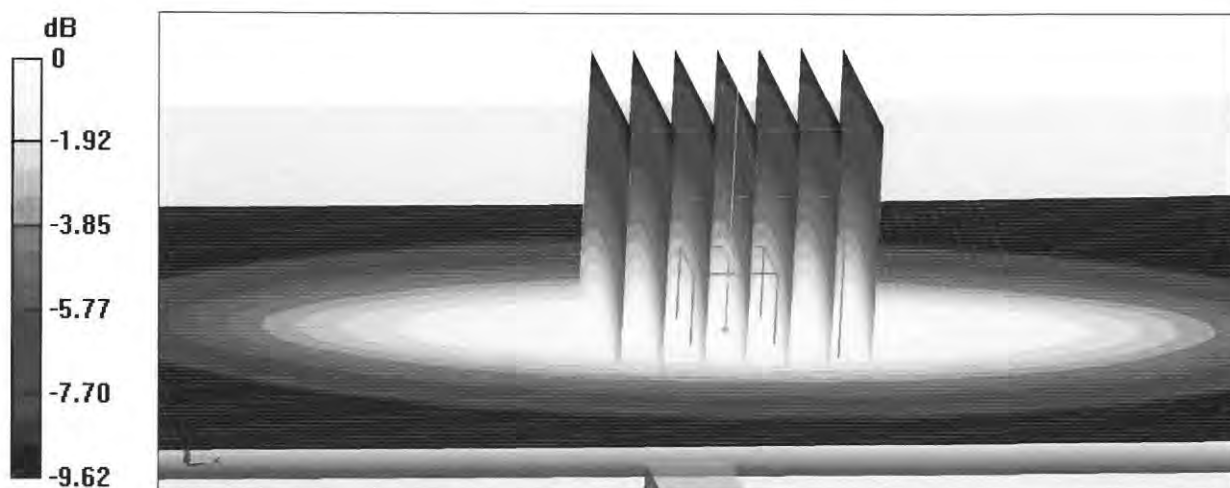


**0 dB = 2.68 W/kg = 4.28 dBW/kg**



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Impedance Measurement Plot for Head TSL

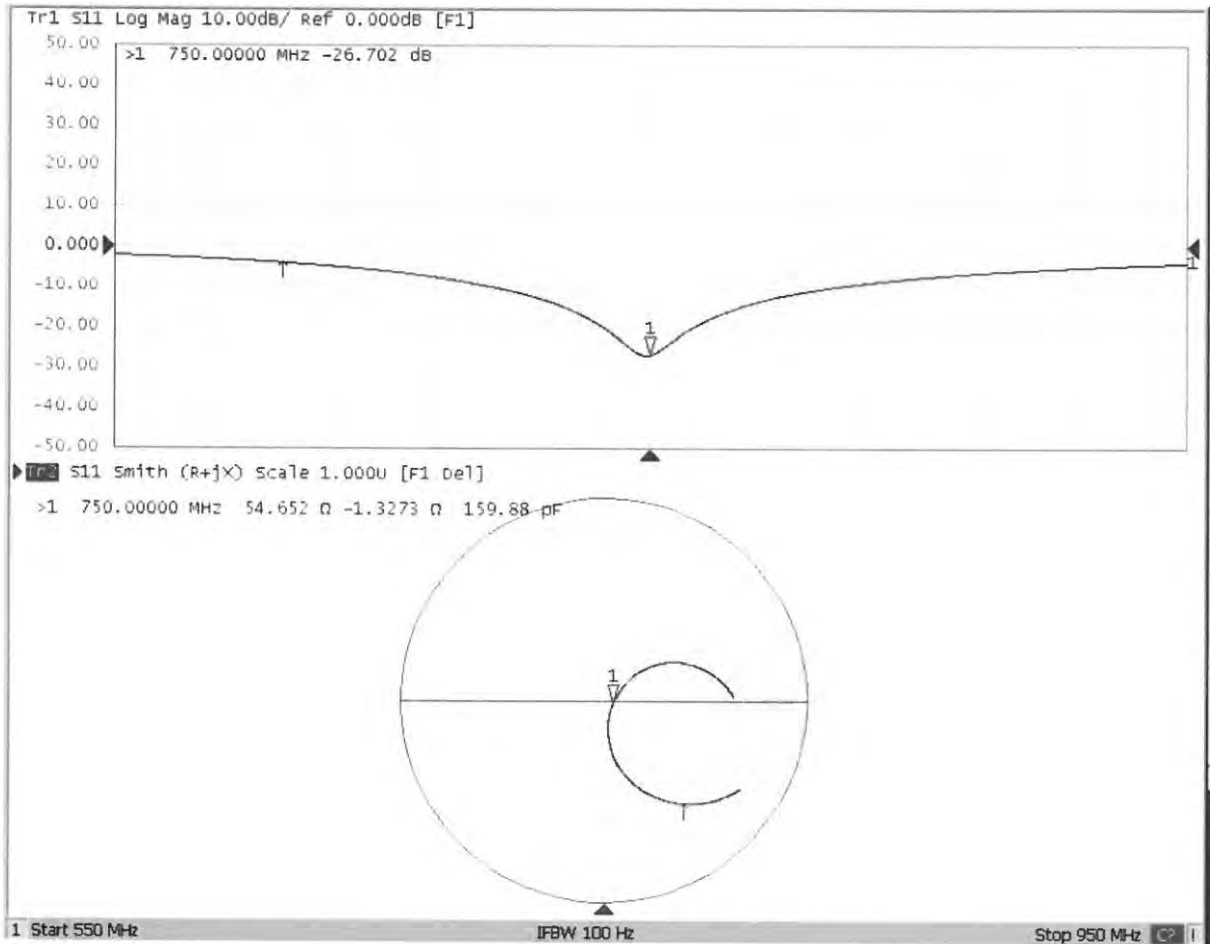



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **AUDEN**

Certificate No: **Z20-60153**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d166**

Calibration Procedure(s) **FF-Z11-003-01**  
**Calibration Procedures for dipole validation kits**

Calibration date: **April 29, 2020**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	04-Sep-19 (CTTL, No.J19X07825)	Sep-20
Power sensor NRP8S	104291	04-Sep-19 (CTTL, No.J19X07825)	Sep-20
ReferenceProbe EX3DV4	SN 7307	24-May-19(SPEAG, No.EX3-7307_May19)	May-20
DAE4	SN 1555	22-Aug-19(CTTL-SPEAG, No.Z19-60295)	Aug-20
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	25-Feb-20 (CTTL, No.J20X00516)	Feb-21
NetworkAnalyzer E5071C	MY46110673	10-Feb-20 (CTTL, No.J20X00515)	Feb-21

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: May 5, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.