

## Report on the RF Testing of:

KYOCERA Corporation  
Mobile Phone, Model: KC-T304C  
FCC ID: V65KC-T304C

## In accordance with FCC Part15 Subpart E

Prepared for: KYOCERA Corporation  
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku  
Yokohama-shi, Kanagawa, Japan  
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.  
Inspire trust.**

## COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-21258-0

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	2021.12.17

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

### EXECUTIVE SUMMARY – Result: Complied

A sample of this product was tested and the result above was confirmed in accordance with FCC Part15 Subpart E.



### DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.  
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.  
Client provided data, for which TÜV SÜD Japan Ltd. take no responsibility, which can affect validity of results within this report is clearly identified.

### ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.  
Yonezawa Testing Center  
5-4149-7 Hachimanpara,  
Yonezawa-shi, Yamagata,  
992-1128 Japan

Phone: +81 (0) 238 28 2881  
www.tuvsud.com/ja-jp



## Contents

<b>1</b>	<b>Summary of Test</b> .....	<b>3</b>
1.1	Modification history of the test report.....	3
1.2	Standards.....	3
1.3	Test methods.....	3
1.4	Deviation from standards.....	3
1.5	List of applied test(s) of the EUT.....	3
1.6	Test information.....	3
1.7	Test set up.....	3
1.8	Test period.....	3
<b>2</b>	<b>Equipment Under Test</b> .....	<b>4</b>
2.1	EUT information.....	4
2.2	Modification to the EUT.....	5
2.3	Variation of family model(s).....	5
2.4	Operating channels and frequencies.....	6
2.5	Description of test mode.....	7
2.6	Operating flow.....	7
<b>3</b>	<b>Configuration of Equipment</b> .....	<b>8</b>
3.1	Equipment used.....	8
3.2	Cable(s) used.....	8
3.3	System configuration.....	8
<b>4</b>	<b>Test Result</b> .....	<b>9</b>
4.1	26dB Bandwidth and 99% Occupied Bandwidth.....	9
4.2	Maximum Conducted Output Power.....	26
4.3	Peak Power Spectral Density.....	44
4.4	Radiated Emissions (Restricted Bands of Operation).....	62
4.5	Frequency Stability.....	160
4.6	AC Power Line Conducted Emissions.....	163
4.7	Duty Cycle.....	168
<b>5</b>	<b>Antenna requirement</b> .....	<b>176</b>
<b>6</b>	<b>Measurement uncertainty</b> .....	<b>177</b>
<b>7</b>	<b>Laboratory Information</b> .....	<b>178</b>
	<b>Appendix A. Test Equipment</b> .....	<b>179</b>

## 1 Summary of Test

### 1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-21258-0	First Issue	Refer to the cover page

### 1.2 Standards

CFR47 FCC Part 15 Subpart E

### 1.3 Test methods

ANSI C63.10-2013  
KDB789033 D02 General U-NII Test Procedures New Rules v02r01

### 1.4 Deviation from standards

None

### 1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
15.407(a)	26dB Bandwidth	Conducted	PASS	-
15.407(a)	Maximum Conducted Output Power	Conducted	PASS	-
15.407(a)	Peak Power Spectral Density	Conducted	PASS	-
15.407(b) 15.205 15.209	Radiated emissions (Restricted Bands of Operation)	Radiated	PASS	-
15.407(g)	Frequency Stability	Conducted	PASS	-
15.207	AC Power Line Conducted Emissions	Conducted	PASS	-

### 1.6 Test information

None

### 1.7 Test set up

Table-top

### 1.8 Test period

19-November-2021 - 8-December-2021

## 2 Equipment Under Test

All information in this chapter was provided by the applicant.

### 2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Tablet
Model number	KC-T304C
Serial number	2695300160, 2695300163
Trade name	Kyocera
Number of sample(s)	2
EUT condition	Prototype
Power rating	Battery: DC 3.8 V
Size	Size: (W) 259 mm × (D) 168 mm × (H) 8.6 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20°C to 60°C
Hardware version	DMT1
Software version	1.011KC
Firmware version	Not applicable
RF Specification	
Protocol	IEEE802.11a, IEEE802.11n (HT20), IEEE802.11n (HT40) IEEE802.11ac (VHT20), IEEE802.11ac (VHT40), IEEE802.11ac (VHT80)
Frequency range	IEEE802.11a/n (HT20) / IEEE802.11ac (VHT20): 5180 MHz-5320 MHz, 5500 MHz-5720 MHz IEEE802.11n (HT40) / IEEE802.11ac (VHT40): 5190 MHz-5310 MHz, 5510 MHz-5710 MHz IEEE802.11ac (VHT80): 5210 MHz, 5290 MHz, 5530 MHz, 5610 MHz, 5690MHz
Number of RF Channels	IEEE802.11a/n (HT20) / IEEE802.11ac (VHT20): 20 Channels IEEE802.11n (HT40) / IEEE802.11ac (VHT40): 10 Channels IEEE802.11ac (VHT80): 5 Channels
Modulation type	IEEE802.11a/n/ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)



Data rate	IEEE802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65, 78, 86.5Mbps IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 86.7, 96.1Mbps IEEE802.11ac (VHT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65, 78, 86.5Mbps IEEE802.11ac (VHT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 86.6, 96.1Mbps IEEE802.11n (HT40 LGI): 13.5, 27, 40.5, 54, 81, 108, 121.5, 135, 162, 180Mbps IEEE802.11n (HT40 SGI): 15, 30, 45, 60, 90, 120, 135, 150, 180, 200Mbps IEEE802.11ac (VHT40 LGI): 13.5, 27, 40.5, 54, 81, 108, 121.5, 135, 162, 180Mbps IEEE802.11ac (VHT40 SGI): 15, 30, 45, 60, 90, 120, 135, 150, 180, 200Mbps IEEE802.11ac (VHT80 LGI): 29.5, 58.5, 87.8, 117, 175.5, 234, 263.3, 292.5, 351, 390Mbps IEEE802.11ac (VHT80 SGI): 32.5, 65, 97.5, 130, 195, 260, 292.5, 325, 390, 433.3Mbps
Channel separation	IEEE802.11a/n(HT20) / IEEE802.11ac (VHT20): 20 MHz IEEE802.11n (HT40) / IEEE802.11ac (VHT40): 40 MHz IEEE802.11ac (VHT80): 80 MHz
Conducted power	9.897 mW (IEEE802.11a) 9.360 mW (IEEE802.11n: HT20) 9.227 mW (IEEE802.11n: HT40) 9.371 mW (IEEE802.11ac: VHT80)
Antenna type	Internal antenna
Antenna gain	5.15-5.25 GHz band: 2.3 dBi 5.25-5.35 GHz band: 1.8 dBi 5.47-5.73 GHz band: 1.3 dBi

**2.2 Modification to the EUT**

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: KC-T304C, Serial Number: 2695300160, 2695300163			
0	As supplied by the applicant	Not Applicable	Not Applicable

**2.3 Variation of family model(s)**

**2.3.1 List of family model(s)**

Not applicable

**2.3.2 Reason for selection of EUT**

Not applicable

## 2.4 Operating channels and frequencies

### [IEEE802.11a/n (HT20) / IEEE802.11ac (VHT20)]

Channel	Frequency [MHz]
36	5180
40	5200
44	5220
48	5240
52	5260
56	5280
60	5300
64	5320
100	5500
104	5520
108	5540
112	5560
116	5580
120	5600
124	5620
128	5640
132	5660
136	5680
140	5700
144	5720

### [IEEE802.11n (HT40) / IEEE802.11ac (VHT40)]

Channel	Frequency [MHz]
38	5190
46	5230
54	5270
62	5310
102	5510
110	5550
118	5590
126	5630
134	5670
142	5710

### [IEEE802.11ac (VHT80)]

Channel	Frequency [MHz]
42	5210
58	5290
106	5530
122	5610
138	5690

## 2.5 Description of test mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

Band	IEEE802.11a/n (HT20) IEEE802.11ac (VHT20)		IEEE802.11n (HT40) IEEE802.11ac (VHT40)		IEEE802.11ac (HT80)	
	Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
5.2 GHz Band	36	5180	38	5190	42	5210
	40	5200	-	-	-	-
	48	5240	46	5230	-	-
5.3 GHz Band	52	5260	54	5270	58	5290
	56	5280	-	-	-	-
	64	5320	62	5310	-	-
5.6 GHz Band	100	5500	102	5510	106	5530
	116	5580	110	5550	122	5610
	140	5700	134	5670	138	5690
	144	5720	142	5690	-	-

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Band	Modulation Type	Data Rate
5.2 GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (VHT80): OFDM	MCS0 (29.5Mbps)
5.3 GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (VHT80): OFDM	MCS0 (29.5Mbps)
5.6 GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (VHT80): OFDM	MCS0 (29.5Mbps)

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

## 2.6 Operating flow

### - Tx mode

- i) Test program setup to the Software
- ii) Select a Test mode  
Operating frequency: 5.2GHz Band, 5.3GHz Band, 5.6GHz Band
- iii) Start test mode

### - Rx mode

- i) Test program setup to the Software
- ii) Select a Test mode  
Operating frequency: 5.2GHz Band, 5.3GHz Band, 5.6GHz Band
- iii) Start test mode

### 3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.3 System configuration” correspond to the lists in “3.1 Equipment used” and “3.2 Cable(s) used”.

This test configuration is based on the manufacture’s instruction.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

#### 3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Tablet	KYOCERA	KC-T304C	2695300160, 2695300163	V65KC-T304C	EUT
2	AC Adapter	KYOCERA	AD06KC	JJA	N/A	*

\*:AC power line Conducted Emission Test.

#### 3.2 Cable(s) used

No.	Equipment	Length[m]	Shield	Connector	Comment
a	DC cable for AC Adapter	1.2	No	Plastic	*

\*:AC power line Conducted Emission Test.

#### 3.3 System configuration





## 4 Test Result

### 4.1 26dB Bandwidth and 99% Occupied Bandwidth

#### 4.1.1 Measurement procedure

##### [FCC 15.407(a), KDB 789033 D02, Section C, D]

The 26dB bandwidth and 99% occupied bandwidth is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=200 kHz/430 kHz/820 kHz, VBW=620 kHz/1.3 MHz/2.4 MHz, Span=40 MHz/80 MHz/160 MHz
- Sweep=auto, Detector=Peak, Trace mode=Max hold


The EUT was set to operate with following conditions.

- 5.2 GHz Band, 5.3 GHz Band, 5.6 GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration



#### 4.1.2 Limit

None

#### 4.1.3 Measurement result

Date : 3-December-2021

Temperature : 20.8 [°C]

Humidity : 31.8 [%]

Test place : Shielded room No.4

Test engineer :

Kazunori Saito

Mode	Band	Channel	Frequency (MHz)	26 dB bandwidth (MHz)	99% Occupied bandwidth (MHz)
802.11a	5.2 GHz Band	36	5180	19.974	16.4128
		40	5200	19.899	16.3957
		48	5240	19.789	16.4018
	5.3 GHz Band	52	5260	19.898	16.4261
		56	5280	19.819	16.4401
		64	5320	20.084	16.4327
	5.6 GHz Band	100	5500	19.878	16.4194
		116	5580	19.993	16.4195
		140	5700	20.111	16.4109
		144	5720	19.907	16.4317

Mode	Band	Channel	Frequency (MHz)	26 dB bandwidth (MHz)	99% Occupied bandwidth (MHz)
802.11n (20 MHz)	5.2 GHz Band	36	5180	20.156	17.5279
		40	5200	20.191	17.5356
		48	5240	20.203	17.5445
	5.3 GHz Band	52	5260	20.265	17.5589
		56	5280	20.227	17.5502
		64	5320	20.154	17.5534
	5.6 GHz Band	100	5500	20.329	17.5440
		116	5580	19.933	17.5380
		140	5700	20.252	17.5311
		144	5720	20.342	17.5443




Mode	Band	Channel	Frequency (MHz)	26 dB bandwidth (MHz)	99% Occupied bandwidth (MHz)
802.11n (40 MHz)	5.2 GHz Band	38	5190	40.488	36.0016
		46	5230	40.601	35.9816
	5.3 GHz Band	54	5270	40.848	35.9982
		62	5310	40.343	35.9711
	5.6 GHz Band	102	5510	40.729	36.0172
		110	5550	40.553	36.0080
		134	5670	40.558	35.9882
		142	5710	40.281	36.0205

Mode	Band	Channel	Frequency (MHz)	26dB bandwidth (MHz)	99% Occupied bandwidth (MHz)
802.11ac (80 MHz)	5.2 GHz Band	42	5210	80.977	75.1234
	5.3 GHz Band	58	5290	80.938	75.1029
	5.6 GHz Band	106	5530	80.821	75.1346
		122	5610	81.102	75.1338
		138	5690	80.910	75.1117




### 4.1.4 Trace data


[IEEE802.11a]  
(5.2 GHz Band)  
Channel: 36

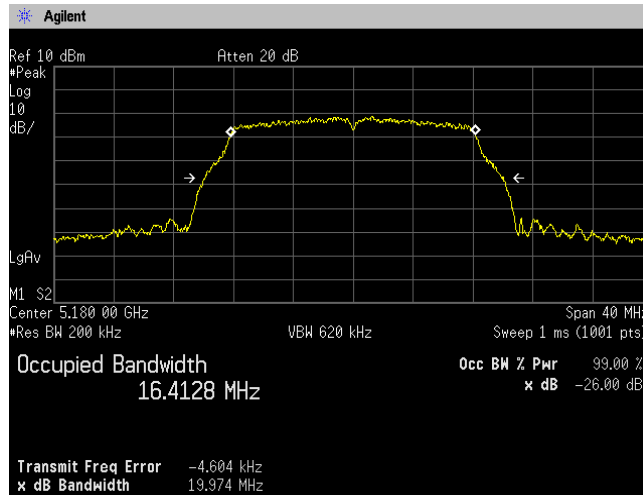

Channel: 40

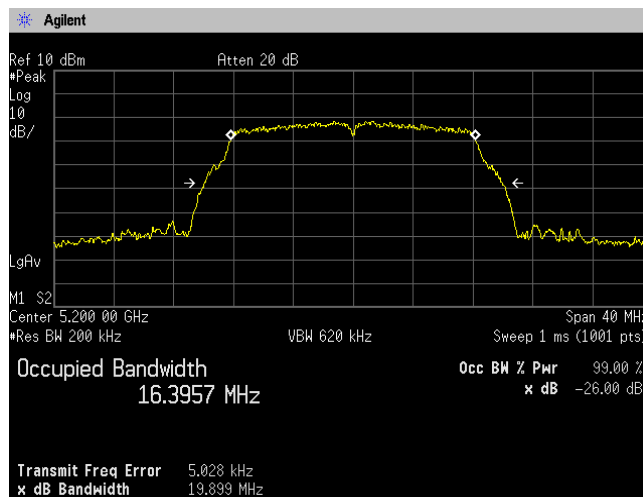


Channel: 48

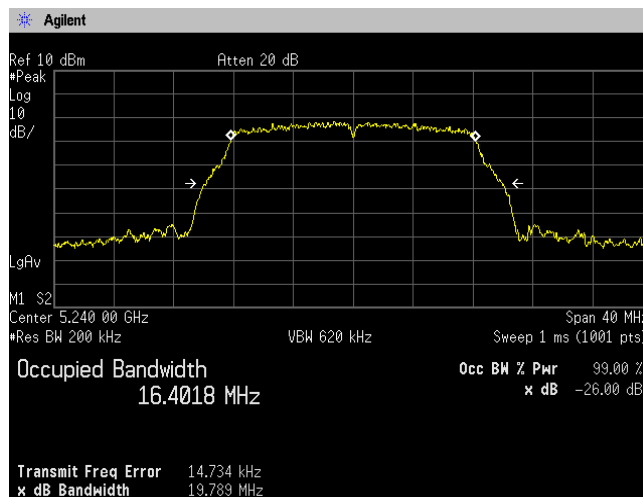





**(5.3 GHz Band)  
Channel: 52**

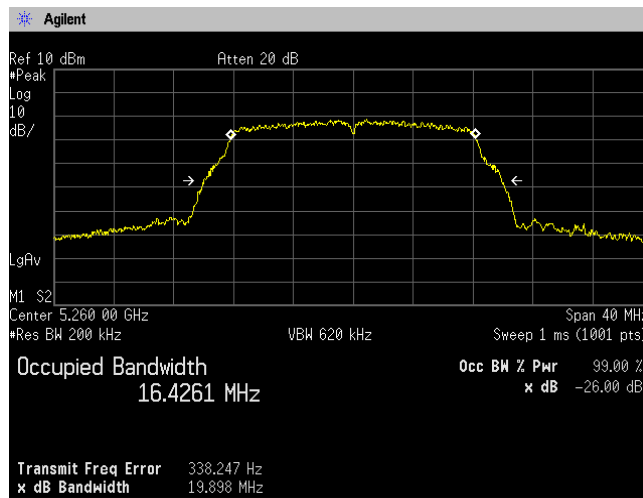

**Channel: 56**

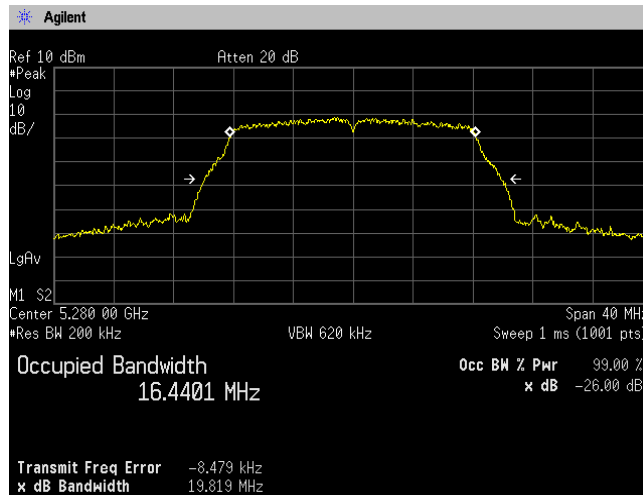


**Channel: 64**

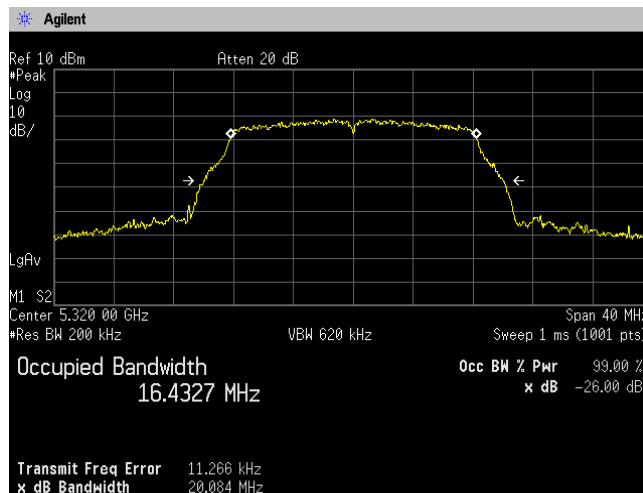





**(5.6 GHz Band)  
Channel: 100**

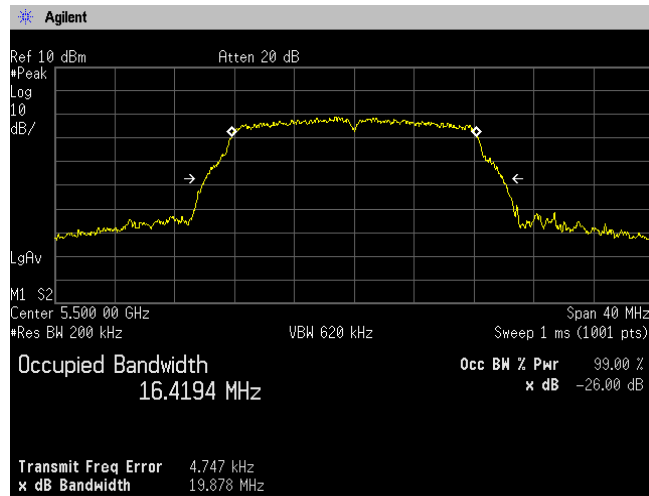


**Channel: 116**

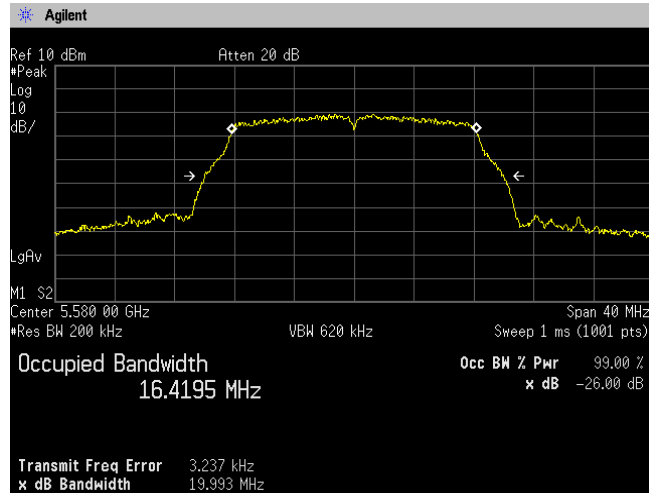

**Channel: 140**

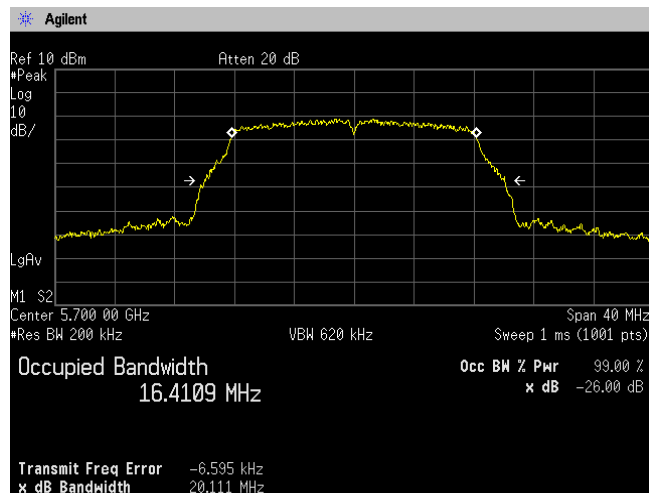


Channel: 144

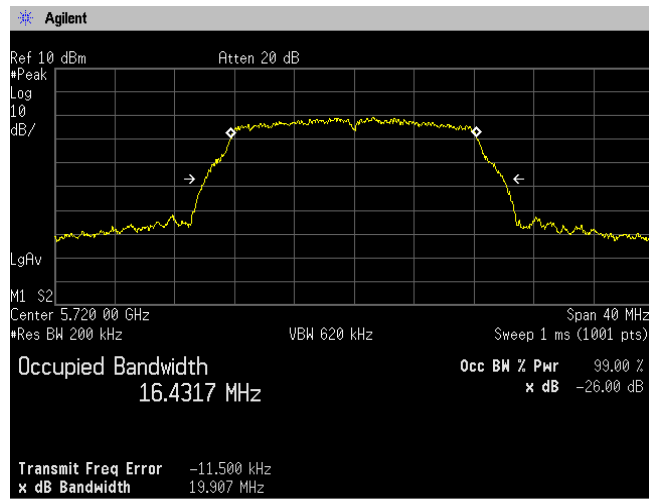





**[IEEE802.11n (HT20)]**  
**(5.2 GHz Band)**  
**Channel: 36**

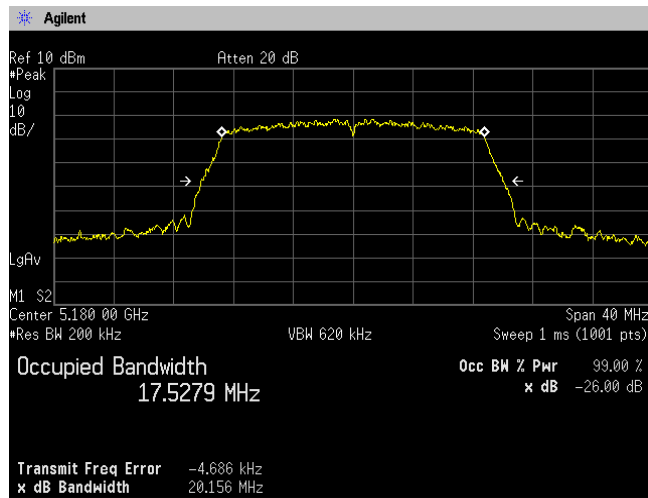

**Channel: 40**

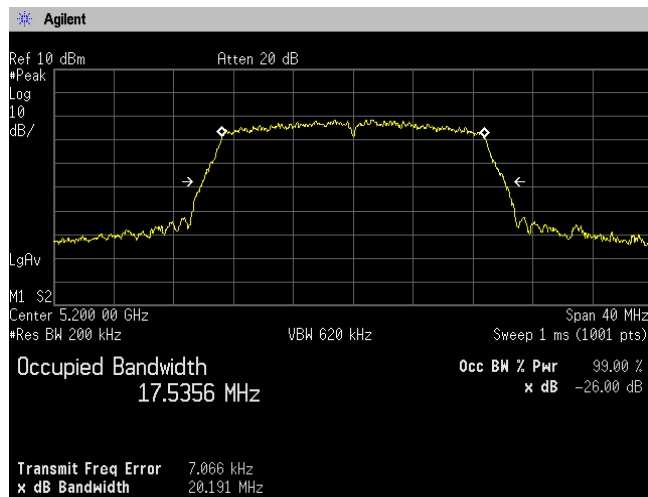


**Channel: 48**

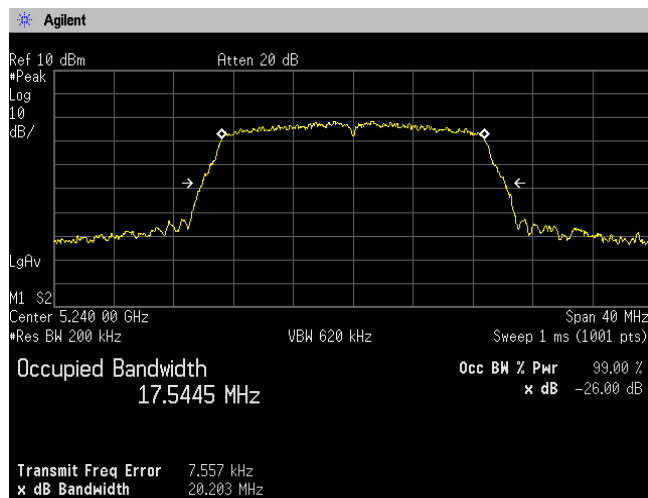





**(5.3 GHz Band)**  
**Channel: 52**

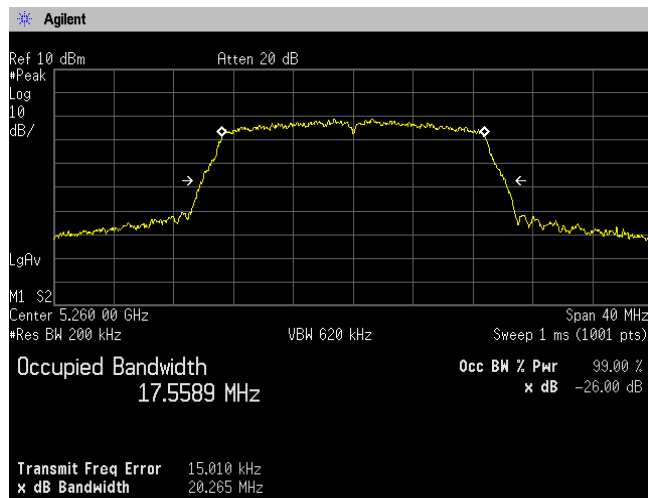


**Channel: 56**

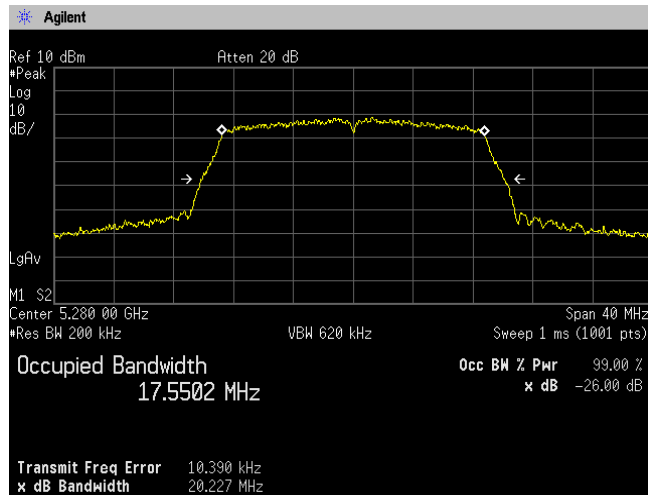


**Channel: 64**

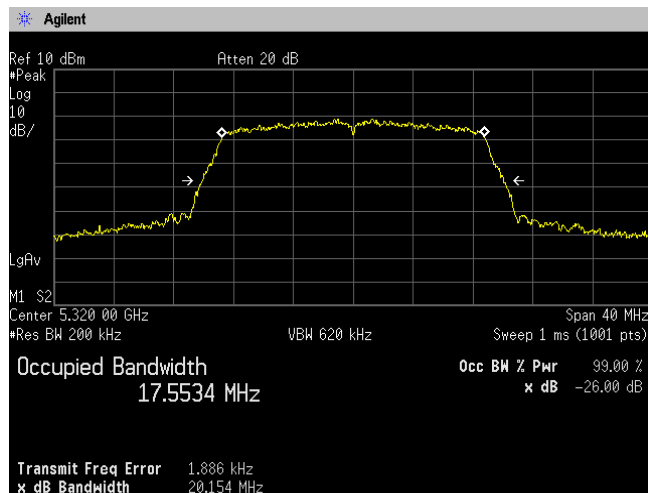


**(5.6 GHz Band)**  
**Channel: 100**

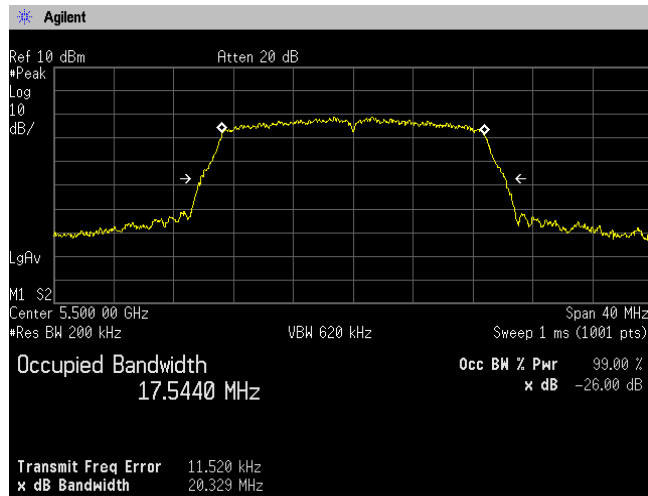


**Channel: 116**

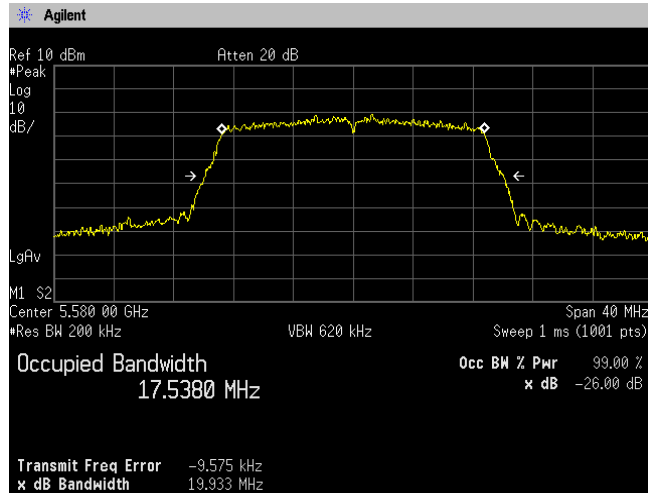

**Channel: 140**

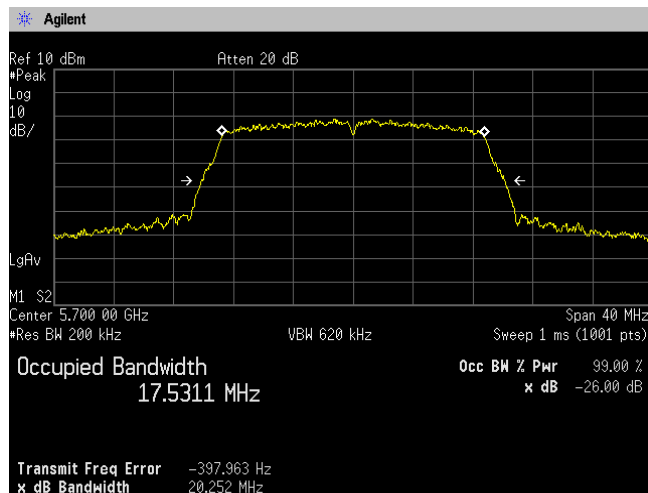


**Channel: 144**

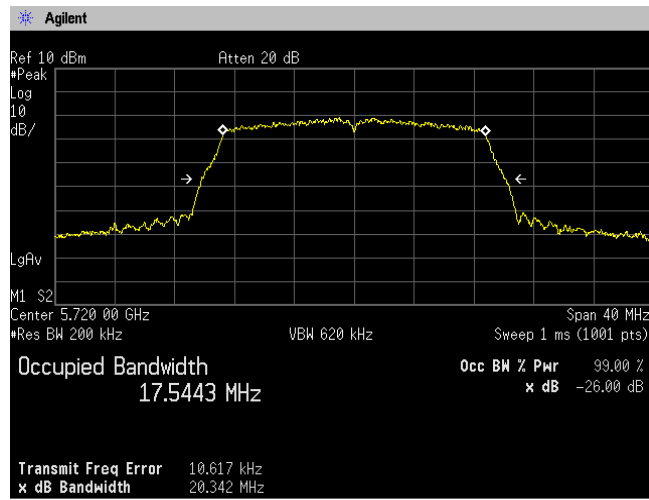





**[IEEE802.11n (HT40)]  
(5.2 GHz Band)  
Channel: 38**

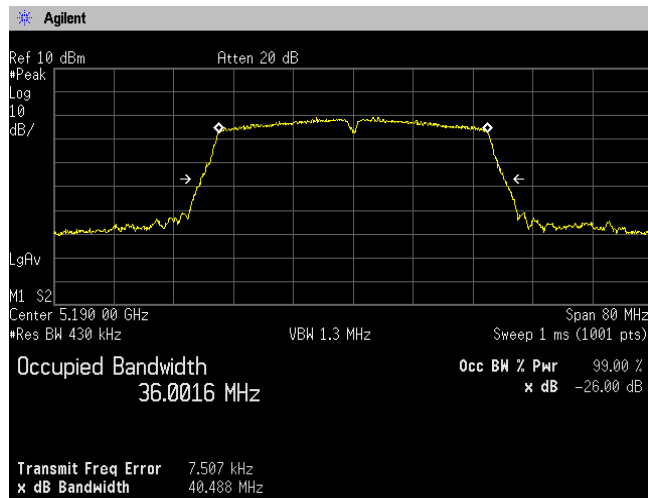


**Channel: 46**

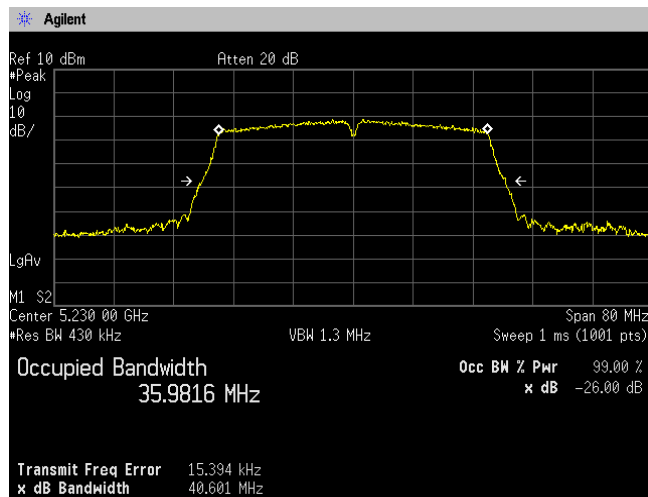

**(5.3 GHz Band)**  
**Channel: 54**

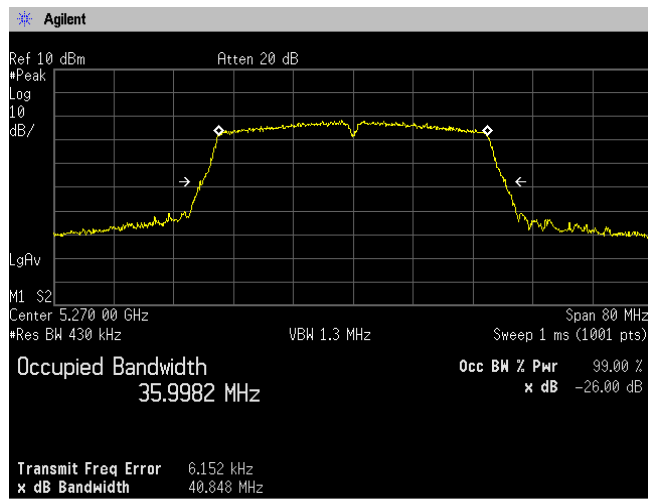


**Channel: 62**

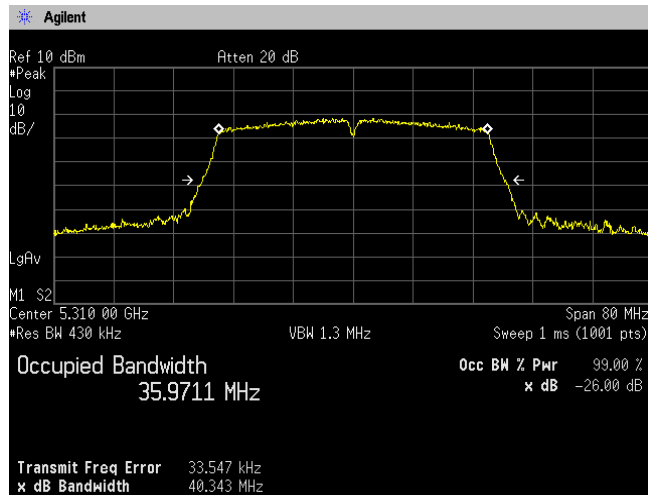





**(5.6 GHz Band)**  
**Channel: 102**

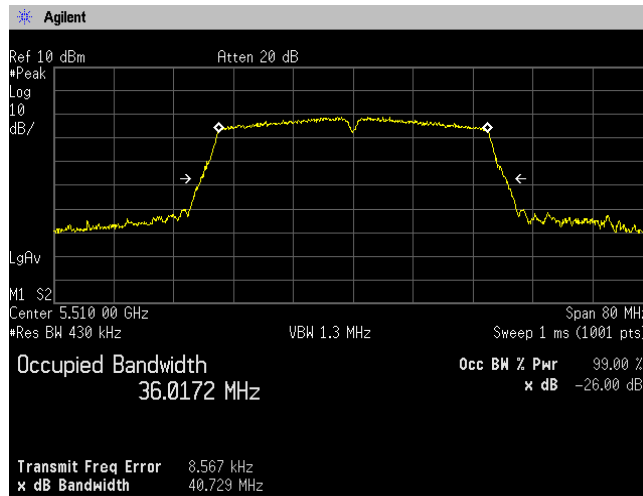


**Channel: 110**

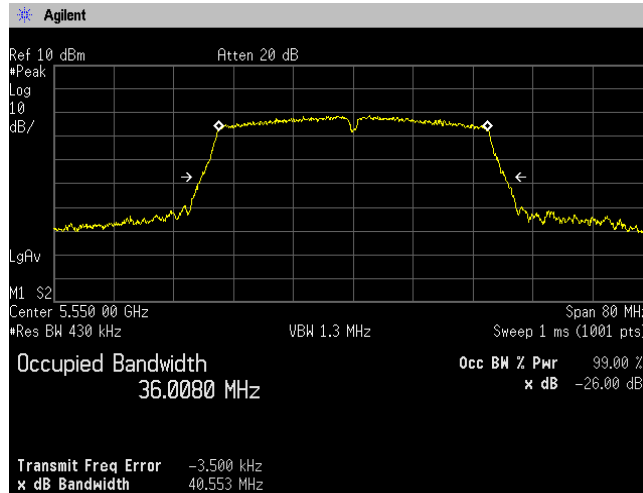

**Channel: 134**

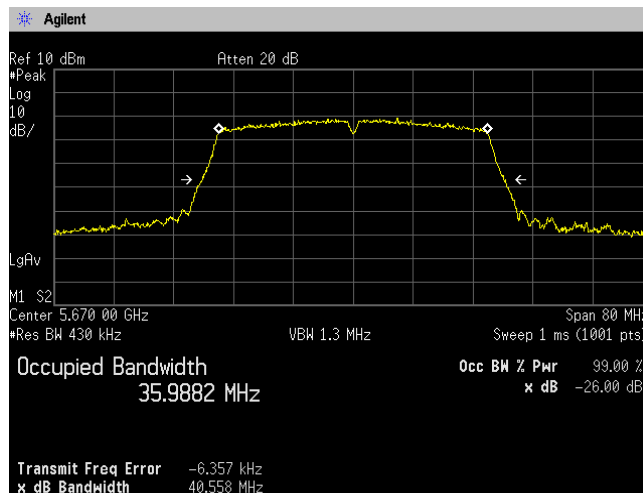


**Channel: 142**

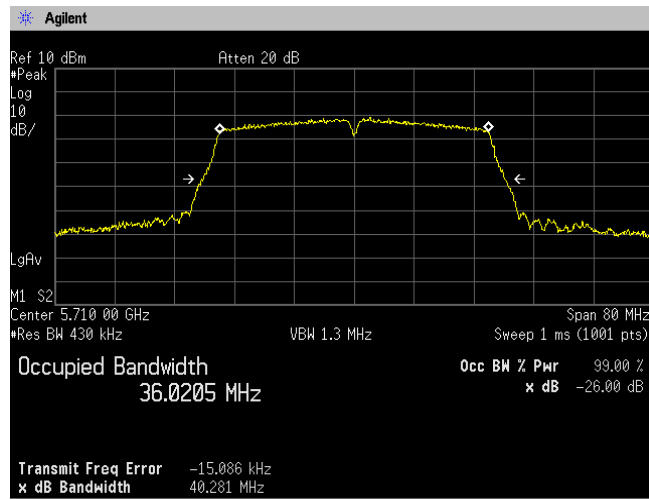




**[IEEE802.11ac (HT80)]**  
**(5.2 GHz Band)**  
**Channel: 42**

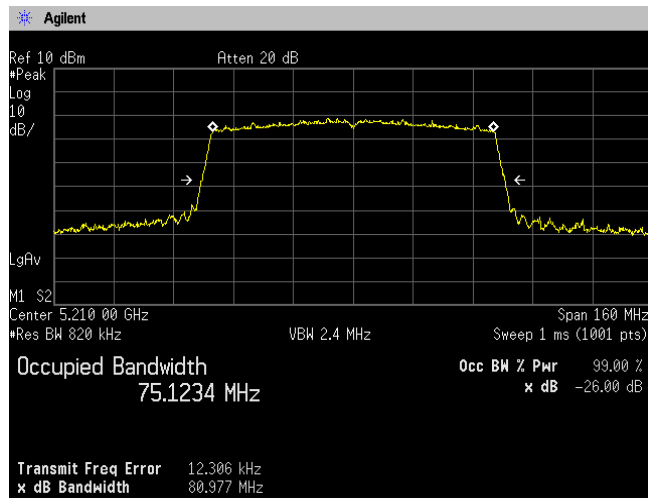


**(5.3GHz Band)**  
**Channel: 58**

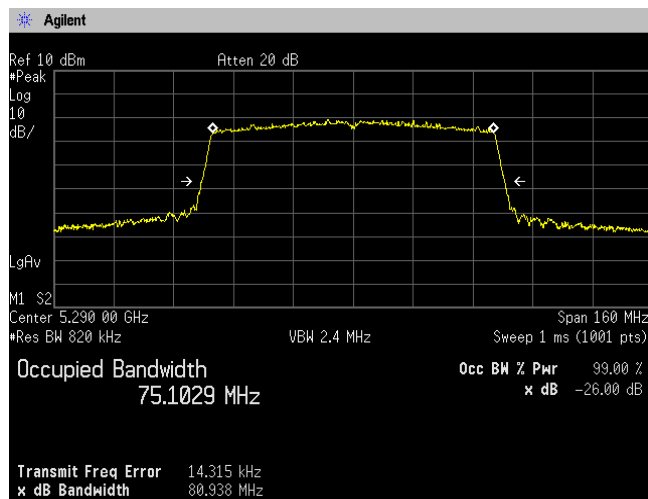







**(5.6 GHz Band)**  
**Channel: 106**

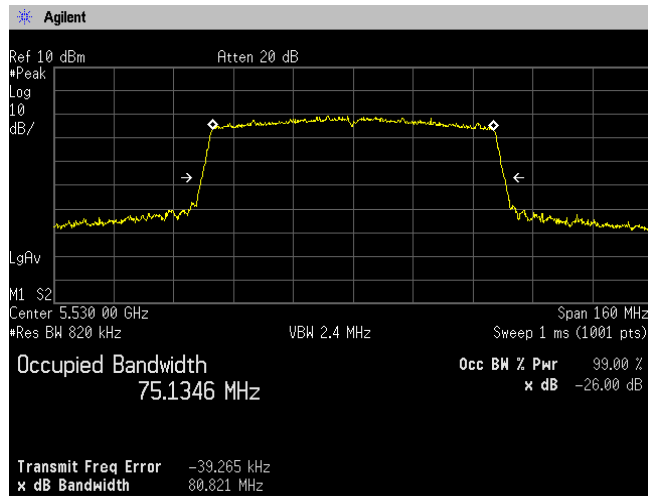

**Channel: 122**

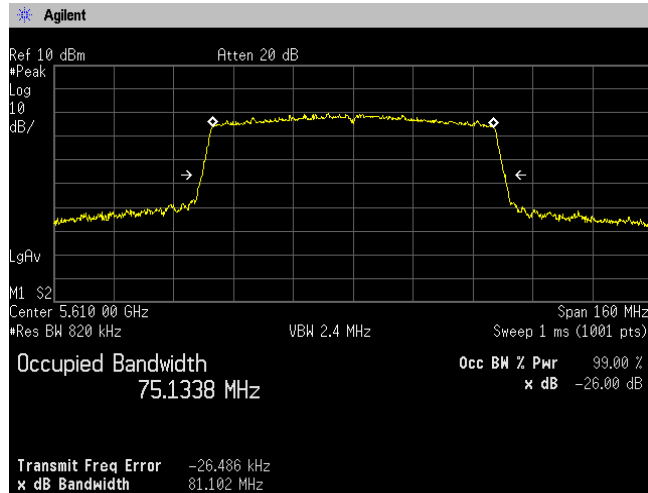

**Channel: 138**

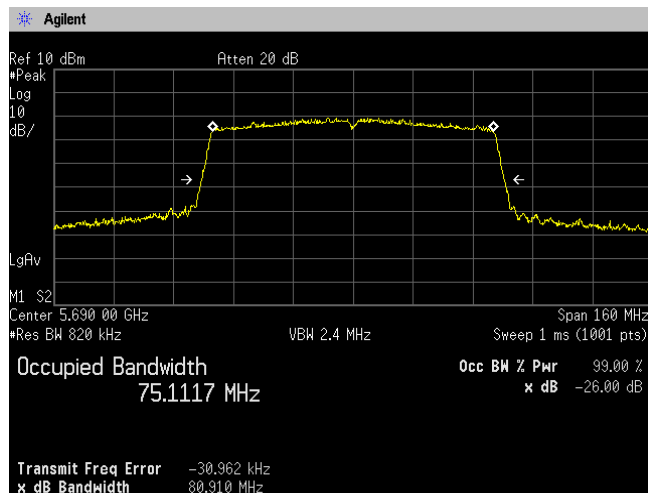

## 4.2 Maximum Conducted Output Power

### 4.2.1 Measurement procedure

#### [FCC 15.407(a), KDB 789033 D02, Section E.2.b) Method SA-1, d)Method SA-2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;


- RBW=1MHz, VBW=3MHz, Span=35MHz/70MHz/140MHz, Sweep=auto,  
Detector=RMS, Trace mode=Averaging

The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode
  
- Test configuration

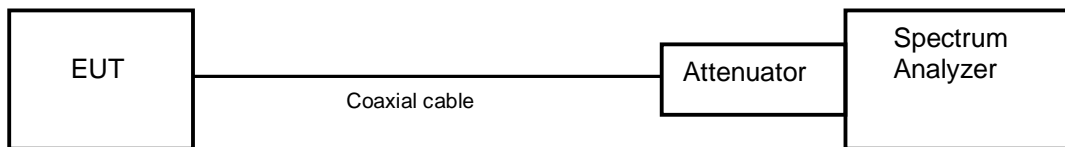

### 4.2.2 Limit

- (1) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250mW or  $11\text{dBm} + 10\log B$ , where B is the 2 dB emission bandwidth in megahertz.
- (3) For the 5.725-5.85 GHz bands, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.



**<Output Power Limit Calculation>**

Band	Mode	Power Limit (mW)	Calculated Limit (dBm)	Antenna Gain (dBi)	Determined Limit (dBm)
5.2GHz Band	802.11a	250	23.97	2.3	23.97
	802.11n HT20				
	802.11n HT20				
	802.11ac HT80				

Band	Mode	Power Limit (mW)	Calculated Limit (dBm)	Antenna Gain (dBi)	Determined Limit (dBm)
		Least 26dBc BW (MHz)			
5.3GHz Band	802.11a	250	23.97	1.8	23.97
		19.819	23.97		
	802.11n HT20	250	23.97		23.97
		20.154	24.04		
	802.11n HT20	250	23.97		23.97
		40.343	27.06		
	802.11ac HT80	250	23.97		23.97
		80.938	30.08		

Band	Mode	Power Limit (mW)	Calculated Limit (dBm)	Antenna Gain (dBi)	Determined Limit (dBm)
		Least 26dBc BW (MHz)			
5.6GHz Band	802.11a	250	23.97	1.3	23.97
		19.878	23.98		
	802.11n HT20	250	23.97		23.97
		19.933	24.00		
	802.11n HT20	250	23.97		23.97
		40.553	27.08		
	802.11ac HT80	250	23.97		23.97
		80.821	30.08		

#### 4.2.3 Measurement result

Date : 3-December-2021  
 Temperature : 20.8 [°C]  
 Humidity : 31.8 [%]  
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11a	36	5180	9.33	1.392	1.436	0.969	0.135	9.465	8.841
	40	5200	8.85					8.985	7.916
	58	5240	8.93					9.065	8.063
	52	5260	9.63	1.392	1.436	0.969	0.135	9.765	9.474
	56	5280	9.06					9.195	8.308
	64	5320	9.46					9.595	9.110
	100	5500	9.50	1.392	1.436	0.969	0.135	9.635	9.194
	116	5580	9.82					9.955	9.897
	140	5700	9.10					9.235	8.385
144	5720	9.24	9.375					8.660	

Note1: X = On time / (On + Off time), DCF=10log (1/x)

Note2: Test Result=Reading + DCF

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11n (20MHz)	36	5180	8.99	1.286	1.332	0.965	0.153	9.143	8.208
	40	5200	8.86					9.013	7.966
	58	5240	8.36					8.513	7.100
	52	5260	8.97	1.286	1.332	0.965	0.153	9.123	8.171
	56	5280	8.70					8.853	7.678
	64	5320	9.22					9.373	8.655
	100	5500	9.22	1.286	1.332	0.965	0.153	9.373	8.655
	116	5580	9.56					9.713	9.360
	140	5700	9.55					9.703	9.338
144	5720	9.23	9.383					8.675	

Note: X = On time / (On + Off time), DCF=10log (1/x)

Note2: Test Result=Reading + DCF



Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11n (40MHz)	38	5190	8.89	0.636	0.680	0.935	0.291	9.181	8.280
	46	5230	8.96					9.251	8.415
	54	5270	8.95	0.636	0.680	0.935	0.291	9.241	8.396
	62	5310	8.97					9.261	8.434
	102	5510	9.16	0.636	0.680	0.935	0.291	9.451	8.812
	110	5550	9.06					9.351	8.611
	134	5670	9.36					9.651	9.227
	142	5710	9.21					9.501	8.914

Note: X = On time / (On + Off time), DCF=10log (1/x)  
 Note2: Test Result=Reading + DCF

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11ac (80MHz)	42	5210	8.61	0.324	0.368	0.879	0.558	9.168	8.256
	58	5290	8.83	0.324	0.368	0.879	0.558	9.388	8.685
	106	5530	8.96	0.324	0.368	0.879	0.558	9.518	8.949
	122	5610	9.16	0.324	0.368	0.879	0.558	9.718	9.371
	138	5690	8.95	0.324	0.368	0.879	0.558	9.508	8.928


Note: X = On time / (On + Off time), DCF=10log (1/x)  
 Note2: Test Result=Reading + DCF




#### 4.2.4 Trace data

[IEEE802.11a]  
(5.2GHz Band)


Channel: 36

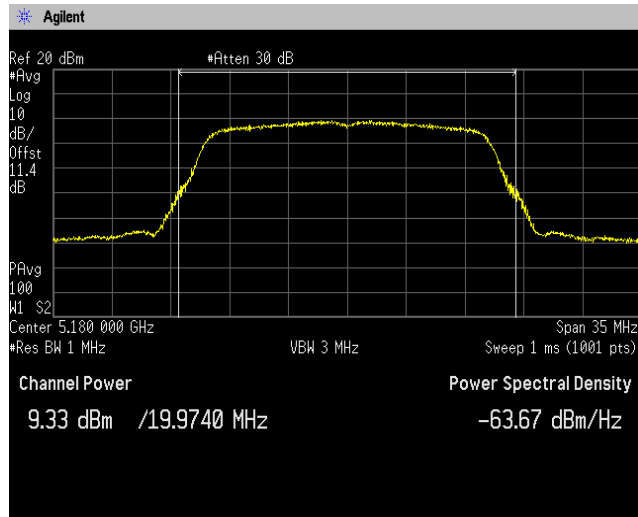


Channel: 40

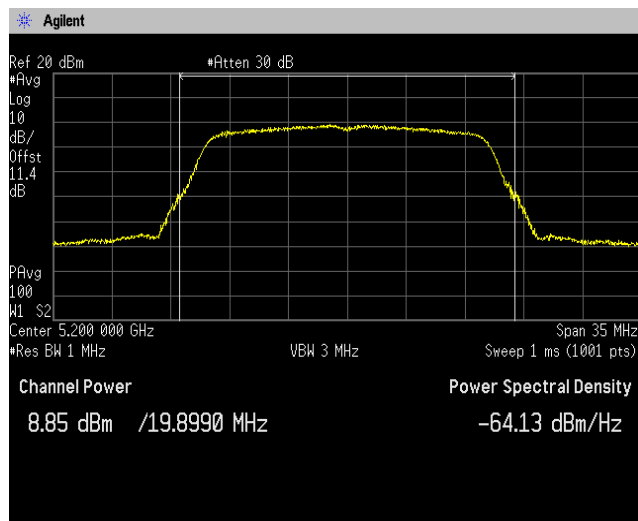


Channel: 48

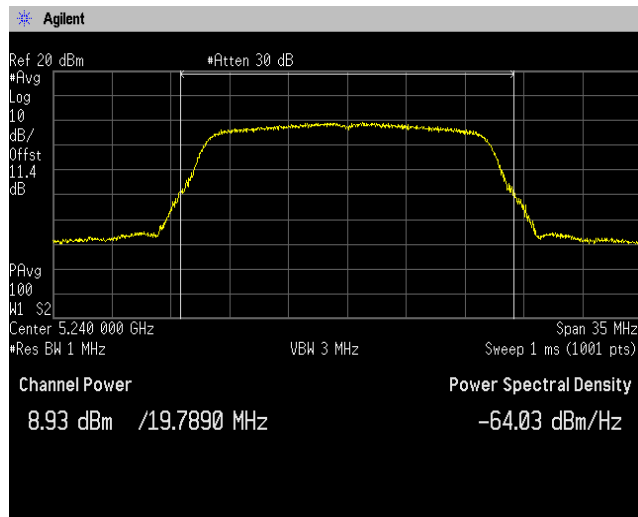


**(5.3GHz Band)**  
**Channel: 52**

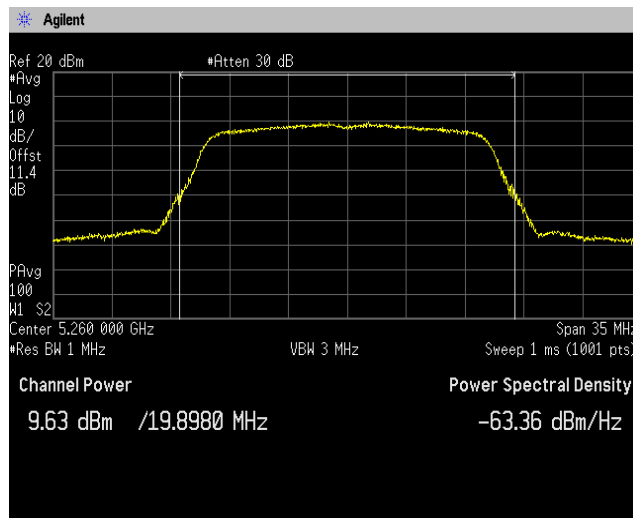


**Channel: 56**

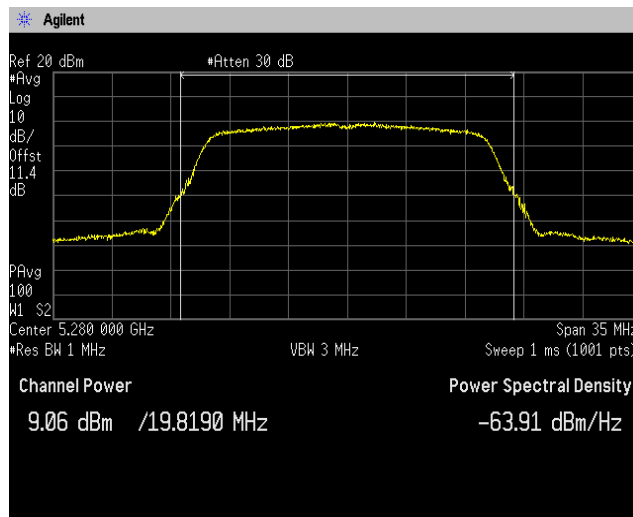


**Channel: 64**

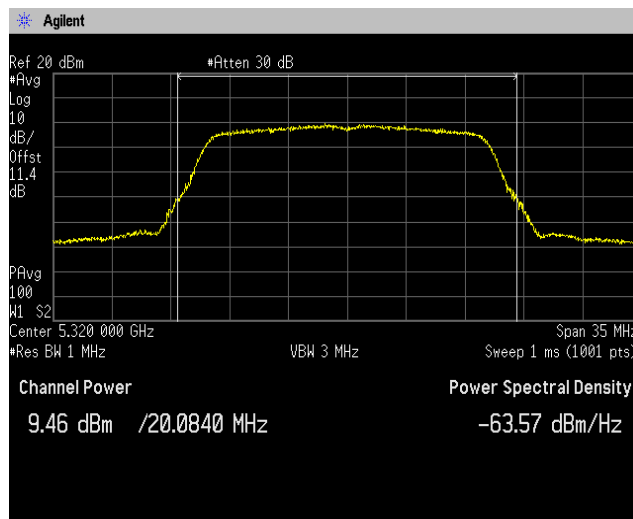


**(5.6GHz Band)**  
**Channel: 100**

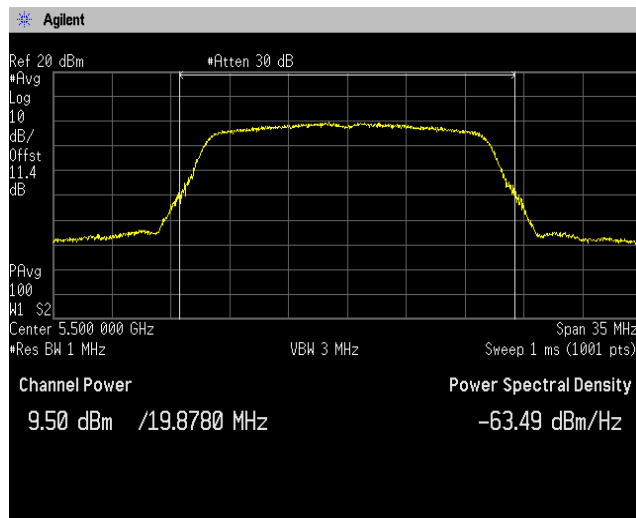

**Channel: 116**

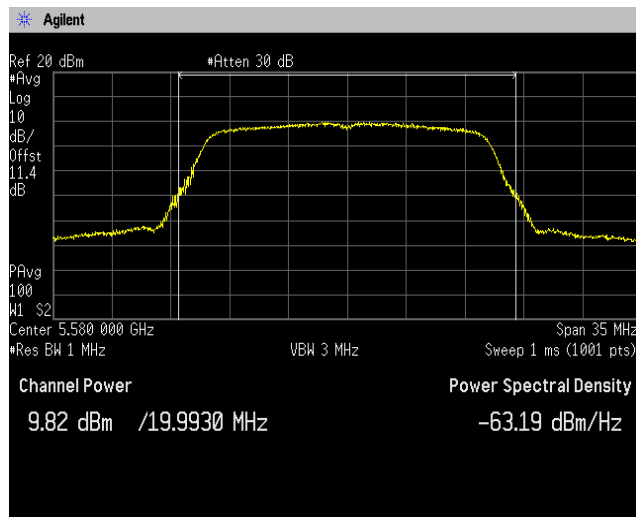


**Channel: 140**

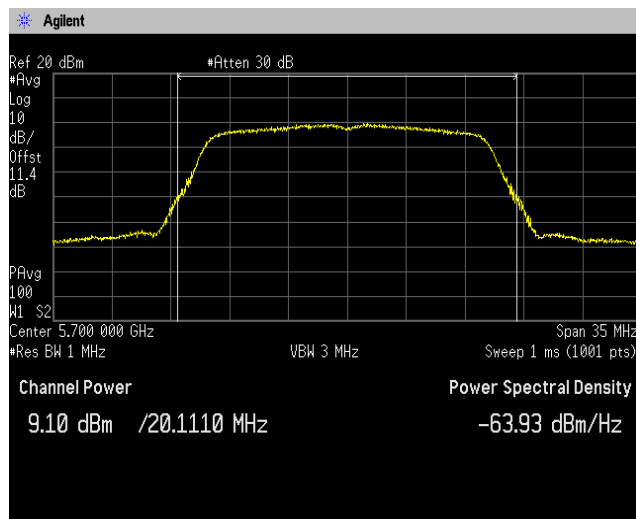




**Channel: 144**

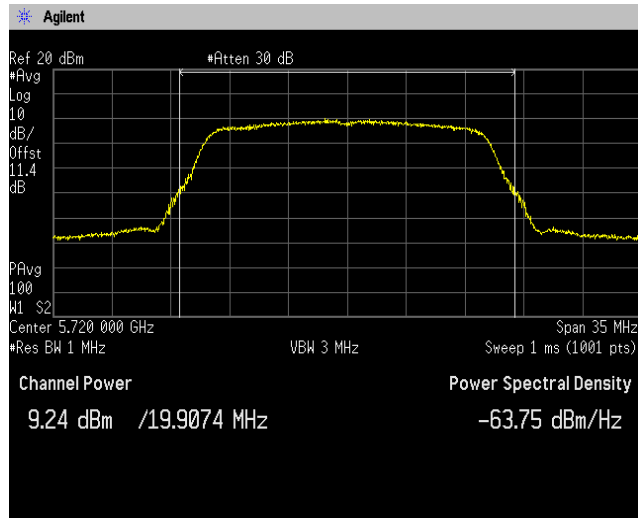





**[IEEE802.11n (HT20)]  
(5.2GHz Band)  
Channel: 36**

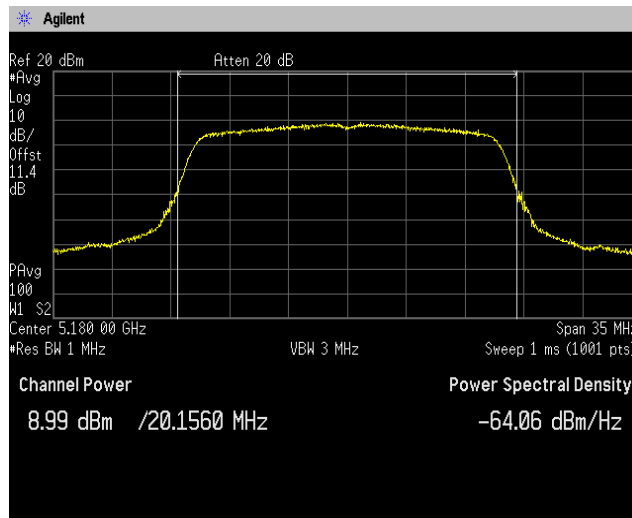


**Channel: 40**

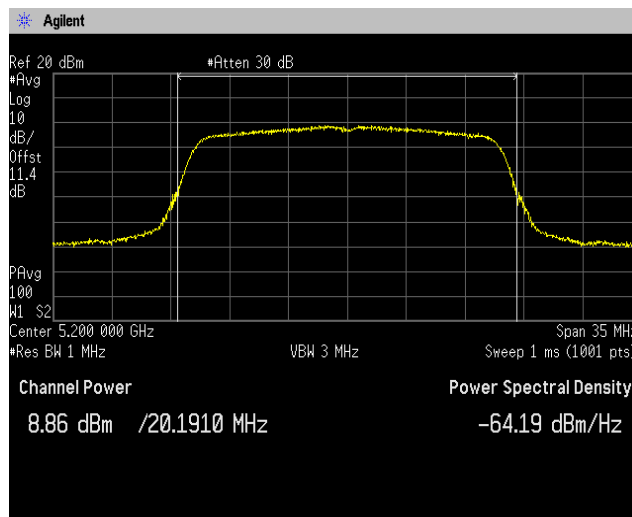


**Channel: 48**

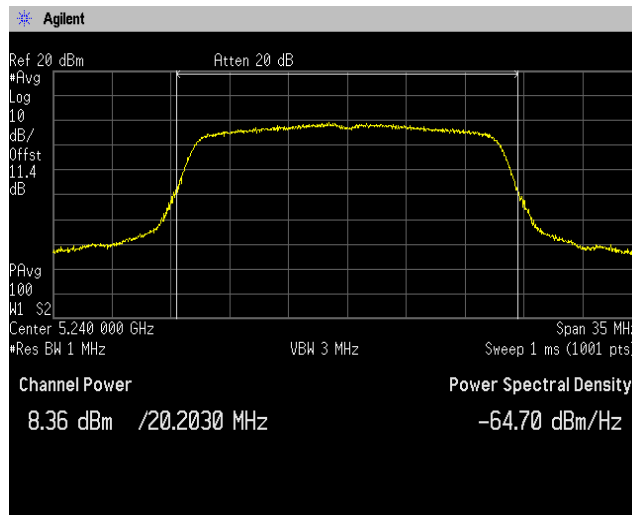


**(5.3GHz Band)**  
**Channel: 52**

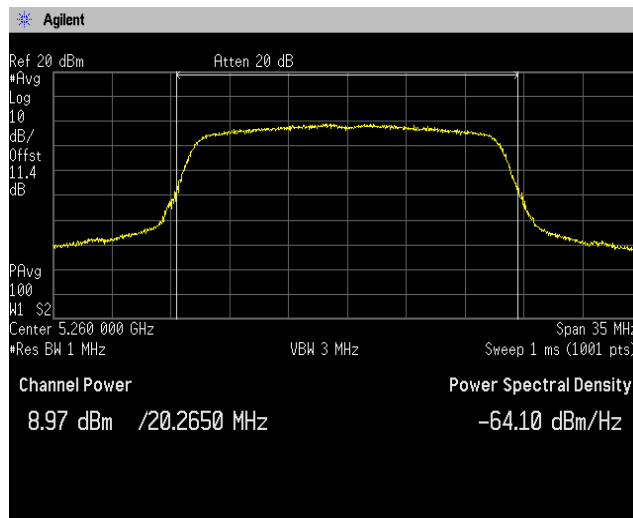

**Channel: 56**

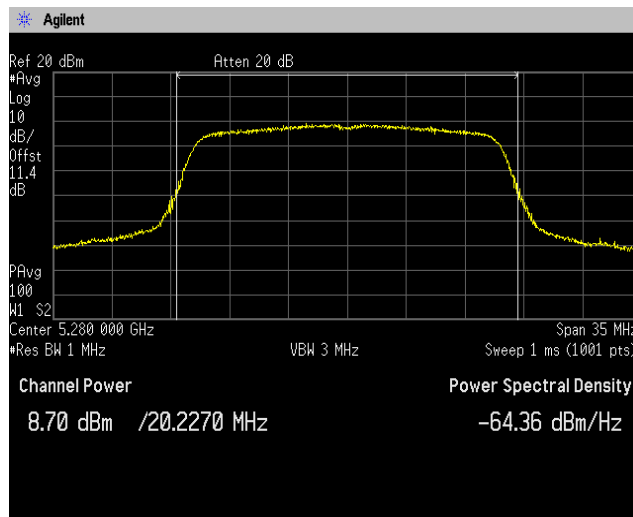


**Channel: 64**

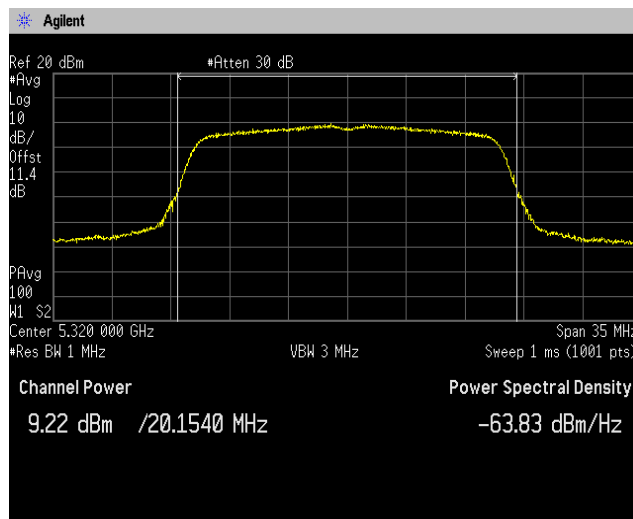





**(5.6GHz Band)**  
**Channel: 100**

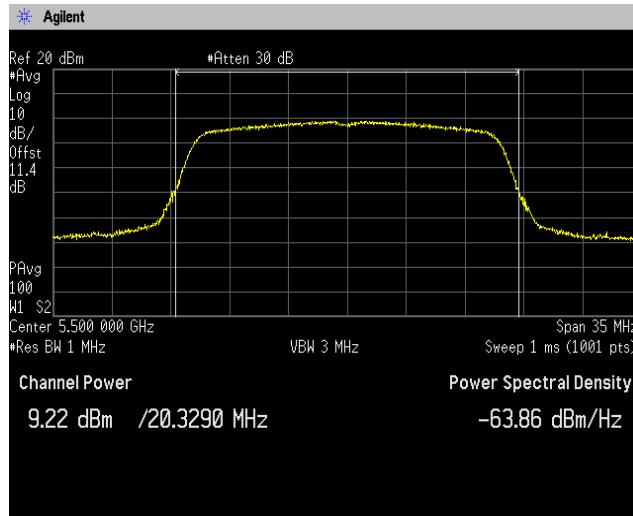


**Channel: 116**

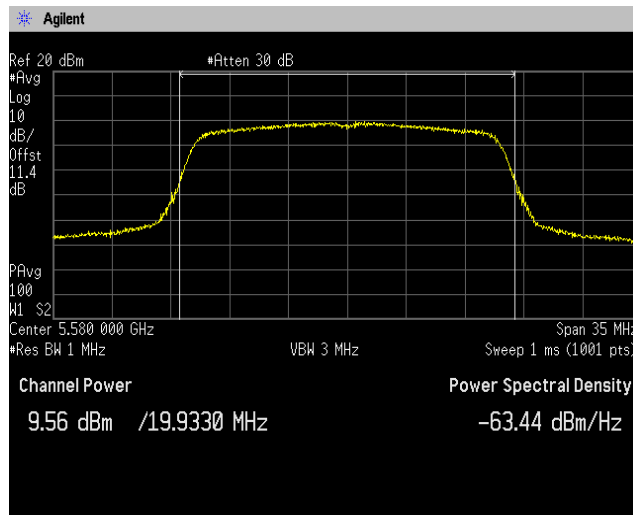


**Channel: 140**

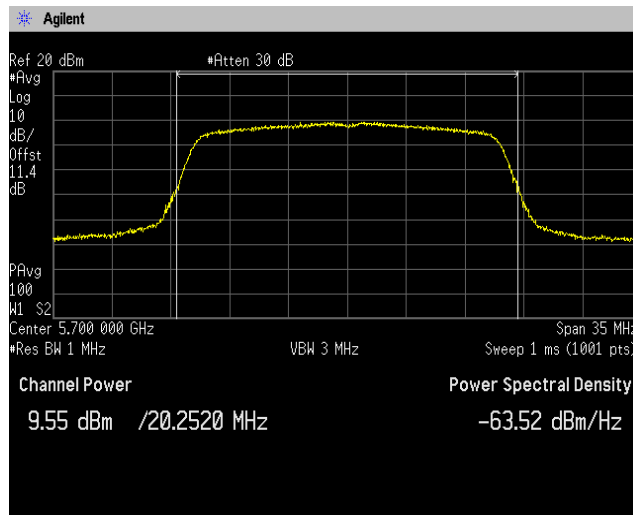


**Channel: 144**

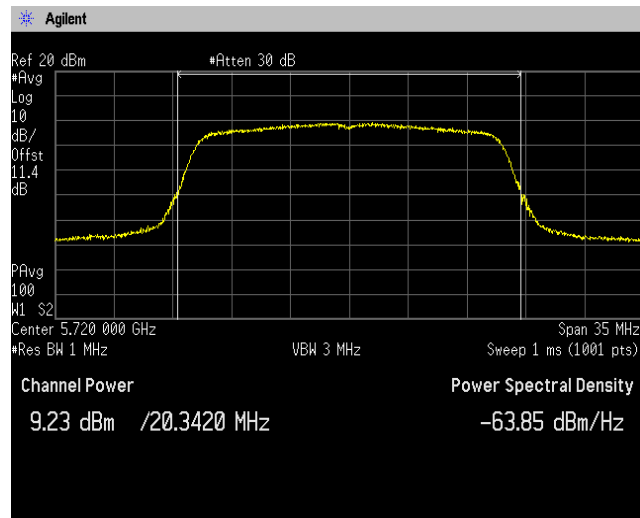

**[IEEE802.11n (HT40)]  
(5.2GHz Band)  
Channel: 38**

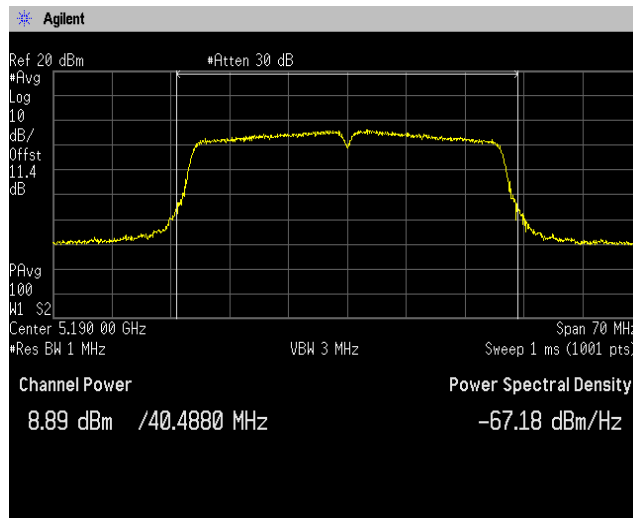


**Channel: 46**

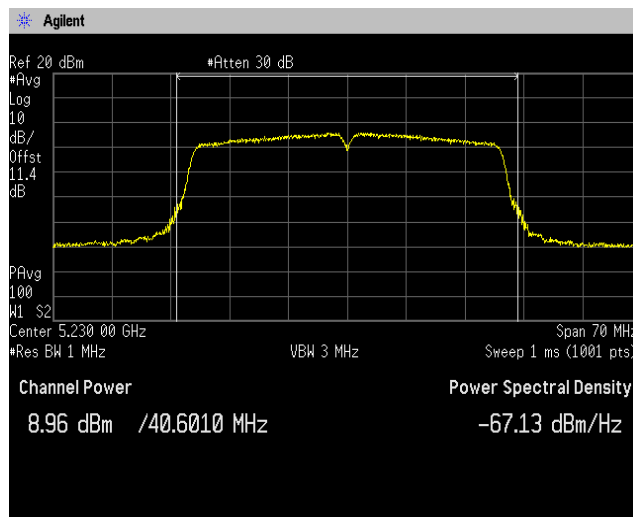




**(5.3GHz Band)**  
**Channel: 54**

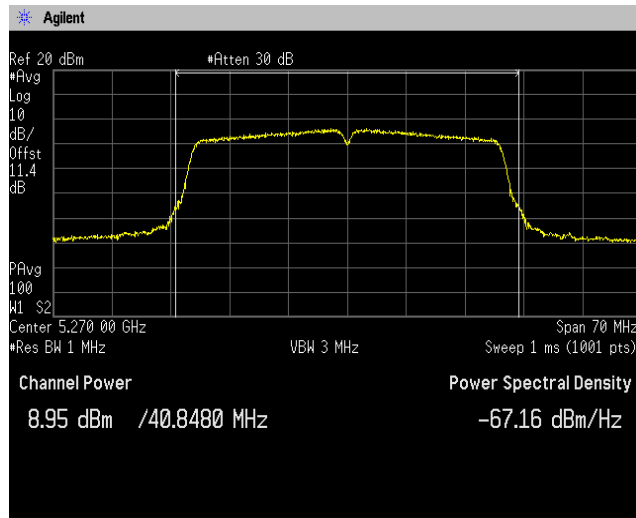


**Channel: 62**

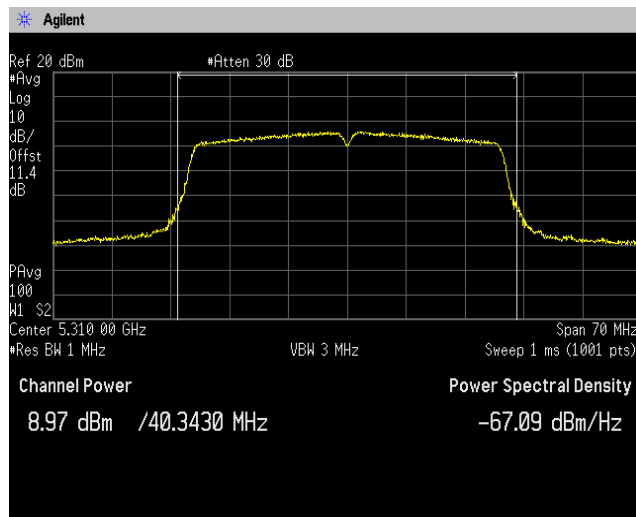





**(5.6GHz Band)**  
**Channel: 102**

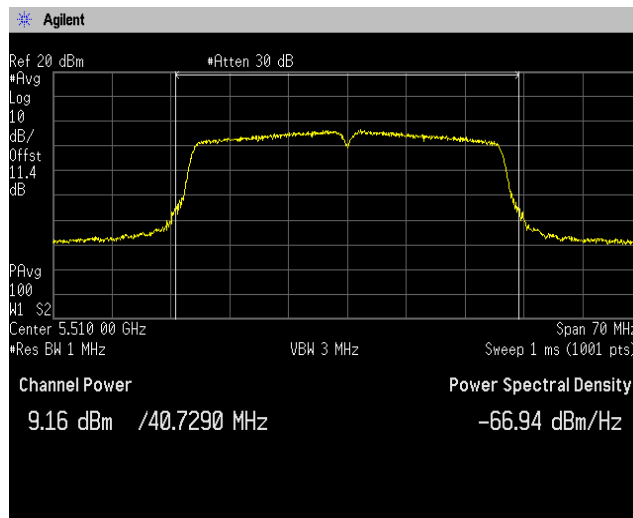

**Channel: 110**

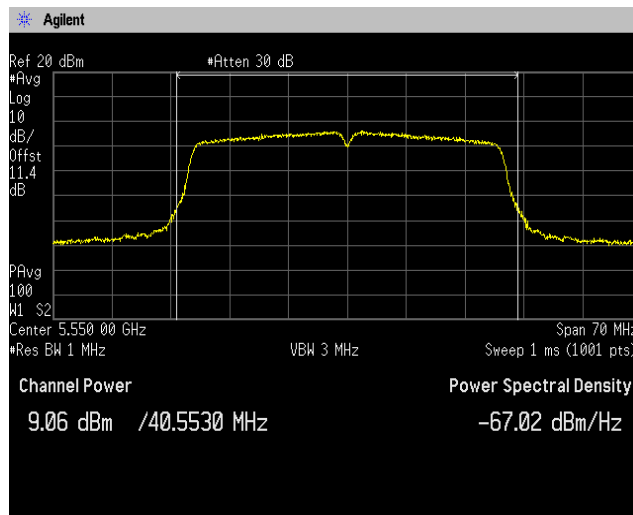


**Channel: 134**

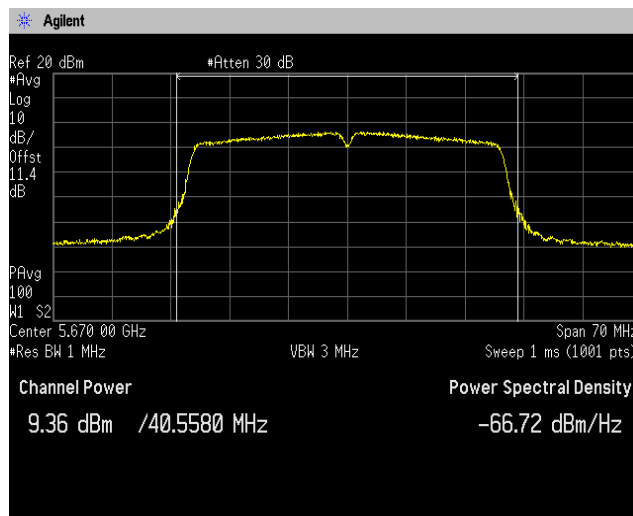






**Channel: 142**

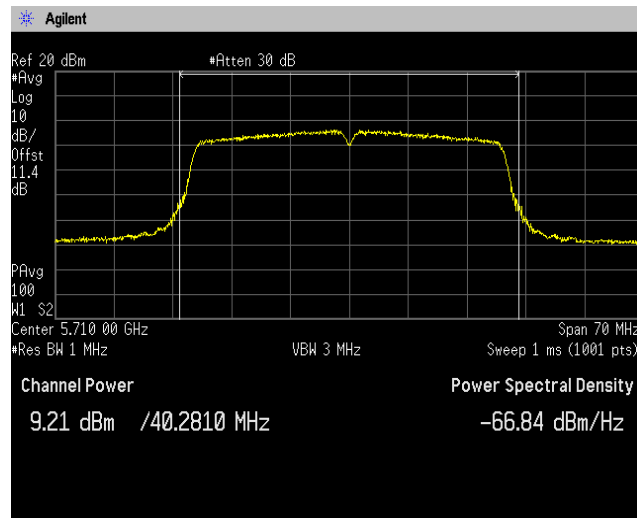





**[IEEE802.11ac (HT80)]**  
**(5.2 GHz Band)**  
**Channel: 42**

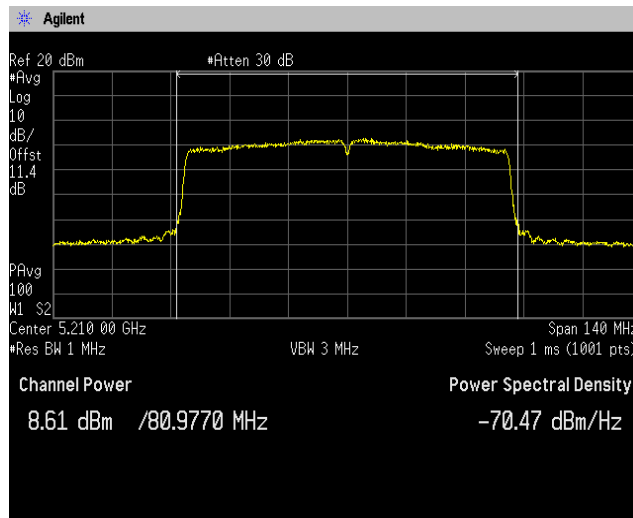


**(5.3GHz Band)**  
**Channel: 58**

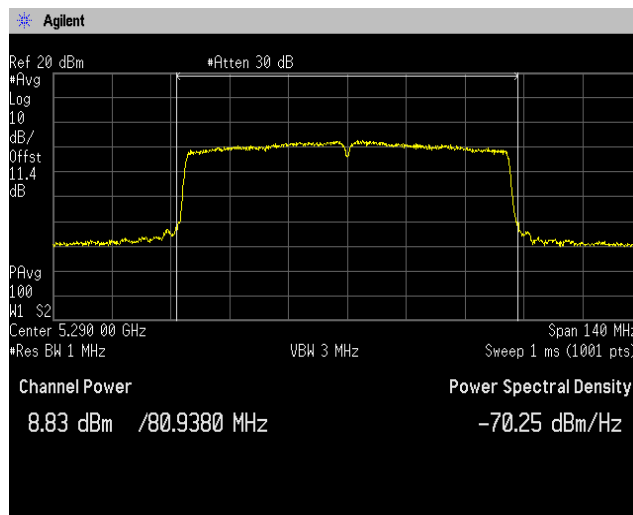

**(5.6 GHz Band)**  
**Channel: 106**

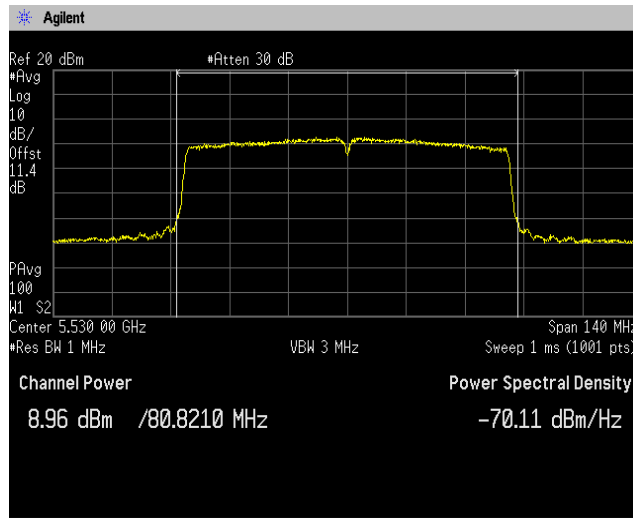

**Channel: 122**

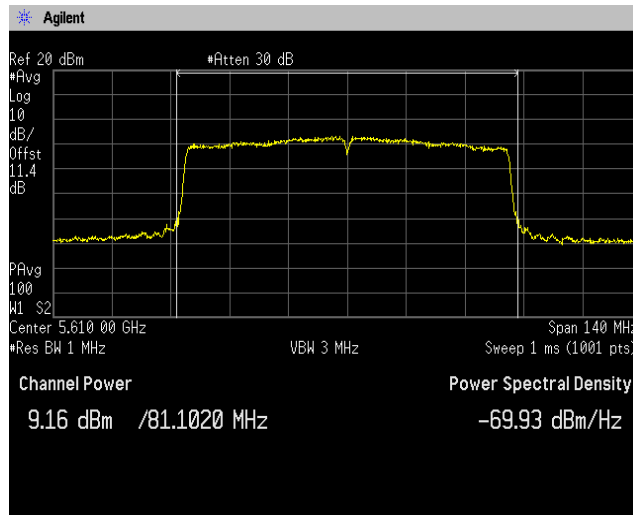

**Channel: 138**



### 4.3 Peak Power Spectral Density

#### 4.3.1 Measurement procedure

##### [FCC 15.407(a), KDB 789033 D02, Section F]

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=1 MHz, VBW=3 MHz, Span=25 MHz/50 MHz/100 MHz, Sweep=Auto, Detector=RMS, Trace mode=Averaging


The EUT was set to operate with following conditions.

- 5.2 GHz Band, 5.3 GHz Band, 5.6 GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

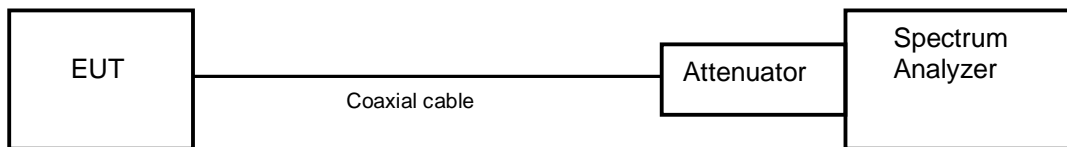

#### 4.3.2 Limit

(1) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

(3) For the 5.725-5.85 GHz bands, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirection applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

##### <Peak Power Spectral Density Limit Calculation>

Band	Antenna Gain (dBi)	Limit
5.2 GHz Band	2.8	13.8 dBm/MHz
5.3 GHz Band	1.8	12.8 dBm/MHz
5.6 GHz Band	1.3	12.3 dBm/MHz

### 4.3.3 Measurement result

Date : 3-December-2021  
 Temperature : 20.8 [°C]  
 Humidity : 31.8 [%]  
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11a	36	5180	-0.460	1.392	1.436	0.969	0.135	-0.325
	40	5200	-0.694					-0.559
	48	5240	-0.718					-0.583
	52	5260	-0.523	1.392	1.436	0.969	0.135	-0.388
	56	5280	-0.410					-0.275
	64	5320	-0.091					0.044
	100	5500	-0.595	1.392	1.436	0.969	0.135	-0.460
	116	5580	-0.417					-0.282
	140	5700	-0.434					-0.299
	144	5720	-0.209					-0.074

Note:  $X = \text{On time} / (\text{On} + \text{Off time})$ ,  $\text{DCF} = 10 \log(1/x)$

Note 2: Test Result = Reading + DCF



Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11n (20MHz)	36	5180	-1.002	1.286	1.332	0.965	0.153	-0.849
	40	5200	-1.199					-1.046
	48	5240	-0.763					-0.610
	52	5260	-0.926	1.286	1.332	0.965	0.153	-0.773
	56	5280	-0.812					-0.659
	64	5320	-1.023					-0.870
	100	5500	-0.641					-0.488
	116	5580	-0.470	1.286	1.332	0.965	0.153	-0.317
	140	5700	-0.143					0.010
	144	5720	-0.917					-0.764

Note: X = On time / (On + Off time), DCF=10log (1/x)  
 Note 2: Test Result = Reading + DCF

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11n (40MHz)	38	5190	-3.997	0.636	0.680	0.935	0.291	-3.706
	46	5230	-3.840					-3.549
	54	5270	-3.994	0.636	0.680	0.935	0.291	-3.703
	62	5310	-4.059					-3.768
	102	5510	-3.702	0.636	0.680	0.935	0.291	-3.411
	110	5550	-3.898					-3.607
	134	5670	-3.467					-3.176
	142	5710	-3.701					-3.410

Note: X = On time / (On + Off time), DCF=10log (1/x)  
 Note 2: Test Result = Reading + DCF


Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11ac (80MHz)	42	5210	-7.596	0.324	0.368	0.879	0.558	-7.038
	58	5290	-7.317	0.324	0.368	0.879	0.558	-6.759
	106	5530	-6.910	0.324	0.368	0.879	0.558	-6.352
	122	5610	-6.601	0.324	0.368	0.879	0.558	-6.043
	138	5690	-7.162	0.324	0.368	0.879	0.558	-6.604

Note:  $X = \text{On time} / (\text{On} + \text{Off time})$ ,  $\text{DCF} = 10 \log(1/x)$


Note 2: Test Result = Reading + DCF

### 4.3.4 Trace data


[IEEE802.11a]  
(5.2 GHz Band)  
Channel: 36

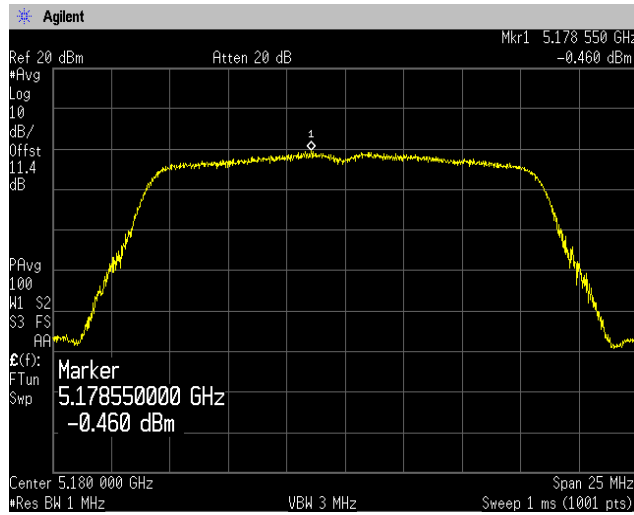

Channel: 40

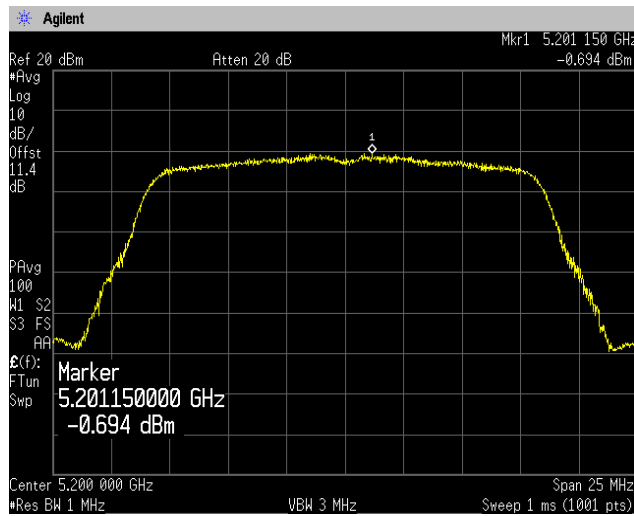


Channel: 48

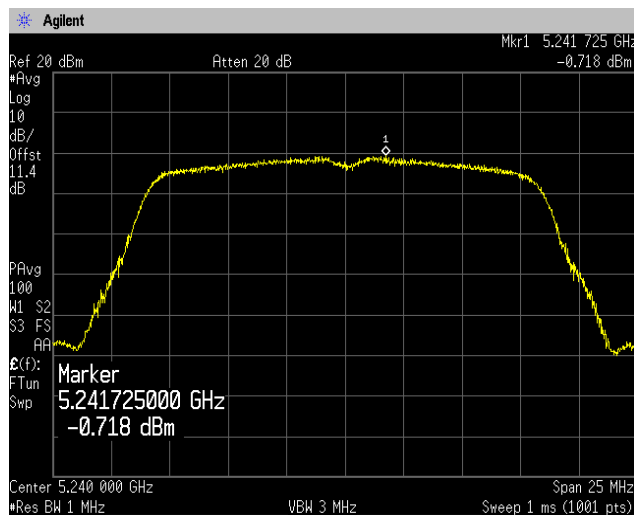







**(5.3 GHz Band)**  
**Channel: 52**

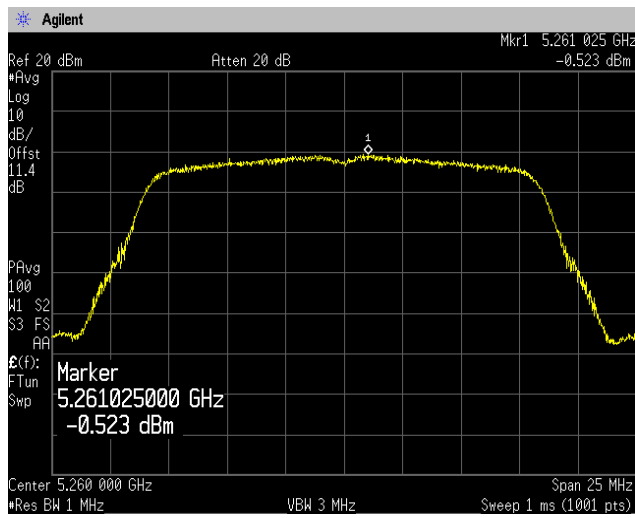


**Channel: 56**

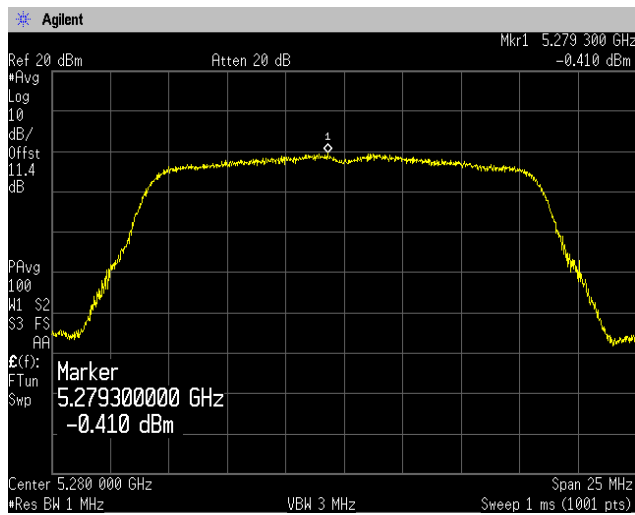


**Channel: 64**

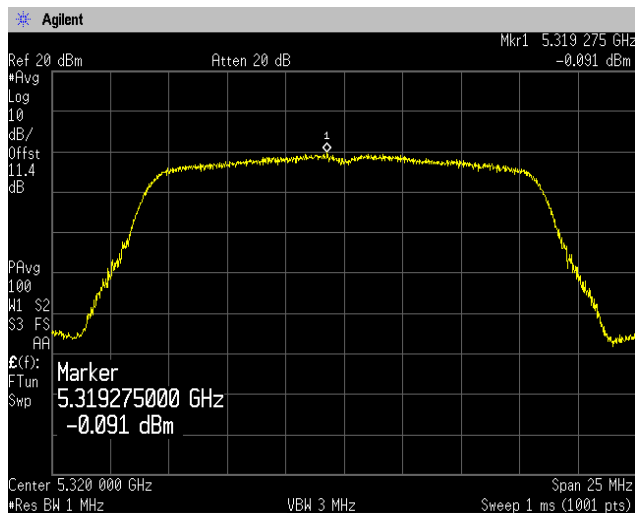


**(5.6 GHz Band)**  
**Channel: 100**

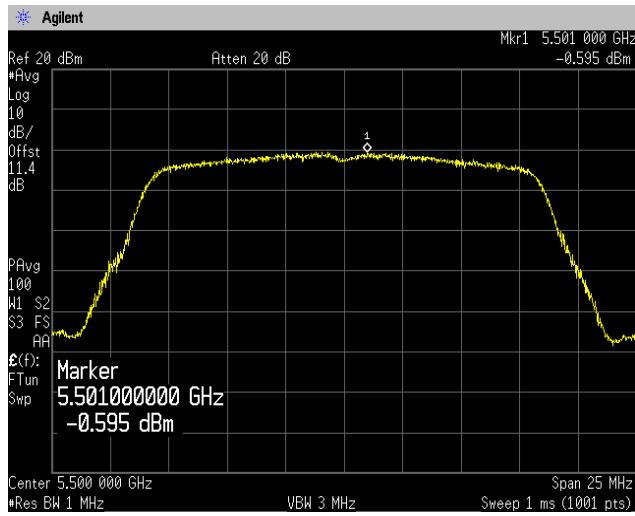


**Channel: 116**

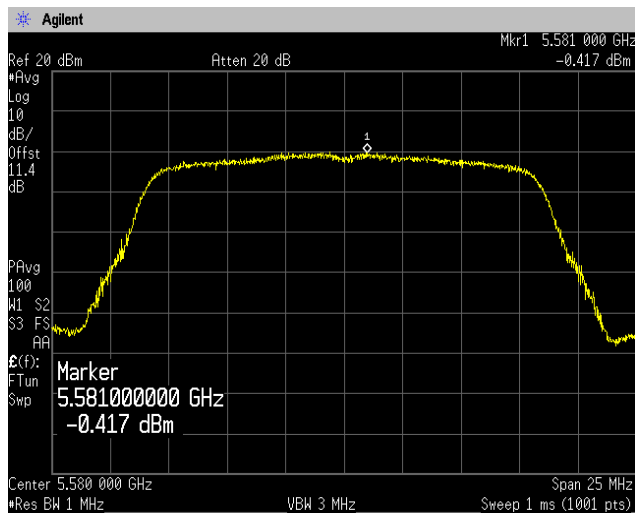


**Channel: 140**

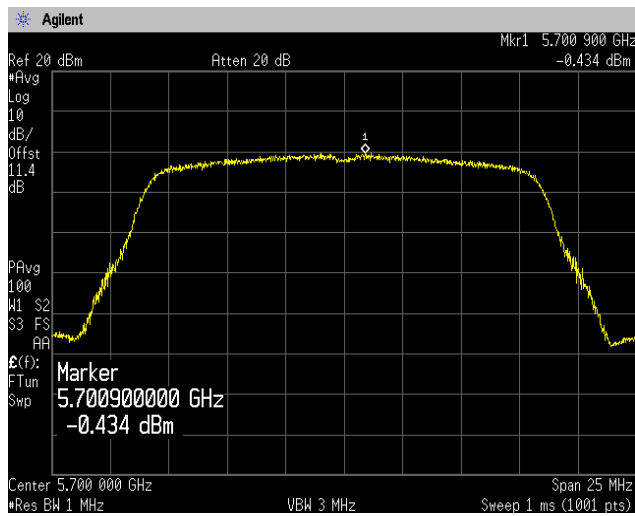


Channel: 144

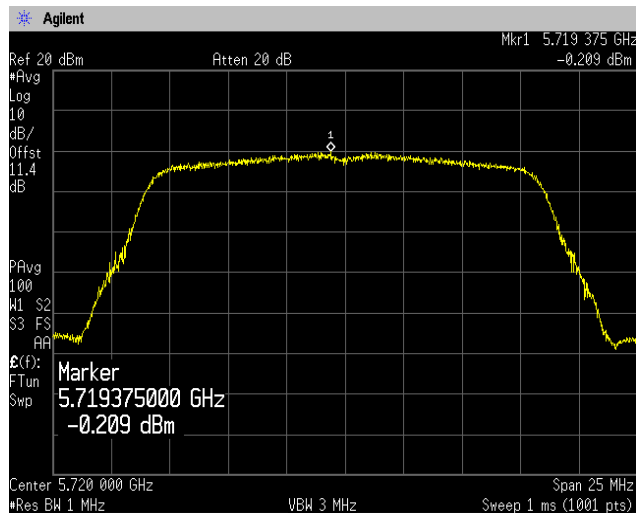


**[IEEE802.11n (HT20)]  
(5.2 GHz Band)  
Channel: 36**

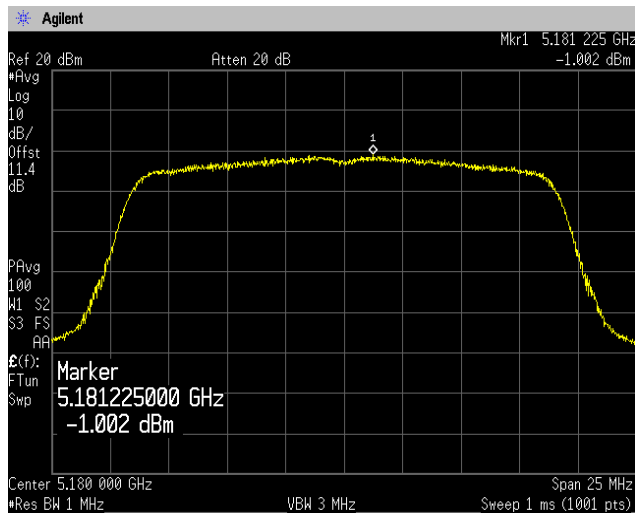


**Channel: 40**

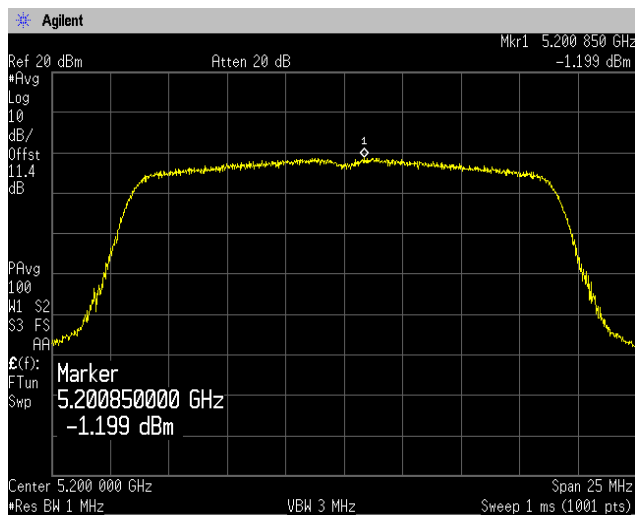


**Channel: 48**

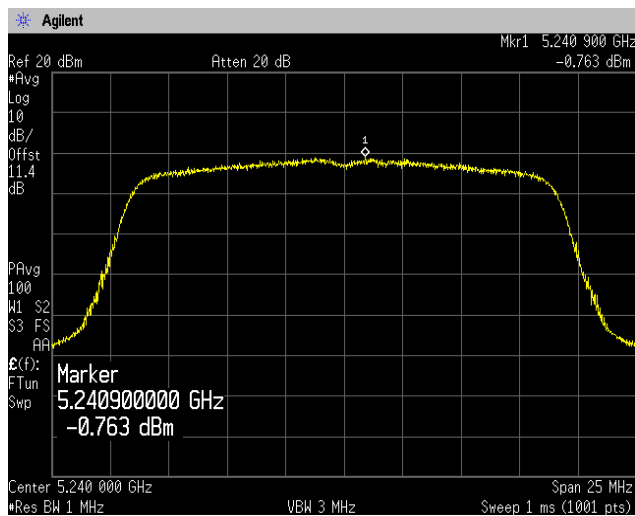


**(5.3 GHz Band)**  
**Channel: 52**

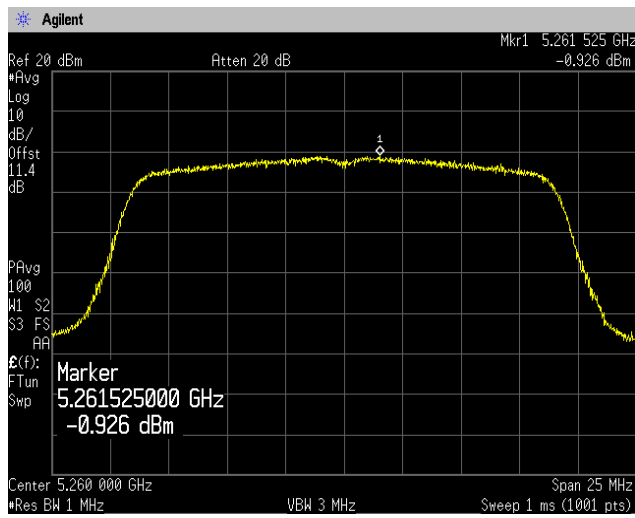

**Channel: 56**

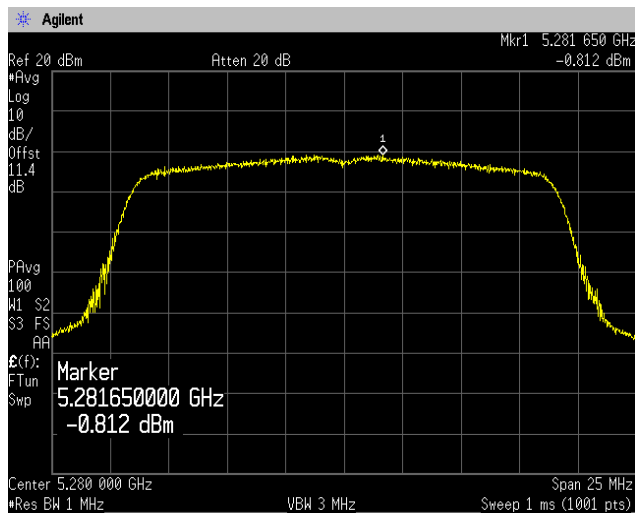


**Channel: 64**

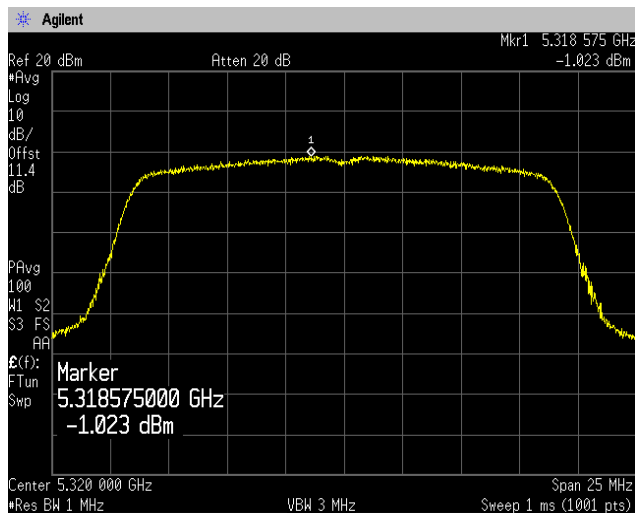





**(5.6 GHz Band)**  
**Channel: 100**

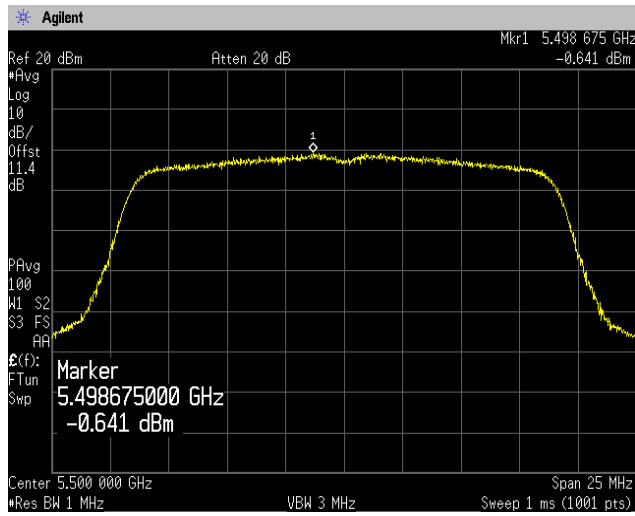


**Channel: 116**

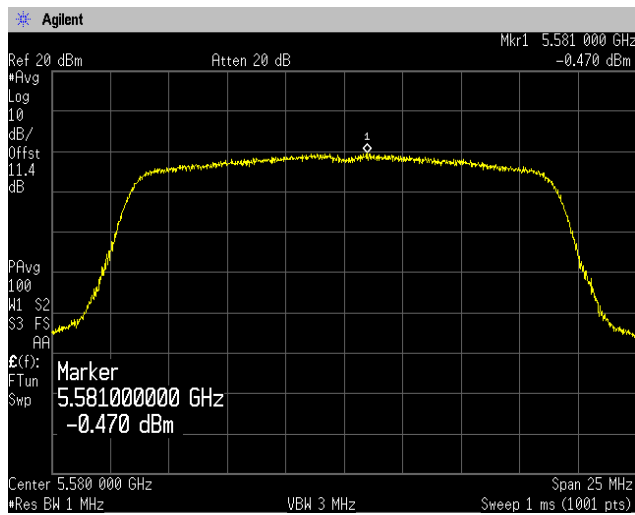


**Channel: 140**

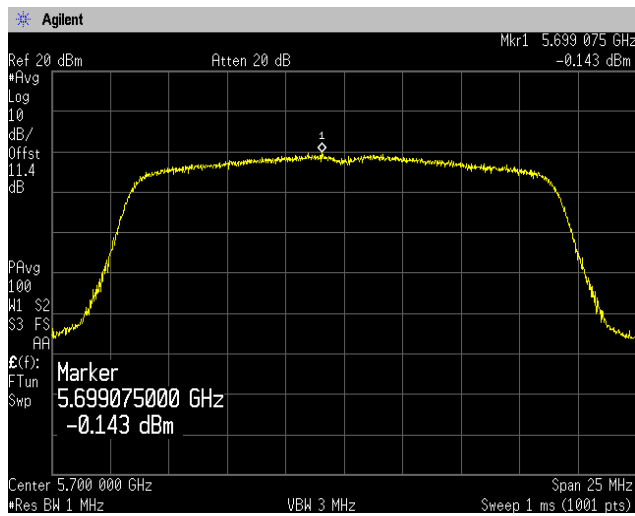


Channel: 144

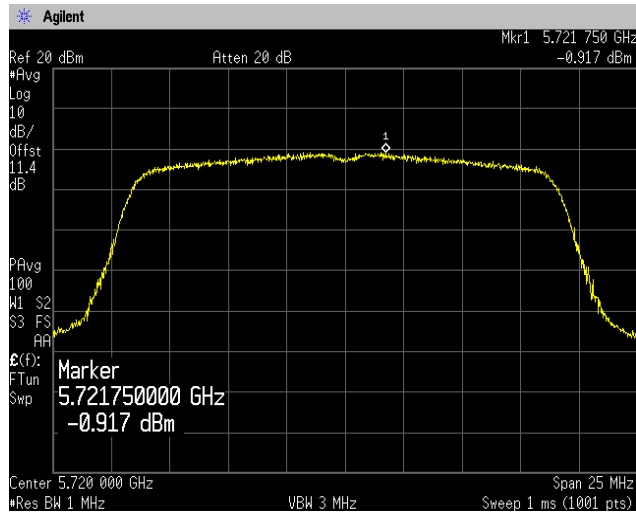

**[IEEE802.11n (HT40)]**  
**(5.2 GHz Band)**  
**Channel: 38**

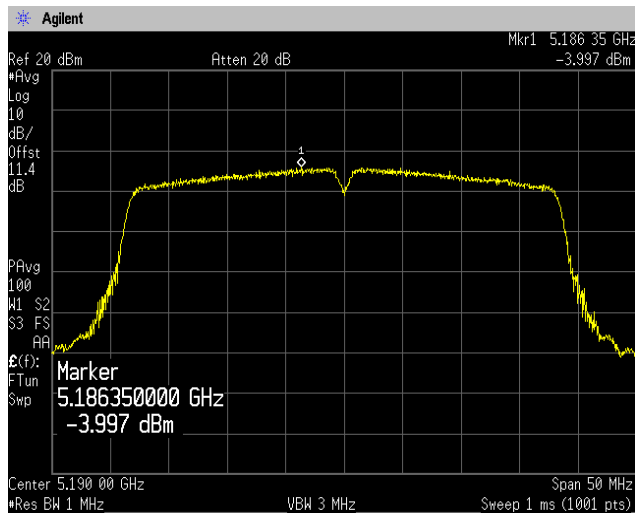


**Channel: 46**

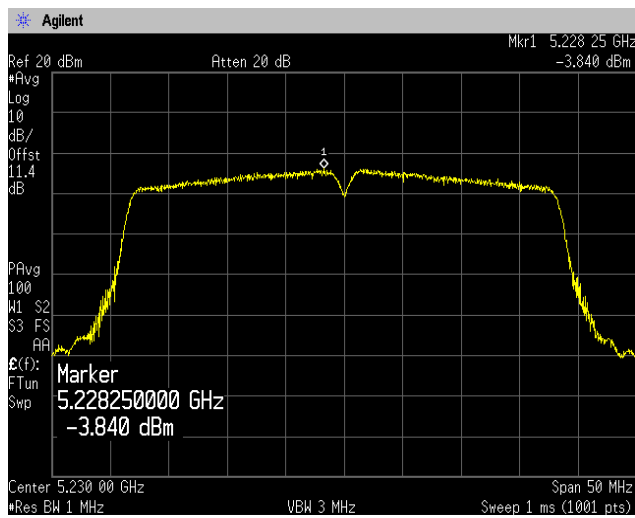







**(5.3 GHz Band)**  
**Channel: 54**

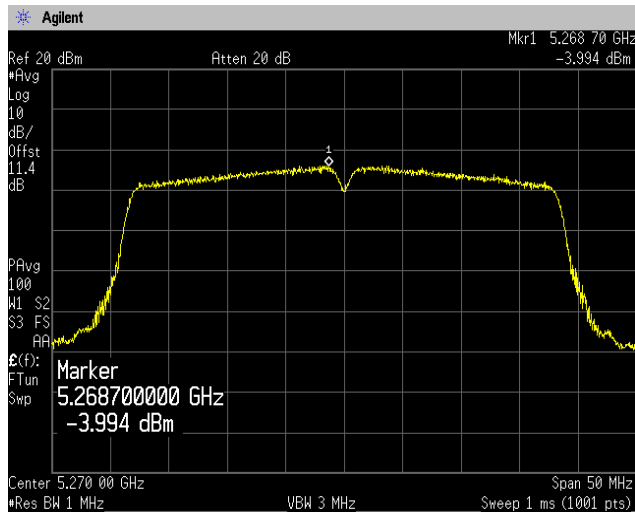


**Channel: 62**

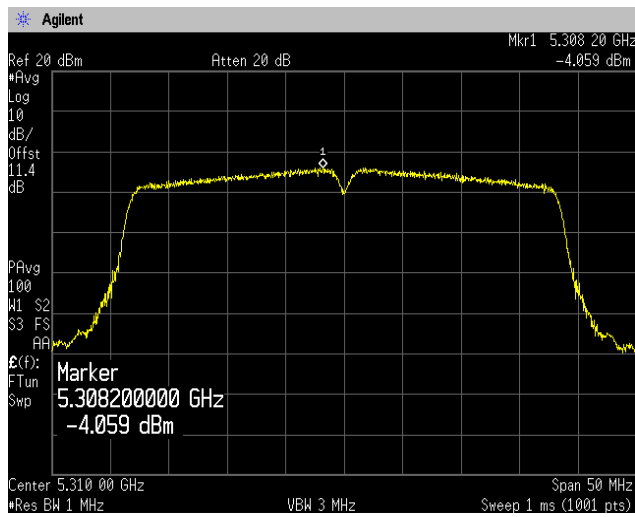


**(5.6 GHz Band)**  
**Channel: 102**

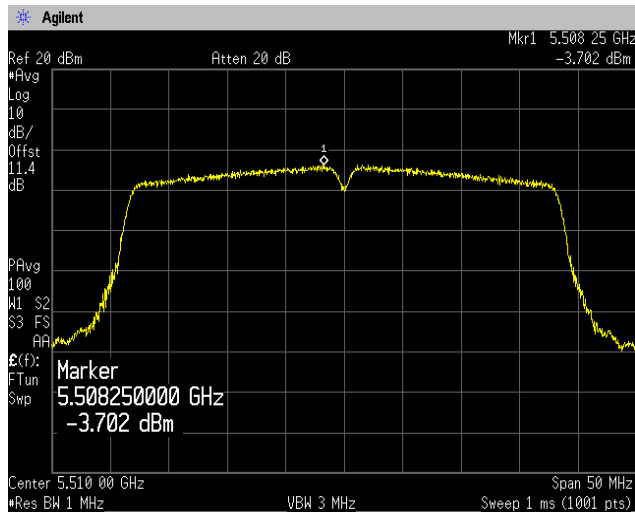


**Channel: 110**

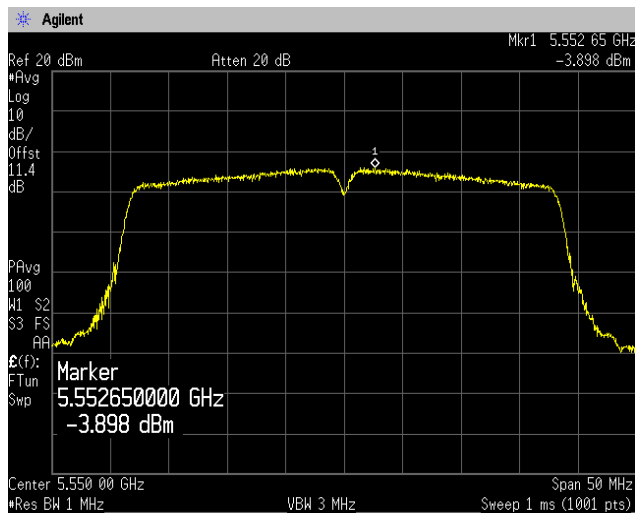

**Channel: 134**

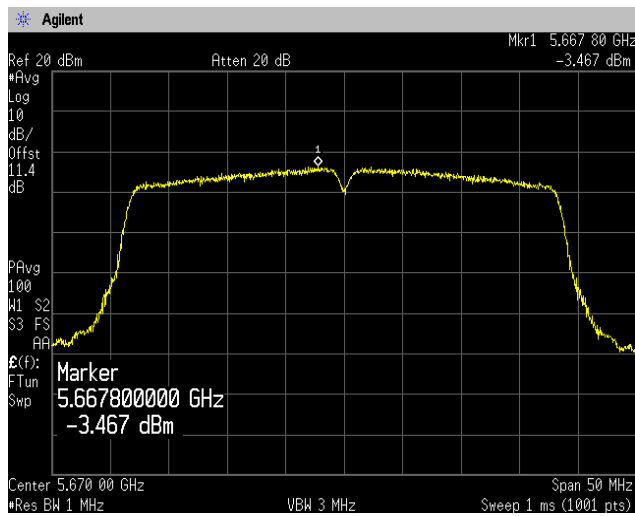


Channel: 142

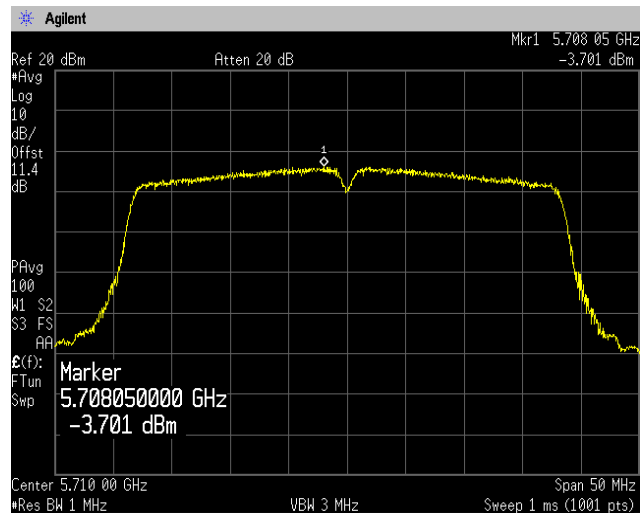





**[IEEE802.11ac (HT80)]**  
**(5.2 GHz Band)**  
**Channel: 42**

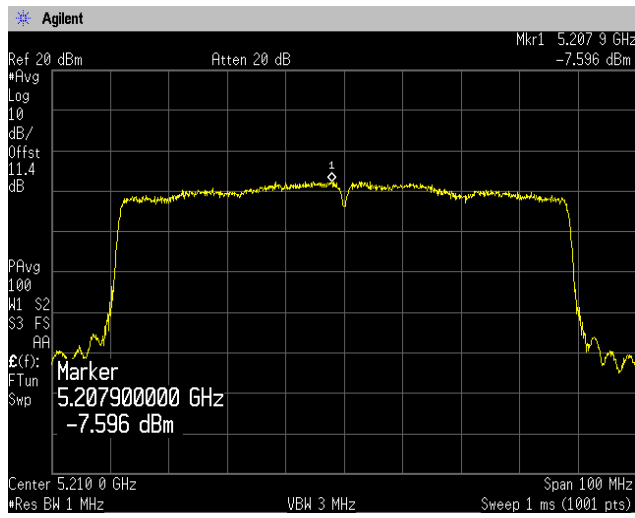


**(5.3 GHz Band)**  
**Channel: 58**

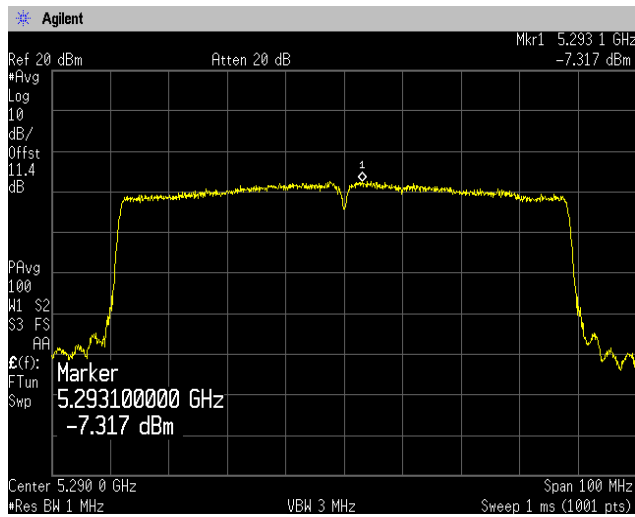


**(5.6 GHz Band)**  
**Channel: 106**

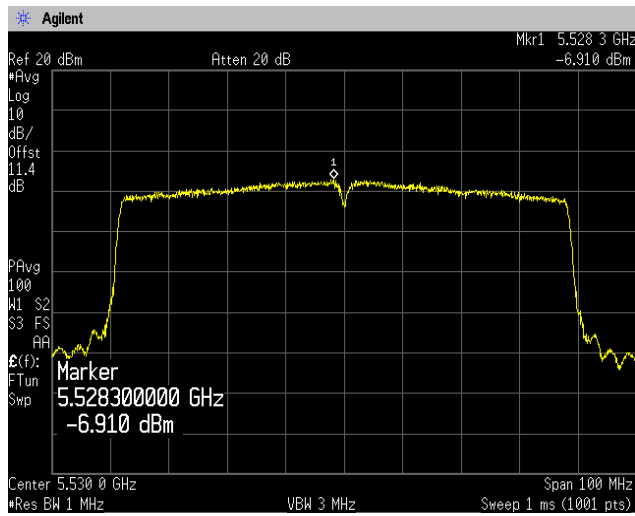

**Channel: 122**

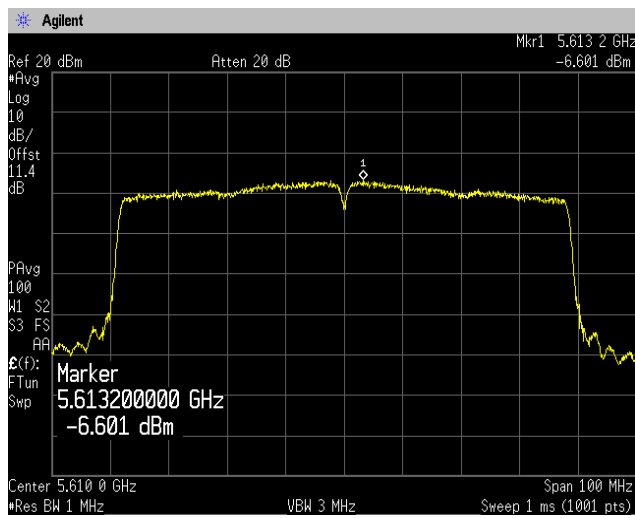

**Channel: 138**

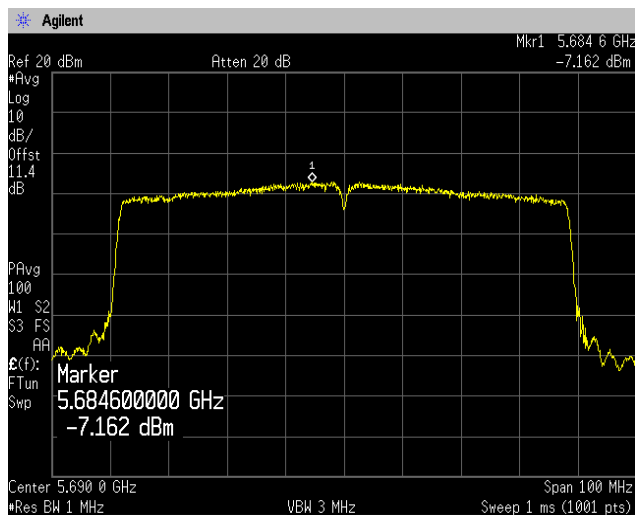

#### 4.4 Radiated Emissions (Restricted Bands of Operation)

##### 4.4.1 Measurement procedure

###### [FCC 15.407(b), 15.205, 15.209, KDB 789033 D02, Section G.4, 5, 6.c)Method AD]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Frequency range	:	9 kHz to 40 GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W) 1.0 x (D) 1.0 x(H) 0.8 m (below 1 GHz) Styrofoam table / (W) 0.6 x (D) 0.6 x(H) 1.5 m (above 1 GHz)
Antenna distance	:	3m
Test receiver setting	:	Below 1 GHz
- Detector	:	Quasi-peak
- Bandwidth	:	120 kHz
Spectrum analyzer setting	:	Above 1 GHz
- Peak	:	RBW=1 MHz, VBW=3 MHz, Span=0 Hz, Sweep=auto, Detector=Peak Trace mode=Max hold
- Average	:	RBW=1 MHz, VBW=3 MHz, Span=0 Hz, Sweep=auto, Detector=RMS Trace mode=Averaging(300 counts)

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna ). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m (below 1 GHz) and 1.5m (above 1 GHz) above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- 5.2 GHz Band, 5.3 GHz Band, 5.6 GHz Band

The test mode of EUT is as follows.

- Tx mode, Rx mode

- Test configuration

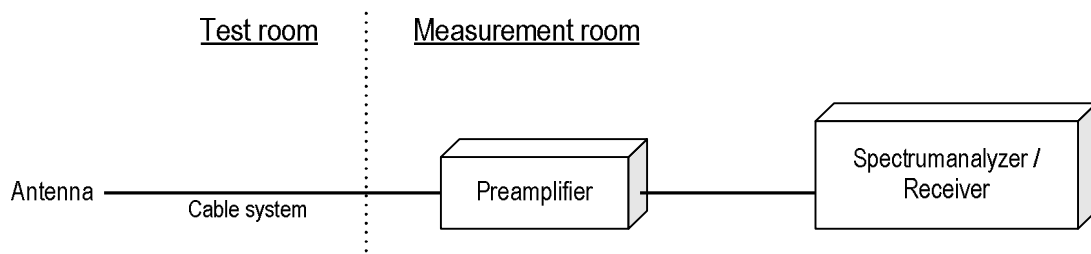

## Duty cycle result

Mode	Band	On Time(ms)	On+Off Time(ms)	Duty Cycle (%)	DCF (dB)
802.11a	W52	1.392	1.436	96.94	0.135
	W53	1.392	1.436	96.94	0.135
	W56	1.392	1.436	96.94	0.135
802.11n (20MHz)	W52	1.286	1.332	96.55	0.153
	W53	1.286	1.332	96.55	0.153
	W56	1.286	1.332	96.55	0.153
802.11n (40MHz)	W52	0.636	0.680	93.53	0.291
	W53	0.636	0.680	93.53	0.291
	W56	0.636	0.680	93.53	0.291
802.11ac (80MHz)	W52	0.324	0.368	87.95	0.558
	W53	0.324	0.368	87.95	0.558
	W56	0.324	0.368	87.95	0.558

Note: DCF =  $10\log(1/x)$

#### 4.4.2 Calculation method

[150 kHz to 25 GHz]

Emission level = Reading + (Ant. factor + Cable system loss - Amp. Gain)

Margin = Limit - Emission level

Example:

Detector: Peak

Limit @ 5147.0 MHz: 74.0 dBuV/m (Peak Limit)

S.A Reading = 40.9 dBuV Cable system loss = 16.4 dB

Result = 40.9 + 16.4 = 57.3 dBuV/m

Margin = 74.0 - 57.3 = 16.7 dB

#### 4.4.3 Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: all emissions outside of the 5.47 5-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.



### 4.4.4 Test data

Date : 25-November-2021  
 Temperature : 22.6 [°C]  
 Humidity : 28.6 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno


Date : 26-November-2021  
 Temperature : 22.4 [°C]  
 Humidity : 40.0 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno


#### 4.4.4.1 Restricted Bandedge

[IEEE802.11a]


#### 5.2 GHz Band, Channel Low Horizontal Peak

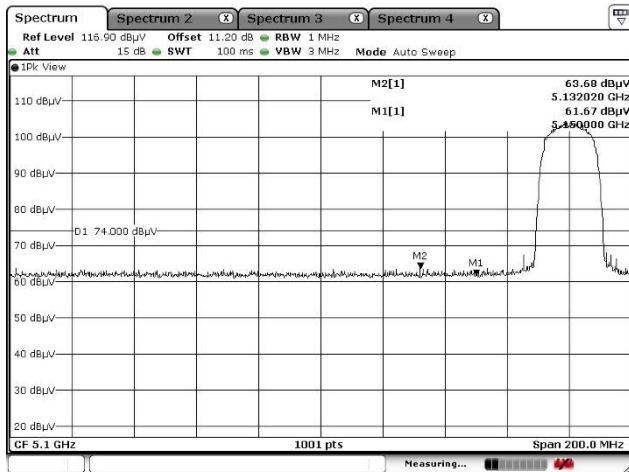


#### Average

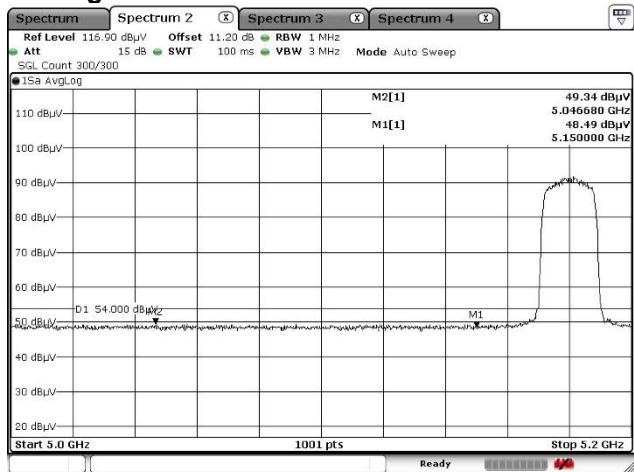

#### Vertical Peak

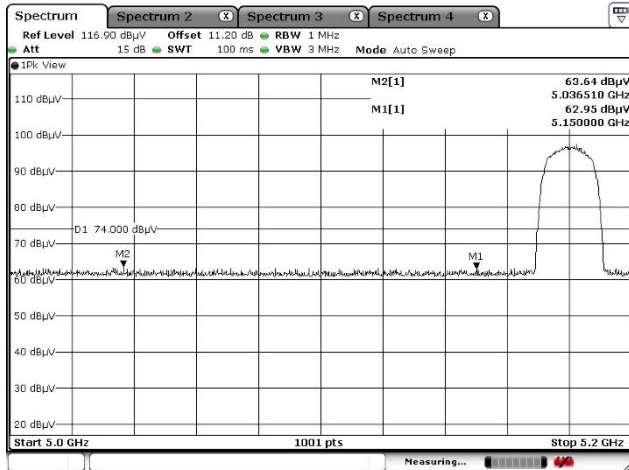


#### Average

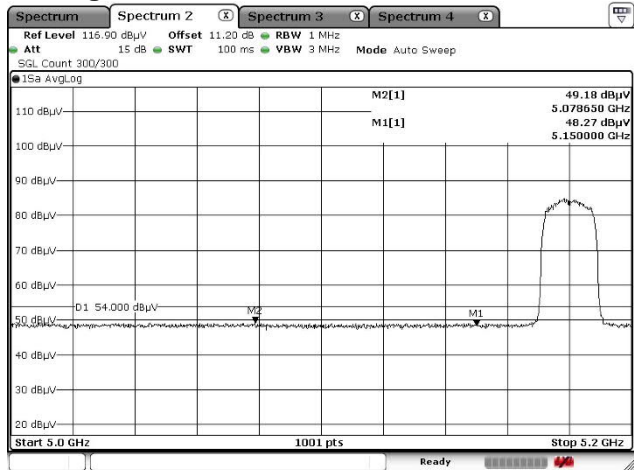




[IEEE802.11a]


5.3 GHz Band, Channel High  
Horizontal  
Peak

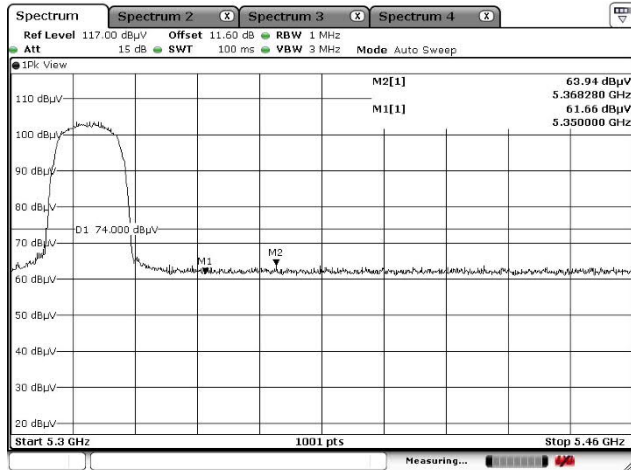


Average

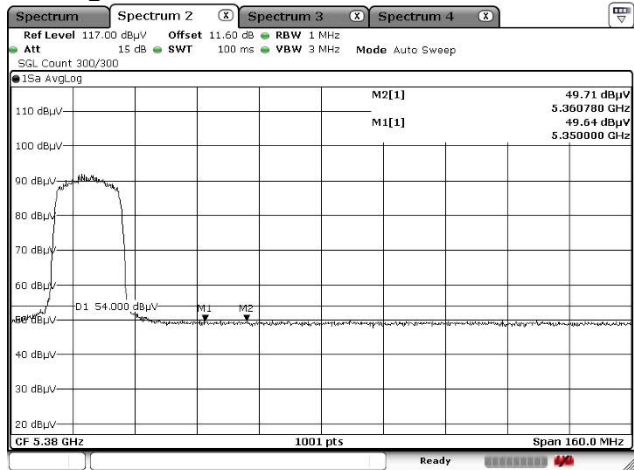

Vertical  
Peak

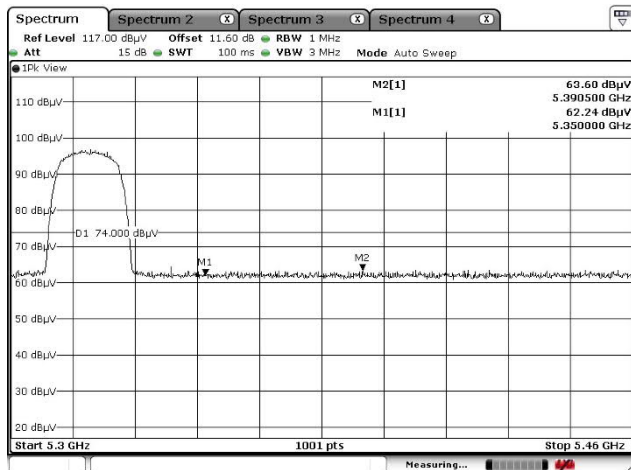


verage

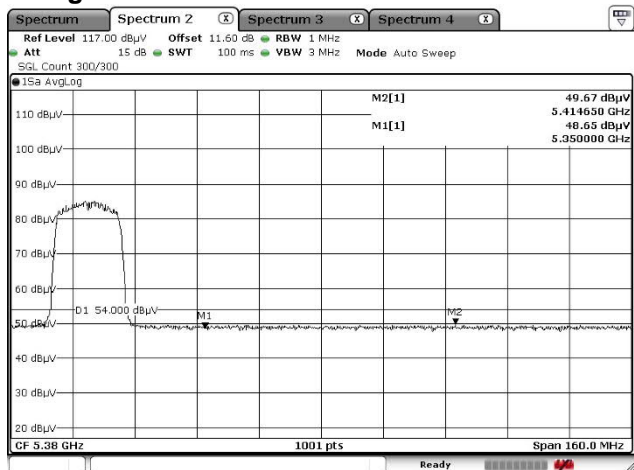




[IEEE802.11a]


5.6 GHz Band, Channel Low  
Horizontal  
Peak

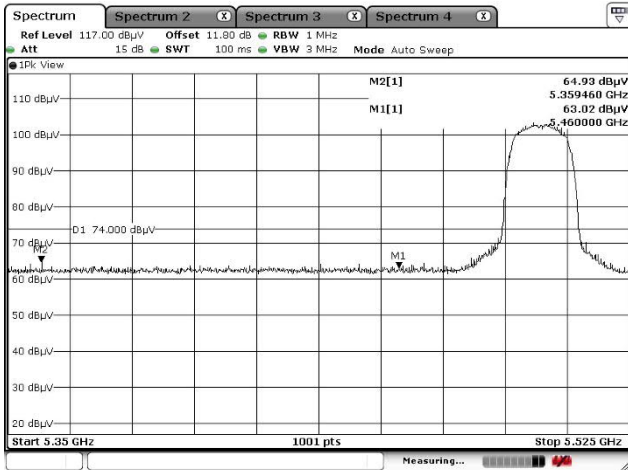


Average

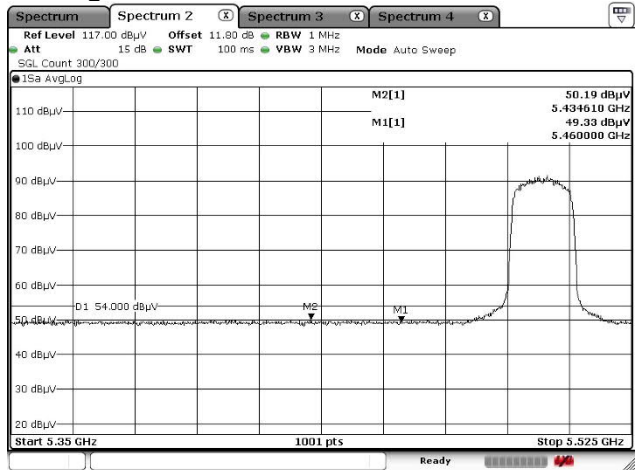

Vertical  
Peak

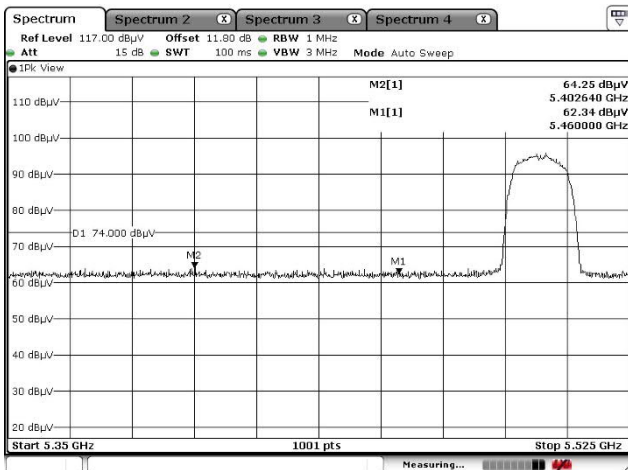


Average

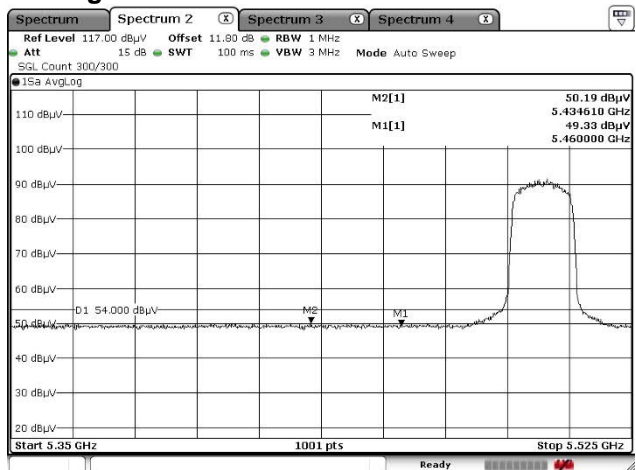




[IEEE802.11n (HT20)]


5.2 GHz Band, Channel Low  
Horizontal  
Peak

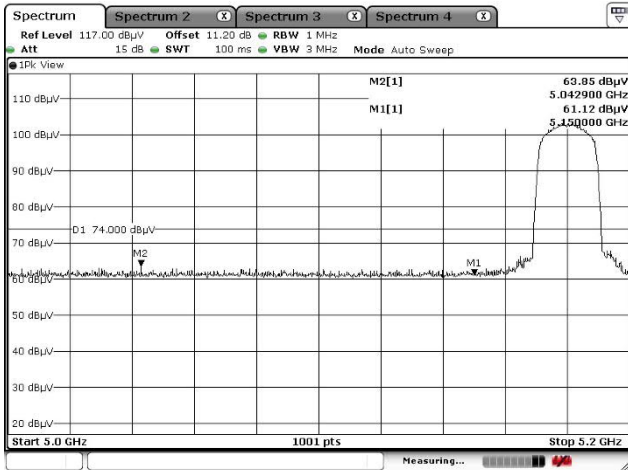


Average

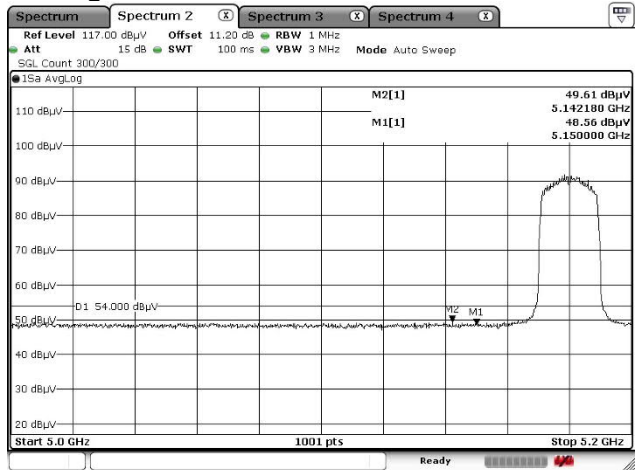

Vertical  
Peak

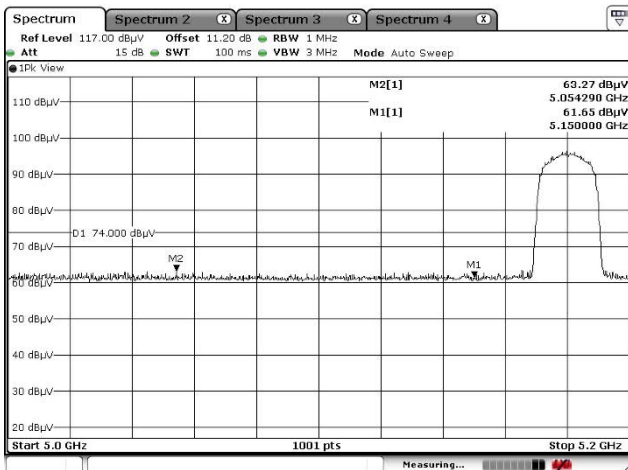


Average

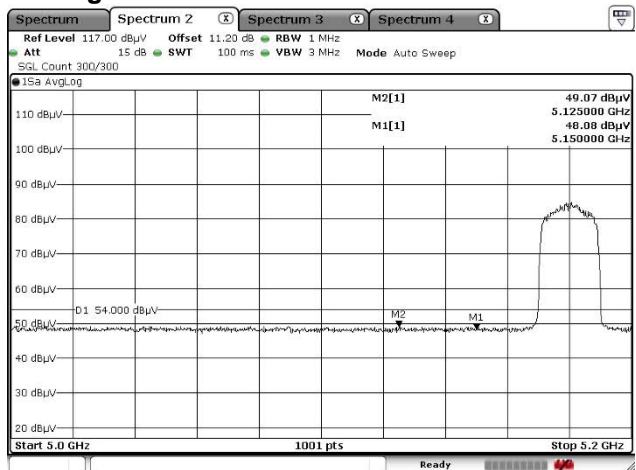




[IEEE802.11n (HT20)]


5.3 GHz Band, Channel High  
Horizontal  
Peak

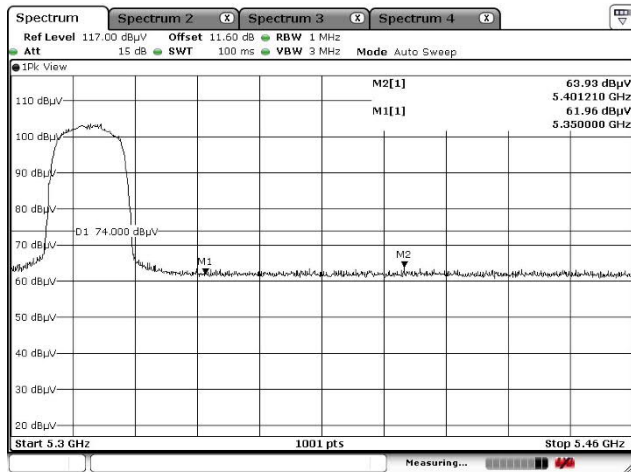


Average

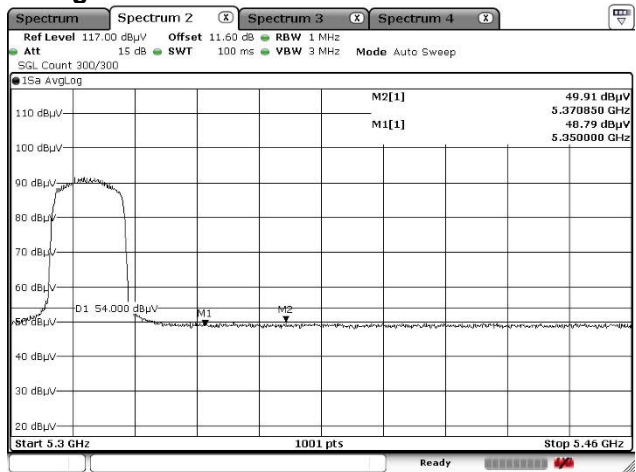

Vertical  
Peak

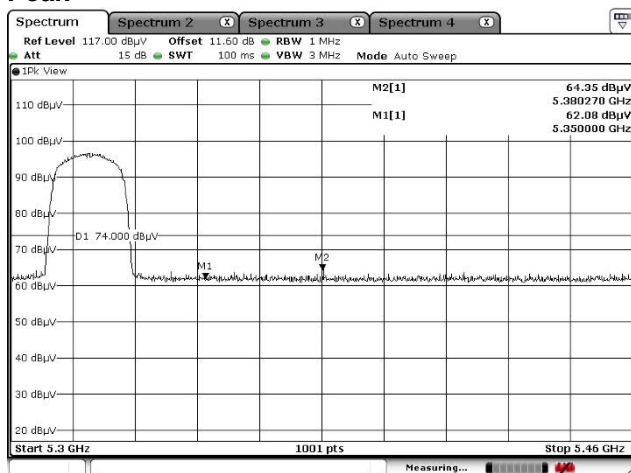


Average

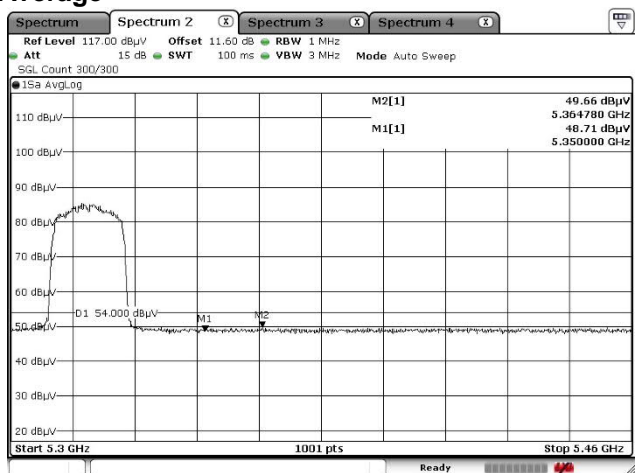


[IEEE802.11n (HT20)]


5.6 GHz Band, Channel Low  
Horizontal  
Peak

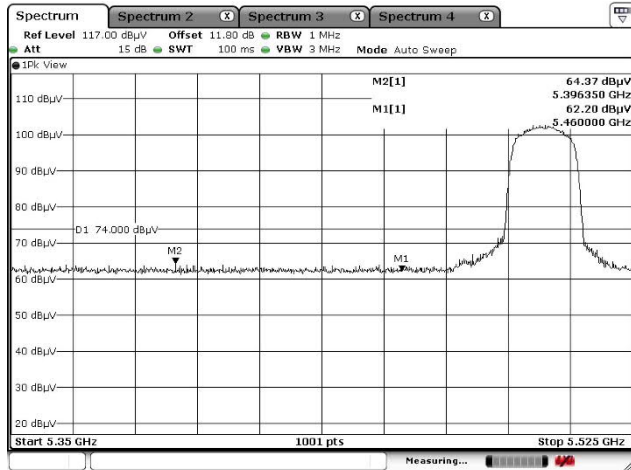


Average

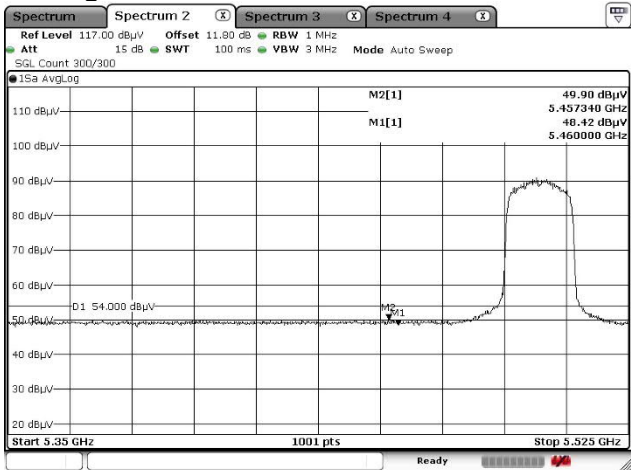

Vertical  
Peak

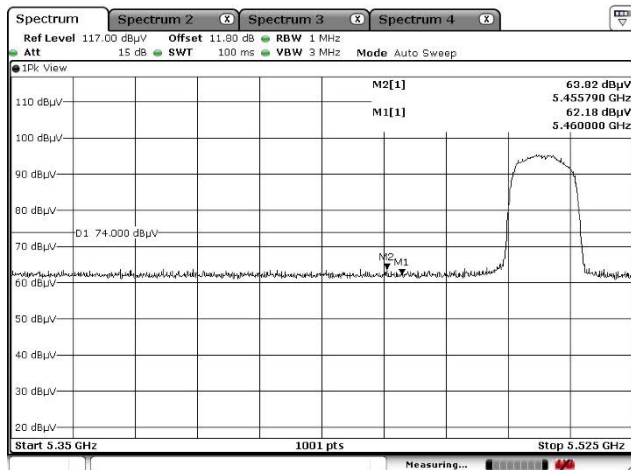


Average

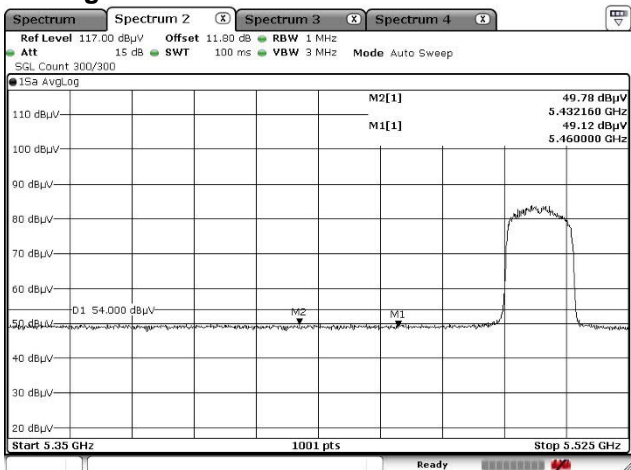




[IEEE802.11n (HT40)]


5.2 GHz Band, Channel Low  
Horizontal  
Peak

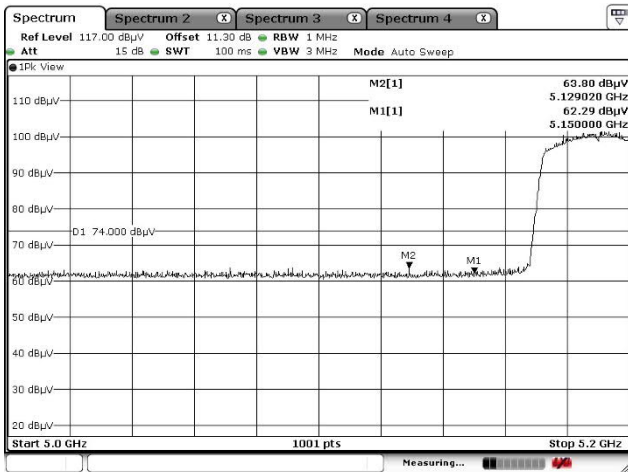


Average

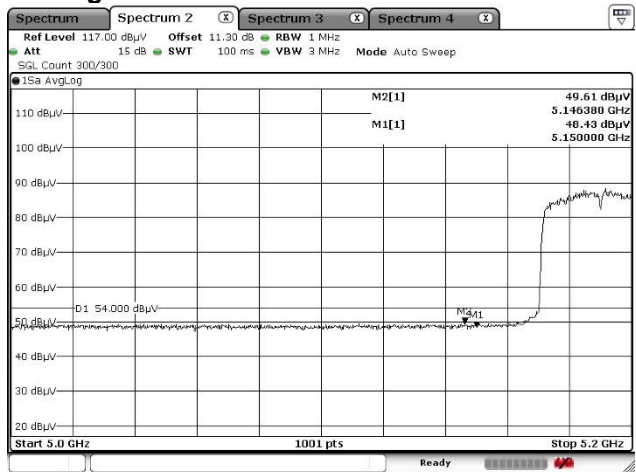

Vertical  
Peak

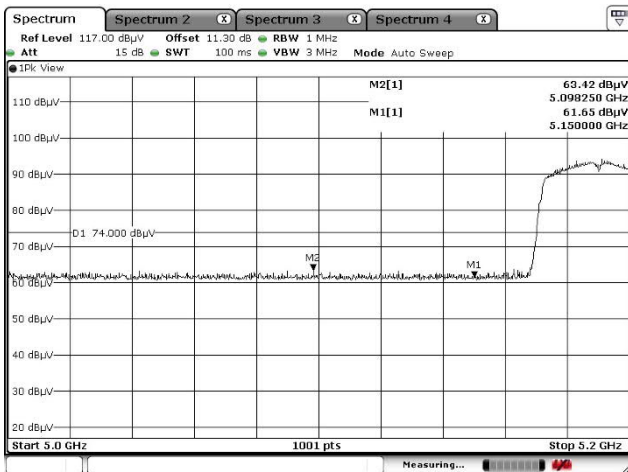

Average

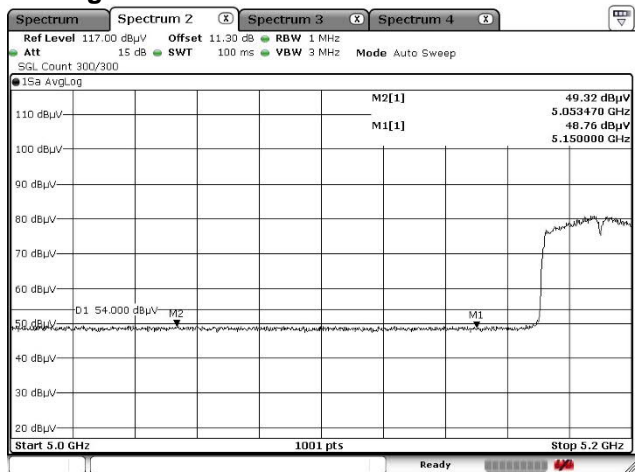







[IEEE802.11n (HT40)]


5.3 GHz Band, Channel High  
Horizontal  
Peak

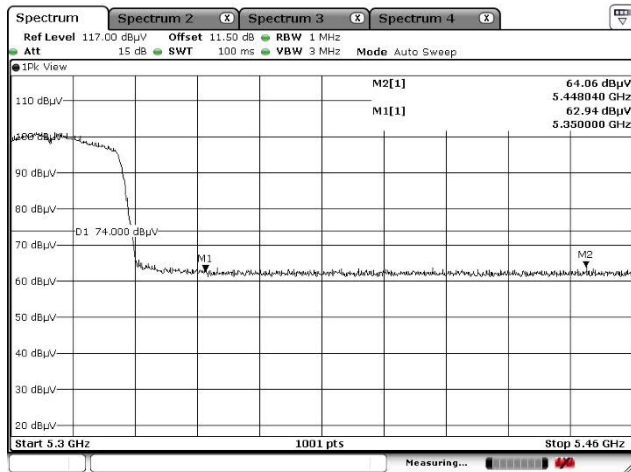


Average

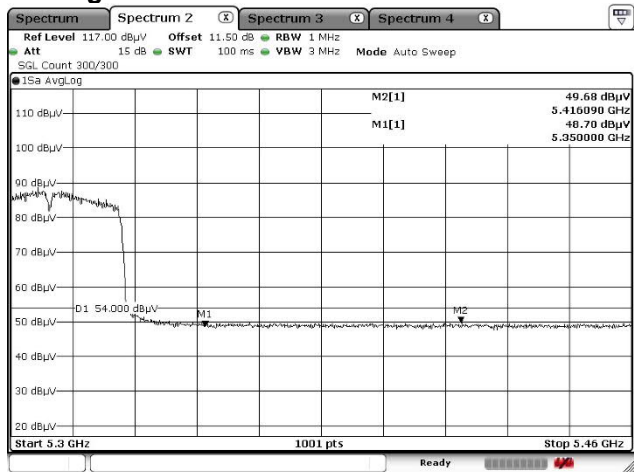

Vertical  
Peak

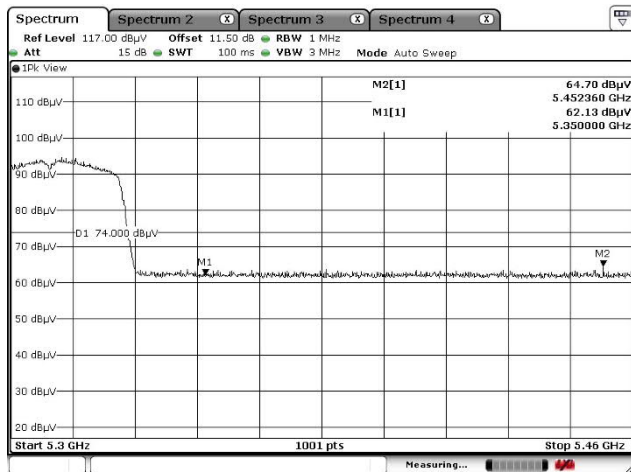

Average

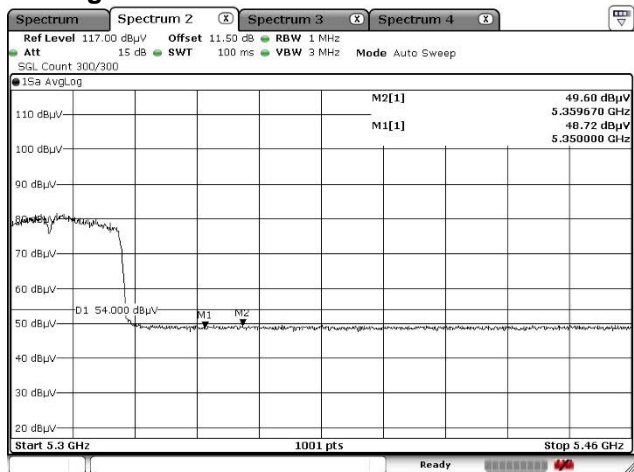







[IEEE802.11n (HT40)]


5.6 GHz Band, Channel Low  
Horizontal  
Peak

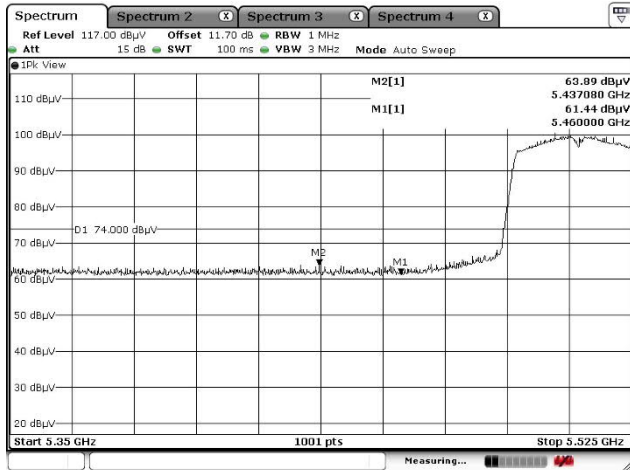


Average

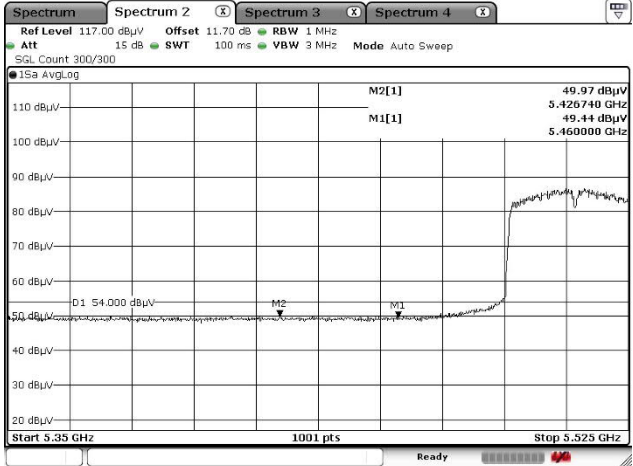

Vertical  
Peak

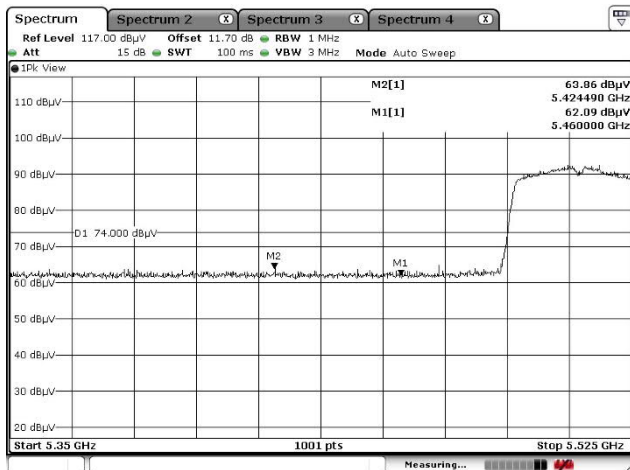


Average

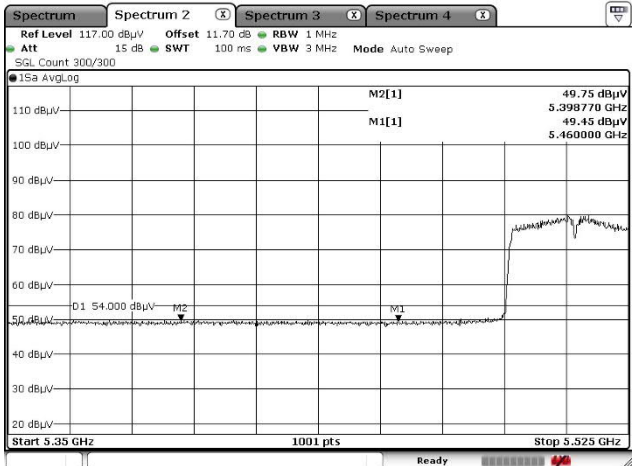




[IEEE802.11ac (VHT80)]


5.2 GHz Band, Channel Low  
Horizontal  
Peak

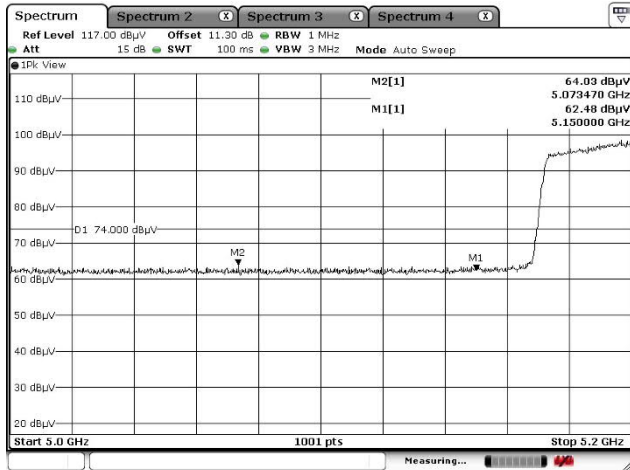


Average

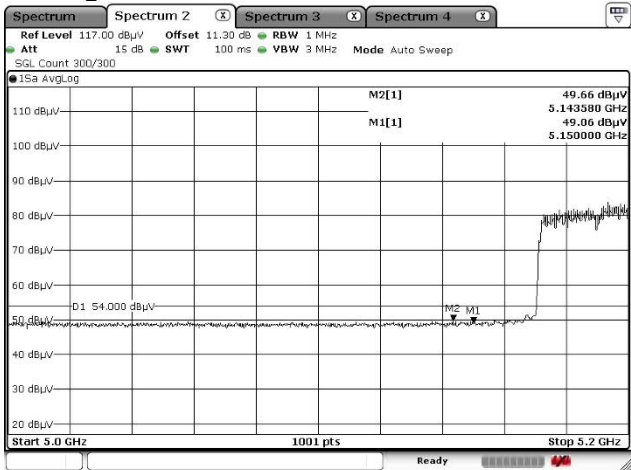

Vertical  
Peak

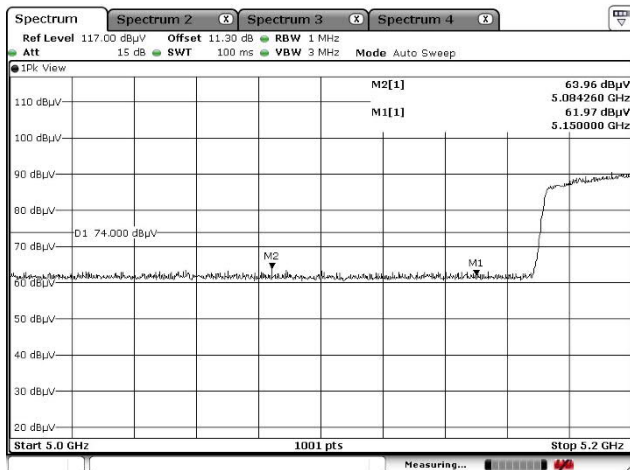


Average

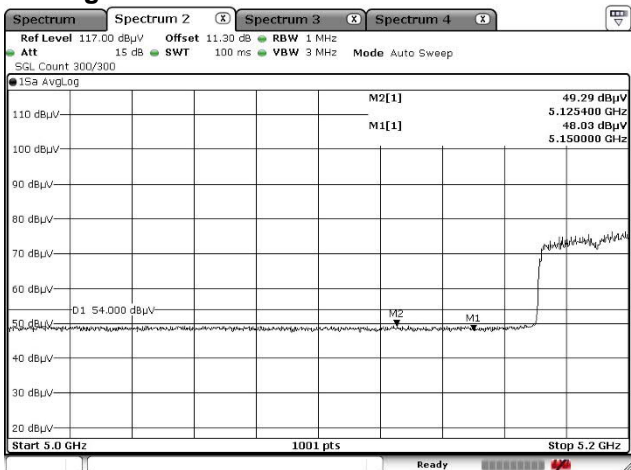




[IEEE802.11ac (VHT80)]


5.3 GHz Band, Channel High  
Horizontal  
Peak

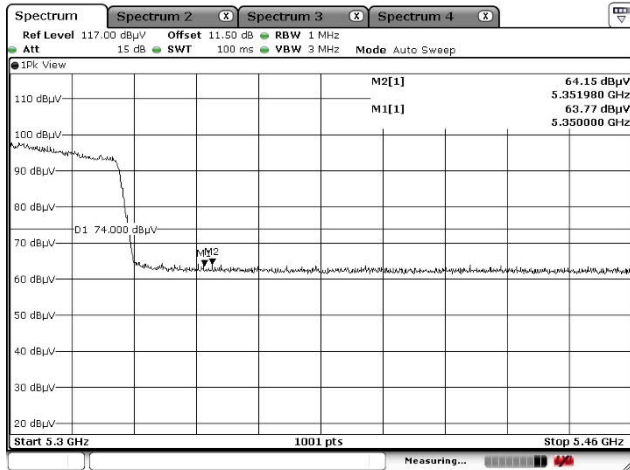


Average

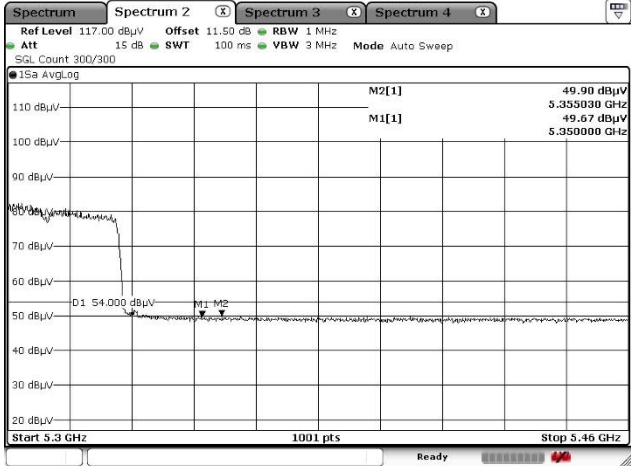

Vertical  
Peak

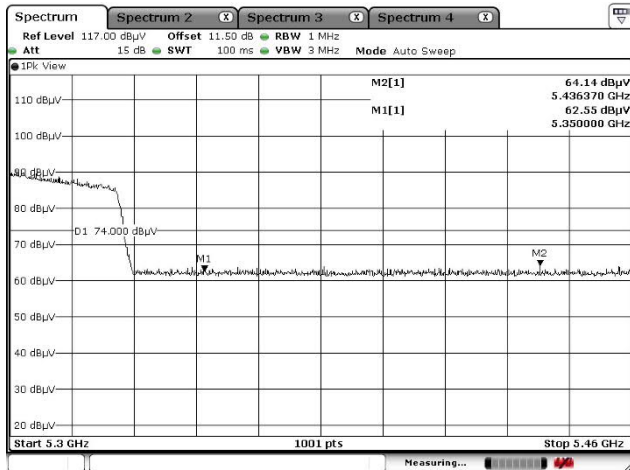


Average

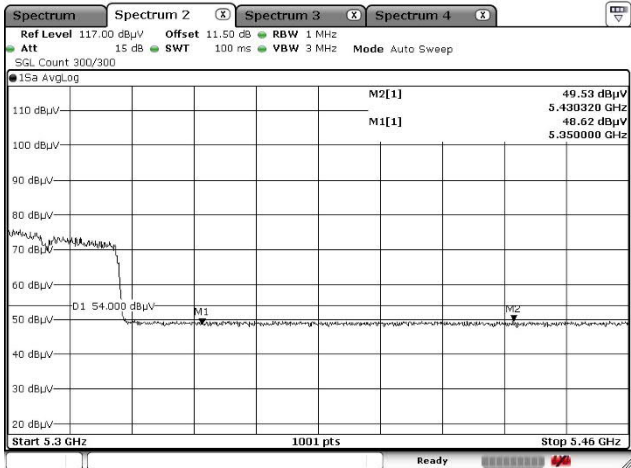




[IEEE802.11ac (VHT80)]


5.6 GHz Band, Channel Low  
Horizontal  
Peak

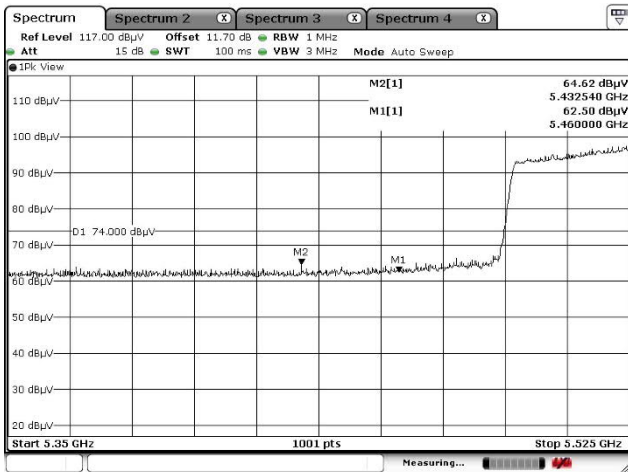


Average

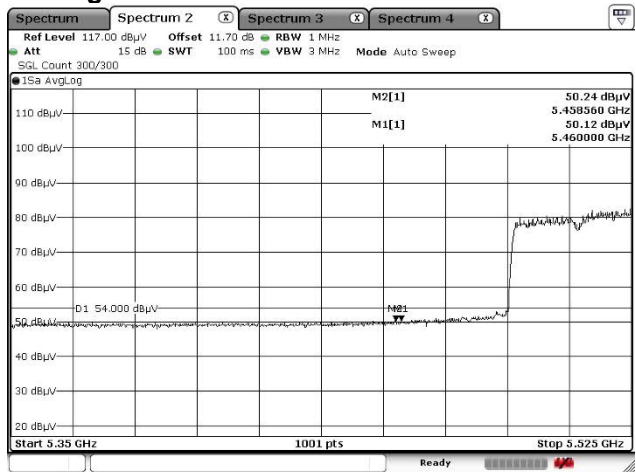

Vertical  
Peak

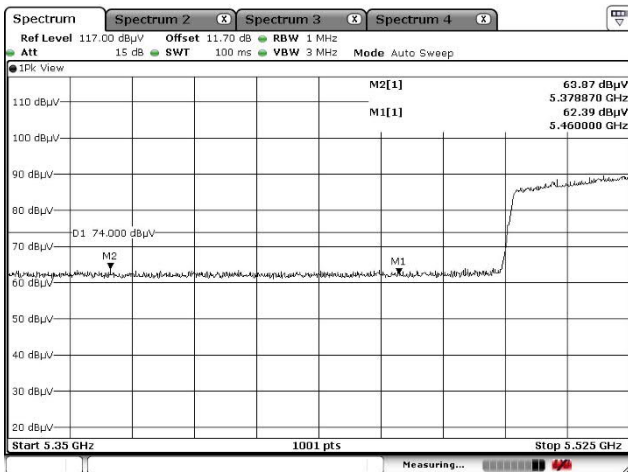


Average

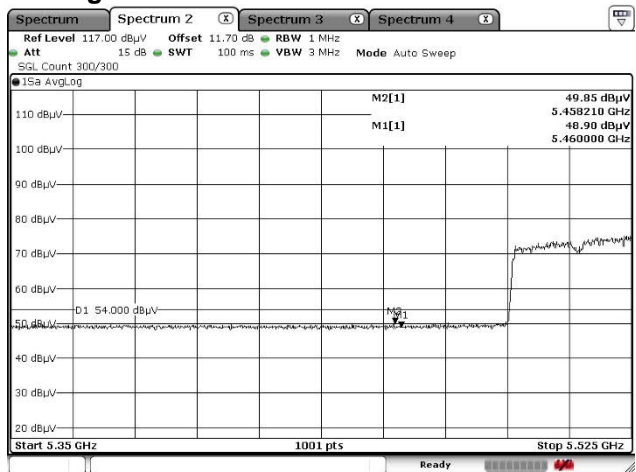


### 4.4.4.2 Non-Restricted Bandedge

[IEEE802.11a]


#### 5.6 GHz Band, Channel High (140) Peak Horizontal

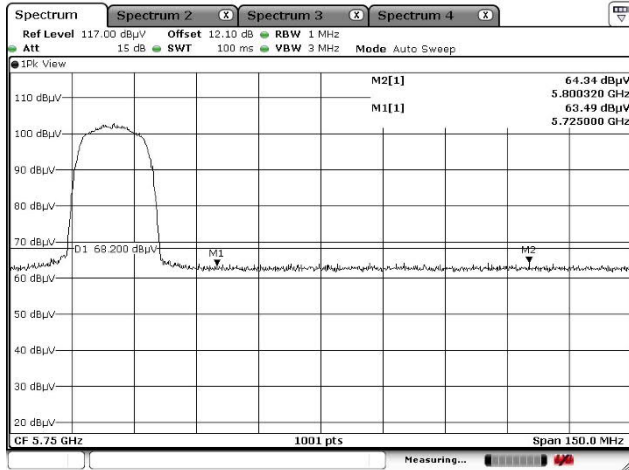


#### Vertical

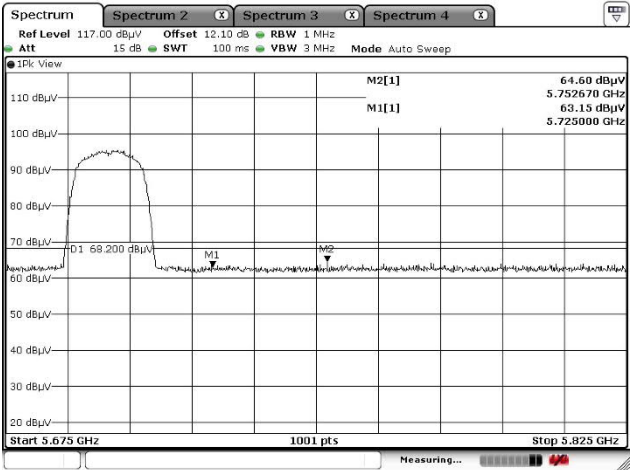

#### 5.6 GHz Band, Channel High (144) Peak Horizontal

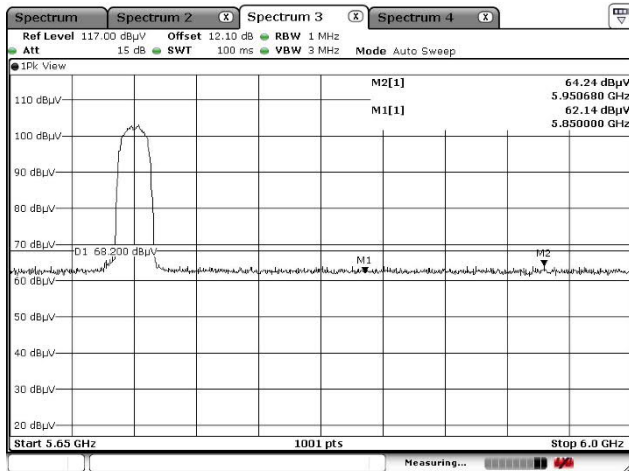

#### Vertical

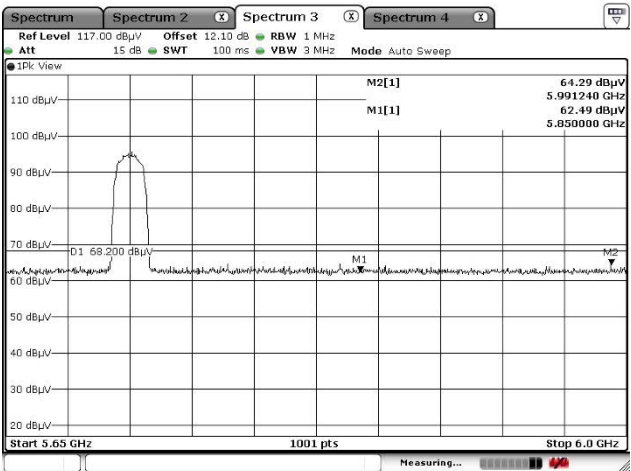




[IEEE802.11n (HT20)]


5.6GHz Band, Channel High (140)

Peak

Horizontal

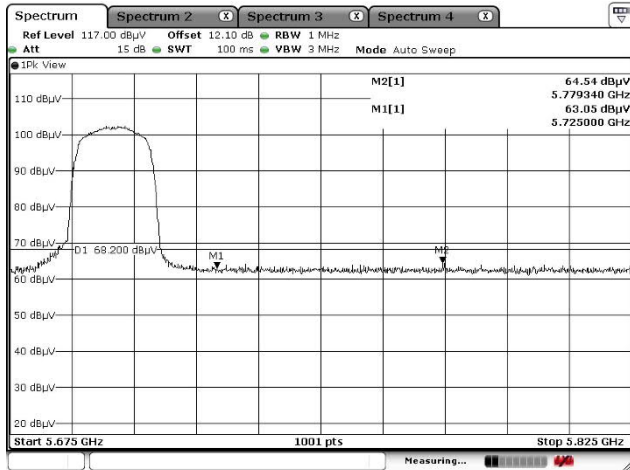


Vertical

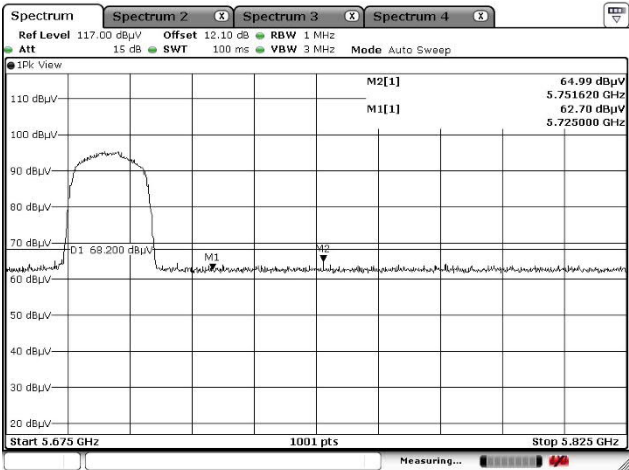


5.6GHz Band, Channel High (144)

Peak

Horizontal

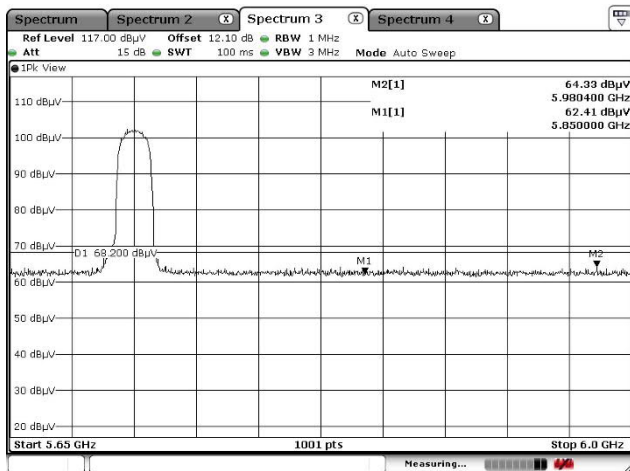

Vertical

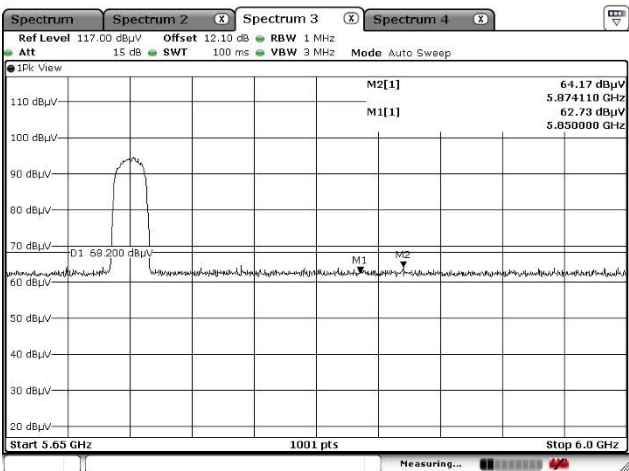




### [IEEE802.11n (HT40)]


#### 5.6GHz Band, Channel High (134)

##### Peak

##### Horizontal

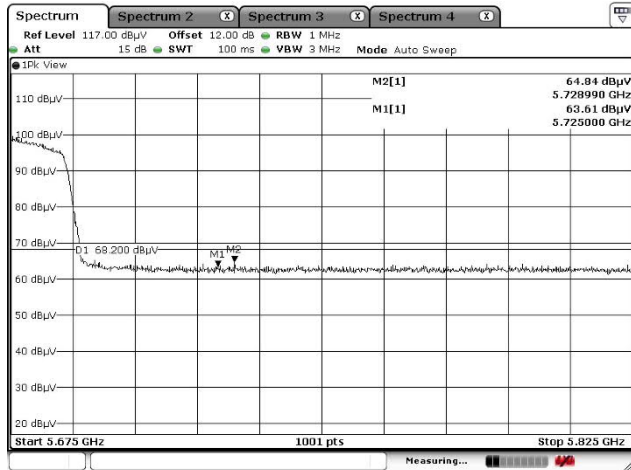


##### Vertical

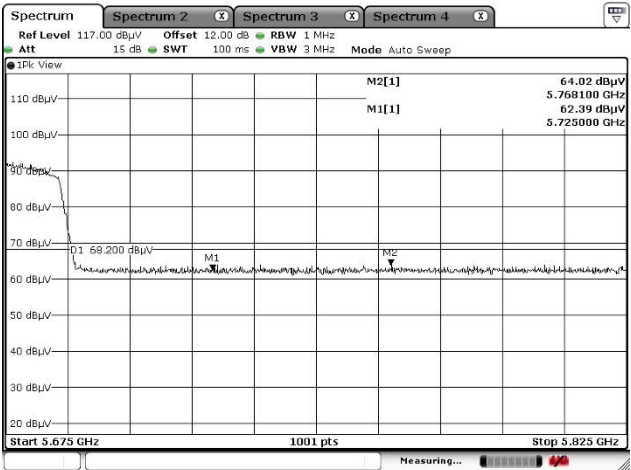


#### 5.6GHz Band, Channel High (142)

##### Peak

##### Horizontal

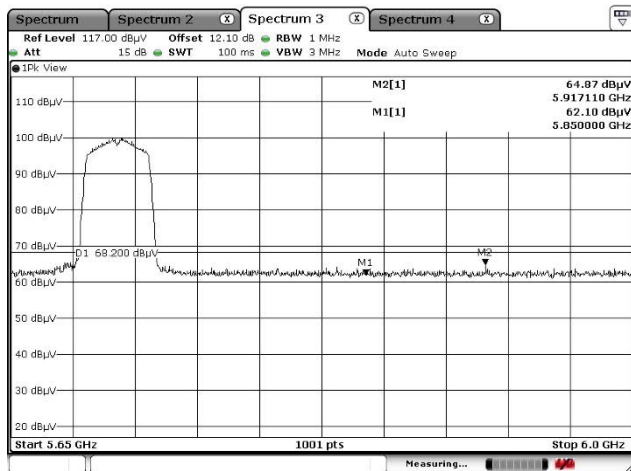

##### Vertical

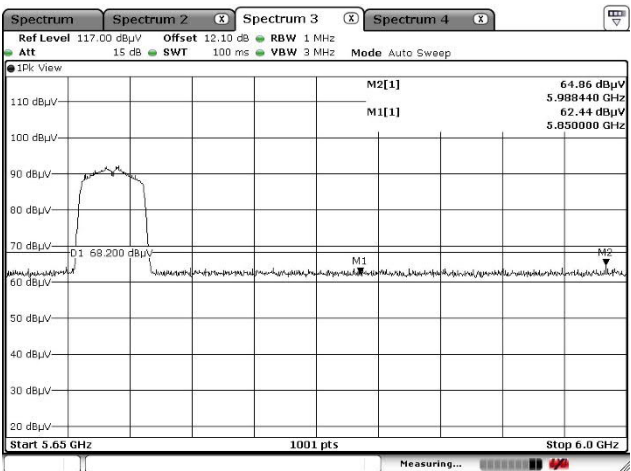






### [IEEE802.11ac (VHT80)]


#### 5.6GHz Band, Channel High (122)

##### Peak

##### Horizontal

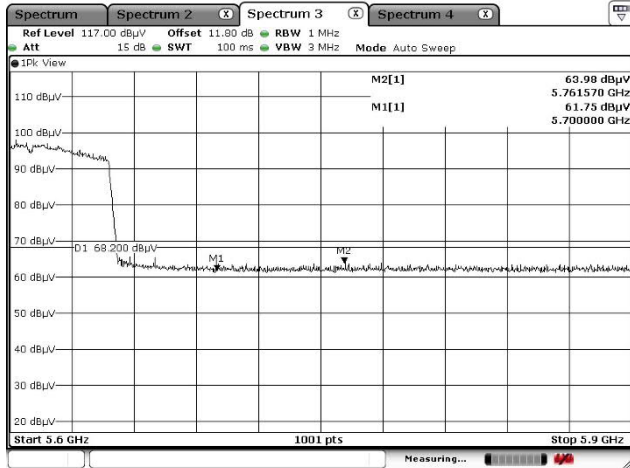


##### Vertical

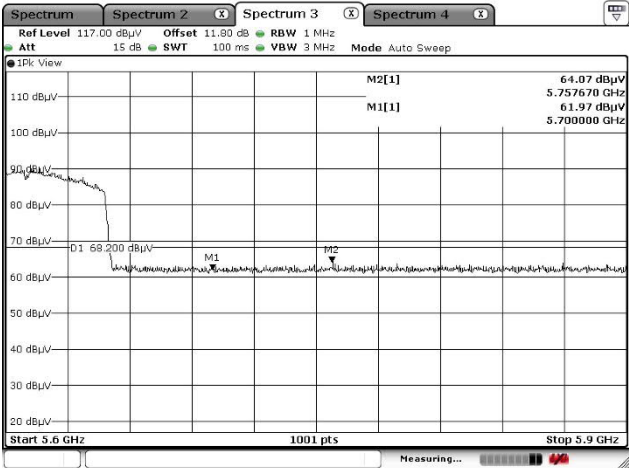


#### 5.6GHz Band, Channel High (138)

##### Peak

##### Horizontal

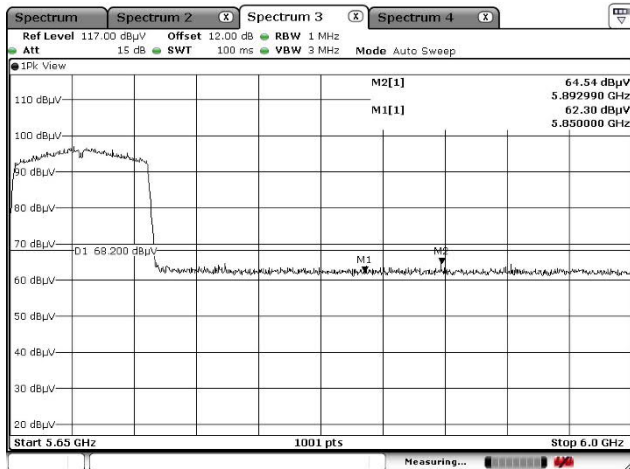

##### Vertical

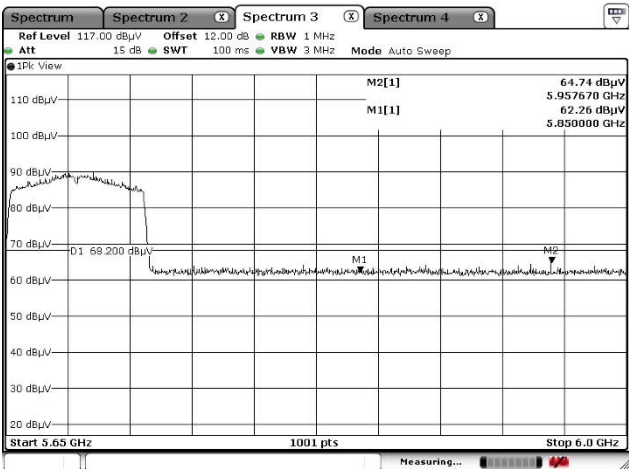



#### 4.4.4.3 Radiated Emissions

Date	: 19-November-2021		
Temperature	: 22.2 [°C]		
Humidity	: 31.3 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 24-November-2021		
Temperature	: 21.8 [°C]		
Humidity	: 28.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 25-November-2021		
Temperature	: 22.6 [°C]		
Humidity	: 28.6 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 29-November-2021		
Temperature	: 20.8 [°C]		
Humidity	: 25.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 1-December-2021		
Temperature	: 23.9 [°C]		
Humidity	: 28.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 2-December-2021		
Temperature	: 23.4 [°C]		
Humidity	: 27.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 3-December-2021		
Temperature	: 17.7 [°C]		
Humidity	: 27.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 7~8-December-2021		
Temperature	: 22.7 [°C]		
Humidity	: 27.6 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 9~10-December-2021		
Temperature	: 22.9 [°C]		
Humidity	: 28.7 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 10~11-December-2021		
Temperature	: 23.1 [°C]		
Humidity	: 26.4 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>

**[IEEE802.11a]  
(5.2 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	36	5180	10360.00	H	PK	46.9	11.2		58.1	68.2	10.1
	40	5200	10400.00	H	PK	46.0	11.3		57.3	68.2	10.9
	48	5240	10480.00	H	PK	46.2	11.4		57.6	68.2	10.6

**(5.3 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	52	5260	10520.00	H	PK	46.2	11.5		57.7	68.2	10.5
	56	5280	10560.00	H	PK	46.6	11.5		58.1	68.2	10.1
	64	5320	10640.00	H	PK	47.3	11.7		59.0	74.0	15.0
			10640.00	H	AV	32.5	11.7	0.135	44.3	54.0	9.7

**(5.6 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	
802.11a	100	5500	5466.00	H	PK	50.3	11.8		62.1	68.2	6.1	
			5467.20	V	PK	50.0	11.8		61.8	68.2	6.4	
			11000.00	H	PK	46.1	12.3		58.4	74.0	15.6	
	116	5580	5580	11000.00	H	AV	32.3	12.3	0.135	44.7	54.0	9.3
				11160.00	H	PK	46.4	12.3		58.7	74.0	15.3
				11160.00	H	AV	32.3	12.3	0.135	44.7	54.0	9.3
				11400.00	H	PK	46.1	12.5		58.6	74.0	15.4
	140	5700	5700	11400.00	H	AV	31.8	12.5	0.135	44.4	54.0	9.6
				11440.00	H	PK	46.4	12.5		58.9	74.0	15.1
	144	5720	5720	11440.00	H	AV	31.6	12.5	0.135	44.2	54.0	9.8

## Note:

1. Emission Level (Margin) = Limit - [Reading + C.F ( Antenna + Cable – Amp)]
2. No emission was detected in the receive mode.

**[IEEE802.11n (HT20)]**  
**(5.2 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	36	5180	10360.00	H	PK	46.4	11.2		57.6	68.2	10.6
	40	5200	10400.00	H	PK	46.1	11.3		57.4	68.2	10.8
	48	5240	10480.00	H	PK	46.0	11.4		57.4	68.2	10.8

**(5.3 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	52	5260	10520.00	H	PK	46.3	11.5		57.8	68.2	10.4
	56	5280	10560.00	H	PK	48.2	11.5		59.7	68.2	8.5
	64	5320	10640.00	H	PK	47.8	11.7		59.5	74.0	14.5
			10640.00	H	AV	32.8	11.7	0.153	44.7	54.0	9.3

**(5.6 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	100	5500	5464.10	H	PK	50.8	11.8		62.6	68.2	5.6
			5463.40	V	PK	50.9	11.8		62.7	68.2	5.5
			11000.00	H	PK	46.0	12.3		58.3	74.0	15.7
			11000.00	H	AV	32.6	12.3	0.153	45.1	54.0	8.9
	116	5580	11160.00	H	PK	46.4	12.3		58.7	74.0	15.3
			11160.00	H	AV	32.6	12.3	0.153	45.1	54.0	8.9
	140	5700	11400.00	H	PK	46.4	12.5		58.9	74.0	15.1
			11400.00	H	AV	32.1	12.5	0.153	44.8	54.0	9.2
	144	5720	11440.00	H	PK	46.9	12.5		59.4	74.0	14.6
			11440.00	H	AV	32.1	12.5	0.153	44.8	54.0	9.2

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F ( Antenna + Cable - Amp)]
2. No emission was detected in the receive mode.

**[IEEE802.11n (HT40)]****(5.2 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	38	5190	10380.00	H	PK	46.6	11.2		57.8	68.2	10.4
	46	5230	10460.00	H	PK	46.2	11.4		57.6	68.2	10.6

**(5.3 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	54	5270	10540.00	H	PK	46.2	11.5		57.7	68.2	10.5
	62	5310	10620.00	H	PK	47.8	11.7		59.5	74.0	14.5
			10620.00	H	AV	32.7	11.7	0.291	44.7	54.0	9.3

**(5.6 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	102	5510	5467.20	H	PK	50.4	11.8		62.2	68.2	6.0
			5463.00	V	PK	50.9	11.8		62.7	68.2	5.5
			11020.00	H	PK	46.8	12.3		59.1	74.0	14.9
			11020.00	H	AV	32.8	12.3	0.291	45.4	54.0	8.6
	110	5550	11100.00	H	PK	46.3	12.3		58.6	74.0	15.4
			11100.00	H	AV	32.3	12.3	0.291	44.9	54.0	9.1
	134	5670	11340.00	H	PK	46.8	12.4		59.2	74.0	14.8
			11340.00	H	AV	32.0	12.4	0.291	44.7	54.0	9.3
	142	5710	11420.00	H	PK	46.4	12.5		58.9	74.0	15.1
			11420.00	H	AV	32.0	12.5	0.291	44.8	54.0	9.2

## Note:

1. Emission Level (Margin) = Limit - [Reading + C.F ( Antenna + Cable – Amp)]
2. No emission was detected in the receive mode.

**[IEEE802.11ac (VHT80)]****(5.2 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	42	5210	10420.00	H	PK	46.3	11.3	/	57.6	68.2	10.6

**(5.3 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	58	5290	10580.00	H	PK	47.1	11.6	/	58.7	68.2	9.5

**(5.6 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	106	5530	5469.80	H	PK	50.7	11.8	/	62.5	68.2	5.7
			5461.00	V	PK	50.8	11.8	/	62.6	68.2	5.6
			11060.00	H	PK	46.5	12.3	/	58.8	74.0	15.2
			11060.00	H	AV	32.8	12.3	0.558	45.7	54.0	8.3
	122	5610	11220.00	H	PK	46.9	12.4	/	59.3	74.0	14.7
			11220.00	H	AV	32.2	12.4	0.558	45.2	54.0	8.8
	138	5690	11380.00	H	PK	46.8	12.5	/	59.3	74.0	14.7
			11380.00	H	AV	32.2	12.5	0.558	45.3	54.0	8.7

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F ( Antenna + Cable – Amp)]
2. No emission was detected in the receive mode.




4.4.4.4 Measurement chart

Transmission mode

[11a]  
W52 / Channel Low  
BELOW 1GHz

Company name : KYOCERA Corporation  
EUT : Tablet  
Model No. : KC-T304C  
Serial No. : 2695300163  
Test mode : WLAN\_11a\_W52\_Tx\_ch:Low

Standard : FCC Part.15 Subpart E  
Operator : C.Kanno  
Temp,Hum : 20.8[°C] 25.9[%]  
Note1 : CH:36 5180MHz  
Note2 :

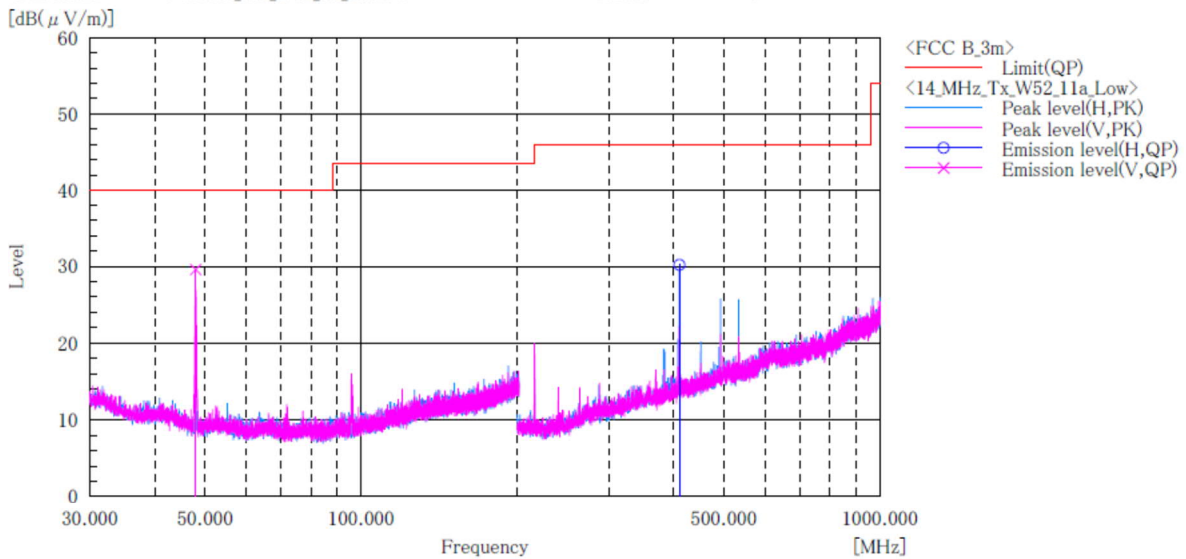

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	48.000	V	45.3	-15.7	29.6	40.0	10.4	100.0	0.0	
2	410.900	H	41.5	-11.3	30.2	46.0	15.8	100.0	270.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**[11a]**  
**W52 / Channel Low**  
**ABOVE 1GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpart E
EUT	: Tablet	Operator	: C.Kanno
Model No.	: KC-T304C	Temp,Hum,Atm	: 22.2[°C] 31.3[%]
Serial No.	: 2695300163	Note1	: ch:36_5180MHz
Test mode	: WLAN_W52_11a_Tx_Low	Note2	:

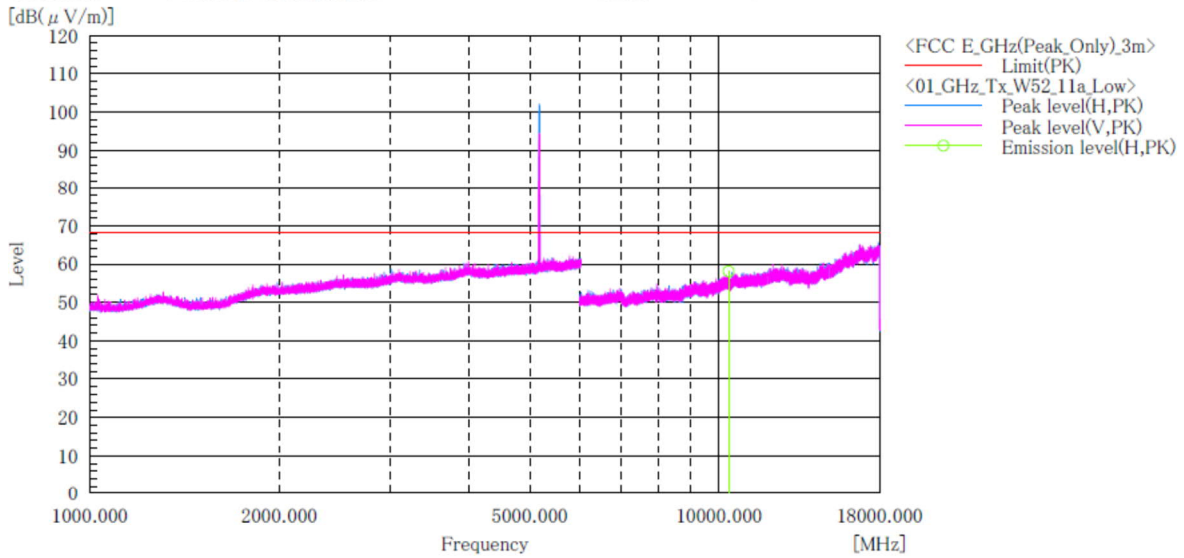

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10360.000	H	46.9	11.2	58.1	68.2	10.1	100.0	128.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11a]**  
**W52 / Channel Middle**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T304C  
 Serial No. : 2695300163  
 Test mode : WLAN\_11a\_W52\_Tx\_ch:Mid

Standard : FCC Part.15 Subpart E  
 Operator : C.Kanno  
 Temp,Hum : 20.8[°C] 25.9[%]  
 Note1 : CH:40 5200MHz  
 Note2 :

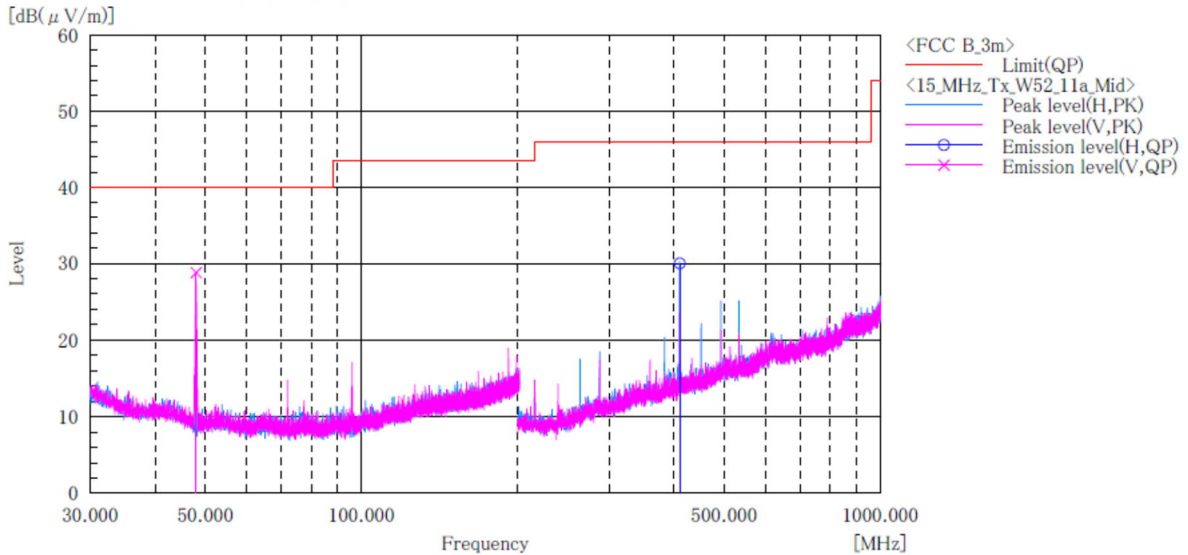

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	48.000	V	44.5	-15.7	28.8	40.0	11.2	100.0	299.0	
2	410.900	H	41.3	-11.3	30.0	46.0	16.0	100.0	262.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.





**[11a]  
W52 / Channel Middle  
ABOVE 1GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpart E
EUT	: Tablet	Operator	: C.Kanno
Model No.	: KC-T304C	Temp,Hum,Atm	: 22.2[°C] 31.3[%]
Serial No.	: 2695300163	Note1	: ch:40_5200MHz
Test mode	: WLAN_W52_11a_Tx_Mid	Note2	:

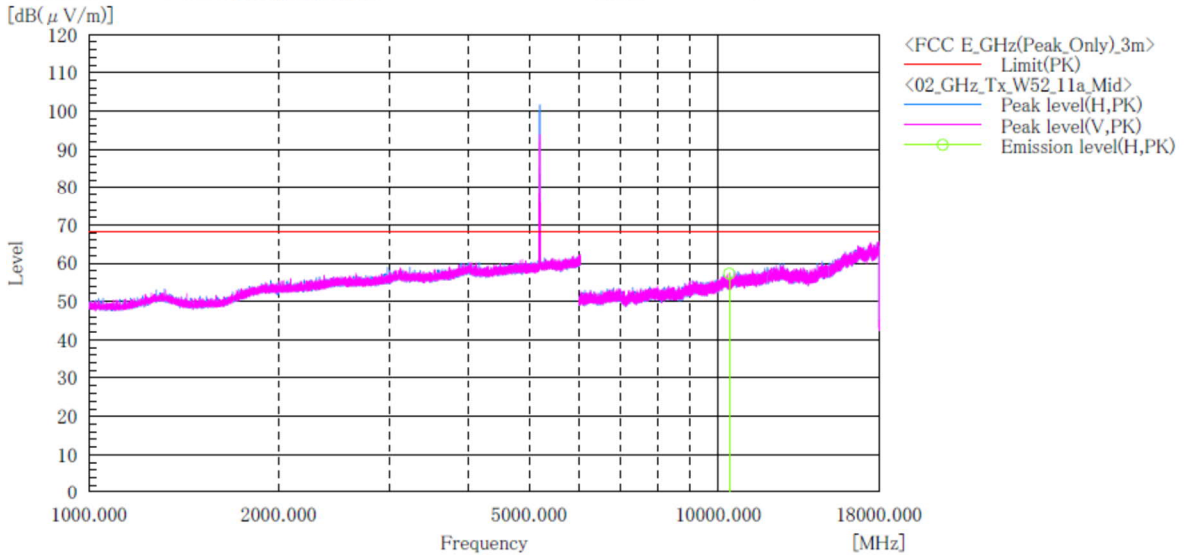

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10400.000	H	46.0	11.3	57.3	68.2	10.9	100.0	58.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11a]  
W52 / Channel High  
BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T304C  
 Serial No. : 2695300163  
 Test mode : WLAN\_11a\_W52\_Tx\_ch:High

Standard : FCC Part.15 Subpart E  
 Operator : C.Kanno  
 Temp,Hum : 20.8[°C] 25.9[%]  
 Note1 : CH:48 5240MHz  
 Note2 :

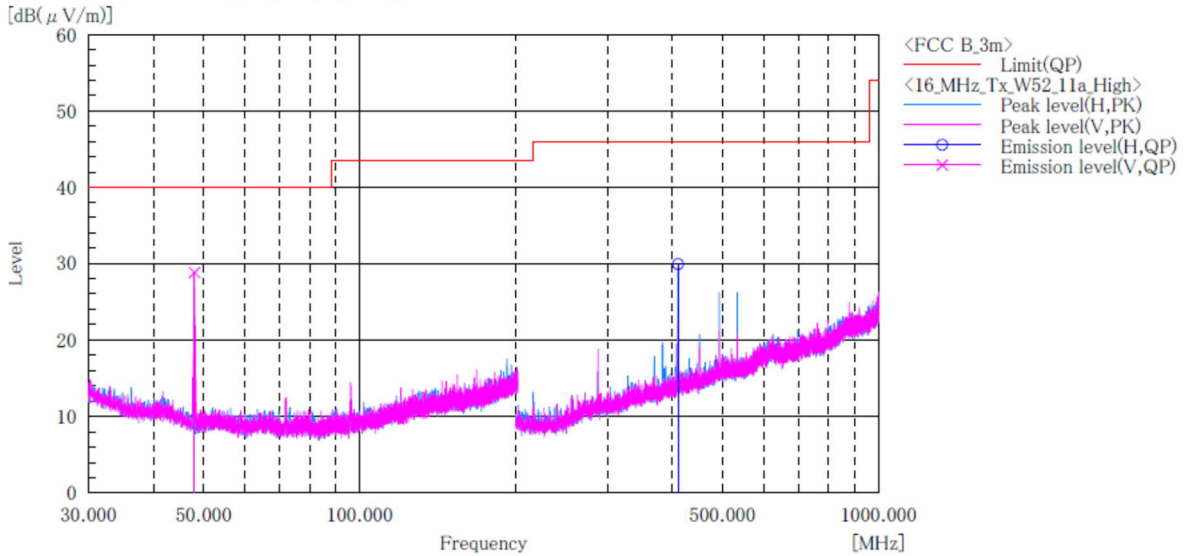

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	48.000	V	44.5	-15.7	28.8	40.0	11.2	100.0	0.0	
2	410.900	H	41.2	-11.3	29.9	46.0	16.1	100.0	270.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**[11a]  
W52 / Channel High  
ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T304C  
 Serial No. : 2695300163  
 Test mode : WLAN\_W52\_11a\_Tx\_High

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 22.2[°C] 31.3[%]  
 Note1 : ch:48\_5240MHz  
 Note2 :

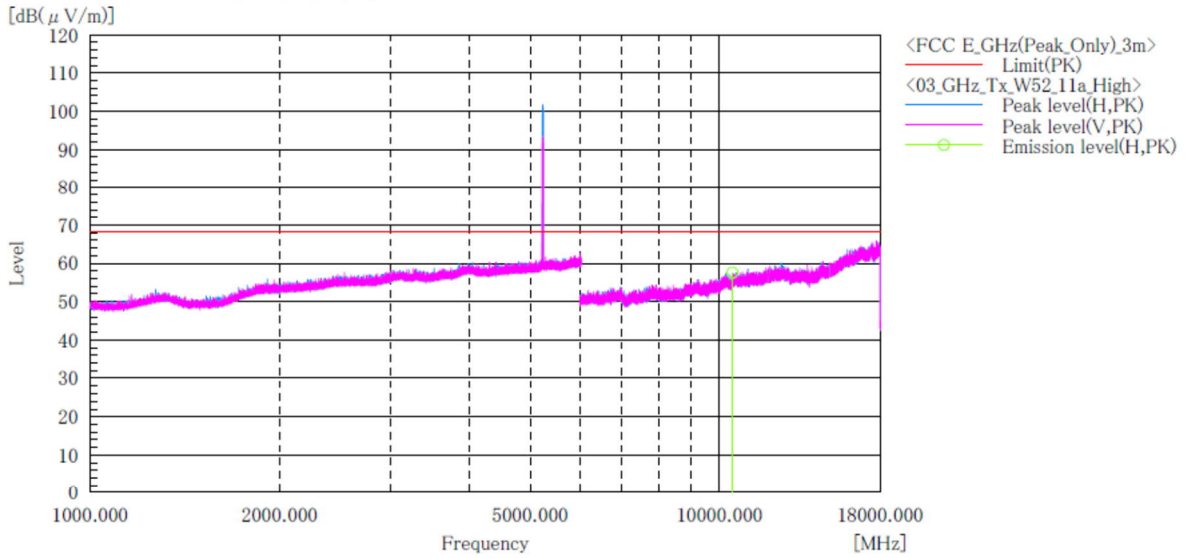

**Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10480.000	H	46.2	11.4	57.6	68.2	10.6	100.0	78.0	

**Note:**


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11a]  
W53 / Channel Low  
BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T304C  
 Serial No. : 2695300163  
 Test mode : WLAN\_11a\_W53\_Tx\_ch:Low

Standard : FCC Part.15 Subpart E  
 Operator : C.Kanno  
 Temp,Hum : 20.8[C] 25.9[%]  
 Note1 : CH:52 5260MHz  
 Note2 :

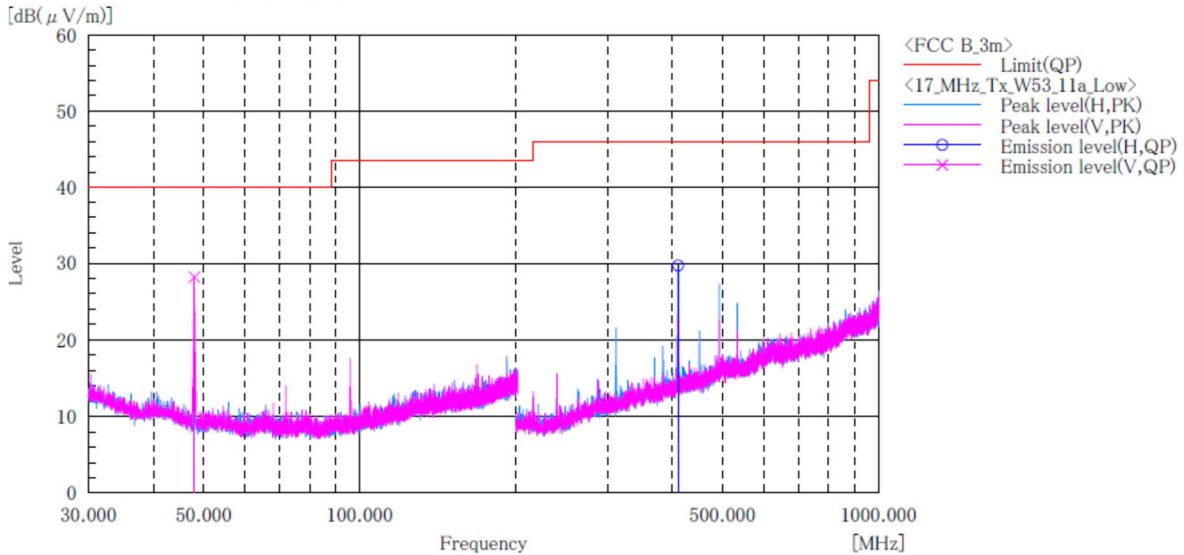

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	48.000	V	43.9	-15.7	28.2	40.0	11.8	100.0	0.0	
2	410.900	H	41.0	-11.3	29.7	46.0	16.3	100.0	265.0	

Note:


- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable - Amp)]
- No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**[11a]  
W53 / Channel Low  
ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T304C  
 Serial No. : 2695300163  
 Test mode : WLAN\_W53\_11a\_Tx\_Low

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 22.2[°C] 31.3[%]  
 Note1 : ch:52\_5260MHz  
 Note2 :

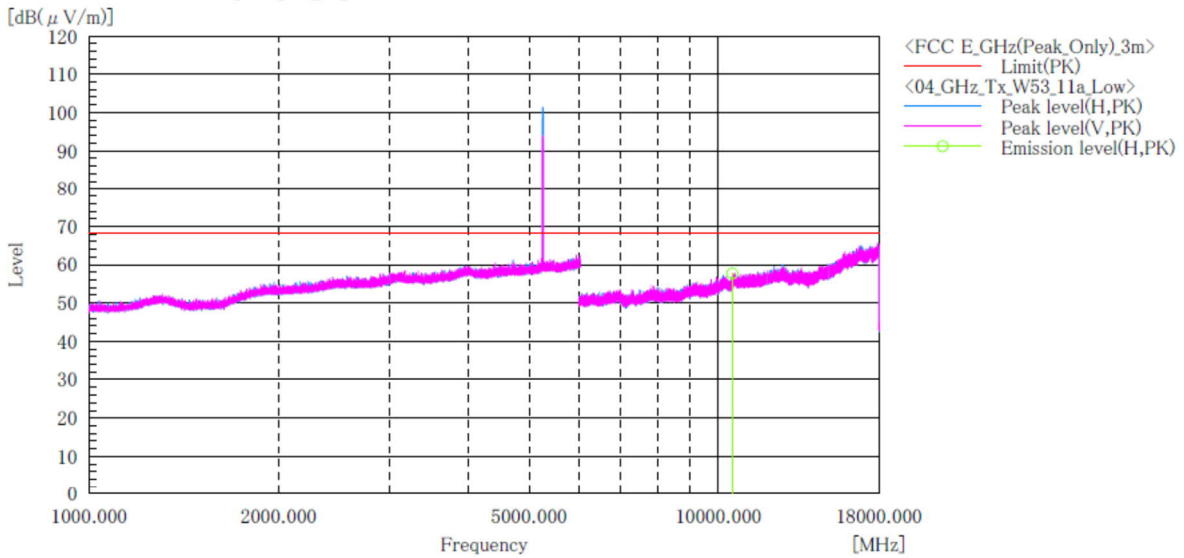

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10520.000	H	46.2	11.5	57.7	68.2	10.5	100.0	218.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11a]**  
**W53 / Channel Middle**  
**BELOW 1GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 Subpart E
EUT	: Tablet	Operator	: C.Kanno
Model No.	: KC-T304C	Temp,Hum	: 20.8[°C] 25.9[%]
Serial No.	: 2695300163	Note1	: CH:56 5280MHz
Test mode	: WLAN_11a_W53_Tx_ch:Mid	Note2	:

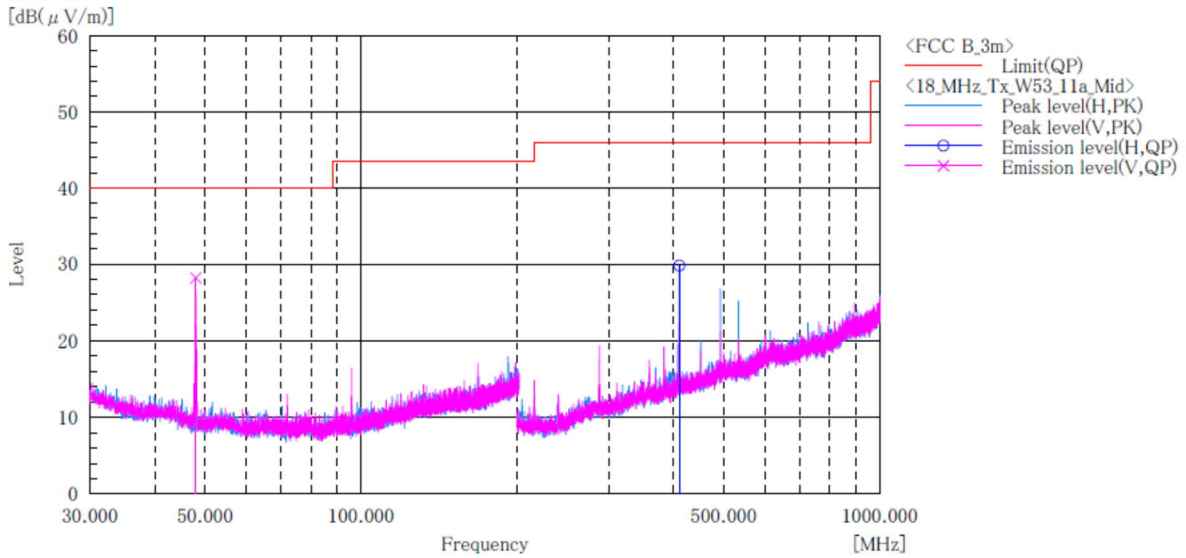

Final Result

No.	Frequency [MHz]	(P)	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	48.000	V	43.9	-15.7	28.2	40.0	11.8	100.0	0.0	
2	410.900	H	41.1	-11.3	29.8	46.0	16.2	100.0	270.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable + Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**[11a]**  
**W53 / Channel Middle**  
**ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T304C  
 Serial No. : 2695300163  
 Test mode : WLAN\_W53\_11a\_Tx\_Mid

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 22.2[°C] 31.3[%]  
 Note1 : ch:56\_5280MHz  
 Note2 :

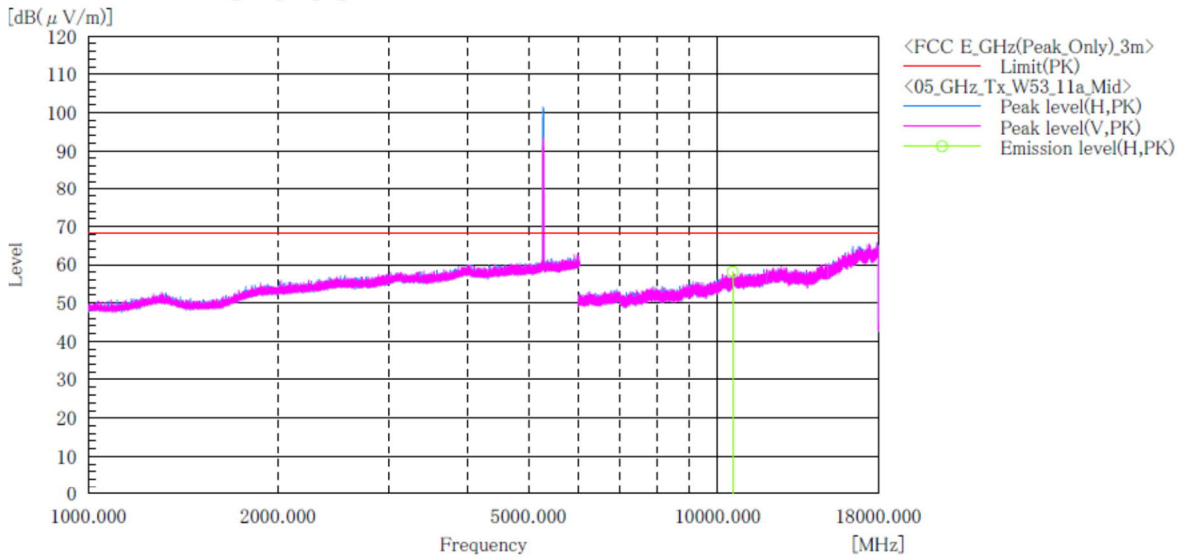

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10560.000	H	46.6	11.5	58.1	68.2	10.1	100.0	191.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.






**[11a]  
W53 / Channel High  
BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T304C  
 Serial No. : 2695300163  
 Test mode : WLAN\_11a\_W53\_Tx\_ch:High

Standard : FCC Part.15 Subpart E  
 Operator : C.Kanno  
 Temp,Hum : 20.8[°C] 25.9[%]  
 Note1 : CH:64 5320MHz  
 Note2 :

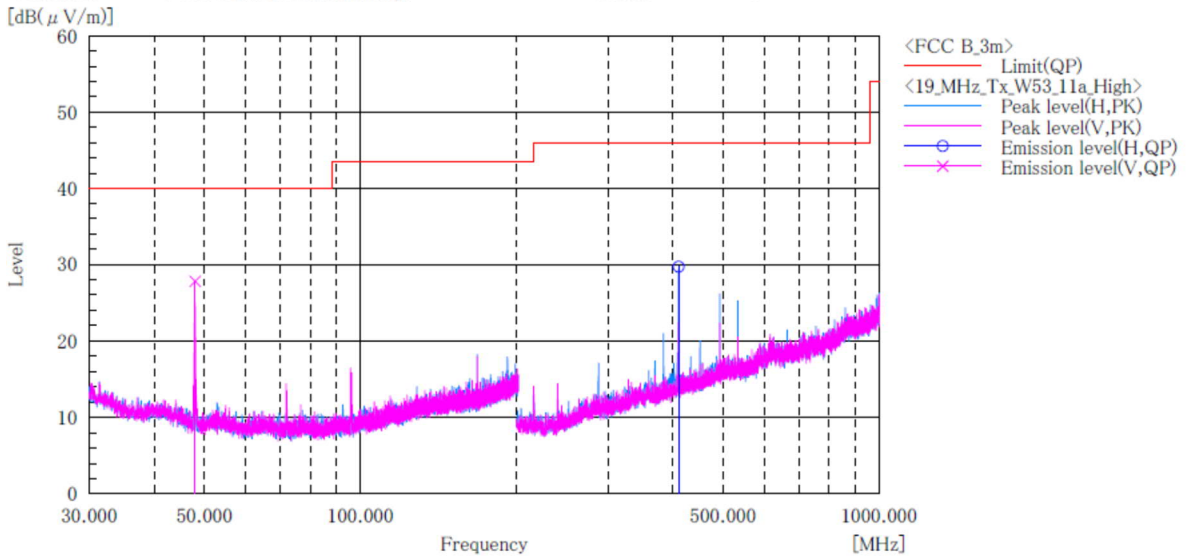

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	48.000	V	43.5	-15.7	27.8	40.0	12.2	100.0	0.0	
2	410.900	H	41.0	-11.3	29.7	46.0	16.3	100.0	279.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.






**[11a]  
W53 / Channel High  
ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T304C  
 Serial No. : 2695300163  
 Test mode : WLAN\_W53\_11a\_Tx\_High

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 22.2[°C] 31.3[%]  
 Note1 : ch:64\_5320MHz  
 Note2 :

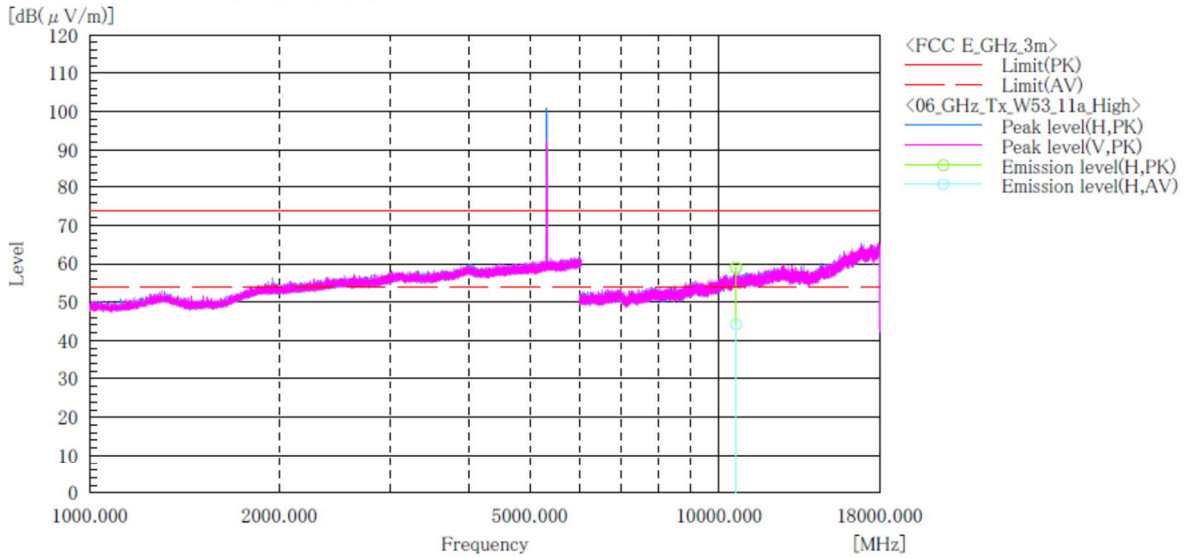

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	10640.000	H	47.3	32.5	11.7	59.0	44.2	74.0	54.0	15.0	9.8	100.0	172.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.