



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

RF Emissions Test Report

FCC Part 22, 24, and 27

For

Kyocera Corporation
c/o Kyocera Communication Inc.

Product:	Tri-Band CDMA Phone
Model:	M6000



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

TABLE OF CONTENTS

- 1 SUMMARY OF TESTING 4
- 2 EQUIPMENT UNDER TEST INFORMATION..... 4
- 3 TEST FACILITIES..... 5
- 4 TEST SETUP 5
 - 4.1 Test Configuration 6
- 5 tty compliance 7
- 6 Conducted RF OUTPUT POWER..... 7
 - 6.1 Test Configuration 7
 - 6.2 Test Results..... 7
- 7 RADIATED RF OUTPUT POWER 8
 - 7.1 Test Configuration 8
 - 7.2 Test Results..... 8
- 8 OCCUPIED BANDWIDTH 9
 - 8.1 Test Configuration 9
 - 8.2 Test Result 9
- 9 Spurious Emissions At Antenna Terminals 13
 - 9.1 Test Configuration 13
 - 9.2 Test Result 13
- 10 Transmitter Radiated Spurious Emissions 23
 - 10.1 Test Configuration and Result 23
- 11 Receiver Spurious Emissions 23
 - 11.1 Receiver Spurious Emissions 23
- 12 Transmitter RF Carrier Frequency Stability..... 24
 - 12.1 Test Configuration 24
 - 12.2 Test Result 25
- 13 Exposure of Humans to RF Fields (SAR) 28
 - 13.1 Test Configuration and Result 28
- 14 TEST EQUIPMENT..... 28



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

ATTESTATION

The tested device complies with the requirements in respect of all parameters subject to the test.

The test results and statements relate only to the items tested.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Product:	Tri-Band CDMA Cellular Phone with Bluetooth and WLAN
Model #:	M6000
FCC ID:	V65M6000
Tested in accordance with:	FCC Part 22, 24 & 27
Test performed by:	CompTest Services LLC
Test Requested by:	Kyocera Corporation c/o Kyocera Communication Inc 10300 Campus Point Drive San Diego, CA 92121 United States
Date of Test:	December 9 – 10, 2009

Responsible Engineer

Benjamin Nguyen

Benjamin Nguyen
Test Engineer

Reviewed and approved by:

Tammy To
Quality Manager



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

1 SUMMARY OF TESTING

Section #	Rule Part	Test Description	Verdict
4	FCC § 2.1046	Conducted Power	Pass
5	FCC § 22.913, 24.232	Radiated Power	Pass
6	FCC § 2.1049, 22.917 (b)(d), 24.238	Occupied Bandwidth	Pass
7	FCC § 2.1051, 22.917(e)(f), 24.238	Spurious Emissions at Antenna Terminals	Pass
8	FCC § 2.1053, 22.91, 24.238	Transmitter Radiated Spurious Emissions	Pass
9	FCC § 15.109	Receiver Spurious Emissions	Pass
10	FCC § 2.1055, 22.355, 24.235	Transmitter RF Carrier Frequency Stability	Pass
11	FCC § 2.1093	Exposure of Humans to RF Fields	Pass

2 EQUIPMENT UNDER TEST INFORMATION


EUT Serial Number:	1095889640E		
Type:	[] Prototype, [X] Pre-Production, [] Production		
Equipment Category:	Portable		
RF Exposure Environment:	General Population / Uncontrolled		
Antenna:	Internal Antenna		
Detachable Antenna:	No		
External Input:	Audio/Digital Data		
Quantity:	Quantity production is planned		
Multiple Access Scheme:	CDMA		
Emission Designators:	1M25F9W		
FCC Rule Parts:	§22H	§27L	§24E
Modes:	800 CDMA	1700 CDMA	1900 CDMA
TX Frequency (MHz):	824 – 849	1710 - 1755	1850 - 1910
Max. Output Power (W):	0.589 ERP	0.389 EIRP	0.692 EIRP

3 TEST FACILITIES

The test sites and measurement facilities used to collect data are located at 10300 Campus Point Drive San Diego, CA 92121, USA

4 TEST SETUP

All CDMA measurements were conducted with a base station simulator to establish a CDMA link with the equipment under test (EUT). To investigate the response of the EUT the main antenna RF output port of the EUT was connected to the input of the spectrum analyzer with a RF cable. The amplitude of the spectrum analyzer is corrected for the cable insertion loss and any other applicable losses. A fully charged battery was used as a power supply voltage, except for the Transmitter RF Carrier Frequency Stability test a dummy battery connected to a power supply was used.

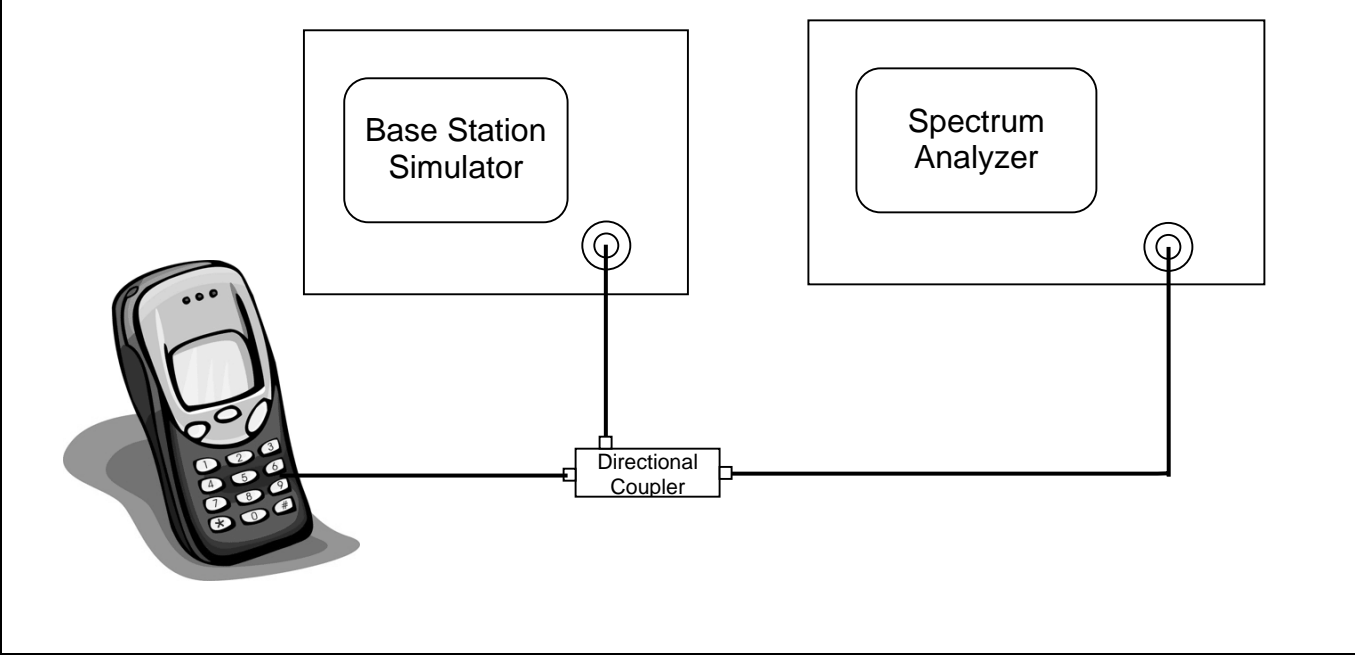

4.1 Test Configuration

To justify on the selection of applicable configurations, the EUT was pre-tested under all Radio Configuration and Service Option operation modes to determine the worst-case scenario.

The following configuration was determined and reported as worst-case for all measurements:

Radio Configuration:	RC1
Service Options:	SO55
Data Rate:	Full Rate

CONFIGURATION Peak Power	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak
SO2, RC1 Full Rate	27.35	28.41	27.36	28.62	27.83	27.81	28.35	28.18	28.74
SO2, RC3 Full Rate	28.4	28.86	27.71	28.79	27.96	27.64	28.15	27.61	27.59
SO55, RC1 Full Rate	28.91	30.05	28.30	29.31	28.47	28.16	28.36	28.18	27.83
SO55, RC3 Full Rate	28.44	29.62	27.94	28.81	28.21	27.9	28.34	27.88	28.4
TDSO SO32, RC3 (+F-SCH) Full Rate	28.62	28.97	28.3	29.3	28.48	28.18	28.34	28.19	28.2
TDSO SO32, RC3 (+SCH) Full Rate	28.82	29.02	28.3	29.11	28.5	28.2	28.4	28.3	28.01

CONFIGURATION Average Power	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg
SO2, RC1 Full Rate	23.78	24.19	23.74	24.08	24.02	23.99	24.04	23.96	24.01
SO2, RC3 Full Rate	23.75	24.11	23.67	24.05	24	24.06	23.90	23.84	23.71
SO55, RC1 Full Rate	23.8	24.17	23.71	24.10	24.11	24.11	23.98	23.91	23.8
SO55, RC3 Full Rate	23.86	24.23	23.75	24.17	24.16	24.22	24.04	23.96	24.00
TDSO SO32, RC3 (+F-SCH) Full Rate	23.86	24.22	23.75	24.14	24.15	24.17	23.98	23.95	23.98
TDSO SO32, RC3 (+SCH) Full Rate	23.84	24.21	23.75	24.17	24.14	24.16	23.99	23.89	23.99

5 TTY COMPLIANCE

FCC: § 255 of the Telecom Act

The EUT has been designed for TTY Compliance with Cellular Compatibility Standard.

6 CONDUCTED RF OUTPUT POWER

6.1 Test Configuration

FCC: § 2.1046

IC: RSS132 §4.4; RSS133 §6.4

The EUT was connected to a Universal Power Meter through a RF cable. The cable loss was taken into account for accurate power measurement. The EUT was set at low, mid, high channels and each frequency band to investigate the conducted power.

6.2 Test Results

Mode	Frequency (MHz)	Channel	Conducted Power (dBm)
CDMA 800	824.70	1013	23.86
	836.52	383	24.23
	848.31	777	23.75
CDMA 1700	1711.25	25	24.17
	1732.5	450	24.16
	1753.75	875	24.22
CDMA 1900	1851.25	25	24.04
	1880	600	23.96
	1908.75	1175	24.00

7 RADIATED RF OUTPUT POWER

7.1 Test Configuration

FCC: § 22.913, § 24.232

IC: RSS132 §4.4; RSS133 §6.4

The test was performed in Compliance Certification Service using substitution method. See separated radiated emission report for details.

7.2 Test Results

Mode	Frequency (MHz)	Channel	Maximum Radiated Power (dBm)
CDMA 800	824.70	1013	25.2
	836.52	383	27.7
	848.31	777	27.6
CDMA 1700	1711.25	25	23.9
	1732.5	450	25.9
	1753.75	875	25.0
CDMA 1900	1851.25	25	28.4
	1880	600	27.9
	1908.75	1175	27.5

8 OCCUPIED BANDWIDTH

8.1 Test Configuration

FCC:	§ 2.1049, § 22.917(b)(d), § 24.238, § 27.53(g)(1)	
IC:	RSS132 §4.5; RSS133 §6.5	

The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum with no modulation was recorded.

For Digital: Modulate with full rate all up power control bit.

S.A. Setting	RBW	VBW
Bandwidth Measurement	30KHz	300kHz
Band Edge Measurement	100KHz	100KHz


Limits: Bandwidth: N/A
 Bandedge: -13dBm

8.2 Test Result

Figure	Description	Mode	Result
8-1	CDMA @ Ch383	CDMA 800	Pass
8-2	Lower Band Edge @ Ch 1013		Pass
8-3	Upper Band Edge @ Ch 777		Pass
8-4	CDMA @ CH450	CDMA 1700	Pass
8-5	Lower Band Edge @ CH 25		Pass
8-6	Upper Band Edge @ CH 875		Pass
8-7	CDMA @ CH600	CDMA 1900	Pass
8-8	Lower Band Edge @ CH 25		Pass
8-9	Upper Band Edge @ CH 1175		Pass




Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

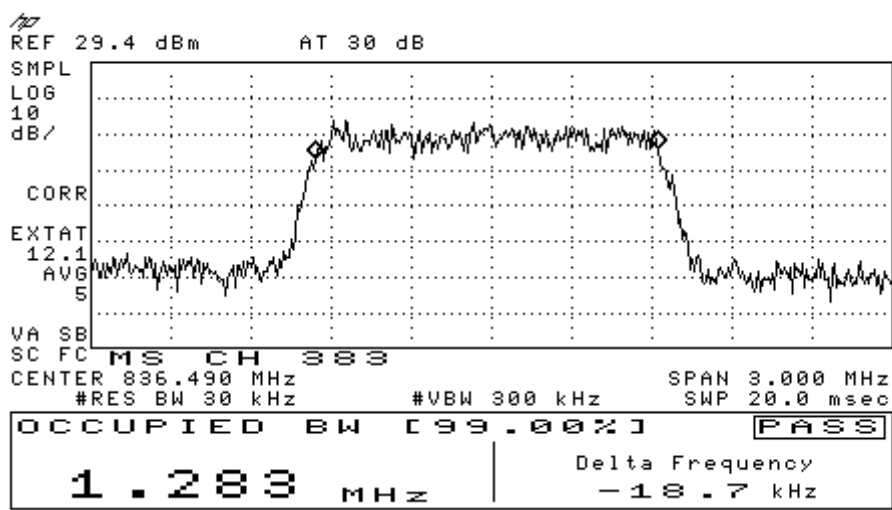


RT

Figure 8-1 CDMA 800 @ CH 383

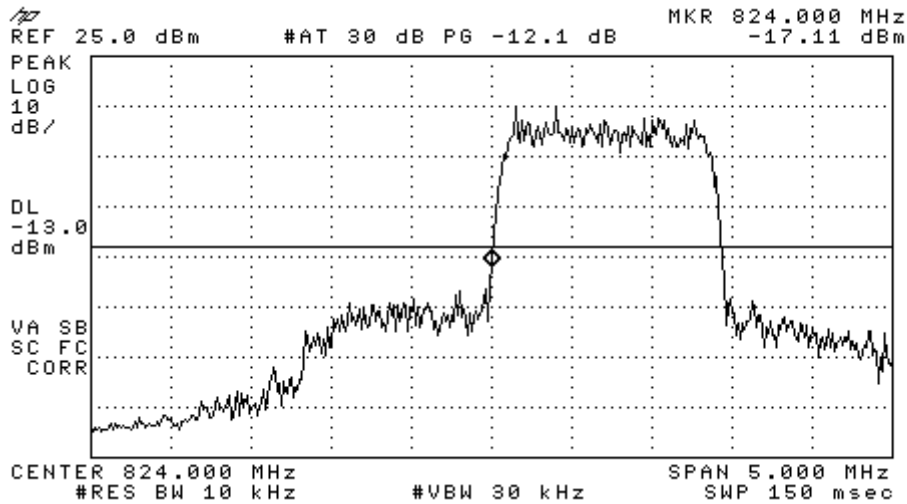

RL

Figure 8-2 CDMA 800 Lower Band Edge @ CH 1013

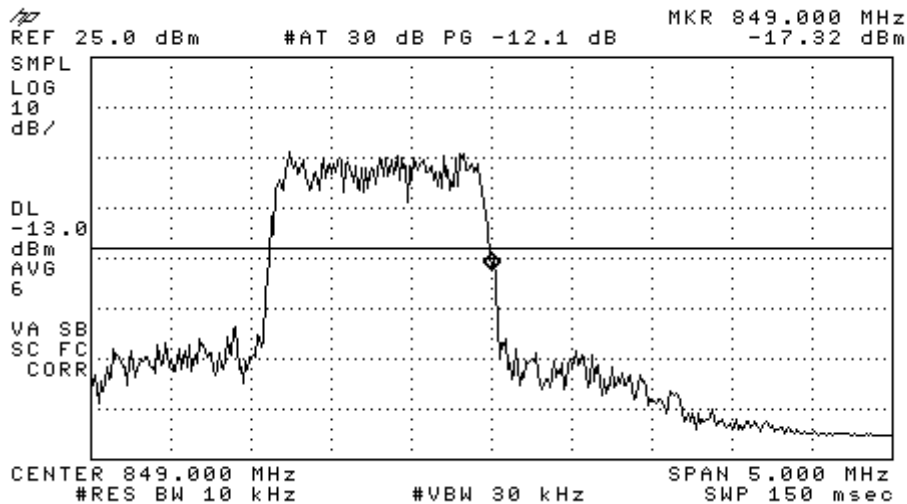


L

Figure 8-3 CDMA 800 Lower Band Edge @ CH 777




Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

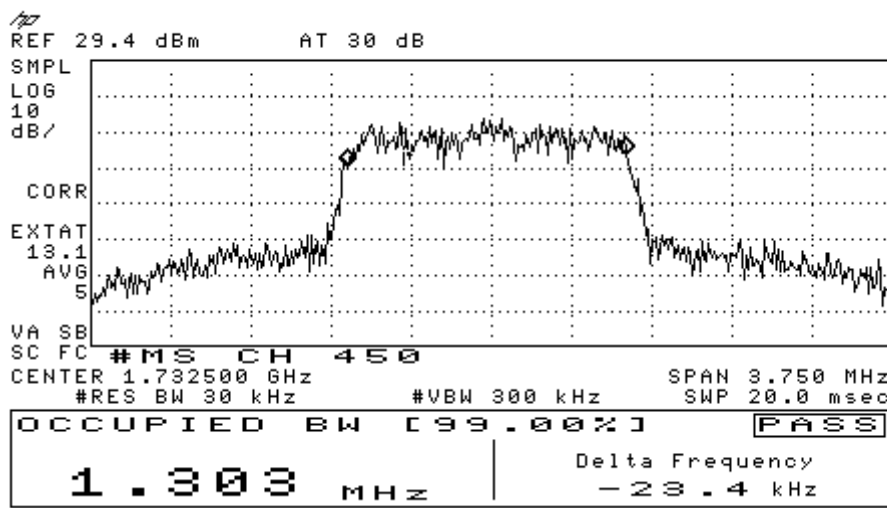


RL

Figure 8-4 CDMA 1700 @ CH 450

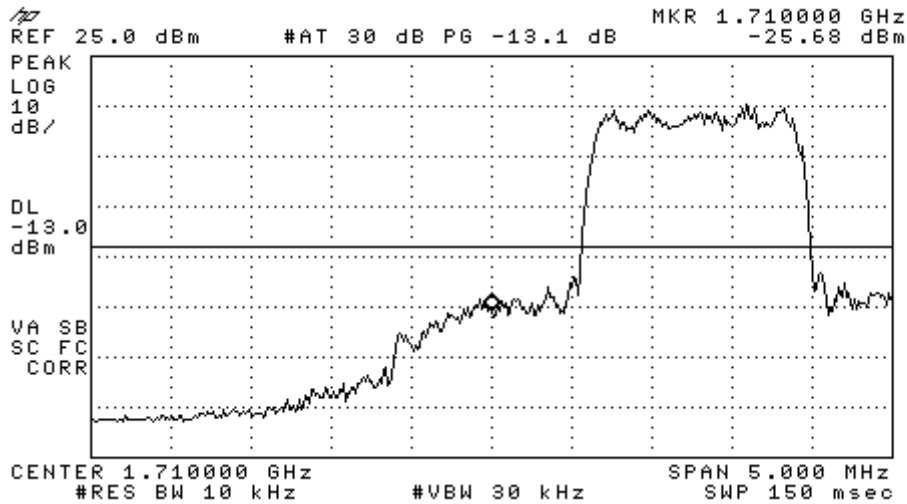

RL

Figure 8-5 CDMA 1700 Lower Band Edge @ CH 25

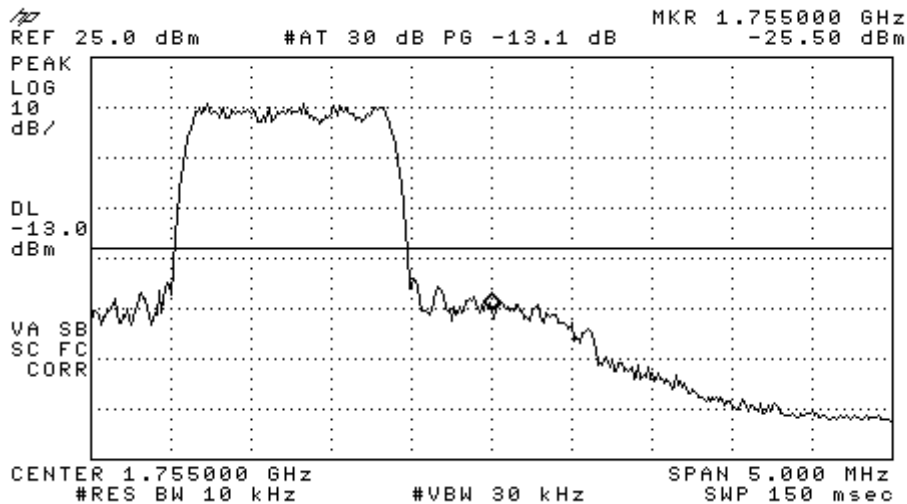


RT

Figure 8-6 CDMA 1700 Upper Band Edge @ CH 875




Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

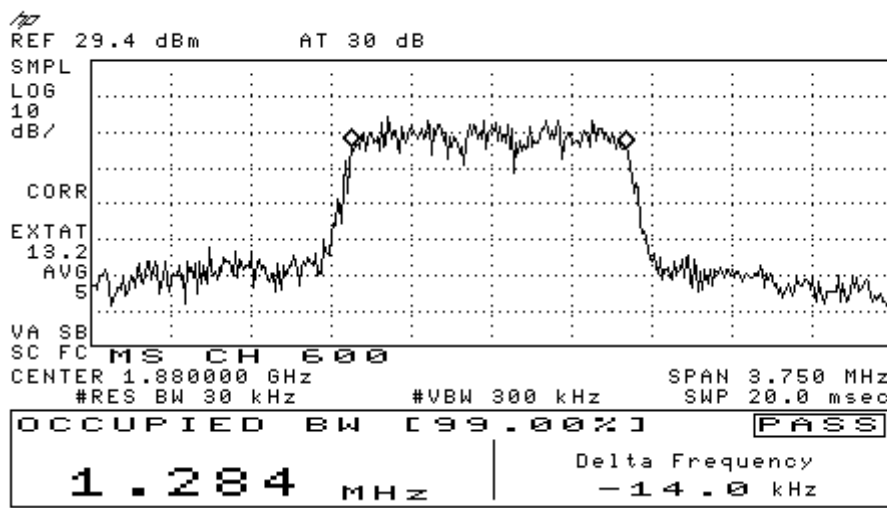


RT

Figure 8-7 CDMA 1900 @ CH 600

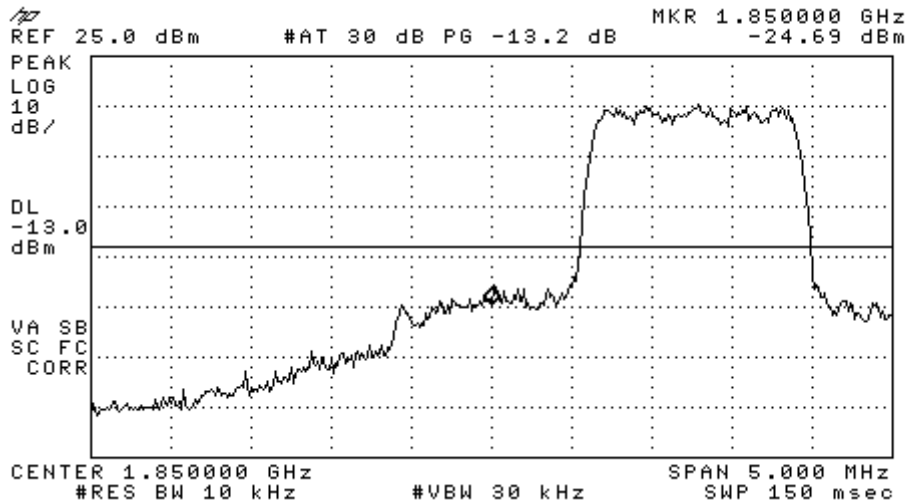

RL

Figure 8-8 CDMA 1900 Lower Band Edge @ CH 25

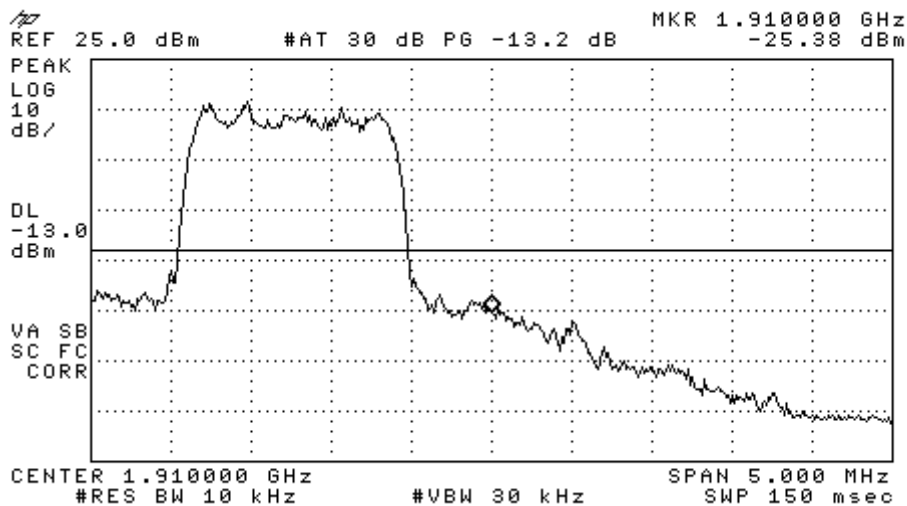

RT

Figure 8-9 CDMA 1900 Upper Band Edge @ CH 1175

9 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

9.1 Test Configuration

FCC: § 2.1051, § 22.917(e)(f), § 24.238

IC: RSS132 §4.5; RSS133 §6.5

Measurement Procedures:

Out of Band: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental.

S.A. Setting	RBW	VBW
Spurious Emissions Measurement	1MHz	1MHz

Limits: -13dBm

9.2 Test Result

Figure	Channel	Plot Description	Result
9-1	1013	CDMA 800 Conducted spurious emissions 9kHz to 10GHz	Pass
9-2	383		Pass
9-3	777		Pass
9-4	25	CDMA 1700 Conducted spurious emissions 9kHz to 20GHz	Pass
9-5	450		Pass
9-6	875		Pass
9-7	25	CDMA 1900 Conducted spurious emissions 9kHz to 20GHz	Pass
9-8	600		Pass
9-9	1175		Pass



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

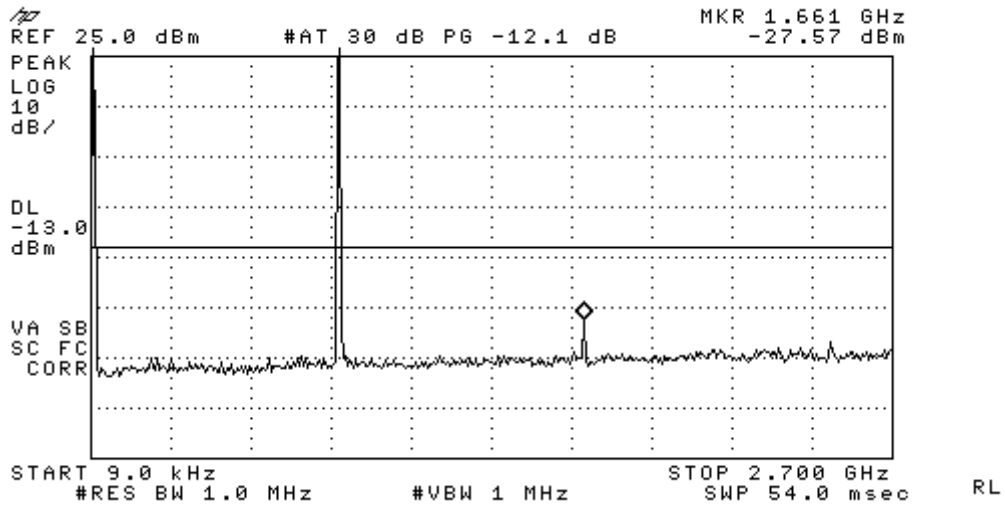


Figure 9-1a CDMA 800 – Conducted Spurious Emission (CH 1013)

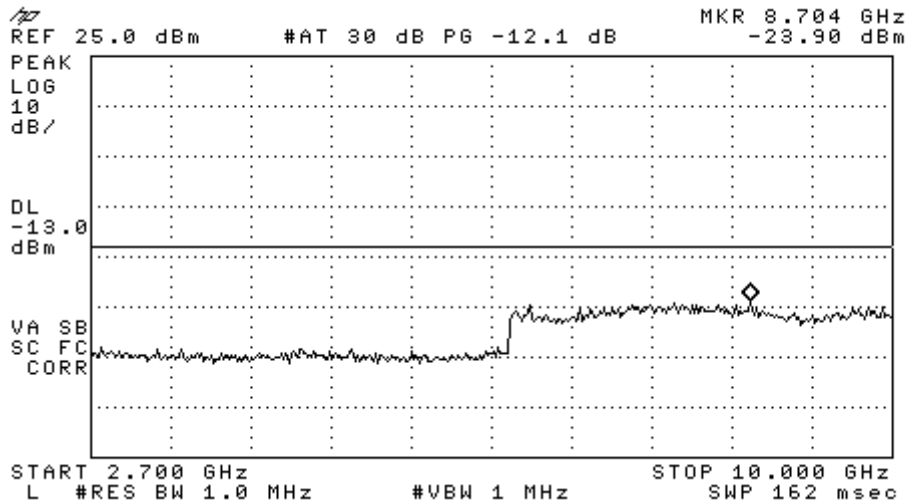


Figure 9-1b CDMA 800 – Conducted Spurious Emission (CH 1013)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

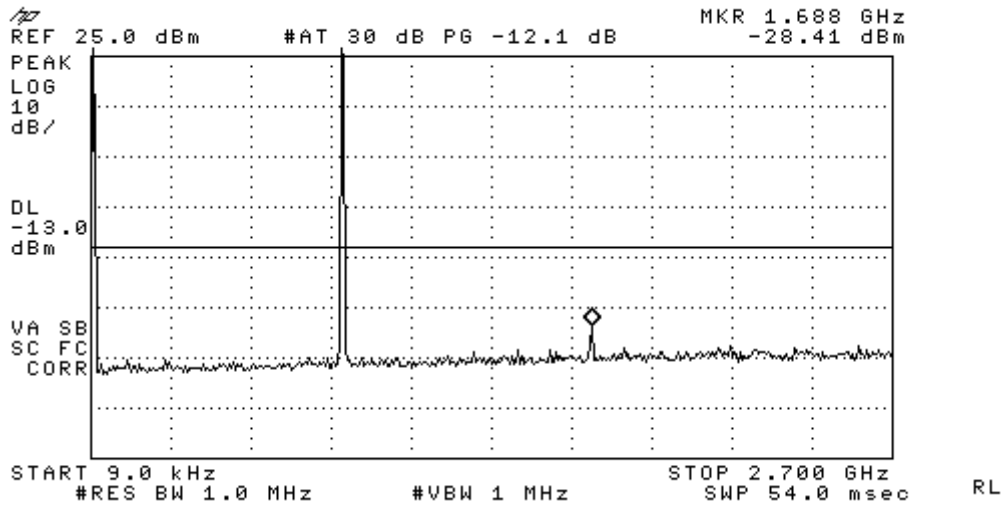


Figure 9-2a CDMA 800 – Conducted Spurious Emission (CH 383)

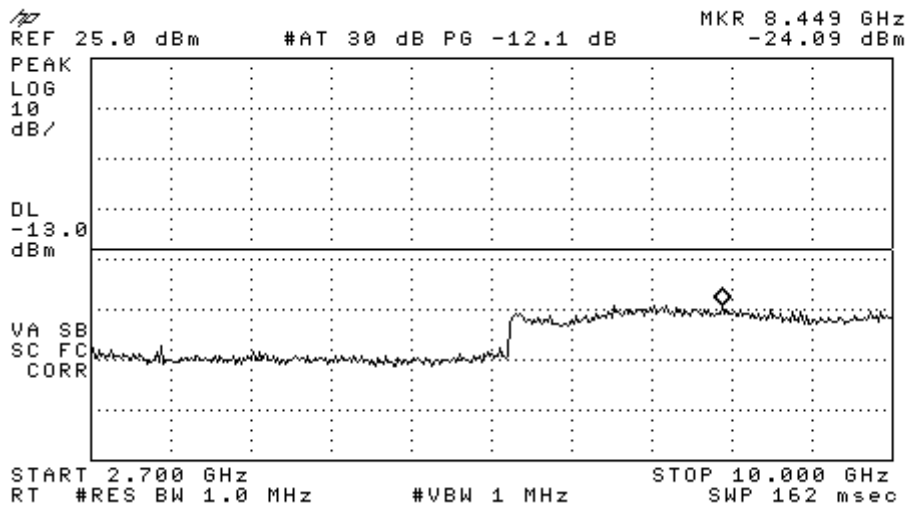


Figure 9-2b CDMA 800 – Conducted Spurious Emission (CH 383)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

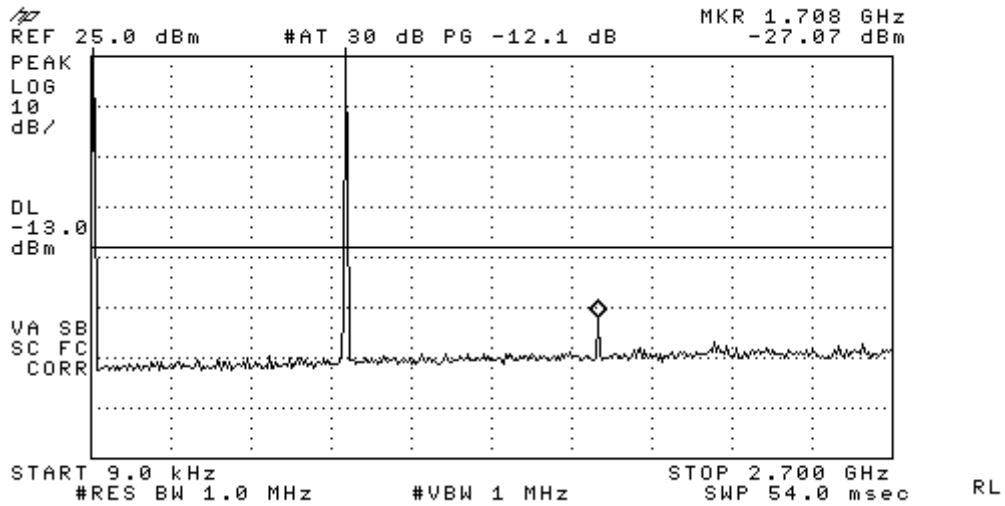


Figure 9-3a CDMA 800 – Conducted Spurious Emission (CH 777)

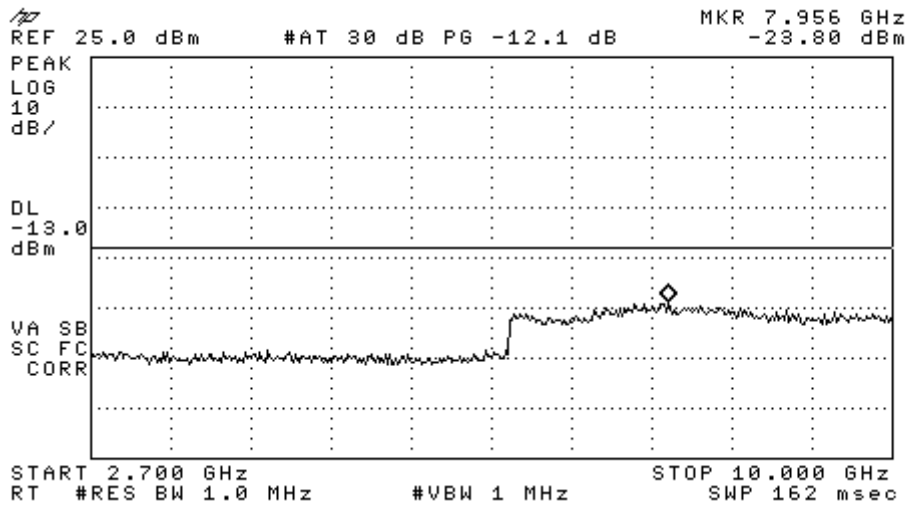


Figure 9-3b CDMA 800 – Conducted Spurious Emission (CH 777)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

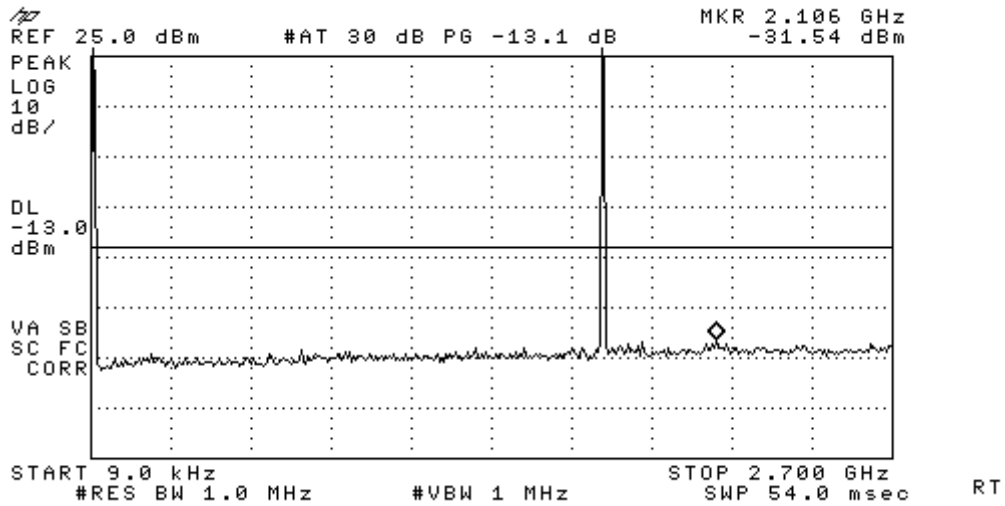


Figure 9-4a CDMA 1700 - Conducted Spurious Emission (CH 25)

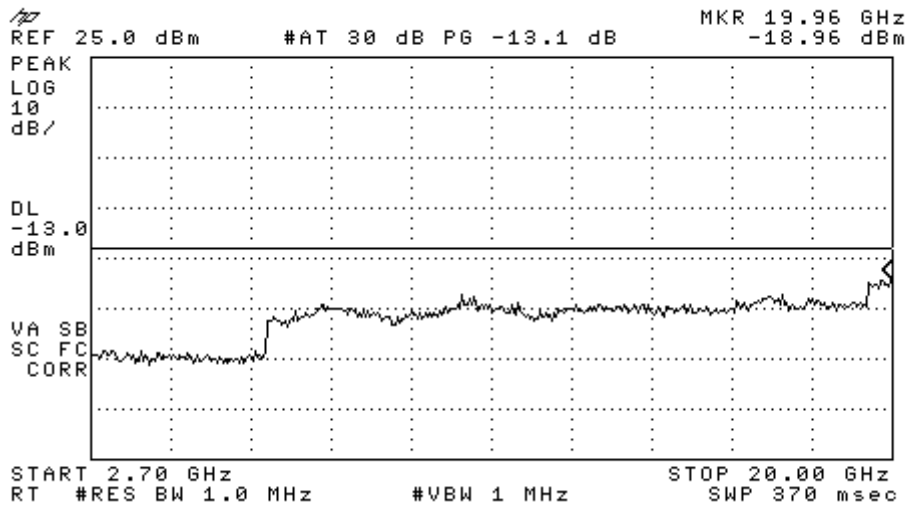


Figure 9-4b CDMA 1700 - Conducted Spurious Emission (CH 25)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

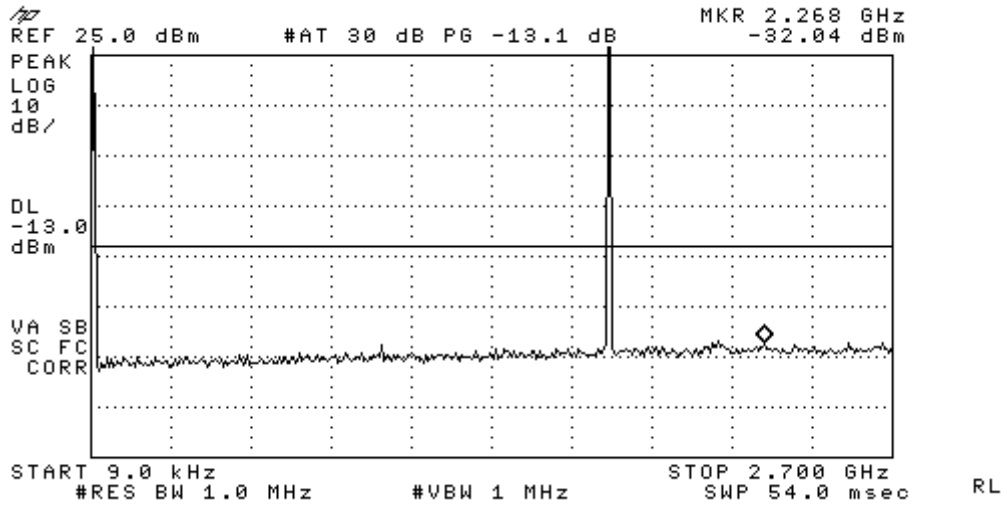


Figure 9-5a CDMA 1700 - Conducted Spurious Emission (CH 450)

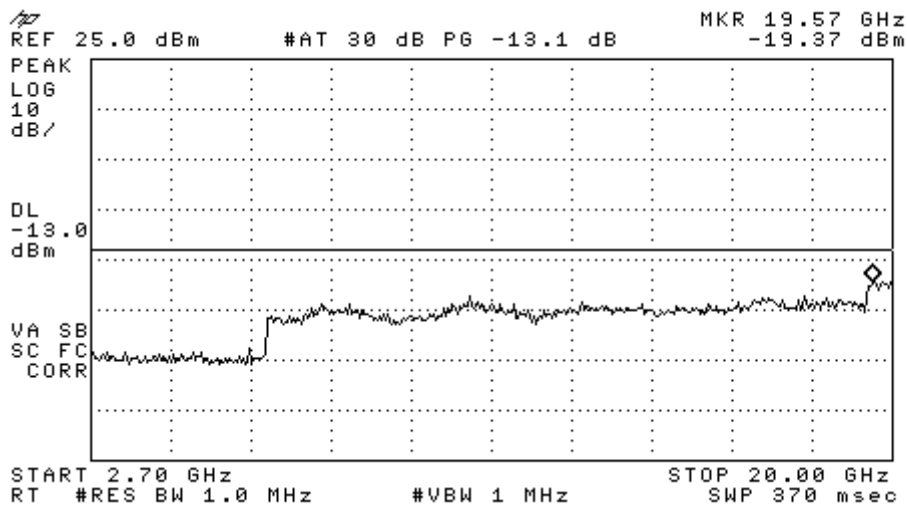


Figure 9-5b CDMA 1700 - Conducted Spurious Emission (CH 450)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

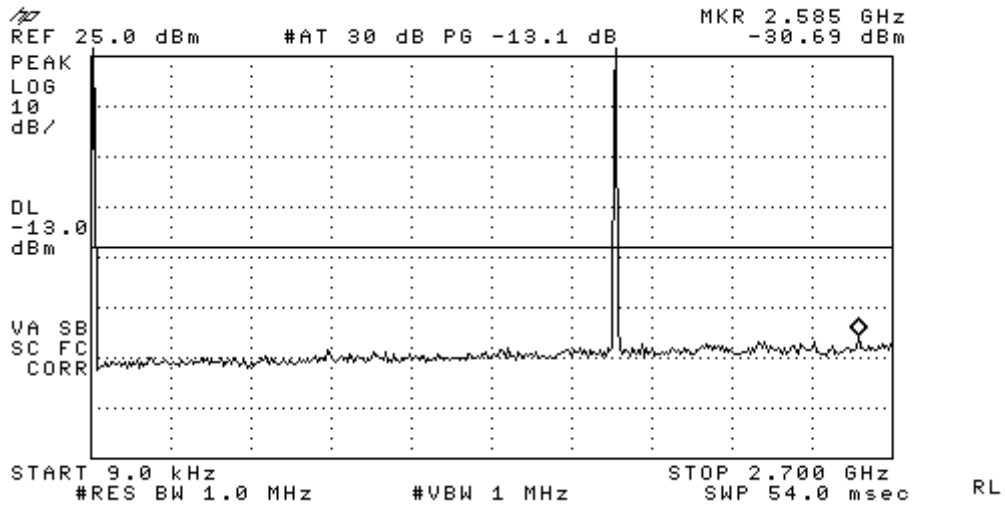


Figure 9-6a CDMA 1700 - Conducted Spurious Emission (CH 875)

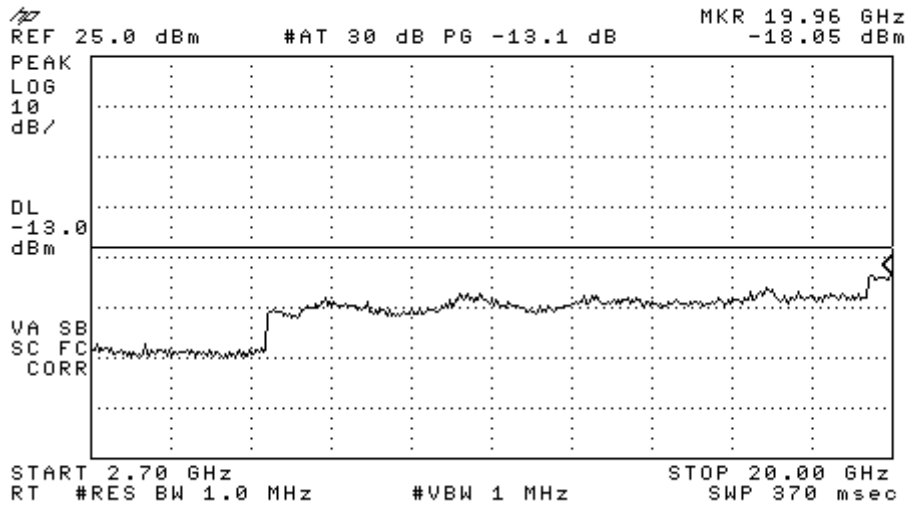


Figure 9-6b CDMA 1700 - Conducted Spurious Emission (CH 875)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

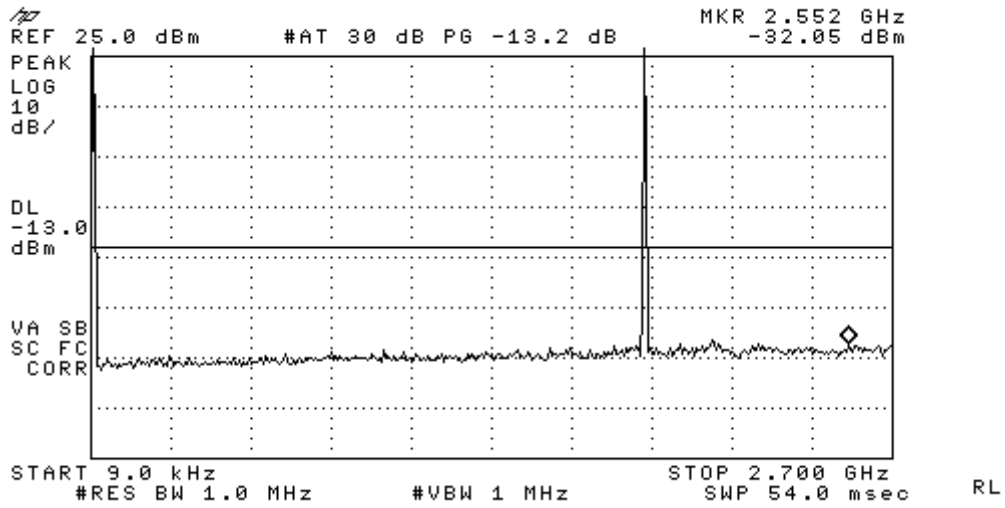


Figure 9-7a CDMA 1900 - Conducted Spurious Emission (CH 25)

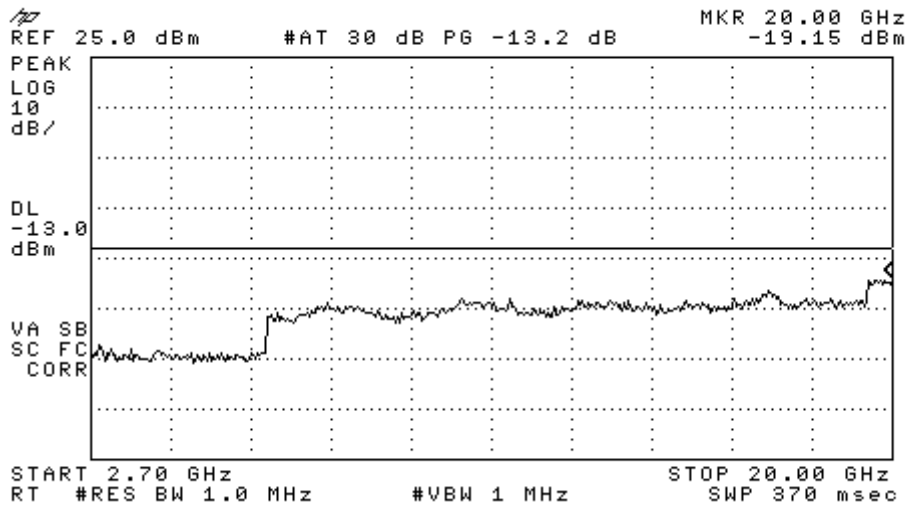


Figure 9-7b CDMA 1900 - Conducted Spurious Emission (CH 25)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

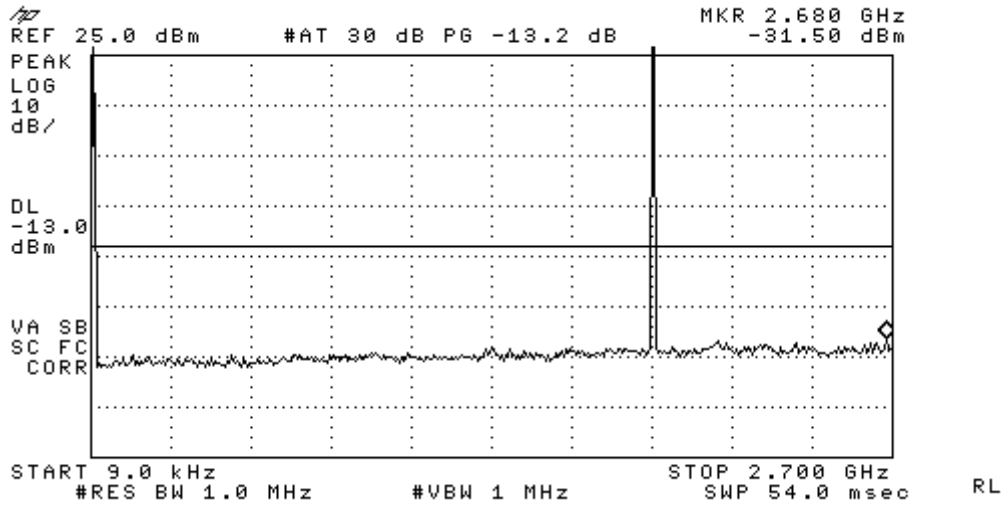


Figure 9-8a CDMA 1900 - Conducted Spurious Emission (CH 600)

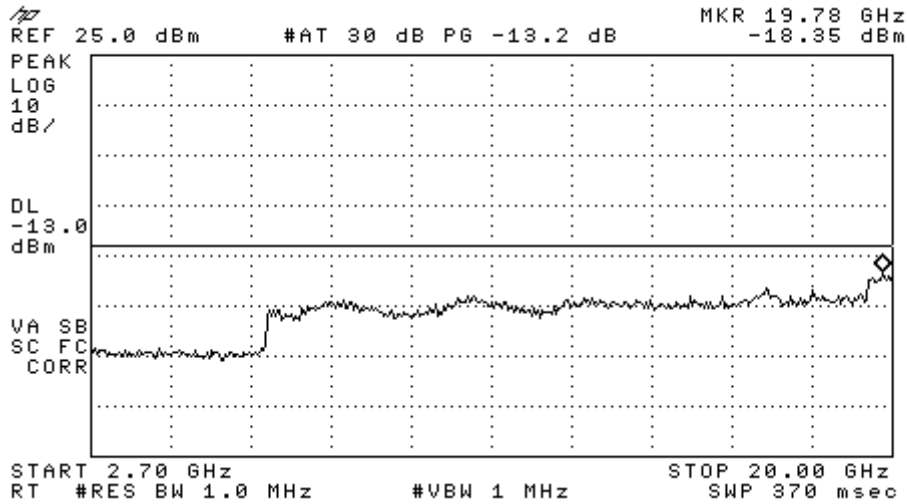


Figure 9-8b CDMA 1900 - Conducted Spurious Emission (CH 600)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

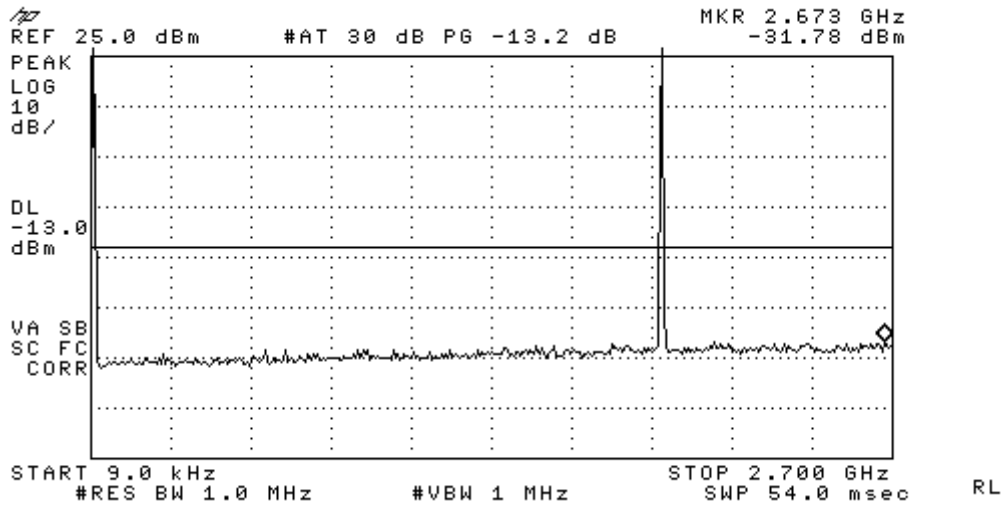


Figure 9-9a CDMA 1900 - Conducted Spurious Emission (CH 1175)

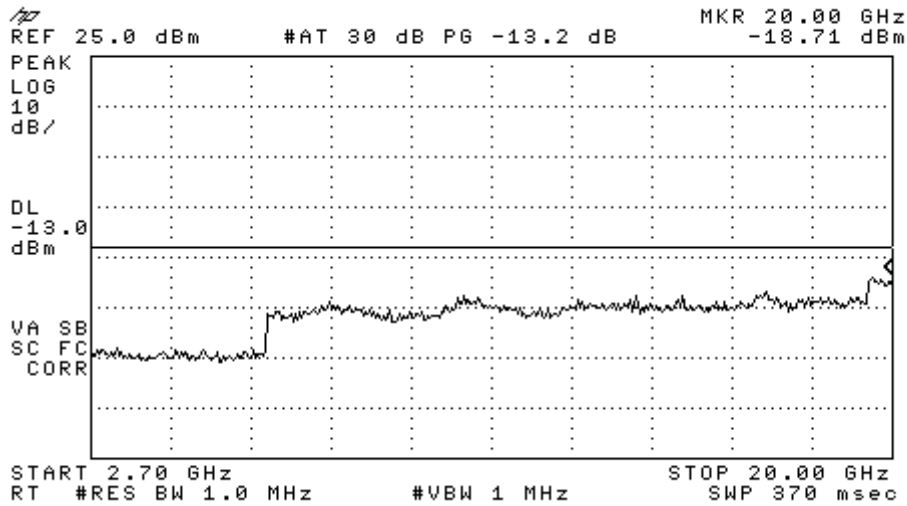


Figure 9-9b CDMA 1900 - Conducted Spurious Emission (CH 1175)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

10 TRANSMITTER RADIATED SPURIOUS EMISSIONS

10.1 Test Configuration and Result

FCC: § 2.1053, § 22.91, § 24.238, §27.53(g)
IC: RSS132 §4.5; RSS133 §6.5
The radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

11 RECEIVER SPURIOUS EMISSIONS

11.1 Receiver Spurious Emissions

FCC: § 15.109
IC: RSS-GEN
The receiver radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

12 TRANSMITTER RF CARRIER FREQUENCY STABILITY

12.1 Test Configuration

FCC: § 2.1055, § 22.355, § 24.235, § 27.54

IC: RSS132 §4.3; RSS133 §6.3


The EUT was placed in an environmental chamber. The RF output of the EUT was connected to Agilent 8960 Series 10 E5515C. A power supplier was connected as primary voltage supply. Only the mid channel of each frequency band was investigated.

Limits:

Tx Frequency	Channel	Limit
836.49 MHz	383	+/- 2.5 ppm (+/- 2091 Hz)
1732.5 MHz	450	+/- 2.5 ppm (+/- 4331 Hz)
1880 MHz	600	+/- 2.5 ppm (+/- 4700 Hz)

12.2 Test Result


CDMA 800								
Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)		Result		
	3.3V (Battery endpoint)	3.7V	4.2V (115%)	Lower limit	Upper limit			
-30		10.45		-2091	2091	Pass		
-20		19.84		-2091	2091			
-10		17.01		-2091	2091			
0		13.67		-2091	2091			
10		13.26		-2091	2091			
20	6.62	-3.86	-6.93	-2091	2091			
30		-5.47		-2091	2091			
40		-10.86		-2091	2091			
50		-10.31		-2091	2091			
60				15.94			-2091	2091

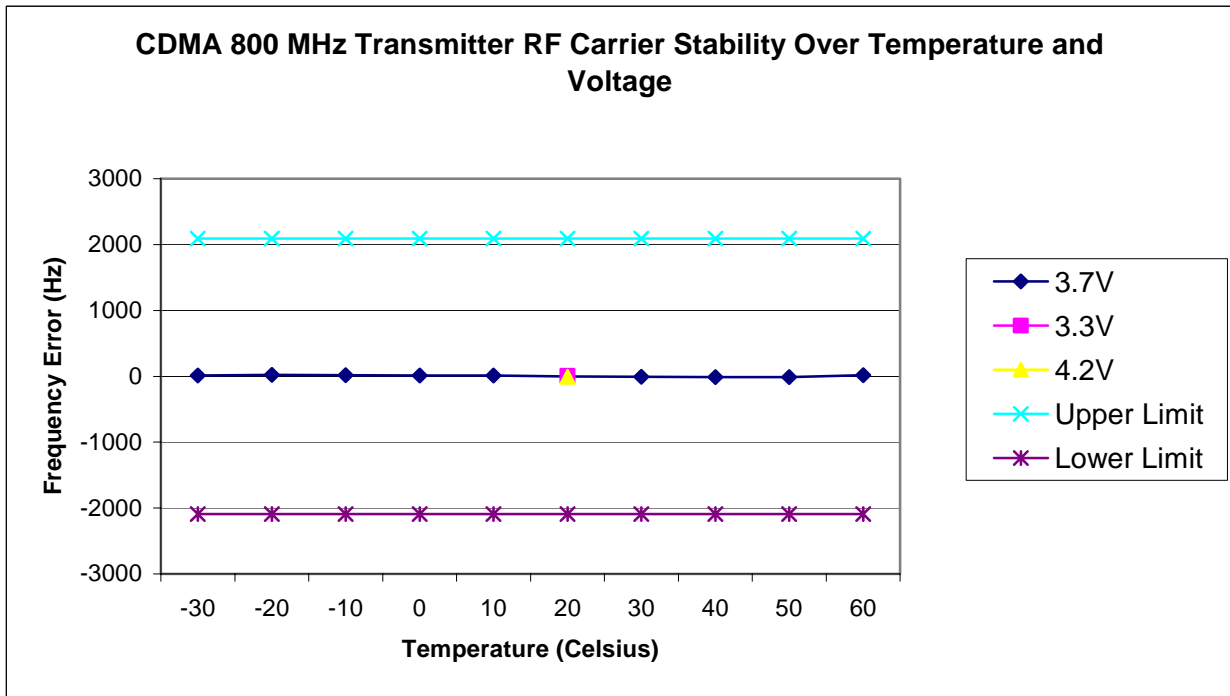



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0


CDMA 1700						
Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)		Result
	3.3V (Battery endpoint)	3.7V	4.2V (115%)	Lower limit	Upper limit	
-30		7.87		-4331	4331	Pass
-20		17.70		-4331	4331	
-10		13.90		-4331	4331	
0		15.61		-4331	4331	
10		11.90		-4331	4331	
20	10.65	5.50	3.84	-4331	4331	
30		5.32		-4331	4331	
40		-8.50		-4331	4331	
50		-8.80		-4331	4331	
60		14.36		-4331	4331	

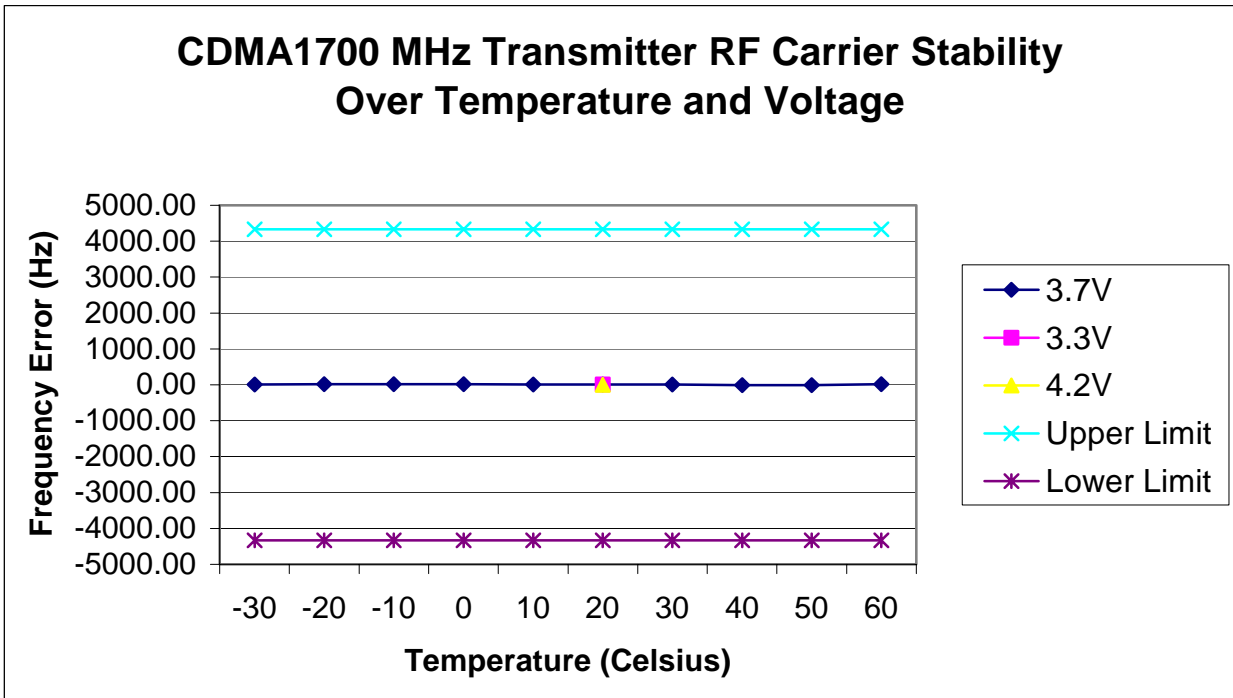



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

CDMA 1900						
Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)		Result
	3.3V (Battery endpoint)	3.7V	4.2V (115%)	Lower limit	Upper limit	
-30		8		-4700	4700	Pass
-20		6.74		-4700	4700	
-10		-18.25		-4700	4700	
0		-12.79		-4700	4700	
10		12.72		-4700	4700	
20		16.02		-5.55	-6.16	
30		6.04		-4700	4700	
40		-10.39		-4700	4700	
50		-6.27		-4700	4700	
60		8.92		-4700	4700	

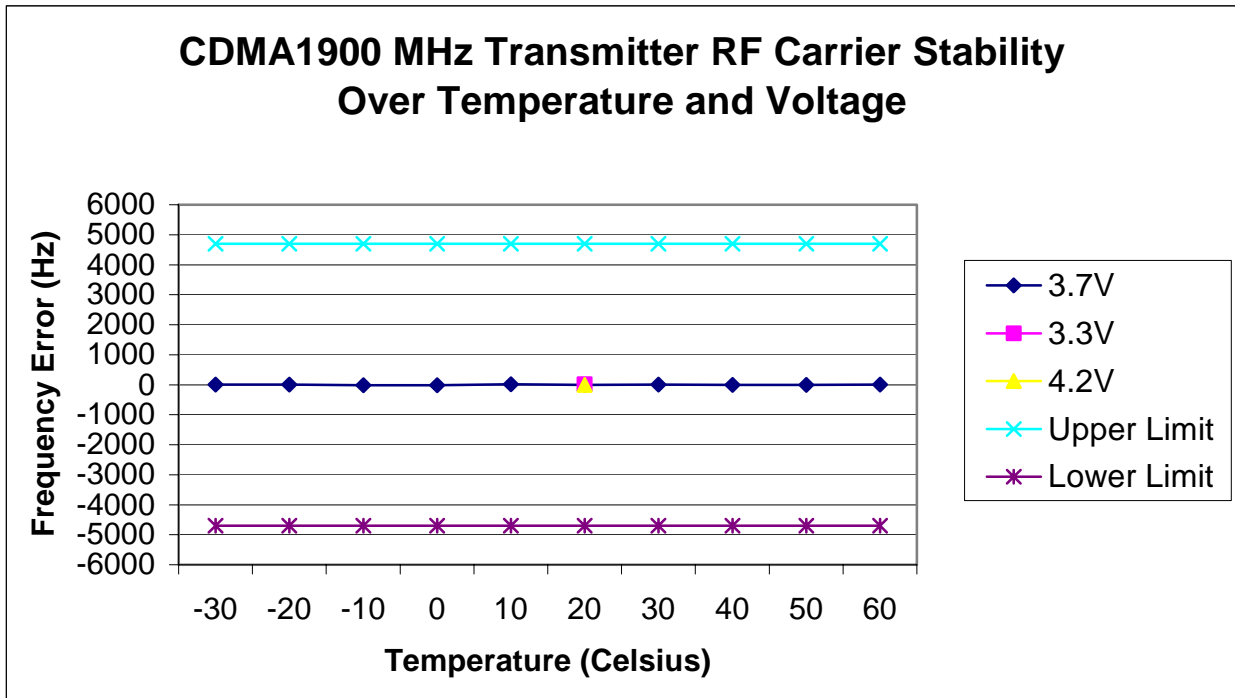

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000-10A-1209-R0

13 EXPOSURE OF HUMANS TO RF FIELDS (SAR)

13.1 Test Configuration and Result

FCC: § 2.1093

IC: RSS102

The SAR test report is attached in a separate attachment.

14 TEST EQUIPMENT

The test equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

Description	Manufacturer	Model No.	Serial No.	Cal Due Date
Power Meter	Giga-tronics	8541C	1831306	03/09/10
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	03/04/10
Spectrum Analyzer	Hewlett Packard	8595E	3911A03899	07/20/11
Wireless Communications Test Set	Agilent	8960	US41070147	05/19/10
Temperature Chamber	Test Equity	ZH2-033-033-H/AC	ZZ9622421	04/13/10