



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

Exhibit 12C: HAC RF Data Plots

CELL-BC0

CDMA 835 Channel 1013

Date: 12/03/2012

Communication System: CDMA_Tri_BC0&10, Frequency: 824.7 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/30/2012
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CELL_1013/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 63.1 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 83.1 V/m; Power Drift = -0.118 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 59.9 M4	Grid 2 62.1 M4	Grid 3 57.8 M4
Grid 4 60.7 M4	Grid 5 63.1 M4	Grid 6 59.1 M4
Grid 7 58.7 M4	Grid 8 59.9 M4	Grid 9 55.4 M4

CELL_1013/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.085 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.072 A/m; Power Drift = 0.000 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.122 M4	Grid 2 0.085 M4	Grid 3 0.055 M4
Grid 4 0.118 M4	Grid 5 0.084 M4	Grid 6 0.056 M4
Grid 7 0.117 M4	Grid 8 0.084 M4	Grid 9 0.057 M4



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

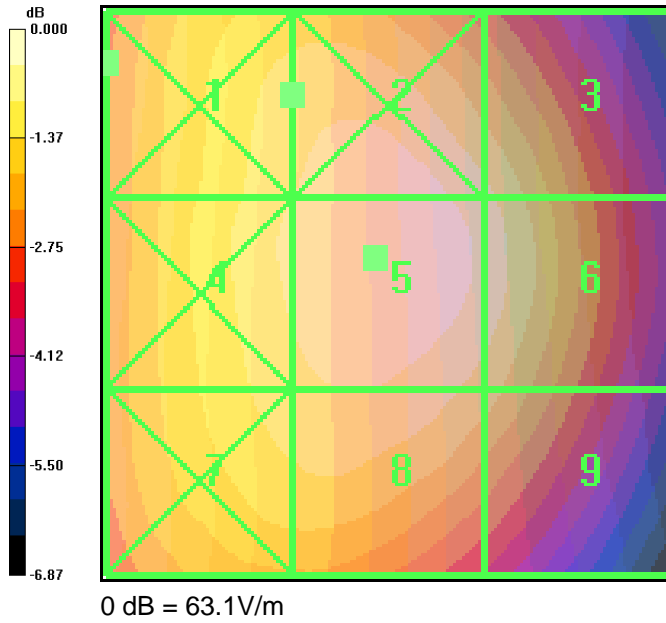

CDMA 835 Channel 384

Date: 12/03/2012

Communication System: CDMA_Tri_BC0&10, Frequency: 836.52 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/30/2012
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CELL_384/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 66.7 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 87.7 V/m; Power Drift = 0.011 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 59.9 M4	Grid 2 63.7 M4	Grid 3 60.2 M4
Grid 4 62.7 M4	Grid 5 66.7 M4	Grid 6 63.8 M4
Grid 7 62.7 M4	Grid 8 66.2 M4	Grid 9 62.1 M4

CELL_384/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.080 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.062 A/m; Power Drift = 0.176 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.107 M4	Grid 2 0.075 M4	Grid 3 0.048 M4
Grid 4 0.105 M4	Grid 5 0.075 M4	Grid 6 0.049 M4
Grid 7 0.112 M4	Grid 8 0.080 M4	Grid 9 0.054 M4



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

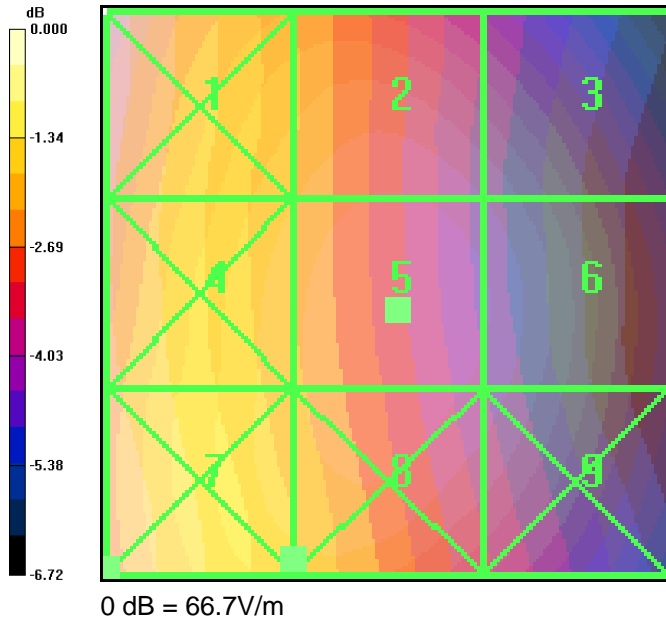

CDMA 835 Channel 777

Date: 12/03/2012

Communication System: CDMA_Tri_BC0&10, Frequency: 848.31 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/30/2012
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CELL_777/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 62.7 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 84.1 V/m; Power Drift = -0.135 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 57.7 M4	Grid 2 61.2 M4	Grid 3 58.1 M4
Grid 4 58.9 M4	Grid 5 62.7 M4	Grid 6 60.5 M4
Grid 7 58.0 M4	Grid 8 60.6 M4	Grid 9 58.1 M4

CELL_777/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.083 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.063 A/m; Power Drift = -0.132 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.107 M4	Grid 2 0.073 M4	Grid 3 0.046 M4
Grid 4 0.107 M4	Grid 5 0.076 M4	Grid 6 0.049 M4
Grid 7 0.115 M4	Grid 8 0.083 M4	Grid 9 0.056 M4




Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

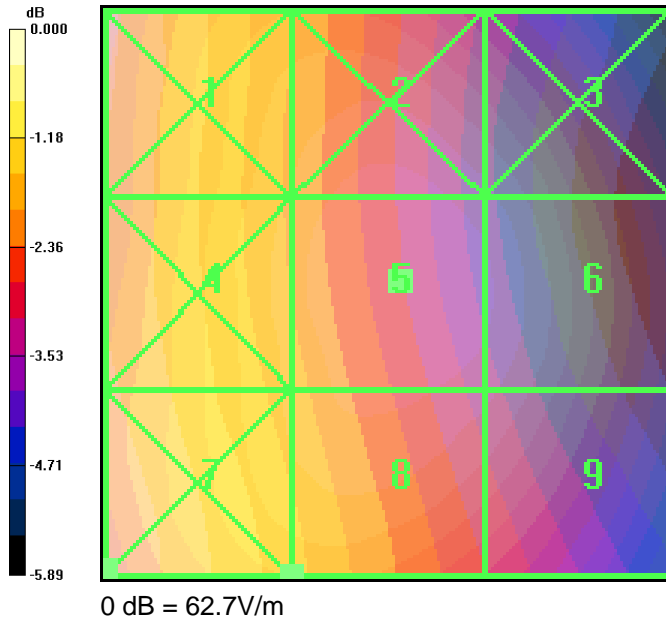



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

CDMA 835 Channel 384 (360) E roll

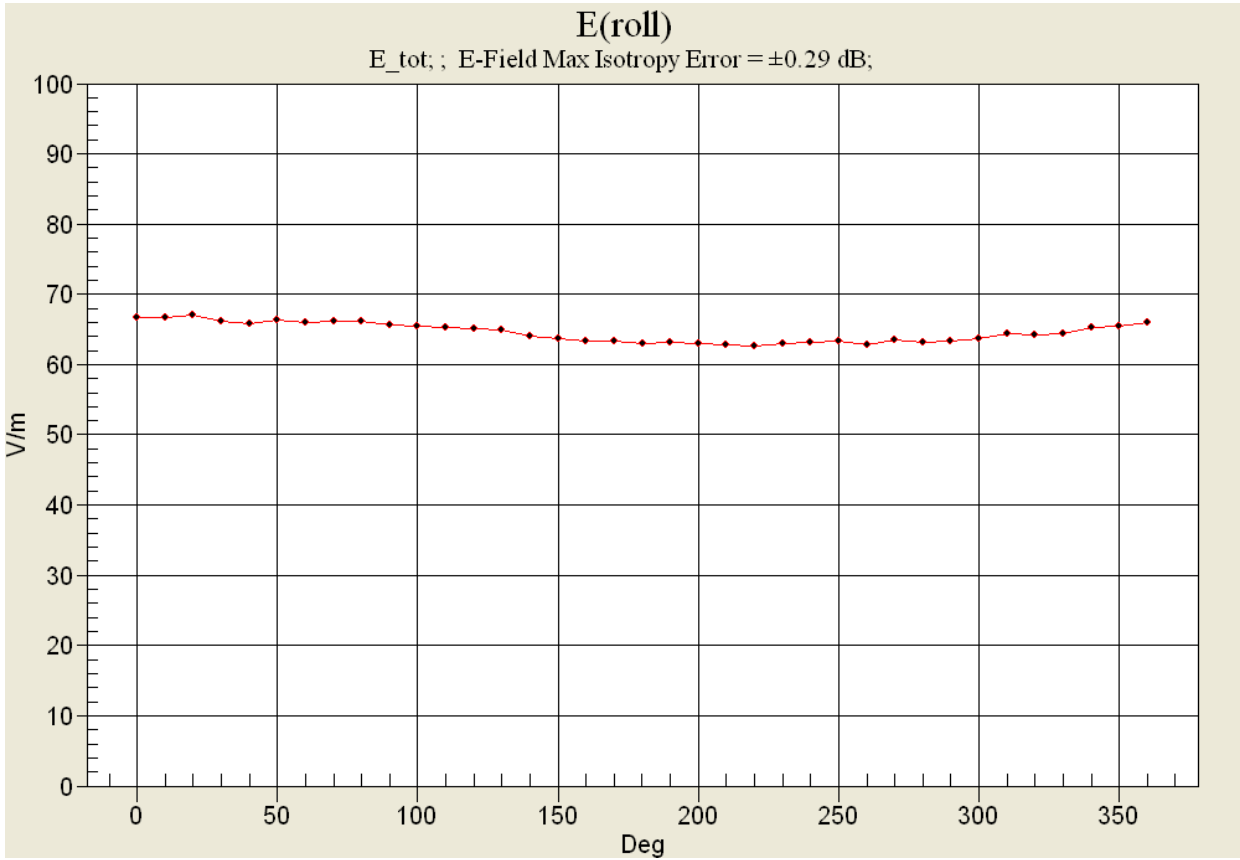



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

CELL-BC10

CDMA 835 Channel 476

Date: 12/03/2012

Communication System: CDMA_Tri_BC0&10, Frequency: 817.9 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/30/2012
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CELL_476/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 62.8 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 81.8 V/m; Power Drift = 0.003 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 60.0 M4	Grid 2 60.8 M4	Grid 3 54.2 M4
Grid 4 61.8 M4	Grid 5 62.8 M4	Grid 6 56.2 M4
Grid 7 61.2 M4	Grid 8 61.3 M4	Grid 9 53.9 M4

CELL_476/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.076 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.063 A/m; Power Drift = 0.194 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.112 M4	Grid 2 0.075 M4	Grid 3 0.046 M4
Grid 4 0.111 M4	Grid 5 0.076 M4	Grid 6 0.046 M4
Grid 7 0.110 M4	Grid 8 0.076 M4	Grid 9 0.049 M4



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

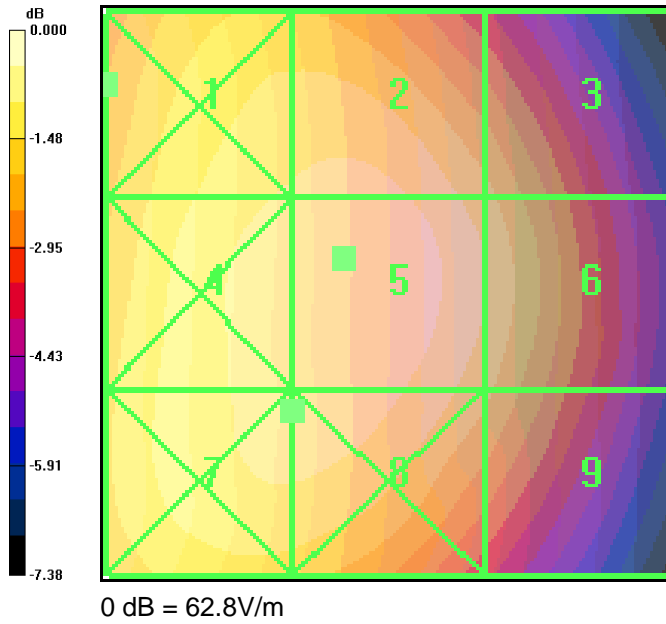

Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

CDMA 835 Channel 580

Date: 12/03/2012

Communication System: CDMA_Tri_BC0&10, Frequency: 820.5 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/30/2012
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CELL_580/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 72.1 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 94.0 V/m; Power Drift = 0.036 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 68.3 M4	Grid 2 70.3 M4	Grid 3 64.2 M4
Grid 4 70.0 M4	Grid 5 72.1 M4	Grid 6 66.6 M4
Grid 7 68.2 M4	Grid 8 69.3 M4	Grid 9 63.3 M4

CELL_580/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.093 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.076 A/m; Power Drift = 0.193 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.134 M4	Grid 2 0.092 M4	Grid 3 0.058 M4
Grid 4 0.131 M4	Grid 5 0.093 M4	Grid 6 0.059 M4
Grid 7 0.130 M4	Grid 8 0.091 M4	Grid 9 0.059 M4



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

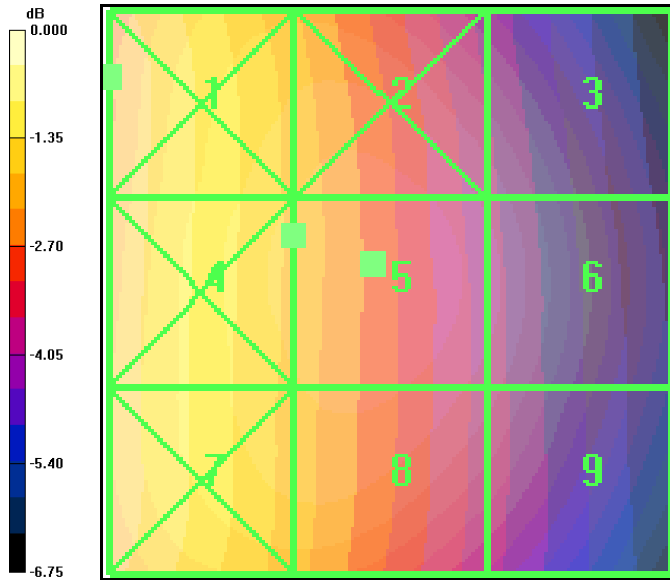

0 dB = 72.1V/m

CDMA 835 Channel 684

Date: 12/03/2012

Communication System: CDMA_Tri_BC0&10, Frequency: 823.1 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/30/2012
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CELL_684/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 67.1 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 88.9 V/m; Power Drift = -0.102 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 63.7 M4	Grid 2 66.1 M4	Grid 3 61.1 M4
Grid 4 64.6 M4	Grid 5 67.1 M4	Grid 6 62.7 M4
Grid 7 62.1 M4	Grid 8 63.7 M4	Grid 9 58.8 M4

CELL_684/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.092 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.079 A/m; Power Drift = 0.130 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.132 M4	Grid 2 0.092 M4	Grid 3 0.061 M4
Grid 4 0.130 M4	Grid 5 0.092 M4	Grid 6 0.062 M4
Grid 7 0.127 M4	Grid 8 0.092 M4	Grid 9 0.062 M4




Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

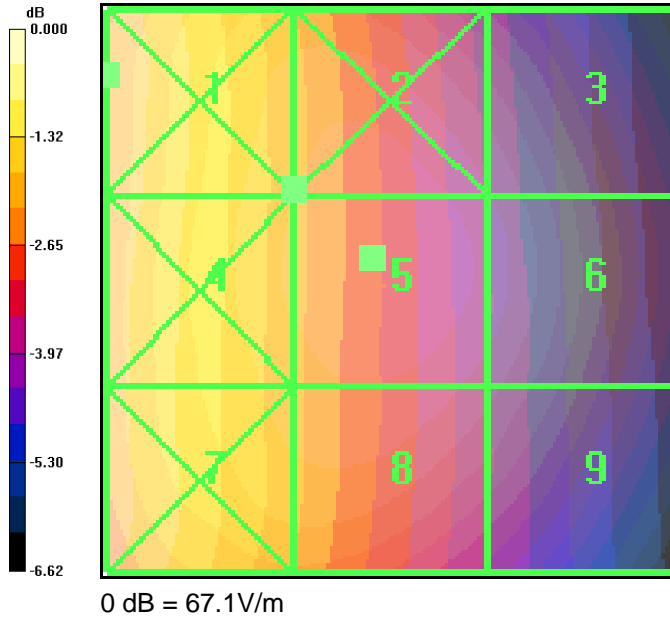



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

CDMA 835 Channel 580 (360) E roll

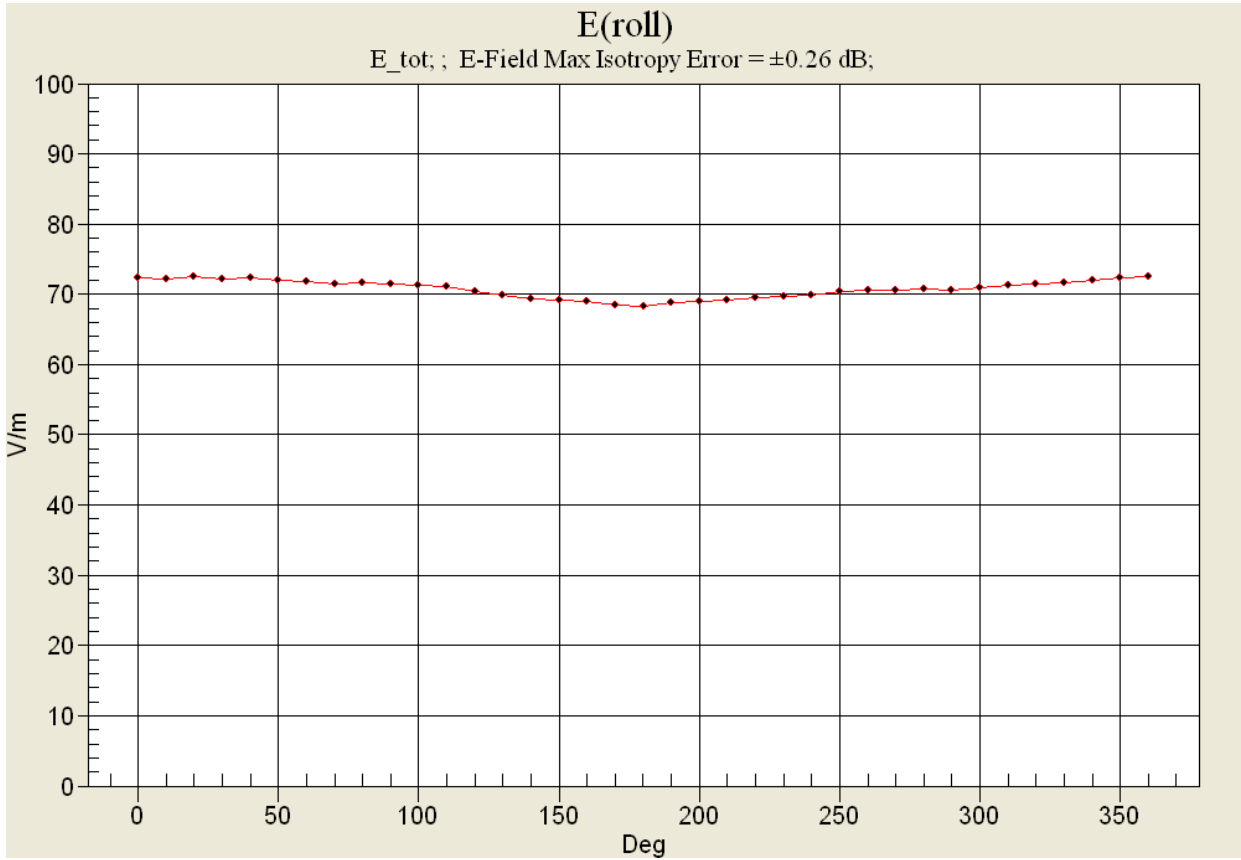



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

PCS

CDMA 1900 Channel 25

Date: 12/03/2012

 Communication System: CDMA-1900
 Frequency: 1851.25 MHz
 Duty Cycle: 1:1

 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

 Probe: ER3DV6 - SN2341
 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012
 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/30/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C, Liquid T = 22.0 °C

PCS_25/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 25.8 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 34.7 V/m; Power Drift = -0.004 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 18.3 M4	Grid 2 21.6 M4	Grid 3 21.3 M4
Grid 4 23.1 M4	Grid 5 25.8 M4	Grid 6 24.4 M4
Grid 7 23.1 M4	Grid 8 25.9 M4	Grid 9 24.5 M4

PCS_25/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.085 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.064 A/m; Power Drift = 0.140 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.096 M4	Grid 2 0.085 M4	Grid 3 0.066 M4
Grid 4 0.091 M4	Grid 5 0.077 M4	Grid 6 0.059 M4
Grid 7 0.089 M4	Grid 8 0.074 M4	Grid 9 0.053 M4



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

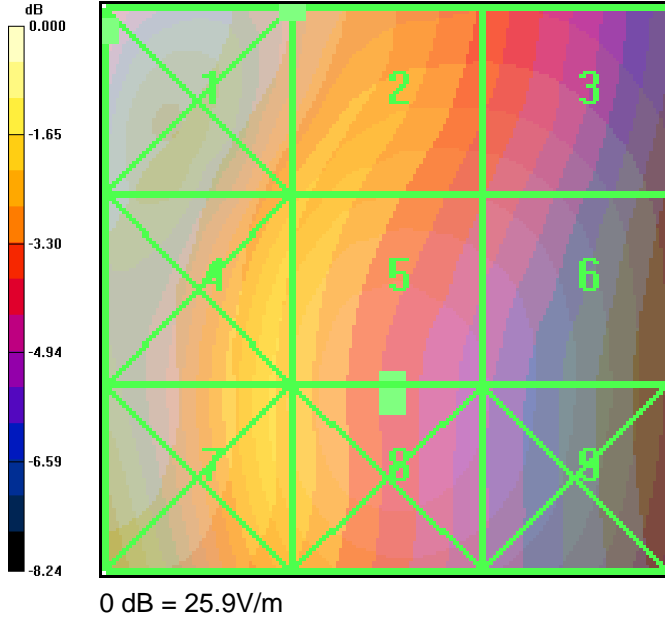

Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

CDMA 1900 Channel 600

Date: 12/03/2012

Communication System: CDMA-1900 Communication System: CDMA_Tri_BC0&10, Frequency: 1880 MHz, Duty Cycle: 1:1

 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/30/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS_600/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 21.7 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 25.5 V/m; Power Drift = -0.080 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 21.9 M4	Grid 2 21.0 M4	Grid 3 18.7 M4
Grid 4 17.9 M4	Grid 5 21.4 M4	Grid 6 21.4 M4
Grid 7 18.2 M4	Grid 8 21.7 M4	Grid 9 21.7 M4

PCS_600/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.085 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.072 A/m; Power Drift = 0.134 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.096 M4	Grid 2 0.085 M4	Grid 3 0.075 M4
Grid 4 0.094 M4	Grid 5 0.084 M4	Grid 6 0.070 M4
Grid 7 0.085 M4	Grid 8 0.071 M4	Grid 9 0.055 M4



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

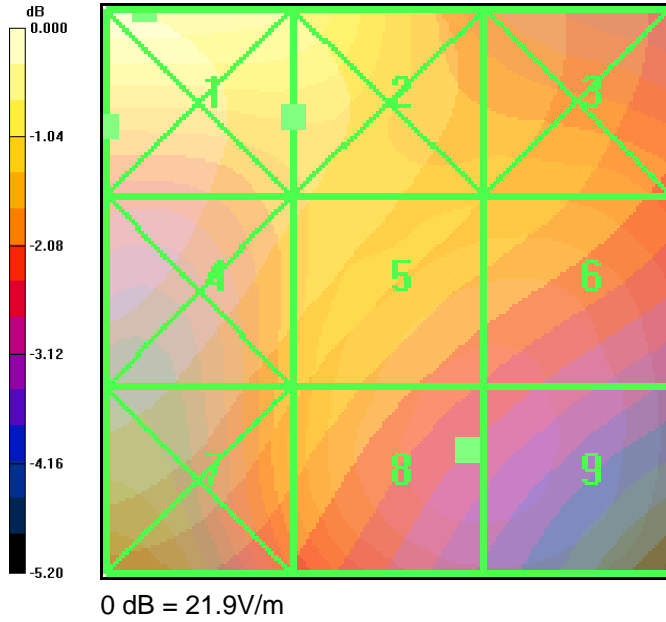

CDMA 1900 Channel 1175

Date: 12/03/2012

Communication System: CDMA-1900
 Frequency: 1908.75 MHz
 Duty Cycle: 1:1

Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341
 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 9/14/2012
 Calibrated: 2/17/2012

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/30/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS_1175/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 20.1 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 25.6 V/m; Power Drift = 0.148 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 24.2 M4	Grid 2 24.2 M4	Grid 3 21.7 M4
Grid 4 18.3 M4	Grid 5 20.1 M4	Grid 6 20.1 M4
Grid 7 17.3 M4	Grid 8 19.2 M4	Grid 9 19.1 M4

PCS_1175/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.095 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.082 A/m; Power Drift = 0.179 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.121 M4	Grid 2 0.095 M4	Grid 3 0.069 M4
Grid 4 0.115 M4	Grid 5 0.094 M4	Grid 6 0.069 M4
Grid 7 0.103 M4	Grid 8 0.089 M4	Grid 9 0.065 M4



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

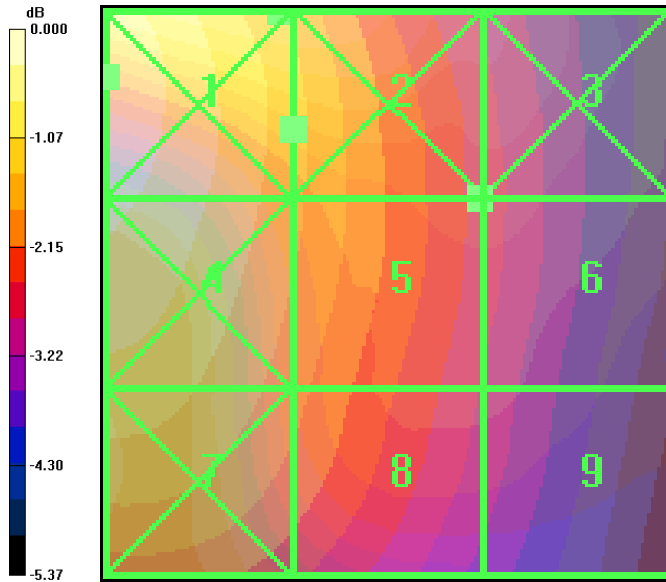

0 dB = 24.2V/m



Applicant:	Kyocera
FCC ID:	V65S2151
Report #:	CT- S2151-20RFC-1112-R0

CDMA 1900 Channel 25 (360) E roll

