

| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

Exhibit 12 Appendix C: HAC RF Data Plot

CELL BC-10

CDMA 800 Channel 476

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 817.9 MHz

Frequency: 839.28 MHz, Duty Cycle: 1:1

Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

CELL_476/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 97.5 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 122.8 V/m; Power Drift = -0.059 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 86.0 M4 | Grid 2 94.5 M4 | Grid 3 90.4 M4 |
| Grid 4 89.7 M4 | Grid 5 97.5 M4 | Grid 6 94.5 M4 |
| Grid 7 89.7 M4 | Grid 8 95.9 M4 | Grid 9 93.0 M4 |

CELL_476/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.163 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.126 A/m; Power Drift = 0.078 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.205 M4 | Grid 2 0.147 M4 | Grid 3 0.097 M4 |
| Grid 4 0.207 M4 | Grid 5 0.152 M4 | Grid 6 0.100 M4 |
| Grid 7 0.216 M4 | Grid 8 0.163 M4 | Grid 9 0.106 M4 |



| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

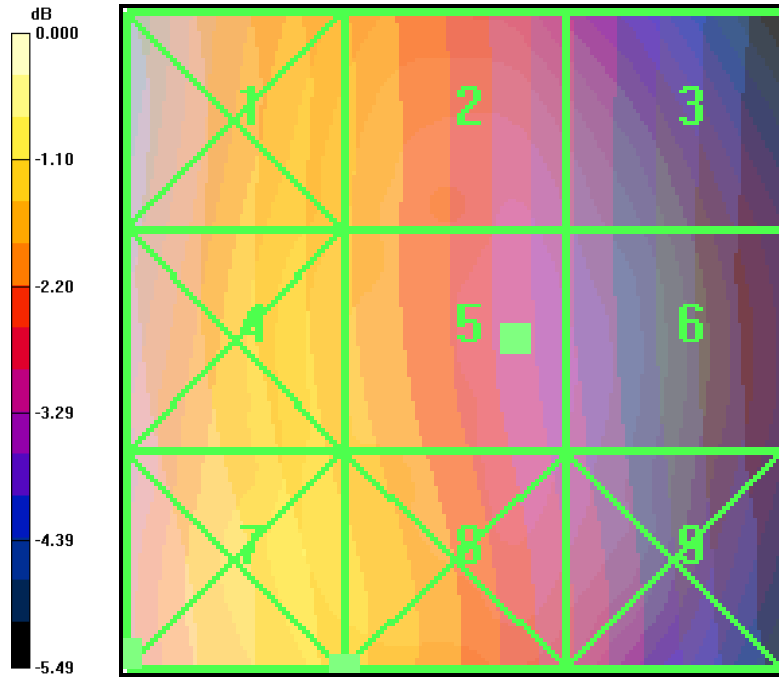

0 dB = 97.5V/m

CDMA 800 Channel 580

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 820.5 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 1/25/2011

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527 Electronics: DAE4 Sn603, Calibrated: 7/8/2010 Calibrated: 9/20/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

CELL_580/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 87.9 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 111.4 V/m; Power Drift = 0.048 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 77.3 M4 | Grid 2 84.8 M4 | Grid 3 82.2 M4 |
| Grid 4 80.7 M4 | Grid 5 87.9 M4 | Grid 6 85.6 M4 |
| Grid 7 80.7 M4 | Grid 8 86.5 M4 | Grid 9 83.5 M4 |

CELL_580/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.160 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.117 A/m; Power Drift = 0.022 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.195 M4 | Grid 2 0.144 M4 | Grid 3 0.094 M4 |
| Grid 4 0.200 M4 | Grid 5 0.151 M4 | Grid 6 0.099 M4 |
| Grid 7 0.208 M4 | Grid 8 0.160 M4 | Grid 9 0.104 M4 |



| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

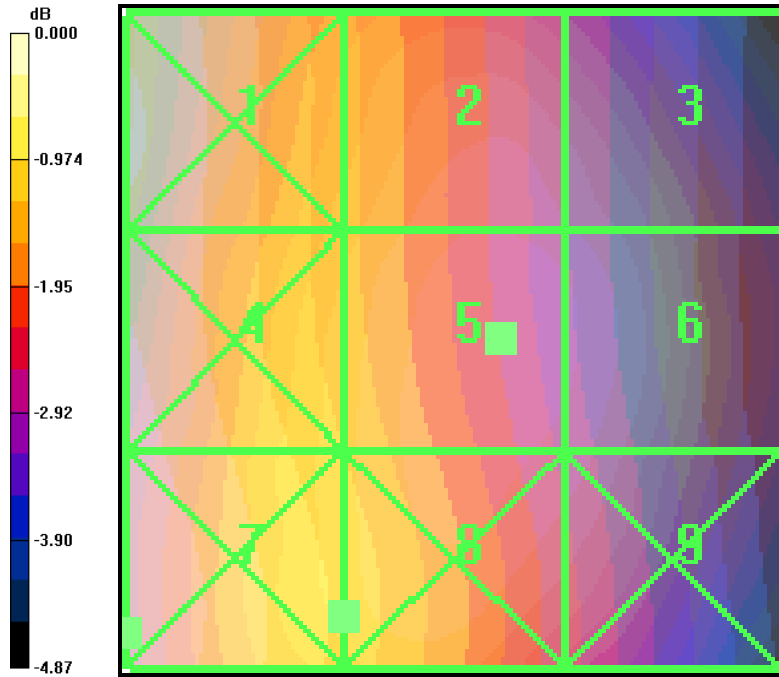

0 dB = 87.9V/m

CDMA 800 Channel 684

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 823.1 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 1/25/2011

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527 Electronics: DAE4 Sn603, Calibrated: 7/8/2010 Calibrated: 9/20/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

CELL_684/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 87.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 110.8 V/m; Power Drift = -0.159 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 77.0 M4 | Grid 2 84.4 M4 | Grid 3 82.2 M4 |
| Grid 4 79.8 M4 | Grid 5 87.3 M4 | Grid 6 84.7 M4 |
| Grid 7 79.9 M4 | Grid 8 85.9 M4 | Grid 9 82.7 M4 |

CELL_684/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.164 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.125 A/m; Power Drift = 0.055 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.196 M4 | Grid 2 0.147 M4 | Grid 3 0.096 M4 |
| Grid 4 0.201 M4 | Grid 5 0.153 M4 | Grid 6 0.100 M4 |
| Grid 7 0.210 M4 | Grid 8 0.164 M4 | Grid 9 0.105 M4 |




| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

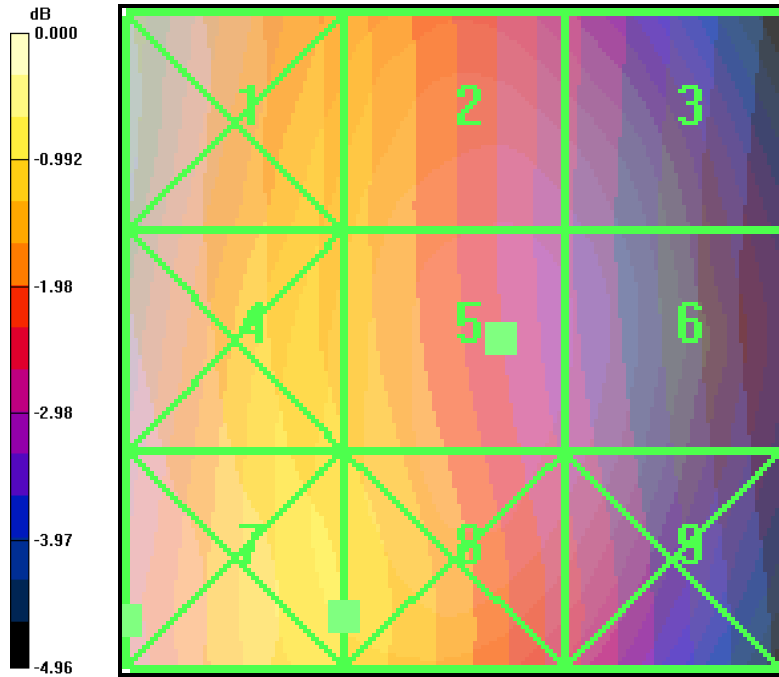

0 dB = 87.3V/m

CDMA 800 Channel 476 (360) E roll

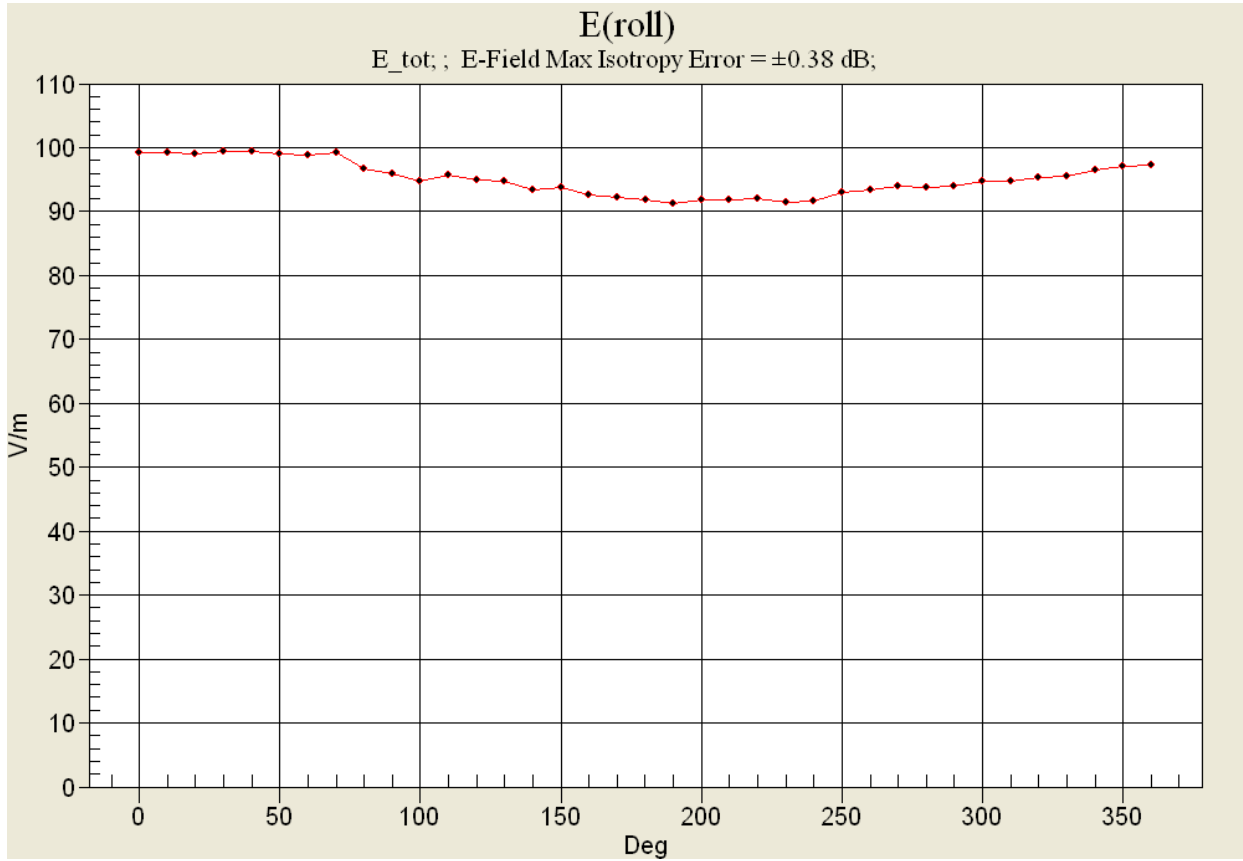

| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

CELL BC-0

CDMA 800 Channel 1013

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 824.7 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 1/25/2011

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527 Electronics: DAE4 Sn603, Calibrated: 7/8/2010 Calibrated: 9/20/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

CELL_1013/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 98.4 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 123.6 V/m; Power Drift = 0.130 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 85.5 M4 | Grid 2 95.5 M4 | Grid 3 94.5 M4 |
| Grid 4 88.3 M4 | Grid 5 98.4 M4 | Grid 6 97.0 M4 |
| Grid 7 89.0 M4 | Grid 8 97.0 M4 | Grid 9 95.4 M4 |

CELL_1013/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.163 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.127 A/m; Power Drift = 0.062 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.201 M4 | Grid 2 0.147 M4 | Grid 3 0.098 M4 |
| Grid 4 0.201 M4 | Grid 5 0.154 M4 | Grid 6 0.102 M4 |
| Grid 7 0.209 M4 | Grid 8 0.163 M4 | Grid 9 0.106 M4 |



| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

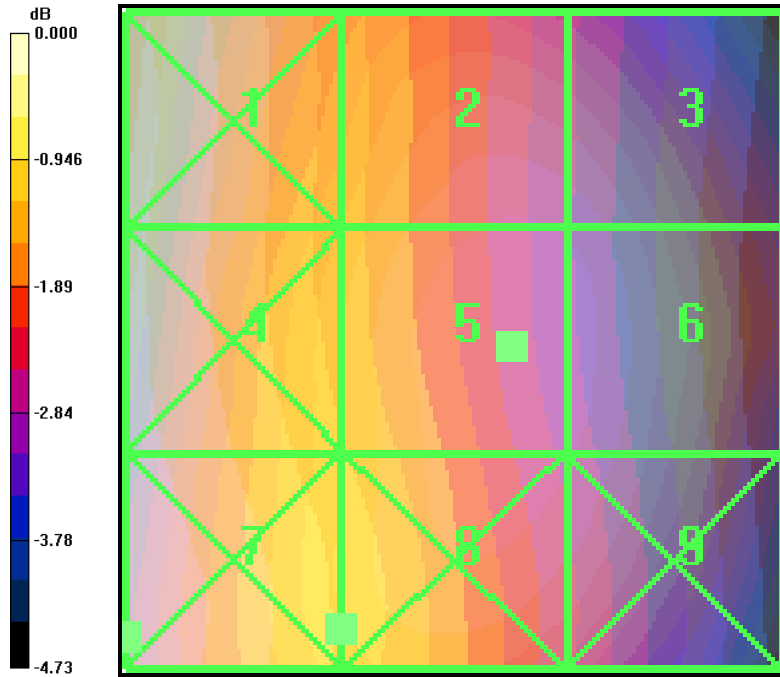

CDMA 800 Channel 384

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 836.52 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

CELL_384/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 97.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 120.0 V/m; Power Drift = -0.189 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 76.2 M4 | Grid 2 91.2 M4 | Grid 3 91.1 M4 |
| Grid 4 83.6 M4 | Grid 5 97.3 M4 | Grid 6 96.7 M4 |
| Grid 7 85.9 M4 | Grid 8 97.4 M4 | Grid 9 96.7 M4 |

CELL_384/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.193 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.145 A/m; Power Drift = -0.027 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.218 M4 | Grid 2 0.166 M4 | Grid 3 0.118 M4 |
| Grid 4 0.224 M4 | Grid 5 0.177 M4 | Grid 6 0.118 M4 |
| Grid 7 0.241 M4 | Grid 8 0.193 M4 | Grid 9 0.129 M4 |



| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

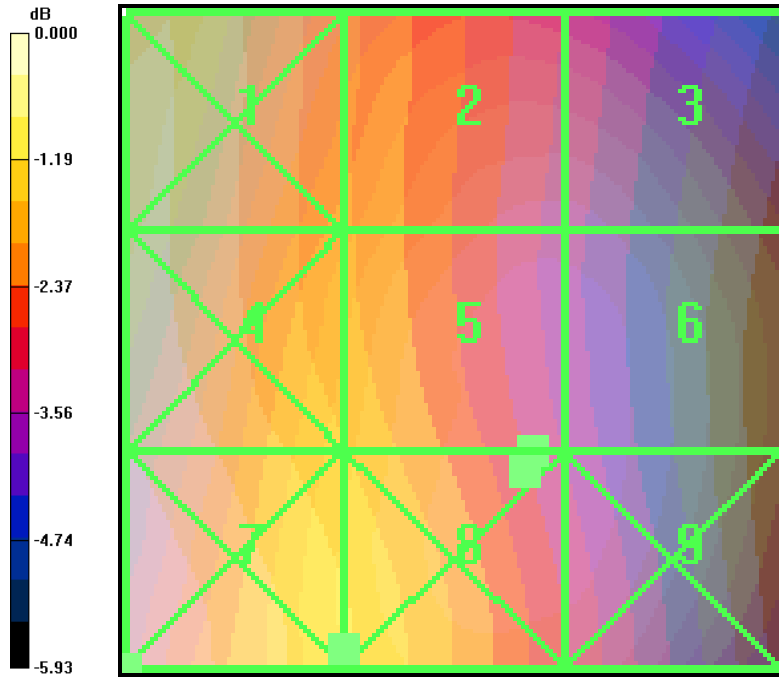

0 dB = 97.4V/m

CDMA 800 Channel 777

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 848.31 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

CELL_777/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 76.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 93.7 V/m; Power Drift = 0.020 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 66.8 M4 | Grid 2 73.6 M4 | Grid 3 73.6 M4 |
| Grid 4 68.5 M4 | Grid 5 76.3 M4 | Grid 6 76.2 M4 |
| Grid 7 68.8 M4 | Grid 8 75.6 M4 | Grid 9 75.2 M4 |

CELL_777/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.151 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.104 A/m; Power Drift = 0.155 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.154 M4 | Grid 2 0.115 M4 | Grid 3 0.077 M4 |
| Grid 4 0.164 M4 | Grid 5 0.129 M4 | Grid 6 0.083 M4 |
| Grid 7 0.182 M4 | Grid 8 0.151 M4 | Grid 9 0.098 M4 |




| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

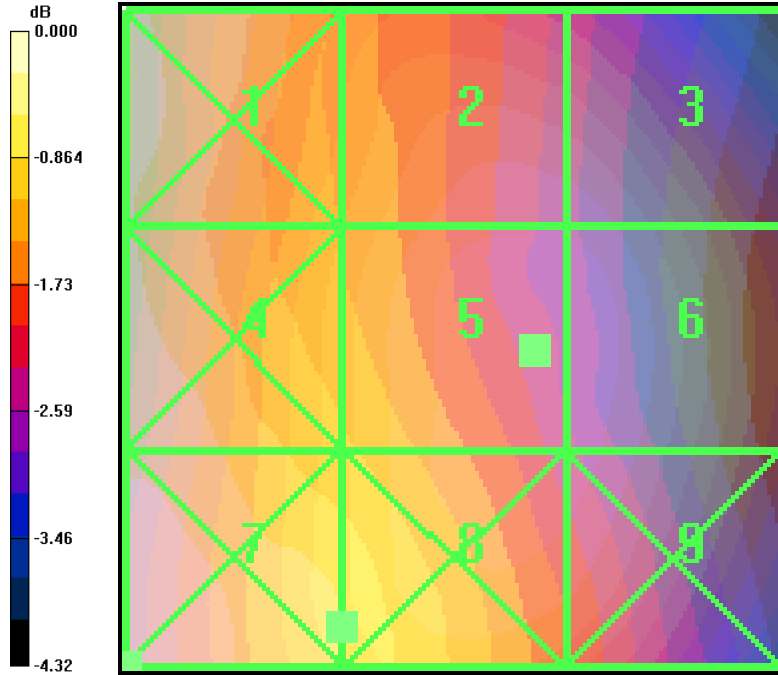

0 dB = 76.3V/m

CDMA 800 Channel 384 (360) E roll

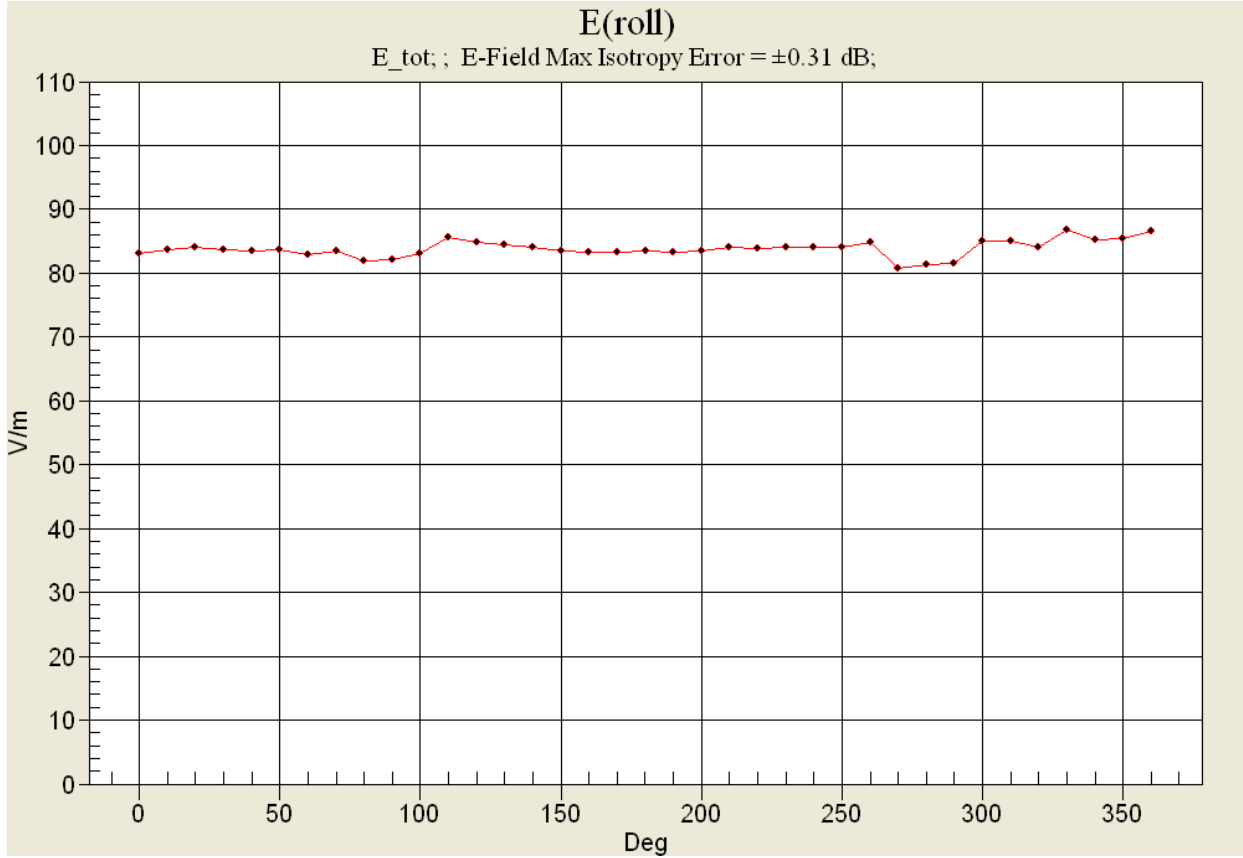



| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

PCS

CDMA 1900 Channel 25

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 1850 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

PCS_25/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 34.6 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 38.3 V/m; Power Drift = 0.064 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 38.3 M4 | Grid 2 32.0 M4 | Grid 3 31.9 M4 |
| Grid 4 35.8 M4 | Grid 5 33.8 M4 | Grid 6 34.0 M4 |
| Grid 7 34.1 M4 | Grid 8 34.3 M4 | Grid 9 34.6 M4 |

PCS_25/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.123 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.117 A/m; Power Drift = 0.036 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.121 M4 | Grid 2 0.112 M4 | Grid 3 0.091 M4 |
| Grid 4 0.126 M4 | Grid 5 0.123 M4 | Grid 6 0.101 M4 |
| Grid 7 0.137 M4 | Grid 8 0.133 M4 | Grid 9 0.107 M4 |



| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

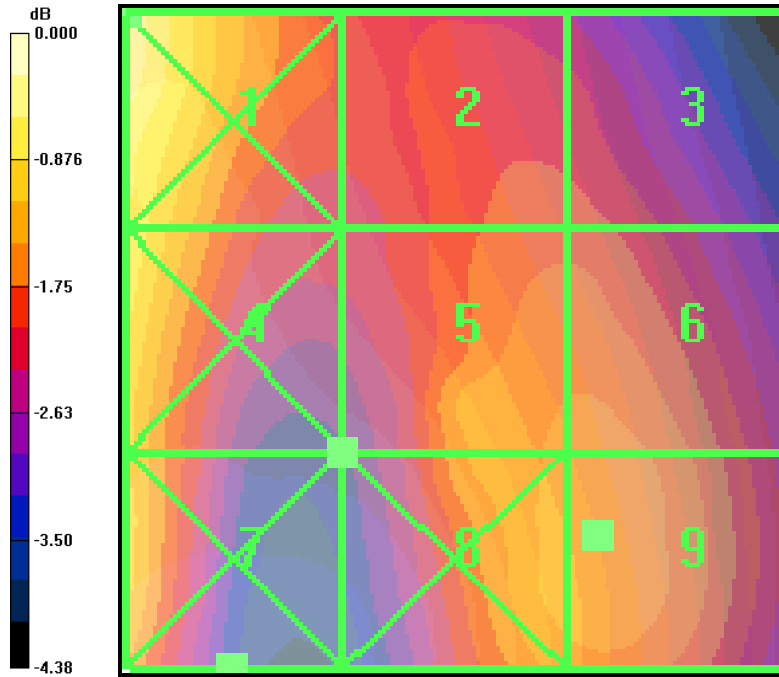

0 dB = 38.3V/m

CDMA 1900 Channel 600

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 1880 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

PCS_600/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 37.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 44.2 V/m; Power Drift = -0.003 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 32.1 M4 | Grid 2 36.1 M4 | Grid 3 36.1 M4 |
| Grid 4 31.6 M4 | Grid 5 37.3 M4 | Grid 6 37.2 M4 |
| Grid 7 34.0 M4 | Grid 8 36.6 M4 | Grid 9 36.5 M4 |

PCS_600/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.126 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.115 A/m; Power Drift = -0.168 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.143 M4 | Grid 2 0.126 M4 | Grid 3 0.086 M4 |
| Grid 4 0.140 M4 | Grid 5 0.125 M4 | Grid 6 0.086 M4 |
| Grid 7 0.134 M4 | Grid 8 0.120 M4 | Grid 9 0.090 M4 |



| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

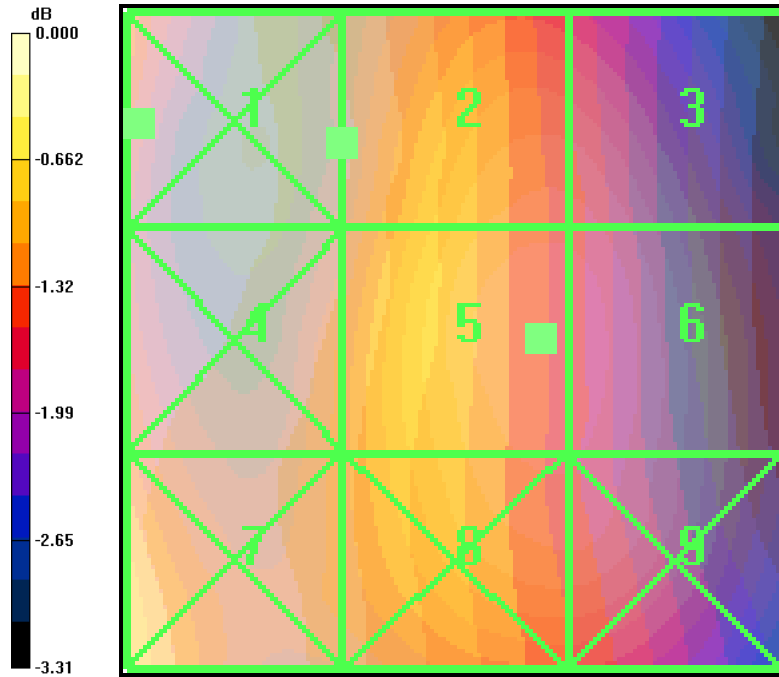

0 dB = 37.3V/m

CDMA 1900 Channel 1175

Date: 07/01/2011

Communication System: CDMA_Tri_BC0&10, Frequency: 1910 MHz, Duty Cycle: 1:1
 Medium: Air, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010
 Measurement SW: DASY4, V4.7 Build 80
 Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

PCS_1175/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 40.7 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 43.5 V/m; Power Drift = -0.099 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|----------------|----------------|----------------|
| Grid 1 | Grid 2 | Grid 3 |
| 37.1 M4 | 35.5 M4 | 35.7 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 33.9 M4 | 40.7 M4 | 40.7 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 36.0 M4 | 40.8 M4 | 40.8 M4 |

PCS_1175/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.136 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.123 A/m; Power Drift = 0.104 dB


Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|-----------------|-----------------|-----------------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.136 M4 | 0.133 M4 | 0.108 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.135 M4 | 0.133 M4 | 0.107 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.141 M4 | 0.128 M4 | 0.101 M4 |



| | |
|------------|-------------------------|
| Applicant: | Kyocera |
| FCC ID: | V65S3015 |
| Report #: | CT- S3015-20RFC-0711-R0 |

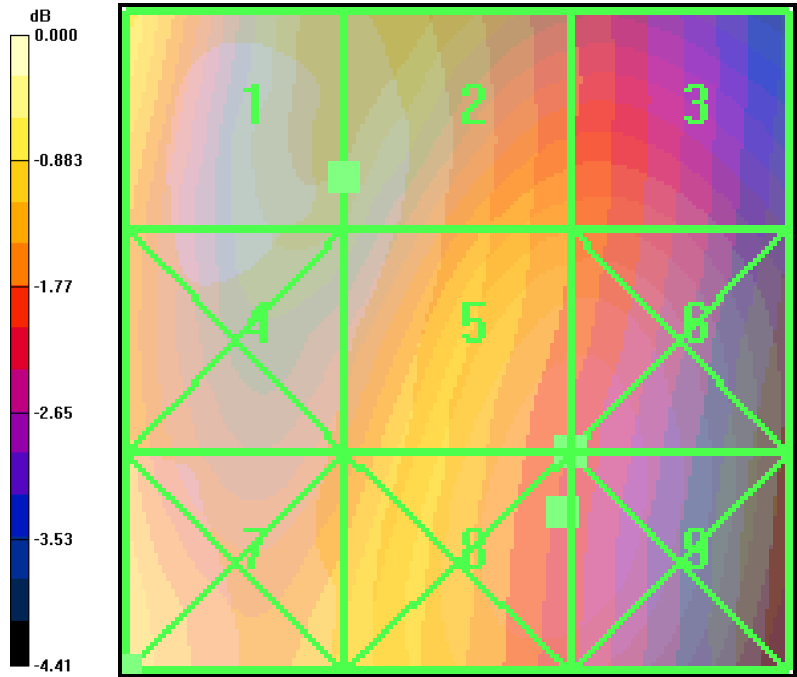

0 dB = 40.8V/m

CDMA 1900 Channel 1175 (360) E roll

