

CDMA 800 Channel 1013 Bluetooth OFF

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

CELL_1013/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 75.6 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 94.4 V/m; Power Drift = -0.163 dB

Peak E-field in V/m

Grid 1 60.9 M4	Grid 2 74.0 M4	Grid 3 73.7 M4
Grid 4 59.4 M4	Grid 5 75.6 M4	Grid 6 75.6 M4
Grid 7 55.0 M4	Grid 8 67.7 M4	Grid 9 67.8 M4

CELL_1013/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.157 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.117 A/m; Power Drift = -0.181 dB

Peak H-field in A/m

Grid 1 0.180 M4	Grid 2 0.143 M4	Grid 3 0.089 M4
Grid 4 0.168 M4	Grid 5 0.134 M4	Grid 6 0.087 M4
Grid 7 0.157 M4	Grid 8 0.131 M4	Grid 9 0.081 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

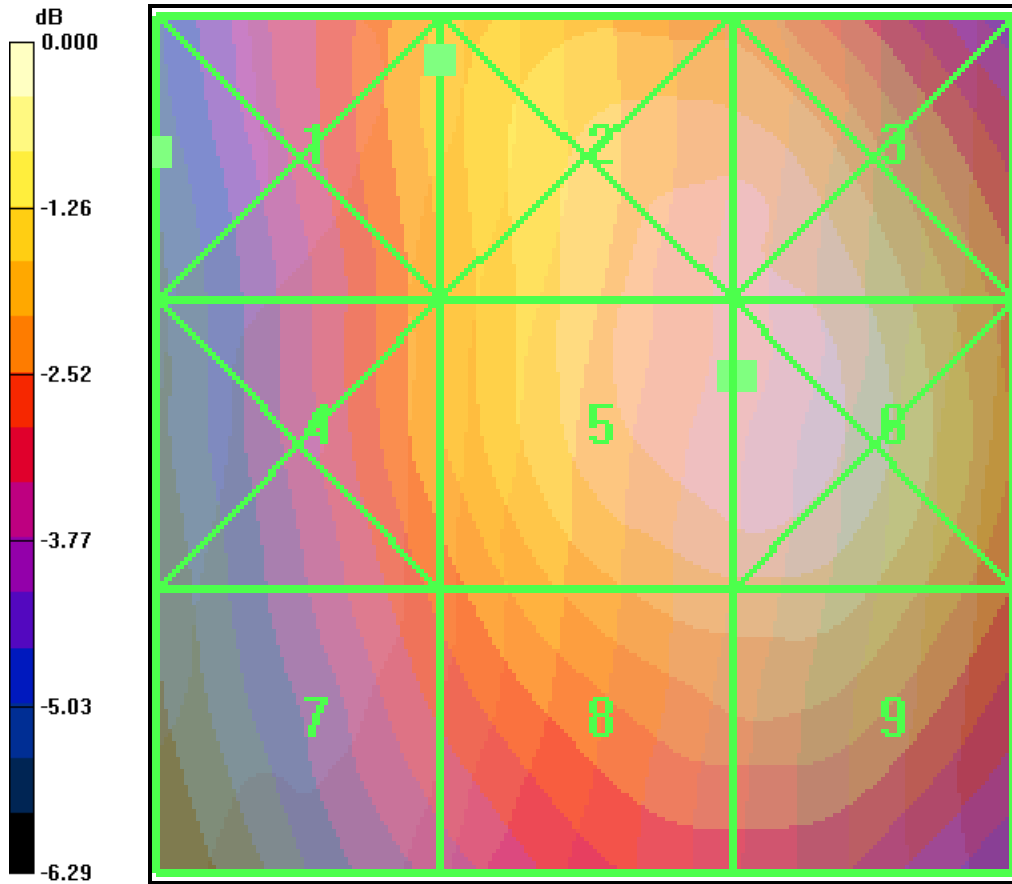

0 dB = 75.6V/m

CDMA 800 Channel 383 Bluetooth OFF

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

CELL_383/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 81.6 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 101.7 V/m; Power Drift = 0.124 dB

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
67.0 M4	80.5 M4	80.4 M4
Grid 4	Grid 5	Grid 6
65.0 M4	81.6 M4	81.6 M4
Grid 7	Grid 8	Grid 9
59.0 M4	72.7 M4	72.9 M4

CELL_383/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.145 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.111 A/m; Power Drift = 0.013 dB

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.175 M4	0.145 M4	0.085 M4
Grid 4	Grid 5	Grid 6
0.159 M4	0.133 M4	0.084 M4
Grid 7	Grid 8	Grid 9
0.149 M4	0.127 M4	0.080 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

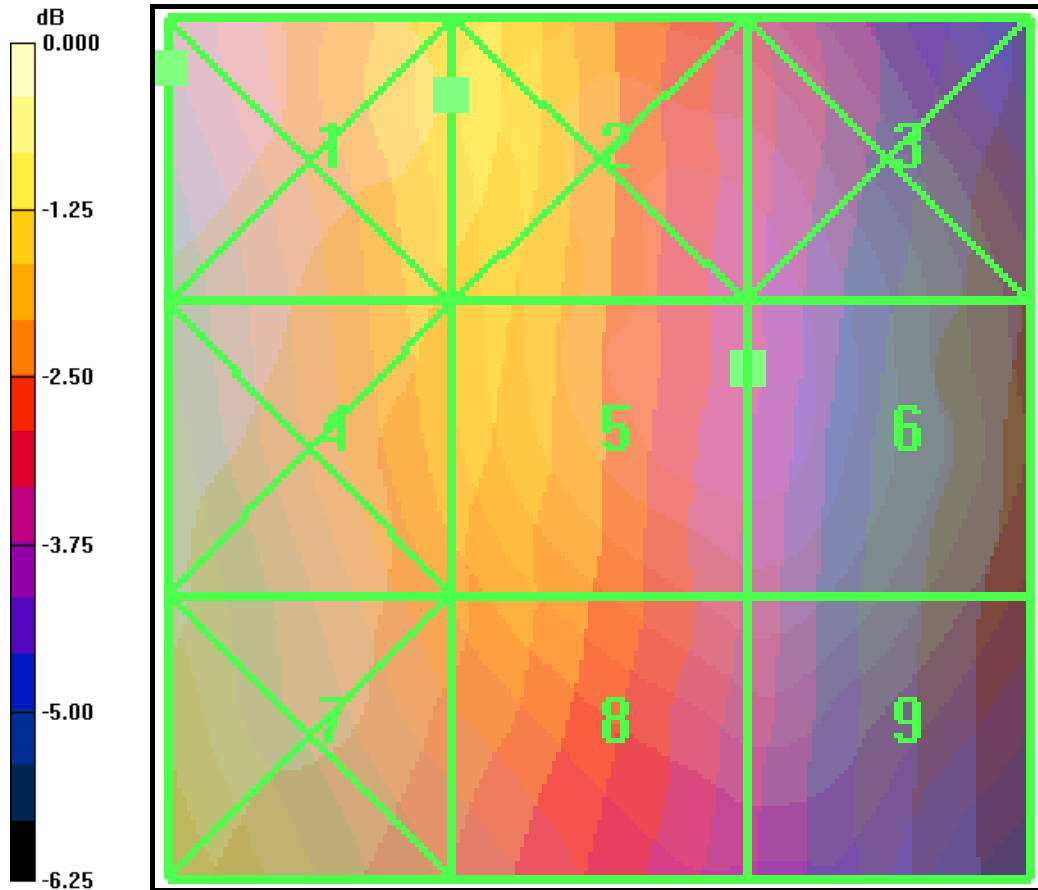

0 dB = 81.6V/m

Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

CDMA 800 Channel 777 Bluetooth OFF

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

CELL_777/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 72.7 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 90.5 V/m; Power Drift = 0.108 dB

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
59.1 M4	71.7 M4	71.5 M4
Grid 4	Grid 5	Grid 6
58.3 M4	72.7 M4	72.7 M4
Grid 7	Grid 8	Grid 9
54.7 M4	66.1 M4	66.1 M4

CELL_777/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.143 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.113 A/m; Power Drift = -0.086 dB

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.176 M4	0.143 M4	0.092 M4
Grid 4	Grid 5	Grid 6
0.163 M4	0.128 M4	0.087 M4
Grid 7	Grid 8	Grid 9
0.149 M4	0.122 M4	0.078 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

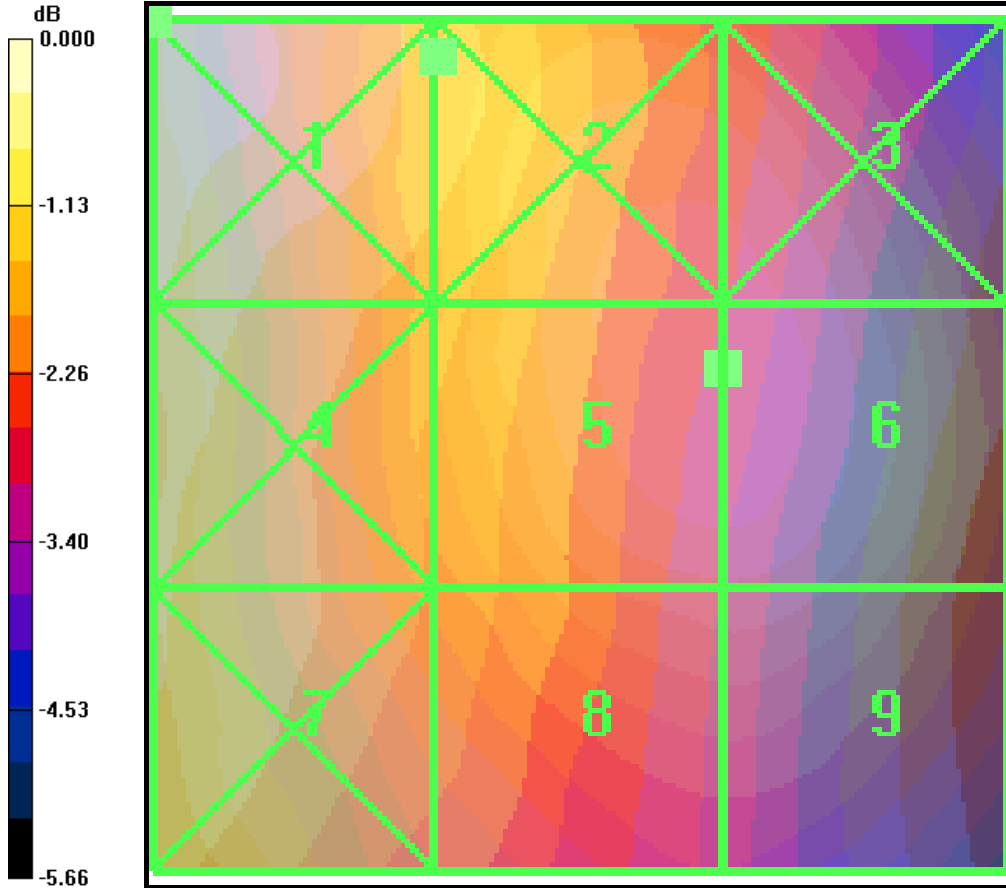

0 dB = 72.7V/m

Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

CDMA 800Channel 1013 (360Degrees) Bluetooth OFF

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

CELL_1013 (360 degree)/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 73.1 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 93.7 V/m; Power Drift = 0.051 dB

Peak E-field in V/m

Grid 1 60.5 M4	Grid 2 72.4 M4	Grid 3 72.3 M4
Grid 4 59.6 M4	Grid 5 73.1 M4	Grid 6 72.5 M4
Grid 7 56.3 M4	Grid 8 67.2 M4	Grid 9 67.5 M4

CELL_1013 (360 degree)/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.153 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.120 A/m; Power Drift = 0.006 dB

Peak H-field in A/m

Grid 1 0.191 M4	Grid 2 0.153 M4	Grid 3 0.100 M4
Grid 4 0.178 M4	Grid 5 0.138 M4	Grid 6 0.097 M4
Grid 7 0.162 M4	Grid 8 0.128 M4	Grid 9 0.087 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

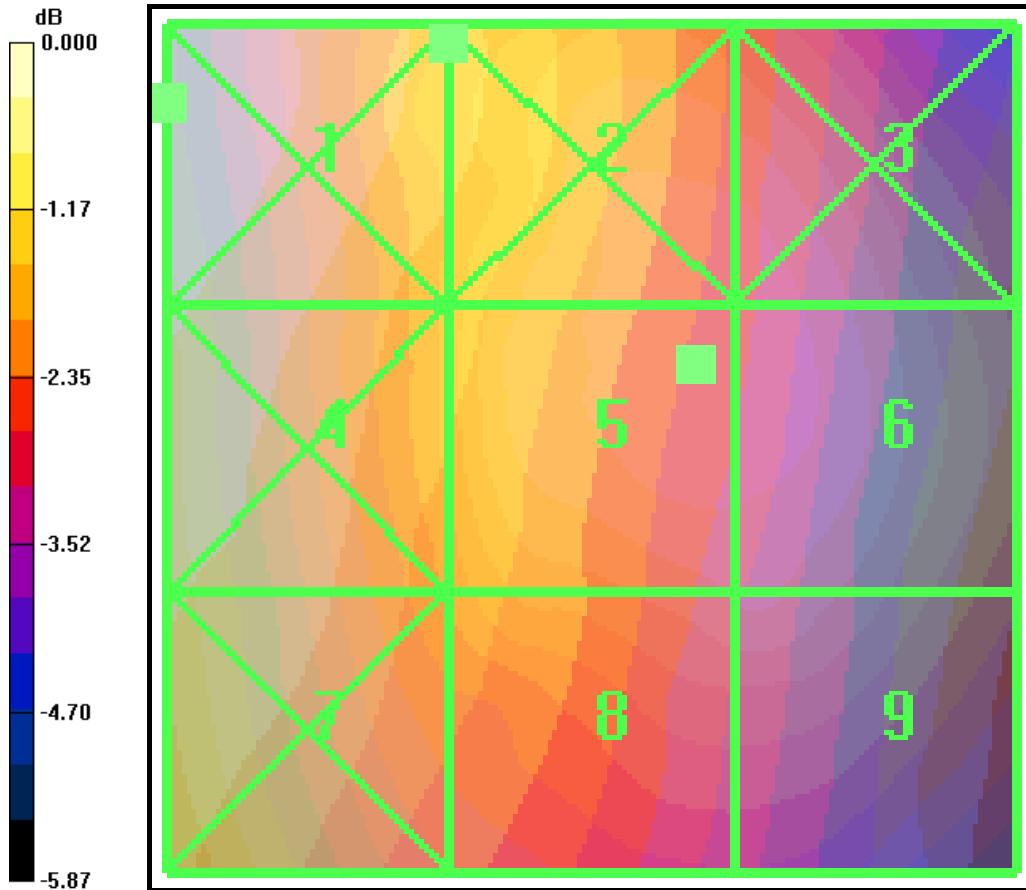

CDMA 800 Channel 1013 Bluetooth ON

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 824.7 MHz; Duty Cycle: 1:1

 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

CELL_1013_BT ON/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 75.9 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 102.1 V/m; Power Drift = 0.058 dB

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
64.3 M4	75.6 M4	75.0 M4
Grid 4	Grid 5	Grid 6
63.0 M4	75.9 M4	75.6 M4
Grid 7	Grid 8	Grid 9
58.2 M4	68.4 M4	68.4 M4

CELL_1013_BT ON/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.147 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.109 A/m; Power Drift = 0.142 dB

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.177 M4	0.147 M4	0.096 M4
Grid 4	Grid 5	Grid 6
0.161 M4	0.133 M4	0.087 M4
Grid 7	Grid 8	Grid 9
0.148 M4	0.124 M4	0.077 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

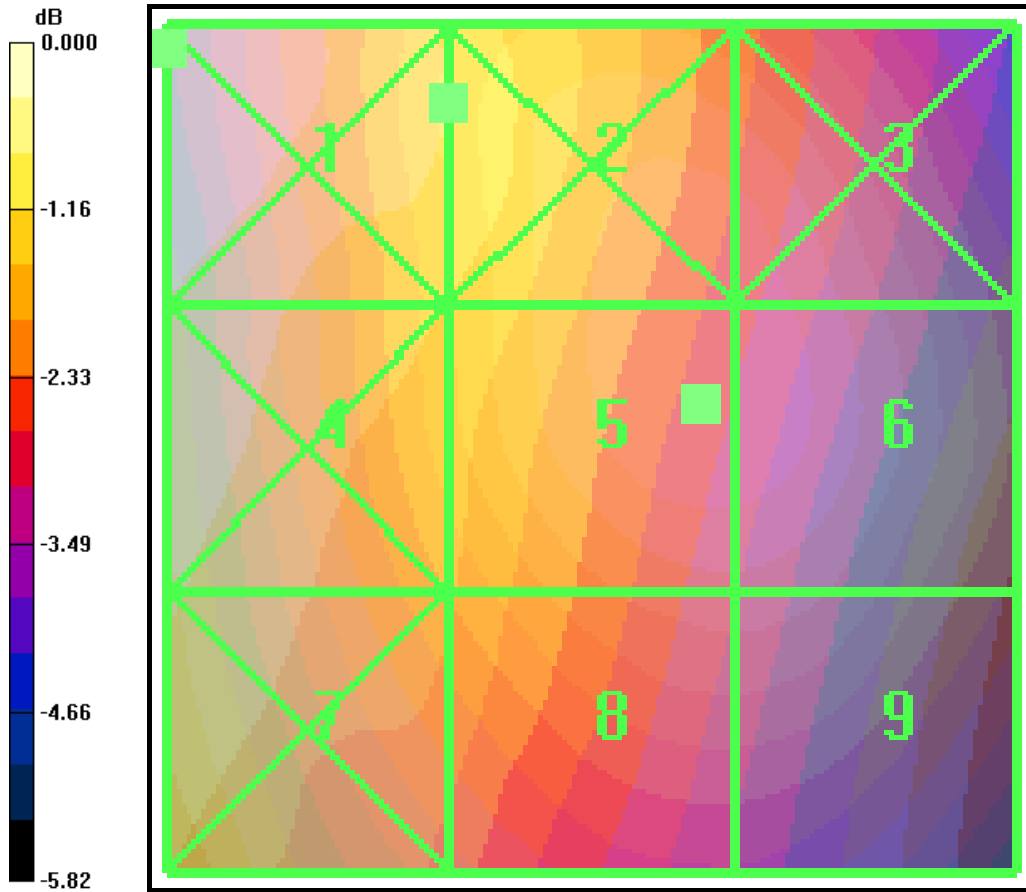

CDMA 1900 Channel 25 Bluetooth OFF

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 1850 MHz; Duty Cycle: 1:1

 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

PCS_25/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 32.6 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 32.6 V/m; Power Drift = -0.093 dB

Peak E-field in V/m

Grid 1 31.5 M4	Grid 2 23.3 M4	Grid 3 26.2 M4
Grid 4 24.2 M4	Grid 5 32.6 M4	Grid 6 33.9 M4
Grid 7 22.8 M4	Grid 8 35.4 M4	Grid 9 35.8 M4

PCS_25/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.096 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.101 A/m; Power Drift = -0.023 dB

Peak H-field in A/m

Grid 1 0.091 M4	Grid 2 0.096 M4	Grid 3 0.087 M4
Grid 4 0.096 M4	Grid 5 0.096 M4	Grid 6 0.086 M4
Grid 7 0.105 M4	Grid 8 0.102 M4	Grid 9 0.076 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

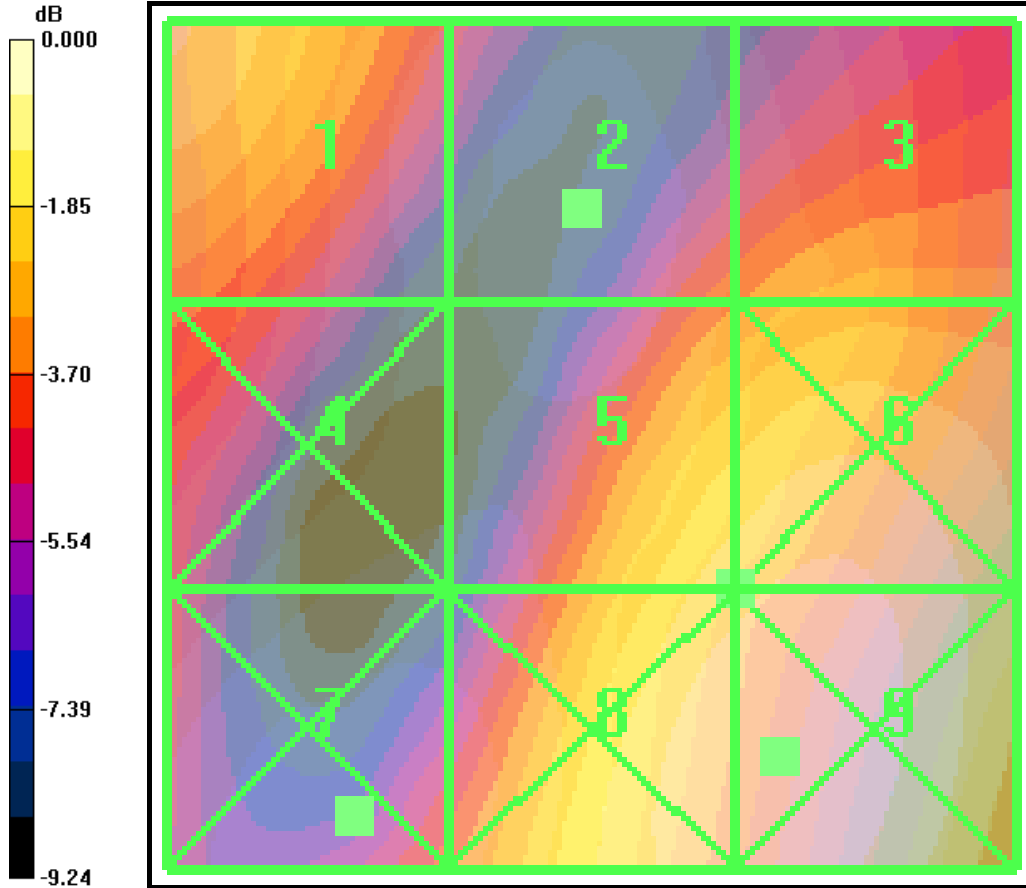

0 dB = 35.8V/m

CDMA 1900 Channel 600 Bluetooth OFF

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 1880 MHz; Duty Cycle: 1:1

 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

PCS_600/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 32.9 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 32.8 V/m; Power Drift = -0.010 dB

Peak E-field in V/m

Grid 1 27.9 M4	Grid 2 22.6 M4	Grid 3 23.8 M4
Grid 4 20.6 M4	Grid 5 32.9 M4	Grid 6 33.4 M4
Grid 7 28.5 M4	Grid 8 37.4 M4	Grid 9 37.4 M4

PCS_600/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.103 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.108 A/m; Power Drift = -0.016 dB

Peak H-field in A/m

Grid 1 0.103 M4	Grid 2 0.103 M4	Grid 3 0.095 M4
Grid 4 0.102 M4	Grid 5 0.102 M4	Grid 6 0.094 M4
Grid 7 0.109 M4	Grid 8 0.103 M4	Grid 9 0.079 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

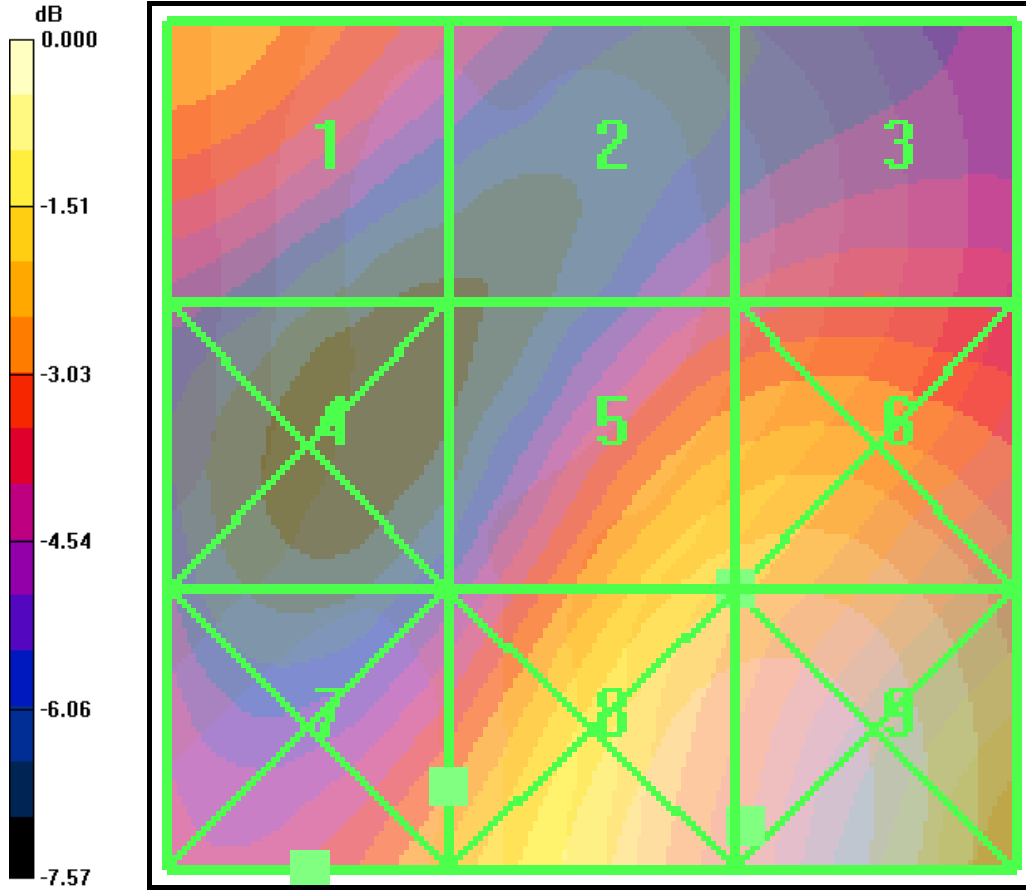

0 dB = 37.4V/m

CDMA 1900 Channel 1175 Bluetooth OFF

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 1910 MHz; Duty Cycle: 1:1

 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

PCS_1175/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 38.8 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 35.3 V/m; Power Drift = -0.103 dB

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
38.3 M4	30.4 M4	31.7 M4
Grid 4	Grid 5	Grid 6
27.8 M4	38.8 M4	40.0 M4
Grid 7	Grid 8	Grid 9
27.9 M4	41.3 M4	41.7 M4

PCS_1175/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.106 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.112 A/m; Power Drift = -0.186 dB

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.103 M4	0.106 M4	0.099 M4
Grid 4	Grid 5	Grid 6
0.103 M4	0.105 M4	0.098 M4
Grid 7	Grid 8	Grid 9
0.109 M4	0.105 M4	0.085 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

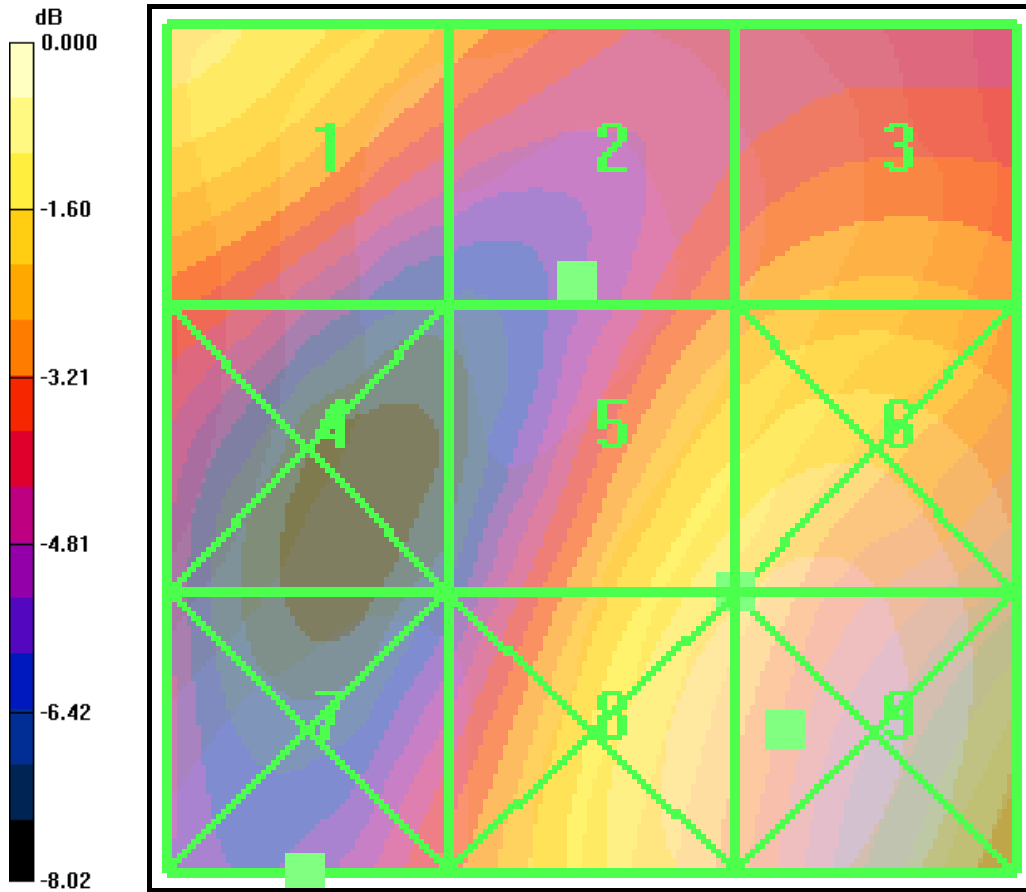

0 dB = 41.7V/m

CDMA 1900 Channel 1175 (360 Degrees) Bluetooth OFF

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 1910 MHz; Duty Cycle: 1:1

 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

PCS_1175 (360 degree)/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 36.9 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 33.3 V/m; Power Drift = -0.113 dB

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
35.8 M4	28.5 M4	30.3 M4
Grid 4	Grid 5	Grid 6
26.1 M4	36.9 M4	38.5 M4
Grid 7	Grid 8	Grid 9
26.4 M4	39.5 M4	40.0 M4

PCS_1175 (360 degree)/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.103 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.112 A/m; Power Drift = 0.102 dB

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.101 M4	0.102 M4	0.097 M4
Grid 4	Grid 5	Grid 6
0.103 M4	0.103 M4	0.097 M4
Grid 7	Grid 8	Grid 9
0.112 M4	0.107 M4	0.087 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

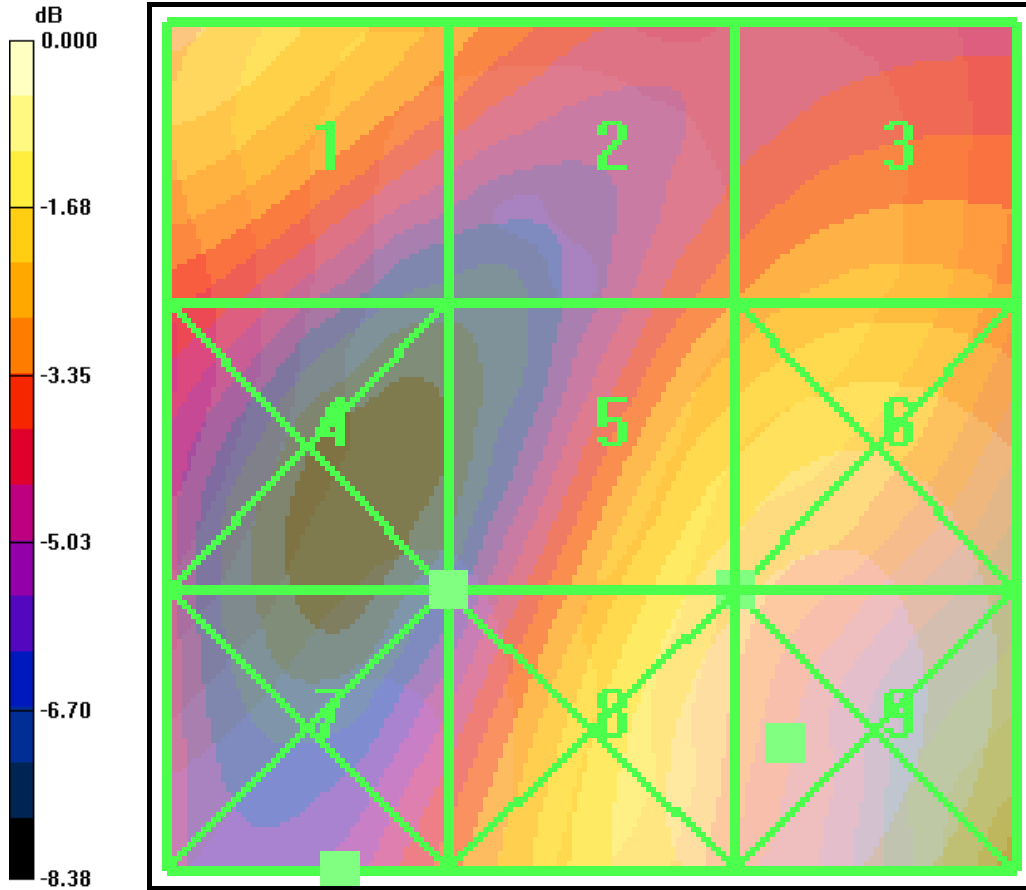

0 dB = 40.0V/m

CDMA 1900 Channel 1175 Bluetooth ON

Date: 7/1/2009

DUT: SCP-6760

Communication System: CDMA_Triband; Frequency: 1910 MHz; Duty Cycle: 1:1

 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2341 Probe: H3DV6 - SN6123; ConvF(1, 1, 1); Calibrated: 3/10/2009 Calibrated: 8/18/2008

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn530; Calibrated: 3/12/2009

- Phantom: HAC Test Arch; Type: SD HAC P01 BA;

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

PCS_1175_BT ON/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 38.8 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 34.9 V/m; Power Drift = 0.169 dB

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
36.7 M4	29.7 M4	32.4 M4
Grid 4	Grid 5	Grid 6
26.9 M4	38.8 M4	40.1 M4
Grid 7	Grid 8	Grid 9
27.2 M4	40.8 M4	41.3 M4

PCS_1175_BT ON/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.115 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.119 A/m; Power Drift = 0.070 dB

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.114 M4	0.115 M4	0.107 M4
Grid 4	Grid 5	Grid 6
0.112 M4	0.114 M4	0.105 M4
Grid 7	Grid 8	Grid 9
0.121 M4	0.111 M4	0.089 M4



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-20RFC-0709-R0

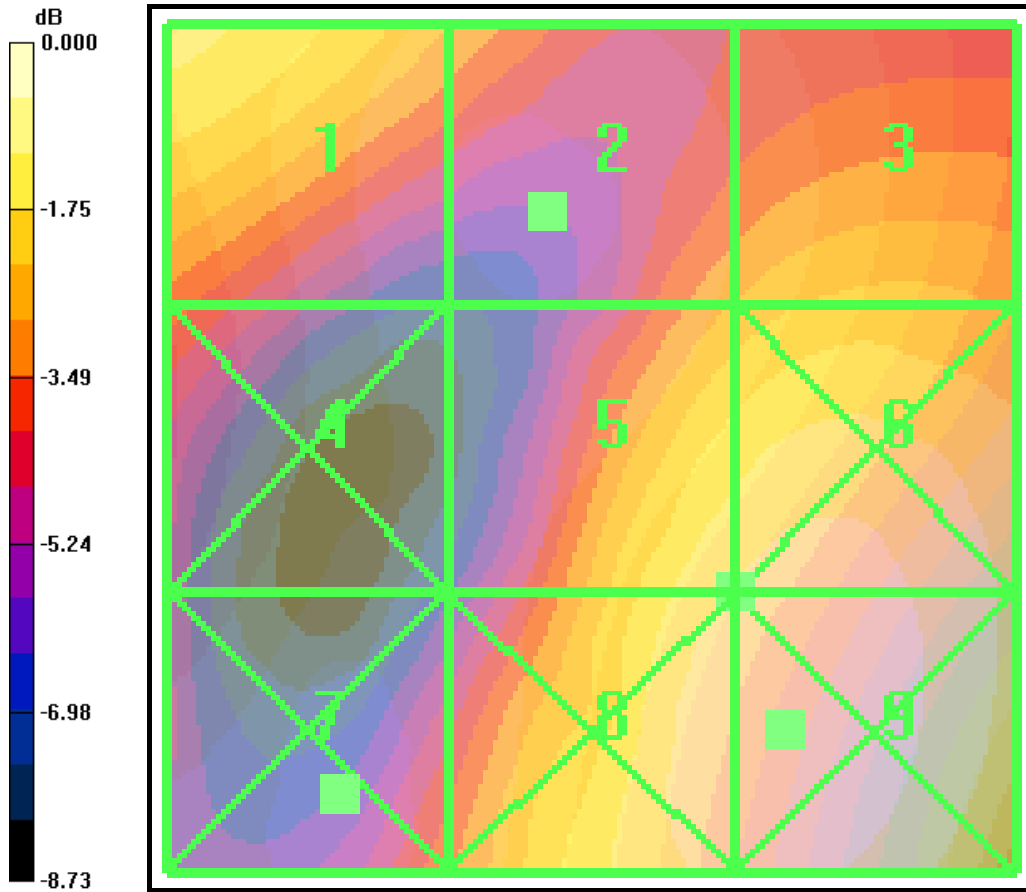

0 dB = 41.3V/m