

# TEST REPORT

ACCORDING TO: FCC part 27

FOR:

**Arcadian Networks Inc.**

**Base station**

**Model:ABSR-757**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines .....	5
6.3	Support and test equipment .....	5
6.4	Operating frequencies .....	5
6.5	Changes made in the EUT .....	5
6.6	Test configuration.....	5
6.7	Transmitter characteristics .....	6
7	Transmitter characteristics .....	7
7.1	Maximum average output power test .....	7
7.2	Occupied bandwidth test.....	12
7.3	Spurious emissions at RF antenna connector test.....	19
7.4	Spurious emissions at RF antenna connector test in 763-775 MHz and 793 – 805 MHz.....	28
7.5	Band edge emissions at RF antenna connector test.....	47
7.6	Radiated spurious emission measurements.....	66
7.7	Radiated spurious emission measurements in 1559-1610 MHz band .....	72
7.8	Frequency stability test.....	76
8	APPENDIX A Test equipment and ancillaries used for tests.....	87
9	APPENDIX B Measurement uncertainties.....	89
10	APPENDIX C Test laboratory description .....	90
11	APPENDIX D Specification references .....	90
12	APPENDIX E Test equipment correction factors.....	91
13	APPENDIX F Abbreviations and acronyms.....	104



## 1 Applicant information

**Client name:** Arcadian Networks Inc  
**Address:** 400 Columbus Avenue, Suite 210E, Valhalla NY 10595, USA  
**Telephone:** +972 3976 9847  
**Fax:** +972 3976 9998  
**E-mail:** hillel.hendler@arcadiannetworks.com  
**Contact name:** Mr. Hillel Hendler

## 2 Equipment under test attributes

**Product name:** Base station  
**Model:** ABSR-757  
**Receipt date:** 7/9/2009

## 3 Manufacturer information

**Manufacturer name:** Arcadian Networks Inc  
**Address:** 400 Columbus Avenue, Suite 210E, Valhalla NY 10595, USA  
**Telephone:** +972 3976 9847  
**Fax:** +972 3976 9998  
**E-Mail:** Arnon.afgin@arcadiannetworks.com  
**Contact name:** Mr. Arnon Afgin

## 4 Test details

**Project ID:** 19829  
**Location:** Hermon Laboratories Ltd. P.O.Box 23, Binyamina 30500, Israel  
**Test started:** 7/9/2009  
**Test completed:** 7/28/2009  
**Test specifications:** FCC part 27:2008



## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
Section 27.50(b)(2), Maximum output power at RF antenna connector	Pass
Section 2.1049, Occupied bandwidth	Pass
Section 27.53(c)(1), Spurious emissions RF antenna connector	Pass
Section 27.53(c)(3), Spurious emissions RF antenna connector in 763-775 MHz and 793-805 MHz	Pass
Section 27.53(c)(3), Band edge emissions RF antenna connector	Pass
Section 27.53(c)(1), Radiated spurious emissions	Pass
Section 27.53(f), Radiated spurious emissions in 1559-1610 MHz band	Pass
Section 27.54, Frequency stability	Pass
Section 2.1091, 27.52, RF safety	Pass, refer to Exhibit to Application

The test results relate only to the items tested. Pass / fail decision was based on nominal values.

This test report replaces the previously issued test report identified by Doc ID:ARCRAD\_FCC.19829\_rev1.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. S. Samokha, test engineer	July 28, 2009	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	July 29, 2009	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and radio group manager	July 30, 2009	



HERMON LABORATORIES

## 6 EUT description

### 6.1 General information

The EUT is a part of a base station transceiver for point to multipoint broadband wireless access system. The EUT operates within 757 to 758 MHz band and is powered from AC mains.

### 6.2 Ports and lines

Port type	Port description	Connected		Connector type	Qty.	Cable type	Cable length	Indoor / outdoor
		From	To					
Power	AC	EUT	AC mains	IEC 60320	1	Unshielded	1.5 m	Indoor
Signal	Ethernet	EUT	Laptop	RJ 45	1	Unshielded	1.5 m	Indoor
Signal	RF	EUT	Antenna	N-type	1	Shielded	2 m	Outdoor

### 6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
Laptop	IBM	X600	Unknown


### 6.4 Operating frequencies

Source	Frequency, MHz				
Clocks	3.3	20.48	25.0	28.0	50.0
Tx amplifier (for BW=330 kHz)	757.17		757.50		757.83
Tx amplifier (for BW=245 kHz)	757.125		757.375		757.875
Transmitter IF	44				

### 6.5 Changes made in the EUT

No changes were implemented.

### 6.6 Test configuration

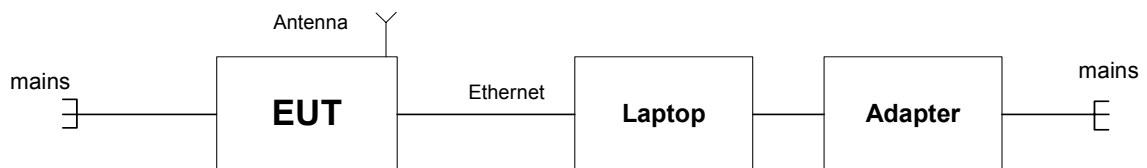



HERMON LABORATORIES

## 6.7 Transmitter characteristics

<b>Type of equipment</b>			
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)		
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
<b>Intended use</b>		<b>Condition of use</b>	
<input checked="" type="checkbox"/>	fixed	Always at a distance more than 2 m from all people	
	mobile	Always at a distance more than 20 cm from all people	
	portable	May operate at a distance closer than 20 cm to human body	
<b>Assigned frequency range</b>		757.0 – 758.0 MHz	
<b>Operating frequency range</b>		757.125 – 757.875 MHz (245 kHz channel bandwidth) 757.170 – 757.830 MHz (330 kHz channel bandwidth)	
<b>Maximum rated output power</b>		At transmitter 50 $\Omega$ RF output connector	41.4 dBm
		Effective radiated power (for equipment with no RF connector)	NA
<b>Is transmitter output power variable?</b>		No	
		continuous variable	
<input checked="" type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	stepped variable with stepsize
			1 dB
			minimum RF power
			-17 dBm
			maximum RF power
			41.4 dBm
<b>Antenna connection</b>			
unique coupling	<input checked="" type="checkbox"/>	standard N-type connector	integral
			with temporary RF connector
			without temporary RF connector
<b>Antenna/s technical characteristics</b>			
Type	Manufacturer	Model number	Gain
Tuned Sector Panel Antenna	Transcom Corporation	VP-700	13.3 dBd
<b>Modulating test signal (baseband)</b>		PRBS	
<b>Type of multiplexing</b>		TDMA	
<b>Transmitter duty cycle supplied for test</b>		100 %	
<b>Transmitter 99% power bandwidth</b>	<b>Bit rate, kbps</b>	<b>Symbol rate, kSym/sec</b>	<b>Type of modulation</b>
245 kHz	433	216	QPSK
	867	216	16QAM
	1245	207	64QAM
	1728	216	256QAM
330 kHz	583	291	QPSK
	1166	291	16QAM
	1668	278	64QAM
	2344	293	256QAM
<b>RF channel spacing</b>	<b>Frequency channel</b>		
	<b>Low</b>	<b>Mid</b>	<b>High</b>
245 kHz	757.125	757.375	757.875
330 kHz	757.170	757.500	757.830
<b>Transmitter power source</b>			
	<b>Nominal rated voltage</b>		Battery type
	DC	<b>Nominal rated voltage</b>	
<input checked="" type="checkbox"/>	AC mains	<b>Nominal rated voltage</b>	120 VAC
		Frequency	60 Hz
<b>Common power source for transmitter and receiver</b>		<input checked="" type="checkbox"/>	yes
			no



<b>Test specification:</b>	<b>Section 27.50(b)(2), Peak output power at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7 Transmitter characteristics

### 7.1 Maximum average output power test

#### 7.1.1 General

This test was performed to measure the maximum output power at RF antenna connector. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Maximum average output power limits

Assigned frequency range, MHz	Maximum output power*	
	dBm	W
757.0 – 758.0	60.0	1000.0

\* The maximum output power limit was calculated by subtracting of antenna gain in dBd from maximum allowed ERP 60.0 dBm (1000 W):  
60.0 dBm – 13.3 dBd = 46.7 dBm


#### 7.1.2 Test procedure for measurements

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.1.2.3 To measure the maximum composite output power over the full BW the RF power meter was used with a thermocouple power sensor (RMS). The RF bandwidth is limited by the power sensor 0.01 to 18 GHz which is much wider than the emission BW of the transmitter. The test results provided in Table 7.1.2, Table 7.1.3.

Figure 7.1.1 Peak output power test setup





<b>Test specification:</b>	<b>Section 27.50(b)(2), Peak output power at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

Table 7.1.2 Maximum average output power test results for 245 kHz channel bandwidth

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 DETECTOR USED: Average  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Carrier frequency, MHz	Power Meter reading, dBm	Cable loss, dB	EUT power setting*: Attenuation, dB	Limit, dBm	Margin**, dB	Verdict
<b>QPSK</b>						
757.375	41.04	Included	4	46.7	-5.66	Pass
<b>16QAM</b>						
757.375	39.94	Included	6	46.7	-6.76	Pass
<b>64QAM</b>						
757.375	40.37	Included	6	46.7	-6.33	Pass
<b>256QAM</b>						
757.375	40.28	Included	6	46.7	-6.42	Pass

\* The EUT power settings that should be declared by the manufacturer to the end user (according to the limitations due the "Band edge emissions" test)

\* Margin (dB)= RF output power (dBm)– Limit (dBm)

Reference numbers of test equipment used

HL 1424	HL 2875	HL 2876	HL 2883	HL 3176	HL 3179		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix






HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 27.50(b)(2), Peak output power at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

Plot 7.1.1 Duty cycle measurement

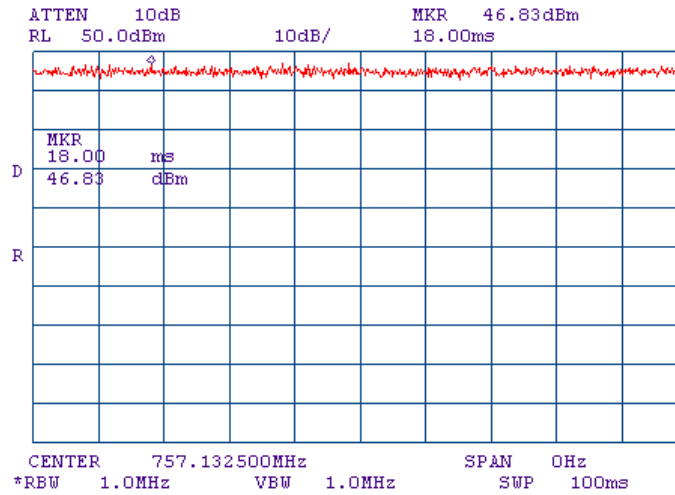



<b>Test specification:</b>	<b>Section 27.50(b)(2), Peak output power at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

Table 7.1.3 Maximum average output power test results for 330 kHz channel bandwidth

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
DETECTOR USED: Average  
MODULATING SIGNAL: PRBS  
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Carrier frequency, MHz	Power Meter reading, dBm	Cable loss, dB	EUT power setting*: Attenuation, dB	Limit, dBm	Margin**, dB	Verdict
<b>QPSK</b>						
757.50	41.02	Included	4	46.7	-5.68	Pass
<b>16QAM</b>						
757.50	40.97	Included	5	46.7	-5.73	Pass
<b>64QAM</b>						
757.50	41.41	Included	5	46.7	-5.29	Pass
<b>256QAM</b>						
757.50	41.31	Included	5	46.7	-5.39	Pass

\* The EUT power settings that should be declared by the manufacturer to the end user (according to the limitations due the "Band edge emissions" test)

\*\* Margin (dB)= RF output power (dBm)– Limit (dBm)

Reference numbers of test equipment used

HL 1424	HL 2875	HL 2876	HL 2883	HL 3176	HL 3179		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix



HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 27.50(b)(2), Peak output power at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1046; TIA/EIA-603-C, Section 2.2.1		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

Plot 7.1.2 Duty cycle measurement

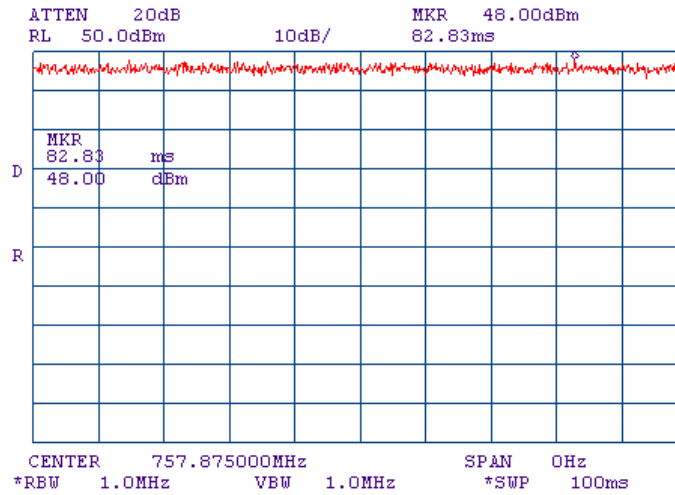



<b>Test specification:</b>	<b>Section 2.1049, Occupied bandwidth</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1049		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.2 Occupied bandwidth test

### 7.2.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Occupied bandwidth limits


Assigned frequency, MHz	Modulation envelope reference points*, dBc
757.0 – 758.0	26

\* - Modulation envelope reference points provided in terms of attenuation below unmodulated carrier.

### 7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.
- 7.2.2.2 The EUT was set to transmit unmodulated carrier and reference peak power level was measured.
- 7.2.2.3 The EUT was set to transmit modulated carrier.
- 7.2.2.4 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.2.2, Table 7.2.3 and associated plots.

Figure 7.2.1 Occupied bandwidth test setup





<b>Test specification:</b>	<b>Section 2.1049, Occupied bandwidth</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1049		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

Table 7.2.2 Occupied bandwidth test results for 245 kHz channel bandwidth

DETECTOR USED: Peak hold  
 RESOLUTION BANDWIDTH: 3 kHz  
 VIDEO BANDWIDTH: 10 kHz  
 MODULATION ENVELOPE REFERENCE POINTS: 26 dBc  
 MODULATING SIGNAL: PRBS

Carrier frequency, MHz	Occupied bandwidth, kHz
<b>Bit rate: 433 kbps / Modulation: QPSK</b>	
757.375	231.0
<b>Bit rate: 867 kbps / Modulation: 16QAM</b>	
757.375	233.0
<b>Bit rate: 1245 kbps / Modulation: 64QAM</b>	
757.375	229.0
<b>Bit rate: 1728 kbps / Modulation: 256QAM</b>	
757.375	233.0

Reference numbers of test equipment used

HL 1424	HL 2883	HL 3176	HL 3179				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.






HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 2.1049, Occupied bandwidth</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1049		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


**Plot 7.2.3 Occupied bandwidth test results at mid frequency**

Bit rate: 1245 kbps  
Modulation: 64QAM

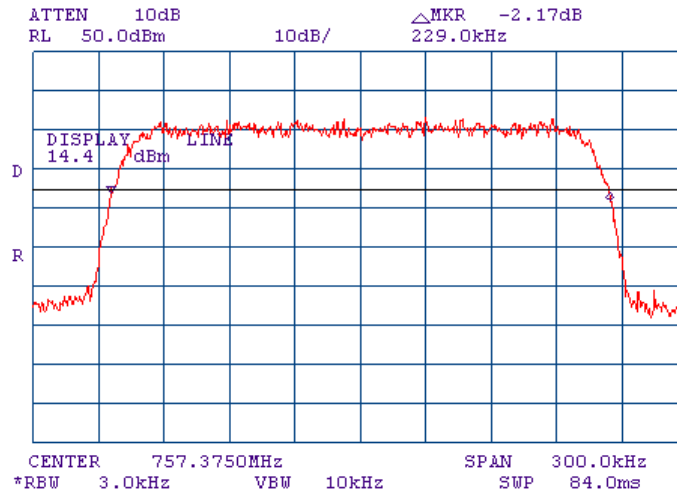

**Plot 7.2.4 Occupied bandwidth test results at mid frequency**

Bit rate: 1728 kbps  
Modulation: 256QAM

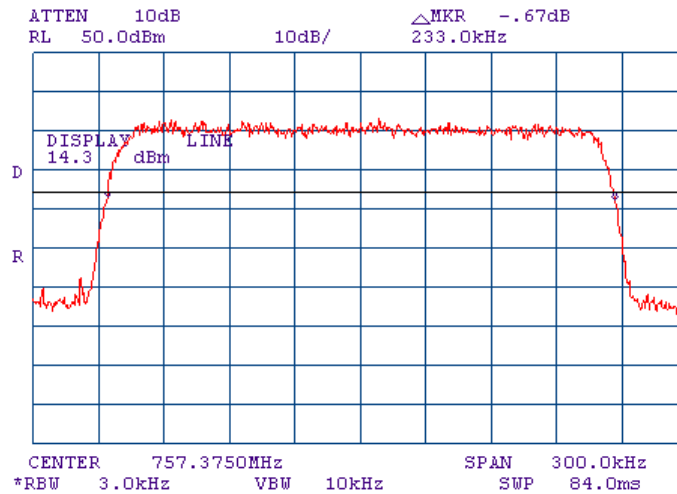



<b>Test specification:</b>	<b>Section 2.1049, Occupied bandwidth</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1049		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

Table 7.2.3 Occupied bandwidth test results for 330 kHz channel bandwidth

DETECTOR USED: Peak hold  
 RESOLUTION BANDWIDTH: 3 kHz  
 VIDEO BANDWIDTH: 10 kHz  
 MODULATION ENVELOPE REFERENCE POINTS: 26 dBc  
 MODULATING SIGNAL: PRBS

Carrier frequency, MHz	Occupied bandwidth, kHz
<b>Bit rate: 583 kbps / Modulation: QPSK</b>	
757.50	308.7
<b>Bit rate: 1166 kbps / Modulation: 16QAM</b>	
757.50	310.7
<b>Bit rate: 1668 kbps / Modulation: 64QAM</b>	
757.50	302.7
<b>Bit rate: 2344 kbps / Modulation: 256QAM</b>	
757.50	310.7

Reference numbers of test equipment used

HL 1424	HL 2883	HL 3176	HL 3179				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.






HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 2.1049, Occupied bandwidth</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1049		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


Plot 7.2.5 Occupied bandwidth test results at mid frequency

Bit rate: 583 kbps  
Modulation: QPSK

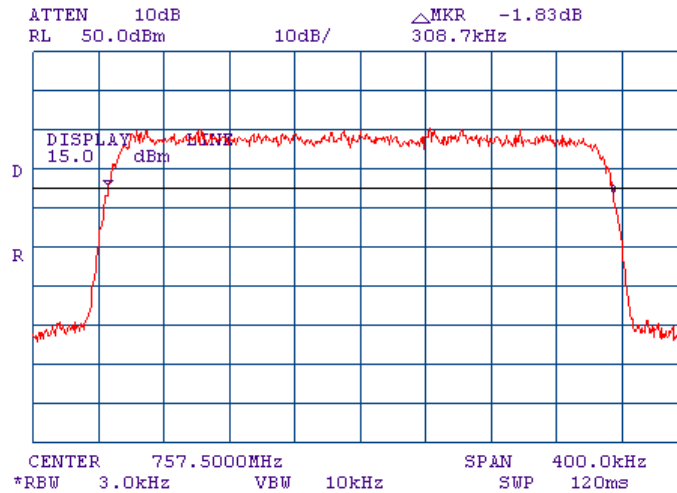

Plot 7.2.6 Occupied bandwidth test results at mid frequency

Bit rate: 1166 kbps  
Modulation: 16QAM

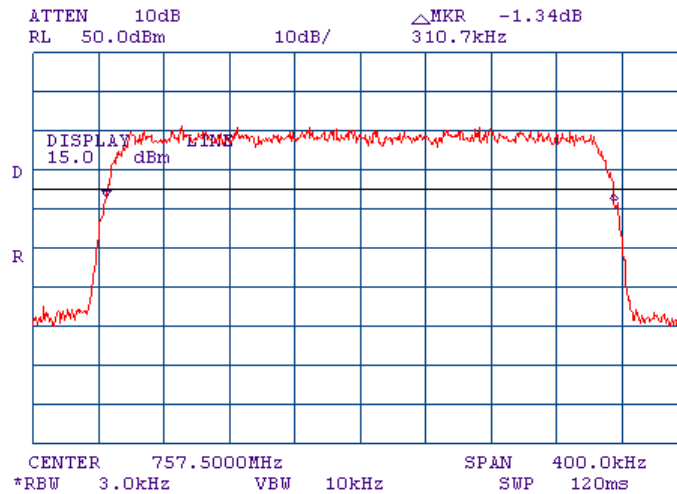





<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

### 7.3 Spurious emissions at RF antenna connector test

#### 7.3.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Spurious emission limits

Frequency, MHz*	Attenuation below carrier, dBc	Spurious emissions, dBm
0.009 – 10 <sup>th</sup> harmonic	43+10logP*	-13

\* - P is transmitter output power in Watts.


#### 7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.3.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Spurious emission test setup





<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Table 7.3.2 Spurious emission test results for 245 kHz channel bandwidth**

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 8000 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 MODULATION: 64QAM (as a representative of the worst case)  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Bit rate, kbps	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Mid channel</b>						Pass
No emissions were found						

\*- Margin = Spurious emission – specification limit.

Note: Preliminary testing at low, mid and high frequencies has shown that 64QAM modulation produced maximum output power.

**Reference numbers of test equipment used**


HL 1424	HL 1876	HL 2871	HL 2883	HL 2951	HL 3175	HL 3181		
---------	---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

Plot 7.3.1 Spurious emission measurements at RF antenna connector, mid channel

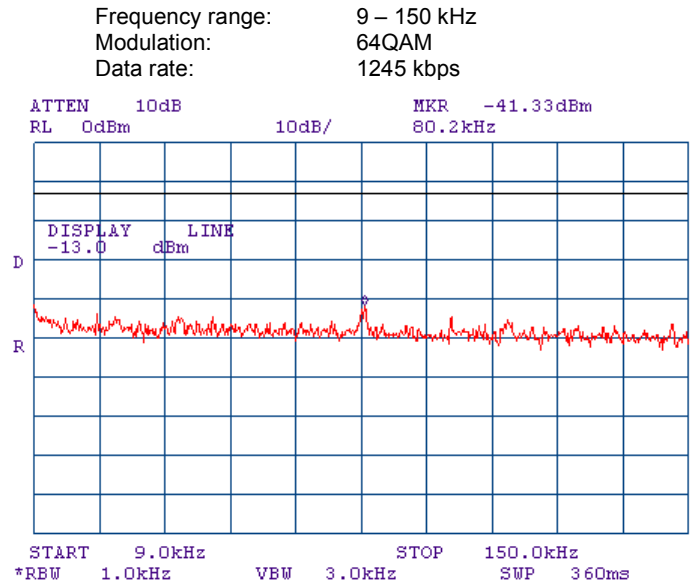


Plot 7.3.2 Spurious emission measurements at RF antenna connector, mid channel

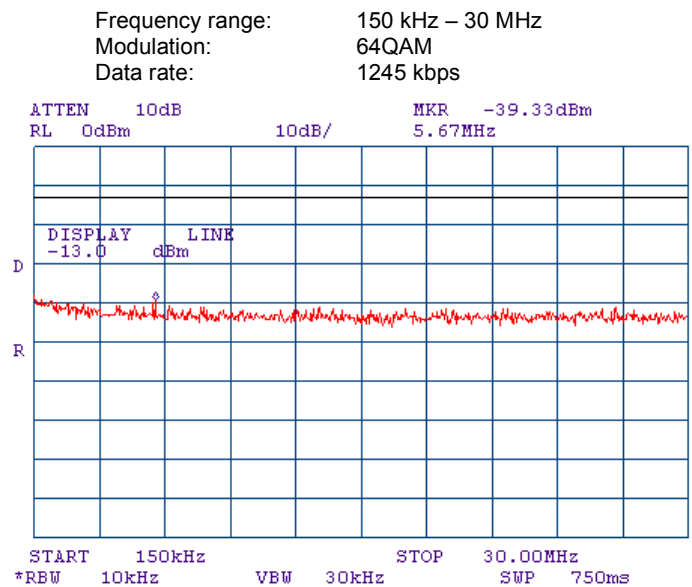




<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

Plot 7.3.3 Spurious emission measurements at RF antenna connector, mid channel

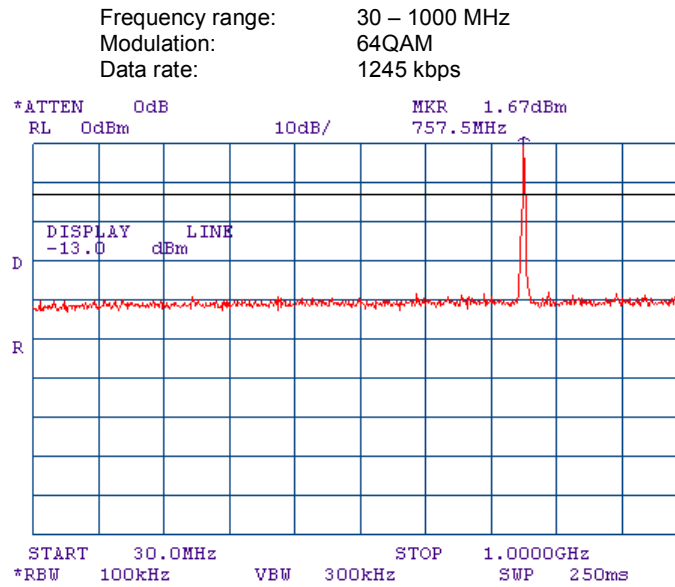


Plot 7.3.4 Spurious emission measurements at RF antenna connector, mid channel

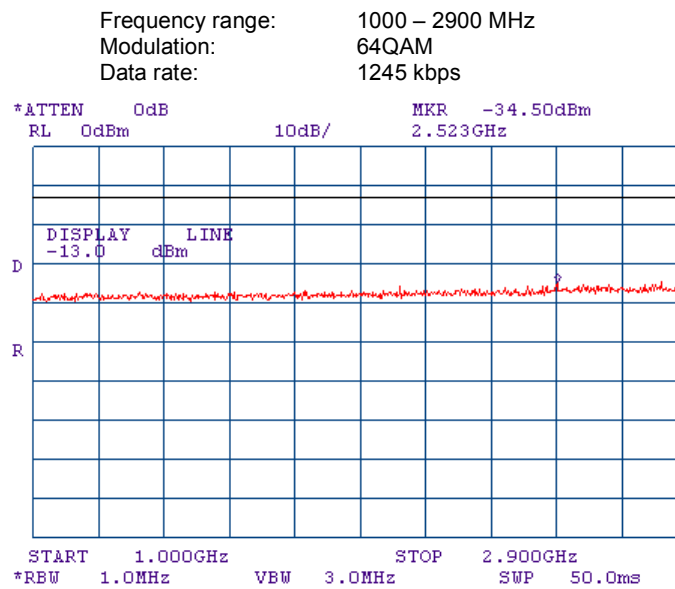



<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

Plot 7.3.5 Spurious emission measurements at RF antenna connector, mid channel

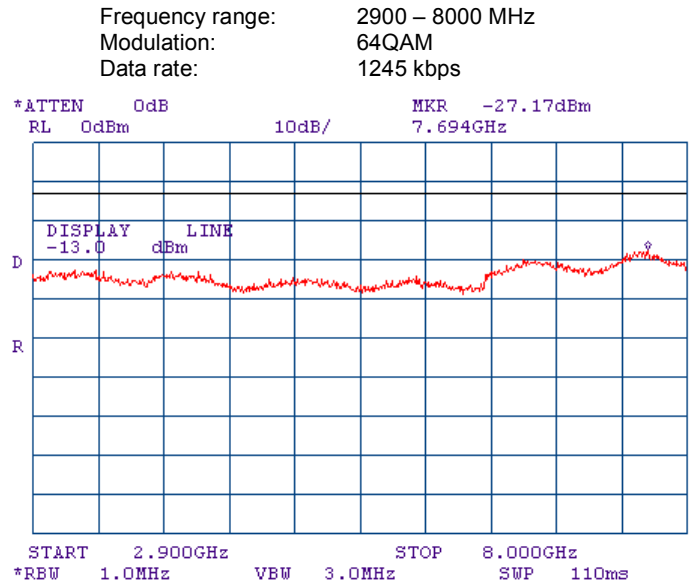



<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Table 7.3.3 Spurious emission test results for 330 kHz channel bandwidth**

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 8000 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 MODULATING SIGNAL: PRBS  
 MODULATION: 256QAM (the worst case in the output power test)  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Bit rate, kbps	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
Mid channel						Pass
No emissions were found						

\*- Margin = Spurious emission – specification limit.

**Reference numbers of test equipment used**

HL 1424	HL 1876	HL 2871	HL 3175	HL 3181			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.






<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


**Plot 7.3.6 Spurious emission measurements at RF antenna connector, mid channel**

Frequency range: 9 – 150 kHz  
Modulation: 256QAM  
Data rate: 2344 kbps

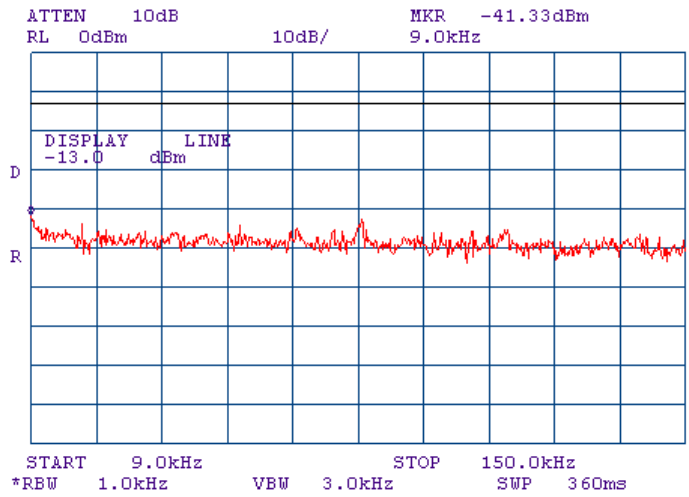

**Plot 7.3.7 Spurious emission measurements at RF antenna connector, mid channel**

Frequency range: 150 kHz – 30 MHz  
Modulation: 256QAM  
Data rate: 2344 kbps

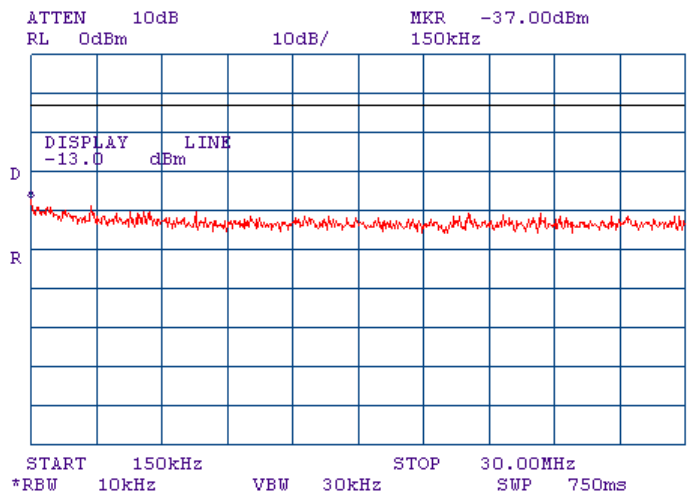




<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


Plot 7.3.8 Spurious emission measurements at RF antenna connector, mid channel

Frequency range: 30 – 1000 MHz  
Modulation: 256QAM  
Data rate: 2344 kbps

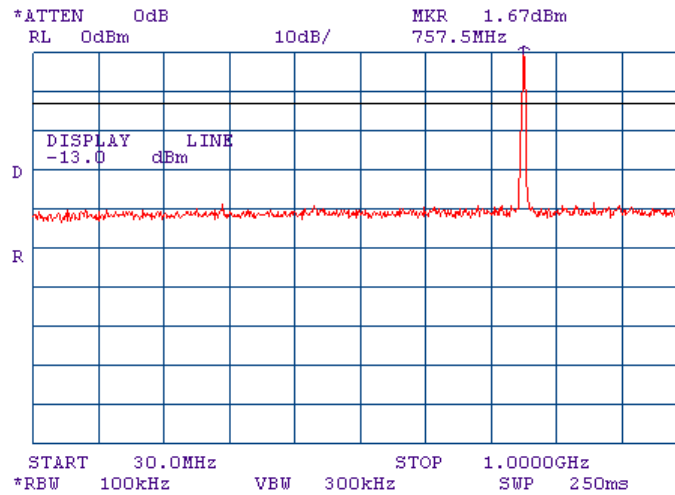

Plot 7.3.9 Spurious emission measurements at RF antenna connector, mid channel

Frequency range: 1000 – 2900 MHz  
Modulation: 256QAM  
Data rate: 2344 kbps

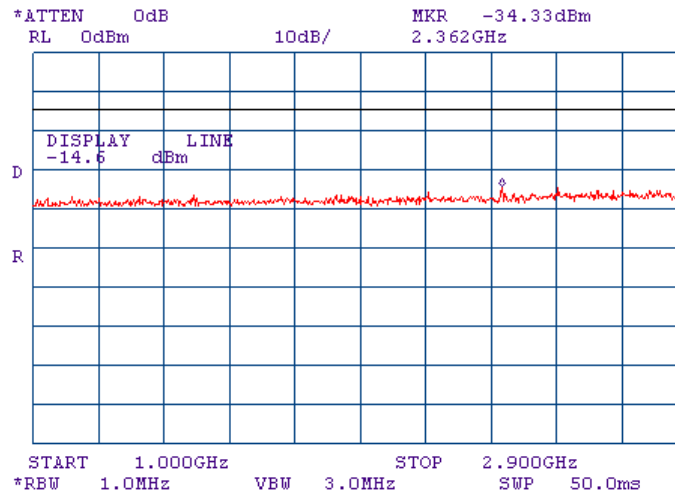




<b>Test specification:</b>	<b>Section 27.53(c)(1), Spurious emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.3.10 Spurious emission measurements at RF antenna connector, mid channel**

Frequency range: 2900 – 8000 MHz  
 Modulation: 256QAM  
 Data rate: 2344 kbps

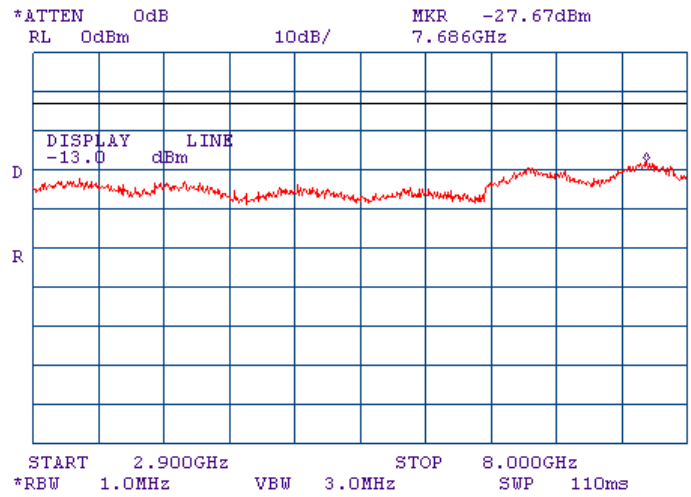



<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

### 7.4 Spurious emissions at RF antenna connector test in 763-775 MHz and 793 – 805 MHz

#### 7.4.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Spurious emission limits

Frequency, MHz*	Attenuation below carrier, dBc	Spurious emissions, dBm
763 – 775 MHz	76+10logP*	-46
793 – 805 MHz	76+10logP*	-46

\* - P is transmitter output power in Watts.


#### 7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.4.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.4.2 and associated plots.

Figure 7.4.1 Occupied bandwidth test setup





<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Table 7.4.2 Spurious emission test results**

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 INVESTIGATED FREQUENCY RANGE: 763 – 775 MHz, 793 – 805 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 MODULATION: 64 QAM (as a representative of the worst case)  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Bit rate, kbps	RBW, kHz	EUT power setting: Attenuation, dB	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Low channel 757.125 MHz</b>							
763.0-775.0	1245	10	4	-48.83	-46.00	-2.83	Pass
793.0-805.0	1245	10	6	-57.67	-46.00	-11.67	Pass
<b>High channel 757.875 MHz</b>							
763.0-775.0	1245	10	6	-47.67	-46.00	-1.67	Pass
793.0-805.0	1245	10	6	-57.67	-46.00	-11.67	Pass

\*- Margin = Spurious emission – specification limit.

Note: Preliminary testing at low, mid and high frequencies has shown that 64QAM modulation produced maximum output power.

**Reference numbers of test equipment used**

HL 1424	HL 1876	HL 2883	HL 2951	HL 3437			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.



<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


**Plot 7.4.1 Spurious emission test results at low frequency**

Frequency range      763 – 775 MHz  
Bit rate:              433 kbps  
Modulation:          QPSK

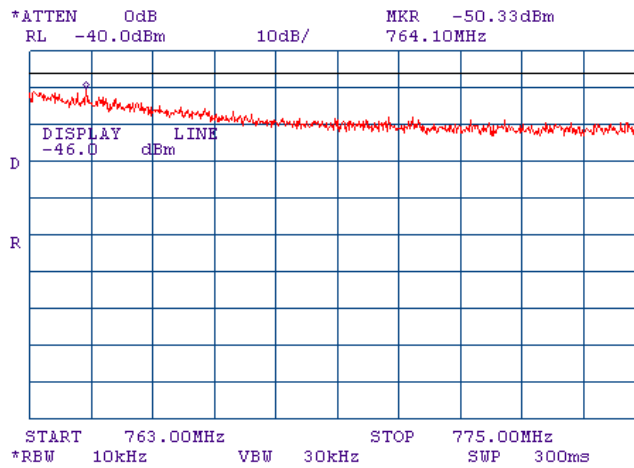

**Plot 7.4.2 Spurious emission test results at low frequency**

Frequency range      793 – 805 MHz  
Bit rate:              433 kbps  
Modulation:          QPSK

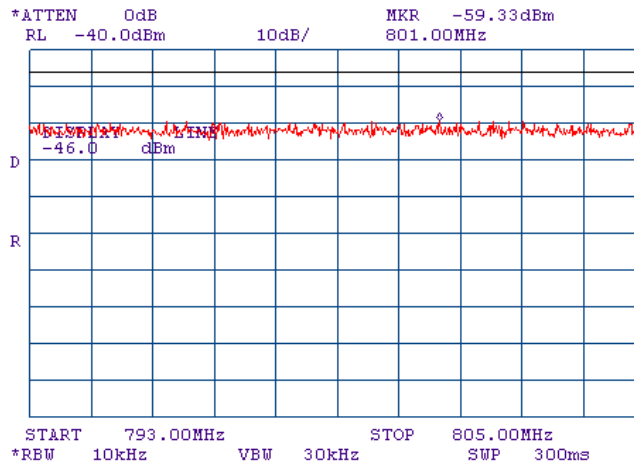




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


**Plot 7.4.3 Spurious emission test results at high frequency**

Frequency range      763 – 775 MHz  
Bit rate:                433 kbps  
Modulation:            QPSK

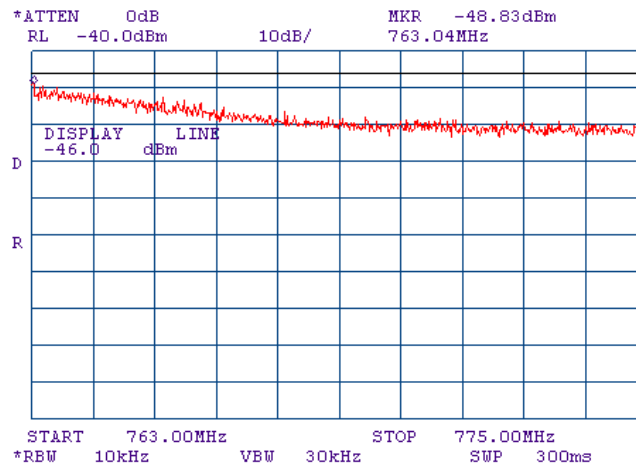

**Plot 7.4.4 Spurious emission test results at high frequency**

Frequency range      763 – 775 MHz  
Bit rate:                433 kbps  
Modulation:            QPSK

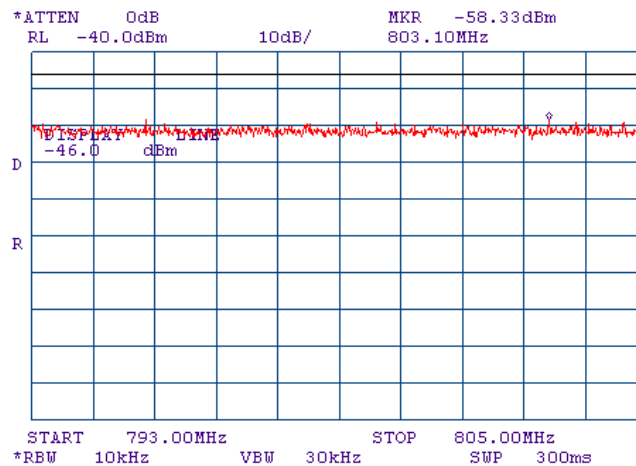




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


**Plot 7.4.5 Spurious emission test results at low frequency**

Frequency range      763 – 775 MHz  
Bit rate:              867 kbps  
Modulation:          16QAM

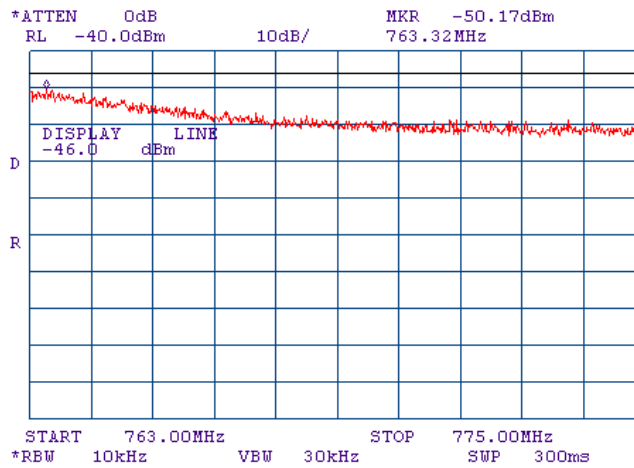

**Plot 7.4.6 Spurious emission test results at low frequency**

Frequency range      793 – 805 MHz  
Bit rate:              867 kbps  
Modulation:          16QAM

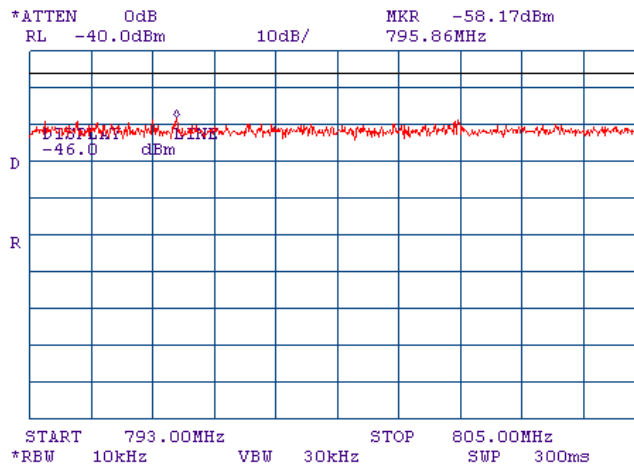






<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


Plot 7.4.7 Spurious emission test results at high frequency

Frequency range      763 – 775 MHz  
Bit rate:              867 kbps  
Modulation:          16QAM

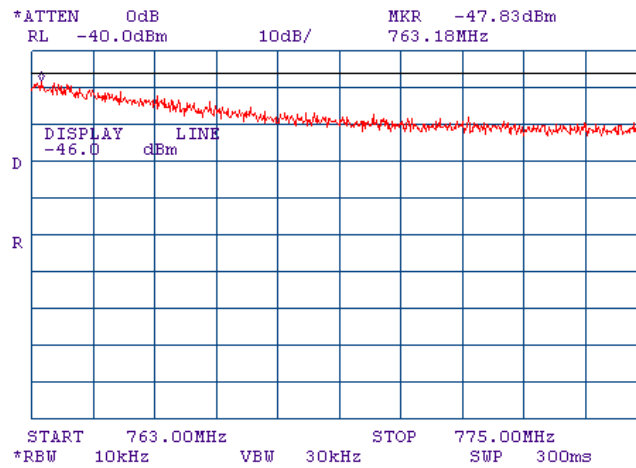

Plot 7.4.8 Spurious emission test results at high frequency

Frequency range      763 – 775 MHz  
Bit rate:              867 kbps  
Modulation:          16QAM

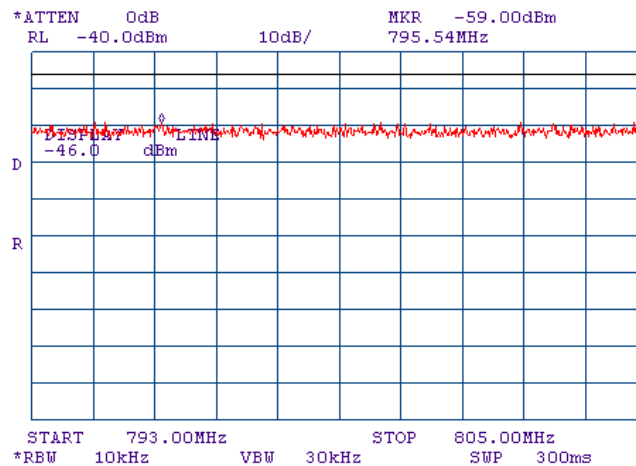




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


**Plot 7.4.9 Spurious emission test results at low frequency**

Frequency range      763 – 775 MHz  
 Bit rate:              1245kbps  
 Modulation:          64QAM

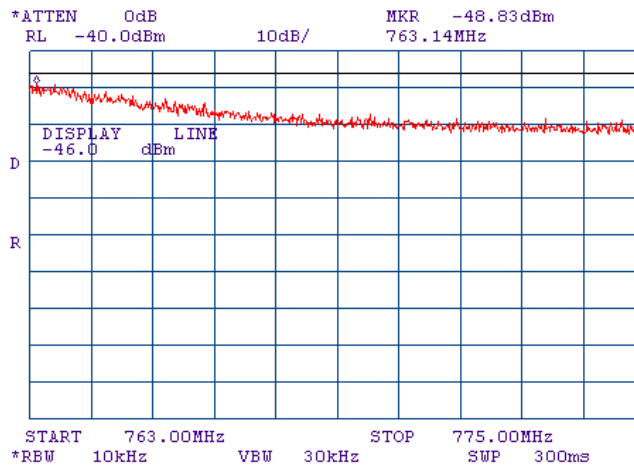

**Plot 7.4.10 Spurious emission test results at low frequency**

Frequency range      793 – 805 MHz  
 Bit rate:              1245kbps  
 Modulation:          64QAM

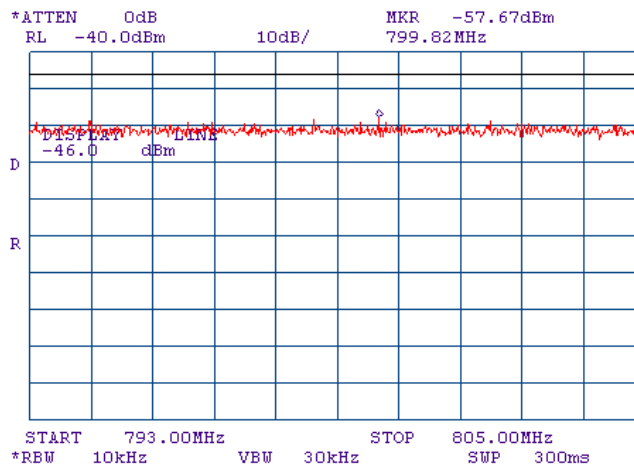




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


Plot 7.4.11 Spurious emission test results at high frequency

Frequency range 763 – 775 MHz  
Bit rate: 1245kbps  
Modulation: 64QAM

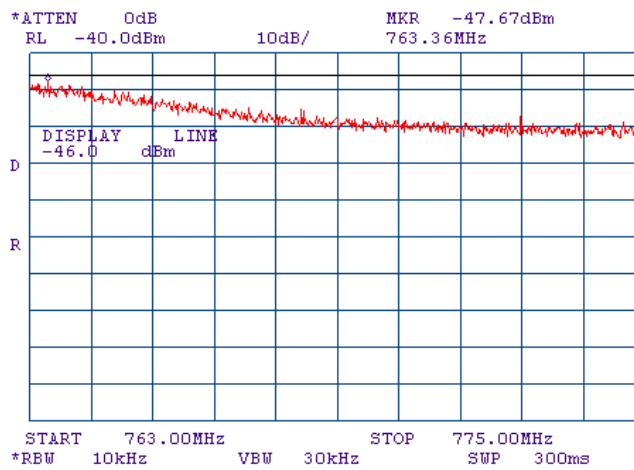

Plot 7.4.12 Spurious emission test results at high frequency

Frequency range 763 – 775 MHz  
Bit rate: 1245 kbps  
Modulation: 64 QAM

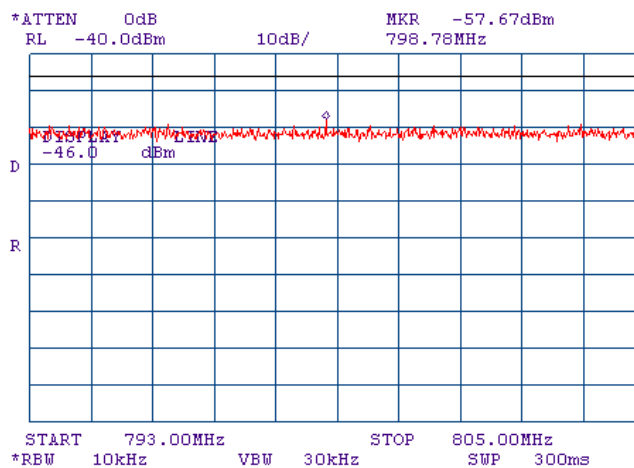




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


Plot 7.4.13 Spurious emission test results at low frequency

Frequency range      763 – 775 MHz  
 Bit rate:              1728 kbps  
 Modulation:          256QAM

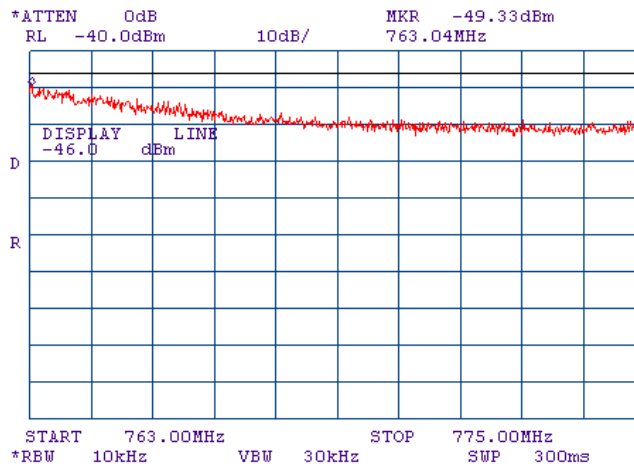

Plot 7.4.14 Spurious emission test results at low frequency

Frequency range      793 – 805 MHz  
 Bit rate:              1728 kbps  
 Modulation:          256QAM

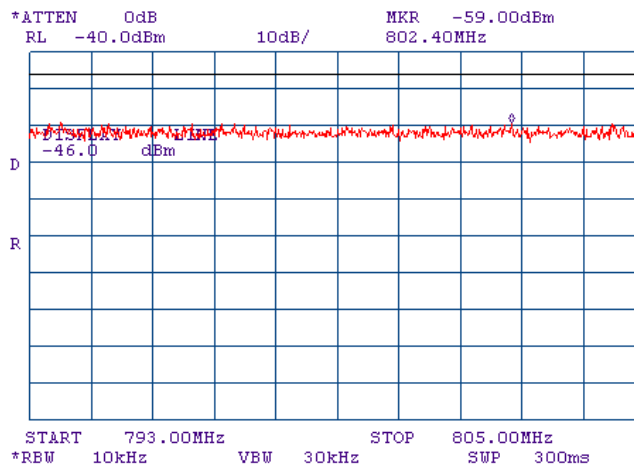




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			


Plot 7.4.15 Spurious emission test results at high frequency

Frequency range 763 – 775 MHz  
Bit rate: 1728 kbps  
Modulation: 256QAM

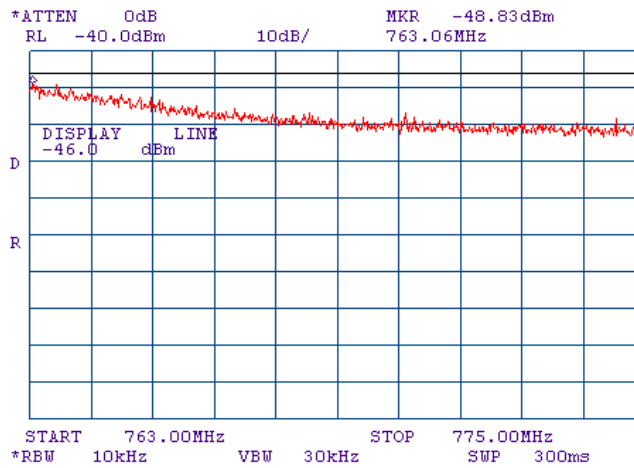

Plot 7.4.16 Spurious emission test results at high frequency

Frequency range 763 – 775 MHz  
Bit rate: 1728 kbps  
Modulation: 256QAM

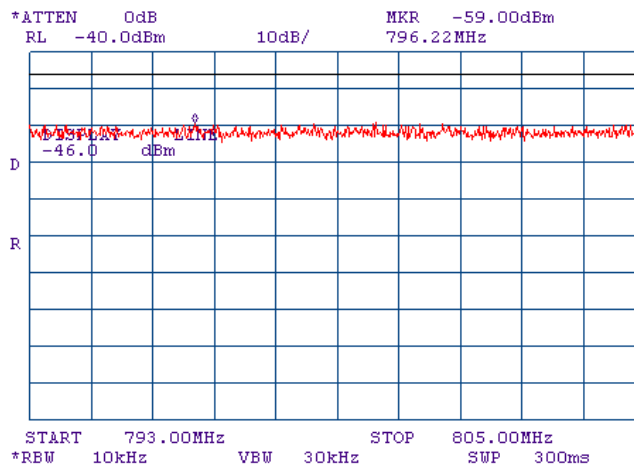



<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Table 7.4.3 Spurious emission test results**

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 INVESTIGATED FREQUENCY RANGE: 763 – 775 MHz, 793 – 805 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 MODULATION: 64QAM (as a representative of the worst case)  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Bit rate, kbps	RBW, kHz	EUT Power setting: Attenuation, dB	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Low channel 757.125 MHz</b>							
763.0-775.0	2344	10	4	-48.67	-46.00	-2.67	Pass
793.0-805.0	2344	10	6	-58.50	-46.00	-12.50	Pass
<b>High channel 757.875 MHz</b>							
763.0-775.0	2344	10	6	-47.83	-46.00	-1.83	Pass
793.0-805.0	2344	10	6	-58.50	-46.00	-12.50	Pass

\*- Margin = Spurious emission – specification limit.

**Reference numbers of test equipment used**

HL 1876	HL 2883	HL 2909	HL 3175	HL 3180			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.



<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


Plot 7.4.17 Spurious emission test results at low frequency

Frequency range      763 – 775 MHz  
Bit rate:              583 kbps  
Modulation:          QPSK

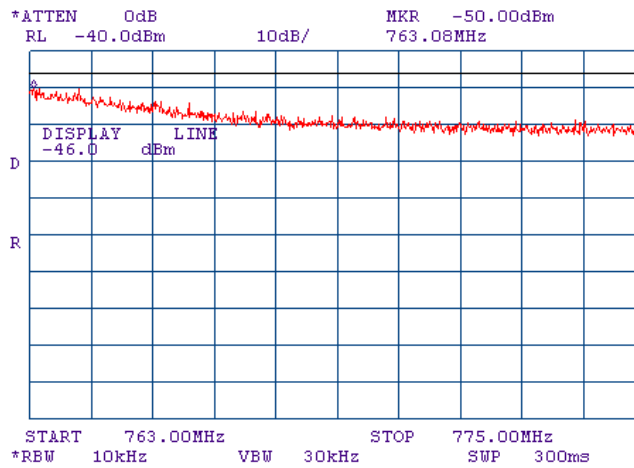

Plot 7.4.18 Spurious emission test results at low frequency

Frequency range      793 – 805 MHz  
Bit rate:              583 kbps  
Modulation:          QPSK

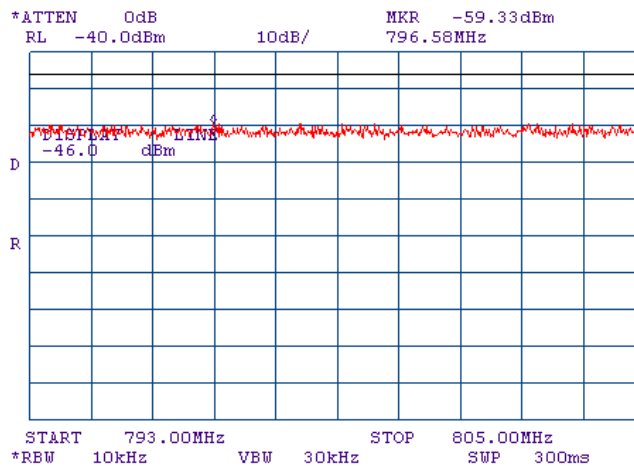




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


**Plot 7.4.19 Spurious emission test results at low frequency**

Frequency range      763 – 775 MHz  
Bit rate:                1166 kbps  
Modulation:            16QAM

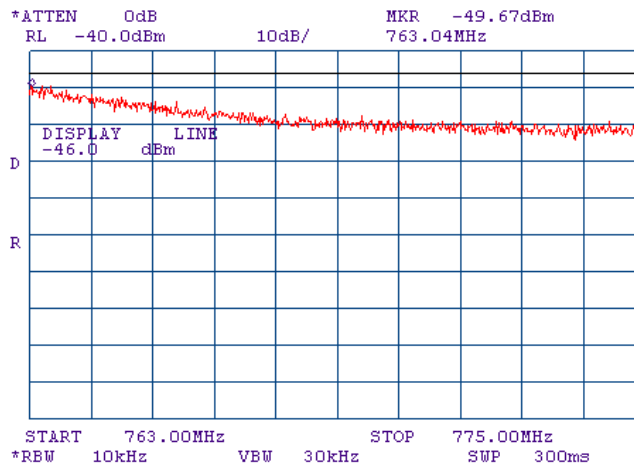

**Plot 7.4.20 Spurious emission test results at low frequency**

Frequency range      793 – 805 MHz  
Bit rate:                1166 kbps  
Modulation:            16QAM

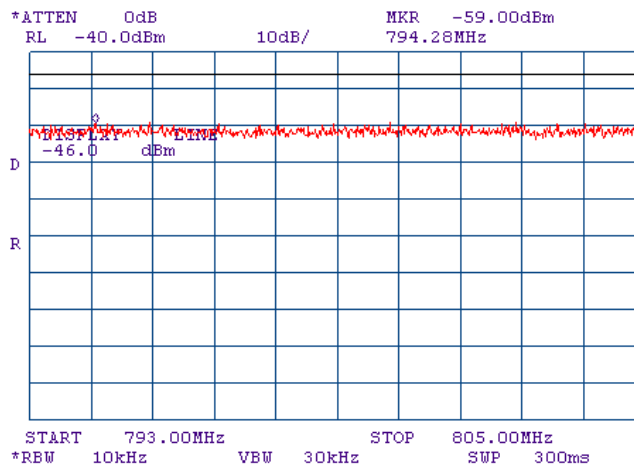






<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


Plot 7.4.21 Spurious emission test results at low frequency

Frequency range      763 – 775 MHz  
Bit rate:              1668kbps  
Modulation:          64QAM

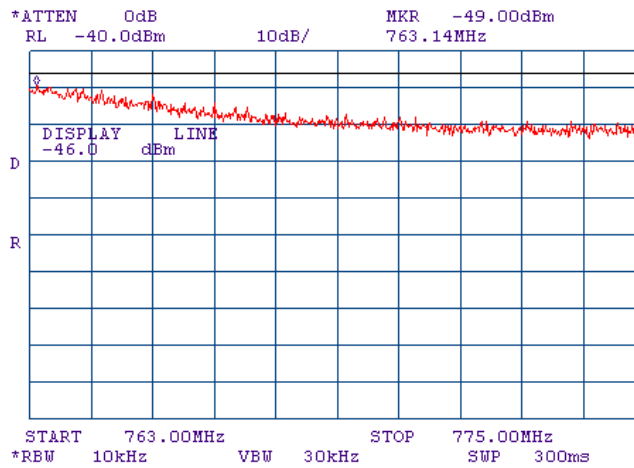

Plot 7.4.22 Spurious emission test results at low frequency

Frequency range      793 – 805 MHz  
Bit rate:              1668kbps  
Modulation:          64QAM

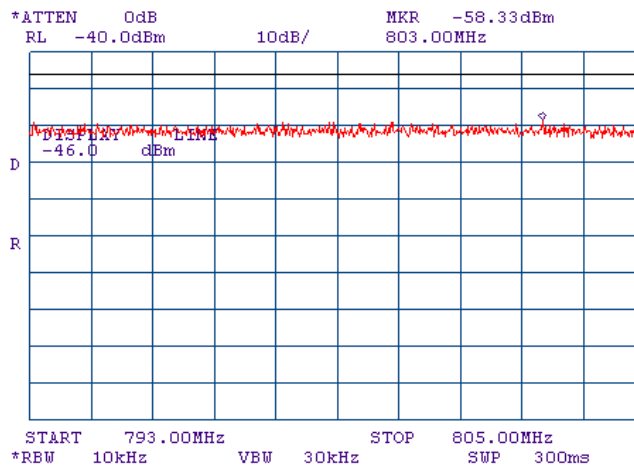




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


**Plot 7.4.23 Spurious emission test results at low frequency**

Frequency range        763 – 775 MHz  
Bit rate:                2344 kbps  
Modulation:            256QAM

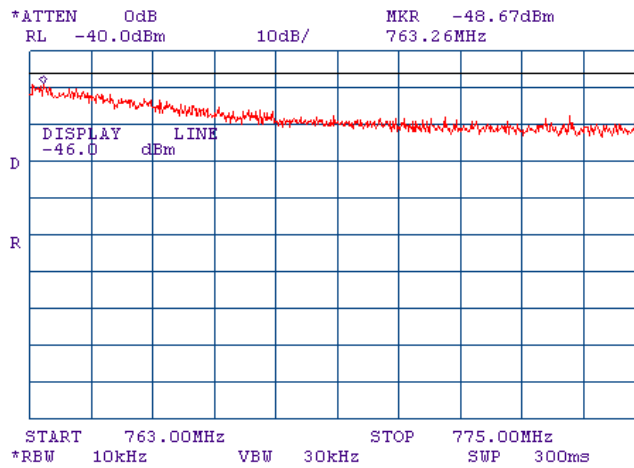

**Plot 7.4.24 Spurious emission test results at low frequency**

Frequency range        793 – 805 MHz  
Bit rate:                2344 kbps  
Modulation:            256QAM

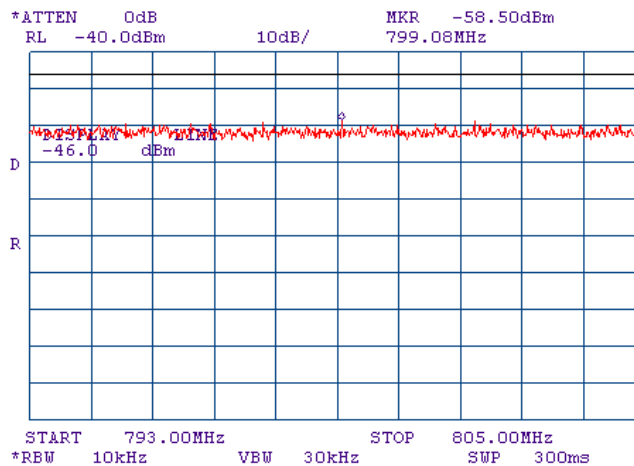






<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


Plot 7.4.27 Spurious emission test results at high frequency

Frequency range 763 – 775 MHz  
Bit rate: 1166 kbps  
Modulation: 16QAM

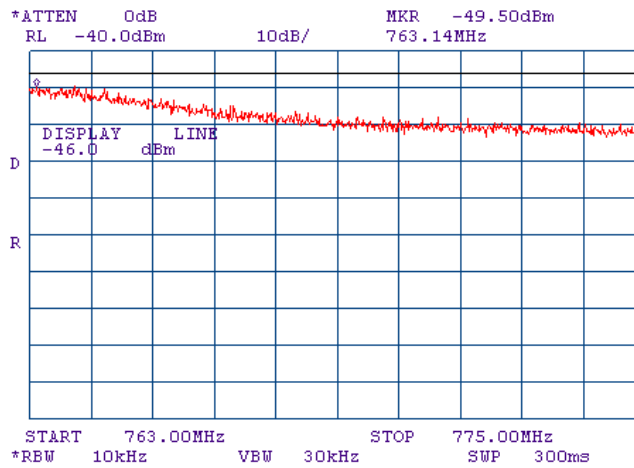

Plot 7.4.28 Spurious emission test results at high frequency

Frequency range 793 – 805 MHz  
Bit rate: 1166 kbps  
Modulation: 16QAM

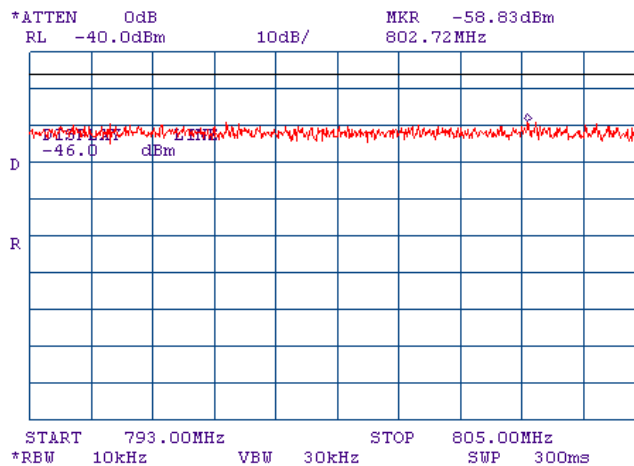




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


Plot 7.4.29 Spurious emission test results at high frequency

Frequency range      763 – 775 MHz  
Bit rate:              1668kbps  
Modulation:          64QAM

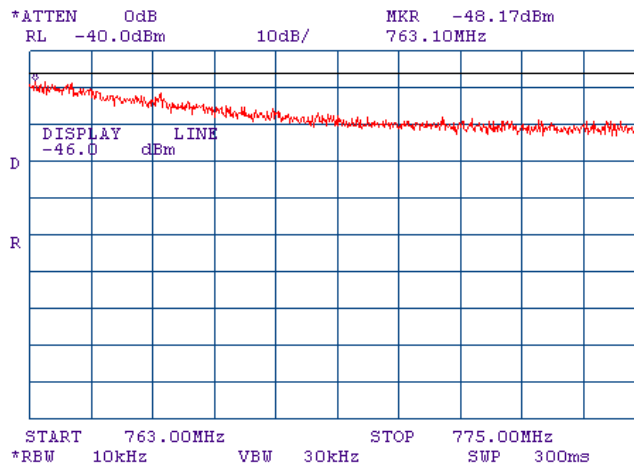

Plot 7.4.30 Spurious emission test results at high frequency

Frequency range      793 – 805 MHz  
Bit rate:              1668kbps  
Modulation:          64QAM

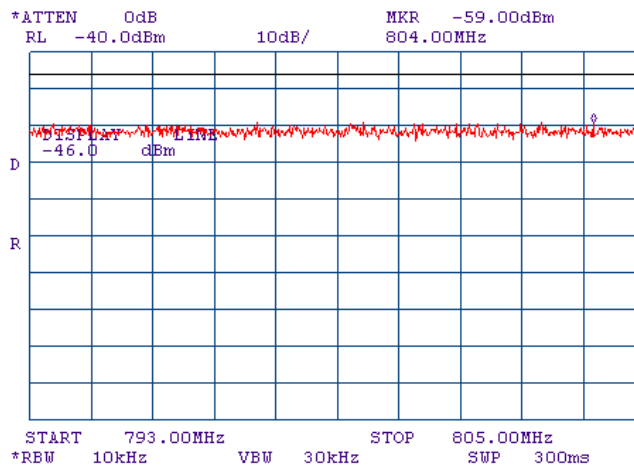




<b>Test specification:</b>	<b>Section 27.53(c)(3), Spurious emissions at RF antenna connector in 763-775 MHz and 793 – 805 MHz</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051, TIA/EIA-603-C, Section 2.2.13		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			


Plot 7.4.31 Spurious emission test results at high frequency

Frequency range 763 – 775 MHz  
Bit rate: 2344 kbps  
Modulation: 256QAM

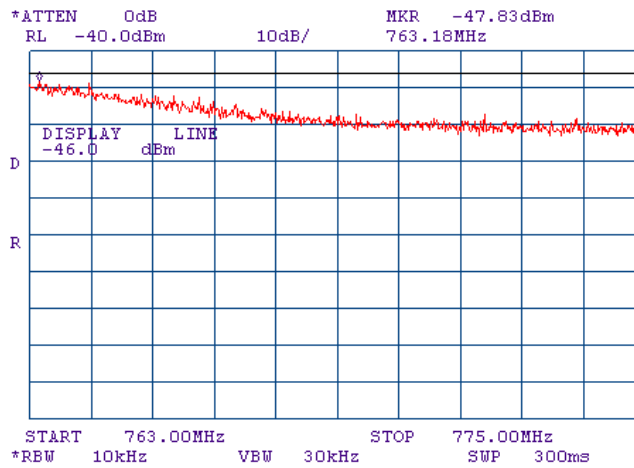

Plot 7.4.32 Spurious emission test results at high frequency

Frequency range 793 – 805 MHz  
Bit rate: 2344 kbps  
Modulation: 256QAM

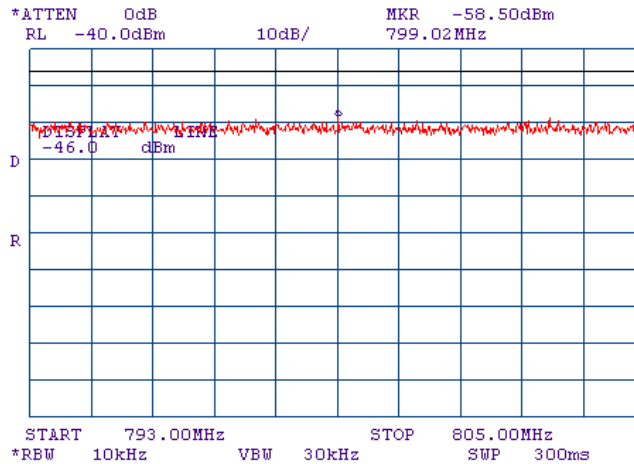



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.5 Band edge emissions at RF antenna connector test

### 7.5.1 General

This test was performed to measure band edge emissions at RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Spurious emission limits for 245 kHz CBW

Frequency, MHz*	Attenuation below carrier, dBc	Spurious emissions, dBm	Measurement technique
756.9 – 757.0 and 758.0 – 758.1	43+10logP*	-13	RBW=3kHz; VBW=10kHz; Sample detector, 100 power averaging; correction factor
756.8 – 756.9 and 758.1 – 758.2	43+10logP*	-13	Channel power across 100 kHz; Sample detector, 100 power averaging
<b>756.2 – 756.8 and 758.2 – 758.8</b>	43+10logP*	-13	RBW=10kHz; VBW=30kHz; Sample detector, 100 power averaging; correction factor

Table 7.5.2 Spurious emission limits for 330 kHz CBW


Frequency, MHz*	Attenuation below carrier, dBc	Spurious emissions, dBm	Measurement technique
756.9 – 757.0 and 758.0 – 758.1	43+10logP*	-13	RBW=3kHz; VBW=10kHz; Sample detector, 100 power averaging; correction factor
756.8 – 756.9 and 758.1 – 758.2	43+10logP*	-13	Channel power across 100 kHz; Sample detector, 100 power averaging
<b>756.6 – 756.8 and 758.2 – 758.4</b>	43+10logP*	-13	RBW=10kHz; VBW=30kHz; Sample detector, 100 power averaging; correction factor

\* - P is transmitter output power in Watts.

### 7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available for end user RF output power.
- 7.5.2.3 The spurious emission was measured with spectrum analyzer as provided in the associated plots.

Figure 7.5.1 Spurious emission test setup






<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.1 Spurious emissions at RF antenna connector, low channel band edge measurements**


Frequency: 757.125 MHz  
 Band edge: 756.9 – 757.0 MHz  
 Modulation: QPSK  
 Bit rate: 433 kbps  
 EUT Power settings Attenuation = 5

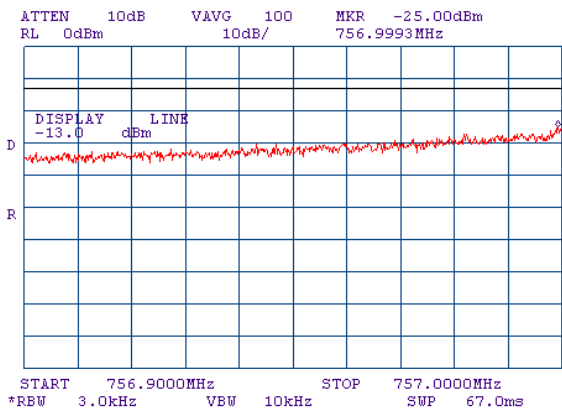

Note: test result = SA reading + Correction factor = -23.17 dBm + 10 dB = -13.17 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.2 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.125 MHz  
 Band edge: 756.8 – 756.9 MHz  
 Modulation: QPSK  
 Bit rate: 433 kbps  
 EUT Power settings Attenuation = 5

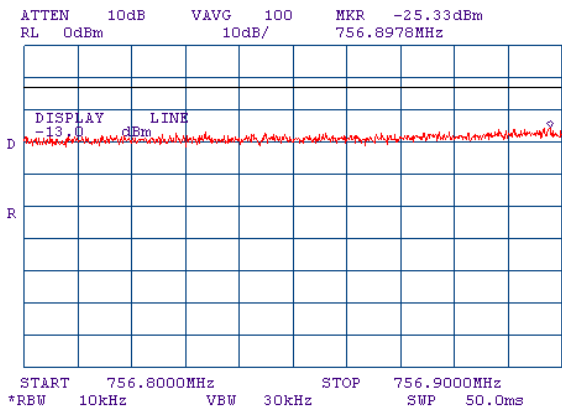

Note: test result = SA reading + Correction factor = -25.33 dBm + 10 dB = -15.33 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$






<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.3 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.125 MHz  
 Band edge: 756.2 – 756.8 MHz  
 Modulation: QPSK  
 Bit rate: 433 kbps  
 EUT Power settings Attenuation = 5

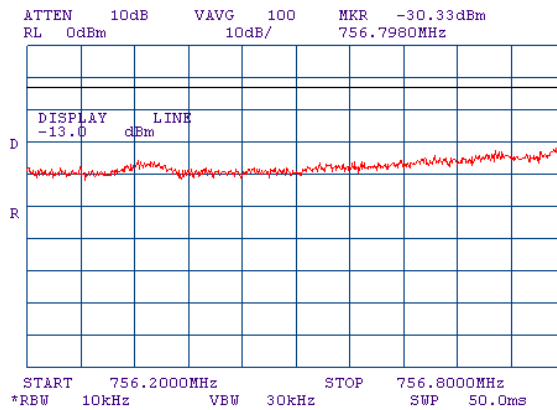


Note: test result = SA reading + Correction factor = -30.33 dBm + 10 dB = -20.33 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.4 Spurious emissions at RF antenna connector, high channel band edge measurements**


Frequency: 757.875 MHz  
 Band edge: 758.0 – 758.1 MHz  
 Modulation: QPSK  
 Bit rate: 433 kbps  
 EUT Power settings Attenuation = 5

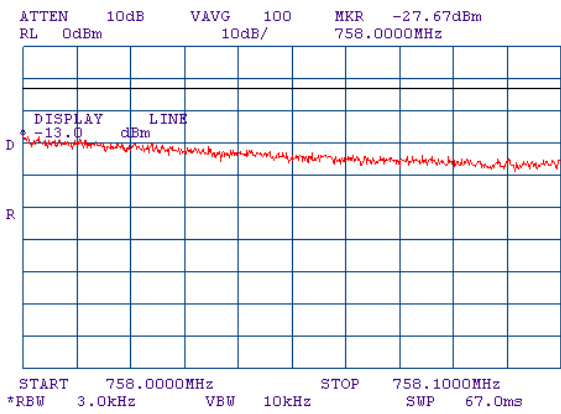

Note: test result = SA reading + Correction factor = -27.67 dBm + 10 dB = -17.67 dBm  
 Correction factor = 10\*log(30kHz/3kHz) = 10 dB

**Plot 1.7.5.5 Spurious emissions at RF antenna connector, high channel band edge measurements**

Frequency: 757.875 MHz  
 Band edge: 758.1 – 758.4 MHz  
 Modulation: QPSK  
 Bit rate: 433 kbps  
 EUT Power settings Attenuation = 5

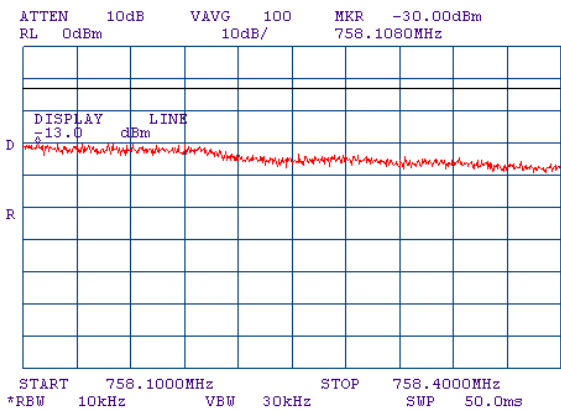


Note: test result = SA reading + Correction factor = -30.00 dBm + 10 dB = -20.00 dBm  
 Correction factor = 10\*log(100kHz/10kHz) = 10dB



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.6 Spurious emissions at RF antenna connector, low channel band edge measurements**


Frequency: 757.125 MHz  
 Band edge: 756.9 – 757.0 MHz  
 Modulation: 16QAM  
 Bit rate: 867 kbps  
 EUT Power settings Attenuation = 6

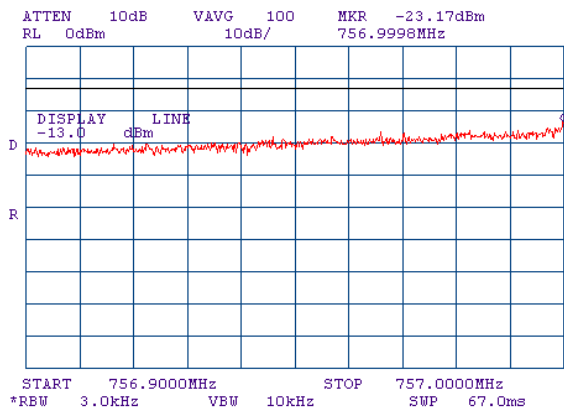

Note: test result = SA reading + Correction factor = -23.17 dBm + 10 dB = -13.17 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10\text{dB}$

**Plot 7.5.7 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.125 MHz  
 Band edge: 756.8 – 756.9 MHz  
 Modulation: 16QAM  
 Bit rate: 867 kbps  
 EUT Power settings Attenuation = 6

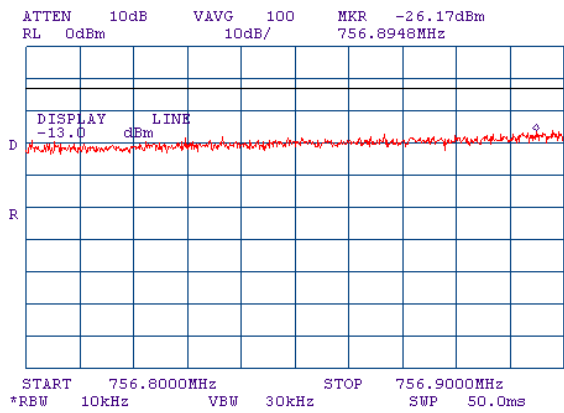


Note: test result = SA reading + Correction factor = -26.17 dBm + 10 dB = -16.17 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10\text{dB}$



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.8 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.125 MHz  
 Band edge: 756.2 – 756.8 MHz  
 Modulation: 16QAM  
 Bit rate: 867 kbps  
 EUT Power settings Attenuation = 6

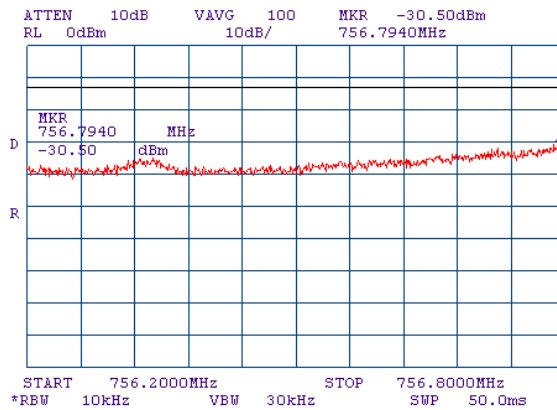


Note: test result = SA reading + Correction factor = -30.50 dBm + 10 dB = -20.50 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.9 Spurious emissions at RF antenna connector, high channel band edge measurements**


Frequency: 757.875 MHz  
 Band edge: 758.0 – 758.1 MHz  
 Modulation: 16QAM  
 Bit rate: 867 kbps  
 EUT Power settings Attenuation = 6

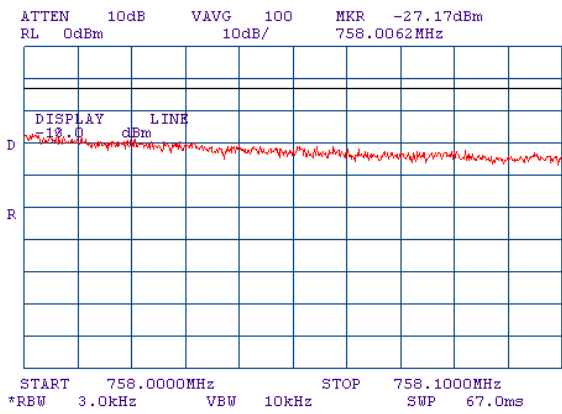

Note: test result = SA reading + Correction factor = -23.10 dBm + 10 dB = -13.10 dBm  
 Correction factor = 10\*log(30kHz/3kHz) = 10 dB

**Plot 7.5.10 Spurious emissions at RF antenna connector, high channel band edge measurements**

Frequency: 757.875 MHz  
 Band edge: 758.1 – 758.8 MHz  
 Modulation: 16QAM  
 Bit rate: 867 kbps  
 EUT Power settings Attenuation = 6

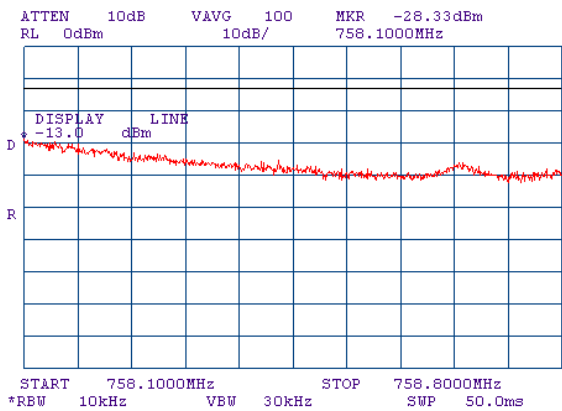

Note: test result = SA reading + Correction factor = -28.33 dBm + 10 dB = -18.33 dBm  
 Correction factor = 10\*log(100kHz/10kHz) = 10 dB




<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.11 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.125 MHz  
 Band edge: 756.9 – 757.0 MHz  
 Modulation: 64QAM  
 Bit rate: 1245 kbps  
 EUT Power settings Attenuation = 6

ATTEN 10dB VAVG 100 MKR -24.67dBm  
 RL 0dBm 10dB/ 756.9930MHz

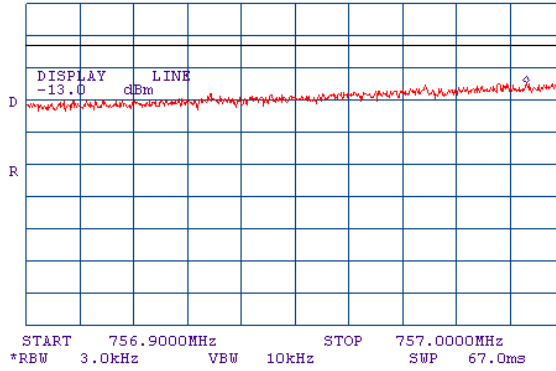


Note: test result = SA reading + Correction factor = -24.67 dBm + 10 dB = -14.67 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.12 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.125 MHz  
 Band edge: 756.2 – 756.8 MHz  
 Modulation: 64QAM  
 Bit rate: 1245 kbps  
 EUT Power settings Attenuation = 6

ATTEN 10dB VAVG 100 MKR -26.33dBm  
 RL 0dBm 10dB/ 756.8953MHz

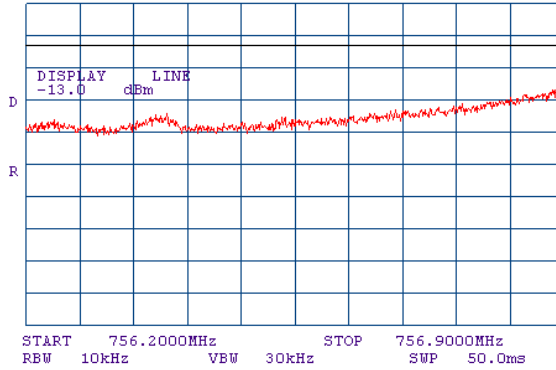


Note: test result = SA reading + Correction factor = -26.33 dBm + 10 dB = -16.33 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.13 Spurious emissions at RF antenna connector, high channel band edge measurements**


Frequency: 757.875 MHz  
 Band edge: 758.0 – 758.1 MHz  
 Modulation: 64QAM  
 Bit rate: 1245 kbps  
 EUT Power settings Attenuation = 6

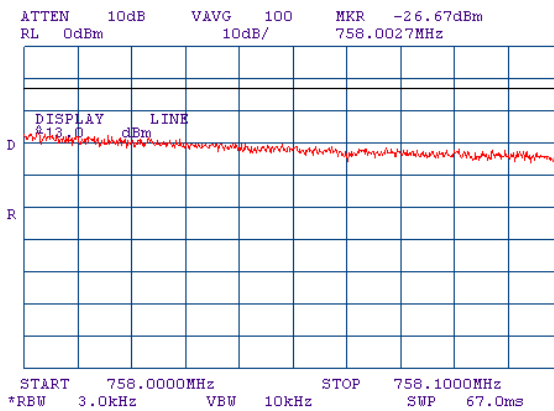

Note: test result = SA reading + Correction factor = -26.67 dBm + 10 dB = -16.67 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.14 Spurious emissions at RF antenna connector, high channel band edge measurements**

Frequency: 757.875 MHz  
 Band edge: 758.1 – 758.8 MHz  
 Modulation: 64QAM  
 Bit rate: 1245 kbps  
 EUT Power settings Attenuation = 6

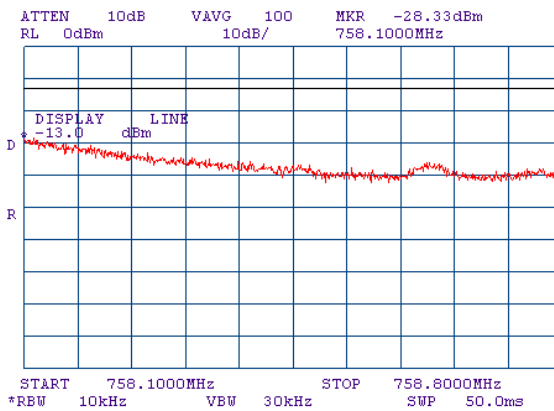


Note: test result = SA reading + Correction factor = -28.33 dBm + 10 dB = -18.33 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$




<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

**Plot 7.5.15 Spurious emissions at RF antenna connector, low channel band edge measurements**

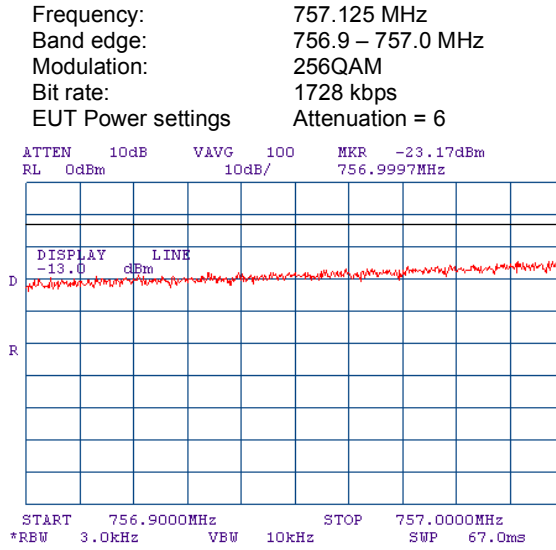

Note: test result = SA reading + Correction factor = -23.17 dBm + 10 dB = -13.17 dBm  
 Correction factor = 10\*log(30kHz/3kHz) = 10 dB

**Plot 7.5.16 Spurious emissions at RF antenna connector, low channel band edge measurements**

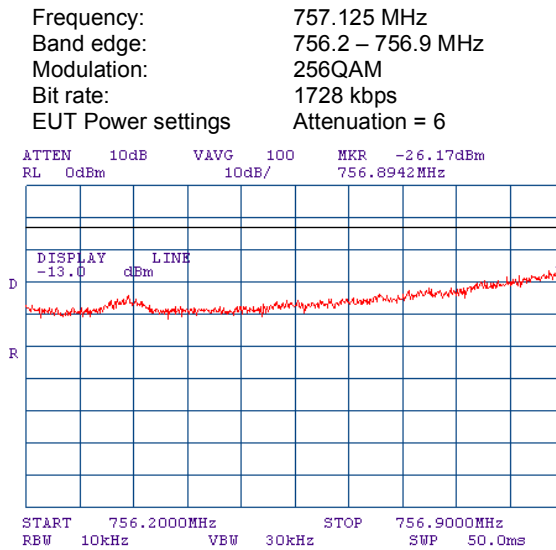


Note: test result = SA reading + Correction factor = -26.17 dBm + 10 dB = -16.17 dBm  
 Correction factor = 10\*log(100kHz/10kHz) = 10 dB






<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 245 kHz CBW			

Plot 7.5.17 Spurious emissions at RF antenna connector, high channel band edge measurements

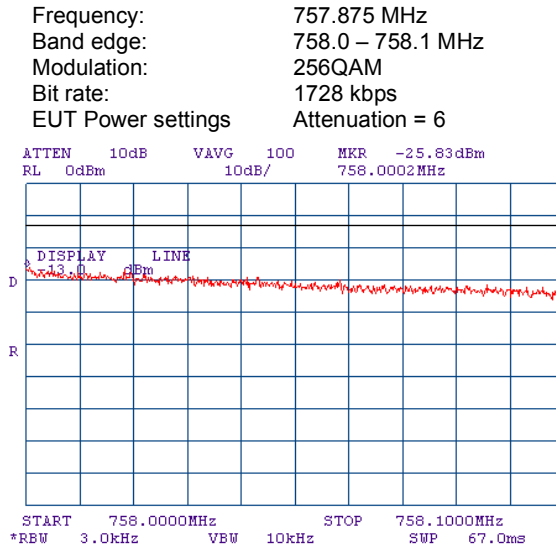

Note: test result = SA reading + Correction factor = -25.83 dBm + 10 dB = -15.83 dBm  
 Correction factor = 10\*log(30kHz/3kHz) = 10 dB

Plot 7.5.18 Spurious emissions at RF antenna connector, high channel band edge measurements

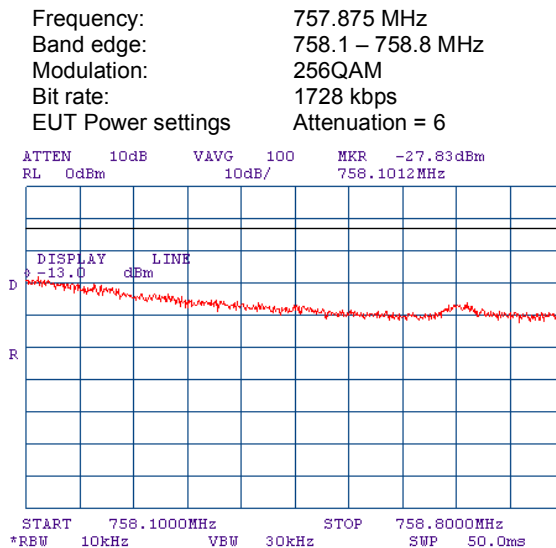


Note: test result = SA reading + Correction factor = -28.53 dBm + 10 dB = -18.53 dBm  
 Correction factor = 10\*log(100kHz/10kHz) = 10 dB



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.5.19 Spurious emissions at RF antenna connector, low channel band edge measurements**


Frequency: 757.17 MHz  
 Band edge: 756.9 – 757.0 MHz  
 Modulation: QPSK  
 Bit rate: 583 kbps  
 EUT Power settings Attenuation = 6

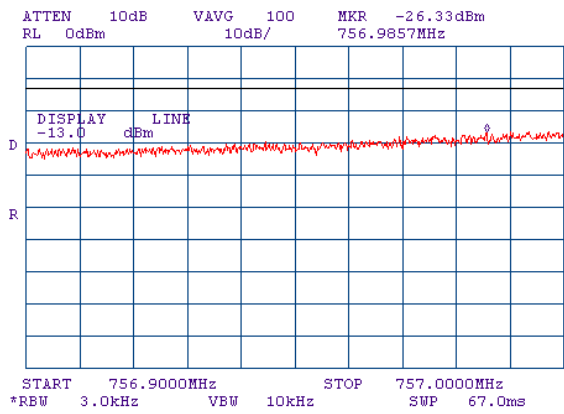

Test result = SA reading + Correction factor = -24.63 dBm + 10 dB = -14.63 dBm,  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.20 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.17 MHz  
 Band edge: 756.2 – 756.9 MHz  
 Modulation: QPSK  
 Bit rate: 583 kbps  
 EUT Power settings Attenuation = 6

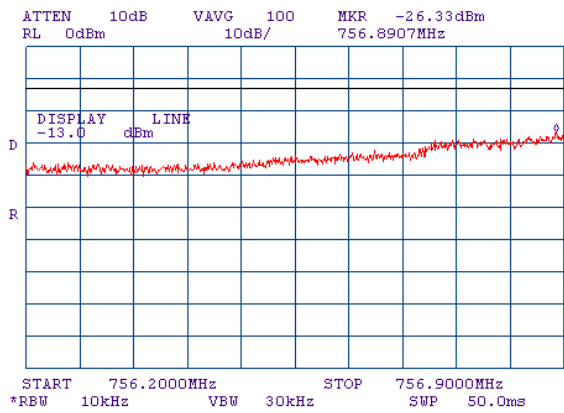

Note: test result = SA reading + Correction factor = -26.33 dBm + 10 dB = -16.33dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$




<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.5.21 Spurious emissions at RF antenna connector, high channel band edge measurements**

Frequency: 757.83 MHz  
 Band edge: 758.0 – 758.1 MHz  
 Modulation: QPSK  
 Bit rate: 583 kbps  
 EUT Power settings Attenuation = 6

ATTEN 10dB VAVG 100 MKR -27.67dBm  
 RL 0dBm 10dB/ 758.0018MHz

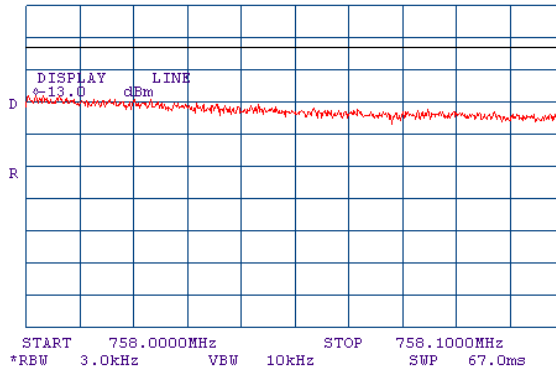


Test result = SA reading + Correction factor = -27.67 dBm + 10 dB = -17.67 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.22 Spurious emissions at RF antenna connector, high channel band edge measurements**

Frequency: 757.83 MHz  
 Band edge: 758.1 – 758.8 MHz  
 Modulation: QPSK  
 Bit rate: 583 kbps  
 EUT Power settings Attenuation = 6

ATTEN 10dB VAVG 100 MKR -28.50dBm  
 RL 0dBm 10dB/ 758.1012MHz

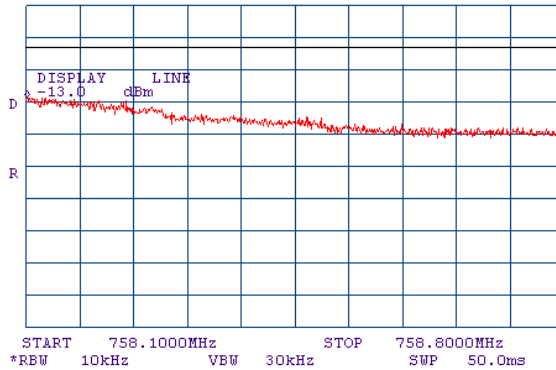


Note: test result = SA reading + Correction factor = -28.50 dBm + 10 dB = -18.50 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.5.23 Spurious emissions at RF antenna connector, low channel band edge measurements**


Frequency: 757.17 MHz  
 Band edge: 756.9 – 757.0 MHz  
 Modulation: 16QAM  
 Bit rate: 1166 kbps  
 EUT Power settings Attenuation = 6

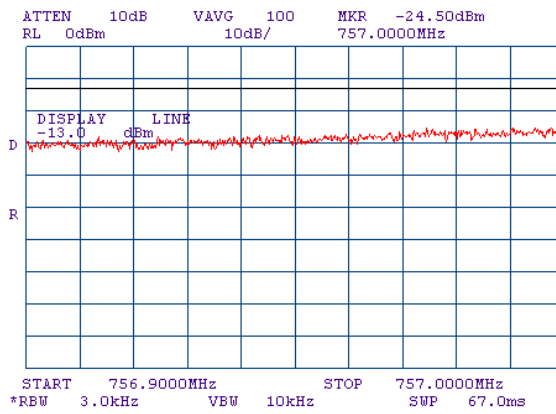

Note: test result = SA reading + Correction factor = -24.50 dBm + 10 dB = -14.50 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.24 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.17 MHz  
 Band edge: 756.2 – 756.9 MHz  
 Modulation: 16QAM  
 Bit rate: 1166 kbps  
 EUT Power settings Attenuation = 6

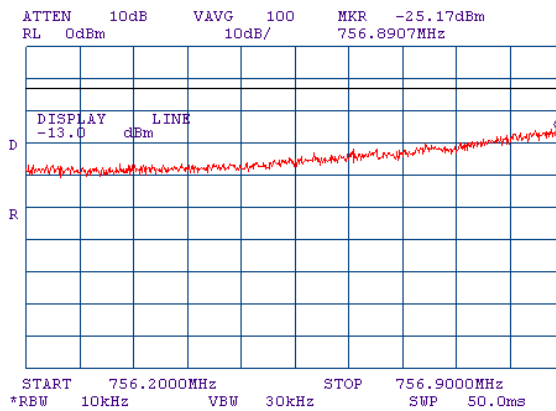


Note: test result = SA reading + Correction factor = -25.17 dBm + 10 dB = -15.17 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.5.25 Spurious emissions at RF antenna connector, high channel band edge measurements**


Frequency: 757.83 MHz  
 Band edge: 758.0 – 758.1 MHz  
 Modulation: 16QAM  
 Bit rate: 1166 kbps  
 EUT Power settings Attenuation = 5

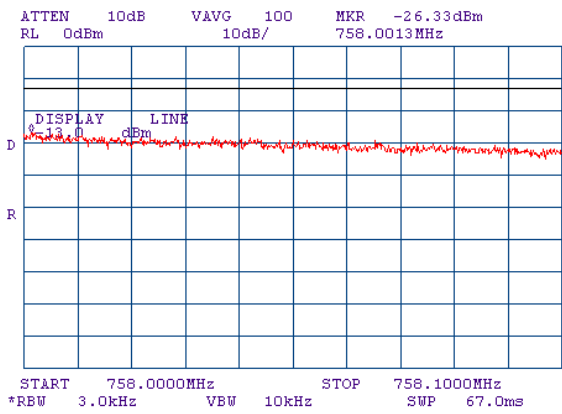

Note: test result = SA reading + Correction factor = -26.33 dBm + 10 dB = -16.33 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.26 Spurious emissions at RF antenna connector, high channel band edge measurements**

Frequency: 757.83 MHz  
 Band edge: 758.2 – 758.8 MHz  
 Modulation: 16QAM  
 Bit rate: 1166 kbps  
 EUT Power settings Attenuation = 5

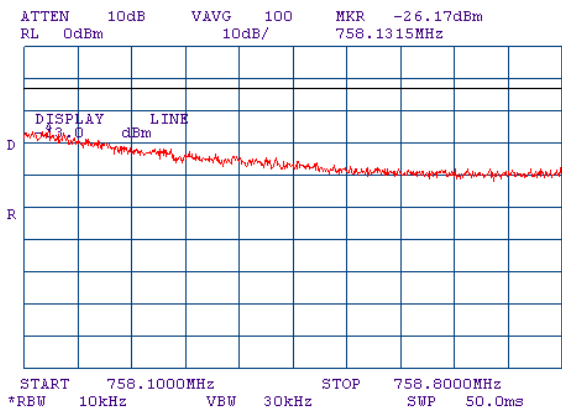


Note: test result = SA reading + Correction factor = -26.17 dBm + 10 dB = -16.17 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.5.27 Spurious emissions at RF antenna connector, low channel band edge measurements**


Frequency: 757.17 MHz  
 Band edge: 756.9 – 757.0 MHz  
 Modulation: 64QAM  
 Bit rate: 1668 kbps  
 EUT Power settings Attenuation = 5

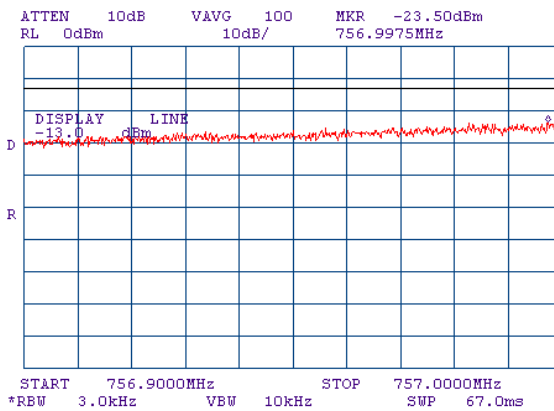

Note: test result = SA reading + Correction factor = -23.50 dBm + 10 dB = -13.50 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.28 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.17 MHz  
 Band edge: 756.6 – 756.8 MHz  
 Modulation: 64QAM  
 Bit rate: 1668 kbps  
 EUT Power settings Attenuation = 5

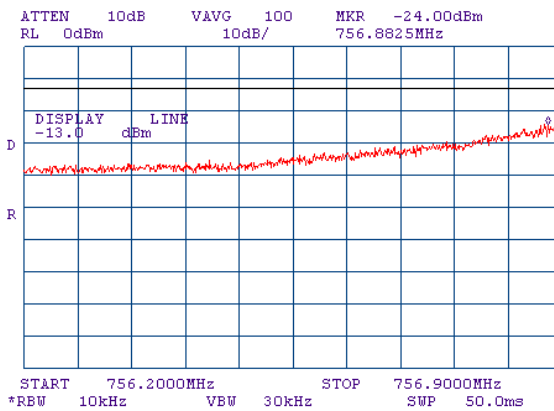


Note: test result = SA reading + Correction factor = -24.00 dBm + 10 dB = -14.00 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.5.29 Spurious emissions at RF antenna connector, high channel band edge measurements**


Frequency: 757.83 MHz  
 Band edge: 758.0 – 758.1 MHz  
 Modulation: 64QAM  
 Bit rate: 1668 kbps  
 EUT Power settings Attenuation = 5

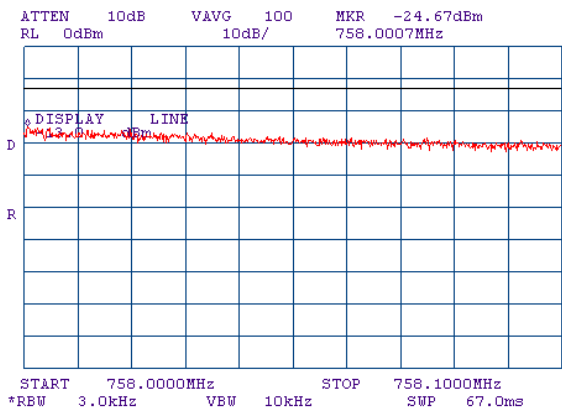

Note: test result = SA reading + Correction factor = -24.67 dBm + 10 dB = -14.67 dBm  
 Correction factor = 10\*log(30kHz/3kHz) = 10 dB

**Plot 7.5.30 Spurious emissions at RF antenna connector, high channel band edge measurements**

Frequency: 757.83 MHz  
 Band edge: 758.2 – 758.4 MHz  
 Modulation: 64QAM  
 Bit rate: 1668 kbps  
 EUT Power settings Attenuation = 5

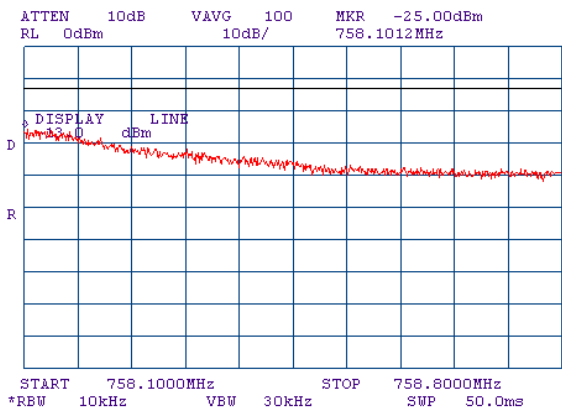


Note: test result = SA reading + Correction factor = -25.00 dBm + 10 dB = -15.00 dBm  
 Correction factor = 10\*log(100kHz/10kHz) = 10 dB



<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.5.31 Spurious emissions at RF antenna connector, low channel band edge measurements**


Frequency: 757.17 MHz  
 Band edge: 756.9 – 757.0 MHz  
 Modulation: 256QAM  
 Bit rate: 2344 kbps  
 EUT Power settings Attenuation = 5

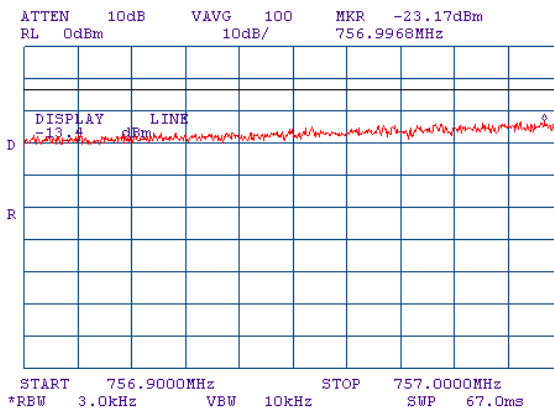

Note: test result = SA reading + Correction factor = -23.17 dBm + 10 dB = -13.17 dBm  
 Correction factor =  $10 \cdot \log(30\text{kHz}/3\text{kHz}) = 10 \text{ dB}$

**Plot 7.5.32 Spurious emissions at RF antenna connector, low channel band edge measurements**

Frequency: 757.17 MHz  
 Band edge: 756.6 – 756.8 MHz  
 Modulation: 256QAM  
 Bit rate: 2344 kbps  
 EUT Power settings Attenuation = 5

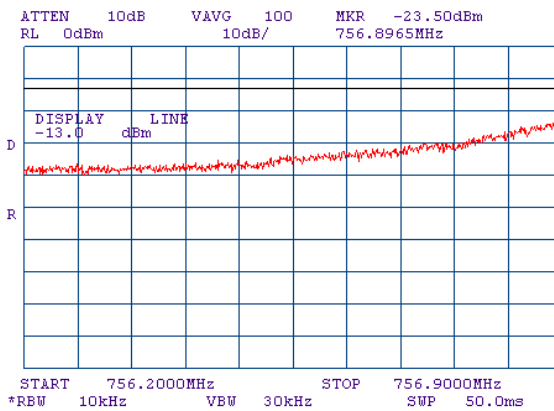


Note: test result = SA reading + Correction factor = -23.50 dBm + 10 dB = -13.50 dBm  
 Correction factor =  $10 \cdot \log(100\text{kHz}/10\text{kHz}) = 10 \text{ dB}$






<b>Test specification:</b>	<b>Section 27.53(c)(3), Band edge emissions at RF antenna connector</b>		
<b>Test procedure:</b>	47 CFR, Sections 2.1047, 2.1051		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/12/2009		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b> 330 kHz CBW			

**Plot 7.5.33 Spurious emissions at RF antenna connector, high channel band edge measurements**

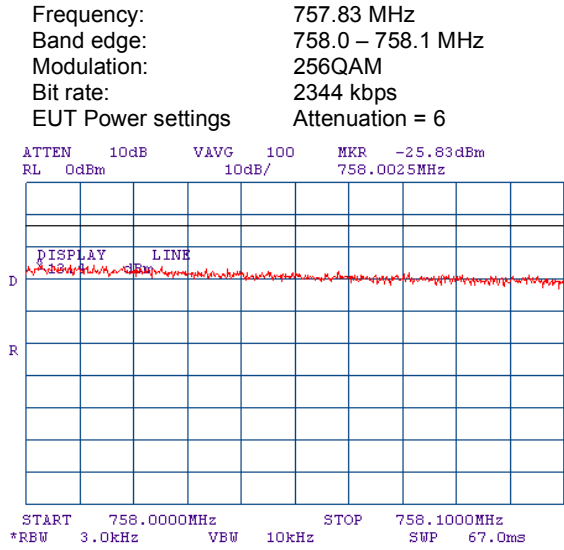

Note: test result = SA reading + Correction factor = -25.83 dBm + 10 dB = -15.83 dBm  
 Correction factor = 10\*log(30kHz/3kHz) = 10 dB

**Plot 7.5.34 Spurious emissions at RF antenna connector, high channel band edge measurements**

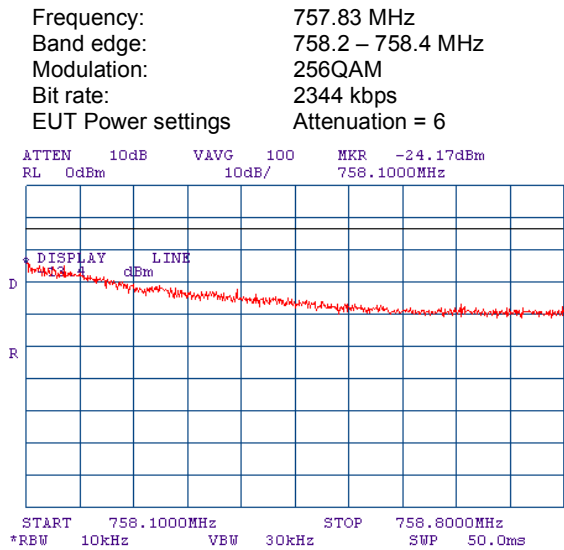

Note: test result = SA reading + Correction factor = -24.17 dBm + 10 dB = -14.17 dBm  
 Correction factor = 10\*log(100kHz/10kHz) = 10 dB



<b>Test specification:</b>	<b>Section 27.53(c)(2), Radiated spurious emissions</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1053, TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/21/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 58%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.6 Radiated spurious emission measurements

### 7.6.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Radiated spurious emission test limits

Frequency, MHz	Attenuation below carrier dBc	ERP of spurious, dBm	Equivalent field strength limit @ 3m, dB(μV/m)***
0.009 – 10 <sup>th</sup> harmonic*	43+10logP**	-13	84.4

\* - Excluding the in band emission within ± 250 % of the authorized bandwidth from the carrier

\*\* - P is transmitter output power in Watts

\*\*\* - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:  $E = \sqrt{30 \times P \times 1.64} / r$ , where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

### 7.6.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and the performance check was conducted.

7.6.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.6.2.3 The worst test results (the lowest margins) were recorded in Table 7.6.2 and shown in the associated plots.

### 7.6.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.6.3.1 The EUT was set up as shown in Figure 7.6.2, energized and the performance check was conducted.

7.6.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.6.3.3 The worst test results (the lowest margins) were recorded in Table 7.6.2 and shown in the associated plots.



<b>Test specification:</b>	<b>Section 27.53(c)(2), Radiated spurious emissions</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1053, TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date:</b>	7/21/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 58%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Figure 7.6.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


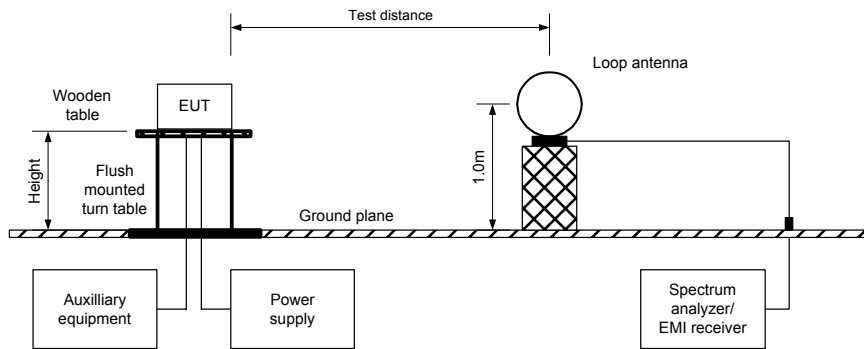


Figure 7.6.2 Setup for spurious emission field strength measurements above 30 MHz



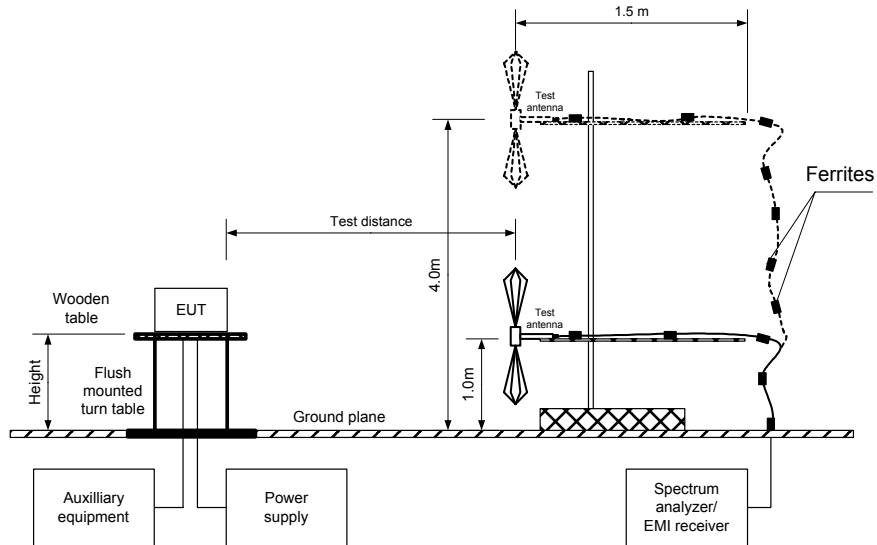

<b>Test specification:</b>	<b>Section 27.53(c)(2), Radiated spurious emissions</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1053, TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/21/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 58%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 7.6.2 Spurious emission field strength test results**

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: Semi anechoic chamber  
 EUT HEIGHT: 0.8 m  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 2000 MHz  
 EUT ANTENNA: Termination 50 Ohm  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Double ridged guide (above 1000 MHz)  
 MODULATION: 16QAM (330 kHz OBW)  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 1.668 Mbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees
<b>Mid carrier frequency 757.500 MHz</b>							
All spurious emissions were found at least 20 dB below the specified limit							

**Verdict:Pass**

\*- Margin = Field strength of spurious – calculated field strength limit.

\*\* - EUT front panel refers to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 1984	HL 2432	HL 2661	HL 3122	HL 3123
HL 3531	HL 3533	HL 3616					

Full description is given in Appendix A.



HERMON LABORATORIES


<b>Test specification:</b>	<b>Section 27.53(c)(2), Radiated spurious emissions</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1053, TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/21/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 58%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 7.6.1 Radiated emission measurements in 9 - 150 kHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical  
 TEST DISTANCE: 3 m

11:12:51 JUL 21, 2009

ACTV DET: PEAK  
 MEAS DET: PEAK OP AVG  
 MKR 15.8 kHz  
 78.44 dBµV/m

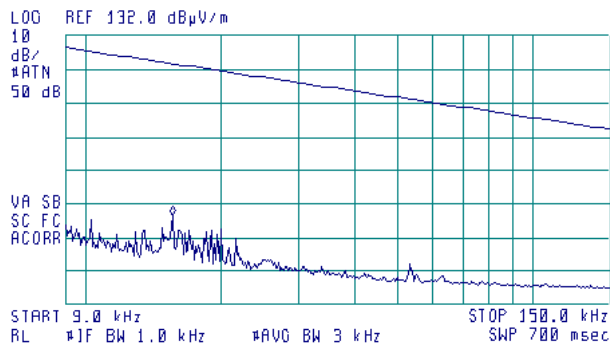


**Plot 7.6.2 Radiated emission measurements in 0.15 - 30 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical  
 TEST DISTANCE: 3 m

11:21:03 JUL 21, 2009

ACTV DET: PEAK  
 MEAS DET: PEAK OP AVG  
 MKR 150 kHz  
 57.68 dBµV/m

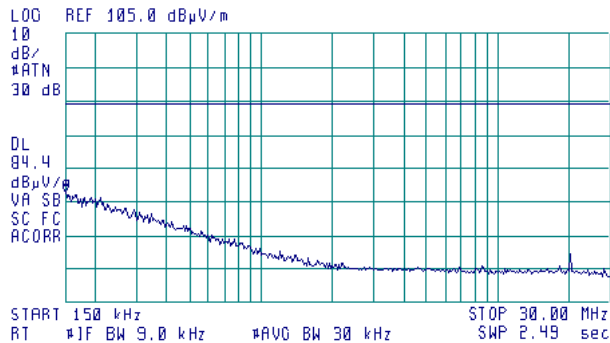



HERMON LABORATORIES


<b>Test specification:</b>	<b>Section 27.53(c)(2), Radiated spurious emissions</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1053, TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/21/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 58%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.6.3 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m

11:59:19 JUL 21, 2009

ACTV DET: PEAK  
 MEAS DET: PEAK OP AVG  
 MKR 756.0 MHz  
 71.37 dBμV/m

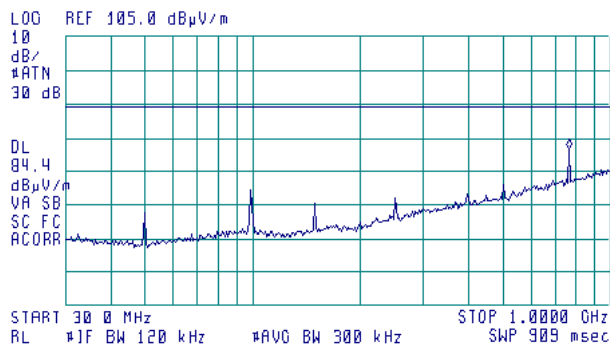


Plot 7.6.4 Radiated emission measurements in 1000 – 2900 MHz range

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m

12:22:04 JUL 21, 2009

ACTV DET: PEAK  
 MEAS DET: PEAK OP AVG  
 MKR 1.518 GHz  
 59.98 dBμV/m

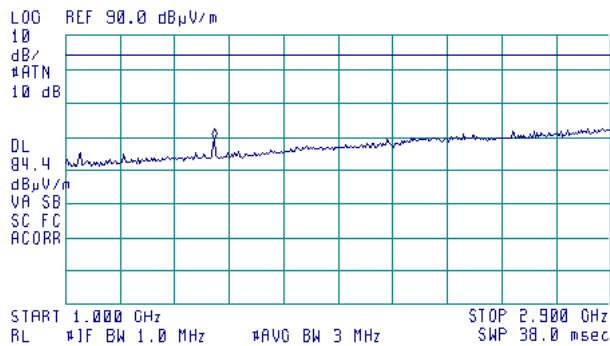




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 27.53(c)(2), Radiated spurious emissions</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1053, TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/21/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 58%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 7.6.5 Radiated emission measurements in 2900 – 8000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m

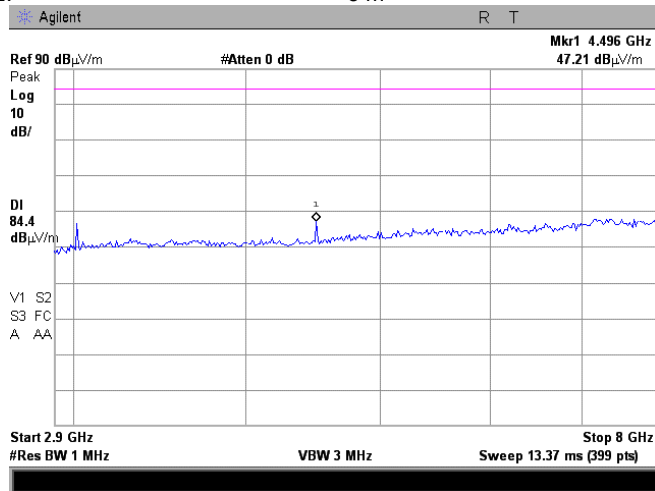



<b>Test specification:</b>	<b>Section 27.53(f), Radiated emissions in the 1559-1610 MHz band</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.5 and 12.1.3; TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/28/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 53%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.7 Radiated spurious emission measurements in 1559-1610 MHz band

### 7.7.1 General

This test was performed to measure radiated spurious emissions from the EUT enclosure with antenna. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emission test limits

Frequency, MHz	Type of signal	EIRP of spurious emissions, dBW/MHz	Spurious emissions, dBm	Equivalent field strength limit @ 3m, dB(μV/m)
1559 - 1610	Wideband	-70	-40	55.23
	Discrete or less than 700 Hz BW	-80	-50	45.23

### 7.7.2 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the EUT performance was checked.

7.7.2.2 The specified frequency range was investigated with antennas connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.7.2.3 The worst test results with respect to the limits were recorded in Table 7.7.2 and shown in the associated plots.

### 7.7.3 Test procedure for substitution EIRP measurements of spurious

7.7.3.1 The test equipment was set up as shown in Figure 7.7.2 and energized.

7.7.3.2 RF signal generator was set to the frequency of investigated spurious emission and the RF output level was preliminary adjusted to produce the same field strength as it was measured from the EUT.

7.7.3.3 The test antenna height was swept from 1 to 4 m to find maximum emission from substitution antenna and RF signal generator output was fine adjusted to produce the same field strength as it was measured from the EUT.

7.7.3.4 The above procedure was performed in both, horizontal and vertical, polarizations of the test and substitution antennas.

7.7.3.5 The EIRP of spurious emissions was calculated as a sum of signal generator output power in dBm and antenna gain in dBi reduced by cable loss in dB.

7.7.3.6 The above procedure was repeated at the rest of investigated frequencies.

7.7.3.7 The worst test results (the lowest margins) were recorded in Table 7.7.3 and shown in the associated plots.





<b>Test specification:</b>	<b>Section 27.53(f), Radiated emissions in the 1559-1610 MHz band</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.5 and 12.1.3; TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/28/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 53%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Figure 7.7.1 Setup for spurious emission field strength measurements


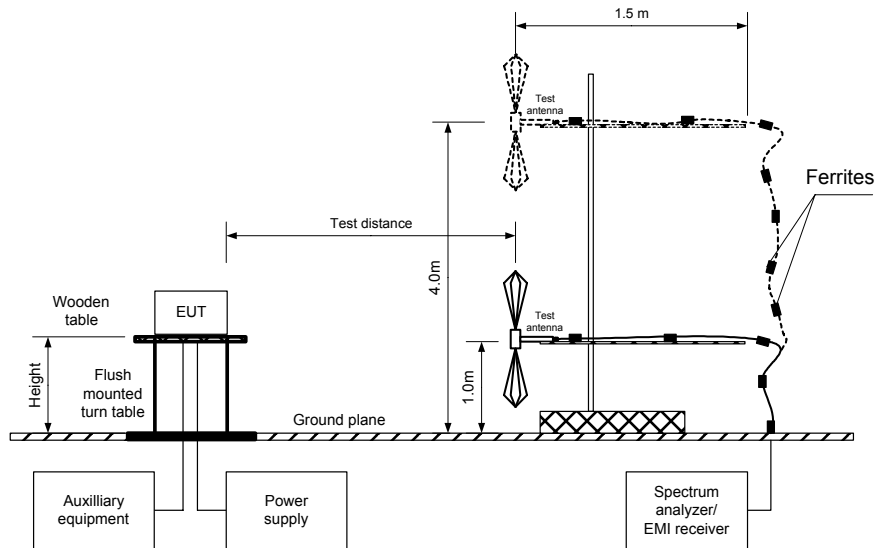


Figure 7.7.2 Setup for substitution EIRP measurements of spurious



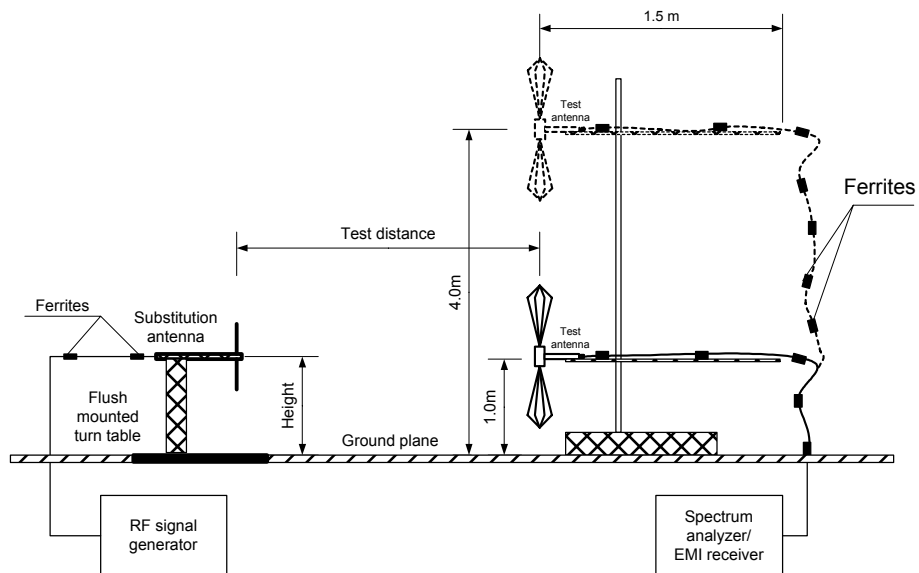

<b>Test specification:</b>	<b>Section 27.53(f), Radiated emissions in the 1559-1610 MHz band</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.5 and 12.1.3; TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/28/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 53%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 7.7.2 Spurious emission field strength test**

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 TEST SITE: Semi Anechoic Chamber  
 TEST DISTANCE: 3 m  
 EUT HEIGHT: 0.8 m  
 INVESTIGATED FREQUENCY RANGE: 1559 – 1610 MHz  
 EUT ANTENNA: External  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 TEST ANTENNA TYPE: Double ridged guide  
 MODULATION: 64QAM  
 CHANNEL BANDWIDTH: 245 kHz  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

\*- Margin = Field strength of spurious – calculated field strength limit.

\*\*- For wideband signals emissions in the band 746-763 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP)

Frequency, MHz	Field strength, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees
<b>Mid carrier frequency 757.500 MHz</b>							
1599.960	45.86	45.20	0.66	1000	V	1.3	010

**Table 7.7.3 Substitution EIRP of spurious test results**

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 SUBSTITUTION ANTENNA HEIGHT: 0.8 m  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 SUBSTITUTION ANTENNA TYPE: Tunable dipole (30 MHz – 1000 MHz)  
 Double ridged guide (above 1000 MHz)

Frequency MHz	Field strength dB(μV/m)	RBW, kHz	Antenna polarization	RF generator output, dBm	Ant gain dBi	Cable loss, dB	ERP, dBm	Limit, dBm	Margin dB*	Verdict
<b>Mid carrier frequency</b>										
1599.960	45.86	1000	V	-59.12	8.49	1.81	-52.44	-50.00	-2.44	Pass

\*- Margin = Calculated EIRP – spurious emissions limit

**Reference numbers of test equipment used**

HL 0661	HL 1365	HL 1430	HL 1947	HL 1984	HL 2432	HL 2871	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 27.53(f), Radiated emissions in the 1559-1610 MHz band</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.5 and 12.1.3; TIA/EIA-603-C, Section 2.2.12		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/28/2009		
<b>Temperature:</b> 25°C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 53%	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 7.7.1 Radiated emission measurements in 1559 - 1610 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 RBW/VBW: 1000/3000 kHz

14:38:17 JUL 21, 2009

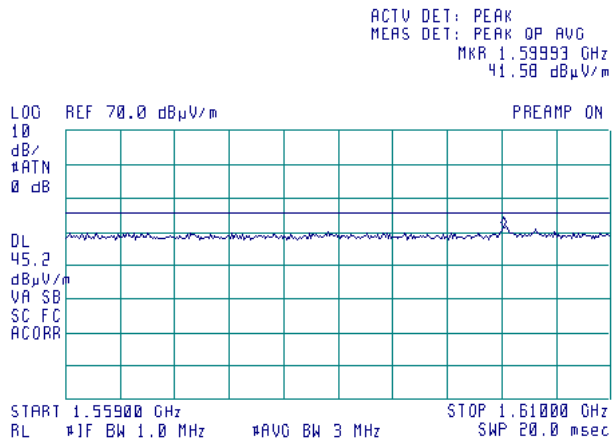



<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.8 Frequency stability test

### 7.8.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.8.1.


Table 7.8.1 Frequency stability limits

Assigned frequency, MHz	Maximum allowed frequency displacement
757.0 – 758.0	26 dBc points including frequency tolerance shall remain within the assigned band

### 7.8.2 Test procedure

- 7.8.2.1 The EUT was set up as shown in Figure 7.8.1, energized and its proper operation was checked.
- 7.8.2.2 The EUT power was turned off. Temperature within test chamber was set to +30°C and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.8.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then every minute until frequency had been stabilized or 10 minutes elapsed whichever reached the last. The EUT was powered off.
- 7.8.2.4 The above procedure was repeated at 0°C and at the lowest test temperature.
- 7.8.2.5 The EUT was powered on and carrier frequency was measured at start up moment and at the end of stabilization period at the rest of test temperatures and voltages. The EUT was powered off.
- 7.8.2.6 Frequency displacement was calculated as provided in Table 7.8.2 and Table 7.8.3.

Figure 7.8.1 Frequency stability test setup

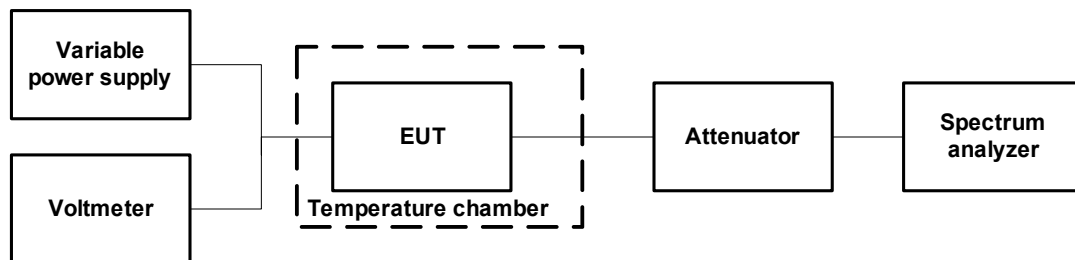



<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Table 7.8.2 Frequency stability test results

ASSIGNED FREQUENCY RANGE: 757.0 – 758.0 MHz  
 NOMINAL POWER VOLTAGE: 120 VAC (102 VAC - 138 VAC)  
 TEMPERATURE STABILIZATION PERIOD: 20 min  
 POWER DURING TEMPERATURE TRANSITION: Off  
 RESOLUTION BANDWIDTH: 100 Hz  
 VIDEO BANDWIDTH: 300 Hz  
 FREQUENCY SPAN: 1.0 kHz  
 SPECTRUM ANALYZER MODE: Counter  
 MODULATION: Unmodulated

T, °C	Voltage, V	Frequency, MHz							Max frequency drift, Hz	
		Start up	1 <sup>st</sup> min	2 <sup>nd</sup> min	3 <sup>rd</sup> min	4 <sup>th</sup> min	5 <sup>th</sup> min	10 <sup>th</sup> min	Positive	Negative
<b>Low frequency, 757.17 MHz</b>										
-30	nominal	No Transmission	NA	NA	NA	NA	NA	No Transmission	0	0
-20	nominal	No Transmission	NA	NA	NA	NA	NA	No Transmission	0	0
-10	nominal	757.124227	NA	NA	NA	NA	NA	757.124227	0	-273
0	nominal	757.124367	757.124400	757.124410	757.124412	757.124427	757.124432	757.124448	0	-133
10	nominal	757.124550	NA	NA	NA	NA	NA	757.124550	50	0
20	15%	757.124480	NA	NA	NA	NA	NA	757.124500	0	-20
20	nominal	757.124500	NA	NA	NA	NA	NA	757.124500	0	0
20	-15%	757.124480	NA	NA	NA	NA	NA	757.124500	0	-20
30	nominal	757.124550	757.124507	757.124500	757.124495	757.124488	757.124477	757.124455	7	-23
40	nominal	757.124235	NA	NA	NA	NA	NA	757.124187	0	-313
50	nominal	757.124107	NA	NA	NA	NA	NA	757.123795	0	-705
<b>High frequency, 757.837 5MHz</b>										
-30	nominal	No Transmission	NA	NA	NA	NA	NA	No Transmission	0	0
-20	nominal	No Transmission	NA	NA	NA	NA	NA	No Transmission	0	0
-10	nominal	757.874163	NA	NA	NA	NA	NA	757.874215	0	-337
0	nominal	757.874448	757.874448	757.874448	757.874448	757.874448	757.874448	757.874448	0	-52
10	nominal	757.874524	NA	NA	NA	NA	NA	757.874551	51	0
20	15%	757.874480	NA	NA	NA	NA	NA	757.874500	0	-20
20	nominal	757.874500	NA	NA	NA	NA	NA	757.874500	0	0
20	-15%	757.874500	NA	NA	NA	NA	NA	757.874520	0	-20
30	nominal	757.874460	757.874457	757.874448	757.874448	757.874448	757.874447	757.874440	0	-60
40	nominal	757.874408	NA	NA	NA	NA	NA	757.874251	0	-249
50	nominal	757.873767	NA	NA	NA	NA	NA	757.873667	0	-833

\* - Reference frequency



<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 7.8.3 Transmitter operating range including frequency drift**

POWER BANDWIDTH		245 kHz			
Assigned frequency band, MHz	Measured 26 dBc point, MHz	Frequency drift, Hz		26 dBc point including frequency tolerance, MHz	Verdict
		Negative	Positive		
<b>QPSK</b>					
<b>Low frequency</b>					
757.0 – 758.0	757.009500	705	NA	757.008795	Pass
<b>High frequency</b>					
757.0 – 758.0	757.991000	NA	51	757.991051	Pass
<b>16QAM</b>					
<b>Low frequency</b>					
757.0 – 758.0	757.008500	705	NA	757.007795	Pass
<b>High frequency</b>					
757.0 – 758.0	757.991000	NA	51	757.99105	Pass
<b>64QAM</b>					
<b>Low frequency</b>					
757.0 – 758.0	757.009500	705	NA	757.008795	Pass
<b>High frequency</b>					
757.0 – 758.0	757.989000	NA	51	757.989051	Pass
<b>256QAM</b>					
<b>Low frequency</b>					
757.0 – 758.0	757.008500	705	NA	757.007795	Pass
<b>High frequency</b>					
757.0 – 758.0	757.992000	NA	51	757.992051	Pass

POWER BANDWIDTH		330 kHz			
Assigned frequency band, MHz	Measured 26 dBc point, MHz	Frequency drift, Hz		26 dBc point including frequency tolerance, MHz	Verdict
		Negative	Positive		
<b>QPSK</b>					
<b>Low frequency</b>					
757.0 – 758.0	757.013300	705	NA	757.012467	Pass
<b>High frequency</b>					
757.0 – 758.0	757.986000	NA	51	757.986051	Pass
<b>16QAM</b>					
<b>Low frequency</b>					
757.0 – 758.0	757.014000	705	NA	757.013167	Pass
<b>High frequency</b>					
757.0 – 758.0	757.986000	NA	51	757.986051	Pass
<b>64QAM</b>					
<b>Low frequency</b>					
757.0 – 758.0	757.016000	705	NA	757.015167	Pass
<b>High frequency</b>					
757.0 – 758.0	757.983300	NA	51	757.983351	Pass
<b>256QAM</b>					
<b>Low frequency</b>					
757.0 – 758.0	757.013300	705	NA	757.012467	Pass
<b>High frequency</b>					
757.0 – 758.0	757.986000	NA	51	757.986051	Pass

**Reference numbers of test equipment used**

HL 1424	HL 2869	HL 1876	HL 3176	HL 3179		
---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.



<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.8.1 Band edge emission at low frequency, QPSK**

Band edge: Left  
Channel Bandwidth: 245 kHz

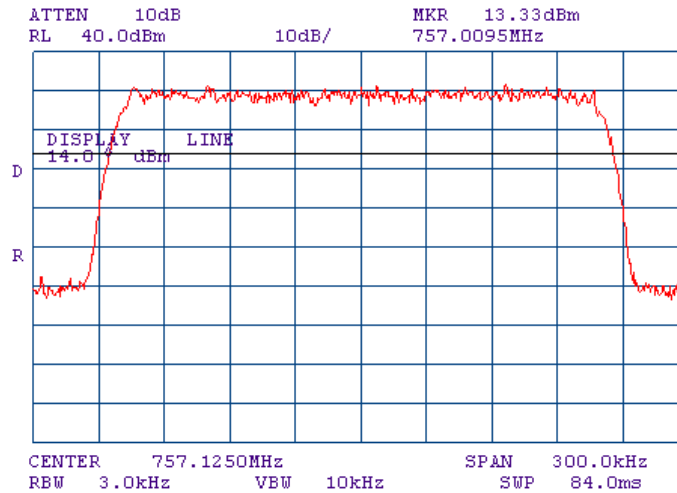

**Plot 7.8.2 Band edge emission at low frequency, 16QAM**

Band edge: Left  
Channel Bandwidth: 245 kHz

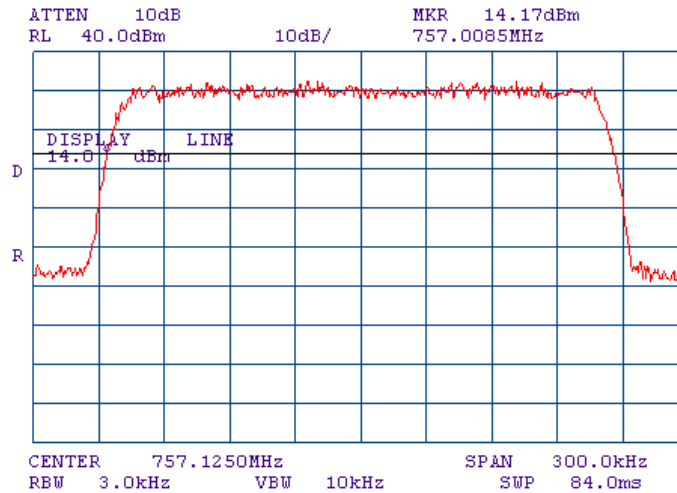




<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date:</b>	7/13/2009		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


Plot 7.8.3 Band edge emission at low frequency, 64QAM

Band edge: Left  
Channel Bandwidth: 245 kHz

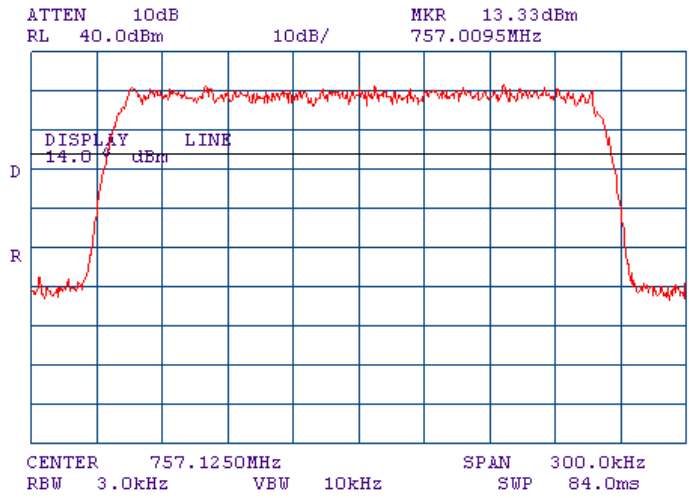

Plot 7.8.4 Band edge emission at low frequency, 256QAM

Band edge: Left  
Channel Bandwidth: 245 kHz

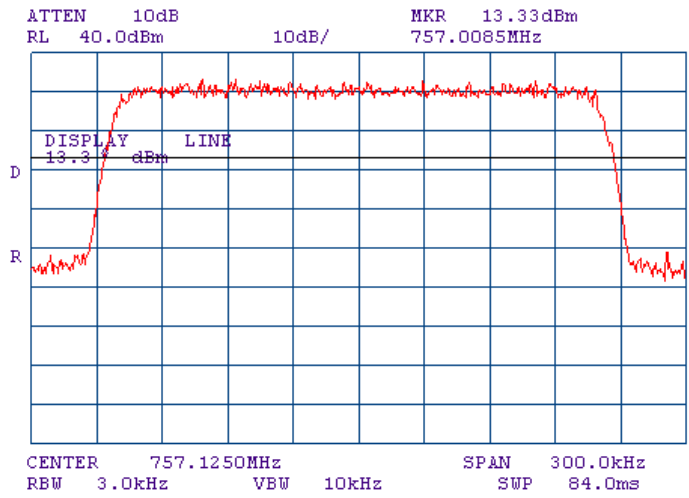






HERMON LABORATORIES

Test specification:	Section 27.54, Frequency stability		
Test procedure:	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
Test mode:	Compliance	Verdict:	PASS
Date:	7/13/2009		
Temperature: 25 °C	Air Pressure: 1014 hPa	Relative Humidity: 48 %	Power Supply: 120 VAC
Remarks:			


Plot 7.8.5 Band edge emission at high frequency, QPSK

Band edge: Right  
Channel Bandwidth: 245 kHz

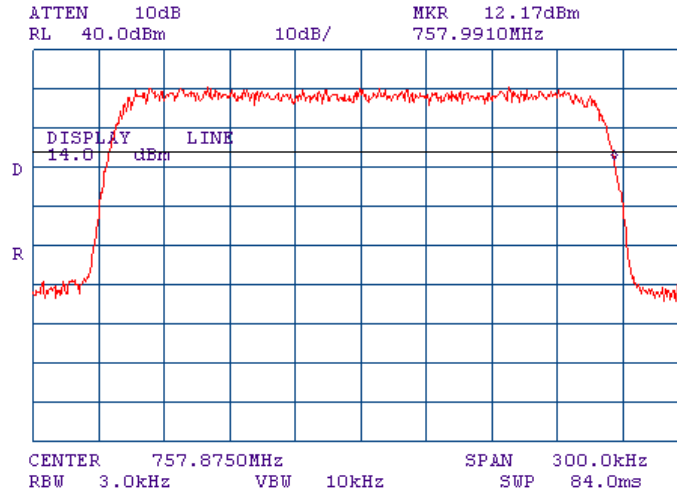

Plot 7.8.6 Band edge emission at high frequency, 16QAM

Band edge: Right  
Channel Bandwidth: 245 kHz

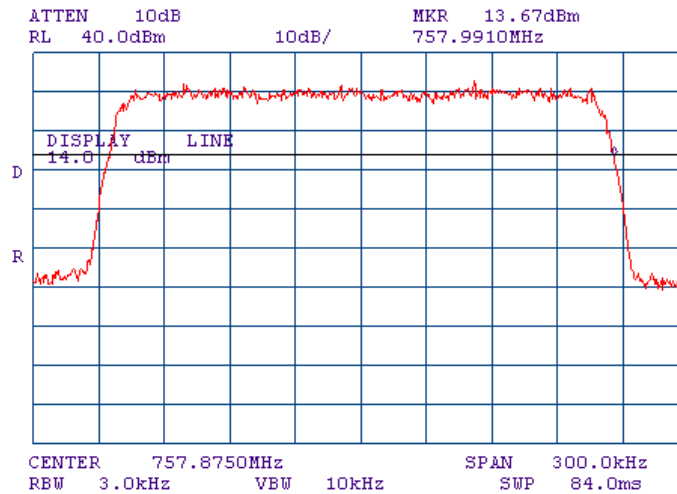




<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature: 25 °C</b>	<b>Air Pressure: 1014 hPa</b>	<b>Relative Humidity: 48 %</b>	<b>Power Supply: 120 VAC</b>
<b>Remarks:</b>			


**Plot 7.8.7 Band edge emission at high frequency, 64QAM**

Band edge: Right  
Channel Bandwidth: 245 kHz

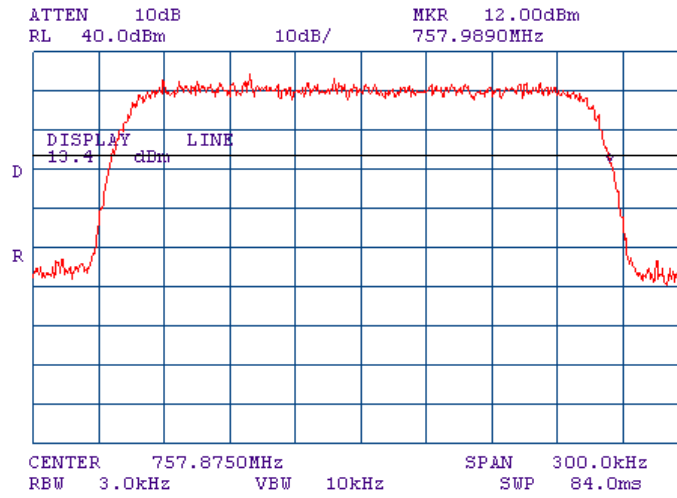

**Plot 7.8.8 Band edge emission at high frequency, 256QAM**

Band edge: Right  
Channel Bandwidth: 245 kHz

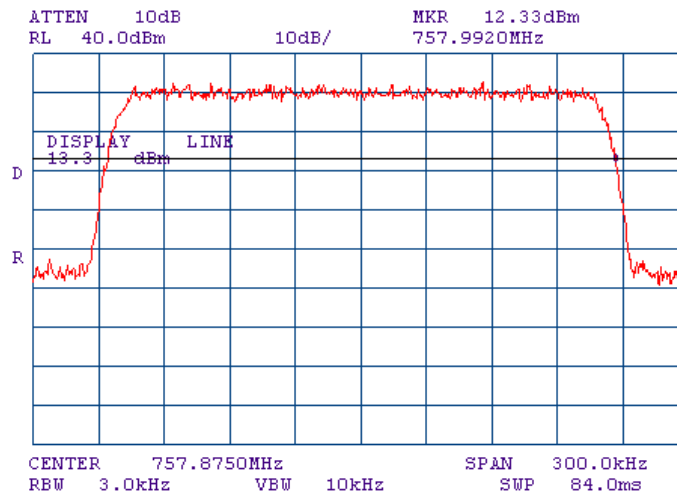




<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.8.9 Band edge emission at low frequency, QPSK**

Band edge: Left  
Channel Bandwidth: 330 kHz

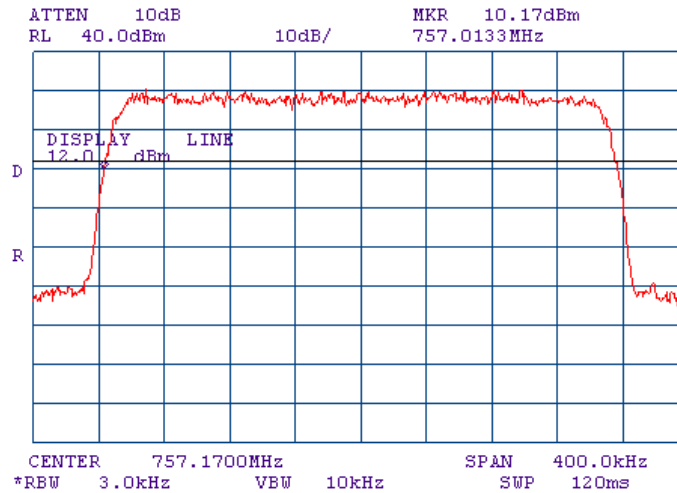

**Plot 7.8.10 Band edge emission at low frequency, 16QAM**

Band edge: Left  
Channel Bandwidth: 330 kHz

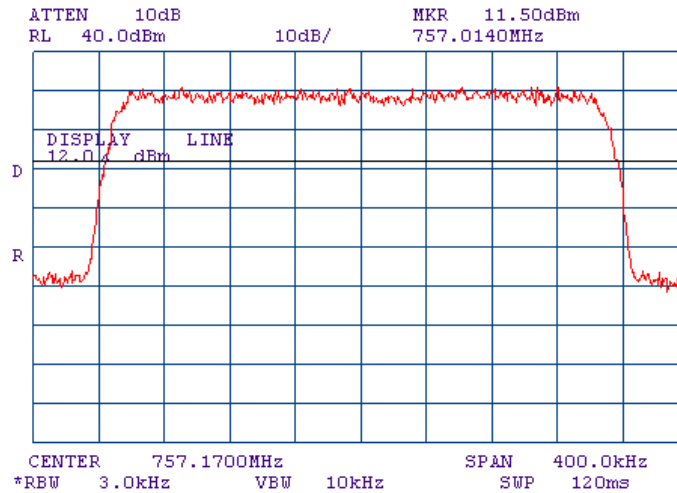




<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.8.11 Band edge emission at low frequency, 64QAM**

Band edge: Left  
Channel Bandwidth: 330 kHz

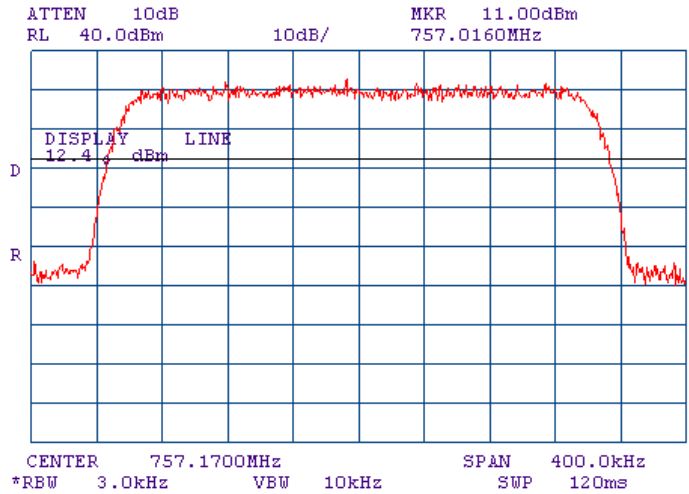

**Plot 7.8.12 Band edge emission at low frequency, 256QAM**

Band edge: Left  
Channel Bandwidth: 330 kHz

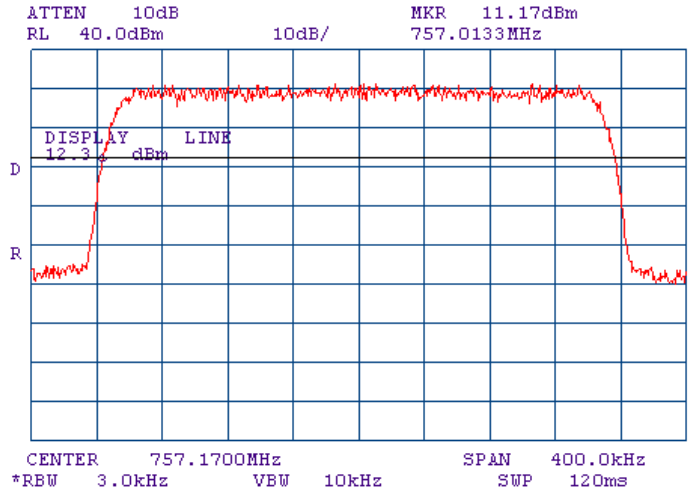




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature: 25 °C</b>	<b>Air Pressure: 1014 hPa</b>	<b>Relative Humidity: 48 %</b>	<b>Power Supply: 120 VAC</b>
<b>Remarks:</b>			


**Plot 7.8.13 Band edge emission at high frequency, QPSK**

Band edge: Right  
Channel Bandwidth: 330 kHz

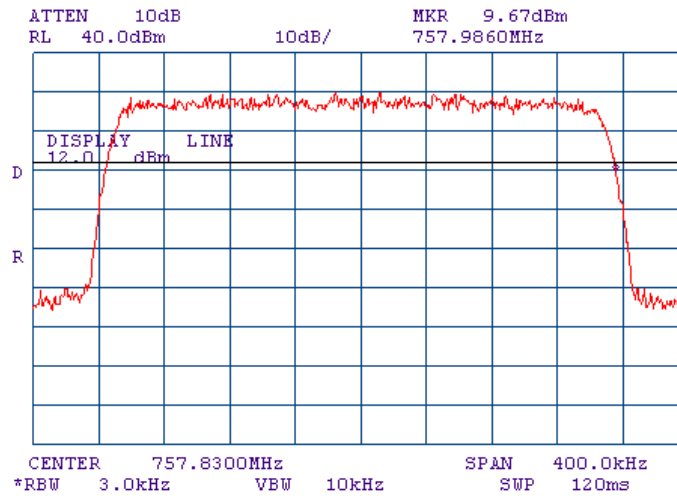

**Plot 7.8.14 Band edge emission at high frequency, 16QAM**

Band edge: Right  
Channel Bandwidth: 330 kHz

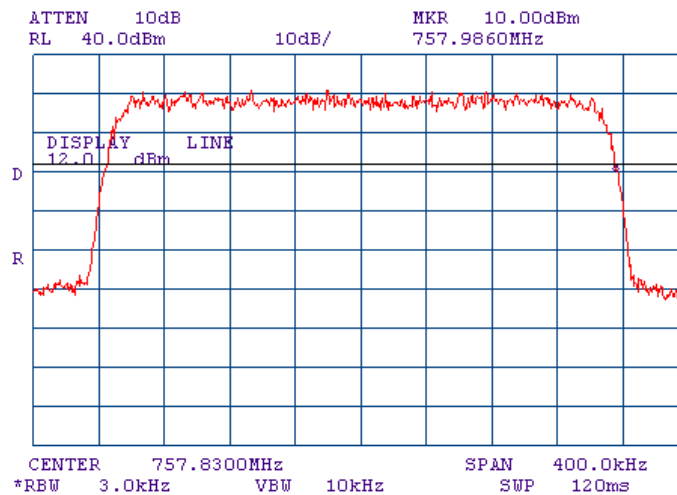




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 27.54, Frequency stability</b>		
<b>Test procedure:</b>	47 CFR, Section 2.1055, TIA/EIA-603-C, Section 2.2.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	7/13/2009		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.8.15 Band edge emission at high frequency, 64QAM**

Band edge: Right  
Channel Bandwidth: 330 kHz

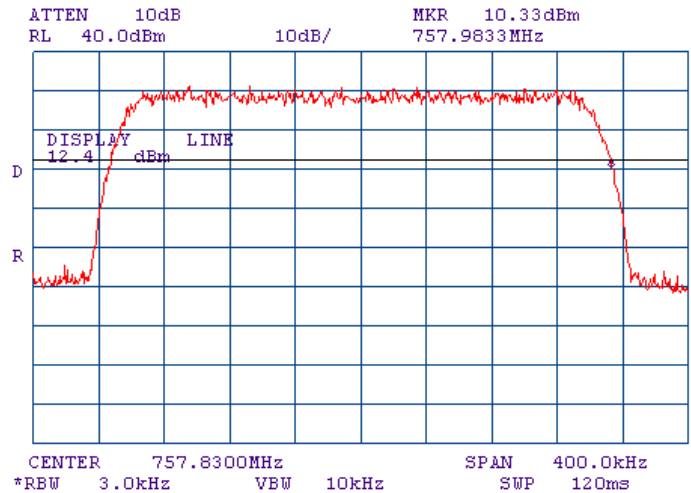

**Plot 7.8.16 Band edge emission at high frequency, 256QAM**

Band edge: Right  
Channel Bandwidth: 330 kHz

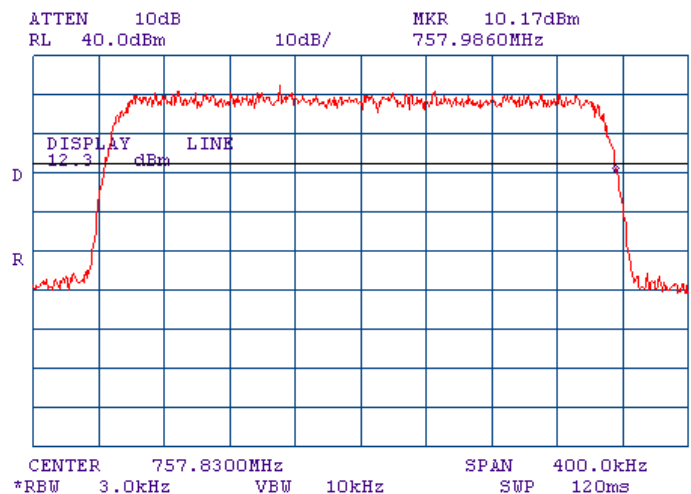

**8 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-09	29-Jun-10
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard Co	8546A	3617A 00319, 3448A002 53	29-Aug-08	29-Aug-09
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-09	11-Jan-10
0661	Generator Swept Signal, 10 MHz to 40 GHz, + 10 dBm	HP	83640B	3614A002 66	17-Sep-08	17-Sep-09
1365	Cable Coaxial, S-FLC 12-50, 5 m	Hermon Laboratories	C214-5	1365	01-Jan-09	01-Jan-10
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	28-Aug-08	28-Aug-09
1430	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL1432	Agilent Technologies	8542E	3807A002 62,3705A0 0217	31-Aug-08	31-Aug-09
1876	Attenuator, 50 Ohm, 100 W, 20 dB	Bird	8343-200	2200	03-Feb-09	03-Feb-10
1947	Cable 18GHz, 6.5 m, blue	Rhophase Microwave Limited	NPS-1803A-6500-NPS	T4974	01-Jan-09	01-Jan-10
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	23-Jan-09	23-Jan-10
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	23-Jan-09	23-Jan-10
2661	Waveguide termination, 18 - 26.5 GHz	Unknown	WR42	2661	29-Aug-06	29-Aug-09
2869	Cable, 18 GHz, 1.2 m, SMA - SMA, Right Angle	Gore	NA	91P72073	04-Feb-09	04-Feb-10
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	11-Feb-09	11-Feb-10
2875	Power meter RF	Boonton Electronics Corp.	42220A	341703AC	20-Feb-09	20-Feb-10
2876	Power sensor, thermocouple, 0.01 to 18 GHz, -30 to20 dBm	Boonton Electronics Corp.	51100 (9E)	26029	20-Feb-09	20-Feb-10
2883	Cable, 18 GHz N-type, M-F, 3 m	Bird	TC-MNFN-3.0	211539 003	07-Dec-08	07-Dec-09
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	07-May-09	07-May-10
2951	Cable, RF, 18 GHz, 0.9 m, SMA-SMA	Gore	10020014	NA	05-Oct-08	05-Oct-09
3122	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	3122	07-Dec-08	07-Dec-09
3123	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	3123	01-Jan-09	01-Jan-10
3175	Attenuator, N-type, 10 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N10W5+	NA	07-May-09	07-May-10
3176	Attenuator, N-type, 10 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N10W5+	NA	07-May-09	07-May-10
3179	Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N20W5+	NA	07-May-09	07-May-10
3180	Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N20W5+	NA	01-Jan-09	01-Jan-10
3181	Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N20W5+	NA	01-Jan-09	01-Jan-10



HERMON LABORATORIES

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
3437	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW-S10W5+	NA	08-Mar-09	08-Mar-10
3531	Amplifier, low noise, 2 to 8 GHz	Quinstar Technology	QLJ-02084040-J0	11159002002	07-Dec-08	07-Dec-09
3533	Amplifier, low noise, 6 to 18 GHz	Quinstar Technology	QLJ-06184040-J0	11159001001	07-Dec-08	07-Dec-09
3616	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	Rg 214/U	NA	07-Dec-08	07-Dec-09





9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
<b>Transmitter tests</b>	
Carrier power conducted at antenna connector	± 1.7 dB
Carrier power radiated (substitution method)	± 4.5 dB
Occupied bandwidth	±8%
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Spurious emissions radiated 30 MHz – 40 GHz (substitution method)	± 4.5 dB
Frequency stability	± 168 Hz (0.56 ppm)

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



## 10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS and IC 2186A-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site). The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 11 APPENDIX D Specification references

47CFR part 27: 2008	Miscellaneous wireless communications services
47CFR part 2: 2008	Frequency allocations and radio treaty matters; general rules and regulations
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI/TIA/EIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards



12 APPENDIX E Test equipment correction factors

Antenna Factor  
Active Loop Antenna  
EMC Test Systems, model 6502, serial number 2857, HL 0446

Frequency, MHz	Magnetic Antenna Factor, dB(S/m)	Electric Antenna Factor, dB(1/m)
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.7
0.750	-41.9	9.6
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.1
4.000	-41.4	10.1
5.000	-41.5	10.0
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB(μV) to convert it into field intensity in dB(μA/m).  
Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field intensity in dB(μV/m).



Antenna factor

Biconilog antenna EMCO, model 3141, serial number 1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	560	19.8	1300	27.0
28	7.8	580	20.6	1320	27.8
30	7.8	600	21.3	1340	28.3
40	7.2	620	21.5	1360	28.2
60	7.1	640	21.2	1380	27.9
70	8.5	660	21.4	1400	27.9
80	9.4	680	21.9	1420	27.9
90	9.8	700	22.2	1440	27.8
100	9.7	720	22.2	1460	27.8
110	9.3	740	22.1	1480	28.0
120	8.8	760	22.3	1500	28.5
130	8.7	780	22.6	1520	28.9
140	9.2	800	22.7	1540	29.6
150	9.8	820	22.9	1560	29.8
160	10.2	840	23.1	1580	29.6
170	10.4	860	23.4	1600	29.5
180	10.4	880	23.8	1620	29.3
190	10.3	900	24.1	1640	29.2
200	10.6	920	24.1	1660	29.4
220	11.6	940	24.0	1680	29.6
240	12.4	960	24.1	1700	29.8
260	12.8	980	24.5	1720	30.3
280	13.7	1000	24.9	1740	30.8
300	14.7	1020	25.0	1760	31.1
320	15.2	1040	25.2	1780	31.0
340	15.4	1060	25.4	1800	30.9
360	16.1	1080	25.6	1820	30.7
380	16.4	1100	25.7	1840	30.6
400	16.6	1120	26.0	1860	30.6
420	16.7	1140	26.4	1880	30.6
440	17.0	1160	27.0	1900	30.6
460	17.7	1180	27.0	1920	30.7
480	18.1	1200	26.7	1940	30.9
500	18.5	1220	26.5	1960	31.2
520	19.1	1240	26.5	1980	31.6
540	19.5	1260	26.5	2000	32.0
		1280	26.6		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**EMC Test Systems, model 3115, serial no: 9911-5964, HL 1984**

Frequency, MHz	Antenna gain, dBi	Antenna factor. dB(1/m)
1000.0	5.8	24.5
1500.0	9.0	24.8
2000.0	8.6	27.7
2500.0	9.5	28.7
3000.0	8.9	30.8
3500.0	8.2	32.9
4000.0	9.6	32.7
4500.0	11.2	32.1
5000.0	10.6	33.6
5500.0	9.8	35.3
6000.0	10.1	35.7
6500.0	10.7	35.8
7000.0	10.9	36.2
7500.0	10.5	37.2
8000.0	11.1	37.2
8500.0	10.8	38.1
9000.0	10.7	38.6
9500.0	11.5	38.3
10000.0	11.8	38.4
10500.0	12.3	38.3
11000.0	12.3	38.8
11500.0	11.5	39.9
12000.0	12.2	39.6
12500.0	12.6	39.5
13000.0	12.0	40.5
13500.0	11.7	41.1
14000.0	11.7	41.5
14500.0	12.7	40.8
15000.0	14.2	39.5
15500.0	16.0	38.1
16000.0	16.2	38.1
16500.0	14.5	40.1
17000.0	12.2	42.6
17500.0	9.7	45.4
18000.0	6.6	48.7

Antenna factor is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Antenna factor**  
**Double-ridged guide horn antenna**  
**Model 3115, serial number: 00027177, HL 2432**

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Cable loss**  
**Cable coaxial, RG-214, 5m, model: C214-5, HL 1365**

No.	Frequency, MHz	Measured, dB	Measured uncertainty dB
1	1000	0.41	±0.12
2	1200	0.44	
3	1400	0.48	
4	1600	0.52	
5	1800	0.55	
6	2000	0.58	
7	2200	0.61	
8	2400	0.64	±0.17
9	2600	0.67	
10	2800	0.7	
11	3000	0.73	
12	3300	0.79	
13	3600	0.84	
14	3900	0.94	
15	4200	1.22	



**Cable loss**  
**Cable 18 GHz, 6.5 m, blue, model NPS-1803A-6500-NPS, serial number T4974, HL 1947**

Frequency, GHz	Insertion loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Insertion loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92





**Cable loss**  
**Cable coaxial, Gore, 18 GHz, 1.1 m, SMA - SMA, model Right Angle, S/N 91P72071**  
**HL 2869**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.06	5750	0.87	12000	1.30
30	0.06	6000	0.87	12250	1.33
100	0.10	6250	0.89	12500	1.35
250	0.18	6500	0.92	12750	1.36
500	0.25	6750	0.94	13000	1.38
750	0.27	7000	0.98	13250	1.41
1000	0.34	7250	0.99	13500	1.39
1250	0.35	7500	1.02	13750	1.41
1500	0.42	7750	1.03	14000	1.42
1750	0.44	8000	1.04	14250	1.46
2000	0.49	8250	1.04	14500	1.39
2250	0.52	8500	1.08	14750	1.46
2500	0.55	8750	1.08	15000	1.40
2750	0.59	9000	1.12	15250	1.47
3000	0.61	9250	1.12	15500	1.36
3250	0.64	9500	1.15	15750	1.49
3500	0.67	9750	1.14	16000	1.51
3750	0.69	10000	1.19	16250	1.60
4000	0.70	10250	1.20	16500	1.56
4250	0.74	10500	1.23	16750	1.66
4500	0.76	10750	1.24	17000	1.71
4750	0.77	11000	1.24	17250	1.78
5000	0.79	11250	1.25	17500	1.75
5250	0.82	11500	1.28	17750	1.77
5500	0.84	11750	1.29	18000	1.86



**Cable loss**  
**Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,**  
**HL 2871**

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



**Cable loss**  
**Cable coaxial, Bird, 18 GHz, N-type, M-F, model TC-MNFN-3.0, S/N 211539 003**  
**HL 2883**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.06	5750	1.70	12000	2.46
30	0.12	6000	1.75	12250	2.48
100	0.21	6250	1.80	12500	2.52
250	0.34	6500	1.81	12750	2.50
500	0.47	6750	1.86	13000	2.54
750	0.59	7000	1.86	13250	2.48
1000	0.67	7250	1.92	13500	2.63
1250	0.76	7500	1.96	13750	2.65
1500	0.84	7750	1.98	14000	2.72
1750	0.92	8000	2.02	14250	2.67
2000	0.98	8250	2.03	14500	2.70
2250	1.05	8500	2.05	14750	2.72
2500	1.12	8750	2.11	15000	2.79
2750	1.17	9000	2.17	15250	2.80
3000	1.22	9250	2.17	15500	2.83
3250	1.27	9500	2.20	15750	2.75
3500	1.33	9750	2.19	16000	2.82
3750	1.38	10000	2.22	16250	2.85
4000	1.42	10250	2.25	16500	2.90
4250	1.46	10500	2.30	16750	2.89
4500	1.51	10750	2.28	17000	2.88
4750	1.54	11000	2.32	17250	2.85
5000	1.59	11250	2.34	17500	2.96
5250	1.62	11500	2.39	17750	3.04
5500	1.65	11750	2.42	18000	3.04



**Cable loss**  
**Cable coaxial, Gore, 18 GHz, 0.9 m, SMA-SMA, S/N 10020014**  
**HL 2951**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.07	5750	0.77	12000	1.23
30	0.06	6000	0.78	12250	1.25
100	0.09	6250	0.81	12500	1.26
250	0.15	6500	0.83	12750	1.26
500	0.21	6750	0.84	13000	1.30
750	0.27	7000	0.85	13250	1.30
1000	0.31	7250	0.88	13500	1.30
1250	0.36	7500	0.88	13750	1.29
1500	0.38	7750	0.93	14000	1.23
1750	0.42	8000	0.92	14250	1.32
2000	0.44	8250	0.94	14500	1.27
2250	0.47	8500	0.99	14750	1.27
2500	0.50	8750	0.97	15000	1.34
2750	0.52	9000	1.01	15250	1.36
3000	0.54	9250	1.05	15500	1.35
3250	0.57	9500	1.08	15750	1.36
3500	0.58	9750	1.10	16000	1.43
3750	0.61	10000	1.09	16250	1.38
4000	0.63	10250	1.09	16500	1.42
4250	0.66	10500	1.07	16750	1.49
4500	0.68	10750	1.10	17000	1.53
4750	0.70	11000	1.09	17250	1.59
5000	0.71	11250	1.09	17500	1.65
5250	0.74	11500	1.13	17750	1.82
5500	0.77	11750	1.12	18000	2.09



**Cable loss**  
**Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA, Huber-Suhner, model 198-9155-00**  
**HL 3122**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	3600	2.08	7400	3.07	11200	3.92	15100	4.61
30	0.17	3700	2.12	7500	3.09	11300	3.95	15200	4.58
50	0.23	3800	2.15	7600	3.14	11400	3.93	15300	4.62
100	0.32	3900	2.18	7700	3.15	11500	3.93	15400	4.62
200	0.47	4000	2.21	7800	3.19	11600	3.94	15500	4.65
300	0.58	4100	2.24	7900	3.22	11700	3.97	15600	4.66
400	0.66	4200	2.27	8000	3.20	11800	3.98	15700	4.66
500	0.74	4300	2.31	8100	3.21	11900	4.08	15800	4.72
600	0.81	4400	2.31	8200	3.24	12000	4.03	15900	4.78
700	0.88	4500	2.36	8300	3.27	12100	4.06	16000	4.89
800	0.95	4600	2.37	8400	3.32	12200	4.05	16100	4.95
900	1.00	4700	2.40	8500	3.35	12300	4.16	16200	4.92
1000	1.06	4800	2.43	8600	3.35	12400	4.18	16300	4.95
1100	1.11	4900	2.45	8700	3.33	12500	4.20	16400	5.02
1200	1.16	5000	2.50	8800	3.37	12600	4.22	16500	5.04
1300	1.21	5100	2.51	8900	3.39	12700	4.23	16600	5.06
1400	1.26	5200	2.55	9000	3.45	12800	4.28	16700	5.17
1500	1.31	5300	2.56	9100	3.46	12900	4.26	16800	5.16
1600	1.35	5400	2.59	9200	3.47	13000	4.28	16900	5.19
1700	1.39	5500	2.62	9300	3.46	13100	4.28	17000	5.23
1800	1.44	5600	2.65	9400	3.50	13200	4.28	17100	5.30
1900	1.47	5700	2.67	9500	3.50	13300	4.29	17200	5.26
2000	1.52	5800	2.71	9600	3.53	13400	4.34	17300	5.30
2100	1.55	5900	2.72	9700	3.52	13500	4.31	17400	5.30
2200	1.60	6000	2.73	9800	3.54	13600	4.35	17500	5.36
2300	1.63	6100	2.76	9900	3.56	13700	4.36	17600	5.40
2400	1.67	6200	2.78	10000	3.57	13800	4.37	17700	5.47
2500	1.70	6300	2.81	10100	3.60	13900	4.41	17800	5.56
2600	1.74	6400	2.85	10200	3.69	14000	4.42	17900	5.45
2700	1.78	6500	2.87	10300	3.69	14100	4.45	18000	5.47
2800	1.83	6600	2.87	10400	3.67	14200	4.49		
2900	1.85	6700	2.90	10500	3.70	14300	4.55		
3000	1.89	6800	2.91	10600	3.70	14400	4.62		
3100	1.92	6900	2.96	10700	3.76	14600	4.54		
3200	1.96	7000	2.99	10800	3.88	14700	4.58		
3300	1.99	7100	3.01	10900	3.88	14800	4.57		
3400	2.03	7200	3.04	11000	3.85	14900	4.65		
3500	2.06	7300	3.08	11100	3.85	15000	4.64		



**Cable loss**  
**Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA, Huber-Suhner, model 198-9155-00**  
**HL 3123**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	3600	1.97	7400	3.12	11200	3.90	15100	4.74
30	0.17	3700	1.97	7500	3.13	11300	3.93	15200	4.70
50	0.25	3800	2.03	7600	3.16	11400	3.88	15300	4.73
100	0.32	3900	2.04	7700	3.18	11500	3.87	15400	4.78
200	0.46	4000	2.10	7800	3.20	11600	3.90	15500	4.75
300	0.58	4100	1.97	7900	3.23	11700	3.86	15600	4.76
400	0.65	4200	1.97	8000	3.25	11800	3.88	15700	4.75
500	0.74	4300	2.03	8100	3.26	11900	3.86	15800	4.78
600	0.82	4400	2.04	8200	3.28	12000	3.89	15900	4.79
700	0.89	4500	2.10	8300	3.31	12100	3.94	16000	4.73
800	0.95	4600	1.97	8400	3.31	12200	3.92	16100	4.78
900	1.01	4700	1.97	8500	3.32	12300	3.96	16200	4.84
1000	1.07	4800	2.03	8600	3.34	12400	4.01	16300	4.90
1100	1.11	4900	2.04	8700	3.35	12500	4.07	16400	4.87
1200	1.17	5000	2.10	8800	3.37	12600	4.08	16500	4.90
1300	1.22	5100	2.53	8900	3.39	12700	4.17	16600	4.98
1400	1.27	5200	2.55	9000	3.42	12800	4.26	16700	5.05
1500	1.29	5300	2.60	9100	3.43	12900	4.16	16800	5.04
1600	1.35	5400	2.61	9200	3.51	13000	4.21	16900	5.02
1700	1.40	5500	2.64	9300	3.52	13100	4.24	17000	5.09
1800	1.44	5600	2.70	9400	3.54	13200	4.27	17100	5.07
1900	1.51	5700	2.67	9500	3.63	13300	4.31	17200	5.10
2000	1.49	5800	2.71	9600	3.61	13400	4.33	17300	5.13
2100	1.55	5900	2.74	9700	3.71	13500	4.25	17400	5.23
2200	1.58	6000	2.80	9800	3.66	13600	4.27	17500	5.21
2300	1.62	6100	2.79	9900	3.77	13700	4.33	17600	5.22
2400	1.72	6200	2.81	10000	3.75	13800	4.33	17700	5.36
2500	1.76	6300	2.83	10100	3.77	13900	4.31	17800	5.35
2600	1.78	6400	2.86	10200	3.80	14000	4.30	17900	5.45
2700	1.80	6500	2.88	10300	3.79	14100	4.30	18000	5.43
2800	1.86	6600	2.90	10400	3.87	14200	4.31		
2900	1.90	6700	2.92	10500	3.83	14300	4.37		
3000	1.90	6800	2.98	10600	3.88	14400	4.35		
3100	1.97	6900	2.98	10700	3.86	14600	4.53		
3200	1.97	7000	3.00	10800	3.87	14700	4.50		
3300	2.03	7100	3.02	10900	3.90	14800	4.62		
3400	2.04	7200	3.04	11000	3.84	14900	4.65		
3500	2.10	7300	3.06	11100	3.88	15000	4.79		



**Cable loss**  
**Cable coaxial, RG-214/U, N type-N type, 6.5 m**  
**Suhner Switzerland, HL 3616**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	1750	2.66	3550	4.44	5350	6.08
30	0.25	1800	2.72	3600	4.46	5400	6.12
50	0.32	1850	2.78	3650	4.59	5450	6.17
100	0.48	1900	2.81	3700	4.60	5500	6.25
150	0.60	1950	2.86	3750	4.72	5550	6.31
200	0.71	2000	2.94	3800	4.72	5600	6.35
250	0.81	2050	2.97	3850	4.86	5650	6.41
300	0.91	2100	3.01	3900	4.85	5700	6.50
350	1.00	2150	3.06	3950	4.99	5750	6.52
400	1.07	2200	3.11	4000	4.90	5800	6.57
450	1.14	2250	3.16	4050	5.04	5850	6.61
500	1.23	2300	3.21	4100	5.01	5900	6.71
550	1.30	2350	3.26	4150	5.10	5950	6.70
600	1.37	2400	3.31	4200	5.08	6000	6.75
650	1.44	2450	3.35	4250	5.18	6050	6.74
700	1.50	2500	3.39	4300	5.14	6100	6.84
750	1.58	2550	3.46	4350	5.22	6150	6.87
800	1.64	2600	3.48	4400	5.21	6200	6.93
850	1.69	2650	3.55	4450	5.29	6250	6.96
900	1.77	2700	3.59	4500	5.31	6300	7.02
950	1.79	2750	3.66	4550	5.39	6350	7.04
1000	1.87	2800	3.68	4600	5.41	6400	7.10
1050	1.92	2850	3.75	4650	5.49	6450	7.11
1100	1.98	2900	3.79	4700	5.52	6500	7.19
1150	2.05	2950	3.86	4750	5.60		
1200	2.09	3000	3.89	4800	5.64		
1250	2.15	3050	3.94	4850	5.73		
1300	2.21	3100	3.98	4900	5.70		
1350	2.27	3150	4.03	4950	5.73		
1400	2.33	3200	4.06	5000	5.75		
1450	2.38	3250	4.12	5050	5.83		
1500	2.44	3300	4.14	5100	5.82		
1550	2.48	3350	4.22	5150	5.91		
1600	2.52	3400	4.24	5200	5.92		
1650	2.56	3450	4.31	5250	5.98		
1700	2.62	3500	4.35	5300	6.01		



## 13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
ITE	information technology equipment
k	kilo
kHz	kilohertz
LISN	line impedance stabilization network
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
OATS	open area test site
$\Omega$	Ohm
QP	quasi-peak
PCB	printed circuit board
PM	pulse modulation
PS	power supply
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT