
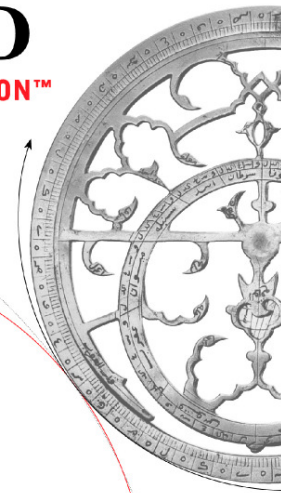


**Operational Description - RFID Reader**

ARE i2 - 17X/USB  
ARE i2 - 22X/USB

V7IAREI2LF-2  
V7IAREI2HF-1

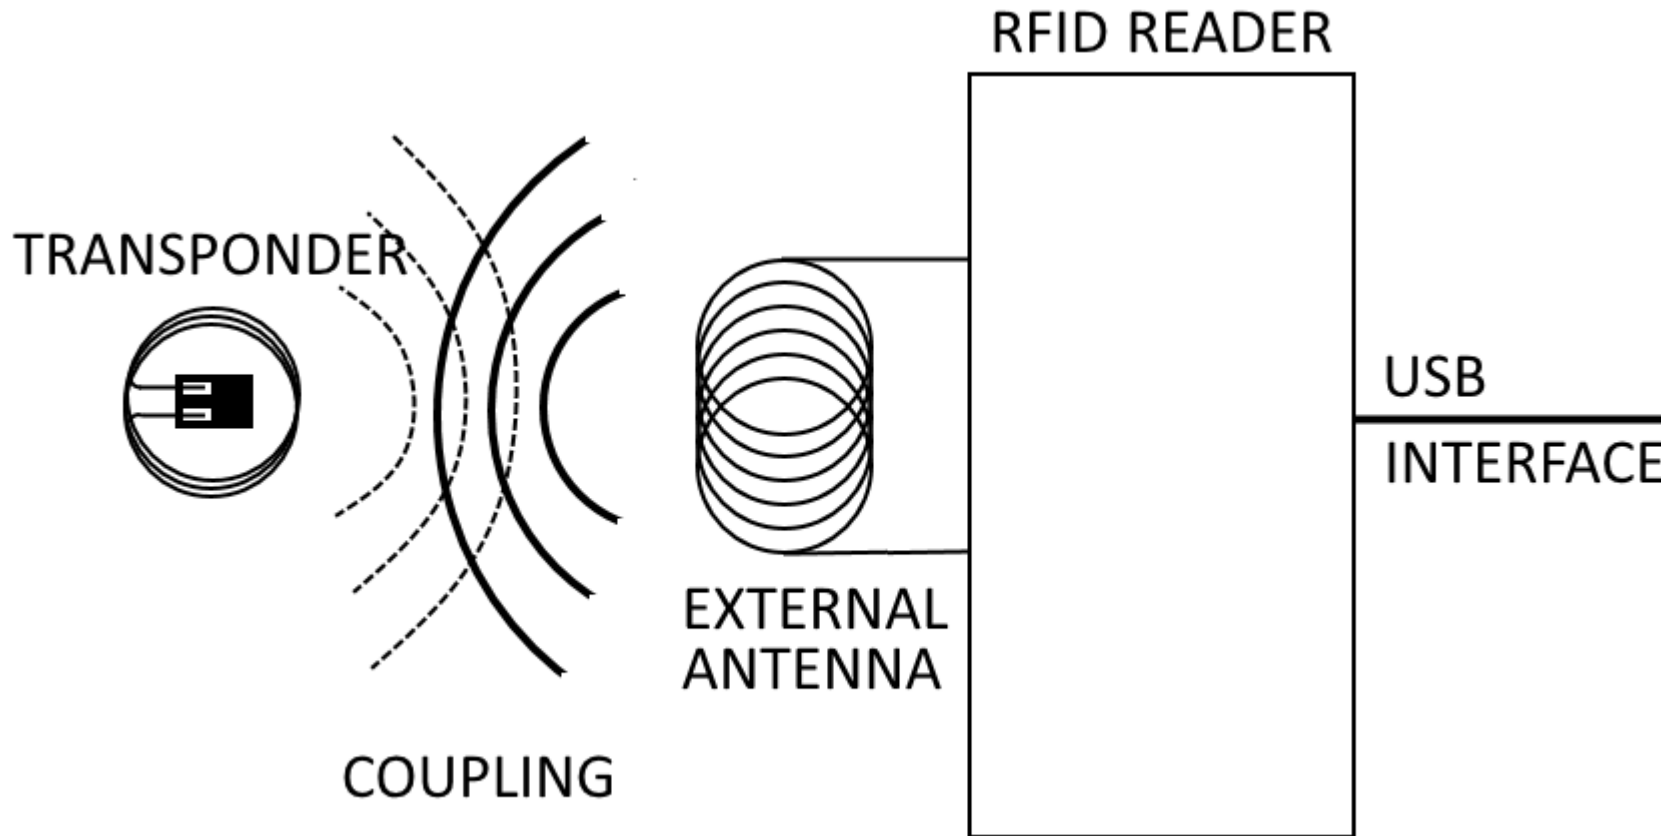

For reading a passive transponder, the RFID reader is generating an electromagnetic field. This happens, depending on the operation mode, permanently or when the reader is receiving a command. The electromagnetic field is powering the transponder which is modulating its UID on the excitation field. The reader receives the signal, demodulates the UID and transfers it via USB.