



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Address: 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052

FCC ID: V7TA33

Product Name: AX3000 Wi-Fi 6 Range Extender

Model Number: A33

**Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22020001-00A

Date Of Issue: 2022-06-25

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	8
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	16
3.2.5 Corrected Amplitude & Margin Calculation.....	16
3.3 6 DB EMISSION BANDWIDTH:.....	17
3.3.1 Applicable Standard.....	17
3.3.2 EUT Setup.....	17
3.3.3 Test Procedure	17
3.4 MAXIMUM PEAK CONDUCTED OUTPUT POWER:.....	18
3.4.1 Applicable Standard.....	18
3.4.2 EUT Setup.....	18
3.4.3 Test Procedure	18
3.5 MAXIMUM POWER SPECTRAL DENSITY:	19
3.5.1 Applicable Standard.....	19
3.5.2 EUT Setup.....	19
3.5.3 Test Procedure	19
3.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:	20
3.6.1 Applicable Standard.....	20
3.6.2 EUT Setup.....	20
3.6.3 Test Procedure	20
3.7 DUTY CYCLE:.....	21

3.7.1 EUT Setup.....	21
3.7.2 Test Procedure	21
3.8 ANTENNA REQUIREMENT.....	21
3.8.1 Applicable Standard.....	21
3.8.2 Judgment.....	21
4. Test DATA AND RESULTS.....	22
4.1 AC LINE CONDUCTED EMISSIONS.....	22
4.2 RADIATION SPURIOUS EMISSIONS.....	25
4.3 6 dB EMISSION BANDWIDTH:.....	38
4.4 99% OCCUPIED BANDWIDTH:	45
4.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER:.....	52
4.5 MAXIMUM POWER SPECTRAL DENSITY:	54
4.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:	68
4.7 DUTY CYCLE:.....	81
5. RF EXPOSURE EVALUATION	84
5.1 APPLICABLE STANDARD.....	84
5.2 PROCEDURE.....	84
5.3 MEASUREMENT RESULT	84

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	AX3000 Wi-Fi 6 Range Extender
EUT Model:	A33
Operation Frequency:	2412-2462 MHz(802.11b/g/n ht20/ax hew20) 2422-2452 MHz(802.11n ht40/ax hew40)
Maximum Peak Output Power (Conducted):	27.60dBm
Modulation Type:	802.11b:DSSS-DBPSK, DQPSK, CCK 802.11g/n:OFDM-BPSK, QPSK, 16QAM, 64QAM 802.11ax: OFDMA-BPSK, QPSK, 16QAM, 64QAM,256QAM,1024QAM
Rated Input Voltage:	AC100~240V
Serial Number:	CR22020001-RF-S1
EUT Received Date:	2022.2.9
EUT Received Status:	Good

Operation Frequency Detail: For 802.11b/g/n ht20/ax hew20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2412
Middle	2437
Highest	2462

For 802.11n ht40/ax hew40:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2422
Middle	2437
Highest	2452

Antenna Information Detail ▲:

Antenna Chain	Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203 Requirement
0	SHENZHEN TENDA TECHNOLOGY CO.,LTD.	PCB	50	4.2dBi/ 2.4~2.5GHz 5.0dBi/ 5.15~5.85GHz	Compliant
1		PCB	50	4.2dBi/ 2.4~2.5GHz 5.0dBi/ 5.15~5.85GHz	Compliant

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
 Antenna must use a unique type of connector to attach to the EUT.
 Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	accessMtool

The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :

Mode	Channel	Frequency (MHz)	Data Rate	RU Config.	Power Level Setting	
					Chain 0	Chain 1
802.11b	Lowest	2412	1Mbps	N/A	46	46
	Middle	2437	1Mbps	N/A	46	46
	Highest	2462	1Mbps	N/A	46	46
802.11g	Lowest	2412	6Mbps	N/A	67	66
	Middle	2437	6Mbps	N/A	67	61
	Highest	2462	6Mbps	N/A	65	61
802.11n ht20	Lowest	2412	MCS0	N/A	58	58
	Middle	2437	MCS0	N/A	58	58
	Highest	2462	MCS0	N/A	58	58
802.11n ht40	Lowest	2422	MCS0	N/A	55	55
	Middle	2437	MCS0	N/A	55	55
	Highest	2452	MCS0	N/A	55	55
802.11ax hew20	Lowest	2412	MCS0	26/0	51	51
				52/37	51	51
				106/53	51	51
				242/61	51	51
	Middle	2437	MCS0	26/0	51	51
				52/37	51	51
				106/53	51	51
				242/61	51	51
	Highest	2462	MCS0	26/0	51	51
				52/37	51	51
				106/53	51	51
				242/61	51	51
802.11ax hew40	Lowest	2422	MCS0	26/0	54	54
				52/37	54	54
				106/53	54	54
				242/61	54	54
	Middle	2437	MCS0	484/65	54	54
				26/0	54	54
				52/37	54	54
				106/53	54	54
	Highest	2452	MCS0	242/61	54	54
				484/65	54	54
				26/0	54	54
				52/37	54	54
				106/53	54	54
				242/61	54	54
				484/65	54	54
				484/65	54	54

Note:

1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.
2. The device supports SISO in all modes, and MIMO 2T2R in 802.11n and 802.11ax modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n and 802.11ax modes.
3. The system supports Beamforming and Non-beamforming modes at 802.11n and 802.11ax modes. The two modes have same output power, and the Beamforming gain is 3 dBi▲, which are declared by manufacturer. Therefore, the all RF conducted test were performed at Non-beamforming mode only.
4. For 802.11 ax testing, all different tone and RU index configurations was performed for output power, the maximum result is in Full RU Configuration, so the other test was only performed at Full RU configuration(802.11ax hew20:242/61, 802.11ax hew40: 484/65).

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	E480	PF-1QQYYYP 19/06

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	Yes	No	10	EUT	Laptop

1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

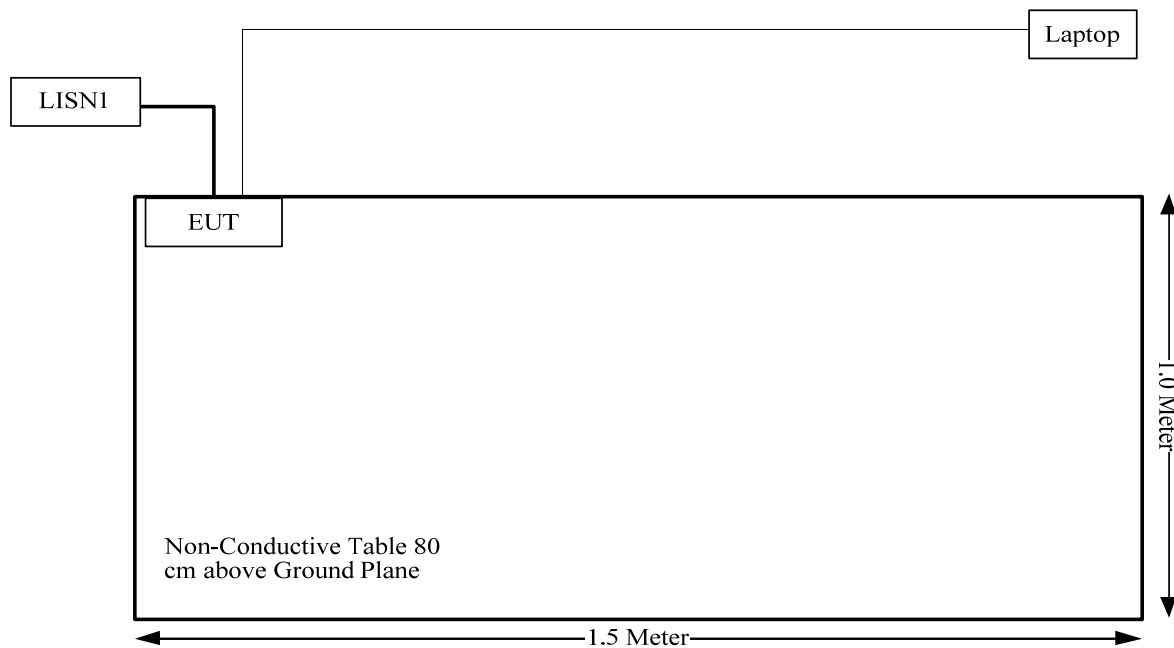

Spurious Emissions:

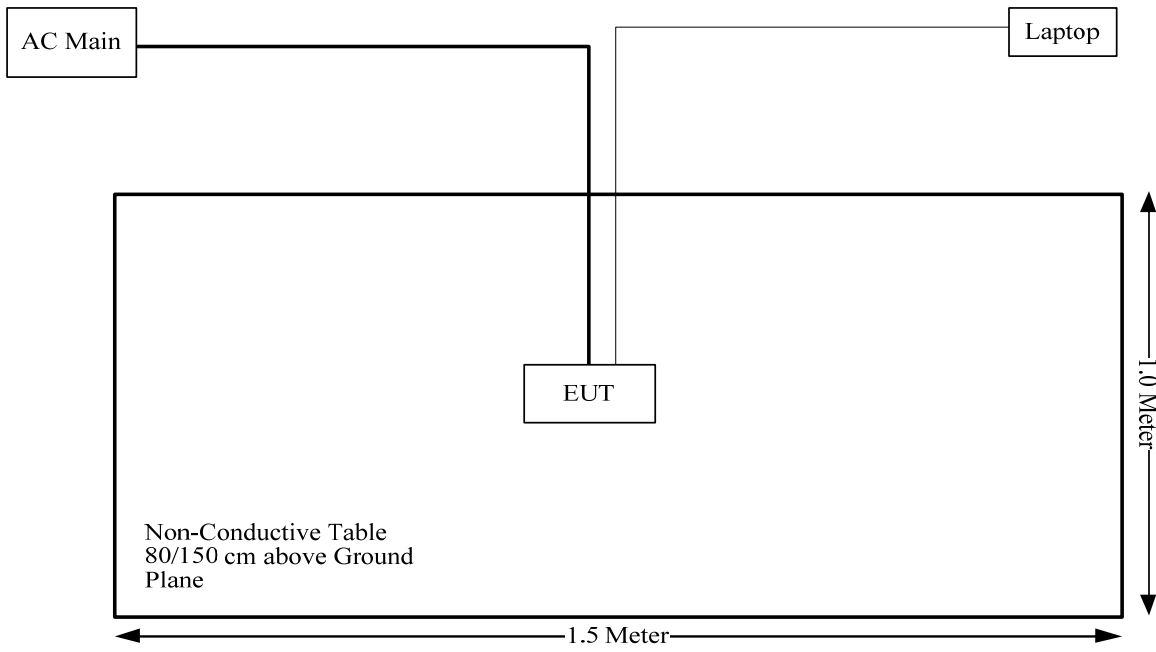

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
§15.247 (i) & §1.1307 & §2.1091	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

Below 1GHz:

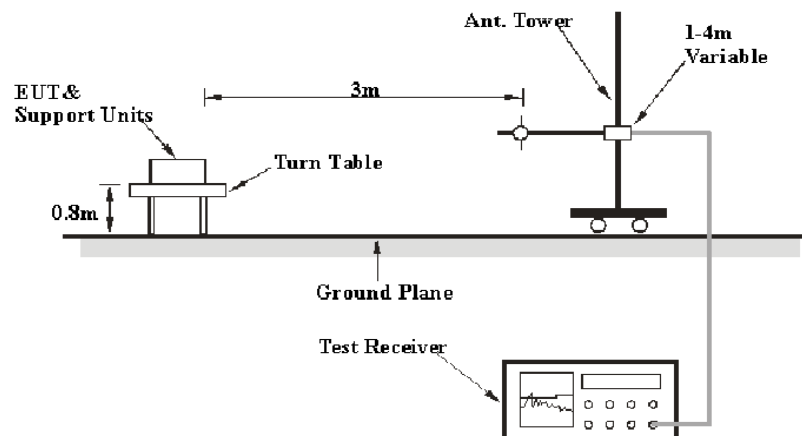

Above 1GHz:

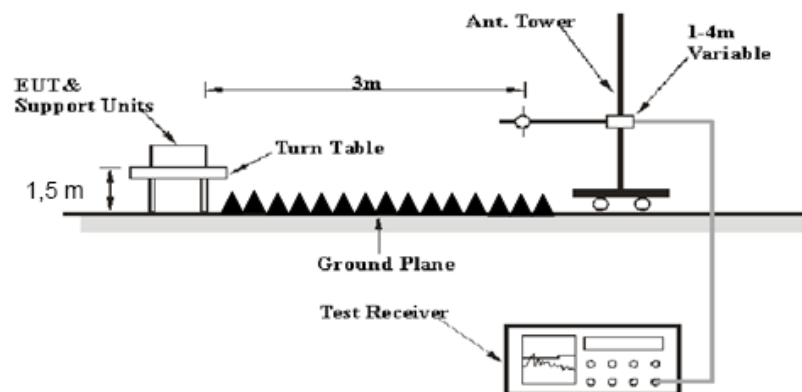

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Detector	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 6 dB Emission Bandwidth:

3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup

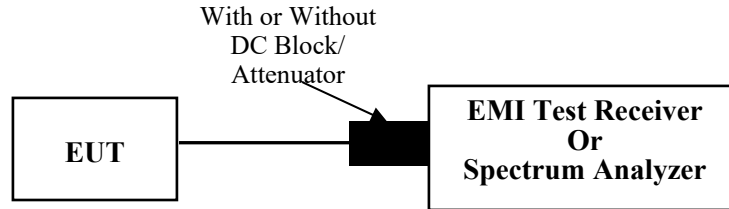

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3.4 Maximum peak conducted output power:

3.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.4.2 EUT Setup

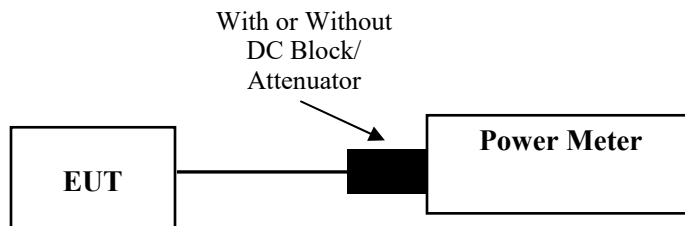

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

- a) Set the EUT in transmitting mode.
- b) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
- c) Add a correction factor to the display.
- d) Set the power meter to test peak output power, record the result.


3.5 Maximum power spectral density:

3.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.5.2 EUT Setup

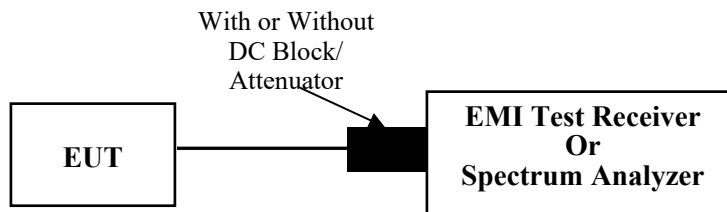

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \cdot \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


3.6 100 kHz Bandwidth of Frequency Band Edge:

3.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.6.2 EUT Setup

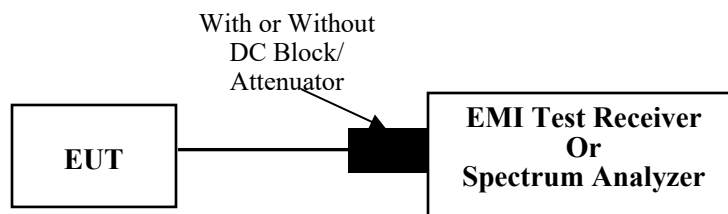

3.6.3 Test Procedure


According to ANSI C63.10-2013 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.7 Duty Cycle:

3.7.1 EUT Setup

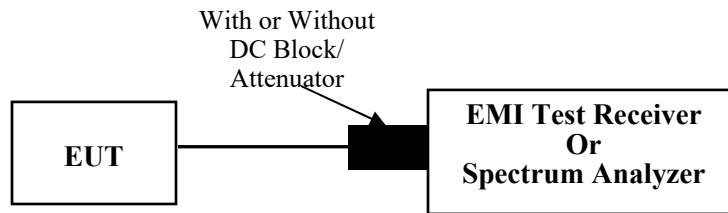

3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR22020001-RF-S1	Test Date:	2022-02-12
Test Site:	CE	Test Mode:	Transmitting (802.11b Chain 0 Middle channel was the worst)
Tester:	Nick Tang	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	19.2	Relative Humidity: (%)	67	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Line:

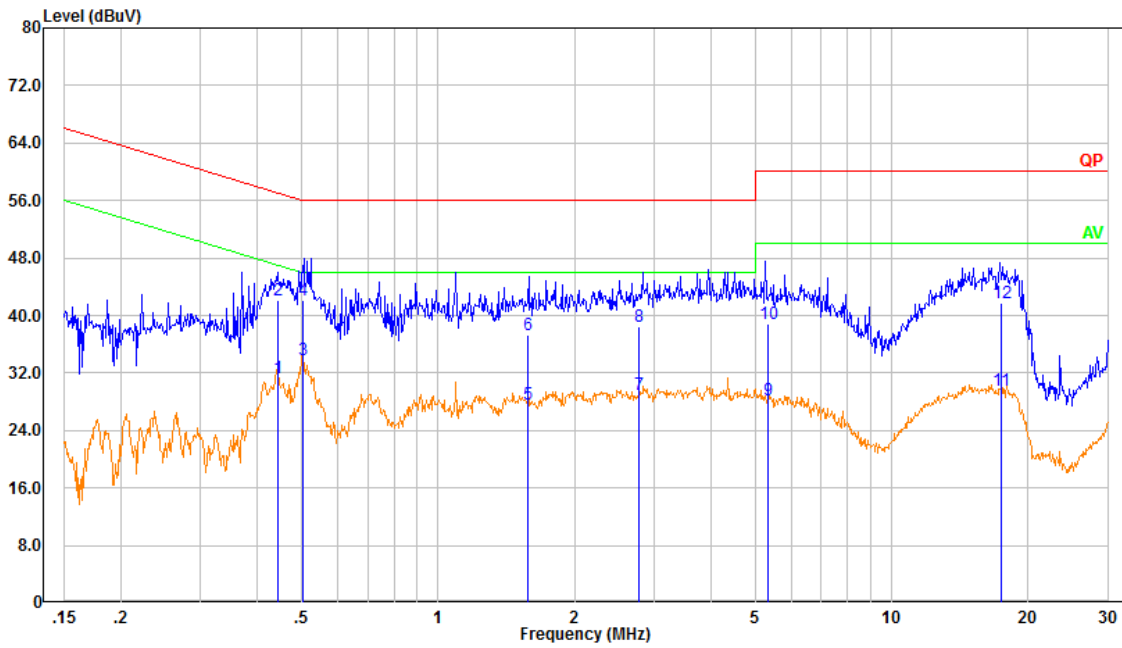

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.445	21.61	9.61	31.22	46.97	15.75	Average
2	0.445	32.49	9.61	42.10	56.97	14.87	QP
3	0.505	24.19	9.61	33.80	46.00	12.20	Average
4	0.505	32.57	9.61	42.18	56.00	13.82	QP
5	1.573	17.95	9.63	27.58	46.00	18.42	Average
6	1.573	27.67	9.63	37.30	56.00	18.70	QP
7	2.778	19.25	9.65	28.89	46.00	17.11	Average
8	2.778	28.82	9.65	38.46	56.00	17.54	QP
9	5.334	18.56	9.66	28.22	50.00	21.78	Average
10	5.334	29.12	9.66	38.78	60.00	21.22	QP
11	17.438	19.92	9.74	29.66	50.00	20.34	Average
12	17.438	31.99	9.74	41.73	60.00	18.27	QP

Neutral:

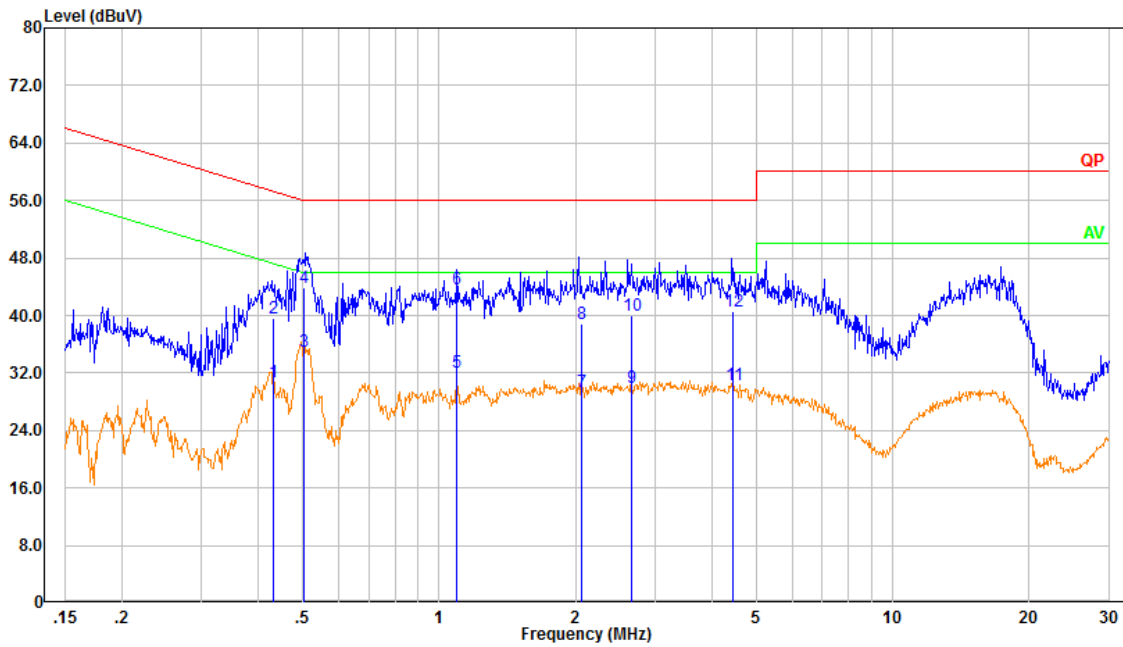

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.431	21.16	9.61	30.77	47.23	16.46	Average
2	0.431	30.08	9.61	39.69	57.23	17.54	QP
3	0.505	25.27	9.61	34.88	46.00	11.12	Average
4	0.505	34.16	9.61	43.77	56.00	12.23	QP
5	1.095	22.52	9.62	32.14	46.00	13.86	Average
6	1.095	34.11	9.62	43.73	56.00	12.27	QP
7	2.059	19.81	9.63	29.44	46.00	16.56	Average
8	2.059	29.13	9.63	38.76	56.00	17.24	QP
9	2.657	20.32	9.64	29.96	46.00	16.04	Average
10	2.657	30.45	9.64	40.09	56.00	15.91	QP
11	4.453	20.59	9.65	30.24	46.00	15.76	Average
12	4.453	30.85	9.65	40.50	56.00	15.50	QP

4.2 Radiation Spurious Emissions

Serial Number:	CR22020001-RF-S1	Test Date:	2022-02-11~2022-05-16
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Carl Liang, Great Qiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.3~23.9	Relative Humidity: (%)	50~70	ATM Pressure: (kPa)	100.8~101.1
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2024-02-04
AH	Preamplifier	PAM-1840VH	190	2021-11-19	2022-11-18
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2021-08-08	2022-08-07
Mini Circuits	High Pass Filter	VHF-6010+	31119	2021-08-08	2022-08-07
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 figure 8, the worst orientation was photographed and it's data was recorded.


1) 30MHz-1GHz(802.11b Chain 0 Low channel was the worst)

Horizontal:

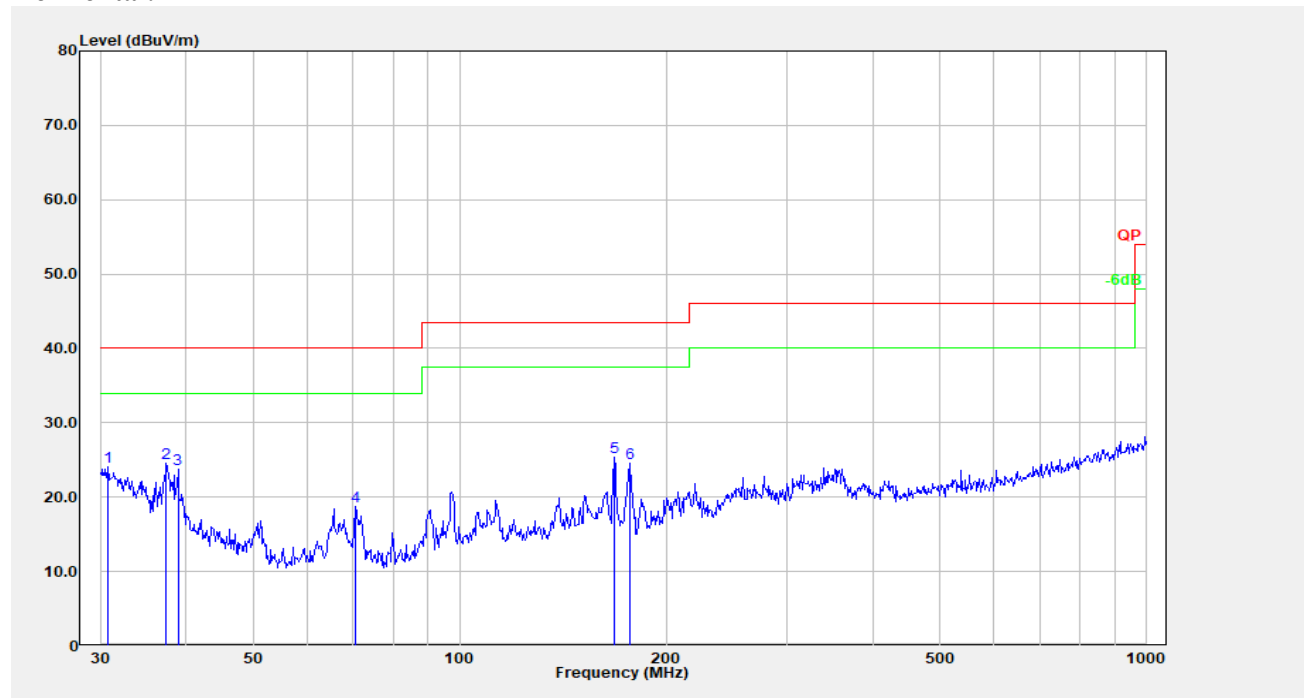

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.745	28.47	-4.36	24.11	40.00	15.89	Peak
2	37.416	34.05	-9.49	24.56	40.00	15.44	Peak
3	38.888	34.35	-10.63	23.72	40.00	16.28	Peak
4	70.584	35.51	-16.78	18.74	40.00	21.26	Peak
5	167.824	38.32	-12.96	25.35	43.50	18.15	Peak
6	176.888	38.12	-13.62	24.50	43.50	19.00	Peak

Vertical:

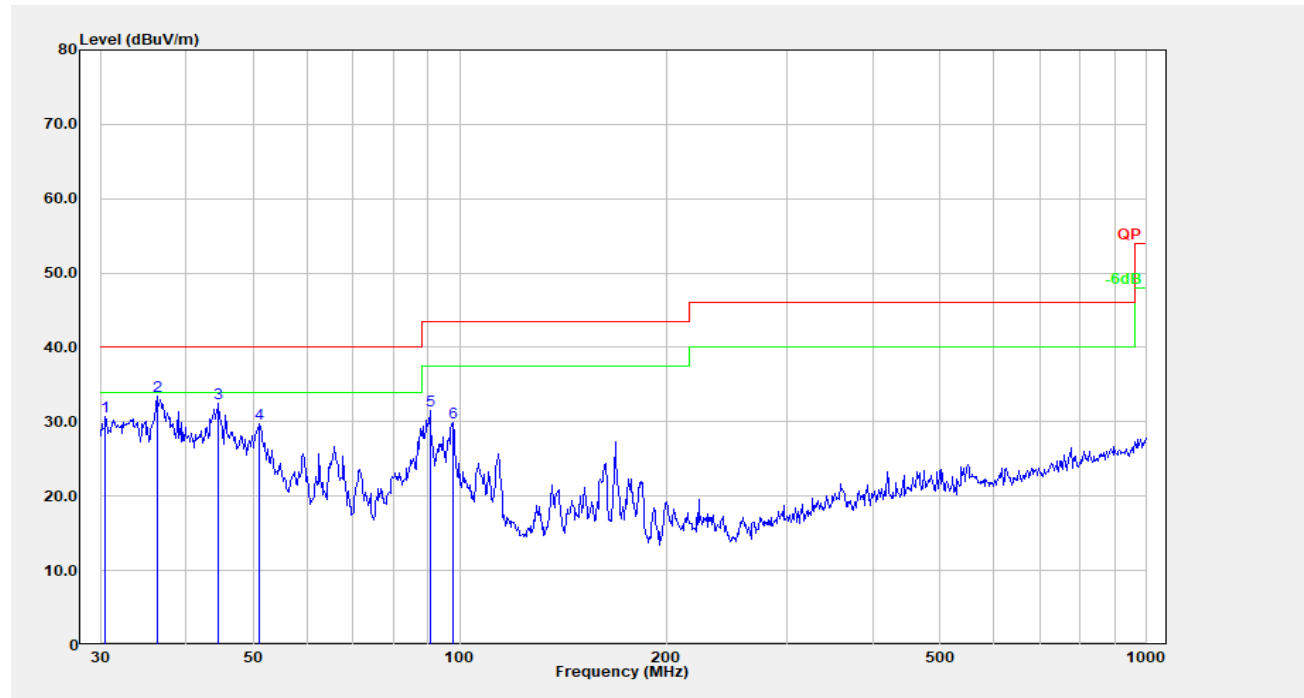

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.531	34.88	-4.20	30.69	40.00	9.31	Peak
2	36.254	42.06	-8.62	33.44	40.00	6.56	Peak
3	44.587	46.70	-14.22	32.48	40.00	7.52	Peak
4	51.121	47.13	-17.43	29.70	40.00	10.30	Peak
5	90.537	48.58	-17.05	31.54	43.50	11.96	Peak
6	97.798	44.95	-15.11	29.85	43.50	13.65	Peak

**2) 1-25GHz:
802.11b Mode, Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2412 MHz							
2412.00	62.26	PK	H	31.53	93.79	N/A	N/A
2412.00	59.07	AV	H	31.53	90.60	N/A	N/A
2412.00	71.78	PK	V	31.53	103.31	N/A	N/A
2412.00	68.53	AV	V	31.53	100.06	N/A	N/A
2390.00	27.54	PK	V	31.46	59.00	74.00	15.00
2390.00	14.59	AV	V	31.46	46.05	54.00	7.95
4824.00	45.53	PK	V	10.94	56.47	74.00	17.53
4824.00	41.70	AV	V	10.94	52.64	54.00	1.36
7236.00	39.86	PK	V	14.44	54.30	74.00	19.70
7236.00	32.31	AV	V	14.44	46.75	54.00	7.25
Middle Channel: 2437 MHz							
2437.00	62.80	PK	H	31.60	94.40	N/A	N/A
2437.00	59.65	AV	H	31.60	91.25	N/A	N/A
2437.00	72.01	PK	V	31.60	103.61	N/A	N/A
2437.00	68.89	AV	V	31.60	100.49	N/A	N/A
4874.00	45.48	PK	V	11.05	56.53	74.00	17.47
4874.00	41.56	AV	V	11.05	52.61	54.00	1.39
7311.00	39.54	PK	V	14.80	54.34	74.00	19.66
7311.00	32.43	AV	V	14.80	47.23	54.00	6.77
High Channel: 2462MHz							
2462.00	62.92	PK	H	31.63	94.55	N/A	N/A
2462.00	59.67	AV	H	31.63	91.30	N/A	N/A
2462.00	71.23	PK	V	31.63	102.86	N/A	N/A
2462.00	68.13	AV	V	31.63	99.76	N/A	N/A
2483.50	27.40	PK	V	31.64	59.04	74.00	14.96
2483.50	14.64	AV	V	31.64	46.28	54.00	7.72
4924.00	42.67	PK	V	11.18	53.85	74.00	20.15
4924.00	37.56	AV	V	11.18	48.74	54.00	5.26
7386.00	38.19	PK	V	14.89	53.08	74.00	20.92
7386.00	30.27	AV	V	14.89	45.16	54.00	8.84

802.11b Mode, Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector					
Low Channel: 2412 MHz							
2412.00	71.30	PK	H	31.53	102.83	N/A	N/A
2412.00	68.15	AV	H	31.53	99.68	N/A	N/A
2412.00	83.74	PK	V	31.53	115.27	N/A	N/A
2412.00	80.65	AV	V	31.53	112.18	N/A	N/A
2390.00	33.08	PK	V	31.46	64.54	74.00	9.46
2390.00	20.60	AV	V	31.46	52.06	54.00	1.94
4824.00	39.84	PK	V	10.94	50.78	74.00	23.22
4824.00	33.23	AV	V	10.94	44.17	54.00	9.83
7236.00	36.47	PK	V	14.44	50.91	74.00	23.09
7236.00	26.27	AV	V	14.44	40.71	54.00	13.29
Middle Channel: 2437 MHz							
2437.00	71.97	PK	H	31.60	103.57	N/A	N/A
2437.00	68.75	AV	H	31.60	100.35	N/A	N/A
2437.00	83.14	PK	V	31.60	114.74	N/A	N/A
2437.00	79.63	AV	V	31.60	111.23	N/A	N/A
4874.00	41.38	PK	V	11.05	52.43	74.00	21.57
4874.00	36.59	AV	V	11.05	47.64	54.00	6.36
7311.00	39.37	PK	V	14.80	54.17	74.00	19.83
7311.00	31.25	AV	V	14.80	46.05	54.00	7.95
High Channel: 2462MHz							
2462.00	72.56	PK	H	31.63	104.19	N/A	N/A
2462.00	69.32	AV	H	31.63	100.95	N/A	N/A
2462.00	83.19	PK	V	31.63	114.82	N/A	N/A
2462.00	79.94	AV	V	31.63	111.57	N/A	N/A
2483.50	31.38	PK	V	31.64	63.02	74.00	10.98
2483.50	19.35	AV	V	31.64	50.99	54.00	3.01
4924.00	42.07	PK	V	11.18	53.25	74.00	20.75
4924.00	37.05	AV	V	11.18	48.23	54.00	5.77
7386.00	37.85	PK	V	14.89	52.74	74.00	21.26
7386.00	29.04	AV	V	14.89	43.93	54.00	10.07

802.11g Mode Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2412 MHz							
2412.00	70.79	PK	H	31.53	102.32	N/A	N/A
2412.00	60.65	AV	H	31.53	92.18	N/A	N/A
2412.00	78.14	PK	V	31.53	109.67	N/A	N/A
2412.00	67.96	AV	V	31.53	99.49	N/A	N/A
2390.00	41.47	PK	V	31.46	72.93	74.00	1.07
2390.00	19.27	AV	V	31.46	50.73	54.00	3.27
4824.00	51.66	PK	V	10.94	62.60	74.00	11.40
4824.00	37.11	AV	V	10.94	48.05	54.00	5.95
7236.00	43.79	PK	V	14.44	58.23	74.00	15.77
7236.00	29.58	AV	V	14.44	44.02	54.00	9.98
Middle Channel: 2437 MHz							
2437.00	71.21	PK	H	31.60	102.81	N/A	N/A
2437.00	61.34	AV	H	31.60	92.94	N/A	N/A
2437.00	78.87	PK	V	31.60	110.47	N/A	N/A
2437.00	69.06	AV	V	31.60	100.66	N/A	N/A
4874.00	52.29	PK	V	11.05	63.34	74.00	10.66
4874.00	38.87	AV	V	11.05	49.92	54.00	4.08
7311.00	40.49	PK	V	14.80	55.29	74.00	18.71
7311.00	25.38	AV	V	14.80	40.18	54.00	13.82
High Channel: 2462MHz							
2462.00	70.54	PK	H	31.63	102.17	N/A	N/A
2462.00	60.97	AV	H	31.63	92.60	N/A	N/A
2462.00	78.89	PK	V	31.63	110.52	N/A	N/A
2462.00	68.59	AV	V	31.63	100.22	N/A	N/A
2483.50	40.26	PK	V	31.64	71.90	74.00	2.10
2483.50	18.15	AV	V	31.64	49.79	54.00	4.21
4924.00	49.26	PK	V	11.18	60.44	74.00	13.56
4924.00	36.45	AV	V	11.18	47.63	54.00	6.37
7386.00	41.19	PK	V	14.89	56.08	74.00	17.92
7386.00	28.42	AV	V	14.89	43.31	54.00	10.69

802.11g Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector					
Low Channel: 2412 MHz							
2412.00	73.21	PK	H	31.53	104.74	N/A	N/A
2412.00	62.79	AV	H	31.53	94.32	N/A	N/A
2412.00	79.86	PK	V	31.53	111.39	N/A	N/A
2412.00	69.99	AV	V	31.53	101.52	N/A	N/A
2390.00	41.63	PK	V	31.46	73.09	74.00	0.91
2390.00	20.67	AV	V	31.46	52.13	54.00	1.87
4824.00	53.13	PK	V	10.94	64.07	74.00	9.93
4824.00	38.49	AV	V	10.94	49.43	54.00	4.57
7236.00	42.82	PK	V	14.44	57.26	74.00	16.74
7236.00	29.65	AV	V	14.44	44.09	54.00	9.91
Middle Channel: 2437 MHz							
2437.00	71.51	PK	H	31.60	103.11	N/A	N/A
2437.00	61.33	AV	H	31.60	92.93	N/A	N/A
2437.00	79.19	PK	V	31.60	110.79	N/A	N/A
2437.00	69.02	AV	V	31.60	100.62	N/A	N/A
4874.00	54.51	PK	V	11.05	65.56	74.00	8.44
4874.00	39.87	AV	V	11.05	50.92	54.00	3.08
7311.00	42.98	PK	V	14.80	57.78	74.00	16.22
7311.00	28.45	AV	V	14.80	43.25	54.00	10.75
High Channel: 2462MHz							
2462.00	70.88	PK	H	31.63	102.51	N/A	N/A
2462.00	60.72	AV	H	31.63	92.35	N/A	N/A
2462.00	79.62	PK	V	31.63	111.25	N/A	N/A
2462.00	69.42	AV	V	31.63	101.05	N/A	N/A
2483.50	41.19	PK	V	31.64	72.83	74.00	1.17
2483.50	18.68	AV	V	31.64	50.32	54.00	3.68
4924.00	50.14	PK	V	11.18	61.32	74.00	12.68
4924.00	37.41	AV	V	11.18	48.59	54.00	5.41
7386.00	40.69	PK	V	14.89	55.58	74.00	18.42
7386.00	26.34	AV	V	14.89	41.23	54.00	12.77

802.11n ht20 Mode(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2412 MHz							
2412.00	72.94	PK	H	31.53	104.47	N/A	N/A
2412.00	61.38	AV	H	31.53	92.91	N/A	N/A
2412.00	82.54	PK	V	31.53	114.07	N/A	N/A
2412.00	70.26	AV	V	31.53	101.79	N/A	N/A
2390.00	38.54	PK	V	31.46	70.00	74.00	4.00
2390.00	18.95	AV	V	31.46	50.41	54.00	3.59
4824.00	33.97	PK	V	10.94	44.91	74.00	29.09
4824.00	21.41	AV	V	10.94	32.35	54.00	21.65
7236.00	33.52	PK	V	14.44	47.96	74.00	26.04
7236.00	21.69	AV	V	14.44	36.13	54.00	17.87
Middle Channel: 2437 MHz							
2437.00	72.45	PK	H	31.60	104.05	N/A	N/A
2437.00	60.59	AV	H	31.60	92.19	N/A	N/A
2437.00	81.92	PK	V	31.60	113.52	N/A	N/A
2437.00	68.84	AV	V	31.60	100.44	N/A	N/A
4874.00	33.96	PK	V	11.05	45.01	74.00	28.99
4874.00	21.86	AV	V	11.05	32.91	54.00	21.09
7311.00	33.74	PK	V	14.80	48.54	74.00	25.46
7311.00	21.85	AV	V	14.80	36.65	54.00	17.35
High Channel: 2462MHz							
2462.00	73.12	PK	H	31.63	104.75	N/A	N/A
2462.00	61.18	AV	H	31.63	92.81	N/A	N/A
2462.00	82.14	PK	V	31.63	113.77	N/A	N/A
2462.00	70.21	AV	V	31.63	101.84	N/A	N/A
2483.50	38.45	PK	V	31.64	70.09	74.00	3.91
2483.50	17.98	AV	V	31.64	49.62	54.00	4.38
4924.00	34.76	PK	V	11.18	45.94	74.00	28.06
4924.00	22.58	AV	V	11.18	33.76	54.00	20.24
7386.00	33.49	PK	V	14.89	48.38	74.00	25.62
7386.00	21.69	AV	V	14.89	36.58	54.00	17.42

802.11n ht40 Mode(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2422 MHz							
2422.00	68.21	PK	H	31.56	99.77	N/A	N/A
2422.00	56.49	AV	H	31.56	88.05	N/A	N/A
2422.00	77.48	PK	V	31.56	109.04	N/A	N/A
2422.00	65.38	AV	V	31.56	96.94	N/A	N/A
2390.00	40.49	PK	V	31.46	71.95	74.00	2.05
2390.00	20.14	AV	V	31.46	51.60	54.00	2.40
4844.00	34.67	PK	V	10.96	45.63	74.00	28.37
4844.00	22.13	AV	V	10.96	33.09	54.00	20.91
7266.00	34.16	PK	V	14.63	48.79	74.00	25.21
7266.00	21.56	AV	V	14.63	36.19	54.00	17.81
Middle Channel: 2437 MHz							
2437.00	69.28	PK	H	31.60	100.88	N/A	N/A
2437.00	56.31	AV	H	31.60	87.91	N/A	N/A
2437.00	78.51	PK	V	31.60	110.11	N/A	N/A
2437.00	66.05	AV	V	31.60	97.65	N/A	N/A
4874.00	33.17	PK	V	11.05	44.22	74.00	29.78
4874.00	21.69	AV	V	11.05	32.74	54.00	21.26
7311.00	33.79	PK	V	14.80	48.59	74.00	25.41
7311.00	21.57	AV	V	14.80	36.37	54.00	17.63
High Channel: 2452MHz							
2452.00	68.49	PK	H	31.63	100.12	N/A	N/A
2452.00	56.67	AV	H	31.63	88.30	N/A	N/A
2452.00	77.45	PK	V	31.63	109.08	N/A	N/A
2452.00	65.66	AV	V	31.63	97.29	N/A	N/A
2483.50	38.95	PK	V	31.64	70.59	74.00	3.41
2483.50	19.21	AV	V	31.64	50.85	54.00	3.15
4904.00	34.75	PK	V	11.14	45.89	74.00	28.11
4904.00	22.96	AV	V	11.14	34.10	54.00	19.90
7356.00	34.53	PK	V	14.80	49.33	74.00	24.67
7356.00	22.85	AV	V	14.80	37.65	54.00	16.35


802.11ax hew20 Mode(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2412 MHz							
2412.00	71.59	PK	H	31.53	103.12	N/A	N/A
2412.00	58.74	AV	H	31.53	90.27	N/A	N/A
2412.00	81.99	PK	V	31.53	113.52	N/A	N/A
2412.00	69.02	AV	V	31.53	100.55	N/A	N/A
2390.00	40.98	PK	V	31.46	72.44	74.00	1.56
2390.00	18.37	AV	V	31.46	49.83	54.00	4.17
4824.00	33.61	PK	V	10.94	44.55	74.00	29.45
4824.00	21.53	AV	V	10.94	32.47	54.00	21.53
7236.00	33.46	PK	V	14.44	47.90	74.00	26.10
7236.00	21.34	AV	V	14.44	35.78	54.00	18.22
Middle Channel: 2437 MHz							
2437.00	72.15	PK	H	31.60	103.75	N/A	N/A
2437.00	59.58	AV	H	31.60	91.18	N/A	N/A
2437.00	81.31	PK	V	31.60	112.91	N/A	N/A
2437.00	68.54	AV	V	31.60	100.14	N/A	N/A
4874.00	33.95	PK	V	11.05	45.00	74.00	29.00
4874.00	21.46	AV	V	11.05	32.51	54.00	21.49
7311.00	34.02	PK	V	14.80	48.82	74.00	25.18
7311.00	22.18	AV	V	14.80	36.98	54.00	17.02
High Channel: 2462MHz							
2462.00	72.41	PK	H	31.63	104.04	N/A	N/A
2462.00	59.73	AV	H	31.63	91.36	N/A	N/A
2462.00	81.44	PK	V	31.63	113.07	N/A	N/A
2462.00	68.84	AV	V	31.63	100.47	N/A	N/A
2483.50	40.52	PK	V	31.64	72.16	74.00	1.84
2483.50	17.51	AV	V	31.64	49.15	54.00	4.85
4924.00	34.06	PK	V	11.18	45.24	74.00	28.76
4924.00	22.59	AV	V	11.18	33.77	54.00	20.23
7386.00	34.56	PK	V	14.89	49.45	74.00	24.55
7386.00	22.18	AV	V	14.89	37.07	54.00	16.93


802.11ax hew40 Mode(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2422 MHz							
2422.00	68.88	PK	H	31.56	100.44	N/A	N/A
2422.00	55.62	AV	H	31.56	87.18	N/A	N/A
2422.00	78.42	PK	V	31.56	109.98	N/A	N/A
2422.00	65.73	AV	V	31.56	97.29	N/A	N/A
2390.00	37.66	PK	V	31.46	69.12	74.00	4.88
2390.00	20.54	AV	V	31.46	52.00	54.00	2.00
4844.00	33.72	PK	V	10.96	44.68	74.00	29.32
4844.00	21.78	AV	V	10.96	32.74	54.00	21.26
7266.00	33.56	PK	V	14.63	48.19	74.00	25.81
7266.00	21.42	AV	V	14.63	36.05	54.00	17.95
Middle Channel: 2437 MHz							
2437.00	70.12	PK	H	31.60	101.72	N/A	N/A
2437.00	66.38	AV	H	31.60	97.98	N/A	N/A
2437.00	79.99	PK	V	31.60	111.59	N/A	N/A
2437.00	66.69	AV	V	31.60	98.29	N/A	N/A
4874.00	34.35	PK	V	11.05	45.40	74.00	28.60
4874.00	22.63	AV	V	11.05	33.68	54.00	20.32
7311.00	33.91	PK	V	14.80	48.71	74.00	25.29
7311.00	21.56	AV	V	14.80	36.36	54.00	17.64
High Channel: 2452MHz							
2452.00	69.66	PK	H	31.63	101.29	N/A	N/A
2452.00	56.86	AV	H	31.63	88.49	N/A	N/A
2452.00	77.95	PK	V	31.63	109.58	N/A	N/A
2452.00	65.97	AV	V	31.63	97.60	N/A	N/A
2483.50	36.88	PK	V	31.64	68.52	74.00	5.48
2483.50	19.77	AV	V	31.64	51.41	54.00	2.59
4904.00	34.33	PK	V	11.14	45.47	74.00	28.53
4904.00	22.02	AV	V	11.14	33.16	54.00	20.84
7356.00	34.24	PK	V	14.80	49.04	74.00	24.96
7356.00	21.89	AV	V	14.80	36.69	54.00	17.31

Worst Test plots(802.11b chain 0 Low channel was the worst)

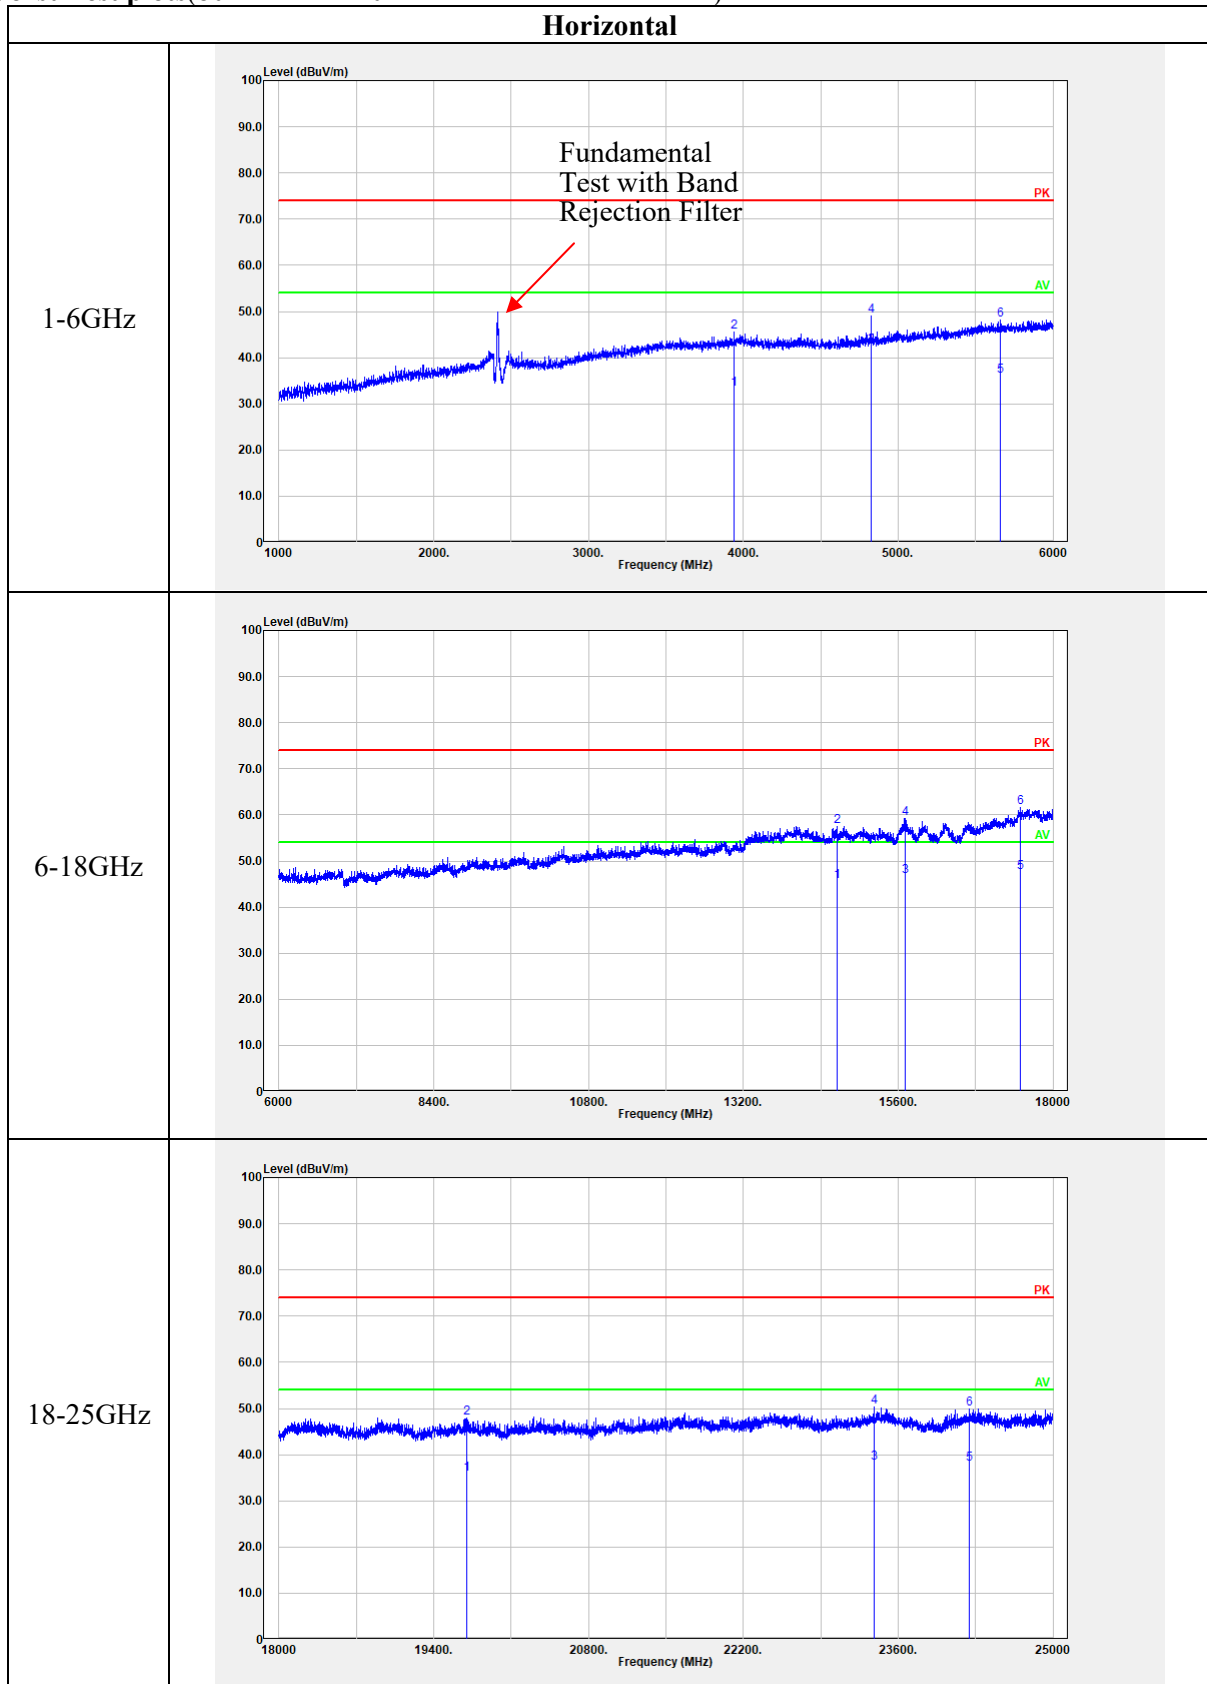

Vertical

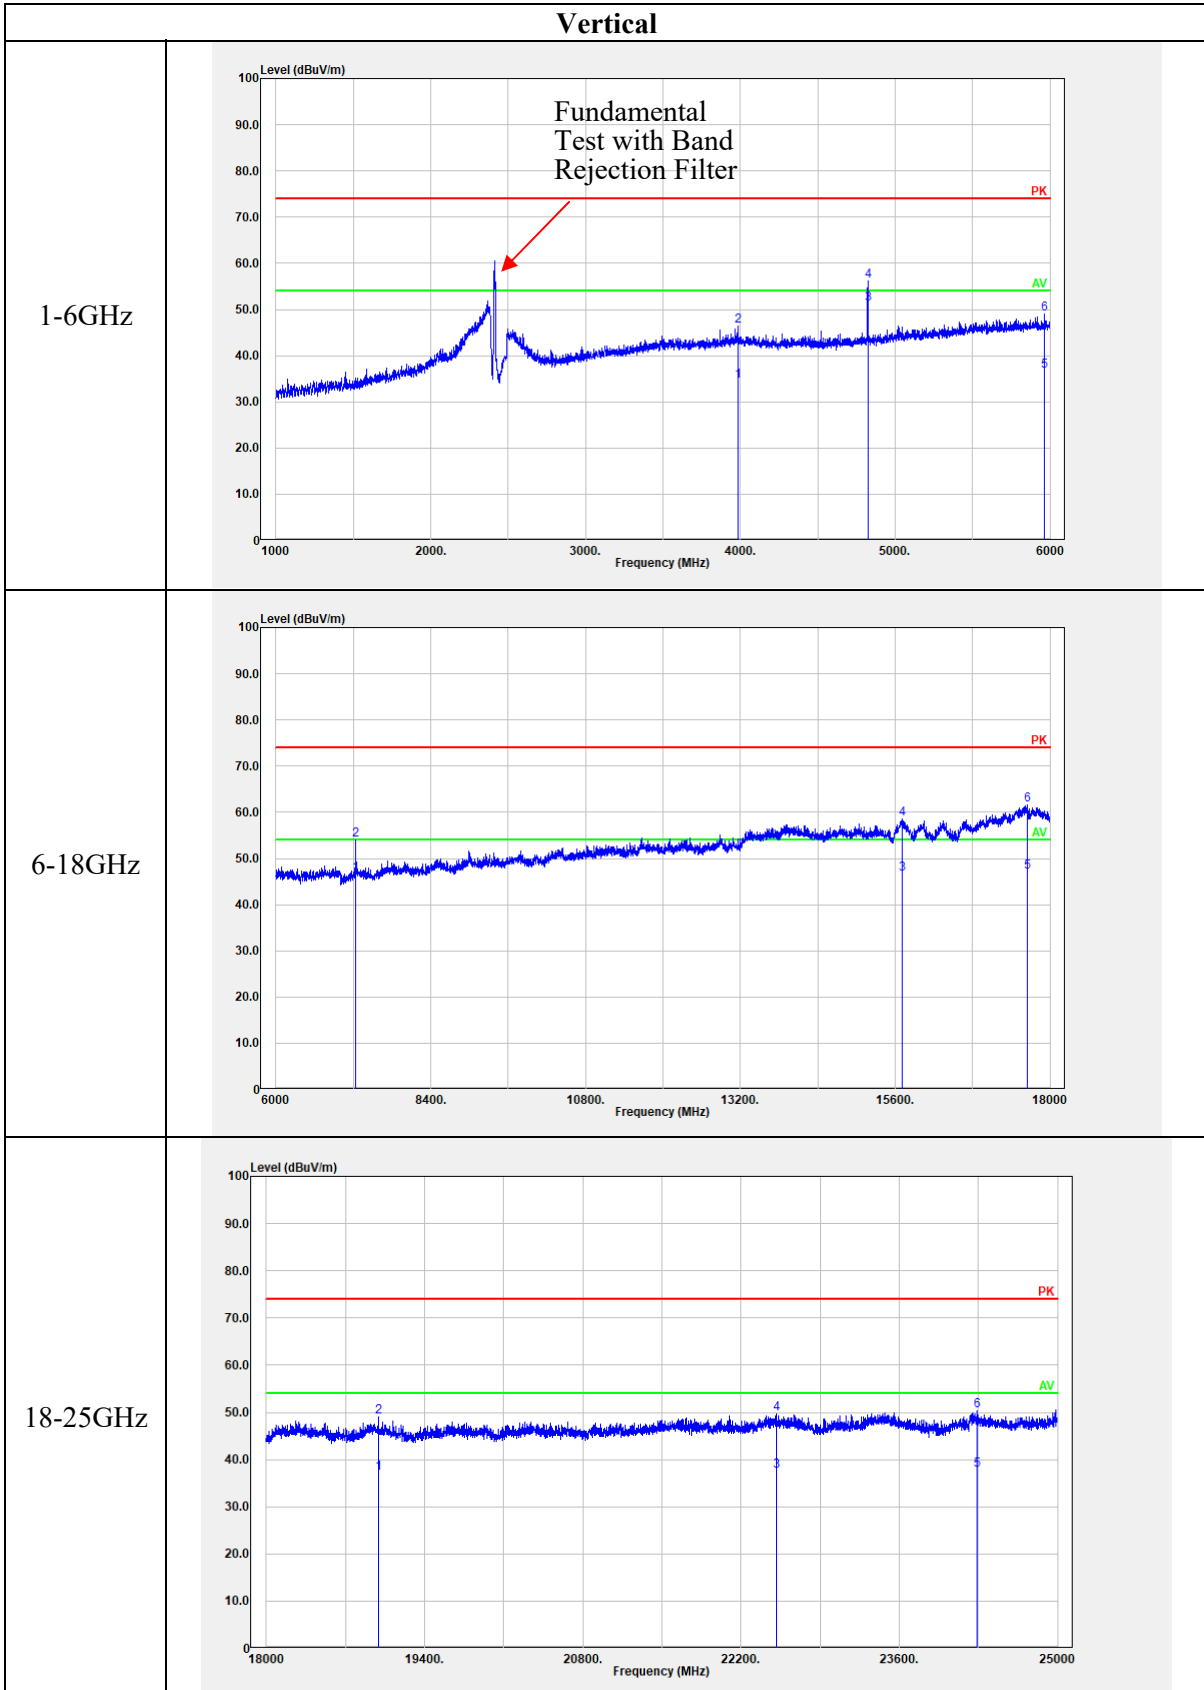

4.3 6 dB Emission Bandwidth:

Serial Number:	CR22020001-RF-S1	Test Date:	2022-5-23-2022-5-25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7~25.9	Relative Humidity: (%)	63~64	ATM Pressure: (kPa)	100.1~100.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	
		Result	Limit
802.11b	2412	7.120	0.5
	2437	6.640	0.5
	2462	7.440	0.5
802.11g	2412	16.480	0.5
	2437	16.480	0.5
	2462	16.480	0.5
802.11n ht20	2412	17.680	0.5
	2437	17.440	0.5
	2462	17.680	0.5
802.11n ht40	2422	36.000	0.5
	2437	36.000	0.5
	2452	35.840	0.5
802.11ax hew20	2412	18.960	0.5
	2437	18.960	0.5
	2462	18.640	0.5
802.11ax hew40	2422	37.600	0.5
	2437	37.600	0.5
	2452	37.600	0.5

Note: Test only was performed at Chain 0.

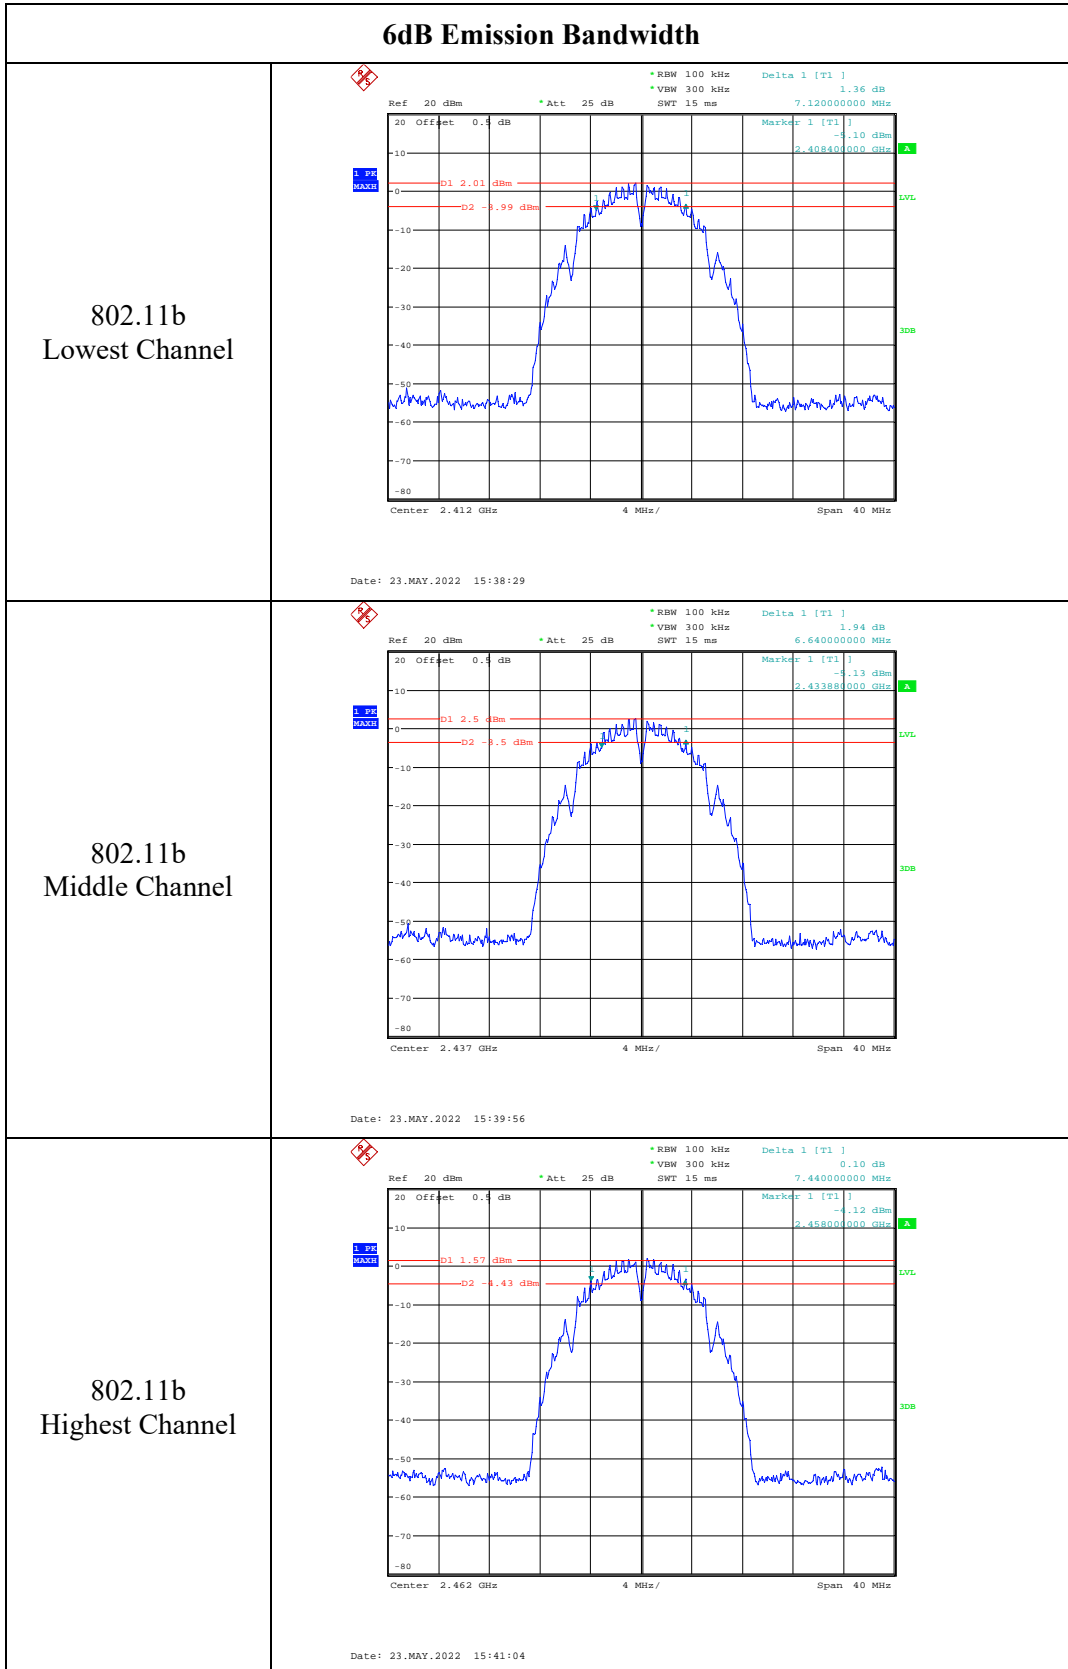


6dB Emission Bandwidth

802.11g
Lowest Channel

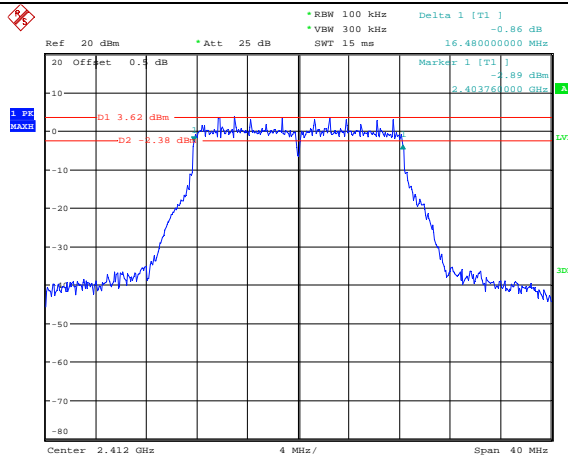


Date: 23.MAY.2022 14:26:12

802.11g
Middle Channel

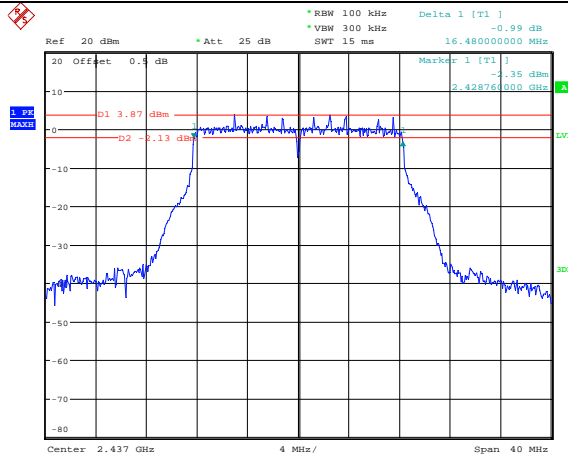



Date: 23.MAY.2022 14:28:04


802.11g
Highest Channel

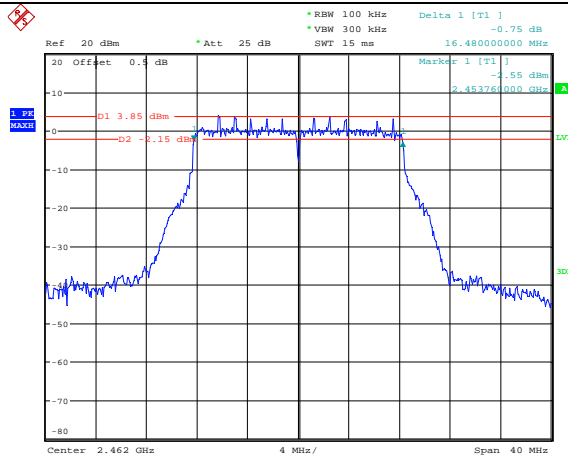


Date: 23.MAY.2022 14:32:42

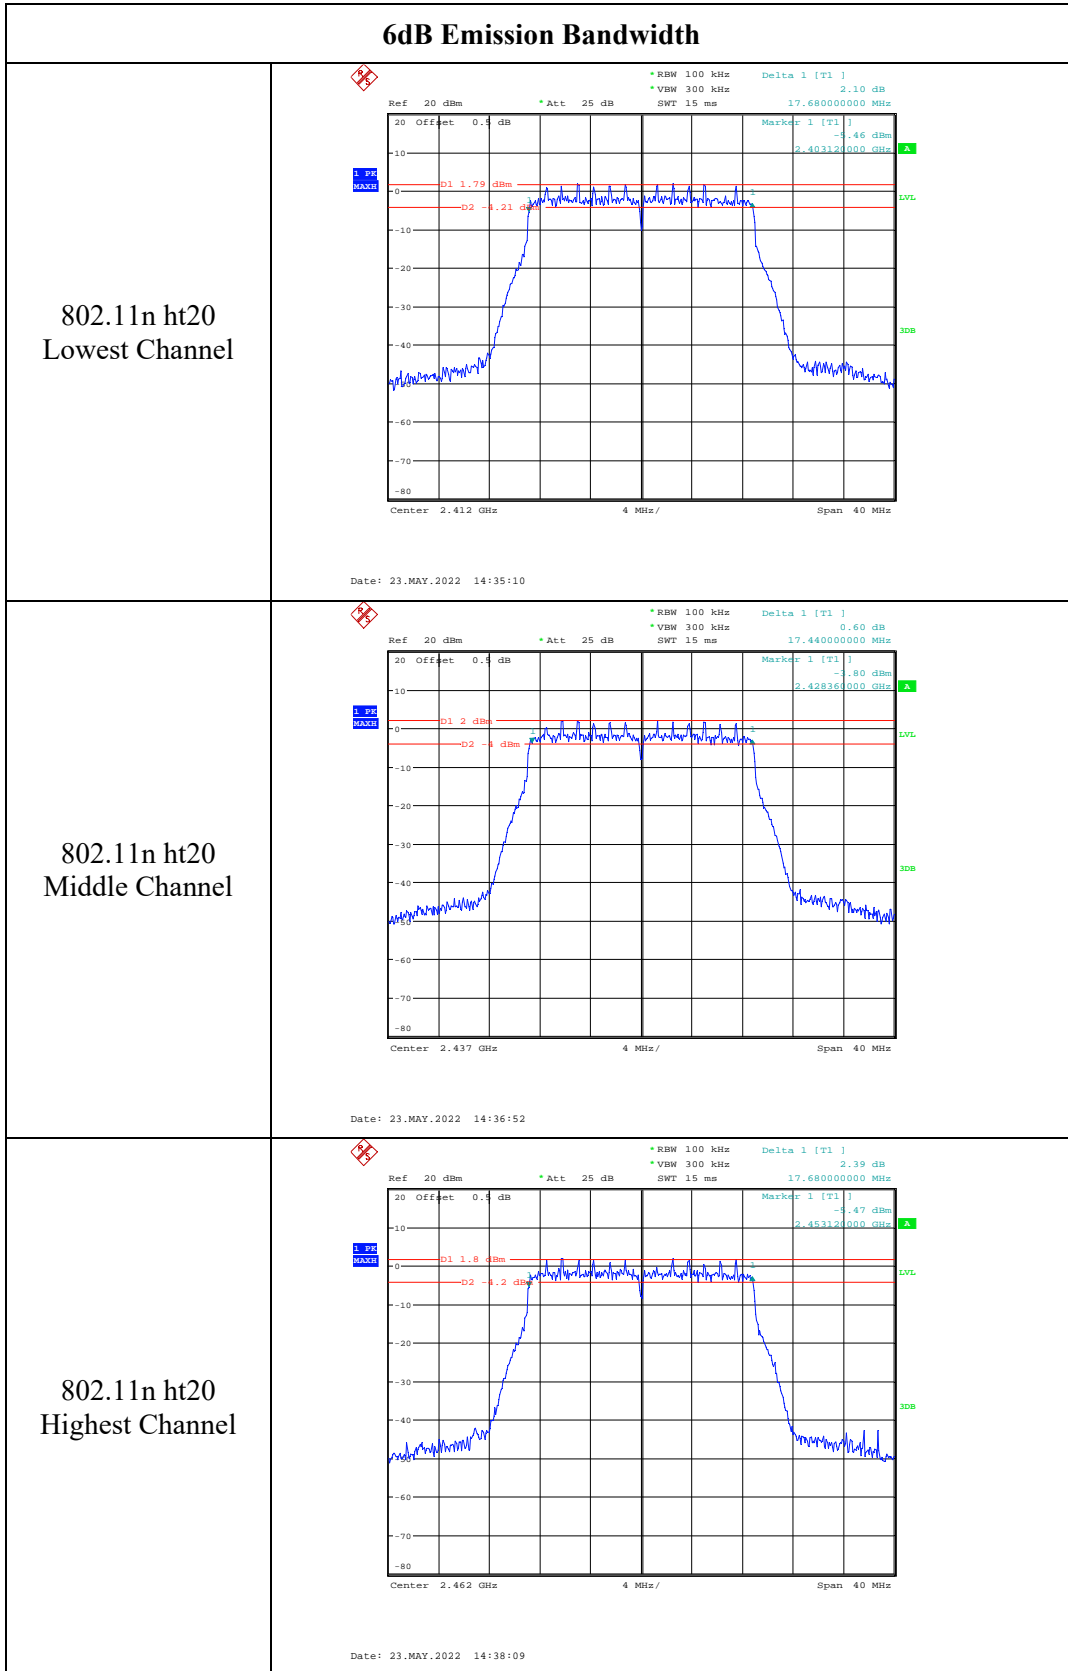

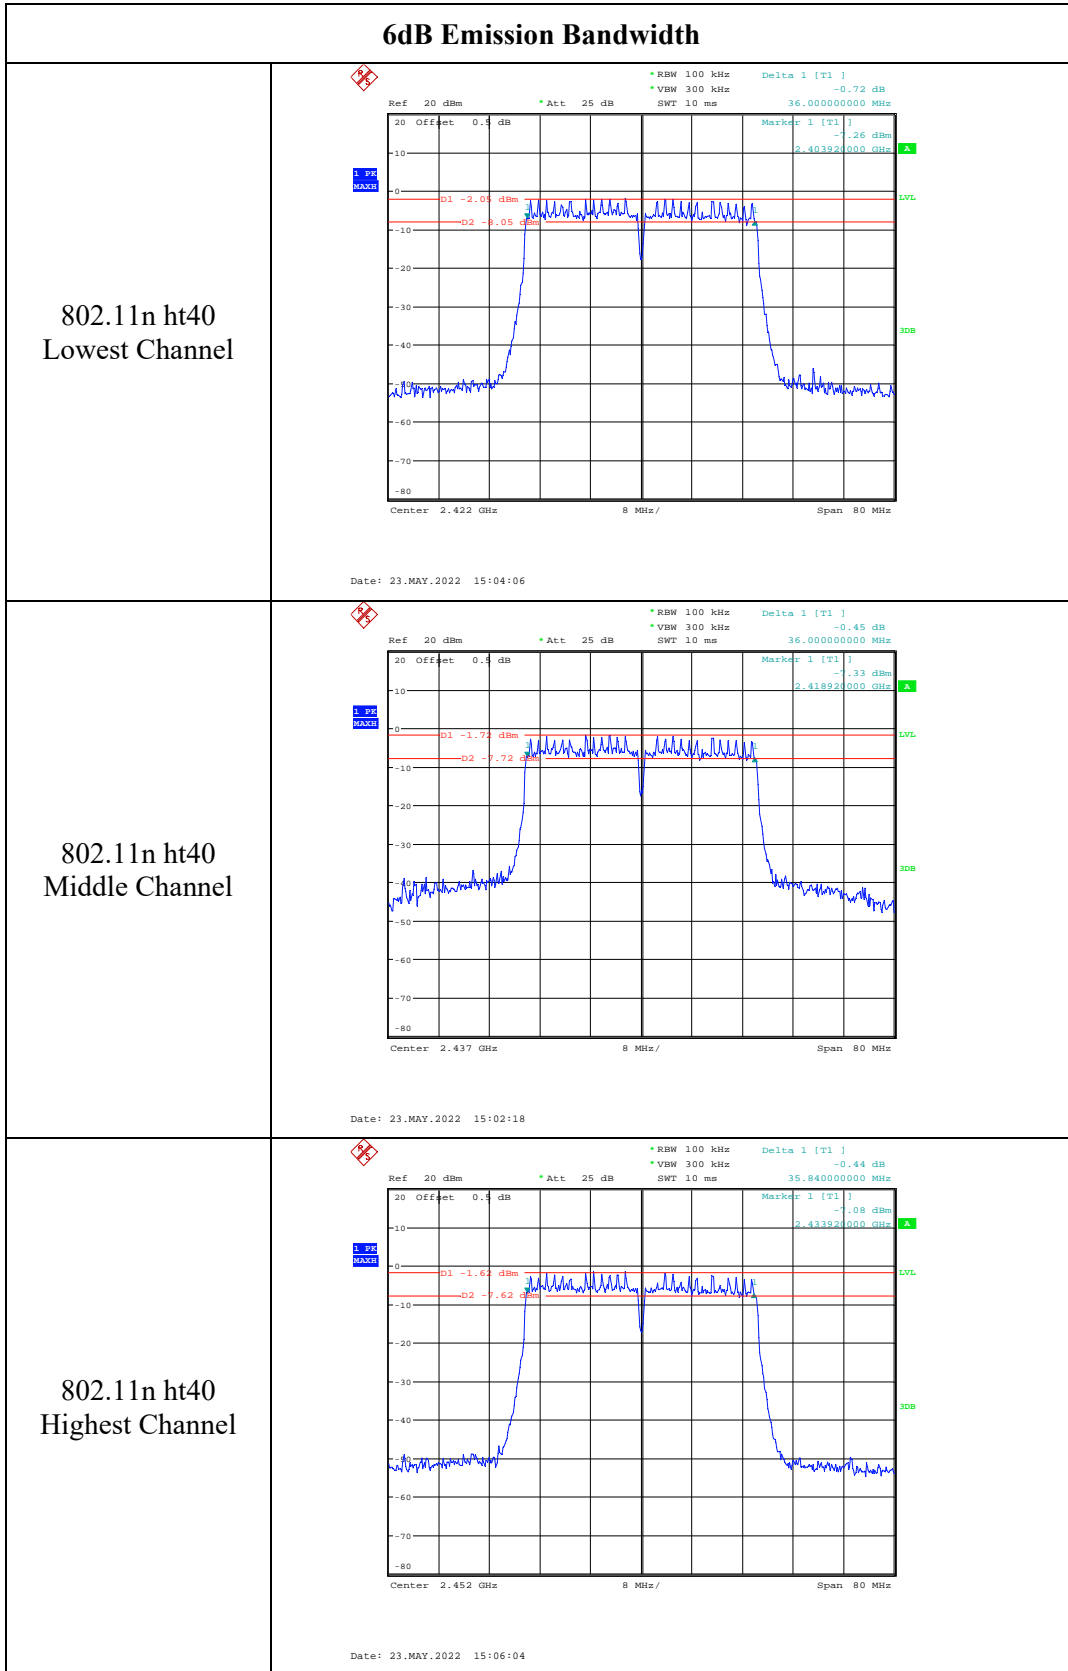

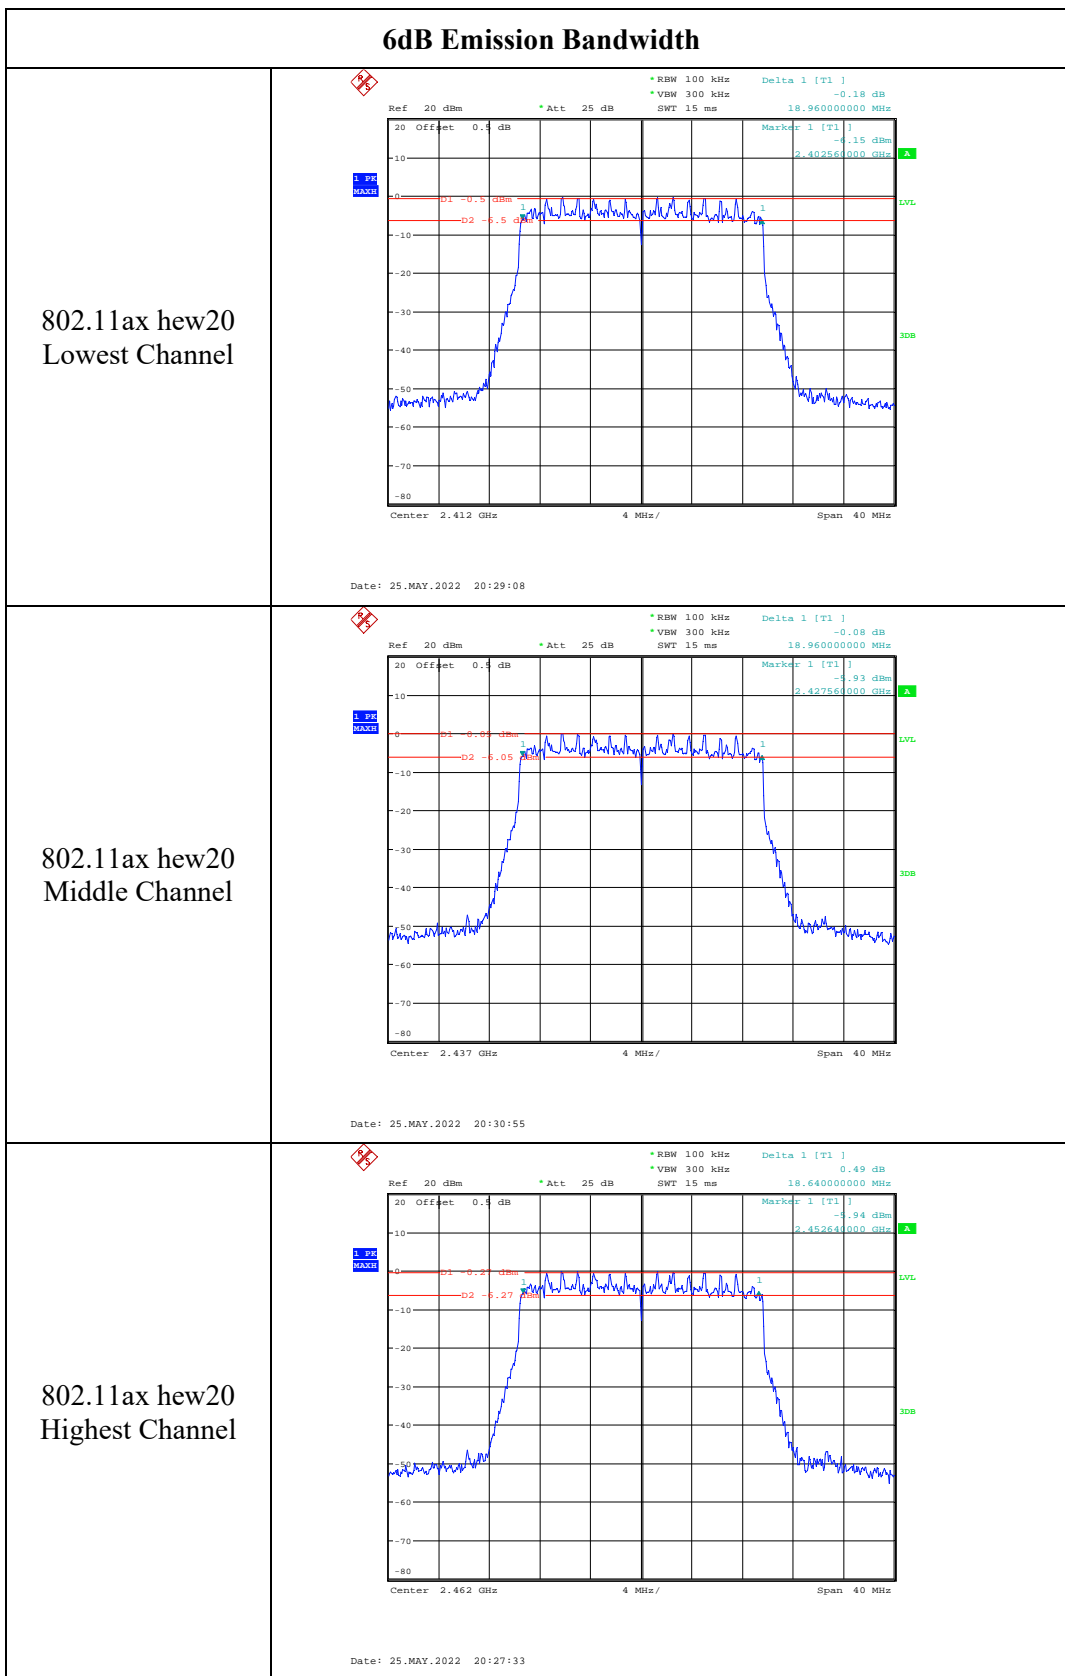

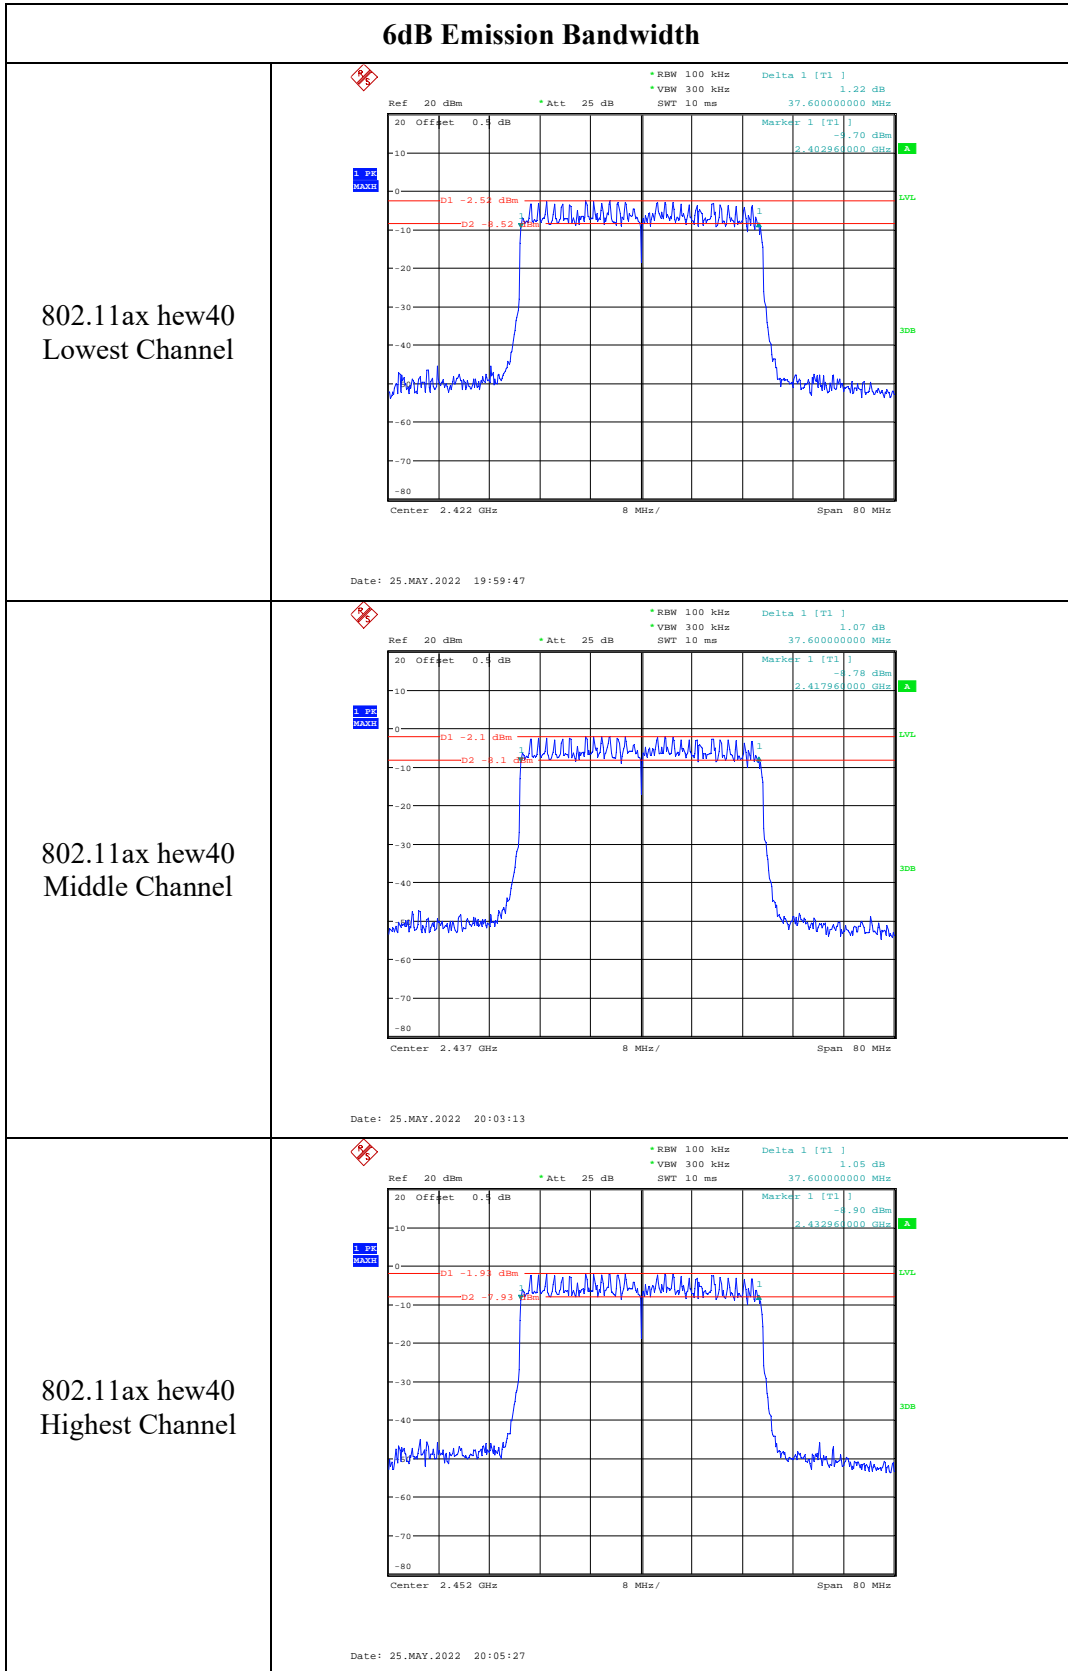

4.4 99% Occupied Bandwidth:

Serial Number:	CR22020001-RF-S1	Test Date:	2022-5-23-2022-5-25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	25.7~25.9	Relative Humidity: (%)	63~64	Temperature: (°C)	25.7~25.9
----------------------	-----------	------------------------------	-------	----------------------	-----------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Test Modes	Test Channel	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)
802.11b	Lowest	2412	10.480
	Middle	2437	10.480
	Highest	2462	10.560
802.11g	Lowest	2412	17.120
	Middle	2437	17.200
	Highest	2462	17.200
802.11n ht20	Lowest	2412	18.000
	Middle	2437	18.080
	Highest	2462	18.080
802.11n ht40	Lowest	2422	36.480
	Middle	2437	36.640
	Highest	2452	36.480
802.11ax hew20	Lowest	2412	19.040
	Middle	2437	19.040
	Highest	2462	19.040
802.11ax hew40	Lowest	2422	37.760
	Middle	2437	37.760
	Highest	2452	37.760

Note: Test only was performed at Chain 0.

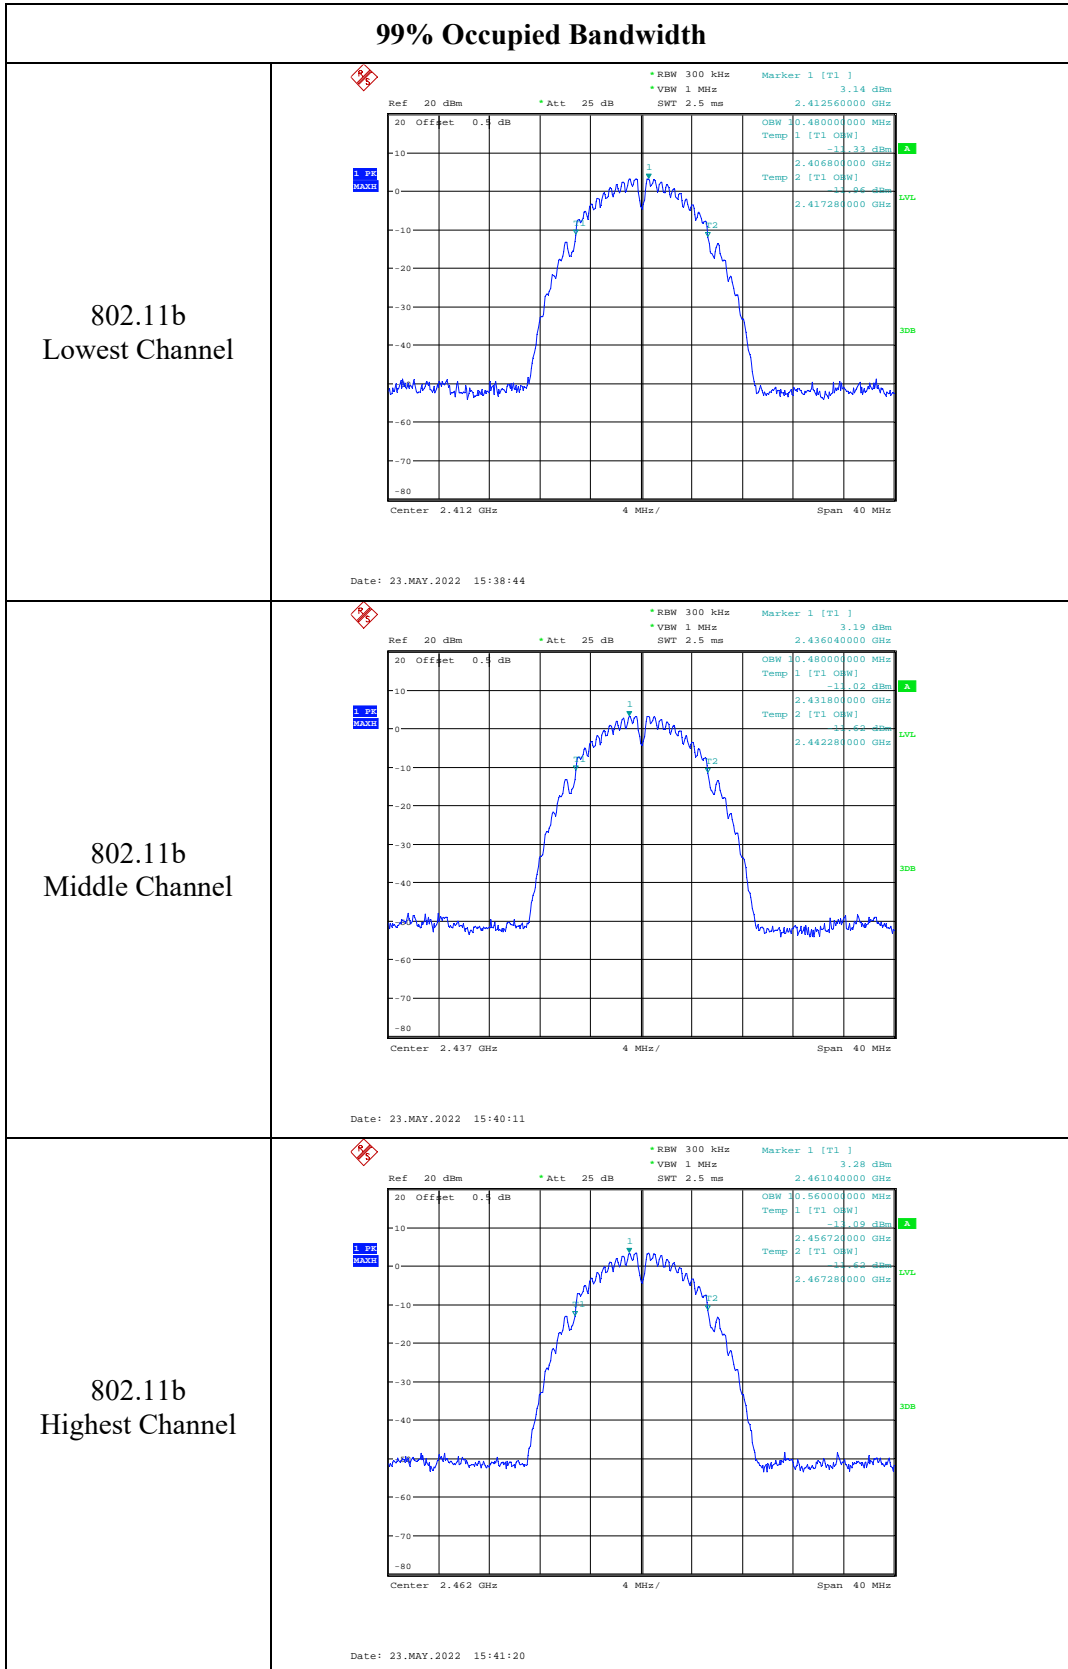


99% Occupied Bandwidth

802.11g
Lowest Channel

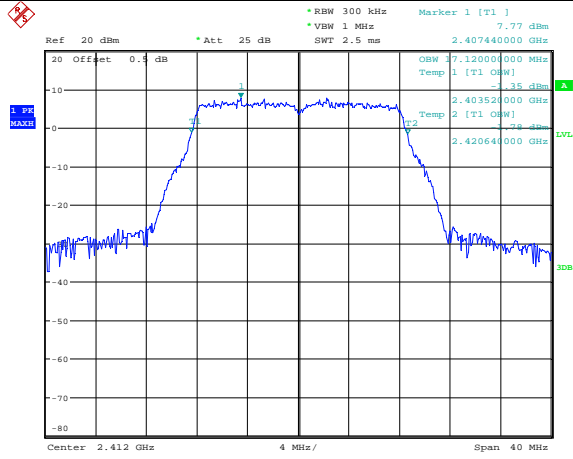


Date: 23.MAY.2022 14:26:40

802.11g
Middle Channel

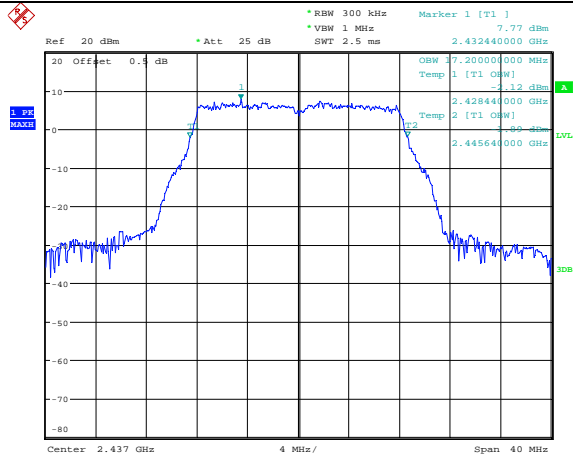

Date: 23.MAY.2022 14:28:28


802.11g
Highest Channel

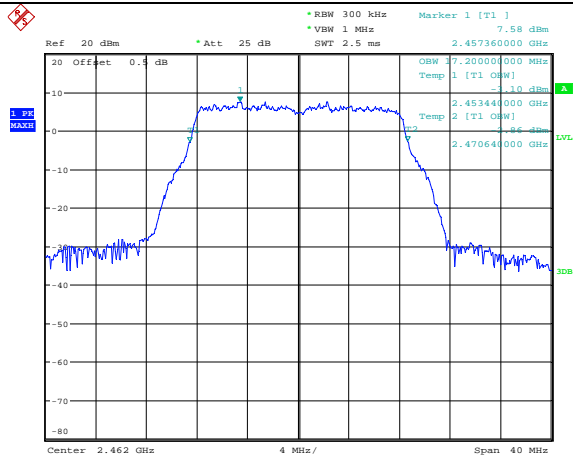

Date: 23.MAY.2022 14:33:09


99% Occupied Bandwidth

802.11n ht20
Lowest Channel

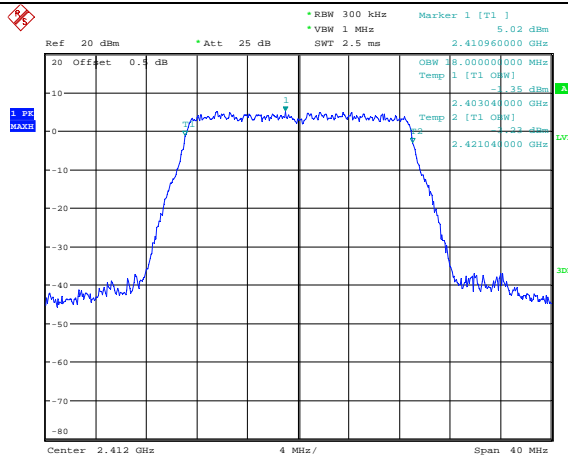


Date: 23.MAY.2022 14:35:29

802.11n ht20
Middle Channel

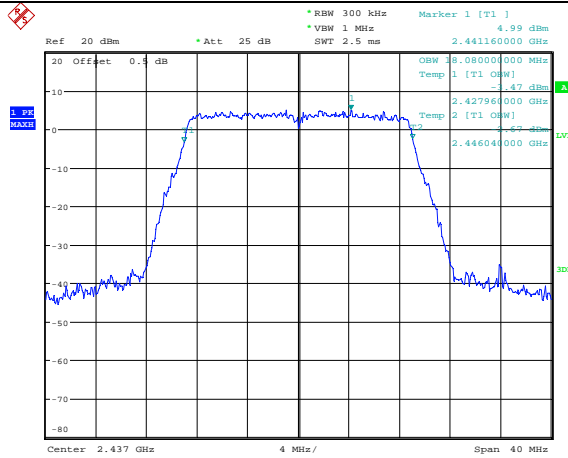



Date: 23.MAY.2022 14:37:11


802.11n ht20
Highest Channel

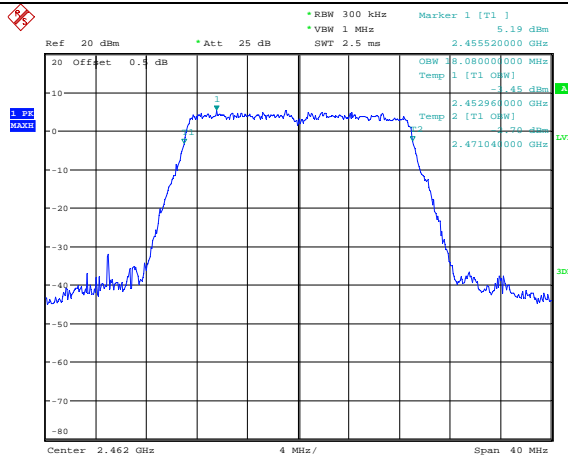

Date: 23.MAY.2022 14:38:29

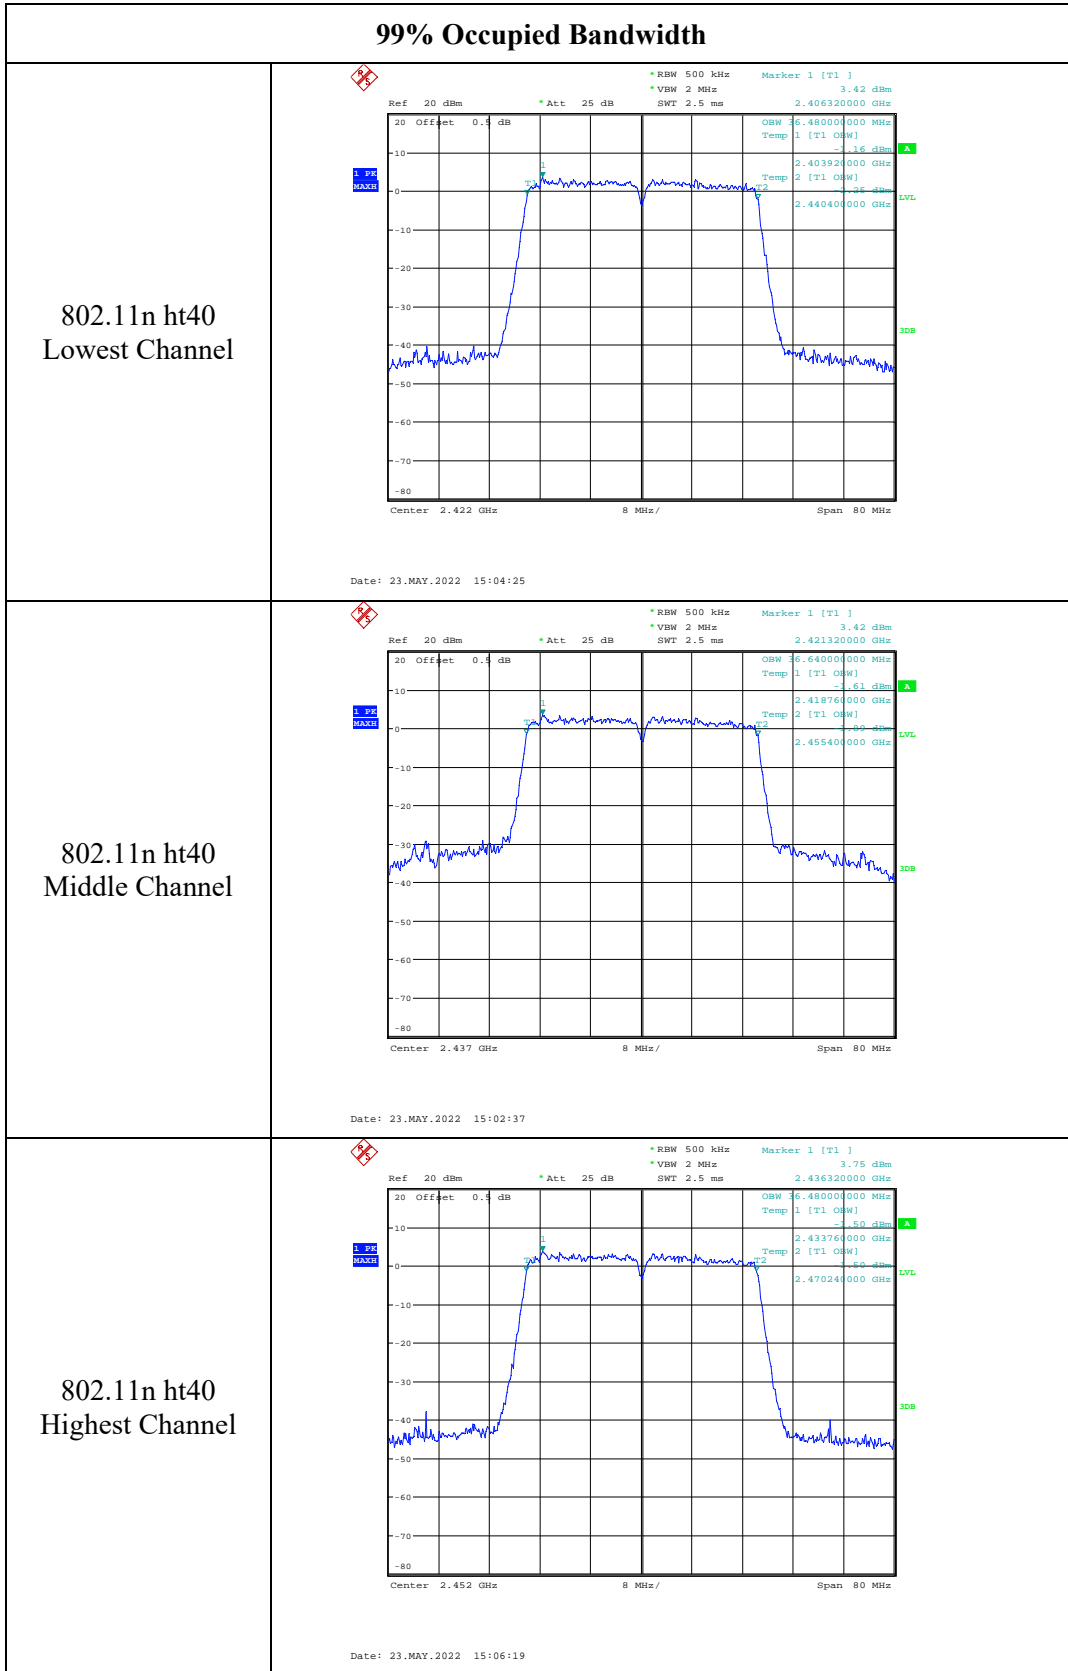

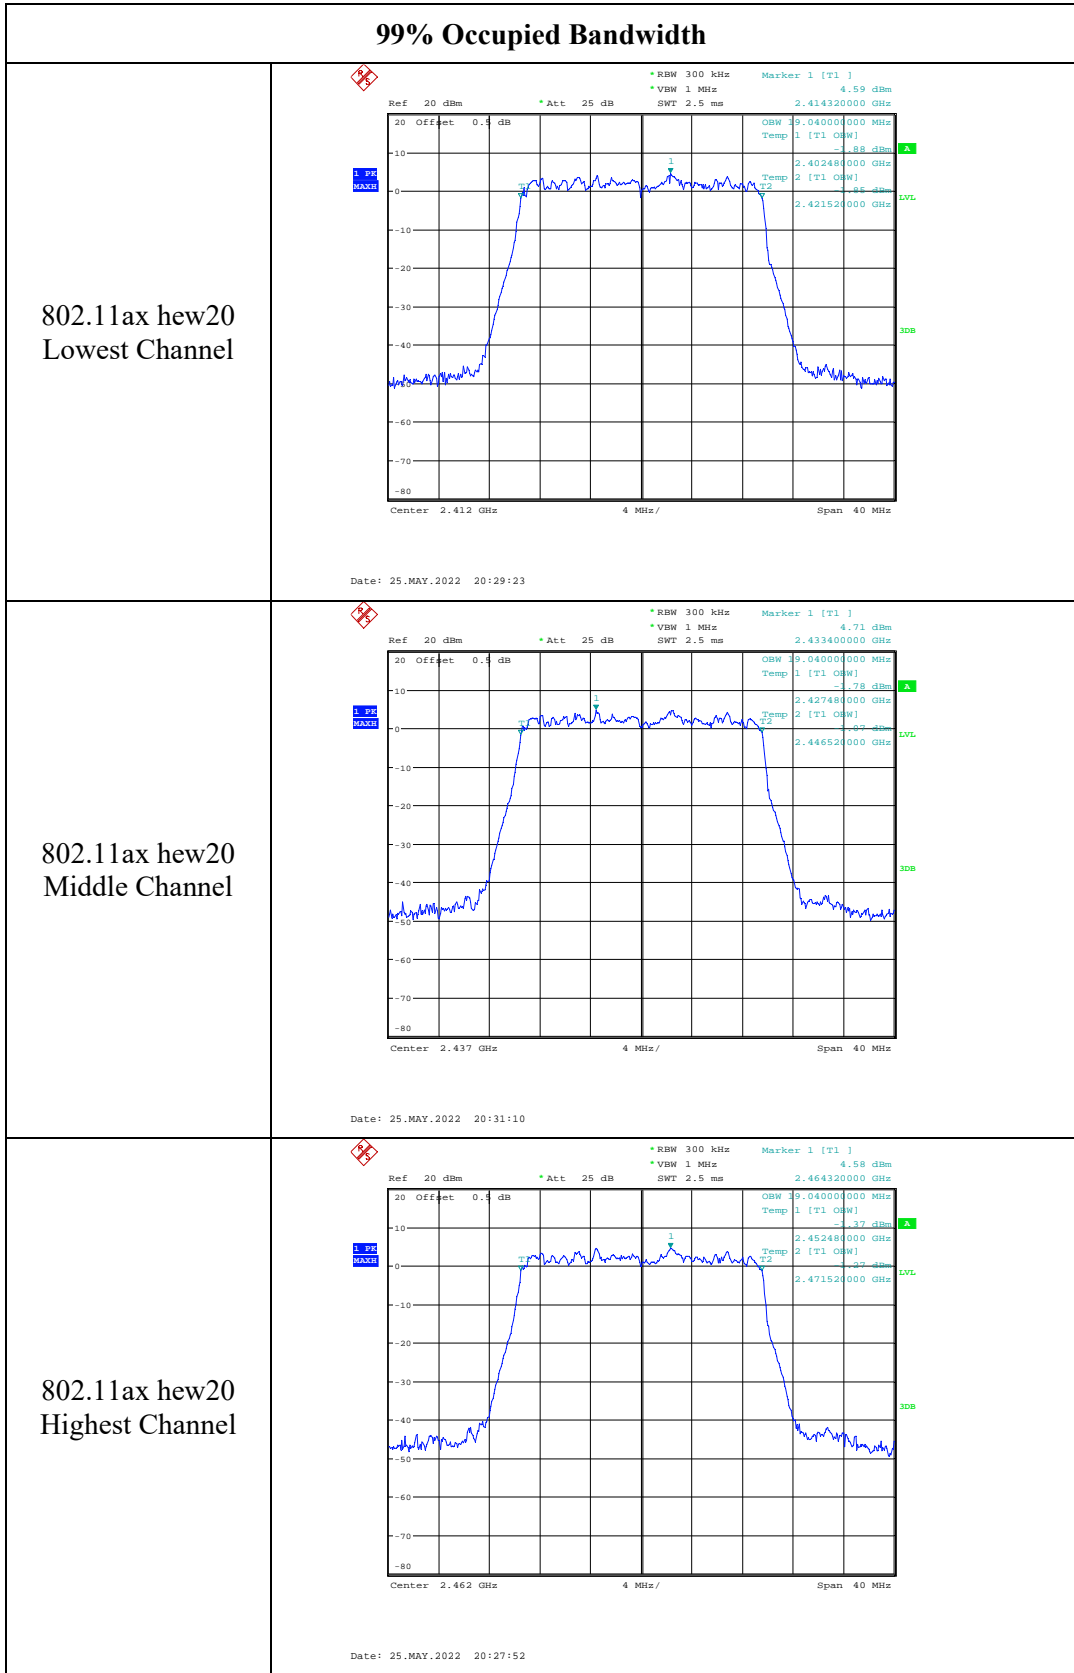

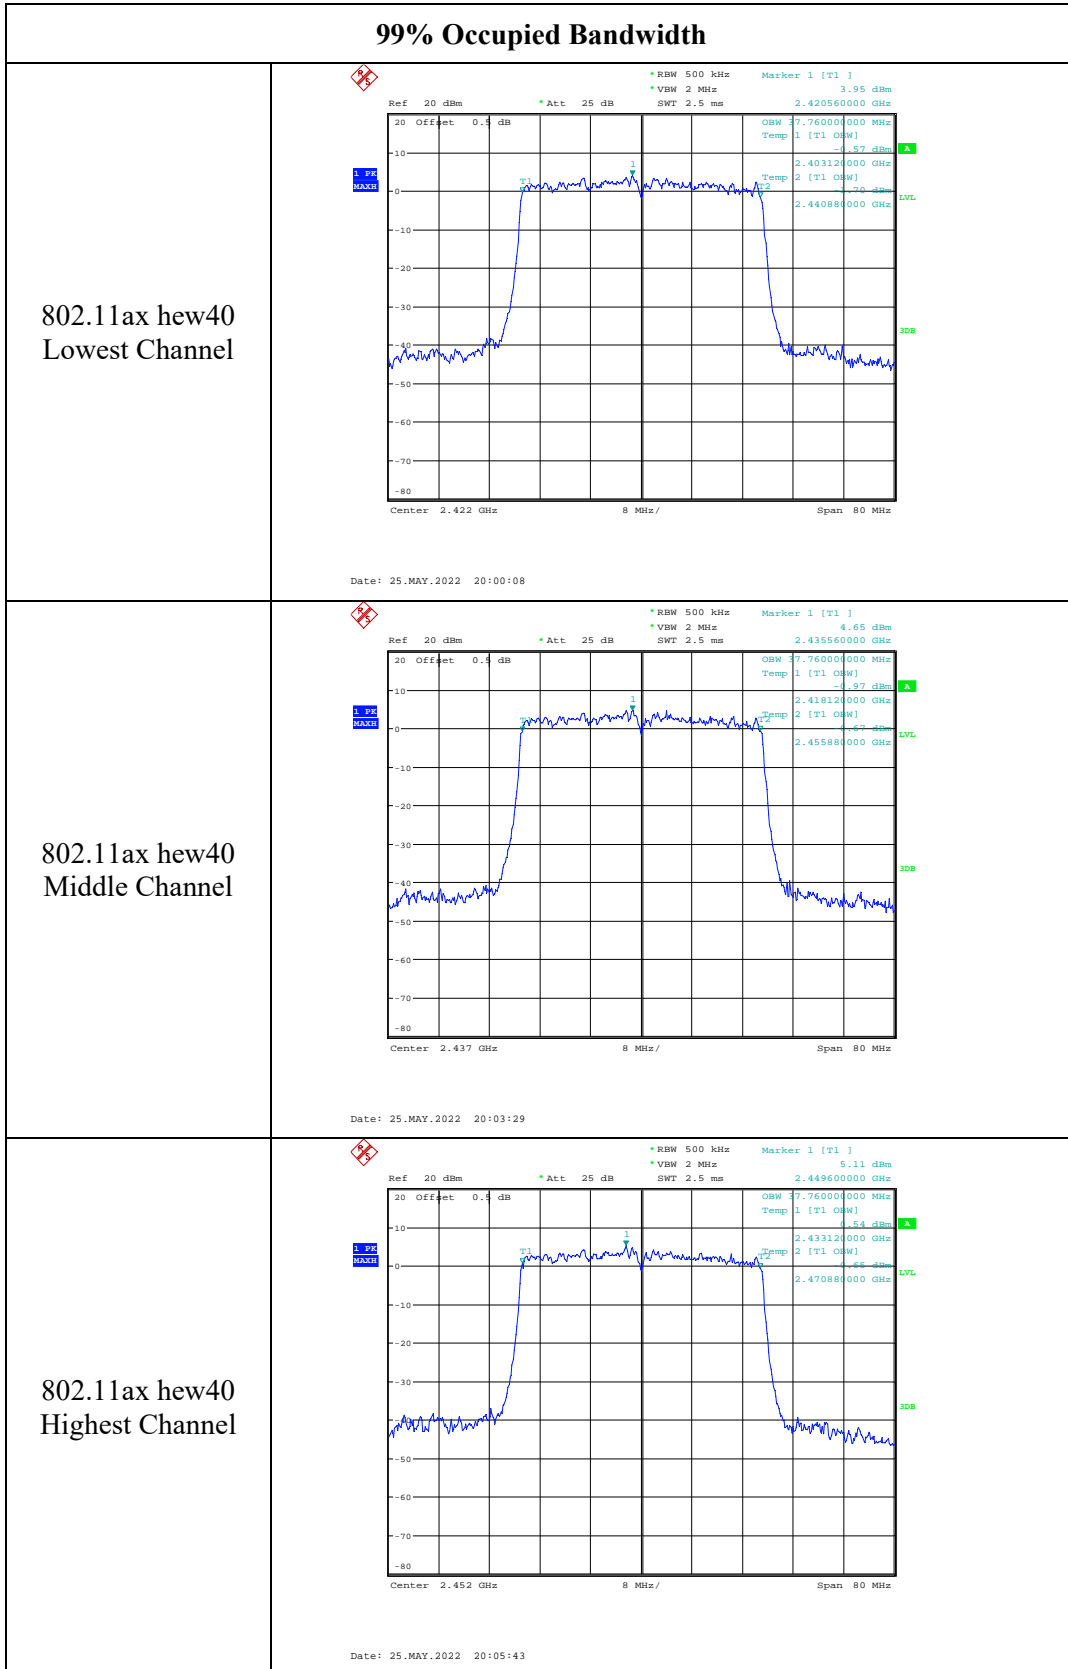

4.5 Maximum peak conducted output power:

Serial Number:	CR22020001-RF-S1	Test Date:	2022-5-23-2022-5-25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7~25.9	Relative Humidity: (%)	63~64	Temperature: (°C)	25.7~25.9
----------------------	-----------	------------------------------	-------	----------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2021-07-22	2022-07-21
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Mode	Channel	Frequency (MHz)	RU Config.	Conducted Peak Output Power (dBm)			Limit For Non-beamforming (dBm)	Limit For Beamforming (dBm)
				Chain 0	Chain 1	Total		
802.11 b	Lowest	2412	N/A	13.84	15.41	/	≤30	/
	Middle	2437	N/A	14	15	/	≤30	/
	Highest	2462	N/A	13.97	14.94	/	≤30	/
802.11 g	Lowest	2412	N/A	25.18	26.77	/	≤30	/
	Middle	2437	N/A	25.28	26.16	/	≤30	/
	Highest	2462	N/A	25.37	26.24	/	≤30	/
802.11n ht20	Lowest	2412	N/A	23.43	25.35	27.51	≤30	≤28.8
	Middle	2437	N/A	23.49	25.47	27.60	≤30	≤28.8
	Highest	2462	N/A	23.78	24.81	27.34	≤30	≤28.8
802.11n ht40	Lowest	2422	N/A	22.59	24.22	26.49	≤30	≤28.8
	Middle	2437	N/A	22.54	24.03	26.36	≤30	≤28.8
	Highest	2452	N/A	22.76	23.51	26.16	≤30	≤28.8
802.11ax hew20	Lowest	2412	26/0	11.25	13.98	15.84	≤30	≤28.8
			52/37	14.66	17.21	19.13	≤30	≤28.8
			106/53	17.89	20.36	22.31	≤30	≤28.8
			242/61	21.01	23.73	25.59	≤30	≤28.8
	Middle	2437	26/0	12.01	13.87	16.05	≤30	≤28.8
			52/37	15.11	16.98	19.16	≤30	≤28.8
			106/53	18.26	20.01	22.23	≤30	≤28.8
			242/61	21.65	23.03	25.40	≤30	≤28.8
	Highest	2462	26/8	12.00	13.87	16.05	≤30	≤28.8
			52/40	15.04	16.98	19.13	≤30	≤28.8
			106/54	18.21	20.14	22.29	≤30	≤28.8
			242/61	21.35	23.18	25.37	≤30	≤28.8
802.11ax hew40	Lowest	2422	26/0	9.14	11.07	13.22	≤30	≤28.8
			52/37	11.39	14.21	16.04	≤30	≤28.8
			106/53	14.58	17.54	19.32	≤30	≤28.8
			242/61	17.98	20.61	22.50	≤30	≤28.8
	Middle	2437	484/65	21.28	23.66	25.64	≤30	≤28.8
			26/0	9.87	11.02	13.49	≤30	≤28.8
			52/37	12.98	14.32	16.71	≤30	≤28.8
			106/53	16.05	17.47	19.83	≤30	≤28.8
	Highest	2452	242/61	19.41	20.61	23.06	≤30	≤28.8
			484/65	22.82	23.65	26.27	≤30	≤28.8
			26/0	10.14	10.54	13.35	≤30	≤28.8
			52/37	13.47	13.69	16.59	≤30	≤28.8
			106/53	16.87	16.87	19.88	≤30	≤28.8
			242/61	20.04	20.15	23.11	≤30	≤28.8
			484/65	23.11	23.42	26.28	≤30	≤28.8

Note:

The maximum antenna gain is 4.2dBi in 2.4GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

For Non-beamforming mode: Directional gain = 4.2dBi

For Beamforming mode: Directional gain = 4.2+3 = 7.2 dBi

4.5 Maximum power spectral density:

Serial Number:	CR22020001-RF-S1	Test Date:	2022-5-23-2022-5-25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7~25.9	Relative Humidity: (%)	63~64	Temperature: (°C)	25.7~25.9
----------------------	-----------	---------------------------	-------	----------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)
		Chain 0	Chain 1	Total	
802.11b	2412	-12.42	-9.95	/	≤8.00
	2437	-11.68	-10.07	/	≤8.00
	2462	-11.61	-10.21	/	≤8.00
802.11g	2412	-10.27	-9.12	/	≤8.00
	2437	-10.19	-10.45	/	≤8.00
	2462	-10.50	-11.02	/	≤8.00
802.11n ht20	2412	-13.06	-10.54	-8.61	≤3.80
	2437	-13.63	-10.93	-9.06	≤3.80
	2462	-12.82	-11.21	-8.93	≤3.80
802.11n ht40	2422	-16.98	-14.60	-12.62	≤3.80
	2437	-16.88	-14.53	-12.54	≤3.80
	2452	-17.05	-14.50	-12.58	≤3.80
802.11ax hew20	2412	-14.79	-12.36	-10.40	≤3.80
	2437	-14.62	-12.41	-10.37	≤3.80
	2462	-15.10	-12.87	-10.83	≤3.80
802.11ax hew40	2422	-15.51	-13.02	-11.08	≤3.80
	2437	-15.33	-13.25	-11.16	≤3.80
	2452	-14.61	-13.36	-10.93	≤3.80

Note:

The maximum antenna gain is 4.2 dBi. And beamforming gain is 3dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$


So:

Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 4.2 + 10 * \log(2/1) = 7.2$ dBi for Non-beamforming mode

Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 4.2 + 3 + 10 * \log(2/1) = 10.2$ dBi for Beamforming mode

The worst limit Beamforming mode was used in the table.

Chain 0:

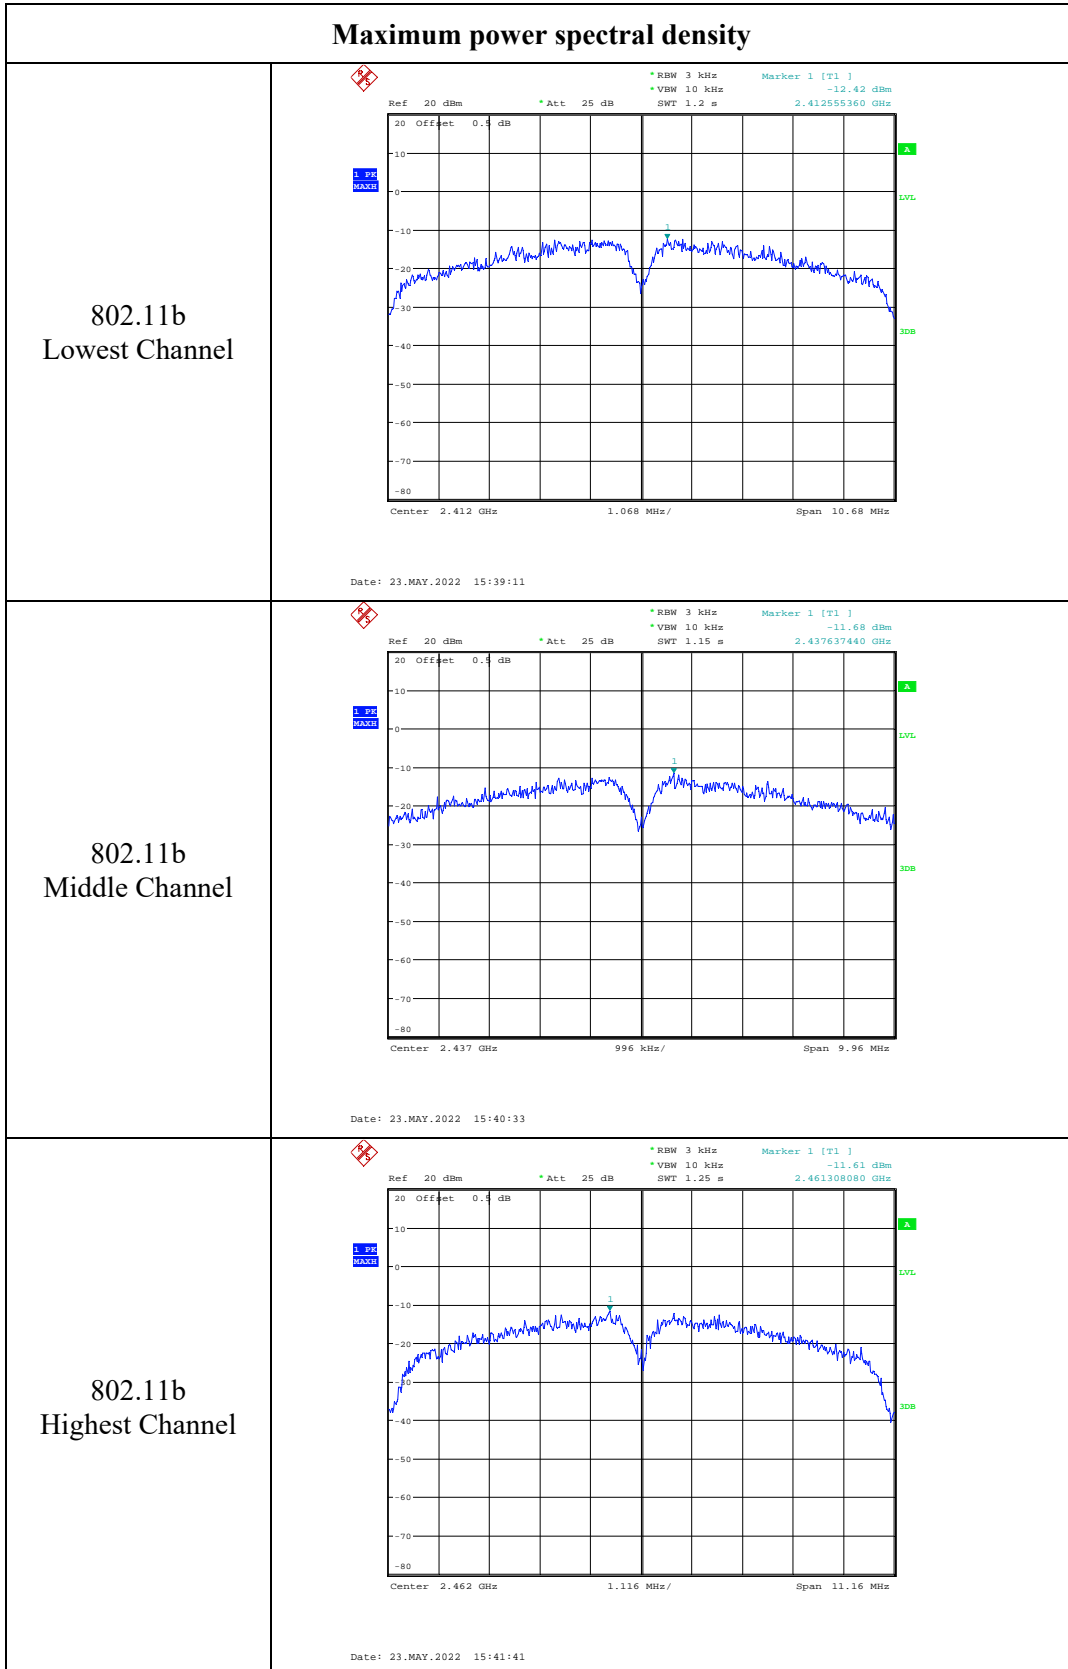


Maximum power spectral density

<p>802.11g Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 2.8 s Marker 1 [T1] -10.27 dBm 2.404781760 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.412 GHz 2.472 MHz/ Span 24.72 MHz</p> <p>Date: 23.MAY.2022 14:27:17</p>
<p>802.11g Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 2.8 s Marker 1 [T1] -10.19 dBm 2.436110080 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.437 GHz 2.472 MHz/ Span 24.72 MHz</p> <p>Date: 23.MAY.2022 14:29:06</p>
<p>802.11g Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 2.8 s Marker 1 [T1] -10.50 dBm 2.454781760 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.462 GHz 2.472 MHz/ Span 24.72 MHz</p> <p>Date: 23.MAY.2022 14:33:37</p>


Maximum power spectral density

802.11n ht20
Lowest Channel

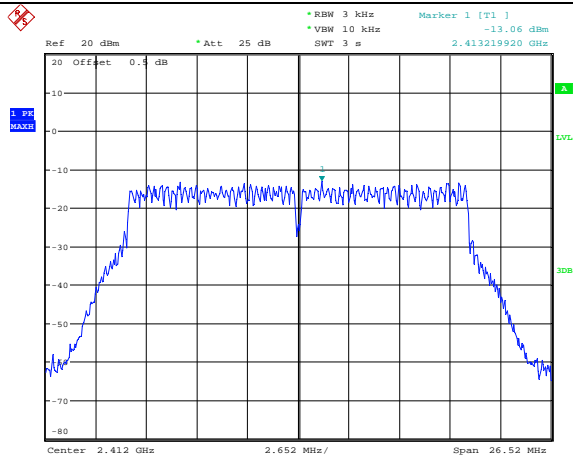


Date: 23.MAY.2022 14:36:09

802.11n ht20
Middle Channel

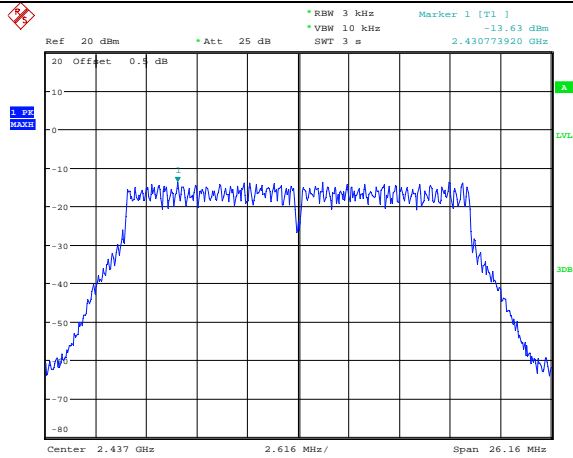

Date: 23.MAY.2022 14:37:40


802.11n ht20
Highest Channel

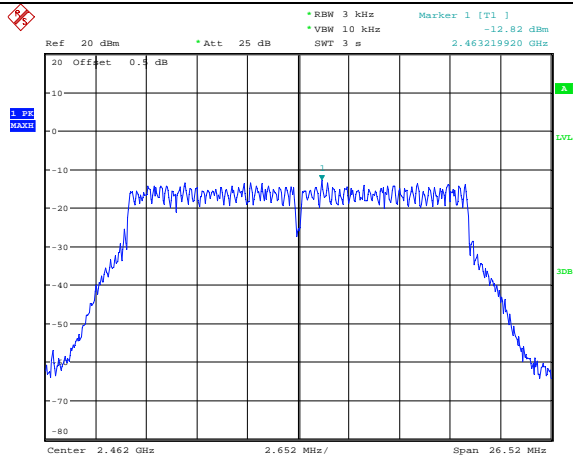

Date: 23.MAY.2022 14:38:58


Maximum power spectral density

802.11n ht40
Lowest Channel

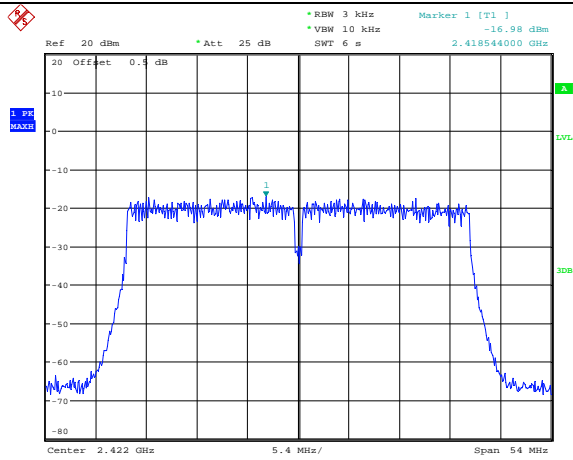


Date: 23.MAY.2022 15:05:14

802.11n ht40
Middle Channel

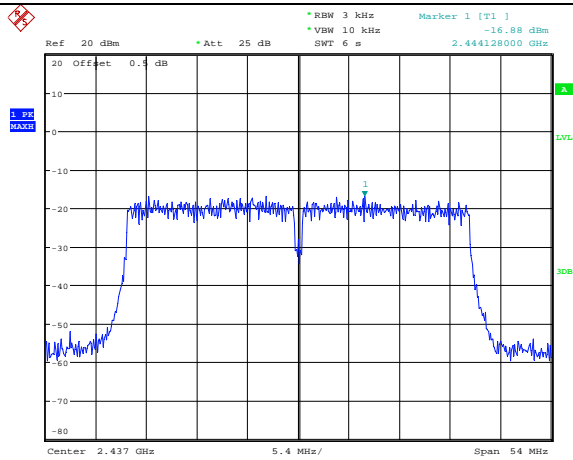

Date: 23.MAY.2022 15:03:26

802.11n ht40
Highest Channel

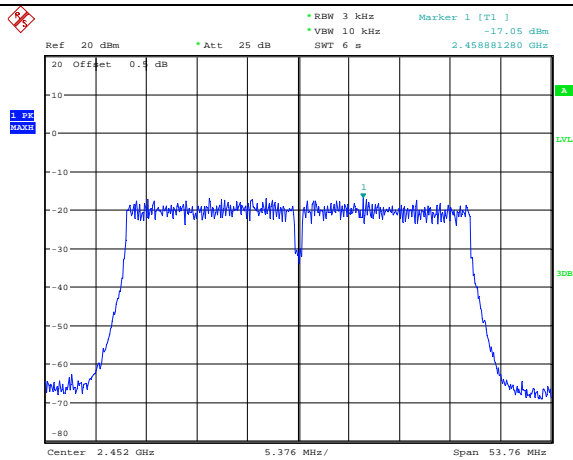

Date: 23.MAY.2022 15:07:09


Maximum power spectral density

<p>802.11ax hew20 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 3.2 s Marker 1 [T1] -14.79 dBm 2.417176080 GHz</p> <p>Offset 0.4 dB</p> <p>Center 2.412 GHz 2.844 MHz/ Span 28.44 MHz</p> <p>Date: 25.MAY.2022 20:30:05</p>
<p>802.11ax hew20 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 3.2 s Marker 1 [T1] -14.62 dBm 2.439502720 GHz</p> <p>Offset 0.4 dB</p> <p>Center 2.437 GHz 2.844 MHz/ Span 28.44 MHz</p> <p>Date: 25.MAY.2022 20:31:41</p>
<p>802.11ax hew20 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 3.2 s Marker 1 [T1] -15.10 dBm 2.463286160 GHz</p> <p>Offset 0.4 dB</p> <p>Center 2.462 GHz 2.796 MHz/ Span 27.96 MHz</p> <p>Date: 25.MAY.2022 20:28:22</p>

Maximum power spectral density

<p>802.11ax hew40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz Marker 1 [T1] -15.51 dBm * VBW 10 kHz 2.419518400 GHz SWT 6.4 s</p> <p>Offset 0.4 dB</p> <p>Center 2.422 GHz 5.64 MHz/ Span 56.4 MHz</p> <p>Date: 25.MAY.2022 20:01:22</p>
<p>802.11ax hew40 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz Marker 1 [T1] -15.33 dBm * VBW 10 kHz 2.434518400 GHz SWT 6.4 s</p> <p>Offset 0.4 dB</p> <p>Center 2.437 GHz 5.64 MHz/ Span 56.4 MHz</p> <p>Date: 25.MAY.2022 20:04:21</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz Marker 1 [T1] -14.61 dBm * VBW 10 kHz 2.449518400 GHz SWT 6.4 s</p> <p>Offset 0.4 dB</p> <p>Center 2.452 GHz 5.64 MHz/ Span 56.4 MHz</p> <p>Date: 25.MAY.2022 20:06:34</p>

Chain 1:

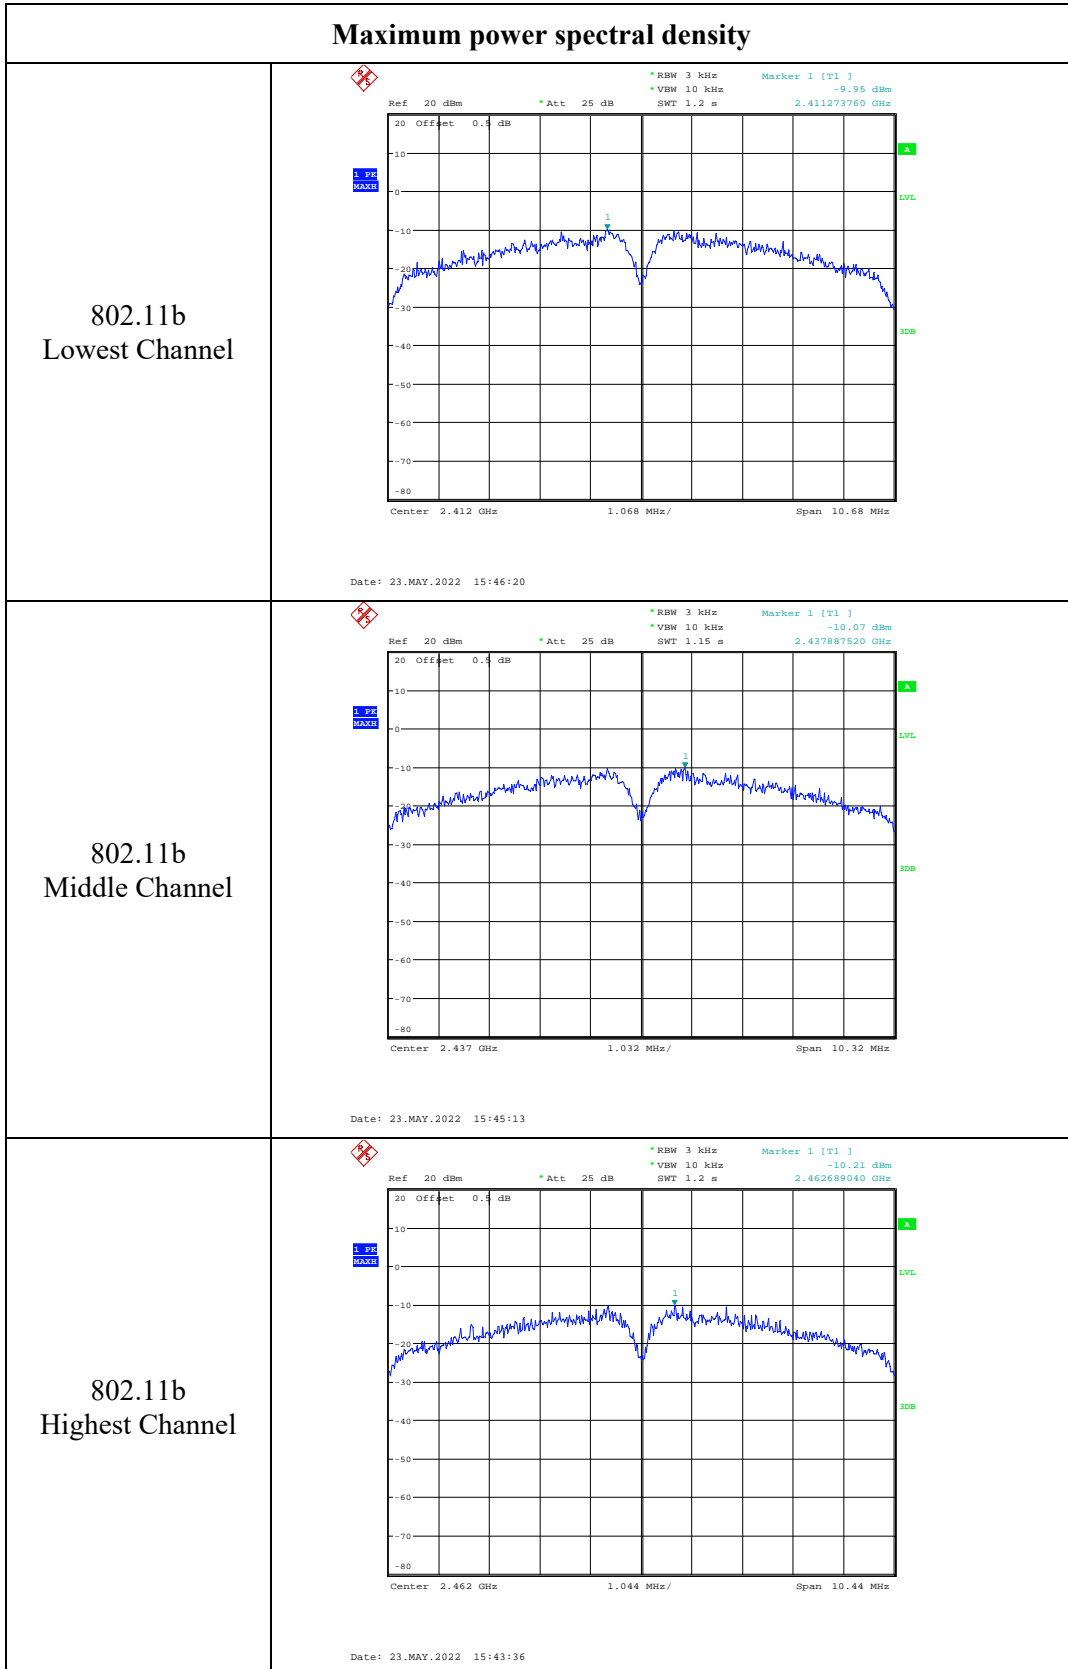


Maximum power spectral density

<p>802.11g Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 2.8 s Marker 1 [T1] -9.12 dBm 2.411069760 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.412 GHz 2.448 MHz/ Span 24.48 MHz</p> <p>Date: 23.MAY.2022 15:09:46</p>
<p>802.11g Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 2.8 s Marker 1 [T1] -10.45 dBm 2.436110080 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.437 GHz 2.472 MHz/ Span 24.72 MHz</p> <p>Date: 23.MAY.2022 15:11:31</p>
<p>802.11g Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 2.8 s Marker 1 [T1] -11.02 dBm 2.460121280 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.462 GHz 2.472 MHz/ Span 24.72 MHz</p> <p>Date: 23.MAY.2022 15:13:17</p>


Maximum power spectral density

802.11n ht20
Lowest Channel

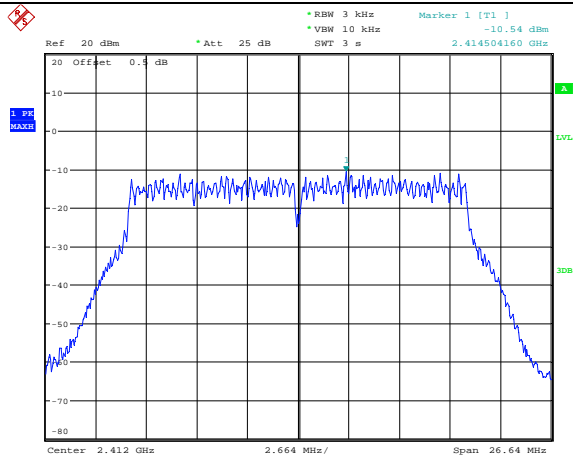


Date: 23.MAY.2022 14:44:23

802.11n ht20
Middle Channel

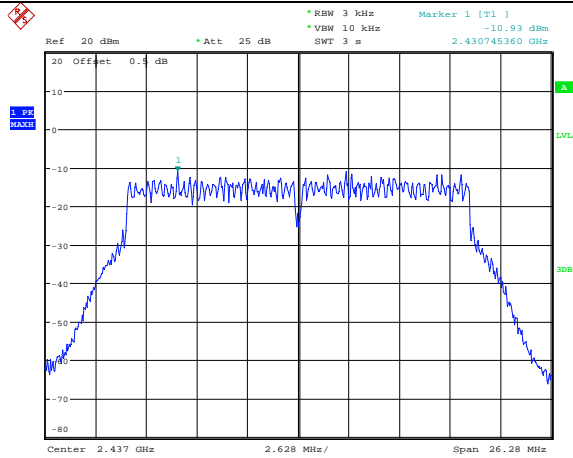

Date: 23.MAY.2022 14:46:03


802.11n ht20
Highest Channel

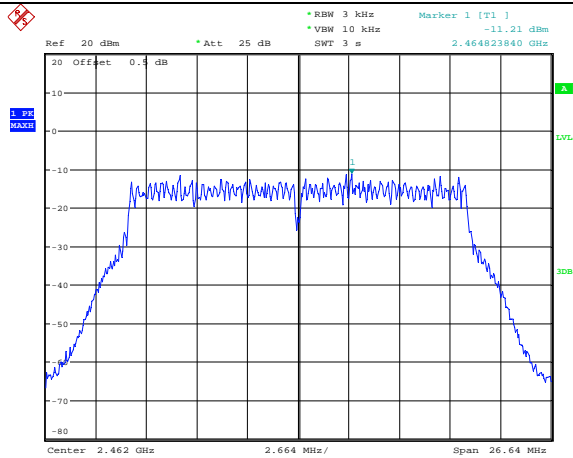

Date: 23.MAY.2022 14:42:09


Maximum power spectral density

802.11n ht40
Lowest Channel

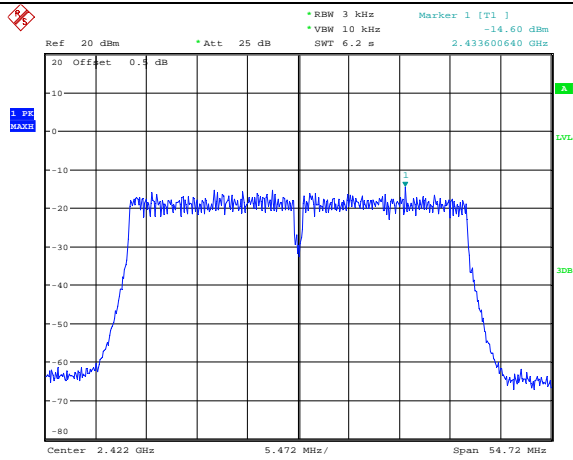


Date: 23.MAY.2022 14:49:24

802.11n ht40
Middle Channel

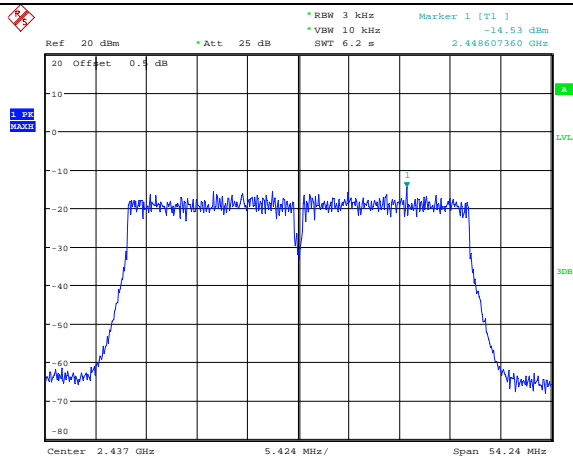

Date: 23.MAY.2022 15:00:16

802.11n ht40
Highest Channel

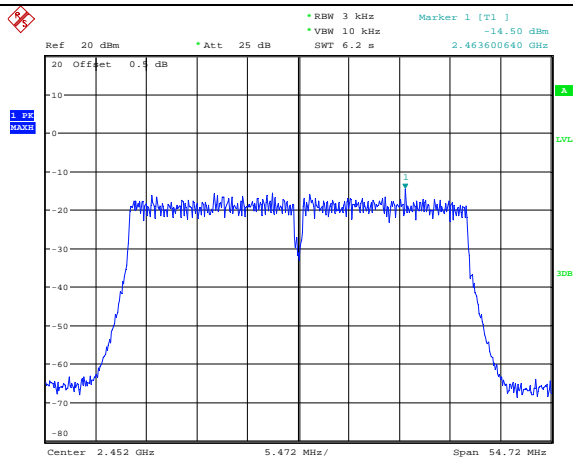

Date: 23.MAY.2022 14:51:57

Maximum power spectral density

<p>802.11ax hew20 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 3.2 s Marker 1 [T1] -12.36 dBm 2.407259040 GHz</p> <p>Offset 0.4 dB</p> <p>Center 2.412 GHz 2.856 MHz/ Span 28.56 MHz</p> <p>Date: 25.MAY.2022 20:16:24</p>
<p>802.11ax hew20 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 3.2 s Marker 1 [T1] -12.41 dBm 2.430716800 GHz</p> <p>Offset 0.4 dB</p> <p>Center 2.437 GHz 2.856 MHz/ Span 28.56 MHz</p> <p>Date: 25.MAY.2022 20:18:38</p>
<p>802.11ax hew20 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 3.2 s Marker 1 [T1] -12.97 dBm 2.455716800 GHz</p> <p>Offset 0.4 dB</p> <p>Center 2.462 GHz 2.856 MHz/ Span 28.56 MHz</p> <p>Date: 25.MAY.2022 20:20:03</p>

Maximum power spectral density

<p>802.11ax hew40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 6.4 s Marker 1 [T1] -13.02 dBm 2.430759520 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.422 GHz 5.688 MHz/ Span 56.88 MHz</p> <p>Date: 25.MAY.2022 20:13:56</p>
<p>802.11ax hew40 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 6.4 s Marker 1 [T1] -13.25 dBm 2.445798400 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.437 GHz 5.64 MHz/ Span 56.4 MHz</p> <p>Date: 25.MAY.2022 20:11:41</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 3 kHz * VBW 10 kHz * SWT 6.4 s Marker 1 [T1] -13.36 dBm 2.460798400 GHz</p> <p>Offset 0.5 dB</p> <p>Center 2.452 GHz 5.64 MHz/ Span 56.4 MHz</p> <p>Date: 25.MAY.2022 20:09:23</p>

4.6 100 kHz Bandwidth of Frequency Band Edge:

Serial Number:	CR22020001-RF-S1	Test Date:	2022-5-23-2022-5-25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass


Environmental Conditions:					
Temperature: (°C)	25.7~25.9	Relative Humidity: (%)	63~64	Temperature: (°C)	25.7~25.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Chain 0:

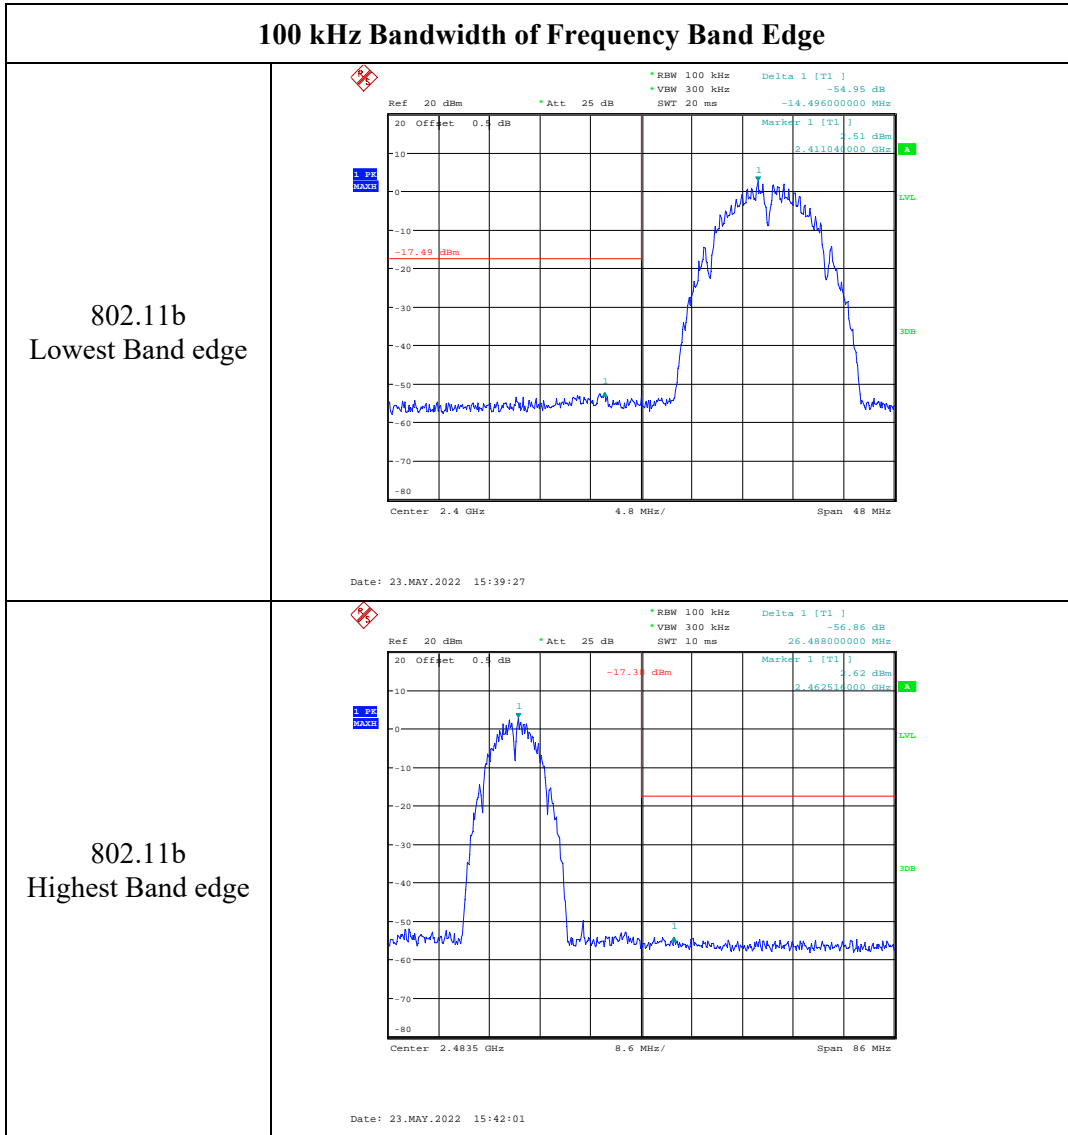


100 kHz Bandwidth of Frequency Band Edge

802.11g
Lowest Band edge

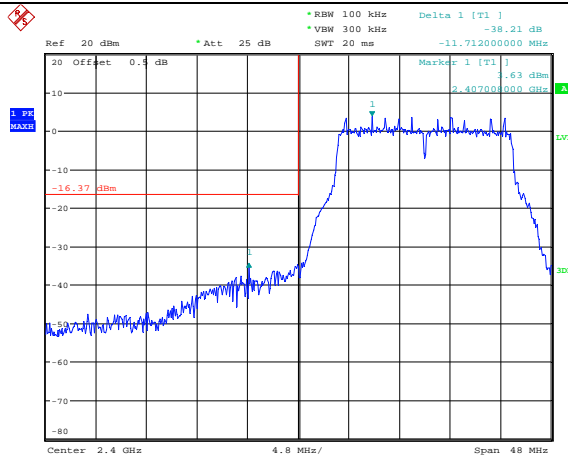

Date: 23.MAY.2022 14:27:35


802.11g
Highest Band edge

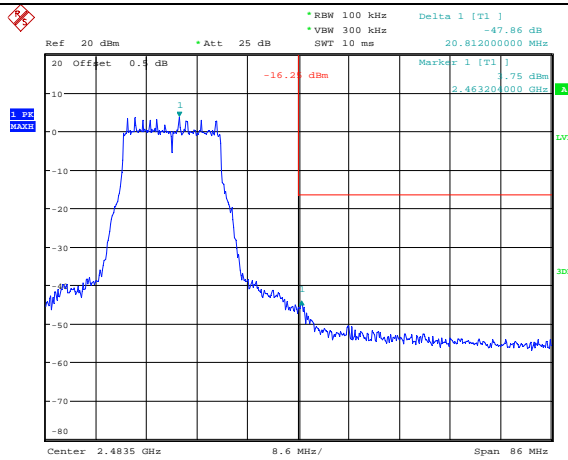

Date: 23.MAY.2022 14:33:57


100 kHz Bandwidth of Frequency Band Edge

802.11n ht20
Lowest Band edge

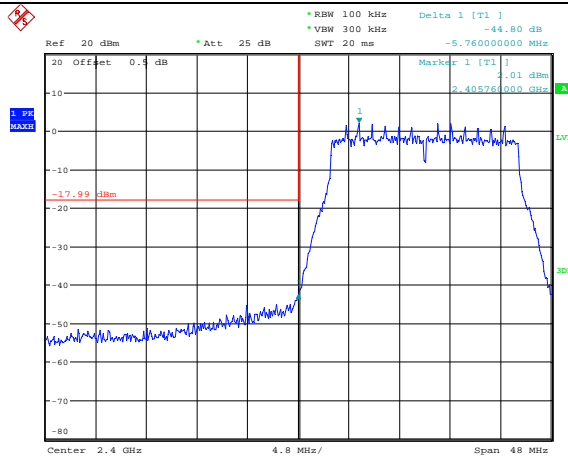

Date: 23.MAY.2022 14:36:25


802.11n ht20
Highest Band edge

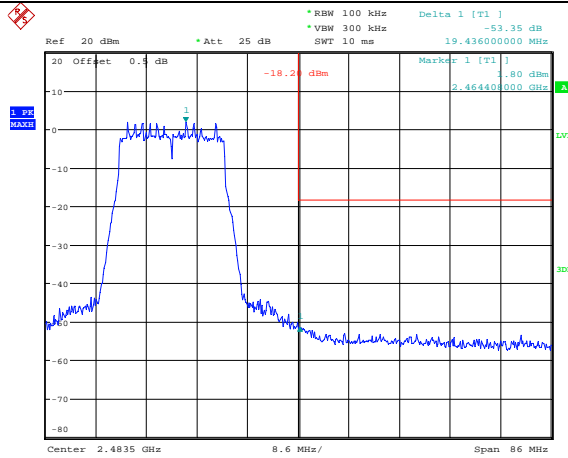

Date: 23.MAY.2022 14:39:14


100 kHz Bandwidth of Frequency Band Edge

802.11n ht40
Lowest Band edge

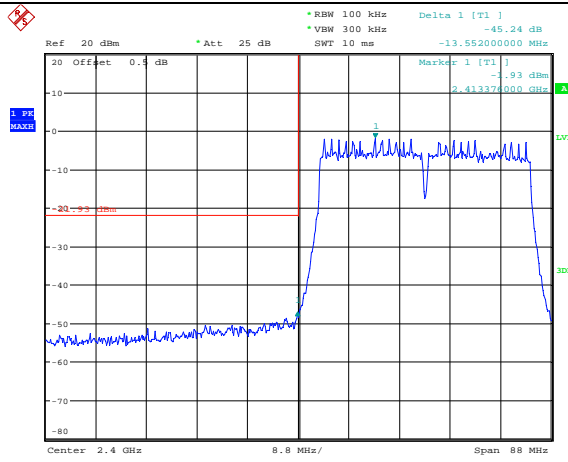

Date: 23.MAY.2022 15:05:29


802.11n ht40
Highest Band edge

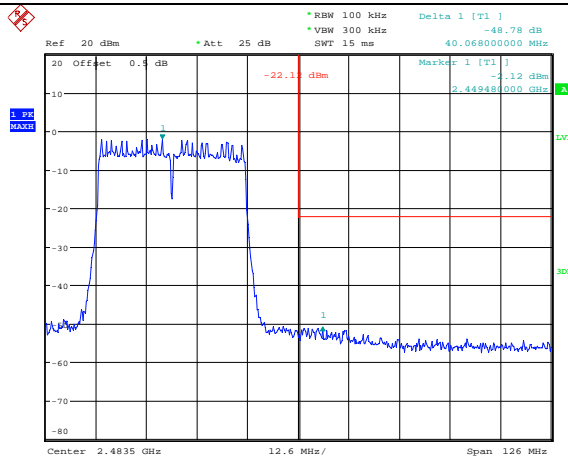

Date: 23.MAY.2022 15:07:24


100 kHz Bandwidth of Frequency Band Edge

802.11ax hew20
Lowest Band edge

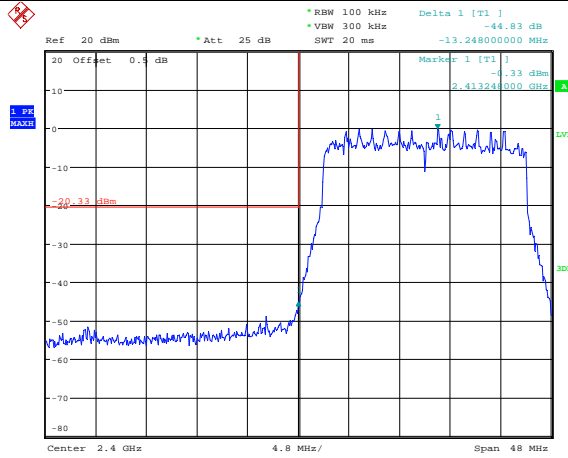

Date: 25.MAY.2022 20:30:20


802.11ax hew20
Highest Band edge

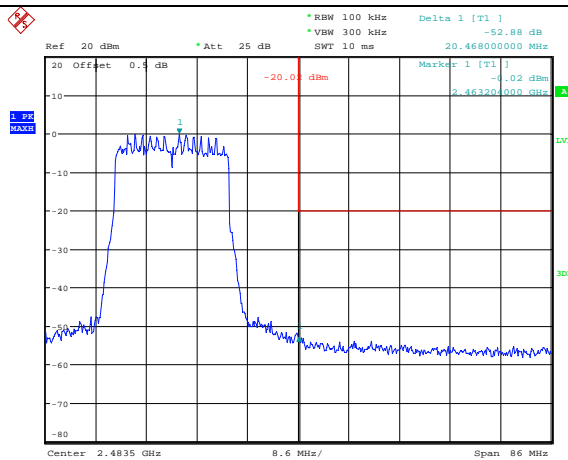

Date: 25.MAY.2022 20:28:38


100 kHz Bandwidth of Frequency Band Edge

802.11ax hew40
Lowest Band edge

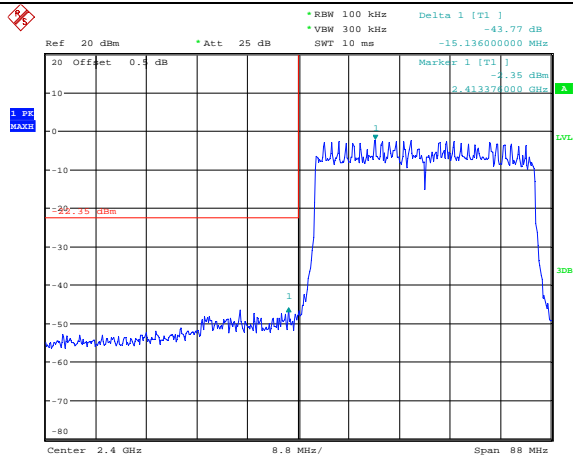


Date: 25.MAY.2022 20:01:36

802.11ax hew40
Highest Band edge

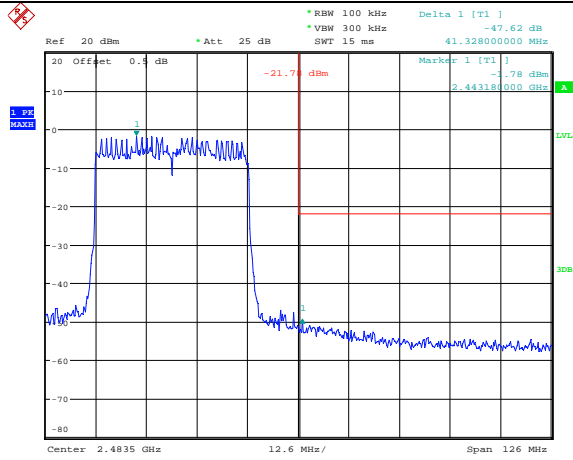


Date: 25.MAY.2022 20:06:50

Chain 1:

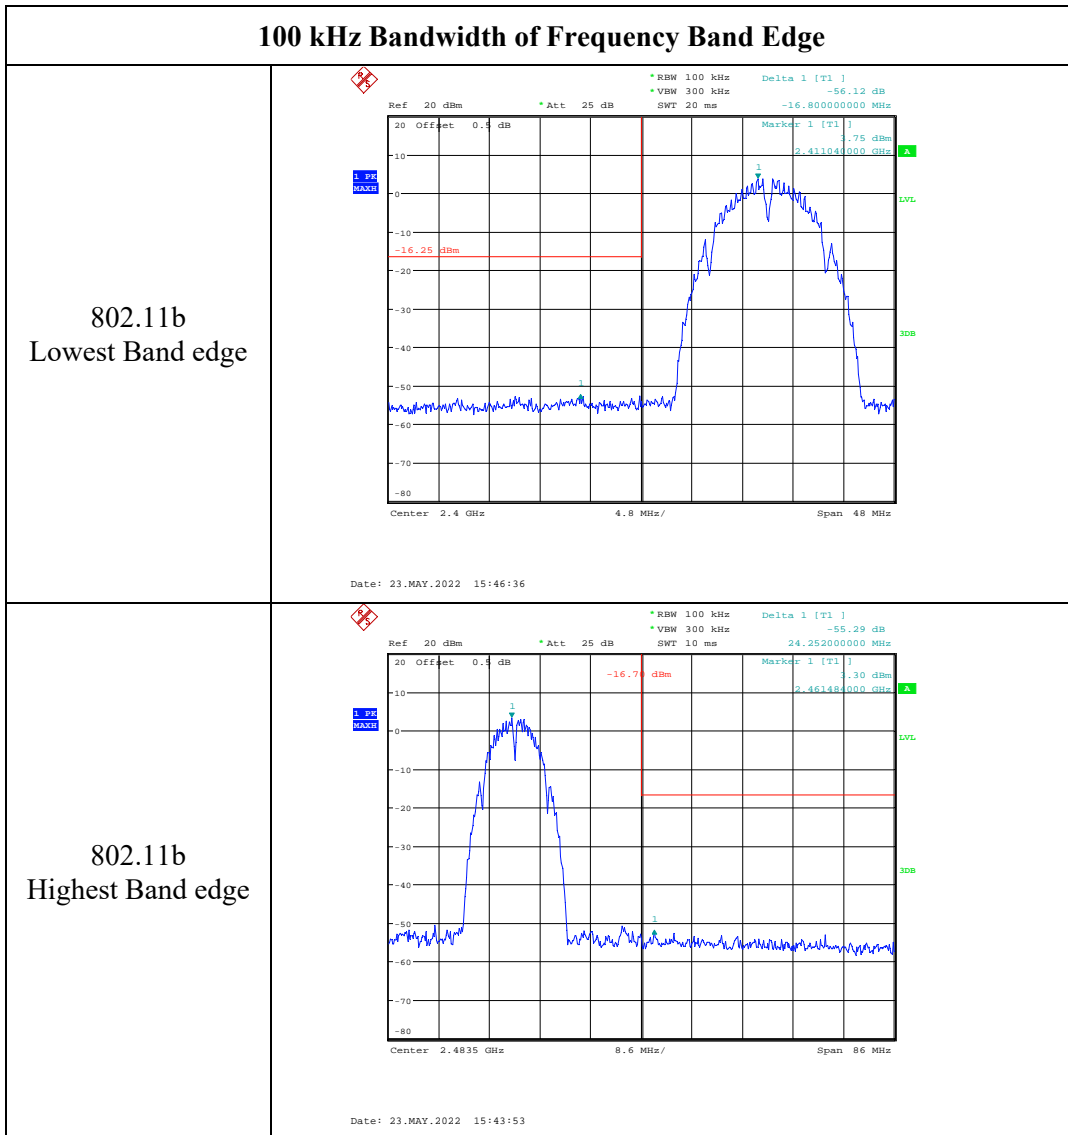


100 kHz Bandwidth of Frequency Band Edge

802.11g
Lowest Band edge

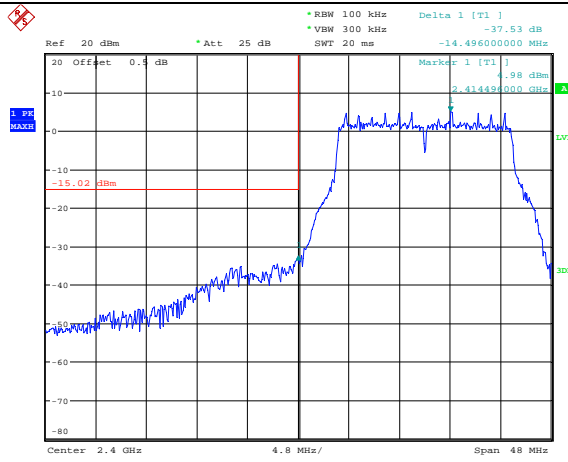

Date: 23.MAY.2022 15:10:05


802.11g
Highest Band edge

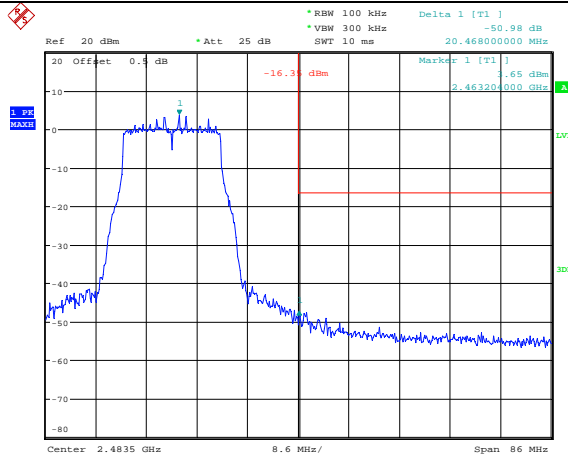


Date: 23.MAY.2022 15:13:37

100 kHz Bandwidth of Frequency Band Edge

802.11n ht20
Lowest Band edge

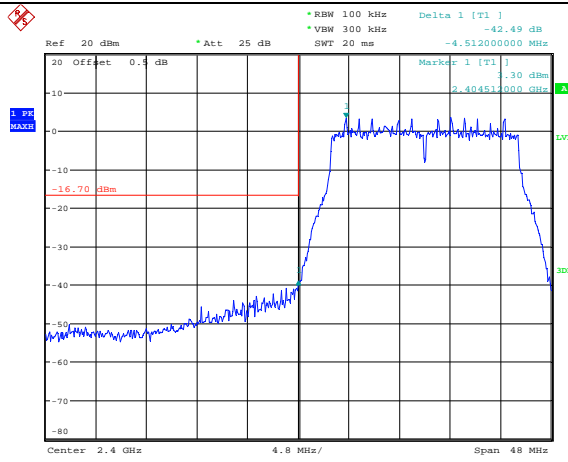


802.11n ht20
Highest Band edge

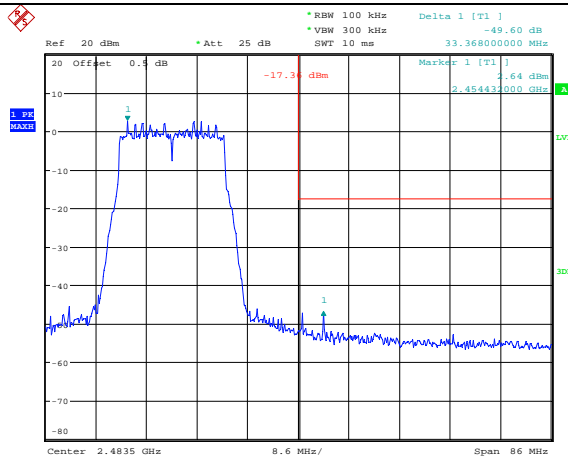


100 kHz Bandwidth of Frequency Band Edge

802.11n ht40
Lowest Band edge

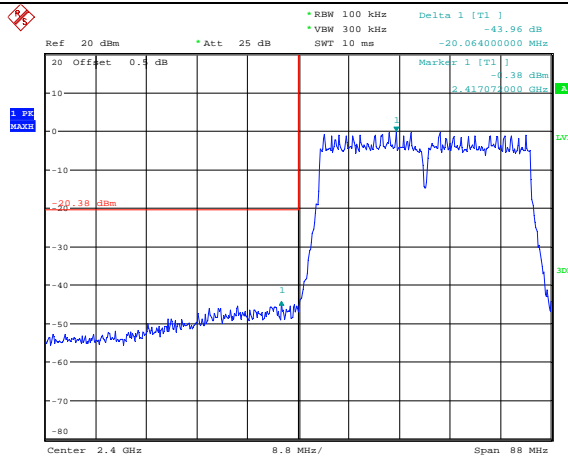

Date: 23.MAY.2022 14:49:42


802.11n ht40
Highest Band edge

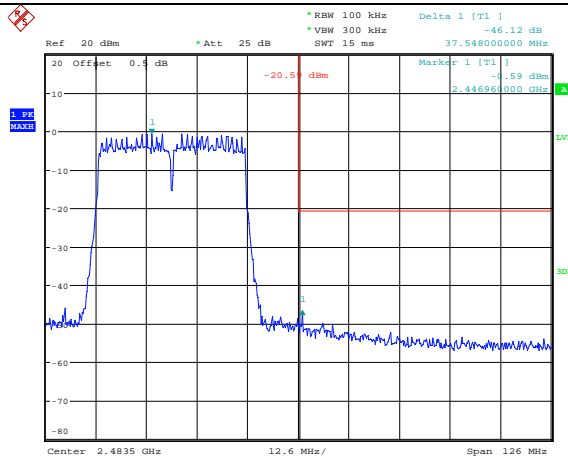

Date: 23.MAY.2022 14:52:13


100 kHz Bandwidth of Frequency Band Edge

802.11ax hew20
Lowest Band edge

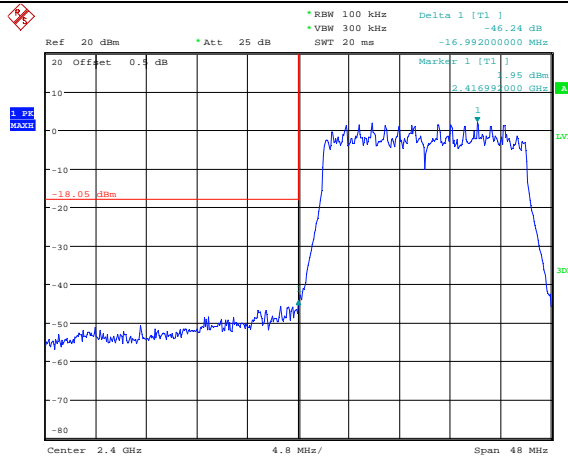

Date: 25.MAY.2022 20:16:39


802.11ax hew20
Highest Band edge

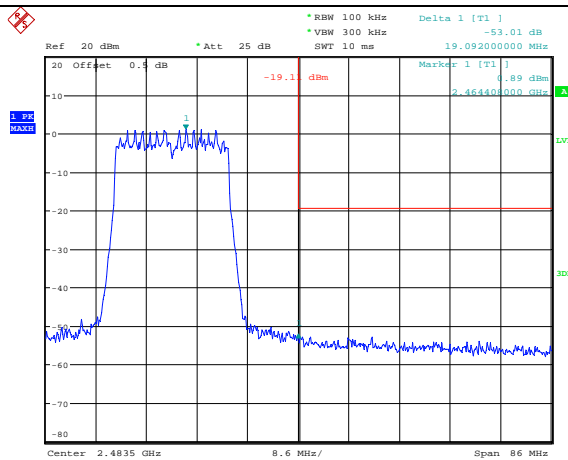

Date: 25.MAY.2022 20:20:18


100 kHz Bandwidth of Frequency Band Edge

802.11ax hew40
Lowest Band edge

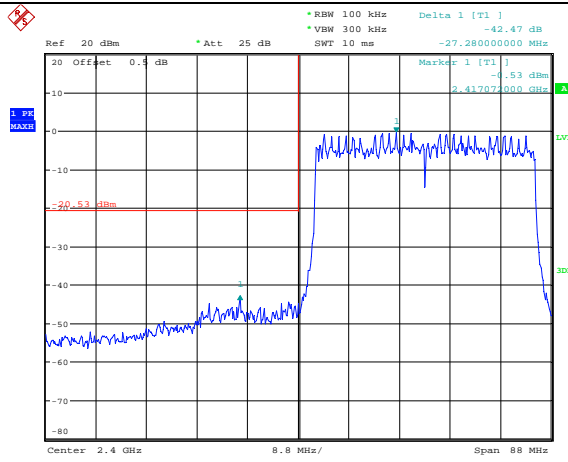

Date: 25.MAY.2022 20:14:10

802.11ax hew40
Highest Band edge

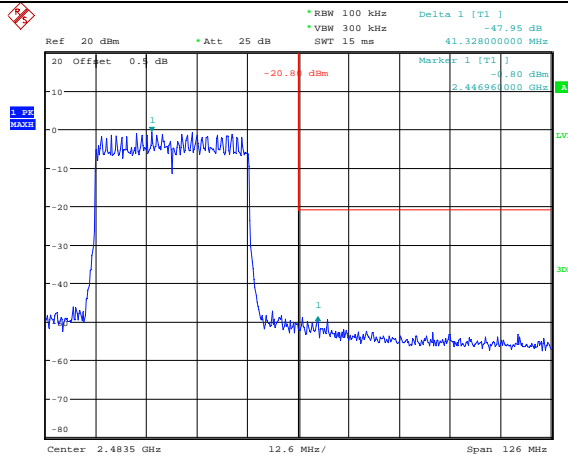

Date: 25.MAY.2022 20:09:38

4.7 Duty Cycle:

Serial Number:	CR22020001-RF-S1	Test Date:	2022-5-23-2022-5-25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	25.7~25.9	Relative Humidity: (%)	63~64	Temperature: (°C)	25.7~25.9

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)
802.11b	12.564	13.125	95.73
802.11g	2.126	2.19	97.08
802.11n ht20	1.012	1.088	93.01
802.11n ht40	0.525	0.619	84.81
802.11ax hew20	0.143	0.168	85.12
802.11ax hew40	0.111	0.139	79.86

Note: test only was performed at chain 0

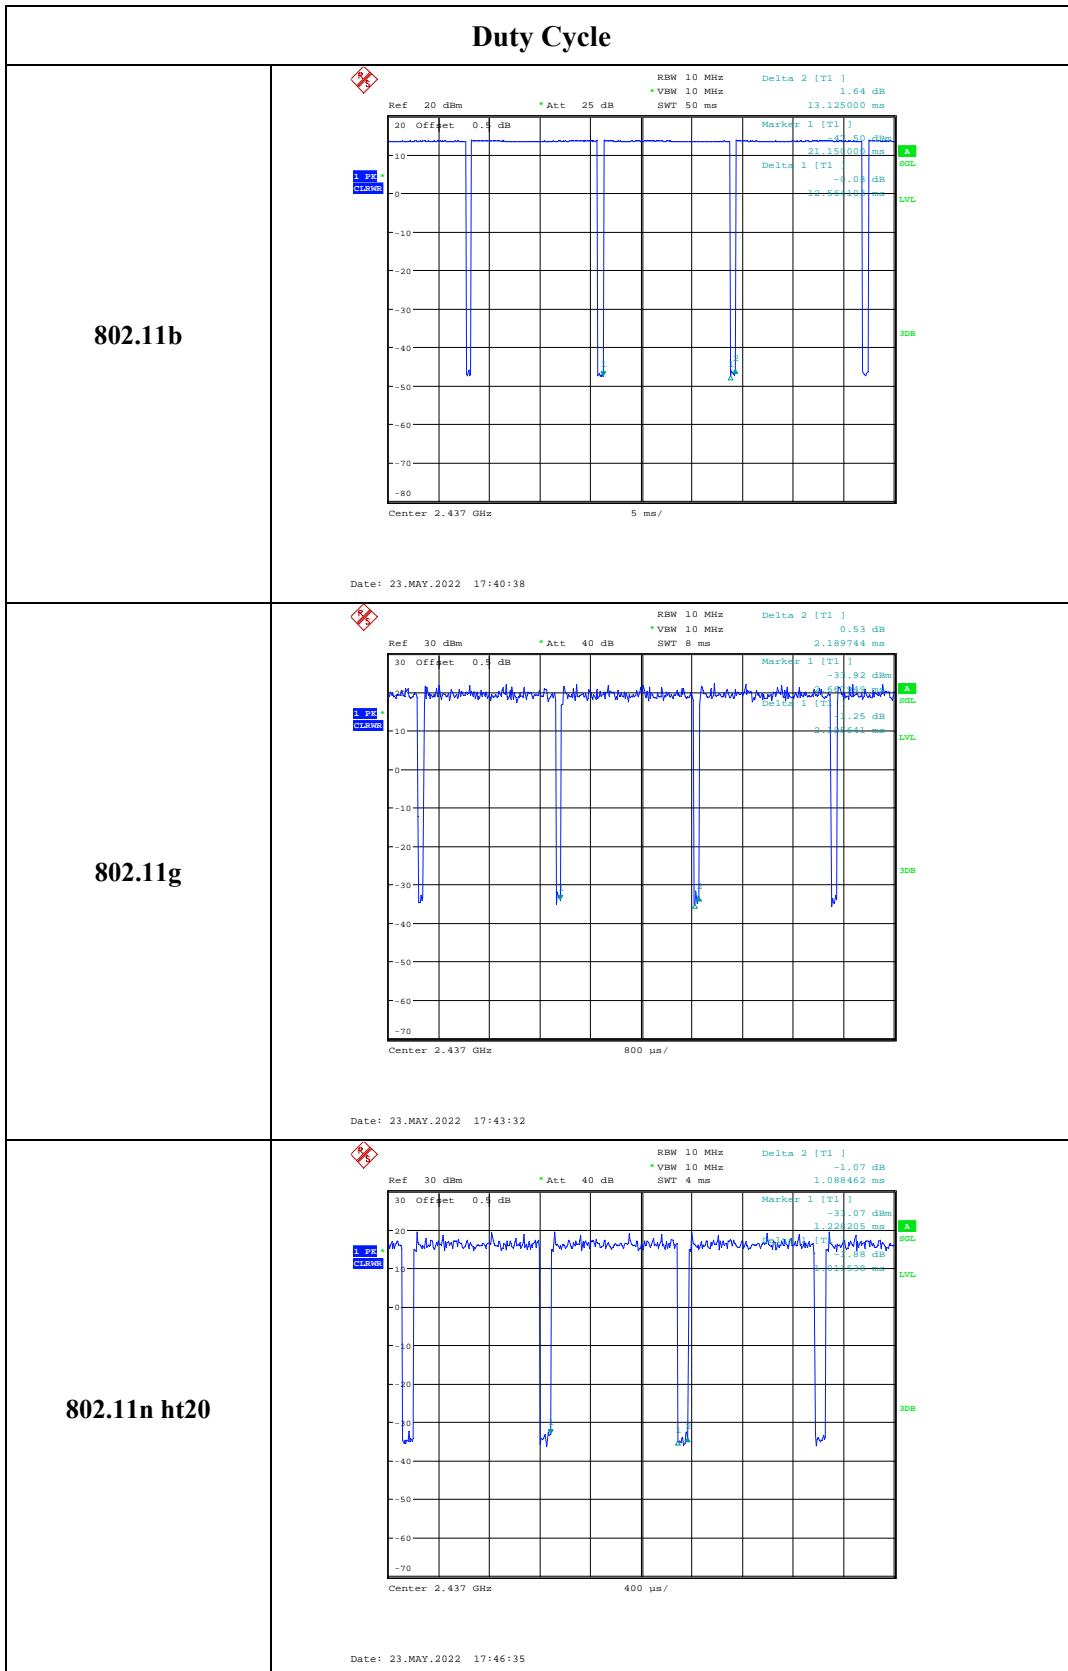


Duty Cycle

802.11n ht40

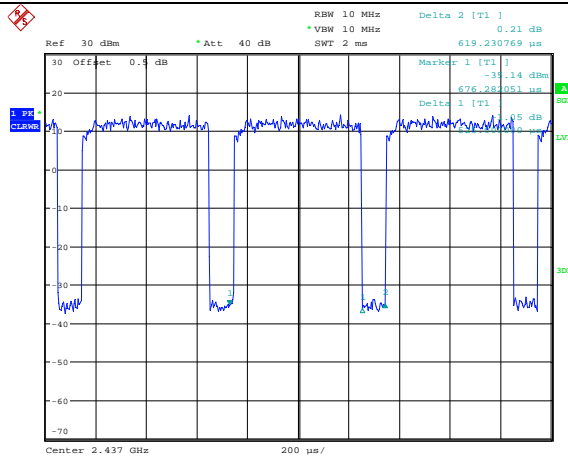


Date: 23.MAY.2022 17:48:26

802.11ax hew20

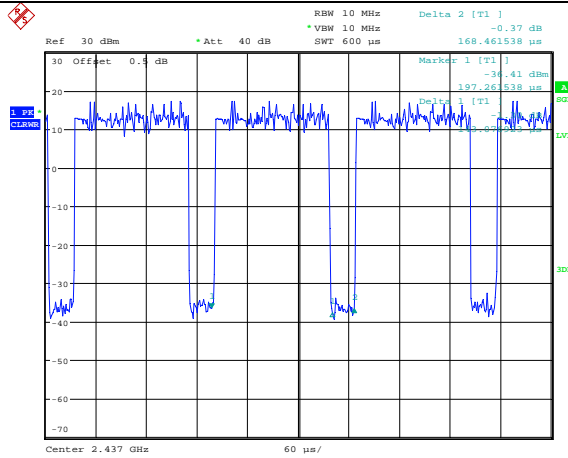

Date: 25.MAY.2022 20:33:34

802.11ax hew40

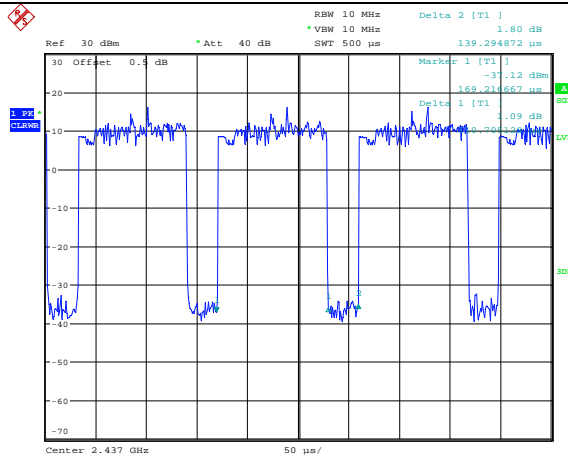

Date: 25.MAY.2022 20:34:48

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

FCC §15.247 (i)

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

5.2 Procedure

According to §1.1307(b)(3)(i)

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

5.3 Measurement Result

Frequency (MHz)	Distance (mm)	P_{th}		Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP (dBm)	Exemption
		(mW)	(dBm)				
2412-2462	200	3060	34.86	28	4.2	30.05	Compliant
5150-5850	200	3060	34.86	24	5	26.85	Compliant

Note: 2.4G WIFI and 5G WIFI can't transmission simultaneously.

Result: The device compliant the Exemption at 20cm distances.

===== END OF REPORT =====