

FCC PART 15.247 TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO., LTD.

6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052

FCC ID: V7TAC10

Report Type: Original Report	Product Name: AC1200 MU-MIMO Dual Band Gigabit WiFi Router
Report Number:	RDG171102010-00A
Report Date:	2017-12-04
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	9
SUPPORT CABLE LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	17
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP.....	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA	23
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42

TEST DATA43

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....44

 APPLICABLE STANDARD44

 TEST PROCEDURE44

 TEST EQUIPMENT LIST AND DETAILS.....44

 TEST DATA45

FCC §15.247(e) - POWER SPECTRAL DENSITY54

 APPLICABLE STANDARD54

 TEST PROCEDURE54

 TEST EQUIPMENT LIST AND DETAILS.....54

 TEST DATA54

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

	EUT Name:	AC1200 MU-MIMO Dual Band Gigabit WiFi Router
	EUT Model:	AC10U
	Mutiple Models:	AC10
	Rated Input Voltage:	DC 12V from adapter
Adapter for AC10U	Model:	BN050-A18012U
	Input:	AC 100-240V, 50/60Hz, 0.6A
	Output:	DC12V, 1.5A
Adapter for AC10	Model:	BN036-A12012U
	Input:	AC 100-240V, 50/60Hz, 0.4A
	Output:	DC 12V, 1.0A
	External Dimension:	Length (27.3cm)*Width (16.2cm)*High (5.9cm)
	Serial Number:	171102010-1(AC10U), 171102010-2(AC10)
	EUT Received Date:	2017.11.02

Note: The series product, model AC10U, AC10 are electrically identical, we selected AC10U for fully testing, and both for AC line conducted test and radiation below 1GHz test, the details difference was explained in the declaration letter.

Objective

This report is prepared on behalf of **SHENZHEN TENDA TECHNOLOGY CO., LTD.** in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: V7TAC10.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

Bay Area Compliance Laboratories Corp. (Dongguan) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L5662). And accredited to ISO/IEC 17025 by NVLAP(Test Laboratory Accreditation Certificate Number 500069-0), the FCC Designation No. CN5002 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Dongguan) was registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The device has 2 external antennas for 2.4GHz and 5GHz. For 2.4GHz band, 11 channels are provided:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

The device supports SISO and MIMO mode at 802.11n ht20 and 802.11n ht40 mode, per pre-test, MIMO mode was the worst and reported.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software "MP_TEST.exe" was used for testing, which was provided by manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations. The maximum power was configured as below table, that provided by the manufacturer:


Antenna 0&Antenna 1				
Test Mode	Test Software Version	MP_TEST.exe		
802.11b	Test Frequency	2412MHz	2417~2457MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting	29	45	29
802.11g	Test Frequency	2412MHz	2417~2457MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting	28	42	28
802.11n ht20	Test Frequency	2412MHz	2417~2457MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	22	36	22
802.11n ht40	Test Frequency	2422MHz	2427~2447MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	23	35	23

All items were test with channel 1,6,11 for 802.11b, 802.11g, and 802.11n ht20 modes, channel 3,6, 9 for 802.11n ht40 mode. Per the difference of the power level setting, additional channel 2417MHz and 2457MHz for 802.11b/g/n ht20, 2427MHz and 2447MHz for 802.11n ht40 were test with output power and radiated bandedge.


The duty cycle as below:


Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	100	100	100
802.11n ht20	100	100	100
802.11n ht40	100	100	100

802.11b

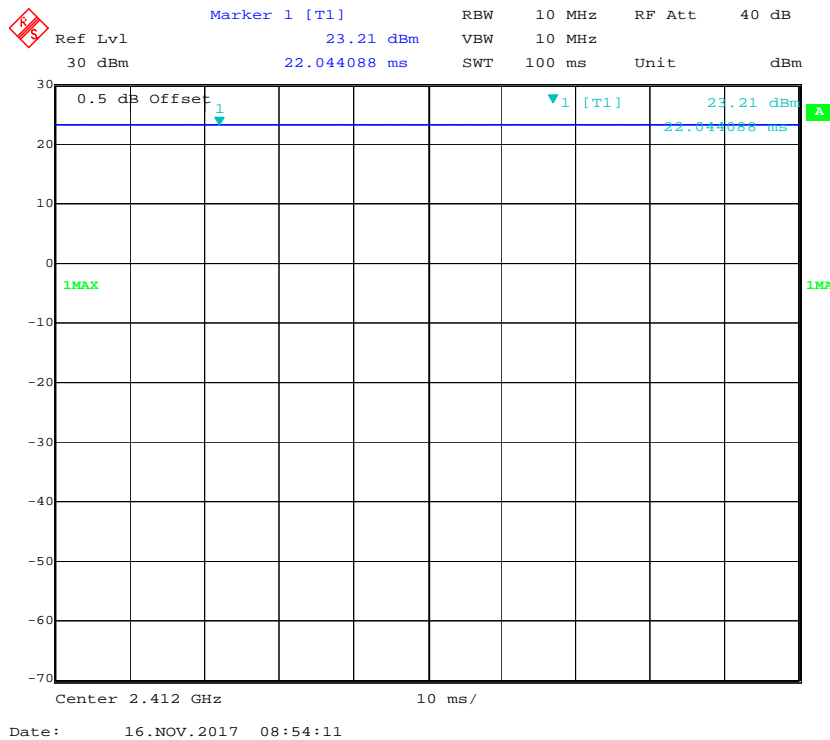

802.11g


 Marker 1 [T1] RBW 10 MHz RF Att 40 dB
Ref Lvl 23.73 dBm VBW 10 MHz
30 dBm 2.805611 ms SWT 100 ms Unit dBm

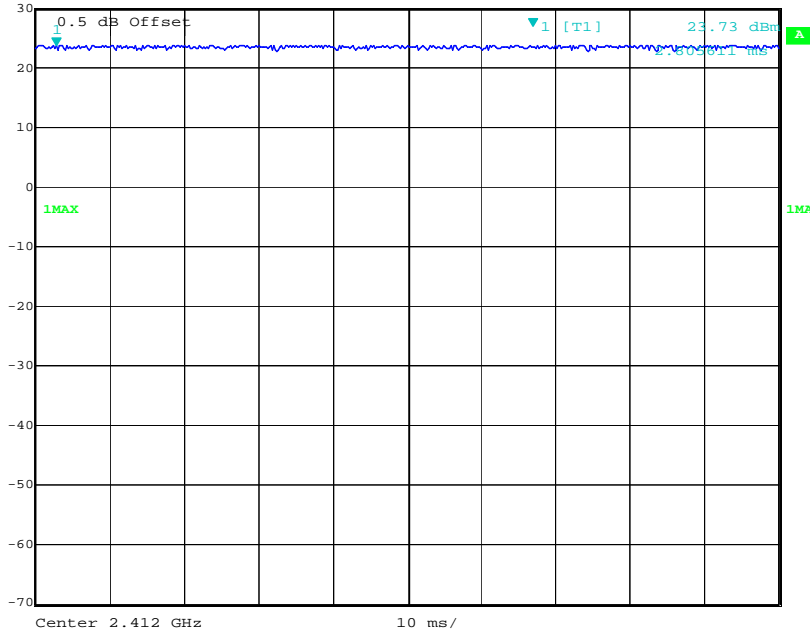

Date: 16.NOV.2017 08:56:32


802.11n ht20

 Marker 1 [T1] RBW 10 MHz RF Att 40 dB
Ref Lvl 22.43 dBm VBW 10 MHz
30 dBm 99.599198 ms SWT 100 ms Unit dBm

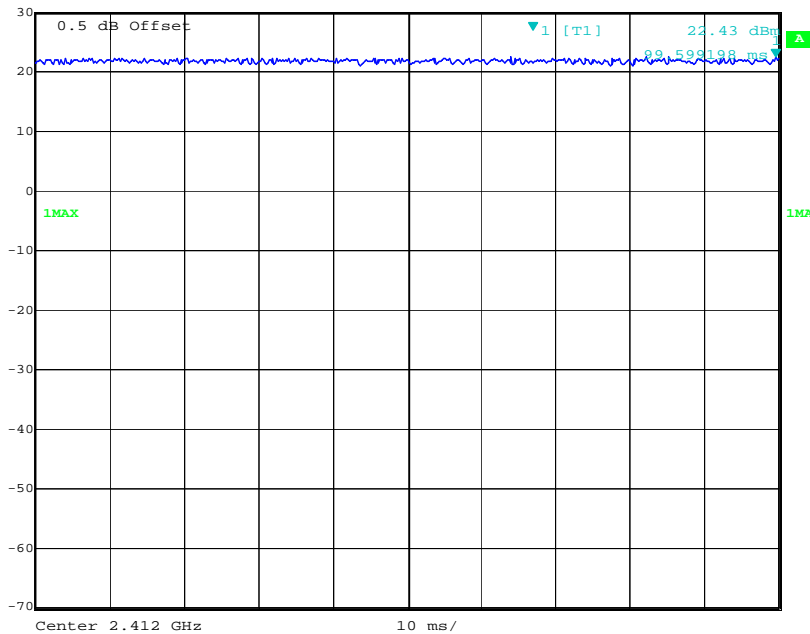

Date: 16.NOV.2017 09:02:09

802.11n ht40

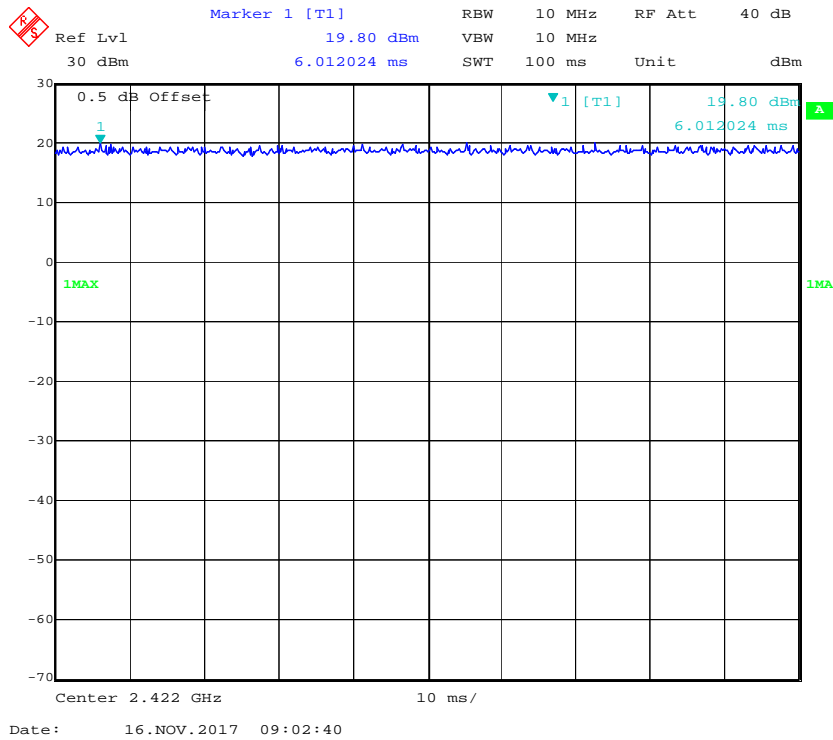

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
DELL	Laptop	PP11L	1CVM0C1
N/A	Load	N/A	N/A
TOSHIBA	Hard Disk	v63700-A	7271TGZ1TSJ2

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	Yes	No	10.0	RJ45 Port of EUT	Laptop
RJ45 Cable	Yes	No	10.0	RJ45 Port of EUT	Laptop
RJ45 Cable*2	Yes	No	10.0	RJ45 Port of EUT	Load
USB Cable	No	No	0.4	USB Port of EUT	HDD

Block Diagram of Test Setup

AC10U:

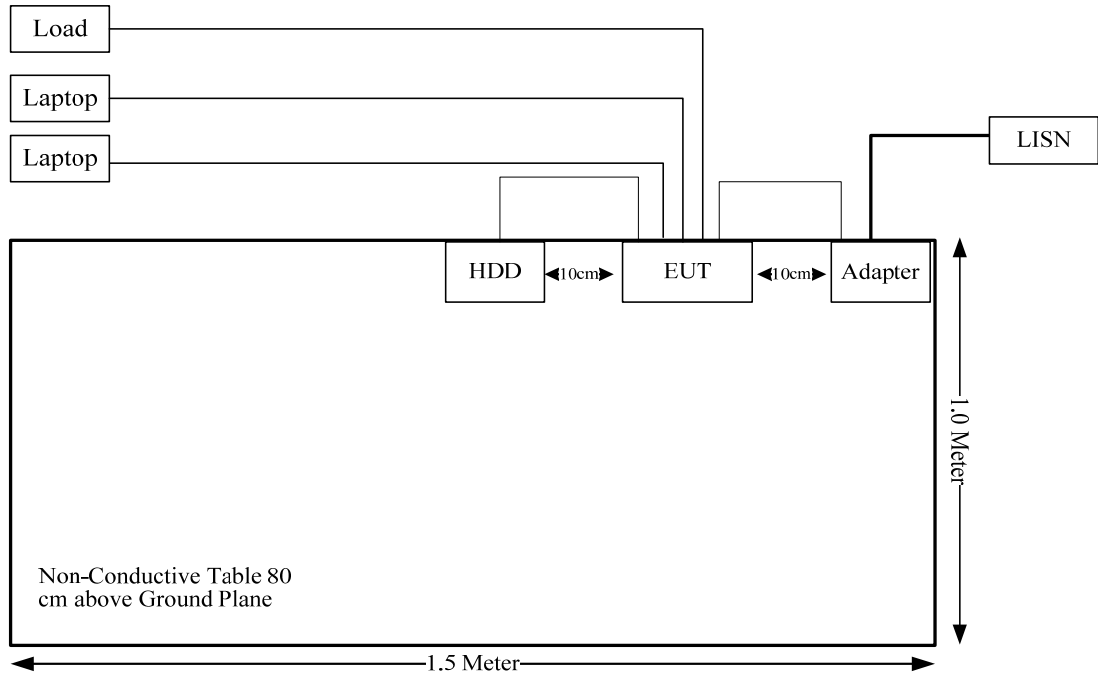

AC10:

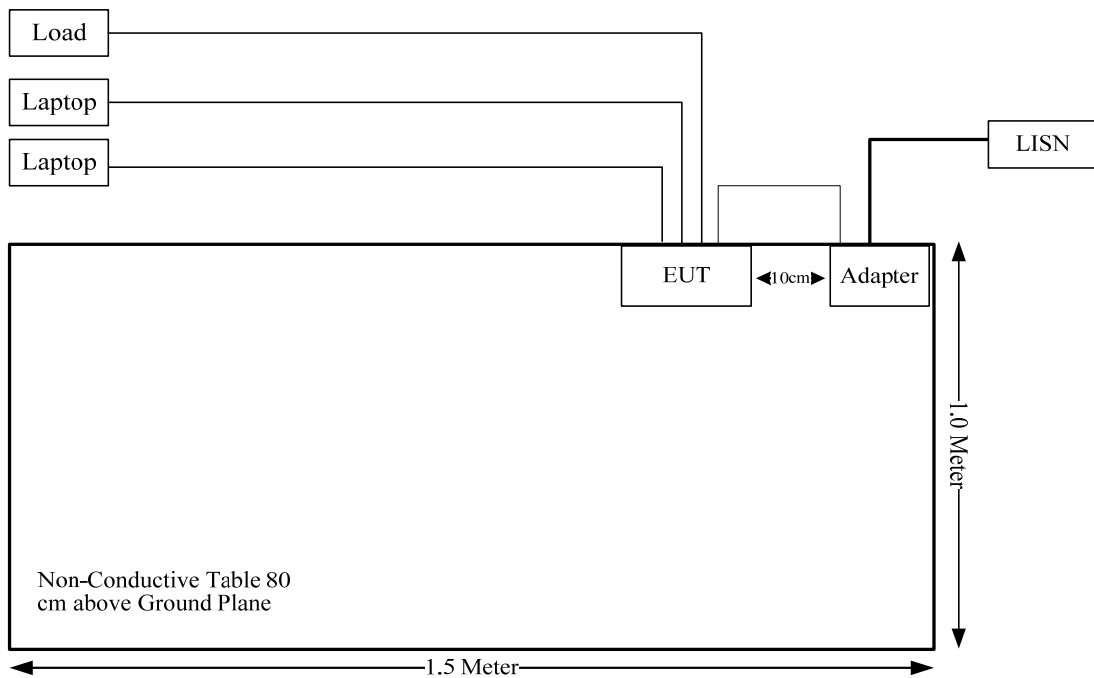

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum conducted output power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	5	3.16	30	1000.00	20.00	0.6294	1.0
5150-5250 & 5725-5850	5	3.16	23	199.53	20.00	0.1256	1.0

The 2.4GHz band and 5GHz band can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$=S_{2.4}/S_{limit-2.4} + S_5/S_{limit-5}$$

$$=0.6294/1+0.1256/1$$

$$=0.755$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT have 2 external antennas for 2.4G, which was permanently attached to the Unit, both antenna gains are 5dBi. Please refer to the EUT photo.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

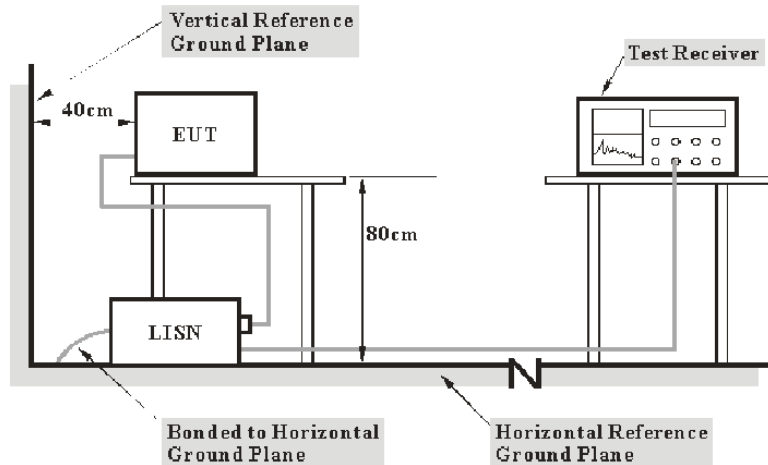

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The EUT was connected to the main lisen with AC 120 V/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2016-12-08	2017-12-08
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-09-01	2018-09-01
R&S	Two-line V-network	ENV 216	3560.6550.12	2016-12-08	2017-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
N/A	Coaxial Cable	2m	C0200/01	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26.4 °C
Relative Humidity:	48 %
ATM Pressure:	101.1kPa

The testing was performed by Alex You on 2017-11-08.

Test Mode: Transmitting

AC10U


AC120 V, 60 Hz, Line:

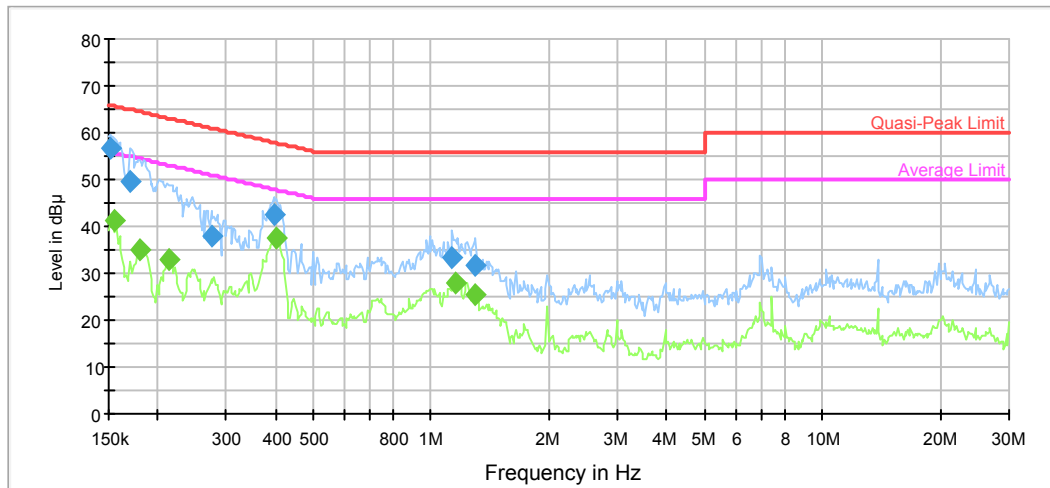

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.151200	56.6	9.000	L1	11.2	9.3	65.9	Compliance
0.170396	49.7	9.000	L1	10.9	15.2	64.9	Compliance
0.274848	37.9	9.000	L1	10.2	23.1	61.0	Compliance
0.396530	42.6	9.000	L1	10.0	15.3	57.9	Compliance
1.135185	33.4	9.000	L1	9.8	22.6	56.0	Compliance
1.299858	31.7	9.000	L1	9.8	24.3	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154858	41.4	9.000	L1	11.1	14.3	55.7	Compliance
0.180171	35.0	9.000	L1	10.8	19.5	54.5	Compliance
0.214692	33.1	9.000	L1	10.5	19.9	53.0	Compliance
0.402900	37.6	9.000	L1	10.0	10.2	47.8	Compliance
1.153421	27.9	9.000	L1	9.8	18.1	46.0	Compliance
1.289541	25.3	9.000	L1	9.8	20.7	46.0	Compliance

AC120 V, 60 Hz, Neutral:

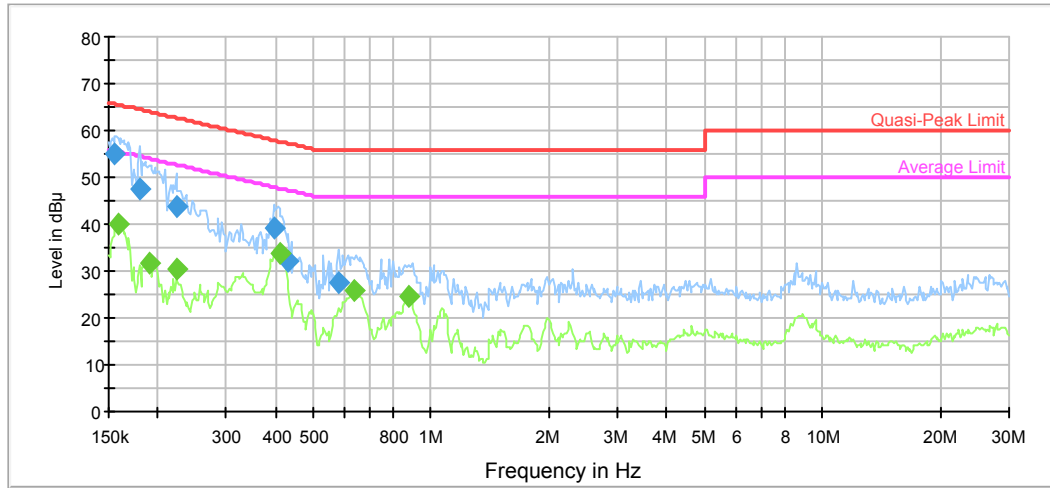


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.156097	55.1	9.000	N	11.1	10.6	65.7	Compliance
0.180171	47.3	9.000	N	10.8	17.2	64.5	Compliance
0.223418	43.8	9.000	N	10.5	18.9	62.7	Compliance
0.396530	39.2	9.000	N	10.0	18.7	57.9	Compliance
0.432855	32.1	9.000	N	9.9	25.1	57.2	Compliance
0.581275	27.3	9.000	N	9.8	28.7	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.158604	40.0	9.000	N	11.1	15.5	55.5	Compliance
0.190505	31.9	9.000	N	10.7	22.1	54.0	Compliance
0.223418	30.5	9.000	N	10.5	22.2	52.7	Compliance
0.412647	33.9	9.000	N	10.0	13.7	47.6	Compliance
0.634524	25.8	9.000	N	9.8	20.2	46.0	Compliance
0.872708	24.5	9.000	N	9.8	21.5	46.0	Compliance

AC10


AC120 V, 60 Hz, Line:

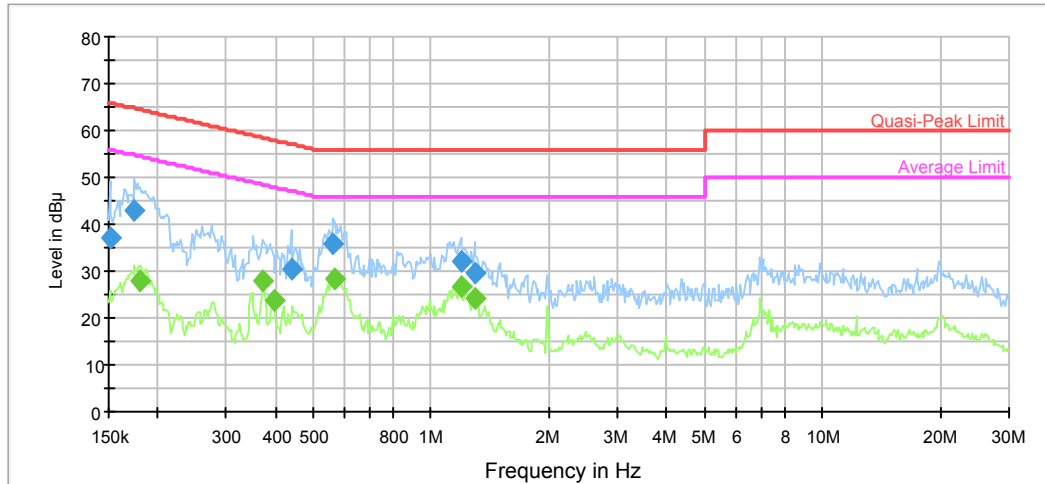

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.151200	37.0	9.000	L1	11.2	28.9	65.9	Compliance
0.174519	42.9	9.000	L1	10.9	21.8	64.7	Compliance
0.439808	30.5	9.000	L1	9.9	26.6	57.1	Compliance
0.563041	35.8	9.000	L1	9.9	20.2	56.0	Compliance
1.190776	32.0	9.000	L1	9.8	24.0	56.0	Compliance
1.289541	29.6	9.000	L1	9.8	26.4	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.180171	28.1	9.000	L1	10.8	26.4	54.5	Compliance
0.372042	28.1	9.000	L1	10.0	20.4	48.5	Compliance
0.396530	23.8	9.000	L1	10.0	24.1	47.9	Compliance
0.567545	28.1	9.000	L1	9.8	17.9	46.0	Compliance
1.190776	26.8	9.000	L1	9.8	19.2	46.0	Compliance
1.289541	24.3	9.000	L1	9.8	21.7	46.0	Compliance

AC120 V, 60 Hz, Neutral:

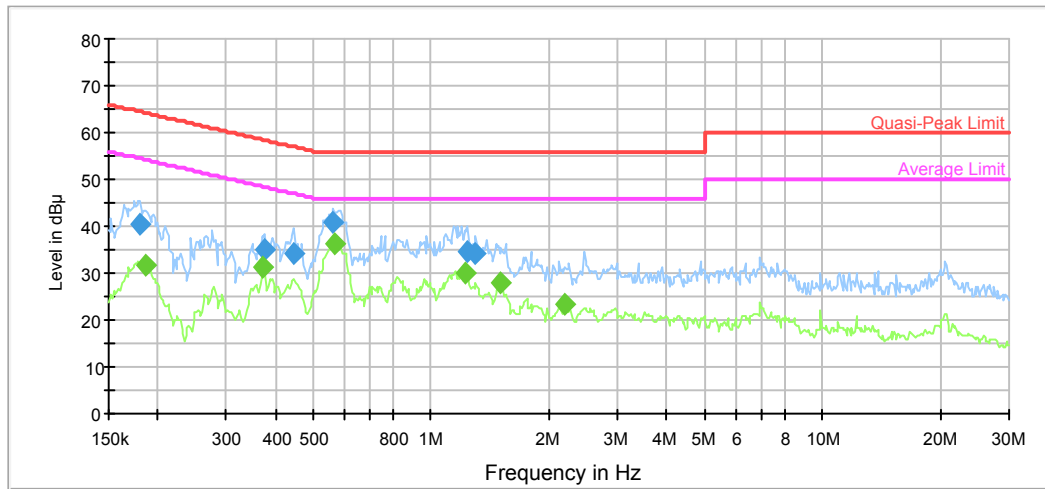

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.180171	40.6	9.000	N	10.8	23.9	64.5	Compliance
0.375019	34.8	9.000	N	10.0	23.6	58.4	Compliance
0.446873	34.1	9.000	N	9.9	22.8	56.9	Compliance
0.563041	41.0	9.000	N	9.8	15.0	56.0	Compliance
1.239175	34.6	9.000	N	9.8	21.4	56.0	Compliance
1.299858	34.3	9.000	N	9.8	21.7	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.187494	31.5	9.000	N	10.7	22.6	54.1	Compliance
0.372042	31.0	9.000	N	10.0	17.5	48.5	Compliance
0.567545	36.3	9.000	N	9.8	9.7	46.0	Compliance
1.219583	29.9	9.000	N	9.8	16.1	46.0	Compliance
1.512328	28.0	9.000	N	9.7	18.0	46.0	Compliance
2.199332	23.4	9.000	N	9.8	22.6	46.0	Compliance


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

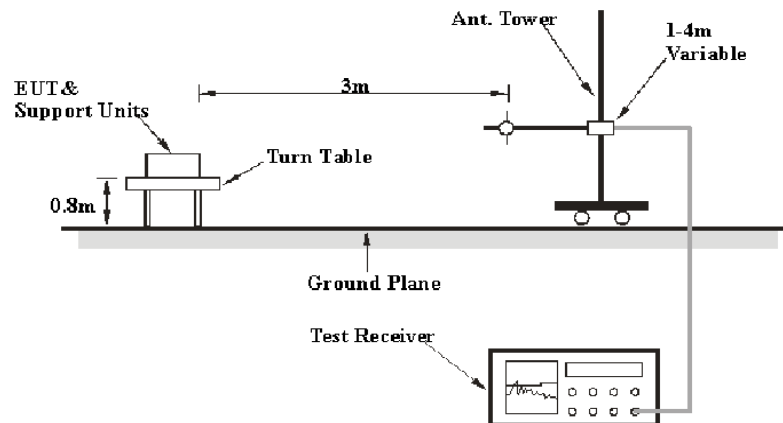

Above 1GHz:

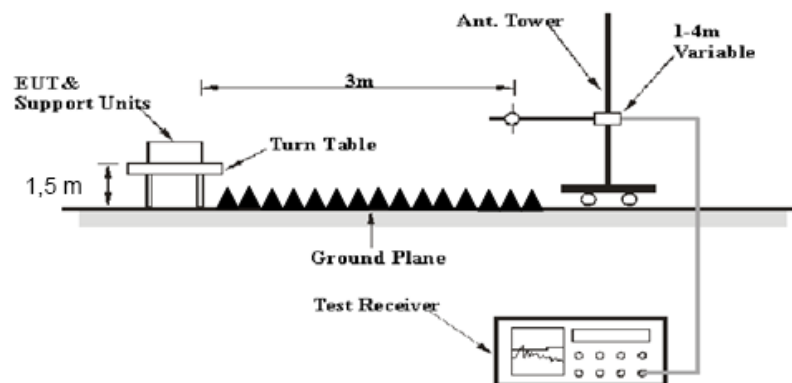

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

The emissions under limit 20dB or below the noise floor have not be recorded in the report.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-2	2017-08-25	2020-08-25
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
unknown	Coaxial Cable	4m	C0400/01	2017-09-05	2018-09-05
unknown	Coaxial Cable	0.75m	C0075/01	2017-09-05	2018-09-05
unknown	Coaxial Cable	10m	C1000/01	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2016-12-08	2017-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2017-06-16	2020-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
unknown	Coaxial Cable	8m	C0800/01	2017-09-05	2018-09-05
Chengdu OuLi	Bandrejector Filter	5725-5850	005	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.1~25.3 °C
Relative Humidity:	27~38 %
ATM Pressure:	101~101.4 kPa


* The testing was performed by Sunny Cen from 2017-10-27 to 2017-11-08

Test Mode: Transmitting

1) Below 1GHz(802.11b mode middle channel was the worst):


AC10U

Horizontal

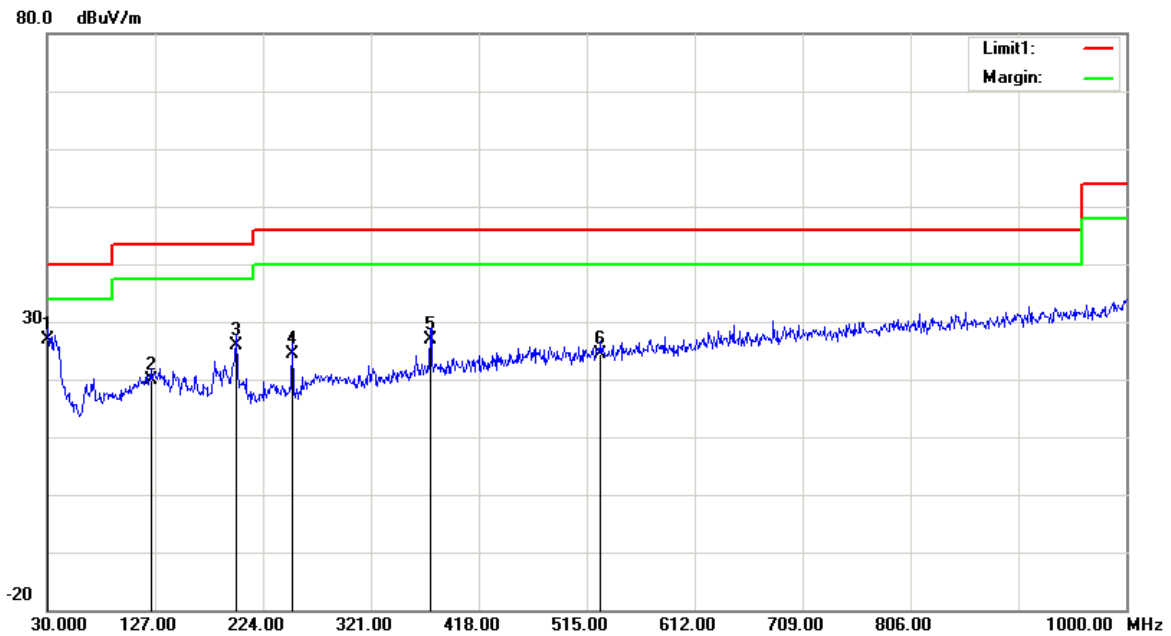

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
30.0000	23.32	QP	3.58	26.90	40.00	13.10
123.1200	24.42	QP	-4.62	19.80	43.50	23.70
199.7500	31.65	QP	-5.85	25.80	43.50	17.70
250.1900	30.72	QP	-6.32	24.40	46.00	21.60
374.3500	29.47	QP	-2.57	26.90	46.00	19.10
527.6100	24.86	QP	-0.36	24.50	46.00	21.50


Vertical

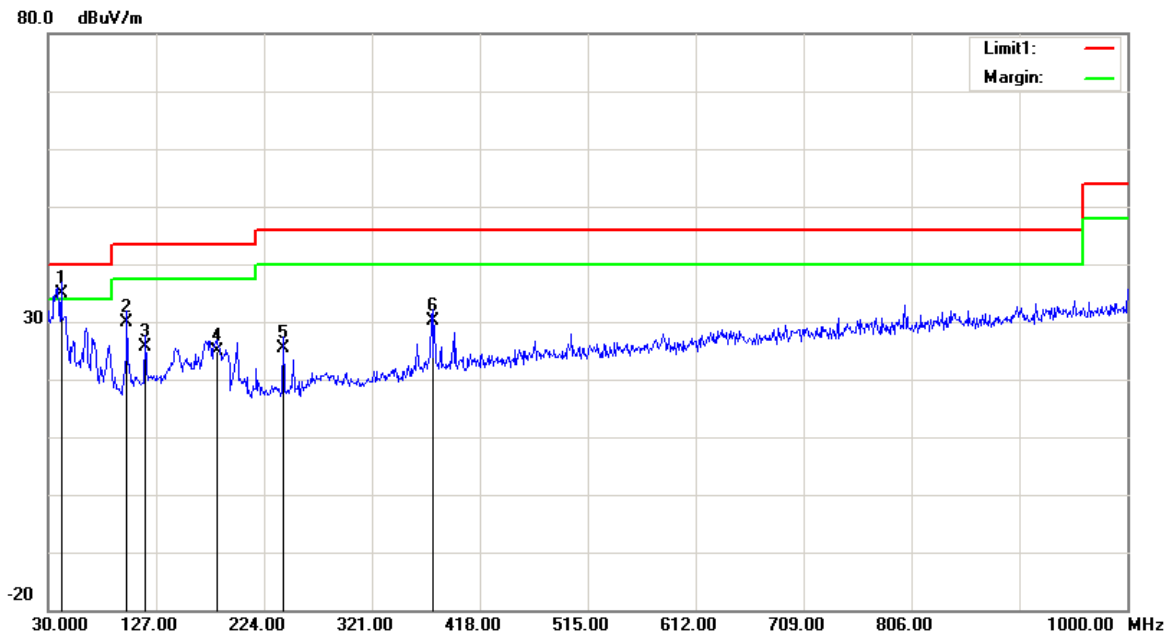

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
41.6400	42.22	QP	-7.32	34.90	40.00	5.10
100.8100	37.71	QP	-7.91	29.80	43.50	13.70
117.3000	30.57	QP	-4.97	25.60	43.50	17.90
181.3200	32.56	QP	-7.76	24.80	43.50	18.70
241.4600	31.55	QP	-6.15	25.40	46.00	20.60
375.3200	32.78	QP	-2.58	30.20	46.00	15.80


AC10

Horizontal

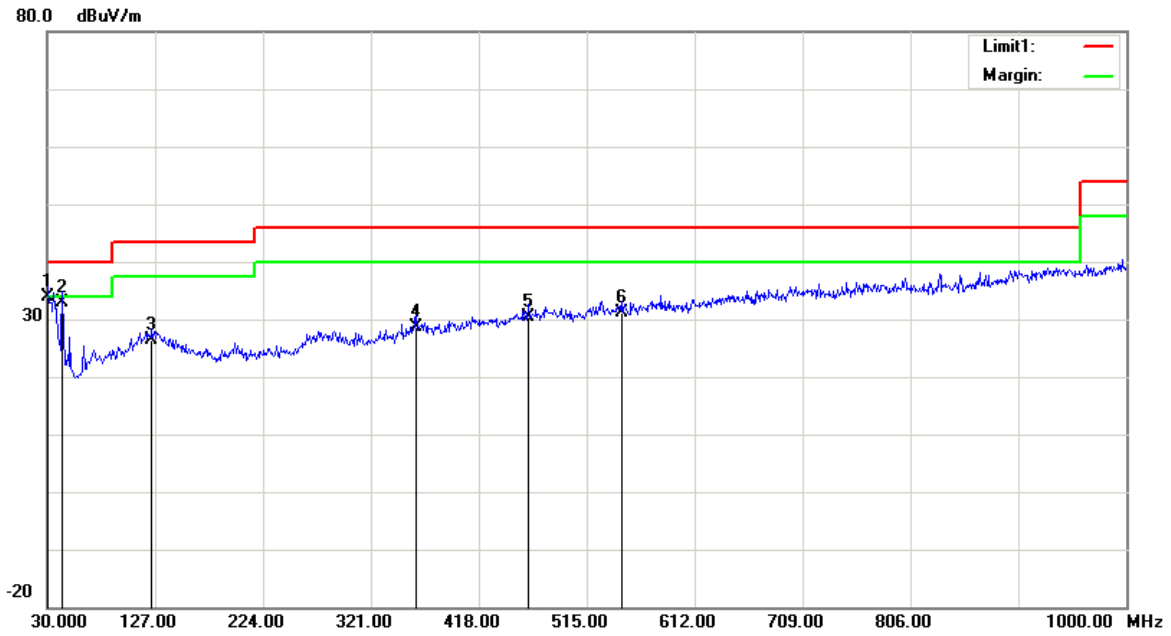

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
30.0000	30.22	QP	3.58	33.80	40.00	6.20
43.5800	41.47	QP	-8.57	32.90	40.00	7.10
124.0900	30.89	QP	-4.59	26.30	43.50	17.20
361.7400	31.30	QP	-2.70	28.60	46.00	17.40
462.6200	31.42	QP	-0.92	30.50	46.00	15.50
546.0400	31.45	QP	-0.25	31.20	46.00	14.80

Vertical

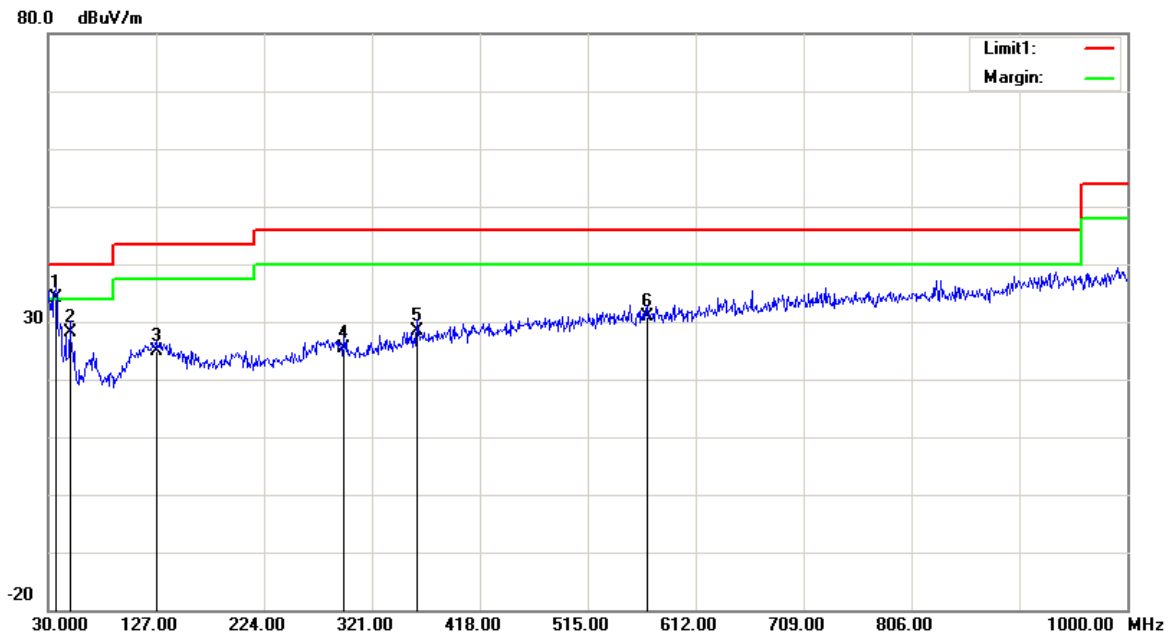

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
36.7900	37.41	QP	-3.31	34.10	40.00	5.90
49.4000	39.35	QP	-11.25	28.10	40.00	11.90
127.0000	29.50	QP	-4.70	24.80	43.50	18.70
295.7800	29.63	QP	-4.13	25.50	46.00	20.50
361.7400	31.10	QP	-2.70	28.40	46.00	17.60
568.3500	30.51	QP	0.29	30.80	46.00	15.20

2) Above 1GHz(AC10U was the worst):
802.11b(Chain 1 was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB)					
Low channel, 2412 MHz									
2412.00	71.14	PK	H	28.12	1.81	0.00	101.07	N/A	N/A
2412.00	66.51	AV	H	28.12	1.81	0.00	96.44	N/A	N/A
2412.00	83.69	PK	V	28.12	1.81	0.00	113.62	N/A	N/A
2412.00	80.24	AV	V	28.12	1.81	0.00	110.17	N/A	N/A
2390.00	36.51	PK	V	28.08	1.80	0.00	66.39	74.00	7.61
2390.00	23.49	AV	V	28.08	1.80	0.00	53.37	54.00	0.63
4824.00	48.42	PK	V	32.95	3.19	37.20	47.36	74.00	26.64
4824.00	33.64	AV	V	32.95	3.19	37.20	32.58	54.00	21.42
7236.00	46.59	PK	V	35.81	4.77	37.27	49.9	74.00	24.1
7236.00	32.43	AV	V	35.81	4.77	37.27	35.74	54.00	18.26
Middle channel, 2437 MHz									
2437.00	74.53	PK	H	28.17	1.82	0.00	104.52	N/A	N/A
2437.00	70.18	AV	H	28.17	1.82	0.00	100.17	N/A	N/A
2437.00	87.27	PK	V	28.17	1.82	0.00	117.26	N/A	N/A
2437.00	82.36	AV	V	28.17	1.82	0.00	112.35	N/A	N/A
4874.00	50.59	PK	V	33.05	3.26	37.21	49.69	74.00	24.31
4874.00	43.67	AV	V	33.05	3.26	37.21	42.77	54.00	11.23
7311.00	47.62	PK	V	36.01	4.64	37.36	50.91	74.00	23.09
7311.00	32.73	AV	V	36.01	4.64	37.36	36.02	54.00	17.98
5899.00	46.54	PK	V	34.26	3.79	37.22	47.37	74.00	26.63
5899.00	32.49	AV	V	34.26	3.79	37.22	33.32	54.00	20.68
High channel, 2462 MHz									
2462.00	71.76	PK	H	28.22	1.83	0.00	101.81	N/A	N/A
2462.00	67.09	AV	H	28.22	1.83	0.00	97.14	N/A	N/A
2462.00	82.43	PK	V	28.22	1.83	0.00	112.48	N/A	N/A
2462.00	77.48	AV	V	28.22	1.83	0.00	107.53	N/A	N/A
2483.50	36.37	PK	V	28.27	1.84	0.00	66.48	74.00	7.52
2483.50	23.14	AV	V	28.27	1.84	0.00	53.25	54.00	0.75
4924.00	48.37	PK	V	33.15	3.27	37.22	47.57	74.00	26.43
4924.00	33.42	AV	V	33.15	3.27	37.22	32.62	54.00	21.38
7386.00	47.59	PK	V	36.20	4.51	37.46	50.84	74.00	23.16
7386.00	32.63	AV	V	36.20	4.51	37.46	35.88	54.00	18.12
Additional Channel, 2417 MHz									
2417.00	87.49	PK	V	28.13	1.81	0.00	117.43	N/A	N/A
2417.00	83.05	AV	V	28.13	1.81	0.00	112.99	N/A	N/A
2390.00	36.54	PK	V	28.08	1.80	0.00	66.42	74.00	7.58
2390.00	23.57	AV	V	28.08	1.80	0.00	53.45	54.00	0.55
Additional Channel, 2457 MHz									
2457.00	87.64	PK	V	28.21	1.83	0.00	117.68	N/A	N/A
2457.00	82.45	AV	V	28.21	1.83	0.00	112.49	N/A	N/A
2483.50	36.48	PK	V	28.27	1.84	0.00	66.59	74.00	7.41
2483.50	23.24	AV	V	28.27	1.84	0.00	53.35	54.00	0.65

802.11g(Chain 1 was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412.00	71.35	PK	H	28.12	1.81	0.00	101.28	N/A	N/A
2412.00	61.41	AV	H	28.12	1.81	0.00	91.34	N/A	N/A
2412.00	83.58	PK	V	28.12	1.81	0.00	113.51	N/A	N/A
2412.00	73.24	AV	V	28.12	1.81	0.00	103.17	N/A	N/A
2390.00	36.33	PK	V	28.08	1.80	0.00	66.21	74.00	7.79
2390.00	23.49	AV	V	28.08	1.80	0.00	53.37	54.00	0.63
4824.00	48.44	PK	V	32.95	3.19	37.20	47.38	74.00	26.62
4824.00	33.68	AV	V	32.95	3.19	37.20	32.62	54.00	21.38
7236.00	46.69	PK	V	35.81	4.77	37.27	50	74.00	24
7236.00	32.35	AV	V	35.81	4.77	37.27	35.66	54.00	18.34
Middle Channel: 2437 MHz									
2437.00	74.19	PK	H	28.17	1.82	0.00	104.18	N/A	N/A
2437.00	64.04	AV	H	28.17	1.82	0.00	94.03	N/A	N/A
2437.00	86.9	PK	V	28.17	1.82	0.00	116.89	N/A	N/A
2437.00	76.51	AV	V	28.17	1.82	0.00	106.5	N/A	N/A
4874.00	48.67	PK	V	33.05	3.26	37.21	47.77	74.00	26.23
4874.00	33.63	AV	V	33.05	3.26	37.21	32.73	54.00	21.27
7311.00	47.61	PK	V	36.01	4.64	37.36	50.9	74.00	23.1
7311.00	32.66	AV	V	36.01	4.64	37.36	35.95	54.00	18.05
5899.00	46.45	PK	V	34.26	3.79	37.22	47.28	74.00	26.72
5899.00	32.43	AV	V	34.26	3.79	37.22	33.26	54.00	20.74
High Channel: 2462 MHz									
2462.00	71.36	PK	H	28.22	1.83	0.00	101.41	N/A	N/A
2462.00	61.22	AV	H	28.22	1.83	0.00	91.27	N/A	N/A
2462.00	83.65	PK	V	28.22	1.83	0.00	113.7	N/A	N/A
2462.00	73.55	AV	V	28.22	1.83	0.00	103.6	N/A	N/A
2483.50	36.37	PK	V	28.27	1.84	0.00	66.48	74.00	7.52
2483.50	23.34	AV	V	28.27	1.84	0.00	53.45	54.00	0.55
4924.00	48.55	PK	V	33.15	3.27	37.22	47.75	74.00	26.25
4924.00	33.69	AV	V	33.15	3.27	37.22	32.89	54.00	21.11
7386.00	46.61	PK	V	36.20	4.51	37.46	49.86	74.00	24.14
7386.00	32.45	AV	V	36.20	4.51	37.46	35.7	54.00	18.3
Additional Channel, 2417 MHz									
2417.00	86.62	PK	V	28.13	1.81	0.00	116.56	N/A	N/A
2417.00	76.33	AV	V	28.13	1.81	0.00	106.27	N/A	N/A
2390.00	36.38	PK	V	28.08	1.80	0.00	66.26	74.00	7.74
2390.00	23.52	AV	V	28.08	1.80	0.00	53.4	54.00	0.6
Additional Channel, 2457 MHz									
2457.00	86.71	PK	V	28.21	1.83	0.00	116.75	N/A	N/A
2457.00	76.43	AV	V	28.21	1.83	0.00	106.47	N/A	N/A
2483.50	36.45	PK	V	28.27	1.84	0.00	66.56	74.00	7.44
2483.50	23.32	AV	V	28.27	1.84	0.00	53.43	54.00	0.57

802.11n20(MIMO was the worst)




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412.00	70.84	PK	H	28.12	1.81	0.00	100.77	N/A	N/A
2412.00	60.59	AV	H	28.12	1.81	0.00	90.52	N/A	N/A
2412.00	82.87	PK	V	28.12	1.81	0.00	112.8	N/A	N/A
2412.00	72.69	AV	V	28.12	1.81	0.00	102.62	N/A	N/A
2390.00	39.63	PK	V	28.08	1.80	0.00	69.51	74.00	4.49
2390.00	23.36	AV	V	28.08	1.80	0.00	53.24	54.00	0.76
4824.00	48.38	PK	V	32.95	3.19	37.20	47.32	74.00	26.68
4824.00	33.78	AV	V	32.95	3.19	37.20	32.72	54.00	21.28
7236.00	46.68	PK	V	35.81	4.77	37.27	49.99	74.00	24.01
7236.00	32.61	AV	V	35.81	4.77	37.27	35.92	54.00	18.08
Middle Channel: 2437 MHz									
2437.00	72.95	PK	H	28.17	1.82	0.00	102.94	N/A	N/A
2437.00	62.78	AV	H	28.17	1.82	0.00	92.77	N/A	N/A
2437.00	86.73	PK	V	28.17	1.82	0.00	116.72	N/A	N/A
2437.00	76.68	AV	V	28.17	1.82	0.00	106.67	N/A	N/A
4874.00	48.75	PK	V	33.05	3.26	37.21	47.85	74.00	26.15
4874.00	33.61	AV	V	33.05	3.26	37.21	32.71	54.00	21.29
7311.00	47.44	PK	V	36.01	4.64	37.36	50.73	74.00	23.27
7311.00	32.77	AV	V	36.01	4.64	37.36	36.06	54.00	17.94
5899.00	46.67	PK	V	34.26	3.79	37.22	47.5	74.00	26.5
5899.00	32.65	AV	V	34.26	3.79	37.22	33.48	54.00	20.52
High Channel: 2462 MHz									
2462.00	71.27	PK	H	28.22	1.83	0.00	101.32	N/A	N/A
2462.00	61.13	AV	H	28.22	1.83	0.00	91.18	N/A	N/A
2462.00	83.76	PK	V	28.22	1.83	0.00	113.81	N/A	N/A
2462.00	73.49	AV	V	28.22	1.83	0.00	103.54	N/A	N/A
2483.50	36.37	PK	V	28.27	1.84	0.00	66.48	74.00	7.52
2483.50	23.42	AV	V	28.27	1.84	0.00	53.53	54.00	0.47
4924.00	48.61	PK	V	33.15	3.27	37.22	47.81	74.00	26.19
4924.00	33.57	AV	V	33.15	3.27	37.22	32.77	54.00	21.23
7386.00	46.45	PK	V	36.20	4.51	37.46	49.7	74.00	24.3
7386.00	32.58	AV	V	36.20	4.51	37.46	35.83	54.00	18.17
7265.00	45.65	PK	V	35.89	4.72	37.30	48.96	74.00	25.04
7265.00	32.32	AV	V	35.89	4.72	37.30	35.63	54.00	18.37
Additional Channel: 2417 MHz									
2417.00	85.71	PK	V	28.13	1.81	0.00	115.65	N/A	N/A
2417.00	75.59	AV	V	28.13	1.81	0.00	105.53	N/A	N/A
2390.00	39.81	PK	V	28.08	1.80	0.00	69.69	74.00	4.31
2390.00	23.45	AV	V	28.08	1.80	0.00	53.33	54.00	0.67
Additional Channel: 2457 MHz									
2457.00	86.59	PK	V	28.21	1.83	0.00	116.63	N/A	N/A
2457.00	76.67	AV	V	28.21	1.83	0.00	106.71	N/A	N/A
2483.50	36.35	PK	V	28.27	1.84	0.00	66.46	74.00	7.54
2483.50	23.23	AV	V	28.27	1.84	0.00	53.34	54.00	0.66

802.11n40(MIMO was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB)					
Frequency Channel: 2422 MHz									
2422.00	71.19	PK	H	28.14	1.81	0.00	101.14	N/A	N/A
2422.00	61.38	AV	H	28.14	1.81	0.00	91.33	N/A	N/A
2422.00	83.55	PK	V	28.14	1.81	0.00	113.5	N/A	N/A
2422.00	73.04	AV	V	28.14	1.81	0.00	102.99	N/A	N/A
2390.00	36.15	PK	V	28.08	1.80	0.00	66.03	74.00	7.97
2390.00	23.56	AV	V	28.08	1.80	0.00	53.44	54.00	0.56
4844.00	48.53	PK	V	32.99	3.22	37.20	47.54	74.00	26.46
4844.00	33.64	AV	V	32.99	3.22	37.20	32.65	54.00	21.35
7266.00	46.59	PK	V	35.89	4.72	37.31	49.89	74.00	24.11
7266.00	32.23	AV	V	35.89	4.72	37.31	35.53	54.00	18.47
5965.00	45.62	PK	V	34.29	3.82	37.29	46.44	74.00	27.56
5965.00	32.34	AV	V	34.29	3.82	37.29	33.16	54.00	20.84
Frequency Channel: 2437 MHz									
2437.00	74.33	PK	H	28.17	1.82	0.00	104.32	N/A	N/A
2437.00	64.57	AV	H	28.17	1.82	0.00	94.56	N/A	N/A
2437.00	86.48	PK	V	28.17	1.82	0.00	116.47	N/A	N/A
2437.00	76.16	AV	V	28.17	1.82	0.00	106.15	N/A	N/A
4874.00	48.57	PK	V	33.05	3.26	37.21	47.67	74.00	26.33
4874.00	33.53	AV	V	33.05	3.26	37.21	32.63	54.00	21.37
7311.00	47.82	PK	V	36.01	4.64	37.36	51.11	74.00	22.89
7311.00	32.84	AV	V	36.01	4.64	37.36	36.13	54.00	17.87
5899.00	46.72	PK	V	34.26	3.79	37.22	47.55	74.00	26.45
5899.00	32.56	AV	V	34.26	3.79	37.22	33.39	54.00	20.61
Frequency Channel: 2452 MHz									
2452.00	72.17	PK	H	28.20	1.83	0.00	102.2	N/A	N/A
2452.00	62.49	AV	H	28.20	1.83	0.00	92.52	N/A	N/A
2452.00	83.86	PK	V	28.20	1.83	0.00	113.89	N/A	N/A
2452.00	73.91	AV	V	28.20	1.83	0.00	103.94	N/A	N/A
2483.50	36.18	PK	V	28.27	1.84	0.00	66.29	74.00	7.71
2483.50	23.29	AV	V	28.27	1.84	0.00	53.4	54.00	0.6
4904.00	48.43	PK	V	33.11	3.30	37.21	47.63	74.00	26.37
4904.00	33.84	AV	V	33.11	3.30	37.21	33.04	54.00	20.96
7356.00	46.57	PK	V	36.13	4.56	37.42	49.84	74.00	24.16
7356.00	32.45	AV	V	36.13	4.56	37.42	35.72	54.00	18.28
5489.00	45.57	PK	V	34.08	3.55	37.34	45.86	74.00	28.14
5489.00	32.12	AV	V	34.08	3.55	37.34	32.41	54.00	21.59
Frequency Channel: 2427 MHz									
2427.00	86.35	PK	V	28.15	1.81	0.00	116.31	N/A	N/A
2427.00	75.95	AV	V	28.15	1.81	0.00	105.91	N/A	N/A
2390.00	36.17	PK	V	28.08	1.80	0.00	66.05	74.00	7.95
2390.00	23.43	AV	V	28.08	1.80	0.00	53.31	54.00	0.69
Frequency Channel: 2447 MHz									
2447.00	86.92	PK	V	28.19	1.82	0.00	116.93	N/A	N/A
2447.00	76.59	AV	V	28.19	1.82	0.00	106.6	N/A	N/A
2483.50	35.97	PK	V	28.27	1.84	0.00	66.08	74.00	7.92
2483.50	23.36	AV	V	28.27	1.84	0.00	53.47	54.00	0.53




**802.11b chain 1 Low Channel:
Horizontal**

Fundamental
Test with Band
Rejection Filter

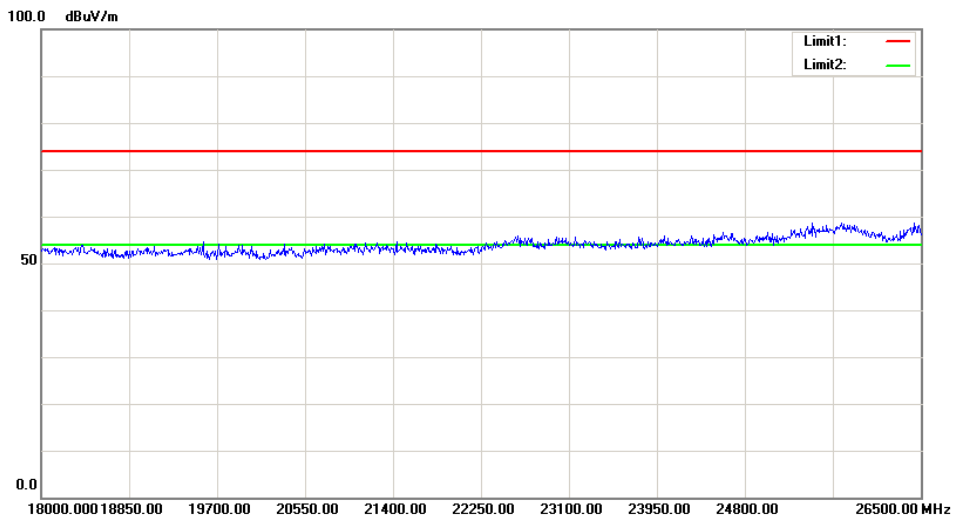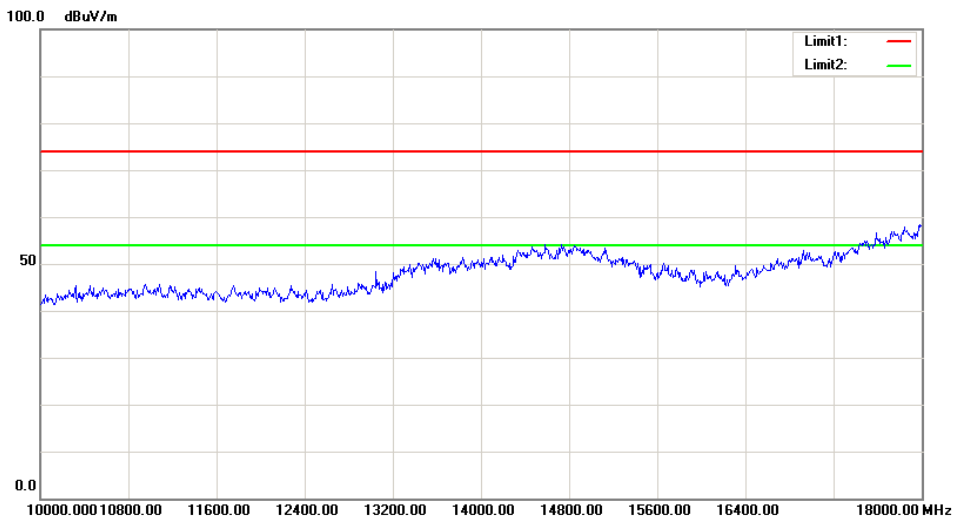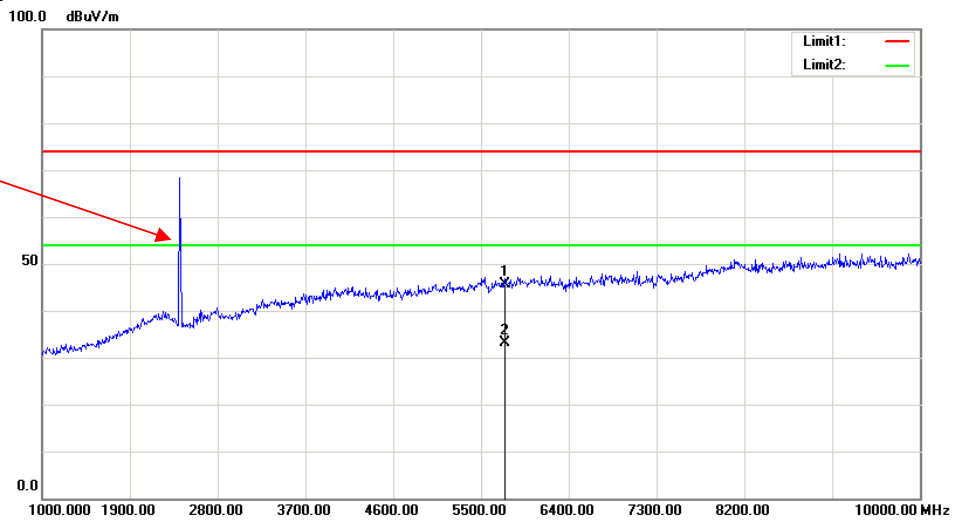

Vertical

Fundamental Test with Band Rejection Filter

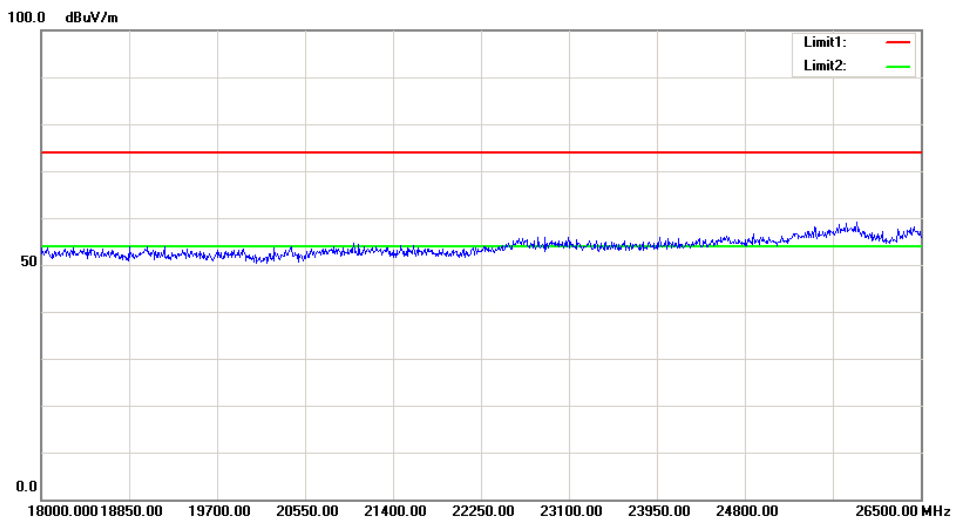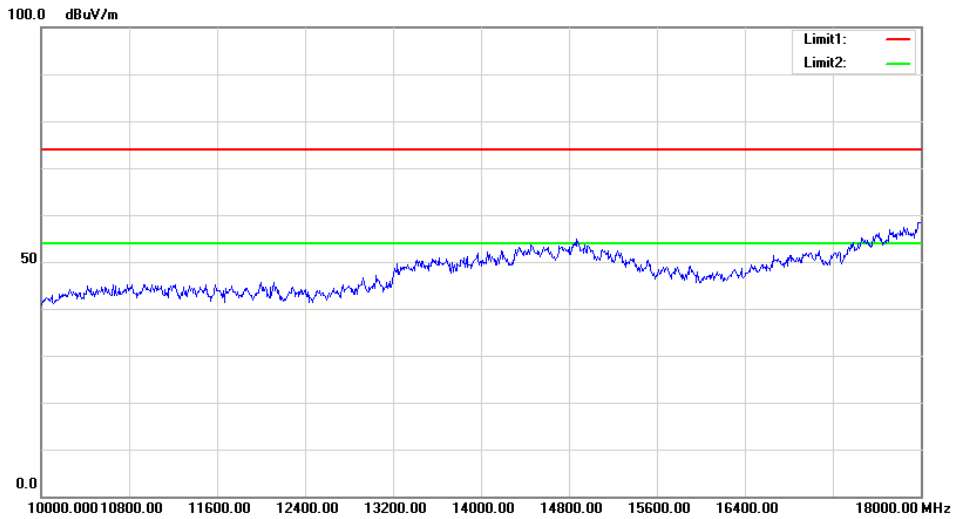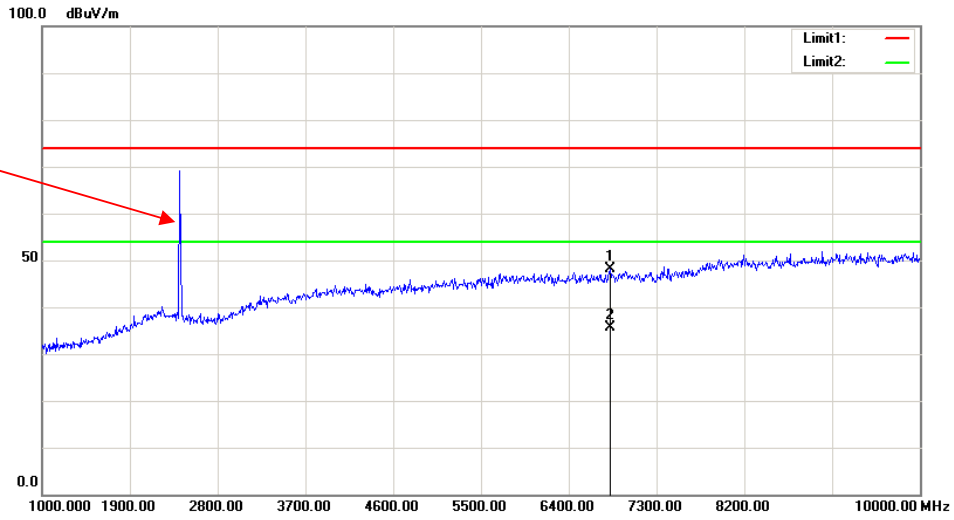


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

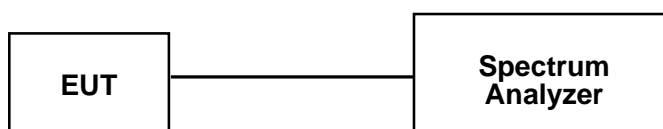

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ 26	831929/005	2017-08-31	2018-08-31
Unknown	RF Cable	Unknown	C-4	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.9 ~ 27.3 °C
Relative Humidity:	53 ~ 55 %
ATM Pressure:	100.9 ~ 101.3 kPa

* The testing was performed by Kami Zhou from 2017-11-15 to 2017-11-29.


Test Mode: Transmitting

Test Result: Compliant


Test performed at chain 0, please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.1	≥0.5
	Middle	2437	10.18	≥0.5
	High	2462	10.1	≥0.5
802.11g	Low	2412	16.57	≥0.5
	Middle	2437	16.51	≥0.5
	High	2462	16.59	≥0.5
802.11n ht20	Low	2412	17.64	≥0.5
	Middle	2437	17.72	≥0.5
	High	2462	17.72	≥0.5
802.11n ht40	Low	2422	36.39	≥0.5
	Middle	2437	36.23	≥0.5
	High	2452	35.75	≥0.5


802.11b Low Channel

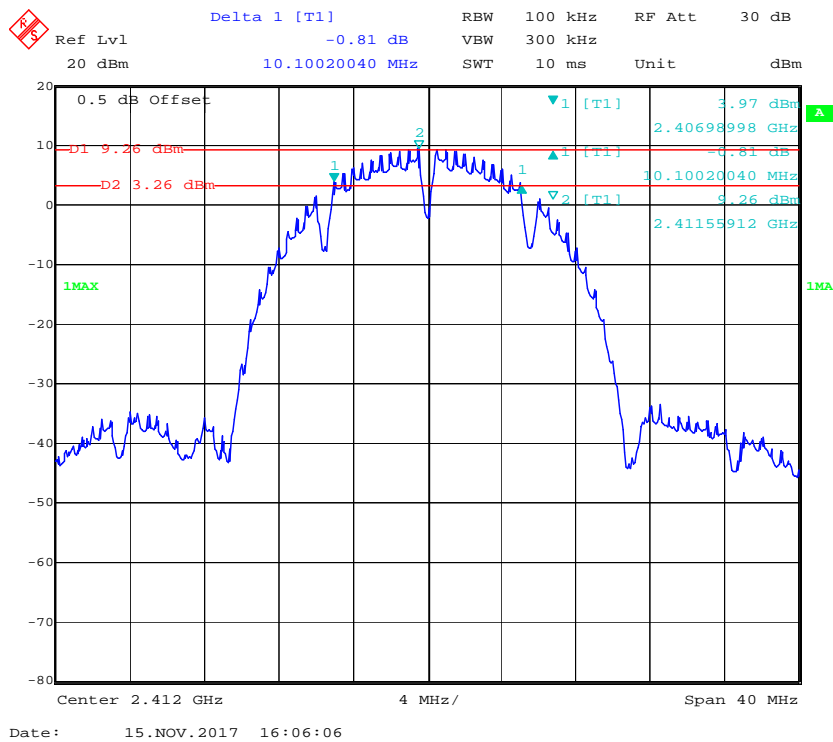


802.11b Middle Channel

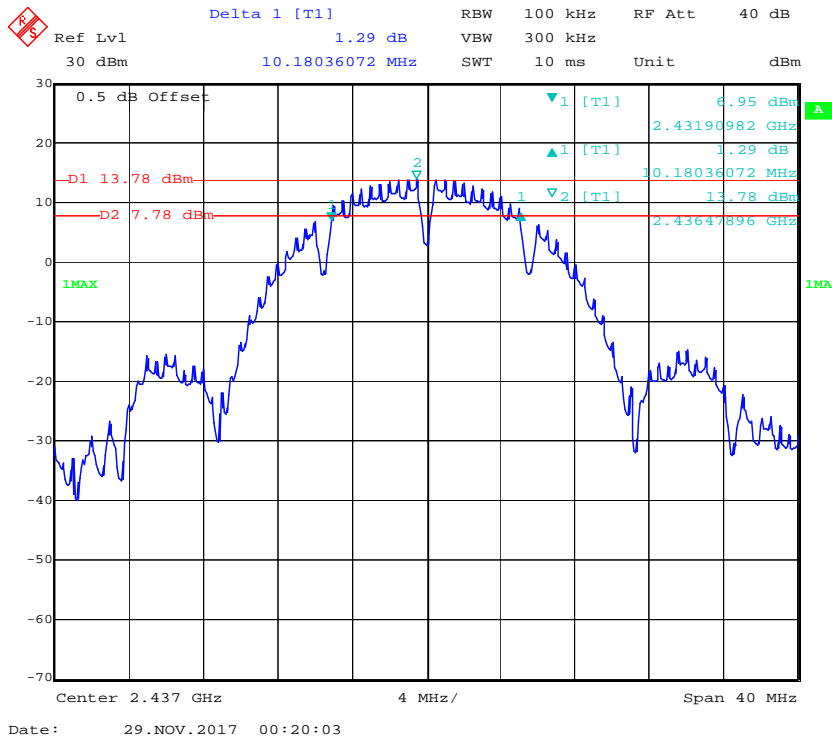


802.11b High Channel

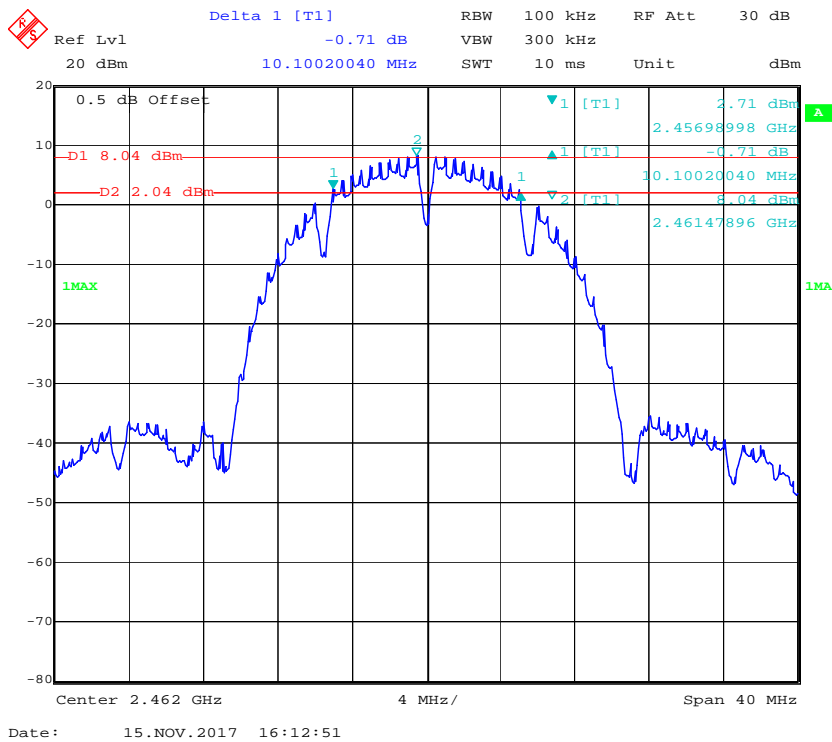


802.11g Low Channel

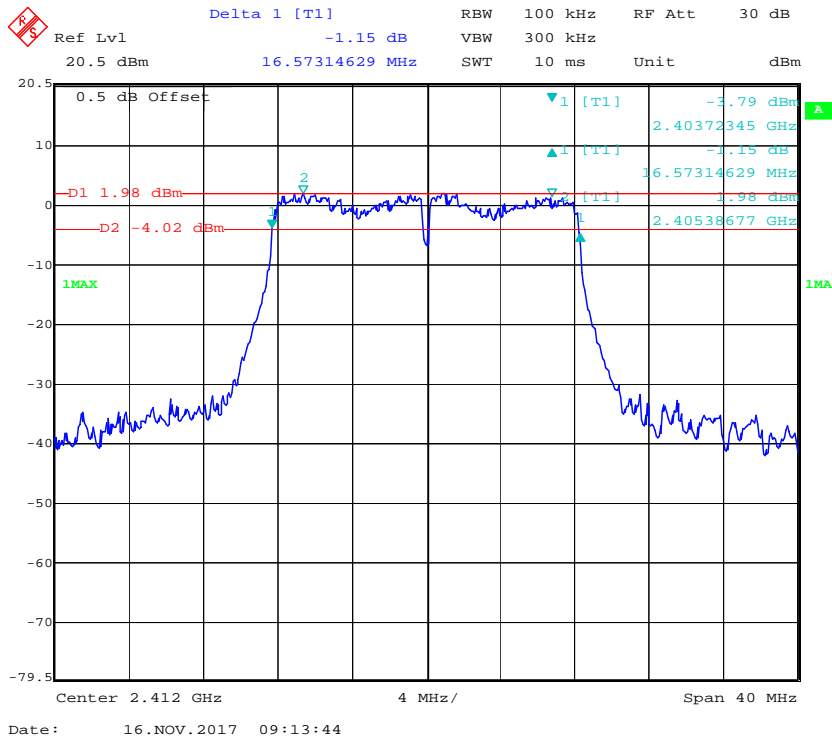


802.11g Middle Channel

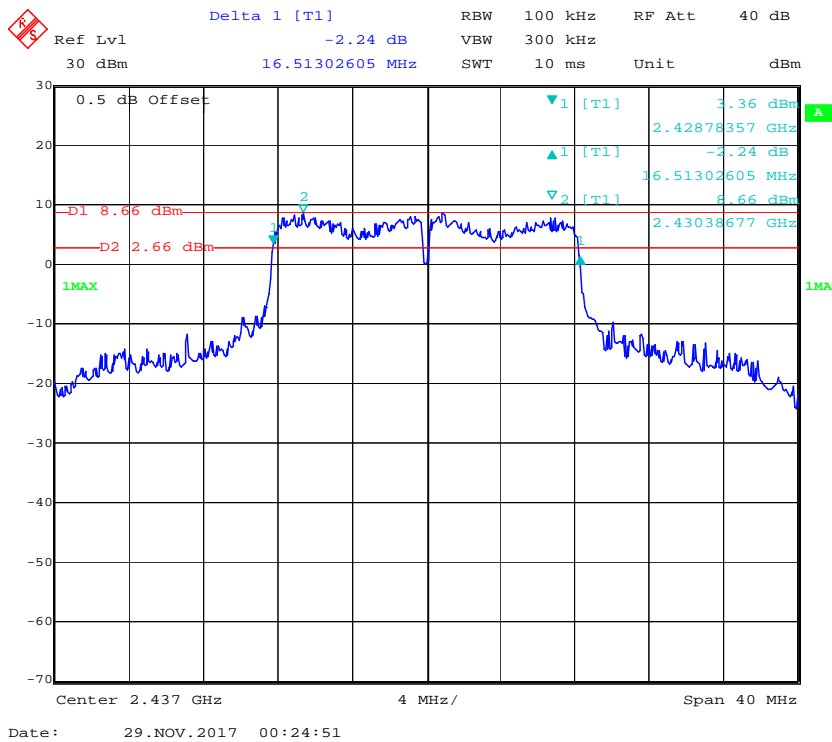


802.11g High Channel

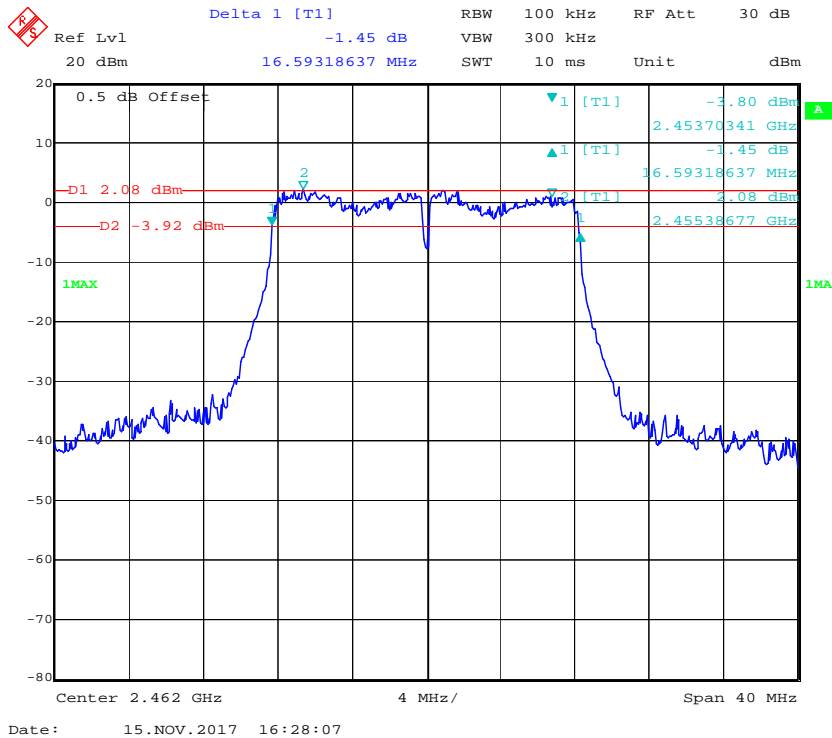


802.11n ht20 Low Channel

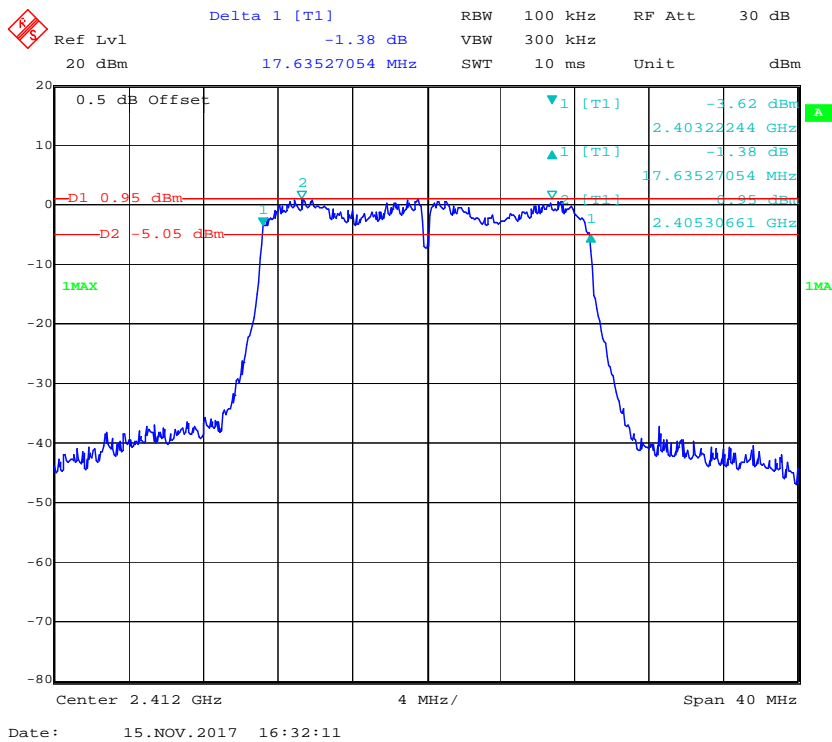


802.11n ht20 Middle Channel

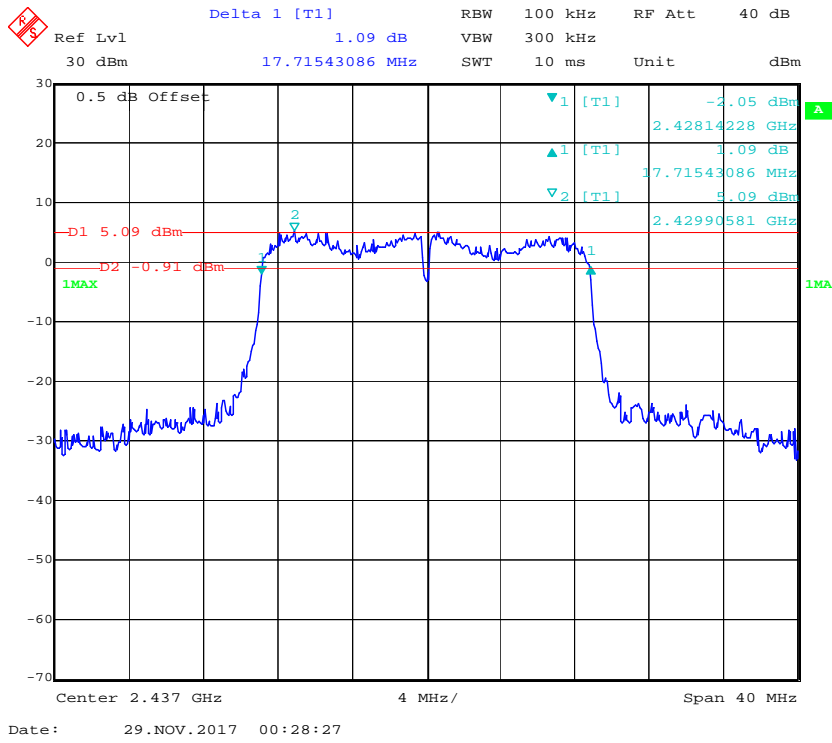


802.11n ht20 High Channel

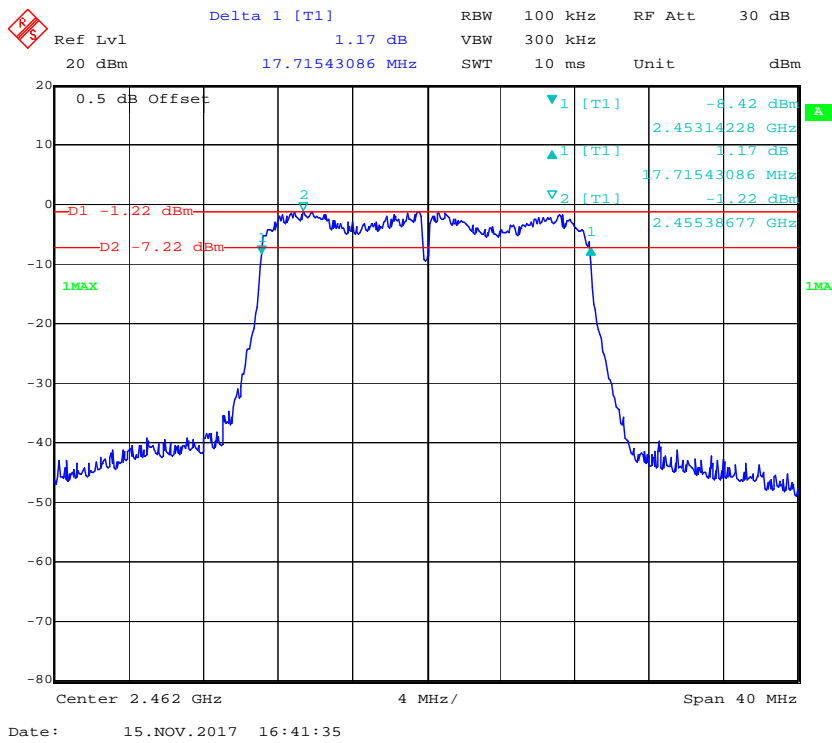


802.11n ht40 Low Channel

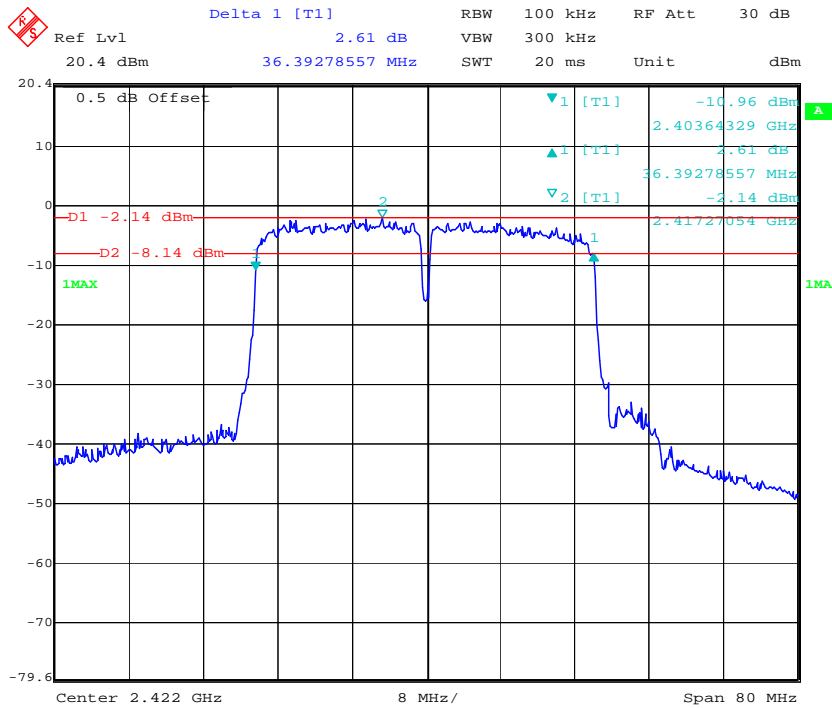

802.11n ht40 Middle Channel

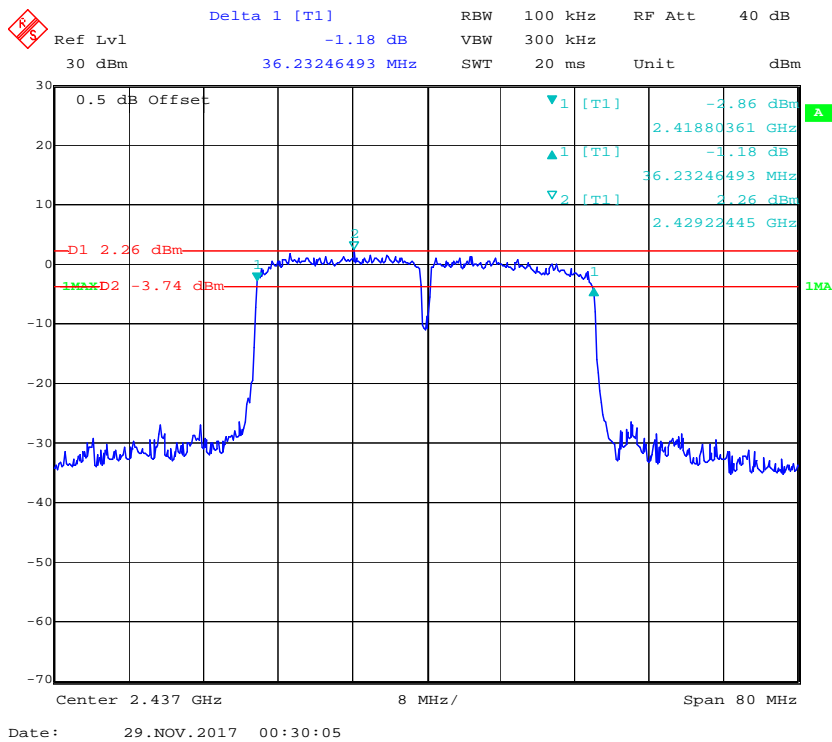

802.11n ht40 High Channel

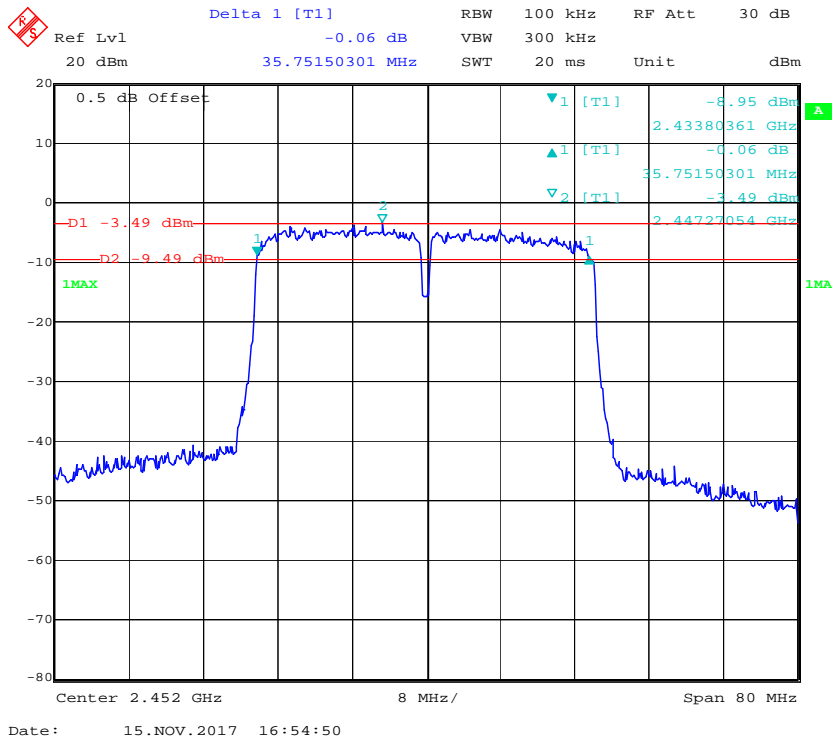


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.

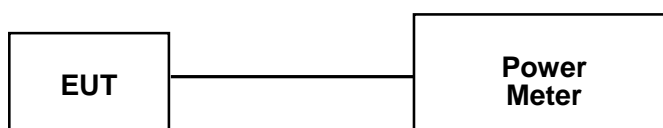

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2017-11-03	2018-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2017-11-03	2018-11-03
Unknown	RF Cable	Unknown	C-4	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.9 °C
Relative Humidity:	55 %
ATM Pressure:	101.3 kPa

* The testing was performed by Kami Zhou on 2017-11-15.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Frequency (MHz)	Max Peak Conducted Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	
802.11b	2412	21.93	22.71	/	30
	2417	27.23	26.78	/	30
	2437	26.68	27.03	/	30
	2457	26.76	26.23	/	30
	2462	20.62	21.85	/	30
802.11g	2412	24.15	25.18	/	30
	2417	29.47	29.59	/	30
	2437	29.22	28.22	/	30
	2457	29.3	29.05	/	30
	2462	23.19	23.75	/	30
802.11n ht20	2412	22.35	22.32	25.35	30
	2417	26.9	26.99	29.96	30
	2437	26.58	26.84	29.72	30
	2457	26.33	26.74	29.55	30
	2462	20.49	23.17	25.04	30
802.11n ht40	2422	21.9	21.85	24.89	30
	2427	26.76	26.72	29.75	30
	2437	26.23	26.58	29.42	30
	2447	26.23	26.78	29.52	30
	2452	20.88	21.18	24.04	30

Note: the maximum antenna gain is 5 dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = $G_{ANT} + \text{Array Gain} = 5\text{dBi} < 6\text{dBi}$

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ 26	831929/005	2017-08-31	2018-08-31
Unknown	RF Cable	Unknown	C-4	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26.9~27.3 °C
Relative Humidity:	40~55 %
ATM Pressure:	101.1~101.2 kPa

* The testing was performed by Kami Zhou from 2017-11-29 to 2017-12-02.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.


Chain 0:

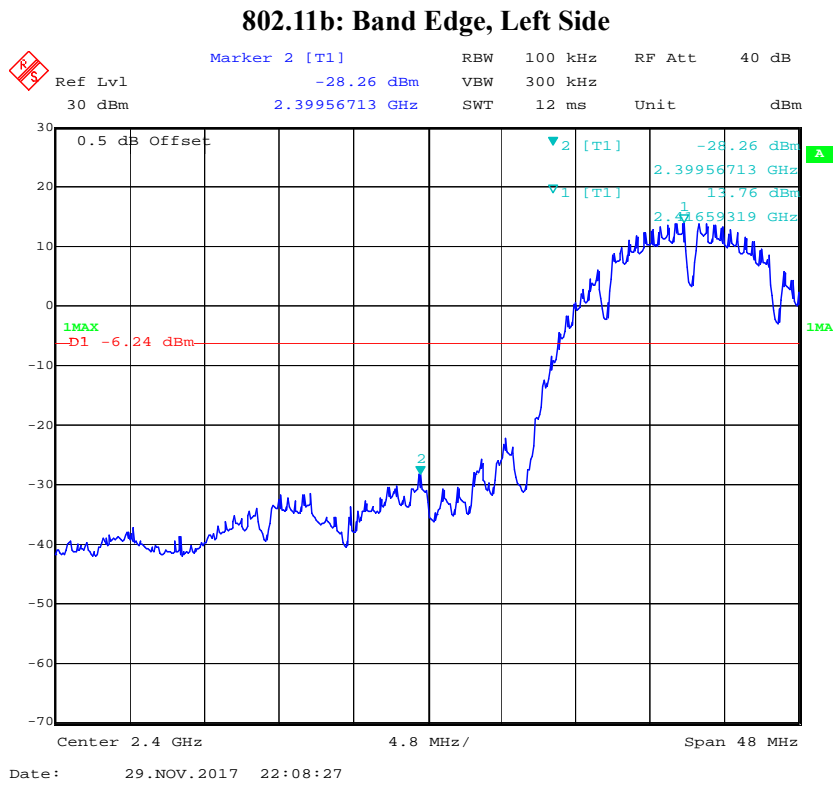


802.11b: Band Edge, Right Side

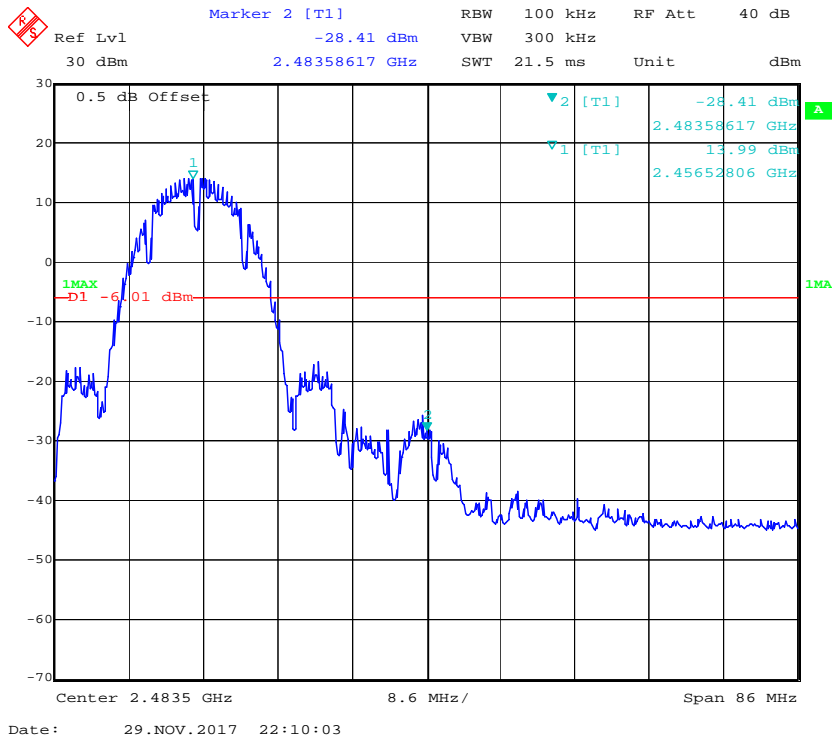


802.11g: Band Edge, Left Side

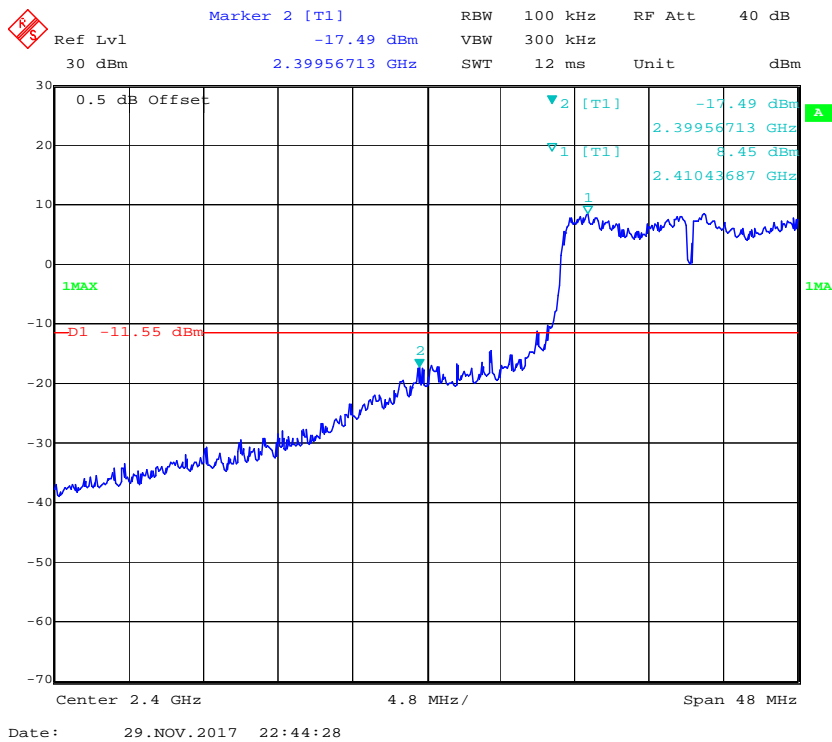


802.11g: Band Edge, Right Side

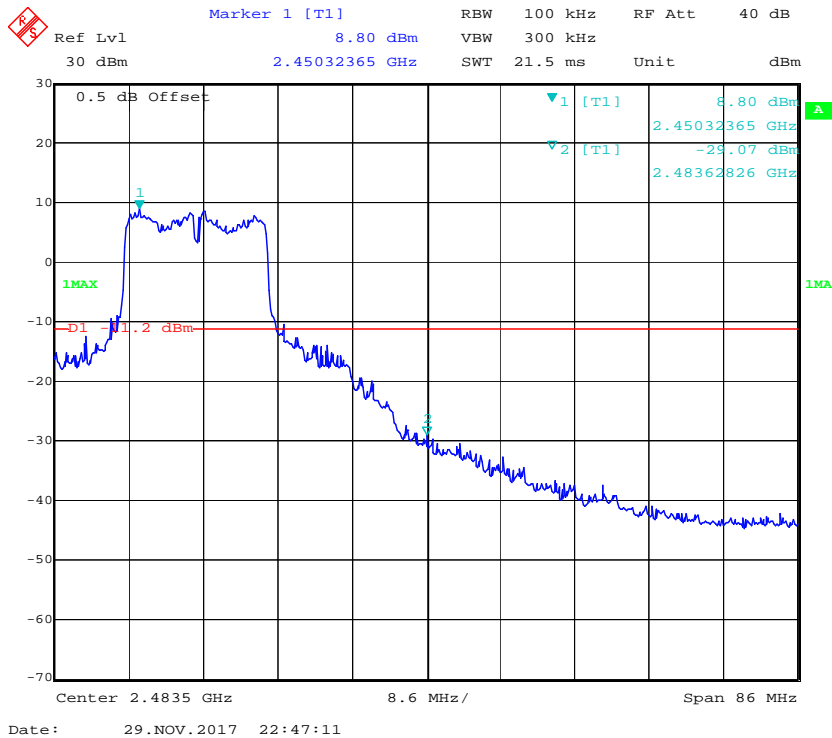


802.11n ht20 Band Edge, Left Side

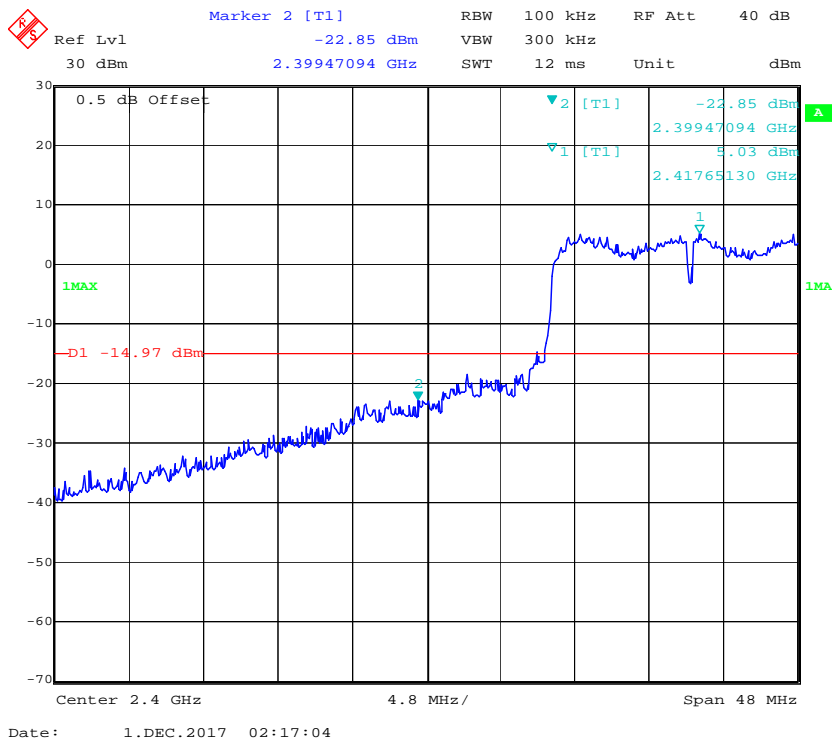


802.11n ht20 Band Edge, Right Side

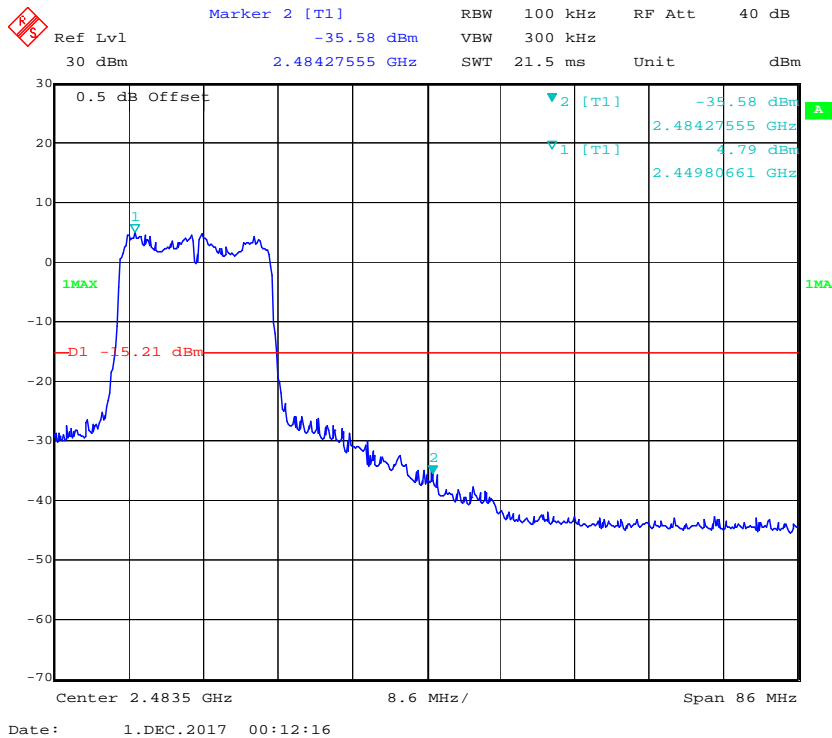

802.11n ht40 Band Edge, Left Side

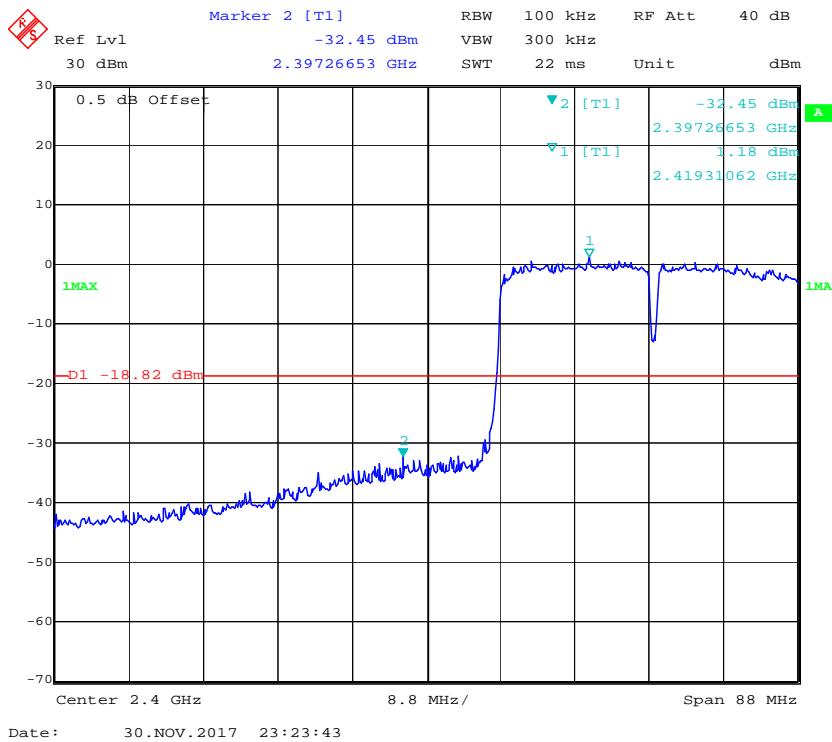


802.11n ht40 Band Edge, Right Side

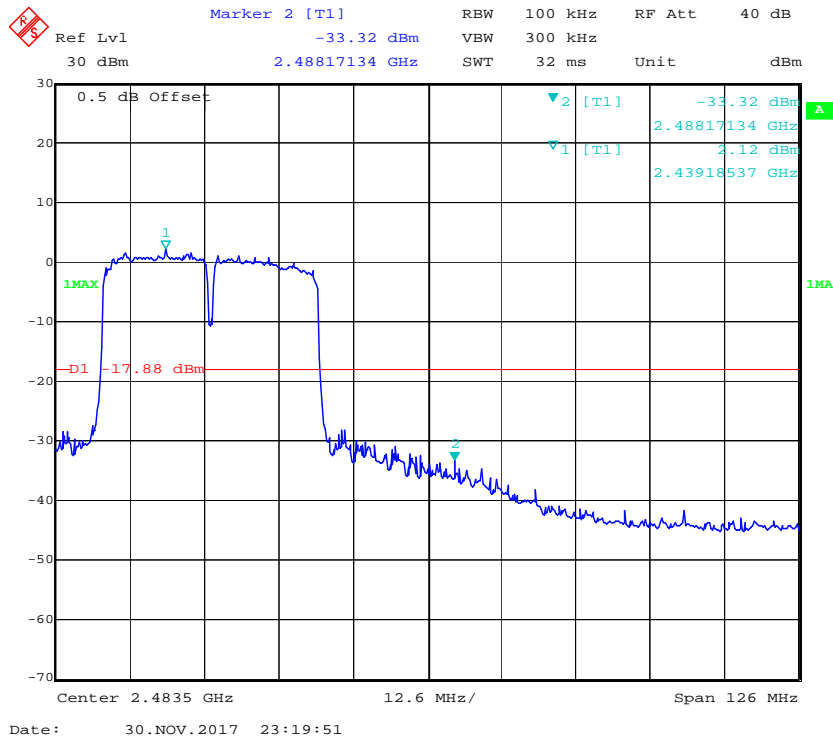


Chain 1:


802.11b: Band Edge, Left Side

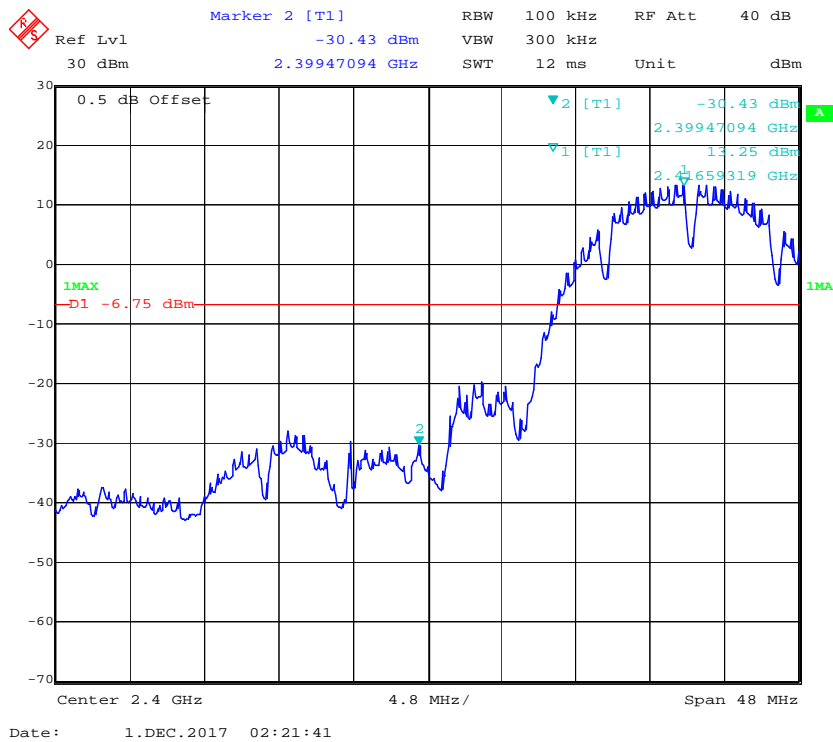


802.11b: Band Edge, Right Side

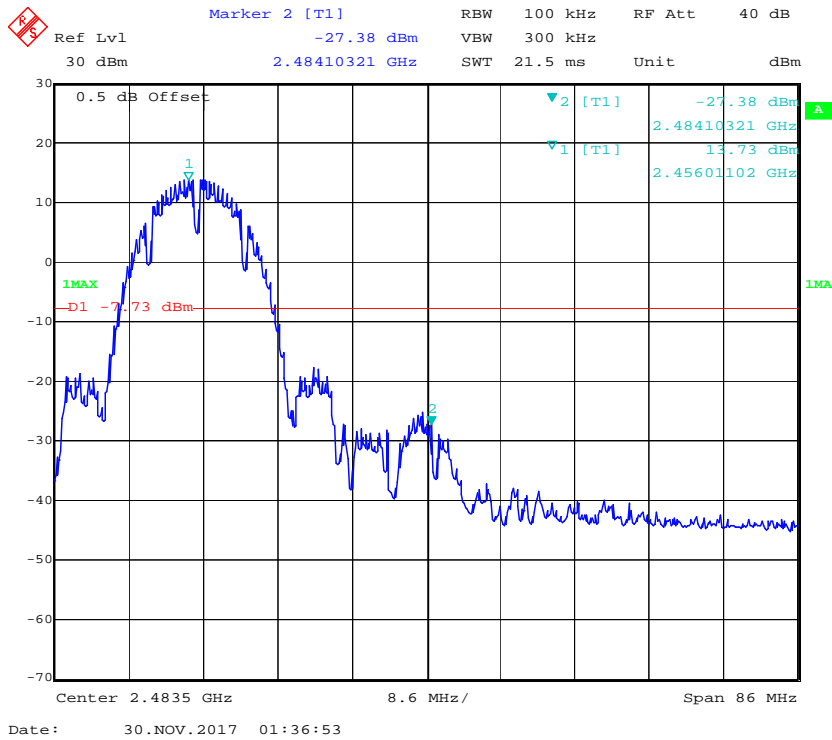


802.11g: Band Edge, Left Side

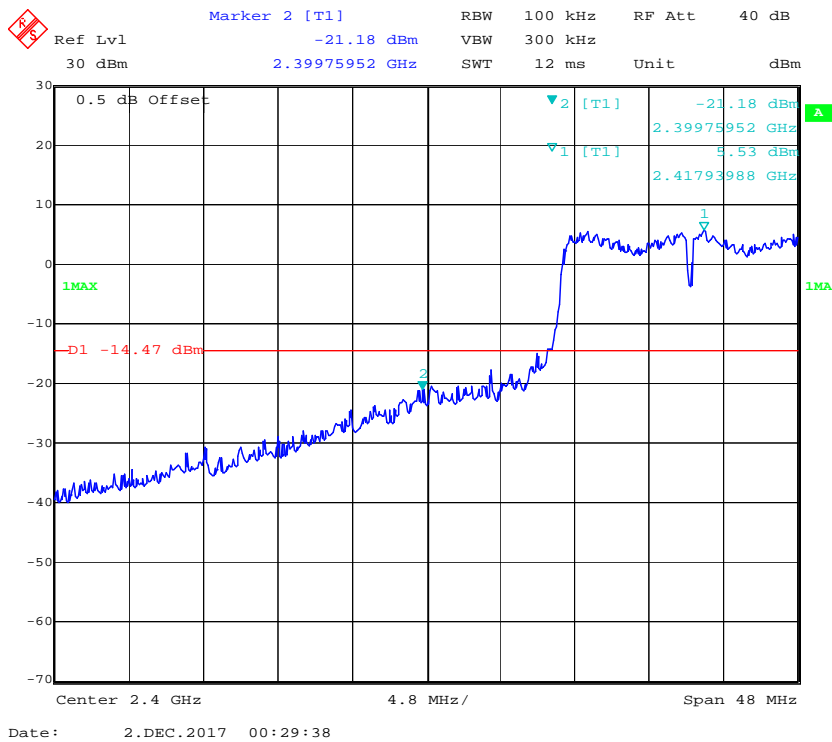


802.11g: Band Edge, Right Side

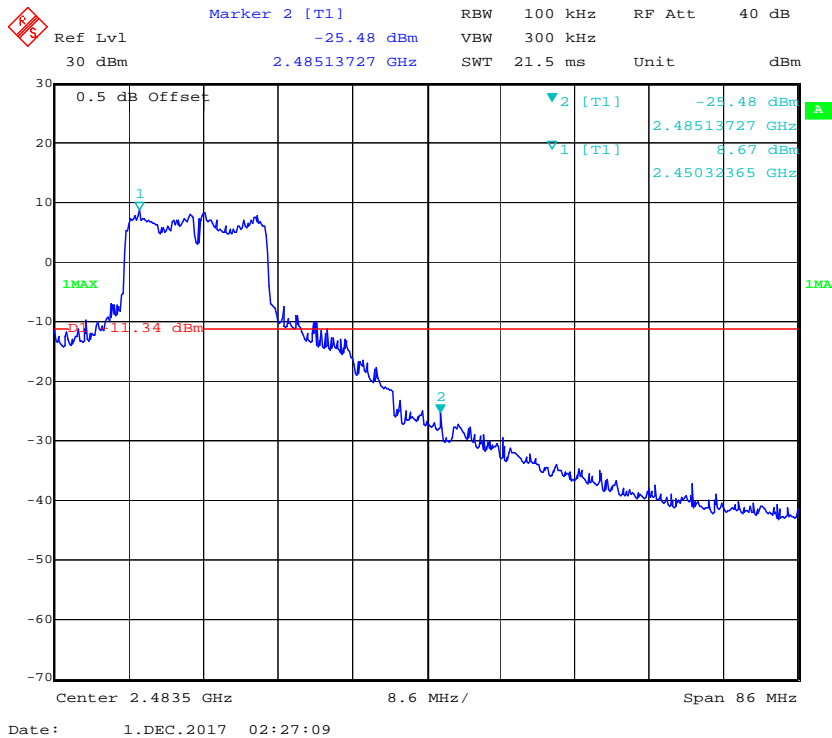


802.11n ht20 Band Edge, Left Side

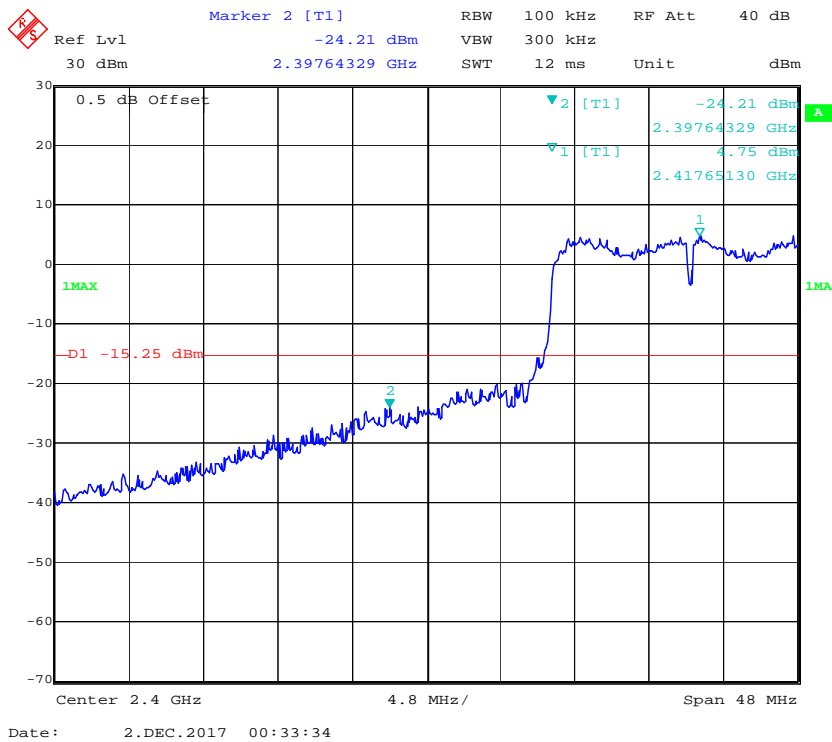


802.11n ht20 Band Edge, Right Side

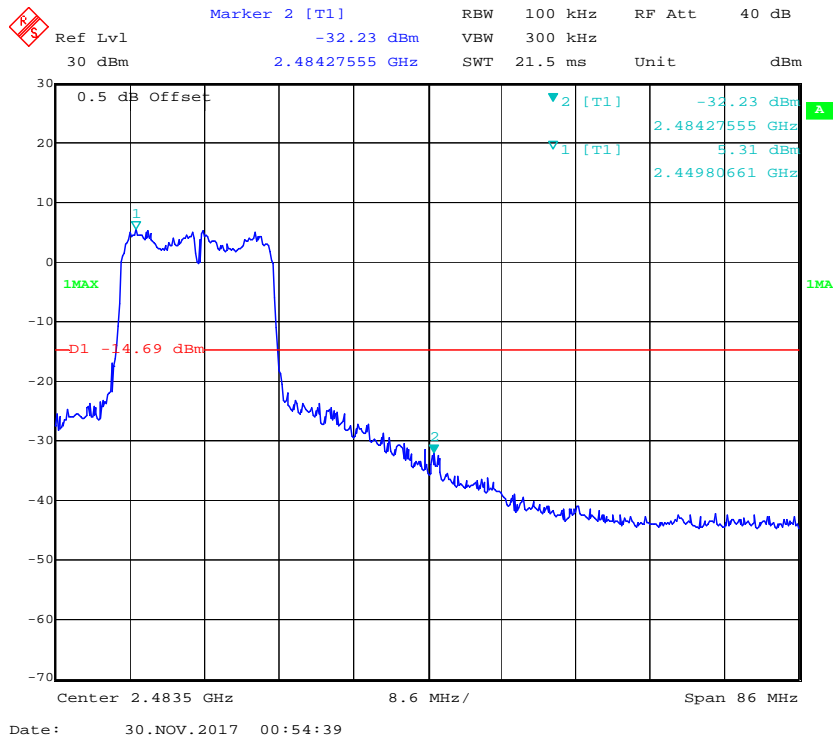

802.11n ht40 Band Edge, Left Side

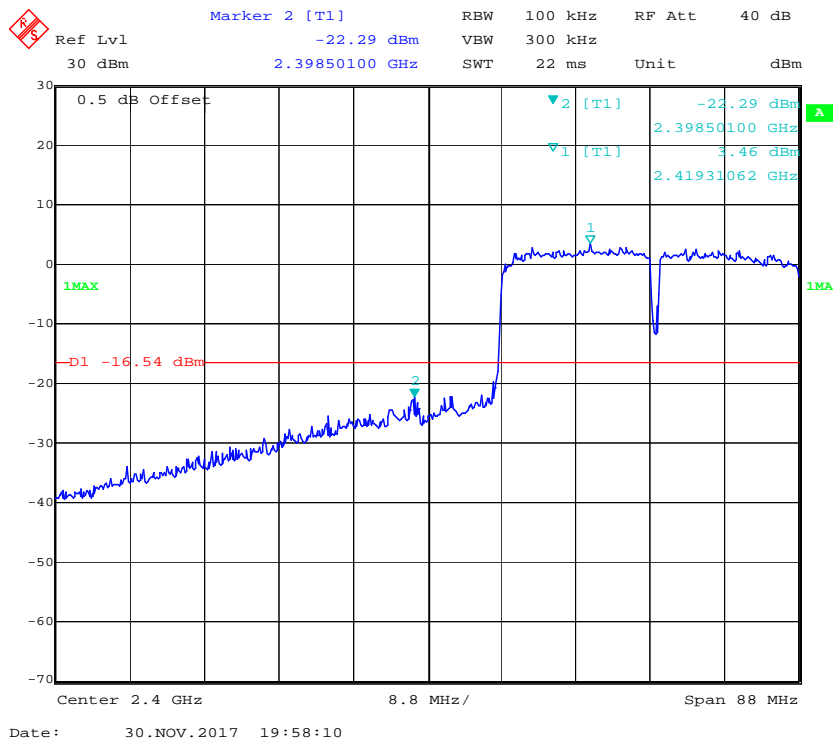

802.11n ht40 Band Edge, Right Side

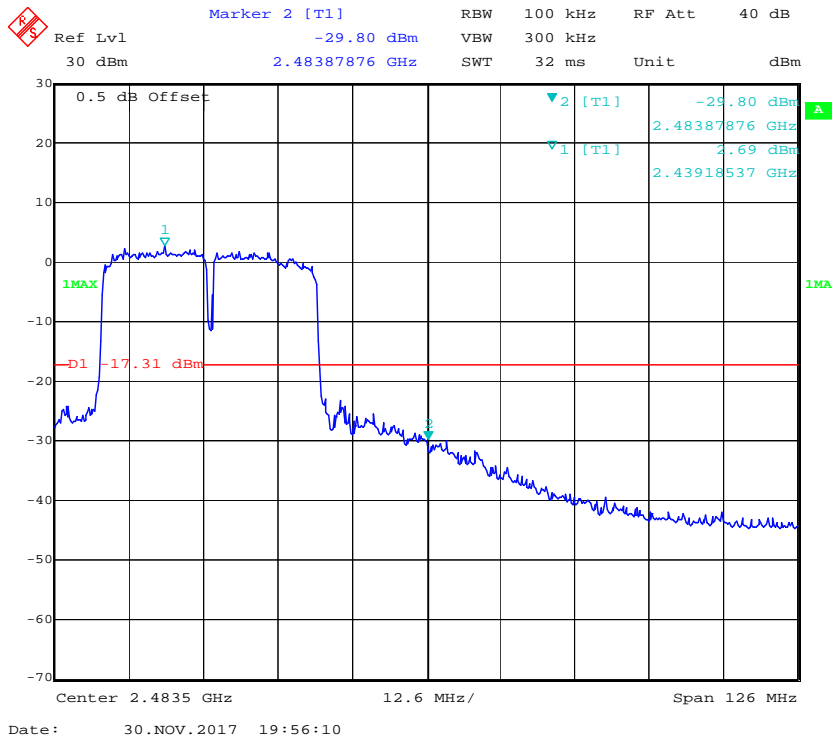

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ 26	831929/005	2017-08-31	2018-08-31
Unknown	RF Cable	Unknown	C-4	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.6~27.5 °C
Relative Humidity:	42~47 %
ATM Pressure:	101~101.9 kPa

* The testing was performed by Kami Zhou from 2017-11-15 to 2017-11-29.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)		Total (dBm/3kHz)	Limit (dBm/3kHz)
			Chain 0	Chain 1		
802.11b	Low	2412	-10.18	-9.48	/	≤8
	Middle	2437	-5.79	-6.18	/	≤8
	High	2462	-11.61	-10.28	/	≤8
802.11g	Low	2412	-11.57	-10.63	/	≤8
	Middle	2437	-6.55	-7.38	/	≤8
	High	2462	-12.57	-11.95	/	≤8
802.11n ht20	Low	2412	-12.4	-12.24	-9.31	≤6
	Middle	2437	-8.75	-7.8	-5.24	≤6
	High	2462	-14	-11.08	-9.29	≤6
802.11n ht40	Low	2422	-16.03	-16.96	-13.46	≤6
	Middle	2437	-10.53	-9.54	-7.00	≤6
	High	2452	-16.74	-17.95	-14.29	≤6

Note: the maximum antenna gain is 5 dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$


So:

$$\text{Directional gain} = \text{GANT} + \text{Array Gain} = 5 + 10 * \log(2) = 8 \text{ dBi}$$


The limit should be reduced by 2dB.

Chain 0:


Power Spectral Density, 802.11b, Low Channel

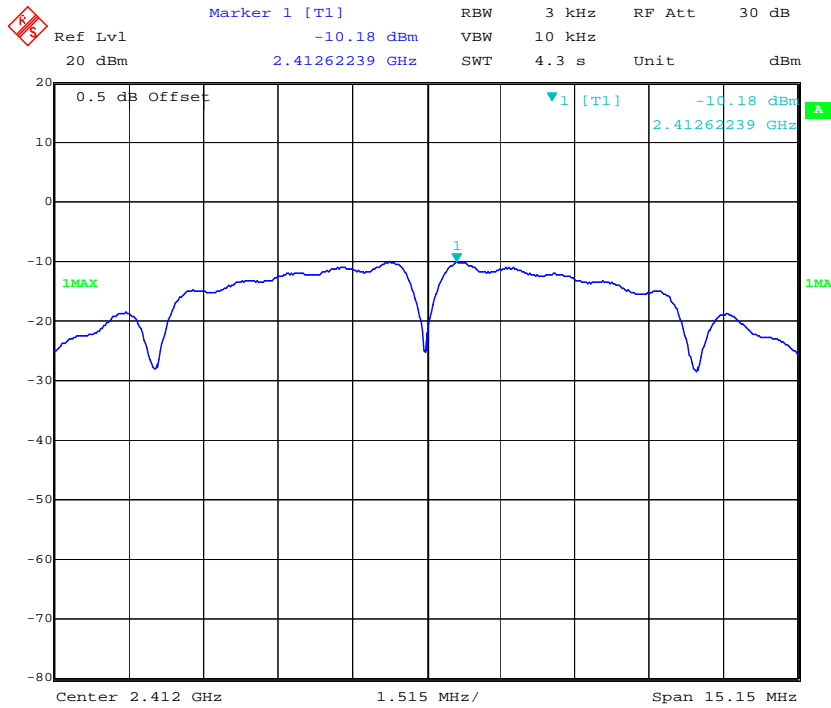


Power Spectral Density, 802.11b, Middle Channel

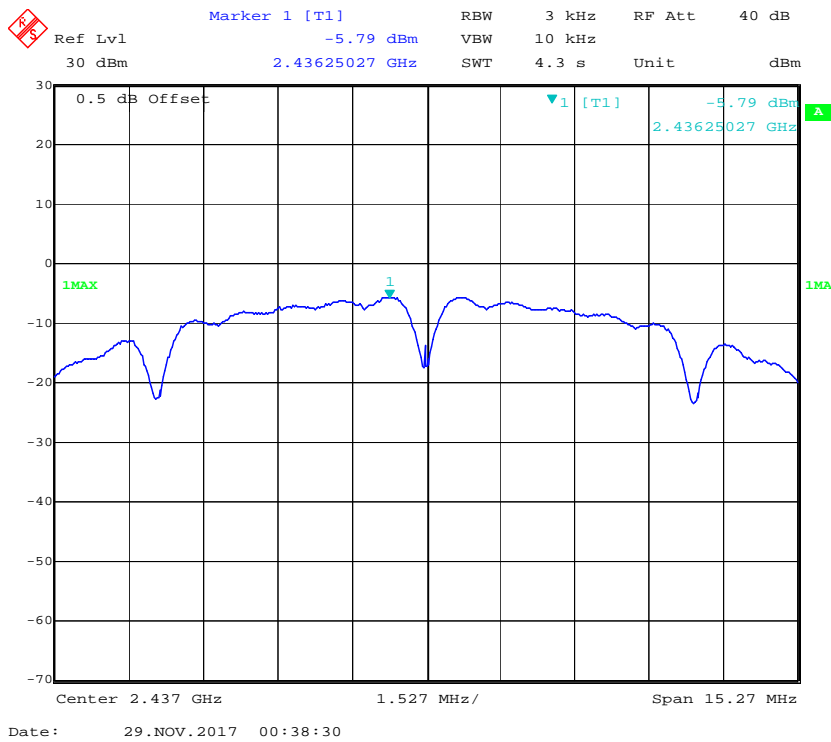


Power Spectral Density, 802.11b, High Channel

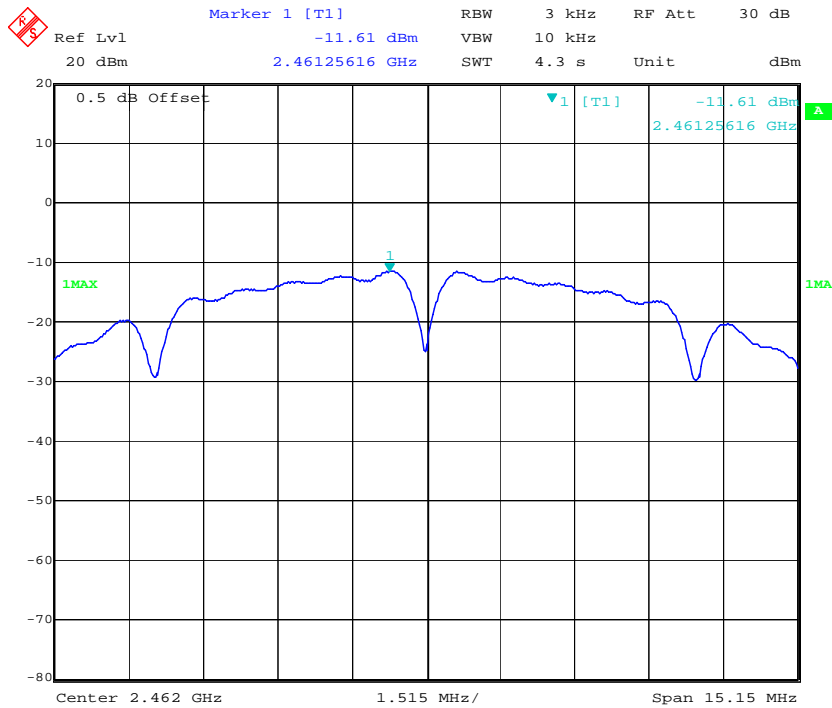


Power Spectral Density, 802.11g, Low Channel

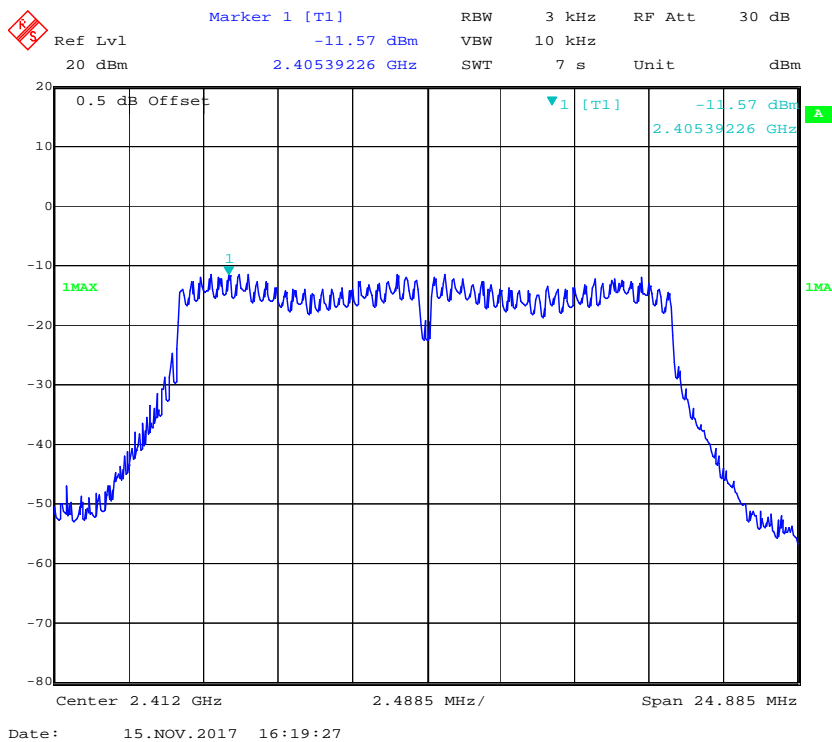


Power Spectral Density, 802.11g, Middle Channel

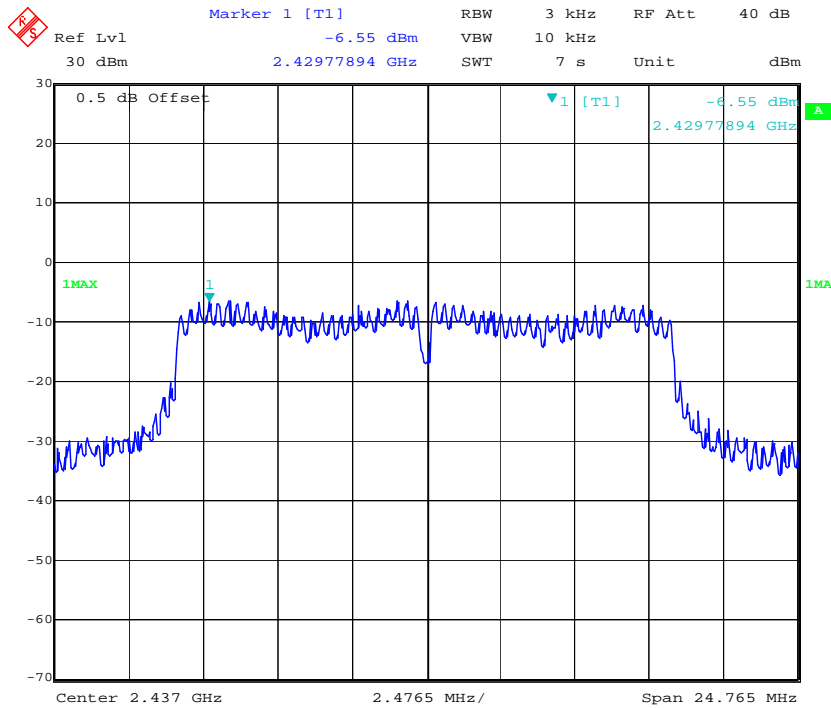


Power Spectral Density, 802.11g, High Channel

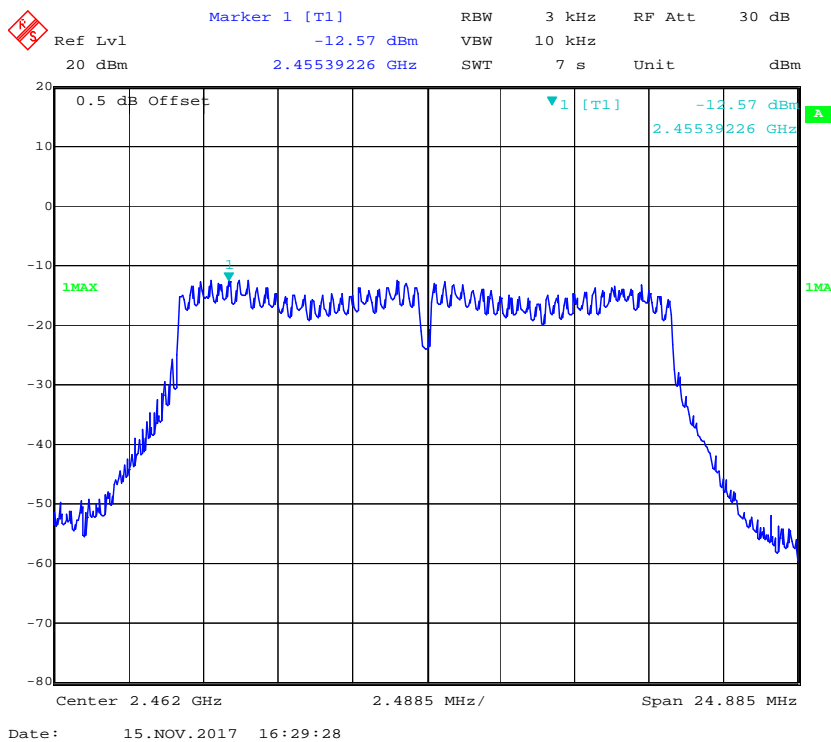


Power Spectral Density, 802.11n ht20, Low Channel

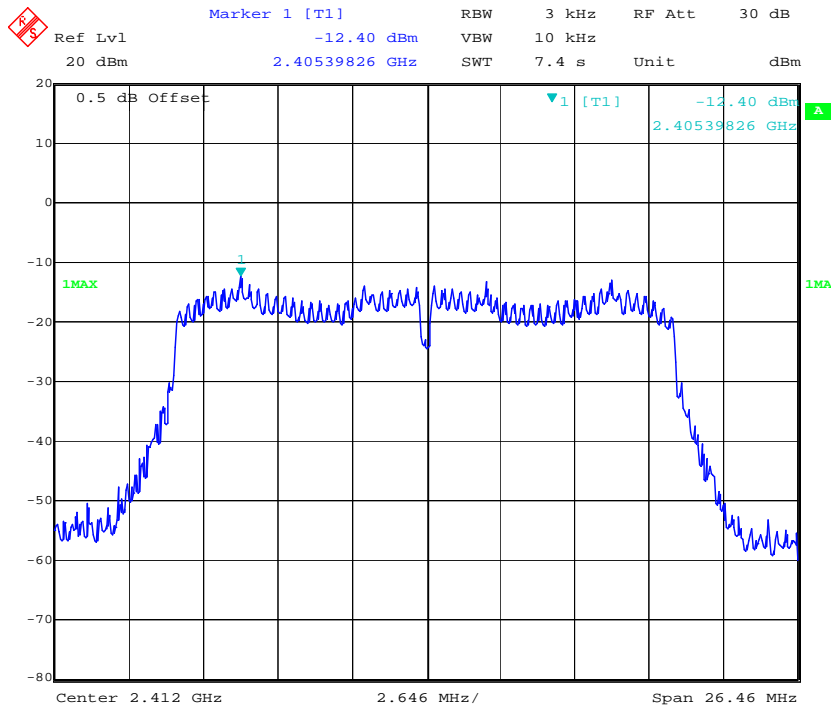


Power Spectral Density, 802.11n ht20, Middle Channel

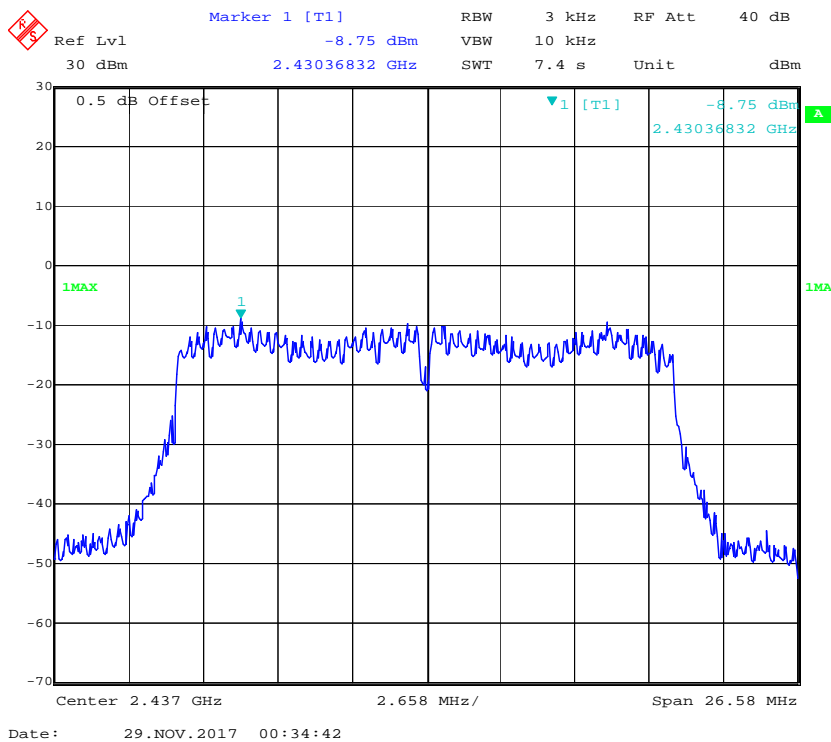


Power Spectral Density, 802.11n ht20, High Channel

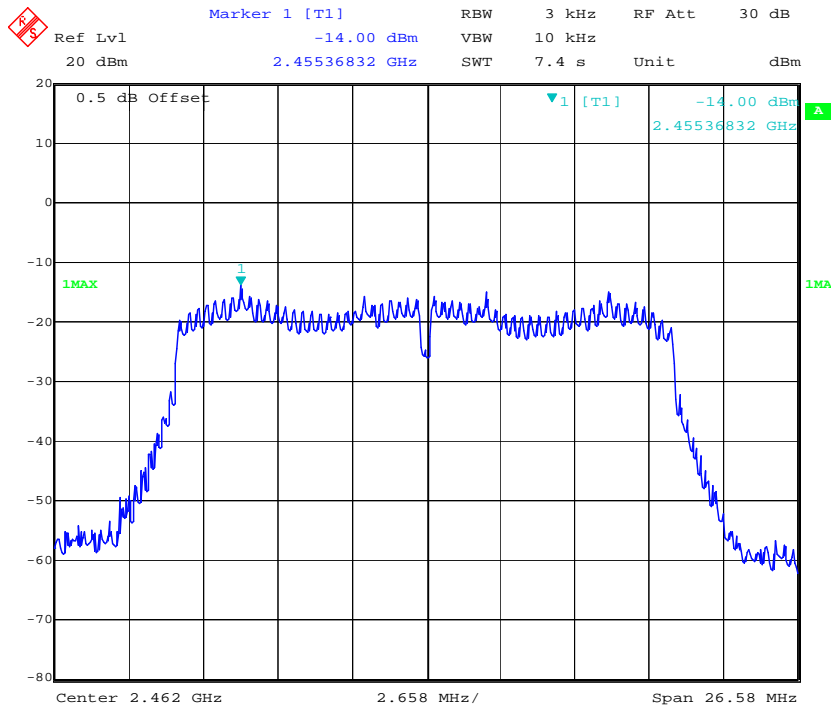


Power Spectral Density, 802.11n ht40 Low Channel

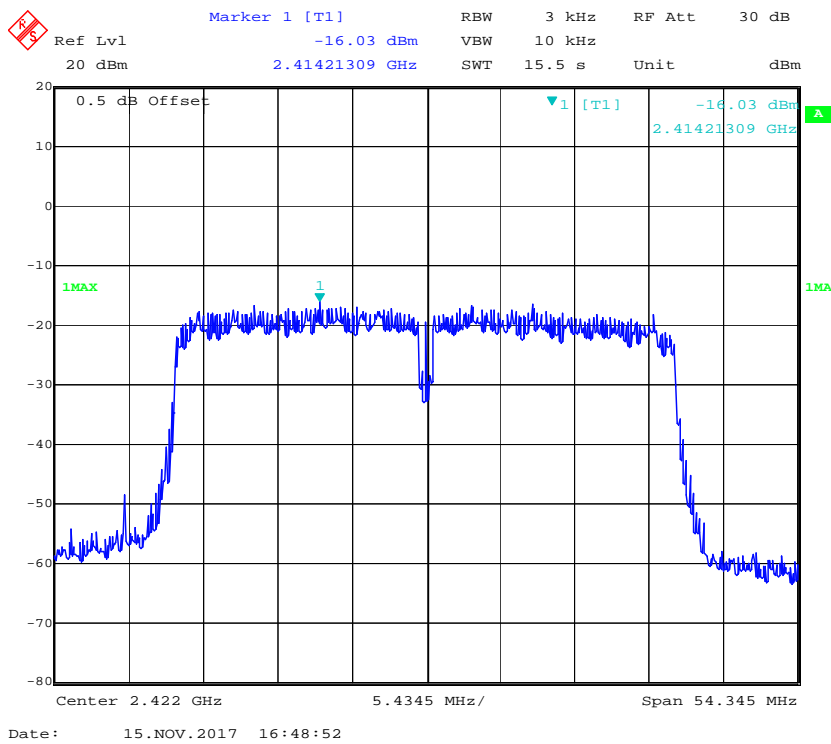

Power Spectral Density, 802.11n ht40 Middle Channel

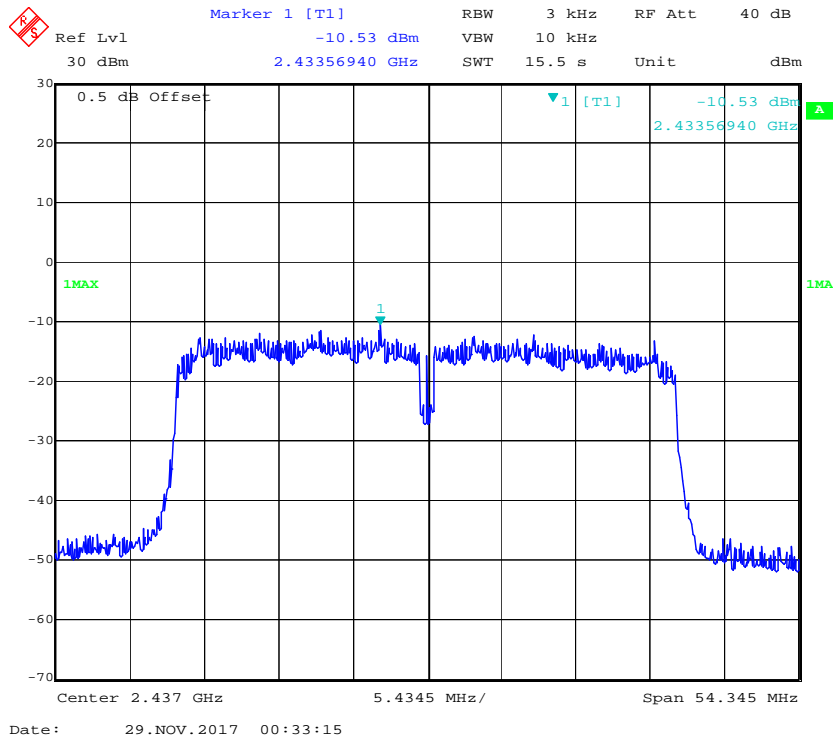


Power Spectral Density, 802.11n ht40 High Channel

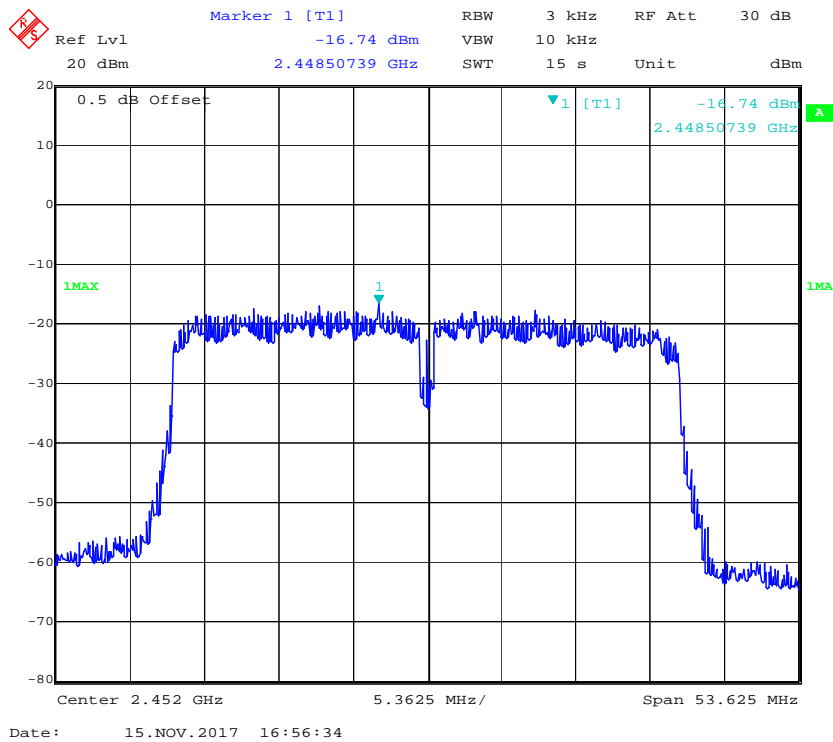


Chain 1:

Power Spectral Density, 802.11b, Low Channel

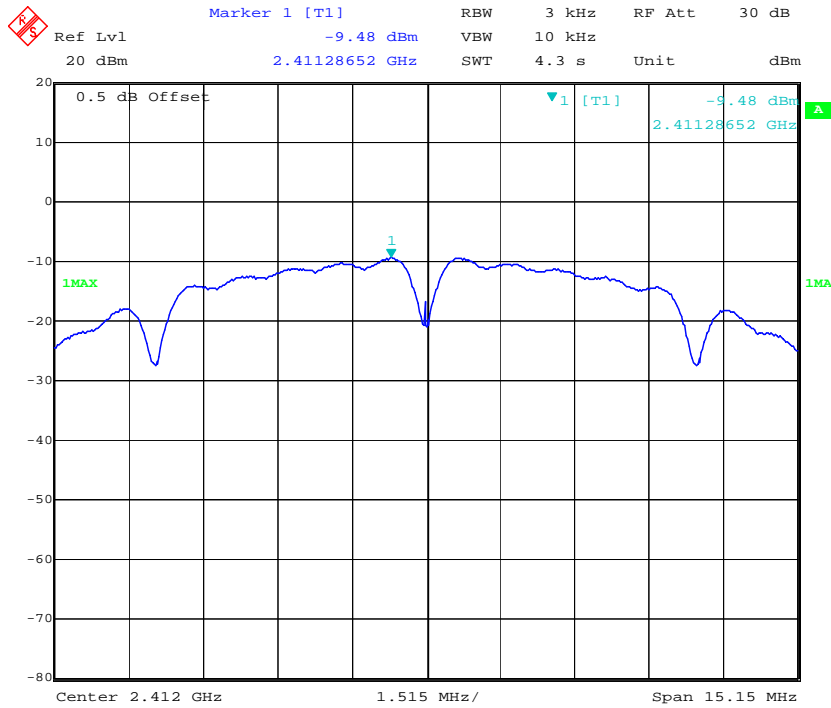


Date: 15.NOV.2017 15:14:14

Power Spectral Density, 802.11b, Middle Channel

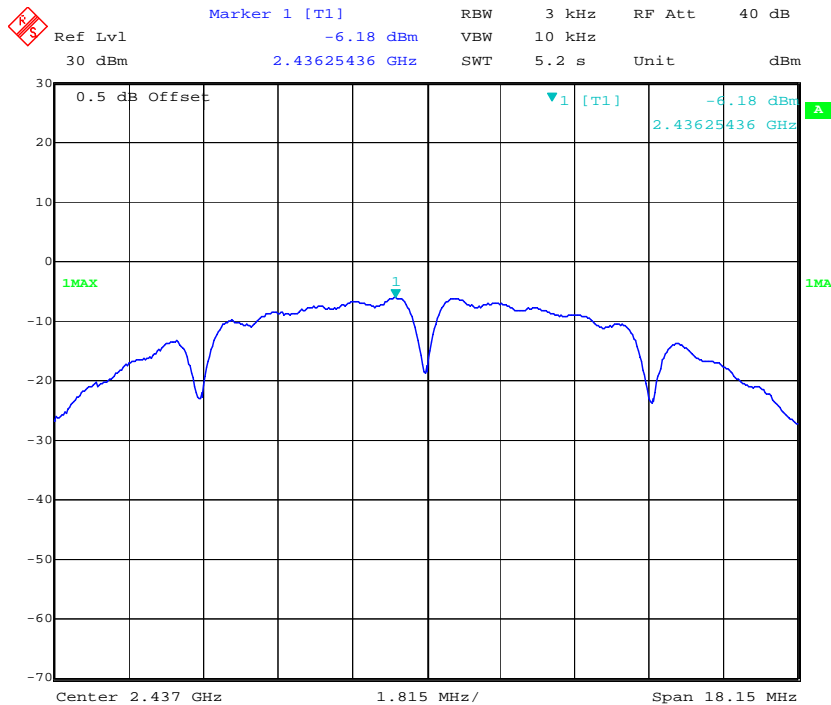


Date: 29.NOV.2017 00:13:02


Power Spectral Density, 802.11b, High Channel

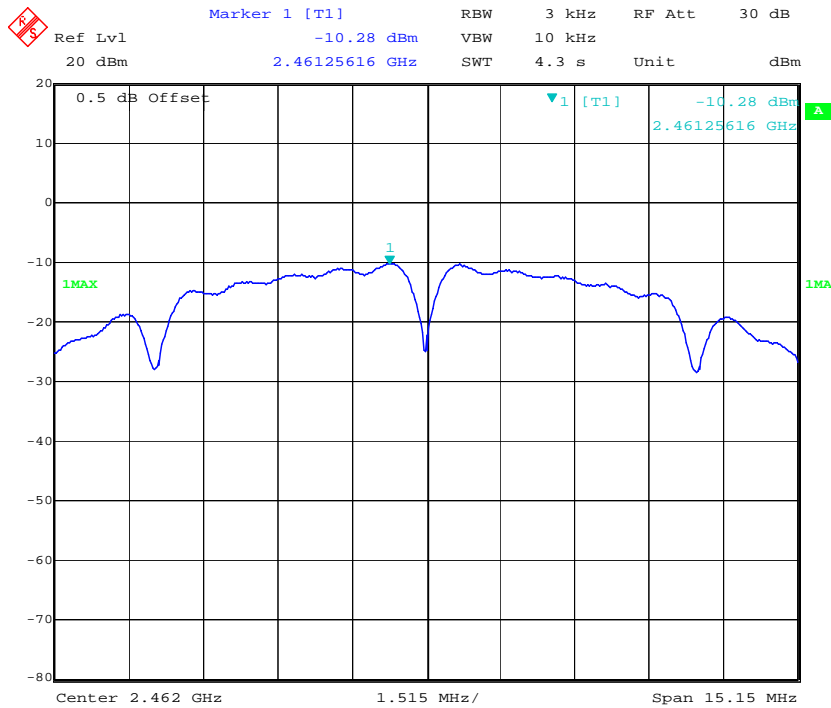


Power Spectral Density, 802.11g, Low Channel

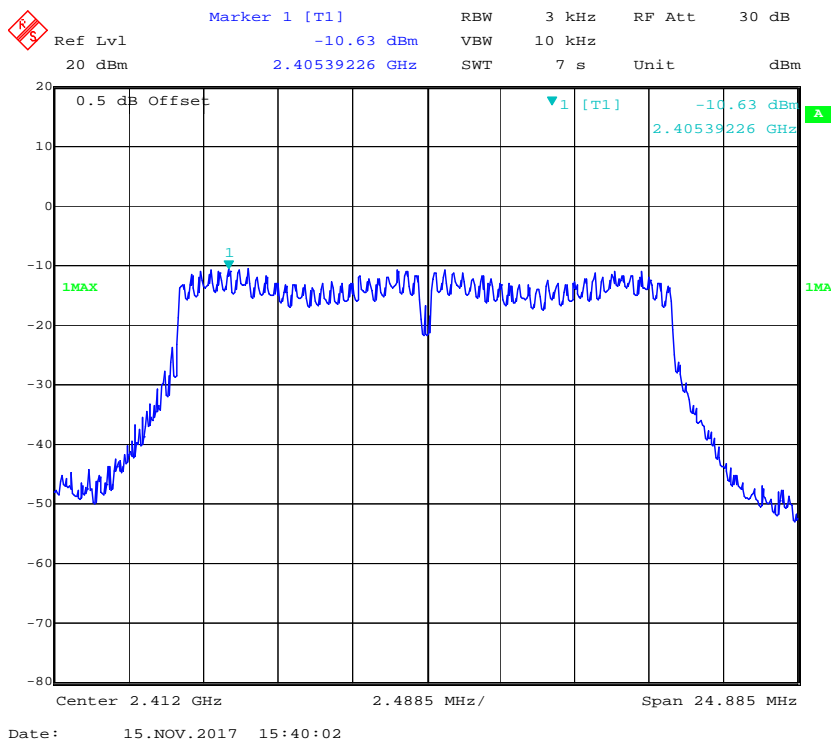


Power Spectral Density, 802.11g, Middle Channel

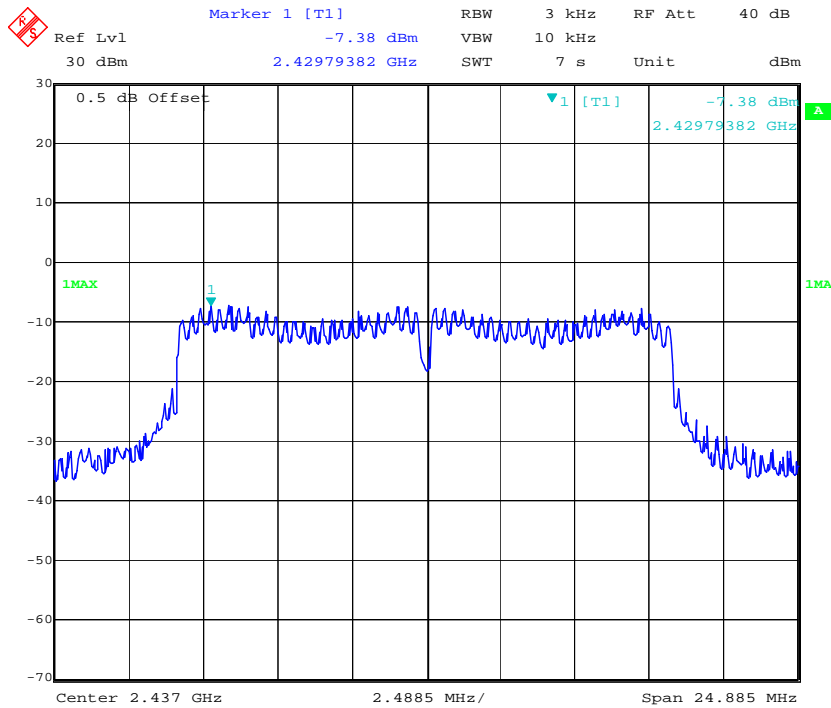


Power Spectral Density, 802.11g, High Channel

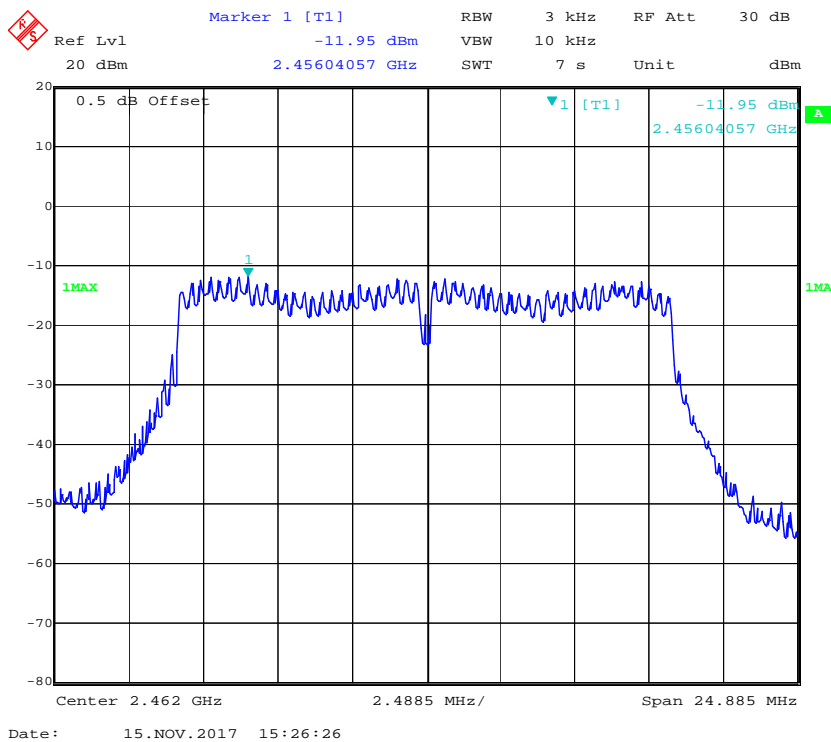


Power Spectral Density, 802.11n ht20, Low Channel

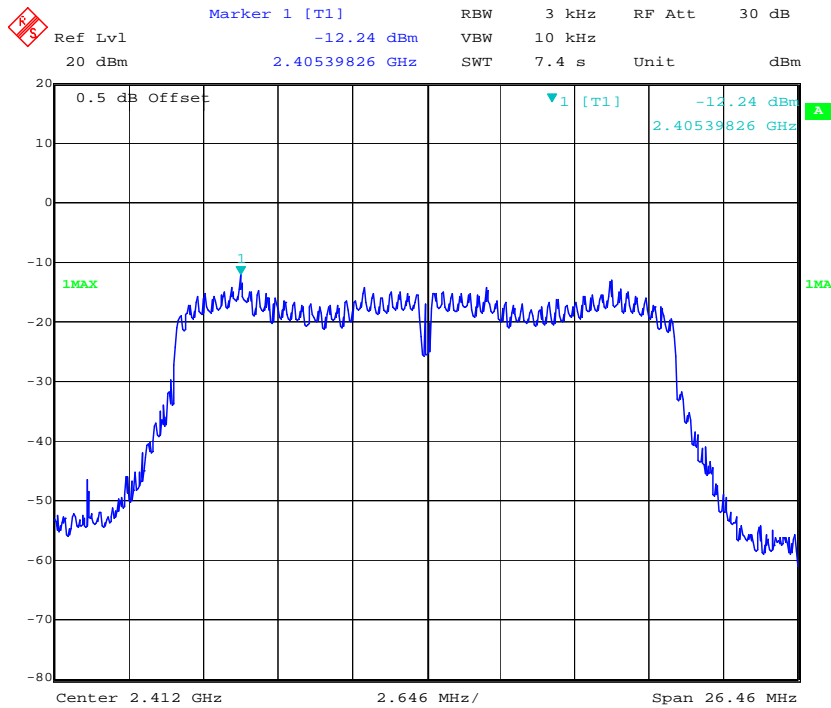

Power Spectral Density, 802.11n ht20, Middle Channel

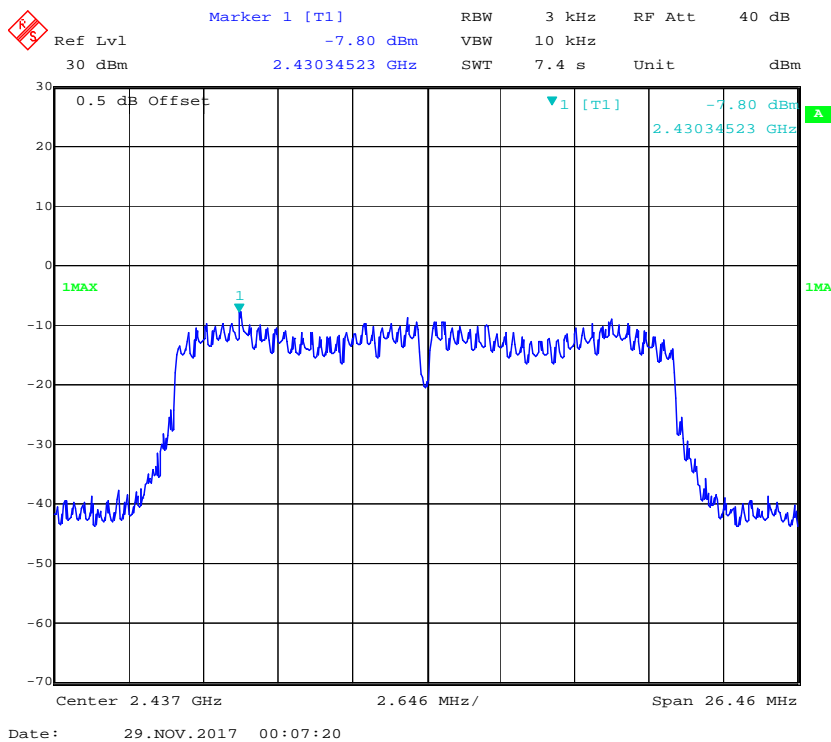


Power Spectral Density, 802.11n ht20, High Channel

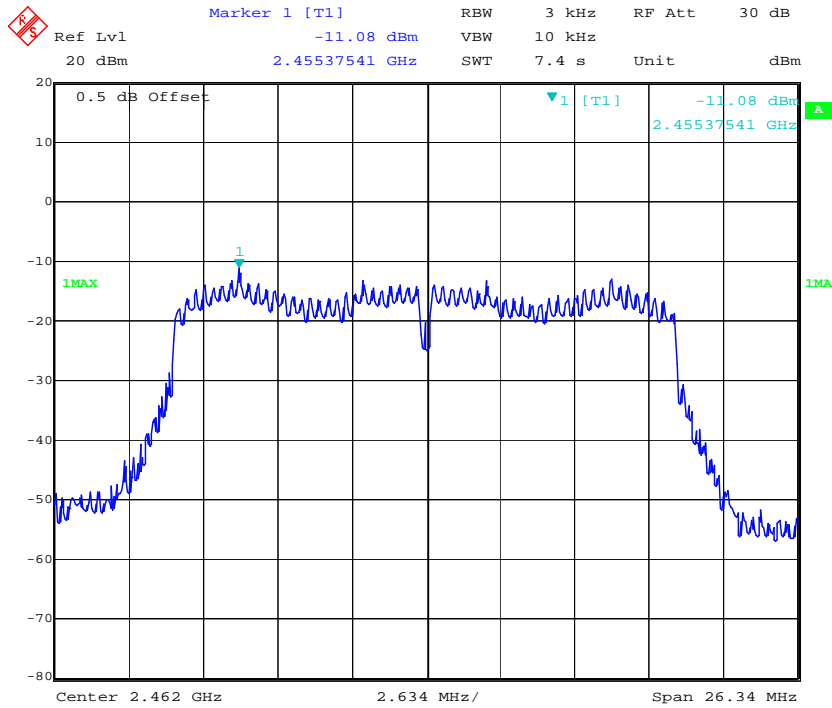


Date: 15.NOV.2017 15:51:09

Power Spectral Density, 802.11n ht40 Low Channel

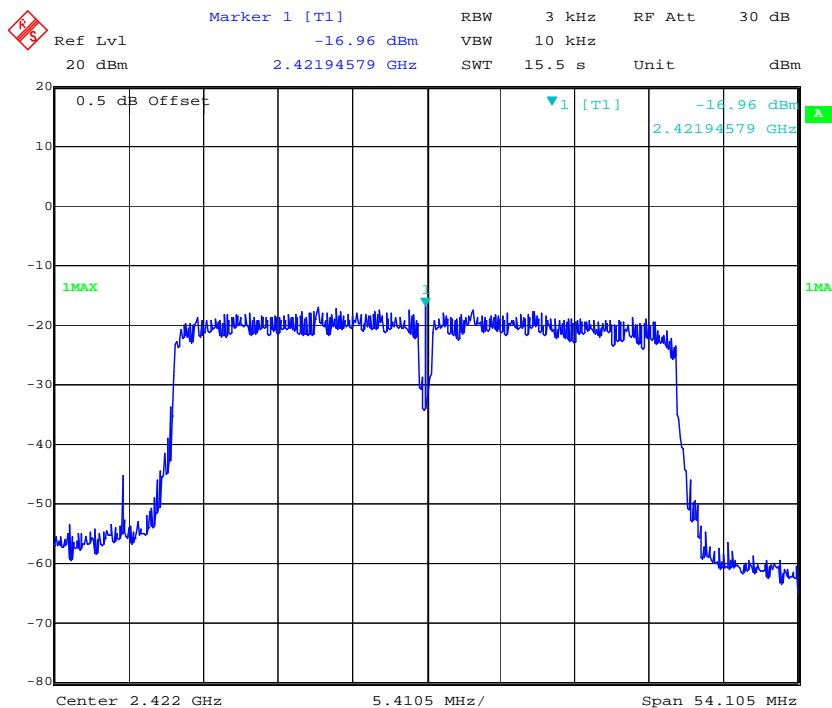


Date: 15.NOV.2017 15:55:42

Power Spectral Density, 802.11n ht40 Middle Channel

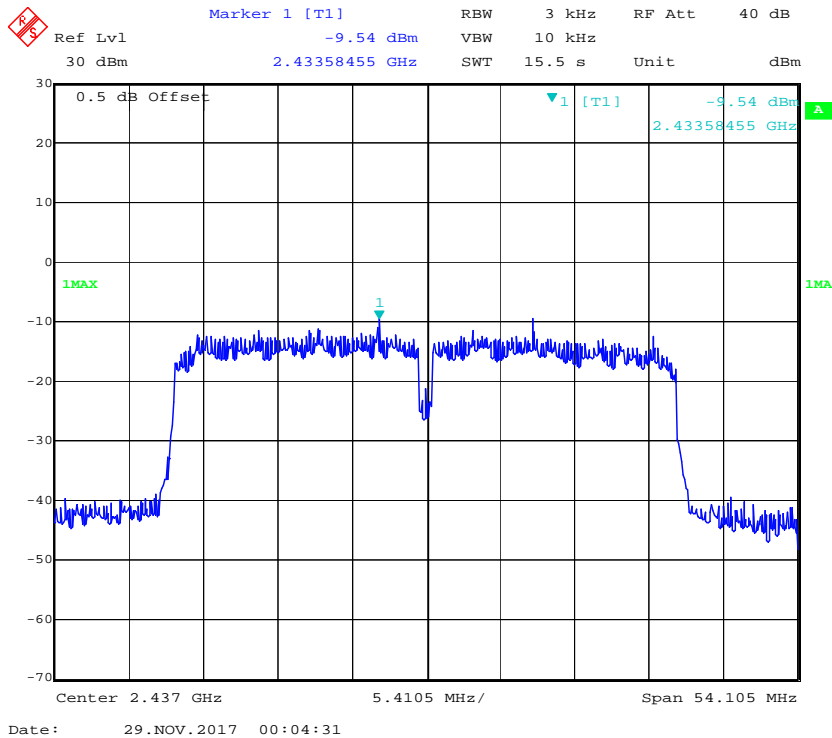

Power Spectral Density, 802.11n ht40 High Channel

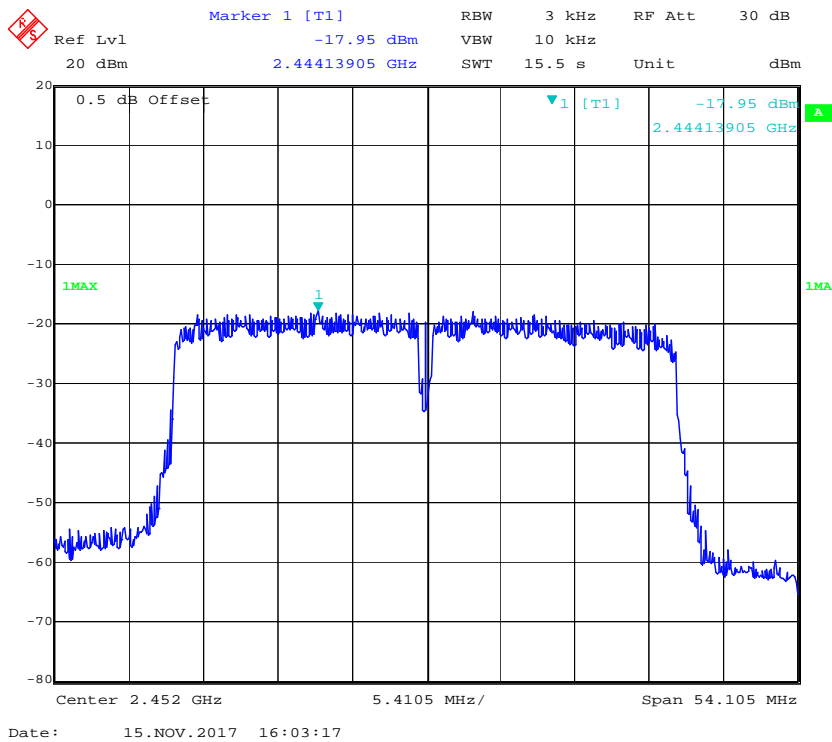

***** END OF REPORT *****