

FCC PART 15.247

TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052

FCC ID: V7TDH301

Report Type: Class II Permissive Change	Product Type: Wireless N300 ADSL2+ High Power Modem Router
Test Engineer: Dean Liu	<i>Dean Liu</i>
Report Number: RDG160310007-00A1	
Report Date: 2016-04-06	
Reviewed By: Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY3

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION5

 DESCRIPTION OF TEST CONFIGURATION5

 EQUIPMENT MODIFICATIONS5

 EUT EXERCISE SOFTWARE5

 SUPPORT EQUIPMENT LIST AND DETAILS6

 EXTERNAL CABLE.....6

 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS8

 APPLICABLE STANDARD8

 MEASUREMENT UNCERTAINTY8

 EUT SETUP8

 EMI TEST RECEIVER SETUP.....9

 TEST PROCEDURE9

 CORRECTED AMPLITUDE & MARGIN CALCULATION9

 TEST EQUIPMENT LIST AND DETAILS.....10

 TEST RESULTS SUMMARY10

 TEST DATA10

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....13

 APPLICABLE STANDARD13

 MEASUREMENT UNCERTAINTY13

 EUT SETUP13

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP14

 TEST PROCEDURE14

 CORRECTED AMPLITUDE & MARGIN CALCULATION14

 TEST EQUIPMENT LIST AND DETAILS.....15

 TEST RESULTS SUMMARY15

 TEST DATA15

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RDG150206005-00	Original Report	2015-02-15
1	RDG160310007-00A1	Class II Permissive Change	2016-04-06

Note: This is an amended report based on the original report RDG150206005-00 issued on 2015-02-15, the detailed differences between the original device and the current one were as below:

1. Added one adapter.

The changes between the original device and the current one are stated and guaranteed by the applicant, the differences between them will affect the test results of Conducted Emission and Spurious Emissions in below 1GHz, we will update the relevant test result, the test photos and EUT photos.

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SHENZHEN TENDA TECHNOLOGY CO.,LTD.* 's product, model number: *DH301 (FCC ID:V7TDH301)* or ("EUT") in this report is a *Wireless N300 ADSL2+ High Power Modem Router*, which was measured approximately: 19.3 cm (L) x19.3 cm (W) x 4.4 cm (H), rated input voltage: DC 12V from adapter.

Adapter Information:

MODEL: BN050-A18012U

INPUT: 100-240V ~ 50/60Hz 0.6A

OUTPUT: DC 12V 1.5A

** All measurement and test data in this report was gathered from production sample serial number: 160310007 (Assigned by BACL, Dongguan). The EUT was received on 2016-03-11.*

Objective

This report is prepared on behalf of *SHENZHEN TENDA TECHNOLOGY CO.,LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Original submission with FCC ID: V7TDH301 which is granted on 2015-03-05.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer. For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with Channel 1, 6 and 11. For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software “MP Kit” was used for testing, which was provided by manufacturer. The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Test Mode	Test Software Version	MP Kit		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting	70	70	70
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting Chain0	70	70	70
	Power Level Setting Chain1	67	67	67
802.11n ht20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting Chain0	55	55	55
	Power Level Setting Chain1	55	55	55
802.11n ht40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting Chain0	50	50	50
	Power Level Setting Chain1	50	50	50


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	10	EUT	Laptop

Block Diagram of Test Setup

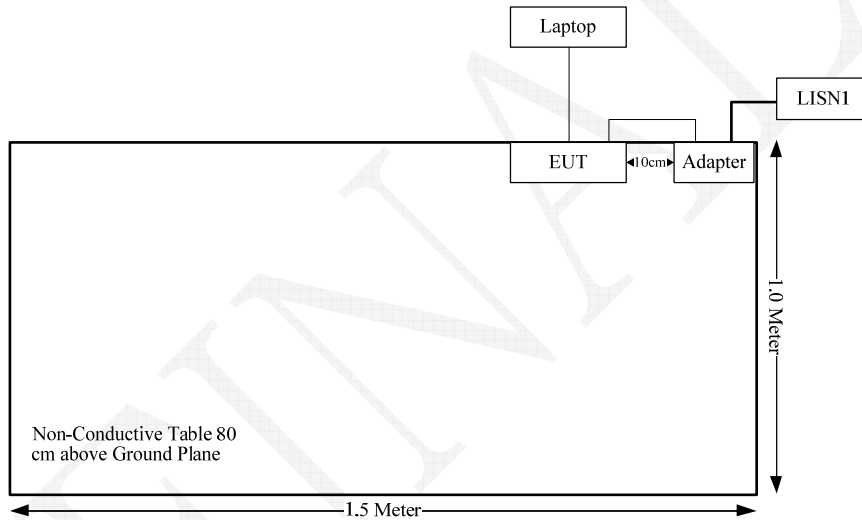

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance*
§15.203	Antenna Requirement	Compliance*
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance*
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance**
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance*
§15.247(b)(3)	Maximum conducted output power	Compliance*
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance*
§15.247(e)	Power Spectral Density	Compliance*

Compliance*: Please refer to the report number RDG150206005-00 granted on 2015-03-05, with FCC ID: V7TDH301.

Compliance**: Spurious Emission above 1 GHz, please refer to the report number RDG150206005-00 granted on 2015-03-05, with FCC ID: V7TDH301.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

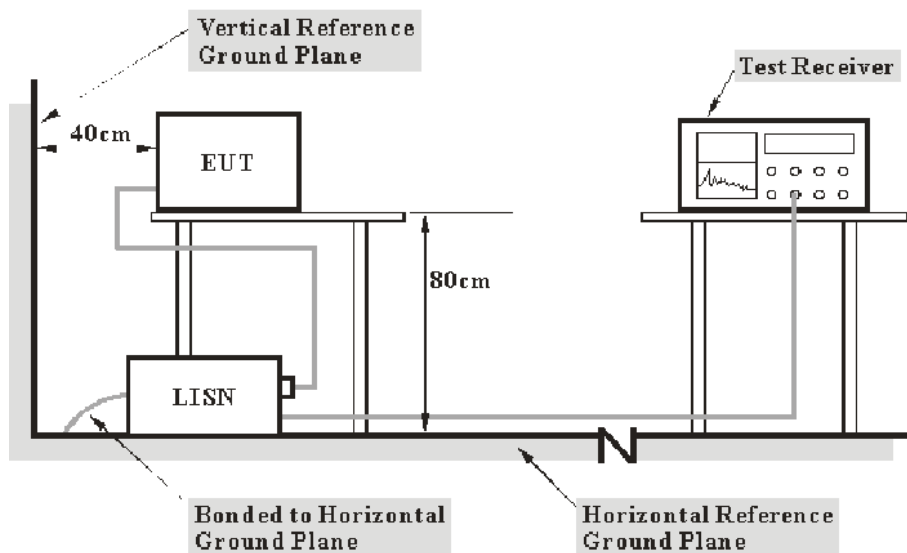

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-12-10	2016-12-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

8.9 dB at 0.406123 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	21.4 °C
Relative Humidity:	51 %
ATM Pressure:	101.4 kPa

The testing was performed by Dean Liu on 2016-03-14.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

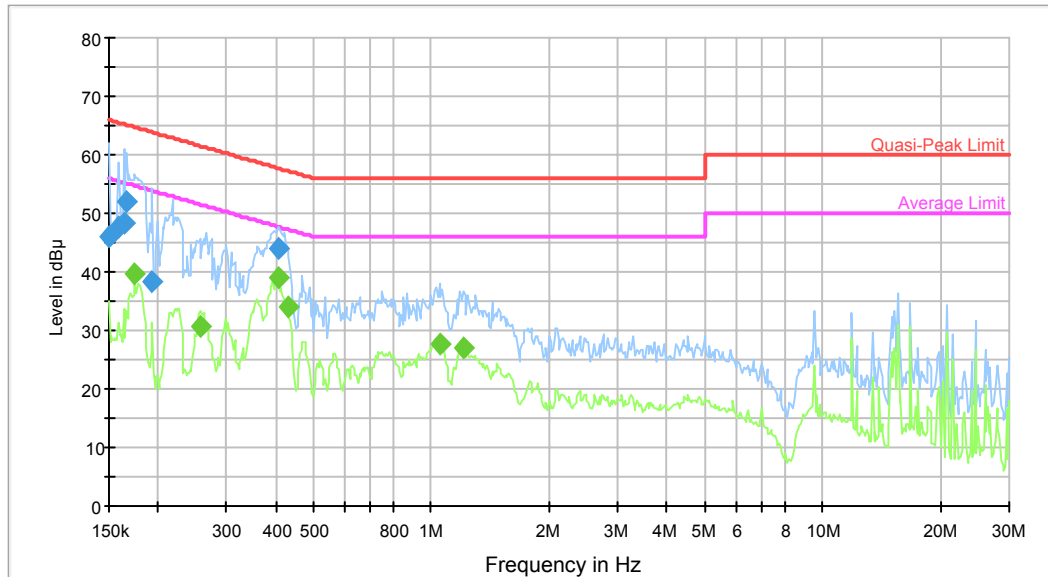

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	46.1	9.000	L1	9.8	19.9	66.0	Compliance
0.158604	47.6	9.000	L1	9.7	17.9	65.5	Compliance
0.163741	48.4	9.000	L1	9.7	16.9	65.3	Compliance
0.166371	52.0	9.000	L1	9.7	13.1	65.1	Compliance
0.193566	38.5	9.000	L1	9.7	25.4	63.9	Compliance
0.406123	44.0	9.000	L1	9.8	13.7	57.7	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174519	39.7	9.000	L1	9.7	15.0	54.7	Compliance
0.257874	30.6	9.000	L1	9.7	20.9	51.5	Compliance
0.406123	38.8	9.000	L1	9.8	8.9	47.7	Compliance
0.432855	34.1	9.000	L1	9.8	13.1	47.2	Compliance
1.048242	27.7	9.000	L1	9.8	18.3	46.0	Compliance
1.209904	27.0	9.000	L1	9.8	19.0	46.0	Compliance

AC120 V, 60 Hz, Neutral:

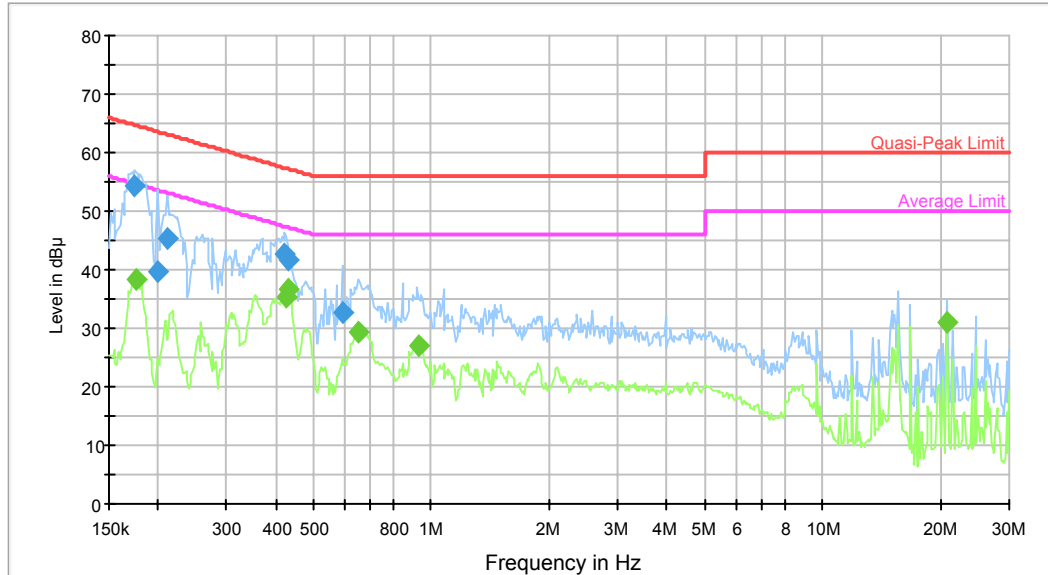

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.174519	54.2	9.000	N	9.7	10.5	64.7	Compliance
0.199835	39.7	9.000	N	9.7	23.9	63.6	Compliance
0.211298	45.4	9.000	N	9.7	17.8	63.2	Compliance
0.422630	42.8	9.000	N	9.7	14.6	57.4	Compliance
0.432855	41.6	9.000	N	9.7	15.6	57.2	Compliance
0.590613	32.5	9.000	N	9.7	23.5	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.175915	38.2	9.000	N	9.7	16.5	54.7	Compliance
0.426011	35.3	9.000	N	9.7	12.0	47.3	Compliance
0.432855	36.8	9.000	N	9.7	10.4	47.2	Compliance
0.649874	29.3	9.000	N	9.7	16.7	46.0	Compliance
0.930151	26.9	9.000	N	9.8	19.1	46.0	Compliance
20.804674	31.1	9.000	N	10.1	18.9	50.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}

Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

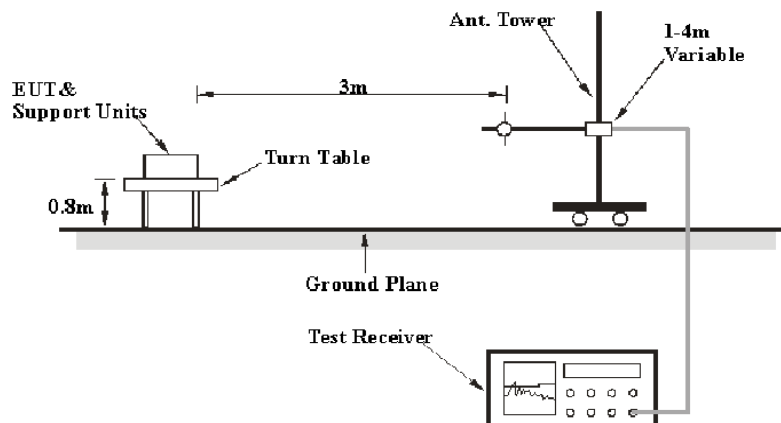

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

3.60 dB at 63.9500 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	20.5°C
Relative Humidity:	72 %
ATM Pressure:	101.4 kPa

The testing was performed by Dean Liu on 2016-03-14.


Test Mode: Transmitting

Test mode: Transmitting

AC 120V/60Hz


Below 1GHz

Horizontal

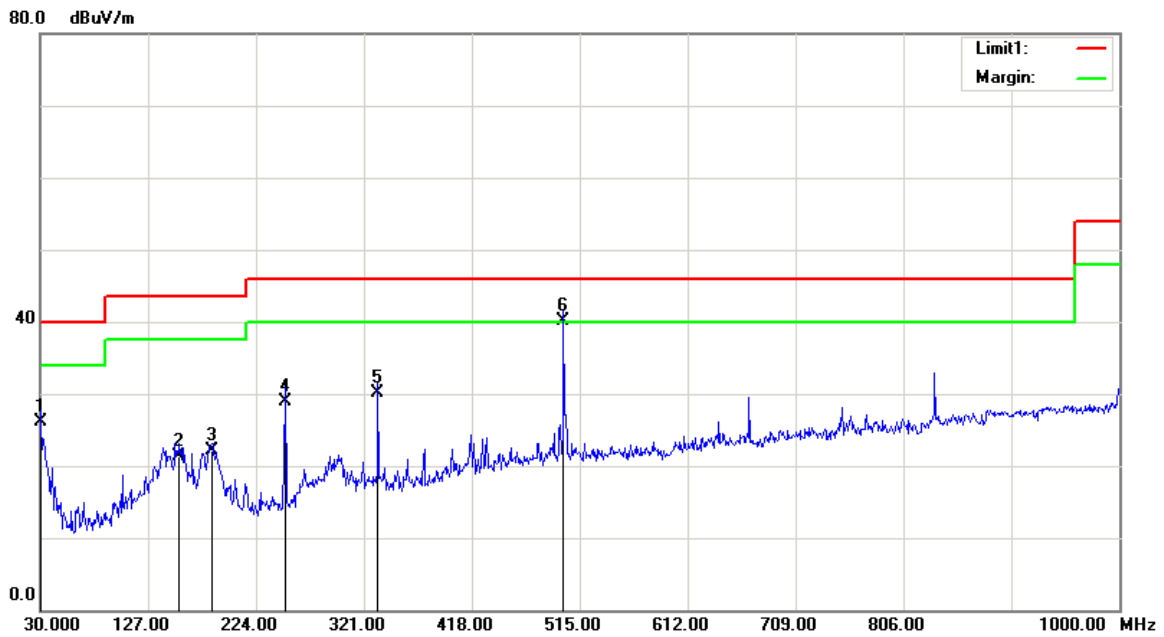

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	22.72	QP	3.38	26.10	40.00	13.90
155.1300	28.70	QP	-7.30	21.40	43.50	22.10
184.2300	30.74	QP	-8.54	22.20	43.50	21.30
250.1900	36.86	QP	-7.96	28.90	46.00	17.10
333.6100	35.56	QP	-5.36	30.20	46.00	15.80
500.4500	41.70	QP	-1.60	40.10	46.00	5.90

Vertical

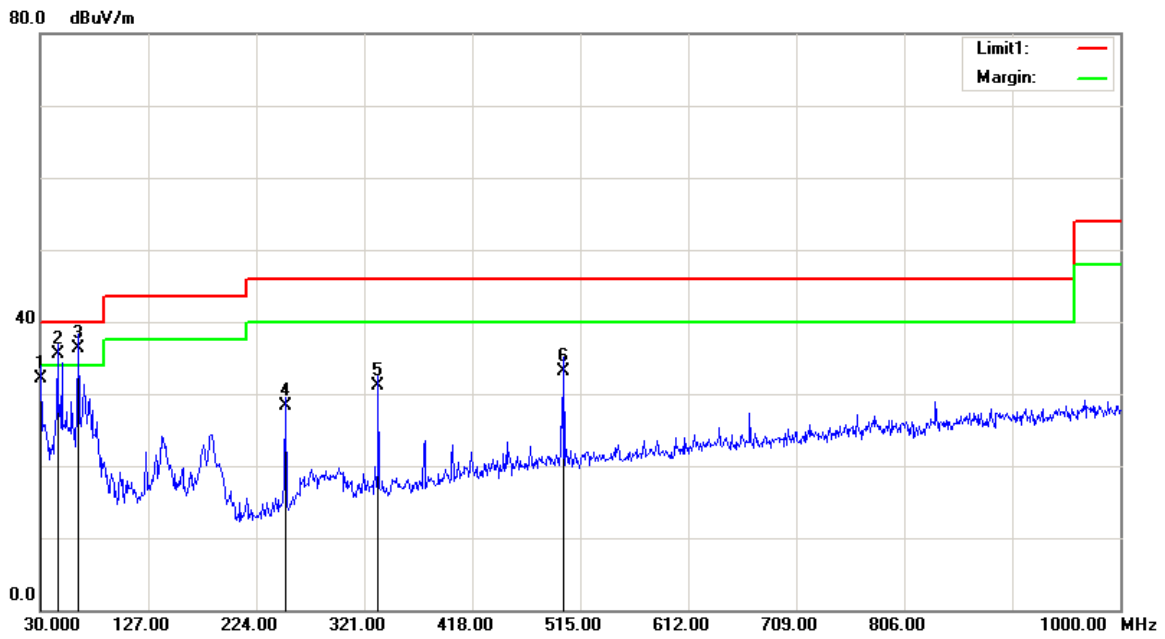

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	28.82	QP	3.38	32.20	40.00	7.80
45.5200	45.71	QP	-10.21	35.50	40.00	4.50
63.9500	48.72	QP	-12.32	36.40	40.00	3.60
250.1900	36.26	QP	-7.96	28.30	46.00	17.70
333.6100	36.46	QP	-5.36	31.10	46.00	14.90
500.4500	34.80	QP	-1.60	33.20	46.00	12.80

******* END OF REPORT *******