



FCC Radio Test Report

FCC ID: V7TF3-16

This report concerns (chec	k one): ⊠Original Grant
Project No. Equipment Model Name Applicant Address	 : 1702C180 : Wireless N300 Easy Setup Router : F3 : SHENZHEN TENDA TECHNOLOGY CO.,LTD : 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
Date of Receipt Date of Test Issued Date Tested by	: Feb. 24, 2017 : Feb. 24, 2017 ~ Mar. 13, 2017 : Mar. 16, 2017 : BTL Inc.
Testing Engineer	: Shawn Xino
Technical Manage	er : <u>Pavid Mao</u> (David Mao)
Authorized Signa	(Steven Lu)

BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Report No.: BTL-FCCP-1-1702C180 Page 1 of 158





Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no I iability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be us ed by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCCP-1-1702C180 Page 2 of 158





Table of Contents	Page
1. CERTIFICATION	6
	_
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TE	STED 13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE 4.1.3 DEVIATION FROM TEST STANDARD	14 14
4.1.3 DEVIATION FROM TEST STANDARD 4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS 4.2.2 TEST PROCEDURE	16 17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19 19
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
5 . BANDWIDTH TEST	20
5.1 APPLIED PROCEDURES	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD 5.1.3 TEST SETUP	20 20
5.1.4 EUT OPERATION CONDITIONS	20 20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	21





Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT 6.1.1 TEST PROCEDURE 6.1.2 DEVIATION FROM STANDARD 6.1.3 TEST SETUP 6.1.4 EUT OPERATION CONDITIONS 6.1.5 EUT TEST CONDITIONS 6.1.6 TEST RESULTS 7 . ANTENNA CONDUCTED SPURIOUS EMISSION 7.1 APPLIED PROCEDURES / LIMIT 7.1.1 TEST PROCEDURE 7.1.2 DEVIATION FROM STANDARD 7.1.3 TEST SETUP 7.1.4 EUT OPERATION CONDITIONS	Page 21 21 21 21 21 21 22 22 22 22 22 22
7.1.5 EUT TEST CONDITIONS	22
7.1.6 TEST RESULTS	22
8 . POWER SPECTRAL DENSITY TEST	23
8.1 APPLIED PROCEDURES / LIMIT 8.1.1 TEST PROCEDURE 8.1.2 DEVIATION FROM STANDARD 8.1.3 TEST SETUP 8.1.4 EUT OPERATION CONDITIONS 8.1.5 EUT TEST CONDITIONS 8.1.6 TEST RESULTS	23 23 23 23 23 23 23
9 . MEASUREMENT INSTRUMENTS LIST	24
10 . EUT TEST PHOTO	26
ATTACHMENT A - CONDUCTED EMISSION	30
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	33
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	38
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	45
ATTACHMENT E - BANDWIDTH	94
ATTACHMENT F - MAXIMUM PEAK CONDUCTED OUTPUT POWER	103
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	107
ATTACHMENT H - POWER SPECTRAL DENSITY	144

Report No.: BTL-FCCP-1-1702C180 Page 4 of 158





REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1702C180	Original Issue.	Mar. 16, 2017

Report No.: BTL-FCCP-1-1702C180 Page 5 of 158





1. CERTIFICATION

Equipment : Wireless N300 Easy Setup Router

Brand Name : Tenda Model Name : F3

Applicant : SHENZHEN TENDA TECHNOLOGY CO.,LTD Manufacturer : SHENZHEN TENDA TECHNOLOGY CO.,LTD

Address : 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District,

Shenzhen, China. 518052

Date of Test : Feb. 24, 2017 ~ Mar. 15, 2017

Test Sample: Engineering Sample

Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1702C180) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCCP-1-1702C180 Page 6 of 158





2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s) Section	Test Item	Judgment	Remark	
15.207	Conducted Emission	PASS		
15.247(d)	Antenna conducted Spurious Emission	PASS		
15.247(a)(2)	6dB Bandwidth	PASS		
15.247(b)(3)	Peak Output Power	PASS		
15.247(e)	Power Spectral Density	PASS		
15.203	Antenna Requirement	PASS		
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS		

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

Report No.: BTL-FCCP-1-1702C180 Page 7 of 158





2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)			
		9KHz~30MHz	V	3.79			
		9KHz~30MHz	Ι	3.57			
		30MHz ~ 200MHz	V	3.82			
		30MHz ~ 200MHz	Ι	3.78			
DG-CB03	CISPR	200MHz ~ 1,000MHz	V	4.10			
DG-CB03	CISPR	200MHz ~ 1,000MHz	Н	4.06			
		1GHz~18GHz	V	3.12			
				1GHz~18GHz	Н	3.68	
		18GHz~40GHz	Н	4.14			

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.





3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless N300 Easy Setup Router		
Brand Name	Tenda		
Model Name	F3		
Model Difference	N/A		
	Operation Frequency	2412~2462 MHz	
Product Description	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM	
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps	
	Output Power (Max.)	802.11b: 26.16dBm 802.11g: 27.96dBm 802.11n(20MHz): 29.81dBm 802.11n(40MHz): 29.62dBm	
Power Source	DC Voltage supplied from AC/DC adapter. Model: BN049-A05009U		
Power Rating	I/P: 100-240Vac, 50/60Hz, 0.3A O/P: 9Vdc, 600mA		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

	CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)						
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01 241	2	04 242	7	07	2442	10 245	7
02 241	7	05 243	2	80	2447	11	2462
03 242	2	06 243	7	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1 N/	A	N/A	Dipole	N/A	5	TX
2 N/	A	N/A	Dipole	N/A	5	TX
3 N/	A	N/A	Dipole	N/A	5	RX

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R).

Report No.: BTL-FCCP-1-1702C180 Page 9 of 158





3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the c onsideration of following EUT operation mode or test configuration mode which possible have effect on E MI emission level. Each of these E UT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test		
Final Test Mode	Description	
Mode 5	TX MODE	

For Radiated Test		
Final Test Mode	Description	
Mode 1	TX B MODE CHANNEL 01/06/11	
Mode 2	TX G MODE CHANNEL 01/06/11	
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11	
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09	

For Band Edge Test			
Final Test Mode Description			
Mode 1	TX B MODE CHANNEL 01/06/11		
Mode 2	TX G MODE CHANNEL 01/06/11		
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11		
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09		

Report No.: BTL-FCCP-1-1702C180 Page 10 of 158





6dB Spectrum Bandwidth			
Final Test Mode Description			
Mode 1	TX B MODE CHANNEL 01/06/11		
Mode 2	TX G MODE CHANNEL 01/06/11		
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11		
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09		

Maximum Conducted Output Power			
Final Test Mode Description			
Mode 1	TX B MODE CHANNEL 01/06/11		
Mode 2	TX G MODE CHANNEL 01/06/11		
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11		
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09		

Power Spectral Density			
Final Test Mode Description			
Mode 1	TX B MODE CHANNEL 01/06/11		
Mode 2	TX G MODE CHANNEL 01/06/11		
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11		
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09		

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
 - 802.11g mode: OFDM (6Mbps)
 - 802.11n HT20 mode: BPSK (13Mbps) 802.11n HT40 mode: BPSK (27Mbps)

 - For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

Report No.: BTL-FCCP-1-1702C180 Page 11 of 158





3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN


Test software version	MP TOOL		
Frequency (MHz)	2412	2437	2462
802.11b	52	52	51
802.11g	43	60	46
802.11n (20MHz)	(41,41)	(43,45)	(48,45)
Frequency	2422	2437	2452
802.11n (40MHz)	(39,39)	(48,48)	(39,39)

Report No.: BTL-FCCP-1-1702C180 Page 12 of 158





3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

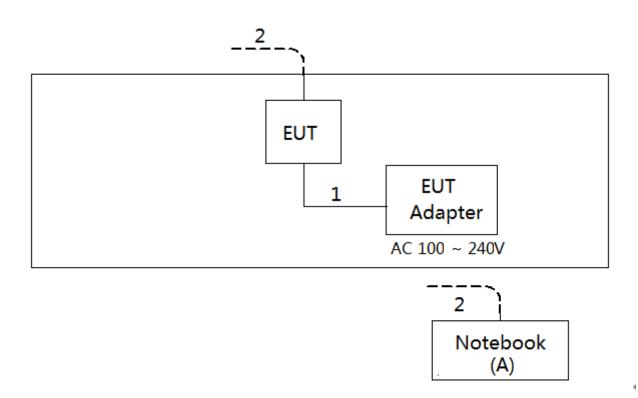

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
Α	Notebook	Lenovo	INSPIRON 1420-	DOC	JX193A01SDC2

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	DC Cable
2	NO	NO	10m	RJ-45 Cable

Report No.: BTL-FCCP-1-1702C180 Page 13 of 158





4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Fraguency of Emission (MHz)	Conducted Limit (dBµV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 -0.50	66 to 56*	56 to 46*	
0.50 -5.0	56	46	
5.0 -30.0	60	50	

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use) Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting	
Attenuation	10 dB	
Start Frequency	0.15 MHz	
Stop Frequency	30 MHz	
IF Bandwidth	9 KHz	

4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.1.3 DEVIATION FROM TEST STANDARD

No deviation





4.1.4 TEST SETUP

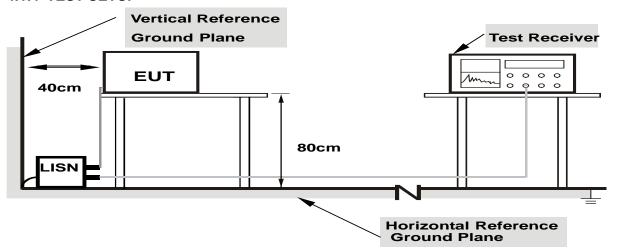

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.





4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
Frequency (Miriz)	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) Margin Level = Measurement Value - Limit Value





Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW	1MHz / 3MHz for Peak,
(Emission in restricted band)	1MHz / 1/T for Average

Receiver Parameter	Setting		
Attenuation	Auto		
Start ~ Stop Frequency 9KHz~90KHz for PK/AVG detector			
Start ~ Stop Frequency	90KHz~110KHz for QP detector		
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector		
Start ~ Stop Frequency	490KHz~30MHz for QP detector		
Start ~ Stop Frequency	30MHz~1000MHz for QP detector		

4.2.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


Report No.: BTL-FCCP-1-1702C180 Page 17 of 158






4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

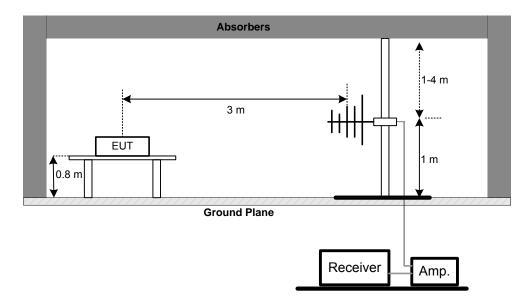

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

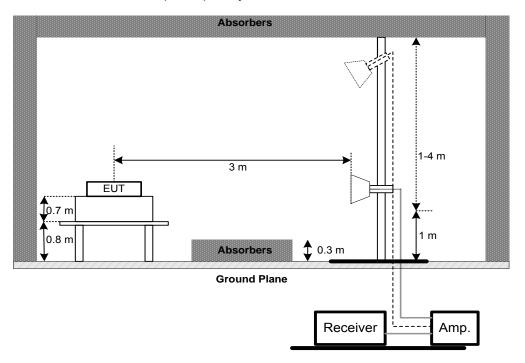


Report No.: BTL-FCCP-1-1702C180 Page 18 of 158





(C) For Radiated Emissions Below 30MHz

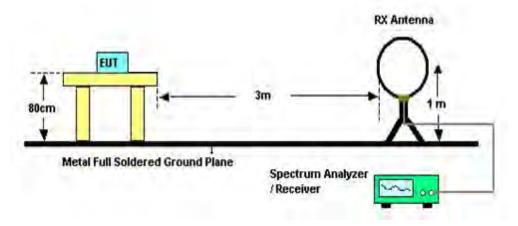

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Report No.: BTL-FCCP-1-1702C180 Page 19 of 158





5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C					
Section Test Item Frequency Range (MHz) Result					
15.247(a)(2) Bandwidth 2400-2483.5 PASS					

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

Report No.: BTL-FCCP-1-1702C180 Page 20 of 158





6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS	

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance and FC C KDB 662911 D01 Multiple Transmitter Output.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

EUT	Power Meter
	, c., c. Meter

6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

Report No.: BTL-FCCP-1-1702C180 Page 21 of 158





7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

Report No.: BTL-FCCP-1-1702C180 Page 22 of 158





8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section Test Item Limit Frequency Range (MHz) Result					
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS	

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

Report No.: BTL-FCCP-1-1702C180 Page 23 of 158





9. MEASUREMENT INSTRUMENTS LIST

	Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017	
2	LISN	R&S	ENV216	101447	Mar. 27, 2017	
3	Test Cable	emci	RG223(9KHz -30MHz)	C_17	Mar. 10, 2017	
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017	
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017	
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1 -01	N/A	N/A	

	Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017	
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017	
3	Receiver	Agilent	N9038A	MY5213003 9	Sep. 04, 2017	
4	Cable	emci	LMR-400(30MH z-1GHz)(8m+5m)	N/A	Jun. 27, 2017	
5	Controller	СТ	SC100	N/A	N/A	
6	Controller	MF	MF-7802	MF78020841 6	N/A	
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	
8	Amplifier	Agilent	8449B	3008A02274	Mar. 10, 2017	
9	Receiver	Agilent	N9038A	MY5213003 9	Sep. 04, 2017	
10	Antenna	EM	EM-6876-1	230	Jul. 08, 2017	
11	Controller	СТ	SC100	N/A	N/A	
12	Controller	MF	MF-7802	MF78020841 6	N/A	
13	Cable	emci	EMC104-SM-S M-12000(12m)	N/A	Jul. 06, 2017	

Report No.: BTL-FCCP-1-1702C180 Page 24 of 158





	6dB Bandwidth Measurement					
Item	Item Kind of Equipment Manufacturer Type No. Serial No. Calibrated until					
1	Spectrum Analyzer	R&S	FSP40	100185	Sep. 04, 2017	

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	ANRITSU	ML2495A	1128009	Apr. 26, 2017
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Apr. 26, 2017

	Antenna Conducted Spurious Emission Measurement					
Item	Item Kind of Equipment Manufacturer Type No. Serial No. Calibrated until					
1	1 Spectrum Analyzer R&S FSP40 100185 Sep. 04, 2017					

	Power Spectral Density Measurement									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until					
1	Spectrum Analyzer	R&S	FSP40	100185	Sep. 04, 2017					

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

Report No.: BTL-FCCP-1-1702C180 Page 25 of 158





10. EUT TEST PHOTO







Report No.: BTL-FCCP-1-1702C180 Page 26 of 158





Radiated Measurement Photos







Report No.: BTL-FCCP-1-1702C180 Page 27 of 158





Radiated Measurement Photos








Report No.: BTL-FCCP-1-1702C180 Page 28 of 158





Radiated Measurement Photos

Above 1000MHz

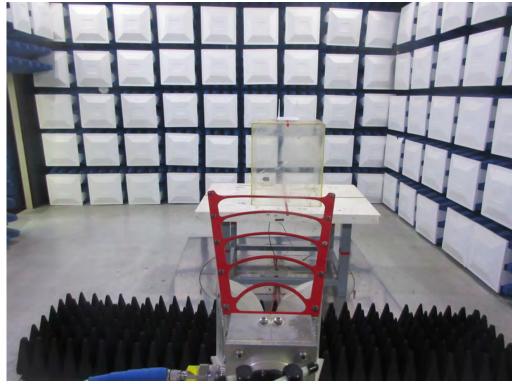



Report No.: BTL-FCCP-1-1702C180 Page 29 of 158





p	The state of the s
l	
I	ATTACHMENT A CONDUCTED EMICCION
I	ATTACHMENT A - CONDUCTED EMISSION
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
١	
١	
l	
١	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
l	
I	
١	
١	
١	
١	
I	
١	
١	
١	
I	
I	
١	
١	
١	
I	
١	
١	
١	
١	
I	
۱	


Report No.: BTL-FCCP-1-1702C180 Page 30 of 158





Test Mode : TX Mode

Line

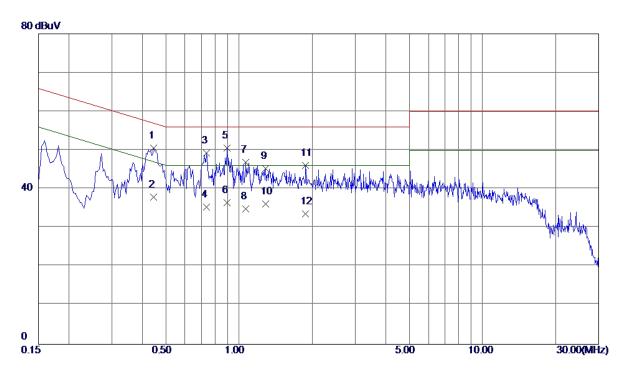

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0. 4470	40. 96	9. 63	50. 59	56. 93	-6. 34	Peak	
2	0. 4470	28. 31	9. 63	37. 94	46. 93	-8. 99	AVG	
3	0. 7350	39. 56	9. 75	49. 31	56.00	-6. 69	Peak	
4	0. 7350	25. 59	9. 75	35. 34	46.00	-10. 66	AVG	
5 *	0.8925	40.66	9. 83	50. 49	56.00	-5. 51	Peak	
6	0.8925	26. 70	9. 83	36. 53	46.00	-9. 47	AVG	
7	1.0680	37. 01	9. 84	46. 85	56.00	-9. 15	Peak	
8	1.0680	25. 00	9. 84	34. 84	46.00	-11. 16	AVG	
9	1. 2839	35. 35	9. 89	45. 24	56.00	-10. 76	Peak	
10	1. 2839	26. 33	9. 89	36. 22	46.00	-9. 78	AVG	_
11	1.8780	36. 05	10. 00	46. 05	56.00	-9. 95	Peak	
12	1.8780	23. 65	10. 00	33. 65	46.00	-12. 35	AVG	


Report No.: BTL-FCCP-1-1702C180 Page 31 of 158





Test Mode: TX Mode

Neutral

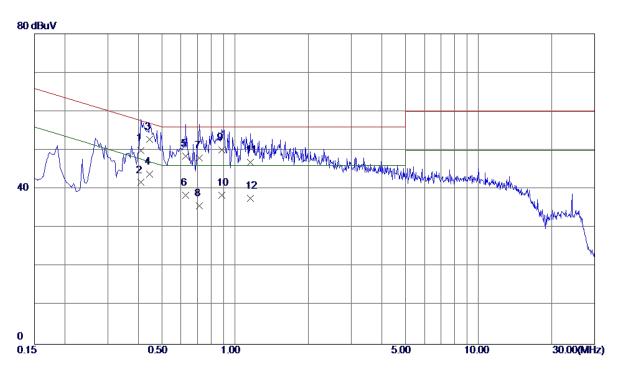

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.4110	40. 40	9. 48	49. 88	57. 63	-7. 75	QP	
2	0. 4110	32. 20	9. 48	41. 68	47. 63	−5. 95	AVG	
3	0. 4470	43. 30	9. 49	52. 79	56. 93	-4. 14	QP	
4 *	0. 4470	34. 40	9. 49	43. 89	46. 93	-3. 04	AVG	
5	0.6270	39. 00	9. 50	48. 50	56. 00	−7. 50	QP	
6	0.6270	28. 90	9. 50	38. 40	46.00	-7. 60	AVG	
7	0.7125	38. 50	9. 52	48. 02	56.00	-7. 98	QP	
8	0.7125	26. 20	9. 52	35. 72	46.00	-10. 28	AVG	
9	0.8835	40. 30	9. 71	50. 01	56. 00	-5. 99	QP	
10	0.8835	28. 70	9. 71	38. 41	46.00	-7. 59	AVG	
11	1. 1580	37. 20	9. 75	46. 95	56. 00	-9. 05	QP	
12	1. 1580	27. 80	9. 75	37. 55	46. 00	-8. 45	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 32 of 158





ATTACHMENT B - RADIATED EMISSION (9KHZ TO	30MHZ)


Report No.: BTL-FCCP-1-1702C180 Page 33 of 158





Test Mode: TX B MODE CHANNEL 01

Ant 0°

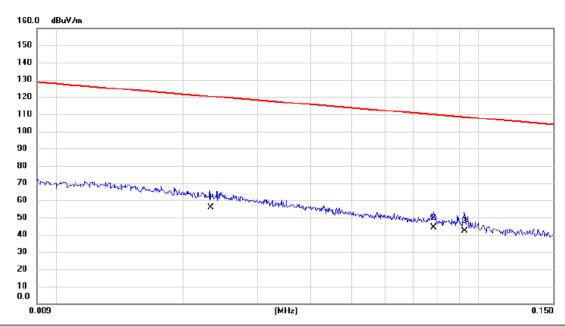

No. Mk.	Freq.	Reading Level	Correct Factor	Measure ment	- Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.023	32.77	23.13	55.90	120.30	-64.40	AVG	
2	0.078	24.70	19.39	44.09	109.75	-65.66	AVG	
3	0.092	23.54	18.76	42.30	108.28	-65.98	AVG	


Report No.: BTL-FCCP-1-1702C180 Page 34 of 158





Test Mode: TX B MODE CHANNEL 01

Ant 0°

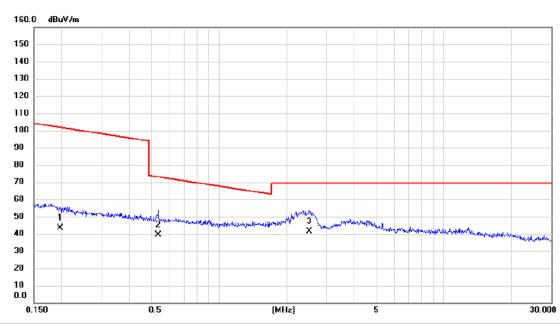

No. Mk.	Freq.		Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.197	24.80	18.69	43.49	101.74	-58.25	AVG	
2	0.535	21.10	18.38	39.48	73.04	-33.56	QP	
3 *	2.513	24.22	17.25	41.47	69.54	-28.07	QP	


Report No.: BTL-FCCP-1-1702C180 Page 35 of 158





Test Mode: TX B MODE CHANNEL 01

Ant 90°

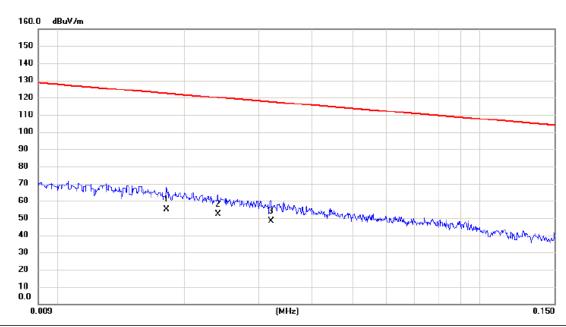


No. Mk.	Freq.		Correct Factor	Measure ment	- Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.018	31.50	23.63	55.13	122.45	-67.32	AVG	
2	0.024	29.10	23.03	52.13	120.00	-67.87	AVG	
3	0.032	26.31	22.04	48.35	117.50	-69.15	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 36 of 158





Ant 90°

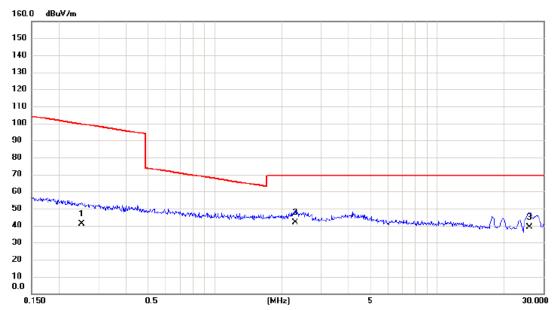

No. Mk.	Freq.	Reading Level		Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.252	22.20	18.65	40.85	99.57	-58.72	AVG	
2 *	2.297	24.30	17.52	41.82	69.54	-27.72	QP	
3	26.001	24.20	14.63	38.83	69.54	-30.71	QP	

Report No.: BTL-FCCP-1-1702C180 Page 37 of 158






ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Report No.: BTL-FCCP-1-1702C180 Page 38 of 158





Vertical

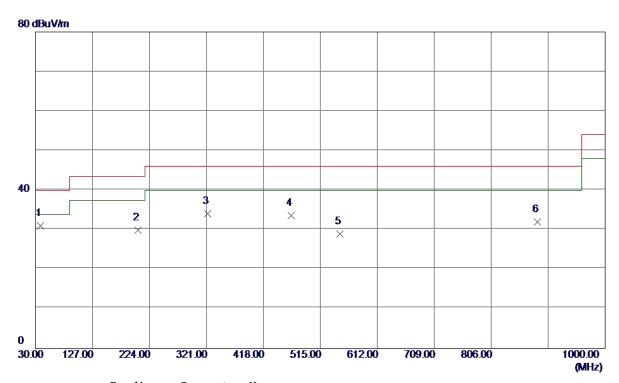


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	38. 7300	45. 16	-14. 06	31. 10	40.00	-8. 90	Peak	
2	204. 6000	44. 49	-14. 53	29. 96	43. 50	-13. 54	Peak	
3	322. 9400	44. 68	-10. 65	34. 03	46.00	-11. 97	Peak	
4	465. 5300	42.07	-8. 53	33. 54	46.00	-12. 46	Peak	
5	547. 9800	33. 70	-4. 75	28. 95	46. 00	-17. 05	Peak	
6	884. 5700	30. 54	1. 44	31. 98	46. 00	-14. 02	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 39 of 158





Horizontal

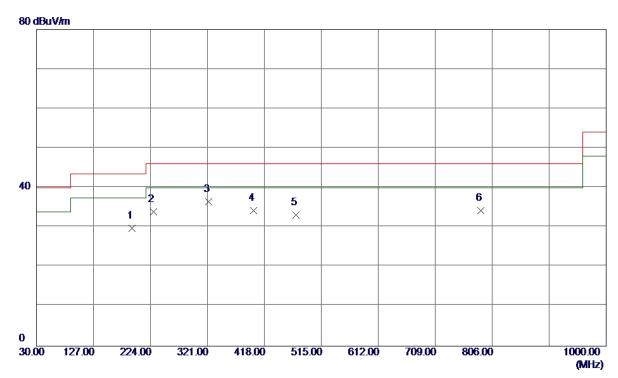


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	192. 9600	43. 84	-14. 08	29. 76	43. 50	-13. 74	Peak	
2	228. 8500	47. 43	-13. 47	33. 96	46.00	-12. 04	Peak	
3 *	322. 9400	47. 09	-10.65	36. 44	46.00	−9. 56	Peak	
4	399. 5700	42. 03	-7. 81	34. 22	46.00	-11. 78	Peak	
5	471. 3500	41.81	-8. 73	33. 08	46.00	-12. 92	Peak	
6	786. 6000	34. 57	-0. 34	34. 23	46. 00	-11. 77	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 40 of 158





Vertical

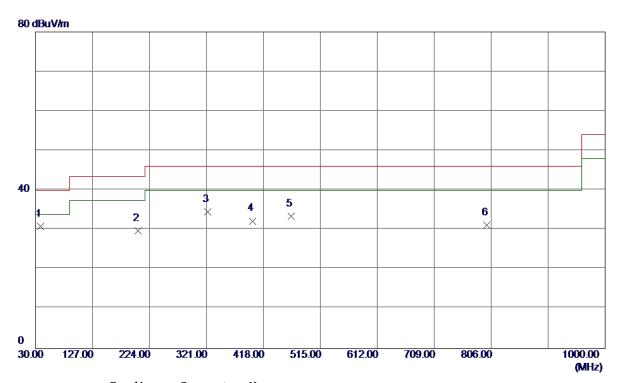


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	38. 7300	44. 94	-14. 06	30. 88	40.00	-9. 12	Peak	
2	204. 6000	44. 24	-14. 53	29. 71	43. 50	-13. 79	Peak	
3	322. 9400	45. 20	-10.65	34. 55	46.00	-11. 45	Peak	
4	399. 5700	40.05	-7. 81	32. 24	46.00	-13. 76	Peak	
5	465. 5300	41. 90	-8. 53	33. 37	46. 00	-12. 63	Peak	
6	798. 2400	31. 01	0. 18	31. 19	46. 00	-14. 81	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 41 of 158





Horizontal

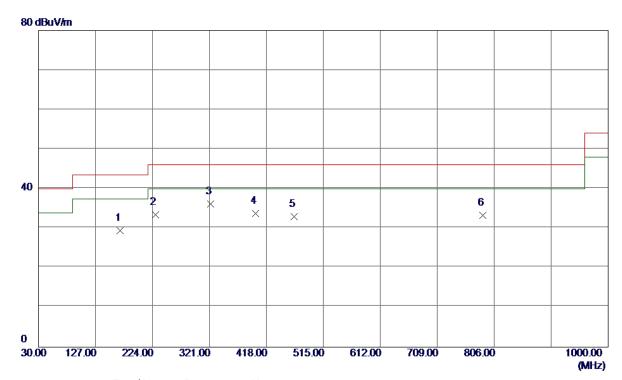


No.	Freq.	Reading Leve1	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	168. 7100	41.61	-12. 23	29. 38	43. 50	-14. 12	Peak	
2	228. 8500	46. 92	-13. 47	33. 45	46.00	-12. 55	Peak	
3 *	322. 9400	46. 78	−10. 65	36. 13	46.00	−9. 87	Peak	
4	399. 5700	41. 51	-7. 81	33. 70	46.00	-12. 30	Peak	
5	465. 5300	41. 54	-8. 53	33. 01	46.00	-12. 99	Peak	
6	786. 6000	33. 68	-0. 34	33. 34	46.00	-12. 66	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 42 of 158





Vertical

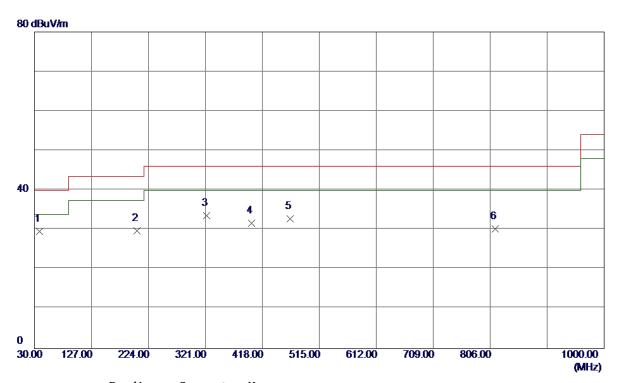


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	38. 7300	43. 73	-14. 06	29. 67	40.00	-10. 33	Peak	
2	204. 6000	44. 26	-14. 53	29. 73	43. 50	-13. 77	Peak	
3	322. 9400	44. 30	-10.65	33. 65	46.00	-12. 35	Peak	
4	399. 5700	39. 54	-7. 81	31. 73	46.00	-14. 27	Peak	
5	465. 5300	41. 35	-8. 53	32. 82	46. 00	-13. 18	Peak	
6	814. 7300	30. 43	-0. 18	30. 25	46.00	-15. 75	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 43 of 158





Horizontal

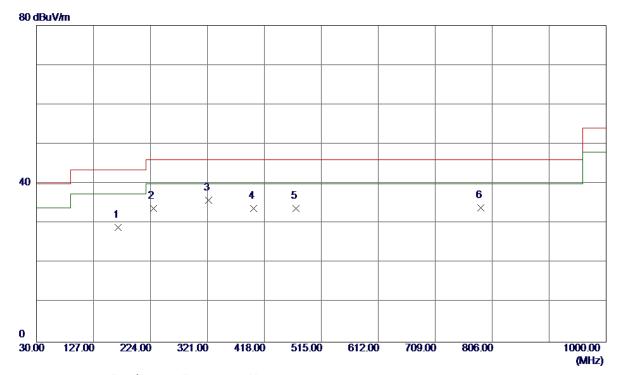

No.	Freq.	Reading Leve1	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	168. 7100	41. 20	-12. 23	28. 97	43. 50	-14. 53	Peak	
2	228. 8500	47. 23	-13. 47	33. 76	46.00	-12. 24	Peak	
3 *	322. 9400	46. 53	-10.65	35. 88	46.00	-10. 12	Peak	
4	399. 5700	41.61	-7. 81	33. 80	46.00	-12. 20	Peak	
5	471. 3500	42. 47	-8. 73	33. 74	46.00	-12. 26	Peak	
6	786. 6000	34. 20	-0. 34	33. 86	46. 00	-12. 14	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 44 of 158






ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Report No.: BTL-FCCP-1-1702C180 Page 45 of 158





Vertical

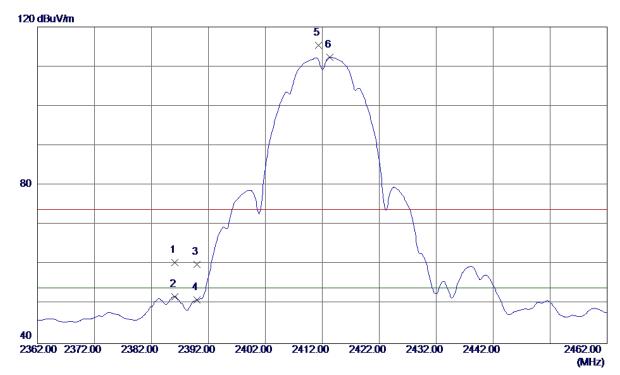


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2386. 1000	27. 55	32. 99	60. 54	74.00	-13. 46	Peak	
2	2386. 1000	18. 89	32. 99	51. 88	54.00	-2. 12	AVG	
3	2390. 0000	26. 99	33. 01	60. 00	74.00	-14.00	Peak	
4	2390. 0000	18. 05	33. 01	51.06	54.00	-2.94	AVG	
5	2411. 3000	82. 19	33. 10	115. 29	74.00	41. 29	Peak	No Limit
6 *	2413. 3000	79. 27	33. 11	112. 38	54. 00	58. 38	AVG	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 46 of 158





Vertical

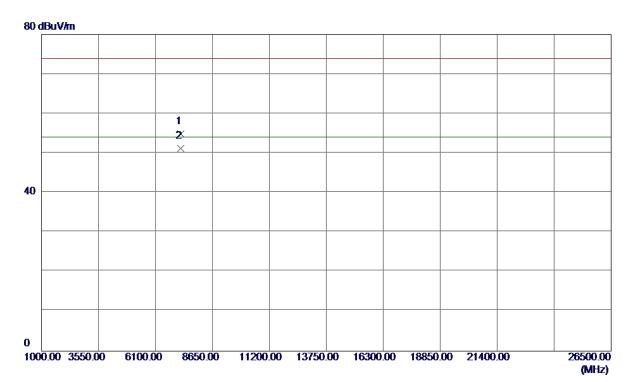


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7236. 9000	46. 05	8. 77	54. 82	74.00	-19. 18	Peak	
2 *	7237. 2000	42. 44	8. 77	51. 21	54. 00	-2. 79	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 47 of 158





Horizontal

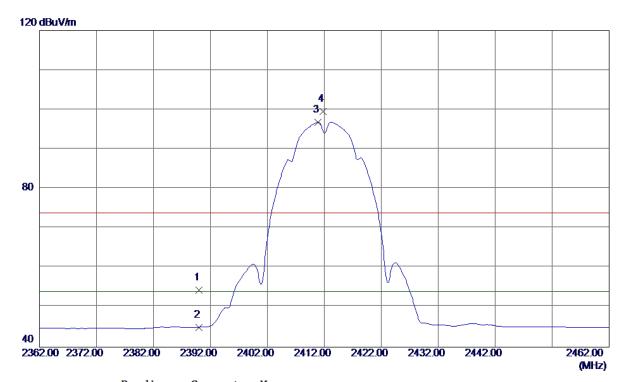


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	21. 43	33. 01	54. 44	74.00	-19. 56	Peak	
2	2390. 0000	12. 02	33. 01	45. 03	54.00	-8. 97	AVG	
3 *	2410. 9000	63. 73	33. 10	96. 83	54.00	42.83	AVG	No Limit
4	2411. 8000	66. 50	33. 10	99. 60	74.00	25. 60	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 48 of 158





Horizontal

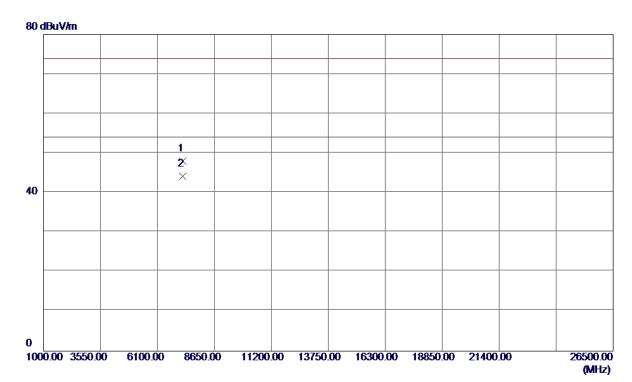


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7236. 9550	39. 23	8. 77	48. 00	74.00	-26. 00	Peak	
2 *	7237. 4000	35. 41	8. 77	44. 18	54. 00	-9. 82	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 49 of 158





Vertical

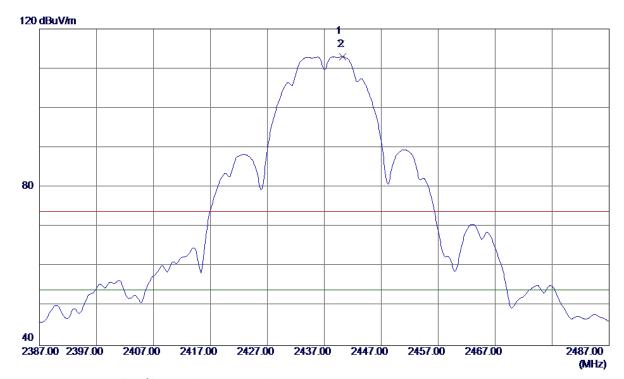


No.	Freq.	Reading Leve1	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2439. 9000	83. 04	33. 22	116. 26	74.00	42. 26	Peak	No Limit
2 *	2440. 2000	79. 73	33. 22	112. 95	54.00	58. 95	AVG	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 50 of 158





Vertical

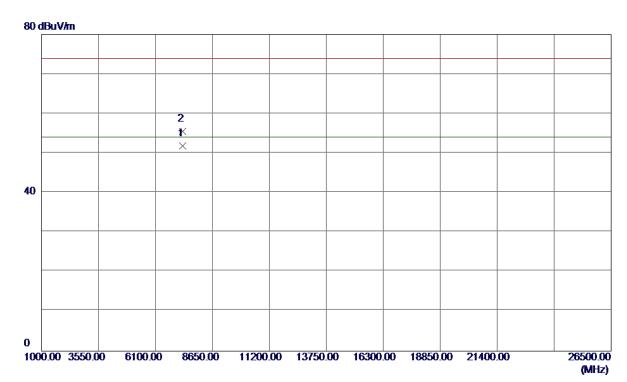


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7310. 1000	42.94	8. 98	51. 92	54.00	-2. 08	AVG	
2	7310. 6500	46. 47	8. 98	55. 45	74. 00	-18. 55	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 51 of 158





Horizontal

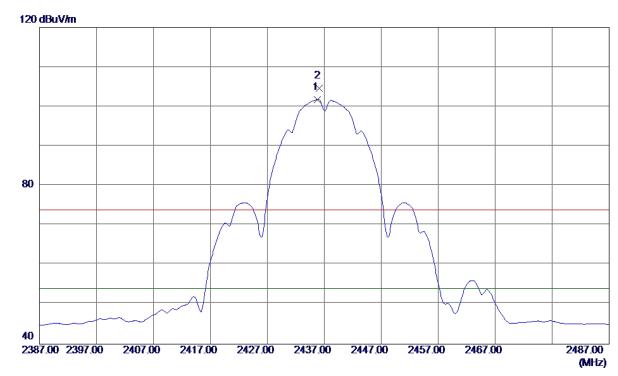


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2435. 8000	68. 63	33. 20	101. 83	54.00	47. 83	AVG	No Limit
2	2436. 1000	71. 39	33. 20	104. 59	74. 00	30. 59	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 52 of 158





Horizontal

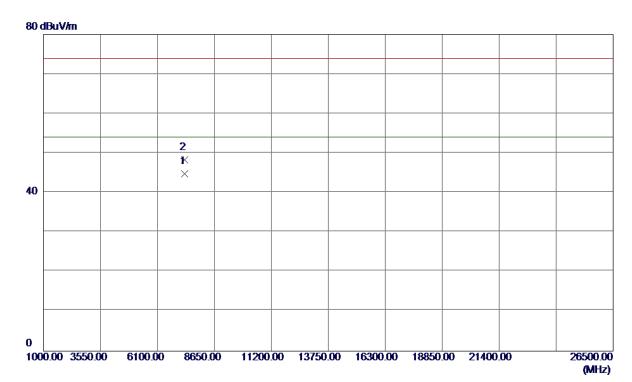


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7310. 3000	35. 78	8. 98	44. 76	54.00	-9. 24	AVG	
2	7310. 8500	39. 26	8. 99	48. 25	74. 00	-25. 75	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 53 of 158





Vertical

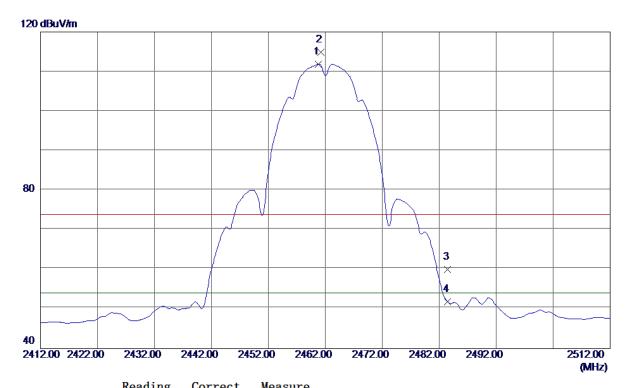


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2460.8000	78. 56	33. 31	111.87	54.00	57. 87	AVG	No Limit
2	2461. 2000	81. 59	33. 31	114. 90	74.00	40. 90	Peak	No Limit
3	2483. 5000	26. 59	33. 40	59. 99	74.00	-14.01	Peak	
4	2483. 5000	18. 42	33. 40	51. 82	54. 00	-2. 18	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 54 of 158





Vertical

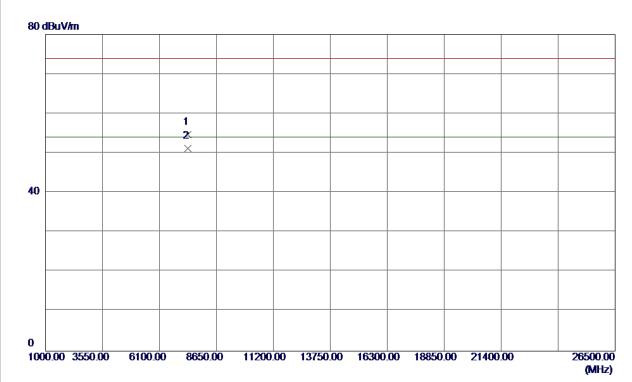


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7386. 2000	45. 48	9. 20	54. 68	74.00	-19.32	Peak	
2 *	7386. 8500	42. 01	9. 20	51. 21	54. 00	-2. 79	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 55 of 158





Horizontal

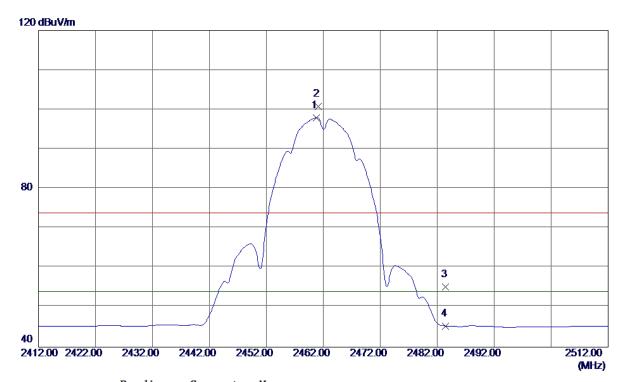


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2460. 8000	64. 66	33. 31	97. 97	54.00	43. 97	AVG	No Limit
2	2461. 1000	67. 43	33. 31	100. 74	74.00	26. 74	Peak	No Limit
3	2483. 5000	21.86	33. 40	55. 26	74.00	-18. 74	Peak	
4	2483. 5000	11. 95	33. 40	45. 35	54.00	−8. 65	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 56 of 158





Horizontal

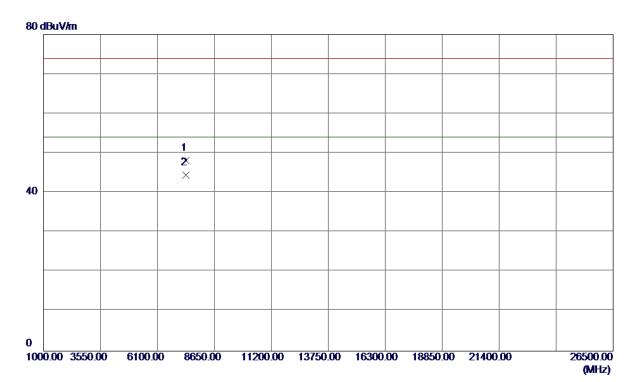


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7386. 2250	38. 89	9. 20	48. 09	74.00	-25. 91	Peak	
2 *	7386. 3500	35. 22	9. 20	44. 42	54. 00	-9. 58	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 57 of 158





Vertical

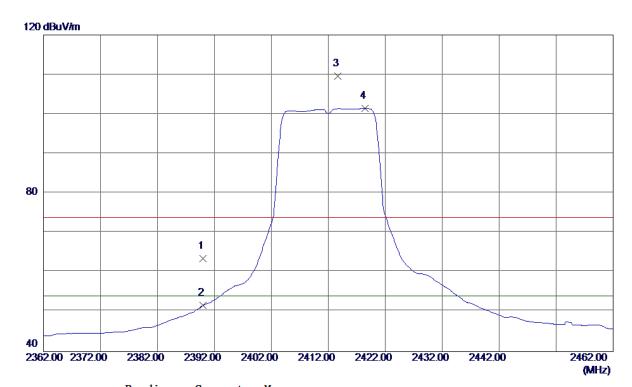


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	30. 57	33. 01	63. 58	74.00	-10. 42	Peak	
2	2390. 0000	18. 65	33. 01	51.66	54.00	-2. 34	AVG	
3	2413. 7000	76. 53	33. 11	109.64	74.00	35. 64	Peak	No Limit
4 *	2418. 4000	68. 27	33. 13	101. 40	54.00	47. 40	AVG	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 58 of 158





Vertical

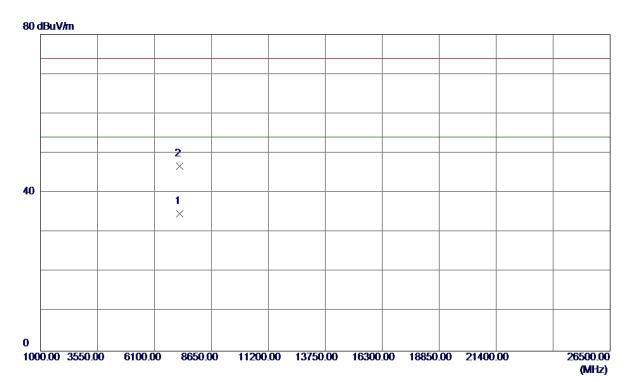


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7233. 1500	25. 99	8. 76	34. 75	54.00	-19.25	AVG	
2	7237. 4500	37. 97	8. 77	46. 74	74. 00	-27. 26	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 59 of 158





Horizontal

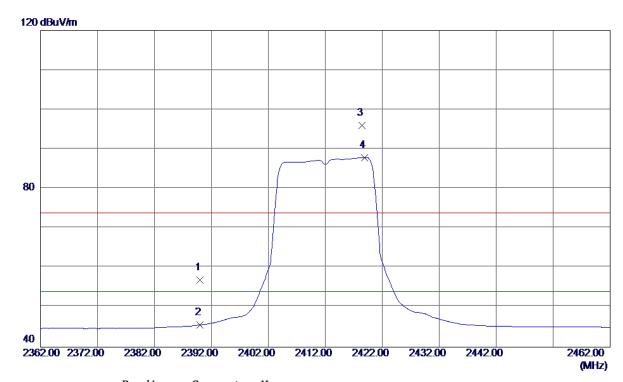


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	23. 90	33. 01	56. 91	74.00	-17. 09	Peak	
2	2390. 0000	12. 61	33. 01	45. 62	54.00	-8. 38	AVG	
3	2418. 4000	62. 90	33. 13	96. 03	74.00	22. 03	Peak	No Limit
4 *	2418. 9000	54. 78	33. 13	87. 91	54.00	33. 91	AVG	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 60 of 158





Horizontal

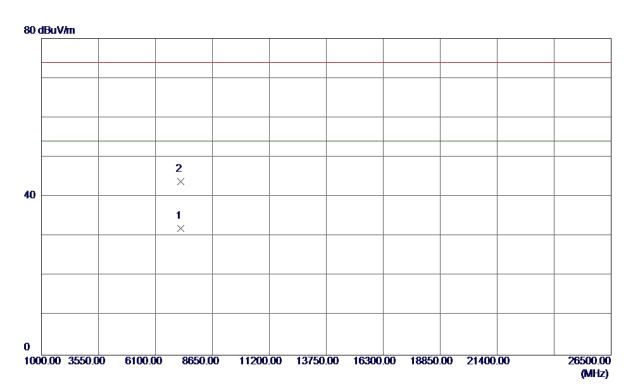


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7233. 4500	23. 22	8. 76	31. 98	54.00	-22. 02	AVG	
2	7237. 3350	35. 12	8. 77	43. 89	74. 00	-30. 11	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 61 of 158





Vertical

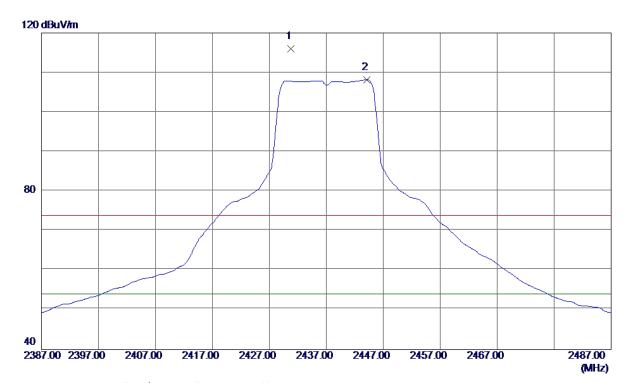


No.	Freq.	Reading Leve1	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2430. 8000	82. 80	33. 18	115. 98	74.00	41. 98	Peak	No Limit
2 *	2444. 1000	74. 92	33. 24	108. 16	54. 00	54. 16	AVG	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 62 of 158





Vertical

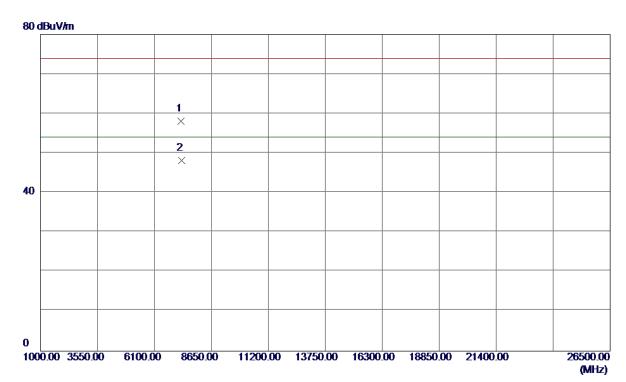


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7302. 9320	49. 19	8. 96	58. 15	74.00	-15. 85	Peak	
2 *	7305. 9320	39. 13	8. 97	48. 10	54. 00	-5. 90	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 63 of 158





Horizontal

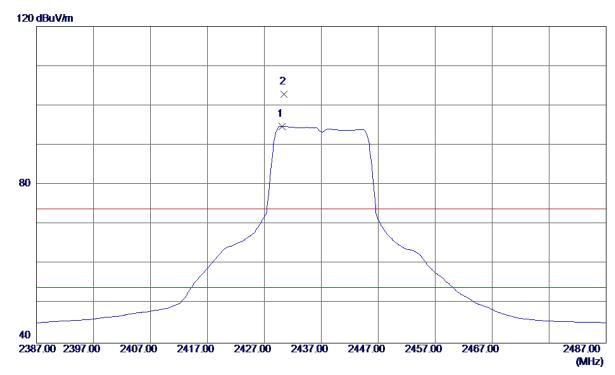


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2430. 1000	61. 62	33. 18	94. 80	54.00	40.80	AVG	No Limit
2	2430. 5000	69. 76	33. 18	102. 94	74. 00	28. 94	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 64 of 158





Horizontal

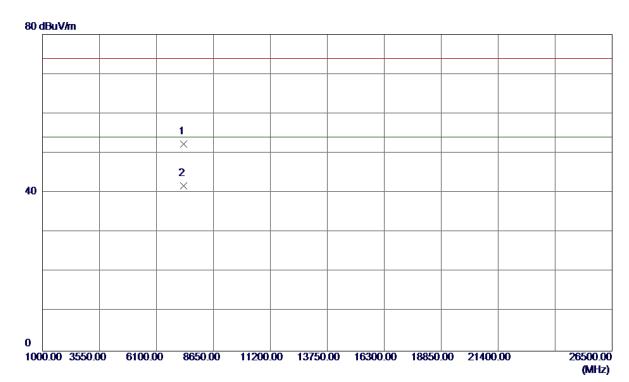


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7305. 2320	43. 30	8. 97	52. 27	74.00	-21. 73	Peak	
2 *	7315. 1320	32. 81	9. 00	41.81	54. 00	-12. 19	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 65 of 158





Vertical

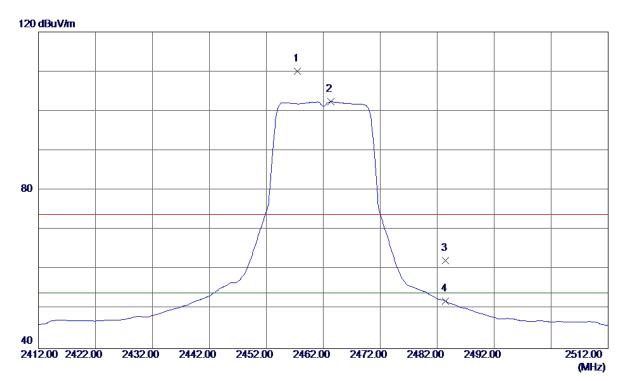


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2457. 5000	76. 82	33. 29	110. 11	74.00	36. 11	Peak	No Limit
2 *	2463. 3000	69. 01	33. 32	102. 33	54.00	48. 33	AVG	No Limit
3	2483. 5000	28. 81	33. 40	62. 21	74.00	-11. 79	Peak	
4	2483. 5000	18. 54	33. 40	51. 94	54. 00	-2.06	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 66 of 158





Vertical

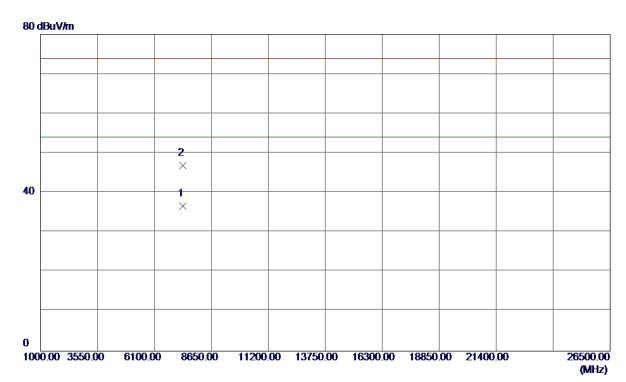


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7385. 4320	27. 41	9. 20	36. 61	54.00	-17. 39	AVG	
2	7387. 6320	37. 72	9. 21	46. 93	74. 00	-27. 07	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 67 of 158





Horizontal

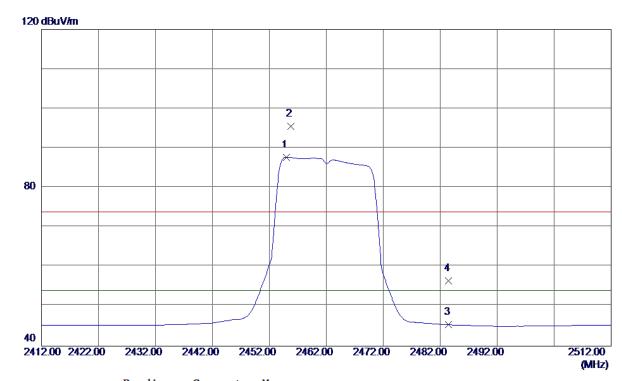


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2455. 0000	54. 40	33. 28	87. 68	74.00	13. 68	Peak	No Limit
2 *	2455. 8000	62. 29	33. 29	95. 58	74.00	21. 58	Peak	No Limit
3	2483. 5000	12. 06	33. 40	45. 46	74.00	-28. 54	Peak	
4	2483. 5000	23. 14	33. 40	56. 54	74.00	-17. 46	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 68 of 158





Horizontal

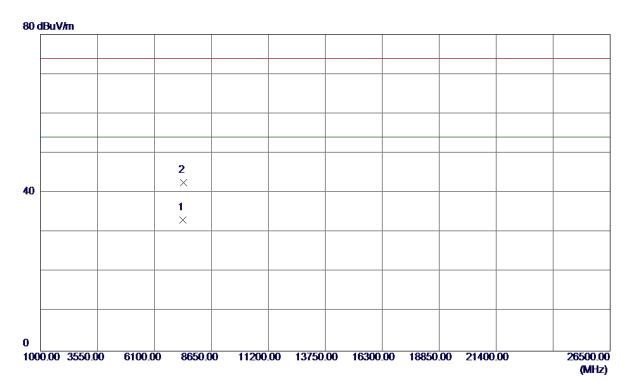


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7384. 0320	23. 92	9. 20	33. 12	54.00	-20.88	AVG	
2	7390. 0320	33. 36	9. 21	42. 57	74. 00	-31. 43	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 69 of 158





Vertical

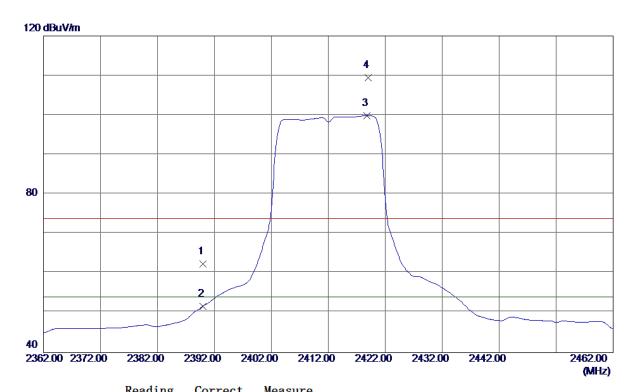


No.	Freq.	Reading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	29. 32	33. 01	62. 33	74.00	-11. 67	Peak	
2	2390. 0000	18. 75	33. 01	51. 76	54.00	-2. 24	AVG	
3 *	2418. 8000	66. 74	33. 13	99. 87	54.00	45. 87	AVG	No Limit
4	2419.0000	76. 24	33. 13	109. 37	74.00	35. 37	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 70 of 158





Vertical

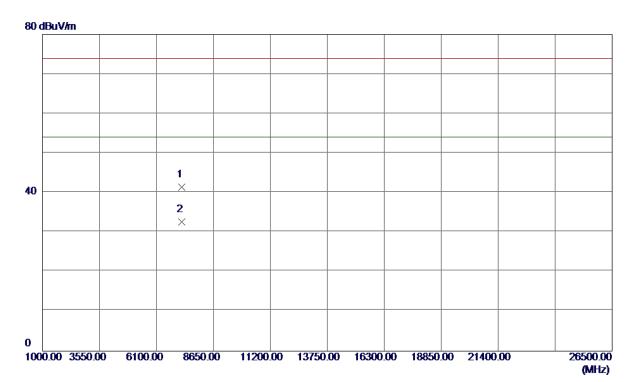


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7234. 0320	32. 73	8. 76	41. 49	74.00	-32. 51	Peak	
2 *	7237. 0320	23. 84	8. 77	32. 61	54. 00	-21. 39	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 71 of 158





Horizontal

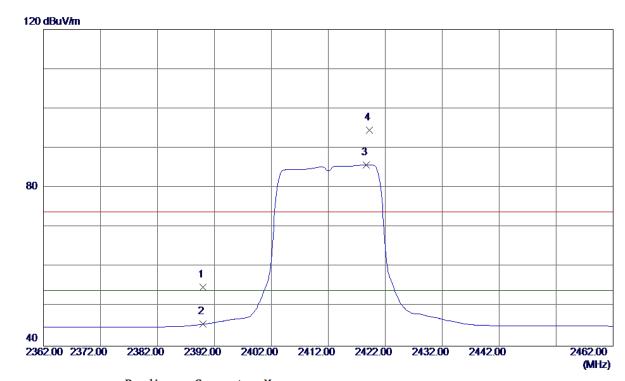


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	21. 88	33. 01	54. 89	74.00	-19. 11	Peak	
2	2390. 0000	12. 54	33. 01	45. 55	54.00	-8. 45	AVG	
3 *	2418. 7000	52. 71	33. 13	85. 84	54.00	31. 84	AVG	No Limit
4	2419. 2000	61. 49	33. 13	94. 62	74.00	20.62	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 72 of 158





Horizontal

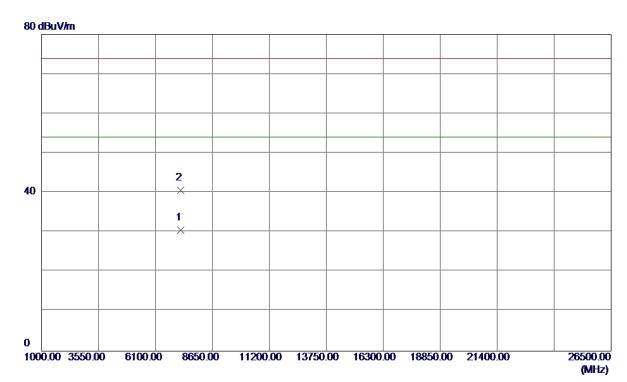


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7233. 0320	21.86	8. 76	30. 62	54.00	-23. 38	AVG	
2	7244. 6320	31. 90	8. 79	40. 69	74. 00	-33. 31	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 73 of 158





Vertical

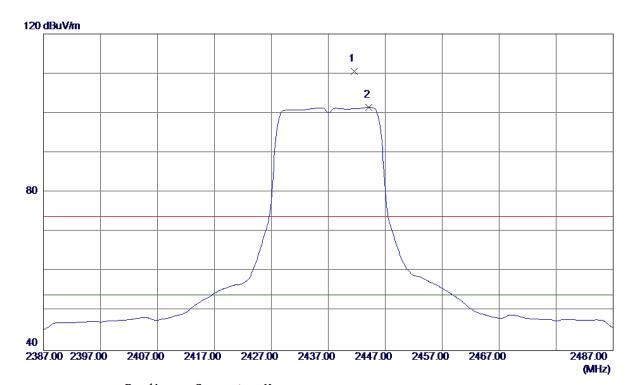


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2441. 5000	77. 30	33. 23	110. 53	74.00	36. 53	Peak	No Limit
2 *	2444. 1000	68. 20	33. 24	101. 44	54.00	47. 44	AVG	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 74 of 158





Vertical

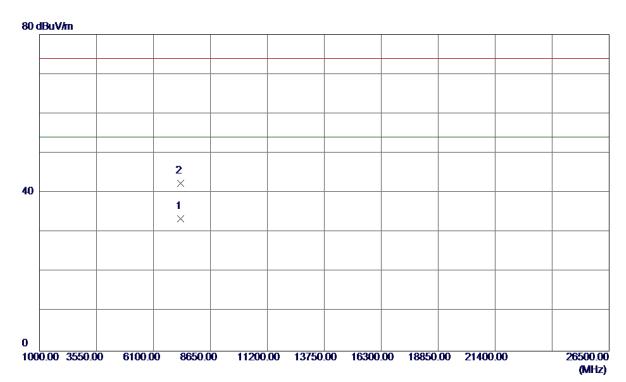


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7305. 0320	24. 50	8. 97	33. 47	54.00	-20. 53	AVG	
2	7310. 6320	33. 44	8. 98	42. 42	74. 00	-31. 58	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 75 of 158





Horizontal

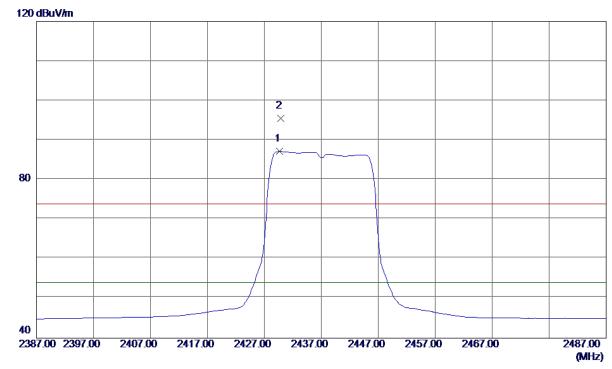


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2429. 7000	53. 97	33. 18	87. 15	54.00	33. 15	AVG	No Limit
2	2429. 9000	62. 36	33. 18	95. 54	74. 00	21. 54	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 76 of 158





Horizontal

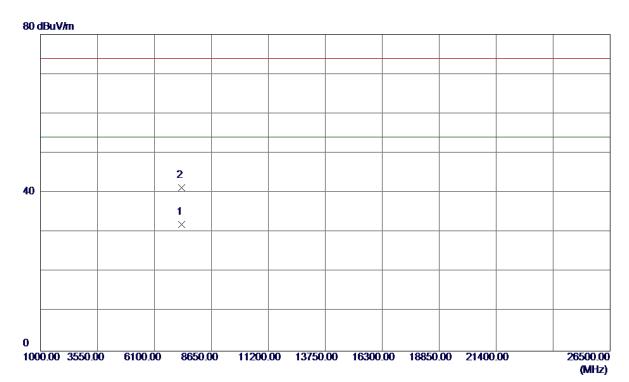


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7308. 8320	22. 95	8. 98	31. 93	54.00	-22. 07	AVG	
2	7316. 6320	32. 34	9. 00	41. 34	74. 00	-32. 66	Peak	

Report No.: BTL-FCCP-1-1702C180 Page 77 of 158





Vertical

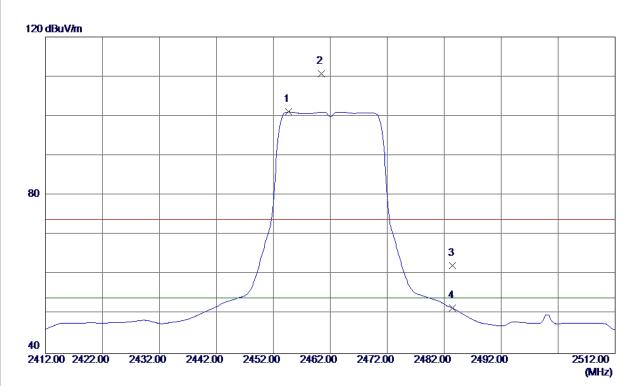


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2454. 7000	67. 77	33. 28	101. 05	54.00	47. 05	AVG	No Limit
2	2460. 4000	77. 42	33. 30	110.72	74.00	36. 72	Peak	No Limit
3	2483. 5000	28. 83	33. 40	62. 23	74.00	-11. 77	Peak	
4	2483. 5000	18. 09	33. 40	51. 49	54.00	-2. 51	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 78 of 158





Vertical

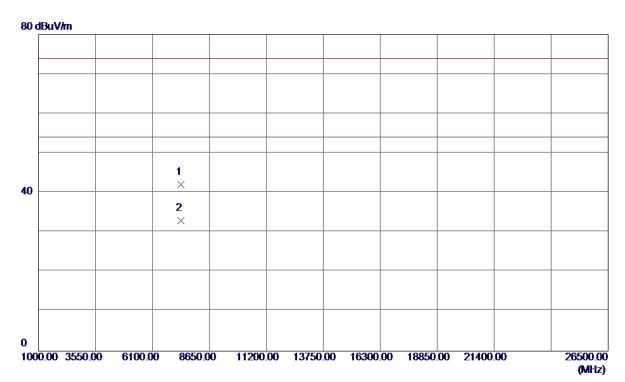


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7374. 4320	32. 96	9. 17	42. 13	74.00	-31.87	Peak	
2 *	7385. 2320	23. 75	9. 20	32. 95	54. 00	-21. 0 5	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 79 of 158





Horizontal

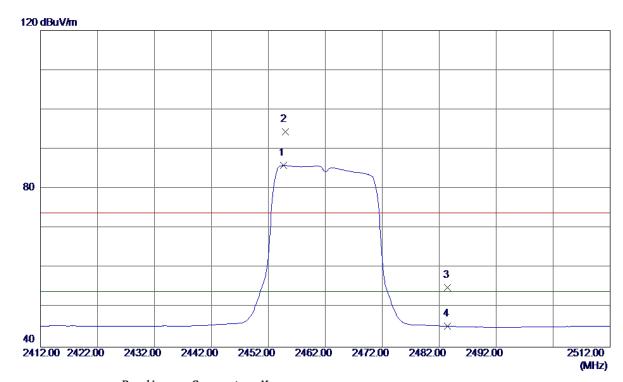


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2454. 7000	52. 59	33. 28	85. 87	54.00	31. 87	AVG	No Limit
2	2455. 0000	61. 08	33. 28	94. 36	74.00	20. 36	Peak	No Limit
3	2483. 5000	21.64	33. 40	55. 04	74.00	-18. 96	Peak	
4	2483. 5000	11. 88	33. 40	45. 28	54.00	-8. 72	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 80 of 158





Horizontal

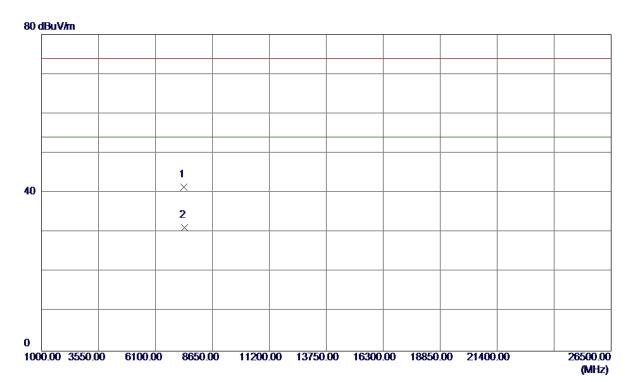


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7383. 6320	32. 20	9. 19	41. 39	74.00	-32. 61	Peak	
2 *	7390. 8320	22. 01	9. 22	31. 23	54. 00	-22. 77	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 81 of 158





Vertical

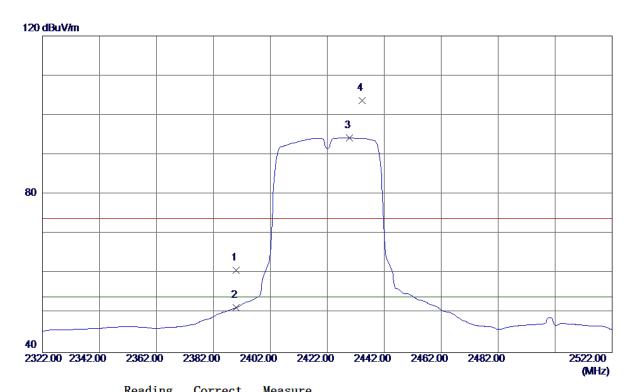


No.	Freq.	Reading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	27. 86	33. 01	60. 87	74.00	-13. 13	Peak	
2	2390. 0000	18. 37	33. 01	51. 38	54.00	-2. 62	AVG	
3 *	2429.8000	61. 05	33. 18	94. 23	54.00	40. 23	AVG	No Limit
4	2434. 2000	70. 48	33. 19	103. 67	74.00	29.67	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 82 of 158





Vertical

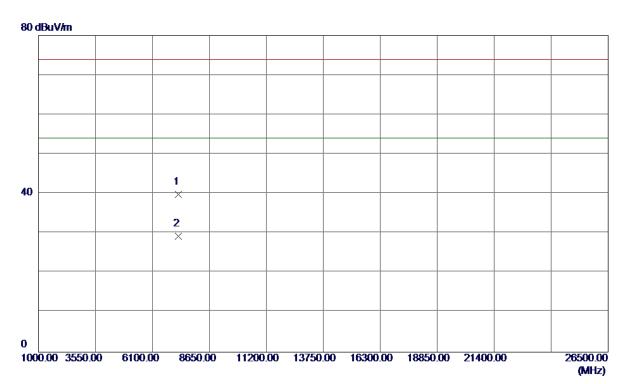


No.	Freq.	Reading Leve1	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7264. 9500	30. 97	8. 85	39. 82	74.00	-34. 18	Peak	
2 *	7266. 1000	20. 42	8. 86	29. 28	54. 00	-24. 72	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 83 of 158





Horizontal

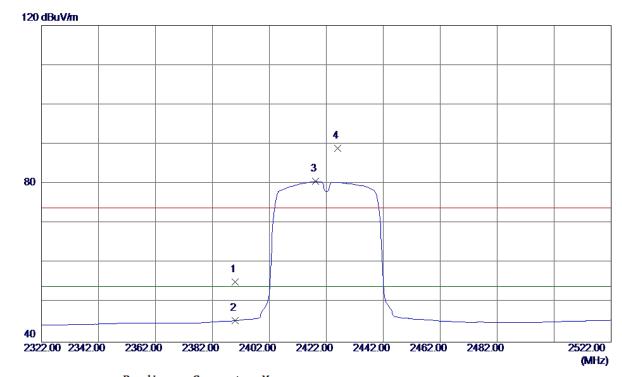


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	22. 21	33. 01	55. 22	74.00	-18. 78	Peak	
2	2390.0000	12. 41	33. 01	45. 42	54.00	-8. 58	AVG	
3 *	2418. 2000	47. 44	33. 13	80. 57	54.00	26. 57	AVG	No Limit
4	2426. 0000	55. 80	33. 16	88. 96	74. 00	14. 96	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 84 of 158





Horizontal

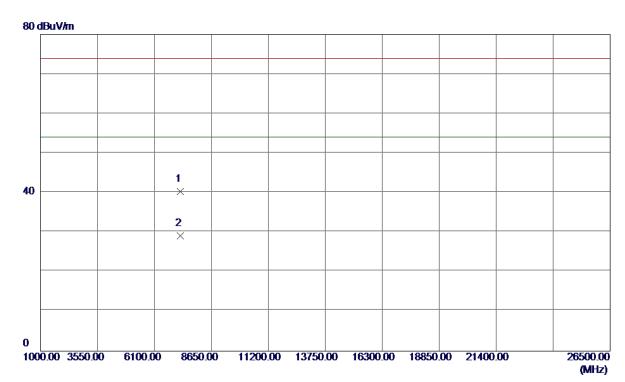


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7263. 2500	31. 52	8. 85	40. 37	74.00	-33. 63	Peak	
2 *	7266. 8000	20. 27	8. 86	29. 13	54. 00	-24. 87	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 85 of 158





Vertical

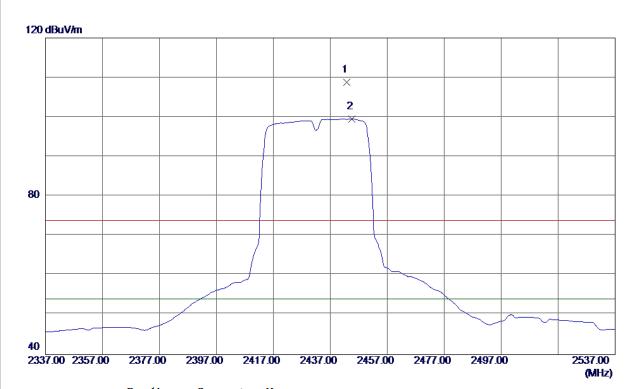


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2442. 8000	75. 57	33. 23	108. 80	74.00	34. 80	Peak	No Limit
2 *	2444. 6000	66. 27	33. 24	99. 51	54.00	45. 51	AVG	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 86 of 158





Vertical

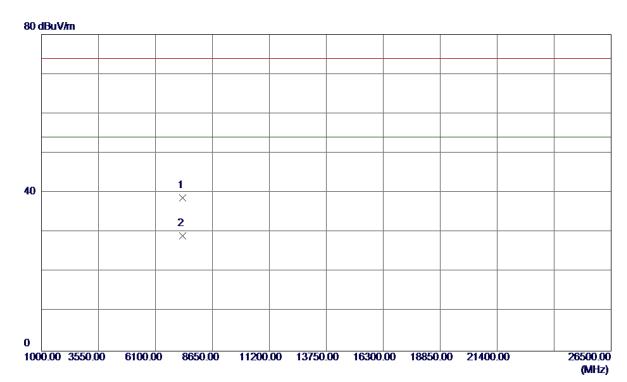


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7309. 1000	29. 72	8. 98	38. 70	74.00	-35. 30	Peak	
2 *	7310. 9500	20. 10	8. 99	29. 09	54. 00	-24. 91	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 87 of 158





Horizontal

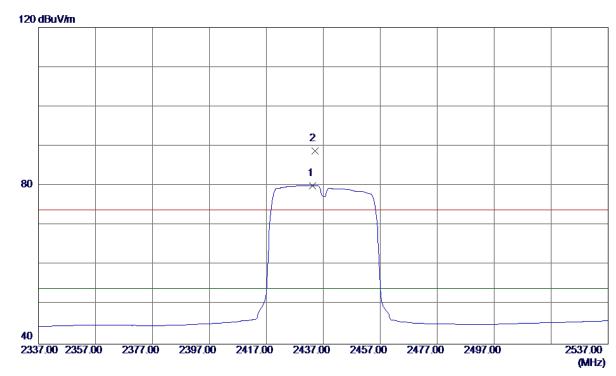


No.	Freq.	Reading Leve1	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2433. 2000	46. 84	33. 19	80. 03	54.00	26. 03	AVG	No Limit
2	2434. 0000	55. 61	33. 19	88. 80	74. 00	14. 80	Peak	No Limit

Report No.: BTL-FCCP-1-1702C180 Page 88 of 158





Horizontal

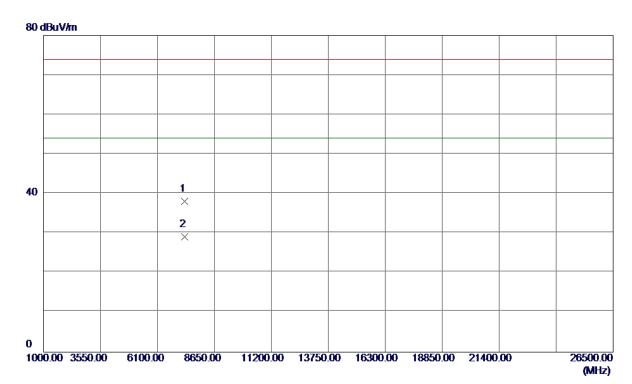

No.	Freq.	Reading Leve1	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7309. 6000	29. 03	8. 98	38. 01	74.00	-35. 99	Peak	
2 *	7310. 7000	20. 11	8. 98	29. 09	54. 00	-24. 91	AVG	


Report No.: BTL-FCCP-1-1702C180 Page 89 of 158





Orthogonal Axis:	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical

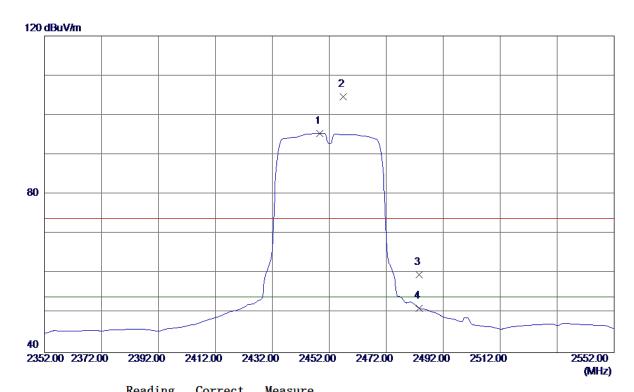


No.	Freq.	Reading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2448. 6000	62. 12	33. 26	95. 38	54.00	41. 38	AVG	No Limit
2	2456. 8000	71. 39	33. 29	104. 68	74.00	30. 68	Peak	No Limit
3	2483. 5000	26. 33	33. 40	59. 73	74.00	-14. 27	Peak	
4	2483. 5000	17. 84	33. 40	51. 24	54.00	-2. 76	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 90 of 158





Vertical

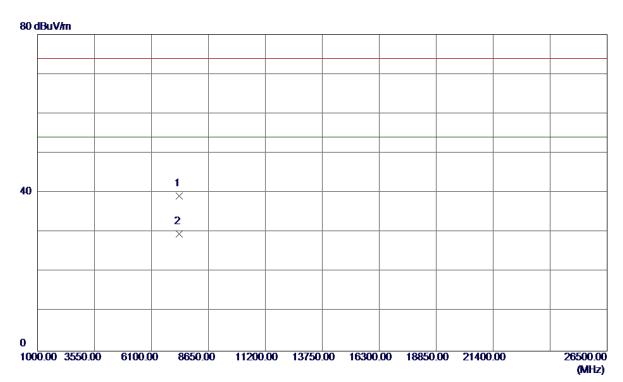


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7356. 2000	30. 14	9. 12	39. 26	74.00	-34. 74	Peak	
2 *	7356. 2000	20. 53	9. 12	29.65	54. 00	-24. 35	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 91 of 158





Horizontal

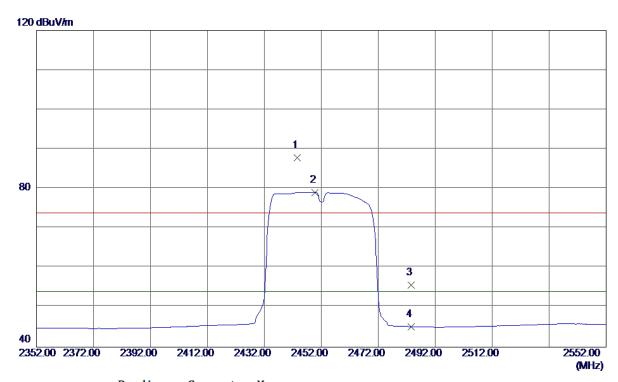


Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
2443. 6000	54. 55	33. 23	87. 78	74.00	13. 78	Peak	No Limit
2449. 8000	45. 80	33. 26	79. 06	54.00	25. 06	AVG	No Limit
2483. 5000	22. 27	33. 40	55. 67	74.00	-18. 33	Peak	
2483. 5000	11. 79	33. 40	45. 19	54.00	-8. 81	AVG	
	MHz 2443. 6000 2449. 8000 2483. 5000	Freq. Level	Hz dBuV/m dB 2443.6000 54.55 33.23 2449.8000 45.80 33.26 2483.5000 22.27 33.40	Hreq. Level Factor ment MHz dBuV/m dB dBuV/m 2443.6000 54.55 33.23 87.78 2449.8000 45.80 33.26 79.06 2483.5000 22.27 33.40 55.67	Hreq. Level Factor ment Limit MHz dBuV/m dB dBuV/m dBuV/m 2443.6000 54.55 33.23 87.78 74.00 2449.8000 45.80 33.26 79.06 54.00 2483.5000 22.27 33.40 55.67 74.00	MHz dBuV/m dB dBuV/m dB Margin 2443.6000 54.55 33.23 87.78 74.00 13.78 2449.8000 45.80 33.26 79.06 54.00 25.06 2483.5000 22.27 33.40 55.67 74.00 -18.33	MHz dBuV/m dB dBuV/m dBuV/m dB Detector 2443.6000 54.55 33.23 87.78 74.00 13.78 Peak 2449.8000 45.80 33.26 79.06 54.00 25.06 AVG 2483.5000 22.27 33.40 55.67 74.00 -18.33 Peak

Report No.: BTL-FCCP-1-1702C180 Page 92 of 158





Horizontal

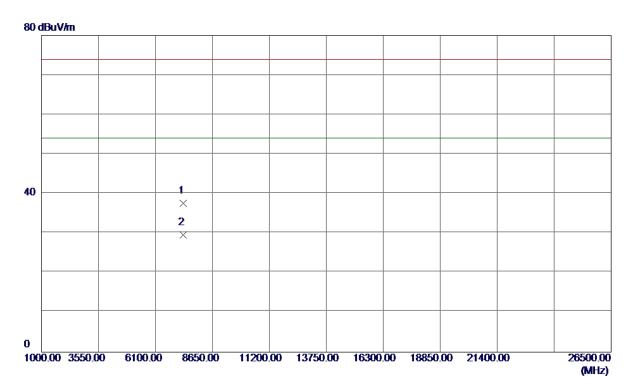

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	7355. 3000	28. 43	9. 11	37. 54	74.00	-36. 46	Peak	
2 *	7356. 7000	20. 50	9. 12	29. 62	54. 00	-24. 38	AVG	

Report No.: BTL-FCCP-1-1702C180 Page 93 of 158





_	
	ATTACHMENT E - BANDWIDTH

Report No.: BTL-FCCP-1-1702C180 Page 94 of 158






Test Mode: TX B Mode_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.10	15.2	500	Complies
2437	10.10	15.28	500	Complies
2462	10.11	15.28	500	Complies

TX CH01

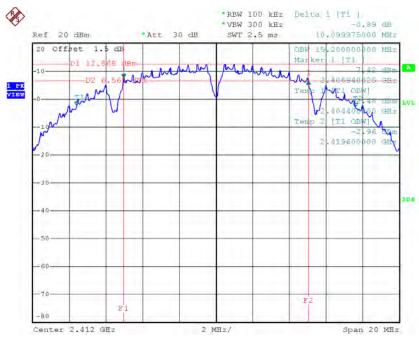


Date: 6.MAR.2017 09:36:35


Report No.: BTL-FCCP-1-1702C180





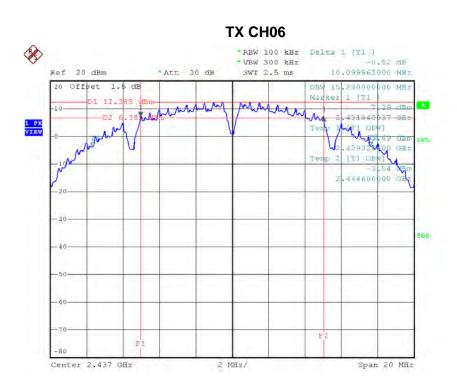

Date: 6.MAR.2017 09:38:31

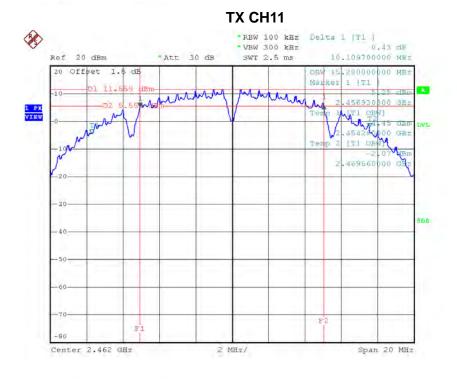

Date: 6.MAR.2017 09:40:21






Test Mode: TX G Mode_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.62	16.52	500	Complies
2437	16.64	16.56	500	Complies
2462	16.62	16.52	500	Complies

TX CH01

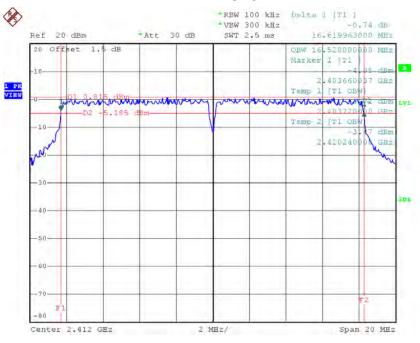


Date: 6.MAR.2017 09:45:59


Report No.: BTL-FCCP-1-1702C180





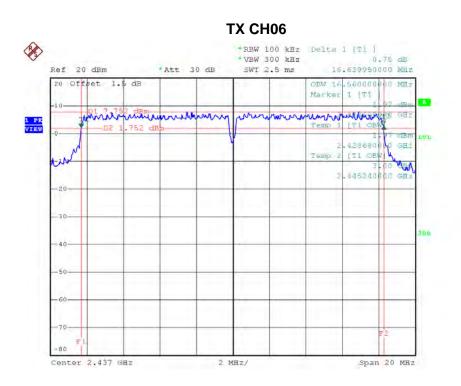

Date: 6.MAR.2017 09:47:56

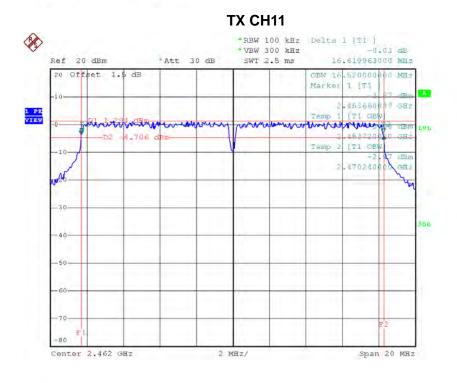

Date: 6.MAR.2017 09:49:17






Test Mode: TX N-20MHz Mode_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.88	17.68	500	Complies
2437	17.86	17.68	500	Complies
2462	17.92	17.72	500	Complies

TX CH01

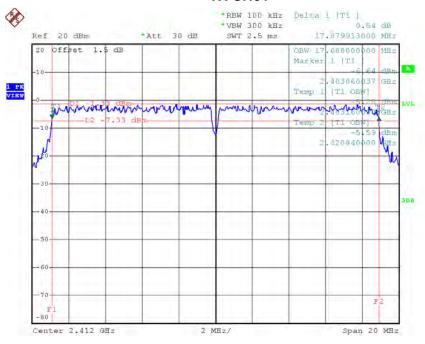


Date: 6.MAR.2017 09:54:17


Report No.: BTL-FCCP-1-1702C180





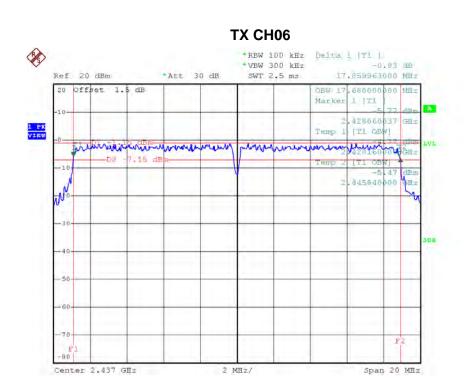

Date: 6.MAR.2017 09:55:37

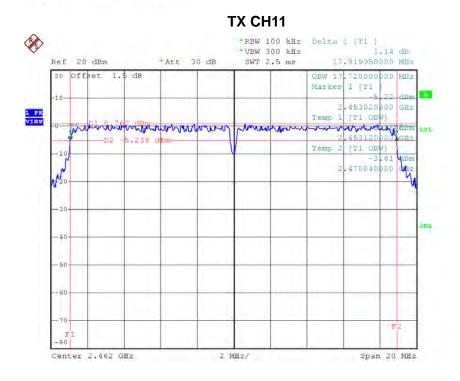

Date: 6.MAR.2017 10:00:35






Test Mode: TX N-40MHz Mode_CH03/06/09

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.63	36.16	500	Complies
2437	36.55	36.16	500	Complies
2452	36.57	36.16	500	Complies

TX CH03

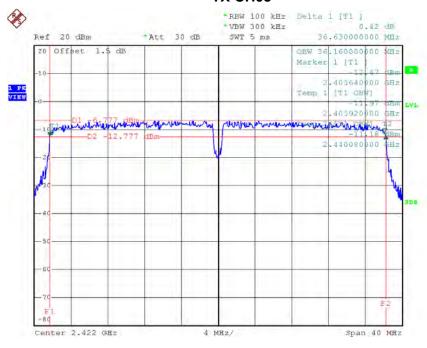


Date: 6.MAR.2017 10:03:10


Report No.: BTL-FCCP-1-1702C180 Page 101 of 158





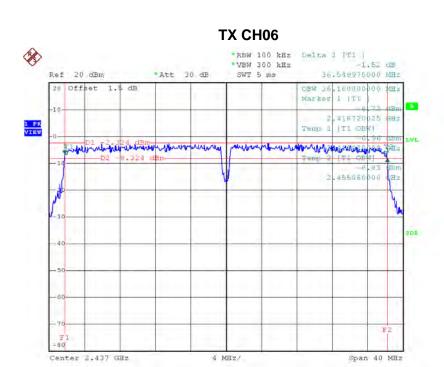

Date: 6.MAR.2017 10:04:43

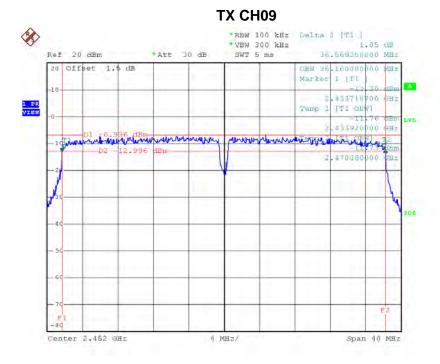

Date: 6.MAR.2017 10:06:03

Report No.: BTL-FCCP-1-1702C180





ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

Report No.: BTL-FCCP-1-1702C180 Page 103 of 158





Test Mode :TX B Mode_CH01/06/11_ANT 1						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Dogult	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2412	26.13	0.41	30.00	1.00	Complies	
2437	26.16	0.41	30.00	1.00	Complies	
2462	25.61	0.36	30.00	1.00	Complies	

Test Mode :TX G Mode_CH01/06/11_ANT 1						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Result	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2412	25.99	0.40	30.00	1.00	Complies	
2437	27.96	0.63	30.00	1.00	Complies	
2462	26.93	0.49	30.00	1.00	Complies	

Report No.: BTL-FCCP-1-1702C180 Page 104 of 158





Test Mode :TX N20 Mode_CH01/06/11_ANT 1						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Result	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2412	24.40	0.28	30.00	1.00	Complies	
2437	26.68	0.47	30.00	1.00	Complies	
2462	26.64	0.46	30.00	1.00	Complies	

	Test Mode :TX N20 Mode_CH01/06/11_ANT 2						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Dogult		
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result		
2412	23.32	0.21	30.00	1.00	Complies		
2437	26.57	0.45	30.00	1.00	Complies		
2462	26.95	0.50	30.00	1.00	Complies		

Test Mode :TX N20 Mode_CH01/06/11_Total						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Result	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2412	26.90	0.49	30.00	1.00	Complies	
2437	29.64	0.92	30.00	1.00	Complies	
2462	29.81	0.96	30.00	1.00	Complies	

Report No.: BTL-FCCP-1-1702C180 Page 105 of 158





Test Mode :TX N40 Mode_CH03/06/09_ANT 1						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Result	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2422	20.52	0.11	30.00	1.00	Complies	
2437	26.36	0.43	30.00	1.00	Complies	
2452	20.71	0.12	30.00	1.00	Complies	

Test Mode :TX N40 Mode_CH03/06/09_ANT 2						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Result	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2422	19.55	0.09	30.00	1.00	Complies	
2437	26.84	0.48	30.00	1.00	Complies	
2452	19.86	0.10	30.00	1.00	Complies	

Test Mode :TX N40 Mode_CH03/06/09_Total						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Result	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2422	23.07	0.20	30.00	1.00	Complies	
2437	29.62	0.92	30.00	1.00	Complies	
2452	23.32	0.21	30.00	1.00	Complies	

Report No.: BTL-FCCP-1-1702C180 Page 106 of 158





ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Report No.: BTL-FCCP-1-1702C180 Page 107 of 158










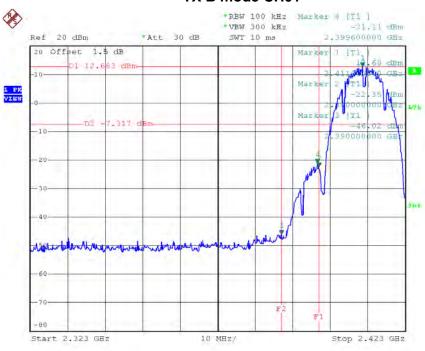

Date: 6.MAR.2017 09:35:34

TX B mode CH11

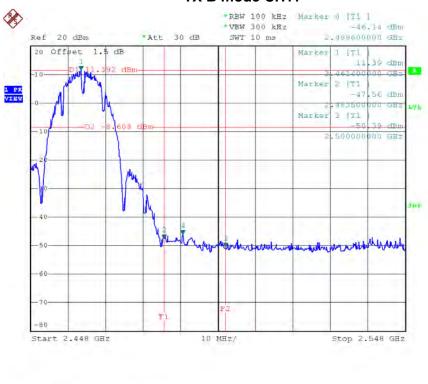


Date: 6.MAR.2017 09:41:00






TX B mode CH01 (10 Harmonic of the frequency)

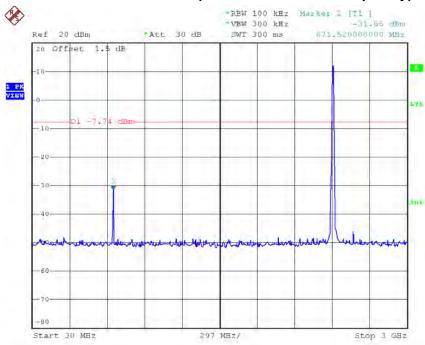


Date: 6.MAR.2017 09:36:49

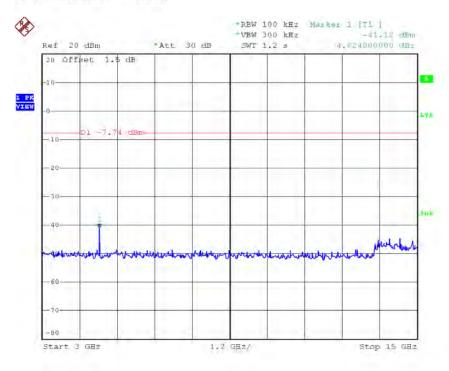

Date: 6.MAR.2017 09:36:58






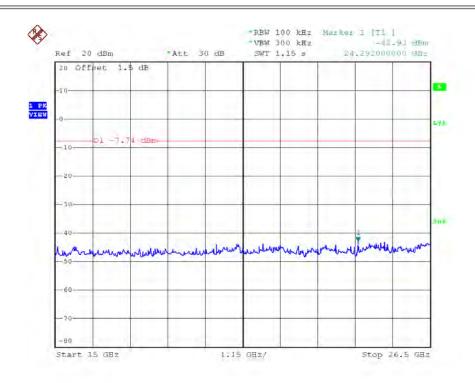

Date: 6.MAR.2017 09:37:06


TX B mode CH06 (10 Harmonic of the frequency)

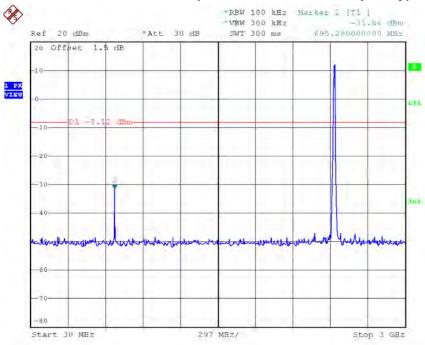

Date: 6.MAR.2017 09:38:45






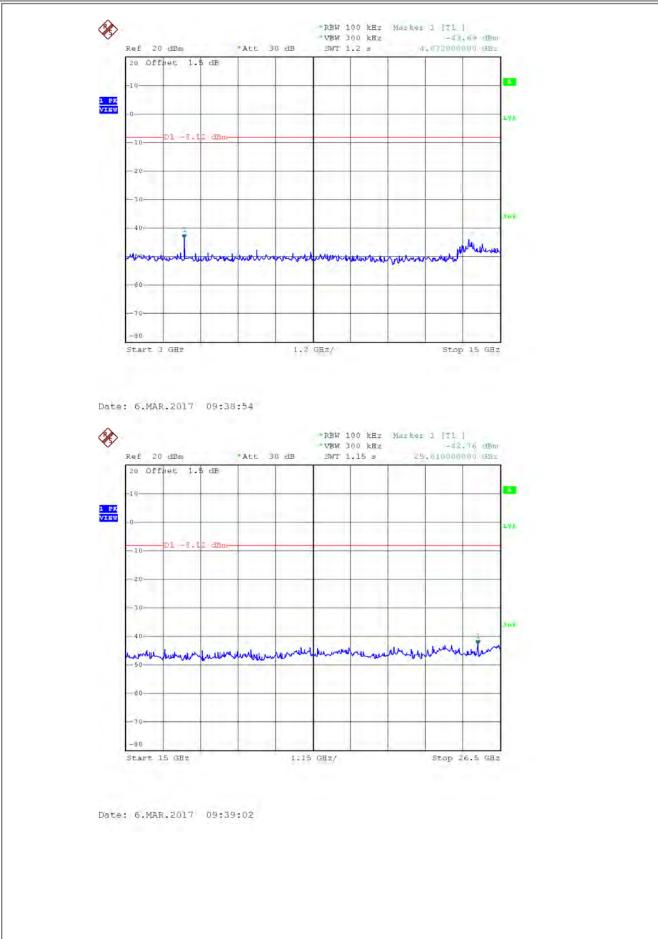








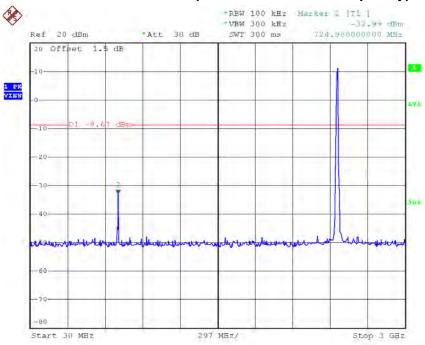


Date: 6.MAR.2017 09:40:35

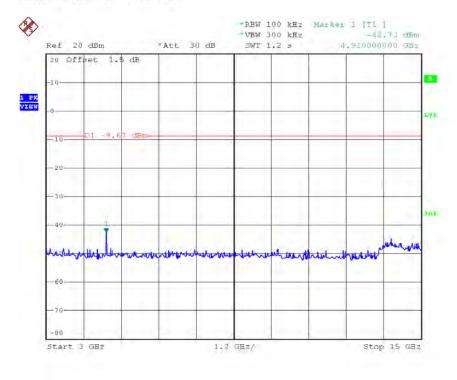

Date: 6.MAR.2017 09:40:44






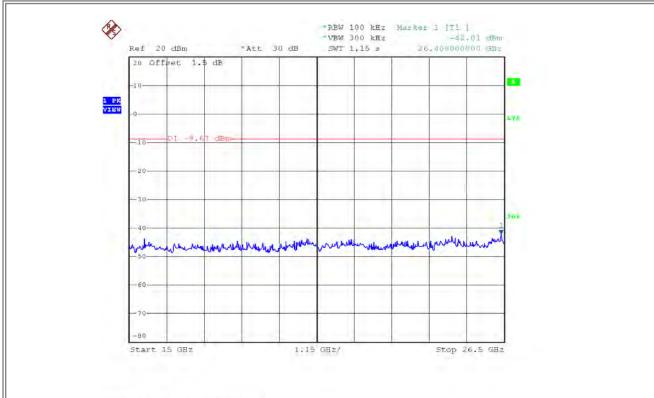


Date: 6.MAR.2017 09:40:52








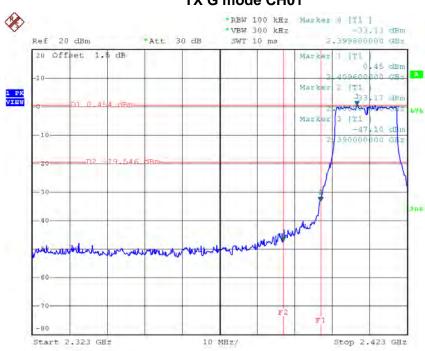

Date: 6.MAR.2017 09:46:38

TX G mode CH11

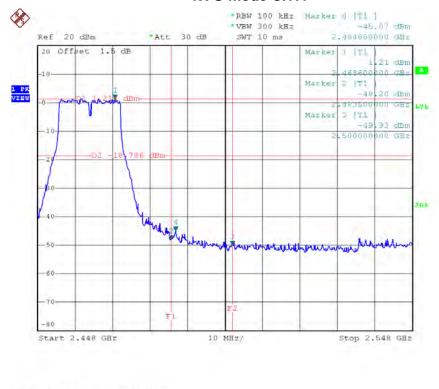


Date: 6.MAR.2017 09:49:56








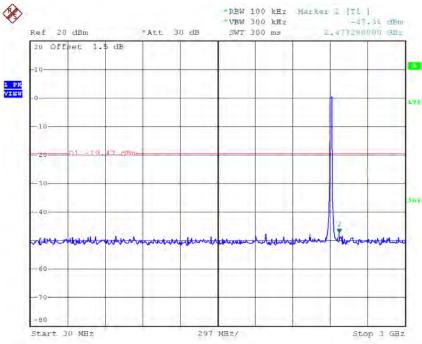


Date: 6.MAR.2017 09:46:13

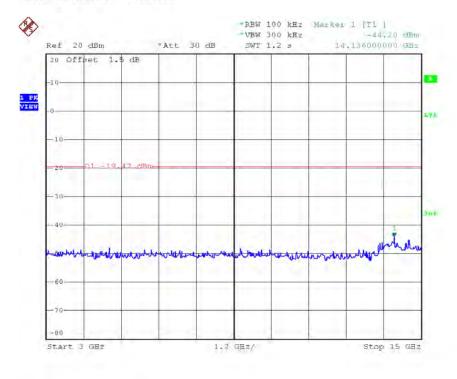

Date: 6.MAR.2017 09:46:22






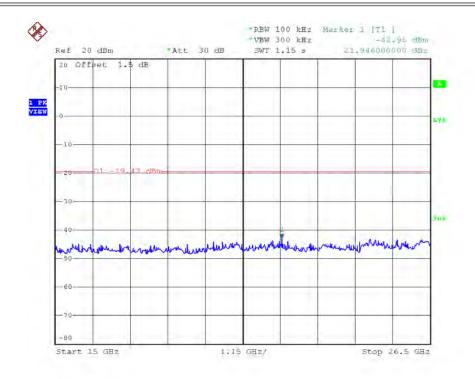

Date: 6.MAR.2017 09:46:31


TX G mode CH06 (10 Harmonic of the frequency)

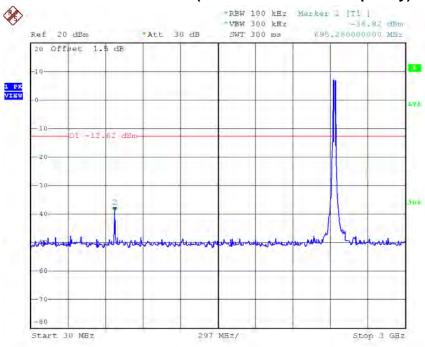

Date: 6.MAR.2017 09:48:10






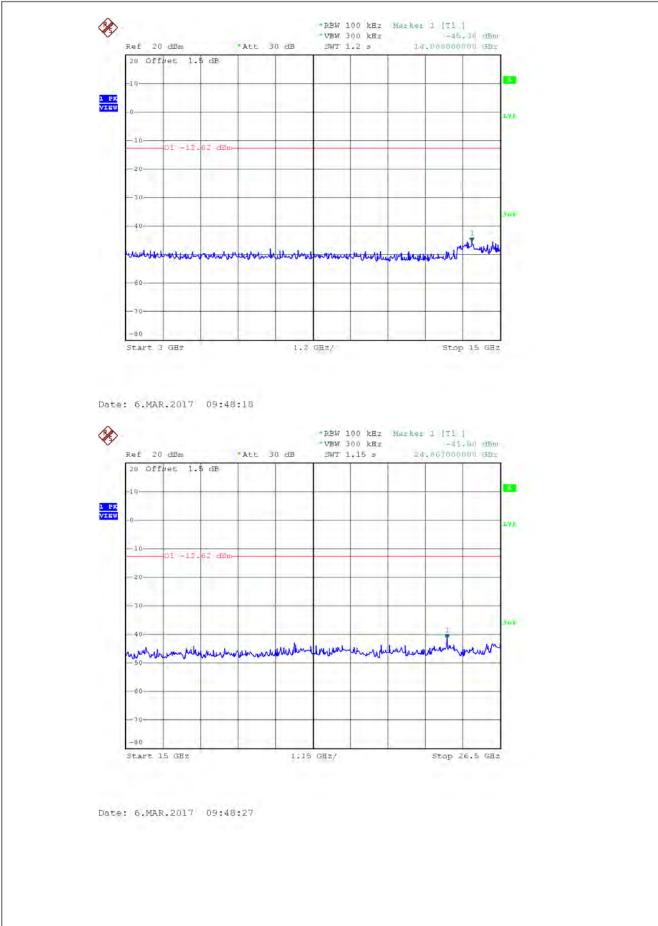






TX G mode CH11 (10 Harmonic of the frequency)

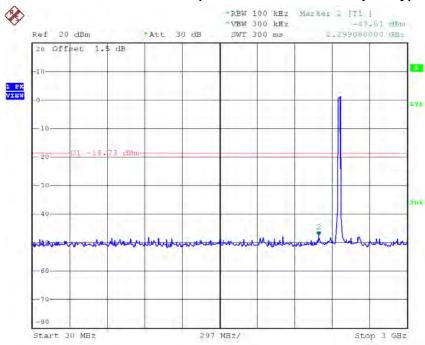

Date: 6.MAR.2017 09:49:31

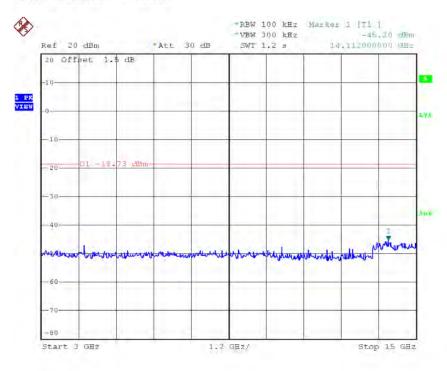


Date: 6.MAR.2017 09:49:40

Report No.: BTL-FCCP-1-1702C180 Page 118 of 158





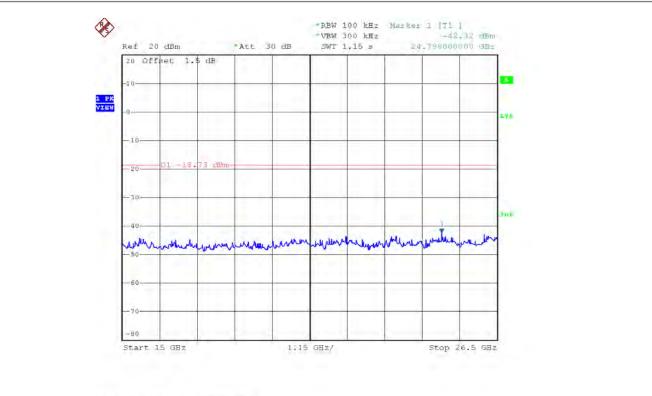


Date: 6.MAR.2017 09:49:48










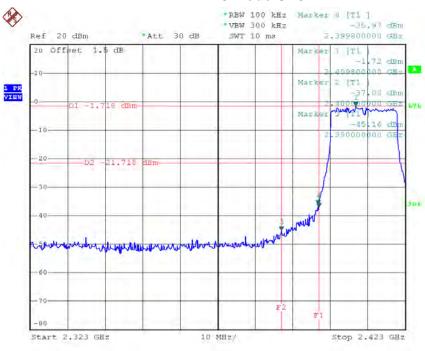

Date: 6.MAR.2017 09:54:56

TX HT20 mode CH11

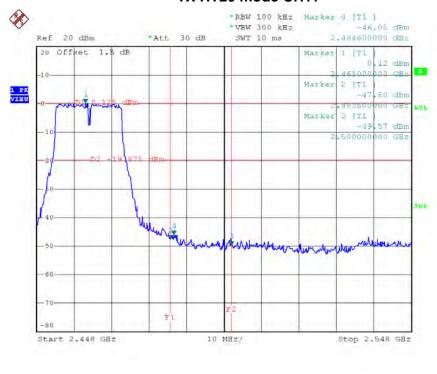


Date: 6.MAR.2017 10:01:14








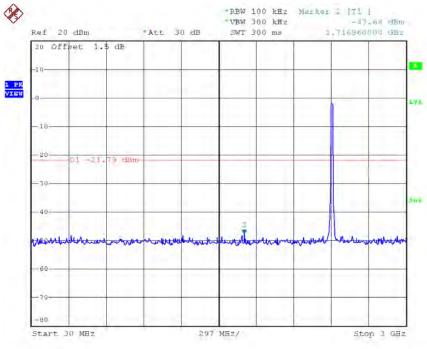

Date: 6.MAR.2017 09:54:32

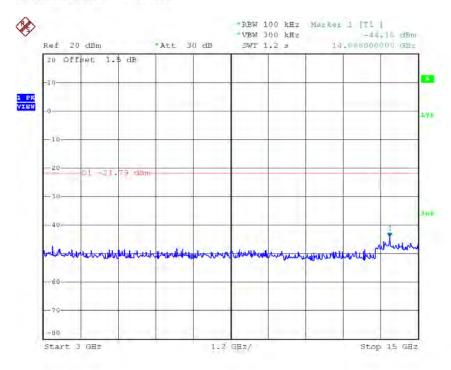


Date: 6.MAR.2017 09:54:40

Report No.: BTL-FCCP-1-1702C180 Page 121 of 158






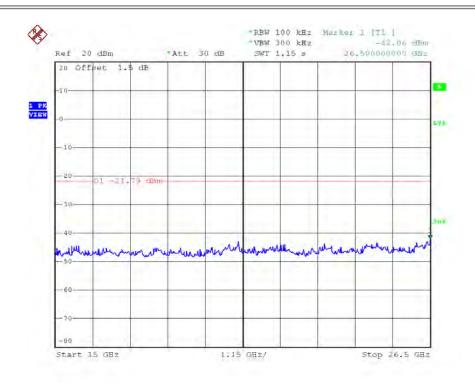

Date: 6.MAR.2017 09:54:49


TX HT20 mode CH06 (10 Harmonic of the frequency)

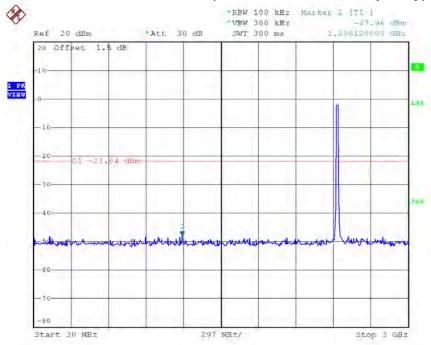

Date: 6.MAR.2017 09:55:51






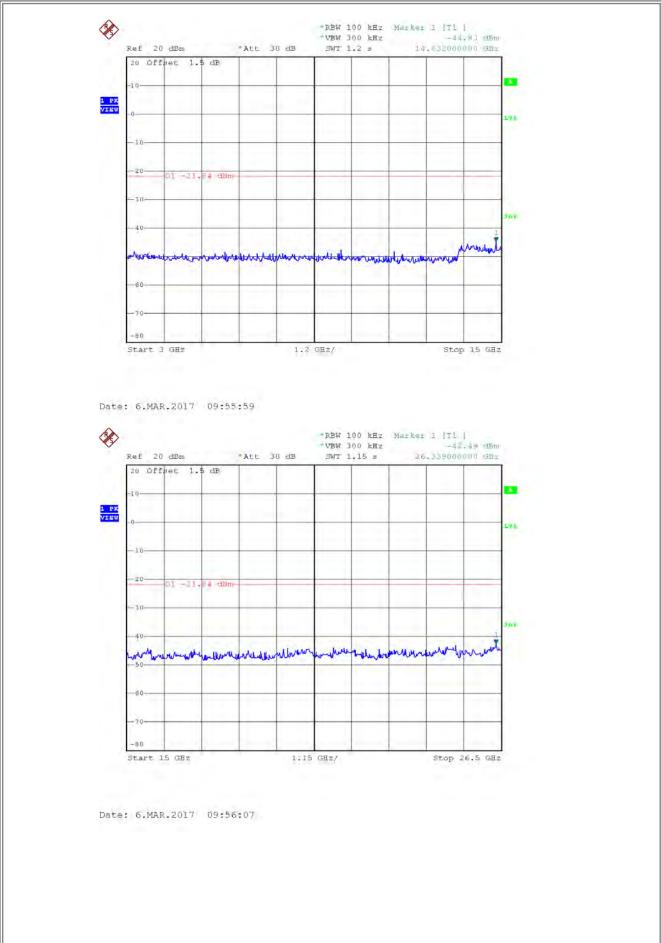






TX HT20 mode CH11 (10 Harmonic of the frequency)

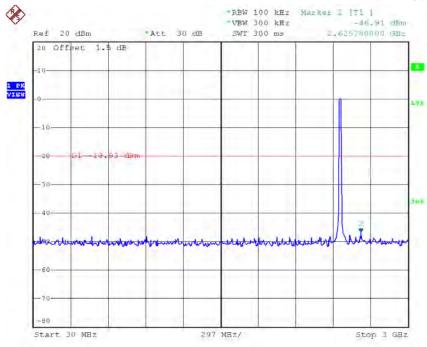


Date: 6.MAR.2017 10:00:50

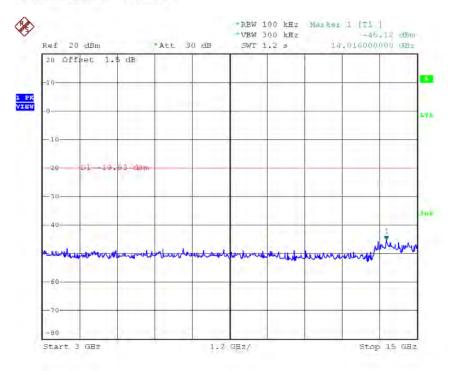

Date: 6.MAR.2017 10:00:58





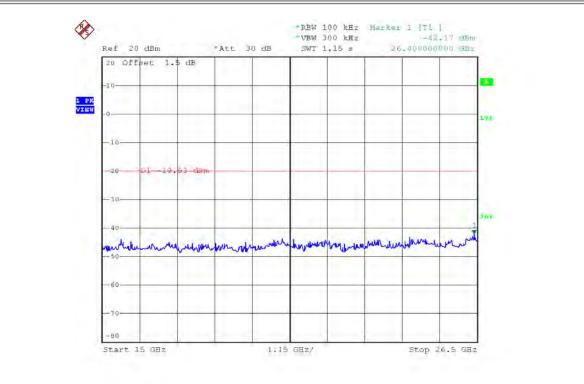


Date: 6.MAR.2017 10:01:06










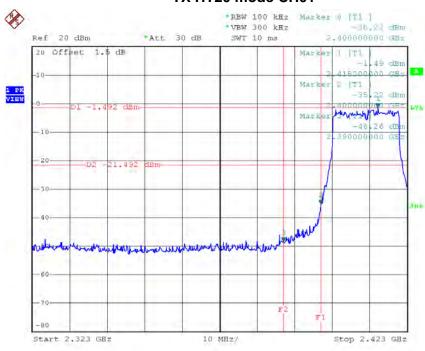

Date: 6.MAR.2017 10:09:25

TX HT20 mode CH11

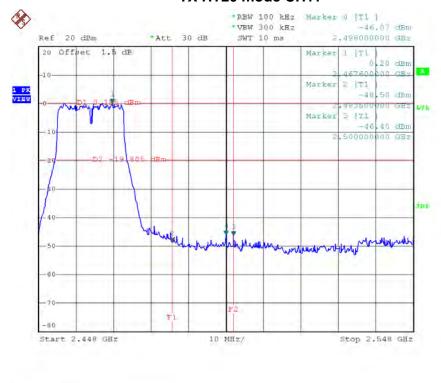


Date: 6.MAR.2017 10:12:14








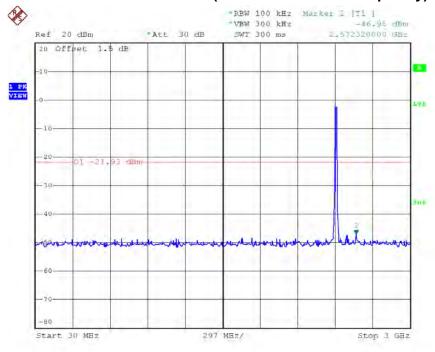


Date: 6.MAR.2017 10:09:00

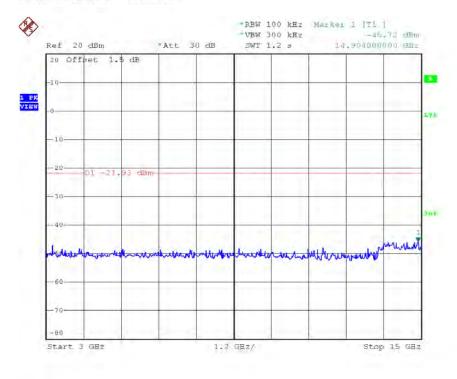

Date: 6.MAR.2017 10:09:08






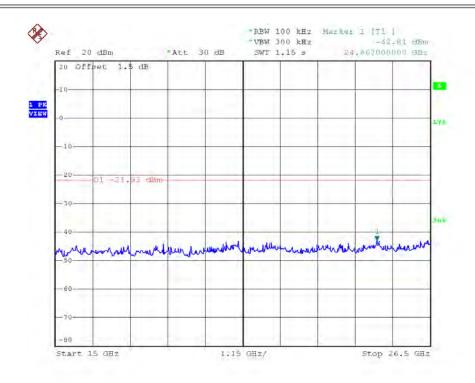

Date: 6.MAR.2017 10:09:17


TX HT20 mode CH06 (10 Harmonic of the frequency)

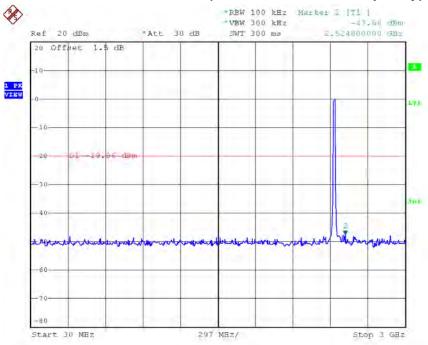

Date: 6.MAR.2017 10:10:35






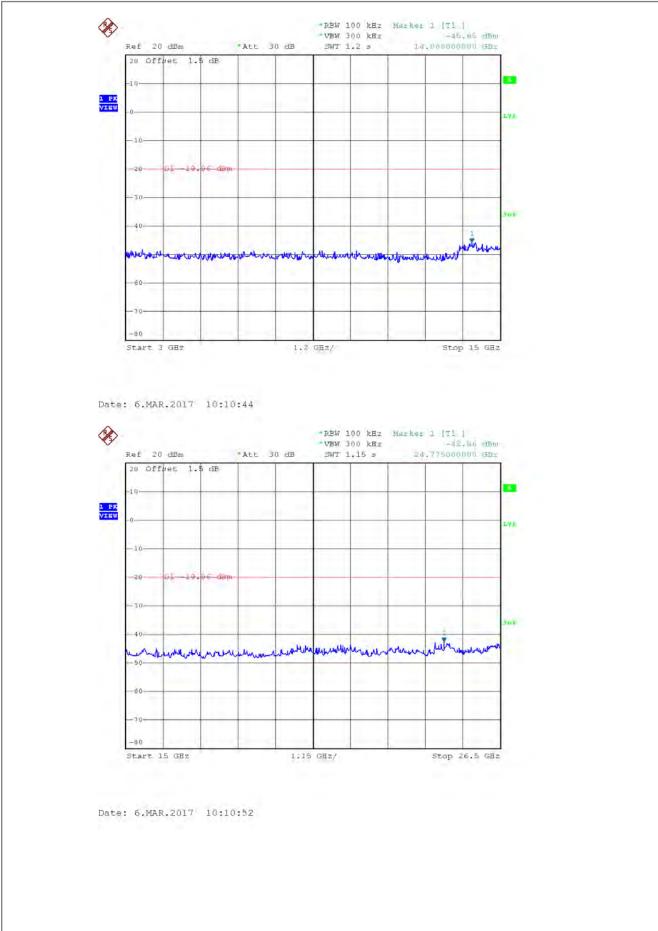






TX HT20 mode CH11 (10 Harmonic of the frequency)

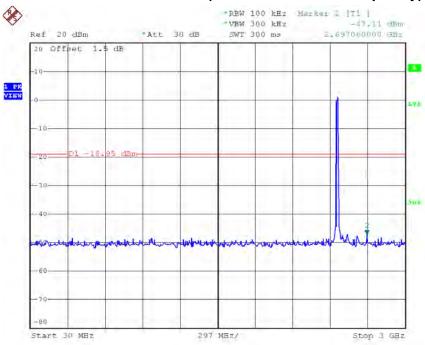


Date: 6.MAR.2017 10:11:50

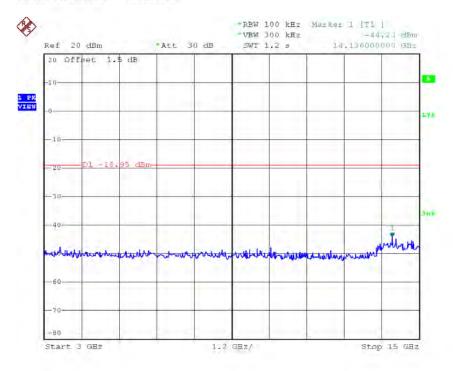

Date: 6.MAR.2017 10:11:58






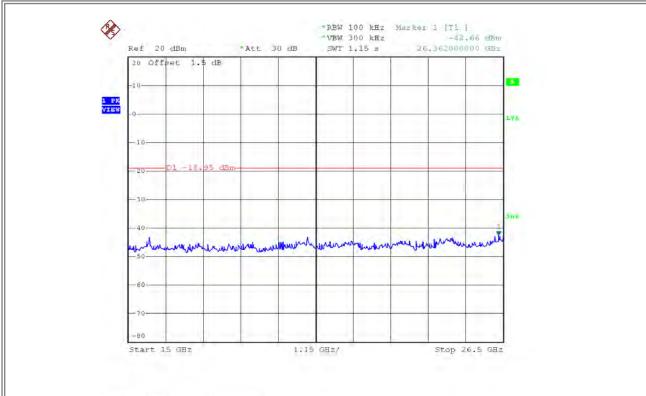

Date: 6.MAR.2017 10:12:06






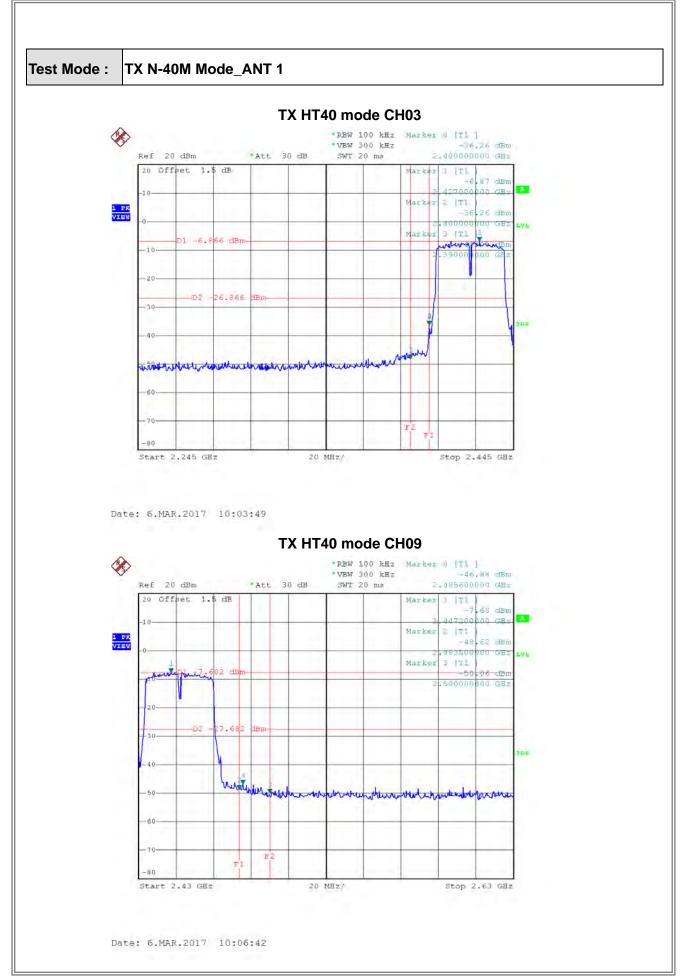








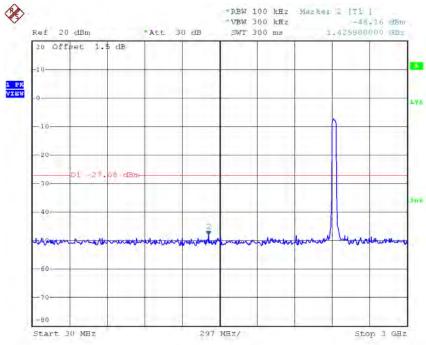


Date: 6.MAR.2017 10:03:24

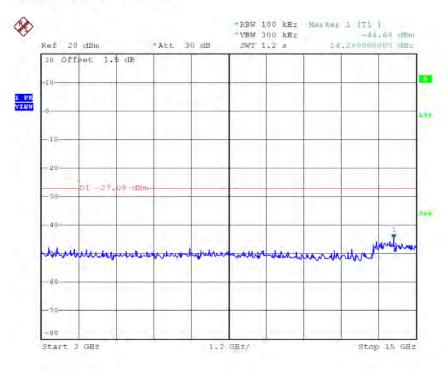

Date: 6.MAR.2017 10:03:33






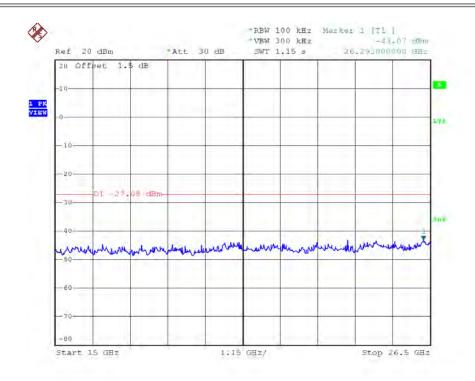

Date: 6.MAR.2017 10:03:41


TX HT40 mode CH06 (10 Harmonic of the frequency)

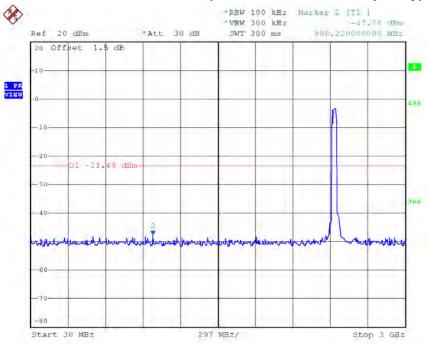

Date: 6.MAR.2017 10:04:57






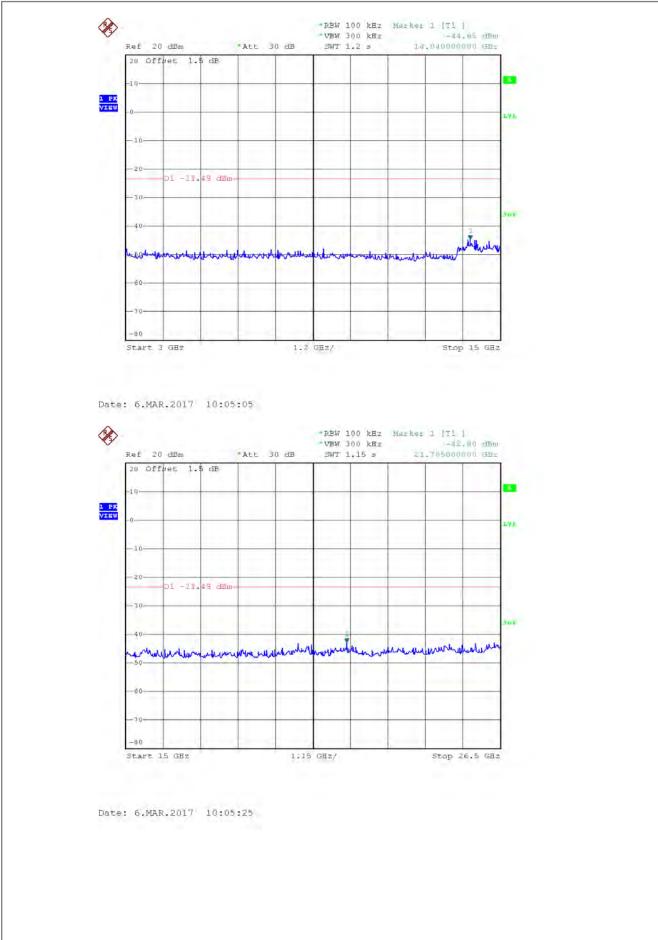






TX HT40 mode CH09 (10 Harmonic of the frequency)

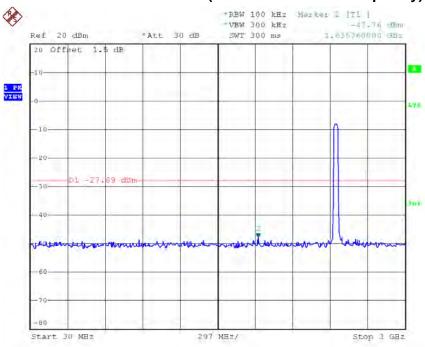

Date: 6.MAR.2017 10:06:17

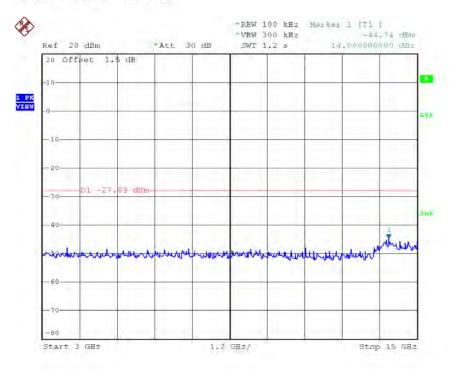


Date: 6.MAR.2017 10:06:25

Report No.: BTL-FCCP-1-1702C180 Page 136 of 158





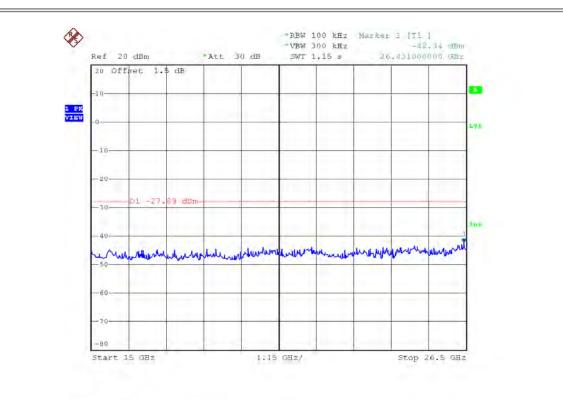


Date: 6.MAR.2017 10:06:34








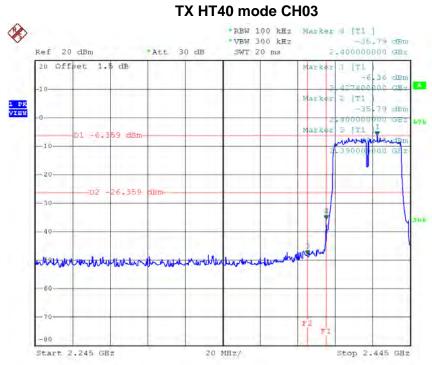

Date: 6.MAR.2017 10:14:05

TX HT40 mode CH09

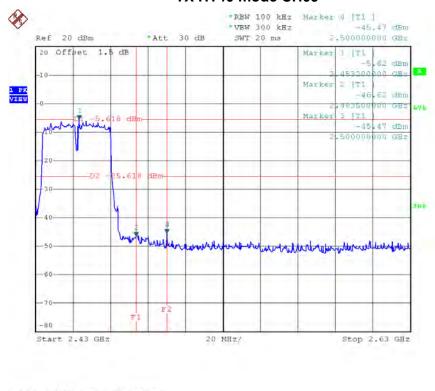


Date: 6.MAR.2017 10:16:57








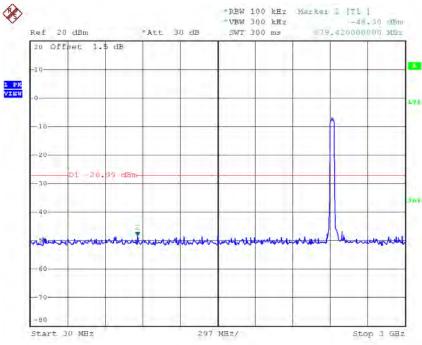


Date: 6.MAR.2017 10:13:40

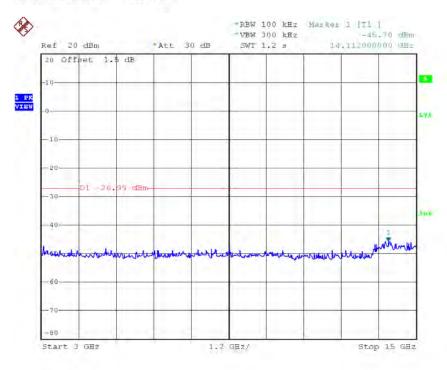

Date: 6.MAR.2017 10:13:49






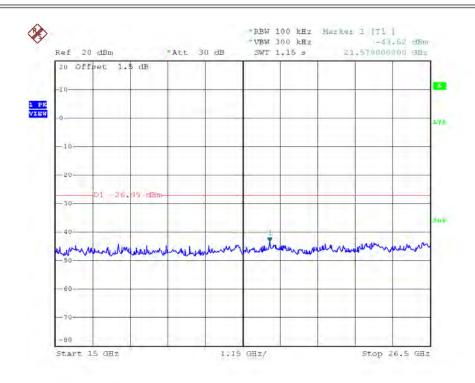

Date: 6.MAR.2017 10:13:57


TX HT40 mode CH06 (10 Harmonic of the frequency)

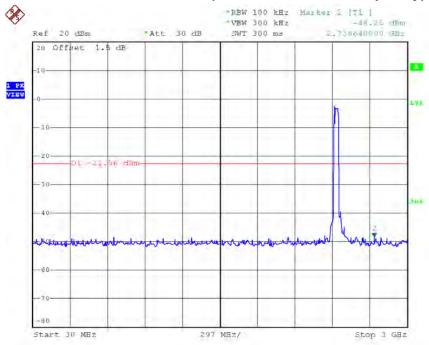

Date: 6.MAR.2017 10:15:03






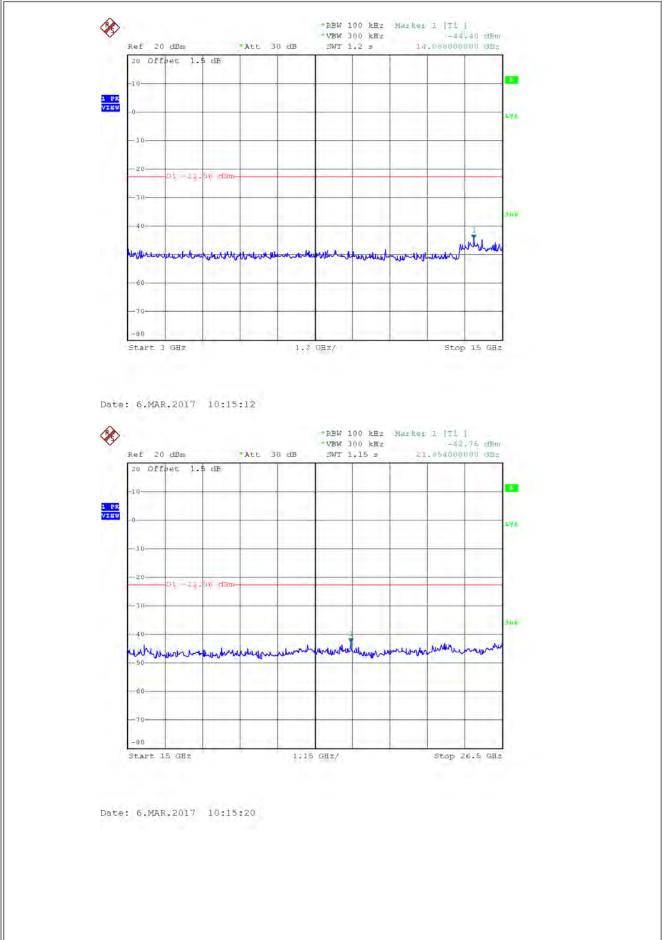






TX HT40 mode CH09 (10 Harmonic of the frequency)

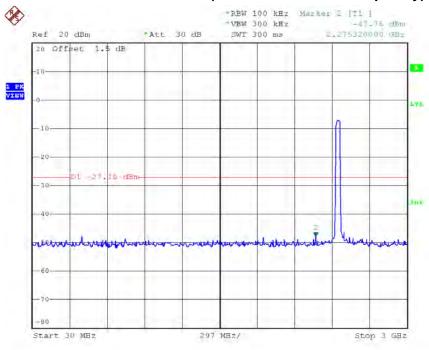


Date: 6.MAR.2017 10:16:32

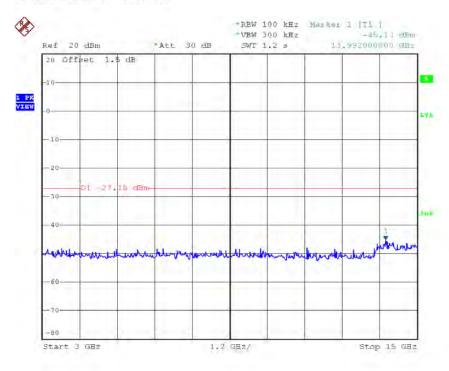

Date: 6.MAR.2017 10:16:41





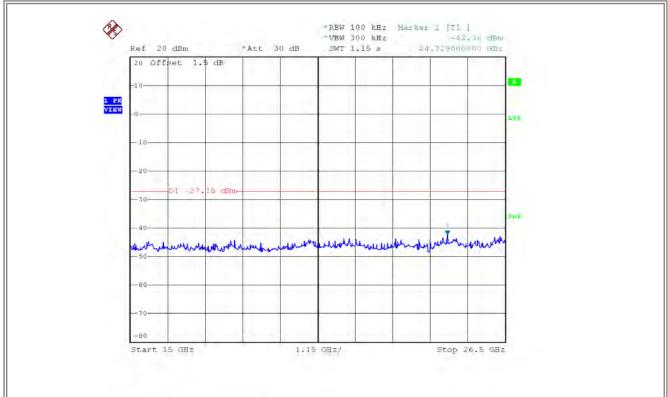

Date: 6.MAR.2017 10:16:49





ATTACHMENT H - POWER SPECTRAL DENSITY	

Report No.: BTL-FCCP-1-1702C180 Page 144 of 158






Test Mode :TX B Mode_CH01/06/11

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-7.55	0.1758	8.00	Complies
2437	-7.85	0.1641	8.00	Complies
2462	-8.52	0.1406	8.00	Complies

TX CH01

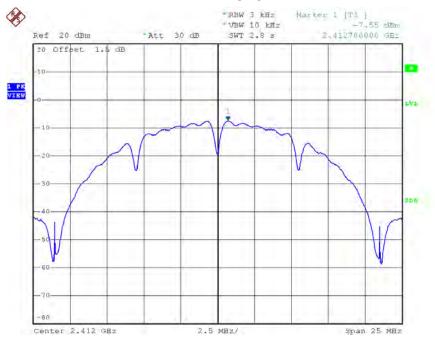


Date: 6.MAR.2017 09:37:15

Report No.: BTL-FCCP-1-1702C180 Page 145 of 158







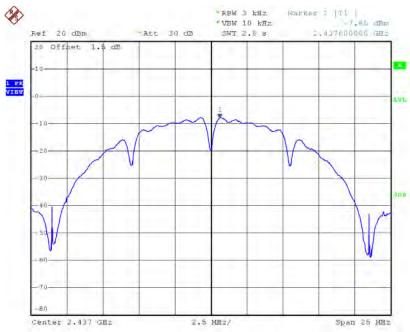

Date: 6.MAR.2017 09:39:12

TX CH11



Date: 6.MAR.2017 09:41:09






Test Mode :TX G Mode_CH01/06/11

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-13.56	0.0441	8.00	Complies
2437	-7.04	0.1977	8.00	Complies
2462	-12.55	0.0556	8.00	Complies

TX CH01

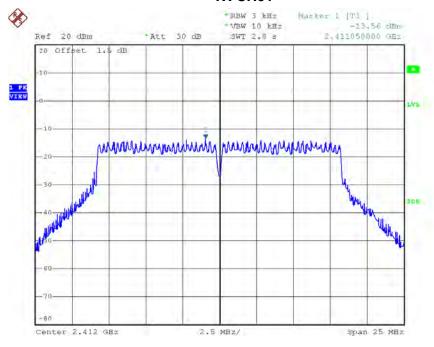


Date: 6.MAR.2017 09:46:47

Report No.: BTL-FCCP-1-1702C180 Page 147 of 158








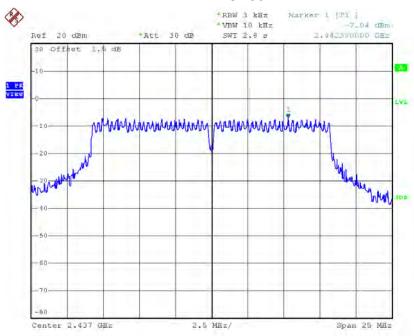

Date: 6.MAR.2017 09:48:36

TX CH11

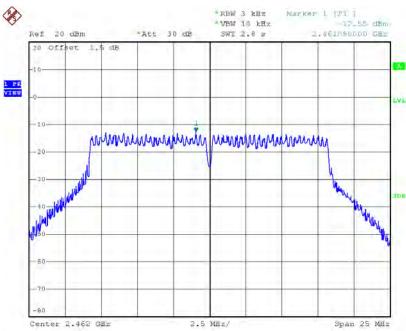

Date: 6.MAR.2017 09:50:05






Test Mode: TX N-20M Mode_CH01/06/11_ANT 1

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-14.77	0.0333	8.00	Complies
2437	-15.42	0.0287	8.00	Complies
2462	-13.13	0.0486	8.00	Complies

TX CH01

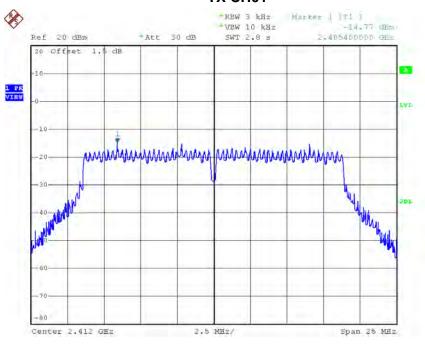


Date: 6.MAR.2017 09:55:05

Report No.: BTL-FCCP-1-1702C180 Page 149 of 158








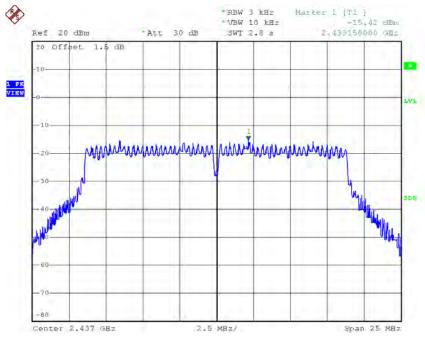

Date: 6.MAR.2017 09:56:17

TX CH11

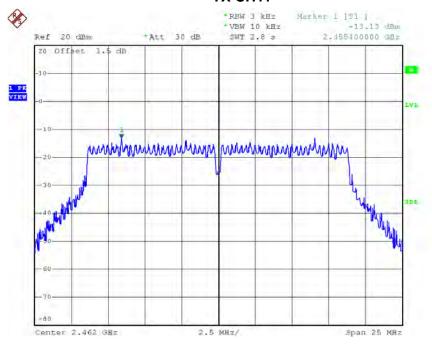

Date: 6.MAR.2017 10:01:23






Test Mode: TX N-20M Mode_CH01/06/11_ANT 2

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-16.01	0.0251	8.00	Complies
2437	-14.12	0.0387	8.00	Complies
2462	-12.96	0.0506	8.00	Complies

TX CH01

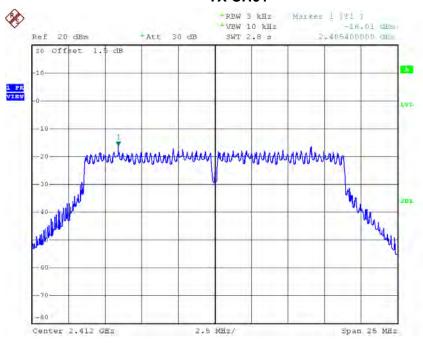


Date: 6.MAR.2017 10:09:34

Report No.: BTL-FCCP-1-1702C180 Page 151 of 158








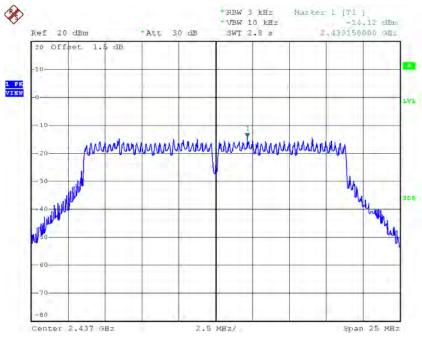

Date: 6.MAR.2017 10:11:01

TX CH11

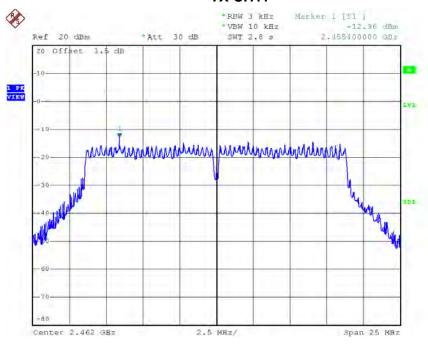

Date: 6.MAR.2017 10:12:23





Test Mode: TX N-20M Mode_CH01/06/11_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-12.22	0.0600	8.00	Complies
2437	-11.55	0.0700	8.00	Complies
2462	-10.00	0.1000	8.00	Complies

Report No.: BTL-FCCP-1-1702C180 Page 153 of 158






Test Mode: TX N-40M Mode_CH03/06/09_ANT 1

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-19.79	0.0105	8.00	Complies
2437	-16.02	0.0250	8.00	Complies
2452	-19.16	0.0121	8.00	Complies

TX CH03

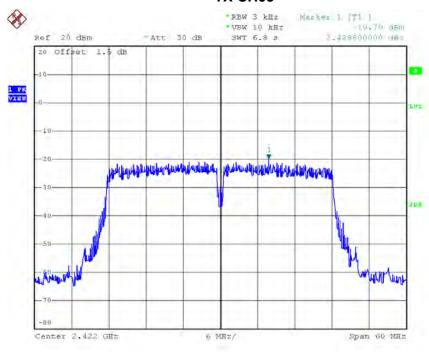


Date: 6.MAR.2017 10:04:01


Report No.: BTL-FCCP-1-1702C180 Page 154 of 158





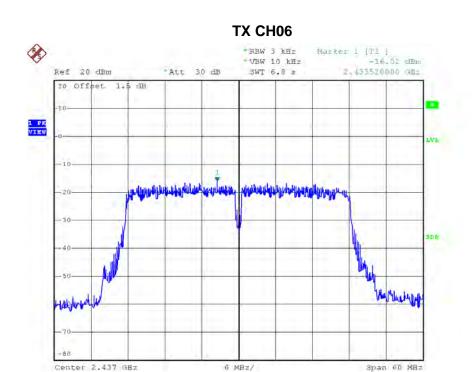

Date: 6.MAR.2017 10:05:17

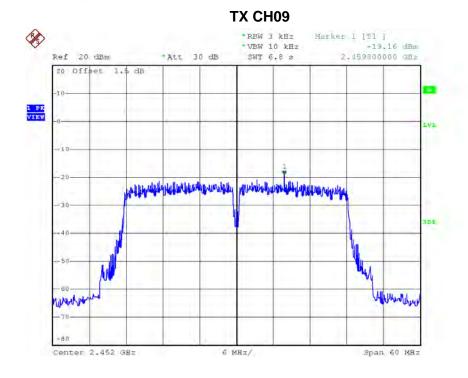

Date: 6.MAR.2017 10:06:54






Test Mode: TX N-40M Mode_CH03/06/09_ANT 2

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-21.08	0.0078	8.00	Complies
2437	-16.40	0.0229	8.00	Complies
2452	-21.02	0.0079	8.00	Complies

TX CH03

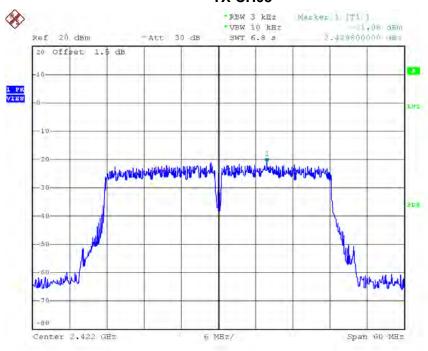


Date: 6.MAR.2017 10:14:17


Report No.: BTL-FCCP-1-1702C180 Page 156 of 158





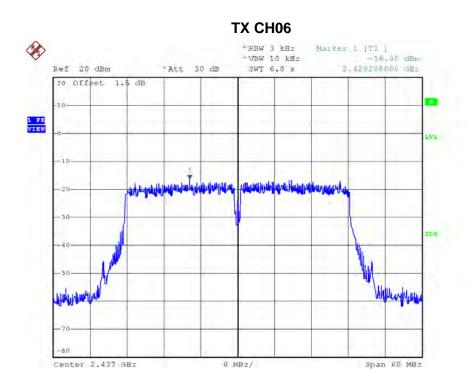

Date: 6.MAR.2017 10:15:32

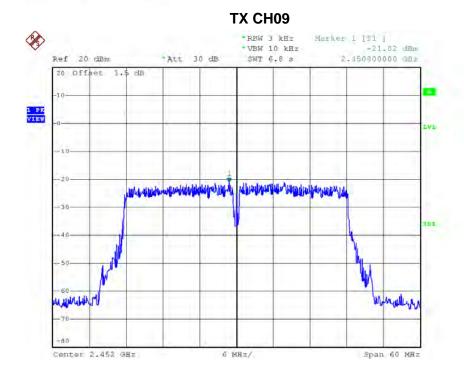

Date: 6.MAR.2017 10:17:09





Test Mode: TX N-40M Mode_CH03/06/09_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-16.99	0.0200	8.00	Complies
2437	-13.01	0.0500	8.00	Complies
2452	-16.99	0.0200	8.00	Complies

Report No.: BTL-FCCP-1-1702C180 Page 158 of 158