

FCC PART 15.247

TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China, 518052

FCC ID: V7TF3

Report Type: Original Report	Product Type: Wireless N300 Easy Setup Router
Test Engineer: Lion Xiao	<i>Lion Xiao</i>
Report Number: RDG150430005-00	
Report Date: 2015-05-13	
Reviewed By: Sula Huang RF Leader	<i>Sula Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....5

 DESCRIPTION OF TEST CONFIGURATION5

 EQUIPMENT MODIFICATIONS5

 EUT EXERCISE SOFTWARE6

 SUPPORT EQUIPMENT LIST AND DETAILS6

 EXTERNAL CABLE.....7

 BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS8

FCC §15.247 (i) & §1.1307 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....9

 APPLICABLE STANDARD9

FCC §15.203 - ANTENNA REQUIREMENT.....10

 APPLICABLE STANDARD10

 ANTENNA CONNECTOR CONSTRUCTION10

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS11

 APPLICABLE STANDARD11

 MEASUREMENT UNCERTAINTY11

 EUT SETUP.....11

 EMI TEST RECEIVER SETUP.....12

 TEST PROCEDURE12

 CORRECTED AMPLITUDE & MARGIN CALCULATION12

 TEST EQUIPMENT LIST AND DETAILS.....13

 TEST RESULTS SUMMARY.....13

 TEST DATA13

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....16

 APPLICABLE STANDARD16

 MEASUREMENT UNCERTAINTY16

 EUT SETUP16

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP17

 TEST PROCEDURE17

 CORRECTED AMPLITUDE & MARGIN CALCULATION18

 TEST EQUIPMENT LIST AND DETAILS.....18

 TEST RESULTS SUMMARY18

 TEST DATA18

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....35

 APPLICABLE STANDARD35

 TEST PROCEDURE35

 TEST EQUIPMENT LIST AND DETAILS.....35

 TEST DATA35

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....49

APPLICABLE STANDARD49
TEST PROCEDURE49
TEST EQUIPMENT LIST AND DETAILS.....49
TEST DATA49

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....51
APPLICABLE STANDARD51
TEST PROCEDURE51
TEST EQUIPMENT LIST AND DETAILS.....51
TEST DATA51

FCC §15.247(e) - POWER SPECTRAL DENSITY60
APPLICABLE STANDARD60
TEST PROCEDURE60
TEST EQUIPMENT LIST AND DETAILS.....60
TEST DATA60



GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SHENZHEN TENDA TECHNOLOGY CO.,LTD.* 's product, model number: *F3 (FCC ID: V7TF3)* (the "EUT") in this report was a *Wireless N300 Easy Setup Router*, which was measured approximately: 18.6 cm (L) x 14.4 cm (W) x 3.0 cm (H), rated input voltage: DC9.0V from adapter.

Adapter information: SWITCHING ADAPTER

Model: TEA09U-09060

Input: AC100-240V, 50/60Hz 0.3A

Output: DC9.0V, 0.6A

All measurement and test data in this report was gathered from production sample serial number: 150430005 (Assigned by BACL, Dongguan). The EUT was received on 2015-05-04.

Objective

This report is prepared on behalf of *SHENZHEN TENDA TECHNOLOGY CO.,LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.
For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g and 802.11n ht20 modes were tested with Channel 1, 6 and 11.
For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software “MTool2.0.0.3” was used for testing, which was provided by manufacturer. The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Test Mode	Test Software Version	MTool2.0.0.3					
802.11b	Test Frequency	2412MHz		2437MHz		2462MHz	
	Data Rate	(CCK)1Mbps		(CCK)1Mbps		(CCK)1Mbps	
	Chain	0	1	0	1	0	1
	Power Level Setting	58	60	59	60	59	61
802.11g	Test Frequency	2412MHz		2437MHz		2462MHz	
	Data Rate	(OFDM)6Mbps		(OFDM)6Mbps		(OFDM)6Mbps	
	Chain	0	1	0	1	0	1
	Power Level Setting	54	56	54	56	53	57
802.11n ht20	Test Frequency	2412MHz		2437MHz		2462MHz	
	Data Rate	MCS0		MCS0		MCS0	
	Chain	0	1	0	1	0	1
	Power Level Setting	43	43	43	43	45	45
802.11n ht40	Test Frequency	2422MHz		2437MHz		2452MHz	
	Data Rate	MCS0		MCS0		MCS0	
	Chain	0	1	0	1	0	1
	Power Level Setting	42	42	42	42	43	43


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05D C
SAST	Modem	AEM-2100	0293

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	Yes	No	1.2	ParallelPort of Laptop	Printer
Keyboard Cable	Yes	Yes	1.8	USB Port of Laptop	Keyboard
RJ45 Cable*1	Yes	No	1.0	EUT	Laptop
RJ45 Cable*3	Yes	No	10	EUT	Terminal Load

Block Diagram of Test Setup

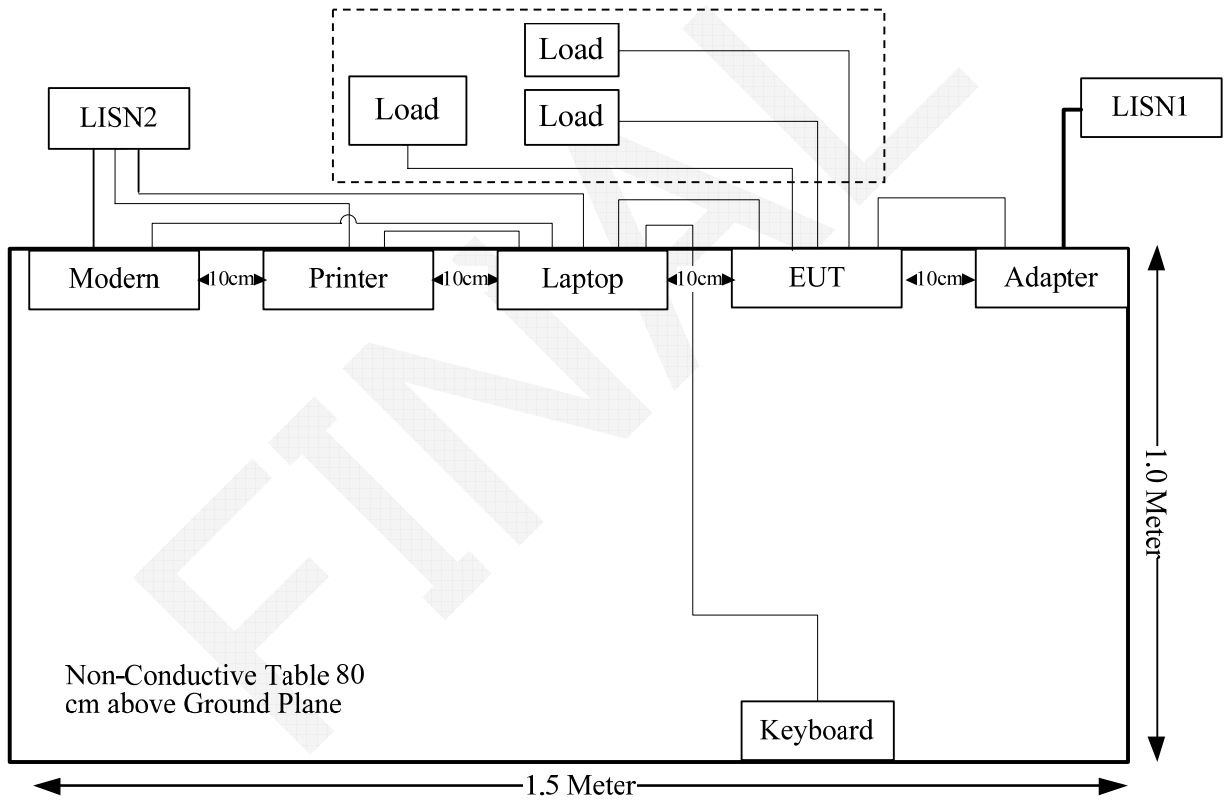

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1307 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412	5.0	3.16	19.34	85.90	20	0.054	1.0
802.11g	2412	5.0	3.16	23.18	207.97	20	0.131	1.0
802.11n HT20	2437	5.0	3.16	23.58	228.03	20	0.143	1.0
802.11n HT40	2422	5.0	3.16	23.17	207.49	20	0.130	1.0

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

This product used three external undetachable 2.4G antennas, two of them (chain0, chain1) are active, another (chain 2) is passive, and each one antenna gain is 5.0 dBi, which fulfill the requirement of this section, please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

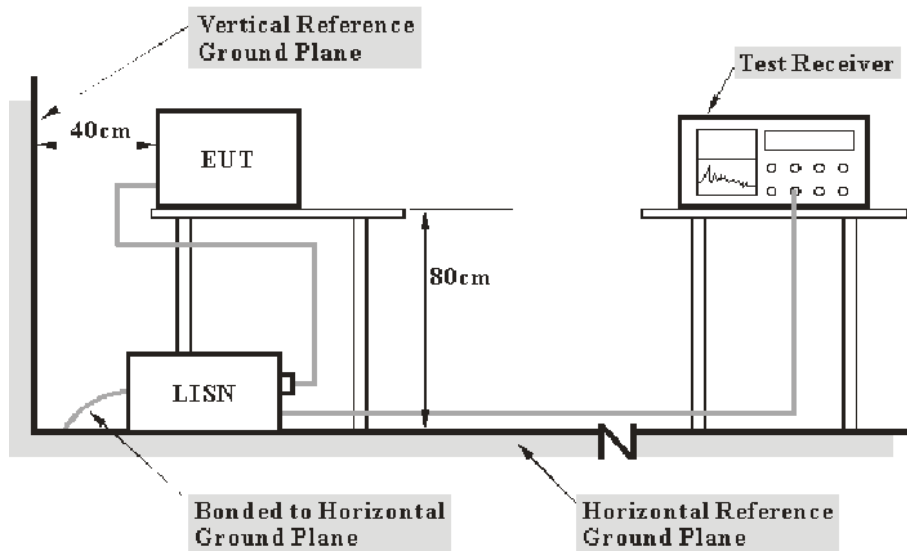

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN, the other equipments were connected to the second LISN .

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-20	2015-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2014-06-09	2015-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

8.20 dB at 0.614619 MHz in the **Neutral** conducted mode.

Test Data


Environmental Conditions

Temperature:	28.4 °C
Relative Humidity:	63 %
ATM Pressure:	100.3 kPa

The testing was performed by Lion Xiao on 2015-05-05.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

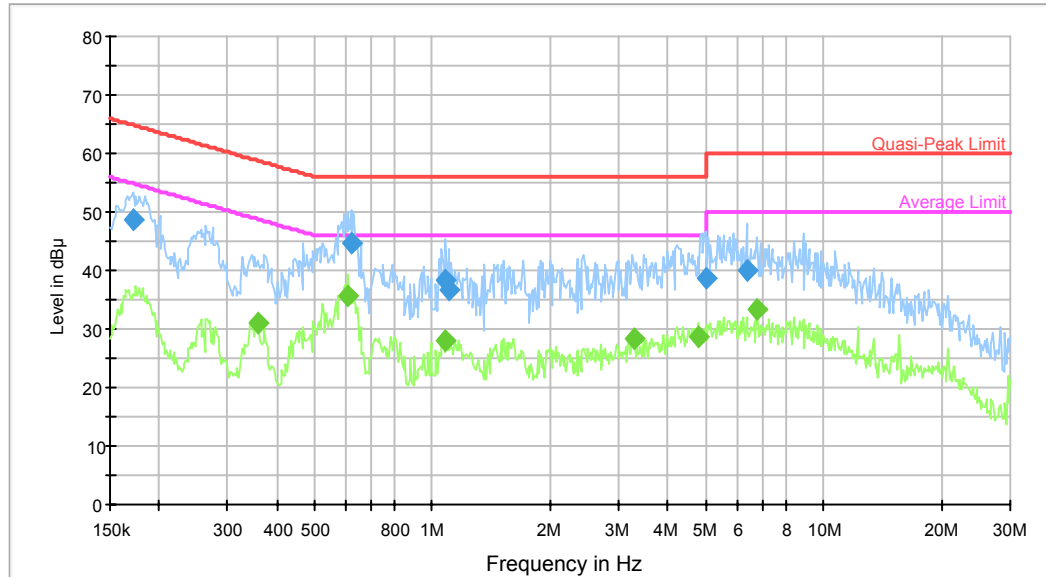

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.171759	48.7	9.000	L1	10.2	16.2	64.9	Compliance
0.619536	44.6	9.000	L1	10.3	11.4	56.0	Compliance
1.082190	38.2	9.000	L1	10.4	17.8	56.0	Compliance
1.099574	36.6	9.000	L1	10.4	19.4	56.0	Compliance
4.997188	38.6	9.000	L1	10.7	17.4	56.0	Compliance
6.346607	39.9	9.000	L1	10.7	20.1	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.357511	30.9	9.000	L1	10.3	17.9	48.8	Compliance
0.609741	35.7	9.000	L1	10.3	10.3	46.0	Compliance
1.082190	28.0	9.000	L1	10.4	18.0	46.0	Compliance
3.275801	28.4	9.000	L1	10.6	17.6	46.0	Compliance
4.763898	28.6	9.000	L1	10.7	17.4	46.0	Compliance
6.764347	33.4	9.000	L1	10.7	16.6	50.0	Compliance

AC120 V, 60 Hz, Neutral:

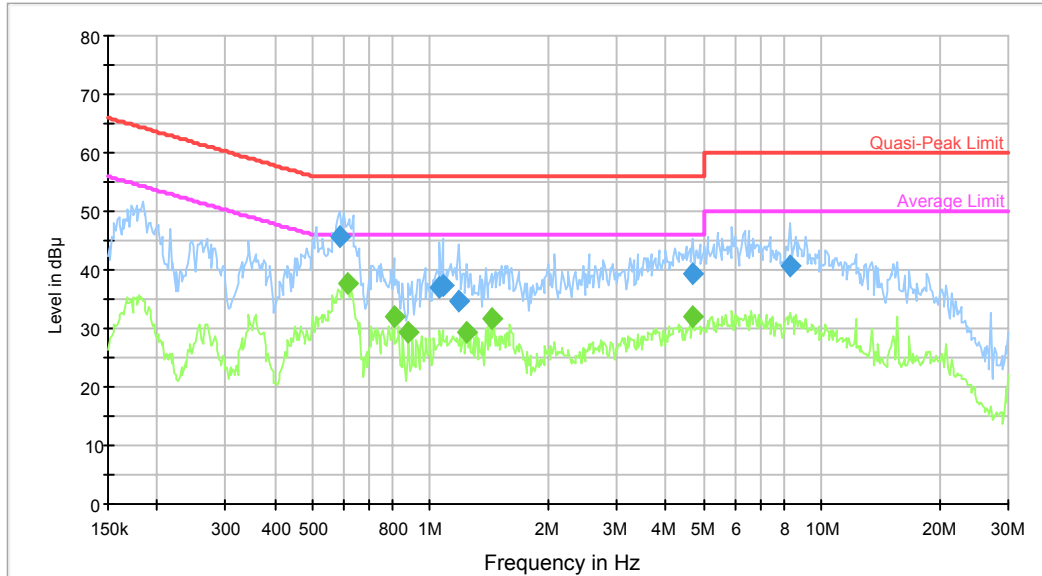

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.585926	45.5	9.000	N	10.2	10.5	56.0	Compliance
1.056628	37.0	9.000	N	10.4	19.0	56.0	Compliance
1.073601	37.4	9.000	N	10.4	18.6	56.0	Compliance
1.181325	34.6	9.000	N	10.4	21.4	56.0	Compliance
4.688581	39.3	9.000	N	10.7	16.7	56.0	Compliance
8.321464	40.5	9.000	N	10.6	19.5	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.614619	37.8	9.000	N	10.3	8.2	46.0	Compliance
0.805868	32.0	9.000	N	10.4	14.0	46.0	Compliance
0.879690	29.2	9.000	N	10.4	16.8	46.0	Compliance
1.239175	29.4	9.000	N	10.4	16.6	46.0	Compliance
1.430284	31.7	9.000	N	10.4	14.3	46.0	Compliance
4.688581	32.0	9.000	N	10.7	14.0	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

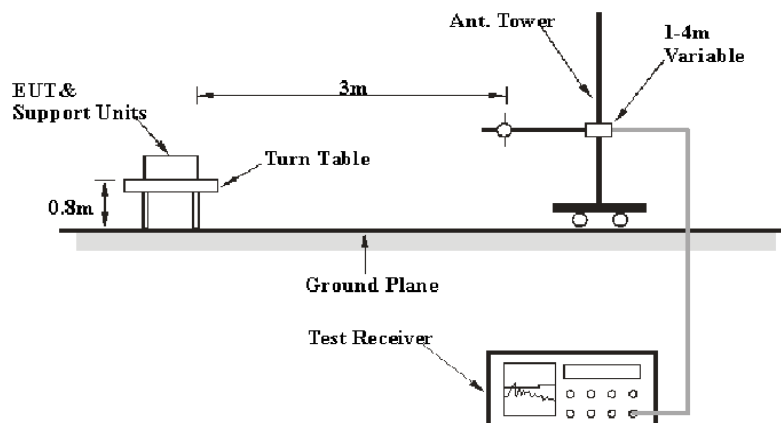

Above 1GHz:

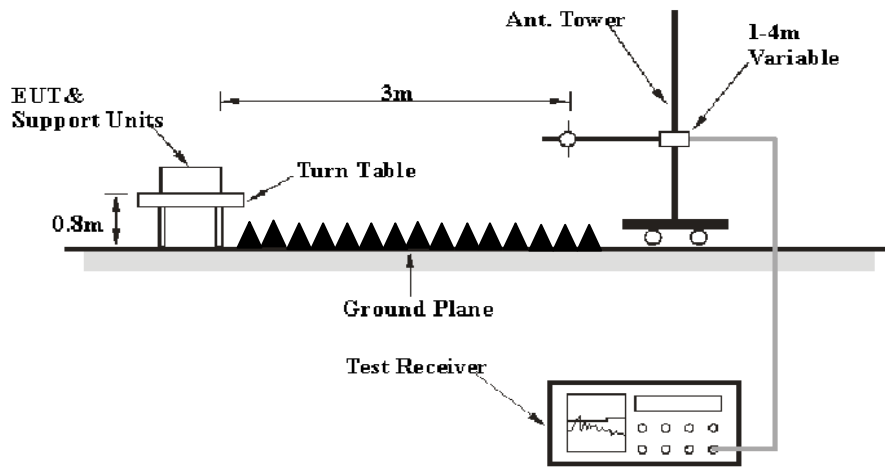

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-05-09	2016-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2014-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

0.32dB at 2483.5 MHz in the Vertical polarization for 802.11g Mode

Test Data

Environmental Conditions

Temperature:	24.8 °C
Relative Humidity:	58 %
ATM Pressure:	100.2 kPa

The testing was performed by Lion Xiao on 2015-05-11.

Test Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	70.32	PK	H	25.67	3.68	0.00	99.67	N/A	N/A
2412	64.58	AV	H	25.67	3.68	0.00	93.93	N/A	N/A
2412	78.36	PK	V	25.67	3.68	0.00	107.71	N/A	N/A
2412	72.77	AV	V	25.67	3.68	0.00	102.12	N/A	N/A
2390	23.39	PK	V	25.61	3.63	0.00	52.63	74.00	21.37
2390	15.35	AV	V	25.61	3.63	0.00	44.59	54.00	9.41
4824	47.88	PK	V	30.64	5.03	27.41	56.14	74.00	17.86
4824	42.99	AV	V	30.64	5.03	27.41	51.25	54.00	2.75*
7236	37.42	PK	V	34.17	6.65	25.90	52.34	74.00	21.66
7236	30.28	AV	V	34.17	6.65	25.90	45.20	54.00	8.80
9648	35.28	PK	V	36.06	8.55	27.46	52.43	74.00	21.57
9648	25.34	AV	V	36.06	8.55	27.46	42.49	54.00	11.51
3216	50.21	PK	V	27.89	6.15	27.36	56.89	87.71	30.82
3216	49.36	AV	V	27.89	6.15	27.36	56.04	82.12	26.08
299.6	36.2	QP	V	14.02	2.08	21.52	30.78	46.00	15.22
Middle Channel: 2437 MHz									
2437	69.88	PK	H	25.74	3.75	0.00	99.37	N/A	N/A
2437	64.06	AV	H	25.74	3.75	0.00	93.55	N/A	N/A
2437	78.11	PK	V	25.74	3.75	0.00	107.60	N/A	N/A
2437	72.37	AV	V	25.74	3.75	0.00	101.86	N/A	N/A
4874	47.43	PK	V	30.77	5.14	27.42	55.92	74.00	18.08
4874	42.52	AV	V	30.77	5.14	27.42	51.01	54.00	2.99*
7311	37.06	PK	V	34.35	6.74	25.88	52.27	74.00	21.73
7311	29.79	AV	V	34.35	6.74	25.88	45.00	54.00	9.00
9748	34.89	PK	V	36.30	8.61	27.24	52.56	74.00	21.44
9748	24.93	AV	V	36.30	8.61	27.24	42.60	54.00	11.40
2362	49.86	PK	V	25.54	3.57	27.31	51.66	87.60	35.94
2362	49.14	AV	V	25.54	3.57	27.31	50.94	81.86	30.92
3249	34.26	PK	V	28.00	6.31	27.33	41.24	74.00	32.76
3249	21.43	AV	V	28.00	6.31	27.33	28.41	54.00	25.59
299.6	36.27	QP	V	14.02	2.08	21.52	30.85	46.00	15.15
High Channel: 2462 MHz									
2462	69.64	PK	H	25.80	3.75	0.00	99.19	N/A	N/A
2462	64.17	AV	H	25.80	3.75	0.00	93.72	N/A	N/A
2462	77.27	PK	V	25.80	3.75	0.00	106.82	N/A	N/A
2462	71.09	AV	V	25.80	3.75	0.00	100.64	N/A	N/A
2483.5	27.96	PK	V	25.86	3.67	0.00	57.49	74.00	16.51
2483.5	14.36	AV	V	25.86	3.67	0.00	43.89	54.00	10.11
4924	47.34	PK	V	30.90	5.34	27.43	56.15	74.00	17.85
4924	43.77	AV	V	30.90	5.34	27.43	52.58	54.00	1.42*
7386	36.6	PK	V	34.53	6.83	25.86	52.10	74.00	21.90
7386	29.5	AV	V	34.53	6.83	25.86	45.00	54.00	9.00
9848	34.59	PK	V	36.54	8.66	26.94	52.85	74.00	21.15
9848	24.5	AV	V	36.54	8.66	26.94	42.76	54.00	11.24
3282	49.46	PK	V	28.10	5.56	27.30	55.82	86.82	31.00
3282	48.65	AV	V	28.10	5.56	27.30	55.01	80.64	25.63
299.6	36.13	QP	V	14.02	2.08	21.52	30.71	46.00	15.29

*within measurement uncertainty!

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	72.54	PK	H	25.67	3.68	0.00	101.89	N/A	N/A
2412	61.45	AV	H	25.67	3.68	0.00	90.80	N/A	N/A
2412	81.53	PK	V	25.67	3.68	0.00	110.88	N/A	N/A
2412	70.81	AV	V	25.67	3.68	0.00	100.16	N/A	N/A
2390	43.15	PK	V	25.61	3.63	0.00	72.39	74.00	1.61
2390	23.29	AV	V	25.61	3.63	0.00	52.53	54.00	1.47
4824	62.64	PK	V	30.64	5.03	27.41	70.90	74.00	3.10
4824	42.78	AV	V	30.64	5.03	27.41	51.04	54.00	2.96
7236	42.85	PK	V	34.17	6.65	25.90	57.77	74.00	16.23
7236	22.15	AV	V	34.17	6.65	25.90	37.07	54.00	16.93
9648	32.32	PK	V	36.06	8.55	27.46	49.47	74.00	24.53
9648	18.34	AV	V	36.06	8.55	27.46	35.49	54.00	18.51
3216	51.24	PK	V	27.89	6.15	27.36	57.92	90.88	32.96
3216	49.36	AV	V	27.89	6.15	27.36	56.04	80.16	24.12
299.6	36.07	QP	V	14.02	2.08	21.52	30.65	46.00	15.35
Middle Channel: 2437 MHz									
2437	71.79	PK	H	25.74	3.75	0.00	101.28	N/A	N/A
2437	60.94	AV	H	25.74	3.75	0.00	90.43	N/A	N/A
2437	81.28	PK	V	25.74	3.75	0.00	110.77	N/A	N/A
2437	70.34	AV	V	25.74	3.75	0.00	99.83	N/A	N/A
4874	62.25	PK	V	30.77	5.14	27.42	70.74	74.00	3.26*
4874	43.15	AV	V	30.77	5.14	27.42	51.64	54.00	2.36*
7311	42.44	PK	V	34.35	6.74	25.88	57.65	74.00	16.35
7311	21.94	AV	V	34.35	6.74	25.88	37.15	54.00	16.85
9748	31.87	PK	V	36.30	8.61	27.24	49.54	74.00	24.46
9748	17.92	AV	V	36.30	8.61	27.24	35.59	54.00	18.41
3249	51.04	PK	V	28.00	6.31	27.33	58.02	90.77	32.75
3249	49.12	AV	V	28.00	6.31	27.33	56.10	79.83	23.73
2362	33.25	PK	V	25.54	3.57	27.31	35.05	74.00	38.95
2362	20.16	AV	V	25.54	3.57	27.31	21.96	54.00	32.04
299.6	36.01	QP	V	14.02	2.08	21.52	30.59	46.00	15.41
High Channel: 2462 MHz									
2462	71.17	PK	H	25.80	3.75	0.00	100.72	N/A	N/A
2462	60.25	AV	H	25.80	3.75	0.00	89.80	N/A	N/A
2462	80.04	PK	V	25.80	3.75	0.00	109.59	N/A	N/A
2462	69.83	AV	V	25.80	3.75	0.00	99.38	N/A	N/A
2483.5	44.15	PK	V	25.86	3.67	0.00	73.68	74.00	0.32*
2483.5	22.82	AV	V	25.86	3.67	0.00	52.35	54.00	1.65*
4924	61.36	PK	V	30.90	5.34	27.43	70.17	74.00	3.83*
4924	43.18	AV	V	30.90	5.34	27.43	51.99	54.00	2.01*
7386	42.08	PK	V	34.53	6.83	25.86	57.58	74.00	16.42
7386	21.73	AV	V	34.53	6.83	25.86	37.23	54.00	16.77
9848	31.53	PK	V	36.54	8.66	26.94	49.79	74.00	24.21
9848	17.48	AV	V	36.54	8.66	26.94	35.74	54.00	18.26
2362	50.62	PK	V	25.54	3.57	27.31	52.42	89.59	37.17
2362	48.81	AV	V	25.54	3.57	27.31	50.61	79.38	28.77
299.6	36.16	QP	V	14.02	2.08	21.52	30.74	46.00	15.26

*within measurement uncertainty!

802.11 n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	71.36	PK	H	25.67	3.68	0.00	100.71	N/A	N/A
2412	58.57	AV	H	25.67	3.68	0.00	87.92	N/A	N/A
2412	80.46	PK	V	25.67	3.68	0.00	109.81	N/A	N/A
2412	67.86	AV	V	25.67	3.68	0.00	97.21	N/A	N/A
2390	43.2	PK	V	25.61	3.63	0.00	72.44	74.00	1.56*
2390	20.98	AV	V	25.61	3.63	0.00	50.22	54.00	3.78*
4824	55.64	PK	V	30.64	5.03	27.41	63.90	74.00	10.10
4824	29.57	AV	V	30.64	5.03	27.41	37.83	54.00	16.17
7236	34.23	PK	V	34.17	6.65	25.90	49.15	74.00	24.85
7236	20.15	AV	V	34.17	6.65	25.90	35.07	54.00	18.93
9648	32.12	PK	V	36.06	8.55	27.46	49.27	74.00	24.73
9648	19.34	AV	V	36.06	8.55	27.46	36.49	54.00	17.51
3215	50.16	PK	V	27.89	6.15	27.36	56.84	89.81	32.97
3215	48.2	AV	V	27.89	6.15	27.36	54.88	77.21	22.33
299.6	36.48	QP	V	14.02	2.08	21.52	31.06	46.00	14.94
Middle Channel: 2437 MHz									
2437	70.87	PK	H	25.74	3.75	0.00	100.36	N/A	N/A
2437	58.17	AV	H	25.74	3.75	0.00	87.66	N/A	N/A
2437	80.23	PK	V	25.74	3.75	0.00	109.72	N/A	N/A
2437	67.52	AV	V	25.74	3.75	0.00	97.01	N/A	N/A
4874	55.54	PK	V	30.77	5.14	27.42	64.03	74.00	9.97
4874	29.42	AV	V	30.77	5.14	27.42	37.91	54.00	16.09
7311	34.15	PK	V	34.35	6.74	25.88	49.36	74.00	24.64
7311	20.1	AV	V	34.35	6.74	25.88	35.31	54.00	18.69
9748	32.01	PK	V	36.30	8.61	27.24	49.68	74.00	24.32
9748	19.2	AV	V	36.30	8.61	27.24	36.87	54.00	17.13
3249	50	PK	V	28.00	6.31	27.33	56.98	89.72	32.74
3249	47.96	AV	V	28.00	6.31	27.33	54.94	77.01	22.07
1636	34.65	PK	V	23.87	2.81	27.76	33.57	74.00	40.43
1636	21.28	AV	V	23.87	2.81	27.76	20.20	54.00	33.80
299.6	36.54	QP	V	14.02	2.08	21.52	31.12	46.00	14.88
High Channel: 2462 MHz									
2462	70.61	PK	H	25.80	3.75	0.00	100.16	N/A	N/A
2462	57.86	AV	H	25.80	3.75	0.00	87.41	N/A	N/A
2462	79.87	PK	V	25.80	3.75	0.00	109.42	N/A	N/A
2462	67.42	AV	V	25.80	3.75	0.00	96.97	N/A	N/A
2483.5	42.68	PK	V	25.86	3.67	0.00	72.21	74.00	1.79*
2483.5	20.14	AV	V	25.86	3.67	0.00	49.67	54.00	4.33*
4924	55.36	PK	V	30.90	5.34	27.43	64.17	74.00	9.83
4924	29.14	AV	V	30.90	5.34	27.43	37.95	54.00	16.05
7386	33.93	PK	V	34.53	6.83	25.86	49.43	74.00	24.57
7386	19.89	AV	V	34.53	6.83	25.86	35.39	54.00	18.61
9848	31.84	PK	V	36.54	8.66	26.94	50.10	74.00	23.90
9848	19.19	AV	V	36.54	8.66	26.94	37.45	54.00	16.55
3282	49.95	PK	V	28.10	5.56	27.30	56.31	89.42	33.11
3282	47.86	AV	V	28.10	5.56	27.30	54.22	76.97	22.75
299.6	36.44	QP	V	14.02	2.08	21.52	31.02	46.00	14.98

*within measurement uncertainty!

802.11 n ht40 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	68.36	PK	H	25.70	3.71	0.00	97.77	N/A	N/A
2422	56.27	AV	H	25.70	3.71	0.00	85.68	N/A	N/A
2422	76.56	PK	V	25.70	3.71	0.00	105.97	N/A	N/A
2422	64.53	AV	V	25.70	3.71	0.00	93.94	N/A	N/A
2390	42.58	PK	V	25.61	3.63	0.00	71.82	74.00	2.18*
2390	23.19	AV	V	25.61	3.63	0.00	52.43	54.00	1.57*
4844	49.55	PK	V	30.69	4.99	27.42	57.81	74.00	16.19
4844	26.23	AV	V	30.69	4.99	27.42	40.51	54.00	13.49
7266	32.25	PK	V	34.24	6.68	25.89	45.17	74.00	28.83
7266	30.14	AV	V	34.24	6.68	25.89	45.17	54.00	8.83
9688	29.52	PK	V	36.15	8.58	27.37	46.88	74.00	27.12
9688	17.31	AV	V	36.15	8.58	27.37	34.67	54.00	19.33
3235	50.39	PK	V	27.95	6.24	27.34	57.24	85.97	28.73
3235	47.82	AV	V	27.95	6.24	27.34	54.67	73.94	19.27
299.6	36.91	QP	V	14.02	2.08	21.52	31.49	46.00	14.51
Middle Channel: 2437 MHz									
2437	68.08	PK	H	25.74	3.75	0.00	97.57	N/A	N/A
2437	55.88	AV	H	25.74	3.75	0.00	85.37	N/A	N/A
2437	76.14	PK	V	25.74	3.75	0.00	105.63	N/A	N/A
2437	64.05	AV	V	25.74	3.75	0.00	93.54	N/A	N/A
4874	49.25	PK	V	30.77	5.14	27.42	57.74	74.00	16.26
4874	25.82	AV	V	30.77	5.14	27.42	34.31	54.00	19.69
7311	31.92	PK	V	34.35	6.74	25.88	47.13	74.00	26.87
7311	29.84	AV	V	34.35	6.74	25.88	45.05	54.00	8.95
9748	29.28	PK	V	36.30	8.61	27.24	46.95	74.00	27.05
9748	17.04	AV	V	36.30	8.61	27.24	34.71	54.00	19.29
3262	50.02	PK	V	28.04	6.03	27.32	56.77	85.63	28.86
3262	47.59	AV	V	28.04	6.03	27.32	54.34	73.54	19.20
1582	33.34	PK	V	23.76	2.58	27.74	31.94	74.00	42.06
1582	20.13	AV	V	23.76	2.58	27.74	18.73	54.00	35.27
299.6	36.83	QP	V	14.02	2.08	21.52	31.41	46.00	14.59
High Channel: 2452 MHz									
2452	67.76	PK	H	25.78	3.78	0.00	97.32	N/A	N/A
2452	55.48	AV	H	25.78	3.78	0.00	85.04	N/A	N/A
2452	74.54	PK	V	25.78	3.78	0.00	104.10	N/A	N/A
2452	62.31	AV	V	25.78	3.78	0.00	91.87	N/A	N/A
2483.5	39.32	PK	V	25.86	3.67	0.00	68.85	74.00	5.15
2483.5	22.52	AV	V	25.86	3.67	0.00	52.05	54.00	1.95 *
4904	49.11	PK	V	30.85	5.31	27.43	57.84	74.00	16.16
4904	25.8	AV	V	30.85	5.31	27.43	34.53	54.00	19.47
7356	31.83	PK	V	34.45	6.79	25.87	47.20	74.00	26.80
7356	29.82	AV	V	34.45	6.79	25.87	45.19	54.00	8.81
9808	29.1	PK	V	36.44	8.64	27.09	47.09	74.00	26.91
9808	17.01	AV	V	36.44	8.64	27.09	35.00	54.00	19.00
3282	50.87	PK	V	28.10	5.56	27.30	57.23	84.10	26.87
3282	47.37	AV	V	28.10	5.56	27.30	53.73	71.87	18.14
299.6	36.75	QP	V	14.02	2.08	21.52	31.33	46.00	14.67


*within measurement uncertainty!

Conducted Spurious Emissions at Antenna Port

Chain 0


802.11b Low Channel

Fundamental

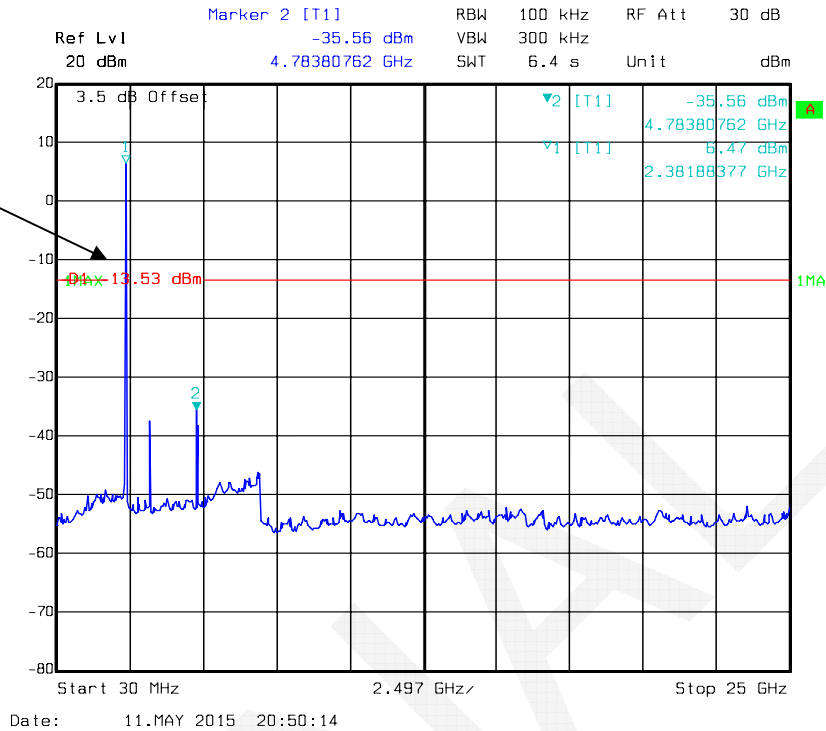


802.11b Middle Channel


Fundamental

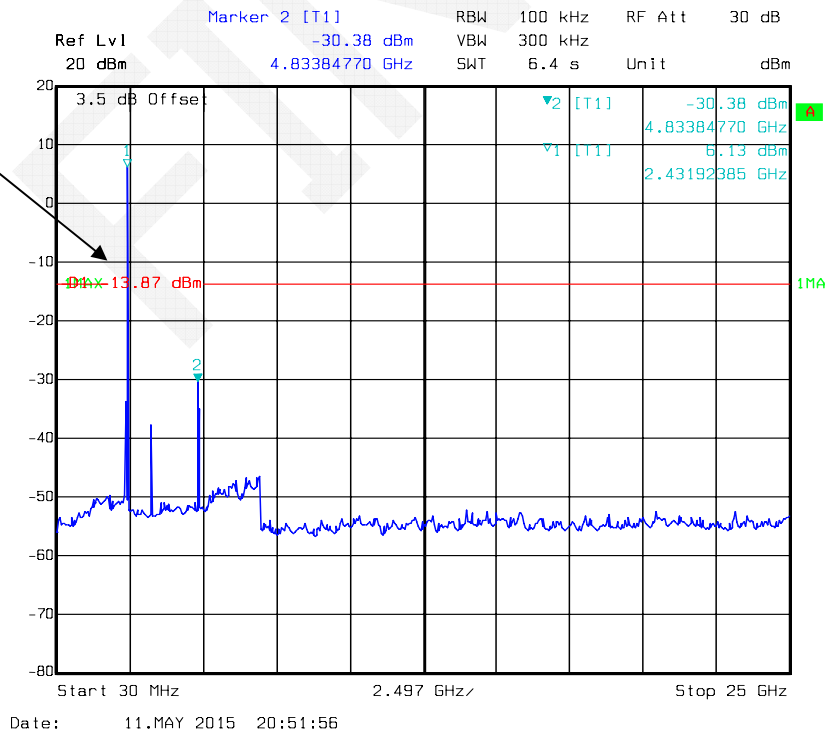

802.11b High Channel

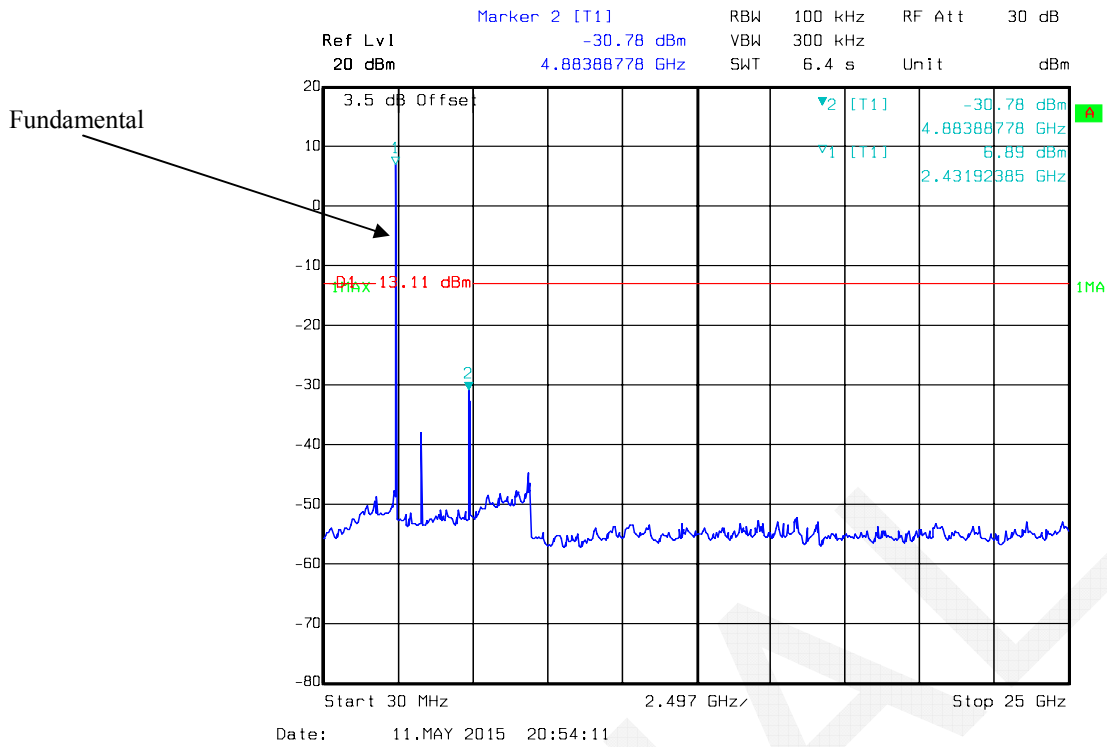


802.11g Low Channel

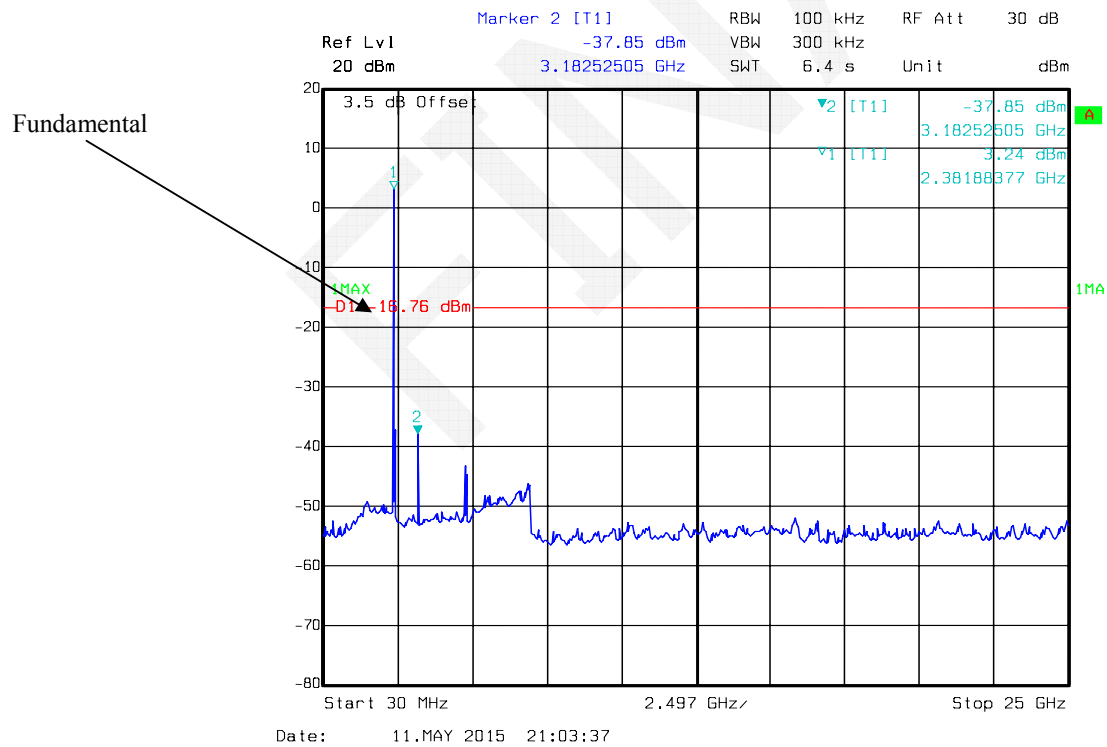


802.11g Middle Channel

Fundamental

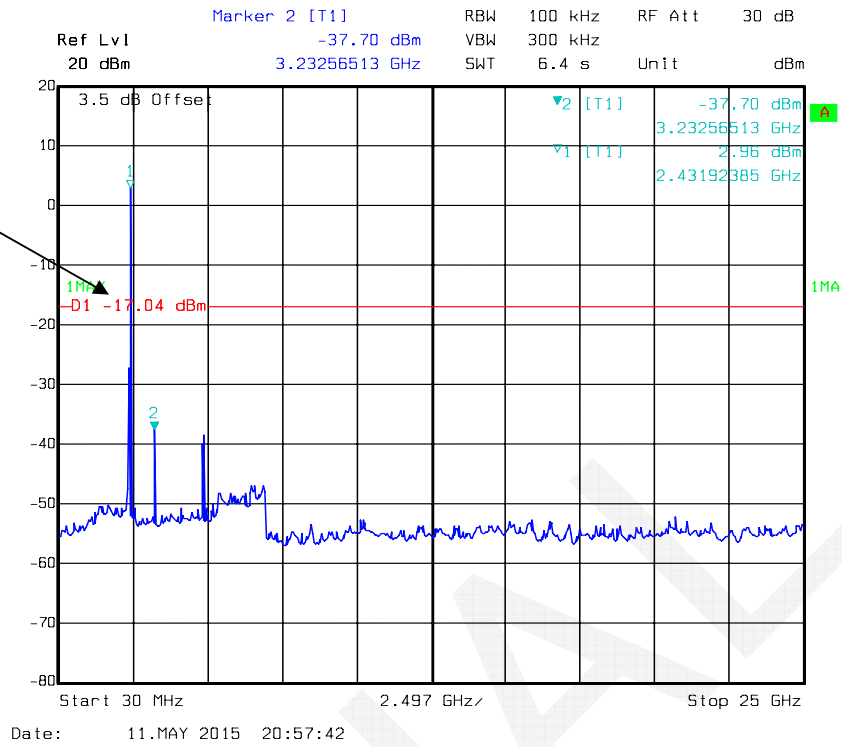


802.11g High Channel

Fundamental

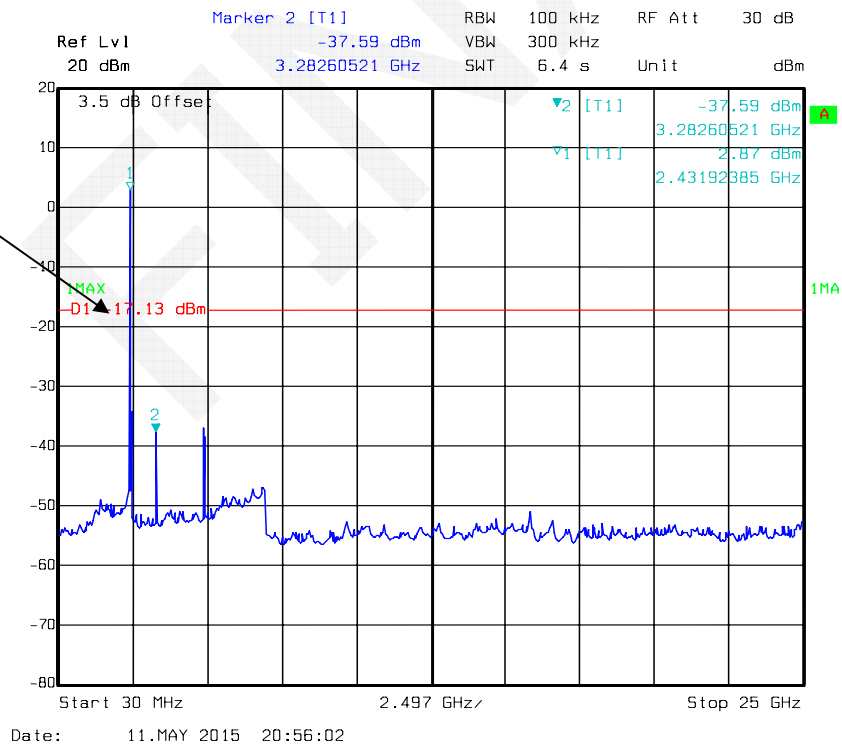


802.11n ht20 Low Channel

Fundamental

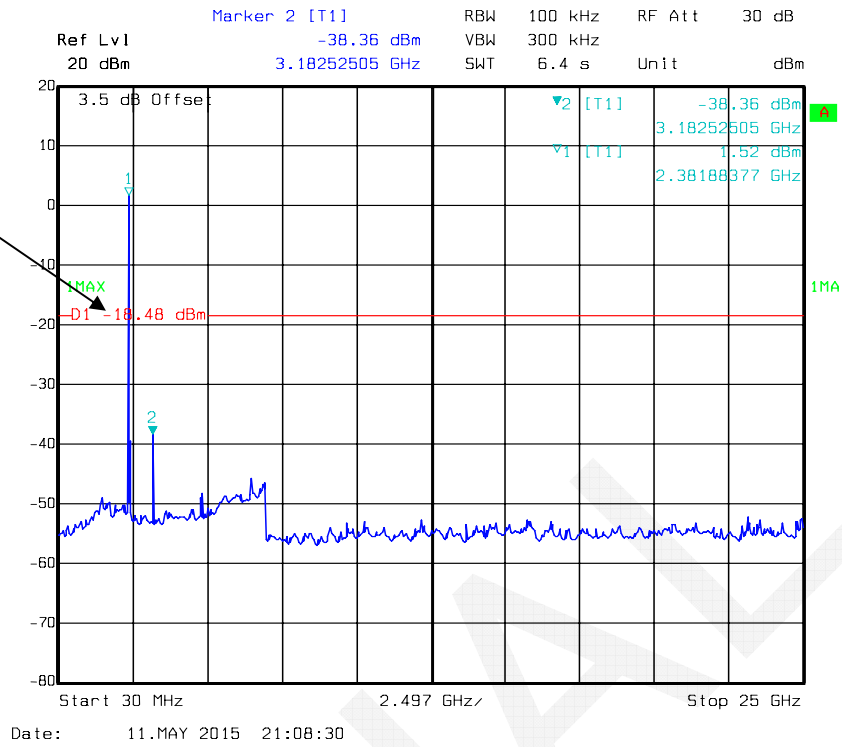


802.11n ht20 Middle Channel

Fundamental

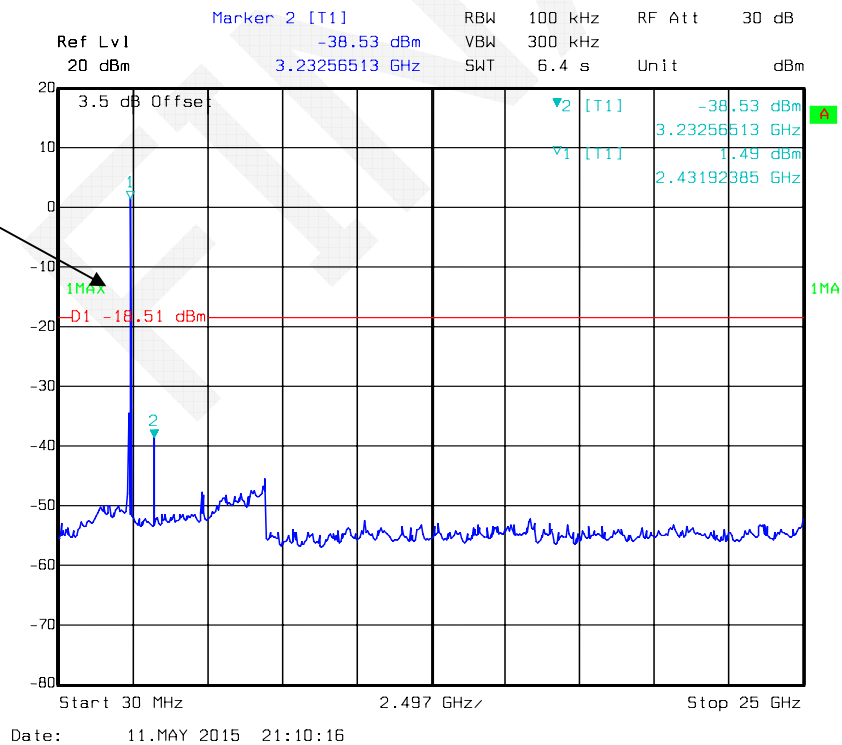


802.11n ht20 High Channel

Fundamental

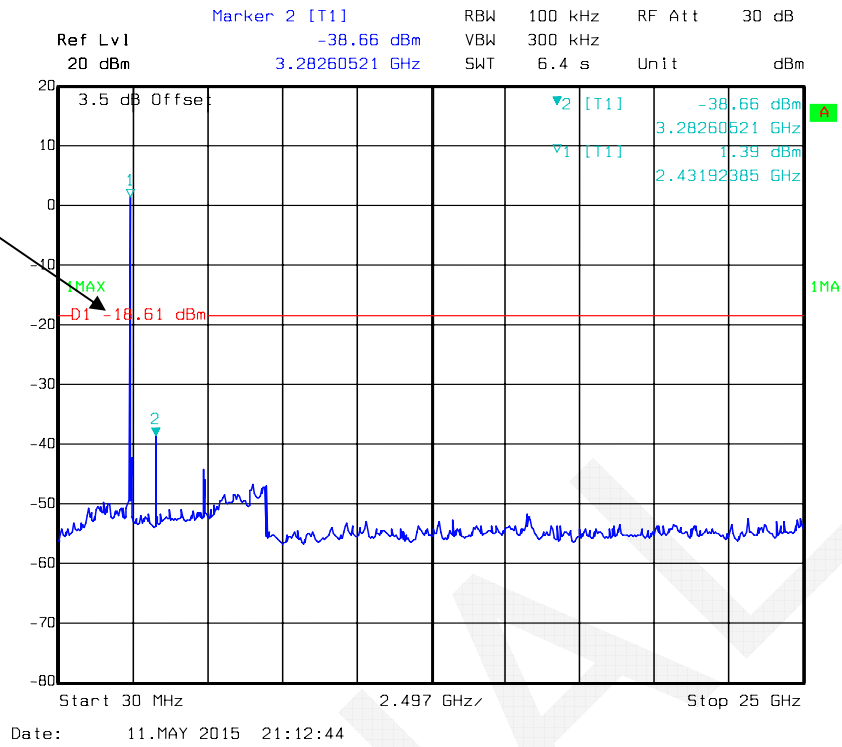


802.11n ht40 Low Channel


Fundamental

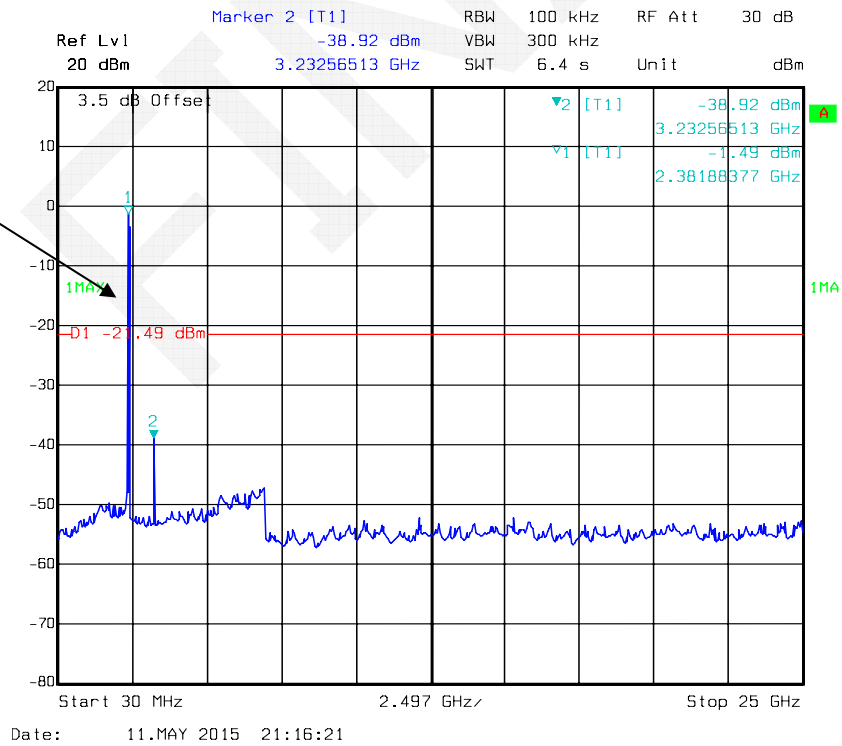

802.11n ht40 Middle Channel

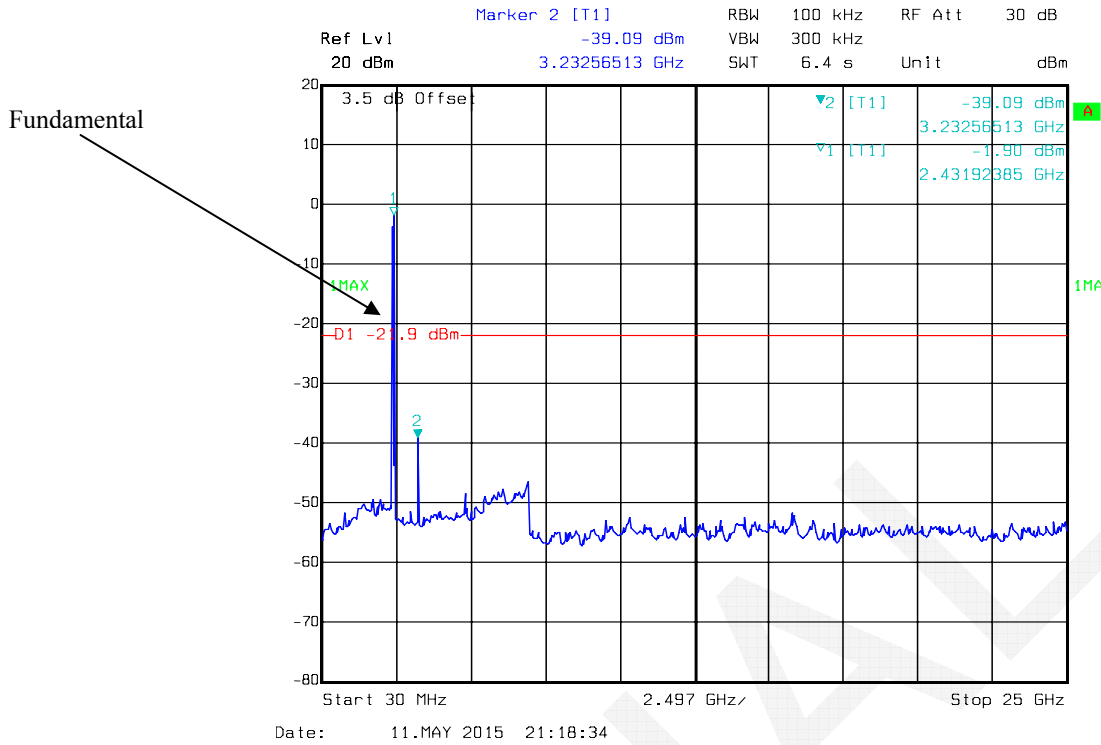


802.11n ht40 High Channel

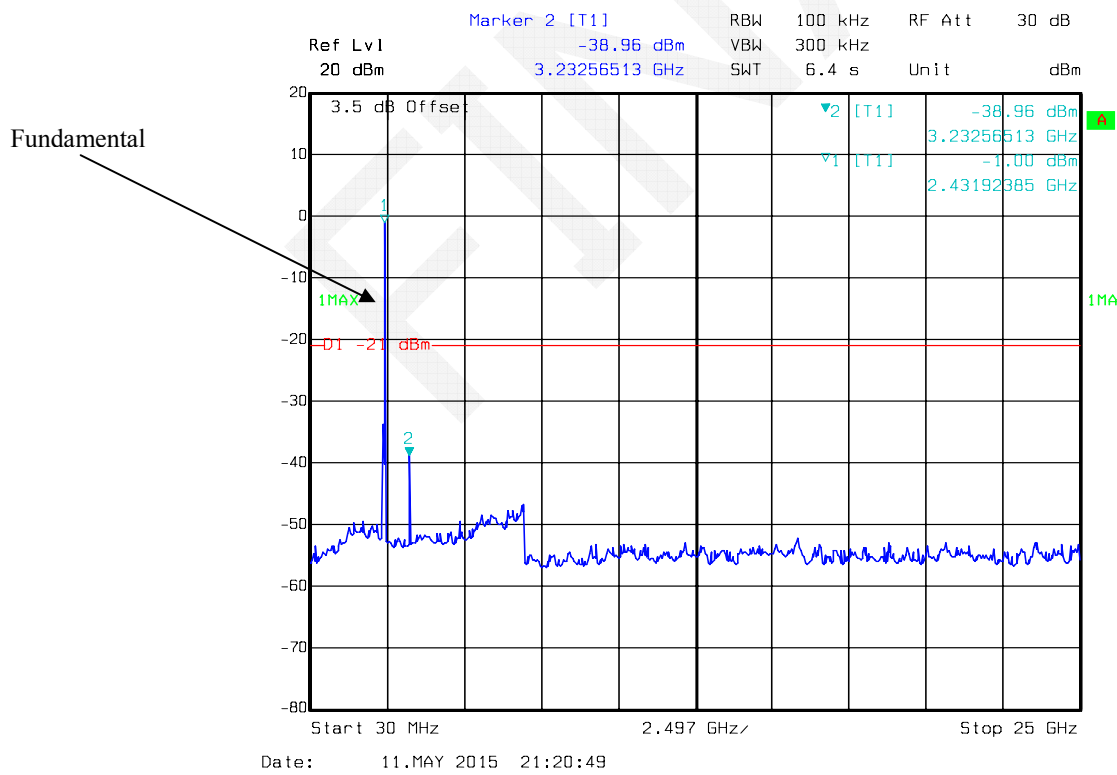

Chain 1


802.11b Low Channel

Fundamental

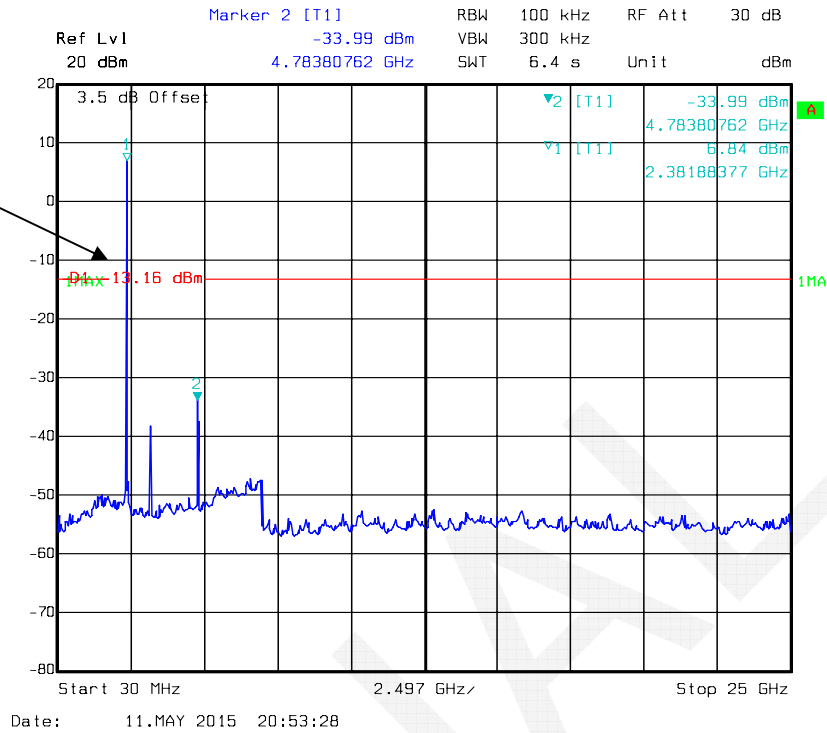


802.11b Middle Channel


Fundamental

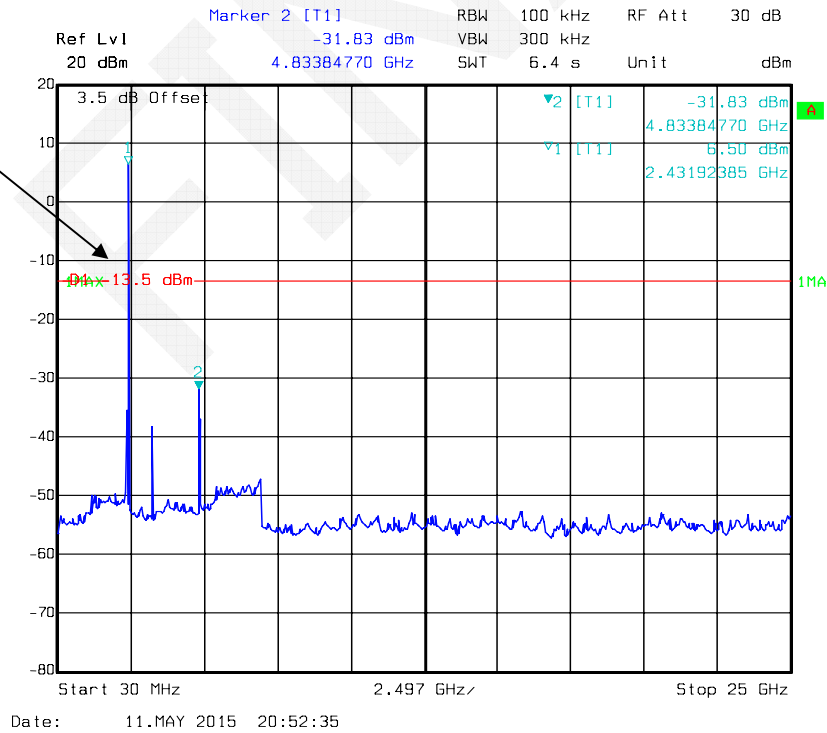

802.11b High Channel

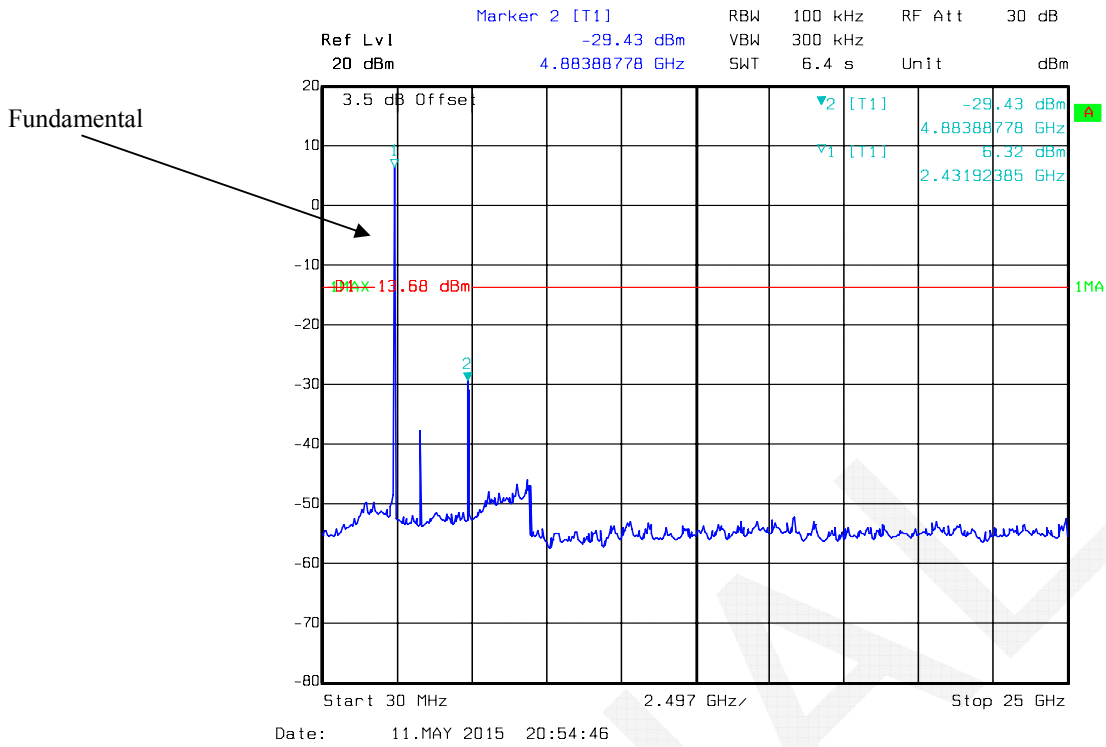


802.11g Low Channel

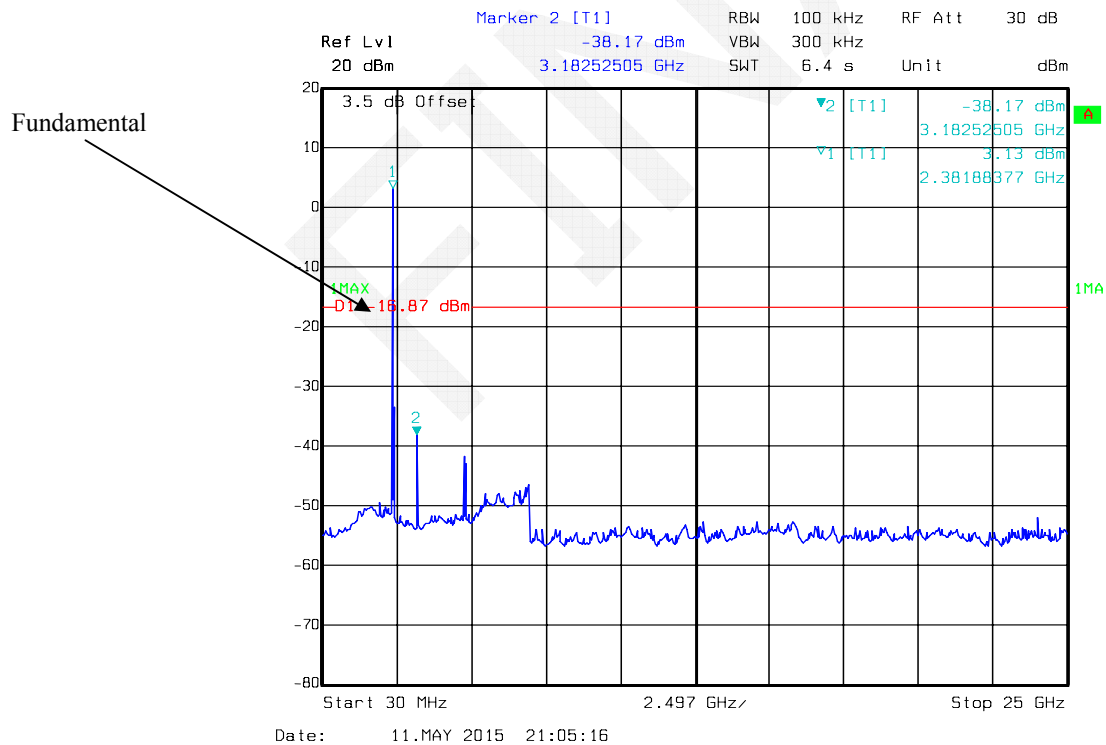


802.11g Middle Channel

Fundamental

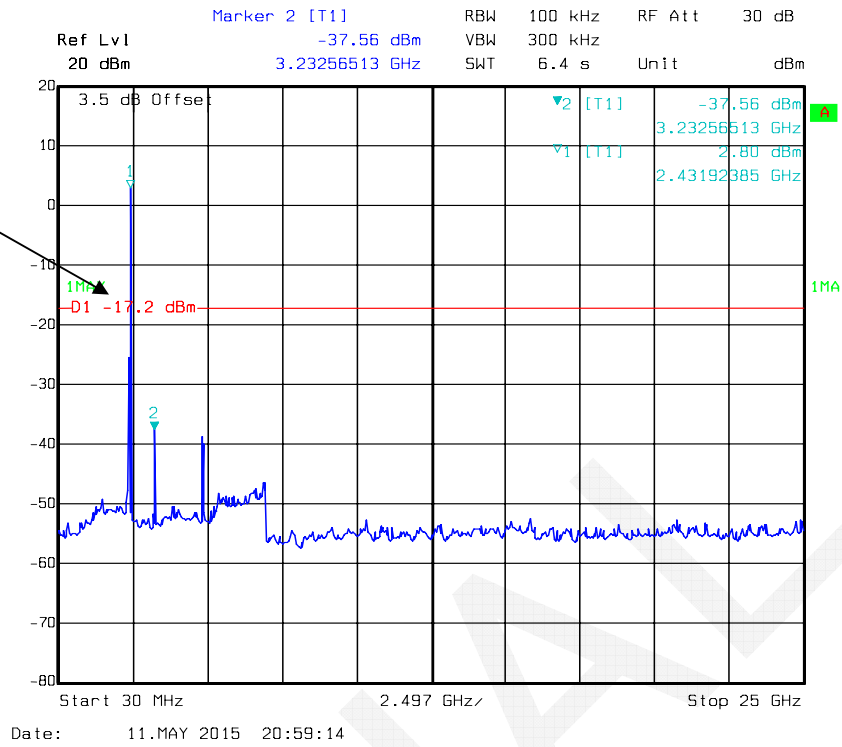


802.11g High Channel

Fundamental

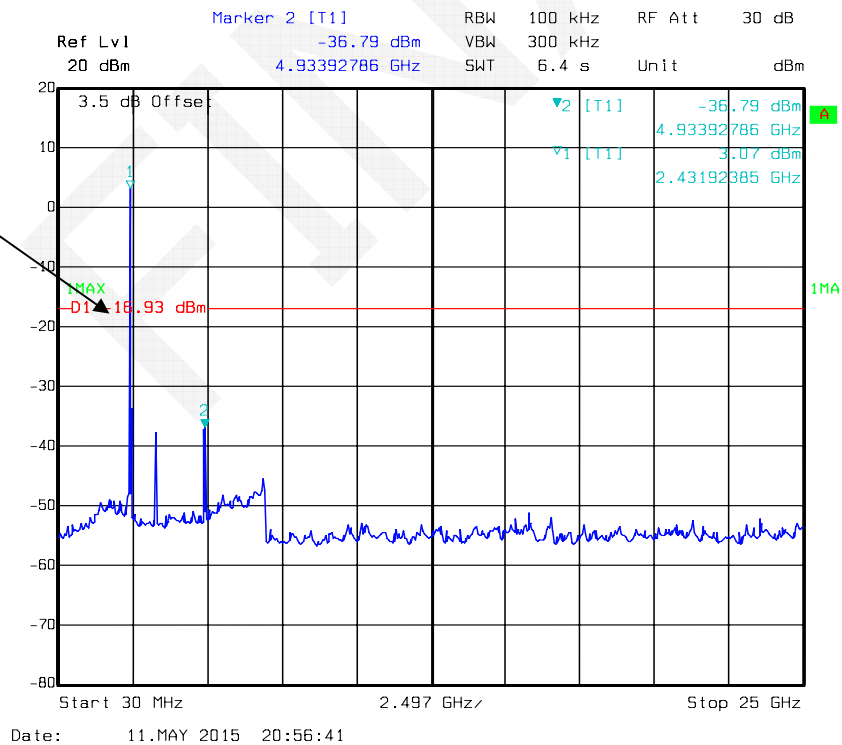


802.11n ht20 Low Channel

Fundamental

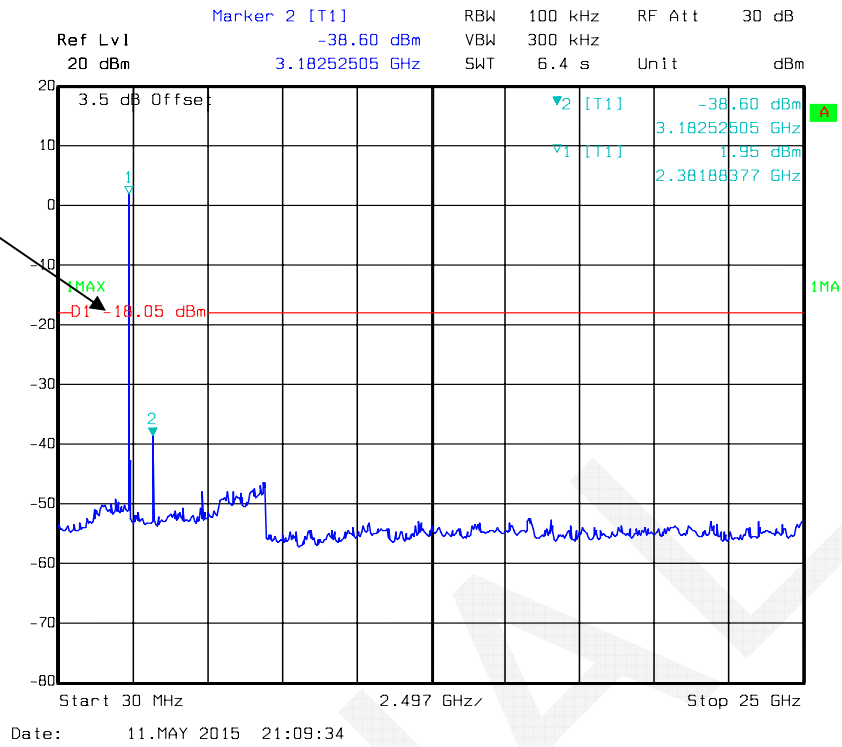


802.11n ht20 Middle Channel

Fundamental

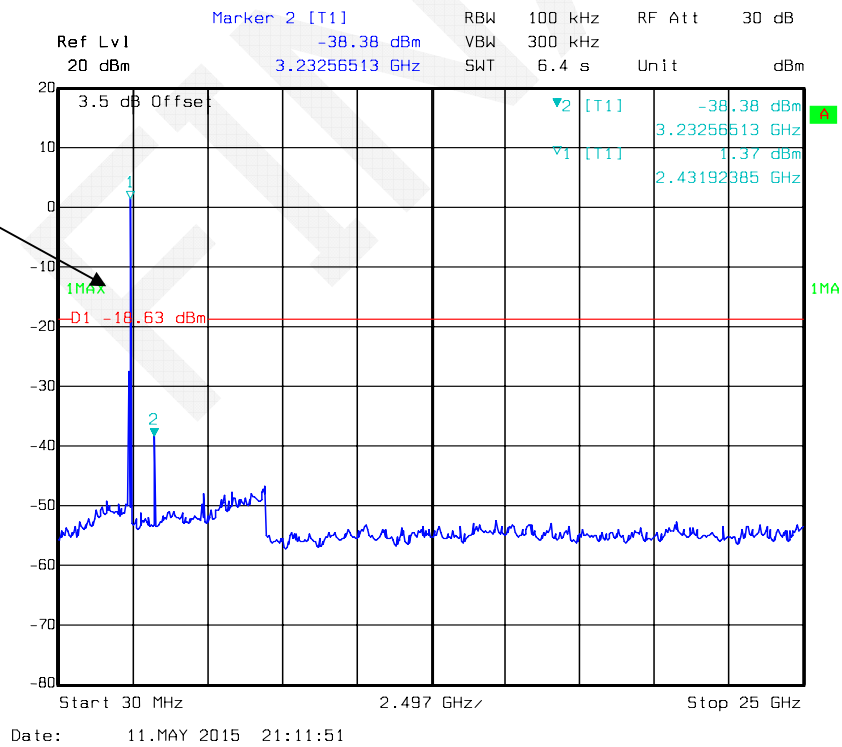


802.11n ht20 High Channel

Fundamental

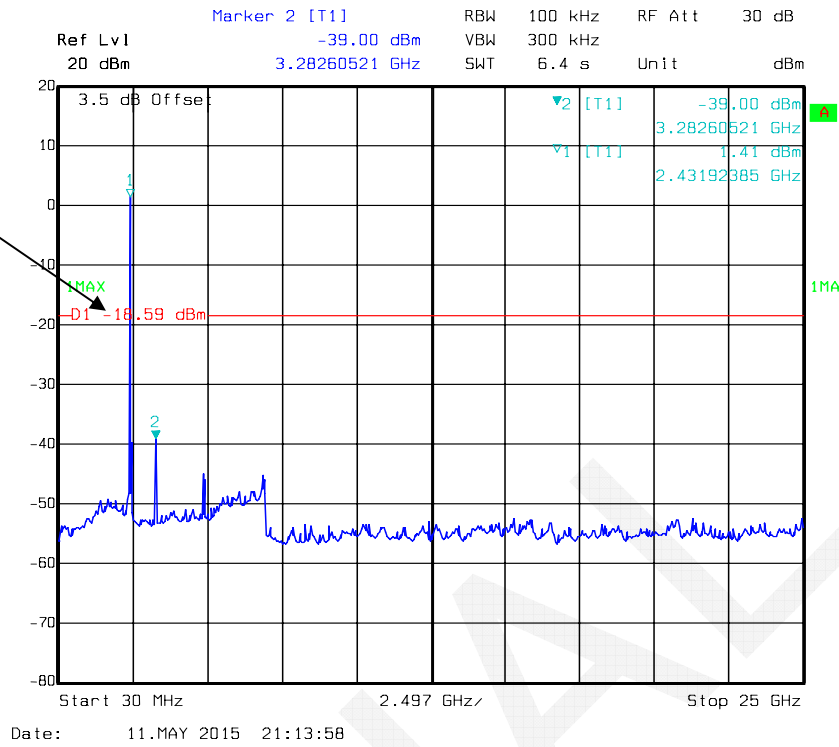


802.11n ht40 Low Channel


Fundamental

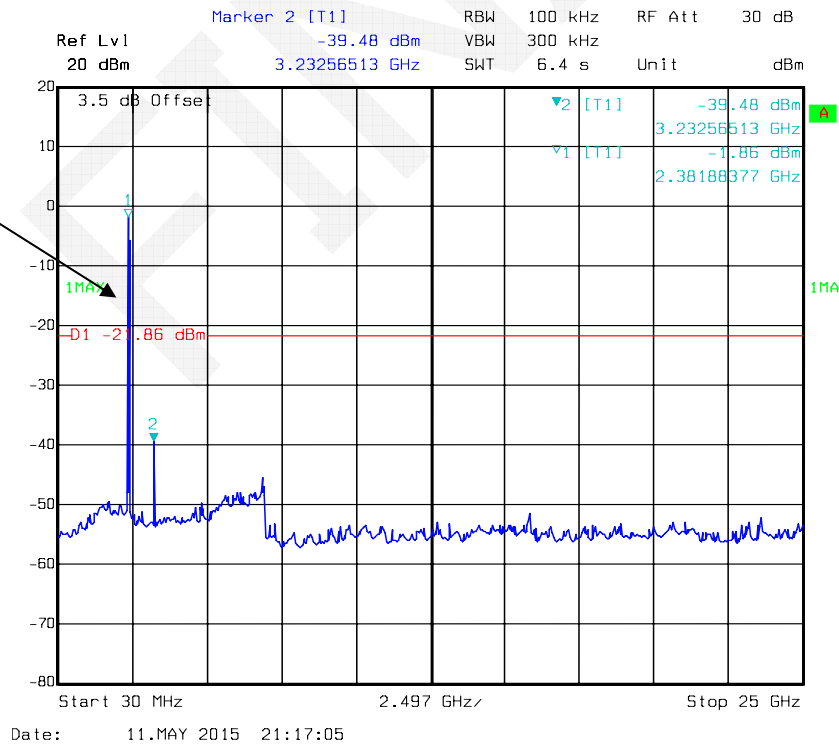

802.11n ht40 Middle Channel

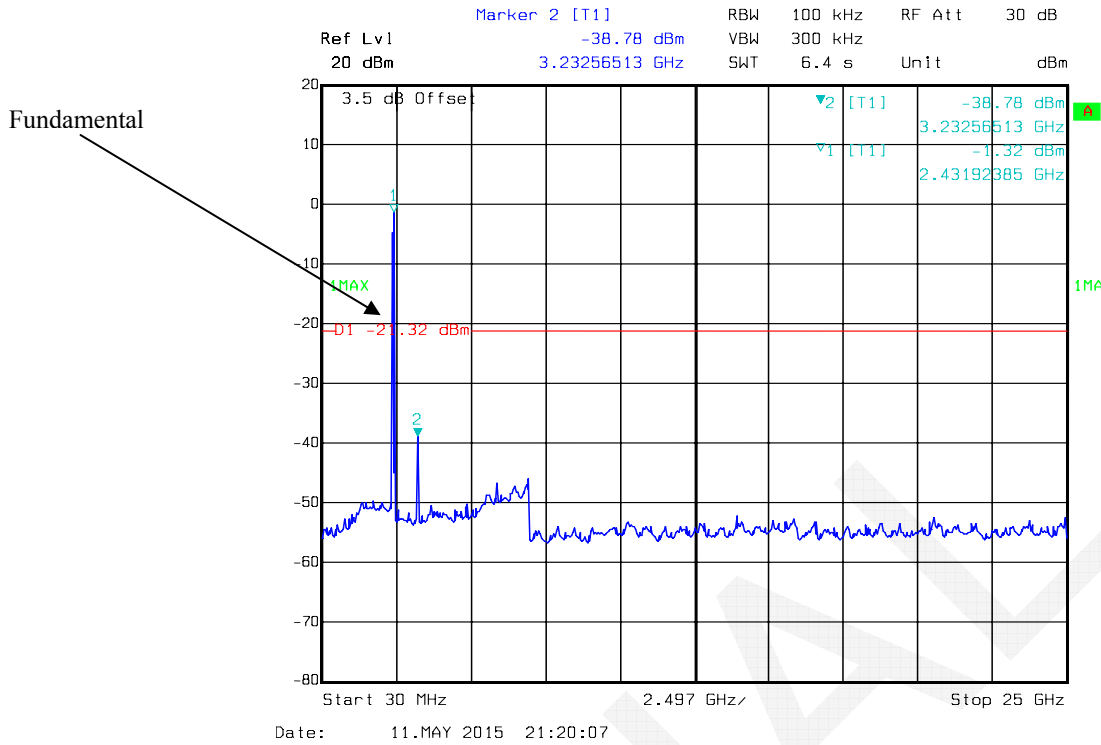

802.11n ht40 High Channel

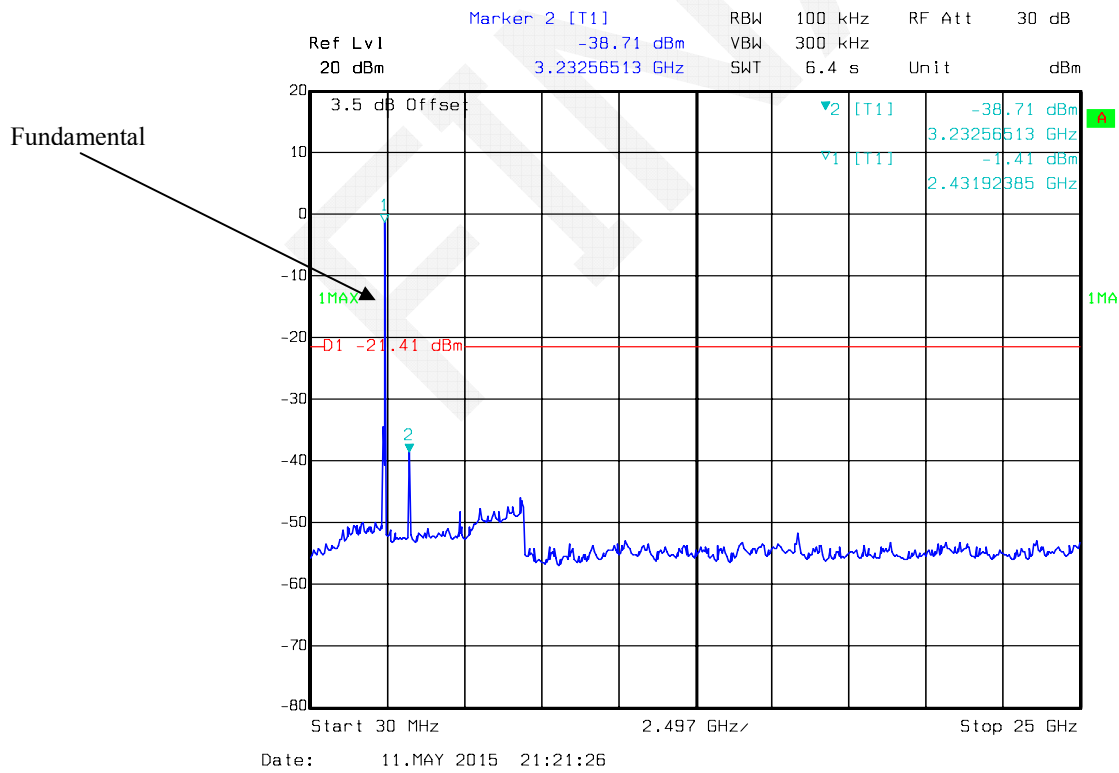

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause8.1 Option 1:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.8 °C
Relative Humidity:	53 %
ATM Pressure:	100.2 kPa

The testing was performed by Lion Xiao on 2015-05-11.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	Chain 0		Chain 1		Limit (MHz)
			6 dB Bandwidth (MHz)	99% occupied bandwidth	6 dB Bandwidth (MHz)	99% occupied bandwidth	
802.11b	Low	2412	8.24	10.16	8.72	10.16	≥0.5
	Middle	2437	8.32	10.24	8.72	10.24	≥0.5
	High	2462	8.24	10.24	8.32	10.16	≥0.5
802.11g	Low	2412	15.28	16.32	15.26	16.31	≥0.5
	Middle	2437	15.28	16.32	15.26	16.31	≥0.5
	High	2462	15.28	16.32	15.26	16.38	≥0.5
802.11n20	Low	2412	15.28	17.52	16.24	17.44	≥0.5
	Middle	2437	15.28	17.44	16.16	17.44	≥0.5
	High	2462	15.28	17.52	16.42	17.50	≥0.5
802.11n40	Low	2422	36.16	36.32	36.00	36.32	≥0.5
	Middle	2437	36.16	36.32	36.00	36.32	≥0.5
	High	2452	36.16	36.32	36.00	36.32	≥0.5


Chain 0

802.11b Low Channel

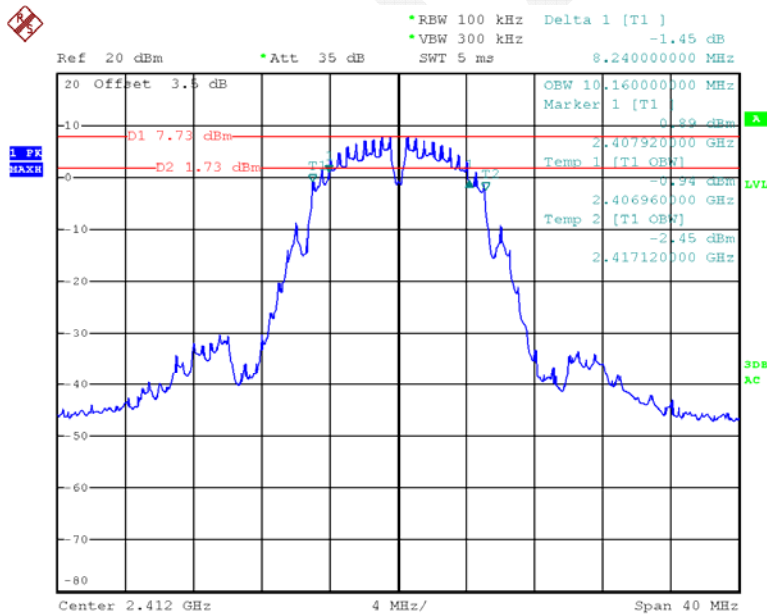


Date: 11.MAY.2015 15:08:58

802.11b Middle Channel

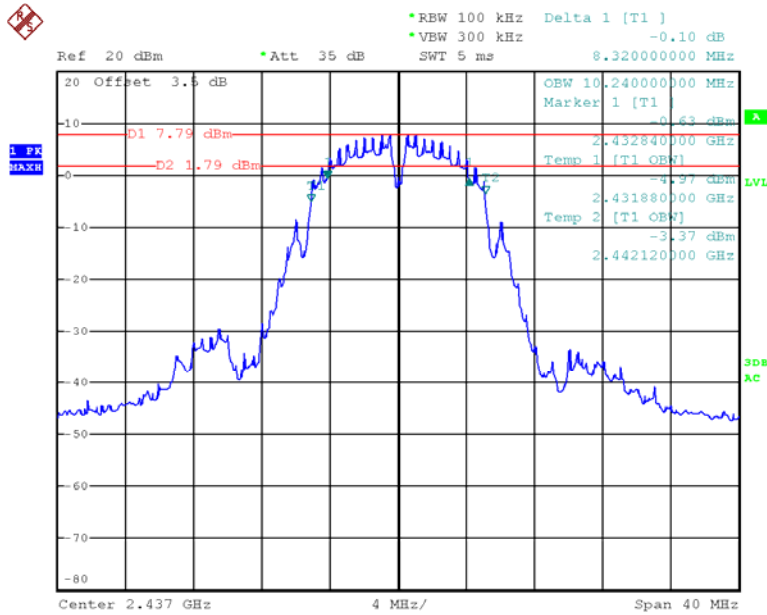


Date: 11.MAY.2015 15:16:53

802.11b High Channel

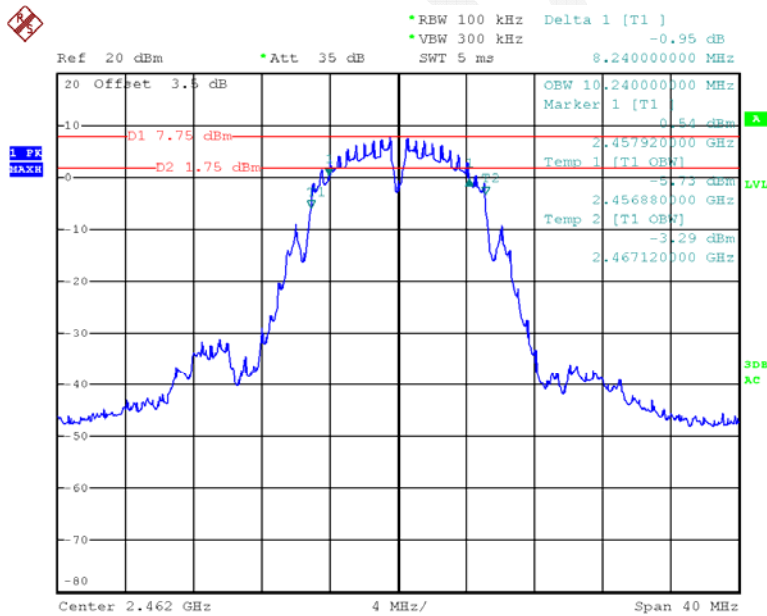


Date: 11.MAY.2015 15:22:36

802.11g Low Channel

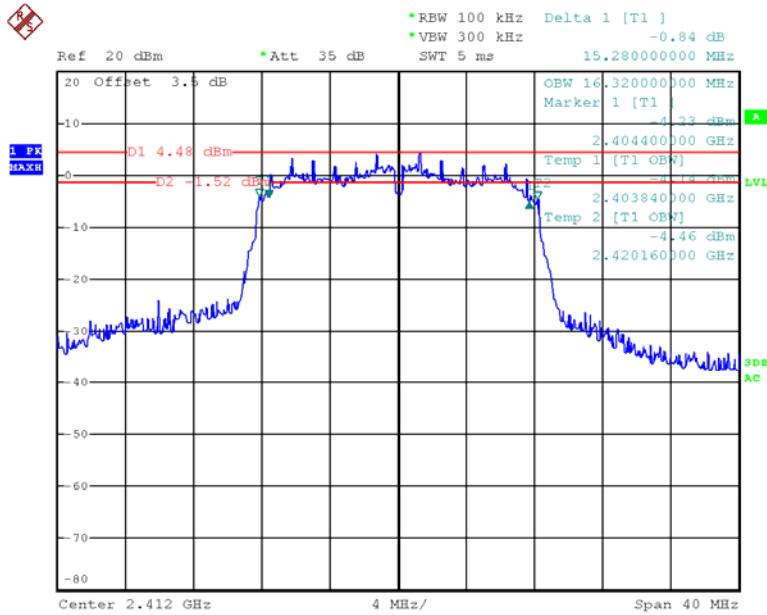


Date: 11.MAY.2015 15:28:50

802.11g Middle Channel

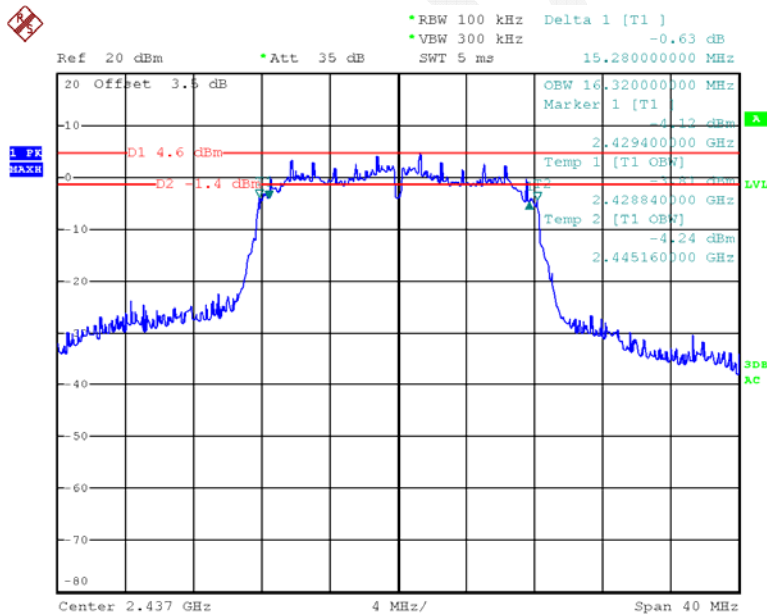


Date: 11.MAY.2015 15:35:26

802.11g High Channel

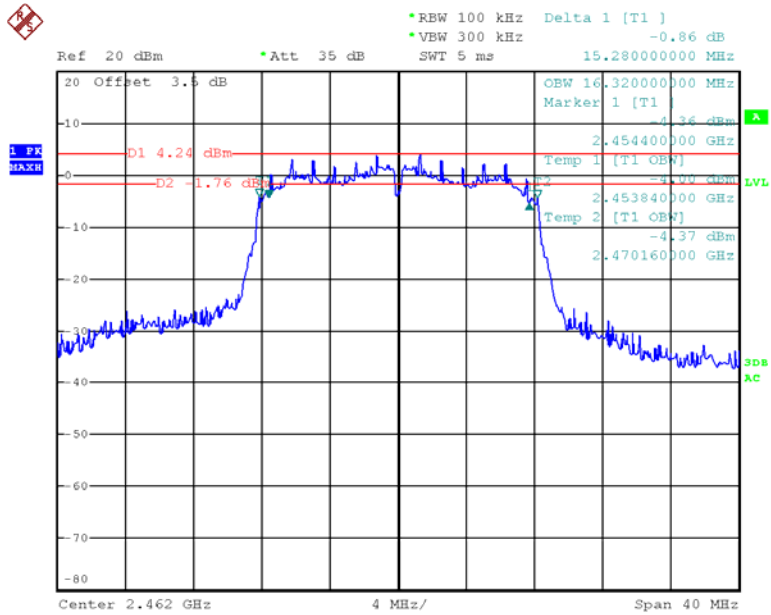


Date: 11.MAY.2015 15:36:45

802.11n ht20 Low Channel

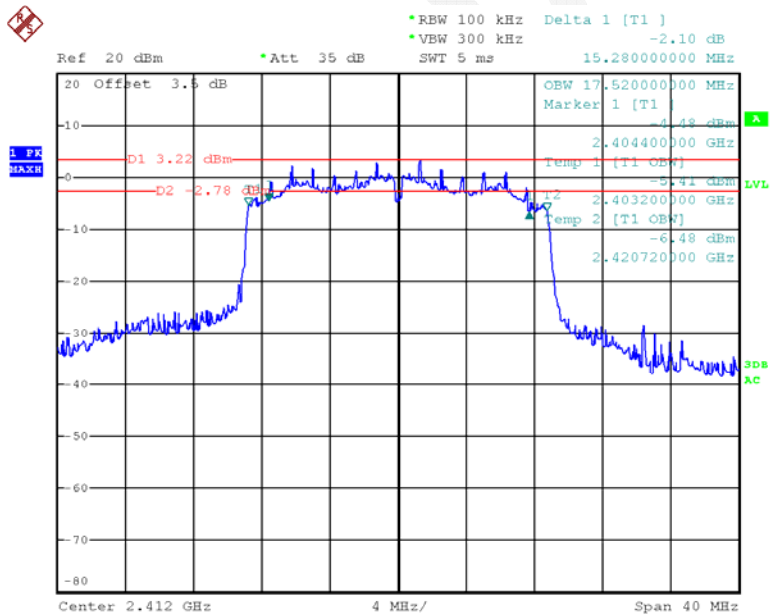


Date: 11.MAY.2015 15:46:08

802.11n ht20 Middle Channel

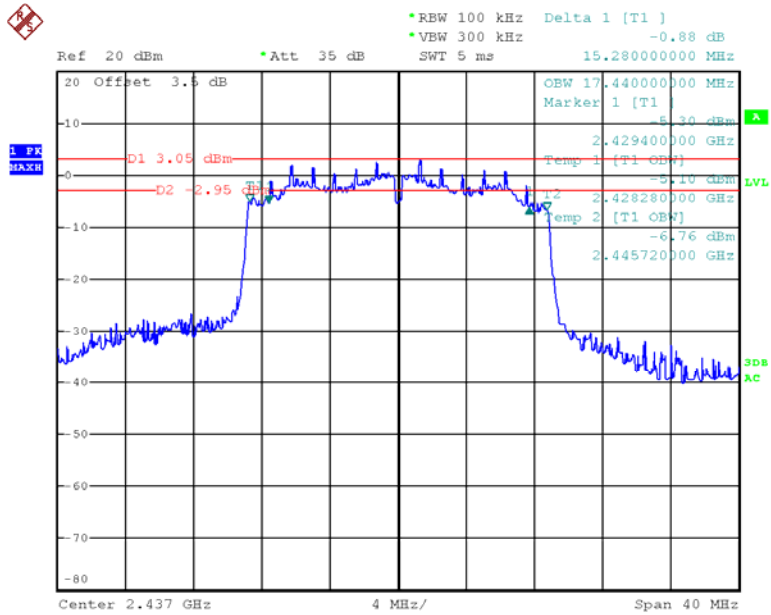


Date: 11.MAY.2015 16:22:16

802.11n ht20 High Channel

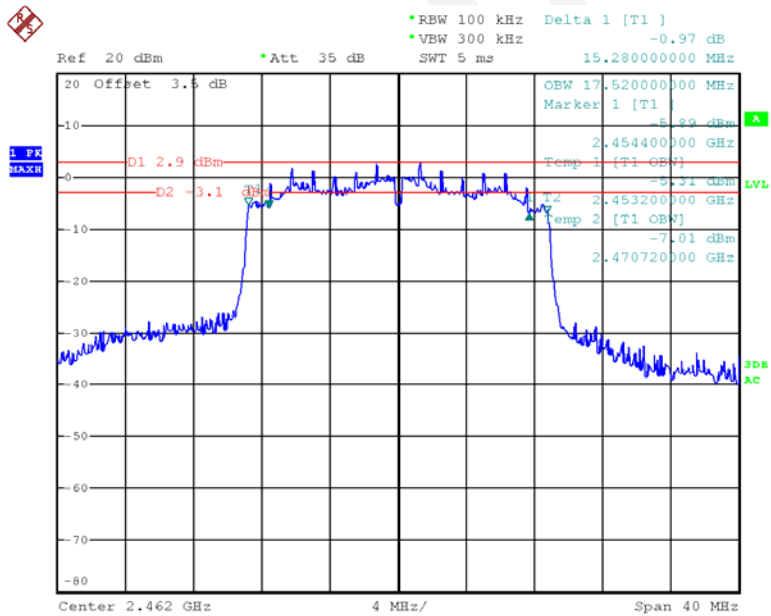


Date: 11.MAY.2015 16:25:34

802.11n ht40 Low Channel

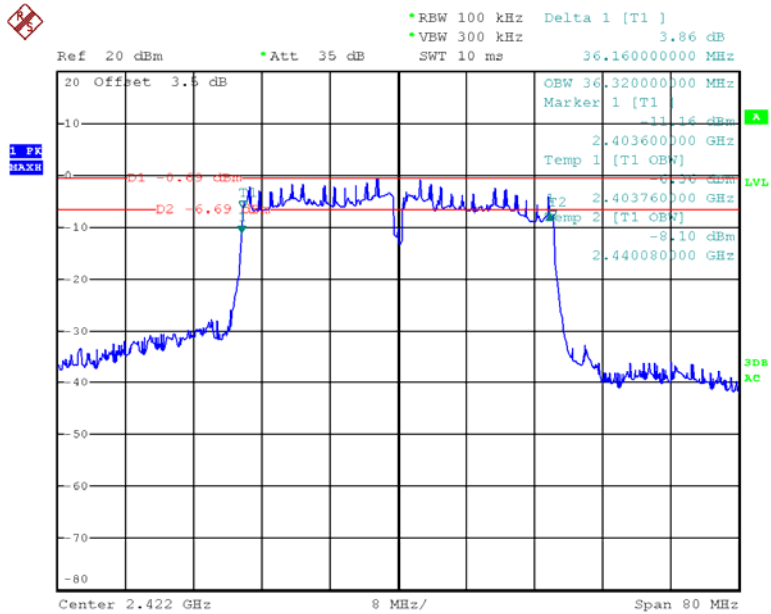


Date: 11.MAY.2015 16:31:32

802.11n ht40 Middle Channel

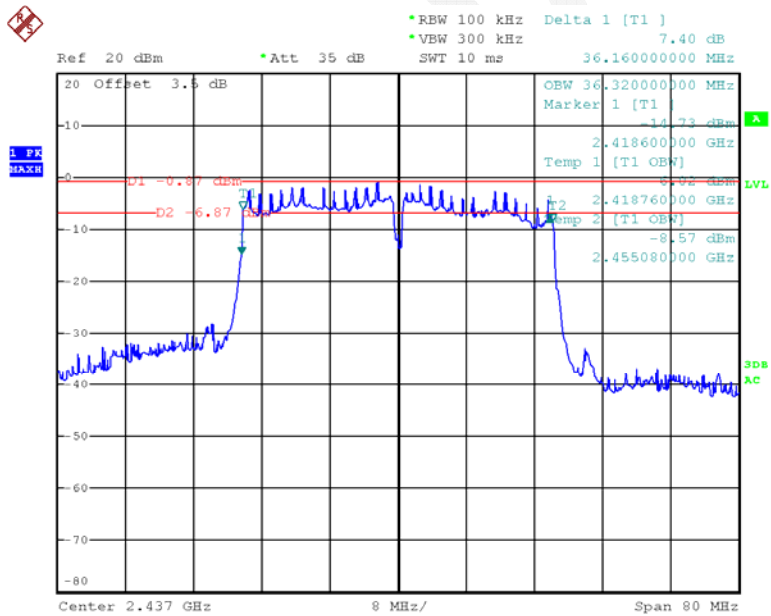

Date: 11.MAY.2015 16:37:19


802.11n ht40 High Channel

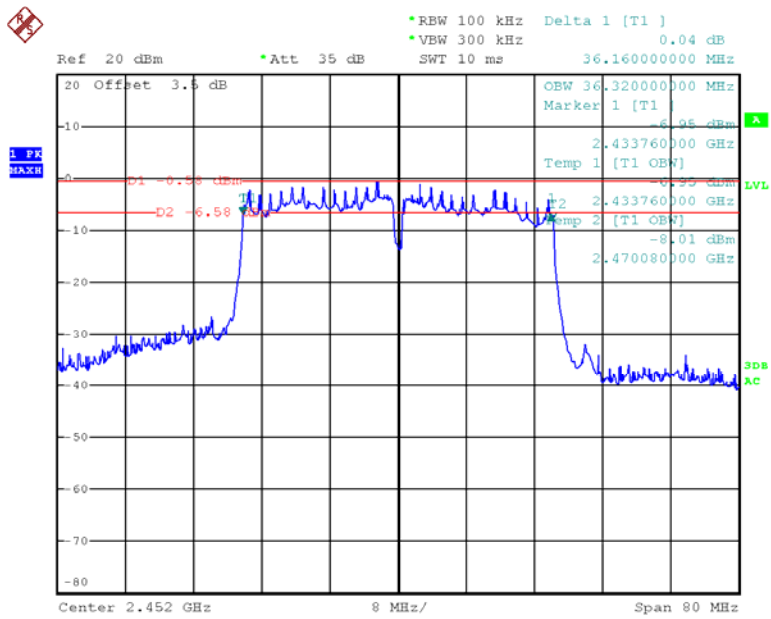

Date: 11.MAY.2015 16:39:34


Chain 1

802.11b Low Channel

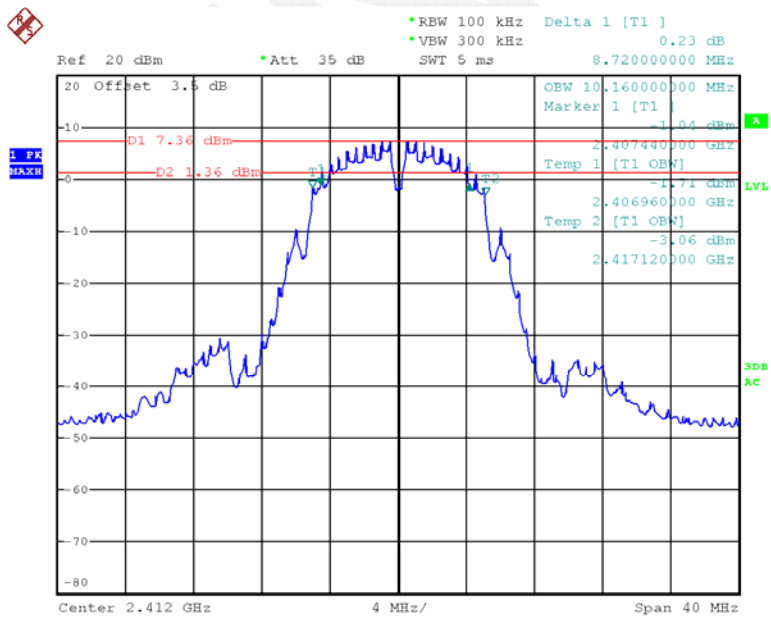


Date: 11.MAY.2015 19:44:51

802.11b Middle Channel

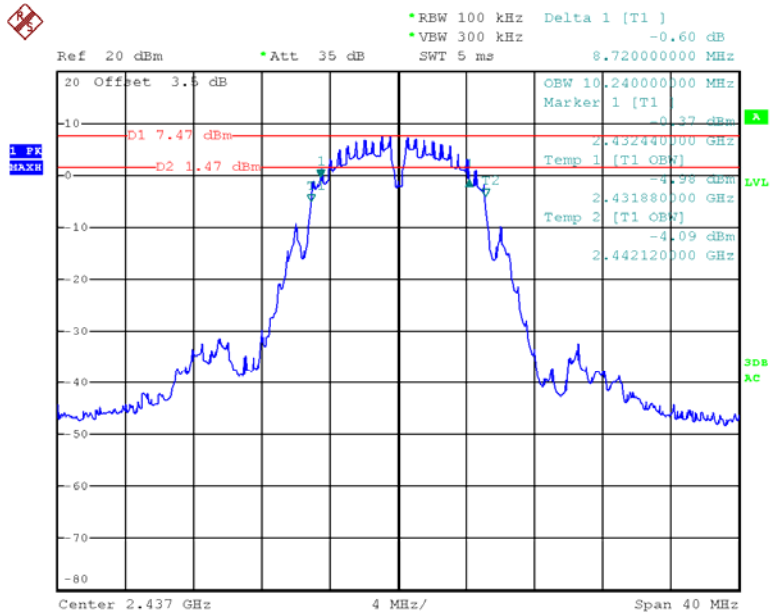


Date: 11.MAY.2015 19:45:40

802.11b High Channel

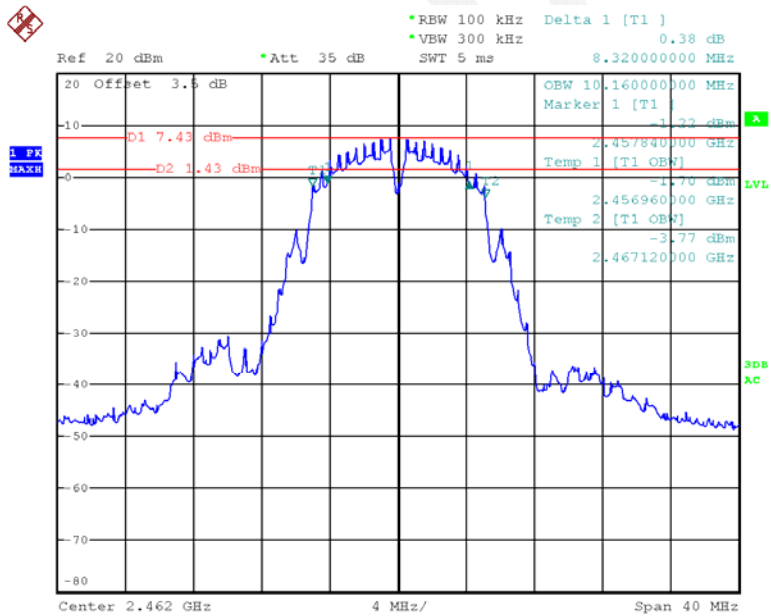


Date: 11.MAY.2015 19:47:18

802.11g Low Channel

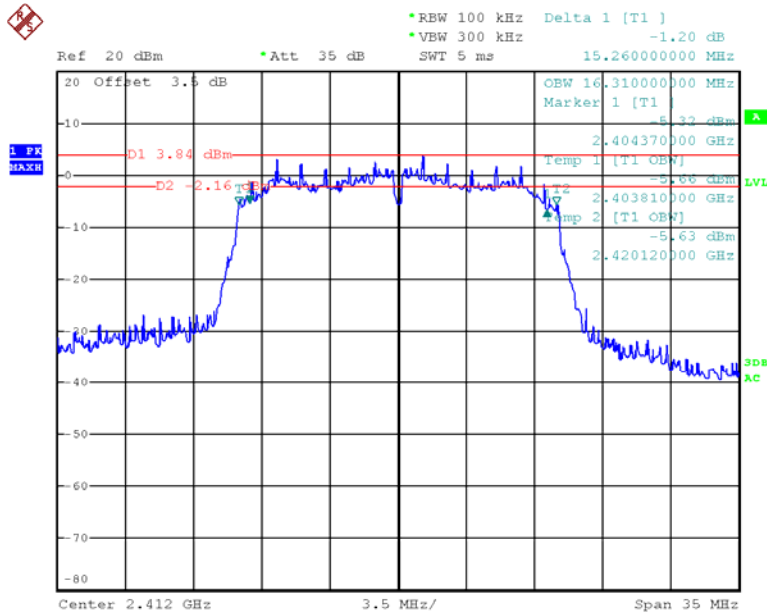


Date: 11.MAY.2015 20:05:04

802.11g Middle Channel

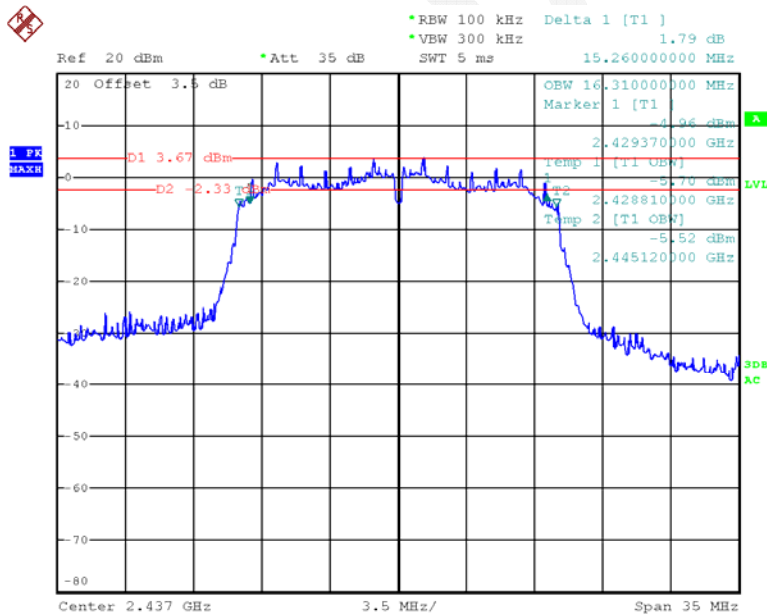


Date: 11.MAY.2015 20:03:15

802.11g High Channel

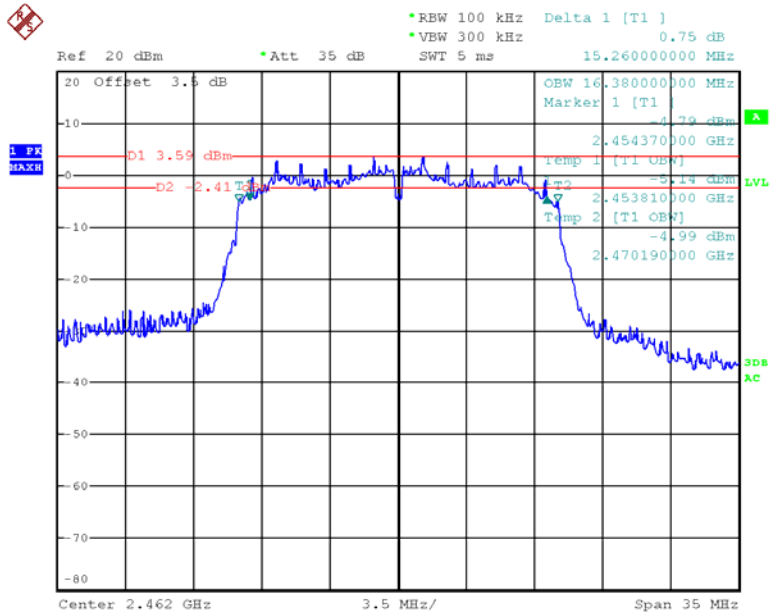


Date: 11.MAY.2015 20:00:41

802.11n ht20 Low Channel

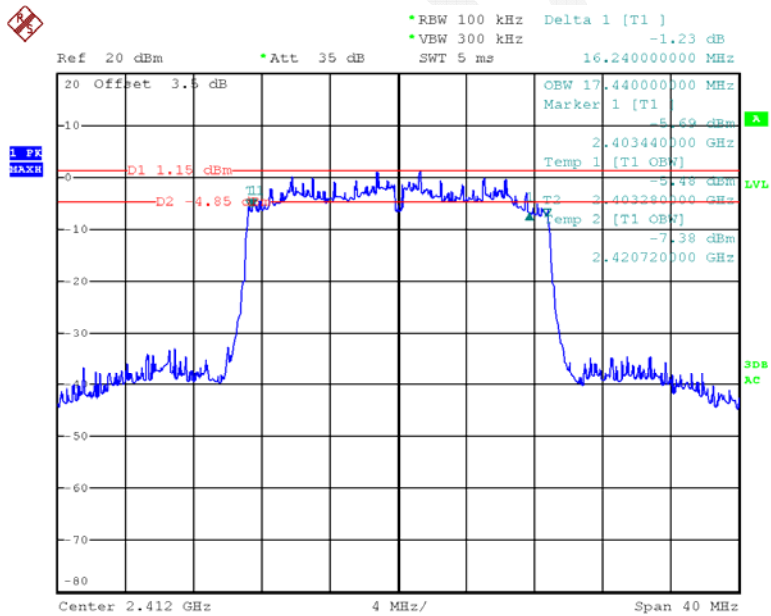


Date: 11.MAY.2015 18:55:45

802.11n ht20 Middle Channel

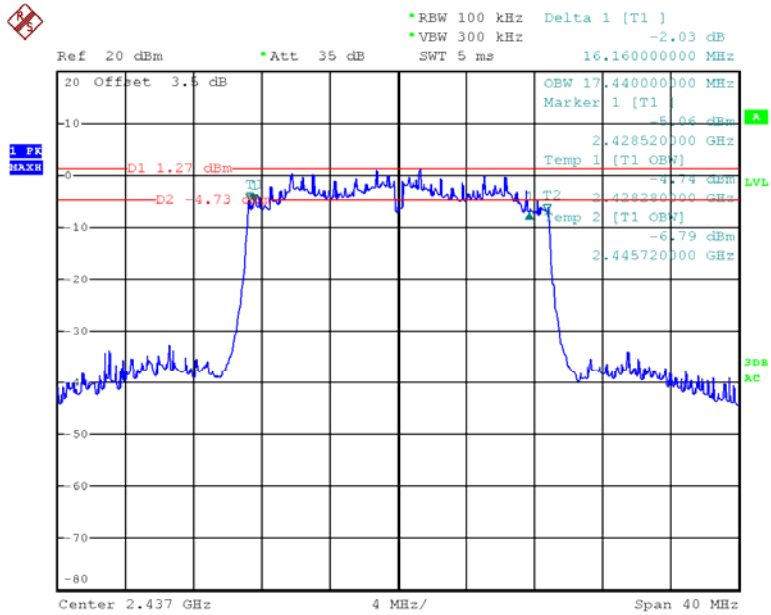


Date: 11.MAY.2015 18:53:21

802.11n ht20 High Channel

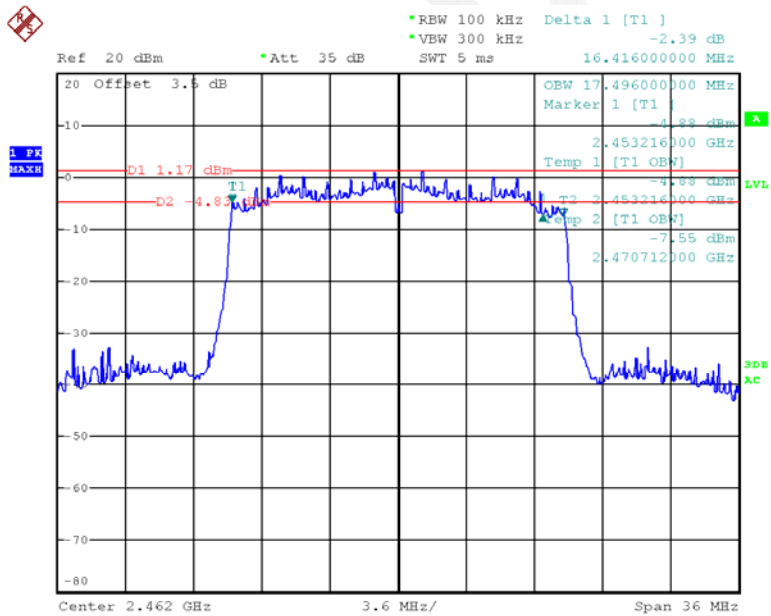


Date: 11.MAY.2015 18:44:09

802.11n ht40 Low Channel

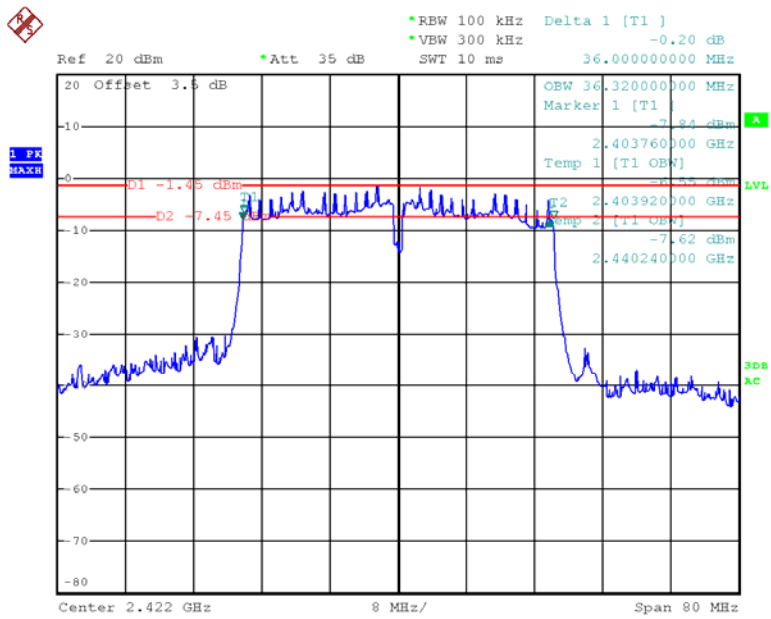


Date: 11.MAY.2015 17:07:47

802.11n ht40 Middle Channel

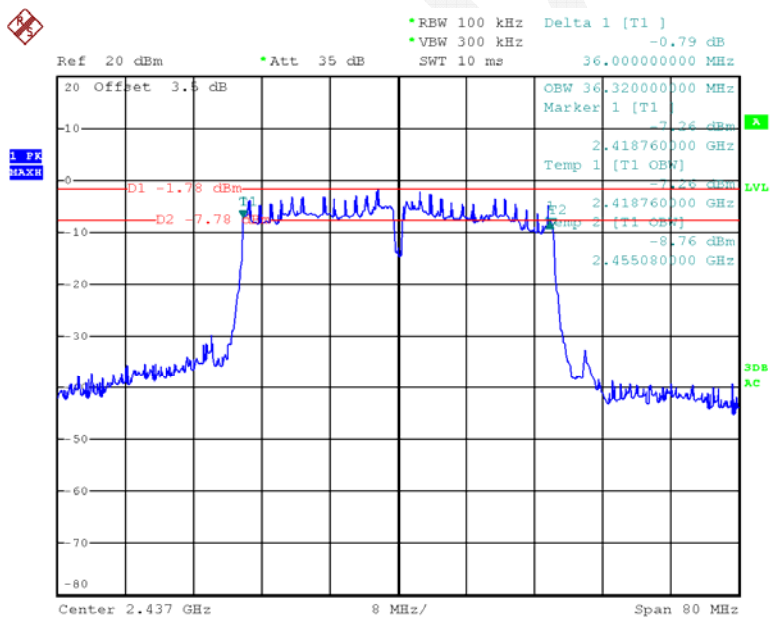

Date: 11.MAY.2015 17:06:46

802.11n ht40 High Channel

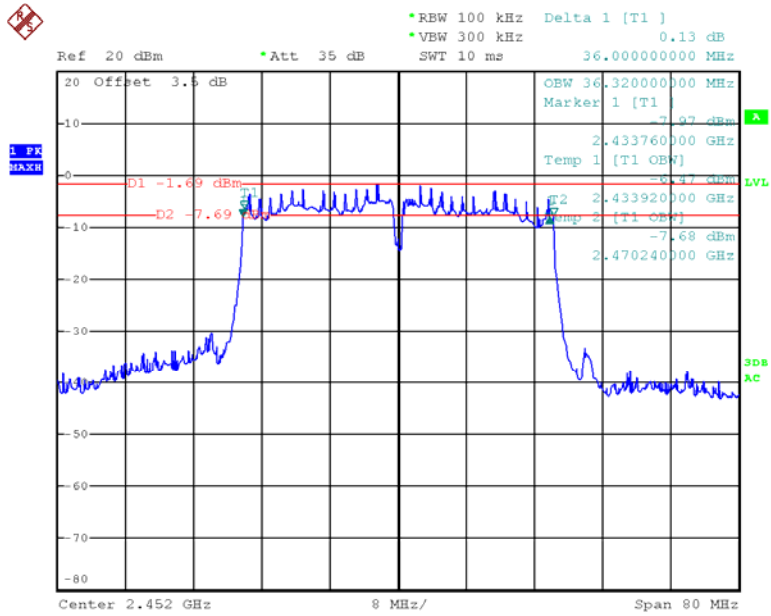

Date: 11.MAY.2015 16:55:56



FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2014-11-03	2015-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2014-11-03	2015-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2014-11-03	2015-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.8°C
Relative Humidity:	53 %
ATM Pressure:	100.2 kPa

The testing was performed by Lion Xiao on 2015-05-11.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency	Max Peak Conducted Output Power (dBm)			Limit	Result
		(MHz)	Chain 0	Chain 1	Total	(dBm)	
802.11b	Low	2412	19.34	19.19	/	30	PASS
	Middle	2437	19.02	19.13	/	30	PASS
	High	2462	19.11	19.27	/	30	PASS
802.11g	Low	2412	23.18	23.15	/	30	PASS
	Middle	2437	23.09	23.17	/	30	PASS
	High	2462	23.07	23.01	/	30	PASS
802.11n20	Low	2412	20.70	20.29	23.51	30	PASS
	Middle	2437	20.56	20.58	23.58	30	PASS
	High	2462	20.32	20.06	23.20	30	PASS
802.11n40	Low	2422	20.22	20.10	23.17	30	PASS
	Middle	2437	20.26	20.01	23.15	30	PASS
	High	2452	20.07	19.92	23.01	30	PASS

Test mode	Channel	Frequency	Max Conducted Average Output Power(dBm)			Limit	Result
		(MHz)	Chain 0	Chain 1	Total	(dBm)	
802.11b	Low	2412	18.94	18.72	/	30	PASS
	Middle	2437	18.48	18.67	/	30	PASS
	High	2462	18.56	18.83	/	30	PASS
802.11g	Low	2412	18.66	18.61	/	30	PASS
	Middle	2437	18.49	18.57	/	30	PASS
	High	2462	18.43	18.38	/	30	PASS
802.11n20	Low	2412	15.44	15.13	18.30	30	PASS
	Middle	2437	15.34	15.35	18.36	30	PASS
	High	2462	15.16	15.04	18.11	30	PASS
802.11n40	Low	2422	13.74	13.61	16.69	30	PASS
	Middle	2437	13.80	13.45	16.64	30	PASS
	High	2452	13.52	13.36	16.45	30	PASS

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.8°C
Relative Humidity:	53 %
ATM Pressure:	100.2 kPa


* The testing was performed by Lion Xiao on 2015-05-11.

Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.


Chain 0

802.11b: Band Edge, Left Side

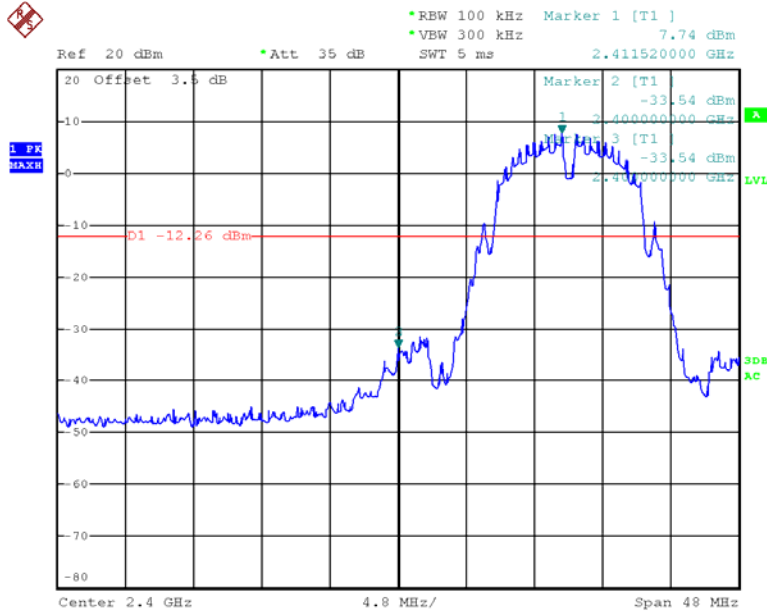


Date: 11.MAY.2015 15:14:06

802.11b: Band Edge, Right Side

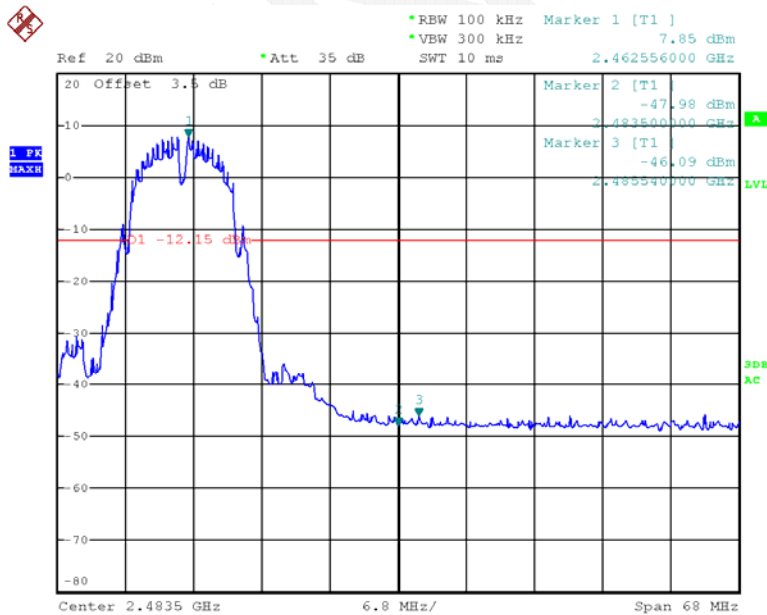


Date: 11.MAY.2015 15:24:36

802.11g: Band Edge, Left Side

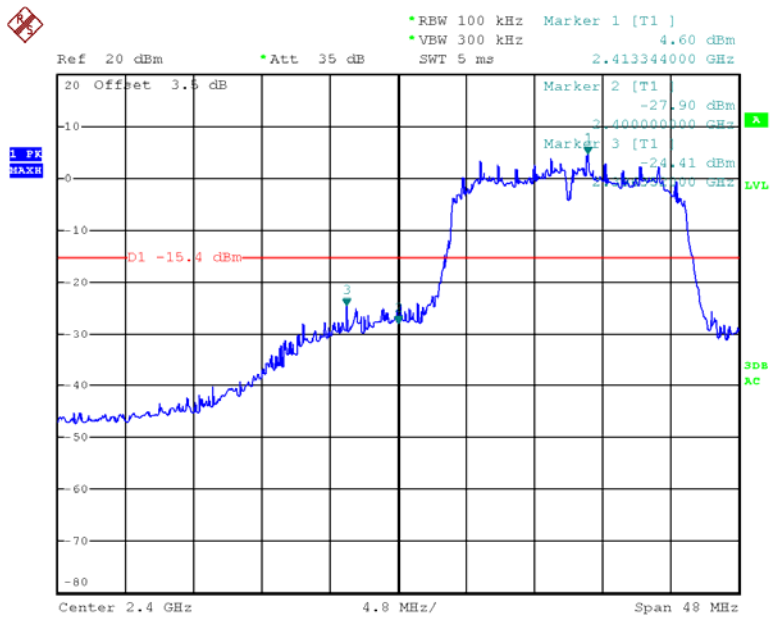


Date: 11.MAY.2015 15:30:31

802.11g: Band Edge, Right Side

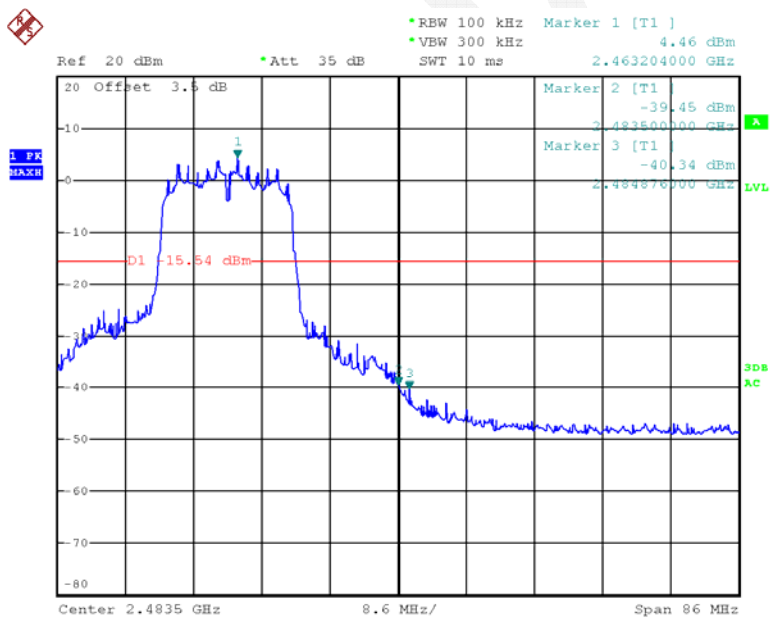


Date: 11.MAY.2015 15:38:04

802.11n ht20 Band Edge, Left Side

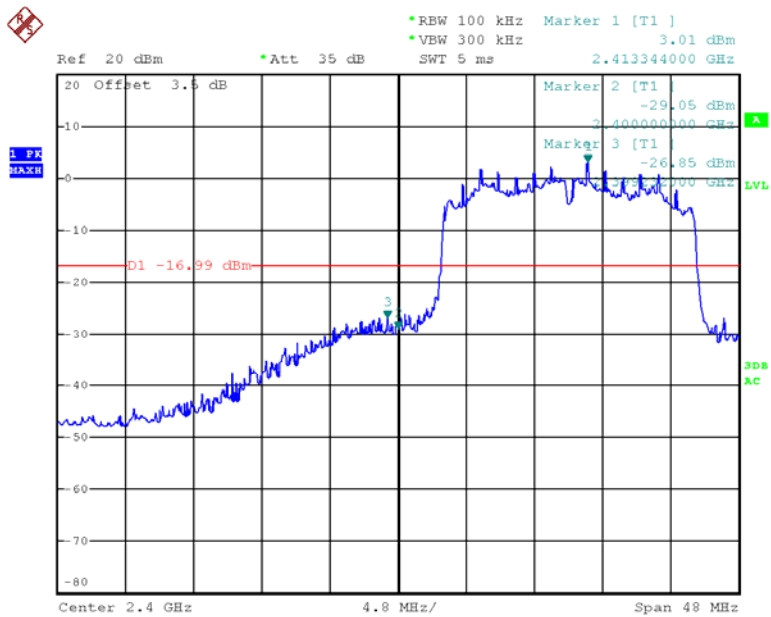


Date: 11.MAY.2015 16:17:48

802.11n ht20 Band Edge, Right Side

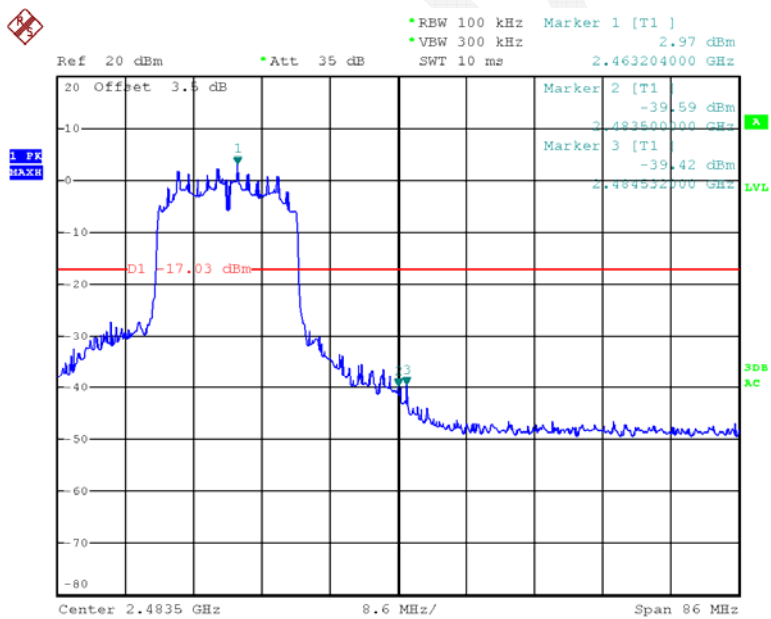


Date: 11.MAY.2015 16:26:18

802.11n ht40 Band Edge , Left Side

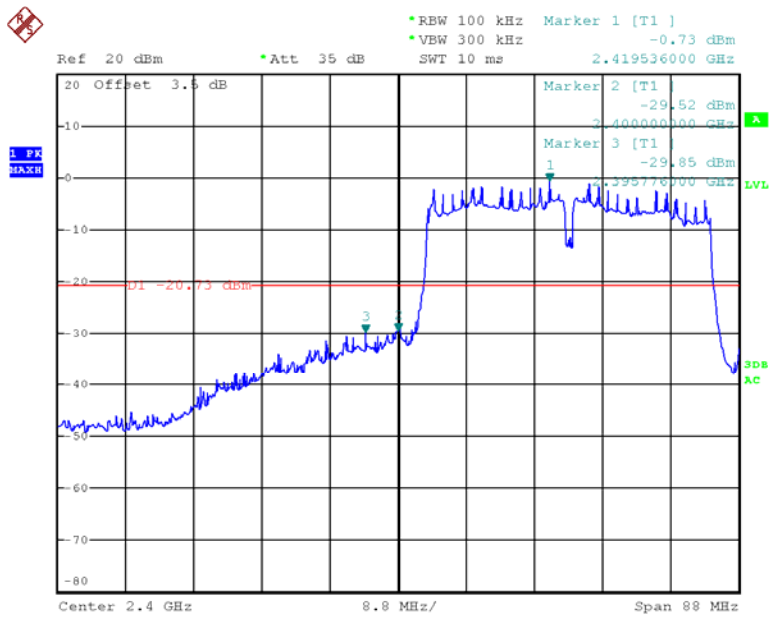

Date: 11.MAY.2015 16:32:13


802.11n ht40 Band Edge, Right Side

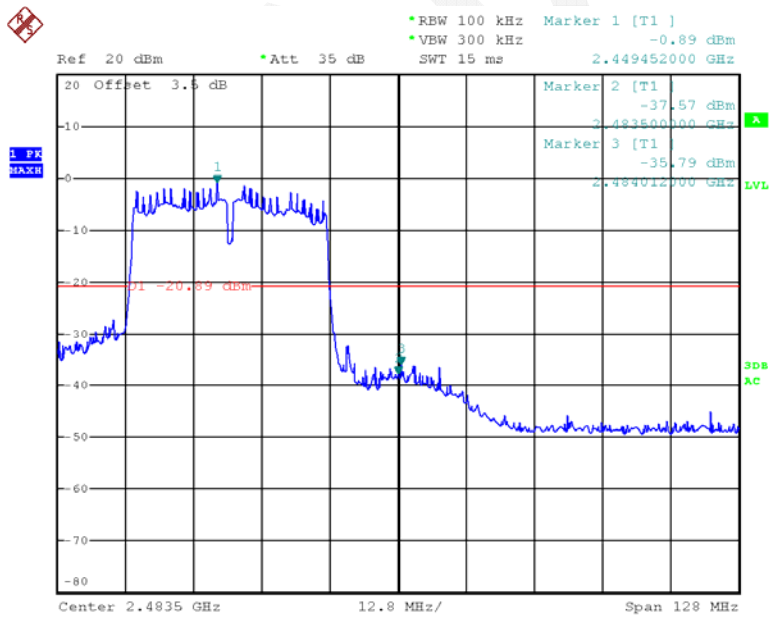

Date: 11.MAY.2015 16:40:51


Chain 1

802.11b: Band Edge, Left Side

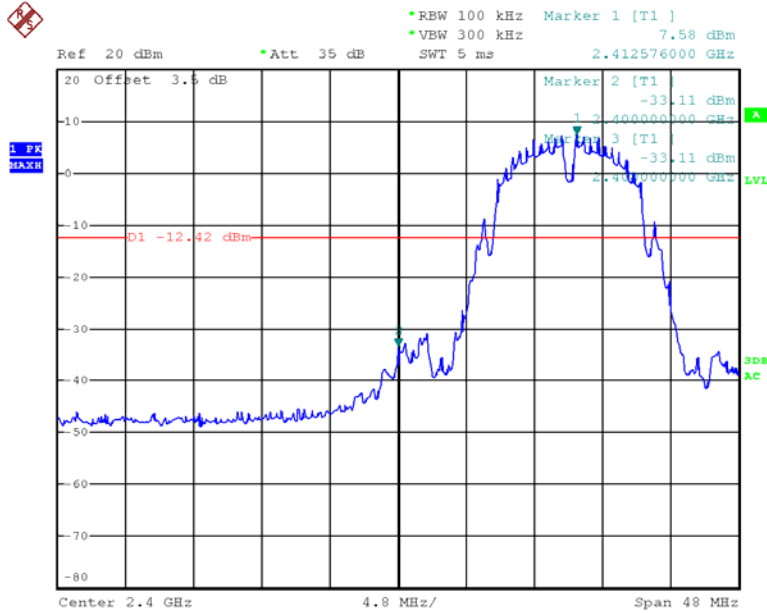


Date: 11.MAY.2015 19:52:03

802.11b: Band Edge, Right Side

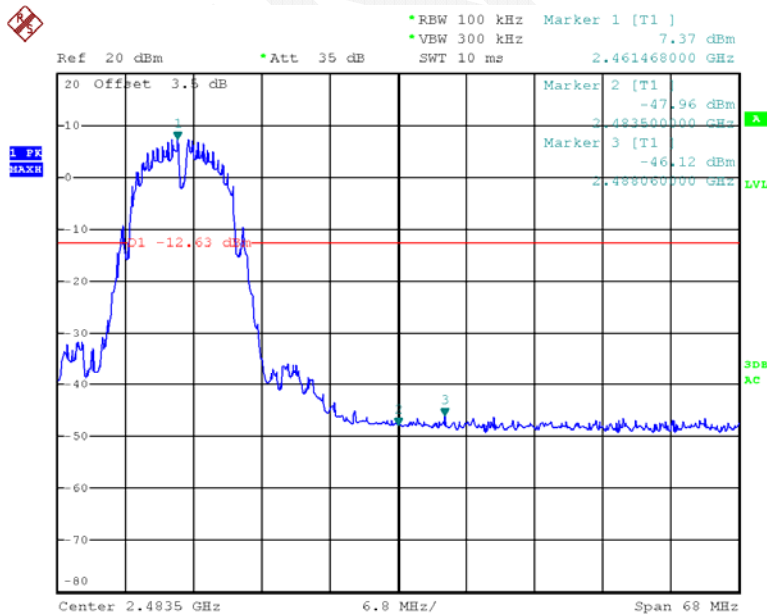


Date: 11.MAY.2015 19:52:58

802.11g: Band Edge, Left Side

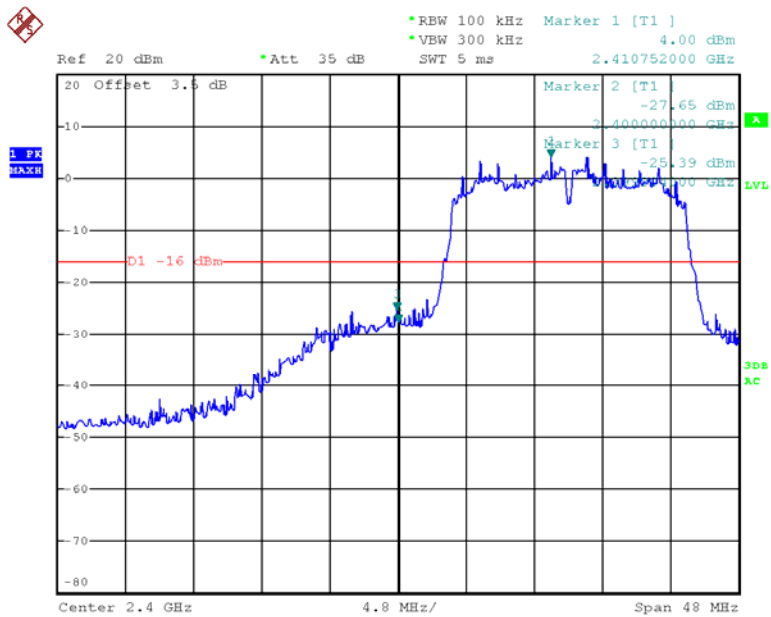


Date: 11.MAY.2015 20:13:51

802.11g: Band Edge, Right Side

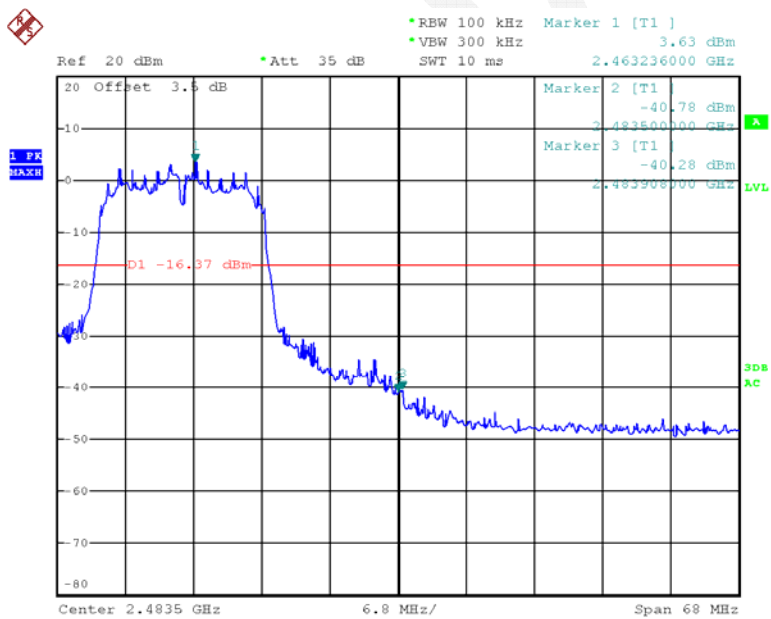


Date: 11.MAY.2015 20:14:58

802.11n ht20 Band Edge, Left Side

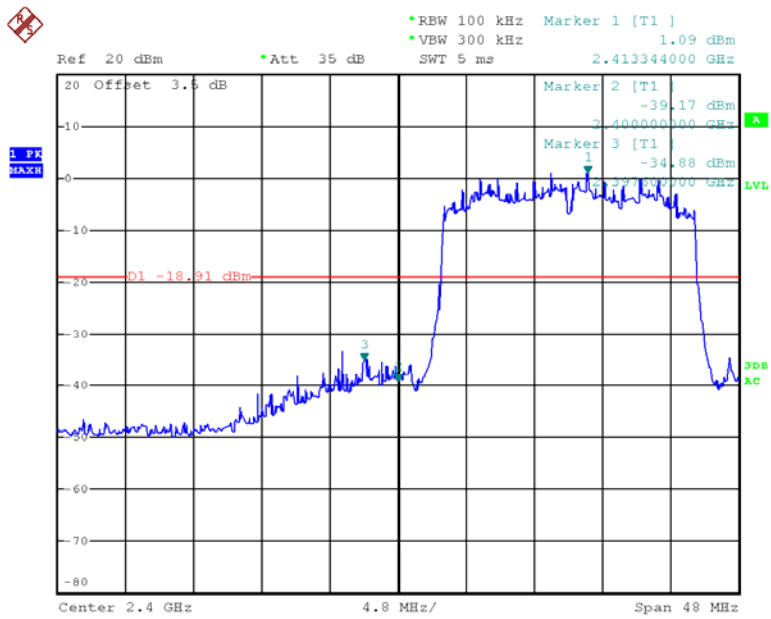


Date: 11.MAY.2015 18:56:25

802.11n ht20 Band Edge, Right Side

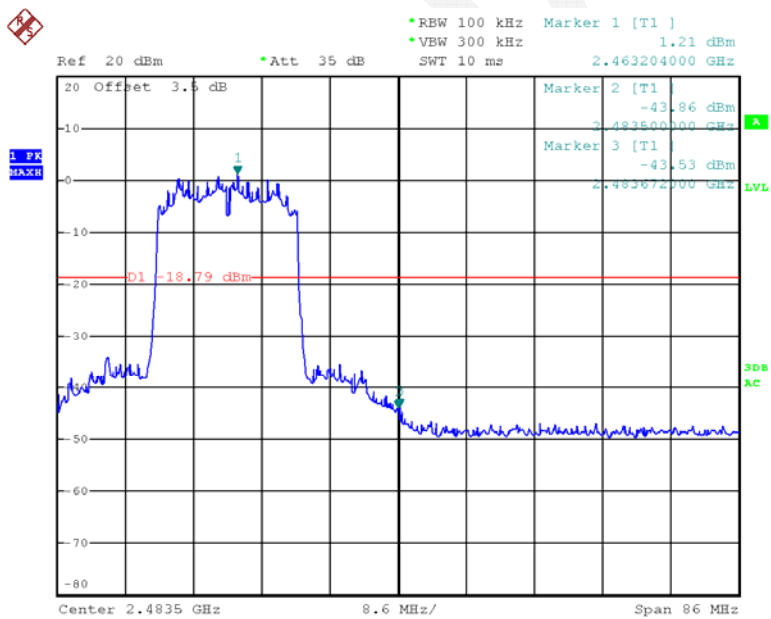


Date: 11.MAY.2015 18:45:48

802.11n ht40 Band Edge, Left Side

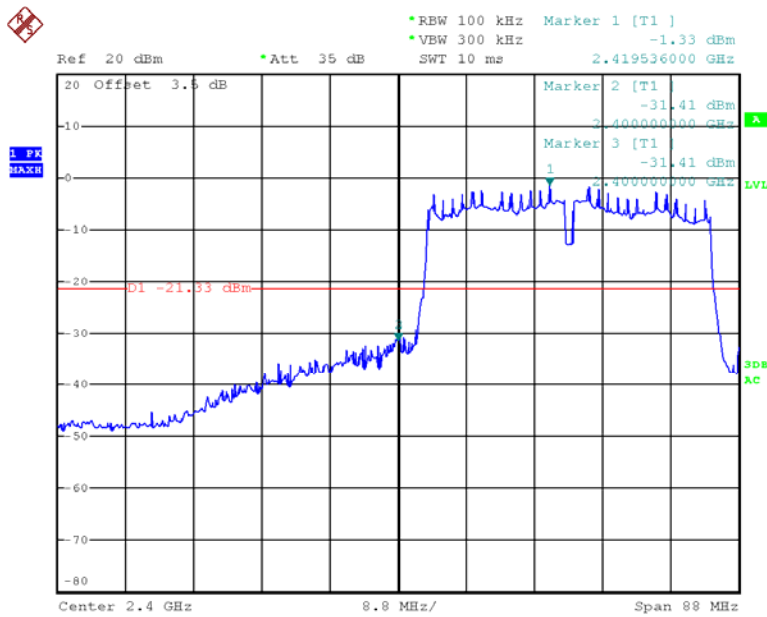

Date: 11.MAY.2015 17:09:09

802.11n ht40 Band Edge, Right Side

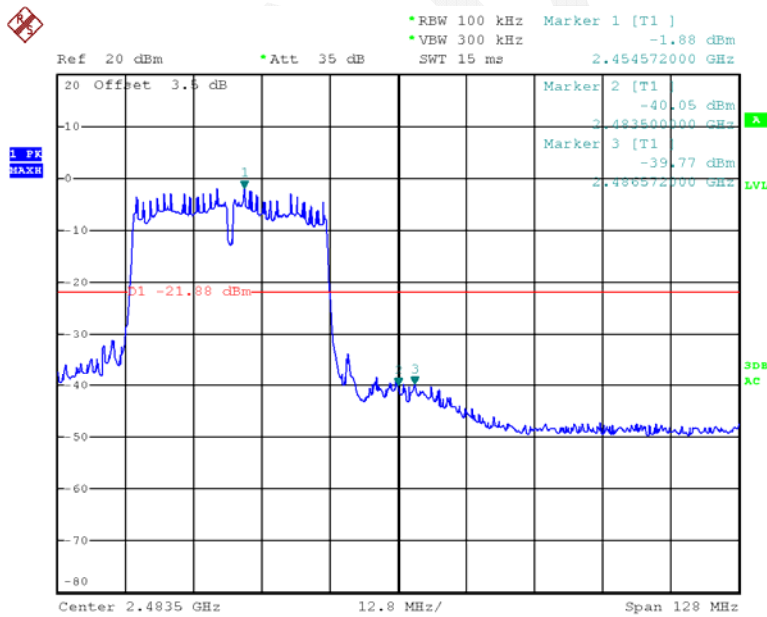

Date: 11.MAY.2015 16:57:22

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.8 °C
Relative Humidity:	53 %
ATM Pressure:	100.2kPa

* The testing was performed by Lion Xiao on 2015-05-11.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)
			Chain 0	Chain 1	Total	
802.11b	Low	2412	-7.04	-7.08	/	≤ 8
	Middle	2437	-7.19	-7.09	/	≤ 8
	High	2462	-7.11	-7.06	/	≤ 8
802.11g	Low	2412	-9.08	-9.1	/	≤ 8
	Middle	2437	-9.12	-9.07	/	≤ 8
	High	2462	-9.14	-9.24	/	≤ 8
802.11n20	Low	2412	-11.52	-11.71	-8.60	≤ 8
	Middle	2437	-11.64	-11.61	-8.61	≤ 8
	High	2462	-11.72	-11.94	-8.82	≤ 8
802.11n40	Low	2422	-16.16	-16.24	-13.19	≤ 8
	Middle	2437	-16.15	-16.46	-13.29	≤ 8
	High	2452	-16.32	-16.68	-13.49	≤ 8


Chain 0

Power Spectral Density, 802.11b Low Channel

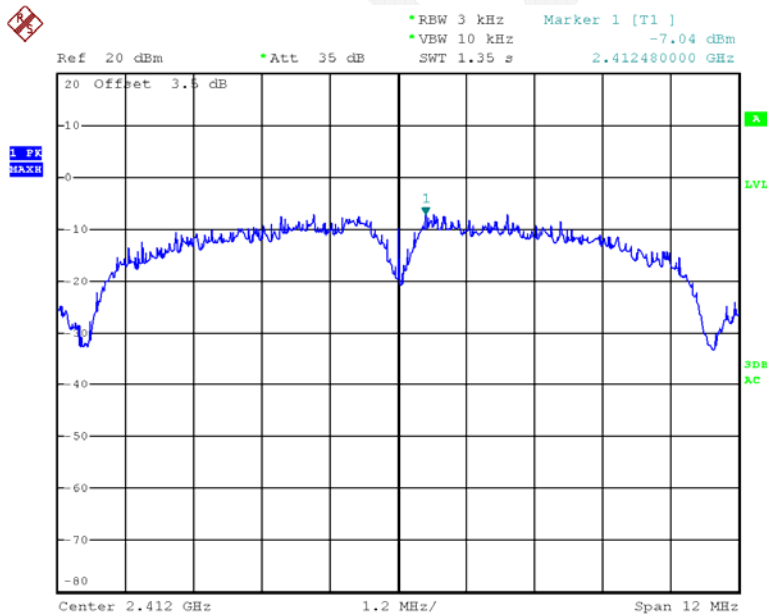


Date: 11.MAY.2015 15:11:13

Power Spectral Density, 802.11b Middle Channel

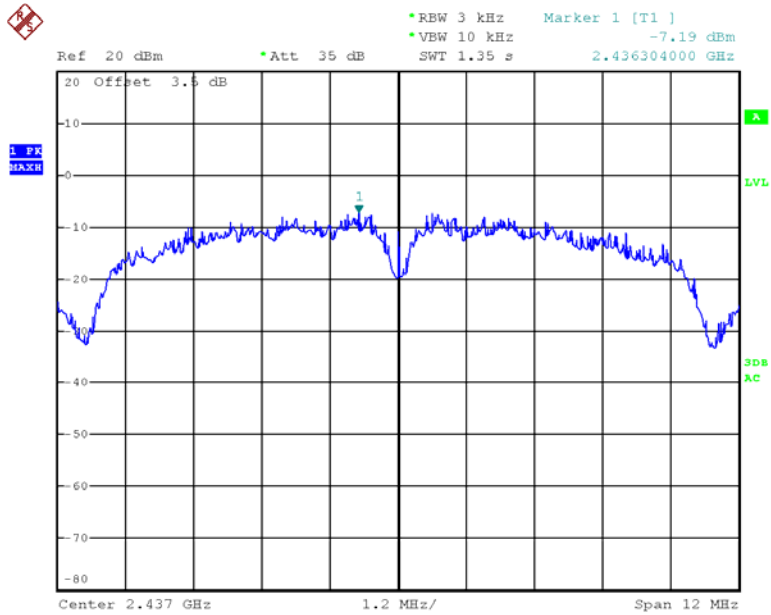


Date: 11.MAY.2015 15:18:36

Power Spectral Density, 802.11b High Channel

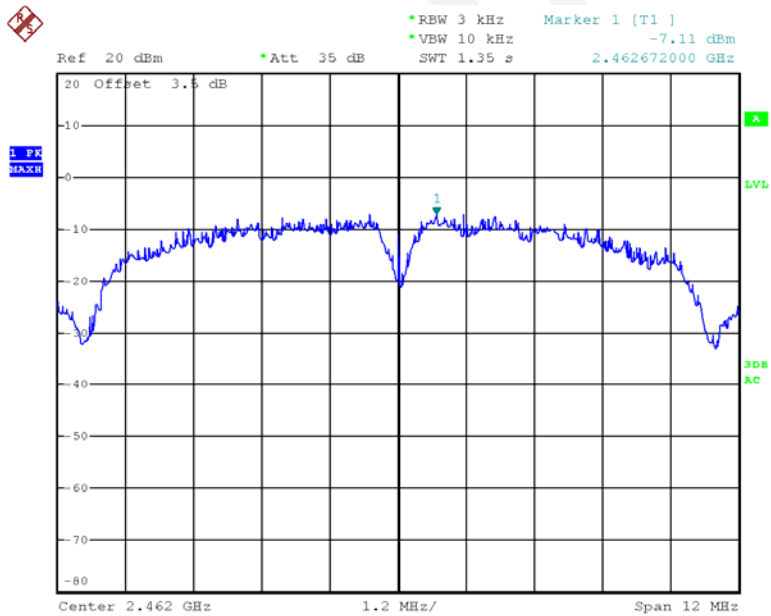


Date: 11.MAY.2015 15:21:35

Power Spectral Density, 802.11g Low Channel

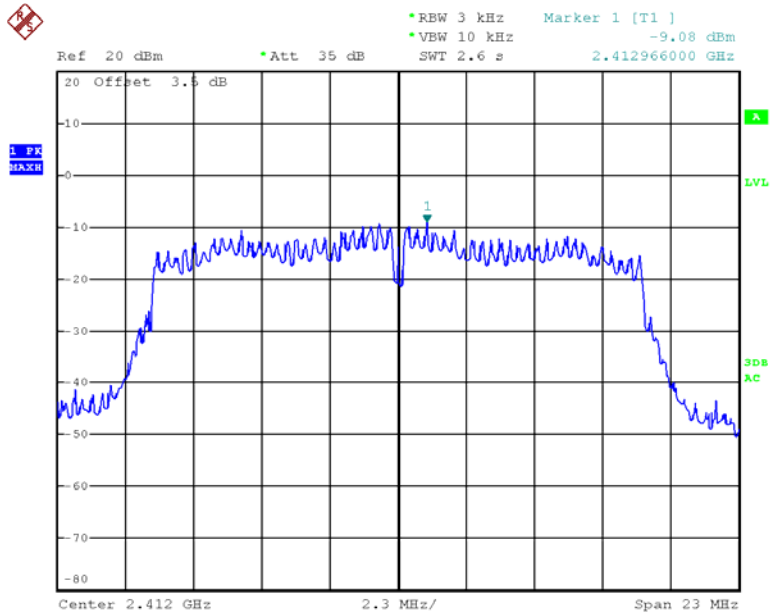


Date: 11.MAY.2015 15:32:29

Power Spectral Density, 802.11g Middle Channel

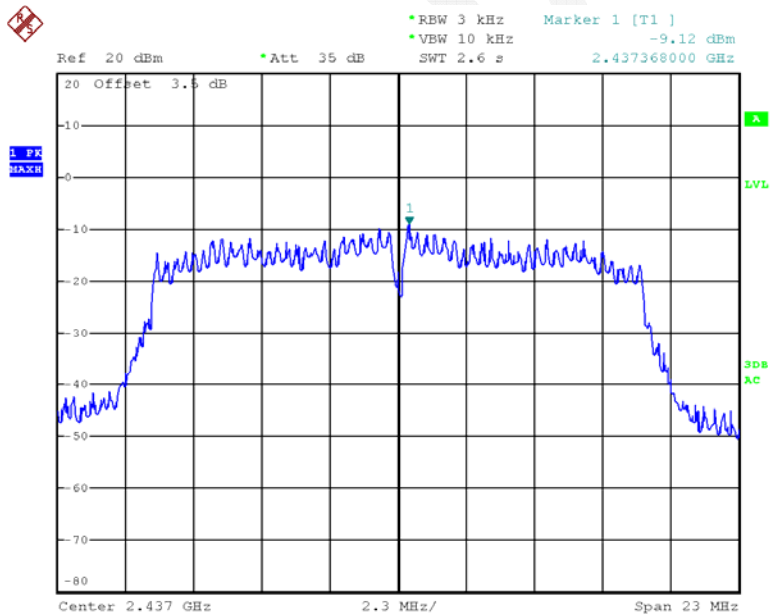


Date: 11.MAY.2015 15:34:07

Power Spectral Density, 802.11g High Channel

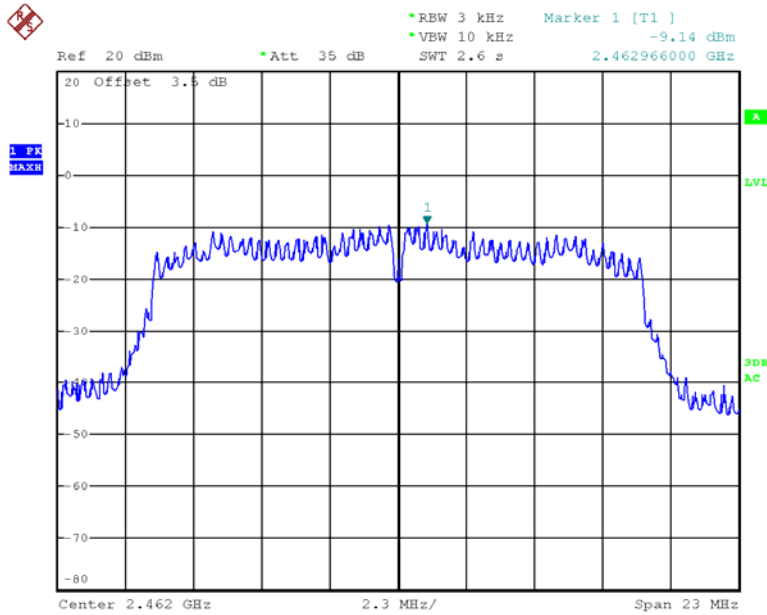


Date: 11.MAY.2015 15:40:24

Power Spectral Density, 802.11n ht20 Low Channel

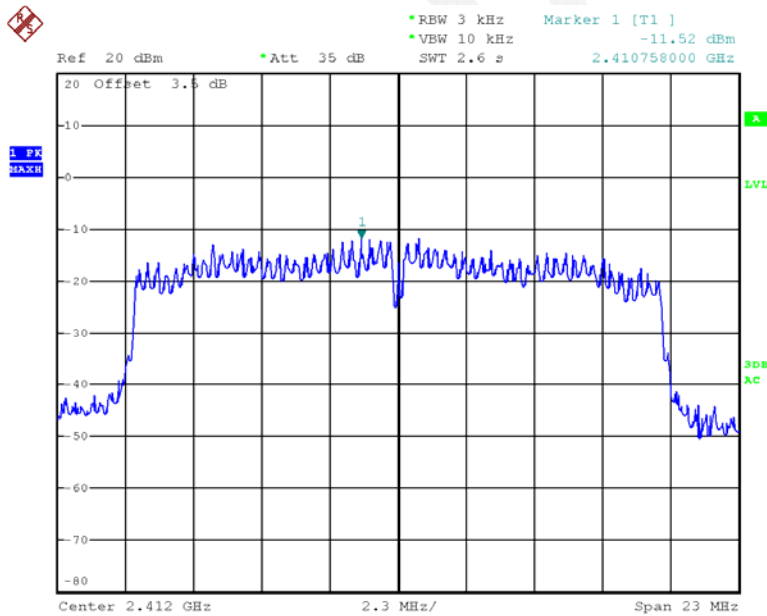


Date: 11.MAY.2015 16:18:32

Power Spectral Density, 802.11n ht20 Middle Channel

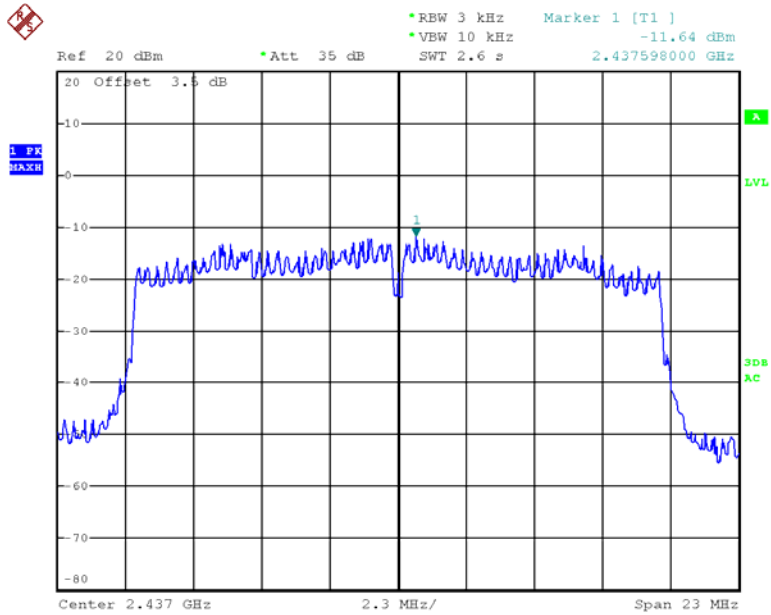


Date: 11.MAY.2015 16:19:32

Power Spectral Density, 802.11n ht20 High Channel

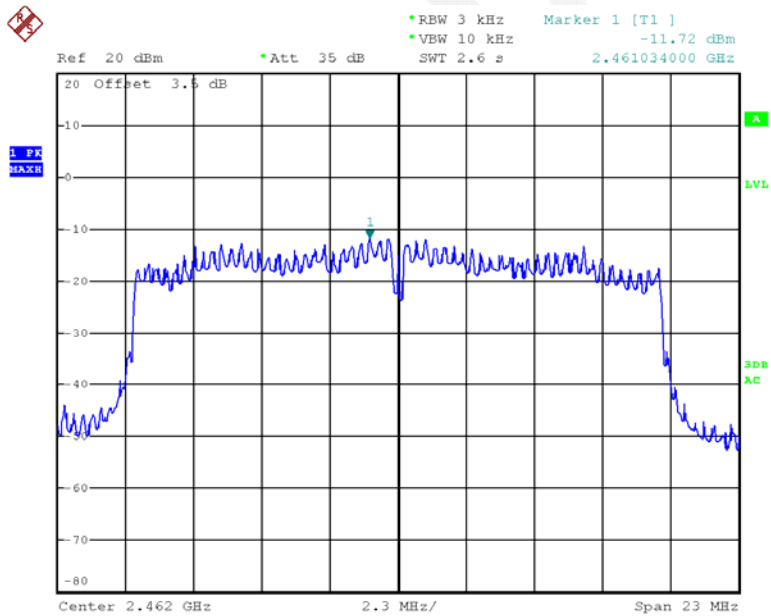


Date: 11.MAY.2015 16:27:21

Power Spectral Density, 802.11n ht40 Low Channel

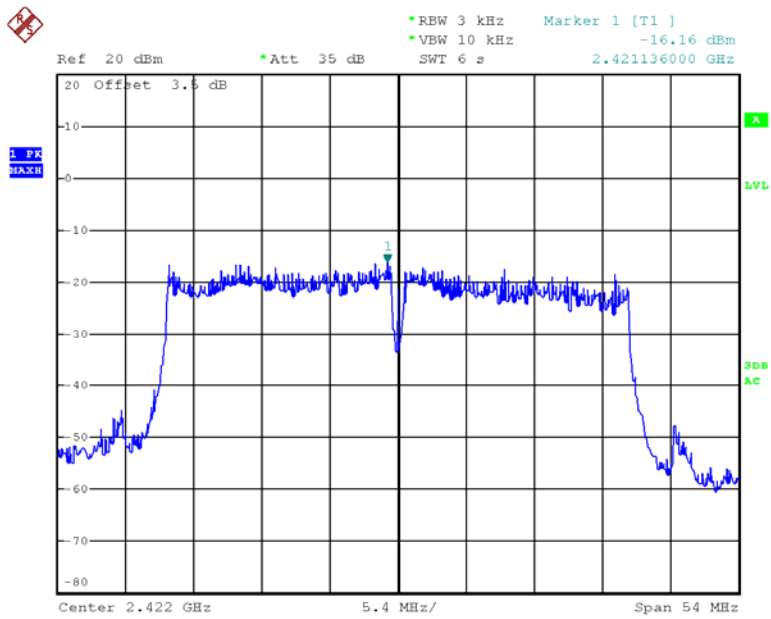


Date: 11.MAY.2015 16:35:38

Power Spectral Density, 802.11n ht40 Middle Channel

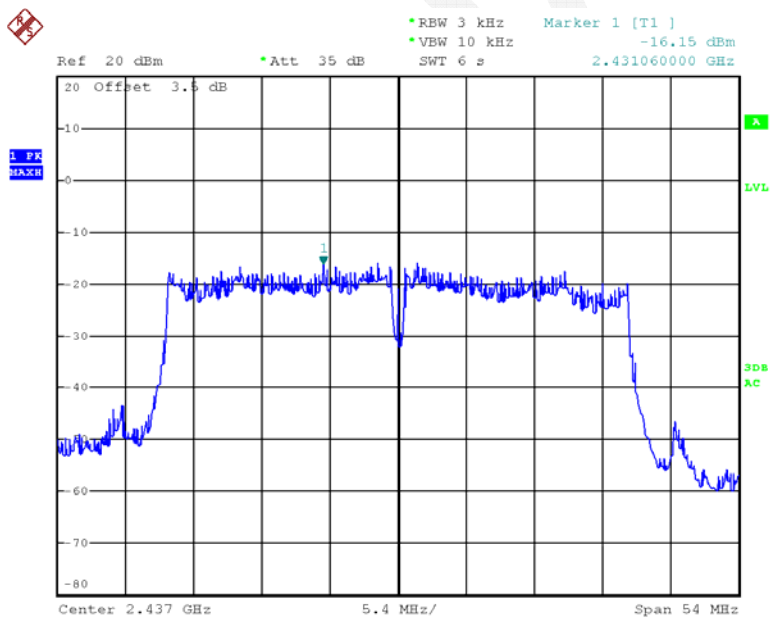

Date: 11.MAY.2015 16:34:30


Power Spectral Density, 802.11n ht40 High Channel

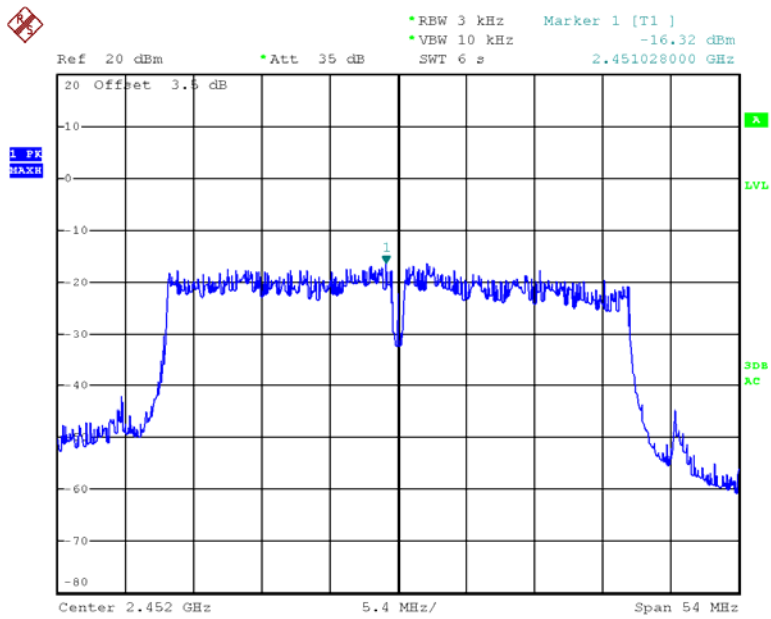

Date: 11.MAY.2015 16:42:11


Chain 1

Power Spectral Density, 802.11b Low Channel

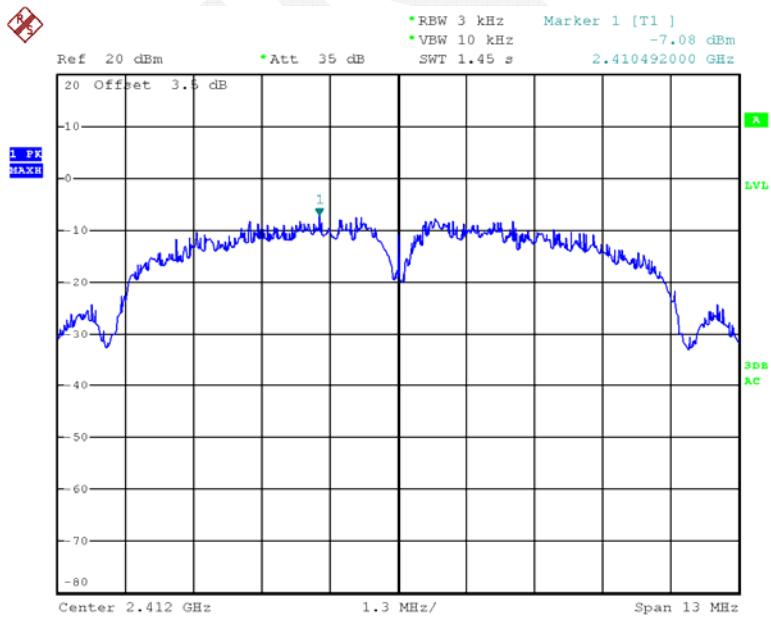


Date: 11.MAY.2015 19:51:21

Power Spectral Density, 802.11b Middle Channel

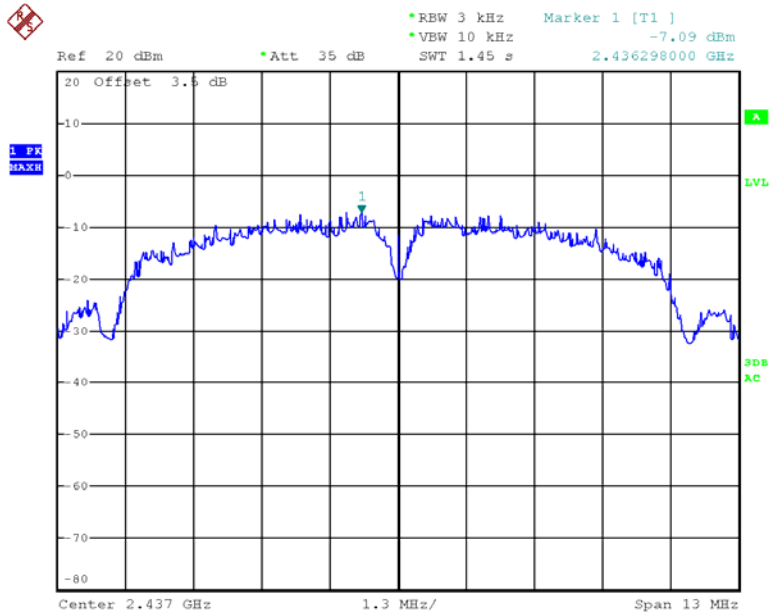


Date: 11.MAY.2015 19:49:02

Power Spectral Density, 802.11b High Channel

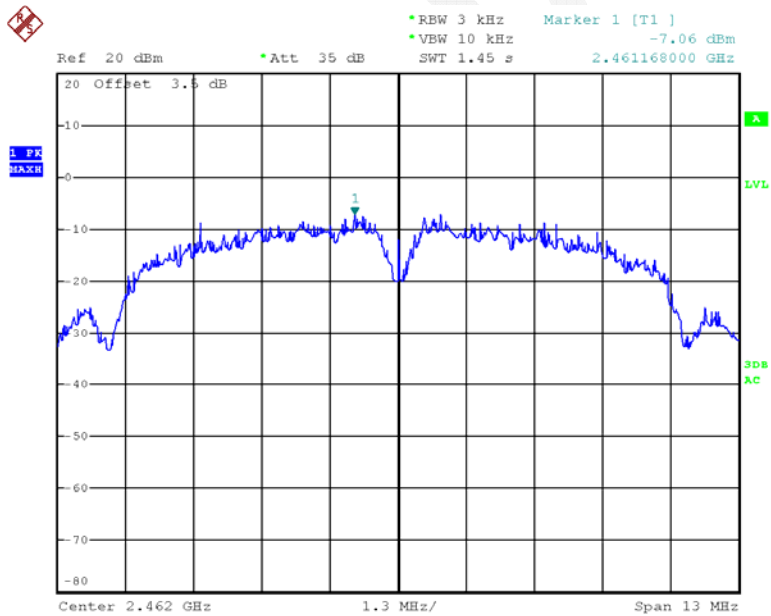


Date: 11.MAY.2015 19:48:19

Power Spectral Density, 802.11g Low Channel

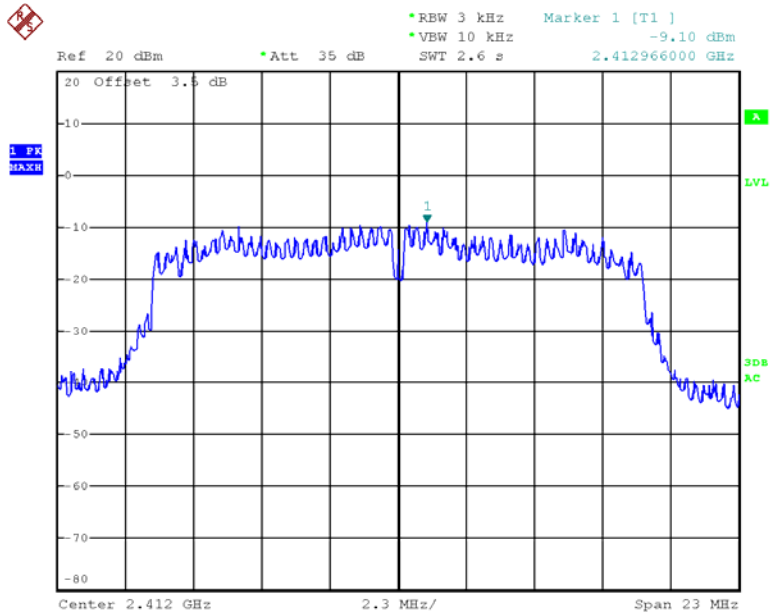


Date: 11.MAY.2015 20:12:33

Power Spectral Density, 802.11g Middle Channel

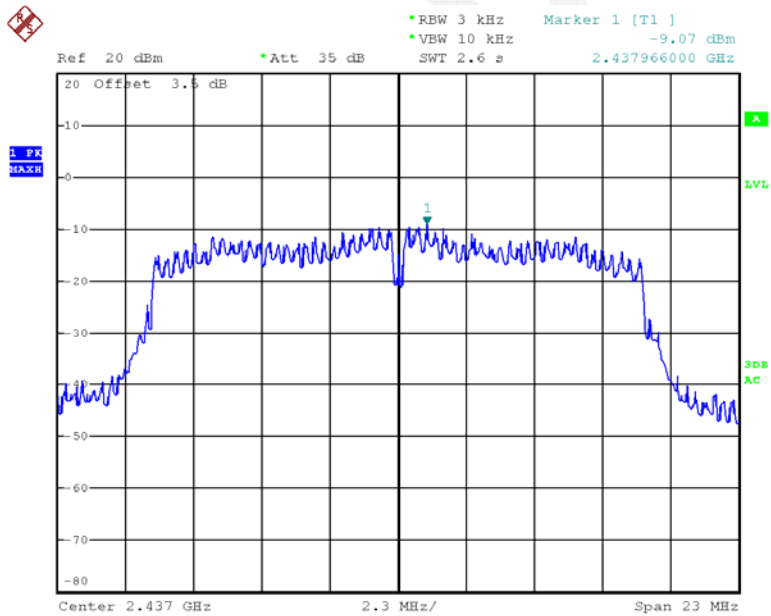


Date: 11.MAY.2015 20:11:20

Power Spectral Density, 802.11g High Channel

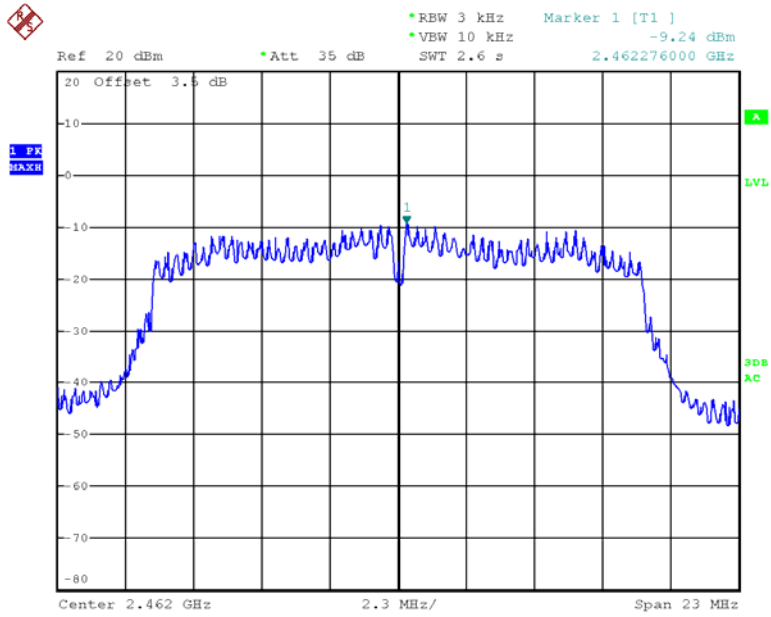


Date: 11.MAY.2015 20:09:08

Power Spectral Density, 802.11n ht20 Low Channel

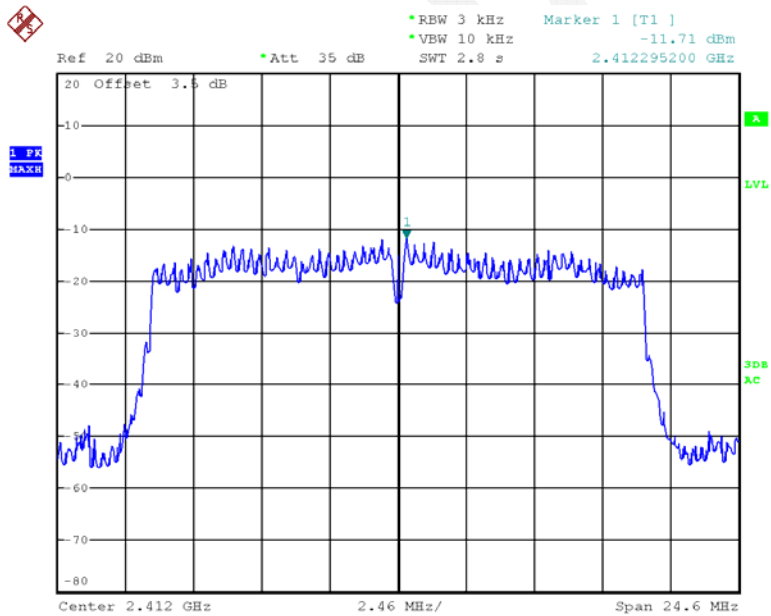


Date: 11.MAY.2015 18:58:19

Power Spectral Density, 802.11n ht20 Middle Channel

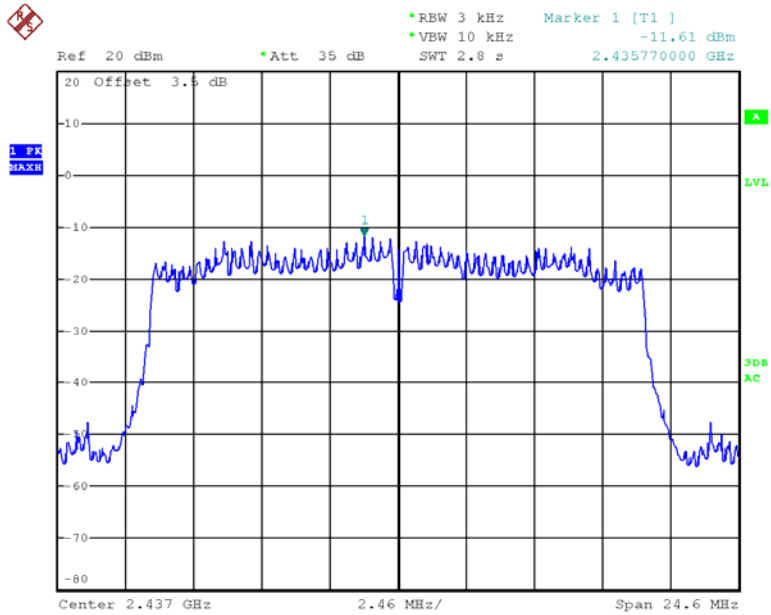


Date: 11.MAY.2015 18:52:07

Power Spectral Density, 802.11n ht20 High Channel

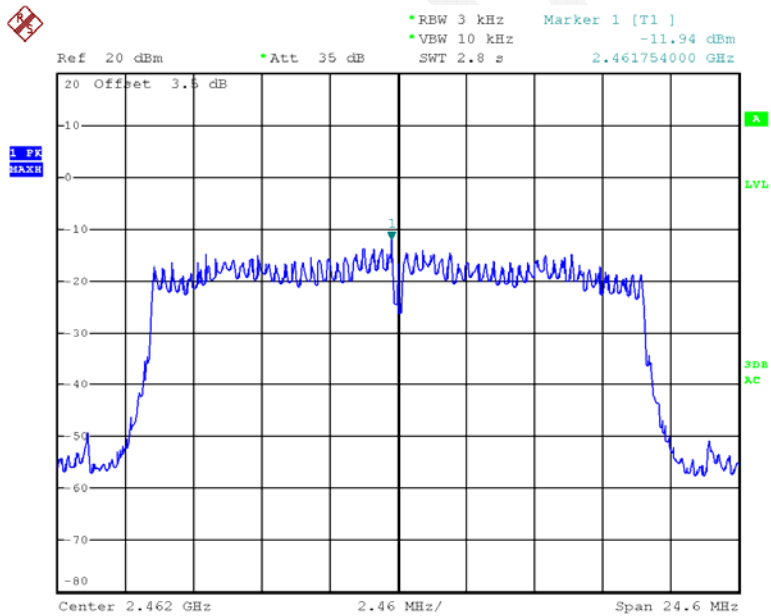


Date: 11.MAY.2015 18:47:29

Power Spectral Density, 802.11n ht40 Low Channel

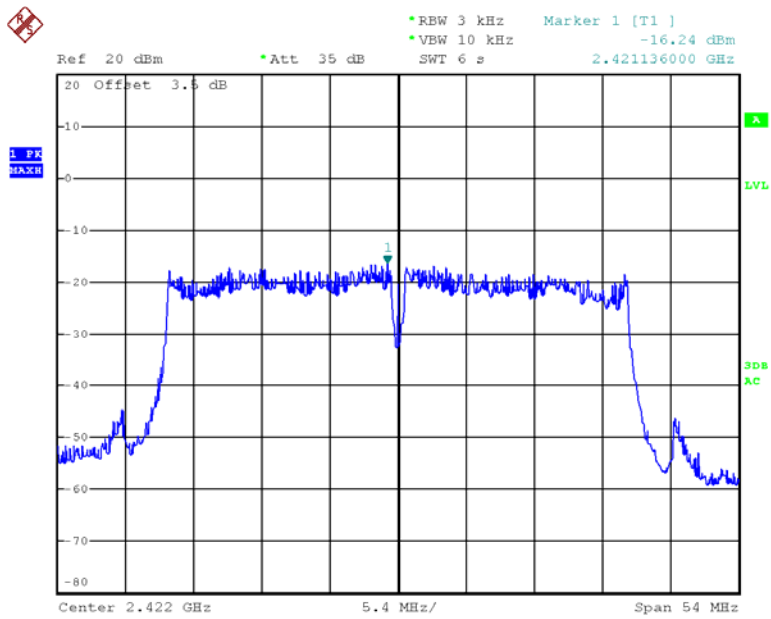


Date: 11.MAY.2015 17:22:05

Power Spectral Density, 802.11n ht40 Middle Channel

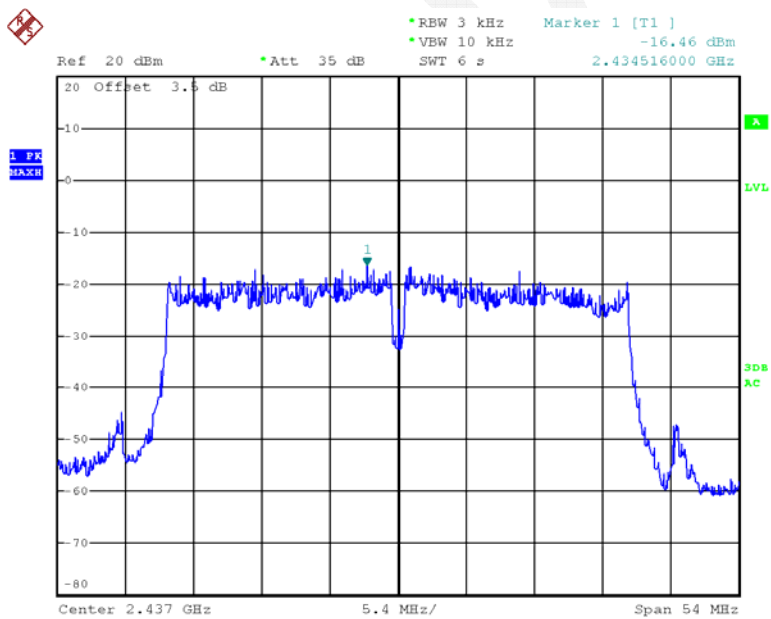

Date: 11.MAY.2015 17:05:29

Power Spectral Density, 802.11n ht40 High Channel

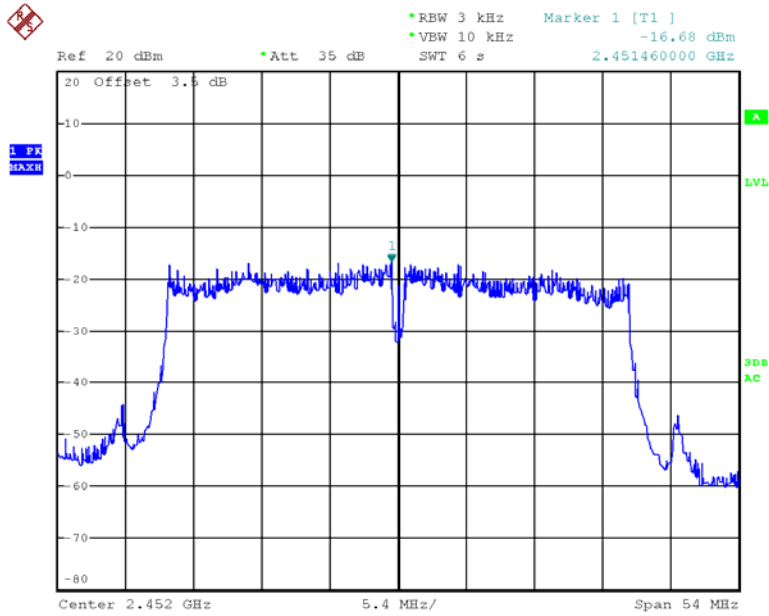

Date: 11.MAY.2015 17:02:03

*****END OF REPORT*****