



Test Mode	IEEE 802.11ax (HE160)_ Ant 2
-----------	------------------------------


Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6025	0.56	0.47	1.03	5.00	Pass
6345	0.20	0.47	0.67	5.00	Pass

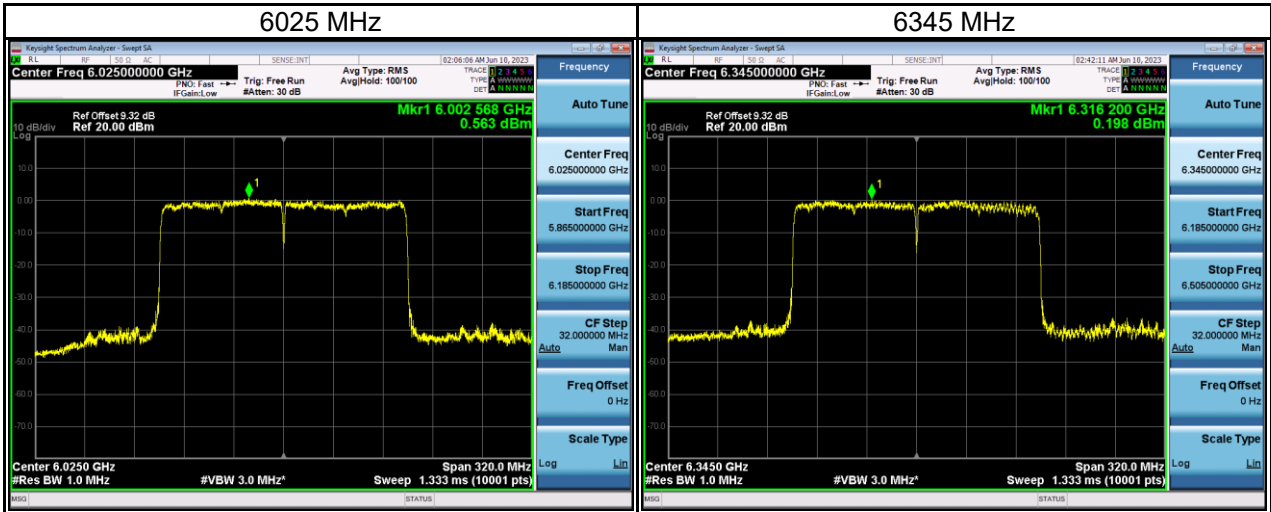


Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6505	-0.19	0.47	0.28	5.00	Pass

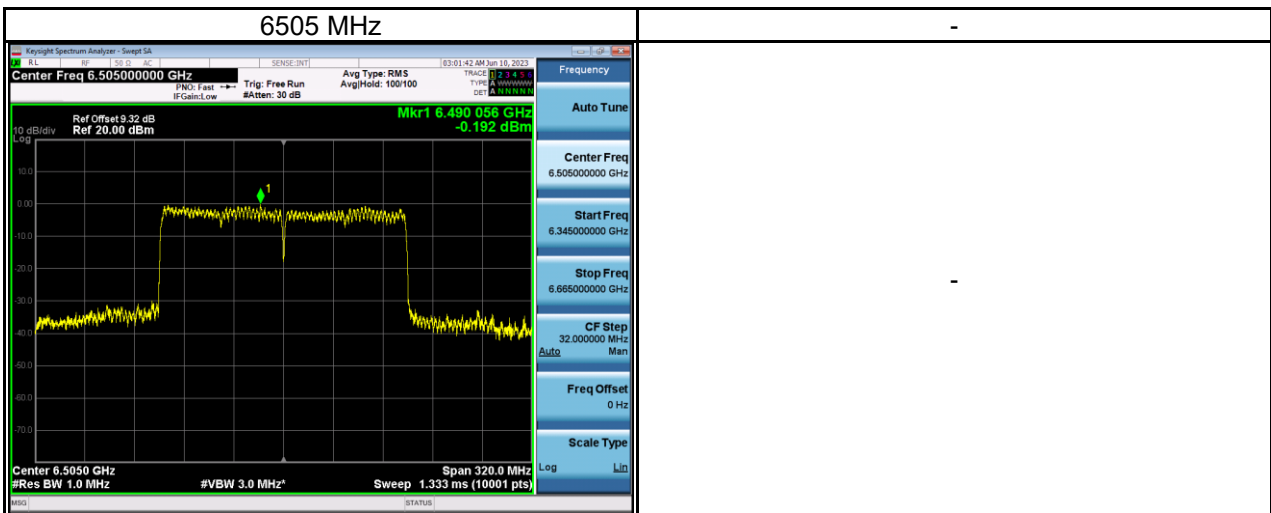

Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6665	0.98	0.47	1.45	5.00	Pass

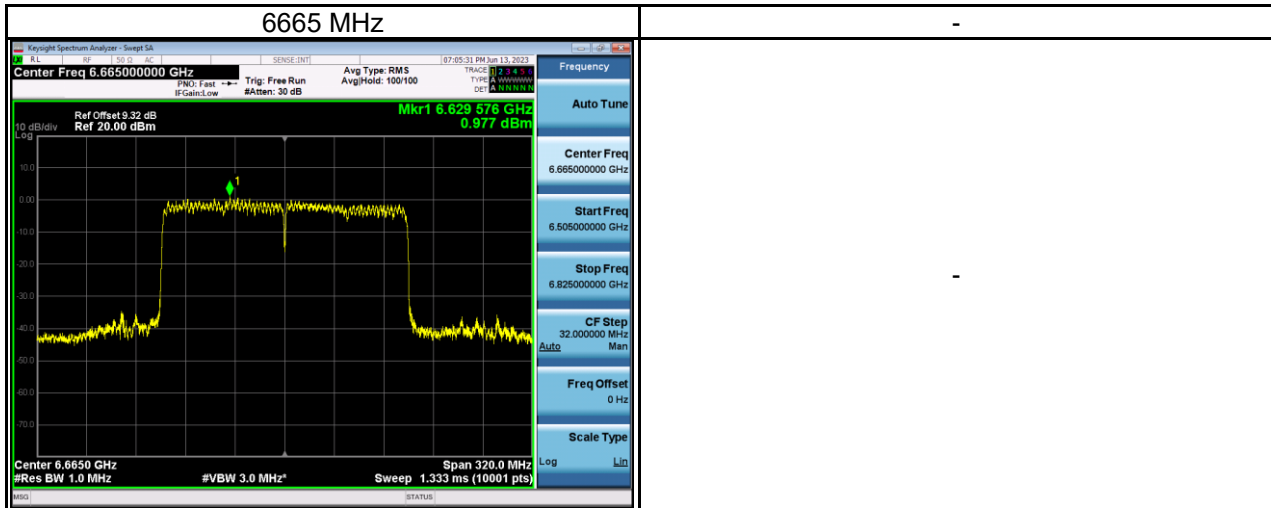

Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6985	-1.93	0.47	-1.46	5.00	Pass

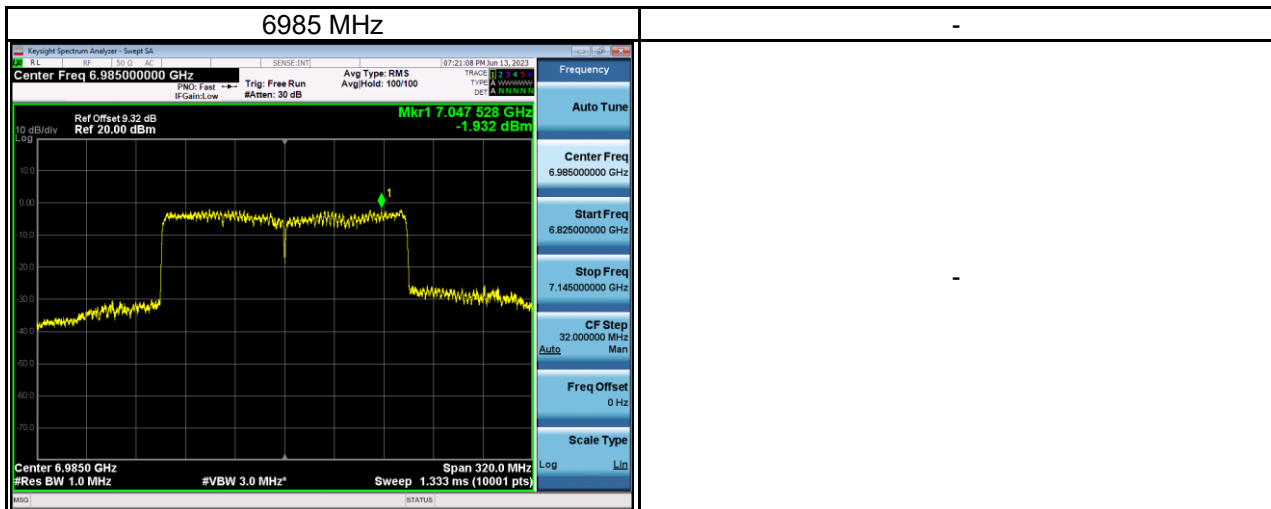


Test Mode	IEEE 802.11ax (HE160)_ Total
-----------	------------------------------

Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Duty Factor (dB)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6025	4.44	0.47	4.91	5.00	Pass
6345	4.43	0.47	4.90	5.00	Pass
6505	4.32	0.47	4.79	5.00	Pass
6665	4.42	0.47	4.89	5.00	Pass
6985	4.27	0.47	4.74	5.00	Pass

**APPENDIX D UNDESIRABLE EMISSIONS - 30 MHZ TO 1 GHZ**

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/4/18
Test Frequency	6985MHz	Polarization	Vertical
Temp	21°C	Hum.	61%

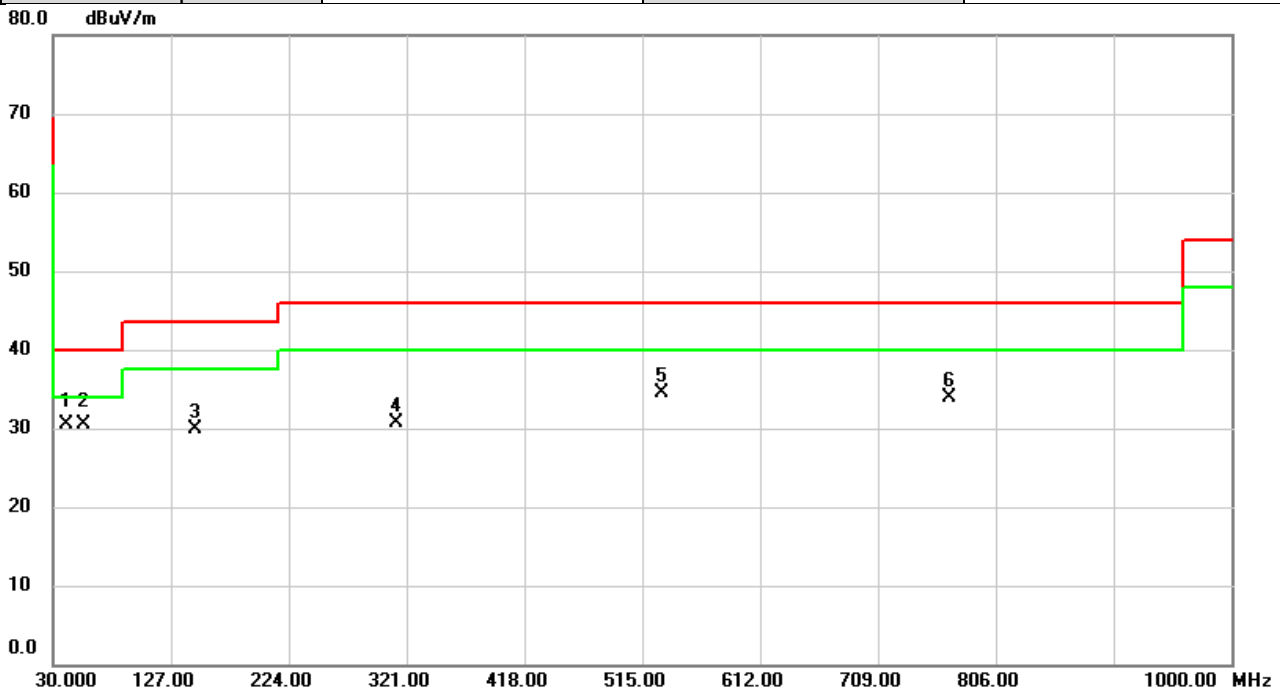


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		40.7023	42.90	-12.46	30.44	40.00	-9.56	QP	
2	*	55.2200	42.54	-11.94	30.60	40.00	-9.40	QP	
3		147.5640	42.23	-12.23	30.00	43.50	-13.50	peak	
4		312.0437	41.70	-11.06	30.64	46.00	-15.36	peak	
5		530.5200	40.21	-5.66	34.55	46.00	-11.45	peak	
6		768.0407	35.18	-1.22	33.96	46.00	-12.04	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/4/18
Test Frequency	6985MHz	Polarization	Horizontal
Temp	21°C	Hum.	61%

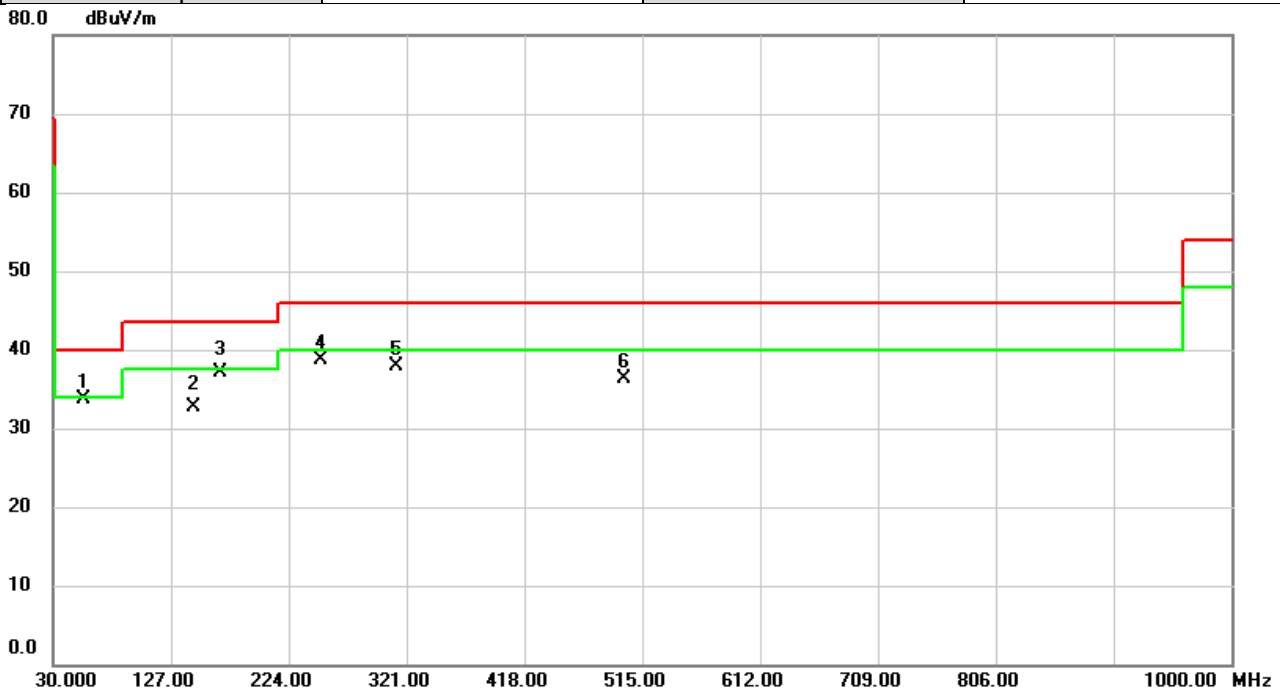


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	55.7697	45.64	-11.97	33.67	40.00	-6.33	peak	
2		145.5270	45.12	-12.38	32.74	43.50	-10.76	QP	
3		167.9987	49.53	-12.41	37.12	43.50	-6.38	QP	
4		249.9960	52.03	-13.24	38.79	46.00	-7.21	peak	
5		311.9790	48.92	-11.06	37.86	46.00	-8.14	peak	
6		499.9973	42.46	-6.23	36.23	46.00	-9.77	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX E UNDESIRABLE EMISSIONS - ABOVE 1 GHZ**

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/19
Test Frequency	5955MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

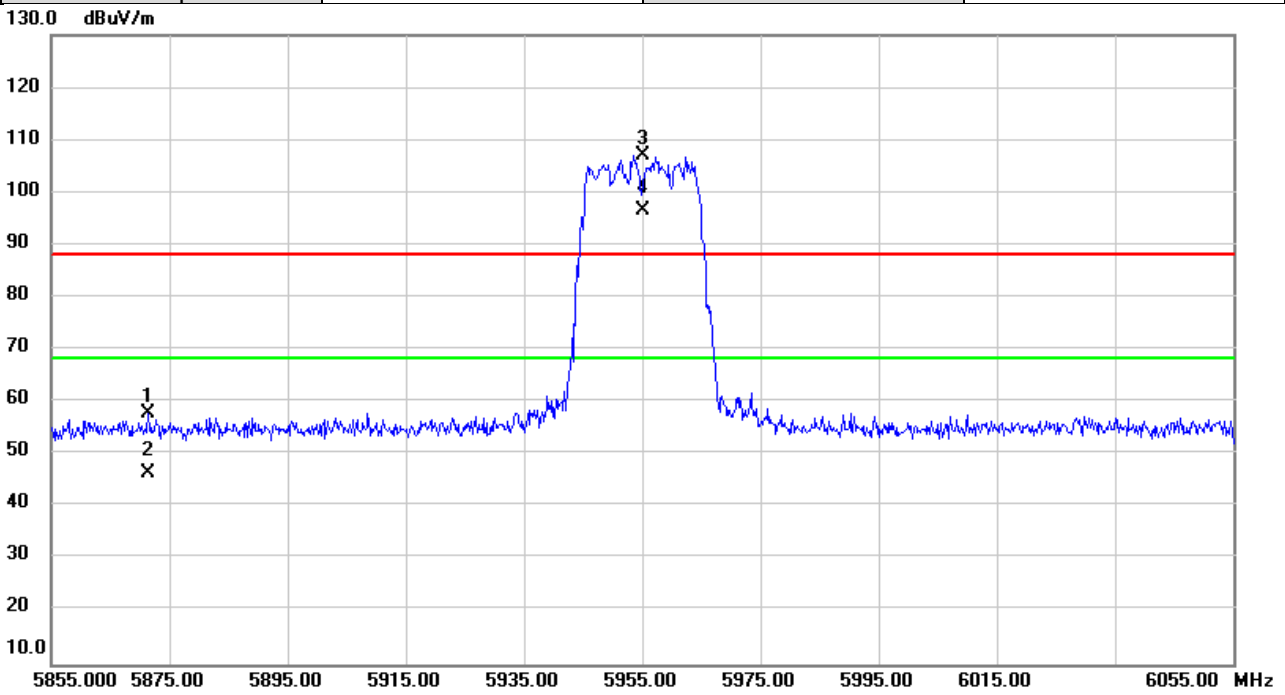


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5871.333	55.96	2.03	57.99	88.20	-30.21	peak	
2		5871.333	44.44	2.03	46.47	68.20	-21.73	AVG	
3	X	5955.000	104.80	2.20	107.00	88.20	18.80	peak	No Limit
4	*	5955.000	94.41	2.20	96.61	68.20	28.41	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/19
Test Frequency	6415MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

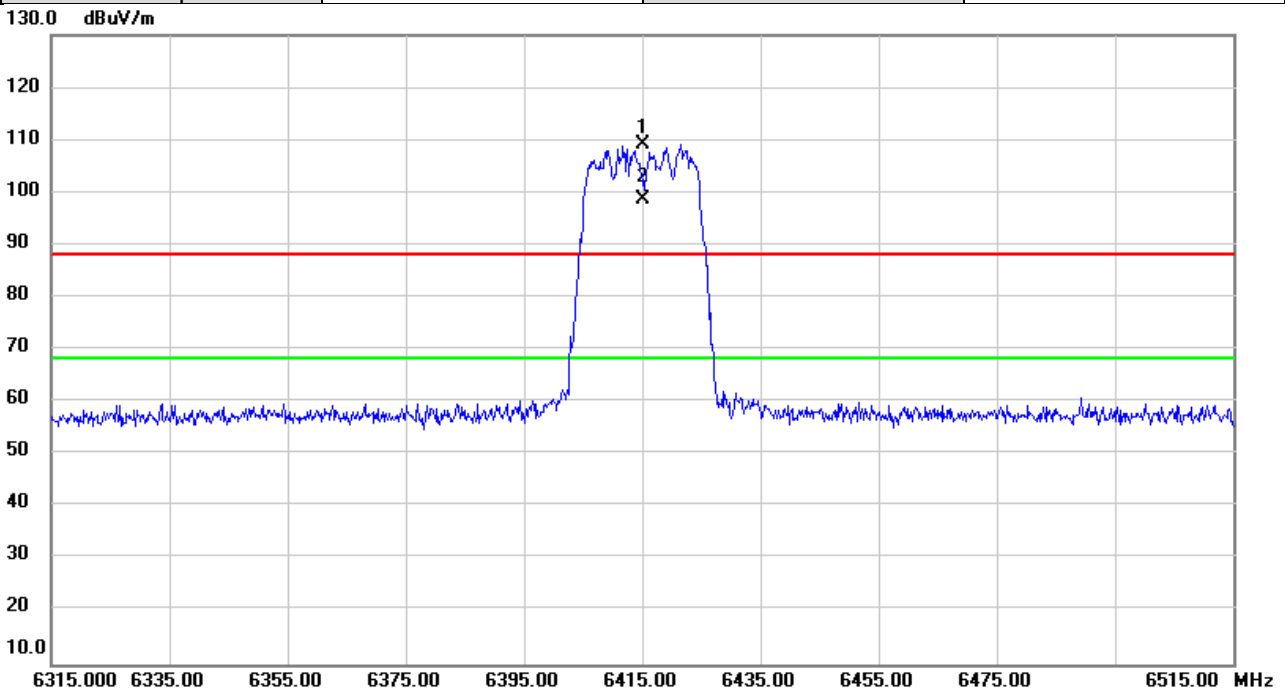


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6415.000	104.63	4.47	109.10	88.20	20.90	peak	No Limit
2	*	6415.000	94.30	4.47	98.77	68.20	30.57	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/19
Test Frequency	6435MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

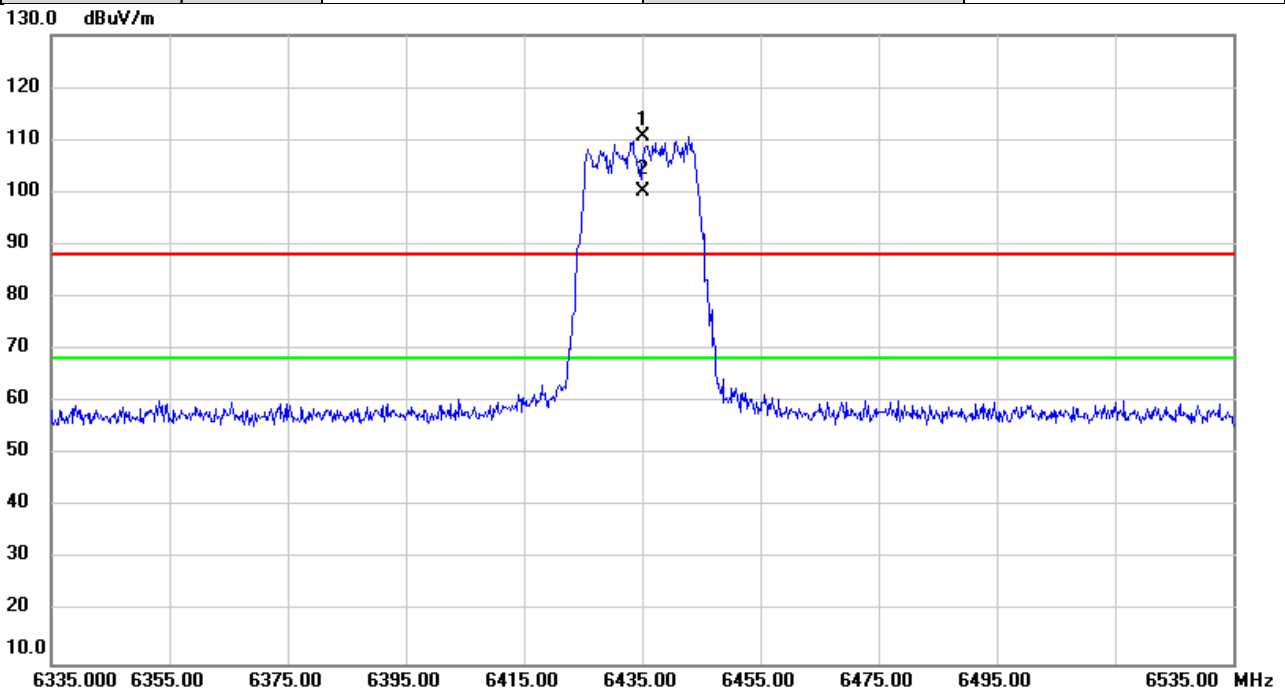


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6435.000	105.98	4.58	110.56	88.20	22.36	peak	No Limit
2	*	6435.000	95.55	4.58	100.13	68.20	31.93	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/19
Test Frequency	6515MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

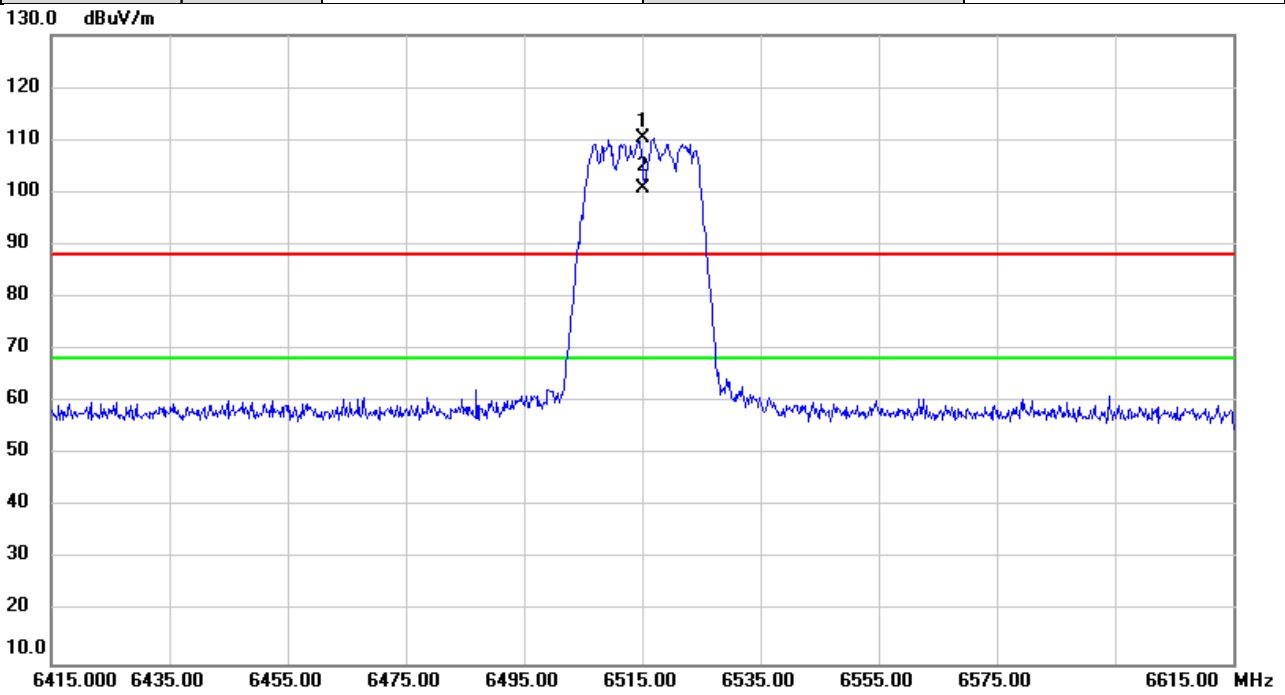


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6515.000	105.26	4.95	110.21	88.20	22.01	peak	No Limit
2	*	6515.000	95.86	4.95	100.81	68.20	32.61	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/19
Test Frequency	6535MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

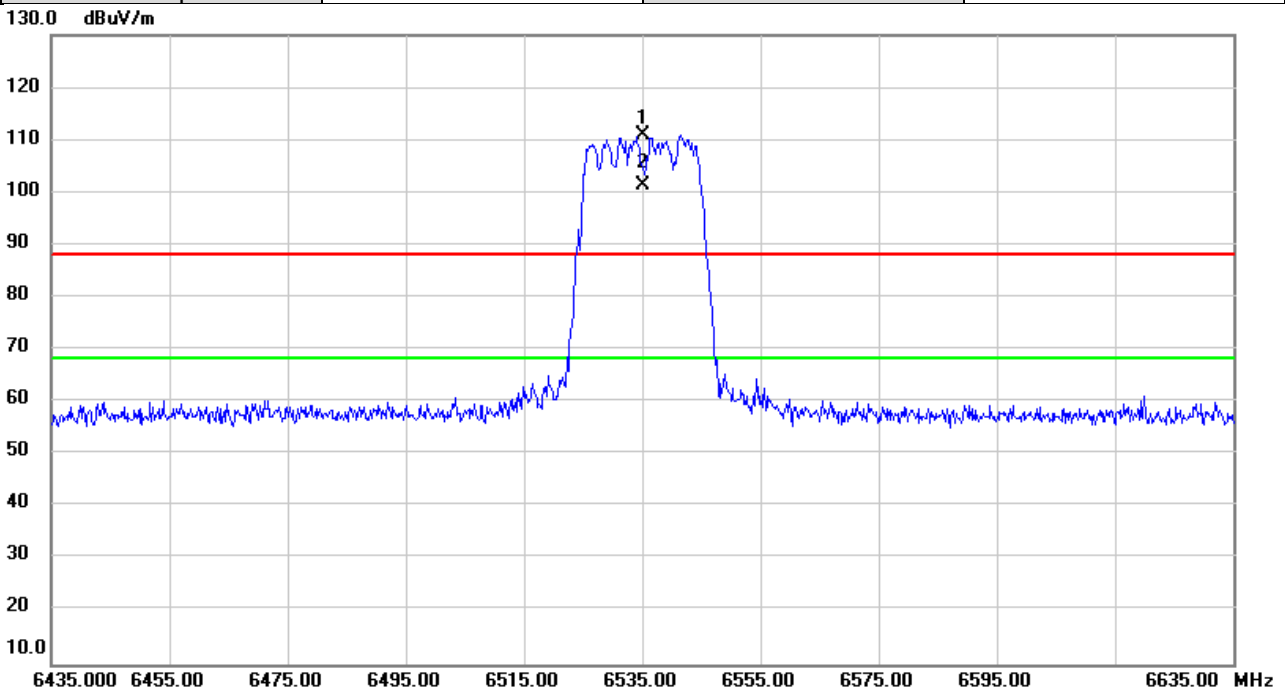


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6535.000	105.94	4.98	110.92	88.20	22.72	peak	No Limit
2	*	6535.000	96.48	4.98	101.46	68.20	33.26	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/19
Test Frequency	6855MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

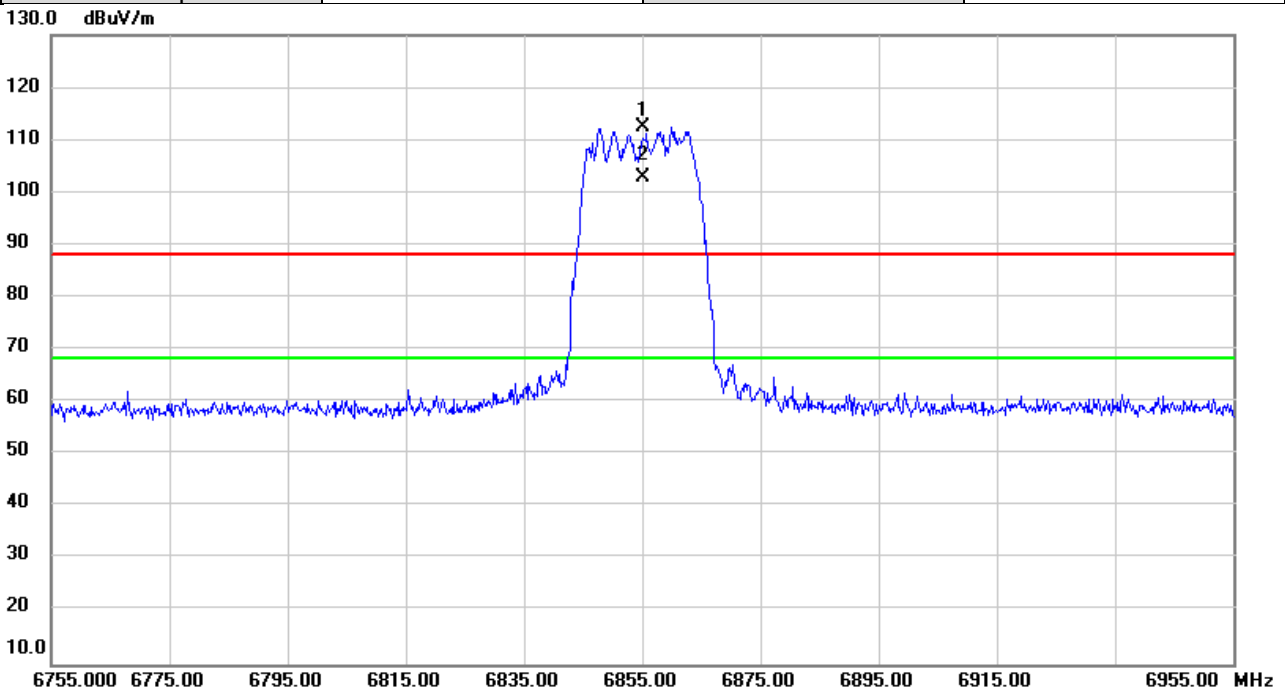


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6855.000	106.99	5.60	112.59	88.20	24.39	peak	No Limit
2	*	6855.000	97.13	5.60	102.73	68.20	34.53	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/19
Test Frequency	6875MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

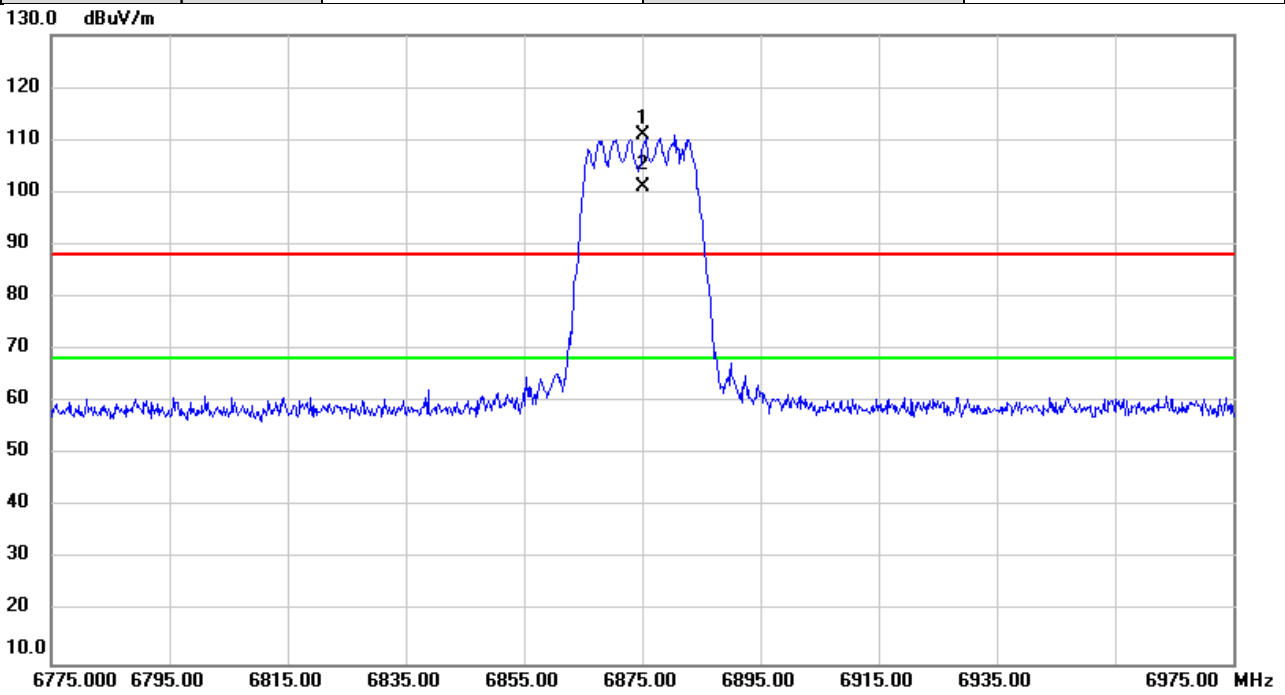


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6875.000	105.20	5.64	110.84	88.20	22.64	peak	No Limit
2	*	6875.000	95.56	5.64	101.20	68.20	33.00	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/19
Test Frequency	7095MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

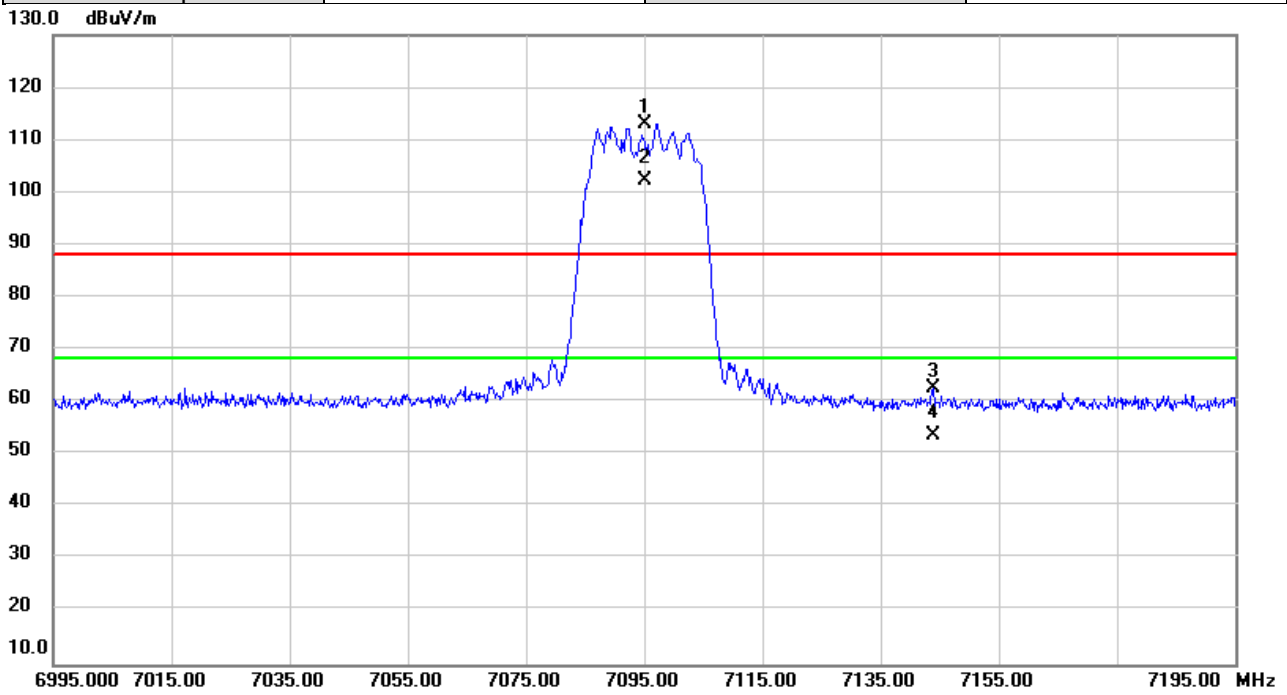


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	7095.000	107.18	5.90	113.08	88.20	24.88	peak	No Limit
2	*	7095.000	96.28	5.90	102.18	68.20	33.98	AVG	No Limit
3		7143.800	56.77	5.92	62.69	88.20	-25.51	peak	
4		7143.800	47.76	5.92	53.68	68.20	-14.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/19
Test Frequency	5965MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

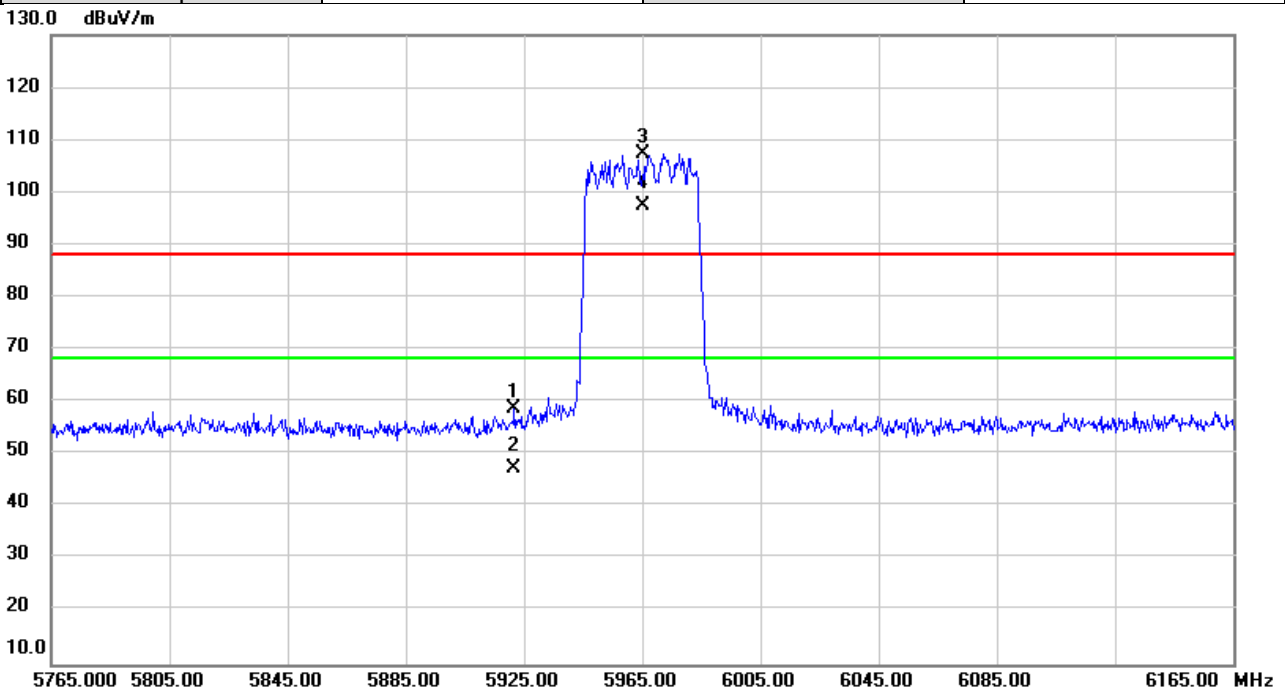


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5921.493	56.76	2.13	58.89	88.20	-29.31	peak	
2		5921.493	45.35	2.13	47.48	68.20	-20.72	AVG	
3	X	5965.000	105.22	2.23	107.45	88.20	19.25	peak	No Limit
4	*	5965.000	95.08	2.23	97.31	68.20	29.11	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/19
Test Frequency	6405MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

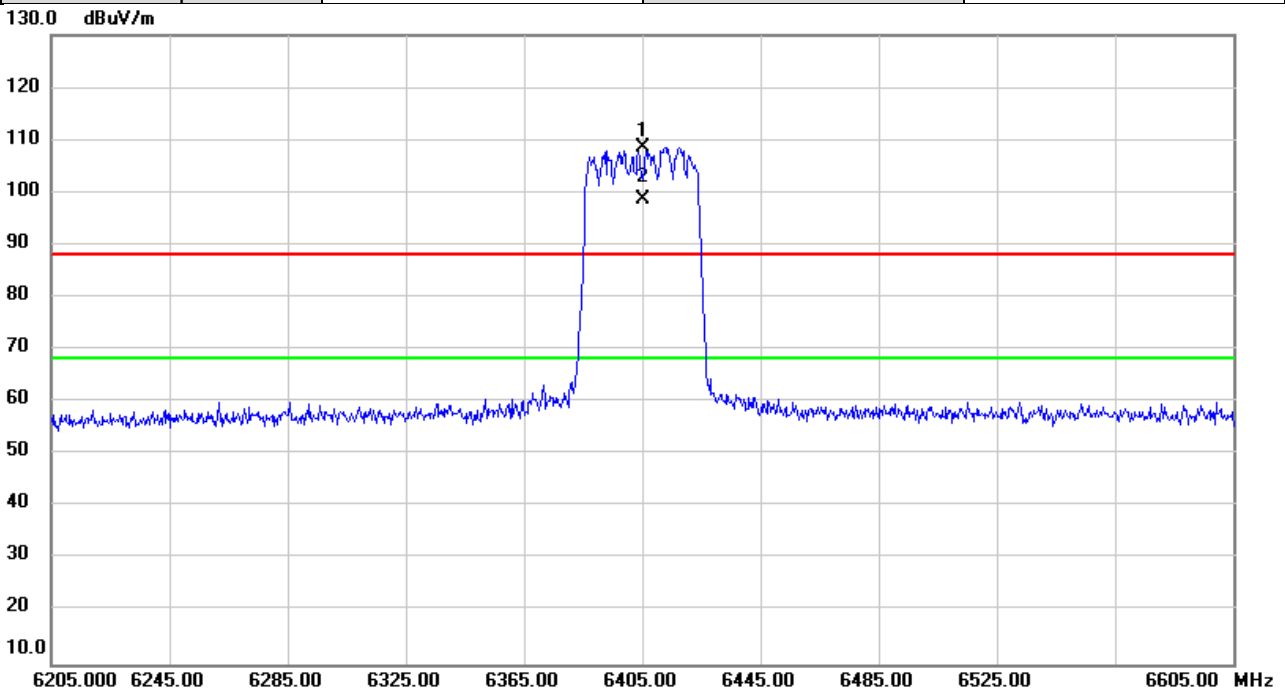


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6405.000	104.15	4.42	108.57	88.20	20.37	peak	No Limit
2	*	6405.000	94.13	4.42	98.55	68.20	30.35	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/19
Test Frequency	6445MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

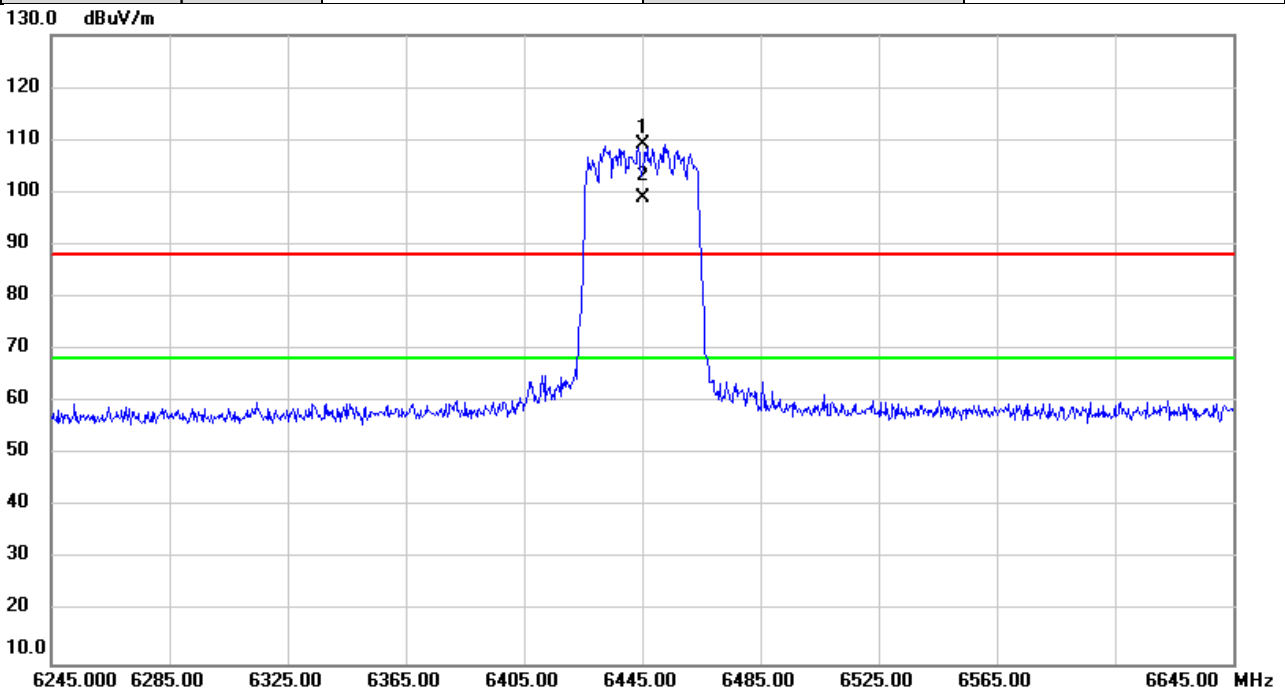


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6445.000	104.38	4.63	109.01	88.20	20.81	peak	No Limit
2	*	6445.000	94.40	4.63	99.03	68.20	30.83	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/19
Test Frequency	6485MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

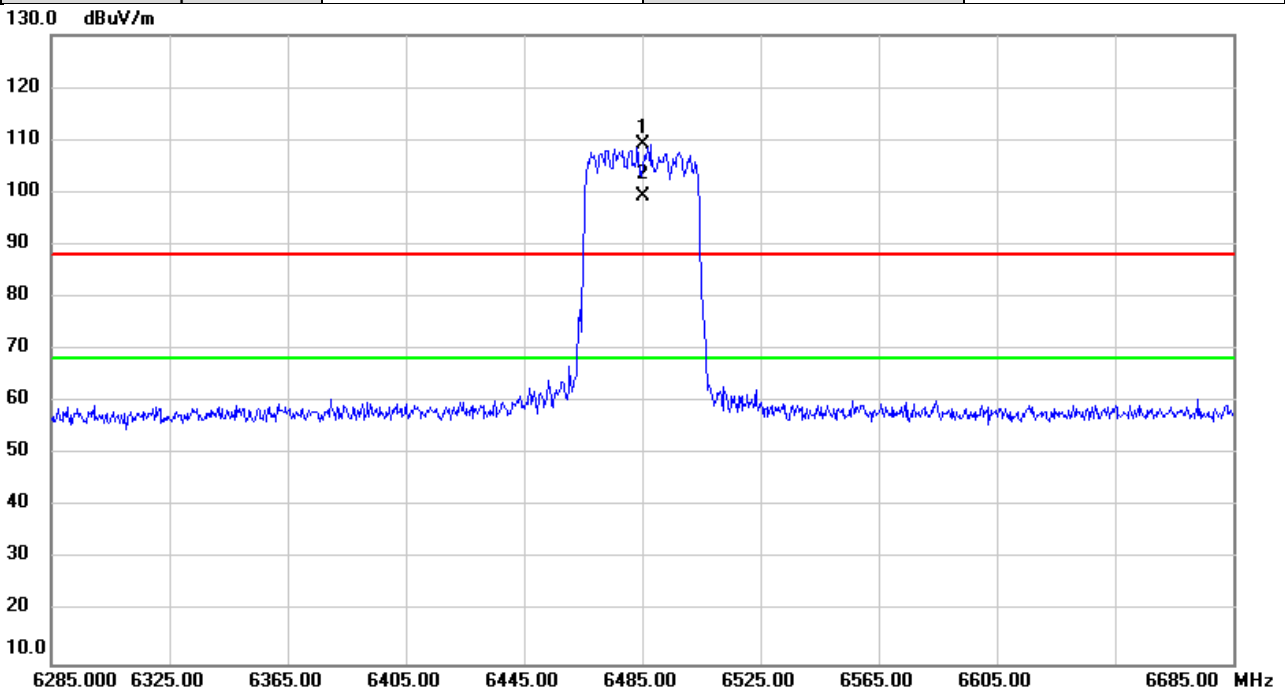


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6485.000	104.22	4.84	109.06	88.20	20.86	peak	No Limit
2	*	6485.000	94.29	4.84	99.13	68.20	30.93	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/19
Test Frequency	6525MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

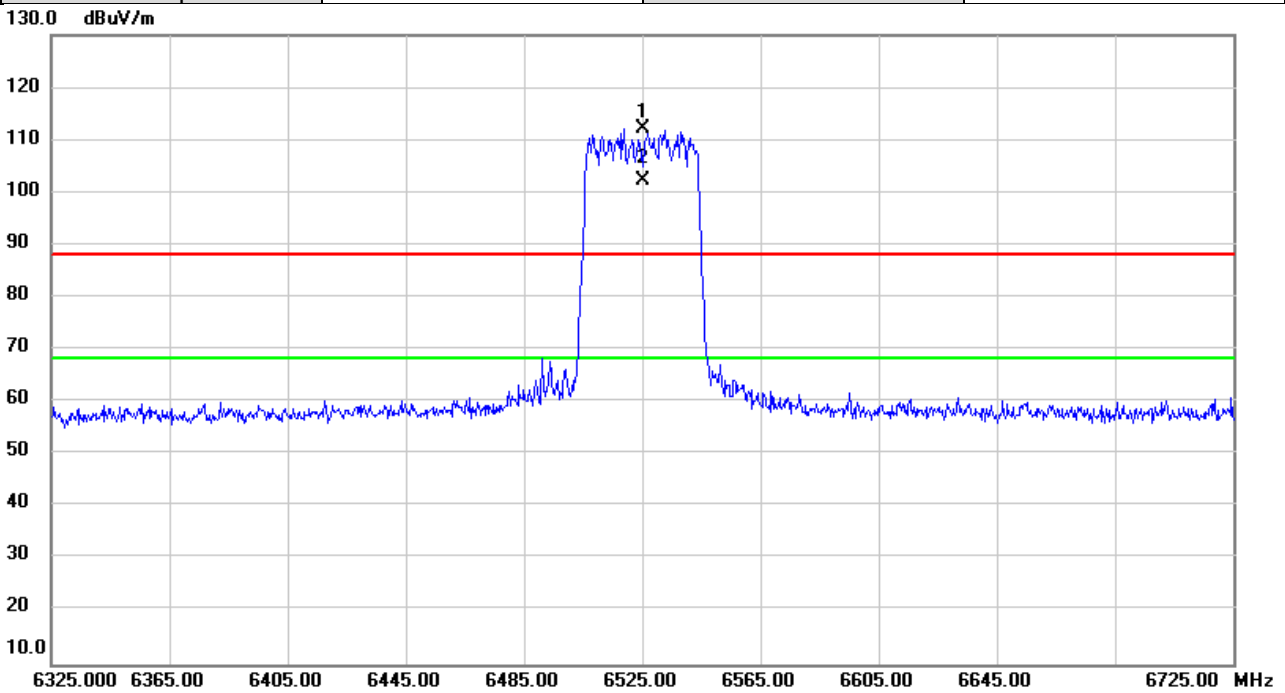


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6525.000	107.24	4.97	112.21	88.20	24.01	peak	No Limit
2	*	6525.000	97.29	4.97	102.26	68.20	34.06	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/19
Test Frequency	6845MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

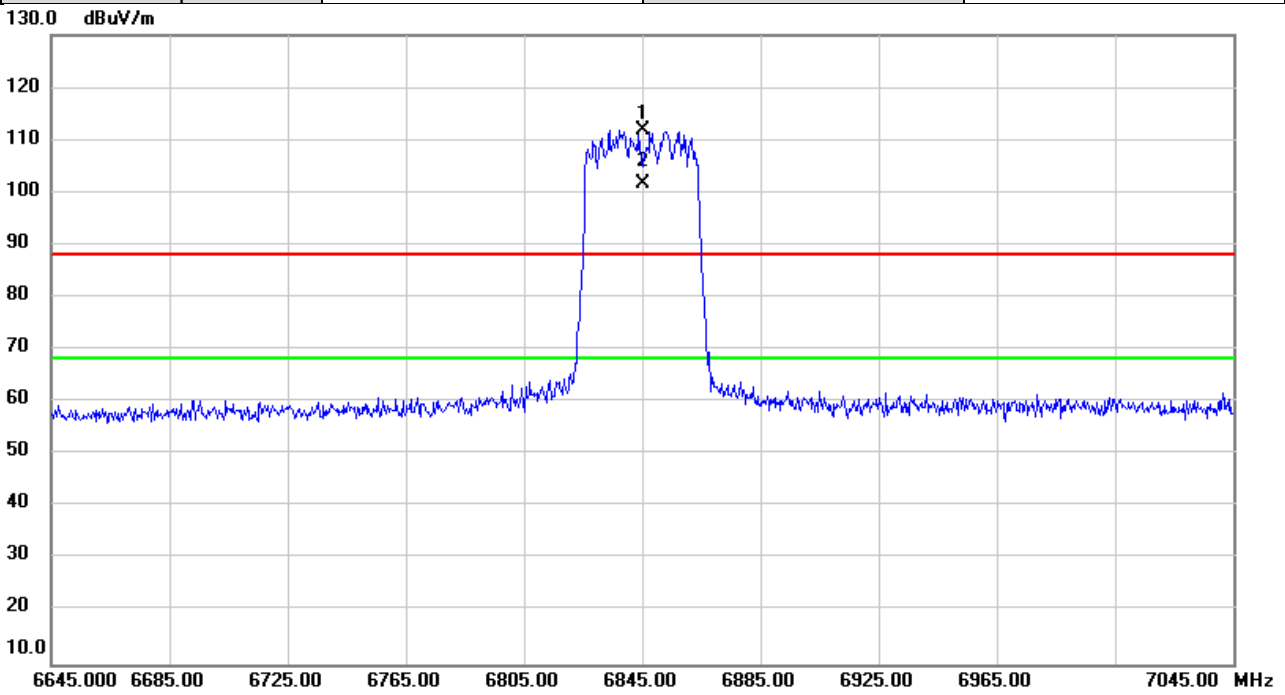


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6845.000	106.30	5.58	111.88	88.20	23.68	peak	No Limit
2	*	6845.000	95.93	5.58	101.51	68.20	33.31	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/19
Test Frequency	6885MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

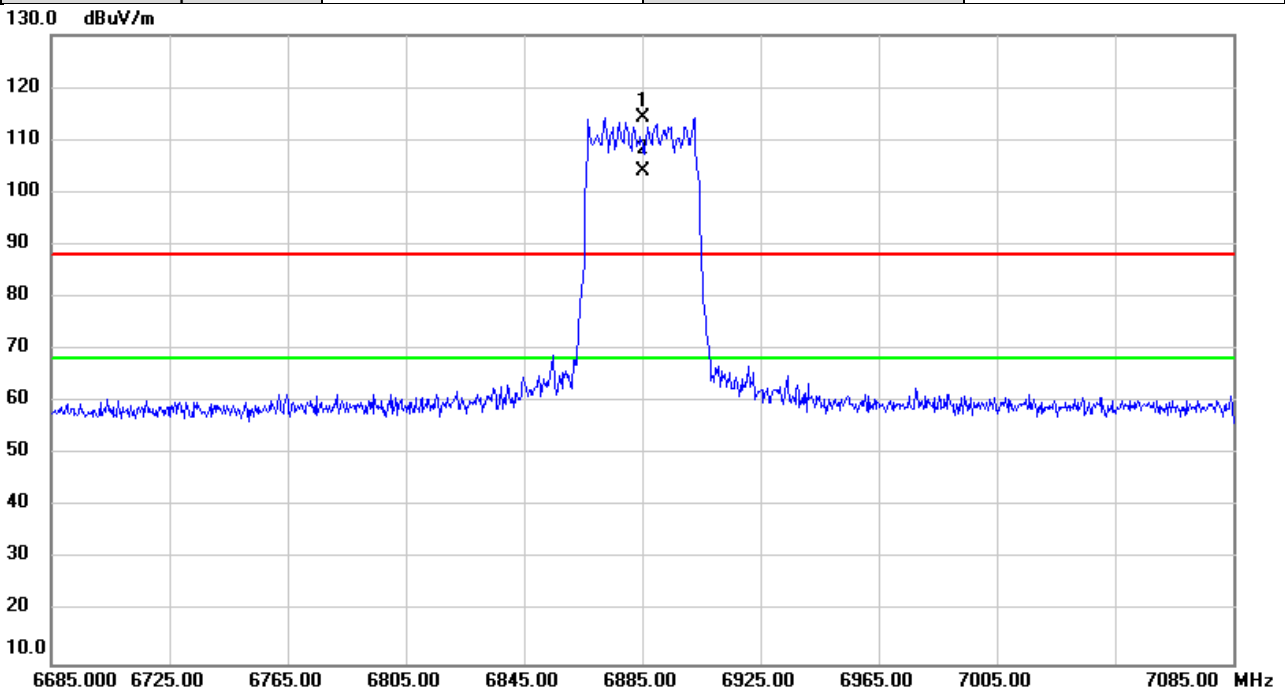


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6885.000	108.74	5.65	114.39	88.20	26.19	peak	No Limit
2	*	6885.000	98.28	5.65	103.93	68.20	35.73	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/19
Test Frequency	7085MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

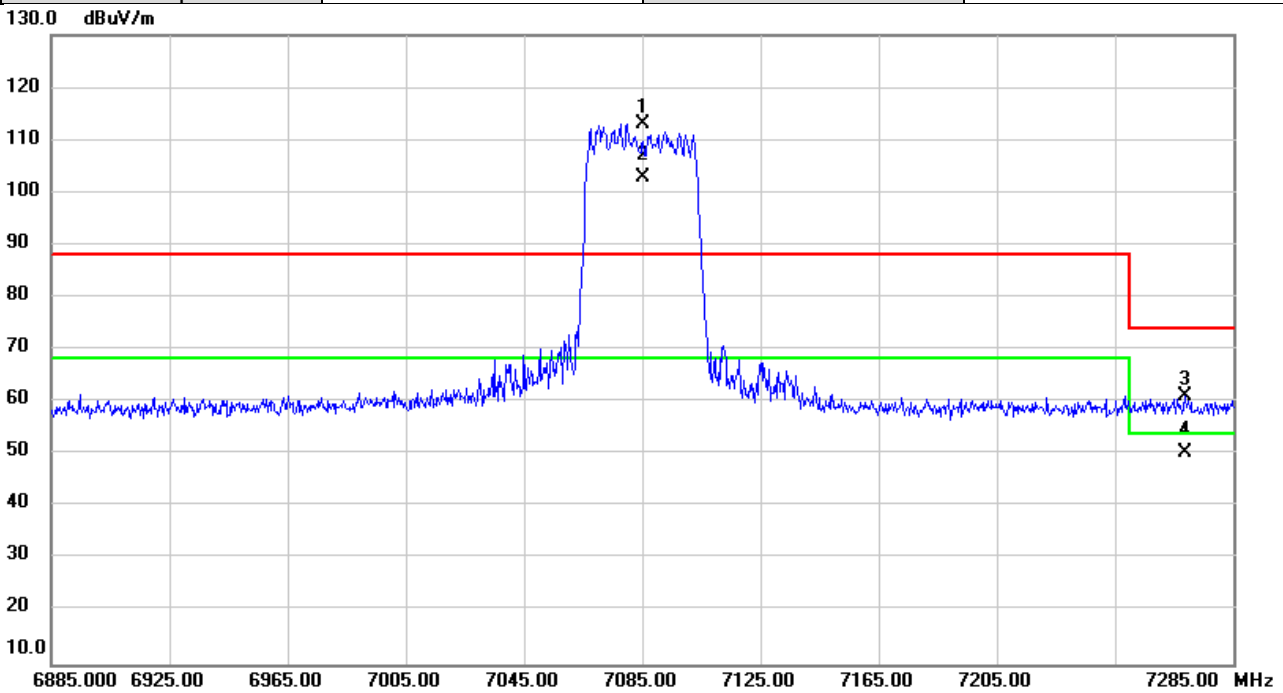


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	7085.000	107.17	5.90	113.07	88.20	24.87	peak	No Limit
2	*	7085.000	97.09	5.90	102.99	68.20	34.79	AVG	No Limit
3		7268.547	55.15	5.93	61.08	74.00	-12.92	peak	
4		7268.547	44.57	5.93	50.50	54.00	-3.50	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/19
Test Frequency	5985MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

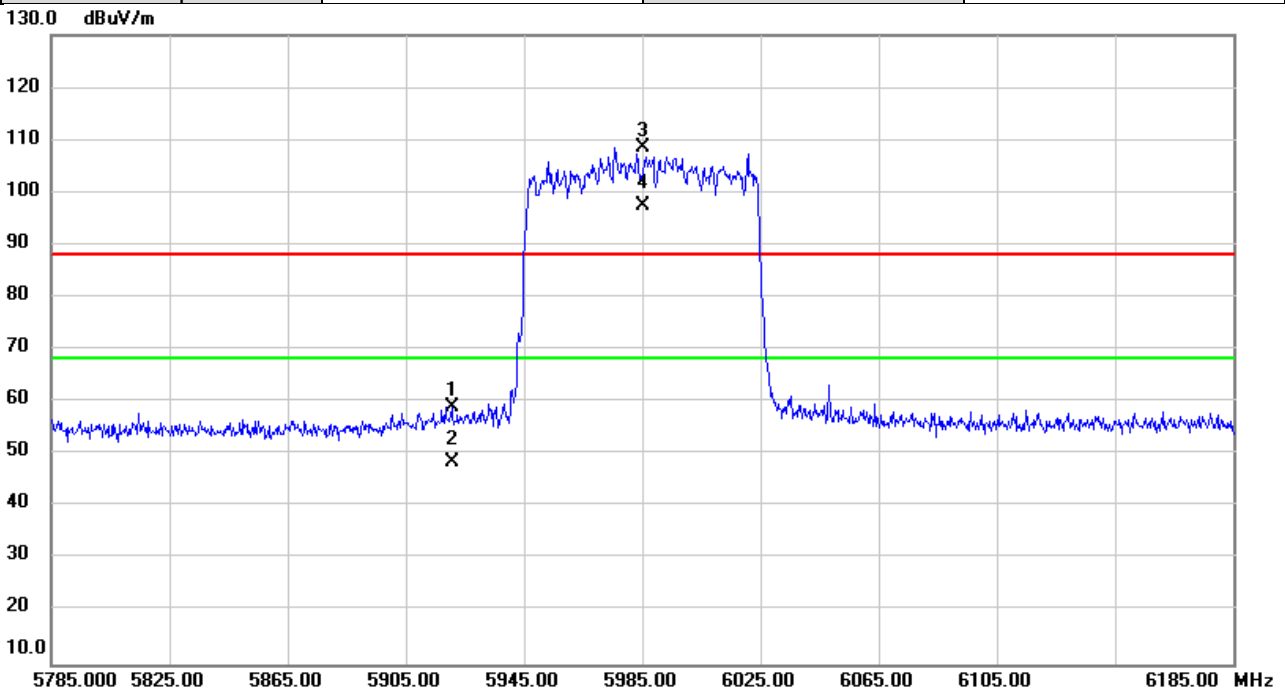


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5920.547	56.84	2.13	58.97	88.20	-29.23	peak	
2		5920.547	46.56	2.13	48.69	68.20	-19.51	AVG	
3	X	5985.000	106.30	2.25	108.55	88.20	20.35	peak	No Limit
4	*	5985.000	95.18	2.25	97.43	68.20	29.23	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/19
Test Frequency	6385MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

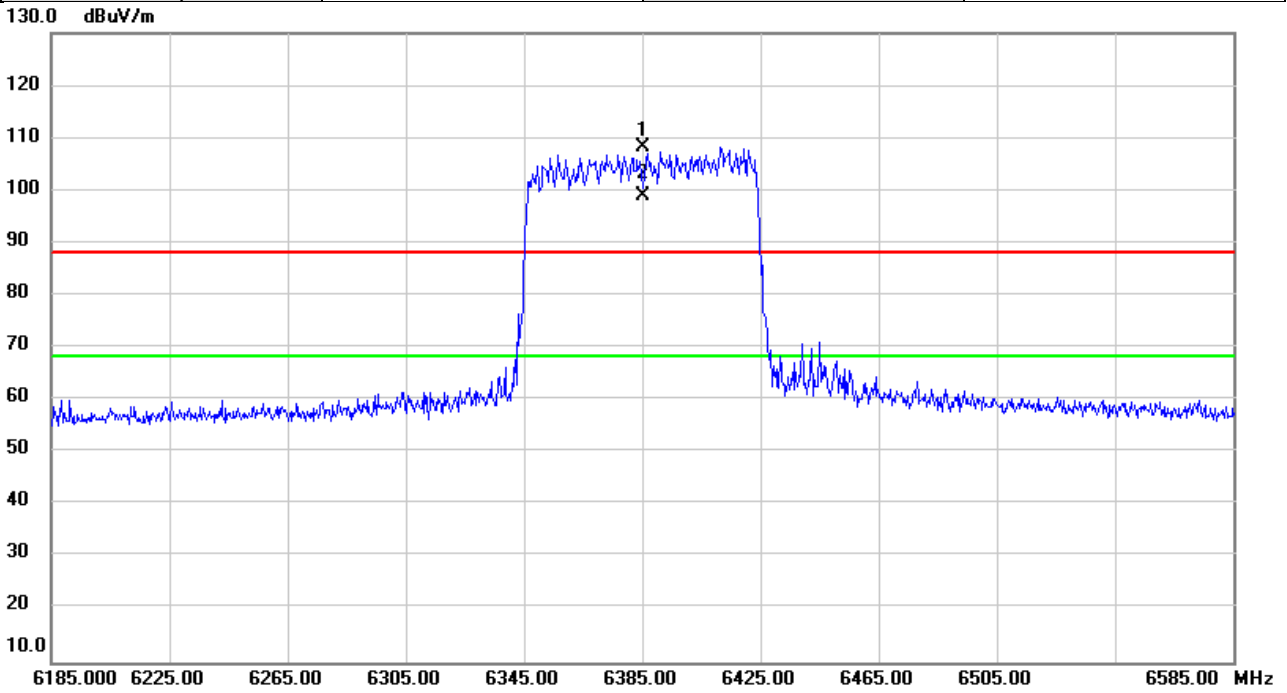


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6385.000	103.97	4.32	108.29	88.20	20.09	peak	No Limit
2	*	6385.000	94.53	4.32	98.85	68.20	30.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/19
Test Frequency	6465MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

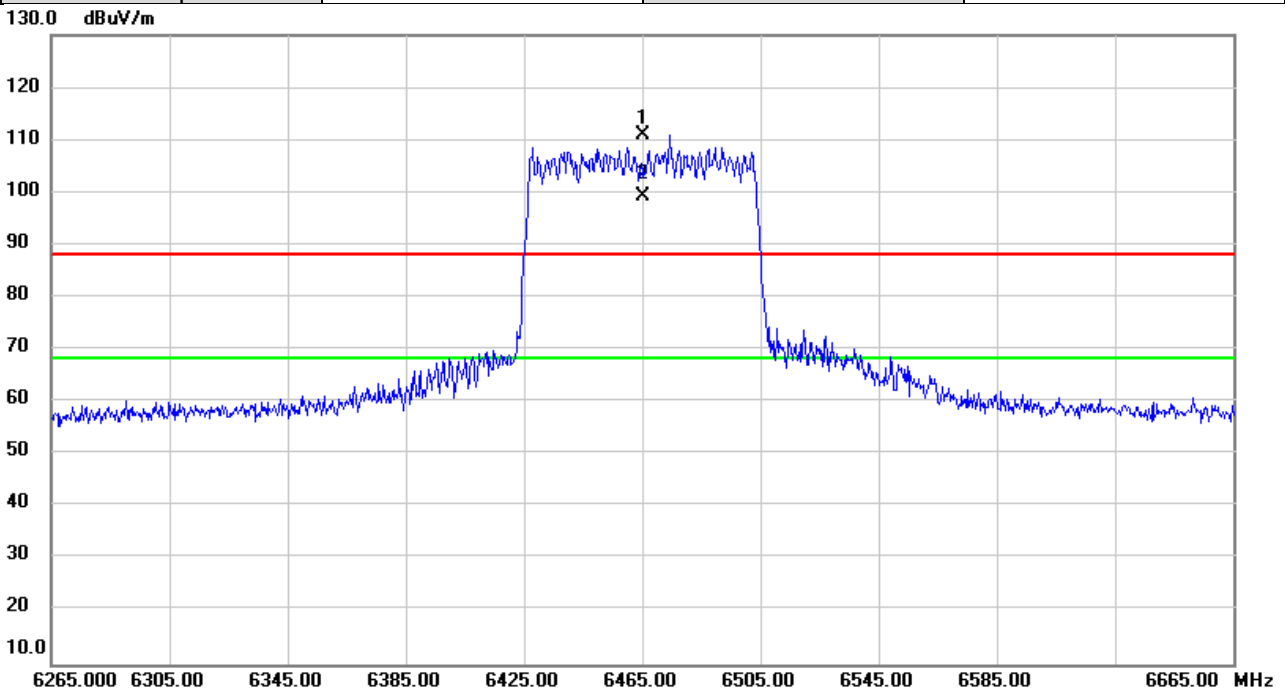


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6465.000	106.14	4.73	110.87	88.20	22.67	peak	No Limit
2	*	6465.000	94.66	4.73	99.39	68.20	31.19	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/19
Test Frequency	6545MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

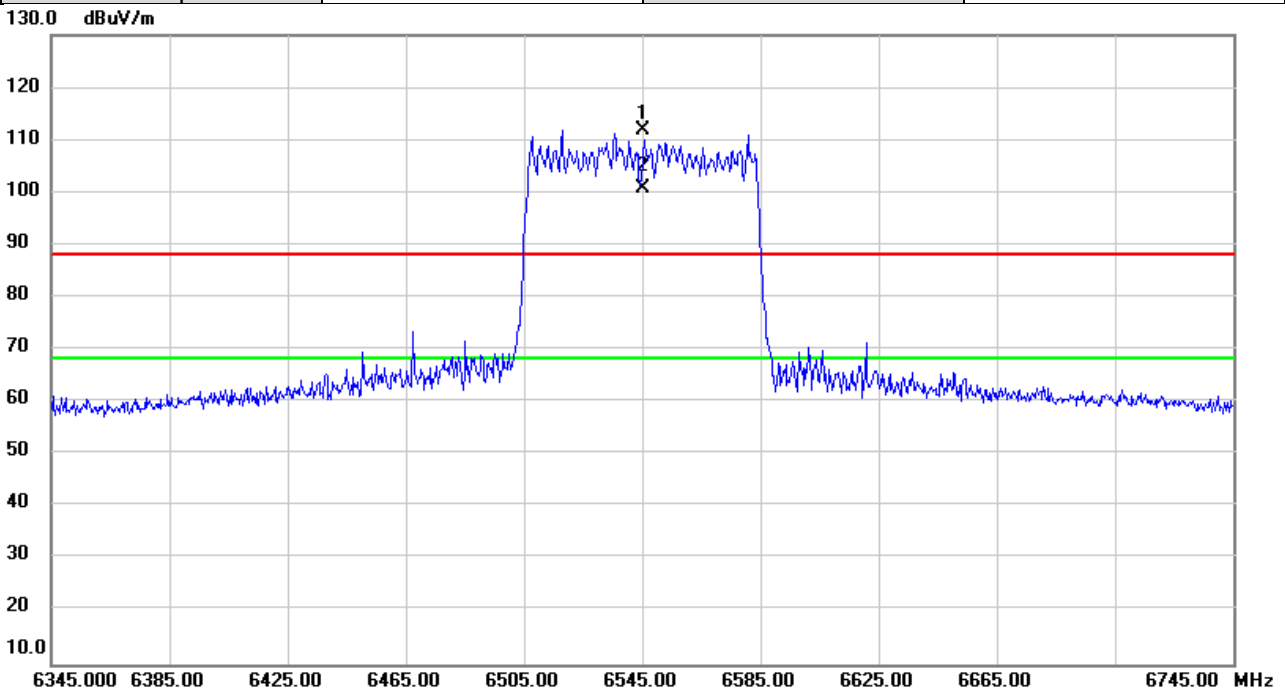


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6545.000	106.70	5.01	111.71	88.20	23.51	peak	No Limit
2	*	6545.000	95.73	5.01	100.74	68.20	32.54	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/19
Test Frequency	6625MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

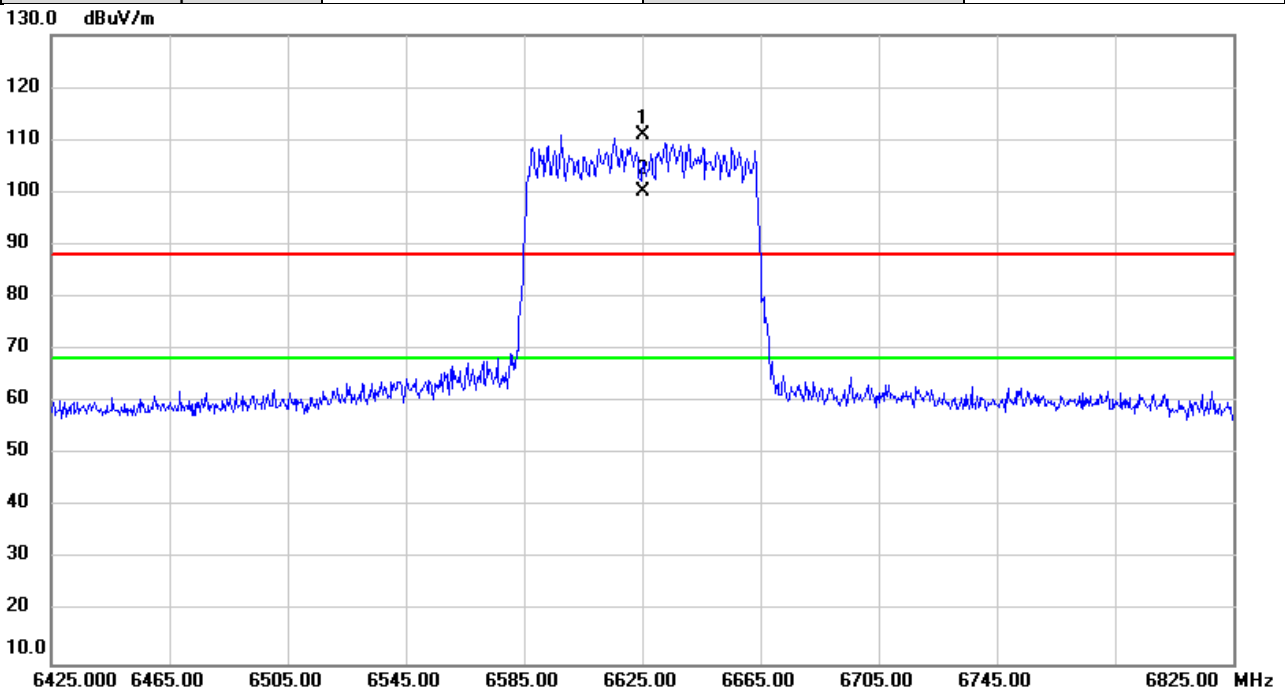


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6625.000	105.90	5.16	111.06	88.20	22.86	peak	No Limit
2	*	6625.000	94.90	5.16	100.06	68.20	31.86	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/19
Test Frequency	6785MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

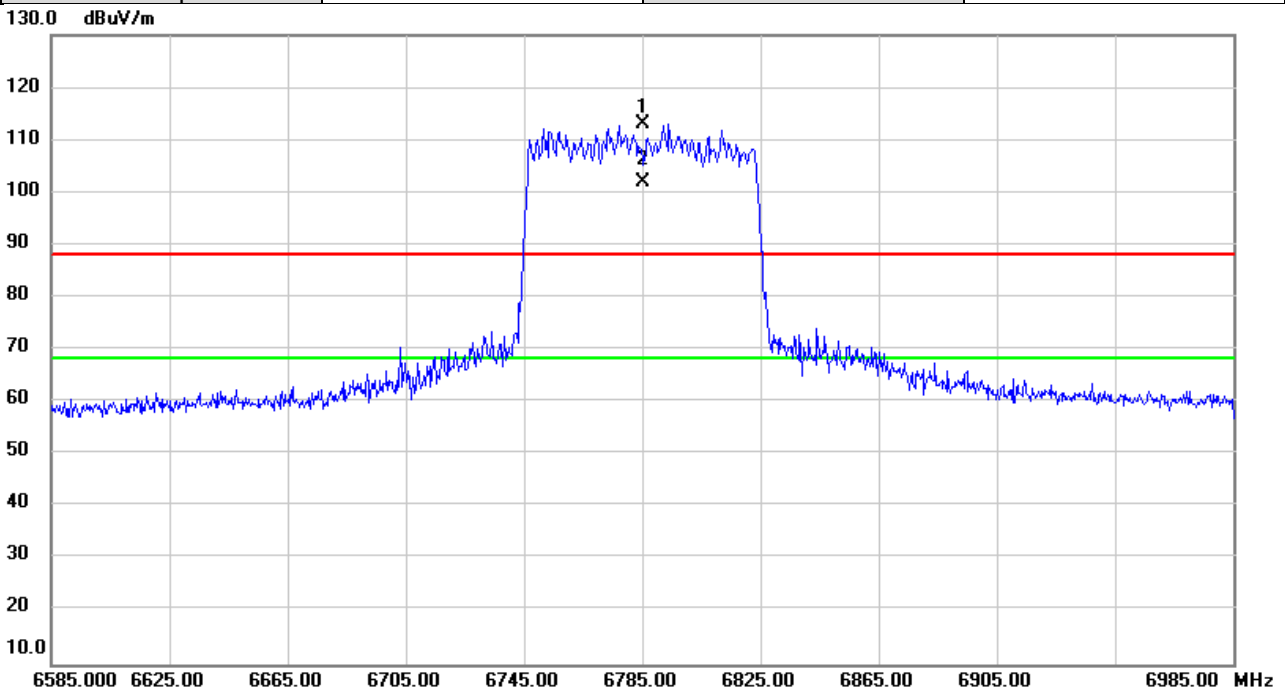


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6785.000	107.73	5.46	113.19	88.20	24.99	peak	No Limit
2	*	6785.000	96.38	5.46	101.84	68.20	33.64	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/19
Test Frequency	6865MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

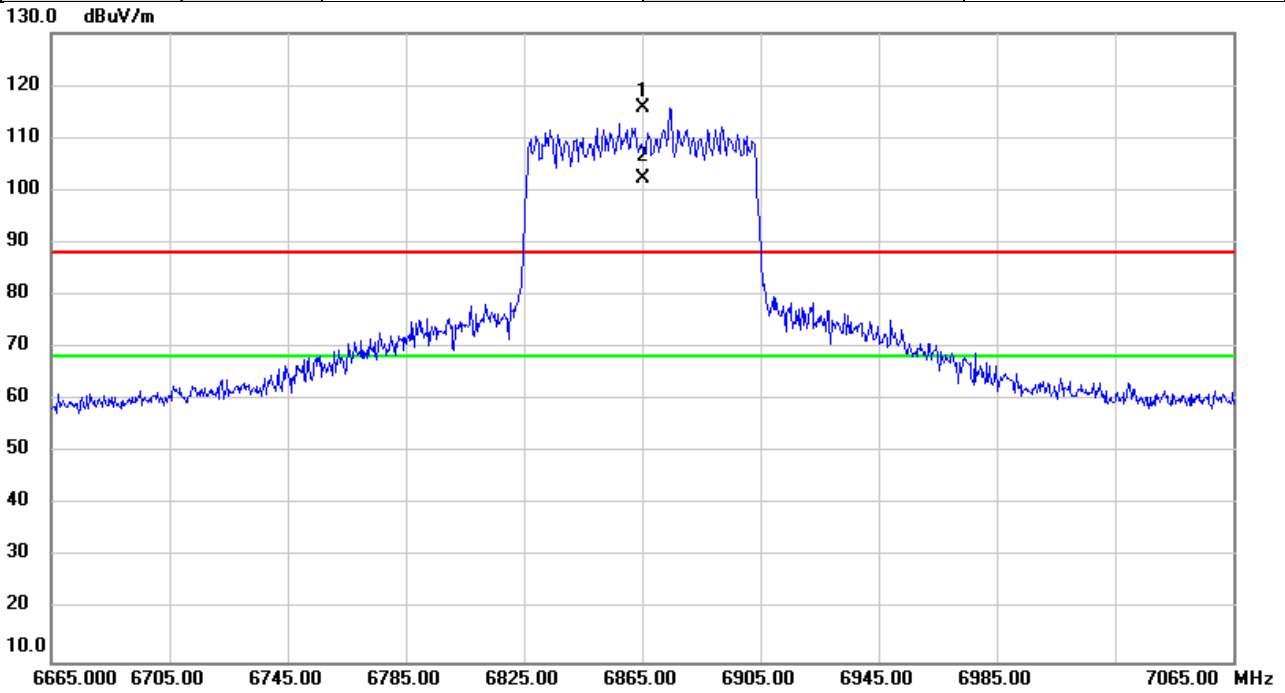


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6865.000	110.00	5.63	115.63	88.20	27.43	peak	No Limit
2	*	6865.000	96.63	5.63	102.26	68.20	34.06	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/19
Test Frequency	7025MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

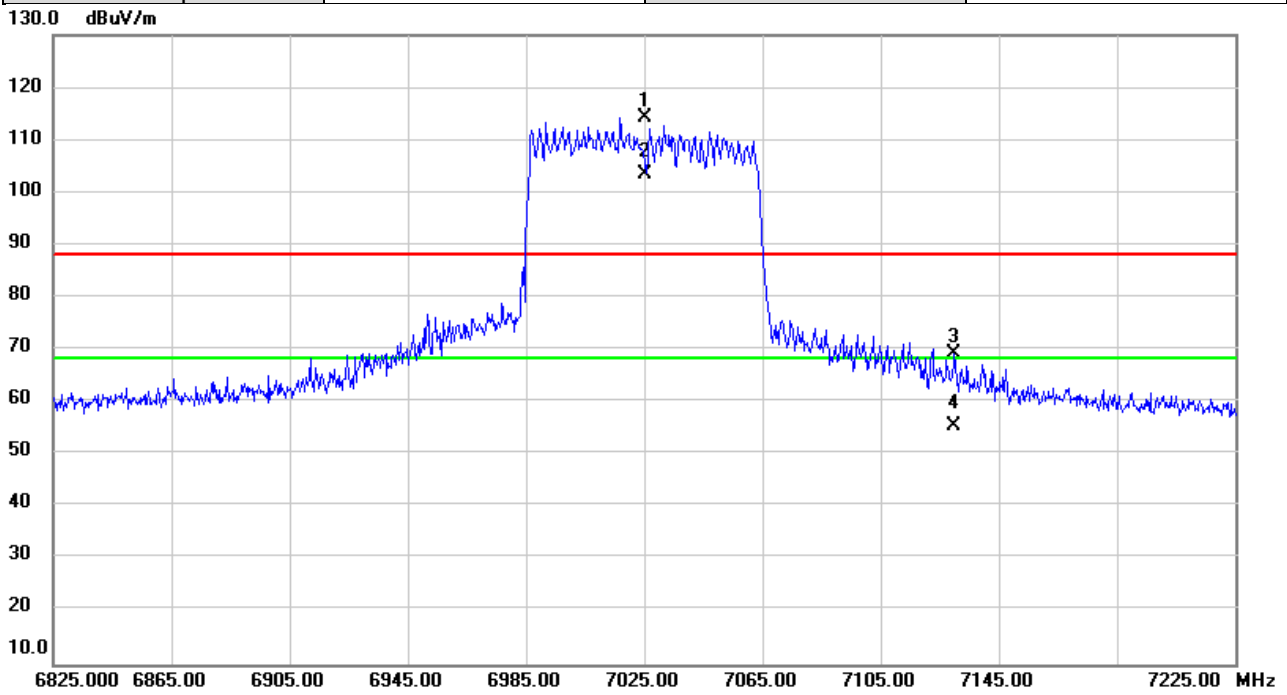


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	7025.000	108.30	5.88	114.18	88.20	25.98	peak	No Limit
2	*	7025.000	97.49	5.88	103.37	68.20	35.17	AVG	No Limit
3		7129.933	63.23	5.90	69.13	88.20	-19.07	peak	
4		7129.933	49.54	5.90	55.44	68.20	-12.76	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/19
Test Frequency	6025MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

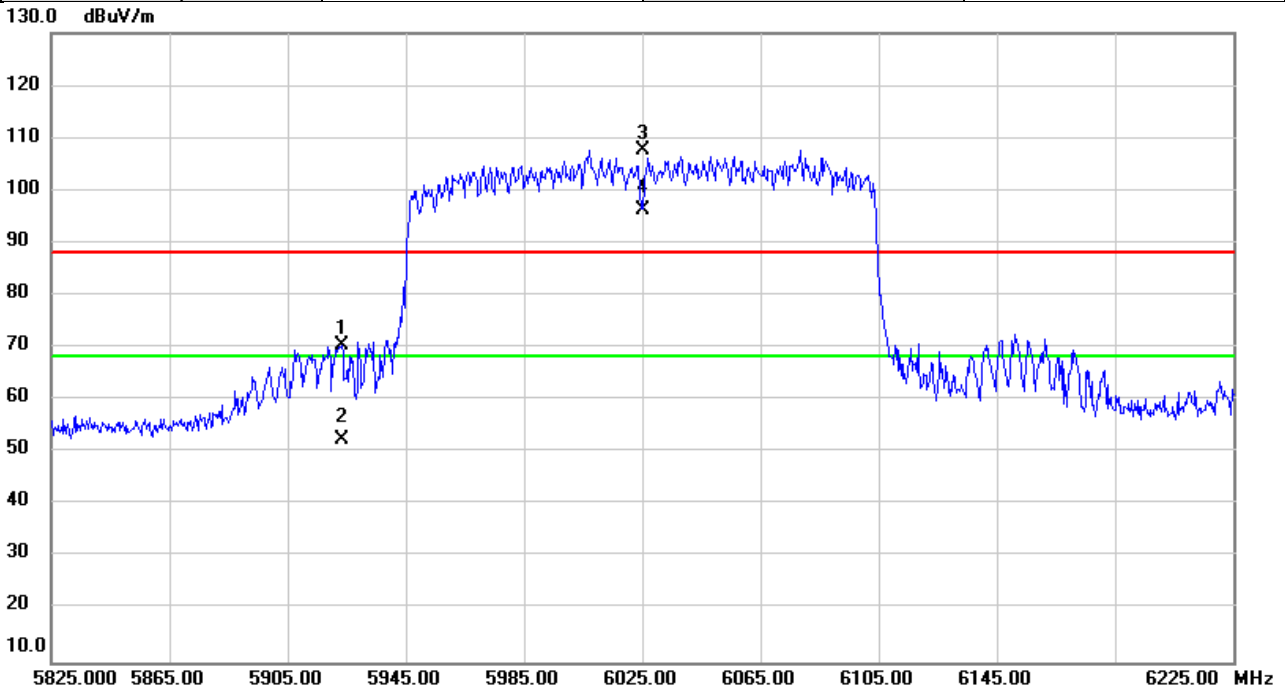


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5923.320	68.37	2.13	70.50	88.20	-17.70	peak	
2		5923.320	50.29	2.13	52.42	68.20	-15.78	AVG	
3	X	6025.000	105.34	2.41	107.75	88.20	19.55	peak	No Limit
4	*	6025.000	93.95	2.41	96.36	68.20	28.16	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/19
Test Frequency	6345MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

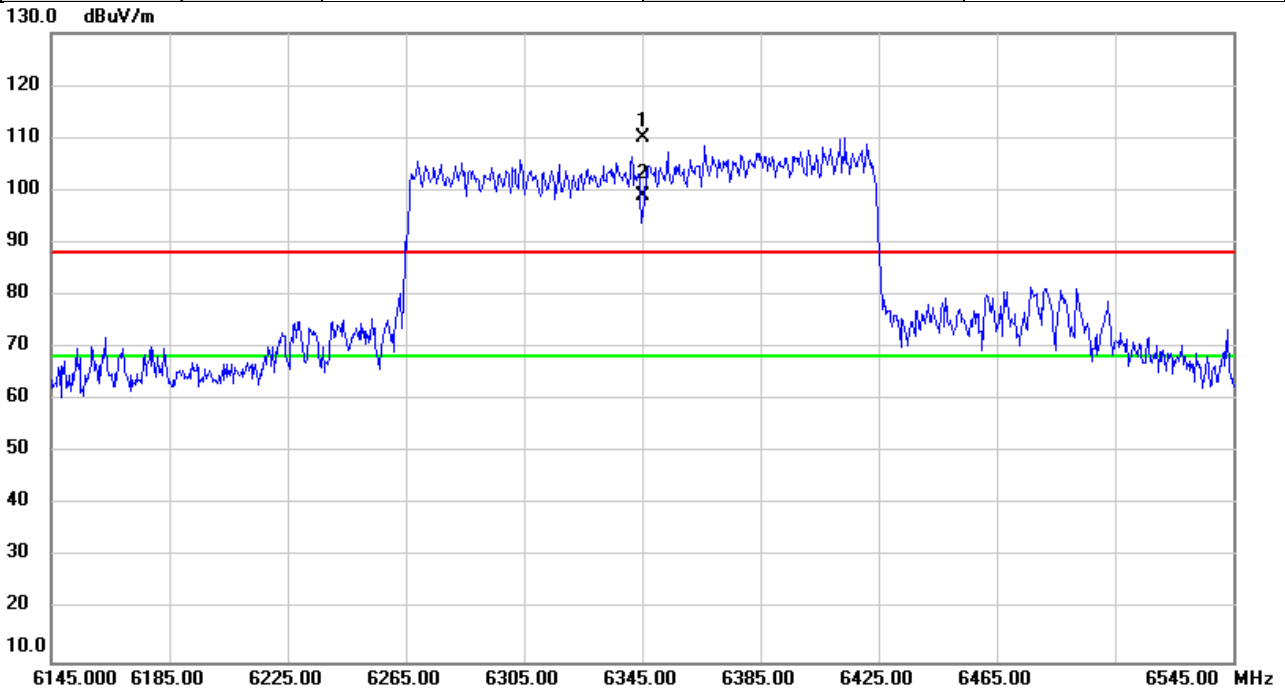


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6345.000	105.84	4.10	109.94	88.20	21.74	peak	No Limit
2	*	6345.000	94.87	4.10	98.97	68.20	30.77	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/19
Test Frequency	6505MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

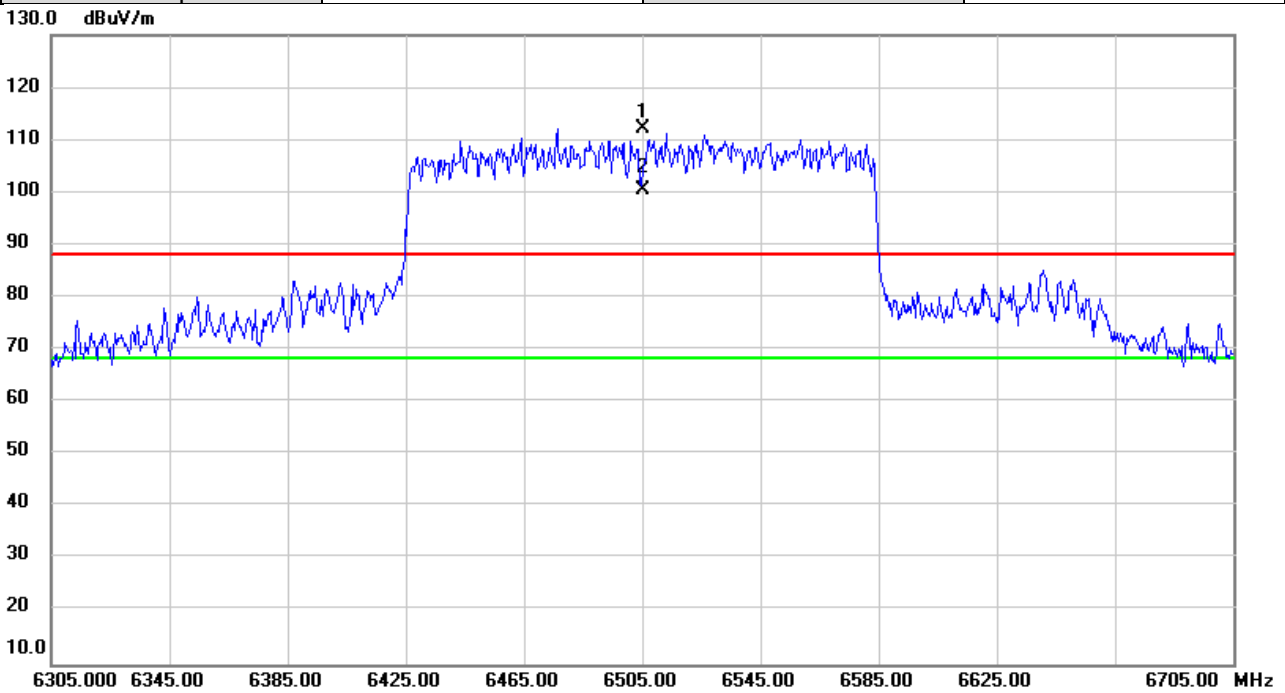


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6505.000	107.11	4.93	112.04	88.20	23.84	peak	No Limit
2	*	6505.000	95.53	4.93	100.46	68.20	32.26	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/19
Test Frequency	6665MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

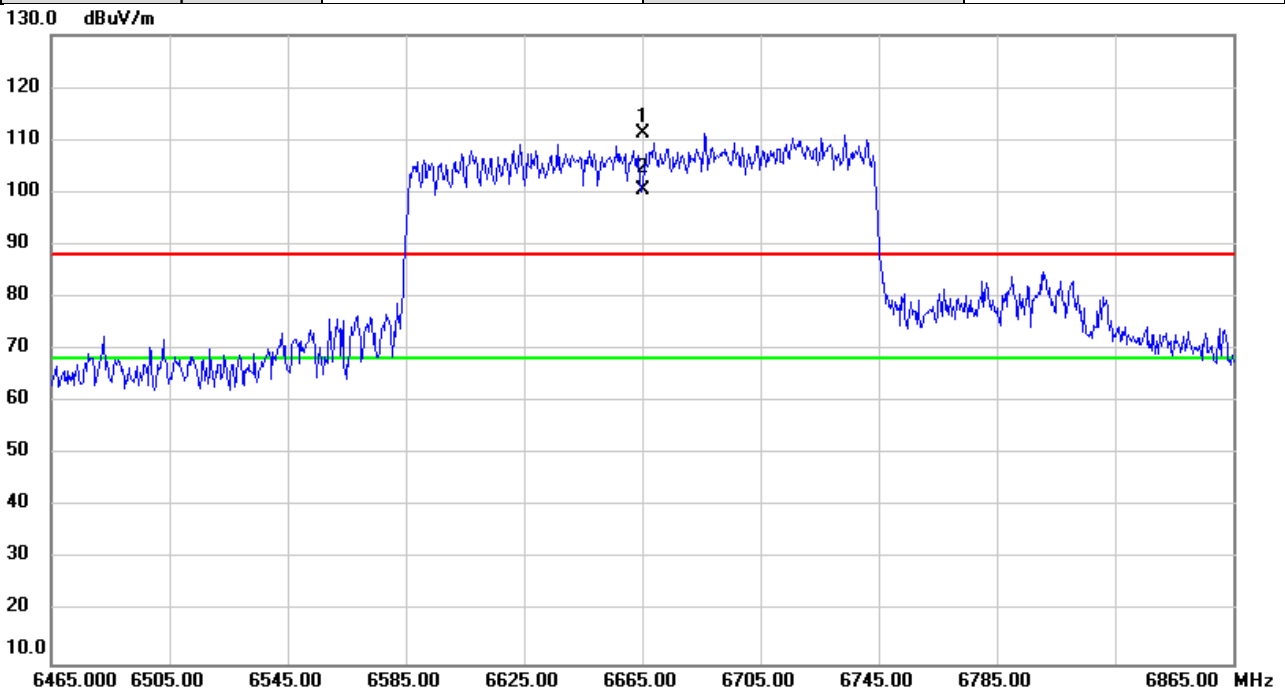


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6665.000	105.87	5.24	111.11	88.20	22.91	peak	No Limit
2	*	6665.000	95.09	5.24	100.33	68.20	32.13	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/19
Test Frequency	6985MHz	Polarization	Vertical
Temp	23°C	Hum.	50%

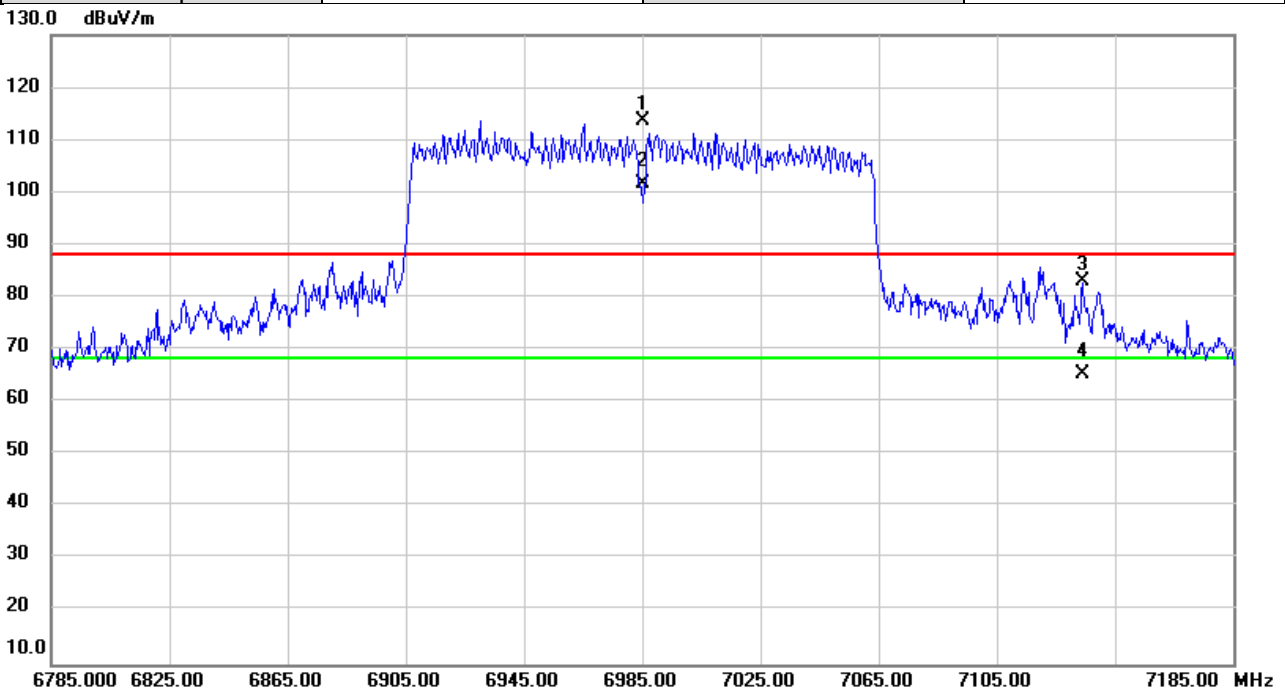


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6985.000	107.70	5.85	113.55	88.20	25.35	peak	No Limit
2	*	6985.000	95.71	5.85	101.56	68.20	33.36	AVG	No Limit
3		7133.853	76.99	5.91	82.90	88.20	-5.30	peak	
4		7133.853	59.35	5.91	65.26	68.20	-2.94	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	5955MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

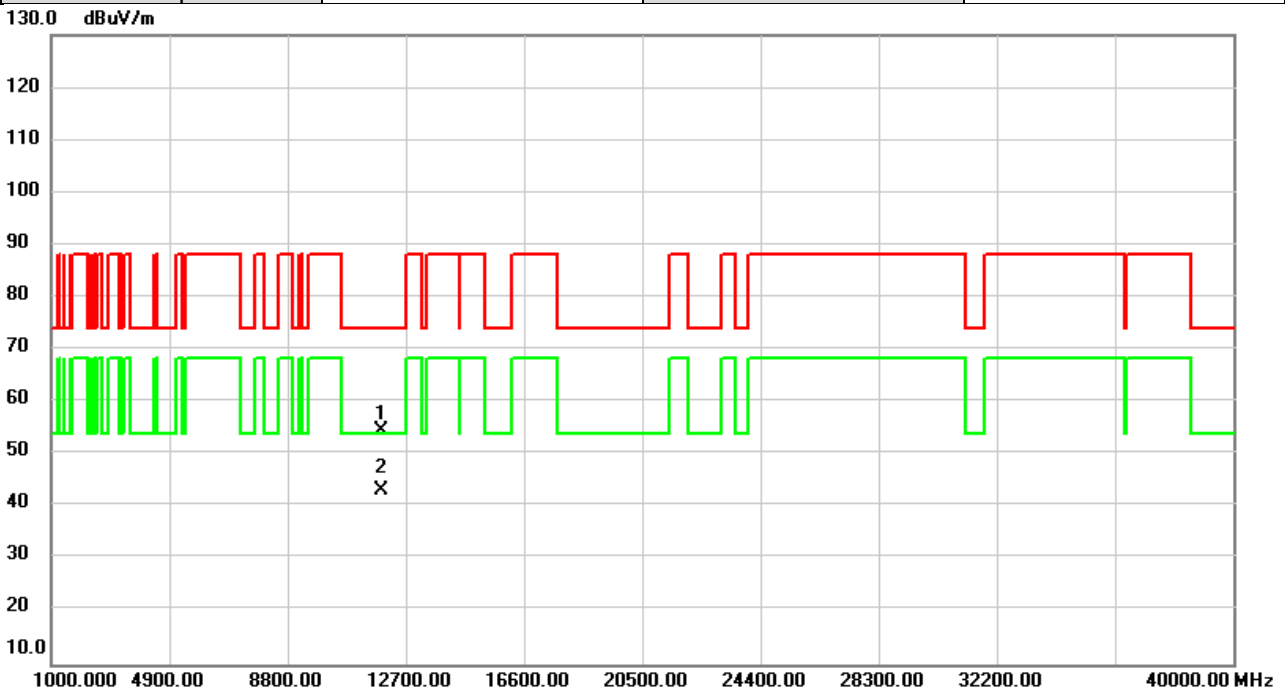


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11910.00	48.16	6.49	54.65	74.00	-19.35	peak	
2	*	11910.00	36.66	6.49	43.15	54.00	-10.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	5955MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

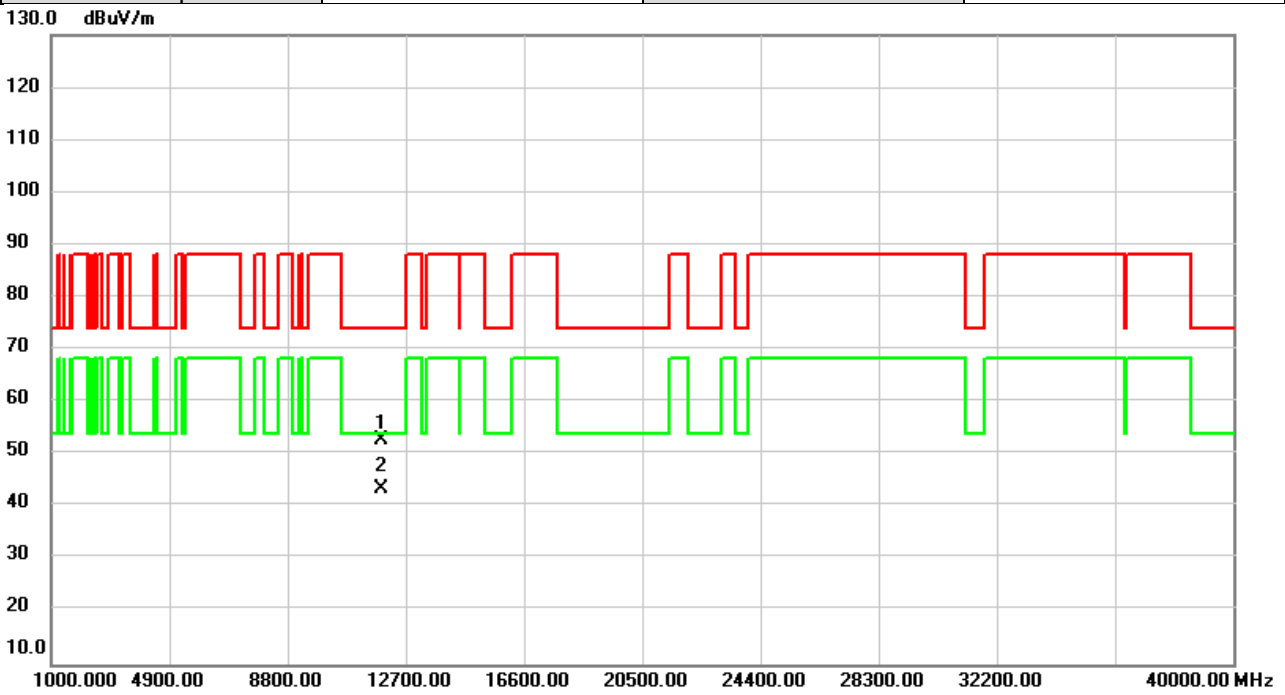


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11910.00	46.31	6.49	52.80	74.00	-21.20	peak	
2	*	11910.00	36.90	6.49	43.39	54.00	-10.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6175MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

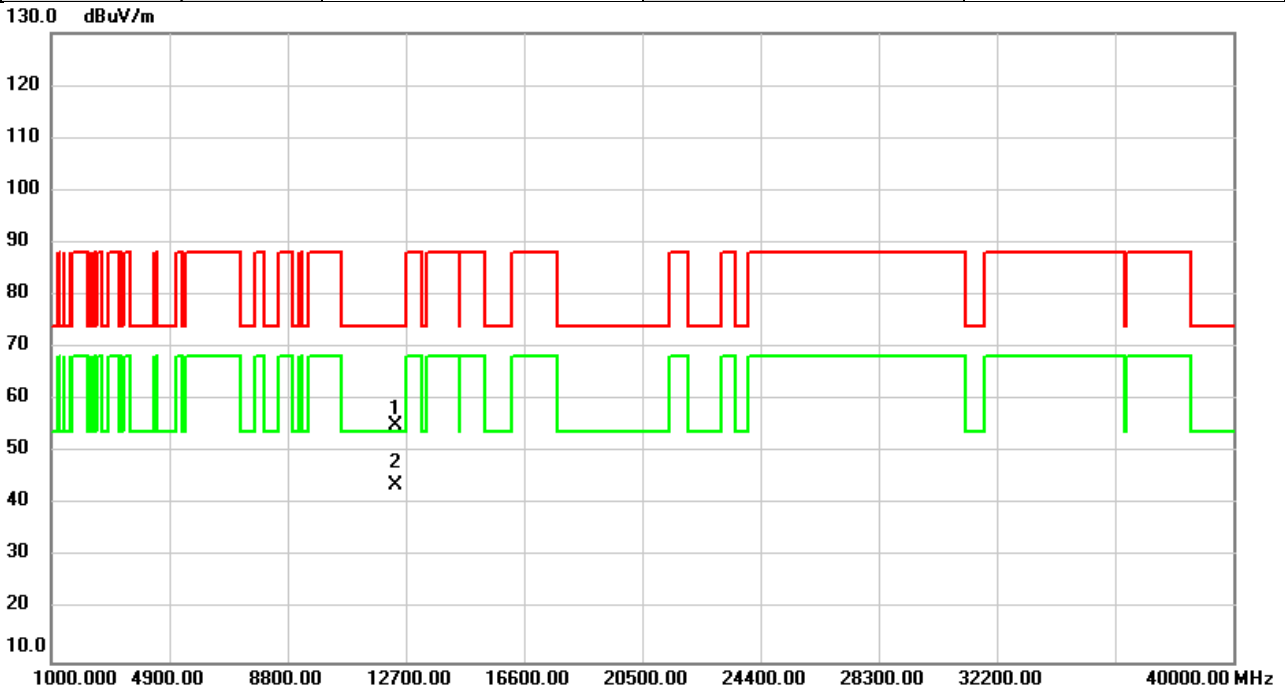


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12350.00	48.07	6.94	55.01	74.00	-18.99	peak	
2	*	12350.00	36.77	6.94	43.71	54.00	-10.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6175MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

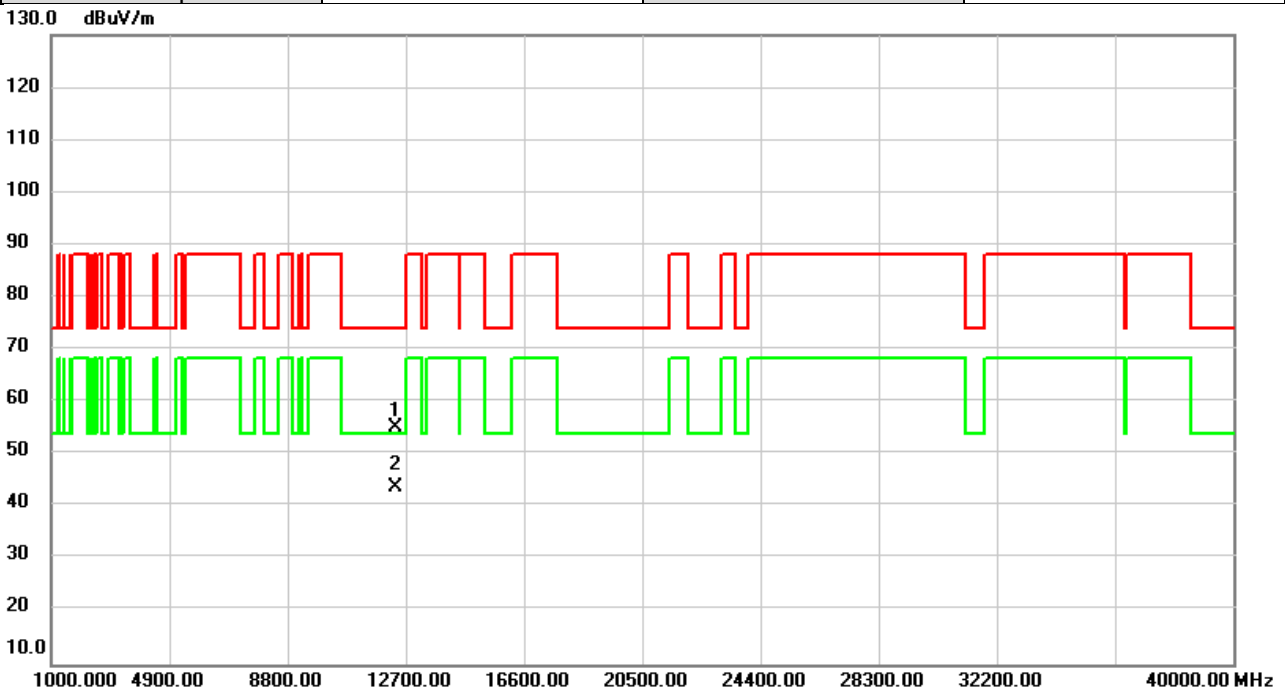


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12350.00	48.36	6.94	55.30	74.00	-18.70	peak	
2	*	12350.00	36.94	6.94	43.88	54.00	-10.12	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6415MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

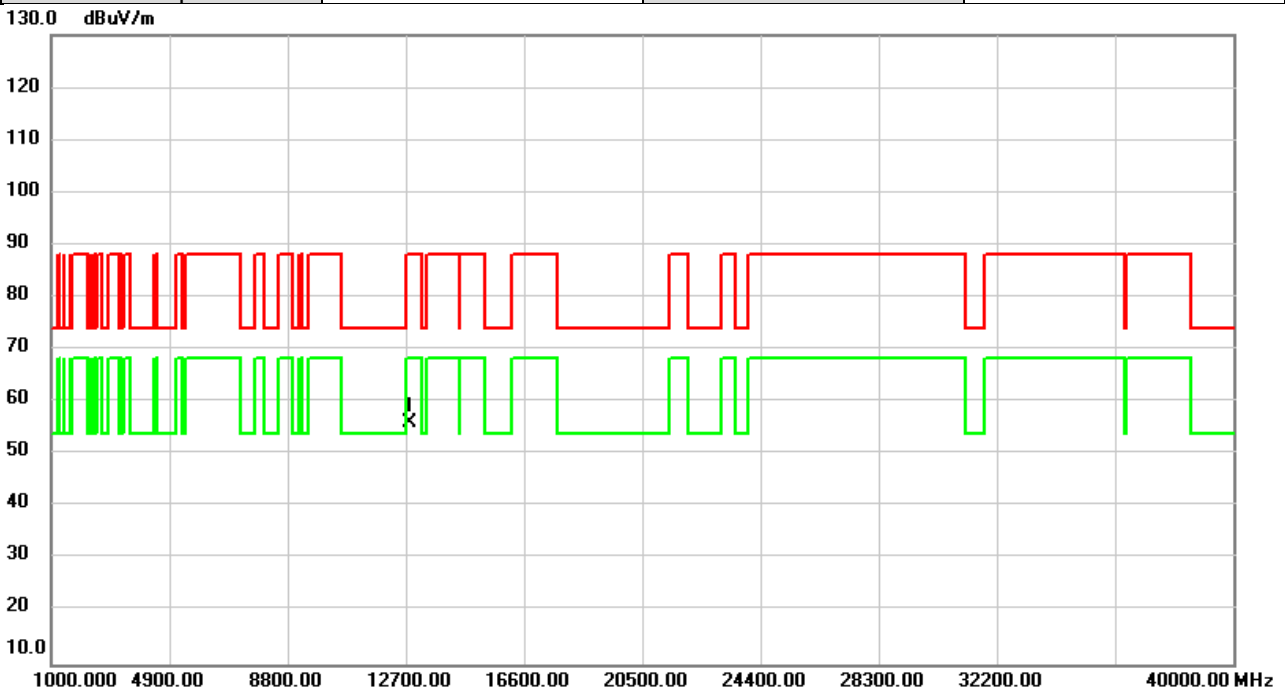


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12830.00	48.29	7.68	55.97	88.20	-32.23	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6415MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

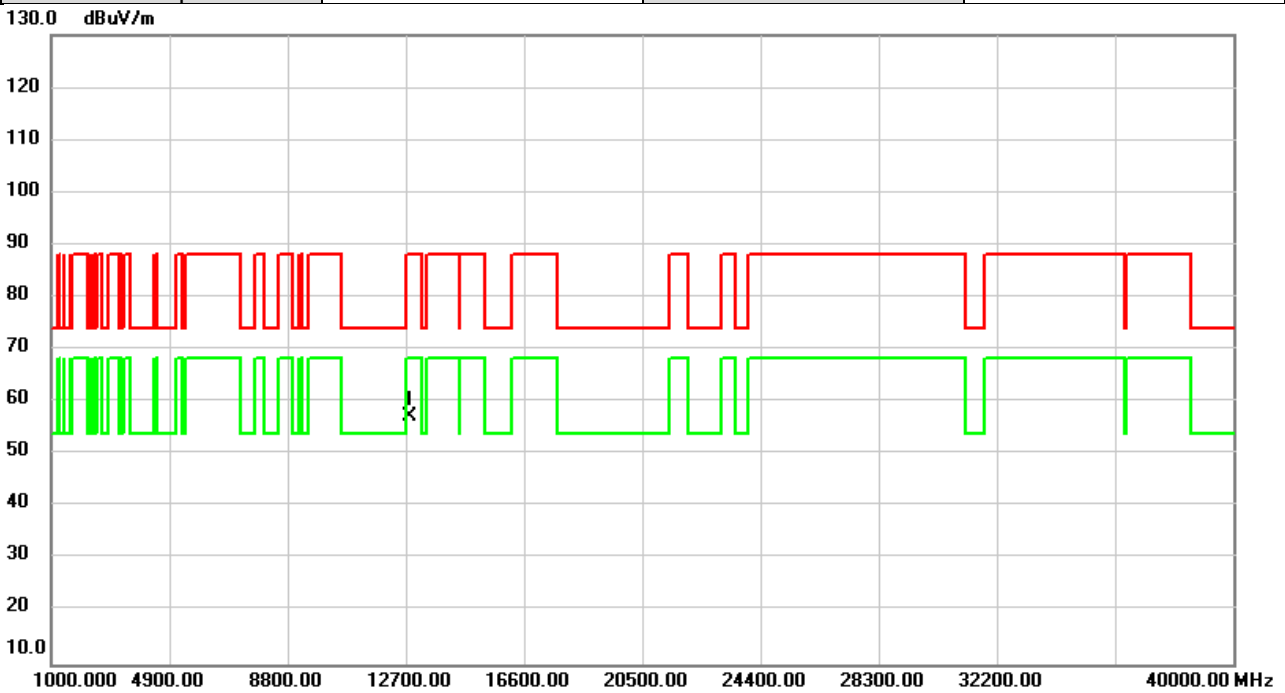


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12830.00	49.63	7.68	57.31	88.20	-30.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6435MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

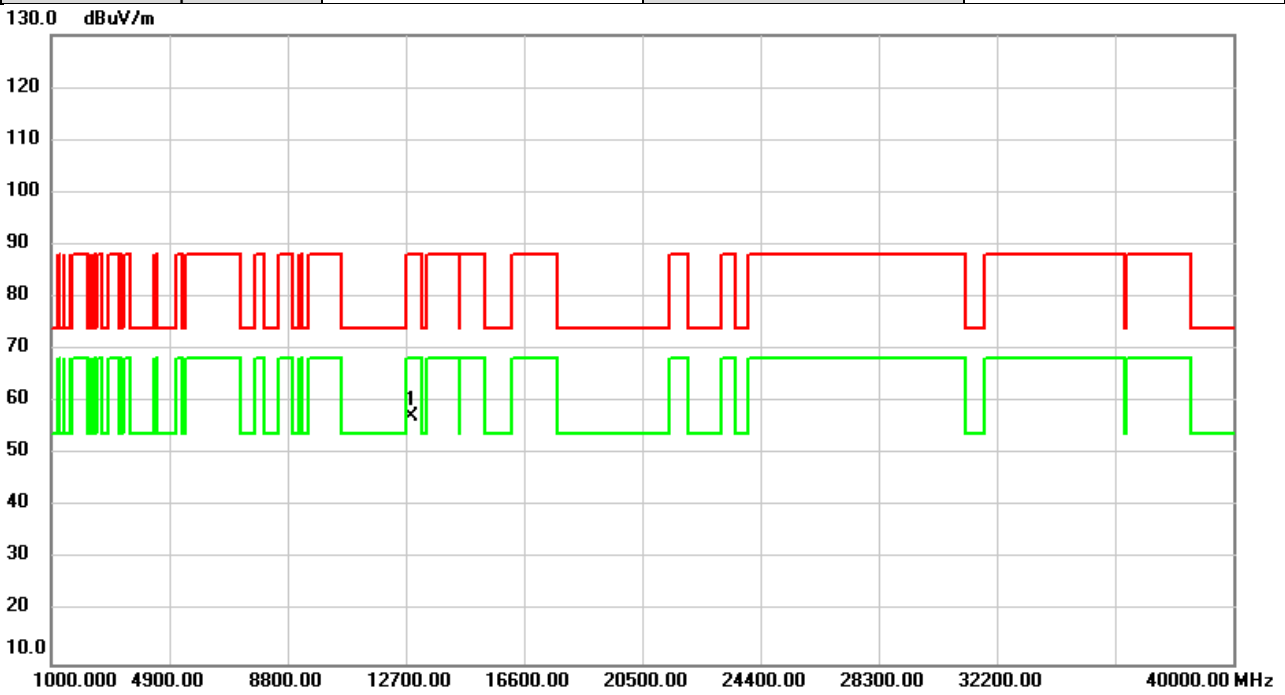


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12870.00	49.52	7.75	57.27	88.20	-30.93	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6435MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

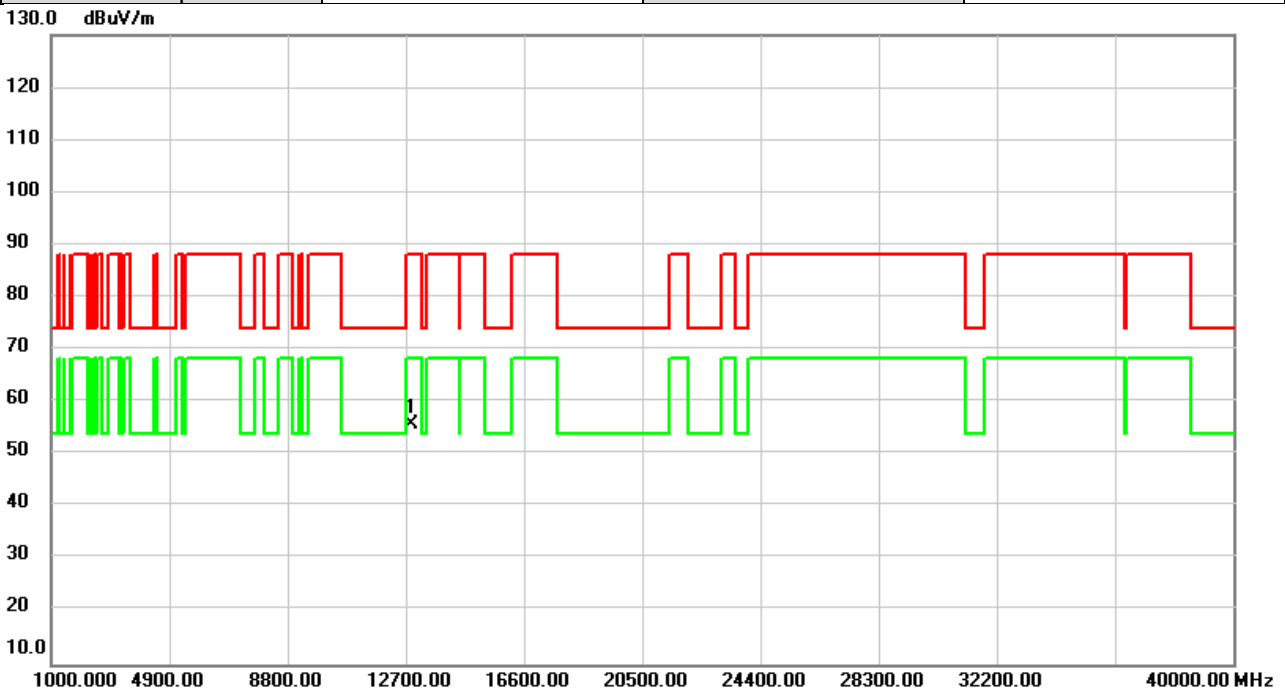


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12870.00	47.90	7.75	55.65	88.20	-32.55	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6475MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

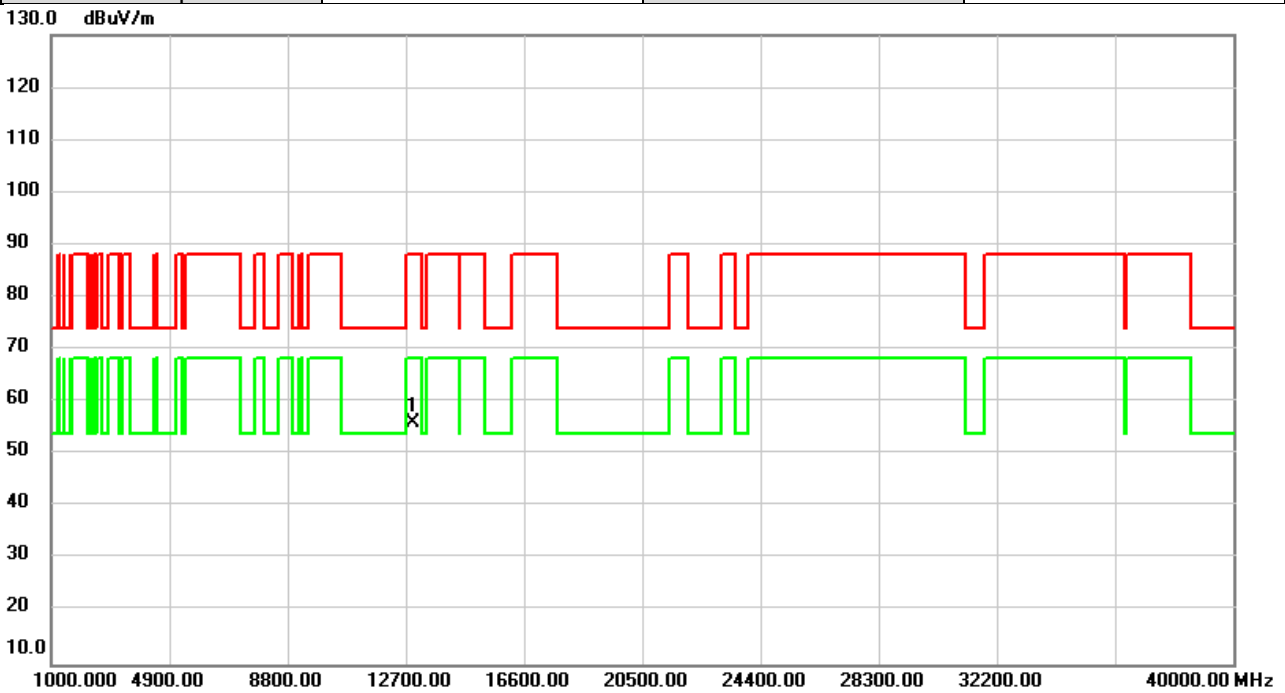


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12950.00	48.30	7.87	56.17	88.20	-32.03	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6475MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

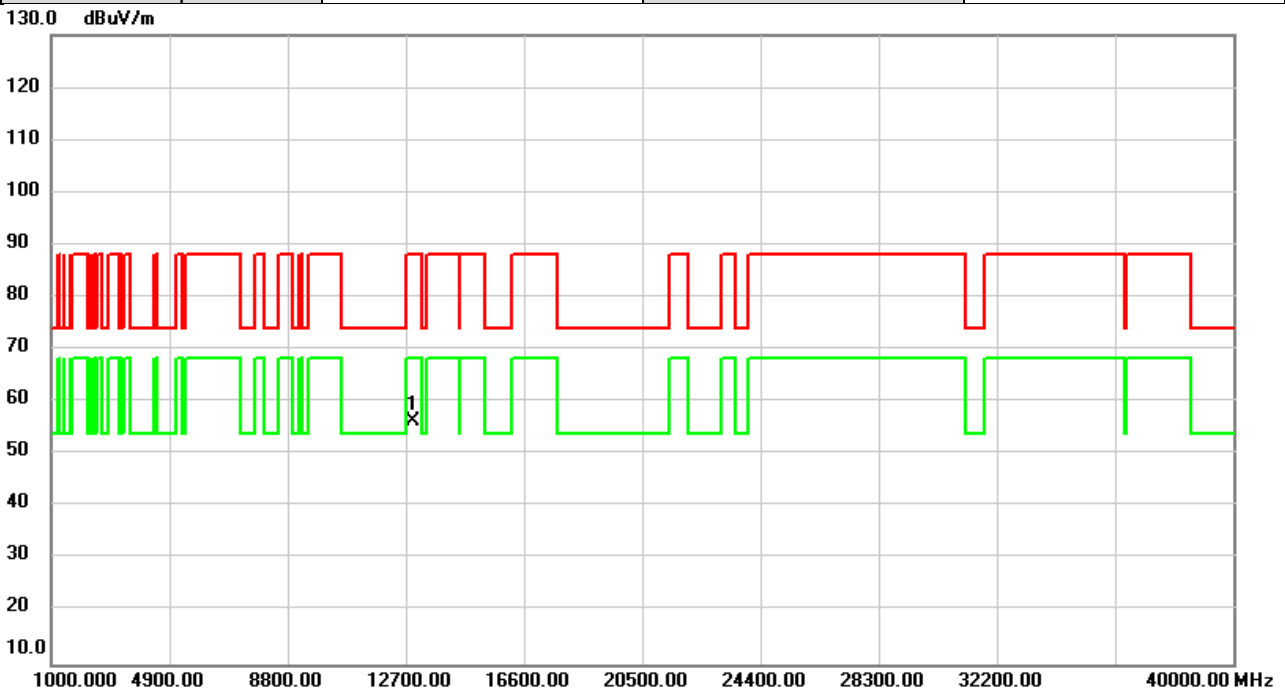


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12950.00	48.33	7.87	56.20	88.20	-32.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6515MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

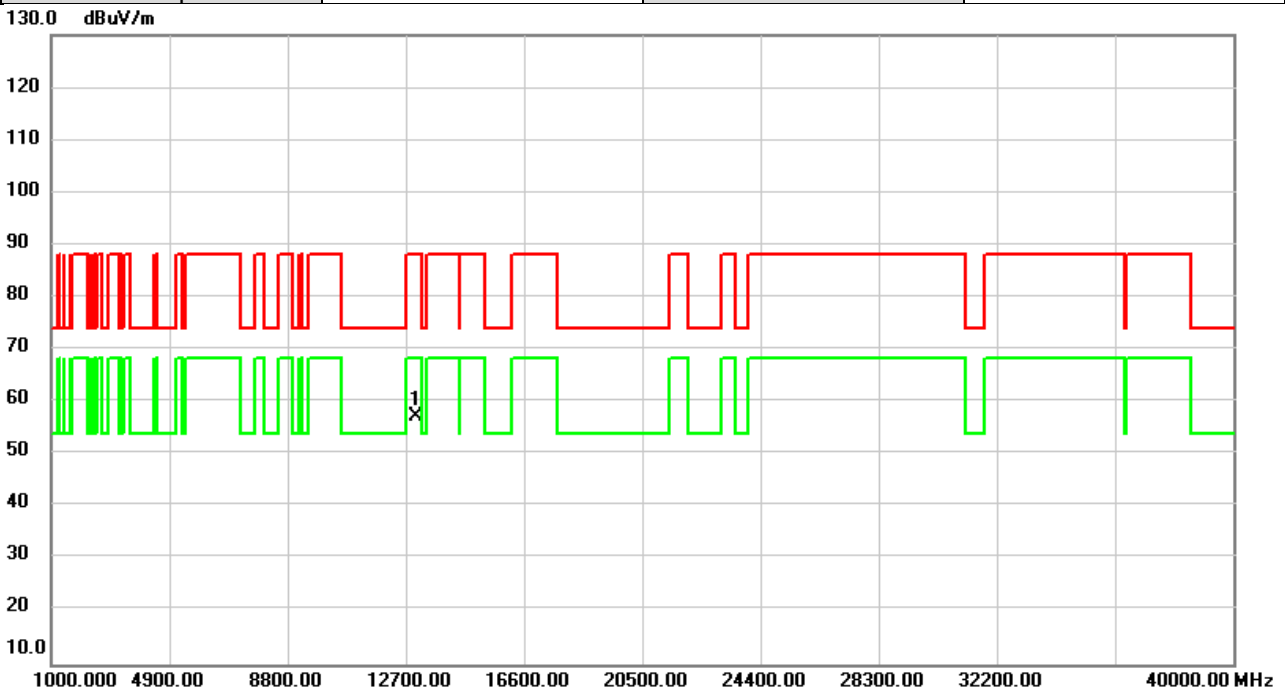


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13030.00	49.24	7.89	57.13	88.20	-31.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6515MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

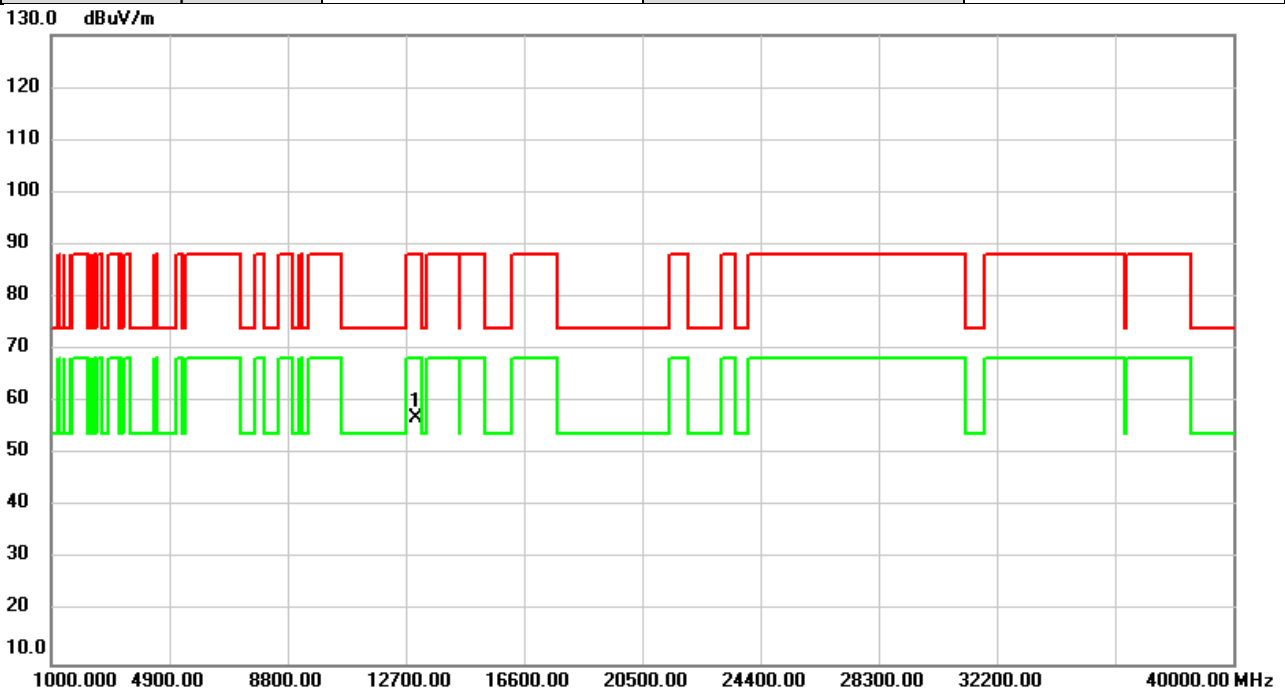


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13030.00	48.99	7.89	56.88	88.20	-31.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6535MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

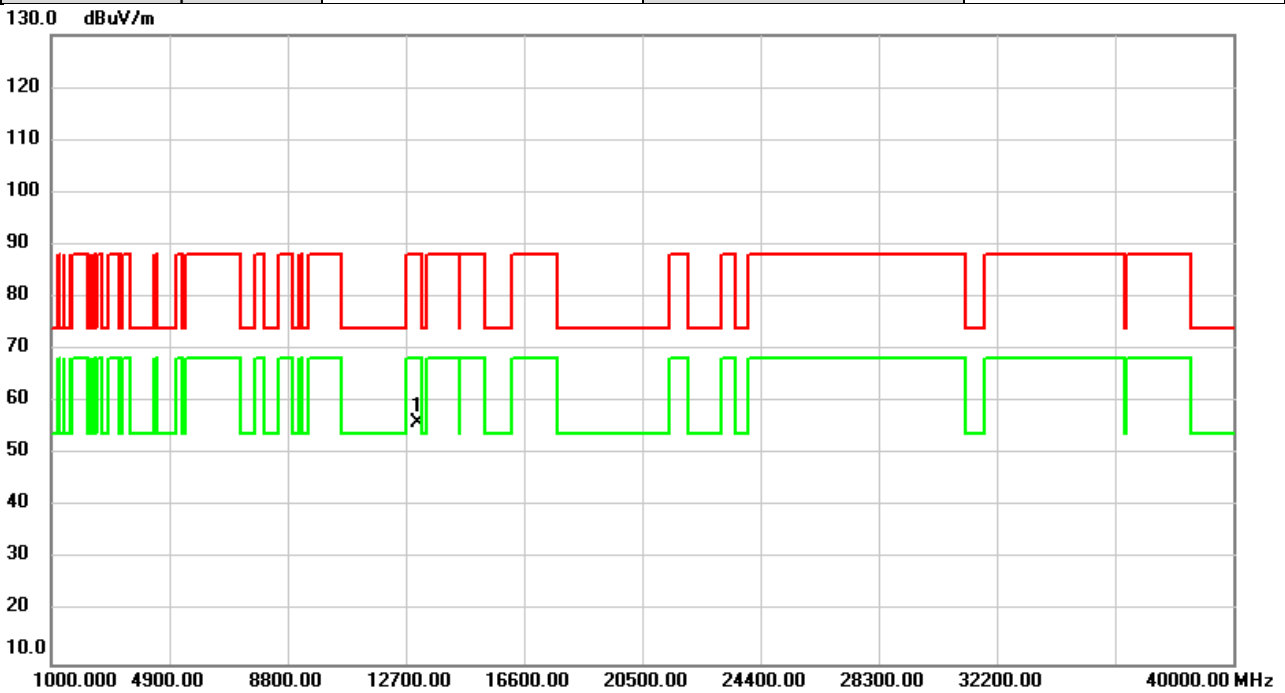


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13070.00	48.13	7.82	55.95	88.20	-32.25	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6535MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

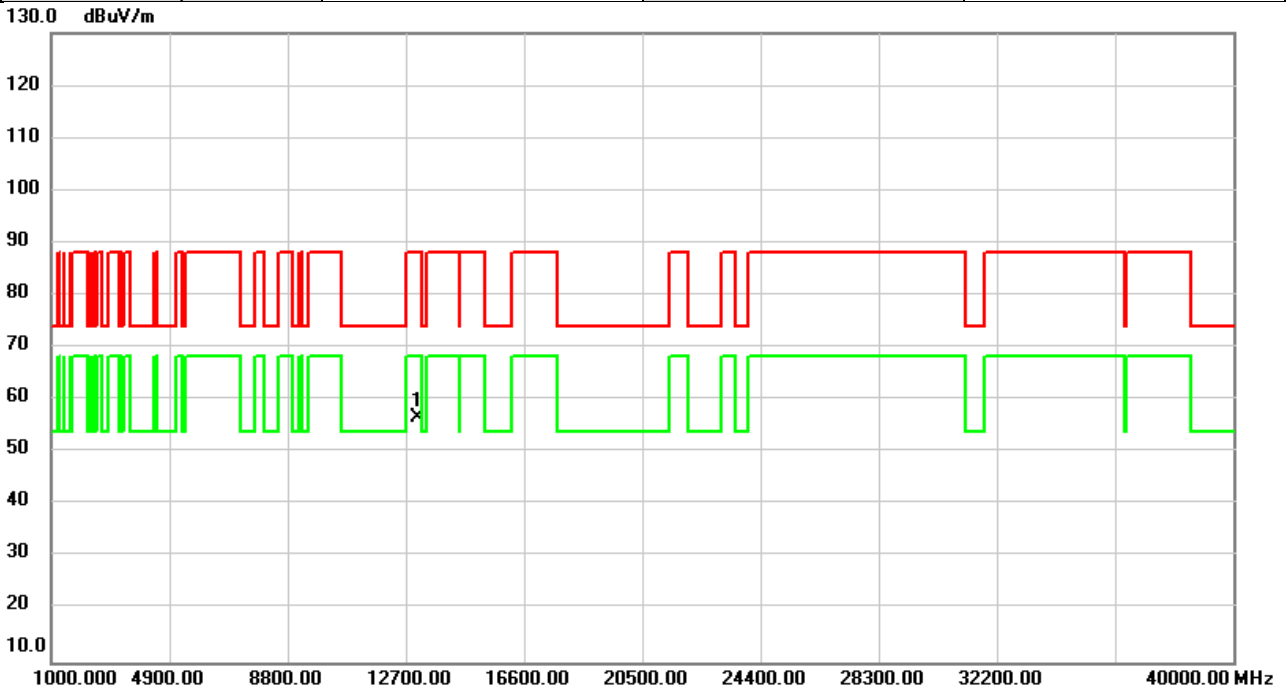


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13070.00	48.69	7.82	56.51	88.20	-31.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6695MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

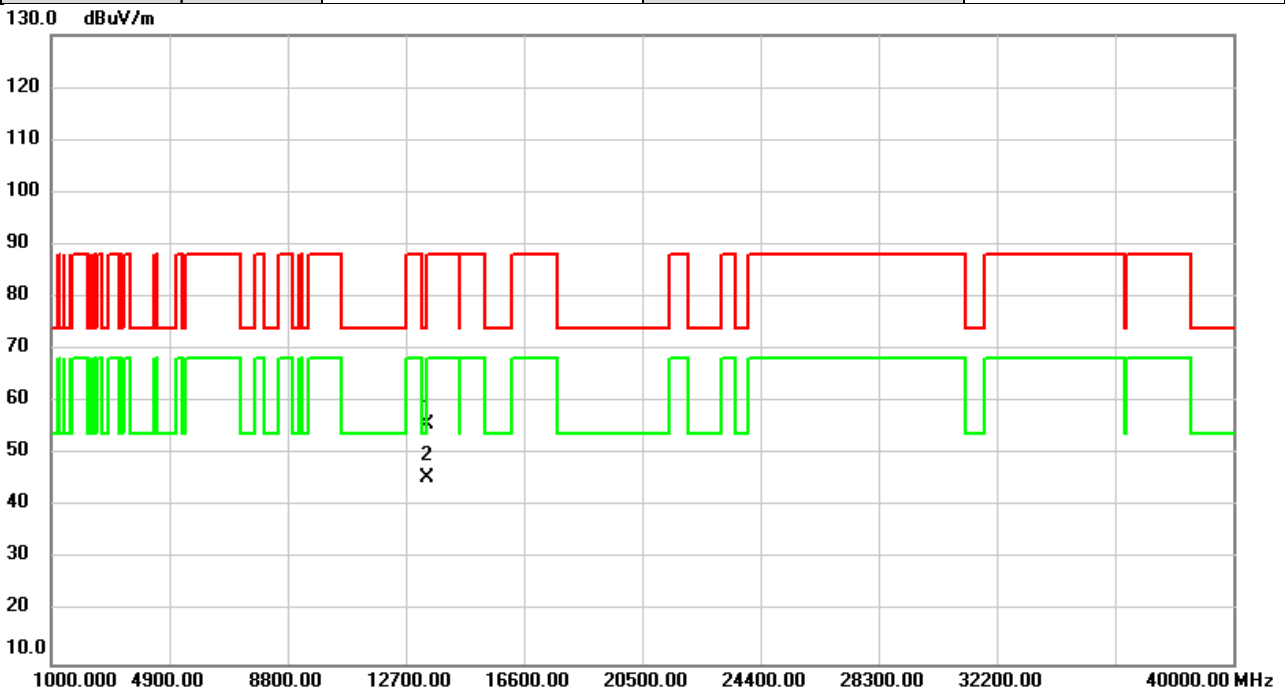


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13390.00	48.54	7.25	55.79	74.00	-18.21	peak	
2	*	13390.00	38.32	7.25	45.57	54.00	-8.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6695MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

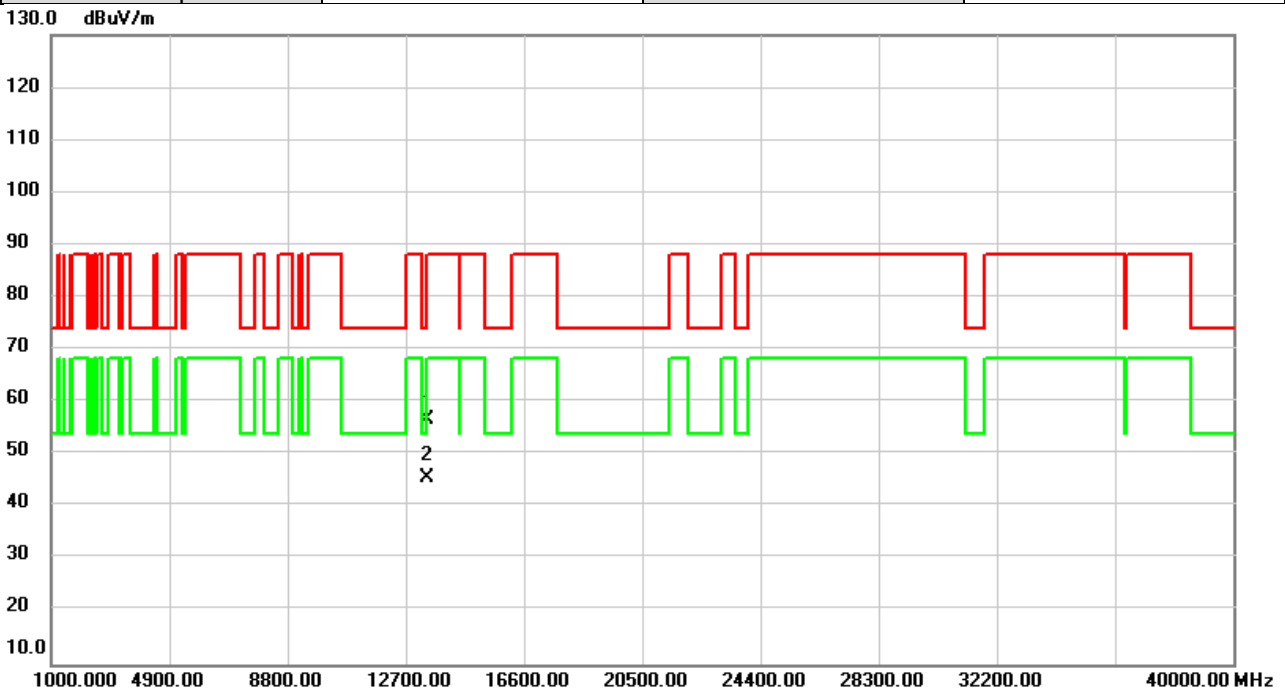


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13390.00	49.49	7.25	56.74	74.00	-17.26	peak	
2	*	13390.00	38.29	7.25	45.54	54.00	-8.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6855MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

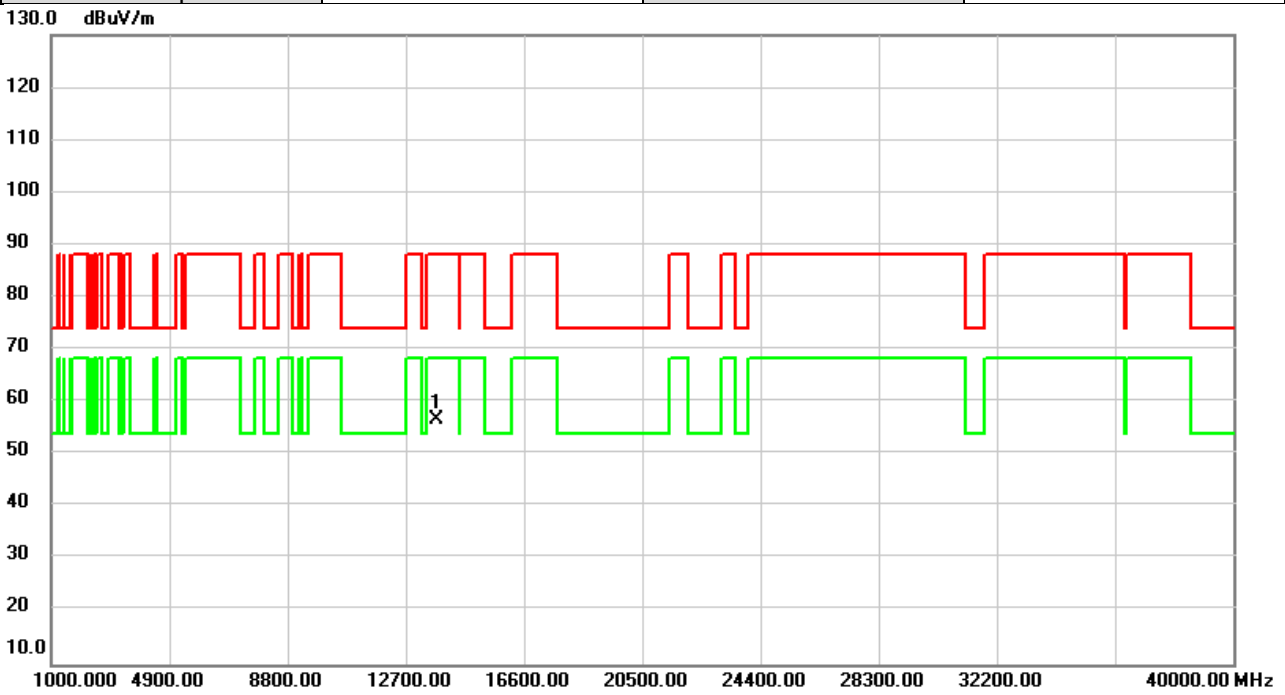


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13710.00	49.23	7.29	56.52	88.20	-31.68	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6855MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

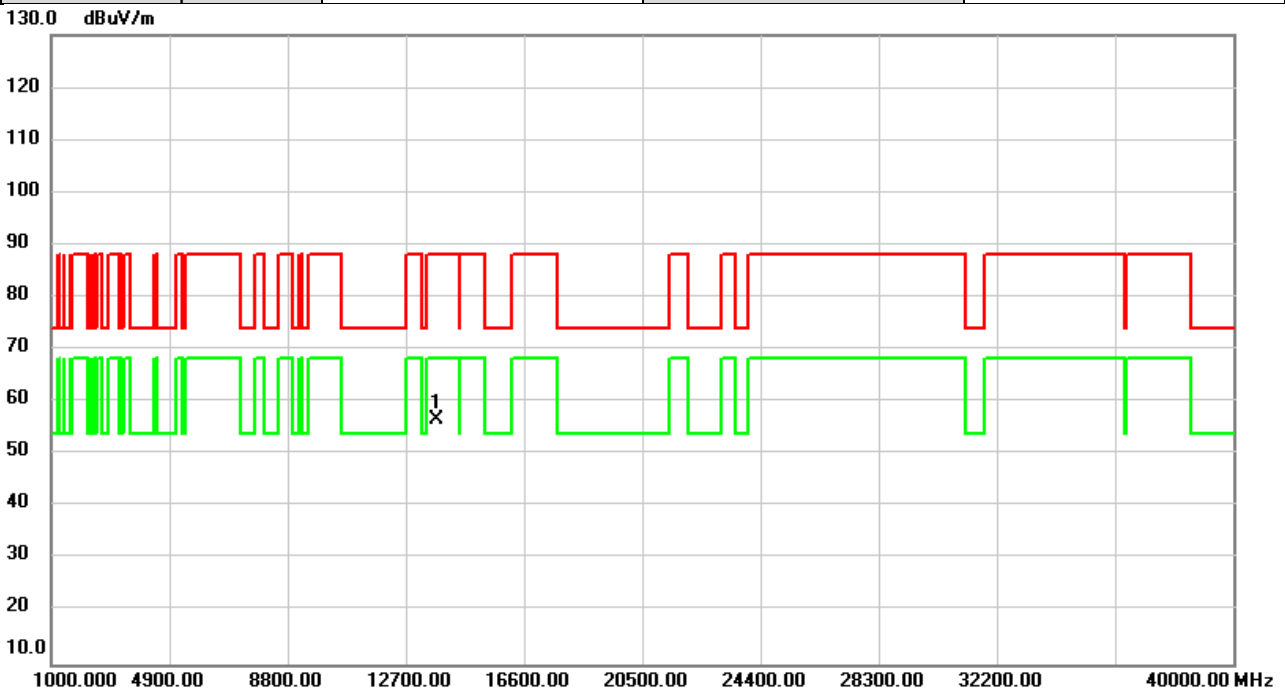


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13710.00	49.38	7.29	56.67	88.20	-31.53	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6875MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

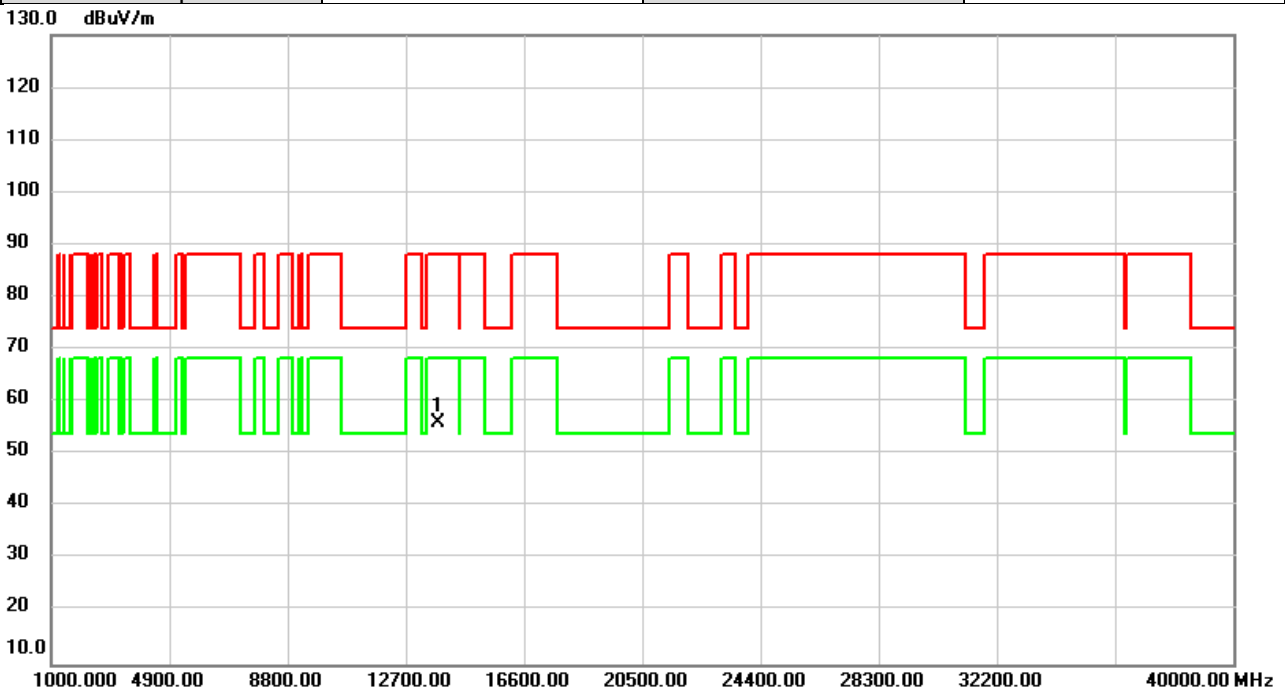


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13750.00	48.73	7.33	56.06	88.20	-32.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6875MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

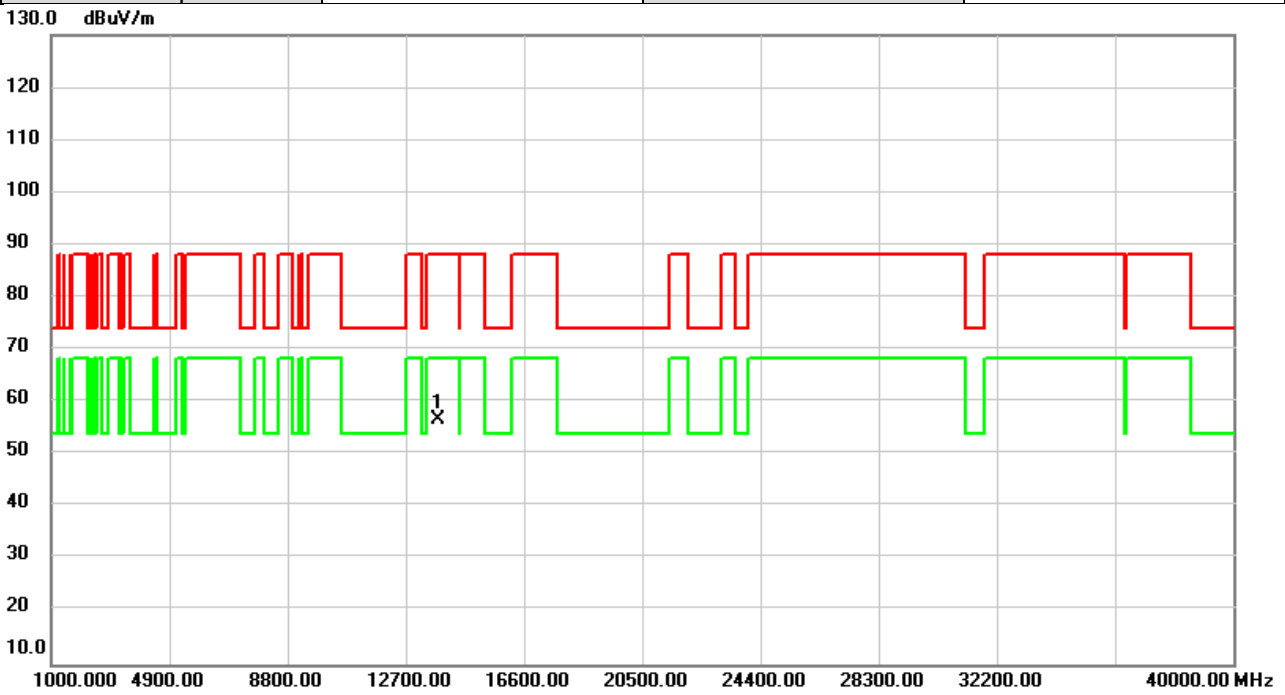


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13750.00	49.36	7.33	56.69	88.20	-31.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6995MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

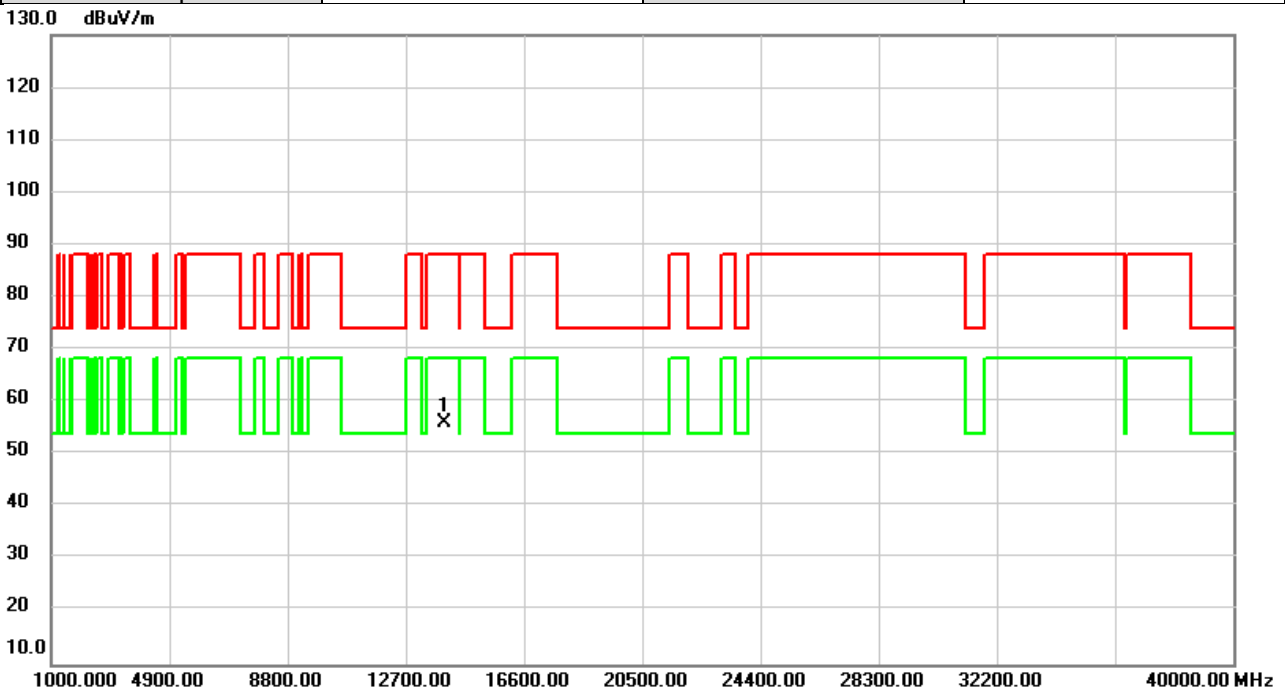


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13990.00	48.55	7.62	56.17	88.20	-32.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	6995MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

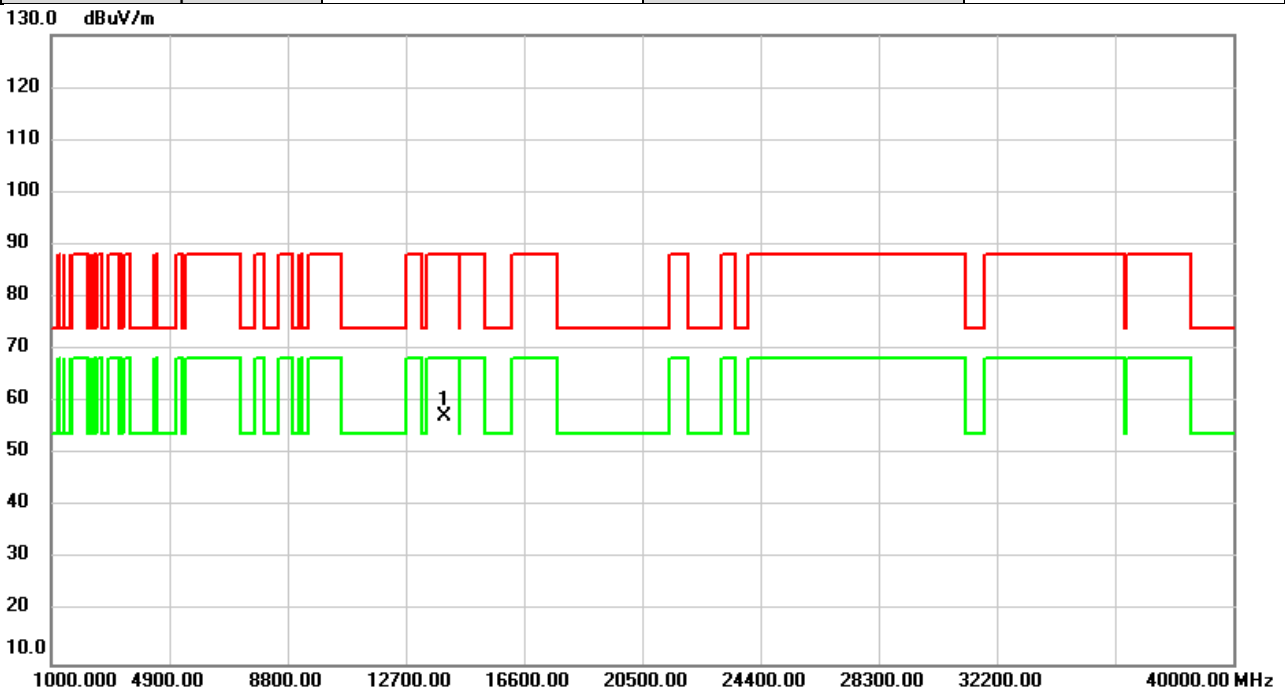


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13990.00	49.78	7.62	57.40	88.20	-30.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	7095MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

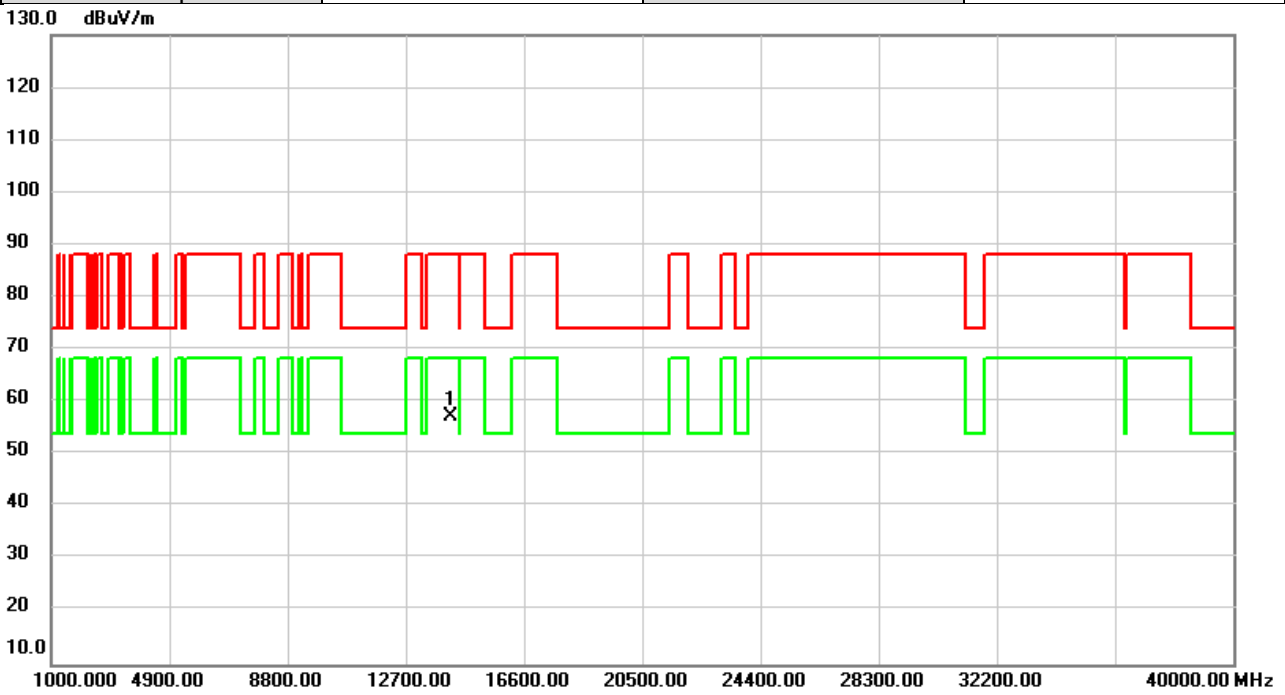


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14190.00	49.53	7.68	57.21	88.20	-30.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/6/20
Test Frequency	7095MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

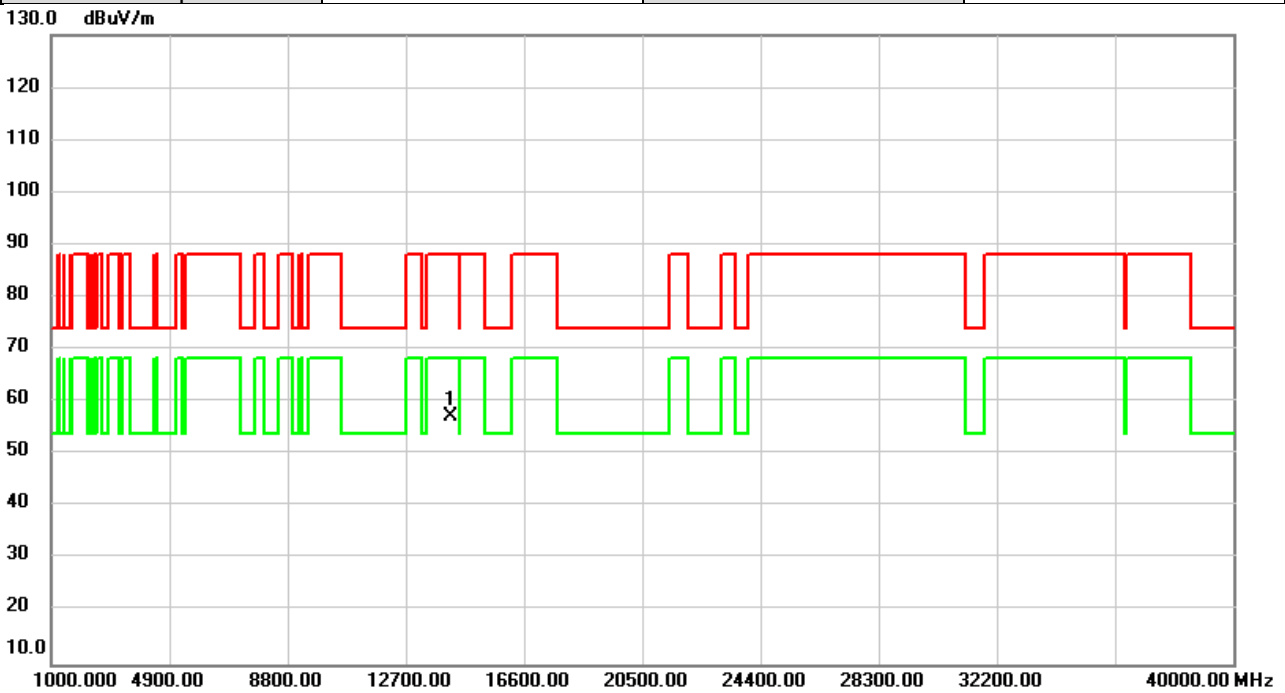


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14190.00	49.61	7.68	57.29	88.20	-30.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	5965MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

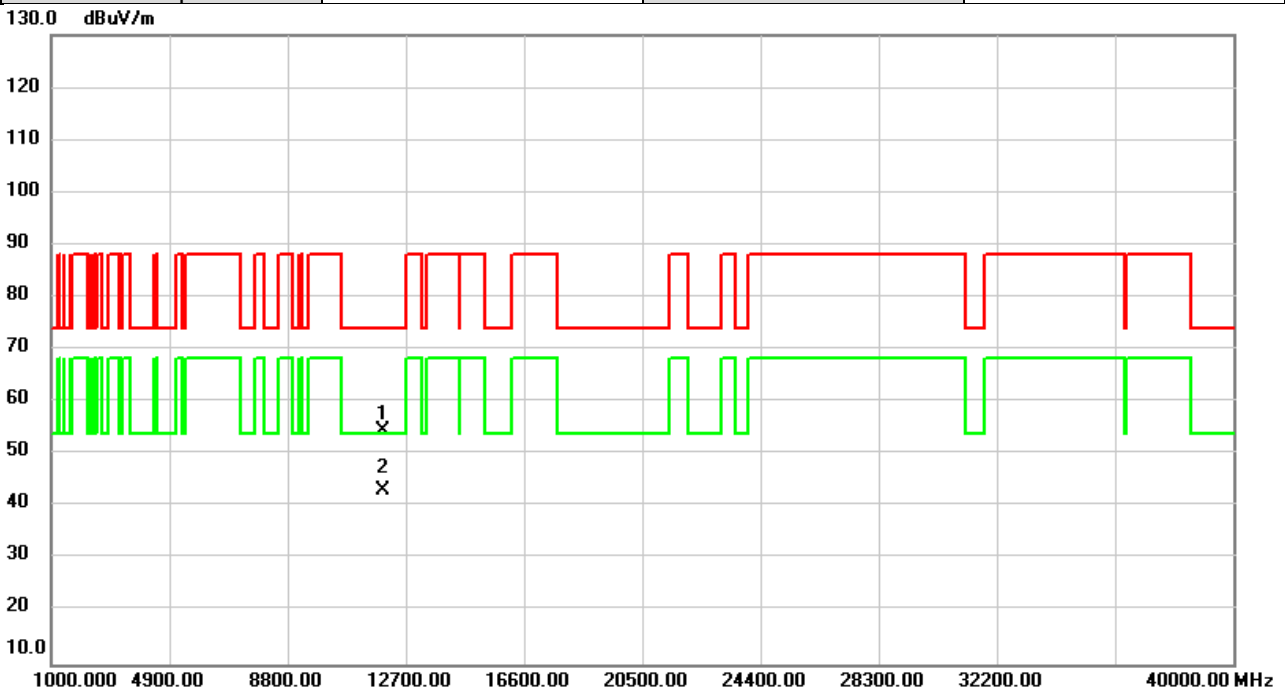


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11930.00	47.98	6.48	54.46	74.00	-19.54	peak	
2	*	11930.00	36.64	6.48	43.12	54.00	-10.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	5965MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

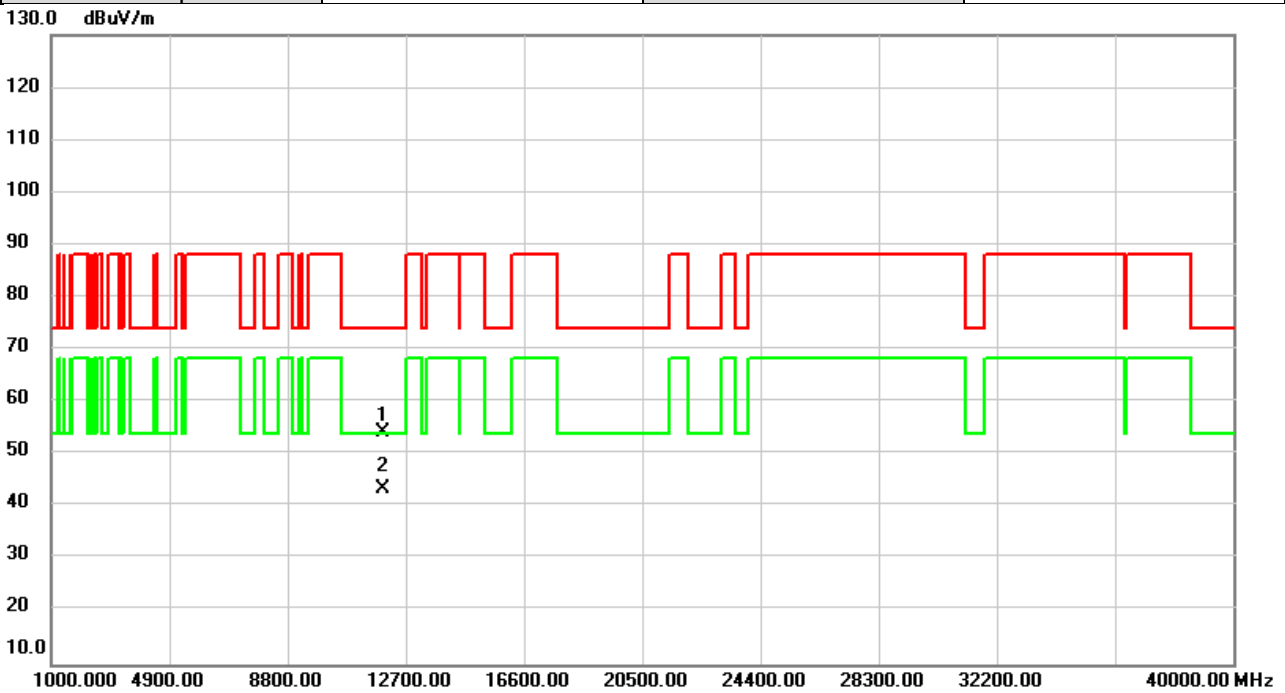


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11930.00	47.82	6.48	54.30	74.00	-19.70	peak	
2	*	11930.00	36.89	6.48	43.37	54.00	-10.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6165MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

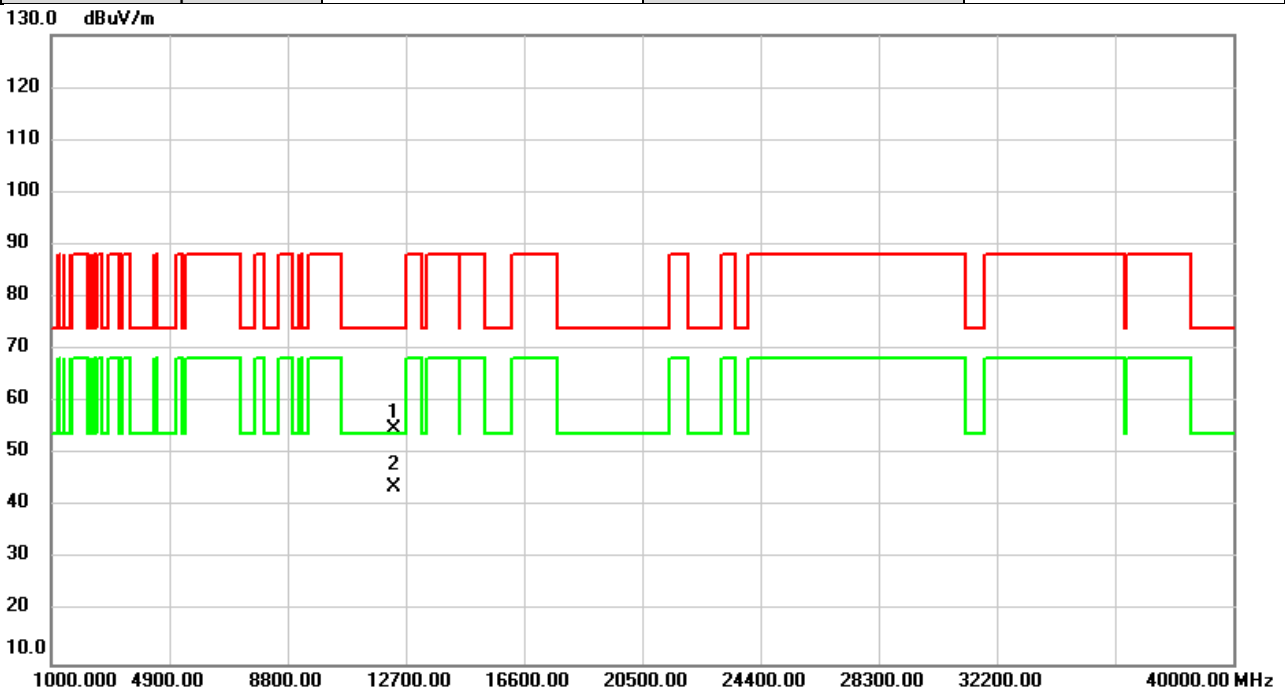


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12330.00	48.04	6.91	54.95	74.00	-19.05	peak	
2	*	12330.00	36.85	6.91	43.76	54.00	-10.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6165MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

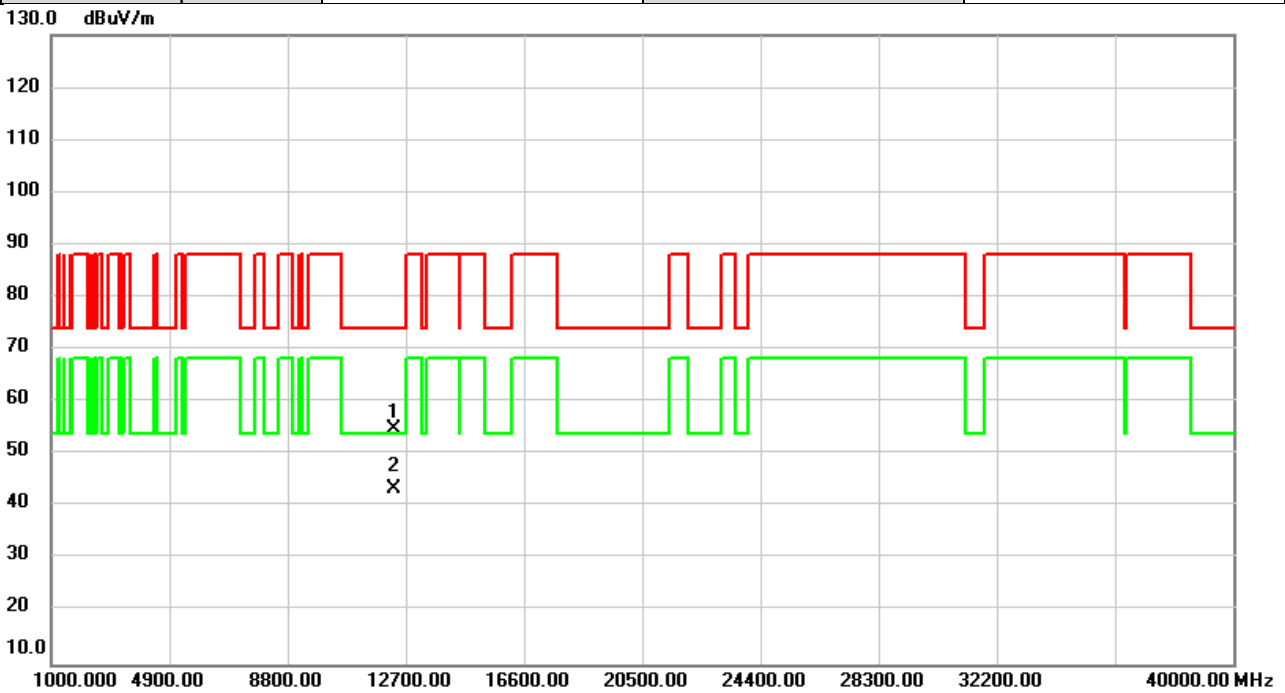


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12330.00	47.91	6.91	54.82	74.00	-19.18	peak	
2	*	12330.00	36.56	6.91	43.47	54.00	-10.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6405MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

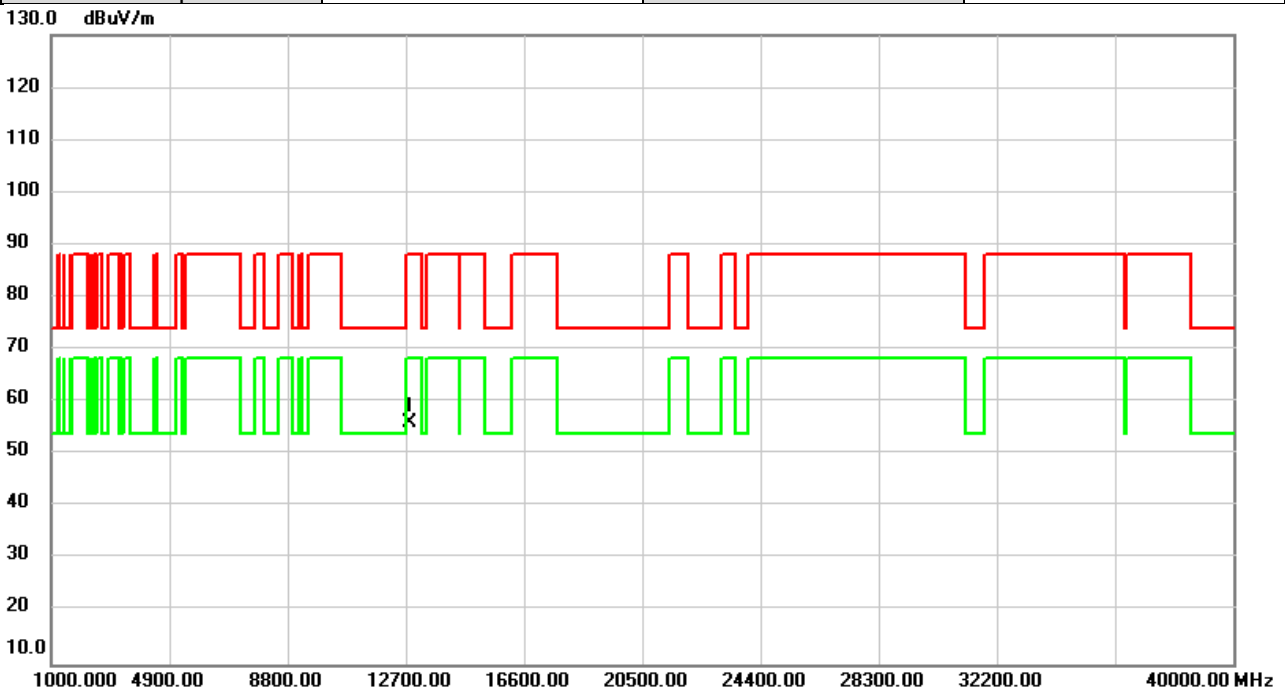


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12810.00	48.31	7.65	55.96	88.20	-32.24	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6405MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

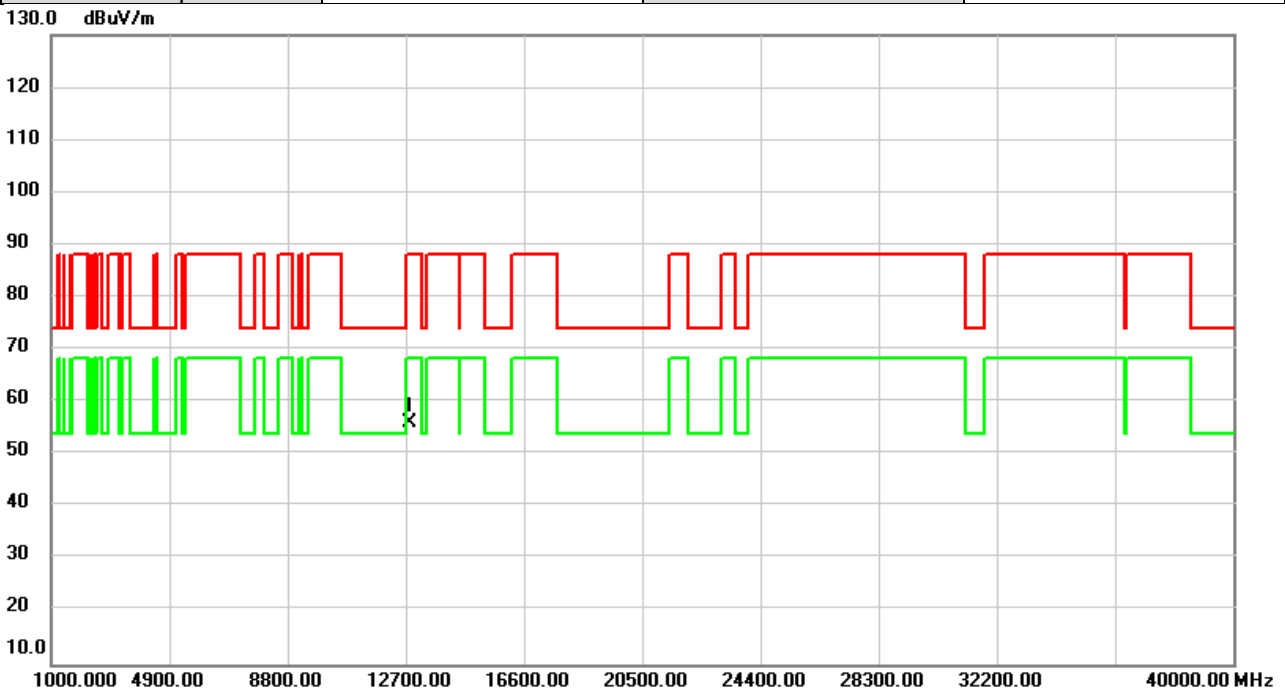


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12810.00	48.31	7.65	55.96	88.20	-32.24	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6445MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

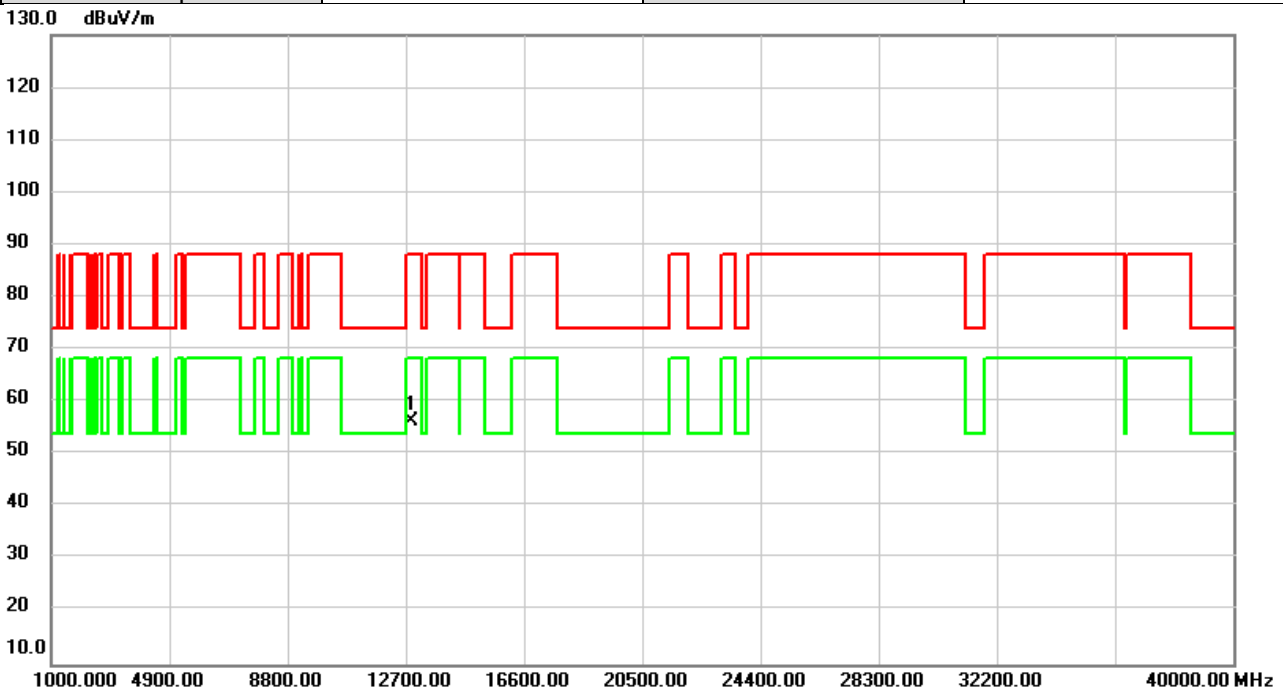


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12890.00	48.43	7.78	56.21	88.20	-31.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6445MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

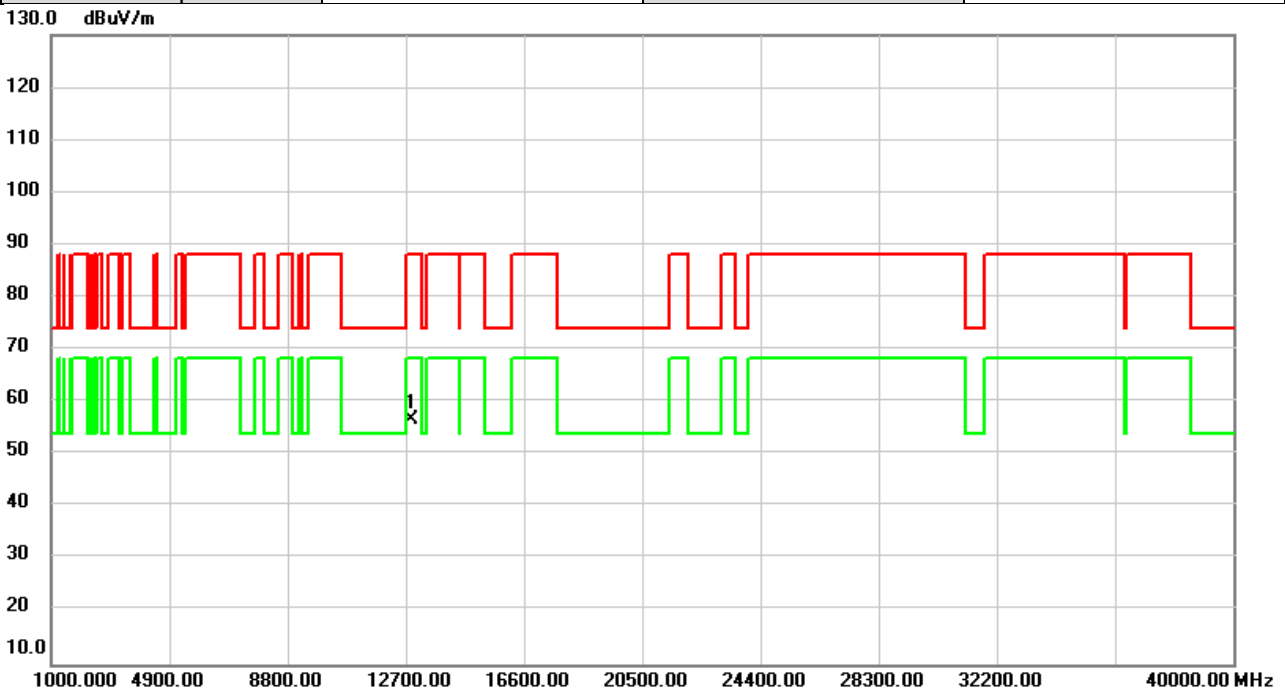


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12890.00	49.00	7.78	56.78	88.20	-31.42	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6485MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

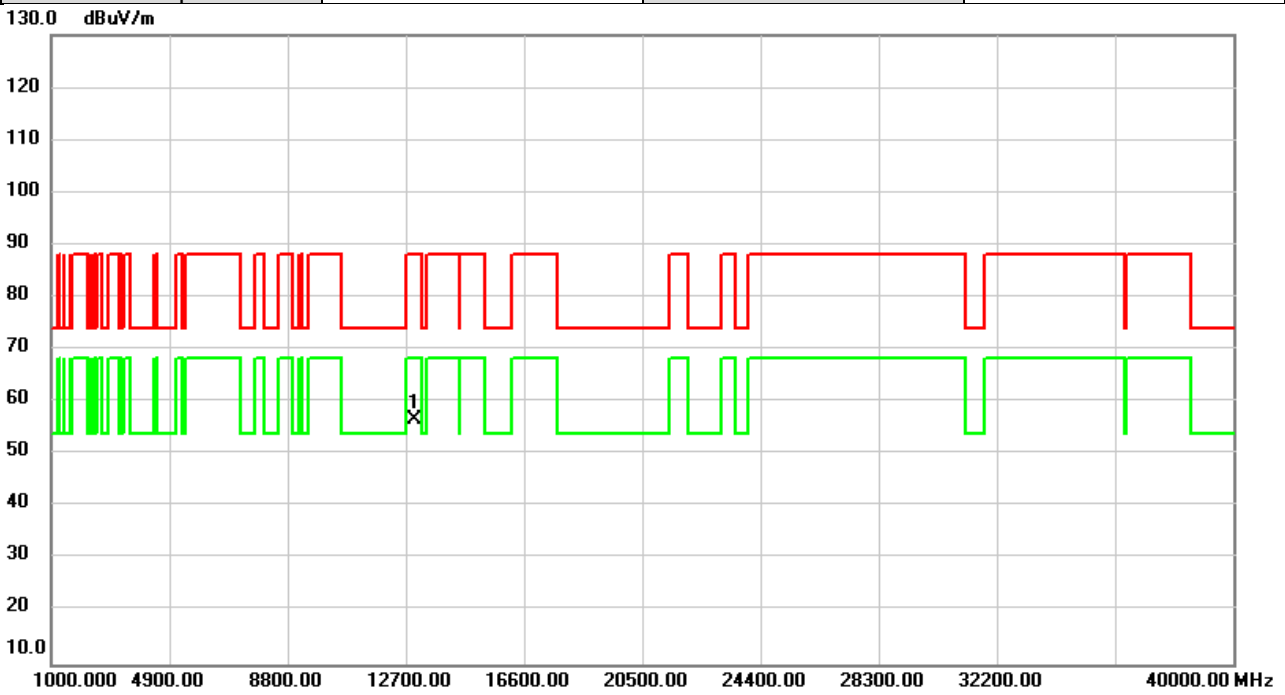


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12970.00	48.77	7.91	56.68	88.20	-31.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6485MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

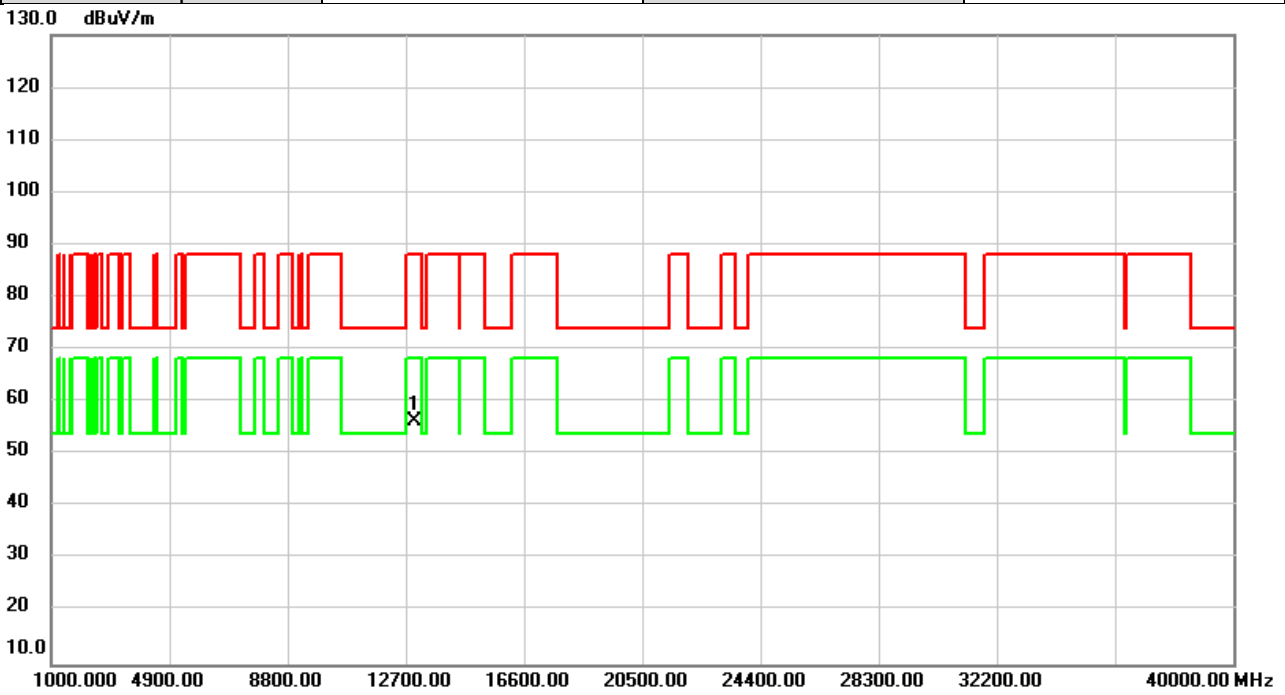


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12970.00	48.32	7.91	56.23	88.20	-31.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6525MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

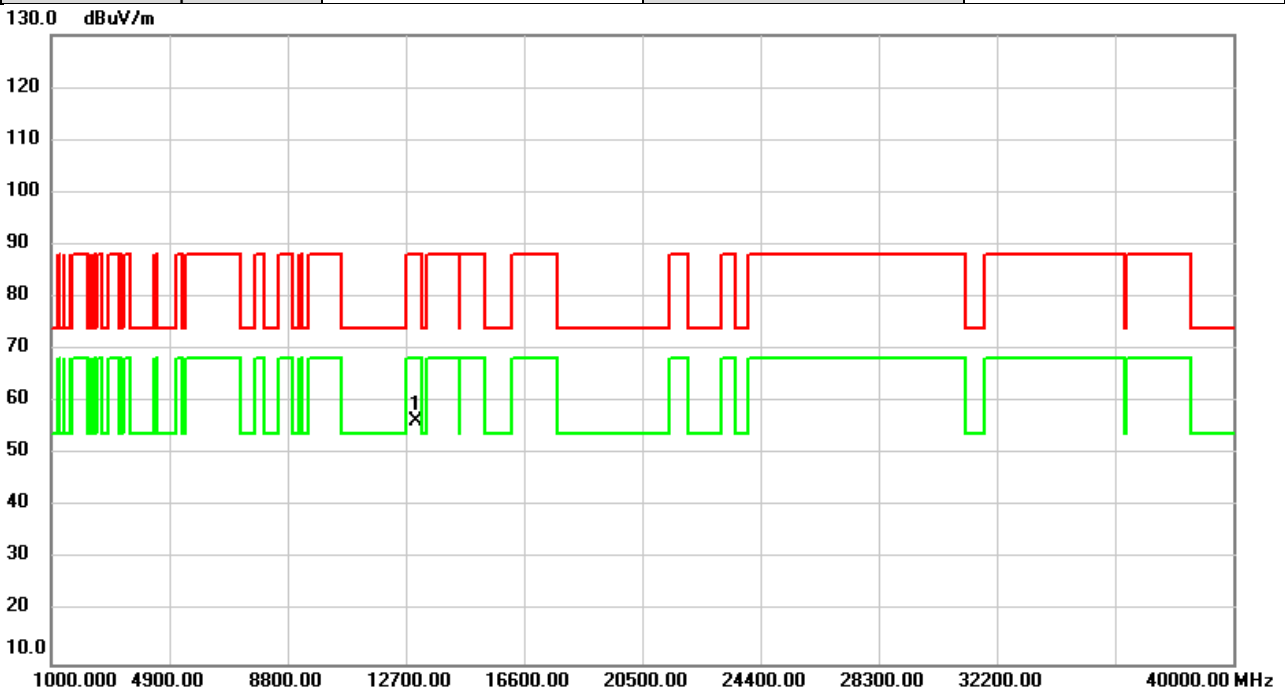


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13050.00	48.57	7.86	56.43	88.20	-31.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6525MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

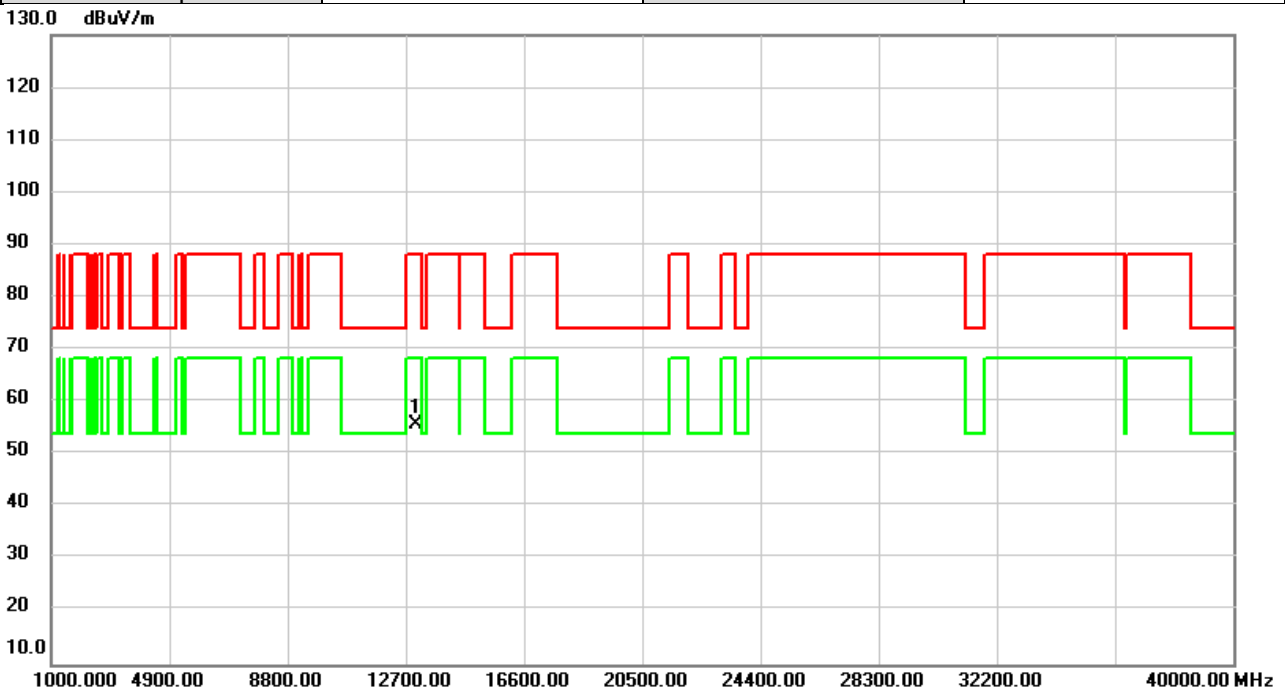


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13050.00	47.83	7.86	55.69	88.20	-32.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6685MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

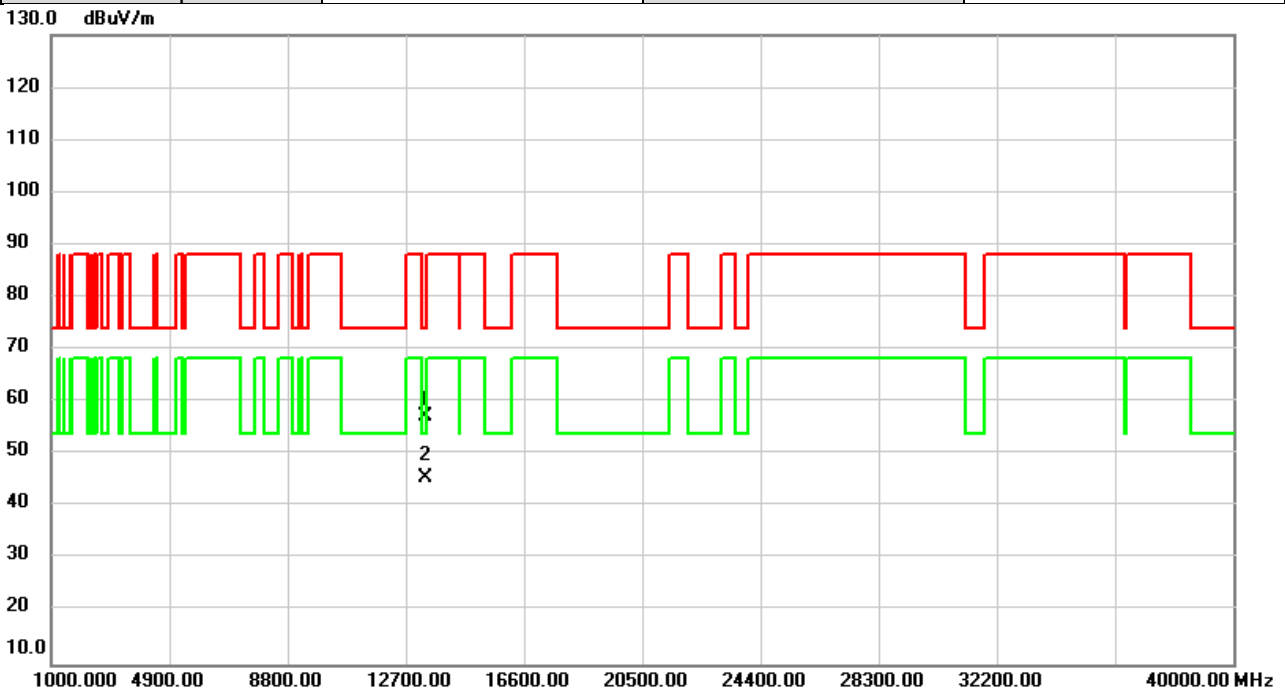


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13370.00	50.00	7.28	57.28	74.00	-16.72	peak	
2	*	13370.00	38.34	7.28	45.62	54.00	-8.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6685MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

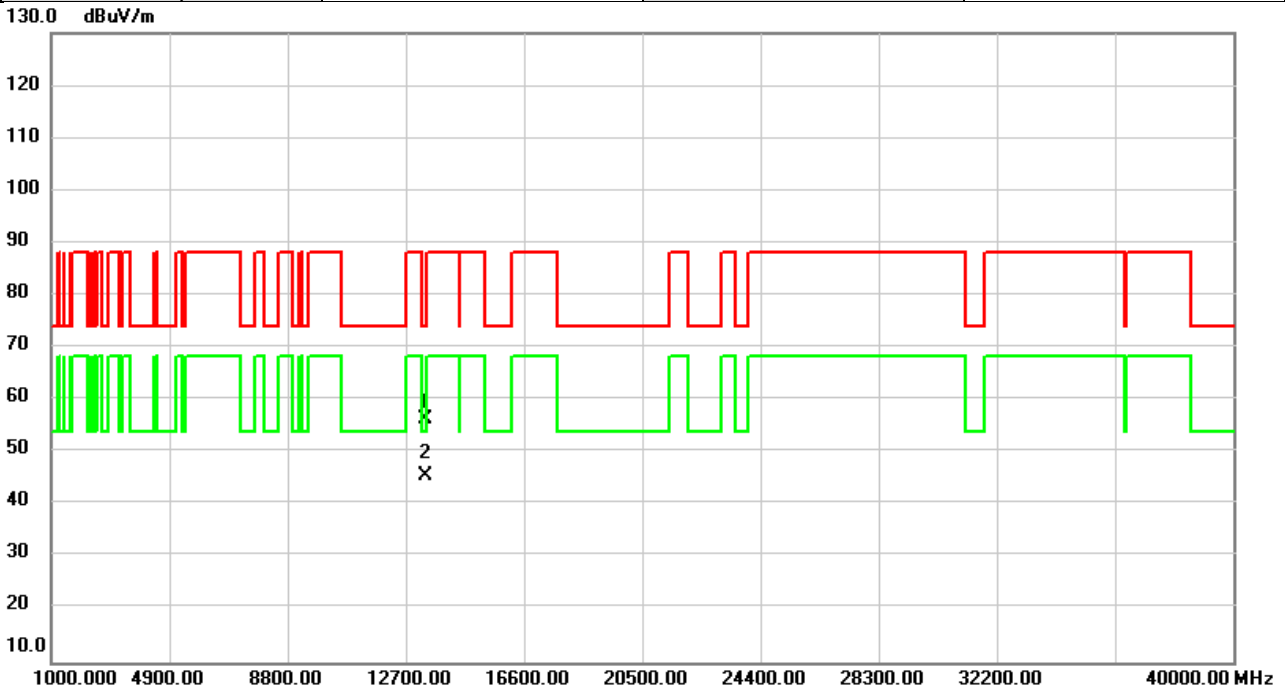


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13370.00	49.22	7.28	56.50	74.00	-17.50	peak	
2	*	13370.00	38.16	7.28	45.44	54.00	-8.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6845MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

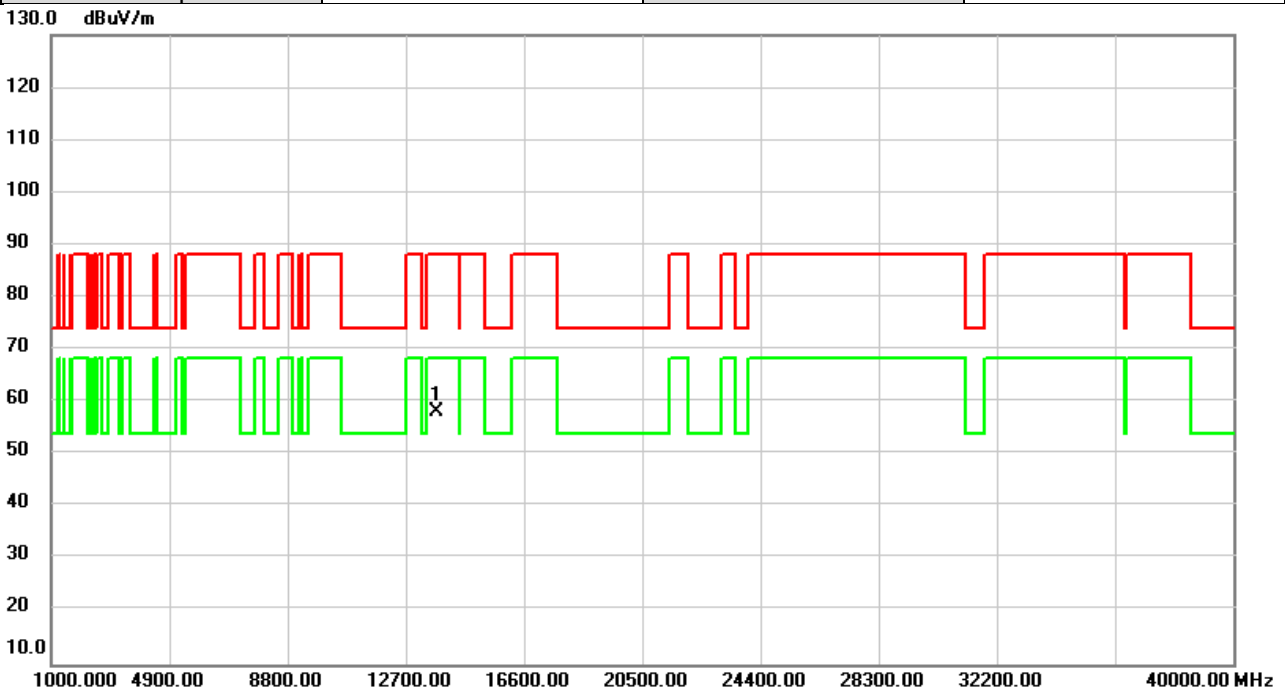


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13690.00	50.76	7.27	58.03	88.20	-30.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6845MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

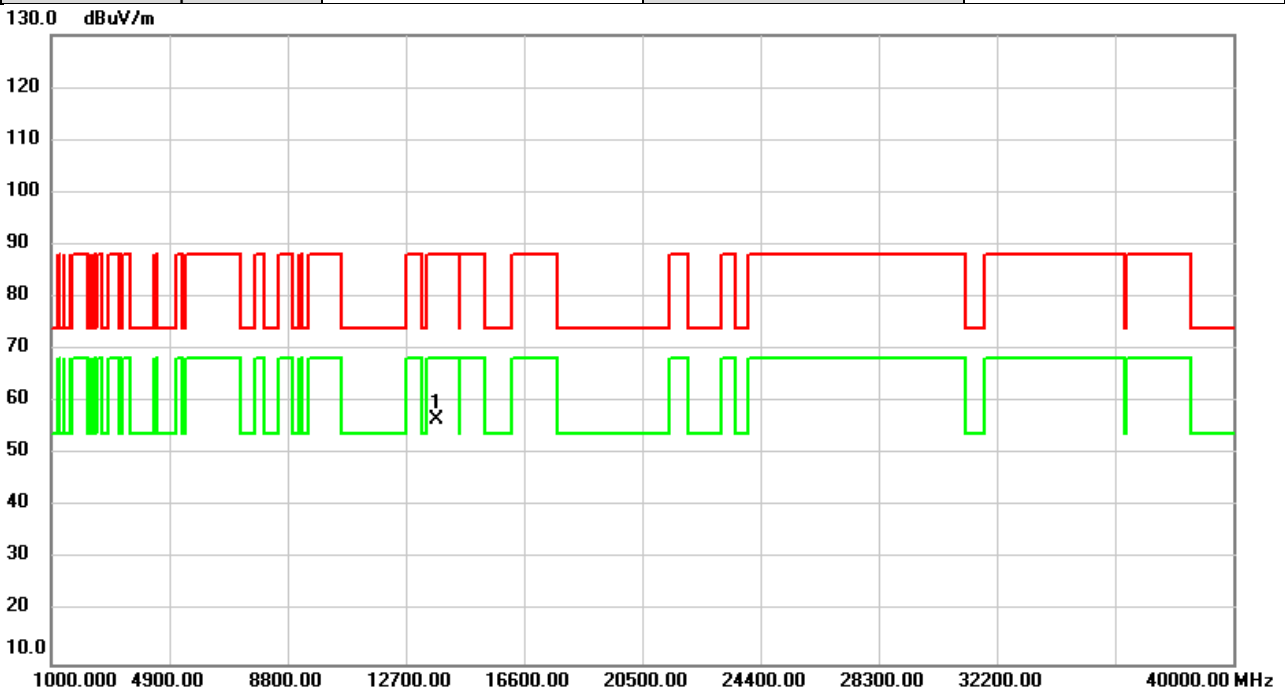


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13690.00	49.40	7.27	56.67	88.20	-31.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6885MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

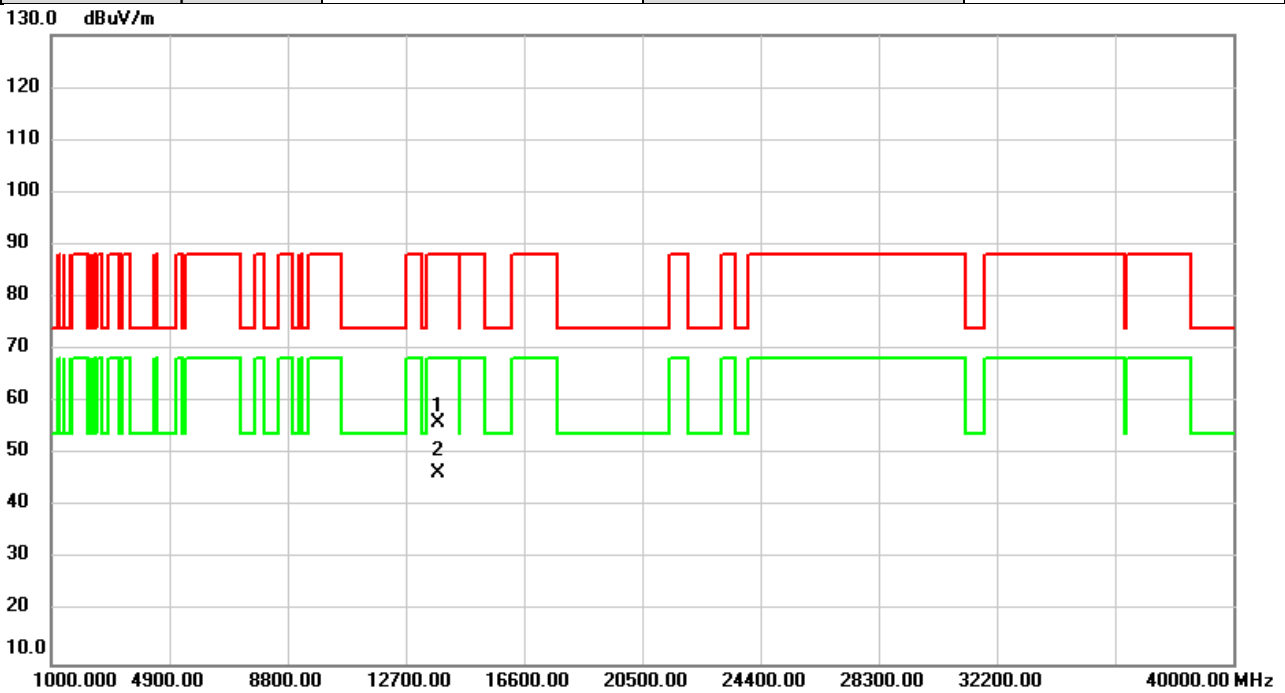


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13770.00	48.63	7.37	56.00	88.20	-32.20	peak	
2	*	13770.00	39.11	7.37	46.48	68.20	-21.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	6885MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

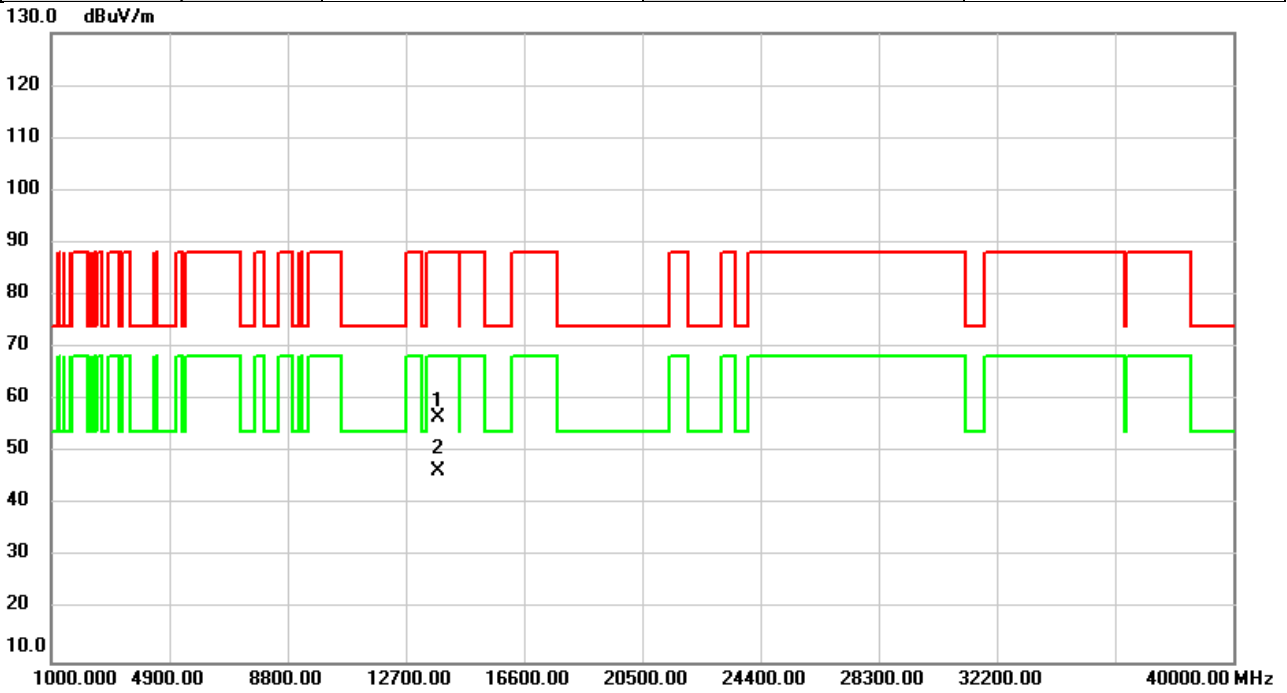


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13770.00	49.40	7.37	56.77	88.20	-31.43	peak	
2	*	13770.00	39.06	7.37	46.43	68.20	-21.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	7085MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

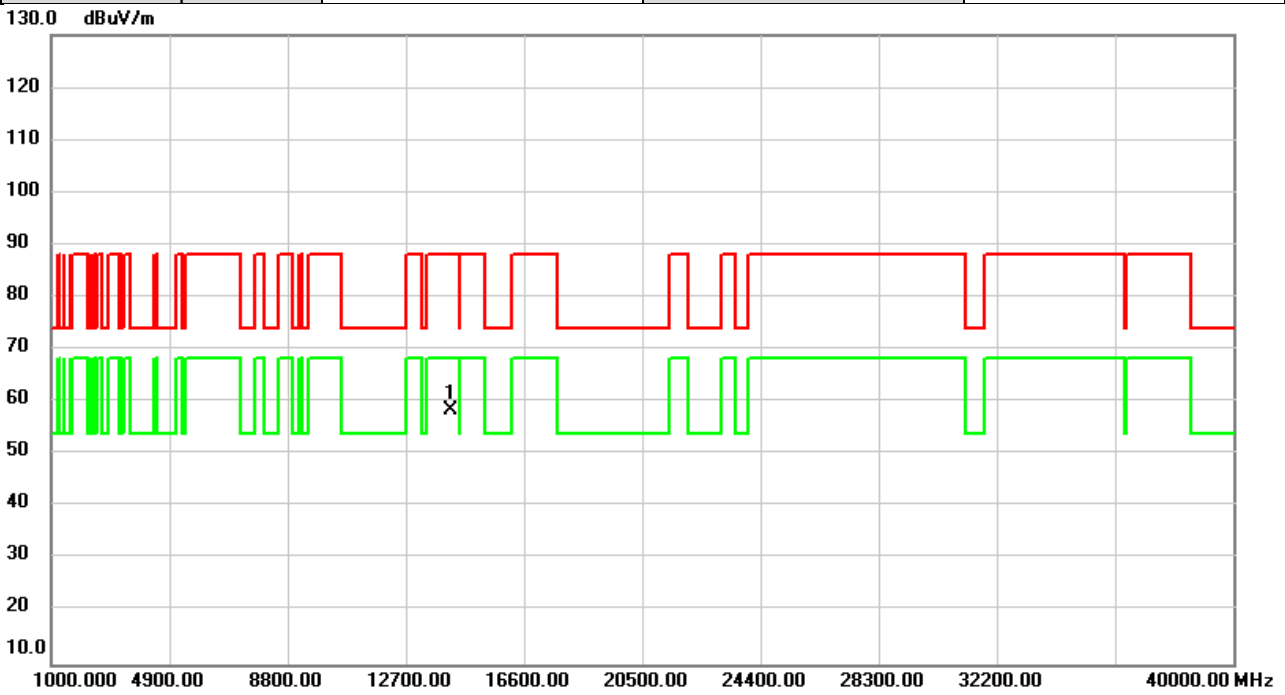


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14170.00	50.69	7.68	58.37	88.20	-29.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/6/20
Test Frequency	7085MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

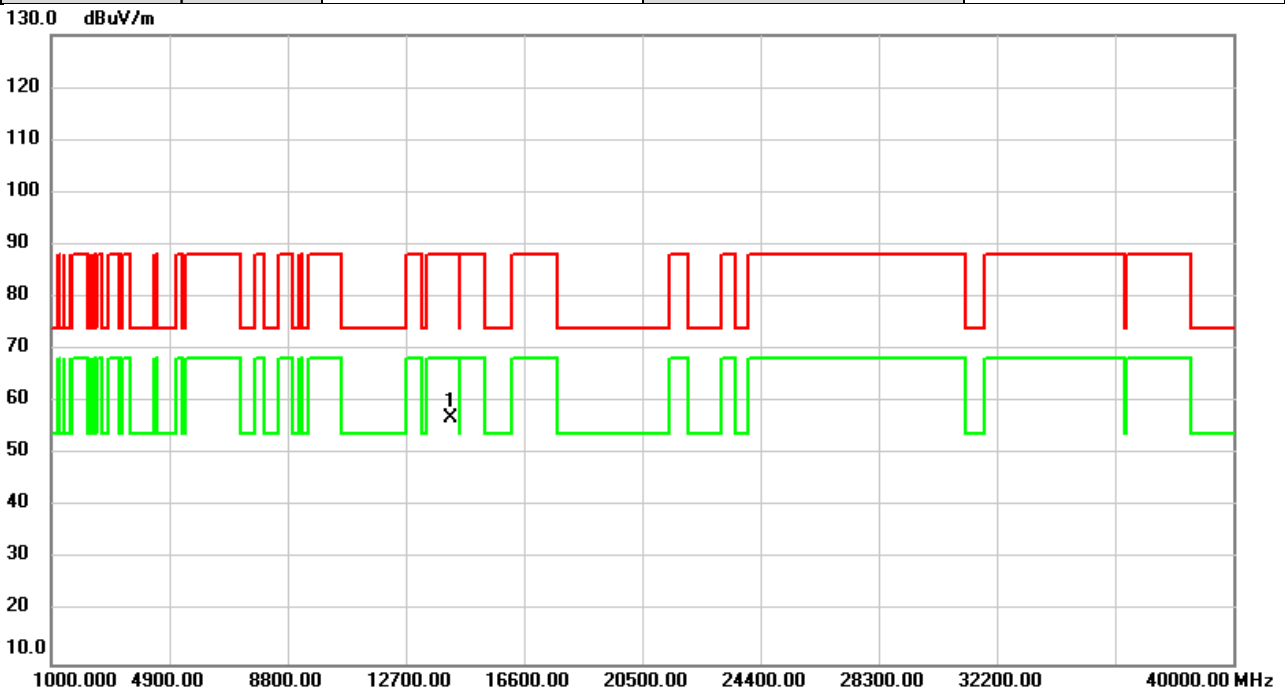


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14170.00	49.28	7.68	56.96	88.20	-31.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	5985MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

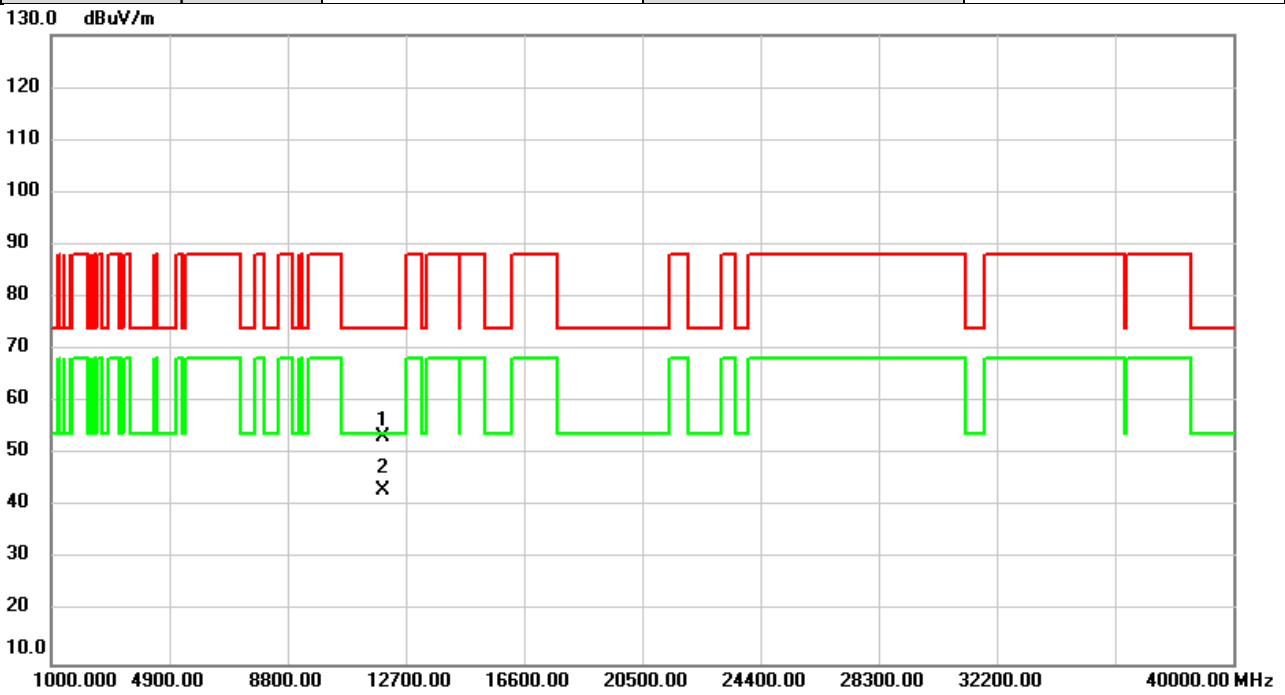


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11970.00	47.03	6.45	53.48	74.00	-20.52	peak	
2	*	11970.00	36.85	6.45	43.30	54.00	-10.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	5985MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

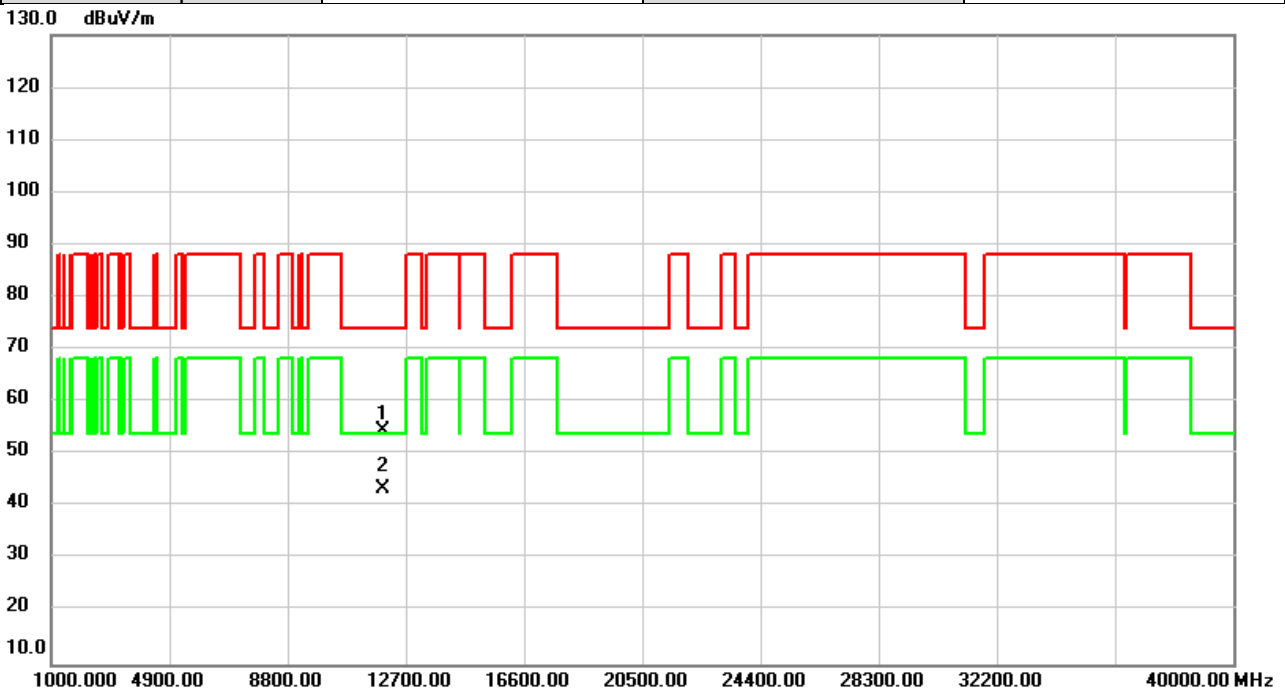


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11970.00	48.09	6.45	54.54	74.00	-19.46	peak	
2	*	11970.00	36.92	6.45	43.37	54.00	-10.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6145MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

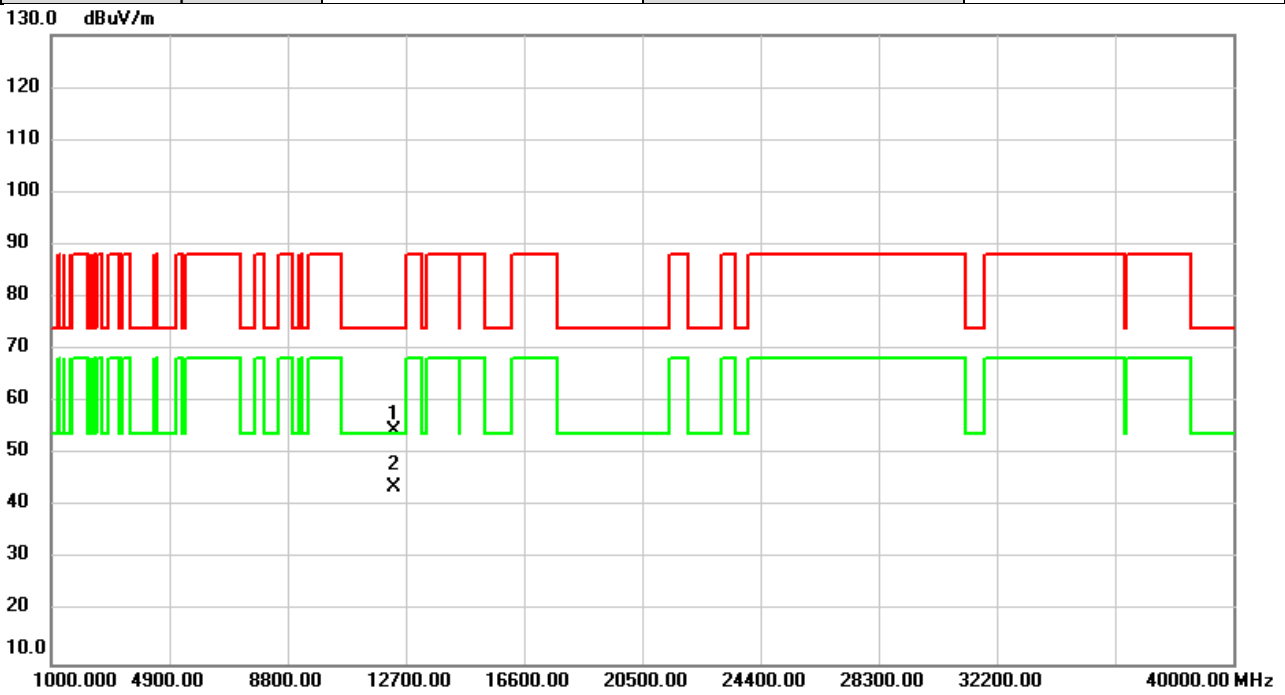


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12290.00	47.76	6.86	54.62	74.00	-19.38	peak	
2	*	12290.00	36.85	6.86	43.71	54.00	-10.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6145MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

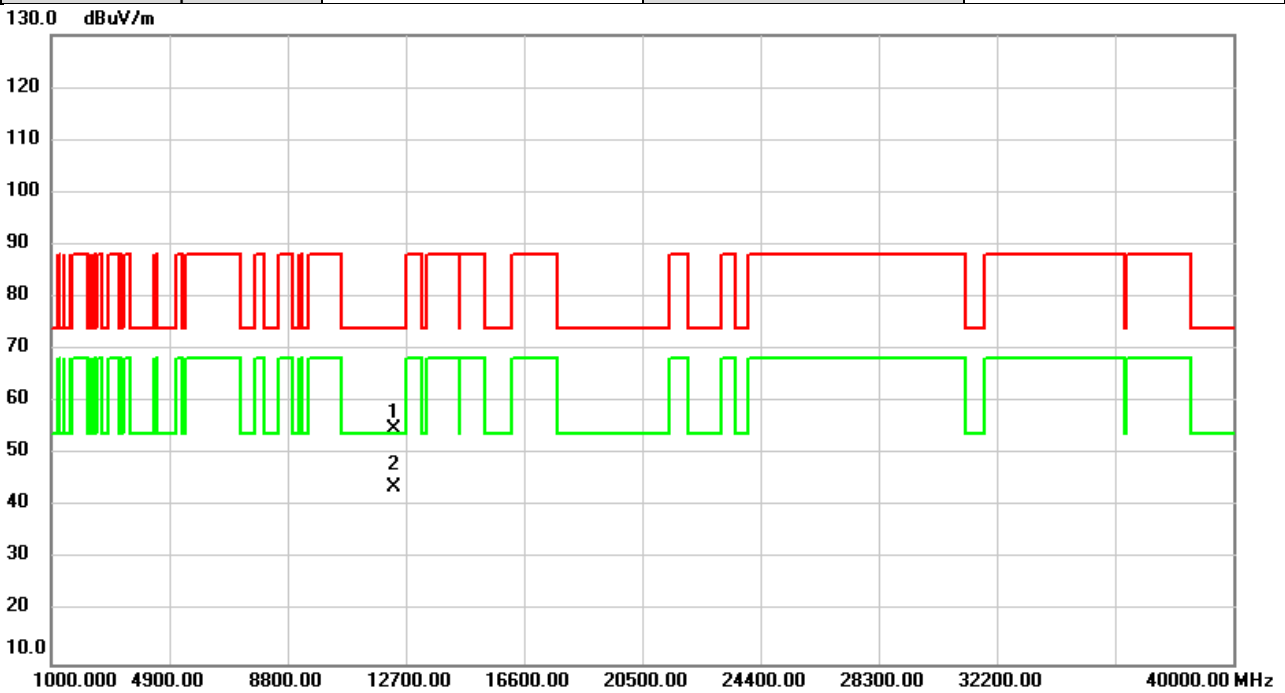


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12290.00	47.90	6.86	54.76	74.00	-19.24	peak	
2	*	12290.00	36.89	6.86	43.75	54.00	-10.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6385MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

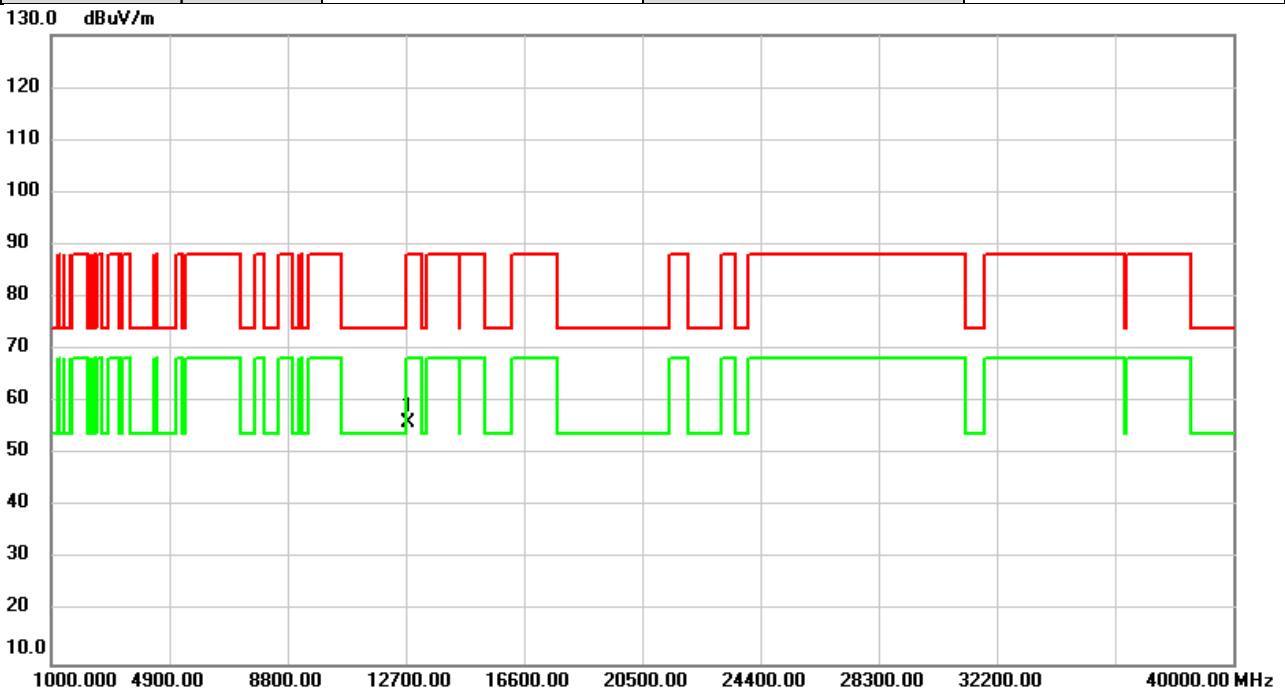


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12770.00	48.54	7.59	56.13	88.20	-32.07	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6385MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

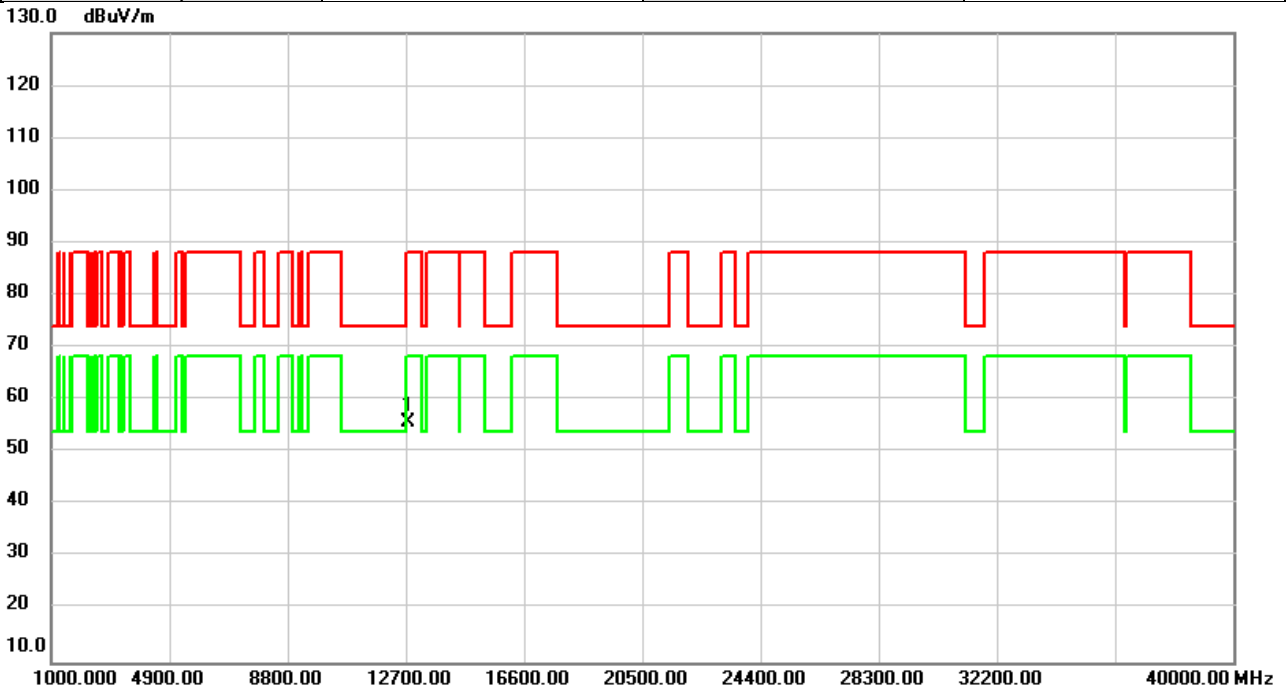


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12770.00	48.28	7.59	55.87	88.20	-32.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6465MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

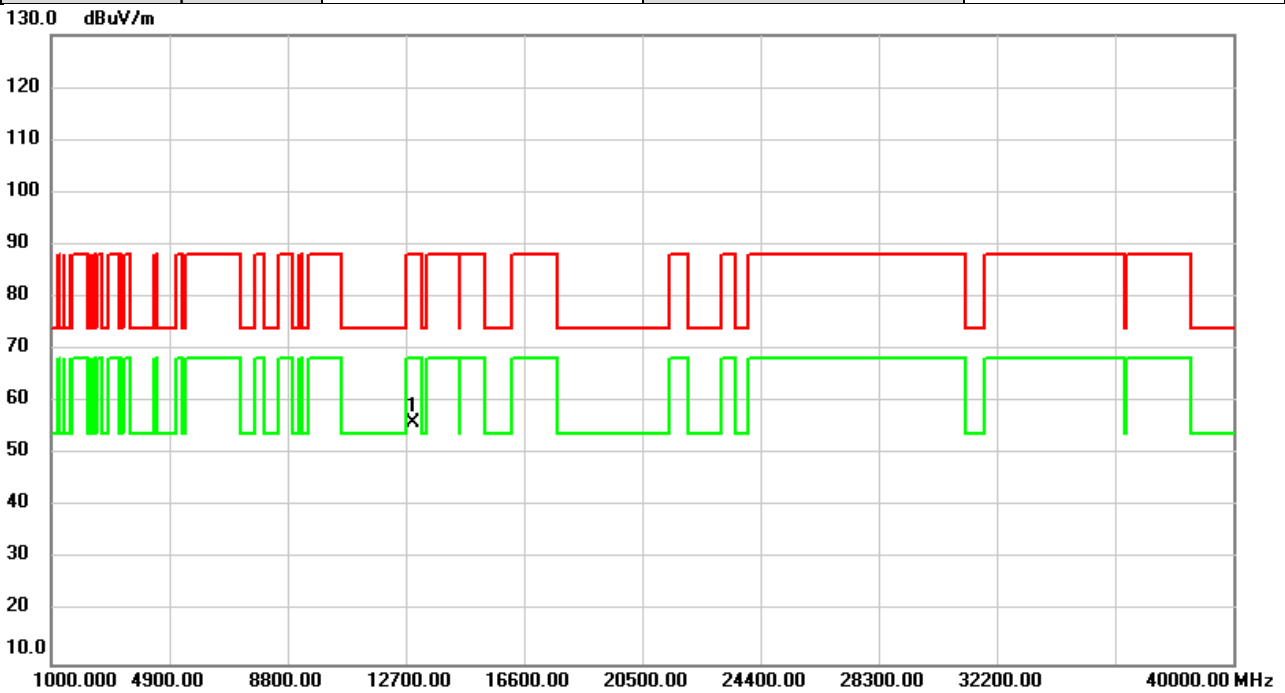


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12930.00	48.10	7.84	55.94	88.20	-32.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6465MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

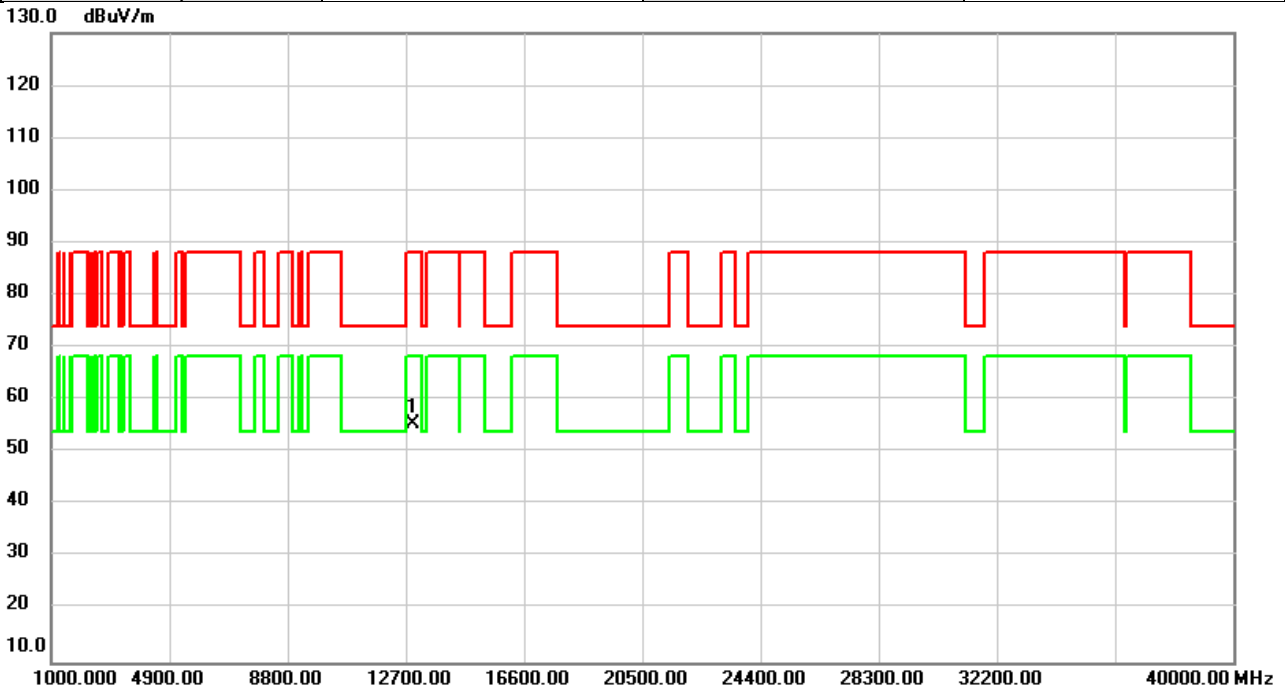


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12930.00	47.73	7.84	55.57	88.20	-32.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6545MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

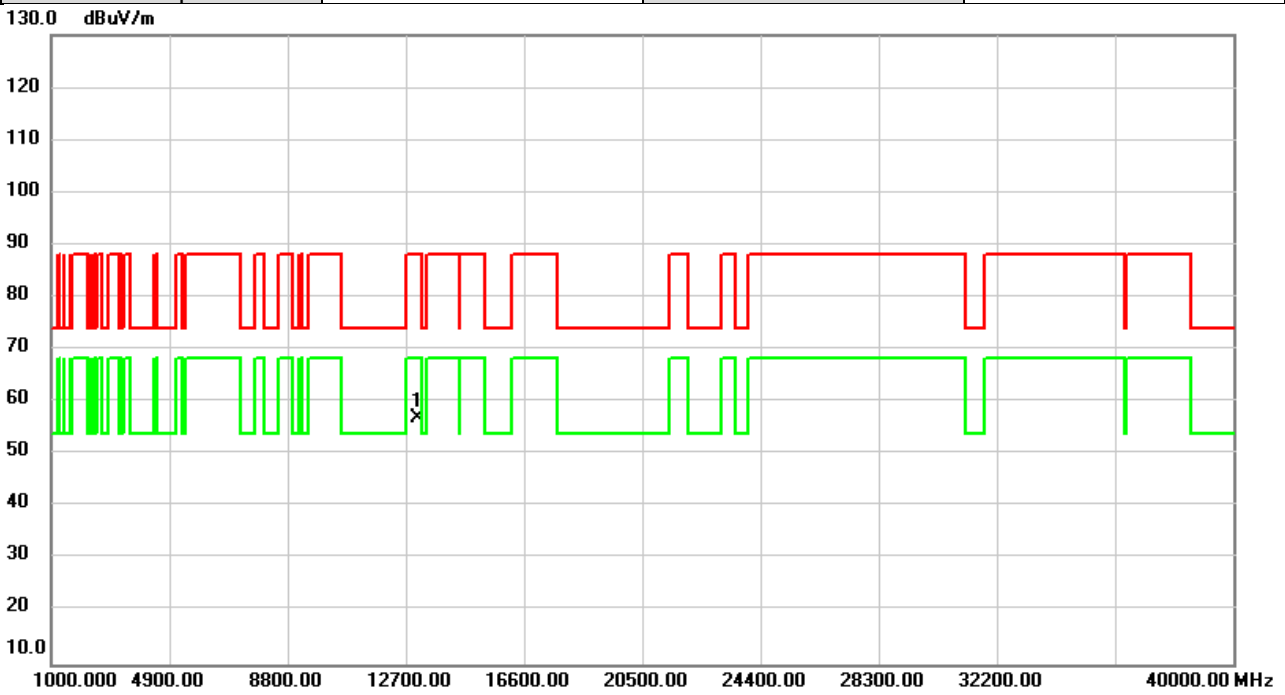


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13090.00	49.31	7.79	57.10	88.20	-31.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6545MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

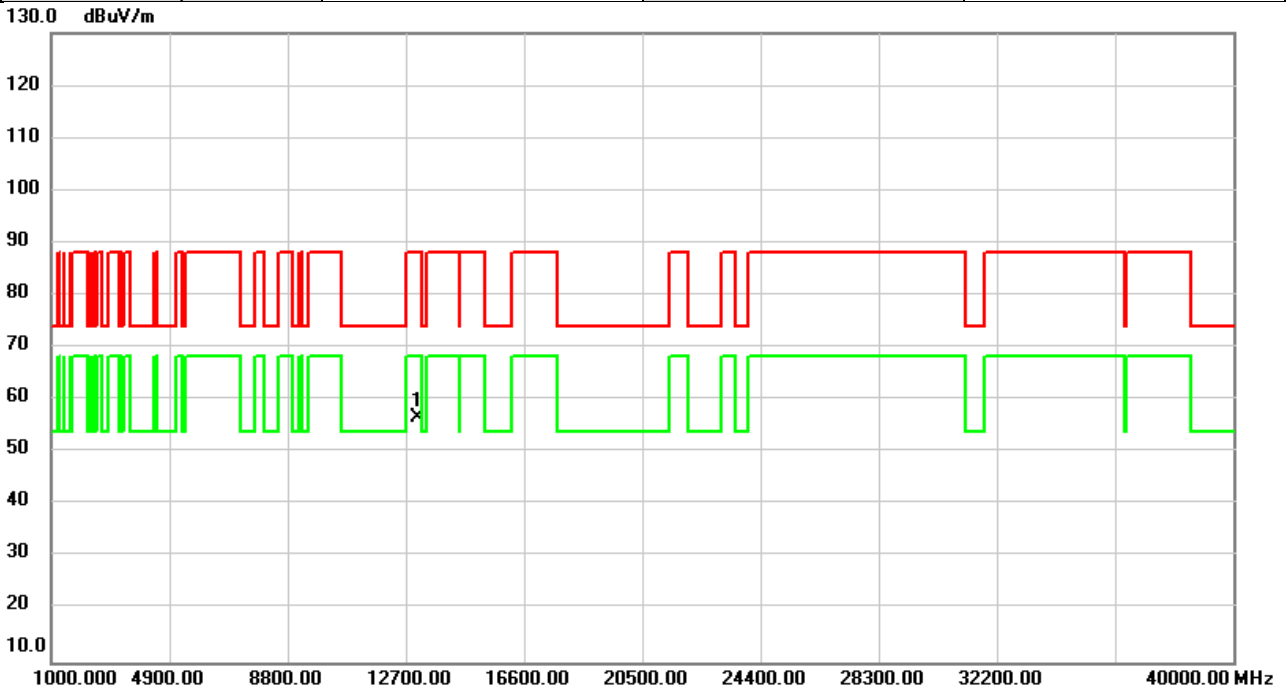


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13090.00	48.81	7.79	56.60	88.20	-31.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6625MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

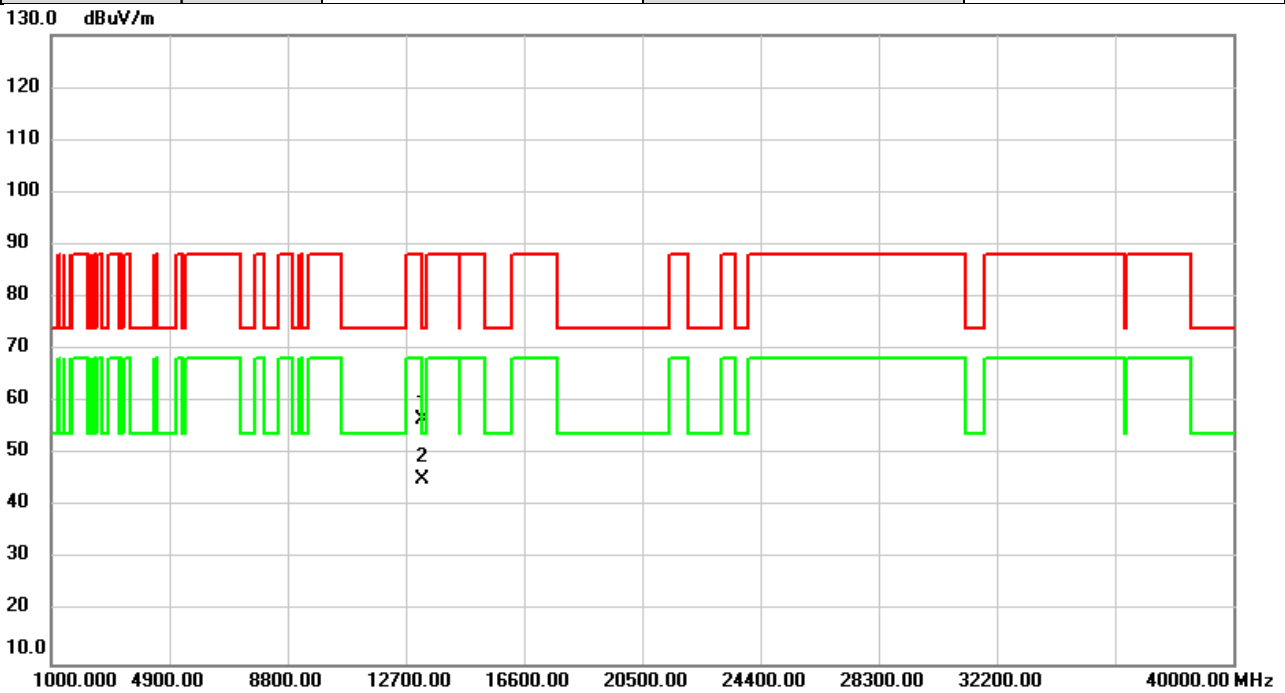


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13250.00	49.06	7.49	56.55	74.00	-17.45	peak	
2	*	13250.00	37.81	7.49	45.30	54.00	-8.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6625MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

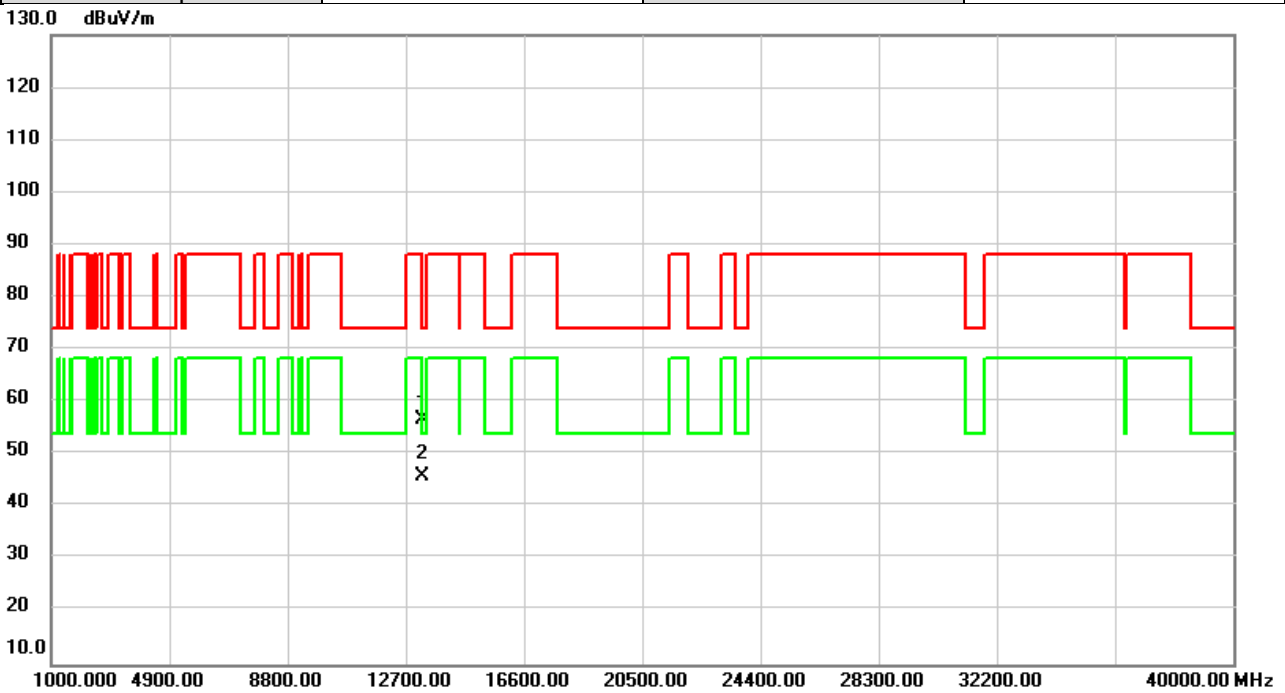


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13250.00	49.19	7.49	56.68	74.00	-17.32	peak	
2	*	13250.00	38.44	7.49	45.93	54.00	-8.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6785MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

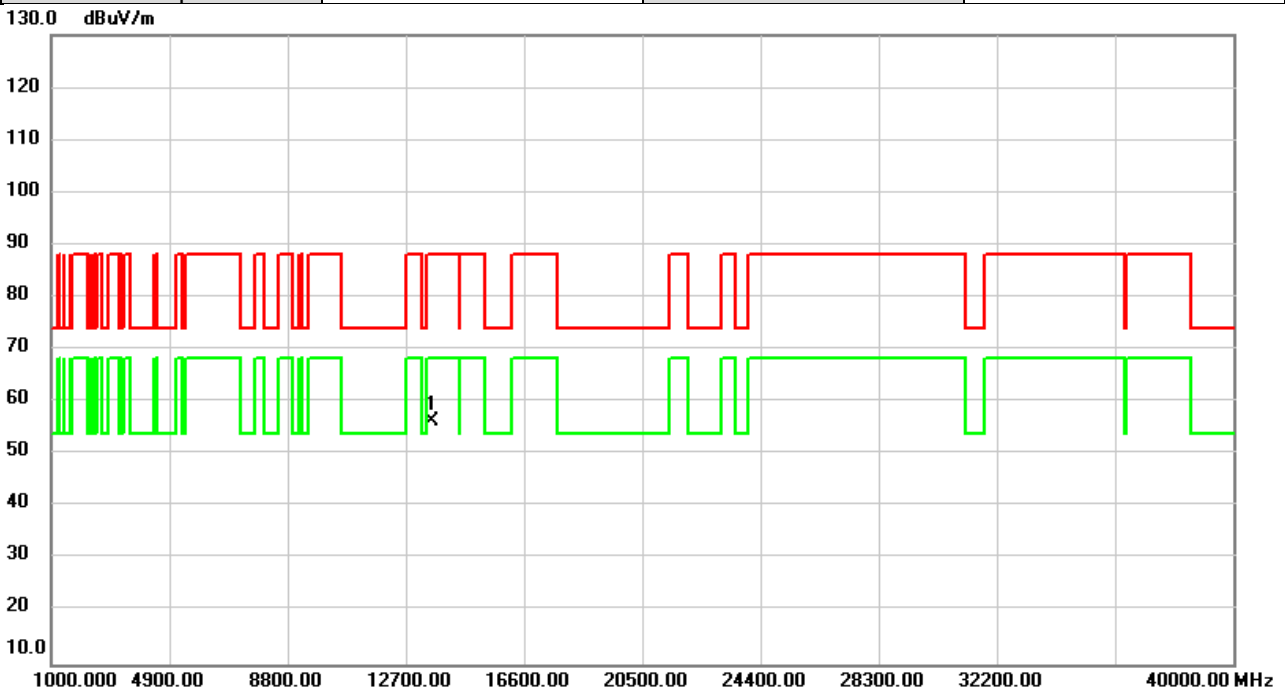


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13570.00	49.29	7.13	56.42	88.20	-31.78	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6785MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

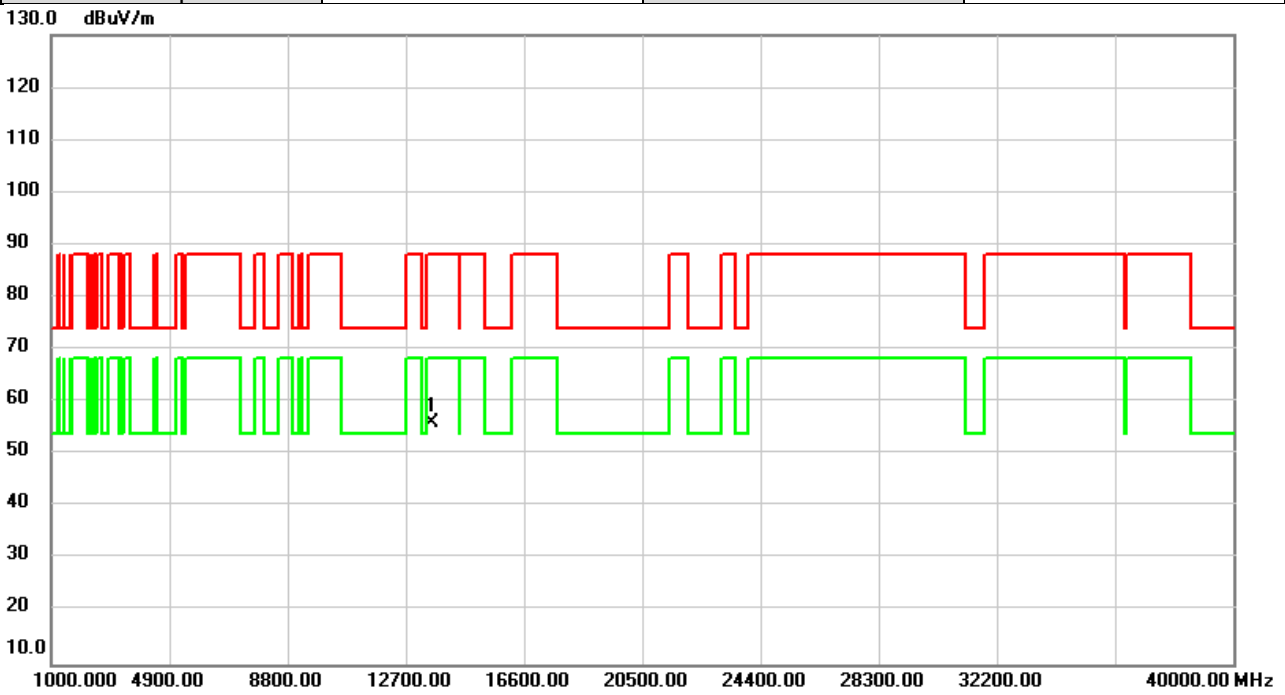


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13570.00	49.00	7.13	56.13	88.20	-32.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6865MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

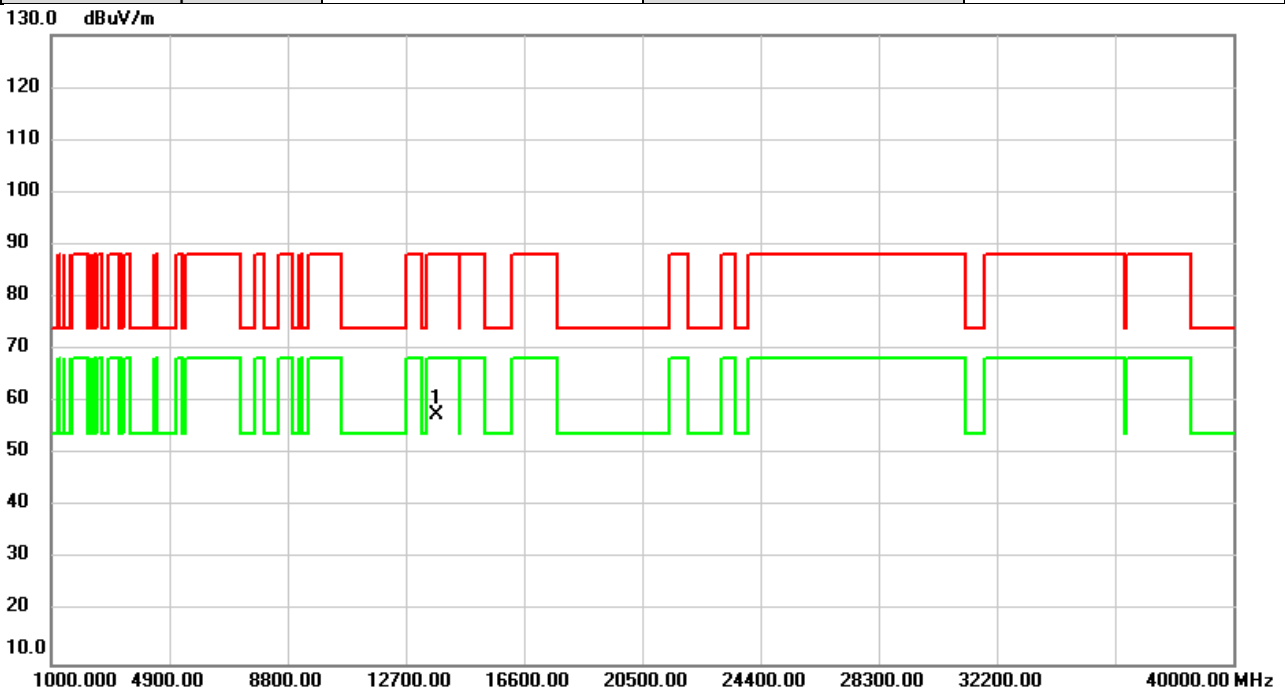


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13730.00	50.24	7.31	57.55	88.20	-30.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6865MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

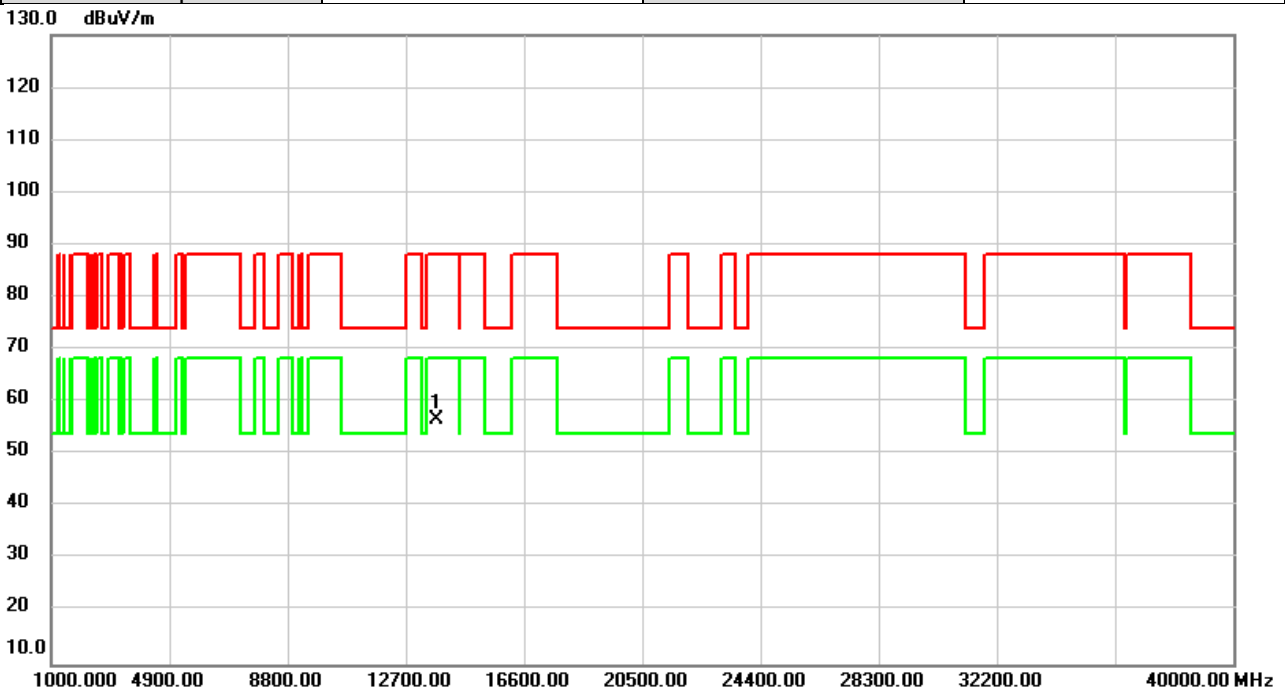


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13730.00	49.48	7.31	56.79	88.20	-31.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6945MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

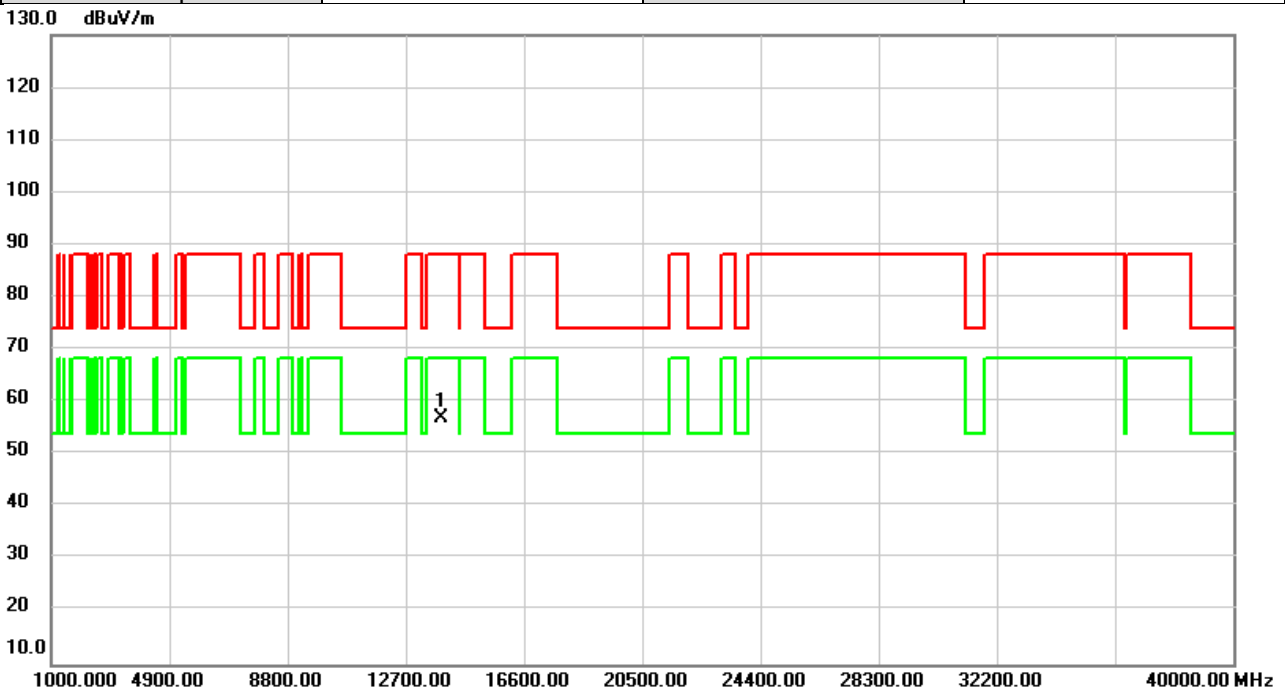


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13890.00	49.30	7.51	56.81	88.20	-31.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	6945MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

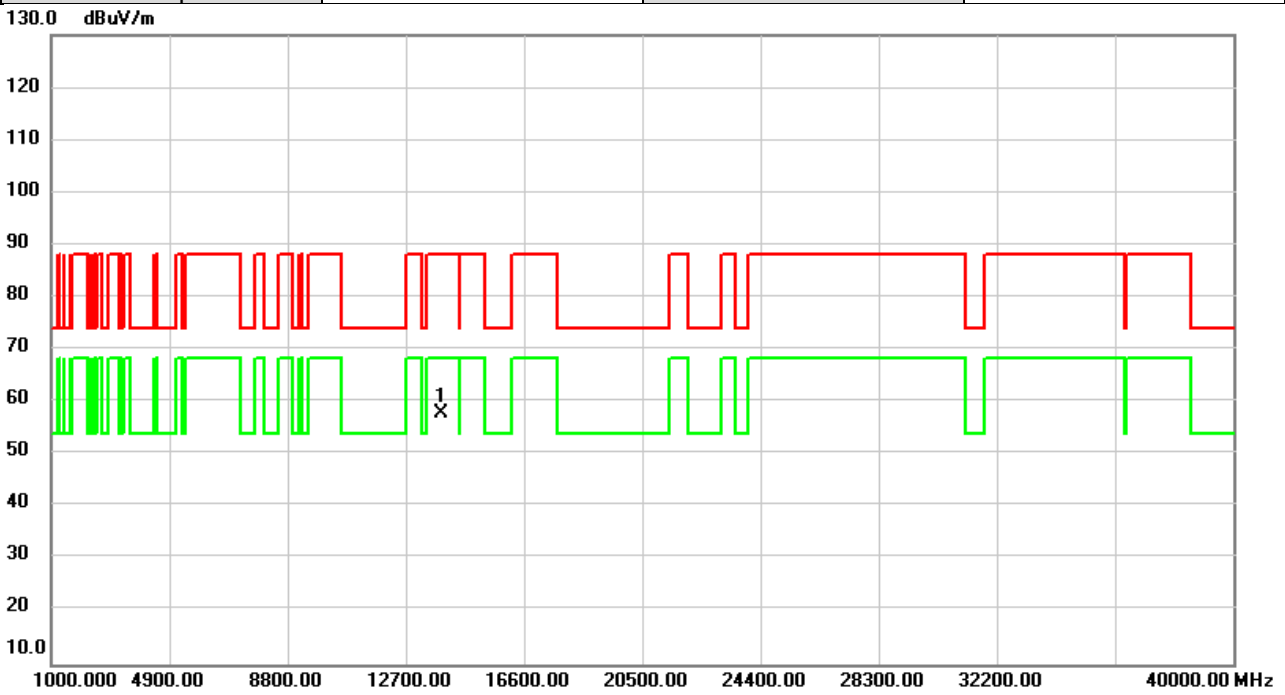


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13890.00	50.43	7.51	57.94	88.20	-30.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	7025MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

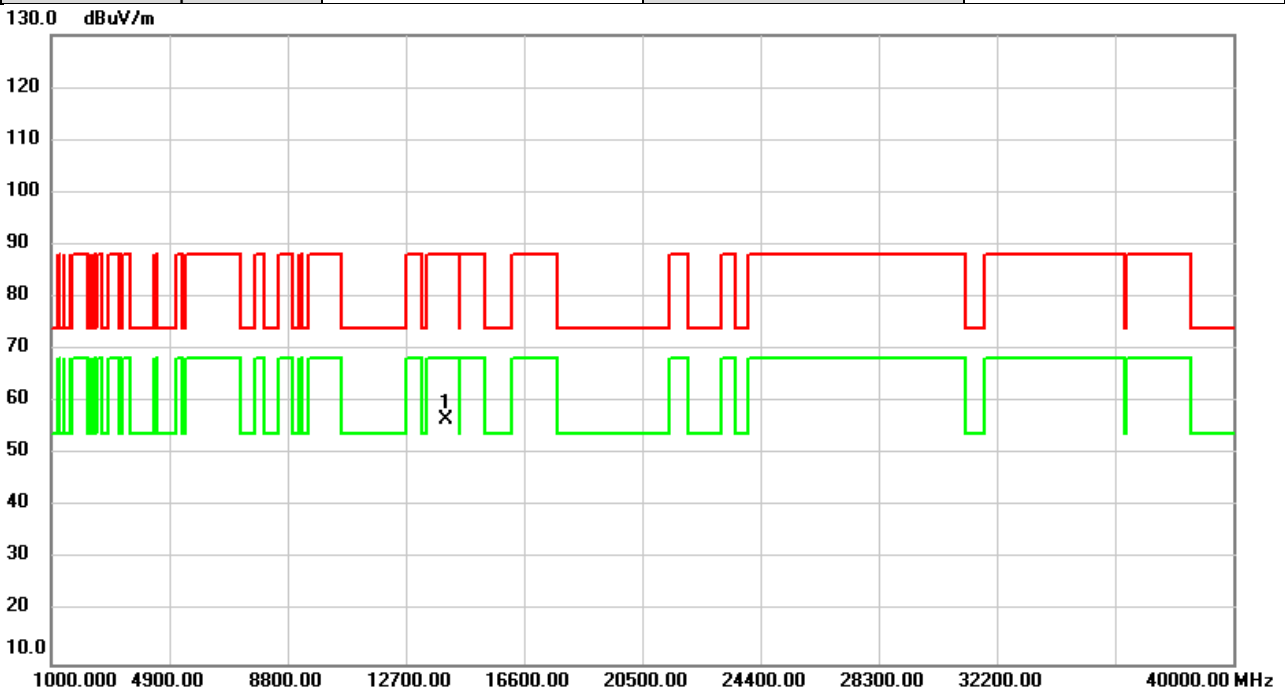


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14050.00	48.94	7.65	56.59	88.20	-31.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/6/20
Test Frequency	7025MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

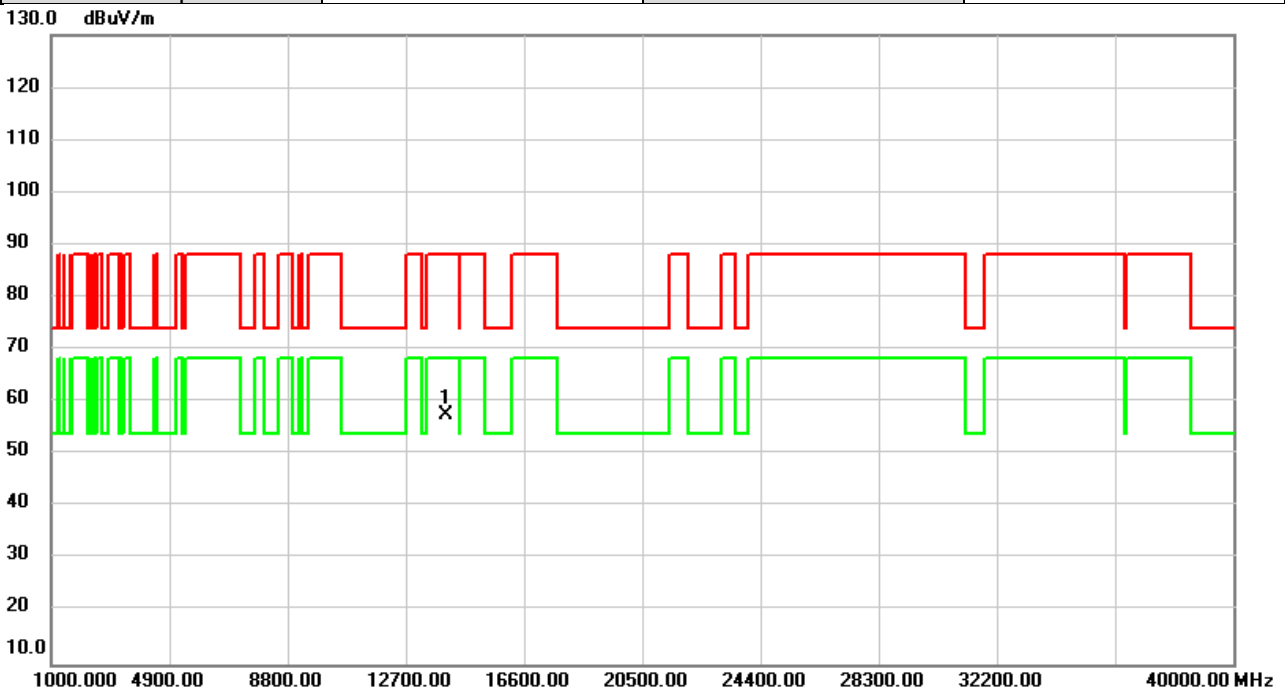


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14050.00	50.00	7.65	57.65	88.20	-30.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6025MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

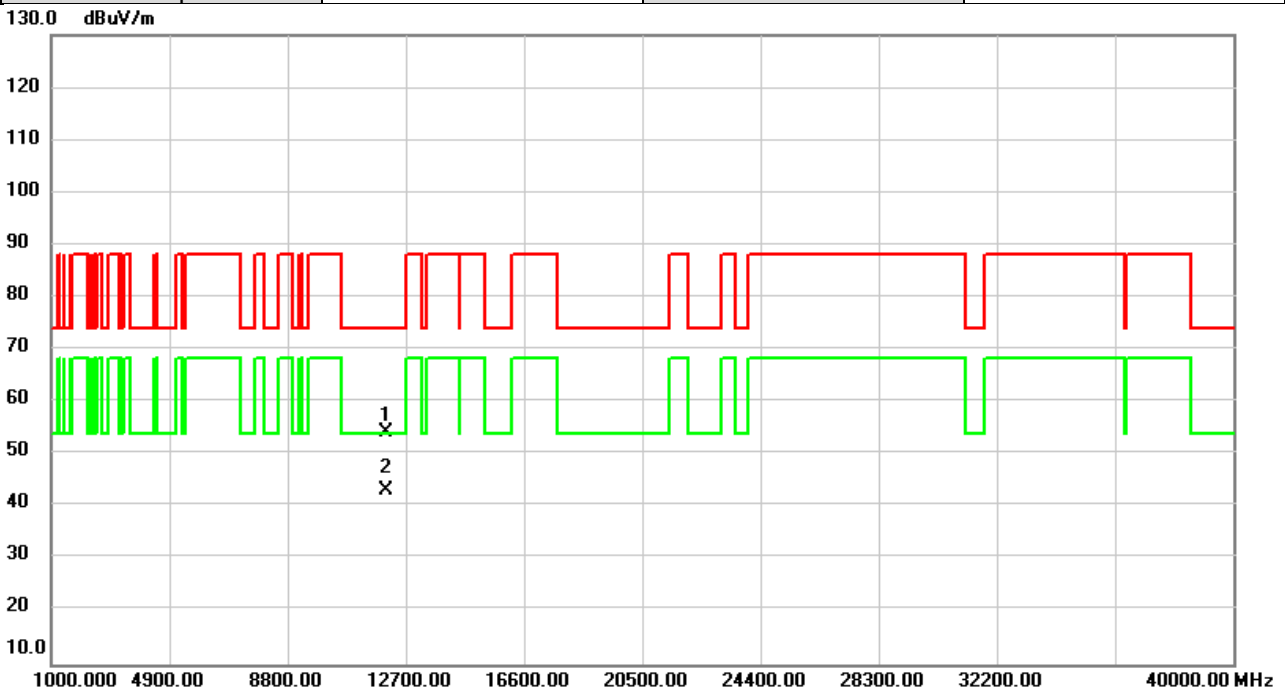


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12050.00	47.86	6.50	54.36	74.00	-19.64	peak	
2	*	12050.00	36.67	6.50	43.17	54.00	-10.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6025MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

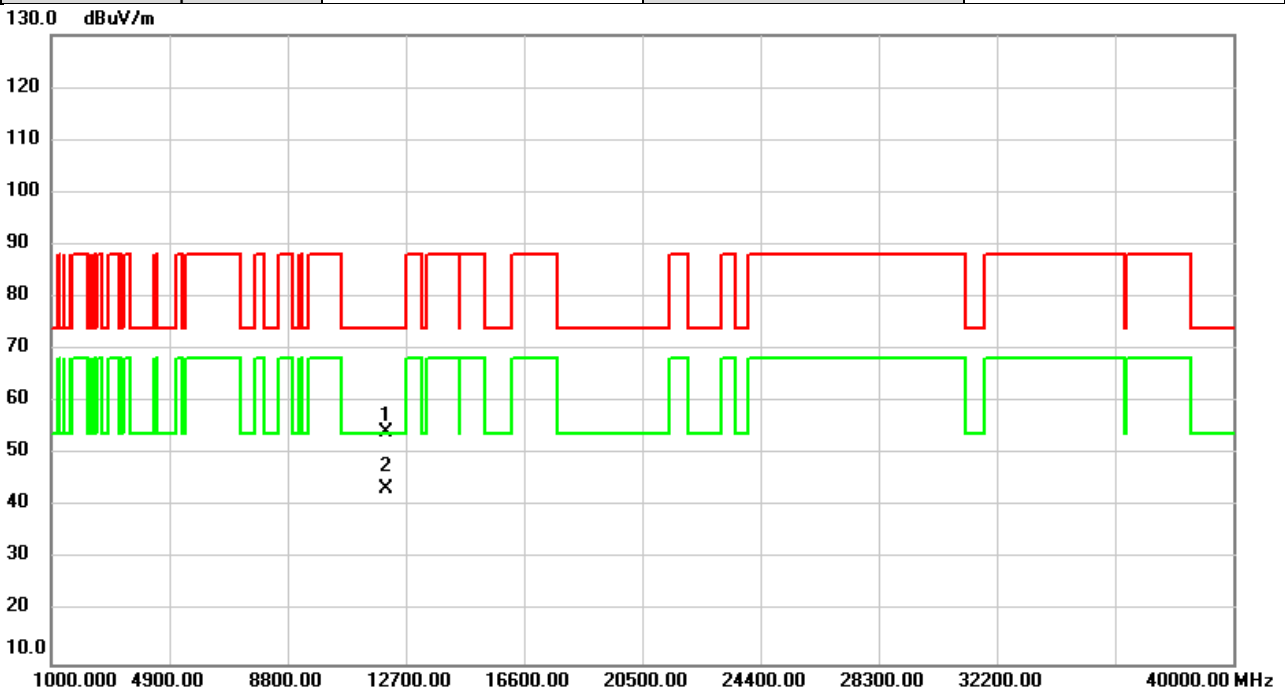


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12050.00	47.84	6.50	54.34	74.00	-19.66	peak	
2	*	12050.00	36.95	6.50	43.45	54.00	-10.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6345MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

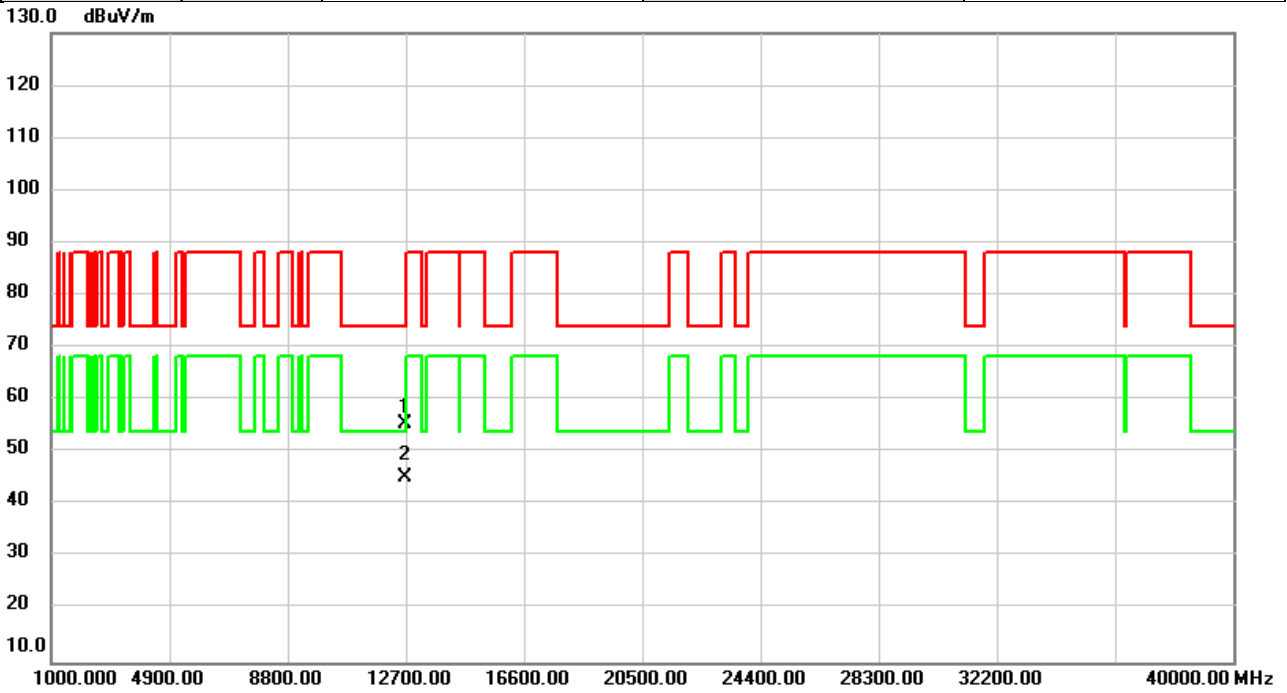


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12690.00	47.87	7.46	55.33	74.00	-18.67	peak	
2	*	12690.00	37.68	7.46	45.14	54.00	-8.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6345MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

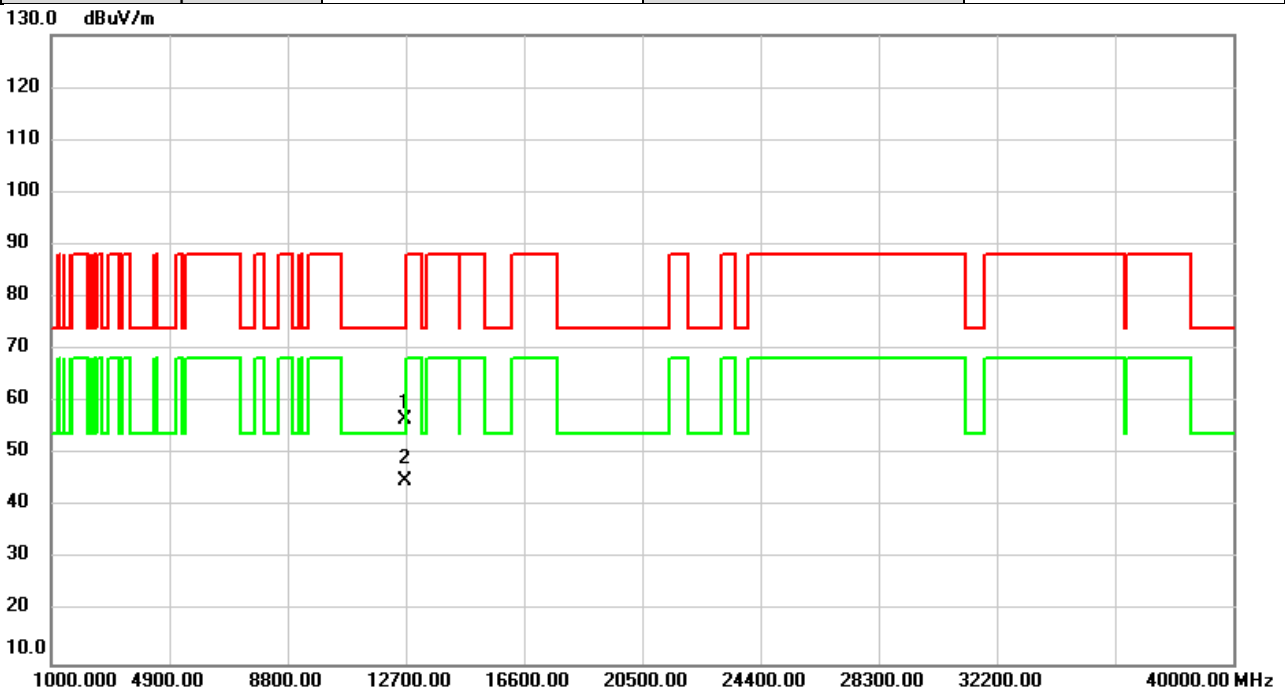


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12690.00	49.16	7.46	56.62	74.00	-17.38	peak	
2	*	12690.00	37.55	7.46	45.01	54.00	-8.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6505MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

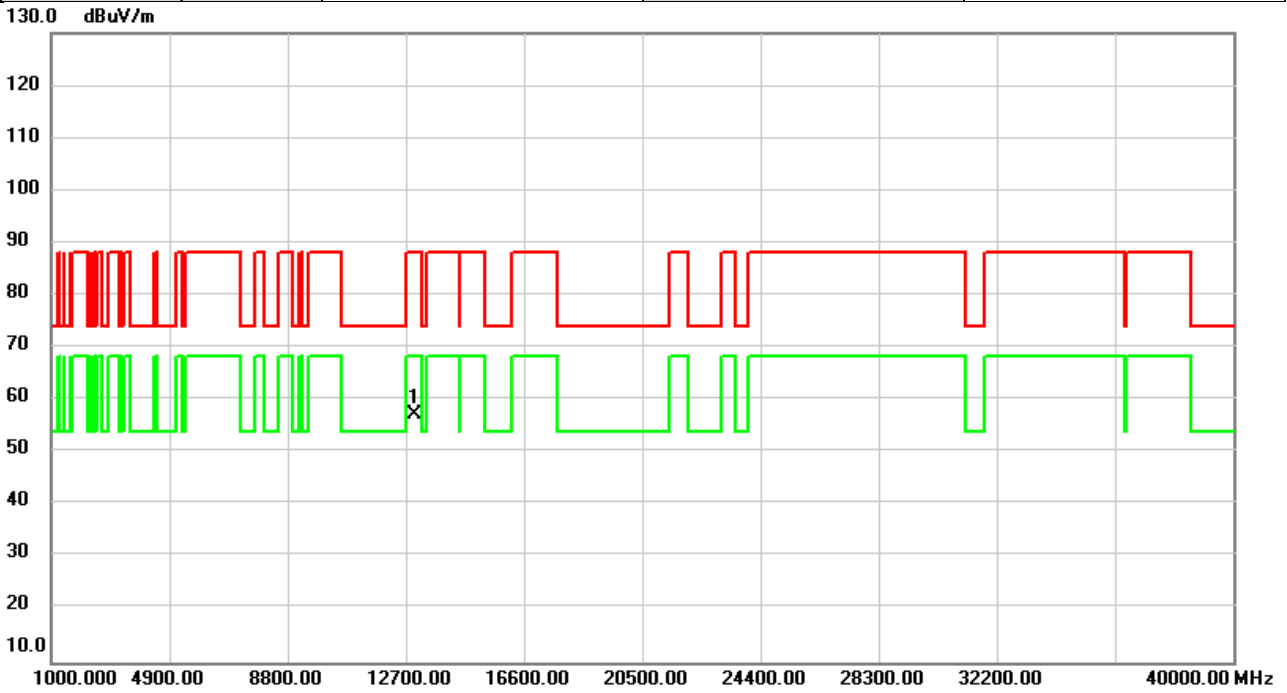


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13010.00	49.43	7.93	57.36	88.20	-30.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6505MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

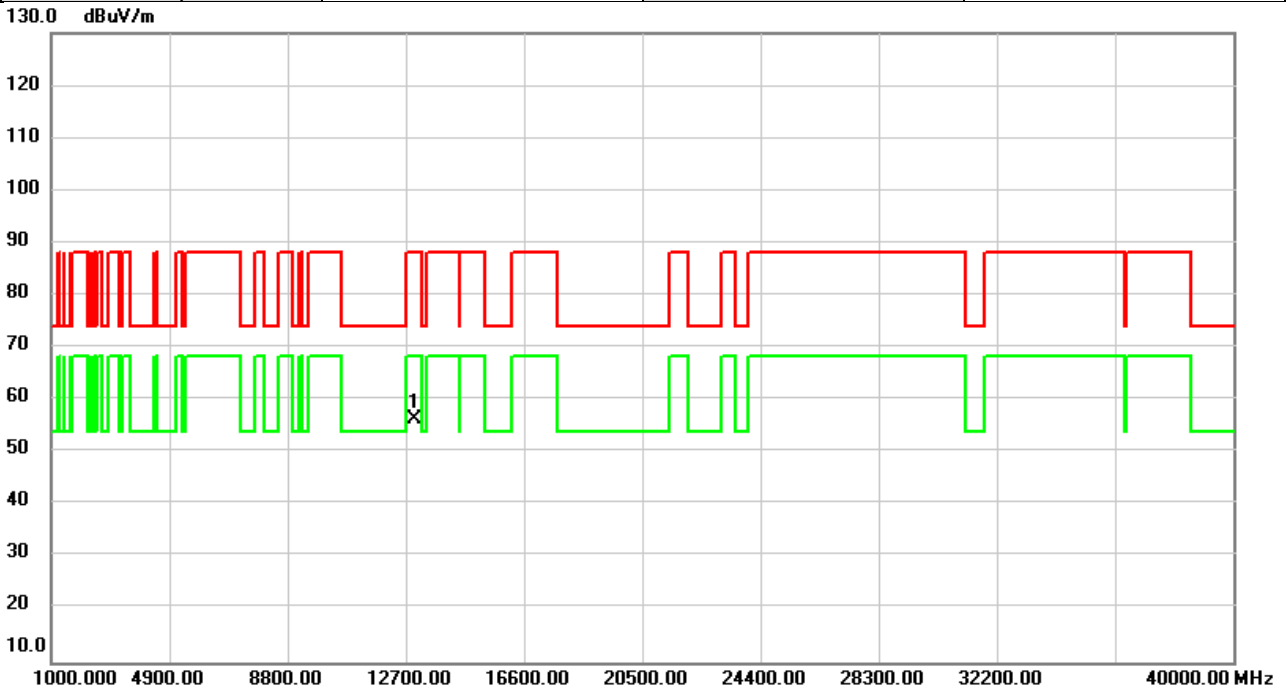


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13010.00	48.48	7.93	56.41	88.20	-31.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6665MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

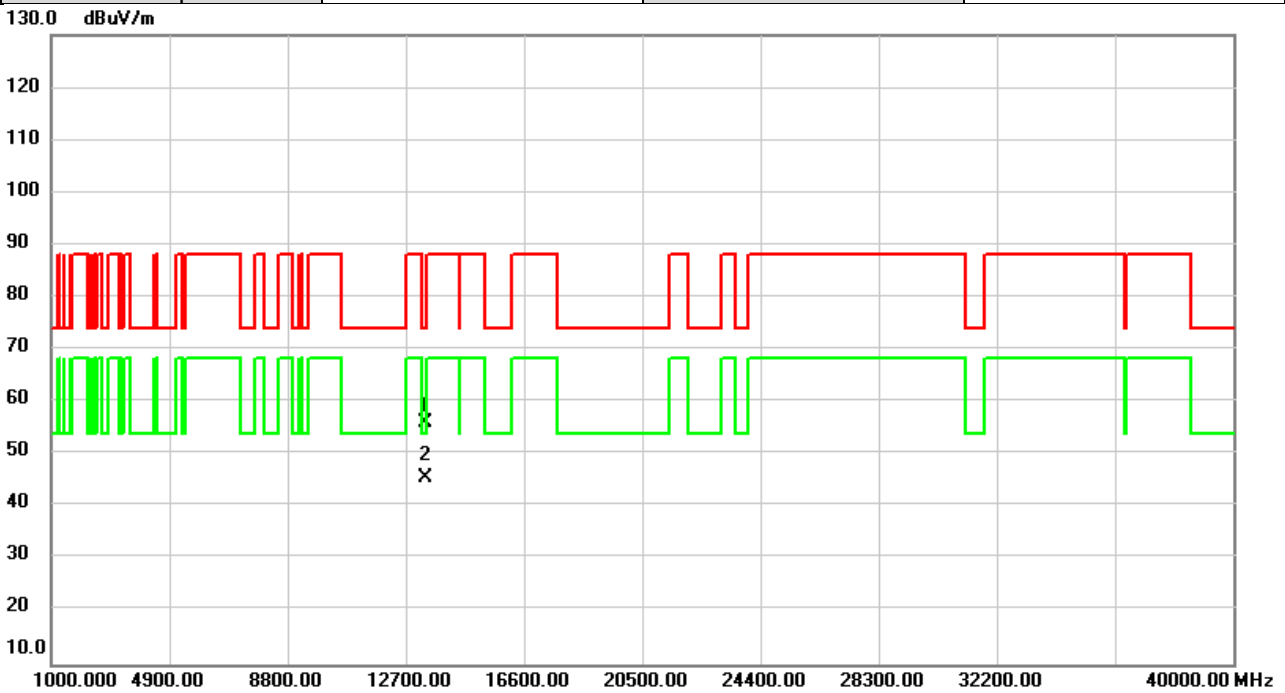


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13330.00	48.79	7.35	56.14	74.00	-17.86	peak	
2	*	13330.00	38.30	7.35	45.65	54.00	-8.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6665MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

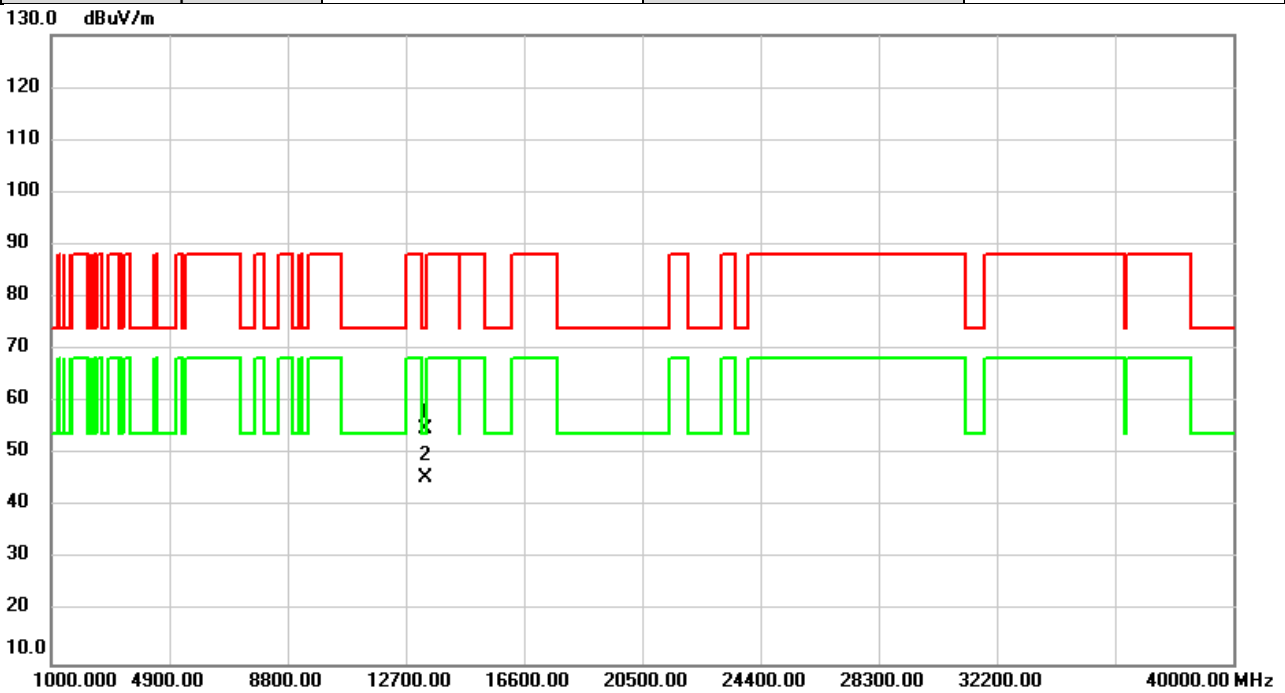


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13330.00	47.54	7.35	54.89	74.00	-19.11	peak	
2	*	13330.00	38.27	7.35	45.62	54.00	-8.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6985MHz	Polarization	Vertical
Temp	25°C	Hum.	53%

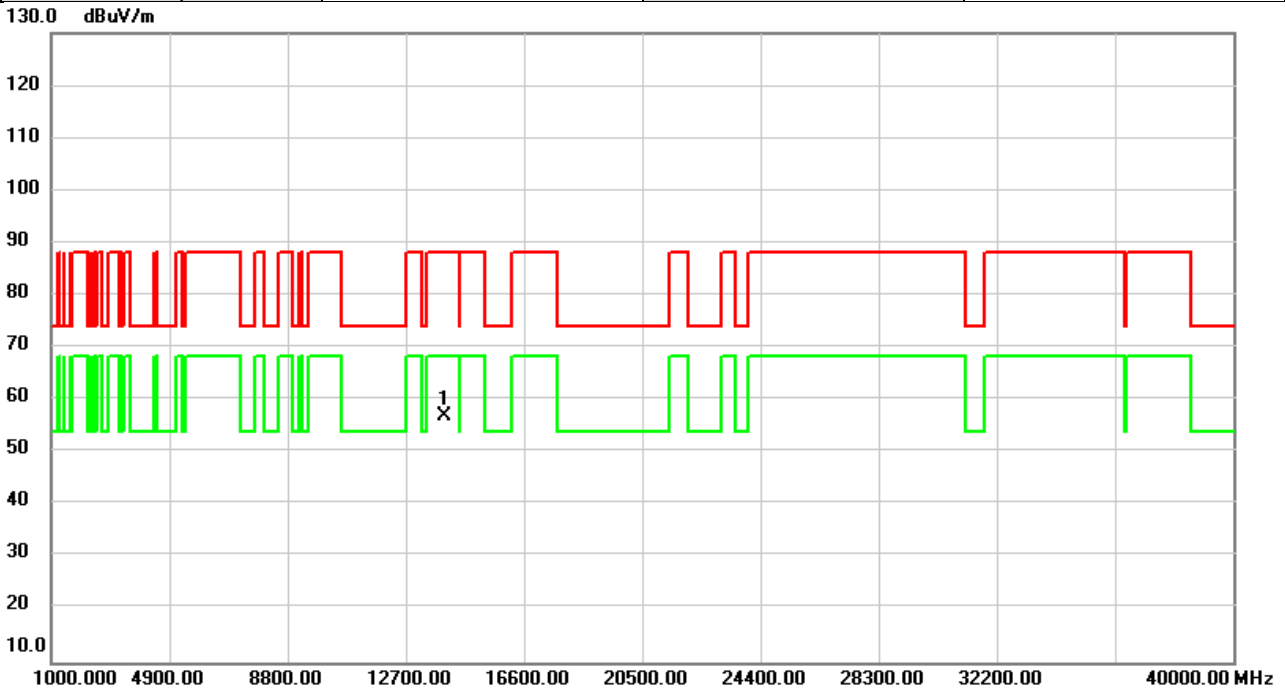


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13970.00	49.25	7.59	56.84	88.20	-31.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/6/20
Test Frequency	6985MHz	Polarization	Horizontal
Temp	25°C	Hum.	53%

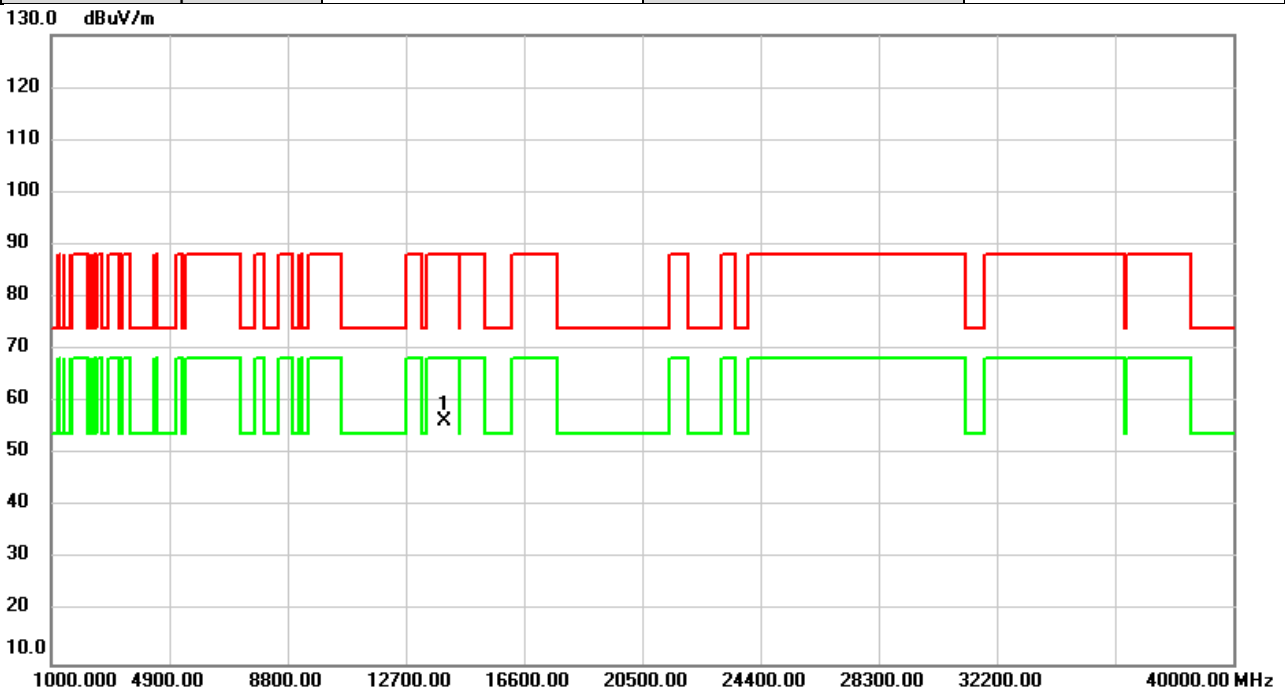


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13970.00	48.91	7.59	56.50	88.20	-31.70	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


## APPENDIX F IN-BAND EMISSION (MASK)


Test Mode IEEE 802.11ax (HE20)\_ Ant 1

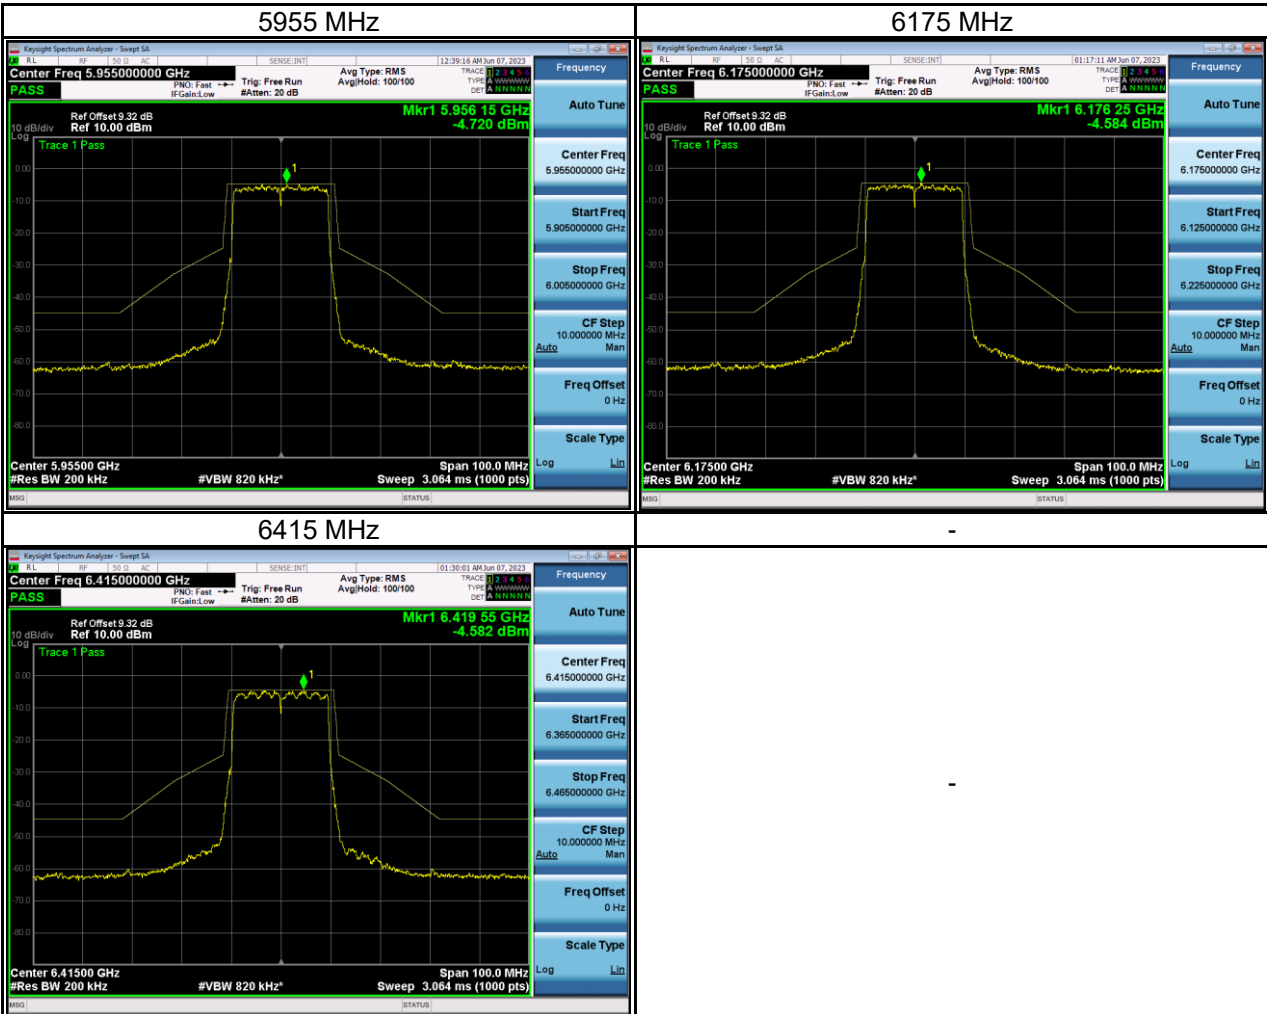




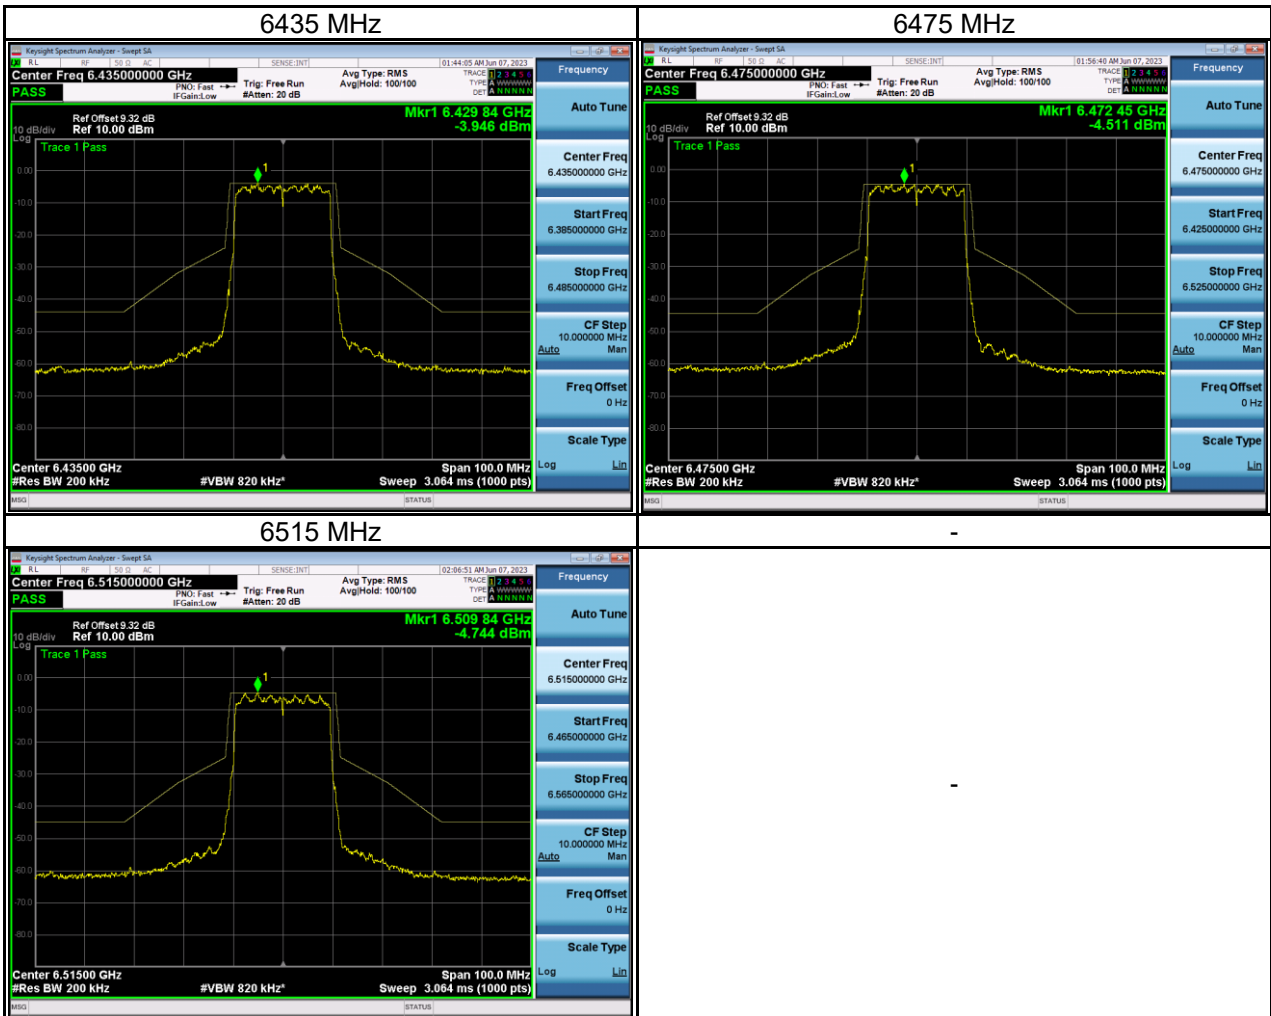


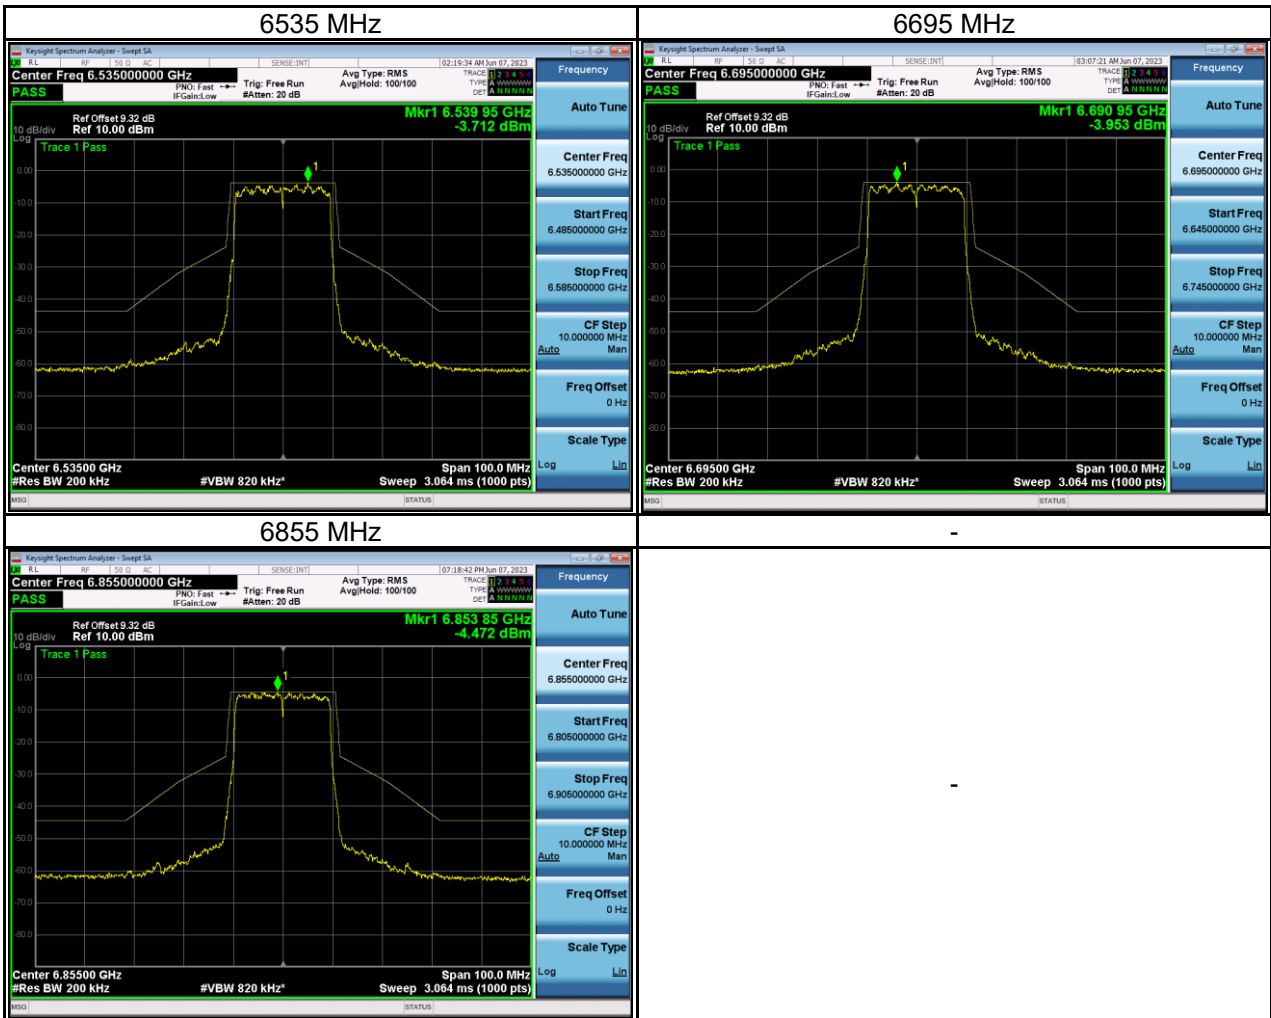


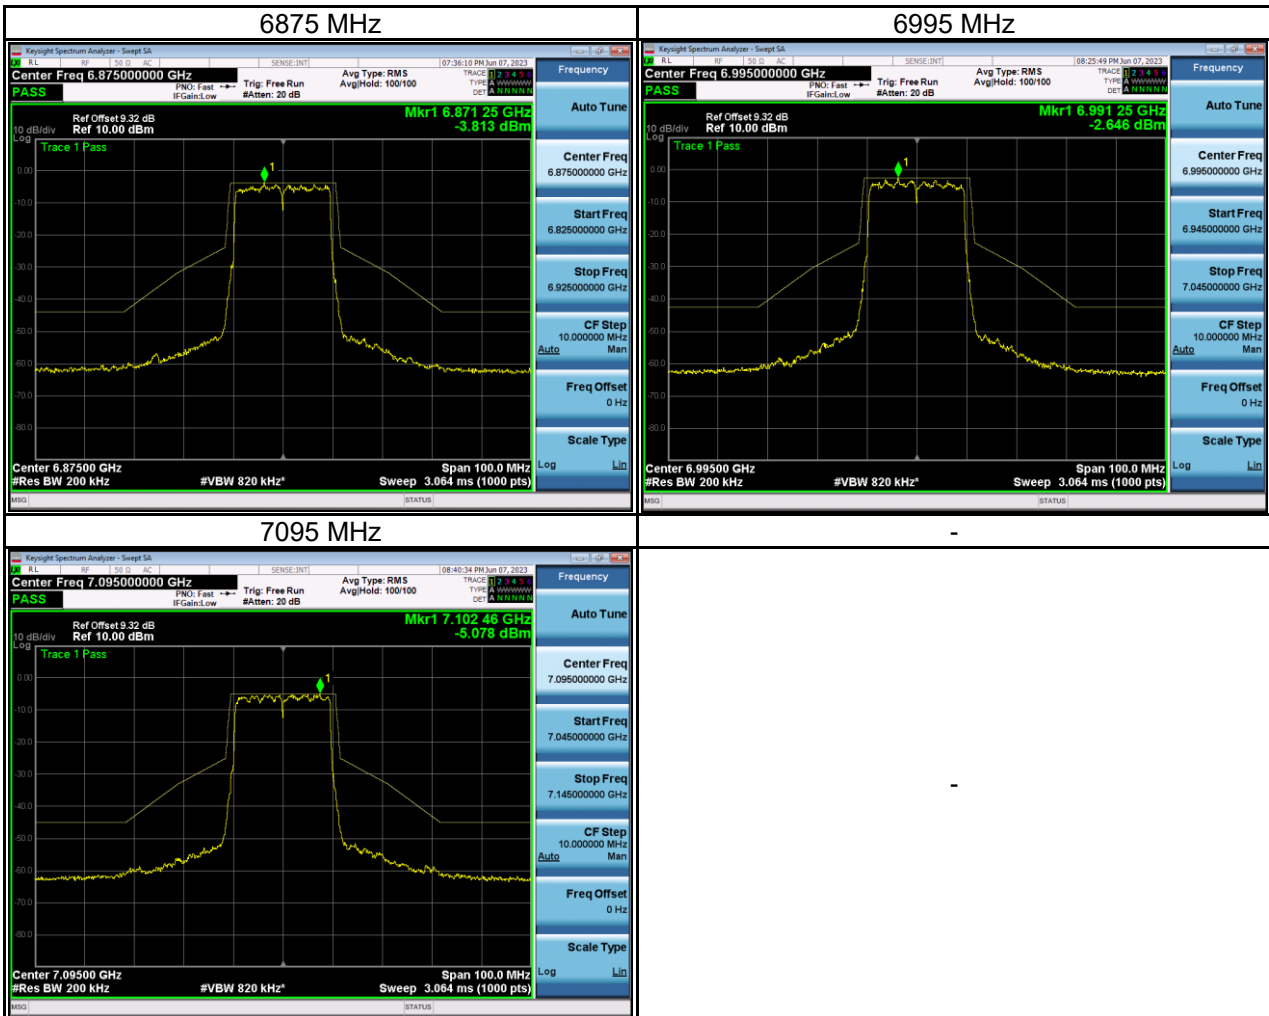


Test Mode IEEE 802.11ax (HE20)\_ Ant 2

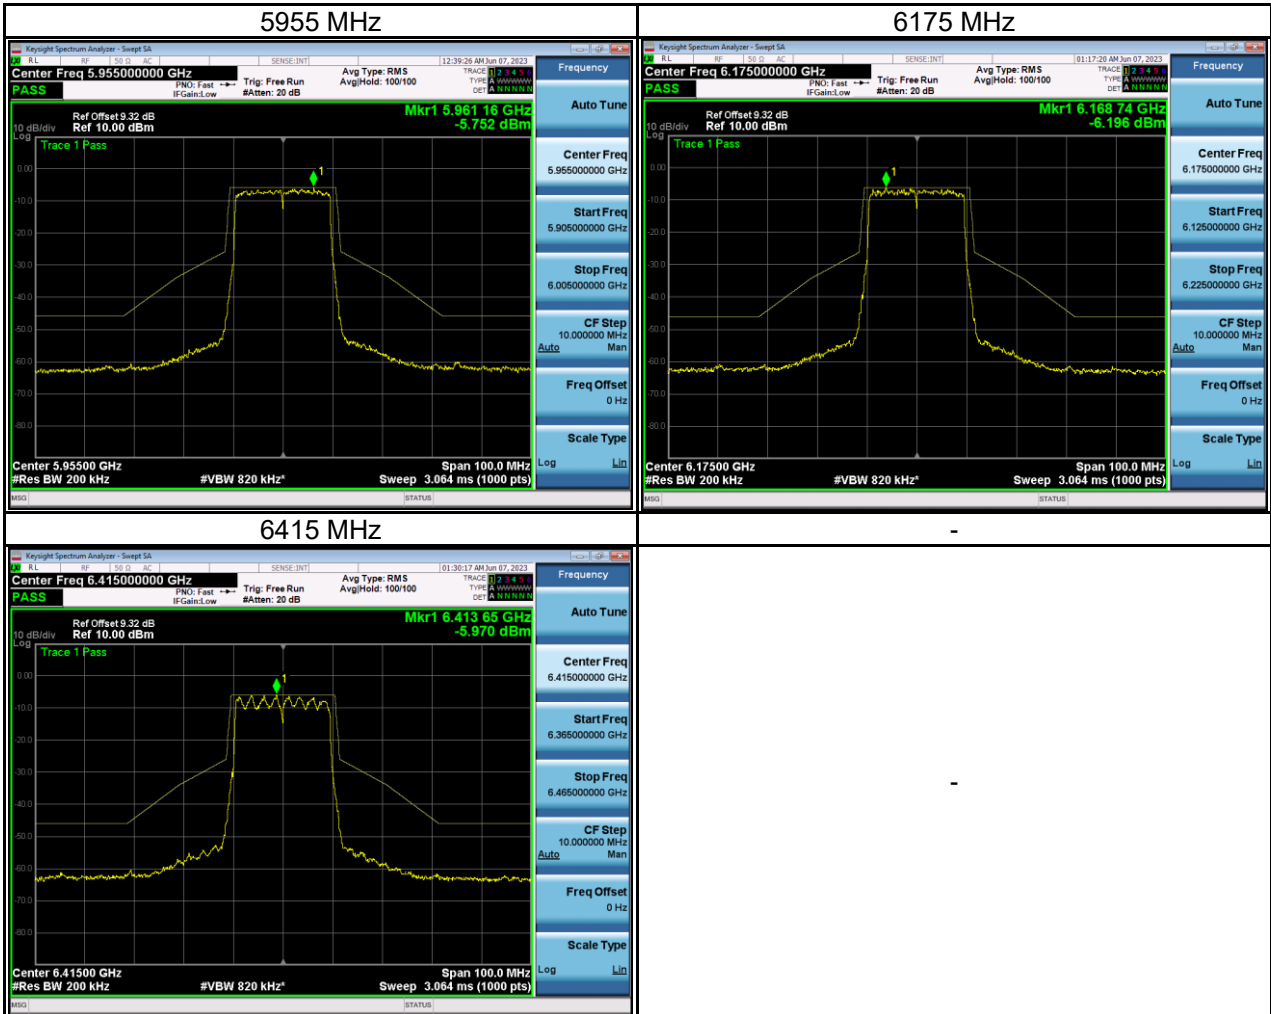


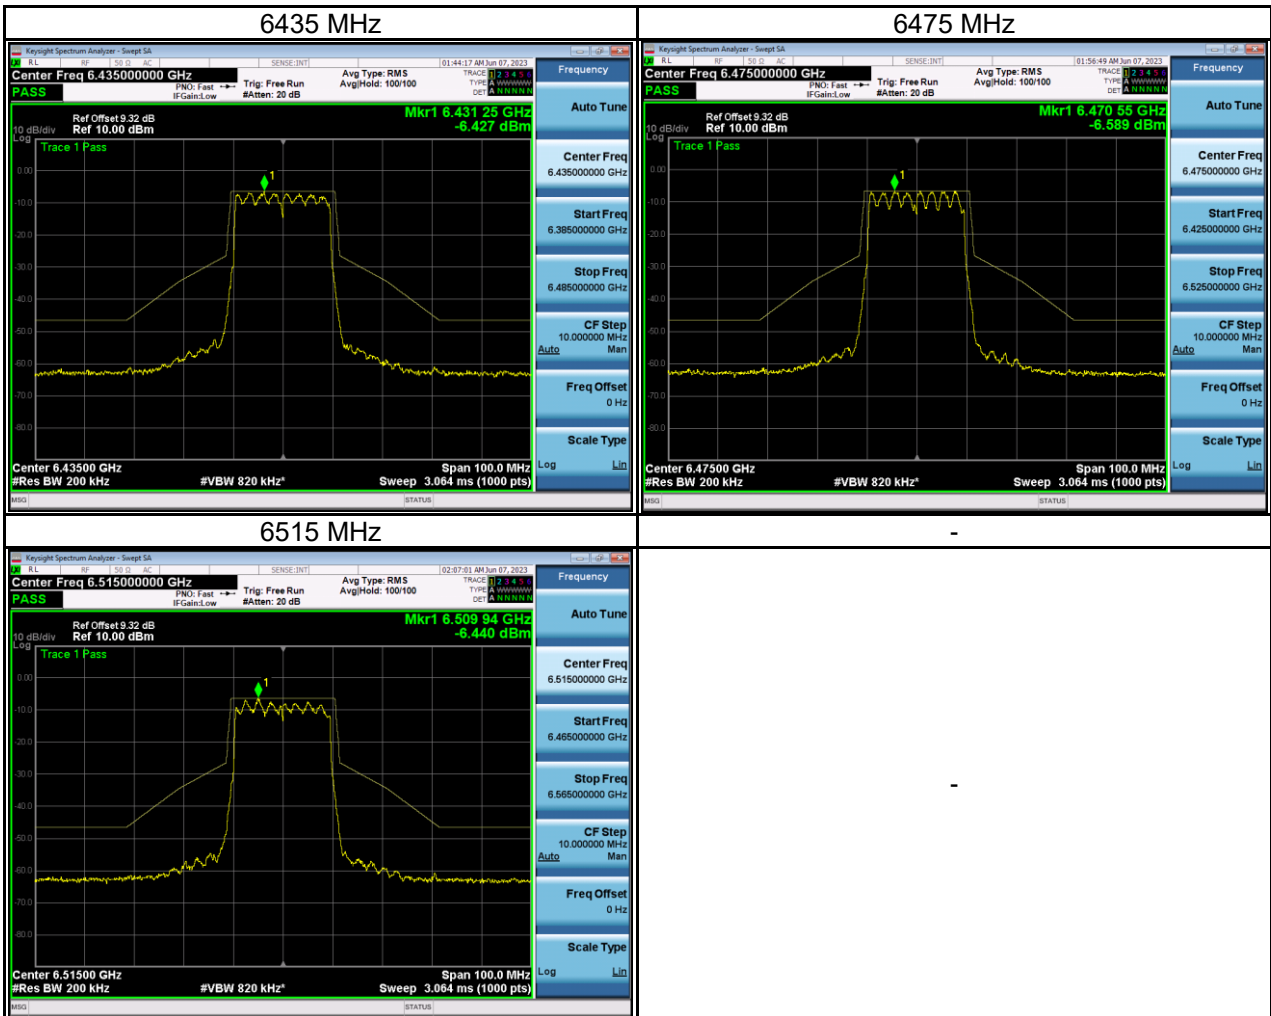

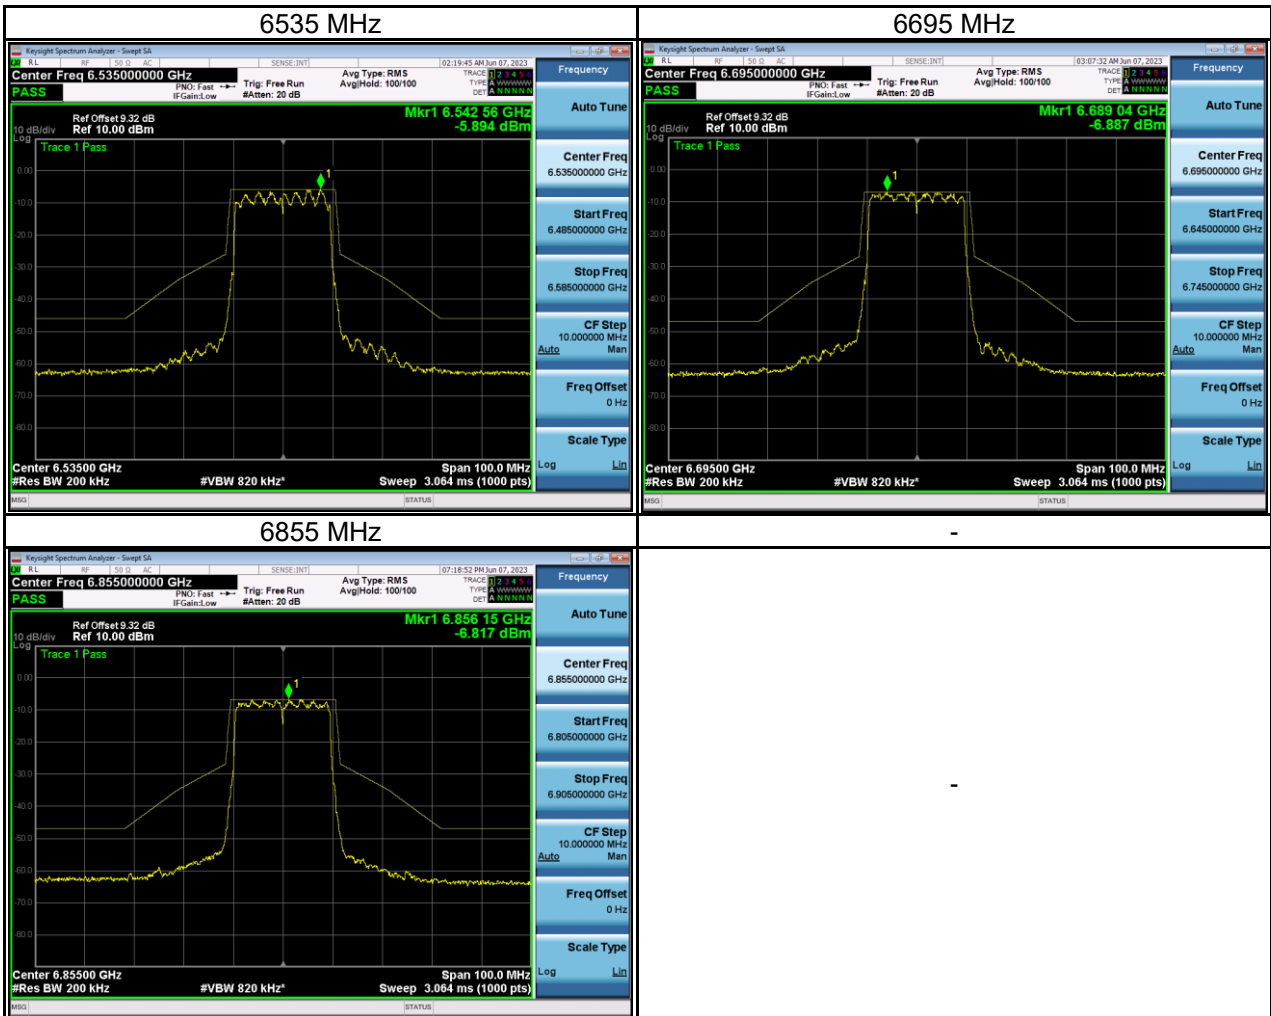


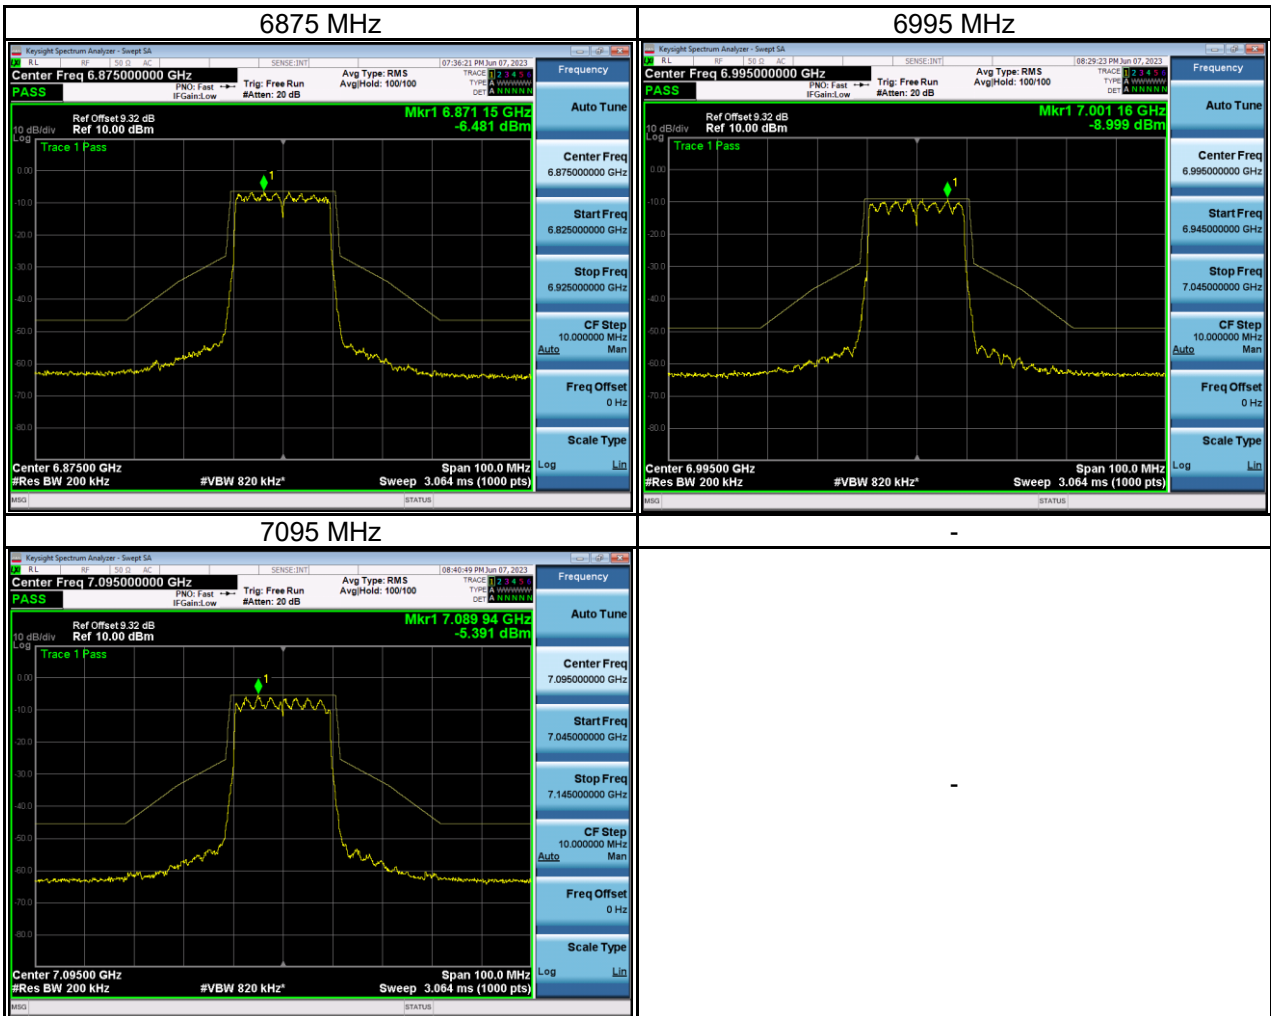

Test Mode IEEE 802.11ax (HE40)\_ Ant 1

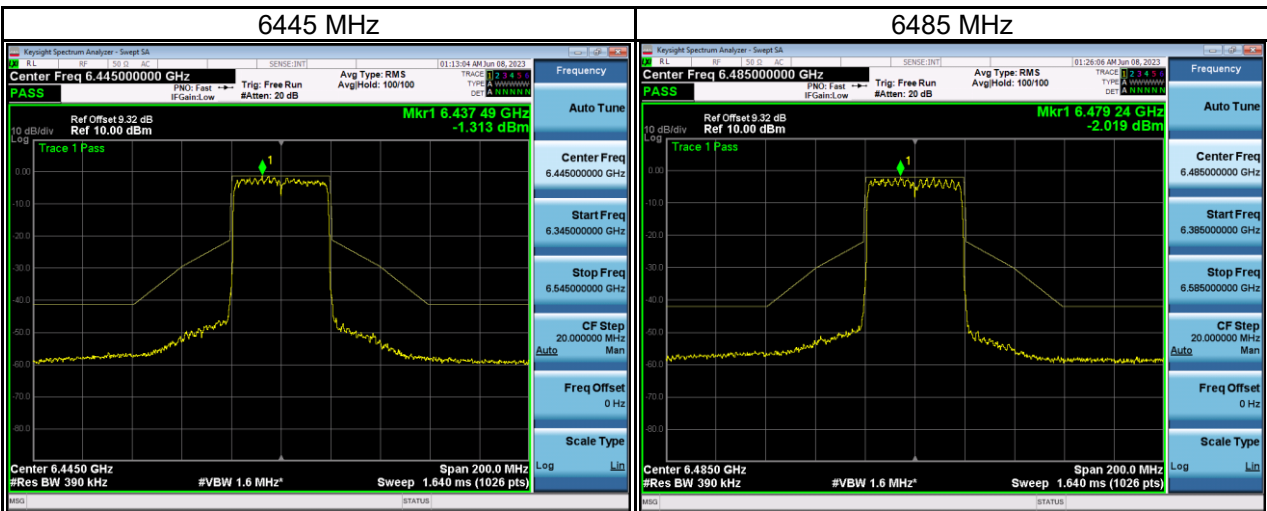



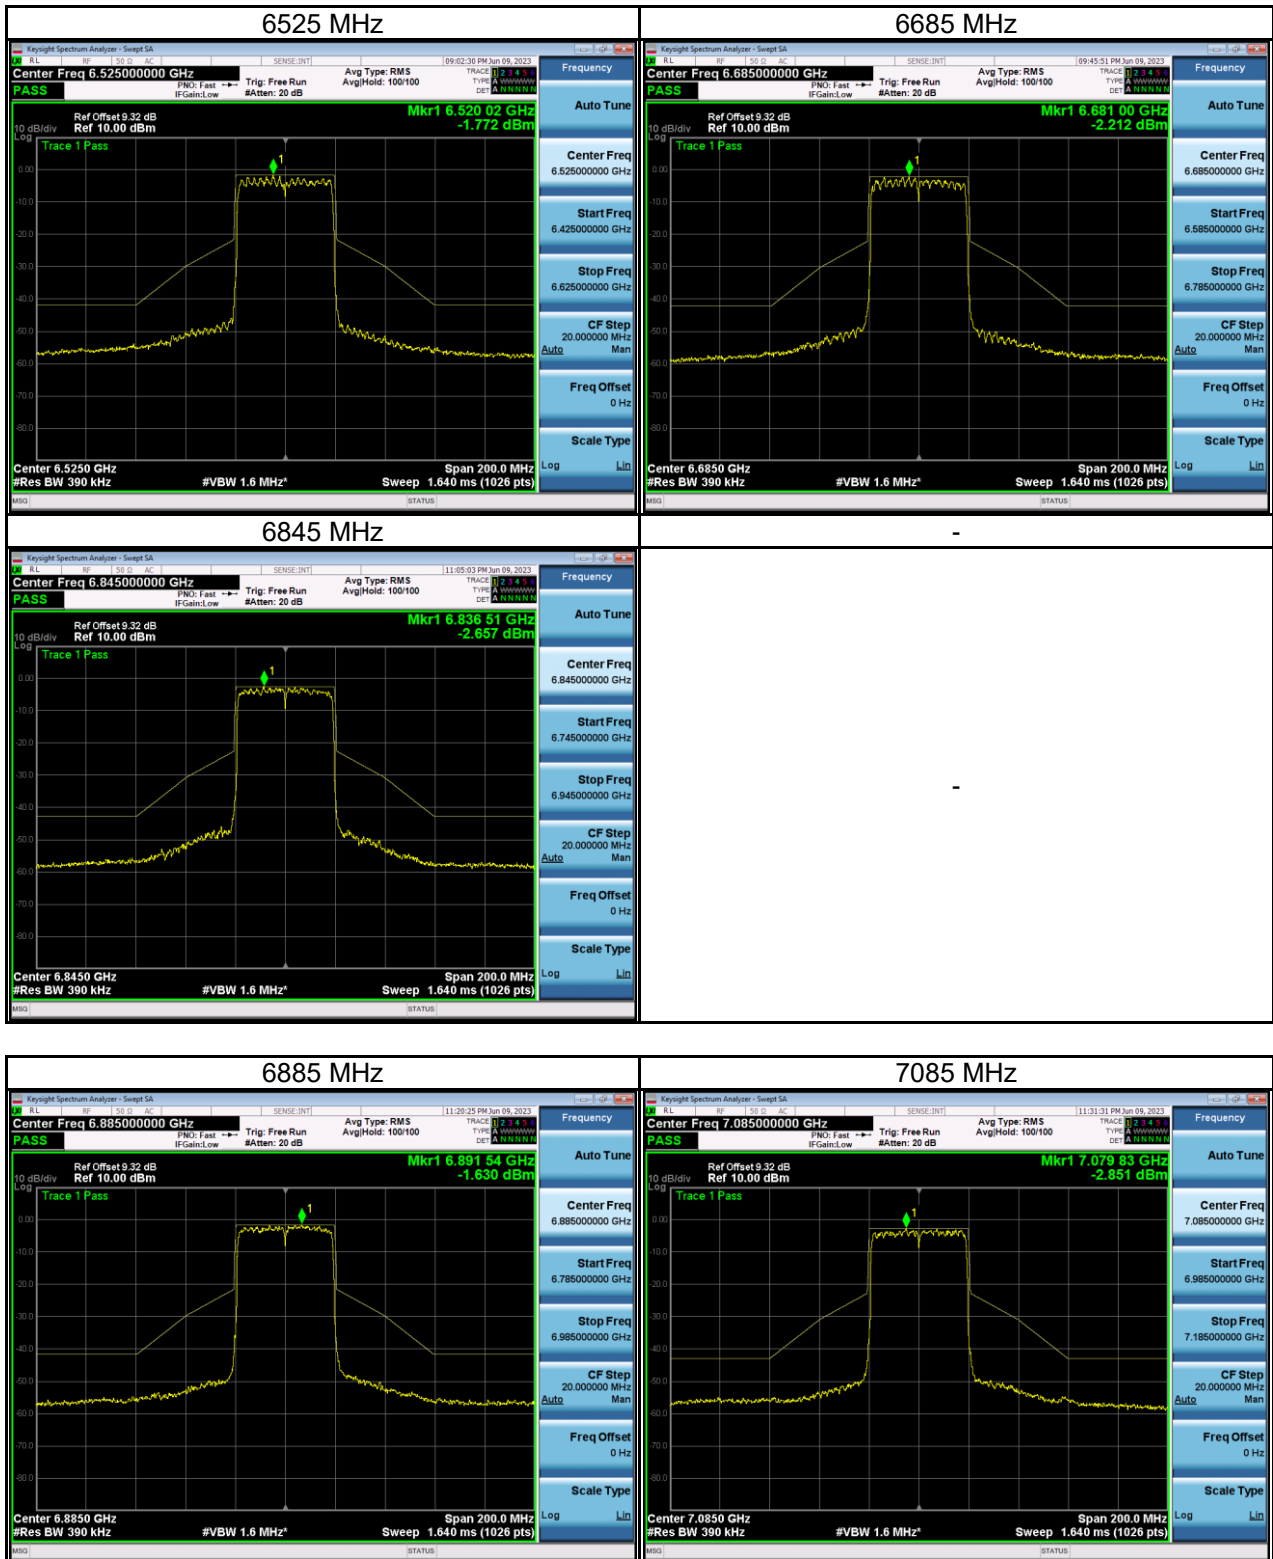

Test Mode IEEE 802.11ax (HE40)\_ Ant 2

