



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO., LTD.

6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China.
518052

FCC ID: V7TO3V2

Report Type: Original Report	Product Name: 2.4G Long Range Outdoor Access Point
Report Number:	RDG180403001-00B
Report Date:	2018-05-07
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	9
SUPPORT CABLE LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
FCC §15.207 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP.....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37

TEST DATA	38
FCC §15.247(d)- 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA	40
FCC §15.247(e) - POWER SPECTRAL DENSITY	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA	45

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	2.4G Long Range Outdoor Access Point
EUT Model:	O3
FCC ID:	V7T03V2
Rated Input Voltage:	DC 12V from adapter
Adapter Information	Model: BN036-A12012U
	Input: AC 100-240V, 50/60Hz, 0.4A
	Output: DC 12V, 1.0A
External Dimension:	275 mm(L)*95mm(W)* 67mm(H)
Serial Number:	180403001
EUT Received Date:	2018-05-07

Objective

This report is prepared on behalf of *SHENZHEN TENDA TECHNOLOGY CO., LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

For 802.11n ht40 mode was tested with channel 3, 6, 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

EUT Exercise Software

The software “MP tool” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:


Test Mode	Test Software Version	MP tool		
802.11b	Test Frequency	2412MHz	2417~2457MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting	12	12	13
802.11g	Test Frequency	2412MHz	2417~2457MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting	12	15	12
802.11n ht20	Test Frequency	2412MHz	2417~2457MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting Chain	12	15	12
802.11n ht40	Test Frequency	2422MHz	2427~2447MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting Chain	12	15	12

All test items performed at Low, Middle and High Channel, for 802.11g, n ht20 and n ht40, radiation bandedge and output power were tested with additional channels according to the difference power level setting,


The maximum duty cycle as following table:

Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	2.008	2.072	96.91
802.11n ht20	1.872	1.936	96.69
802.11n ht40	0.928	0.958	95.87


802.11b

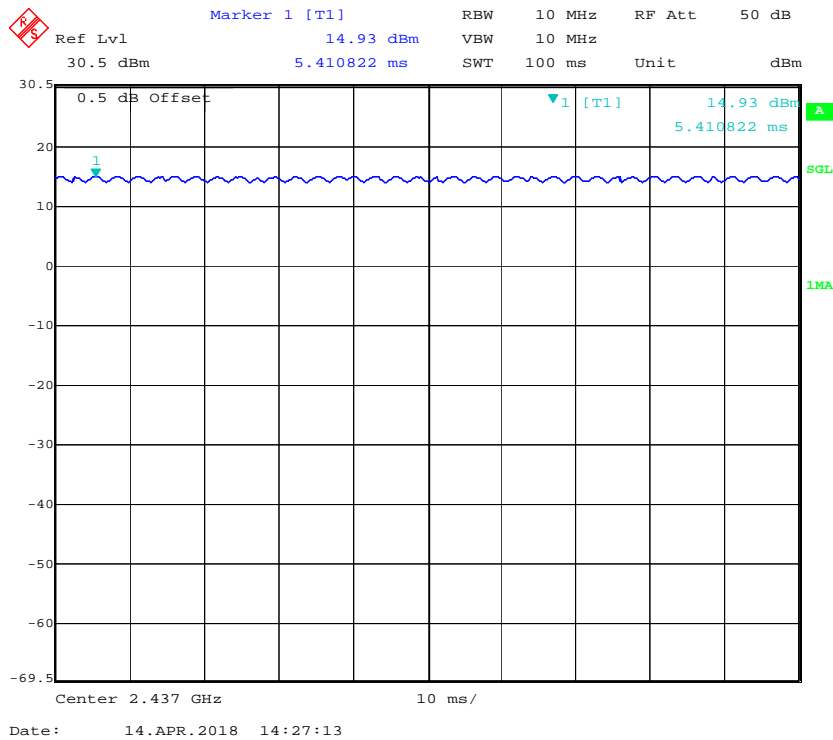


802.11g

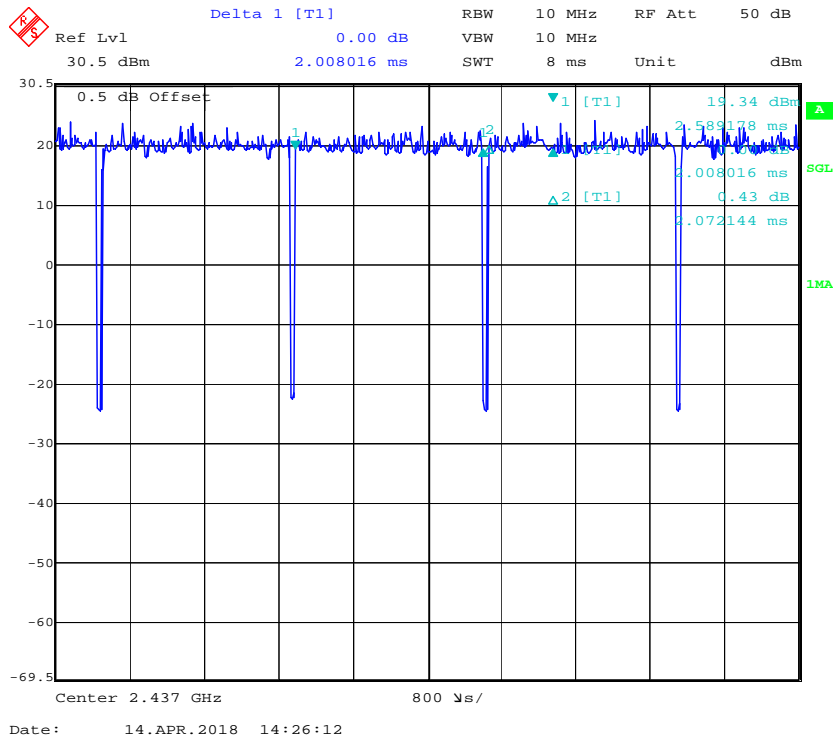

802.11n ht20

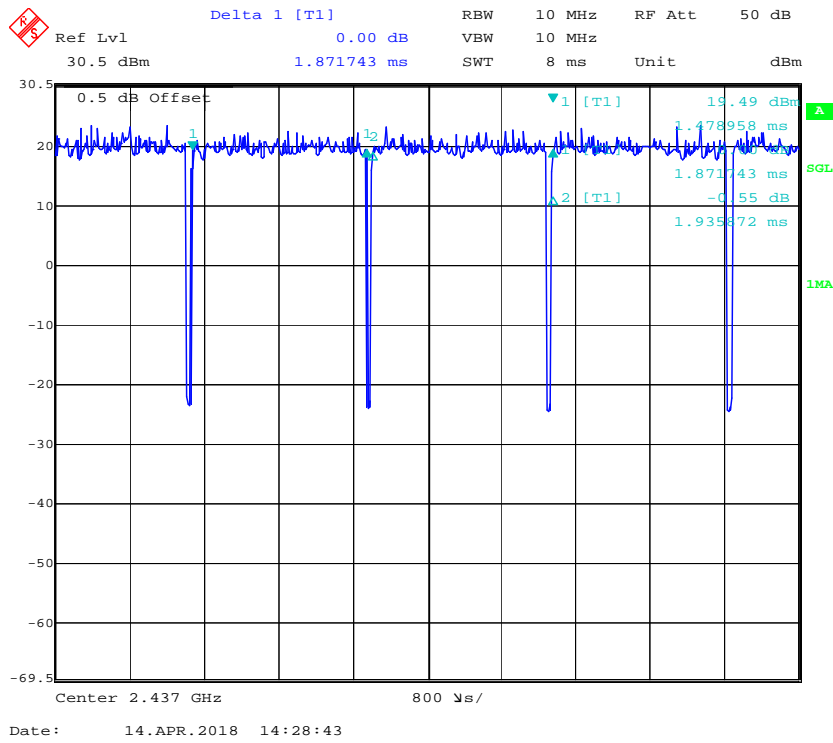

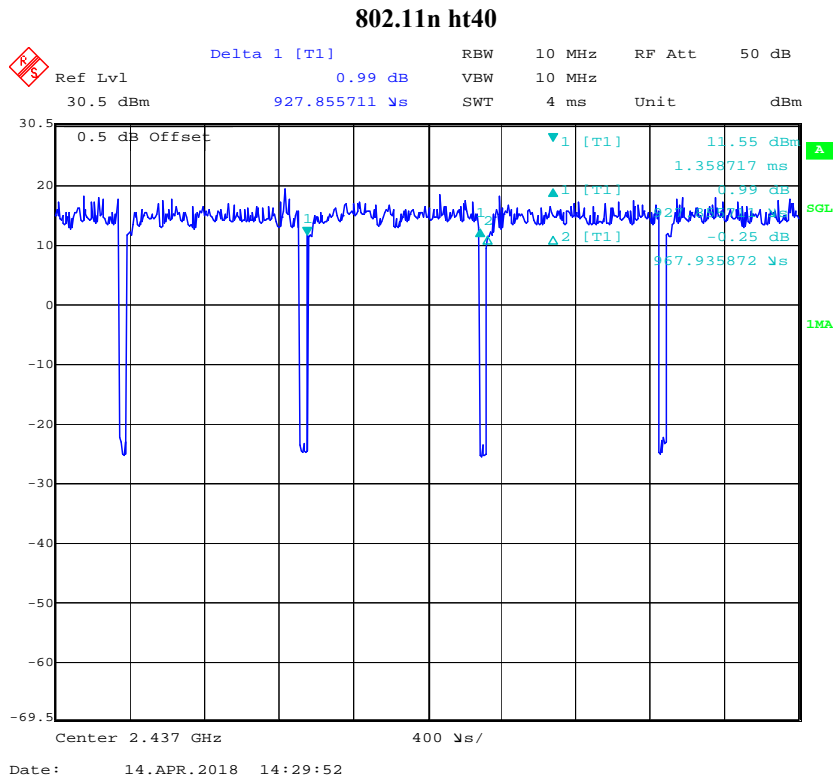

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	E450	PF-0MR8KV 16/08

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
RJ45 Cable	yes	no	10	PoE Adapter	Laptop
RJ45 Cable	yes	no	1.0	EUT	PoE Adapter
DC Cable	No	No	1.2	Adapter	PoE Adapter

Block Diagram of Test Setup

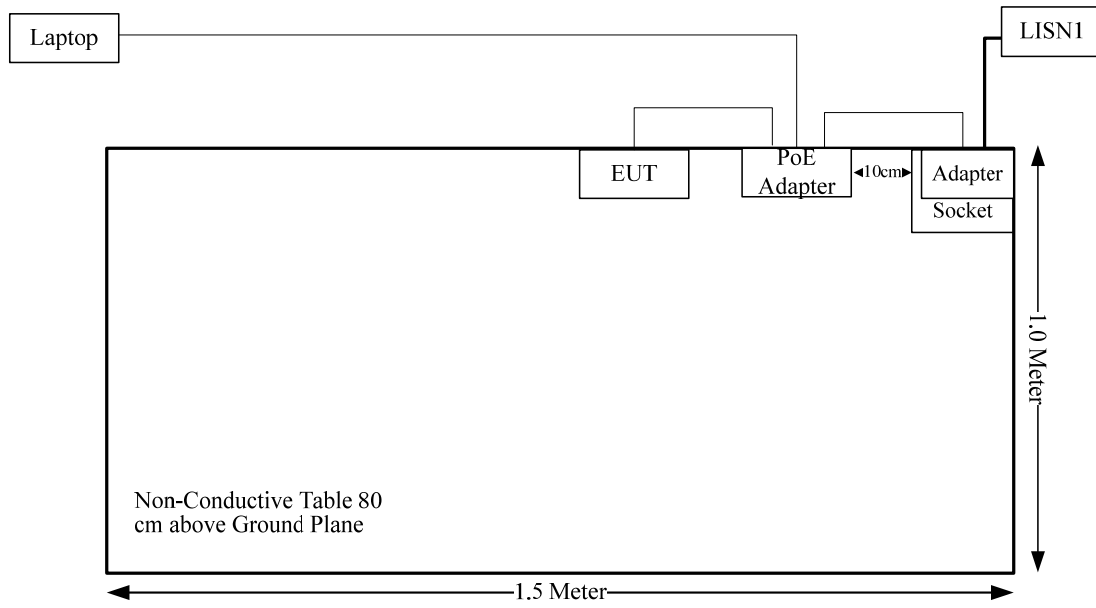

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.207 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.207(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency Band (MHz)	Antenna Gain		Output Power including Turn-Up tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	11	12.59	22	158.49	20.00	0.397	1.00

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one internal antenna arrangement, and the antenna gain is 11 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

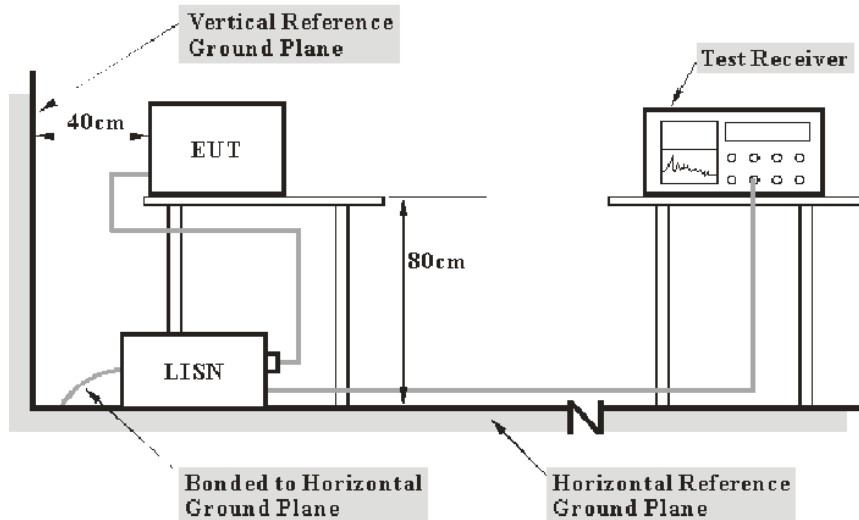

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-09-25	2018-09-25
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08
N/A	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	26.4 °C
Relative Humidity:	60 %
ATM Pressure:	100.8 kPa

The testing was performed by Ade Xiao on 2018-04-11.

Test Mode: Transmitting (Wi-Fi 802.11b mode High channel was the worst)


AC120 V, 60 Hz, Line:

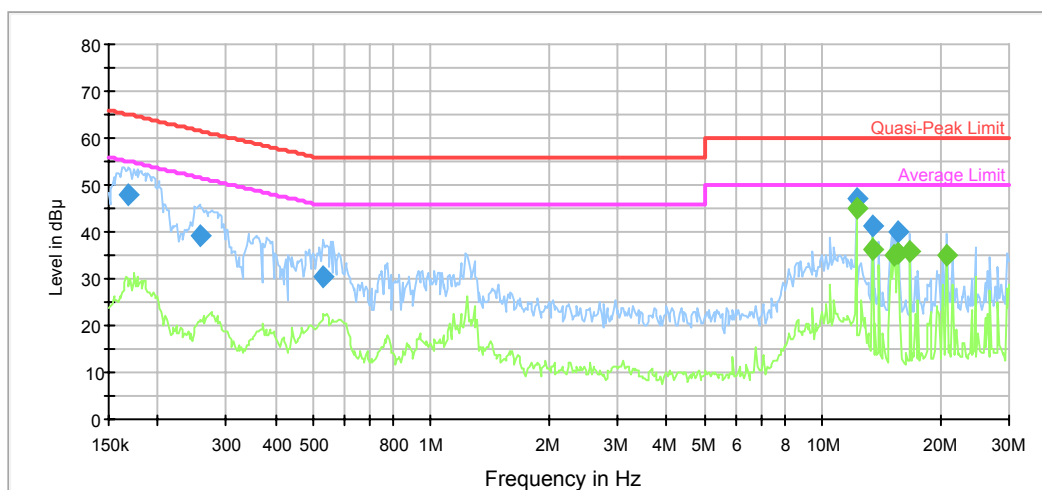

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.169044	47.5	9.000	L1	10.9	17.5	65.0	Compliance
0.255827	39.1	9.000	L1	10.3	22.4	61.6	Compliance
0.532496	30.3	9.000	L1	9.9	25.7	56.0	Compliance
12.198467	47.2	9.000	L1	9.9	12.8	60.0	Compliance
13.422446	41.1	9.000	L1	9.9	18.9	60.0	Compliance
15.616430	40.1	9.000	L1	10.0	19.9	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
12.198467	45.1	9.000	L1	9.9	4.9	50.0	Compliance
13.422446	36.3	9.000	L1	9.9	13.7	50.0	Compliance
15.247554	34.9	9.000	L1	10.0	15.1	50.0	Compliance
15.616430	35.4	9.000	L1	10.0	14.6	50.0	Compliance
16.777473	35.6	9.000	L1	10.0	14.4	50.0	Compliance
20.804674	35.0	9.000	L1	10.1	15.0	50.0	Compliance

AC120 V, 60 Hz, Neutral:

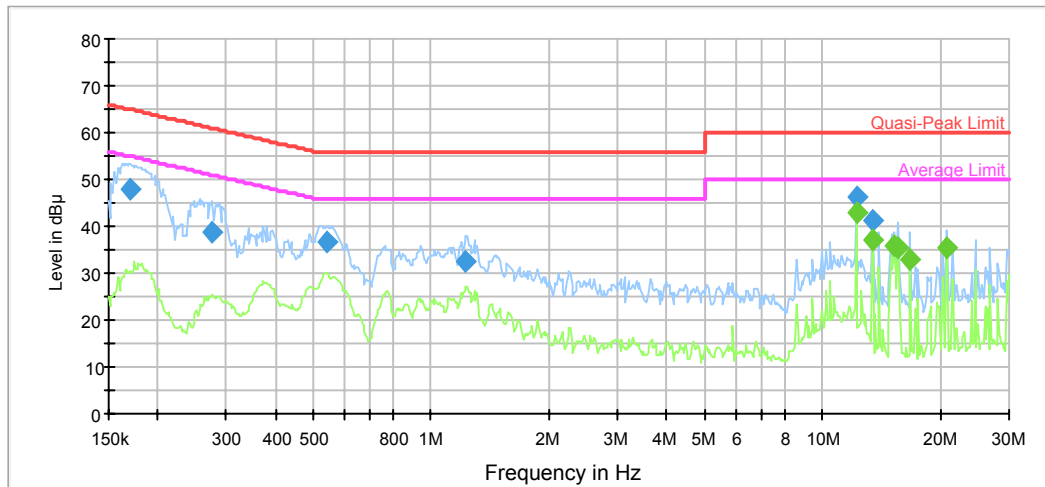

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.170396	47.8	9.000	N	10.9	17.1	64.9	Compliance
0.277046	39.2	9.000	N	10.2	21.7	60.9	Compliance
0.541050	36.7	9.000	N	9.9	19.3	56.0	Compliance
1.229340	32.5	9.000	N	9.8	23.5	56.0	Compliance
12.198467	46.2	9.000	N	9.9	13.8	60.0	Compliance
13.422446	41.3	9.000	N	9.9	18.7	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
12.198467	42.9	9.000	N	9.9	7.1	50.0	Compliance
13.422446	37.1	9.000	N	9.9	12.9	50.0	Compliance
15.247554	36.0	9.000	N	9.9	14.0	50.0	Compliance
15.616430	35.1	9.000	N	10.0	14.9	50.0	Compliance
16.777473	32.8	9.000	N	10.0	17.2	50.0	Compliance
20.804674	35.4	9.000	N	10.0	14.6	50.0	Compliance


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

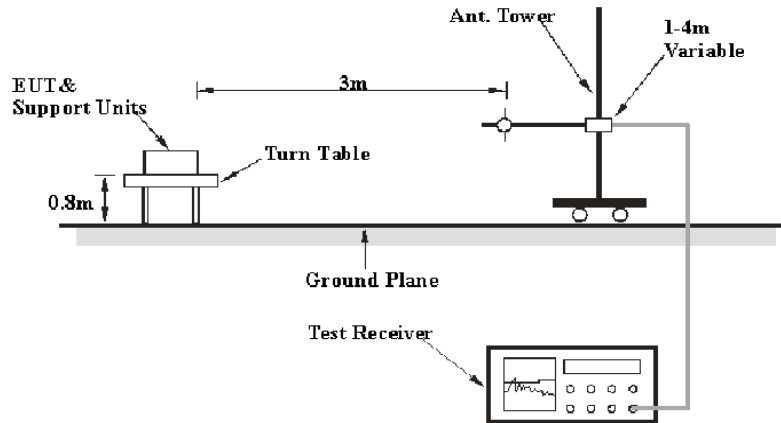

Above 1GHz:

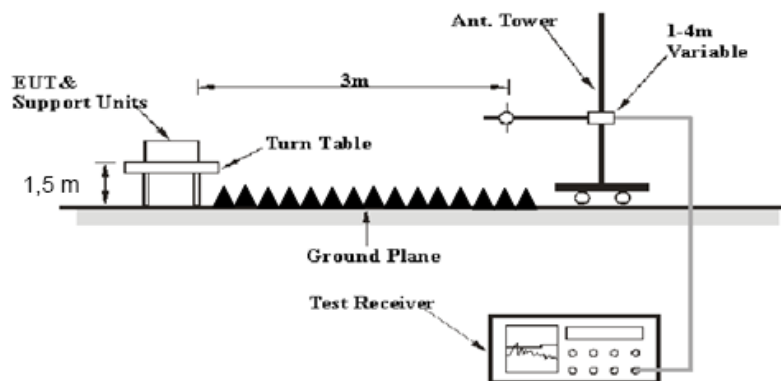

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-04
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2017-06-16	2018-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2017-06-16	2018-06-16
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2017-06-27	2018-06-27
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	46 %
ATM Pressure:	100.6 kPa


* The testing was performed by Sunny Cen on 2018-04-13.

Test Result: Compliance, please Refer to the following data

Test Mode: Transmitting


1) 30MHz-1GHz(802.11b high channel was the worst)

Horizontal:

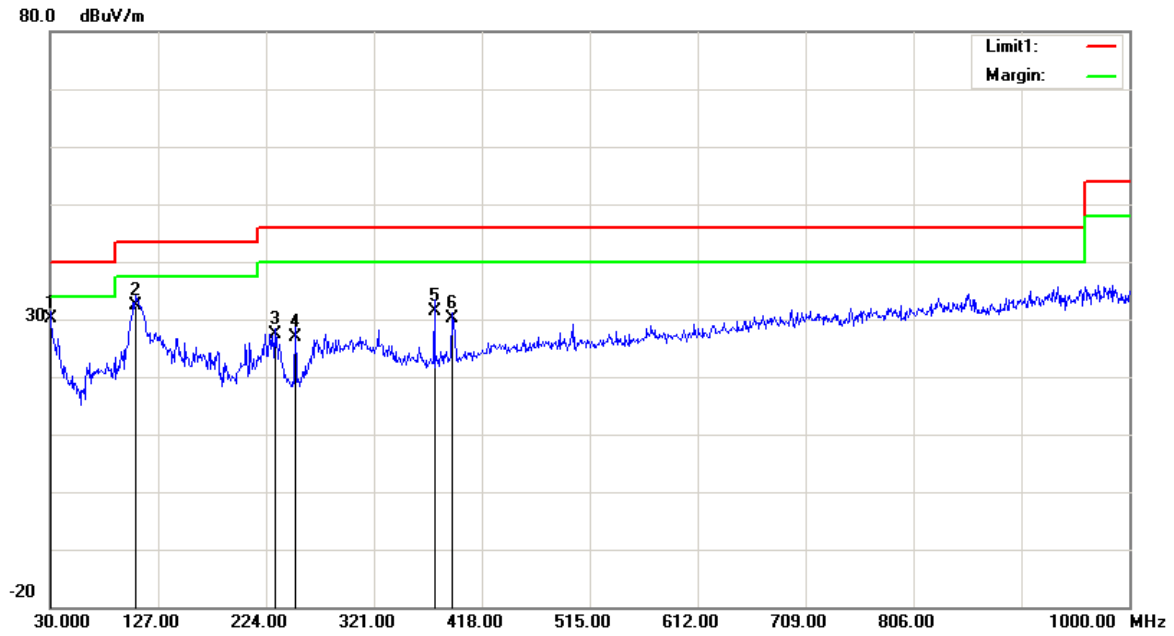

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	28.56	QP	1.54	30.10	40.00	9.90
106.6300	39.60	QP	-7.20	32.40	43.50	11.10
231.7600	33.77	QP	-6.47	27.30	46.00	18.70
250.1900	32.99	QP	-6.19	26.80	46.00	19.20
375.3200	34.06	QP	-2.66	31.40	46.00	14.60
390.8400	32.55	QP	-2.35	30.20	46.00	15.80

Vertical:

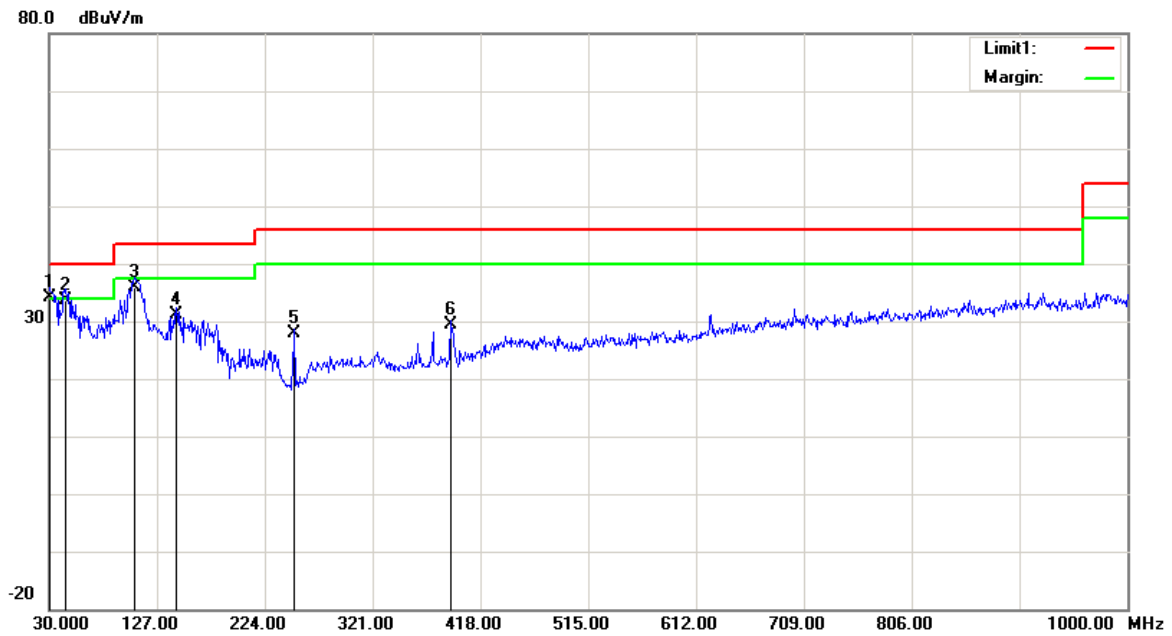

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	32.66	QP	1.54	34.20	40.00	5.80
44.5500	42.53	QP	-8.93	33.60	40.00	6.40
106.6300	43.00	QP	-7.20	35.80	43.50	7.70
144.4600	37.20	QP	-6.00	31.20	43.50	12.30
250.1900	33.99	QP	-6.19	27.80	46.00	18.20
390.8400	31.65	QP	-2.35	29.30	46.00	16.70

**2) 1-25GHz:
802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	79.32	PK	H	28.12	1.81	0.00	109.25	N/A	N/A
2412.00	76.45	AV	H	28.12	1.81	0.00	106.38	N/A	N/A
2412.00	65.93	PK	V	28.12	1.81	0.00	95.86	N/A	N/A
2412.00	62.14	AV	V	28.12	1.81	0.00	92.07	N/A	N/A
2390.00	36.25	PK	H	28.08	1.80	0.00	66.13	74.00	7.87
2390.00	22.33	AV	H	28.08	1.80	0.00	52.21	54.00	1.79
4824.00	57.08	PK	H	32.95	3.19	37.20	56.02	74.00	17.98
4824.00	54.36	AV	H	32.95	3.19	37.20	53.30	54.00	0.70
7236.00	45.58	PK	H	35.81	4.77	37.27	48.89	74.00	25.11
7236.00	40.24	AV	H	35.81	4.77	37.27	43.55	54.00	10.45
Middle Channel: 2437 MHz									
2437.00	79.34	PK	H	28.17	1.82	0.00	109.33	N/A	N/A
2437.00	75.96	AV	H	28.17	1.82	0.00	105.95	N/A	N/A
2437.00	64.94	PK	V	28.17	1.82	0.00	94.93	N/A	N/A
2437.00	61.47	AV	V	28.17	1.82	0.00	91.46	N/A	N/A
4874.00	56.90	PK	H	33.05	3.26	37.21	56.00	74.00	18.00
4874.00	54.25	AV	H	33.05	3.26	37.21	53.35	54.00	0.65
7311.00	45.24	PK	H	36.01	4.64	37.36	48.53	74.00	25.47
7311.00	39.26	AV	H	36.01	4.64	37.36	42.55	54.00	11.45
High Channel: 2462 MHz									
2462.00	80.76	PK	H	28.22	1.83	0.00	110.81	N/A	N/A
2462.00	77.36	AV	H	28.22	1.83	0.00	107.41	N/A	N/A
2462.00	67.24	PK	V	28.22	1.83	0.00	97.29	N/A	N/A
2462.00	63.41	AV	V	28.22	1.83	0.00	93.46	N/A	N/A
2483.50	36.87	PK	H	28.27	1.84	0.00	66.98	74.00	7.02
2483.50	20.97	AV	H	28.27	1.84	0.00	51.08	54.00	2.92
4924.00	56.85	PK	H	33.15	3.27	37.22	56.05	74.00	17.95
4924.00	54.22	AV	H	33.15	3.27	37.22	53.42	54.00	0.58
7386.00	44.25	PK	H	36.20	4.51	37.46	47.50	74.00	26.50
7386.00	38.89	AV	H	36.20	4.51	37.46	42.14	54.00	11.86

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	84.52	PK	H	28.12	1.81	0.00	114.45	N/A	N/A
2412.00	73.48	AV	H	28.12	1.81	0.00	103.41	N/A	N/A
2412.00	70.54	PK	V	28.12	1.81	0.00	100.47	N/A	N/A
2412.00	61.24	AV	V	28.12	1.81	0.00	91.17	N/A	N/A
2390.00	36.48	PK	H	28.08	1.80	0.00	66.36	74.00	7.64
2390.00	22.64	AV	H	28.08	1.80	0.00	52.52	54.00	1.48
4824.00	62.43	PK	H	32.95	3.19	37.20	61.37	74.00	12.63
4824.00	48.35	AV	H	32.95	3.19	37.20	47.29	54.00	6.71
7236.00	44.99	PK	H	35.81	4.77	37.27	48.30	74.00	25.70
7236.00	34.83	AV	H	35.81	4.77	37.27	38.14	54.00	15.86
Additional Channel: 2417 MHz									
2417.00	86.74	PK	H	28.13	1.81	0.00	116.68	N/A	N/A
2417.00	75.14	AV	H	28.13	1.81	0.00	105.08	N/A	N/A
2390.00	34.85	PK	H	28.08	1.80	0.00	64.73	74.00	9.27
2390.00	20.17	AV	H	28.08	1.80	0.00	50.05	54.00	3.95
Middle Channel: 2437 MHz									
2437.00	86.63	PK	H	28.17	1.82	0.00	116.62	N/A	N/A
2437.00	76.25	AV	H	28.17	1.82	0.00	106.24	N/A	N/A
2437.00	71.82	PK	V	28.17	1.82	0.00	101.81	N/A	N/A
2437.00	61.45	AV	V	28.17	1.82	0.00	91.44	N/A	N/A
4874.00	61.54	PK	H	33.05	3.26	37.21	60.64	74.00	13.36
4874.00	48.10	AV	H	33.05	3.26	37.21	47.20	54.00	6.80
7311.00	45.29	PK	H	36.01	4.64	37.36	48.58	74.00	25.42
7311.00	35.88	AV	H	36.01	4.64	37.36	39.17	54.00	14.83
Additional Channel: 2457 MHz									
2457.00	87.03	PK	H	28.21	1.83	0.00	117.07	N/A	N/A
2457.00	76.41	AV	H	28.21	1.83	0.00	106.45	N/A	N/A
2483.50	35.40	PK	H	28.27	1.84	0.00	65.51	74.00	8.49
2483.50	21.85	AV	H	28.27	1.84	0.00	51.96	54.00	2.04
High Channel: 2462 MHz									
2462.00	84.74	PK	H	28.22	1.83	0.00	114.79	N/A	N/A
2462.00	73.94	AV	H	28.22	1.83	0.00	103.99	N/A	N/A
2462.00	71.21	PK	V	28.22	1.83	0.00	101.26	N/A	N/A
2462.00	61.41	AV	V	28.22	1.83	0.00	91.46	N/A	N/A
2483.50	36.16	PK	H	28.27	1.84	0.00	66.27	74.00	7.73
2483.50	22.80	AV	H	28.27	1.84	0.00	52.91	54.00	1.09
4924.00	60.55	PK	H	33.15	3.27	37.22	59.75	74.00	14.25
4924.00	46.36	AV	H	33.15	3.27	37.22	45.56	54.00	8.44
7386.00	46.07	PK	H	36.20	4.51	37.46	49.32	74.00	24.68
7386.00	35.24	AV	H	36.20	4.51	37.46	38.49	54.00	15.51

802.11n ht20 Mode:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	83.29	PK	H	28.12	1.81	0.00	113.22	N/A	N/A
2412.00	73.59	AV	H	28.12	1.81	0.00	103.52	N/A	N/A
2412.00	69.34	PK	V	28.12	1.81	0.00	99.27	N/A	N/A
2412.00	59.88	AV	V	28.12	1.81	0.00	89.81	N/A	N/A
2390.00	37.52	PK	H	28.08	1.80	0.00	67.40	74.00	6.60
2390.00	22.64	AV	H	28.08	1.80	0.00	52.52	54.00	1.48
4824.00	58.04	PK	H	32.95	3.19	37.20	56.98	74.00	17.02
4824.00	44.38	AV	H	32.95	3.19	37.20	43.32	54.00	10.68
7236.00	46.96	PK	H	35.81	4.77	37.27	50.27	74.00	23.73
7236.00	35.67	AV	H	35.81	4.77	37.27	38.98	54.00	15.02
Additional Channel: 2417 MHz									
2417.00	86.95	PK	H	28.13	1.81	0.00	116.89	N/A	N/A
2417.00	76.25	AV	H	28.13	1.81	0.00	106.19	N/A	N/A
2390.00	34.74	PK	H	28.08	1.80	0.00	64.62	74.00	9.38
2390.00	21.03	AV	H	28.08	1.80	0.00	50.91	54.00	3.09
Middle Channel: 2437 MHz									
2437.00	86.47	PK	H	28.17	1.82	0.00	116.46	N/A	N/A
2437.00	76.33	AV	H	28.17	1.82	0.00	106.32	N/A	N/A
2437.00	72.64	PK	V	28.17	1.82	0.00	102.63	N/A	N/A
2437.00	61.87	AV	V	28.17	1.82	0.00	91.86	N/A	N/A
4874.00	62.87	PK	H	33.05	3.26	37.21	61.97	74.00	12.03
4874.00	48.21	AV	H	33.05	3.26	37.21	47.31	54.00	6.69
7311.00	46.85	PK	H	36.01	4.64	37.36	50.14	74.00	23.86
7311.00	36.87	AV	H	36.01	4.64	37.36	40.16	54.00	13.84
Additional Channel: 2457 MHz									
2457.00	85.47	PK	H	28.21	1.83	0.00	115.51	N/A	N/A
2457.00	75.39	AV	H	28.21	1.83	0.00	105.43	N/A	N/A
2483.50	34.18	PK	H	28.27	1.84	0.00	64.29	74.00	9.71
2483.50	20.96	AV	H	28.27	1.84	0.00	51.07	54.00	2.93
High Channel: 2462 MHz									
2462.00	84.03	PK	H	28.22	1.83	0.00	114.08	N/A	N/A
2462.00	74.15	AV	H	28.22	1.83	0.00	104.20	N/A	N/A
2462.00	70.15	PK	V	28.22	1.83	0.00	100.20	N/A	N/A
2462.00	60.32	AV	V	28.22	1.83	0.00	90.37	N/A	N/A
2483.50	36.02	PK	H	28.27	1.84	0.00	66.13	74.00	7.87
2483.50	22.77	AV	H	28.27	1.84	0.00	52.88	54.00	1.12
4924.00	57.49	PK	H	33.15	3.27	37.22	56.69	74.00	17.31
4924.00	42.88	AV	H	33.15	3.27	37.22	42.08	54.00	11.92
7386.00	46.40	PK	H	36.20	4.51	37.46	49.65	74.00	24.35
7386.00	36.45	AV	H	36.20	4.51	37.46	39.70	54.00	14.30

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	83.57	PK	H	28.14	1.81	0.00	113.52	N/A	N/A
2422.00	73.52	AV	H	28.14	1.81	0.00	103.47	N/A	N/A
2422.00	69.48	PK	V	28.14	1.81	0.00	99.43	N/A	N/A
2422.00	59.66	AV	V	28.14	1.81	0.00	89.61	N/A	N/A
2390.00	37.87	PK	H	28.08	1.80	0.00	67.75	74.00	6.25
2390.00	22.93	AV	H	28.08	1.80	0.00	52.81	54.00	1.19
4844.00	57.89	PK	H	32.99	3.22	37.20	56.90	74.00	17.10
4844.00	45.58	AV	H	32.99	3.22	37.20	44.59	54.00	9.41
7266.00	46.37	PK	H	35.89	4.72	37.31	49.67	74.00	24.33
7266.00	35.63	AV	H	35.89	4.72	37.31	38.93	54.00	15.07
Additional Channel: 2427 MHz									
2427.00	86.22	PK	H	28.15	1.81	0.00	116.18	N/A	N/A
2427.00	75.11	AV	H	28.15	1.81	0.00	105.07	N/A	N/A
2390.00	34.95	PK	H	28.08	1.80	0.00	64.83	74.00	9.17
2390.00	20.74	AV	H	28.08	1.80	0.00	50.62	54.00	3.38
Middle Channel: 2437 MHz									
2437.00	86.74	PK	H	28.17	1.82	0.00	116.73	N/A	N/A
2437.00	76.65	AV	H	28.17	1.82	0.00	106.64	N/A	N/A
2437.00	72.69	PK	V	28.17	1.82	0.00	102.68	N/A	N/A
2437.00	62.34	AV	V	28.17	1.82	0.00	92.33	N/A	N/A
4874.00	62.48	PK	H	33.05	3.26	37.21	61.58	74.00	12.42
4874.00	48.77	AV	H	33.05	3.26	37.21	47.87	54.00	6.13
7311.00	45.11	PK	H	36.01	4.64	37.36	48.40	74.00	25.60
7311.00	37.06	AV	H	36.01	4.64	37.36	40.35	54.00	13.65
Additional Channel: 2447 MHz									
2447.00	86.99	PK	H	28.19	1.82	0.00	117.00	N/A	N/A
2447.00	76.84	AV	H	28.19	1.82	0.00	106.85	N/A	N/A
2483.50	34.74	PK	H	28.27	1.84	0.00	64.85	74.00	9.15
2483.50	20.85	AV	H	28.27	1.84	0.00	50.96	54.00	3.04
High Channel: 2452 MHz									
2452.00	84.39	PK	H	28.20	1.83	0.00	114.42	N/A	N/A
2452.00	74.40	AV	H	28.20	1.83	0.00	104.43	N/A	N/A
2452.00	70.18	PK	V	28.20	1.83	0.00	100.21	N/A	N/A
2452.00	60.22	AV	V	28.20	1.83	0.00	90.25	N/A	N/A
2483.50	37.32	PK	H	28.27	1.84	0.00	67.43	74.00	6.57
2483.50	22.89	AV	H	28.27	1.84	0.00	53.00	54.00	1.00
4904.00	56.84	PK	H	33.11	3.30	37.21	56.04	74.00	17.96
4904.00	43.57	AV	H	33.11	3.30	37.21	42.77	54.00	11.23
7356.00	45.89	PK	H	36.13	4.56	37.42	49.16	74.00	24.84
7356.00	35.36	AV	H	36.13	4.56	37.42	38.63	54.00	15.37




Test plots(802.11 b mode high channel was the worst)
Horizontal:

Fundamental
Test with Band
Rejection Filter

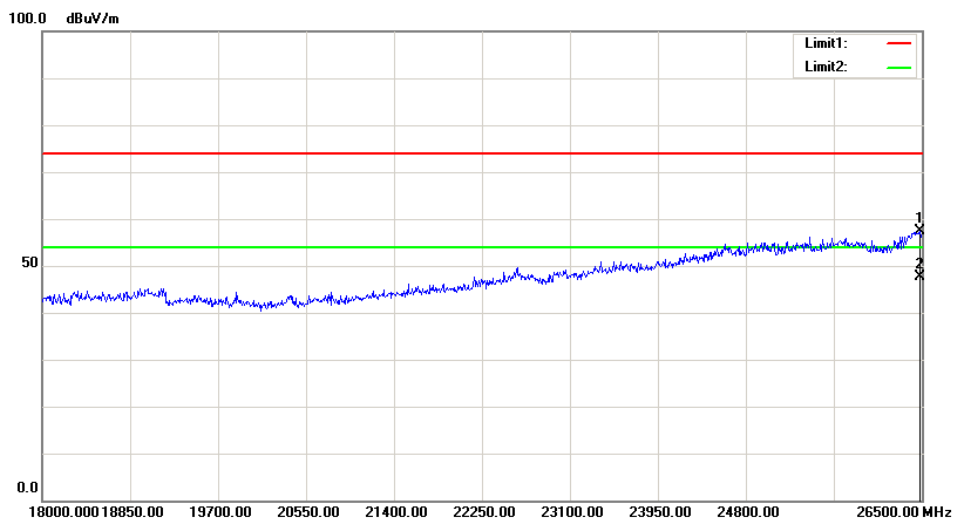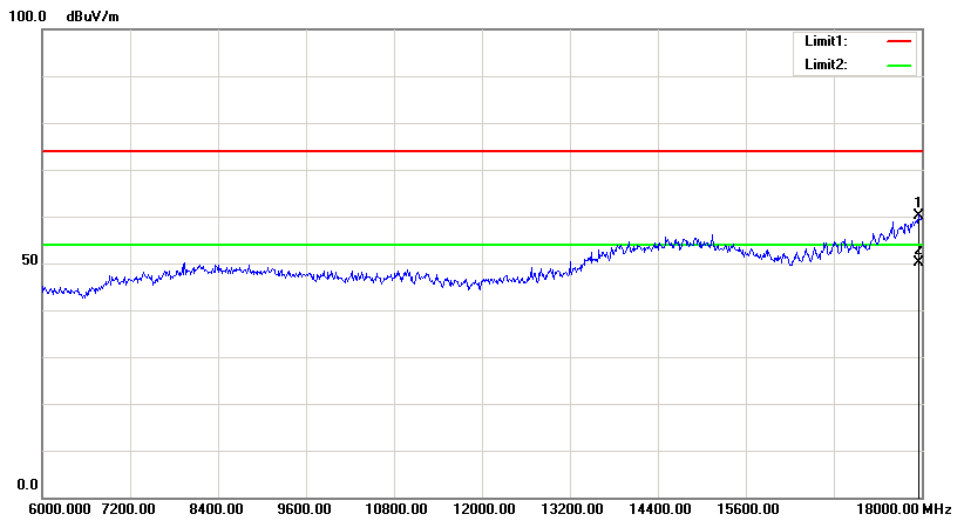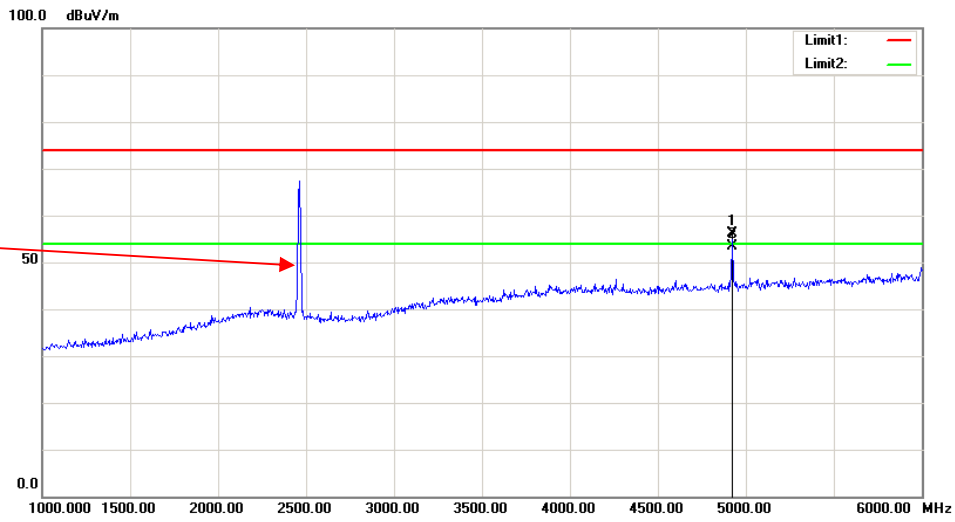

Vertical:

Fundamental
Test with Band
Rejection Filter

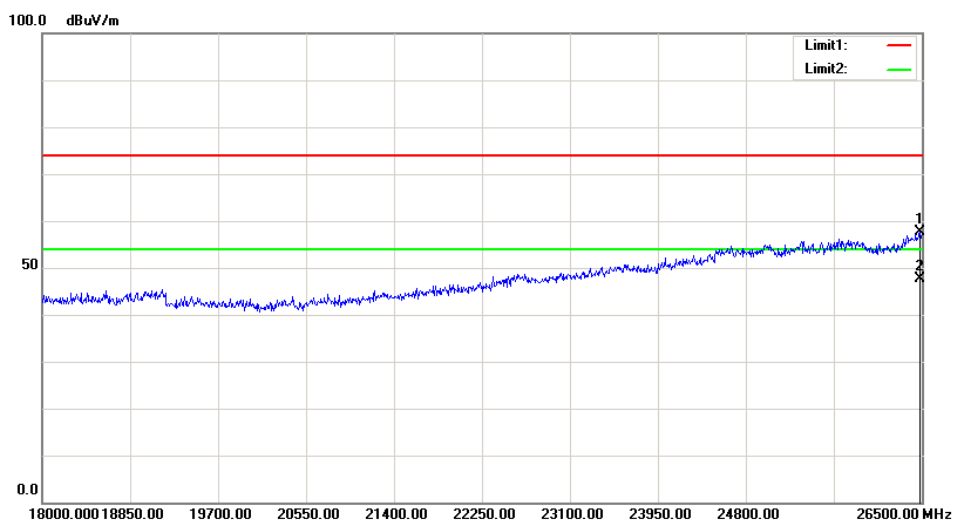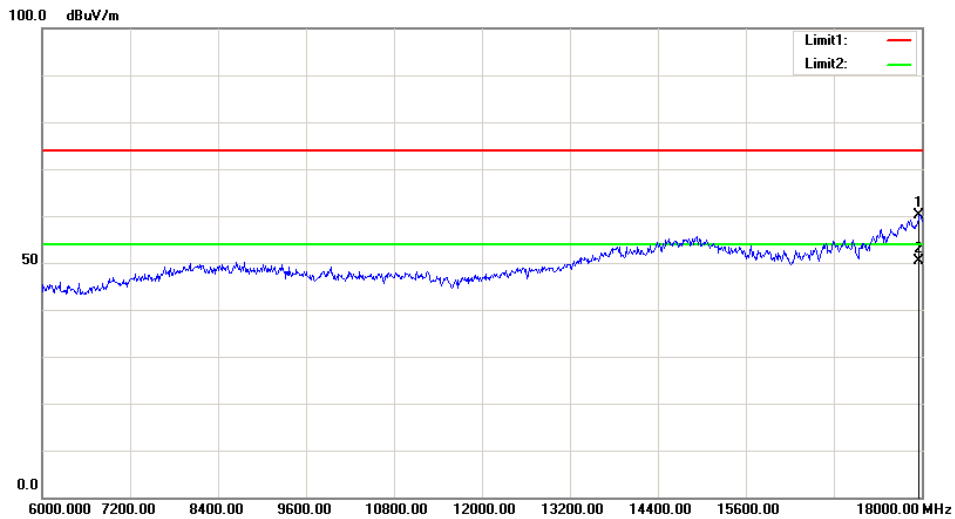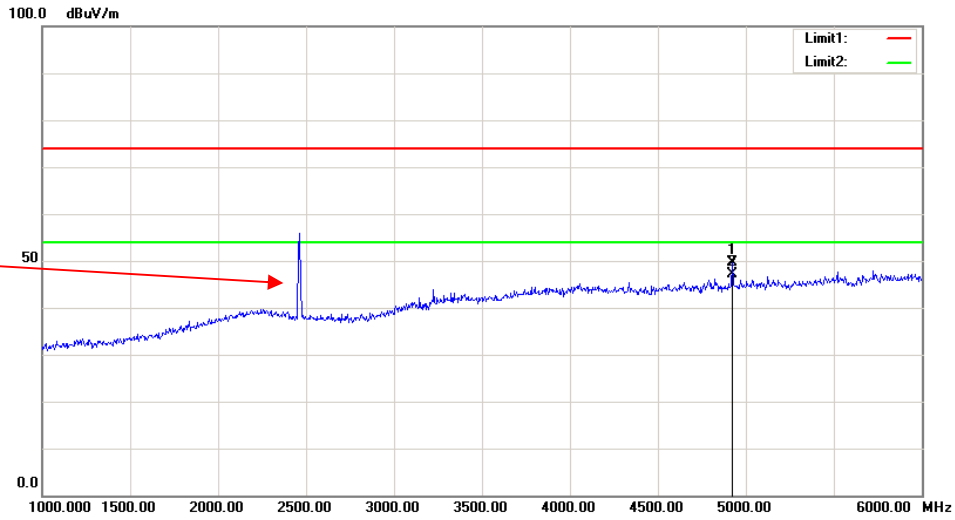

FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.8 °C
Relative Humidity:	58 %
ATM Pressure:	100.5 kPa

* The testing was performed by Kami Zhou on 2018-04-14.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Test mode	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	2412	9.54	≥0.5
	2437	10.1	≥0.5
	2462	10.1	≥0.5
802.11g	2412	14.75	≥0.5
	2437	14.75	≥0.5
	2462	15.15	≥0.5
802.11n ht20	2412	15.07	≥0.5
	2437	15.15	≥0.5
	2462	15.15	≥0.5
802.11n ht40	2422	33.83	≥0.5
	2437	33.83	≥0.5
	2452	33.83	≥0.5

6dB bandwidth:


802.11b Low Channel

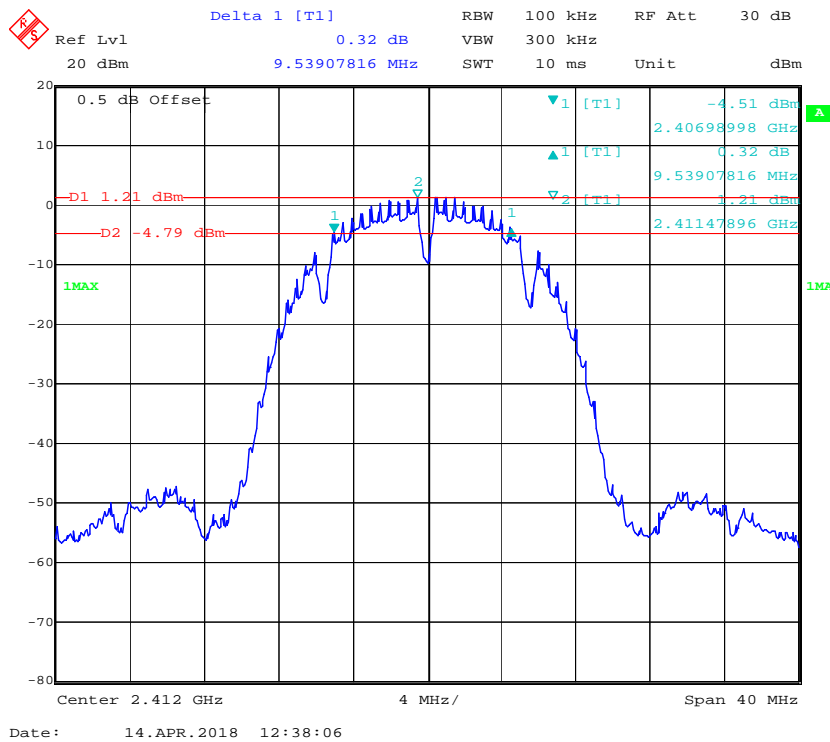


802.11g Low Channel

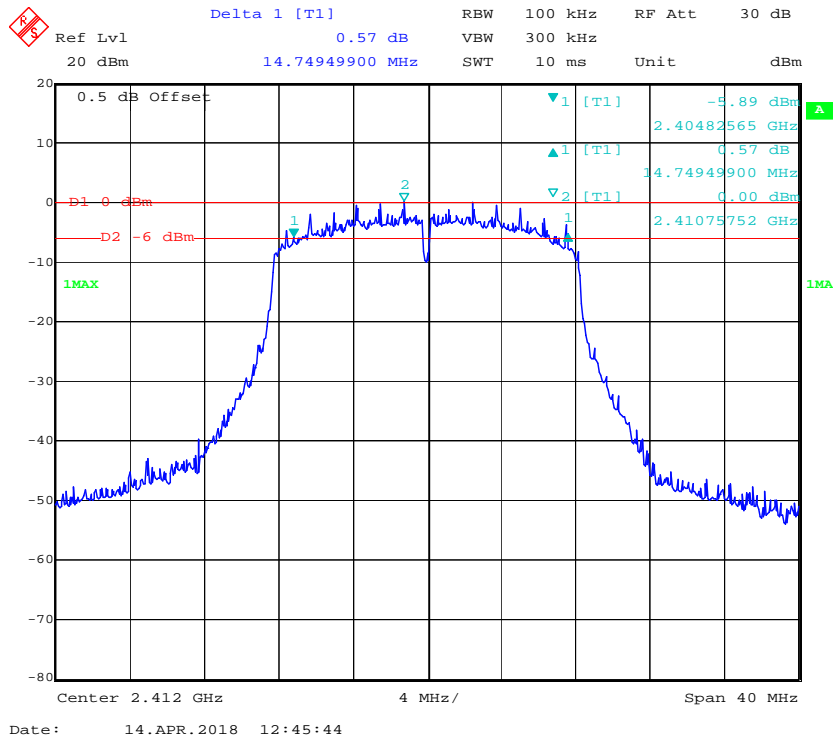


802.11g Middle Channel

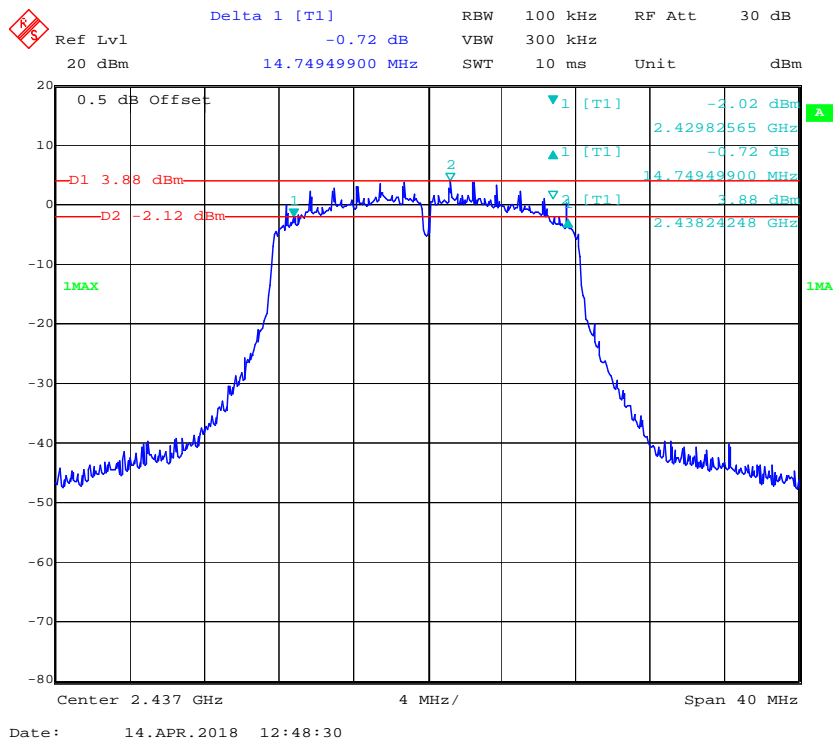


802.11g High Channel

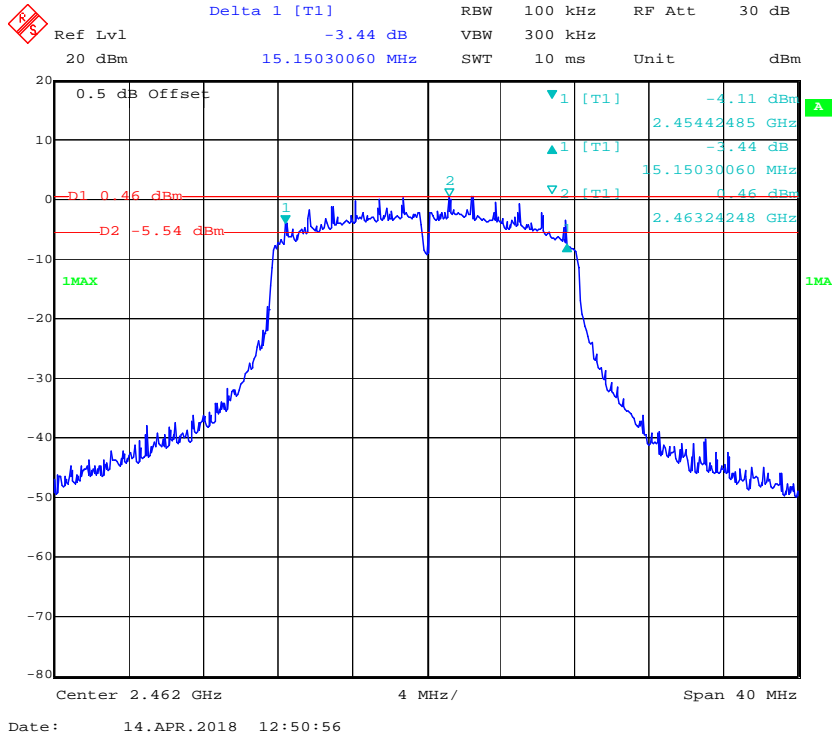


802.11n ht20 Low Channel

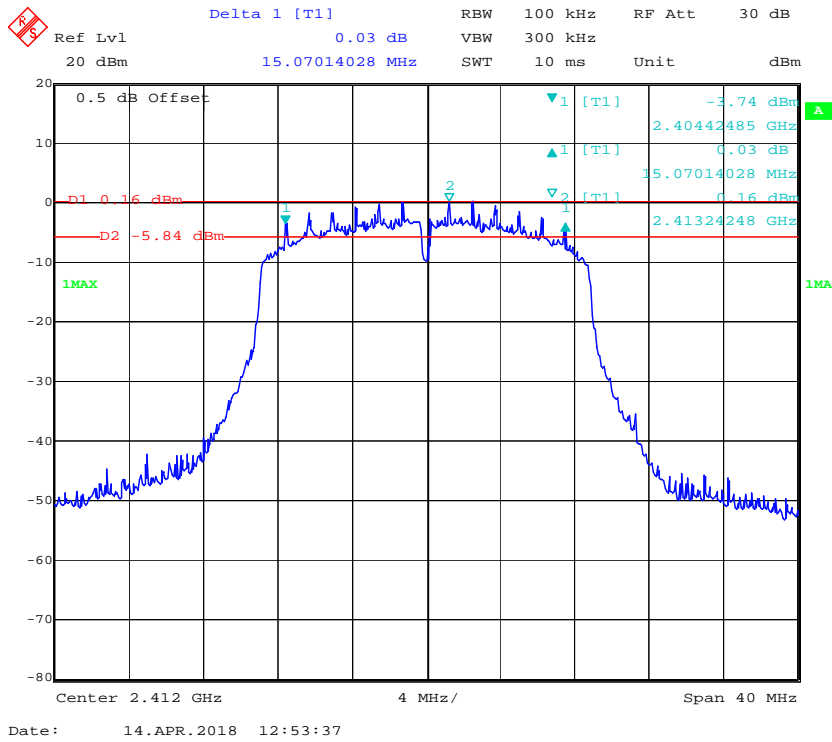


802.11n ht20 Middle Channel

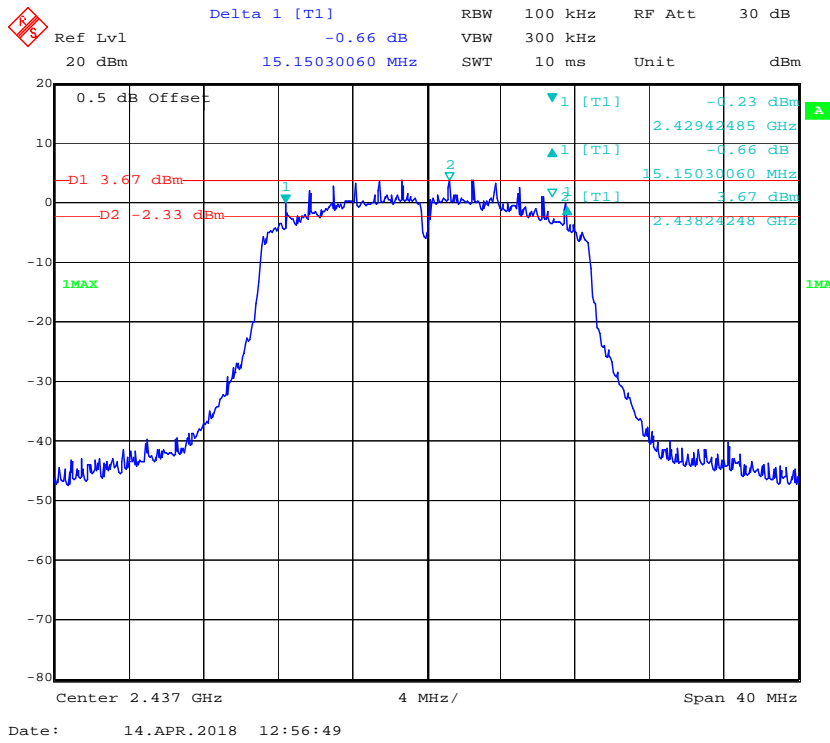


802.11n ht20 High Channel

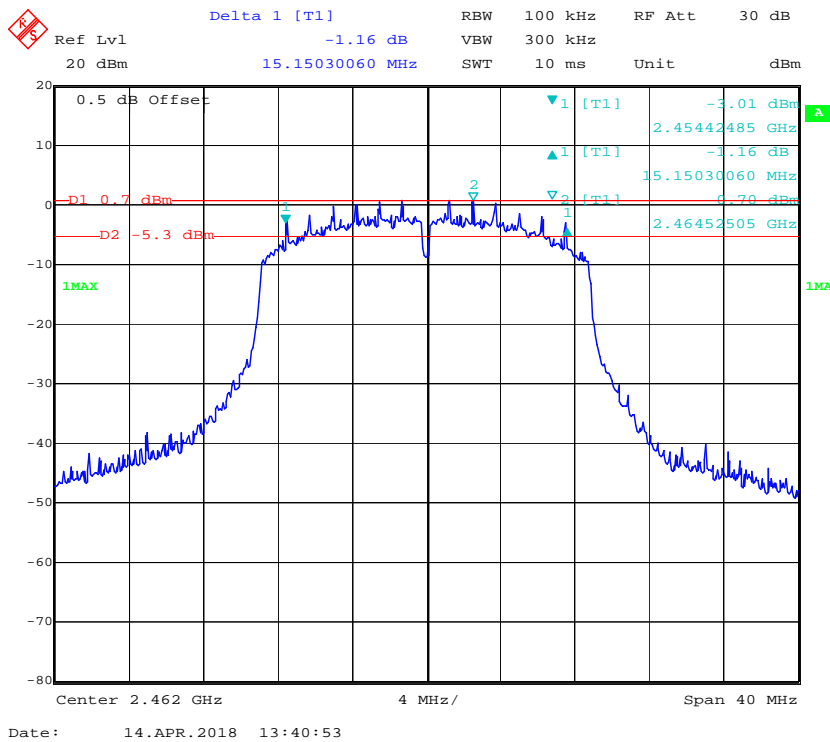


802.11n ht40 Low Channel

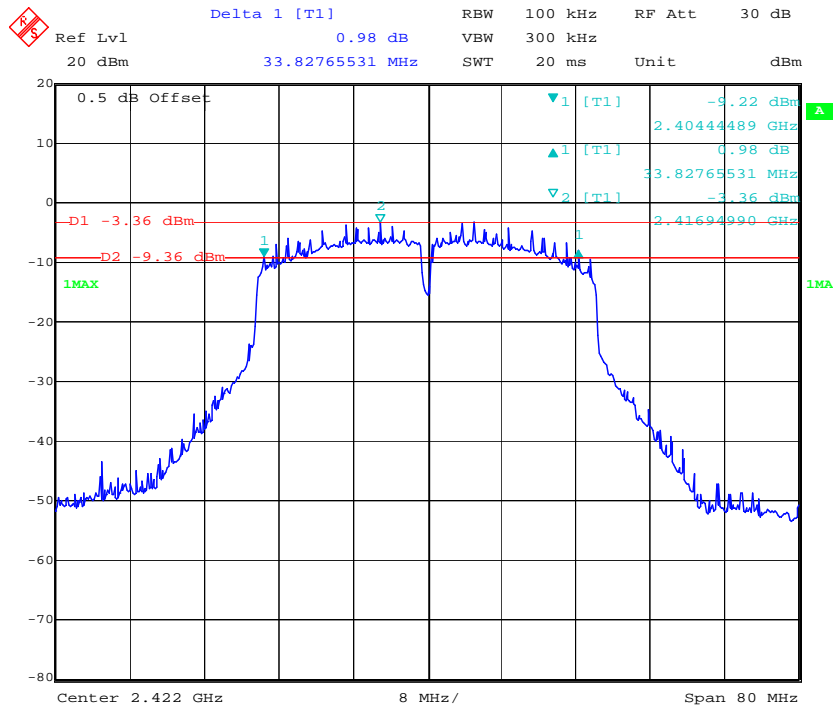

802.11n ht40 Middle Channel

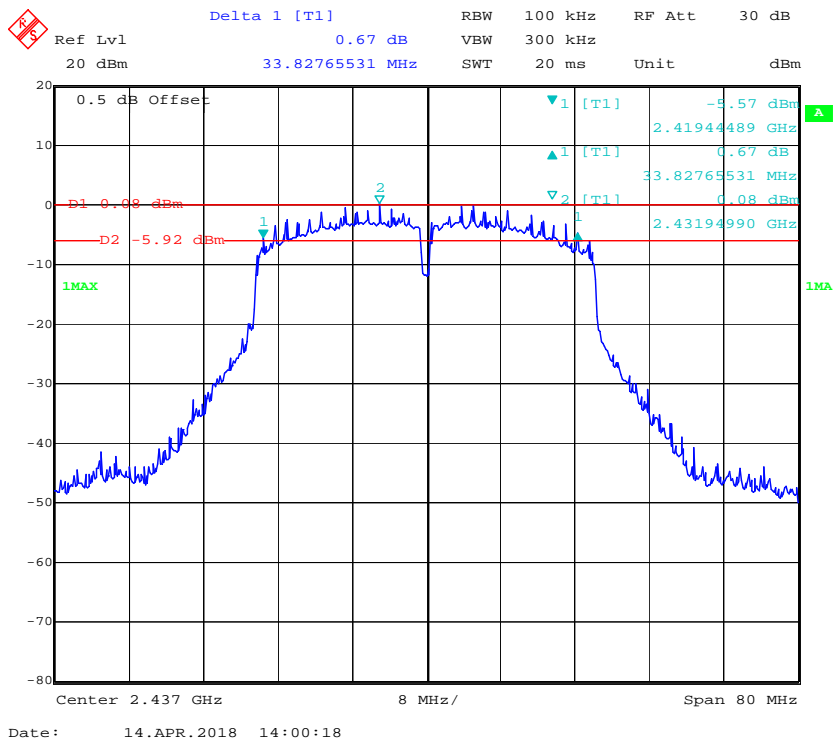

802.11n ht40 High Channel

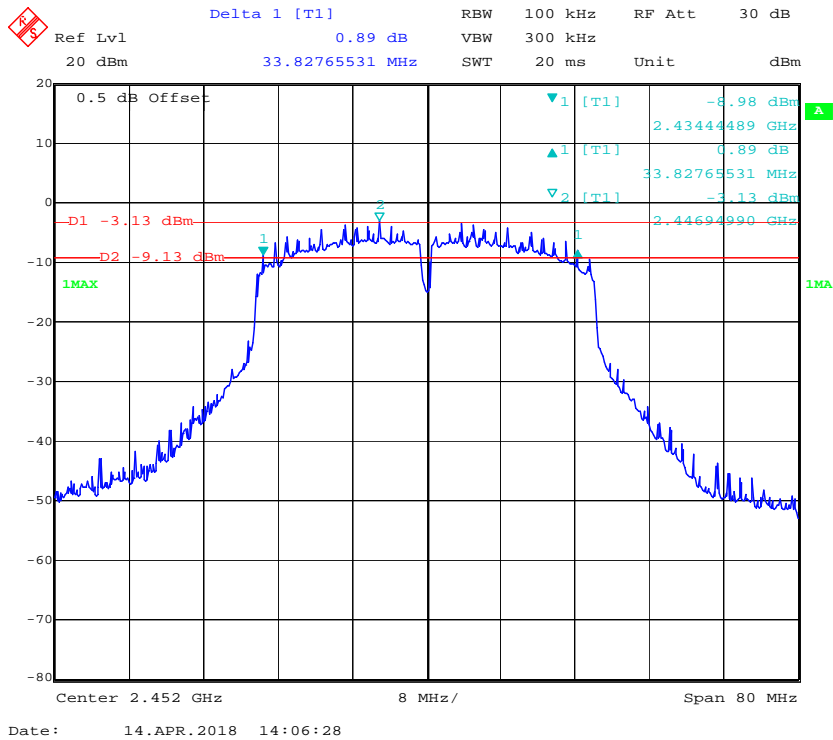


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
N/A	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.8 °C
Relative Humidity:	58 %
ATM Pressure:	100.5 kPa

* The testing was performed by Kami Zhou on 2018-04-14.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b	2412	12.46	10.11	25
	2437	13.16	10.67	25
	2462	14.22	11.89	25
802.11g	2412	17.63	10.61	25
	2417	20.74	14.03	25
	2437	21.72	14.32	25
	2457	20.86	14.14	25
	2462	17.72	11.28	25
802.11n ht20	2412	17.32	10.24	25
	2417	21.03	14.01	25
	2437	21.31	13.99	25
	2457	20.98	13.96	25
	2462	17.92	10.91	25
802.11n ht40	2422	15.05	10.15	25
	2427	18.9	13.84	25
	2437	18.95	13.76	25
	2447	18.78	13.62	25
	2452	15.55	10.62	25

Note: the antenna gain is 11dBi.

FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26.8 °C
Relative Humidity:	58 %
ATM Pressure:	100.5 kPa

* The testing was performed by Kami Zhou on 2018-04-14.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.


802.11b: Band Edge, Left Side

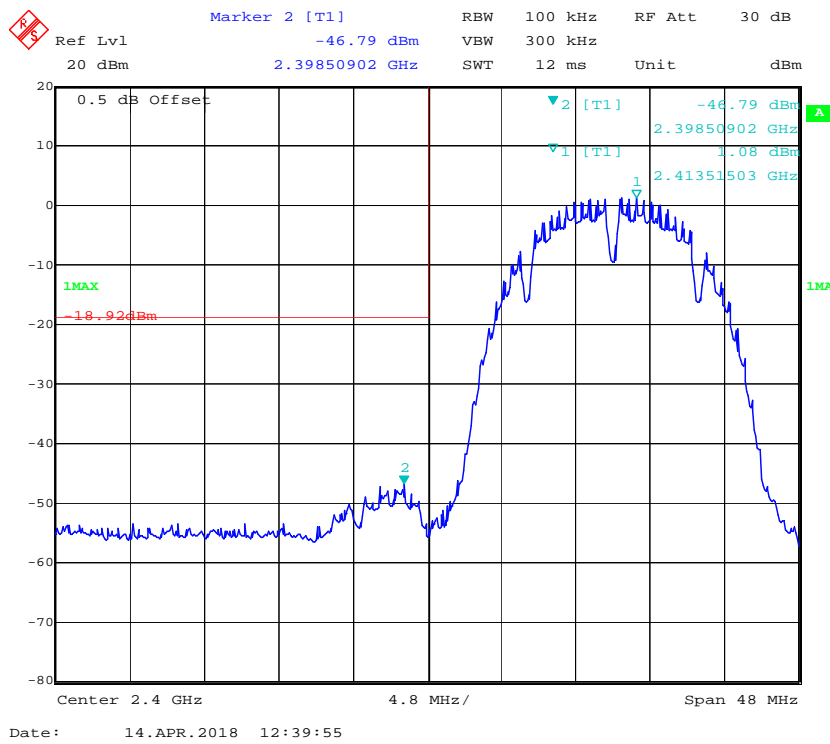


802.11b: Band Edge, Right Side

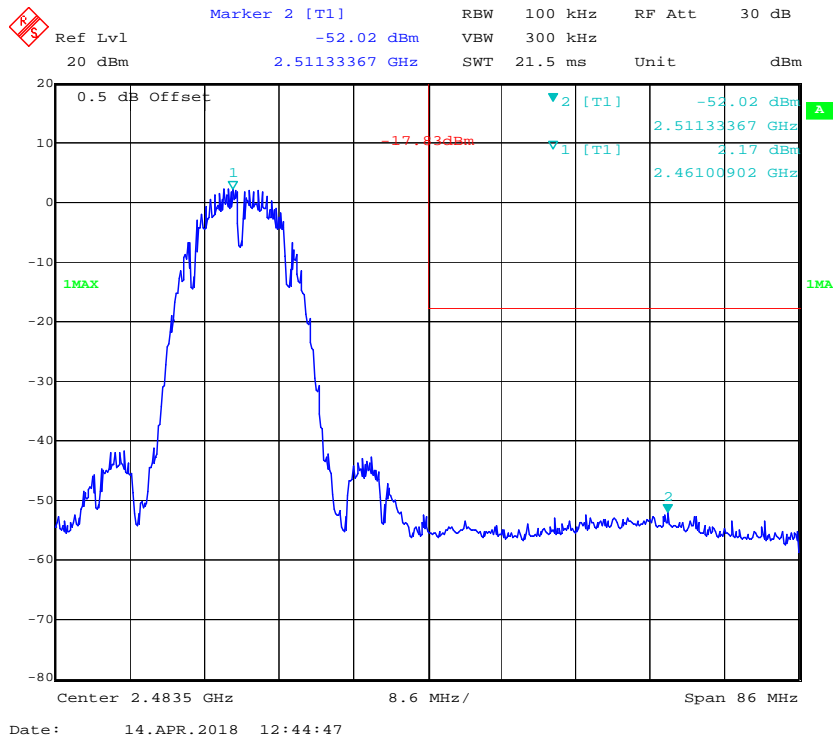


802.11g: Band Edge, Left Side

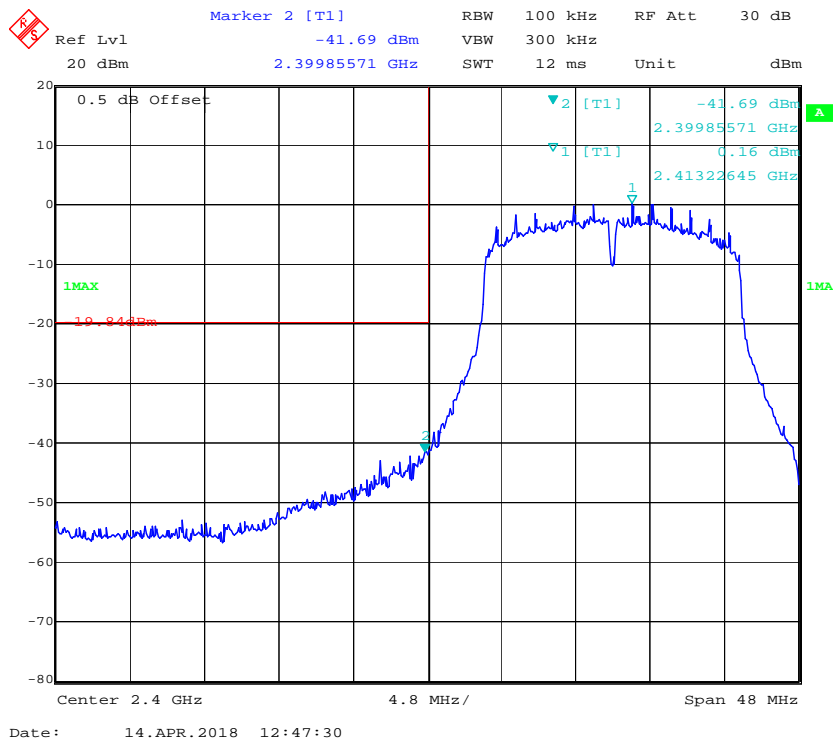


802.11g: Band Edge, Right Side

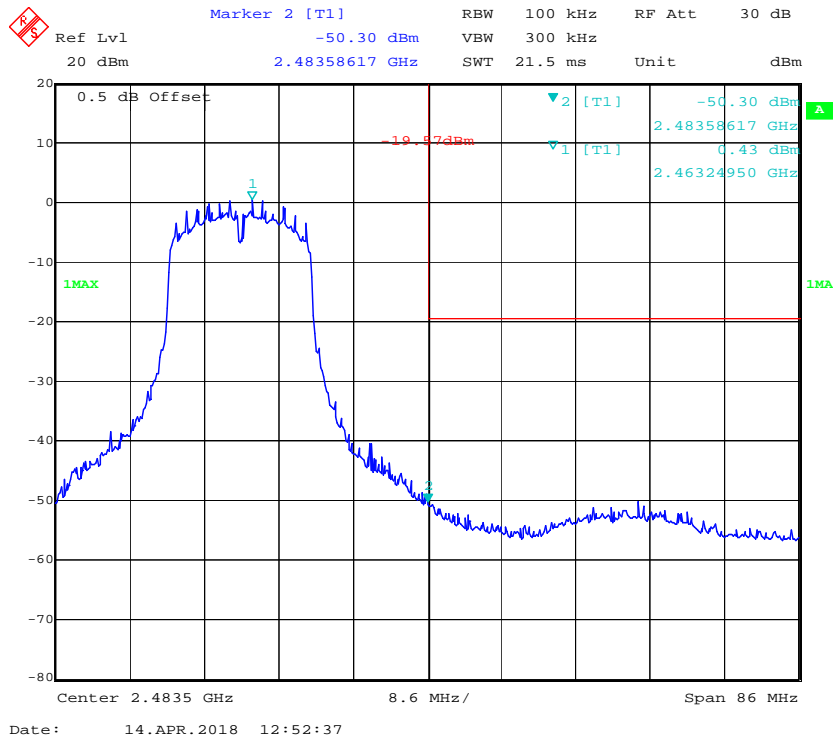


802.11n ht20 Band Edge, Left Side

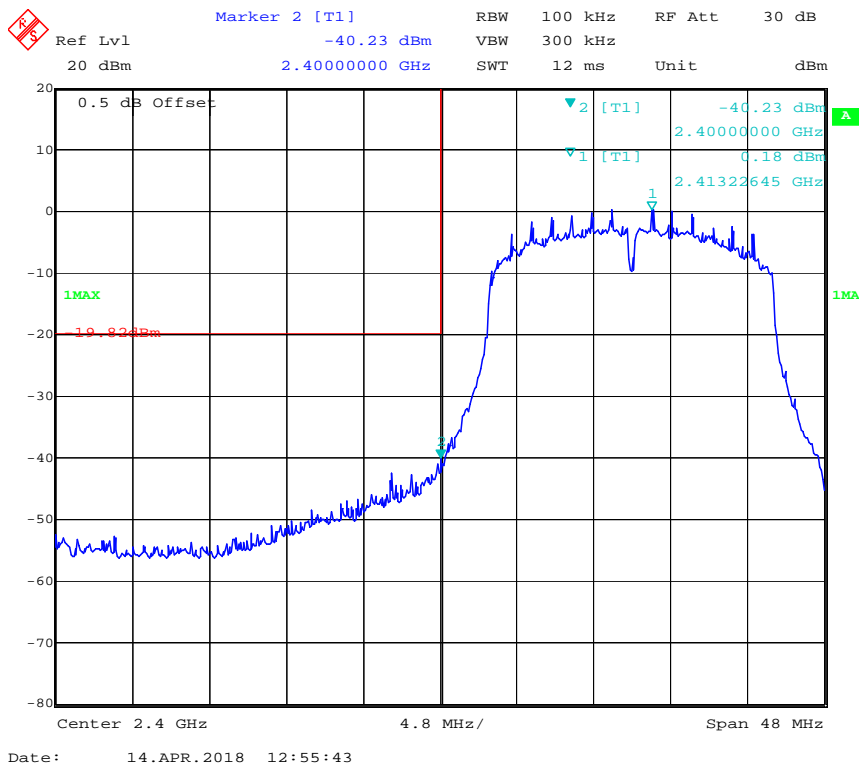


802.11n ht20 Band Edge, Right Side

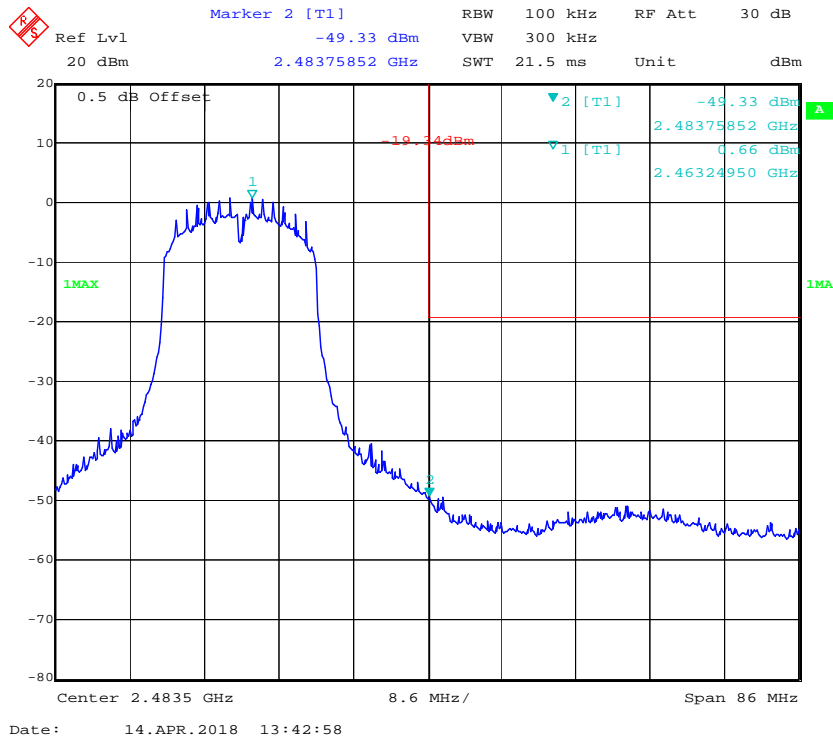

802.11n ht40: Band Edge, Left Side

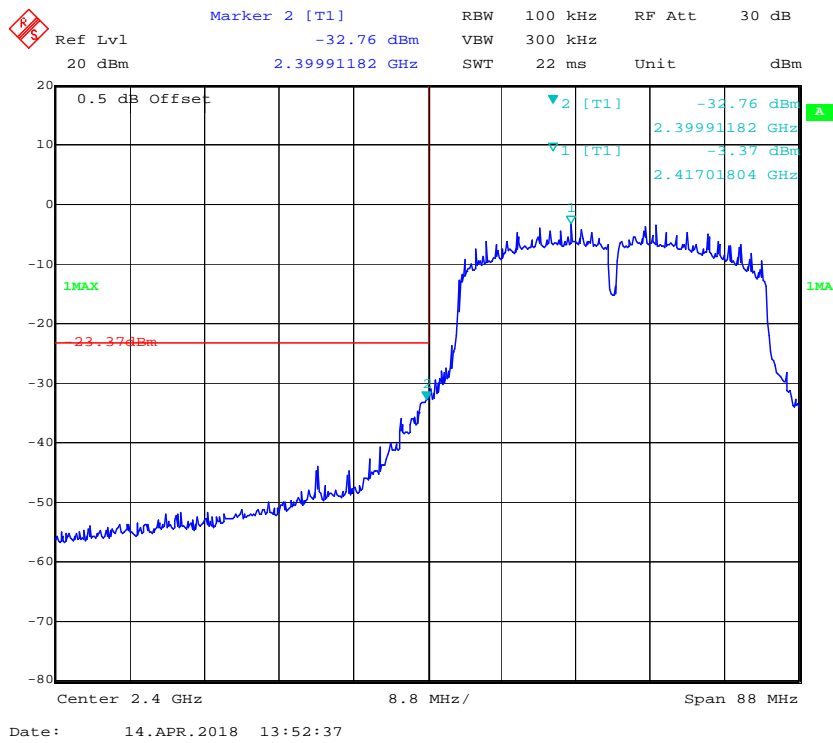

802.11n ht40 Band Edge, Right Side

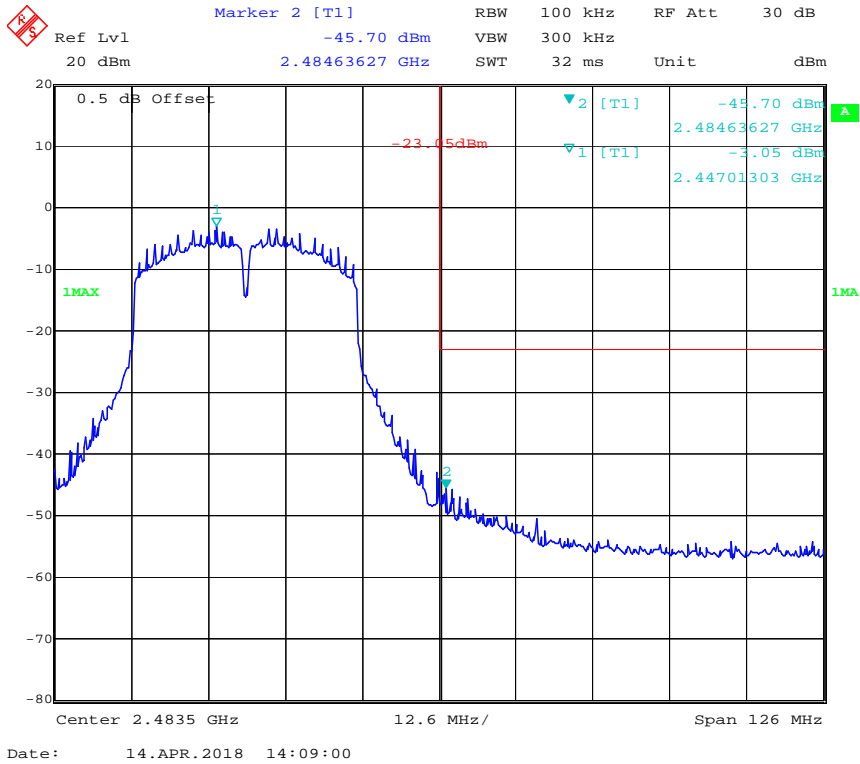

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.8 °C
Relative Humidity:	58 %
ATM Pressure:	100.5 kPa

* The testing was performed by Kami Zhou on 2018-04-14.

Test Result: Compliance


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots


Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-13.86	≤3
	Middle	2437	-12.4	≤3
	High	2462	-11.24	≤3
802.11g	Low	2412	-14.26	≤3
	Middle	2437	-10.56	≤3
	High	2462	-14.13	≤3
802.11n ht20	Low	2412	-14.24	≤3
	Middle	2437	-10.17	≤3
	High	2462	-13.49	≤3
802.11n ht40	Low	2422	-15.94	≤3
	Middle	2437	-13.51	≤3
	High	2452	-17.07	≤3

Note: the antenna gain is 11dBi.


Power Spectral Density, 802.11b Low Channel

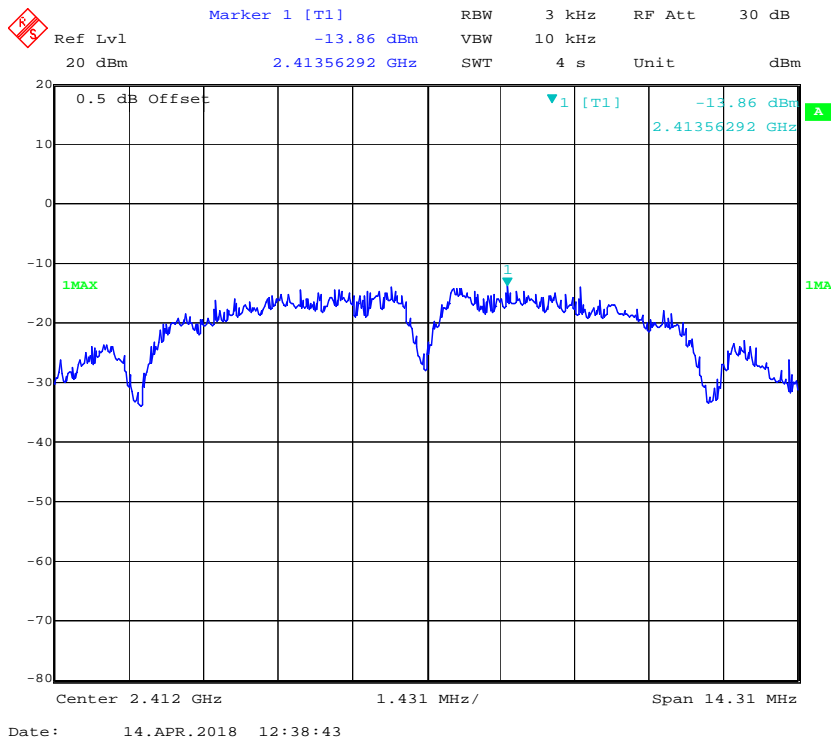


Power Spectral Density, 802.11b Middle Channel

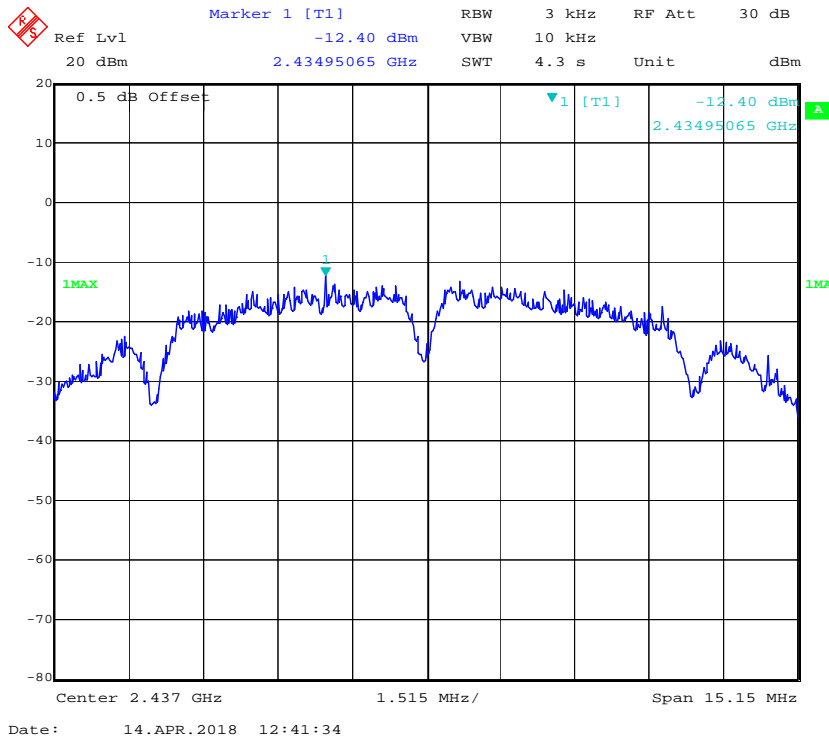


Power Spectral Density, 802.11b High Channel

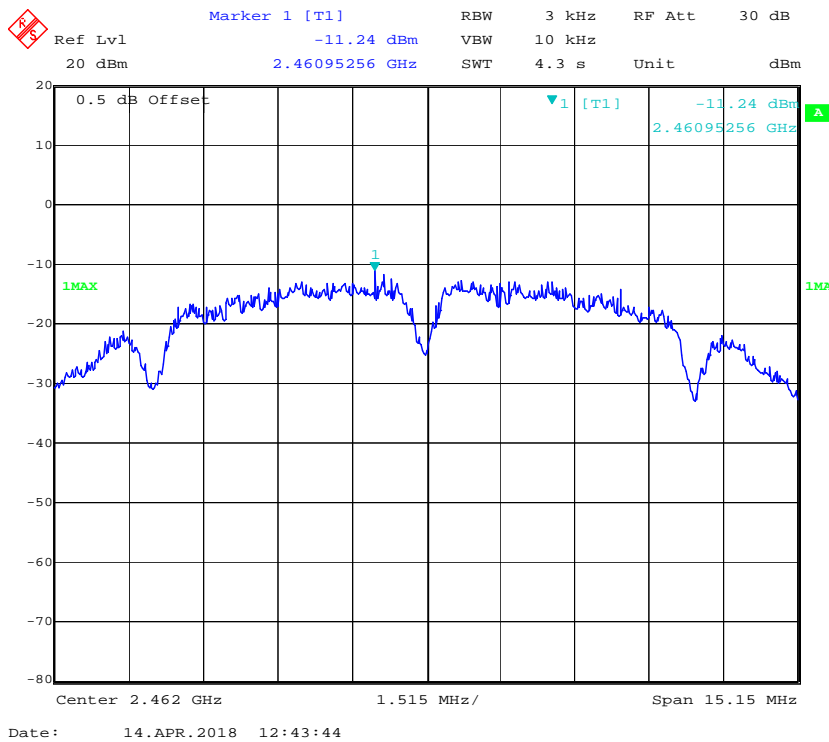


Power Spectral Density, 802.11g Low Channel

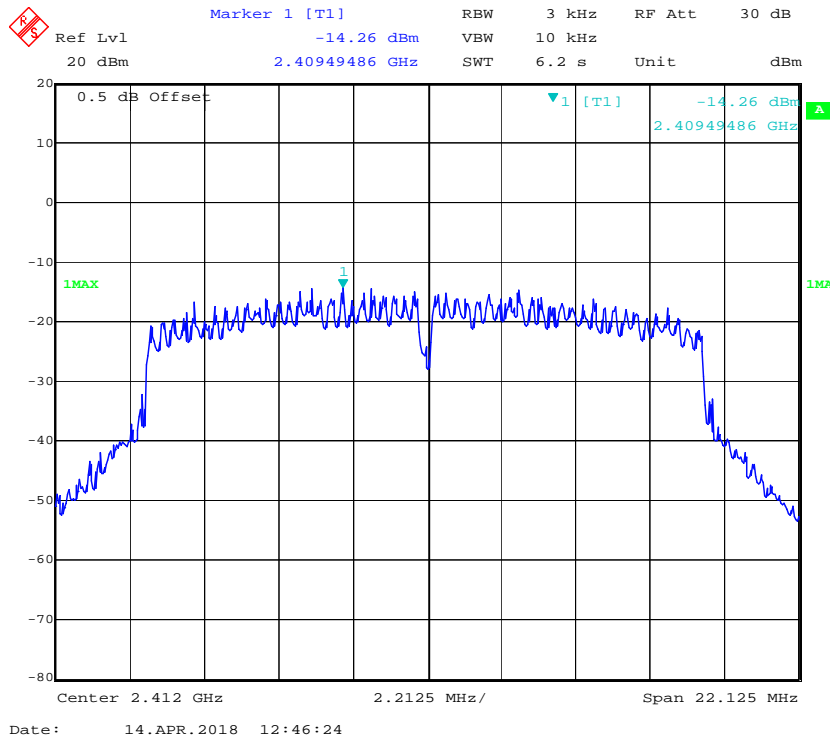


Power Spectral Density, 802.11g Middle Channel

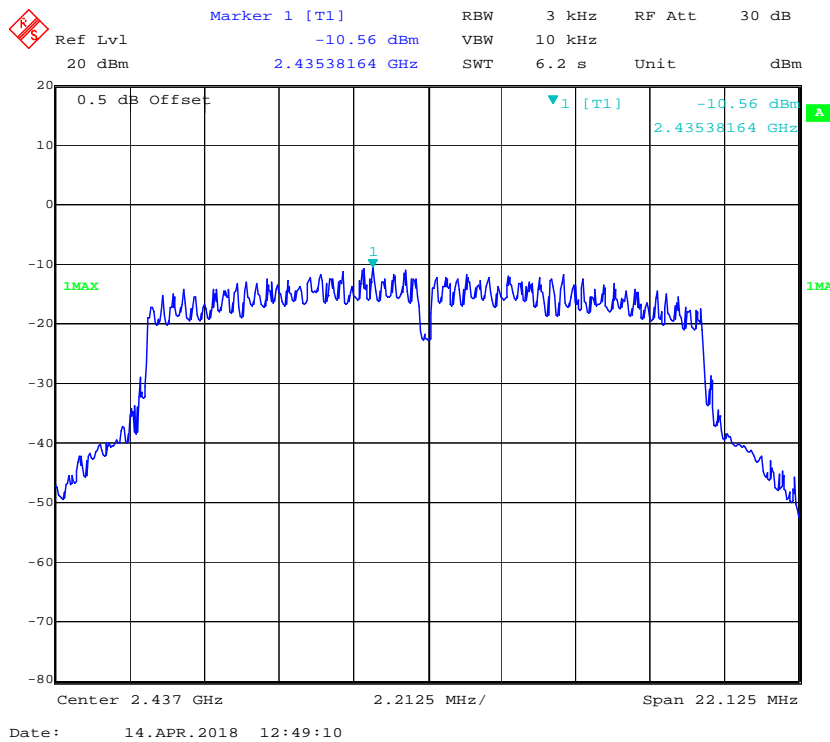


Power Spectral Density, 802.11g High Channel

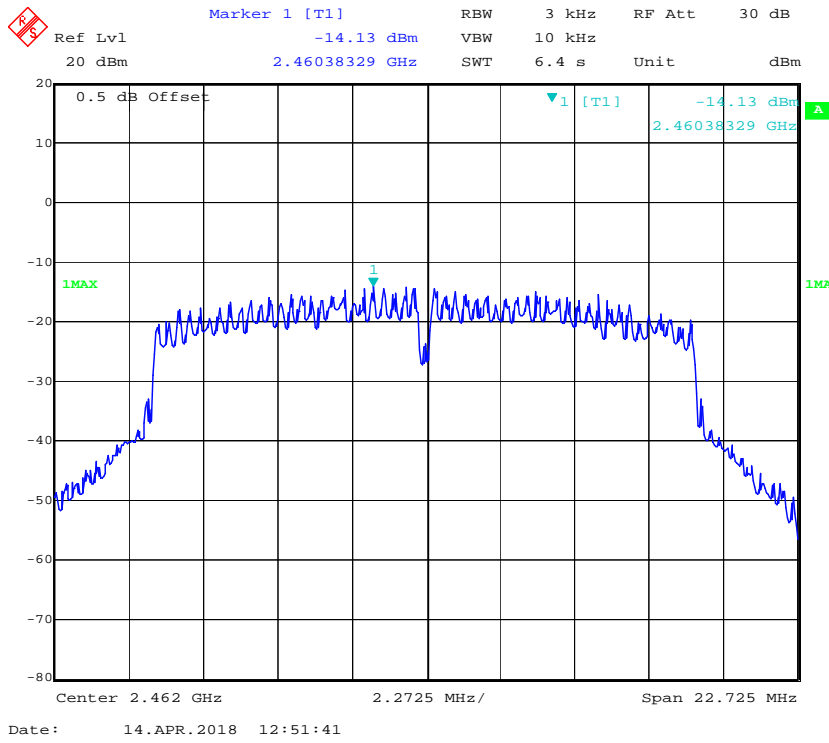


Power Spectral Density, 802.11n ht20 Low Channel

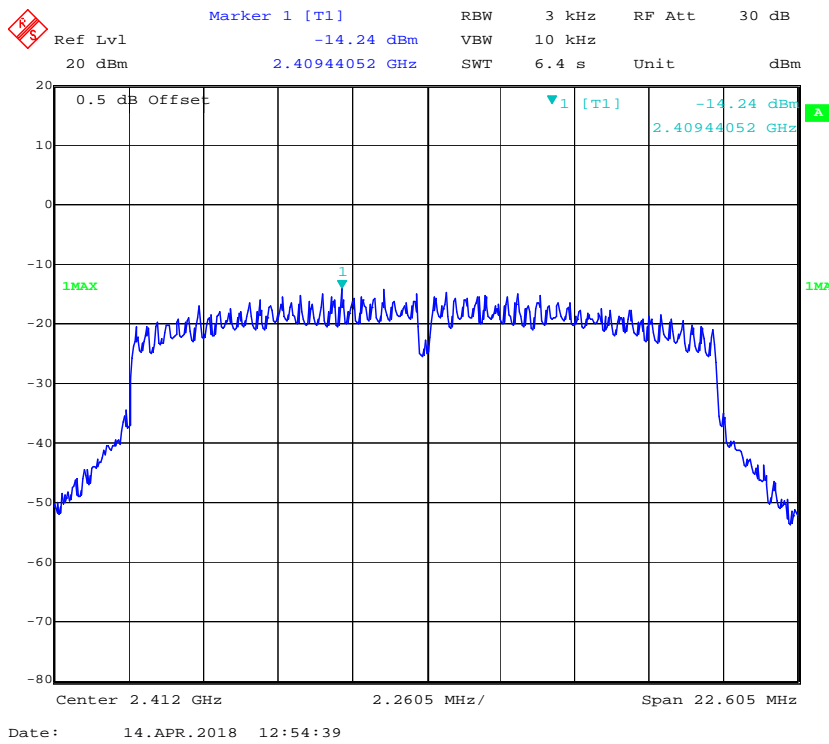


Power Spectral Density, 802.11n ht20 Middle Channel

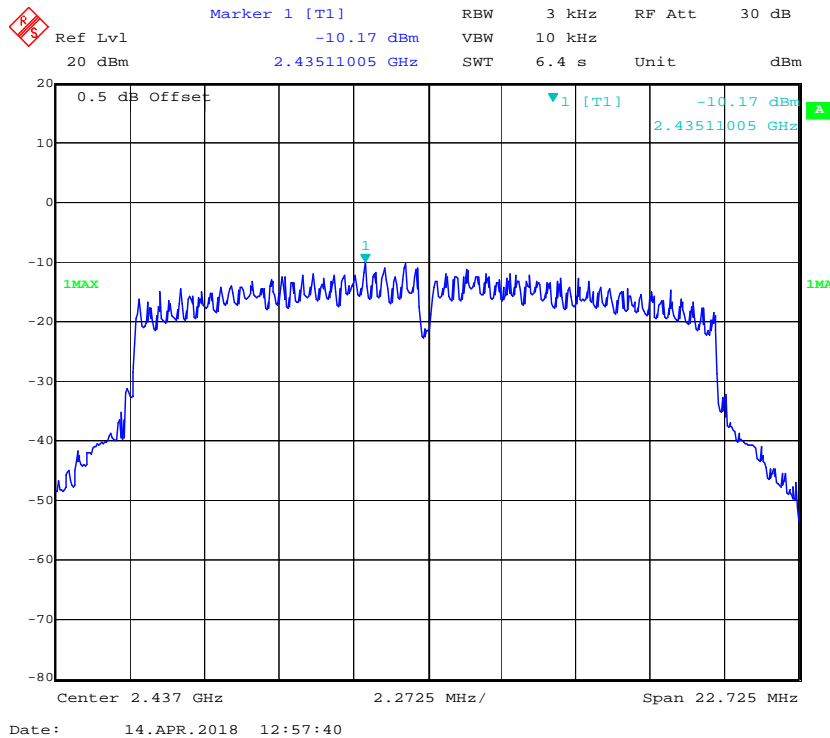


Power Spectral Density, 802.11n ht20 High Channel

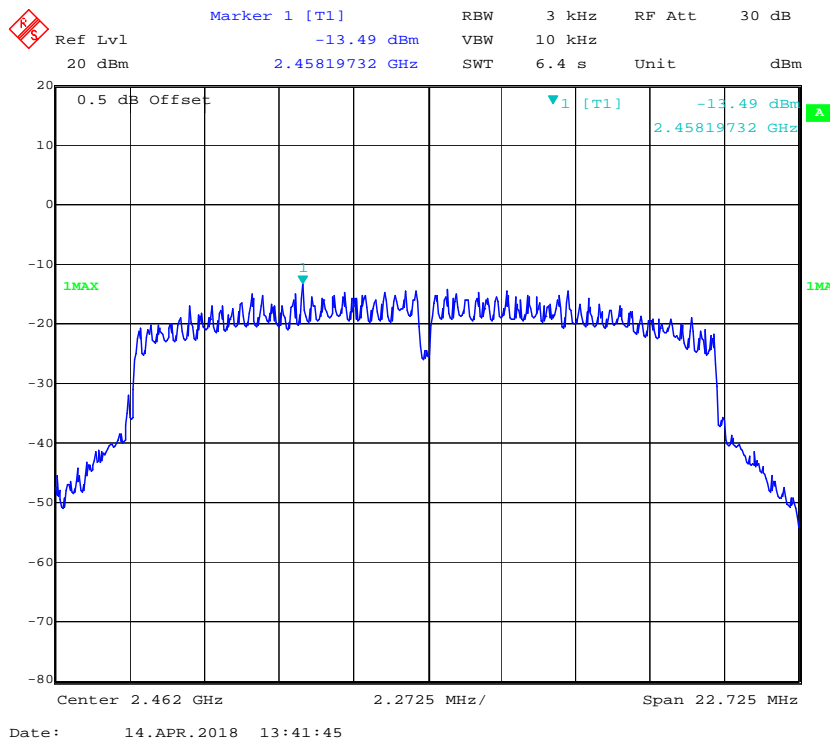


Power Spectral Density, 802.11n ht40 Low Channel

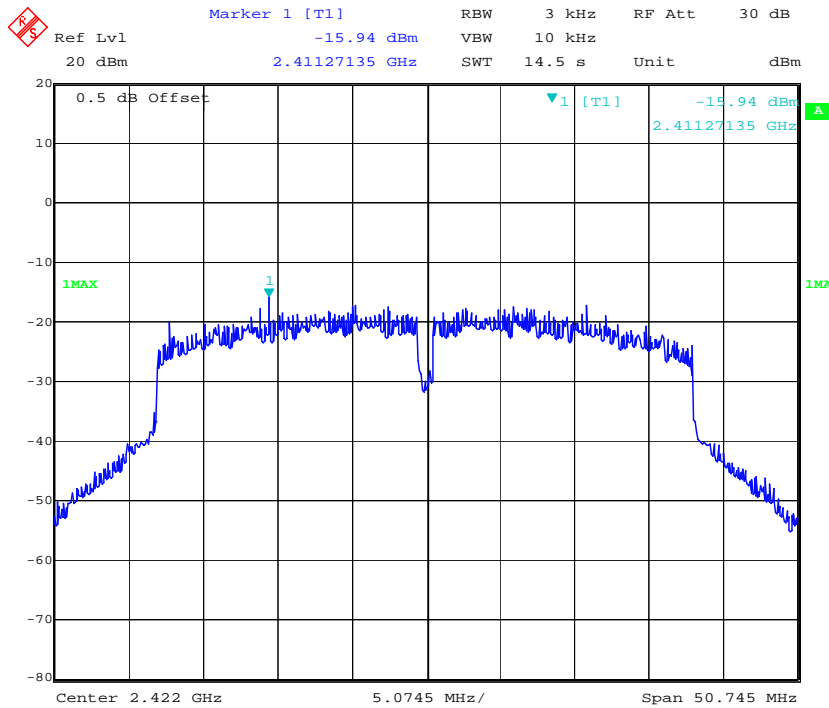

Power Spectral Density, 802.11n ht40 Middle Channel

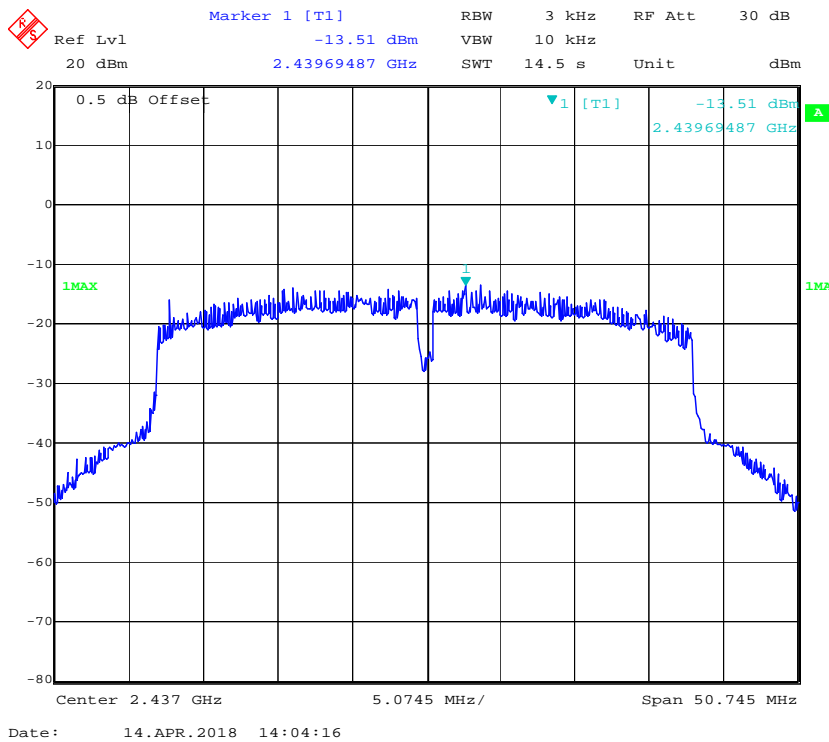

Power Spectral Density, 802.11n ht40 High Channel

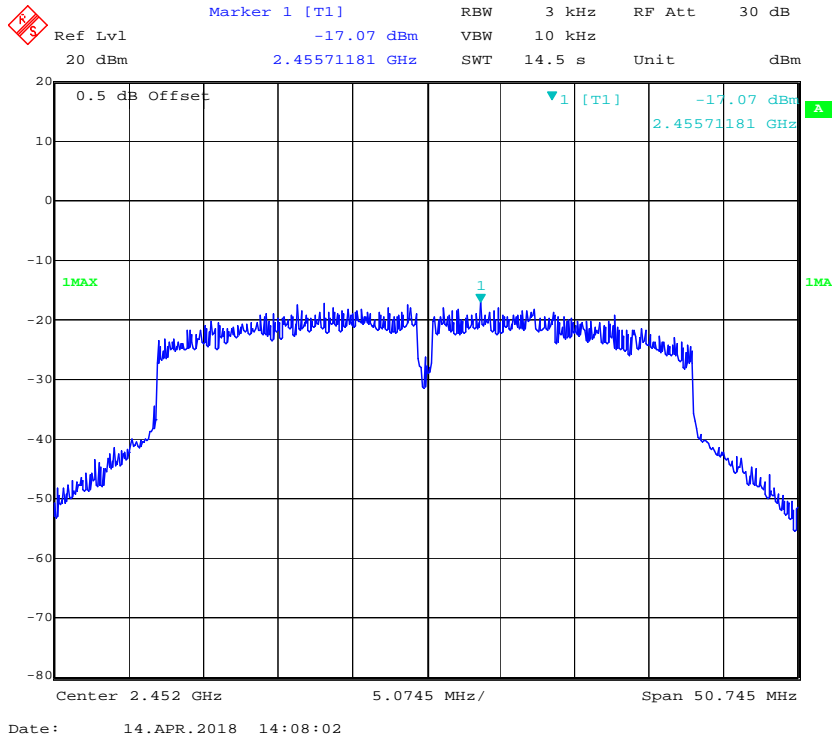

***** END OF REPORT *****