

FCC PART 15.407

TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO.,LTD

6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China.
518052

FCC ID: V7T08


| | |
|--|---|
| Report Type: Original Report | Product Name: 5GHz 23dBi 11ac Outdoor CPE |
| Report Number: | DG2210607-21790E-00A |
| Report Date: | 2021-07-02 |
| Reviewed By: | Ivan Cao  Assistant Manager |
| Test Laboratory: | Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn |

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY | 4 |
| MEASUREMENT UNCERTAINTY | 5 |
| TEST FACILITY | 5 |
| DECLARATIONS..... | 5 |
| SYSTEM TEST CONFIGURATION..... | 6 |
| DESCRIPTION OF TEST CONFIGURATION | 6 |
| EQUIPMENT MODIFICATIONS | 6 |
| EUT EXERCISE SOFTWARE | 6 |
| LOCAL SUPPORT EQUIPMENT LIST AND DETAILS | 11 |
| SUPPORT CABLE LIST AND DETAILS | 11 |
| BLOCK DIAGRAM OF TEST SETUP | 11 |
| SUMMARY OF TEST RESULTS..... | 12 |
| FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) | 13 |
| APPLICABLE STANDARD | 13 |
| FCC §15.203- ANTENNA REQUIREMENT..... | 14 |
| APPLICABLE STANDARD | 14 |
| ANTENNA CONNECTOR CONSTRUCTION | 14 |
| FCC §15.207(a)– CONDUCTED EMISSIONS..... | 15 |
| APPLICABLE STANDARD | 15 |
| EUT SETUP..... | 15 |
| EMI TEST RECEIVER SETUP..... | 15 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 16 |
| TEST EQUIPMENT LIST AND DETAILS..... | 16 |
| TEST PROCEDURE | 16 |
| TEST DATA | 17 |
| FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION..... | 19 |
| APPLICABLE STANDARD | 19 |
| EUT SETUP..... | 20 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 21 |
| TEST PROCEDURE | 21 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 22 |
| TEST EQUIPMENT LIST AND DETAILS..... | 23 |
| TEST DATA | 23 |
| FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH..... | 41 |
| APPLICABLE STANDARD | 41 |
| TEST EQUIPMENT LIST AND DETAILS..... | 41 |
| TEST PROCEDURE | 41 |
| TEST DATA | 41 |
| FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER..... | 71 |
| APPLICABLE STANDARD | 71 |

| | |
|--|-----------|
| TEST EQUIPMENT LIST AND DETAILS..... | 72 |
| TEST PROCEDURE | 72 |
| TEST DATA | 72 |
| FCC §15.407(a) - POWER SPECTRAL DENSITY | 74 |
| APPLICABLE STANDARD | 74 |
| TEST PROCEDURE | 75 |
| TEST EQUIPMENT LIST AND DETAILS..... | 75 |
| TEST DATA | 75 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|--|--|
| EUT Name: | 5GHz 23dBi 11ac Outdoor CPE |
| EUT Model: | O8 |
| Operation Frequency: | 5180-5240MHz(802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5745-5825MHz(802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80) |
| Maximum Output Power (Conducted): | 5150-5250 MHz:10.59 dBm 5725-5850 MHz:14.97 dBm |
| Antenna Gain[▲]: | 21.0 dBi |
| Modulation Type: | OFDM |
| Rated Input Voltage: | DC 12V from PoE adapter |
| PoE Adapter Information: | Model: BN073-A12012U |
| | Input: 100V-240V~50/60Hz 0.4A |
| | Output: 12V 1A |
| Serial Number: | DG2210607-21790E-RF-S-8SY |
| EUT Received Date: | 2021.06.08 |
| EUT Received Status: | Good |

Objective

This type approval report is prepared on behalf of *SHENZHEN TENDA TECHNOLOGY CO.,LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

| Parameter | Measurement Uncertainty |
|-----------------------------------|---|
| Occupied Channel Bandwidth | ±5 % |
| RF output power, conducted | ±0.61dB |
| Power Spectral Density, conducted | ±0.61 dB |
| Unwanted Emissions, radiated | 30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB |
| Unwanted Emissions,conducted | ±1.5 dB |
| Temperature | ±1 °C |
| Humidity | ±5% |
| DC and low frequency voltages | ±0.4% |
| Duty Cycle | 1% |
| AC Power Lines Conducted Emission | 3.12 dB (150 kHz to 30 MHz) |

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage Factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80.

For 5150~5250 MHz band, 7 channels are provided:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 36 | 5180 | 44 | 5220 |
| 38 | 5190 | 46 | 5230 |
| 40 | 5200 | 48 | 5240 |
| 42 | 5210 | / | / |

For 802.11a, 802.11n ht20, 802.11ac vht20 channel 36, 40 and 48 was tested, for 802.11n ht40, 802.11ac vht40 channel 38, 46 were tested, for 802.11ac vht80, channel 42 was tested.

For 5725~5850MHz band, 8 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 149 | 5745 | 157 | 5785 |
| 151 | 5755 | 159 | 5795 |
| 153 | 5765 | 161 | 5805 |
| 155 | 5775 | 165 | 5825 |

For 802.11a, 802.11n ht20, 802.11ac vht20 channel 149, 157 and 165 was tested, for 802.11n ht40, 802.11ac vht40 channel 151, 159 were tested, for 802.11ac vht80, channel 155 was tested.

Equipment Modifications

No modification was made to the EUT.

EUT Exercise Software


The software “QCA9886_BT_MR1_TEST” was used for testing, which was provided by Manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The maximum power was configured as below table, that provided by the Manufacturer▲:

| Band | Mode | Channel | Frequency (MHz) | Data Rate | Power level Setting |
|--------------------------|--------------------------|---------|-----------------|-----------|---------------------|
| 5150 - 5250 MHz | 802.11a | Low | 5180 | 6 Mbps | 13 |
| | | Middle | 5200 | 6 Mbps | 13 |
| | | High | 5240 | 6 Mbps | 13 |
| | 802.11n ht20 | Low | 5180 | MCS0 | 13 |
| | | Middle | 5200 | MCS0 | 13 |
| | | High | 5240 | MCS0 | 13 |
| | 802.11n ht40 | Low | 5190 | MCS0 | 13 |
| | | High | 5230 | MCS0 | 13 |
| | 802.11ac vht20 | Low | 5180 | MCS0 | 13 |
| | | Middle | 5200 | MCS0 | 13 |
| | | High | 5240 | MCS0 | 13 |
| | 802.11ac vht40 | Low | 5190 | MCS0 | 13 |
| | | High | 5230 | MCS0 | 13 |
| | 802.11ac vht80 | Middle | 5210 | MCS0 | 13 |
| | 5725 - 5850 MHz | 802.11a | Low | 5745 | 6 Mbps |
| Middle | | | 5785 | 6 Mbps | 17 |
| High | | | 5825 | 6 Mbps | 17 |
| 802.11n ht20 | | Low | 5745 | MCS0 | 17 |
| | | Middle | 5785 | MCS0 | 17 |
| | | High | 5825 | MCS0 | 17 |
| 802.11n ht40 | | Low | 5755 | MCS0 | 17 |
| | | High | 5795 | MCS0 | 17 |
| 802.11ac vht20 | | Low | 5745 | MCS0 | 17 |
| | | Middle | 5785 | MCS0 | 17 |
| | | High | 5825 | MCS0 | 17 |
| 802.11ac vht40 | | Low | 5755 | MCS0 | 17 |
| | | High | 5795 | MCS0 | 17 |
| 802.11ac vht80 | | Middle | 5775 | MCS0 | 17 |

The duty cycle as below:


| Mode | T _{on} (ms) | T _{on+off} (ms) | Duty Cycle (%) |
|----------------|----------------------|--------------------------|----------------|
| 802.11 a | 2.0481 | 2.0962 | 97.71 |
| 802.11n ht20 | 5.0256 | 5.0576 | 99.37 |
| 802.11n ht40 | 2.4391 | 2.4712 | 98.70 |
| 802.11ac vht20 | 5.0256 | 5.0385 | 99.74 |
| 802.11ac vht40 | 4.9936 | 5.0385 | 99.11 |
| 802.11ac vht80 | 1.1522 | 1.2115 | 95.11 |

802.11a

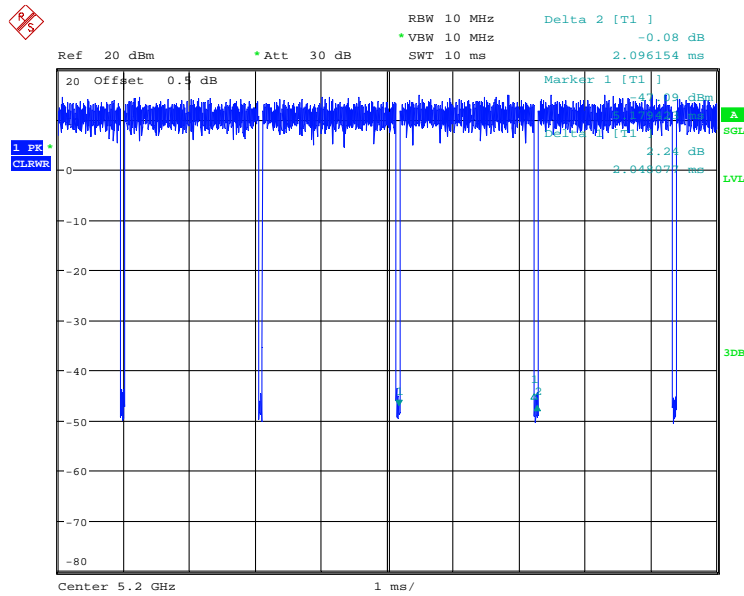


Date: 21.JUN.2021 14:26:12

802.11n ht20

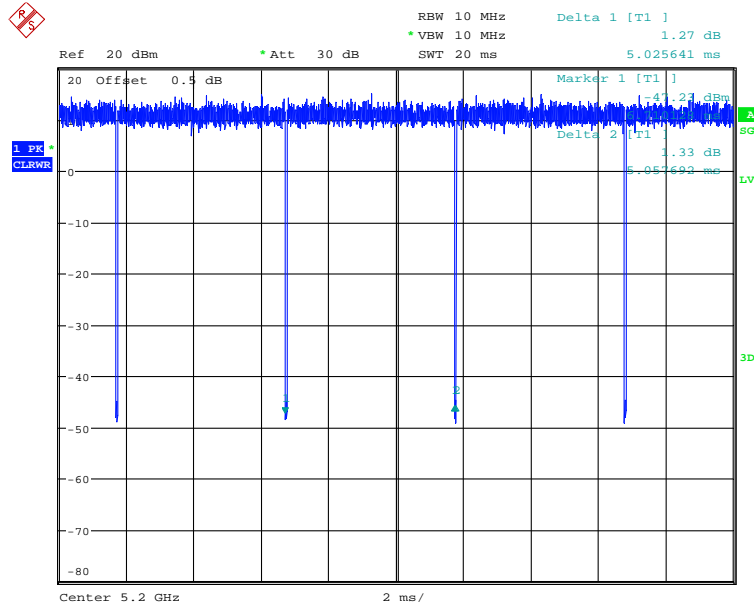


Date: 21.JUN.2021 14:24:08

802.11n ht40

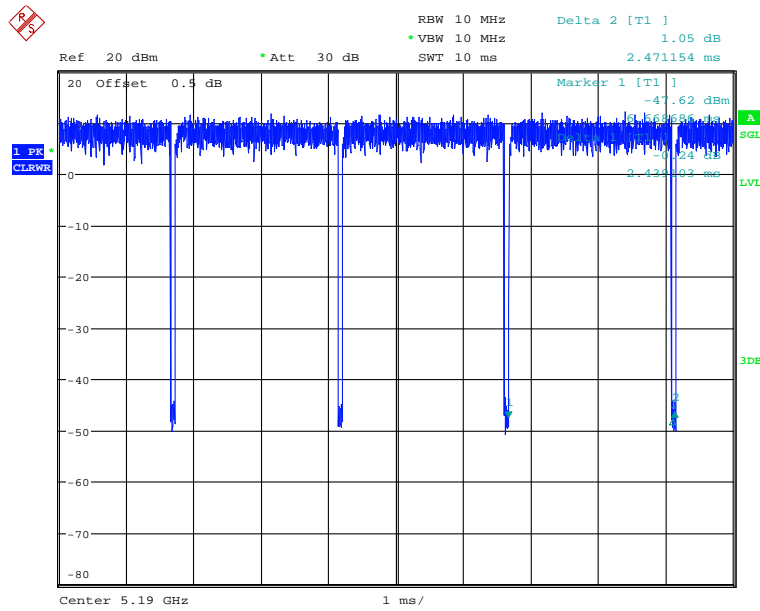


Date: 21.JUN.2021 14:33:22

802.11ac vht20

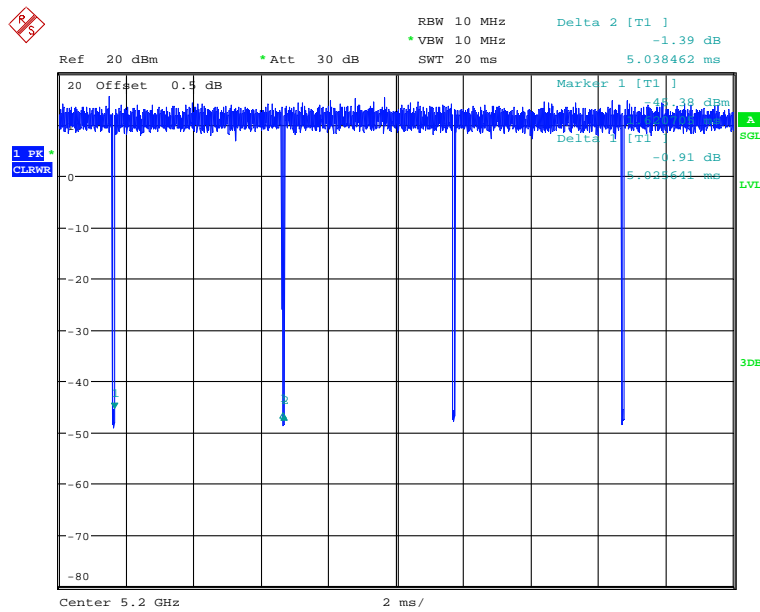


Date: 21.JUN.2021 14:27:53

802.11ac vht40

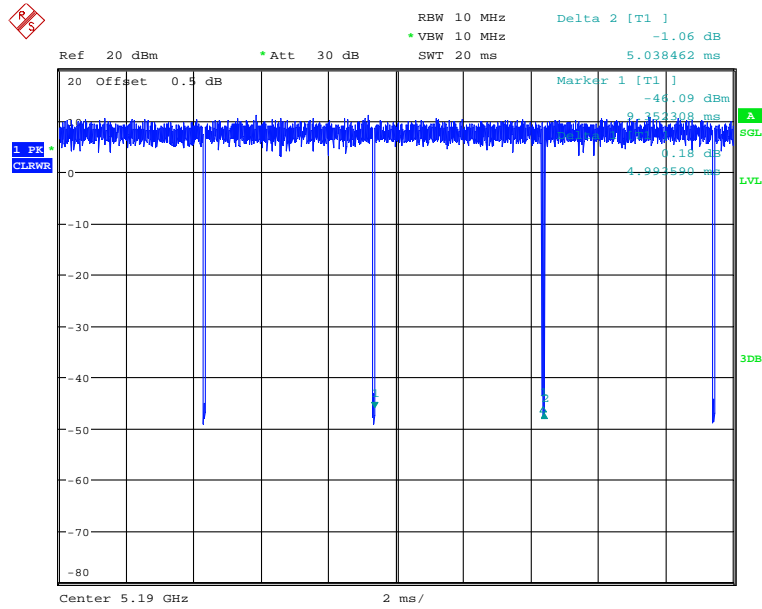

Date: 21.JUN.2021 14:31:09

802.11ac vht80

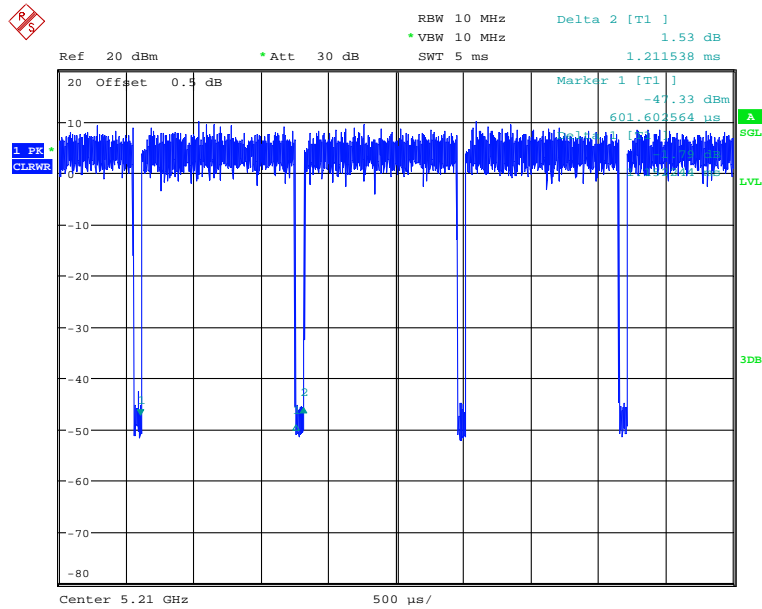

Date: 21.JUN.2021 14:39:21


Local Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| DELL | Laptop | E6410 | QDS-BRCM1017 |

Support Cable List and Details

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To |
|-------------------|----------------|--------------|------------|-------------|--------|
| RJ45 Cable | Yes | No | 1.2 | PoE Adapter | EUT |
| RJ45 Cable | Yes | No | 10 | PoE Adapter | Laptop |

Block Diagram of Test Setup

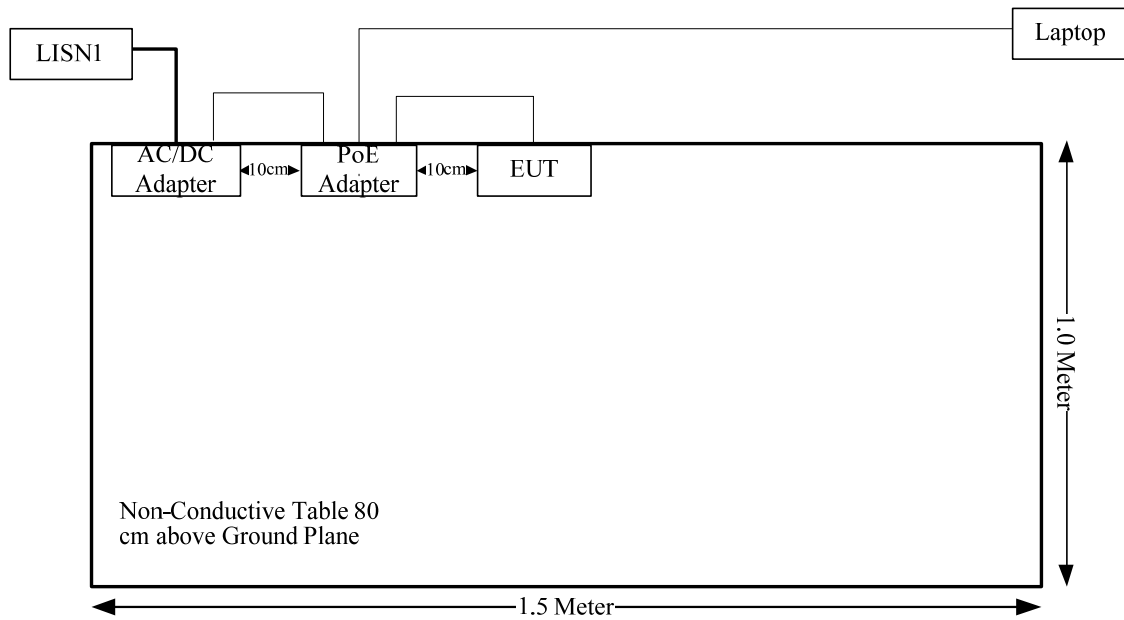

SUMMARY OF TEST RESULTS

| Rules | Description of Test | Result |
|-------------------------------------|--|---------------|
| FCC §15.407 (f) & §1.1310 & §2.1091 | Maximum Permissible Exposure (MPE) | Compliance |
| FCC§15.203 | Antenna Requirement | Compliance |
| FCC§15.407(b)(6)& §15.207(a) | Conducted Emissions | Compliance |
| FCC§15.205& §15.209 &§15.407(b) | Undesirable Emission& Restricted Bands | Compliance |
| FCC§15.407(b) | Out Of Band Emissions | Compliance |
| FCC§15.407(a) (e) | Emission Bandwidth | Compliance |
| FCC§15.407(a) | Conducted Transmitter Output Power | Compliance |
| FCC§15.407 (a) | Power Spectral Density | Compliance |

FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| (B) Limits for General Population/Uncontrolled Exposure | | | | |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (minutes) |
| 0.3–1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34–30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30–300 | 27.5 | 0.073 | 0.2 | 30 |
| 300–1500 | / | / | f/1500 | 30 |
| 1500–100,000 | / | / | 1.0 | 30 |

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain Factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

| Mode | Frequency (MHz) | Antenna Gain | | Conducted output power including Tune-up Tolerance | | Evaluation Distance (cm) | Power Density (mW/cm ²) | MPE Limit (mW/cm ²) |
|------|-----------------|--------------|-----------|--|-------|--------------------------|-------------------------------------|---------------------------------|
| | | (dBi) | (numeric) | (dBm) | (mW) | | | |
| WLAN | 5150-5250 | 21 | 125.89 | 11 | 12.59 | 20.00 | 0.32 | 1.0 |
| WLAN | 5725-5850 | 21 | 125.89 | 15 | 31.62 | 20.00 | 0.79 | 1.0 |

Result: The device meet FCC MPE at **20 cm** distance

FCC §15.203- ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna for 5G WLAN, which was permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos and below information:

| Antenna Type | input impedance (Ohm) | Antenna Gain /Frequency Range |
|--------------|-----------------------|-------------------------------|
| Internal | 50 | 21dBi/5.15-5.85GHz |


Result: Compliance.

FCC §15.207(a)– CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6).

EUT Setup

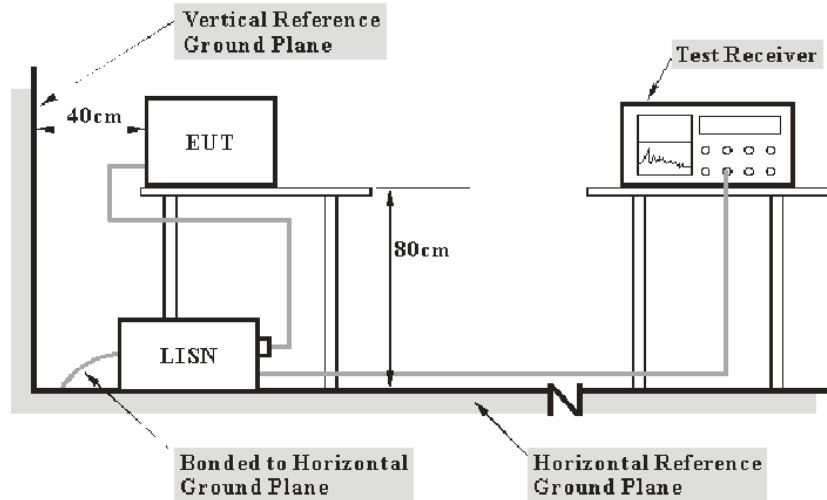

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisen with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division Factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-----------|-----------------|------------------|----------------------|
| R&S | LISN | ENV 216 | 101614 | 2020-09-12 | 2021-09-12 |
| R&S | EMI Test Receiver | ESCI | 101121 | 2020-07-07 | 2021-07-07 |
| MICRO-COAX | Coaxial Cable | C-NJNJ-50 | C-0200-01 | 2020-09-05 | 2021-09-05 |
| R&S | Test Software | EMC32 | Version 9.10.00 | N/A | N/A |

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Test Data


Environmental Conditions

| | |
|---------------------------|-------------|
| Temperature: | 27.5 °C |
| Relative Humidity: | 64 % |
| ATM Pressure: | 100.3 kPa |
| Tester: | Walker Chen |
| Test Date: | 2021-06-21 |

Test Result: Compliance.

Test Mode: Transmitting (802.11a 5200MHz was the worst)


AC120 V, 60 Hz, Line:

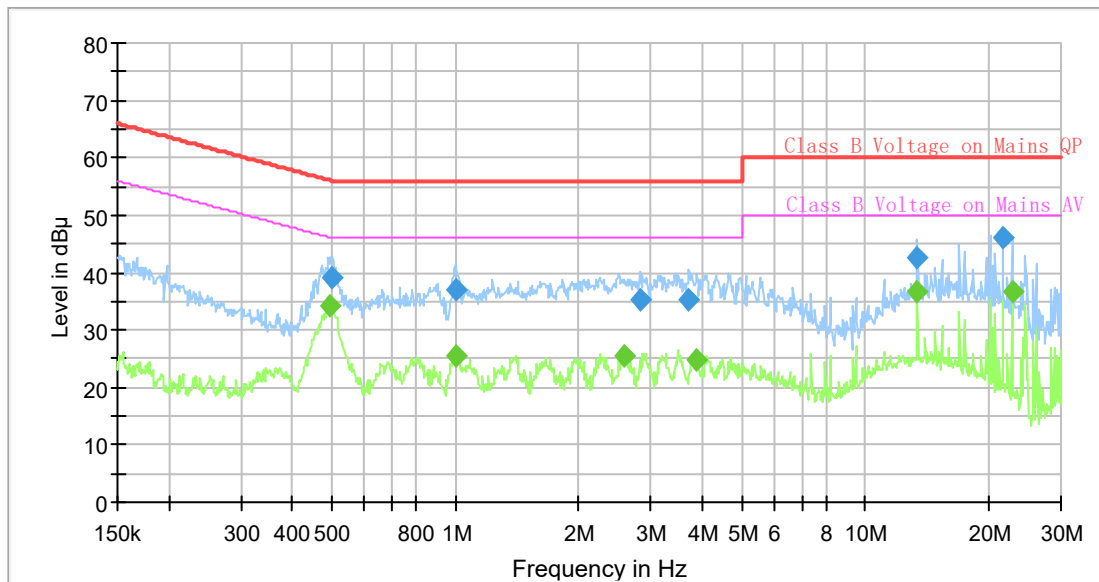

Final Result

| Frequency (MHz) | QuasiPeak (dB μV) | Average (dB μV) | Limit (dB μV) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|-------------------|-----------------|---------------|-------------|-----------------|------|------------|
| 0.496531 | --- | 34.24 | 46.06 | 11.82 | 9.000 | L1 | 9.6 |
| 0.501508 | 39.23 | --- | 56.00 | 16.77 | 9.000 | L1 | 9.6 |
| 1.003138 | --- | 25.62 | 46.00 | 20.38 | 9.000 | L1 | 9.7 |
| 1.003138 | 36.92 | --- | 56.00 | 19.08 | 9.000 | L1 | 9.7 |
| 2.587692 | --- | 25.39 | 46.00 | 20.61 | 9.000 | L1 | 9.7 |
| 2.816667 | 35.34 | --- | 56.00 | 20.66 | 9.000 | L1 | 9.7 |
| 3.705689 | 35.35 | --- | 56.00 | 20.65 | 9.000 | L1 | 9.7 |
| 3.875819 | --- | 24.73 | 46.00 | 21.27 | 9.000 | L1 | 9.7 |
| 13.418776 | 42.76 | --- | 60.00 | 17.24 | 9.000 | L1 | 10.1 |
| 13.418776 | --- | 36.60 | 50.00 | 13.40 | 9.000 | L1 | 10.1 |
| 21.659819 | 45.99 | --- | 60.00 | 14.01 | 9.000 | L1 | 10.0 |
| 22.881343 | --- | 36.72 | 50.00 | 13.28 | 9.000 | L1 | 10.0 |

AC120 V, 60 Hz, Neutral:

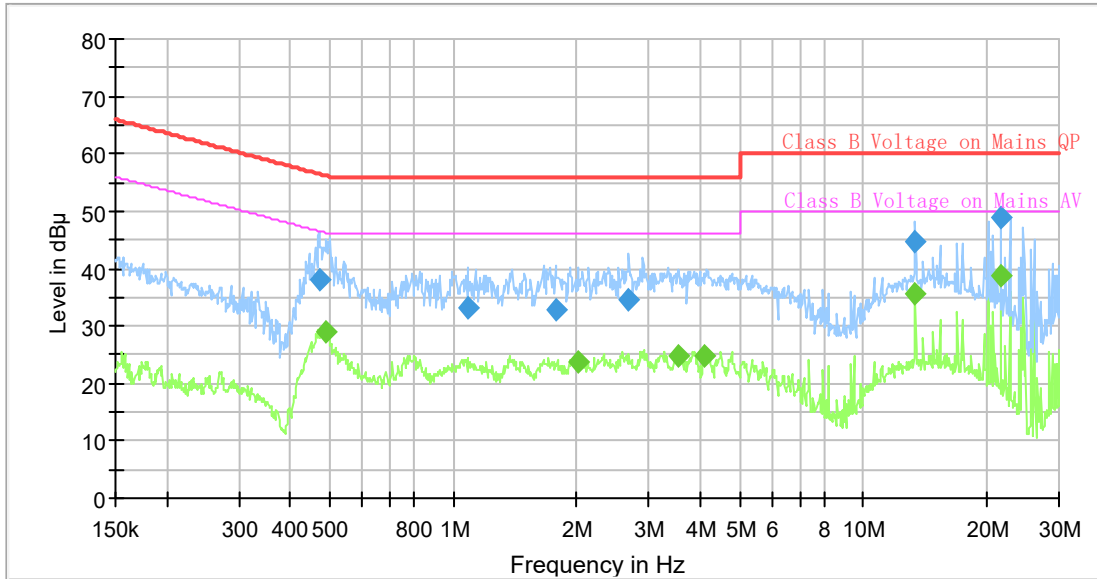

Final Result

| Frequency (MHz) | QuasiPeak (dB μ V) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|--------------------|------------------|----------------|-------------|-----------------|------|------------|
| 0.470023 | 37.97 | --- | 56.51 | 18.54 | 9.000 | N | 9.6 |
| 0.489157 | --- | 28.92 | 46.18 | 17.26 | 9.000 | N | 9.6 |
| 1.086470 | 33.11 | --- | 56.00 | 22.89 | 9.000 | N | 9.6 |
| 1.780155 | 32.88 | --- | 56.00 | 23.12 | 9.000 | N | 9.6 |
| 2.016552 | --- | 23.81 | 46.00 | 22.19 | 9.000 | N | 9.6 |
| 2.679631 | 34.48 | --- | 56.00 | 21.52 | 9.000 | N | 9.6 |
| 3.543027 | --- | 24.64 | 46.00 | 21.36 | 9.000 | N | 9.6 |
| 4.114871 | --- | 24.69 | 46.00 | 21.31 | 9.000 | N | 9.6 |
| 13.418776 | 44.70 | --- | 60.00 | 15.30 | 9.000 | N | 9.8 |
| 13.418776 | --- | 35.73 | 50.00 | 14.27 | 9.000 | N | 9.8 |
| 21.659819 | --- | 38.61 | 50.00 | 11.39 | 9.000 | N | 9.9 |
| 21.659819 | 48.80 | --- | 60.00 | 11.20 | 9.000 | N | 9.9 |

FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufac vhturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufac vhturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


(7) The provisions of §15.205 apply to intentional radiators operating under this section.

EUT Setup


Below 1 GHz:

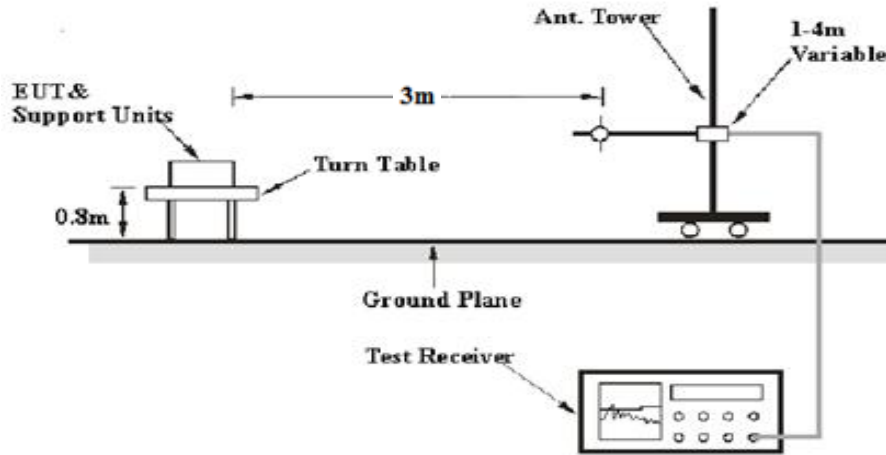

1-26.5 GHz:

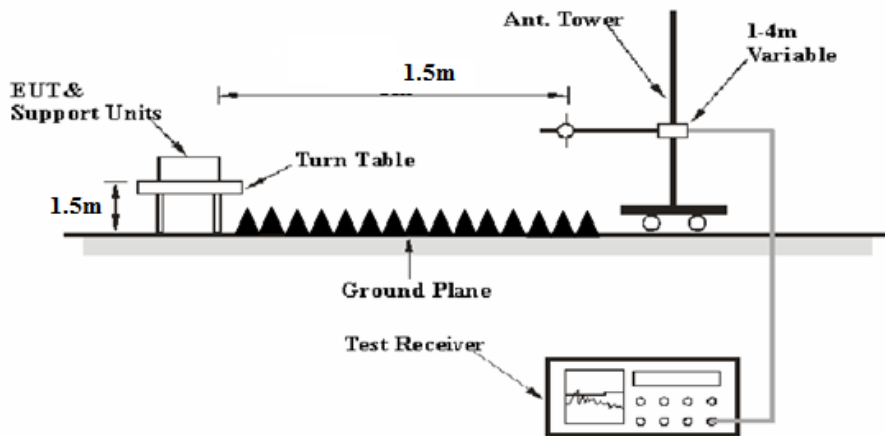

26.5-40 GHz:

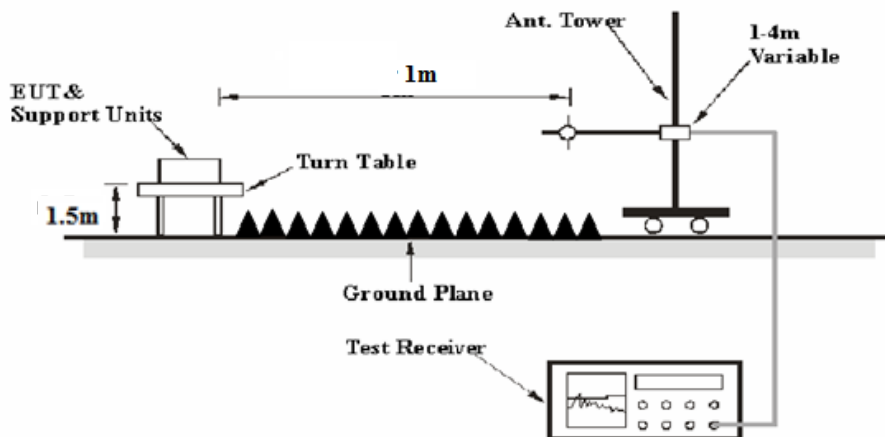

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

| Measurement | RBW | Video B/W | IF B/W |
|-------------|---------|-----------|--------|
| QP | 120 kHz | 300 kHz | 120kHz |

1GHz- 40GHz:

| Measurement | Duty cycle | RBW | Video B/W |
|-------------|------------|------|-----------|
| PK | Any | 1MHz | 3 MHz |
| Ave. | >98% | 1MHz | 10 Hz |
| | <98% | 1MHz | 1/T |

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation Factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|----------------------------------|-------------------|-------------------------|--------------------|------------------|----------------------|
| Radiation Below 1GHz Test | | | | | |
| Sunol Sciences | Antenna | JB3 | A060611-1 | 2020-11-10 | 2023-11-10 |
| R&S | EMI Test Receiver | ESR3 | 102453 | 2020-09-12 | 2021-09-12 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0075-01 | 2020-09-05 | 2021-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0400-01 | 2020-09-05 | 2021-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-1400-01 | 2021-05-06 | 2022-05-05 |
| HP | Amplifier | 8447D | 2727A05902 | 2020-09-05 | 2021-09-05 |
| Radiation Above 1GHz Test | | | | | |
| ETS-Lindgren | Horn Antenna | 3115 | 000 527 35 | 2018-10-12 | 2021-10-12 |
| Ducommun Technologies | Horn Antenna | ARH-4223-02 | 1007726-01 1304 | 2020-12-05 | 2023-12-04 |
| Ducommun Technologies | Horn Antenna | ARH-2823-02 | 1007726-01 1302 | 2020-12-05 | 2023-12-04 |
| R&S | Spectrum Analyzer | FSV40 | 101474 | 2020-07-07 | 2021-07-07 |
| Agilent | Spectrum Analyzer | E4440A | SG43360054 | 2020-07-07 | 2021-07-07 |
| Unknown | Coaxial Cable | C-SJSJ-50 | C-0800-01 | 2020-09-05 | 2021-09-05 |
| Unknown | Coaxial Cable | C-2.4J2.4J-50 | C-0700-02 | 2020-06-27 | 2021-06-27 |
| Mini-Circuit | Amplifier | ZVA-213-S+ | 54201245 | 2020-09-05 | 2021-09-05 |
| Quinstar | Amplifier | QLW-18405536-JO | 15964001001 | 2020-06-27 | 2021-06-27 |
| Farad | Test Software | EZ-EMC | V1.1.4.2 | N/A | N/A |
| Sinoscite | Bandstop Filters | BSF5150-5850MN-0899-003 | 0899003 | 2021-05-06 | 2022-05-05 |
| Mini Circuits | High Pass Filter | VHF-6010+ | 31118 | 2021-06-16 | 2022-06-16 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


| Test Items | Radiation Below 1GHz | Radiation Above 1GHz |
|---------------------------|----------------------|----------------------|
| Temperature: | 27.7°C | 27.2 °C |
| Relative Humidity: | 49 % | 56 % |
| ATM Pressure: | 100.3kPa | 100.3kPa |
| Tester: | Joker Chen | Lee Li |
| Test Date: | 2021-06-23 | 2021-06-23 |

Test Mode: Transmitting

1) Below 1GHz(802.11a 5745 MHz was the worst):

Horizontal:


80.0 dBuV/m

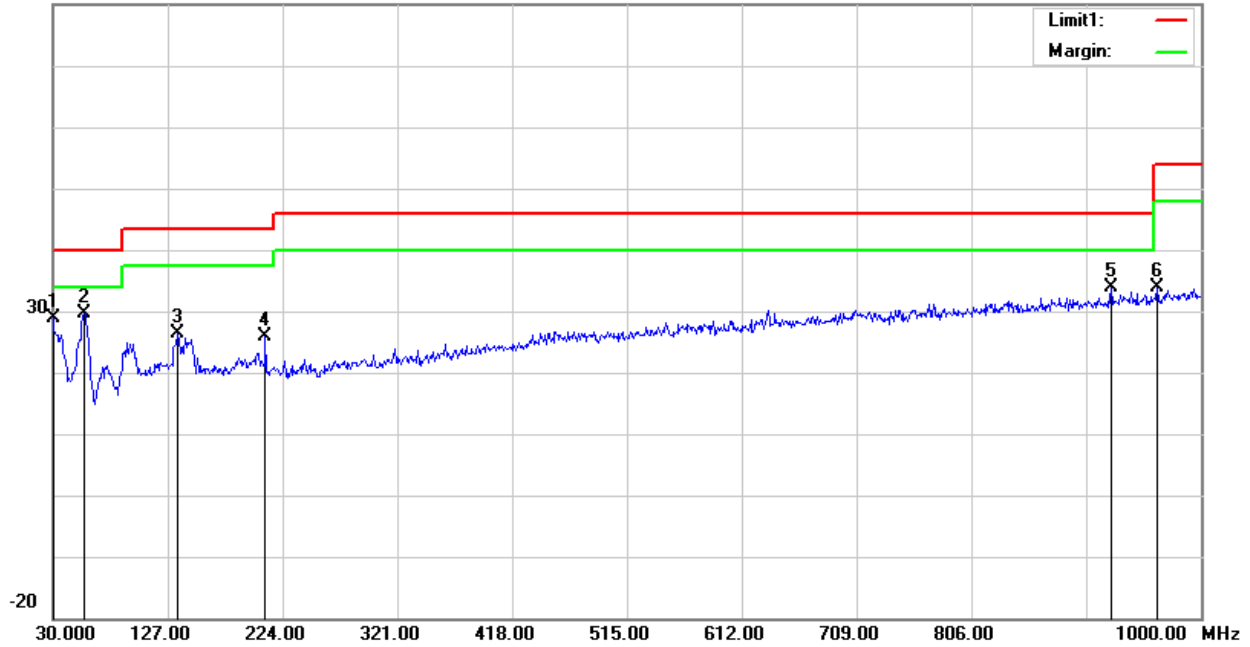

| Frequency (MHz) | Receiver Reading (dBuV) | Detector | Correction Factor (dB/m) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------|--------------------------|---------------------|----------------|-------------|
| 30.0000 | 27.37 | peak | 1.46 | 28.83 | 40.00 | 11.17 |
| 56.1900 | 42.04 | peak | -12.37 | 29.67 | 40.00 | 10.33 |
| 135.7300 | 31.60 | peak | -5.32 | 26.28 | 43.50 | 17.22 |
| 209.4500 | 33.24 | peak | -7.31 | 25.93 | 43.50 | 17.57 |
| 924.3400 | 34.31 | peak | -0.41 | 33.90 | 46.00 | 12.10 |
| 963.1400 | 33.67 | peak | 0.10 | 33.77 | 54.00 | 20.23 |

Vertical:

80.0 dB μ V/m

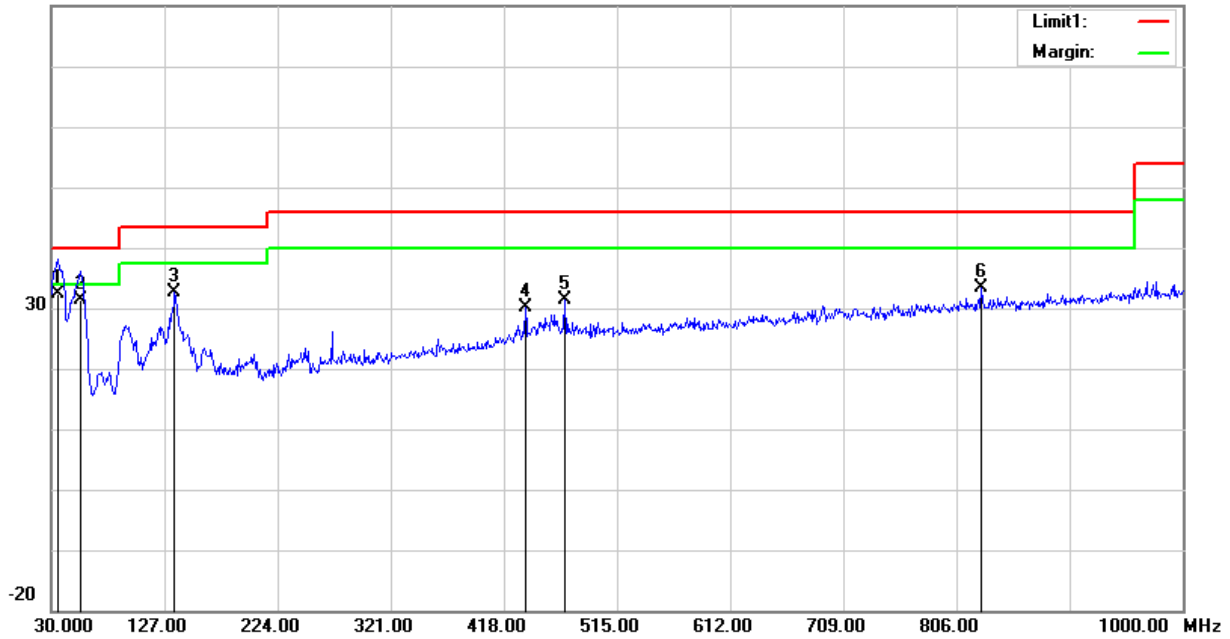

| Frequency (MHz) | Receiver Reading (dB μ V) | Detector | Correction Factor (dB/m) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|-------------------------------|----------|--------------------------|---------------------------|----------------------|-------------|
| 35.8200 | 35.12 | QP | -2.79 | 32.33 | 40.00 | 7.67 |
| 55.2200 | 43.70 | QP | -12.33 | 31.37 | 40.00 | 8.63 |
| 135.7300 | 38.05 | peak | -5.32 | 32.73 | 43.50 | 10.77 |
| 436.4300 | 31.32 | peak | -1.31 | 30.01 | 46.00 | 15.99 |
| 470.3800 | 31.93 | peak | -0.53 | 31.40 | 46.00 | 14.60 |
| 827.3400 | 29.00 | peak | 4.38 | 33.38 | 46.00 | 12.62 |

**2) 1GHz-40GHz:
5150-5250MHz
802.11a**

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|--------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5180 MHz | | | | | | | | | | |
| 5180.00 | 67.73 | PK | H | 33.59 | 3.58 | 0.00 | 104.90 | 98.88 | N/A | N/A |
| 5180.00 | 57.63 | AV | H | 33.59 | 3.58 | 0.00 | 94.80 | 88.78 | N/A | N/A |
| 5180.00 | 69.78 | PK | V | 33.59 | 3.58 | 0.00 | 106.95 | 100.93 | N/A | N/A |
| 5180.00 | 59.19 | AV | V | 33.59 | 3.58 | 0.00 | 96.36 | 90.34 | N/A | N/A |
| 5150.00 | 27.26 | PK | V | 33.54 | 3.56 | 0.00 | 64.36 | 58.34 | 74.00 | 15.66 |
| 5150.00 | 15.48 | AV | V | 33.54 | 3.56 | 0.00 | 52.58 | 46.56 | 54.00 | 7.44 |
| 10360.00 | 39.53 | PK | V | 38.17 | 6.29 | 25.46 | 58.53 | 52.51 | 68.20 | 15.69 |
| 15540.00 | 35.96 | PK | V | 38.06 | 8.85 | 24.27 | 58.60 | 52.58 | 74.00 | 21.42 |
| 15540.00 | 23.60 | AV | V | 38.06 | 8.85 | 24.27 | 46.24 | 40.22 | 54.00 | 13.78 |
| Middle Channel: 5200 MHz | | | | | | | | | | |
| 5200.00 | 67.67 | PK | H | 33.62 | 3.60 | 0.00 | 104.89 | 98.87 | N/A | N/A |
| 5200.00 | 57.52 | AV | H | 33.62 | 3.60 | 0.00 | 94.74 | 88.72 | N/A | N/A |
| 5200.00 | 69.72 | PK | V | 33.62 | 3.60 | 0.00 | 106.94 | 100.92 | N/A | N/A |
| 5200.00 | 59.13 | AV | V | 33.62 | 3.60 | 0.00 | 96.35 | 90.33 | N/A | N/A |
| 10400.00 | 39.36 | PK | V | 38.18 | 6.32 | 25.46 | 58.40 | 52.38 | 68.20 | 15.82 |
| 15600.00 | 35.73 | PK | V | 38.00 | 8.83 | 24.31 | 58.25 | 52.23 | 74.00 | 21.77 |
| 15600.00 | 23.37 | AV | V | 38.00 | 8.83 | 24.31 | 45.89 | 39.87 | 54.00 | 14.13 |
| High Channel: 5240 MHz | | | | | | | | | | |
| 5240.00 | 67.23 | PK | H | 33.68 | 3.52 | 0.00 | 104.43 | 98.41 | N/A | N/A |
| 5240.00 | 56.37 | AV | H | 33.68 | 3.52 | 0.00 | 93.57 | 87.55 | N/A | N/A |
| 5240.00 | 69.22 | PK | V | 33.68 | 3.52 | 0.00 | 106.42 | 100.4 | N/A | N/A |
| 5240.00 | 58.50 | AV | V | 33.68 | 3.52 | 0.00 | 95.70 | 89.68 | N/A | N/A |
| 5350.00 | 27.36 | PK | V | 33.86 | 3.52 | 0.00 | 64.74 | 58.72 | 74.00 | 15.28 |
| 5350.00 | 15.26 | AV | V | 33.86 | 3.52 | 0.00 | 52.64 | 46.62 | 54.00 | 7.38 |
| 10480.00 | 39.76 | PK | V | 38.20 | 6.37 | 25.47 | 58.86 | 52.84 | 68.20 | 15.36 |
| 15720.00 | 36.19 | PK | V | 37.88 | 8.79 | 24.39 | 58.47 | 52.45 | 74.00 | 21.55 |
| 15720.00 | 23.83 | AV | V | 37.88 | 8.79 | 24.39 | 46.11 | 40.09 | 54.00 | 13.91 |

802.11n ht20:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|--------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5180 MHz | | | | | | | | | | |
| 5180.00 | 66.91 | PK | H | 33.59 | 3.58 | 0.00 | 104.08 | 98.06 | N/A | N/A |
| 5180.00 | 56.01 | AV | H | 33.59 | 3.58 | 0.00 | 93.18 | 87.16 | N/A | N/A |
| 5180.00 | 69.04 | PK | V | 33.59 | 3.58 | 0.00 | 106.21 | 100.19 | N/A | N/A |
| 5180.00 | 58.36 | AV | V | 33.59 | 3.58 | 0.00 | 95.53 | 89.51 | N/A | N/A |
| 5150.00 | 27.28 | PK | V | 33.54 | 3.56 | 0.00 | 64.38 | 58.36 | 74.00 | 15.64 |
| 5150.00 | 14.97 | AV | V | 33.54 | 3.56 | 0.00 | 52.07 | 46.05 | 54.00 | 7.95 |
| 10360.00 | 38.69 | PK | V | 38.17 | 6.29 | 25.46 | 57.69 | 51.67 | 68.20 | 16.53 |
| 15540.00 | 35.62 | PK | V | 38.06 | 8.85 | 24.27 | 58.26 | 52.24 | 74.00 | 21.76 |
| 15540.00 | 23.89 | AV | V | 38.06 | 8.85 | 24.27 | 46.53 | 40.51 | 54.00 | 13.49 |
| Middle Channel: 5200 MHz | | | | | | | | | | |
| 5200.00 | 66.87 | PK | H | 33.62 | 3.60 | 0.00 | 104.09 | 98.07 | N/A | N/A |
| 5200.00 | 55.96 | AV | H | 33.62 | 3.60 | 0.00 | 93.18 | 87.16 | N/A | N/A |
| 5200.00 | 69.01 | PK | V | 33.62 | 3.60 | 0.00 | 106.23 | 100.21 | N/A | N/A |
| 5200.00 | 58.32 | AV | V | 33.62 | 3.60 | 0.00 | 95.54 | 89.52 | N/A | N/A |
| 10400.00 | 38.65 | PK | V | 38.18 | 6.32 | 25.46 | 57.69 | 51.67 | 68.20 | 16.53 |
| 15600.00 | 35.62 | PK | V | 38.00 | 8.83 | 24.31 | 58.14 | 52.12 | 74.00 | 21.88 |
| 15600.00 | 23.84 | AV | V | 38.00 | 8.83 | 24.31 | 46.36 | 40.34 | 54.00 | 13.66 |
| High Channel: 5240 MHz | | | | | | | | | | |
| 5240.00 | 66.96 | PK | H | 33.68 | 3.52 | 0.00 | 104.16 | 98.14 | N/A | N/A |
| 5240.00 | 55.98 | AV | H | 33.68 | 3.52 | 0.00 | 93.18 | 87.16 | N/A | N/A |
| 5240.00 | 68.95 | PK | V | 33.68 | 3.52 | 0.00 | 106.15 | 100.13 | N/A | N/A |
| 5240.00 | 57.64 | AV | V | 33.68 | 3.52 | 0.00 | 94.84 | 88.82 | N/A | N/A |
| 5350.00 | 27.59 | PK | V | 33.86 | 3.52 | 0.00 | 64.97 | 58.95 | 74.00 | 15.05 |
| 5350.00 | 14.85 | AV | V | 33.86 | 3.52 | 0.00 | 52.23 | 46.21 | 54.00 | 7.79 |
| 10480.00 | 38.88 | PK | V | 38.20 | 6.37 | 25.47 | 57.98 | 51.96 | 68.20 | 16.24 |
| 15720.00 | 35.78 | PK | V | 37.88 | 8.79 | 24.39 | 58.06 | 52.04 | 74.00 | 21.96 |
| 15720.00 | 24.05 | AV | V | 37.88 | 8.79 | 24.39 | 46.33 | 40.31 | 54.00 | 13.69 |

802.11n ht40:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5190 MHz | | | | | | | | | | |
| 5190.00 | 64.55 | PK | H | 33.60 | 3.59 | 0.00 | 101.74 | 95.72 | N/A | N/A |
| 5190.00 | 54.63 | AV | H | 33.60 | 3.59 | 0.00 | 91.82 | 85.8 | N/A | N/A |
| 5190.00 | 67.98 | PK | V | 33.60 | 3.59 | 0.00 | 105.17 | 99.15 | N/A | N/A |
| 5190.00 | 57.27 | AV | V | 33.60 | 3.59 | 0.00 | 94.46 | 88.44 | N/A | N/A |
| 5150.00 | 27.98 | PK | V | 33.54 | 3.56 | 0.00 | 65.08 | 59.06 | 74.00 | 14.94 |
| 5150.00 | 15.16 | AV | V | 33.54 | 3.56 | 0.00 | 52.26 | 46.24 | 54.00 | 7.76 |
| 10380.00 | 36.11 | PK | V | 38.18 | 6.31 | 25.46 | 55.14 | 49.12 | 68.20 | 19.08 |
| 15570.00 | 35.53 | PK | V | 38.03 | 8.84 | 24.29 | 58.11 | 52.09 | 74.00 | 21.91 |
| 15570.00 | 24.12 | AV | V | 38.03 | 8.84 | 24.29 | 46.70 | 40.68 | 54.00 | 13.32 |
| High Channel: 5230 MHz | | | | | | | | | | |
| 5230.00 | 63.94 | PK | H | 33.67 | 3.54 | 0.00 | 101.15 | 95.13 | N/A | N/A |
| 5230.00 | 53.45 | AV | H | 33.67 | 3.54 | 0.00 | 90.66 | 84.64 | N/A | N/A |
| 5230.00 | 66.05 | PK | V | 33.67 | 3.54 | 0.00 | 103.26 | 97.24 | N/A | N/A |
| 5230.00 | 56.04 | AV | V | 33.67 | 3.54 | 0.00 | 93.25 | 87.23 | N/A | N/A |
| 5350.00 | 27.92 | PK | V | 33.86 | 3.52 | 0.00 | 65.30 | 59.28 | 74.00 | 14.72 |
| 5350.00 | 14.25 | AV | V | 33.86 | 3.52 | 0.00 | 51.63 | 45.61 | 54.00 | 8.39 |
| 10460.00 | 36.11 | PK | V | 38.19 | 6.36 | 25.47 | 55.19 | 49.17 | 68.20 | 19.03 |
| 15690.00 | 35.53 | PK | V | 37.91 | 8.80 | 24.37 | 57.87 | 51.85 | 74.00 | 22.15 |
| 15690.00 | 24.19 | AV | V | 37.91 | 8.80 | 24.37 | 46.53 | 40.51 | 54.00 | 13.49 |

802.11ac vht20:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dB μ V/m) | Extrapolation result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------------|----------------------|----------|-------------|---------------|-----------------|---------------------|------------------------------------|-------------------------------------|----------------------|-------------|
| | Reading (dB μ V) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5180 MHz | | | | | | | | | | |
| 5180.00 | 66.95 | PK | H | 33.59 | 3.58 | 0.00 | 104.12 | 98.1 | N/A | N/A |
| 5180.00 | 56.11 | AV | H | 33.59 | 3.58 | 0.00 | 93.28 | 87.26 | N/A | N/A |
| 5180.00 | 69.20 | PK | V | 33.59 | 3.58 | 0.00 | 106.37 | 100.35 | N/A | N/A |
| 5180.00 | 58.03 | AV | V | 33.59 | 3.58 | 0.00 | 95.20 | 89.18 | N/A | N/A |
| 5150.00 | 27.69 | PK | V | 33.54 | 3.56 | 0.00 | 64.79 | 58.77 | 74.00 | 15.23 |
| 5150.00 | 14.98 | AV | V | 33.54 | 3.56 | 0.00 | 52.08 | 46.06 | 54.00 | 7.94 |
| 10360.00 | 35.93 | PK | V | 38.17 | 6.29 | 25.46 | 54.93 | 48.91 | 68.20 | 19.29 |
| 15540.00 | 35.35 | PK | V | 38.06 | 8.85 | 24.27 | 57.99 | 51.97 | 74.00 | 22.03 |
| 15540.00 | 24.01 | AV | V | 38.06 | 8.85 | 24.27 | 46.65 | 40.63 | 54.00 | 13.37 |
| Middle Channel: 5200 MHz | | | | | | | | | | |
| 5200.00 | 66.72 | PK | H | 33.62 | 3.60 | 0.00 | 103.94 | 97.92 | N/A | N/A |
| 5200.00 | 55.88 | AV | H | 33.62 | 3.60 | 0.00 | 93.10 | 87.08 | N/A | N/A |
| 5200.00 | 68.97 | PK | V | 33.62 | 3.60 | 0.00 | 106.19 | 100.17 | N/A | N/A |
| 5200.00 | 57.86 | AV | V | 33.62 | 3.60 | 0.00 | 95.08 | 89.06 | N/A | N/A |
| 10400.00 | 36.23 | PK | V | 38.18 | 6.32 | 25.46 | 55.27 | 49.25 | 68.20 | 18.95 |
| 15600.00 | 35.63 | PK | V | 38.00 | 8.83 | 24.31 | 58.15 | 52.13 | 74.00 | 21.87 |
| 15600.00 | 23.41 | AV | V | 38.00 | 8.83 | 24.31 | 45.93 | 39.91 | 54.00 | 14.09 |
| High Channel: 5240 MHz | | | | | | | | | | |
| 5240.00 | 65.89 | PK | H | 33.68 | 3.52 | 0.00 | 103.09 | 97.07 | N/A | N/A |
| 5240.00 | 54.96 | AV | H | 33.68 | 3.52 | 0.00 | 92.16 | 86.14 | N/A | N/A |
| 5240.00 | 68.43 | PK | V | 33.68 | 3.52 | 0.00 | 105.63 | 99.61 | N/A | N/A |
| 5240.00 | 57.62 | AV | V | 33.68 | 3.52 | 0.00 | 94.82 | 88.8 | N/A | N/A |
| 5350.00 | 27.59 | PK | V | 33.86 | 3.52 | 0.00 | 64.97 | 58.95 | 74.00 | 15.05 |
| 5350.00 | 14.85 | AV | V | 33.86 | 3.52 | 0.00 | 52.23 | 46.21 | 54.00 | 7.79 |
| 10480.00 | 35.87 | PK | V | 38.20 | 6.37 | 25.47 | 54.97 | 48.95 | 68.20 | 19.25 |
| 15720.00 | 35.29 | PK | V | 37.88 | 8.79 | 24.39 | 57.57 | 51.55 | 74.00 | 22.45 |
| 15720.00 | 23.18 | AV | V | 37.88 | 8.79 | 24.39 | 45.46 | 39.44 | 54.00 | 14.56 |

802.11ac vht40:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dB μ V/m) | Extrapolation result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|------------------------|----------------------|----------|-------------|---------------|-----------------|---------------------|------------------------------------|-------------------------------------|----------------------|-------------|
| | Reading (dB μ V) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5190 MHz | | | | | | | | | | |
| 5190.00 | 63.56 | PK | H | 33.60 | 3.59 | 0.00 | 100.75 | 94.73 | N/A | N/A |
| 5190.00 | 53.85 | AV | H | 33.60 | 3.59 | 0.00 | 91.04 | 85.02 | N/A | N/A |
| 5190.00 | 66.72 | PK | V | 33.60 | 3.59 | 0.00 | 103.91 | 97.89 | N/A | N/A |
| 5190.00 | 56.86 | AV | V | 33.60 | 3.59 | 0.00 | 94.05 | 88.03 | N/A | N/A |
| 5150.00 | 27.16 | PK | V | 33.54 | 3.56 | 0.00 | 64.26 | 58.24 | 74.00 | 15.76 |
| 5150.00 | 14.89 | AV | V | 33.54 | 3.56 | 0.00 | 51.99 | 45.97 | 54.00 | 8.03 |
| 10380.00 | 36.03 | PK | V | 38.18 | 6.31 | 25.46 | 55.06 | 49.04 | 68.20 | 19.16 |
| 15570.00 | 35.41 | PK | V | 38.03 | 8.84 | 24.29 | 57.99 | 51.97 | 74.00 | 22.03 |
| 15570.00 | 24.15 | AV | V | 38.03 | 8.84 | 24.29 | 46.73 | 40.71 | 54.00 | 13.29 |
| High Channel: 5230 MHz | | | | | | | | | | |
| 5230.00 | 63.69 | PK | H | 33.67 | 3.54 | 0.00 | 100.90 | 94.88 | N/A | N/A |
| 5230.00 | 53.98 | AV | H | 33.67 | 3.54 | 0.00 | 91.19 | 85.17 | N/A | N/A |
| 5230.00 | 66.85 | PK | V | 33.67 | 3.54 | 0.00 | 104.06 | 98.04 | N/A | N/A |
| 5230.00 | 56.93 | AV | V | 33.67 | 3.54 | 0.00 | 94.14 | 88.12 | N/A | N/A |
| 5350.00 | 27.29 | PK | V | 33.86 | 3.52 | 0.00 | 64.67 | 58.65 | 74.00 | 15.35 |
| 5350.00 | 15.02 | AV | V | 33.86 | 3.52 | 0.00 | 52.40 | 46.38 | 54.00 | 7.62 |
| 10460.00 | 36.04 | PK | V | 38.19 | 6.36 | 25.47 | 55.12 | 49.1 | 68.20 | 19.10 |
| 15690.00 | 35.48 | PK | V | 37.91 | 8.80 | 24.37 | 57.82 | 51.8 | 74.00 | 22.20 |
| 15690.00 | 24.43 | AV | V | 37.91 | 8.80 | 24.37 | 46.77 | 40.75 | 54.00 | 13.25 |

802.11ac vht80:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (Db) | Amplifier Gain (Db) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (Db) |
|--------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (Db/m) | | | | | | |
| Middle Channel: 5210 MHz | | | | | | | | | | |
| 5210.00 | 61.51 | PK | H | 33.64 | 3.58 | 0.00 | 98.73 | 92.71 | N/A | N/A |
| 5210.00 | 51.28 | AV | H | 33.64 | 3.58 | 0.00 | 88.50 | 82.48 | N/A | N/A |
| 5210.00 | 63.40 | PK | V | 33.64 | 3.58 | 0.00 | 100.62 | 94.6 | N/A | N/A |
| 5210.00 | 53.18 | AV | V | 33.64 | 3.58 | 0.00 | 90.40 | 84.38 | N/A | N/A |
| 5150.00 | 28.13 | PK | V | 33.54 | 3.56 | 0.00 | 65.23 | 59.21 | 74.00 | 14.79 |
| 5150.00 | 16.98 | AV | V | 33.54 | 3.56 | 0.00 | 54.08 | 48.06 | 54.00 | 5.94 |
| 5350.00 | 27.65 | PK | V | 33.86 | 3.52 | 0.00 | 65.03 | 59.01 | 74.00 | 14.99 |
| 5350.00 | 16.04 | AV | V | 33.86 | 3.52 | 0.00 | 53.42 | 47.4 | 54.00 | 6.60 |
| 10420.00 | 35.96 | PK | V | 38.18 | 6.33 | 25.47 | 55.00 | 48.98 | 68.20 | 19.22 |
| 15630.00 | 35.38 | PK | V | 37.97 | 8.82 | 24.33 | 57.84 | 51.82 | 74.00 | 22.18 |
| 15630.00 | 24.19 | AV | V | 37.97 | 8.82 | 24.33 | 46.65 | 40.63 | 54.00 | 13.37 |

**5725-5850MHz
802.11a**

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|--------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5745 MHz | | | | | | | | | | |
| 5745.00 | 73.20 | PK | H | 34.20 | 3.69 | 0.00 | 111.09 | 105.07 | N/A | N/A |
| 5745.00 | 62.33 | AV | H | 34.20 | 3.69 | 0.00 | 100.22 | 94.2 | N/A | N/A |
| 5745.00 | 72.11 | PK | V | 34.20 | 3.69 | 0.00 | 110.00 | 103.98 | N/A | N/A |
| 5745.00 | 61.56 | AV | V | 34.20 | 3.69 | 0.00 | 99.45 | 93.43 | N/A | N/A |
| 5725.00 | 28.90 | PK | H | 34.19 | 3.69 | 0.00 | 66.78 | 60.76 | 122.20 | 61.44 |
| 5720.00 | 28.34 | PK | H | 34.19 | 3.69 | 0.00 | 66.22 | 60.2 | 110.80 | 50.60 |
| 5700.00 | 27.86 | PK | H | 34.18 | 3.68 | 0.00 | 65.72 | 59.7 | 105.20 | 45.50 |
| 5650.00 | 27.60 | PK | H | 34.16 | 3.63 | 0.00 | 65.39 | 59.37 | 68.20 | 8.83 |
| 11490.00 | 51.94 | PK | H | 38.99 | 6.59 | 25.51 | 72.01 | 65.99 | 74.00 | 8.01 |
| 11490.00 | 38.28 | AV | H | 38.99 | 6.59 | 25.51 | 58.35 | 52.33 | 54.00 | 1.67 |
| 17235.00 | 35.58 | PK | H | 41.56 | 8.78 | 23.72 | 62.20 | 56.18 | 68.20 | 12.02 |
| Middle Channel: 5785 MHz | | | | | | | | | | |
| 5785.00 | 72.94 | PK | H | 34.21 | 3.71 | 0.00 | 110.86 | 104.84 | N/A | N/A |
| 5785.00 | 62.13 | AV | H | 34.21 | 3.71 | 0.00 | 100.05 | 94.03 | N/A | N/A |
| 5785.00 | 71.85 | PK | V | 34.21 | 3.71 | 0.00 | 109.77 | 103.75 | N/A | N/A |
| 5785.00 | 61.36 | AV | V | 34.21 | 3.71 | 0.00 | 99.28 | 93.26 | N/A | N/A |
| 11570.00 | 49.62 | PK | H | 39.00 | 6.61 | 25.46 | 69.77 | 63.75 | 74.00 | 10.25 |
| 11570.00 | 37.43 | AV | H | 39.00 | 6.61 | 25.46 | 57.58 | 51.56 | 54.00 | 2.44 |
| 17355.00 | 35.12 | PK | H | 42.26 | 8.81 | 23.60 | 62.59 | 56.57 | 68.20 | 11.63 |
| High Channel: 5825 MHz | | | | | | | | | | |
| 5825.00 | 73.07 | PK | H | 34.23 | 3.73 | 0.00 | 111.03 | 105.01 | N/A | N/A |
| 5825.00 | 62.26 | AV | H | 34.23 | 3.73 | 0.00 | 100.22 | 94.2 | N/A | N/A |
| 5825.00 | 71.98 | PK | V | 34.23 | 3.73 | 0.00 | 109.94 | 103.92 | N/A | N/A |
| 5825.00 | 61.43 | AV | V | 34.23 | 3.73 | 0.00 | 99.39 | 93.37 | N/A | N/A |
| 5850.00 | 28.77 | PK | H | 34.24 | 3.75 | 0.00 | 66.76 | 60.74 | 122.20 | 61.46 |
| 5855.00 | 28.21 | PK | H | 34.24 | 3.75 | 0.00 | 66.20 | 60.18 | 110.80 | 50.62 |
| 5875.00 | 27.73 | PK | H | 34.25 | 3.77 | 0.00 | 65.75 | 59.73 | 105.20 | 45.47 |
| 5925.00 | 27.47 | PK | H | 34.27 | 3.80 | 0.00 | 65.54 | 59.52 | 68.20 | 8.68 |
| 11650.00 | 51.63 | PK | H | 39.00 | 6.64 | 25.41 | 71.86 | 65.84 | 74.00 | 8.16 |
| 11650.00 | 38.43 | AV | H | 39.00 | 6.64 | 25.41 | 58.66 | 52.64 | 54.00 | 1.36 |
| 17475.00 | 35.64 | PK | H | 42.96 | 8.84 | 23.48 | 63.96 | 57.94 | 68.20 | 10.26 |

802.11n ht20:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|--------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5745 MHz | | | | | | | | | | |
| 5745.00 | 73.10 | PK | H | 34.20 | 3.69 | 0.00 | 110.99 | 104.97 | N/A | N/A |
| 5745.00 | 61.81 | AV | H | 34.20 | 3.69 | 0.00 | 99.70 | 93.68 | N/A | N/A |
| 5745.00 | 72.36 | PK | V | 34.20 | 3.69 | 0.00 | 110.25 | 104.23 | N/A | N/A |
| 5745.00 | 61.12 | AV | V | 34.20 | 3.69 | 0.00 | 99.01 | 92.99 | N/A | N/A |
| 5725.00 | 28.89 | PK | H | 34.19 | 3.69 | 0.00 | 66.77 | 60.75 | 122.20 | 61.45 |
| 5720.00 | 28.41 | PK | H | 34.19 | 3.69 | 0.00 | 66.29 | 60.27 | 110.80 | 50.53 |
| 5700.00 | 27.86 | PK | H | 34.18 | 3.68 | 0.00 | 65.72 | 59.7 | 105.20 | 45.50 |
| 5650.00 | 27.25 | PK | H | 34.16 | 3.63 | 0.00 | 65.04 | 59.02 | 68.20 | 9.18 |
| 11490.00 | 51.50 | PK | H | 38.99 | 6.59 | 25.51 | 71.57 | 65.55 | 74.00 | 8.45 |
| 11490.00 | 38.18 | AV | H | 38.99 | 6.59 | 25.51 | 58.25 | 52.23 | 54.00 | 1.77 |
| 17235.00 | 35.24 | PK | H | 41.56 | 8.78 | 23.72 | 61.86 | 55.84 | 68.20 | 12.36 |
| Middle Channel: 5785 MHz | | | | | | | | | | |
| 5785.00 | 73.07 | PK | H | 34.21 | 3.71 | 0.00 | 110.99 | 104.97 | N/A | N/A |
| 5785.00 | 61.78 | AV | H | 34.21 | 3.71 | 0.00 | 99.70 | 93.68 | N/A | N/A |
| 5785.00 | 72.33 | PK | V | 34.21 | 3.71 | 0.00 | 110.25 | 104.23 | N/A | N/A |
| 5785.00 | 61.09 | AV | V | 34.21 | 3.71 | 0.00 | 99.01 | 92.99 | N/A | N/A |
| 11570.00 | 49.72 | PK | H | 39.00 | 6.61 | 25.46 | 69.87 | 63.85 | 74.00 | 10.15 |
| 11570.00 | 36.05 | AV | H | 39.00 | 6.61 | 25.46 | 56.20 | 50.18 | 54.00 | 3.82 |
| 17355.00 | 35.12 | PK | H | 42.26 | 8.81 | 23.60 | 62.59 | 56.57 | 68.20 | 11.63 |
| High Channel: 5825 MHz | | | | | | | | | | |
| 5825.00 | 73.33 | PK | H | 34.23 | 3.73 | 0.00 | 111.29 | 105.27 | N/A | N/A |
| 5825.00 | 62.04 | AV | H | 34.23 | 3.73 | 0.00 | 100.00 | 93.98 | N/A | N/A |
| 5825.00 | 72.59 | PK | V | 34.23 | 3.73 | 0.00 | 110.55 | 104.53 | N/A | N/A |
| 5825.00 | 61.35 | AV | V | 34.23 | 3.73 | 0.00 | 99.31 | 93.29 | N/A | N/A |
| 5850.00 | 29.12 | PK | H | 34.24 | 3.75 | 0.00 | 67.11 | 61.09 | 122.20 | 61.11 |
| 5855.00 | 28.64 | PK | H | 34.24 | 3.75 | 0.00 | 66.63 | 60.61 | 110.80 | 50.19 |
| 5875.00 | 28.09 | PK | H | 34.25 | 3.77 | 0.00 | 66.11 | 60.09 | 105.20 | 45.11 |
| 5925.00 | 27.48 | PK | H | 34.27 | 3.80 | 0.00 | 65.55 | 59.53 | 68.20 | 8.67 |
| 11650.00 | 50.46 | PK | H | 39.00 | 6.64 | 25.41 | 70.69 | 64.67 | 74.00 | 9.33 |
| 11650.00 | 37.67 | AV | H | 39.00 | 6.64 | 25.41 | 57.90 | 51.88 | 54.00 | 2.12 |
| 17475.00 | 35.74 | PK | H | 42.96 | 8.84 | 23.48 | 64.06 | 58.04 | 68.20 | 10.16 |

802.11n ht40:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5755 MHz | | | | | | | | | | |
| 5755.00 | 69.58 | PK | H | 34.20 | 3.70 | 0.00 | 107.48 | 101.46 | N/A | N/A |
| 5755.00 | 58.74 | AV | H | 34.20 | 3.70 | 0.00 | 96.64 | 90.62 | N/A | N/A |
| 5755.00 | 70.01 | PK | V | 34.20 | 3.70 | 0.00 | 107.91 | 101.89 | N/A | N/A |
| 5755.00 | 59.96 | AV | V | 34.20 | 3.70 | 0.00 | 97.86 | 91.84 | N/A | N/A |
| 5725.00 | 31.54 | PK | V | 34.19 | 3.69 | 0.00 | 69.42 | 63.4 | 122.20 | 58.80 |
| 5720.00 | 31.41 | PK | V | 34.19 | 3.69 | 0.00 | 69.29 | 63.27 | 110.80 | 47.53 |
| 5700.00 | 28.63 | PK | V | 34.18 | 3.68 | 0.00 | 66.49 | 60.47 | 105.20 | 44.73 |
| 5650.00 | 27.62 | PK | V | 34.16 | 3.63 | 0.00 | 65.41 | 59.39 | 68.20 | 8.81 |
| 11510.00 | 48.69 | PK | V | 39.00 | 6.59 | 25.50 | 68.78 | 62.76 | 74.00 | 11.24 |
| 11510.00 | 36.18 | AV | V | 39.00 | 6.59 | 25.50 | 56.27 | 50.25 | 54.00 | 3.75 |
| 17265.00 | 35.27 | PK | V | 41.74 | 8.79 | 23.69 | 62.11 | 56.09 | 68.20 | 12.11 |
| High Channel: 5795 MHz | | | | | | | | | | |
| 5795.00 | 69.46 | PK | H | 34.22 | 3.71 | 0.00 | 107.39 | 101.37 | N/A | N/A |
| 5795.00 | 59.14 | AV | H | 34.22 | 3.71 | 0.00 | 97.07 | 91.05 | N/A | N/A |
| 5795.00 | 69.79 | PK | V | 34.22 | 3.71 | 0.00 | 107.72 | 101.7 | N/A | N/A |
| 5795.00 | 59.36 | AV | V | 34.22 | 3.71 | 0.00 | 97.29 | 91.27 | N/A | N/A |
| 5850.00 | 28.74 | PK | V | 34.24 | 3.75 | 0.00 | 66.73 | 60.71 | 122.20 | 61.49 |
| 5855.00 | 28.29 | PK | V | 34.24 | 3.75 | 0.00 | 66.28 | 60.26 | 110.80 | 50.54 |
| 5875.00 | 27.62 | PK | V | 34.25 | 3.77 | 0.00 | 65.64 | 59.62 | 105.20 | 45.58 |
| 5925.00 | 27.37 | PK | V | 34.27 | 3.80 | 0.00 | 65.44 | 59.42 | 68.20 | 8.78 |
| 11590.00 | 48.33 | PK | V | 39.00 | 6.62 | 25.45 | 68.50 | 62.48 | 74.00 | 11.52 |
| 11590.00 | 34.74 | AV | V | 39.00 | 6.62 | 25.45 | 54.91 | 48.89 | 54.00 | 5.11 |
| 17385.00 | 35.64 | PK | V | 42.43 | 8.82 | 23.57 | 63.32 | 57.3 | 68.20 | 10.90 |

802.11ac vht20:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|--------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5745 MHz | | | | | | | | | | |
| 5745.00 | 72.72 | PK | H | 34.20 | 3.69 | 0.00 | 110.61 | 104.59 | N/A | N/A |
| 5745.00 | 61.48 | AV | H | 34.20 | 3.69 | 0.00 | 99.37 | 93.35 | N/A | N/A |
| 5745.00 | 71.84 | PK | V | 34.20 | 3.69 | 0.00 | 109.73 | 103.71 | N/A | N/A |
| 5745.00 | 61.02 | AV | V | 34.20 | 3.69 | 0.00 | 98.91 | 92.89 | N/A | N/A |
| 5725.00 | 28.64 | PK | H | 34.19 | 3.69 | 0.00 | 66.52 | 60.5 | 122.20 | 61.70 |
| 5720.00 | 27.68 | PK | H | 34.19 | 3.69 | 0.00 | 65.56 | 59.54 | 110.80 | 51.26 |
| 5700.00 | 27.43 | PK | H | 34.18 | 3.68 | 0.00 | 65.29 | 59.27 | 105.20 | 45.93 |
| 5650.00 | 27.12 | PK | H | 34.16 | 3.63 | 0.00 | 64.91 | 58.89 | 68.20 | 9.31 |
| 11490.00 | 51.44 | PK | H | 38.99 | 6.59 | 25.51 | 71.51 | 65.49 | 74.00 | 8.51 |
| 11490.00 | 38.12 | AV | H | 38.99 | 6.59 | 25.51 | 58.19 | 52.17 | 54.00 | 1.83 |
| 17235.00 | 35.18 | PK | H | 41.56 | 8.78 | 23.72 | 61.80 | 55.78 | 68.20 | 12.42 |
| Middle Channel: 5785 MHz | | | | | | | | | | |
| 5785.00 | 72.53 | PK | H | 34.21 | 3.71 | 0.00 | 110.45 | 104.43 | N/A | N/A |
| 5785.00 | 61.26 | AV | H | 34.21 | 3.71 | 0.00 | 99.18 | 93.16 | N/A | N/A |
| 5785.00 | 71.62 | PK | V | 34.21 | 3.71 | 0.00 | 109.54 | 103.52 | N/A | N/A |
| 5785.00 | 60.81 | AV | V | 34.21 | 3.71 | 0.00 | 98.73 | 92.71 | N/A | N/A |
| 11570.00 | 49.73 | PK | H | 39.00 | 6.61 | 25.46 | 69.88 | 63.86 | 74.00 | 10.14 |
| 11570.00 | 36.11 | AV | H | 39.00 | 6.61 | 25.46 | 56.26 | 50.24 | 54.00 | 3.76 |
| 17355.00 | 35.17 | PK | H | 42.26 | 8.81 | 23.60 | 62.64 | 56.62 | 68.20 | 11.58 |
| High Channel: 5825 MHz | | | | | | | | | | |
| 5825.00 | 72.69 | PK | H | 34.23 | 3.73 | 0.00 | 110.65 | 104.63 | N/A | N/A |
| 5825.00 | 61.45 | AV | H | 34.23 | 3.73 | 0.00 | 99.41 | 93.39 | N/A | N/A |
| 5825.00 | 71.81 | PK | V | 34.23 | 3.73 | 0.00 | 109.77 | 103.75 | N/A | N/A |
| 5825.00 | 60.99 | AV | V | 34.23 | 3.73 | 0.00 | 98.95 | 92.93 | N/A | N/A |
| 5850.00 | 28.61 | PK | H | 34.24 | 3.75 | 0.00 | 66.60 | 60.58 | 122.20 | 61.62 |
| 5855.00 | 27.65 | PK | H | 34.24 | 3.75 | 0.00 | 65.64 | 59.62 | 110.80 | 51.18 |
| 5875.00 | 27.48 | PK | H | 34.25 | 3.77 | 0.00 | 65.50 | 59.48 | 105.20 | 45.72 |
| 5925.00 | 27.09 | PK | H | 34.27 | 3.80 | 0.00 | 65.16 | 59.14 | 68.20 | 9.06 |
| 11650.00 | 50.50 | PK | H | 39.00 | 6.64 | 25.41 | 70.73 | 64.71 | 74.00 | 9.29 |
| 11650.00 | 37.71 | AV | H | 39.00 | 6.64 | 25.41 | 57.94 | 51.92 | 54.00 | 2.08 |
| 17475.00 | 35.78 | PK | H | 42.96 | 8.84 | 23.48 | 64.10 | 58.08 | 68.20 | 10.12 |

802.11ac vht40:




| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Extrapolation result (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|------------------------|----------------|----------|-------------|---------------|-----------------|---------------------|------------------------------|-------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Low Channel: 5755 MHz | | | | | | | | | | |
| 5755.00 | 69.01 | PK | H | 34.20 | 3.70 | 0.00 | 106.91 | 100.89 | N/A | N/A |
| 5755.00 | 58.69 | AV | H | 34.20 | 3.70 | 0.00 | 96.59 | 90.57 | N/A | N/A |
| 5755.00 | 69.25 | PK | V | 34.20 | 3.70 | 0.00 | 107.15 | 101.13 | N/A | N/A |
| 5755.00 | 59.41 | AV | V | 34.20 | 3.70 | 0.00 | 97.31 | 91.29 | N/A | N/A |
| 5725.00 | 31.28 | PK | V | 34.19 | 3.69 | 0.00 | 69.16 | 63.14 | 122.20 | 59.06 |
| 5720.00 | 31.15 | PK | V | 34.19 | 3.69 | 0.00 | 69.03 | 63.01 | 110.80 | 47.79 |
| 5700.00 | 28.37 | PK | V | 34.18 | 3.68 | 0.00 | 66.23 | 60.21 | 105.20 | 44.99 |
| 5650.00 | 27.36 | PK | V | 34.16 | 3.63 | 0.00 | 65.15 | 59.13 | 68.20 | 9.07 |
| 11510.00 | 48.83 | PK | V | 39.00 | 6.59 | 25.50 | 68.92 | 62.9 | 74.00 | 11.10 |
| 11510.00 | 36.29 | AV | V | 39.00 | 6.59 | 25.50 | 56.38 | 50.36 | 54.00 | 3.64 |
| 17265.00 | 35.38 | PK | V | 41.74 | 8.79 | 23.69 | 62.22 | 56.2 | 68.20 | 12.00 |
| High Channel: 5795 MHz | | | | | | | | | | |
| 5795.00 | 69.33 | PK | H | 34.22 | 3.71 | 0.00 | 107.26 | 101.24 | N/A | N/A |
| 5795.00 | 59.01 | AV | H | 34.22 | 3.71 | 0.00 | 96.94 | 90.92 | N/A | N/A |
| 5795.00 | 69.61 | PK | V | 34.22 | 3.71 | 0.00 | 107.54 | 101.52 | N/A | N/A |
| 5795.00 | 59.17 | AV | V | 34.22 | 3.71 | 0.00 | 97.10 | 91.08 | N/A | N/A |
| 5850.00 | 28.61 | PK | V | 34.24 | 3.75 | 0.00 | 66.60 | 60.58 | 122.20 | 61.62 |
| 5855.00 | 28.16 | PK | V | 34.24 | 3.75 | 0.00 | 66.15 | 60.13 | 110.80 | 50.67 |
| 5875.00 | 27.49 | PK | V | 34.25 | 3.77 | 0.00 | 65.51 | 59.49 | 105.20 | 45.71 |
| 5925.00 | 27.24 | PK | V | 34.27 | 3.80 | 0.00 | 65.31 | 59.29 | 68.20 | 8.91 |
| 11590.00 | 48.23 | PK | V | 39.00 | 6.62 | 25.45 | 68.40 | 62.38 | 74.00 | 11.62 |
| 11590.00 | 34.62 | AV | V | 39.00 | 6.62 | 25.45 | 54.79 | 48.77 | 54.00 | 5.23 |
| 17385.00 | 35.51 | PK | V | 42.43 | 8.82 | 23.57 | 63.19 | 57.17 | 68.20 | 11.03 |


802.11ac vht80:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dB μ V/m) | Extrapolation result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------------|-------------------------|----------|----------------|------------------|-----------------------|---------------------------|--|---|-------------------------|----------------|
| | Reading (dB μ V) | Detector | Polar (H/V) | Factor (dB/m) | | | | | | |
| Middle Channel: 5775 MHz | | | | | | | | | | |
| 5775.00 | 66.34 | PK | H | 34.21 | 3.70 | 0.00 | 104.25 | 98.23 | N/A | N/A |
| 5775.00 | 56.08 | AV | H | 34.21 | 3.70 | 0.00 | 93.99 | 87.97 | N/A | N/A |
| 5775.00 | 65.73 | PK | V | 34.21 | 3.70 | 0.00 | 103.64 | 97.62 | N/A | N/A |
| 5775.00 | 55.19 | AV | V | 34.21 | 3.70 | 0.00 | 93.10 | 87.08 | N/A | N/A |
| 5725.00 | 32.87 | PK | H | 34.19 | 3.69 | 0.00 | 70.75 | 64.73 | 122.20 | 57.47 |
| 5720.00 | 32.45 | PK | H | 34.19 | 3.69 | 0.00 | 70.33 | 64.31 | 110.80 | 46.49 |
| 5700.00 | 31.14 | PK | H | 34.18 | 3.68 | 0.00 | 69.00 | 62.98 | 105.20 | 42.22 |
| 5650.00 | 28.13 | PK | H | 34.16 | 3.63 | 0.00 | 65.92 | 59.9 | 68.20 | 8.30 |
| 5850.00 | 28.63 | PK | H | 34.24 | 3.75 | 0.00 | 66.62 | 60.6 | 122.20 | 61.60 |
| 5855.00 | 28.12 | PK | H | 34.24 | 3.75 | 0.00 | 66.11 | 60.09 | 110.80 | 50.71 |
| 5875.00 | 27.51 | PK | H | 34.25 | 3.77 | 0.00 | 65.53 | 59.51 | 105.20 | 45.69 |
| 5925.00 | 27.26 | PK | H | 34.27 | 3.80 | 0.00 | 65.33 | 59.31 | 68.20 | 8.89 |
| 11550.00 | 46.75 | PK | H | 39.00 | 6.61 | 25.48 | 66.88 | 60.86 | 74.00 | 13.14 |
| 11550.00 | 33.15 | AV | H | 39.00 | 6.61 | 25.48 | 53.28 | 47.26 | 54.00 | 6.74 |
| 17325.00 | 35.63 | PK | H | 42.09 | 8.80 | 23.63 | 62.89 | 56.87 | 68.20 | 11.33 |


Test Plots(802.11a mode 5825MHz was the worst)

Horizontal

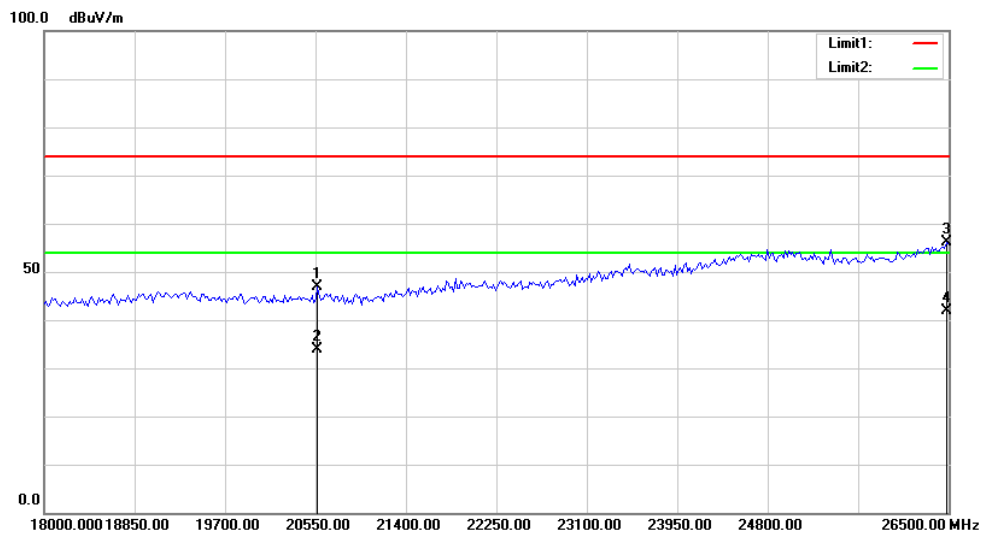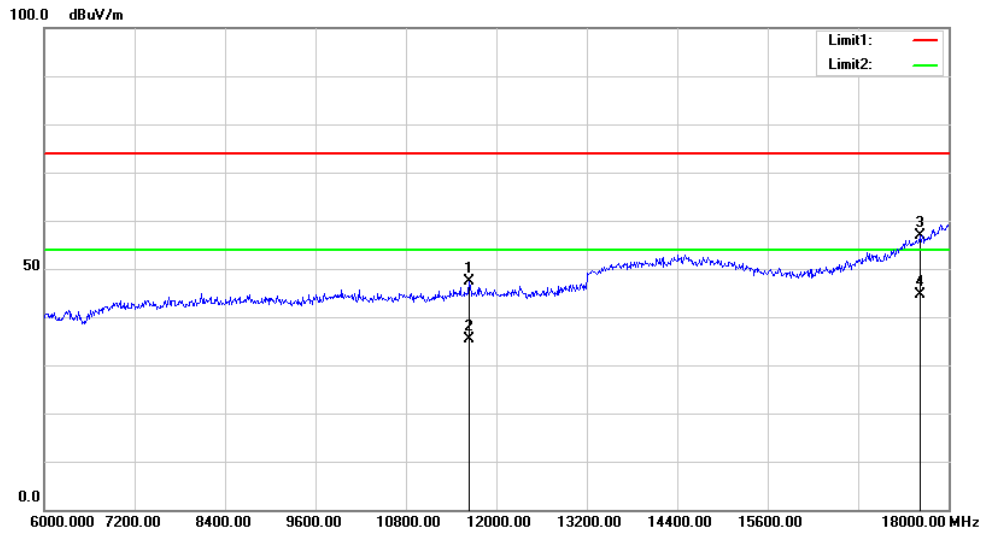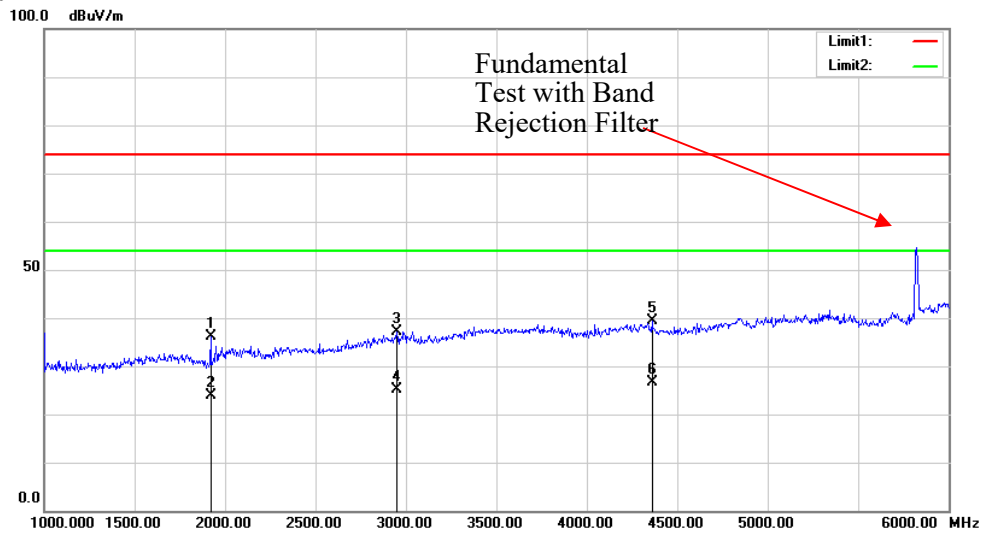



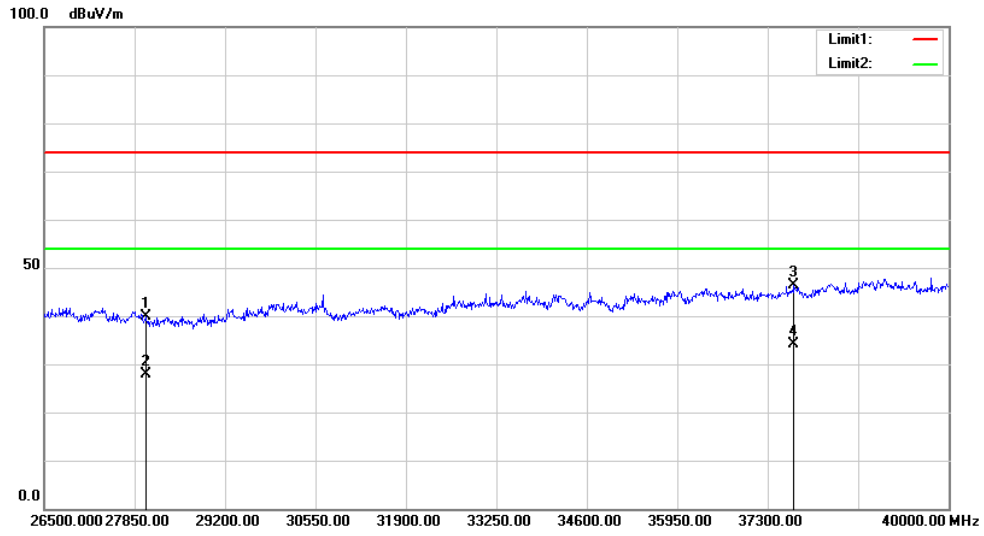


Vertical:

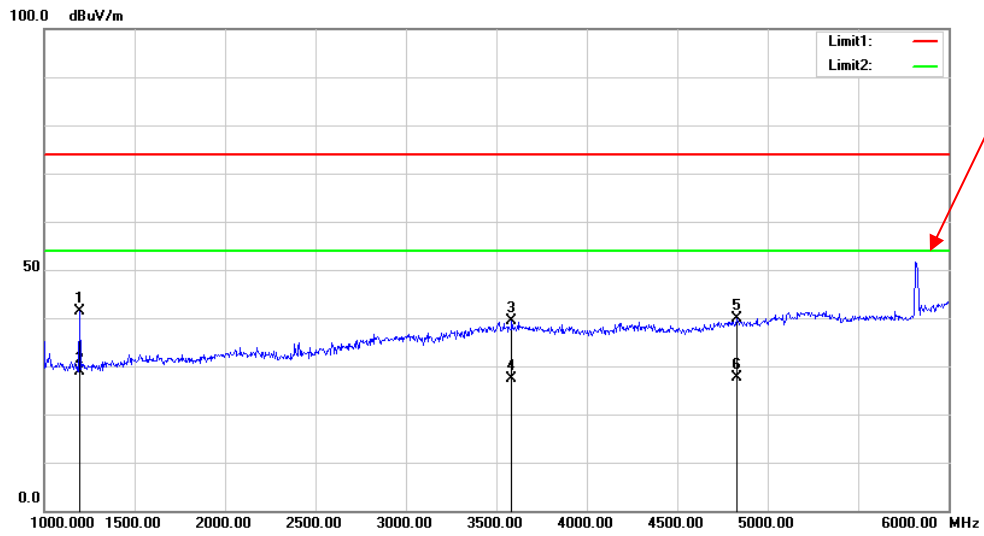

Fundamental Test with Band Rejection Filter

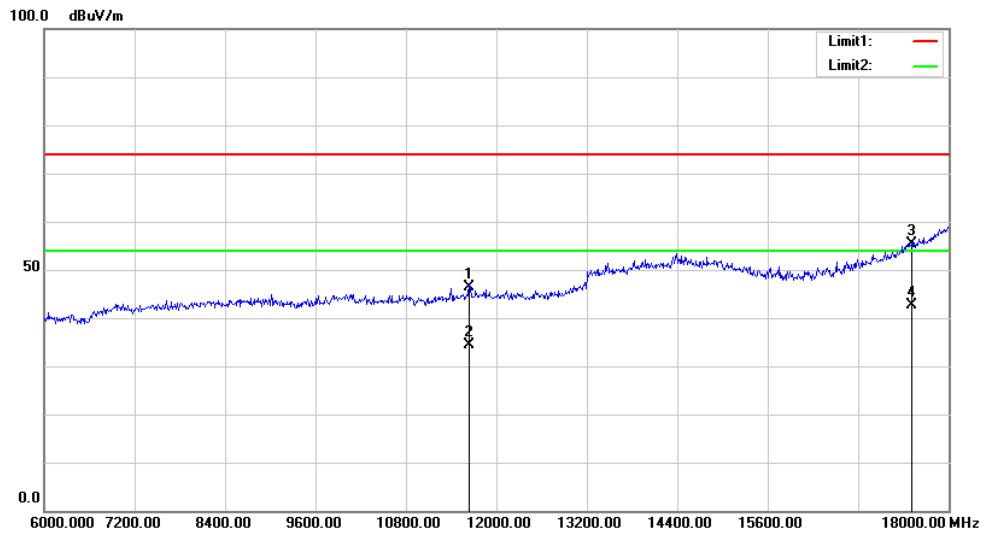

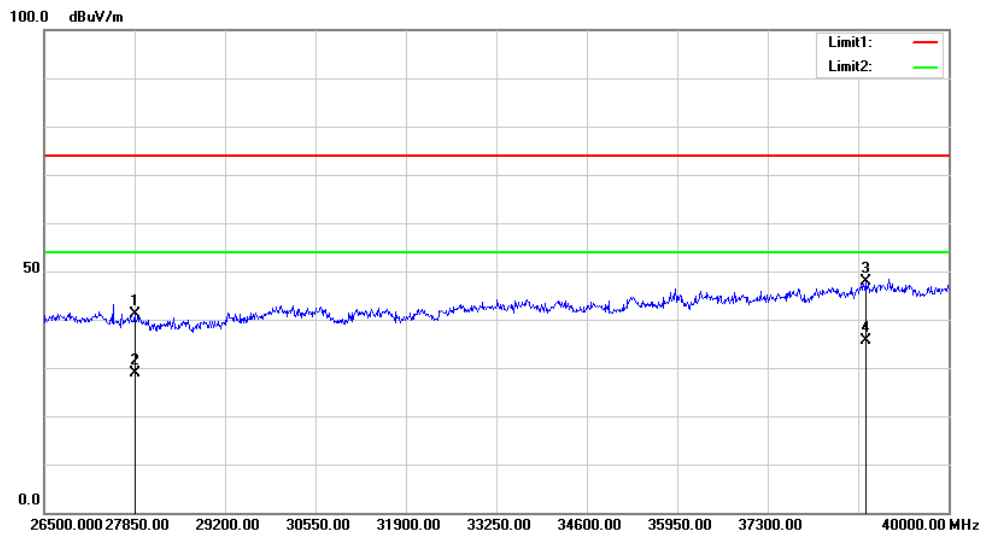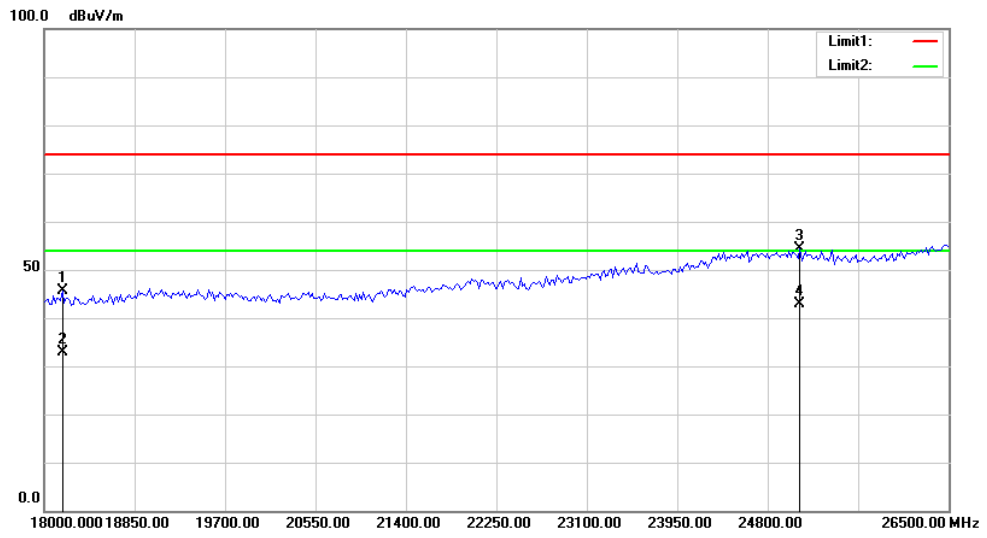

FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

Applicable Standard

15.407(a) (e).

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSU 26 | 200256 | 2020-07-07 | 2021-07-07 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/01 | Each time | N/A |

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 23 °C |
| Relative Humidity: | 60 % |
| ATM Pressure: | 100.2kPa |
| Test by: | Bond Qin |
| Test Date: | 2021-06-17 |

Test Result: Compliance. Please refer to the following tables and plots.

Test mode: Transmitting

5150-5250MHz:

| Mode | Frequency (MHz) | 26 dB Emission Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|----------------|-----------------|--------------------------------|------------------------------|
| 802.11 a | 5180 | 20.160 | 16.480 |
| | 5200 | 20.160 | 16.640 |
| | 5240 | 20.240 | 16.640 |
| 802.11n ht20 | 5180 | 21.040 | 17.760 |
| | 5200 | 21.040 | 17.760 |
| | 5240 | 20.960 | 17.760 |
| 802.11n ht40 | 5190 | 39.840 | 36.160 |
| | 5230 | 39.840 | 36.160 |
| 802.11ac vht20 | 5180 | 21.120 | 17.760 |
| | 5200 | 20.720 | 17.760 |
| | 5240 | 20.880 | 17.760 |
| 802.11ac vht40 | 5190 | 39.680 | 36.160 |
| | 5230 | 39.840 | 36.160 |
| 802.11ac vht80 | 5210 | 84.160 | 76.160 |


5725-5850MHz:

| Mode | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | 6 dB Emission Bandwidth Limits (MHz) | 99% Occupied Bandwidth (MHz) |
|----------------|-----------------|-------------------------------|--------------------------------------|------------------------------|
| 802.11 a | 5745 | 16.400 | ≥0.5 | 16.560 |
| | 5785 | 16.400 | ≥0.5 | 16.560 |
| | 5825 | 16.400 | ≥0.5 | 16.560 |
| 802.11n ht20 | 5745 | 17.520 | ≥0.5 | 17.680 |
| | 5785 | 16.640 | ≥0.5 | 17.760 |
| | 5825 | 17.520 | ≥0.5 | 17.760 |
| 802.11n ht40 | 5755 | 34.400 | ≥0.5 | 36.320 |
| | 5795 | 34.880 | ≥0.5 | 36.320 |
| 802.11ac vht20 | 5745 | 17.360 | ≥0.5 | 17.680 |
| | 5785 | 17.280 | ≥0.5 | 17.680 |
| | 5825 | 17.600 | ≥0.5 | 17.760 |
| 802.11ac vht40 | 5755 | 35.360 | ≥0.5 | 36.320 |
| | 5795 | 35.520 | ≥0.5 | 36.320 |
| 802.11ac vht80 | 5775 | 75.520 | ≥0.5 | 75.840 |

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz or 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


5150-5250MHz:
26dB Emission Bandwidth:

802.11a Low Channel

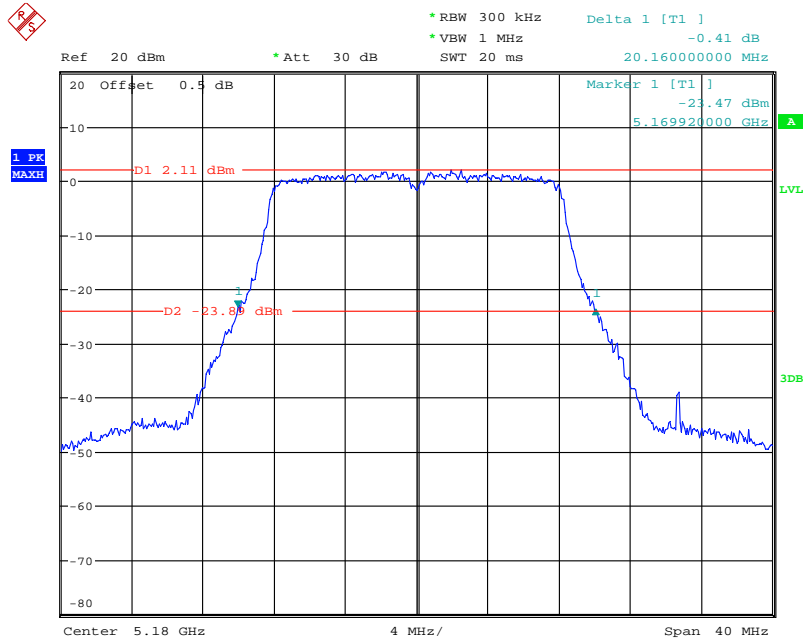


Date: 17.JUN.2021 11:32:50

802.11a Middle Channel

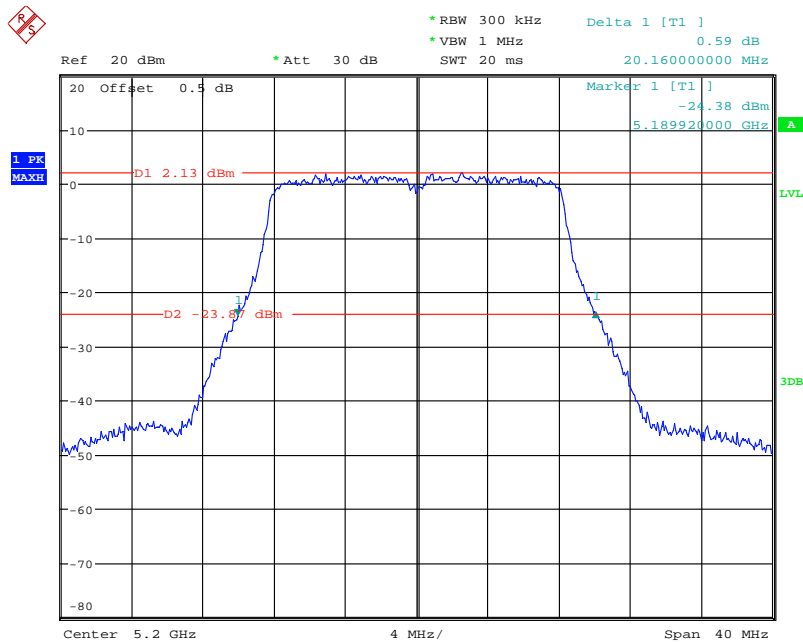


Date: 17.JUN.2021 11:36:05

802.11a High Channel

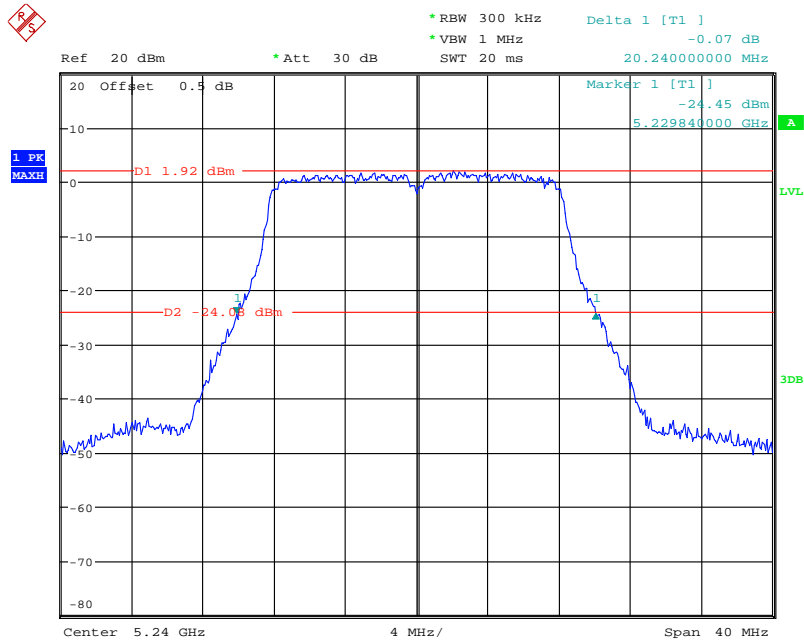


Date: 17.JUN.2021 11:37:49

802.11n ht20 Low Channel

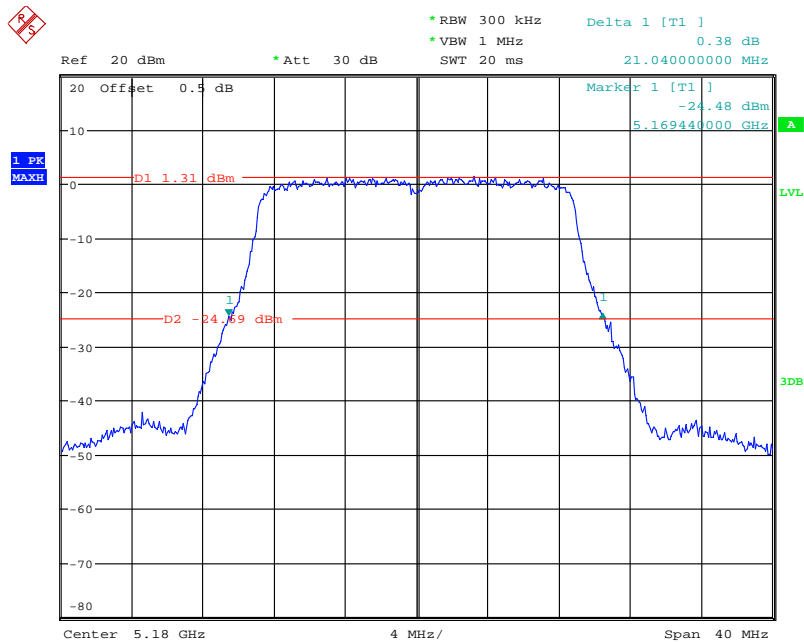


Date: 17.JUN.2021 11:51:31

802.11n ht20 Middle Channel

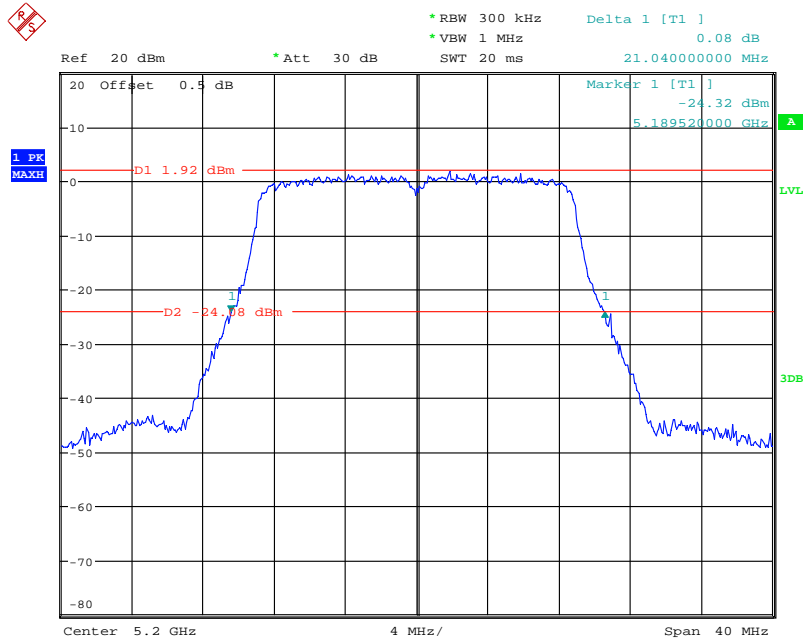


Date: 17.JUN.2021 11:52:41

802.11n ht20 High Channel

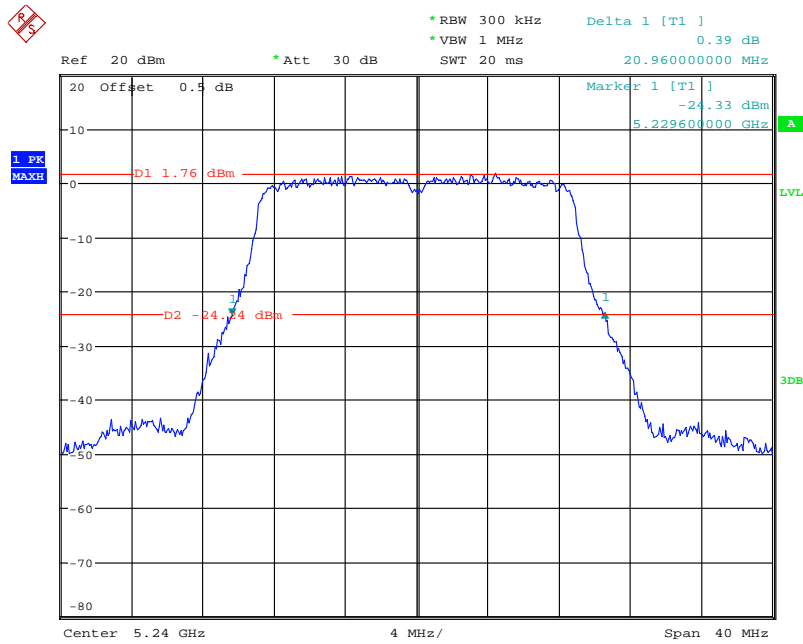


Date: 17.JUN.2021 11:54:12

802.11n ht40 Low Channel

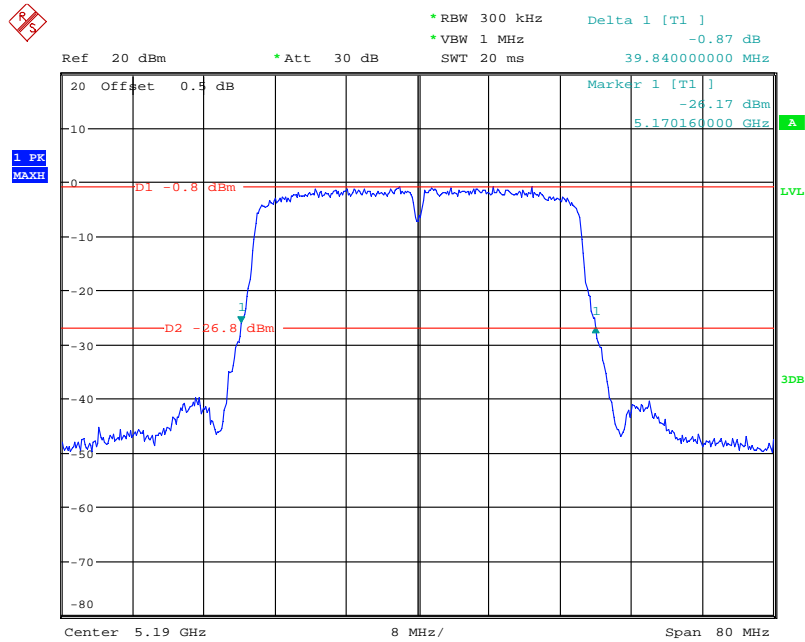


Date: 17.JUN.2021 12:28:38

802.11n ht40 High Channel

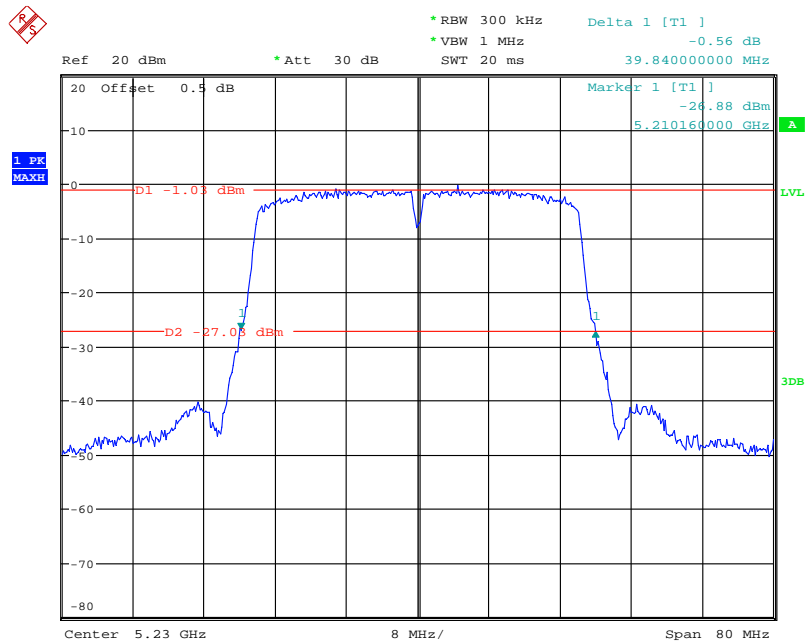


Date: 17.JUN.2021 12:26:48

802.11ac vht20 Low Channel

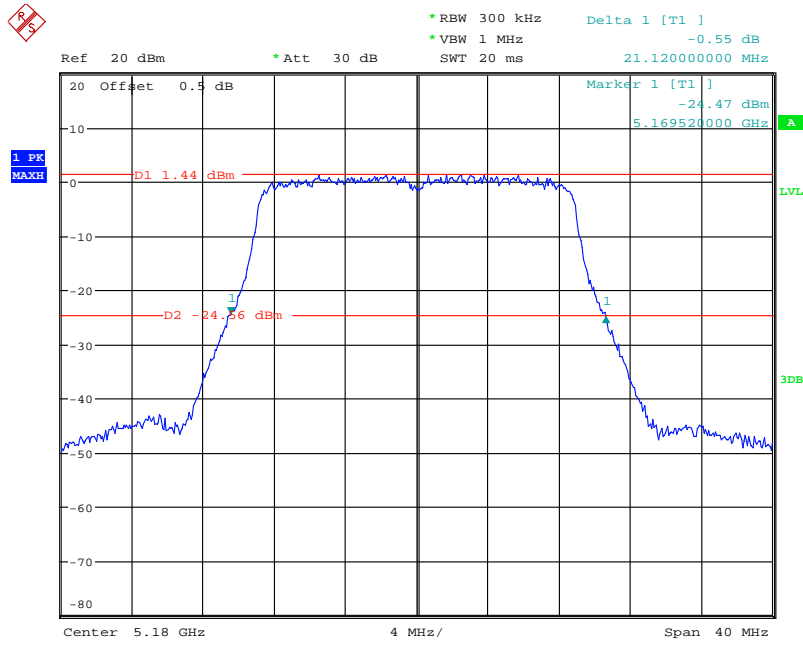


Date: 17.JUN.2021 11:55:46

802.11ac20 Middle Channel

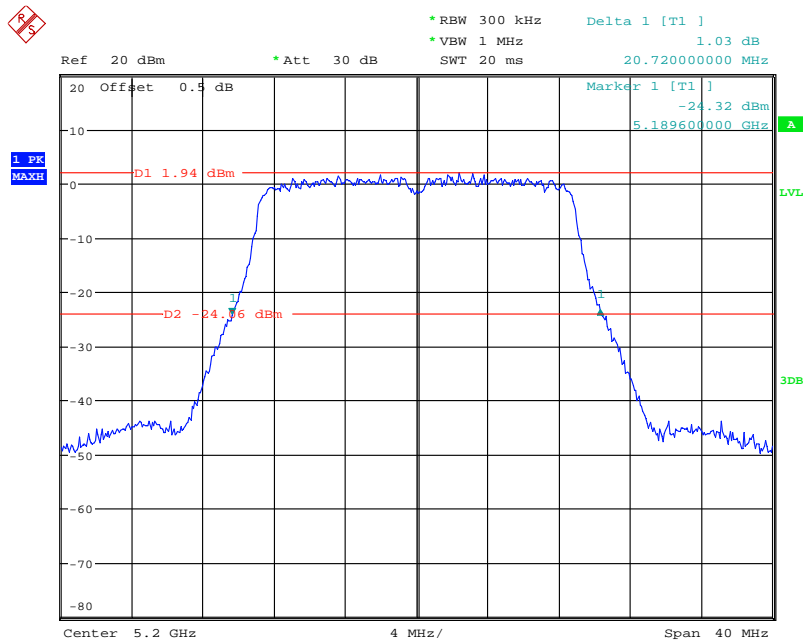


Date: 17.JUN.2021 11:56:45

802.11ac20 High Channel

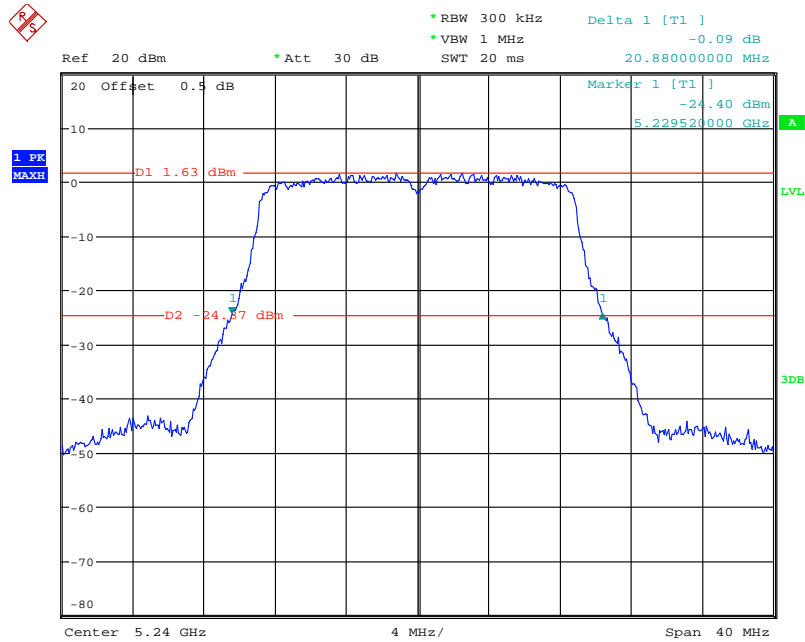


Date: 17.JUN.2021 11:57:45

802.11ac vht40 Low Channel

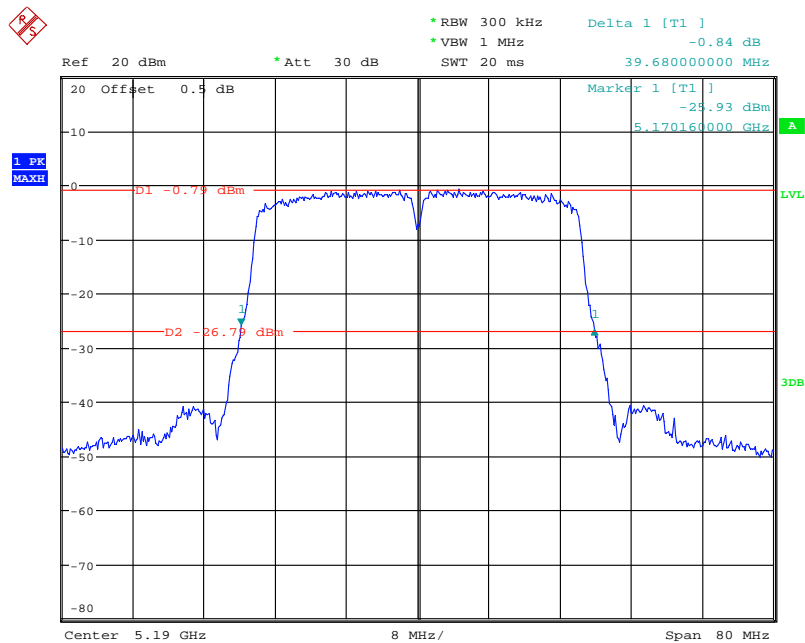


Date: 17.JUN.2021 12:23:28

802.11ac vht40 High Channel

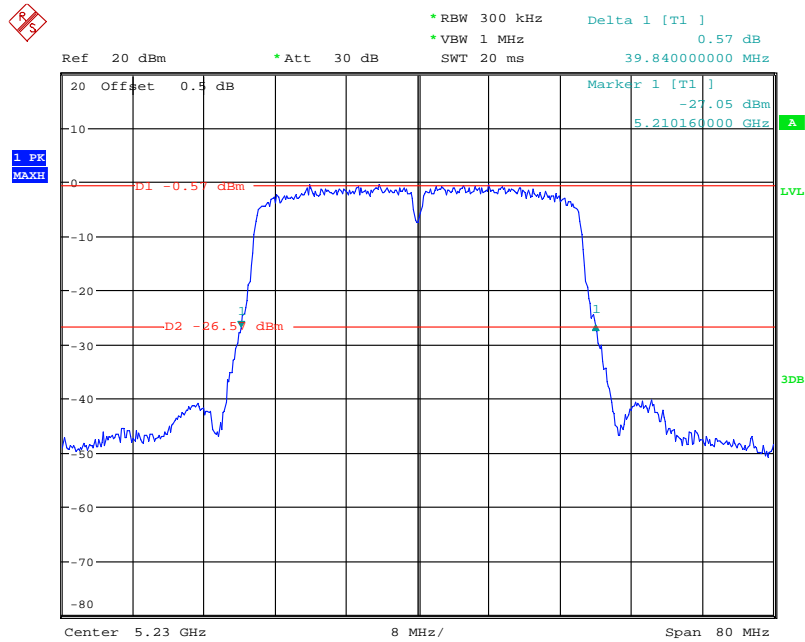

Date: 17.JUN.2021 12:25:07


802.11ac vht80 Middle Channel

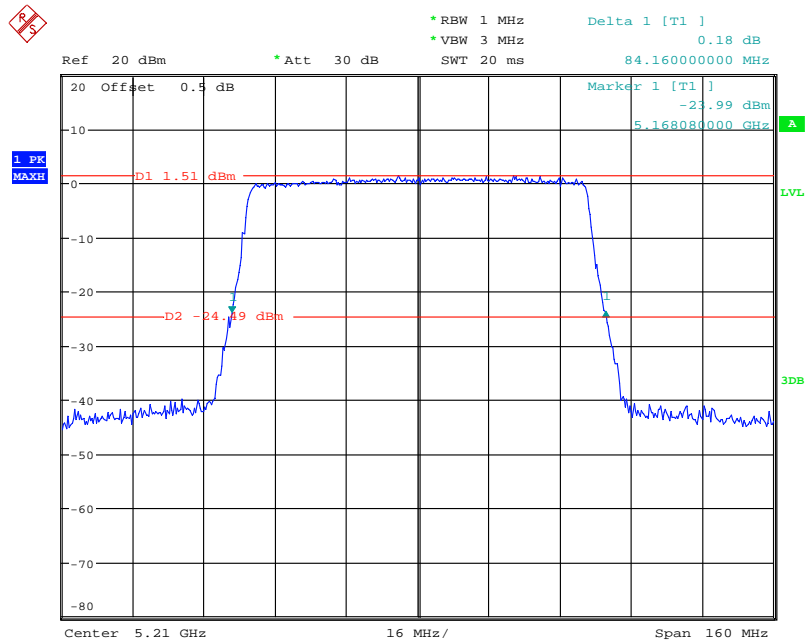

Date: 17.JUN.2021 12:36:11


99% Occupied Bandwidth:

802.11a Low Channel

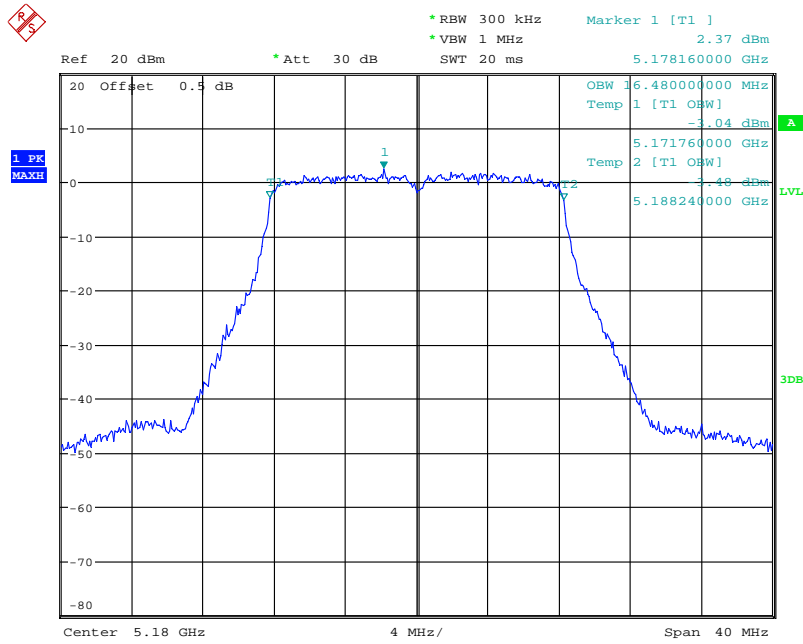


Date: 17.JUN.2021 11:33:04

802.11a Middle Channel

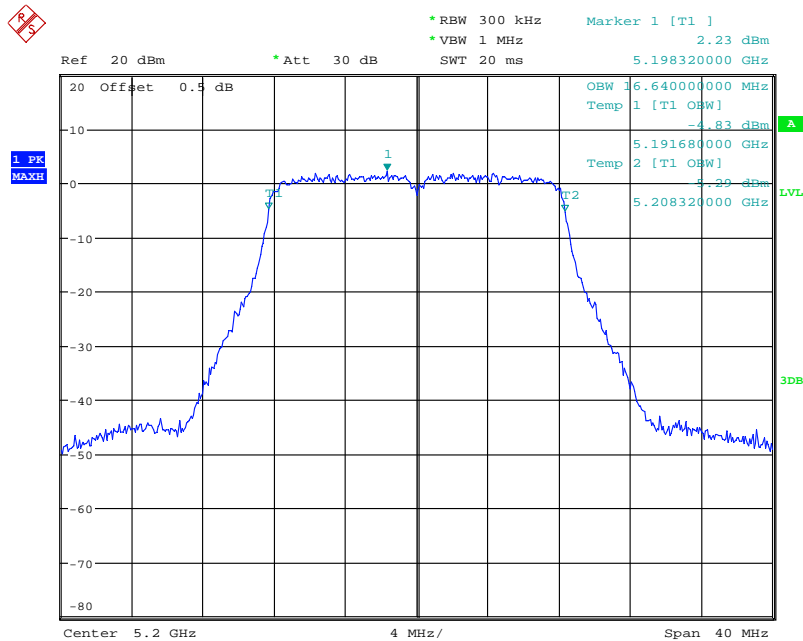


Date: 17.JUN.2021 11:36:22

802.11a High Channel

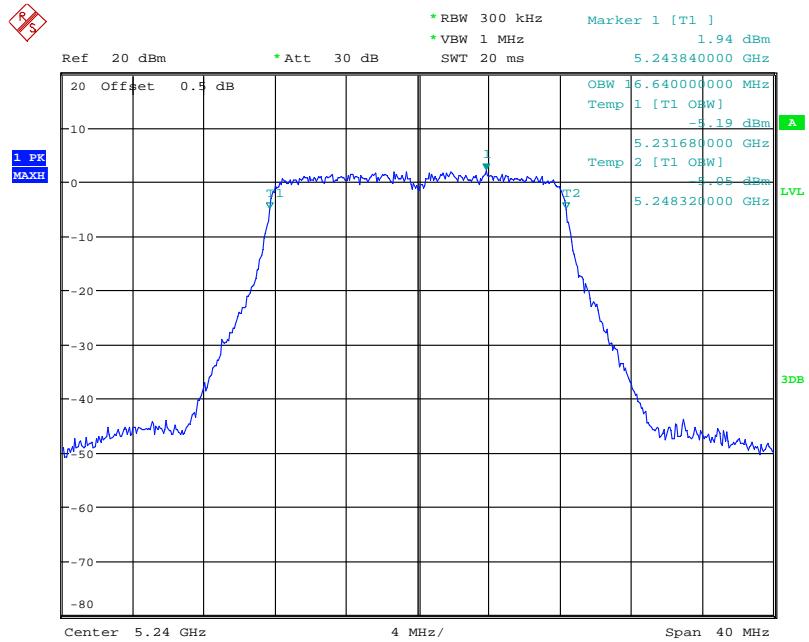


Date: 17.JUN.2021 11:38:02

802.11n ht20 Low Channel

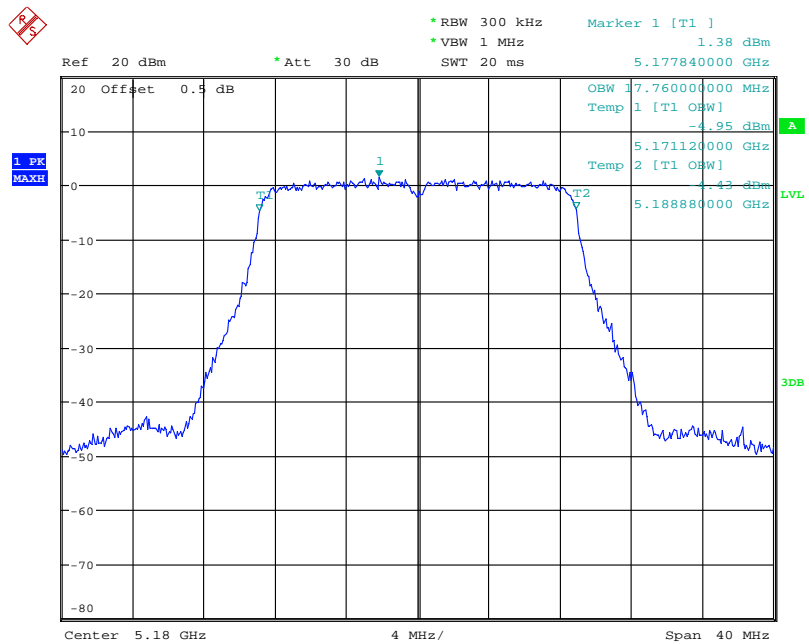


Date: 17.JUN.2021 11:51:45

802.11n ht20 Middle Channel

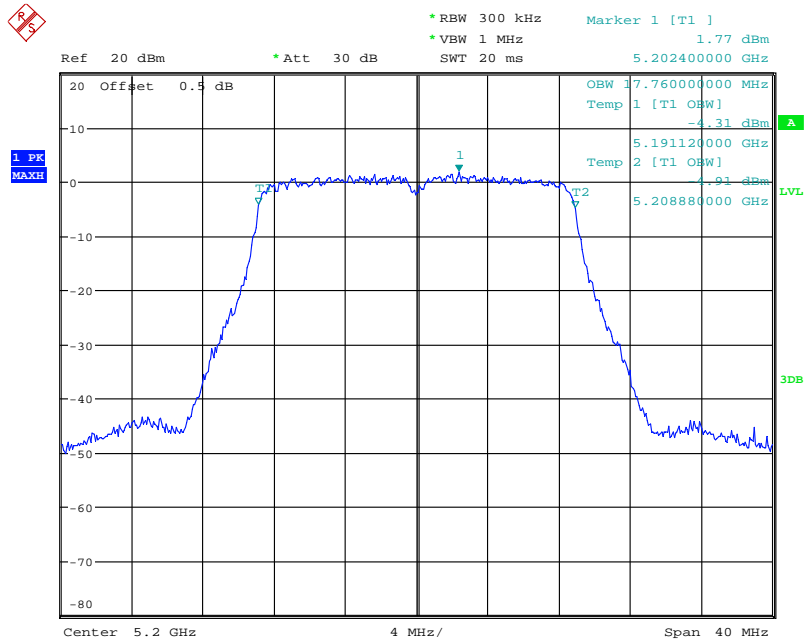


Date: 17.JUN.2021 11:52:55

802.11n ht20 High Channel

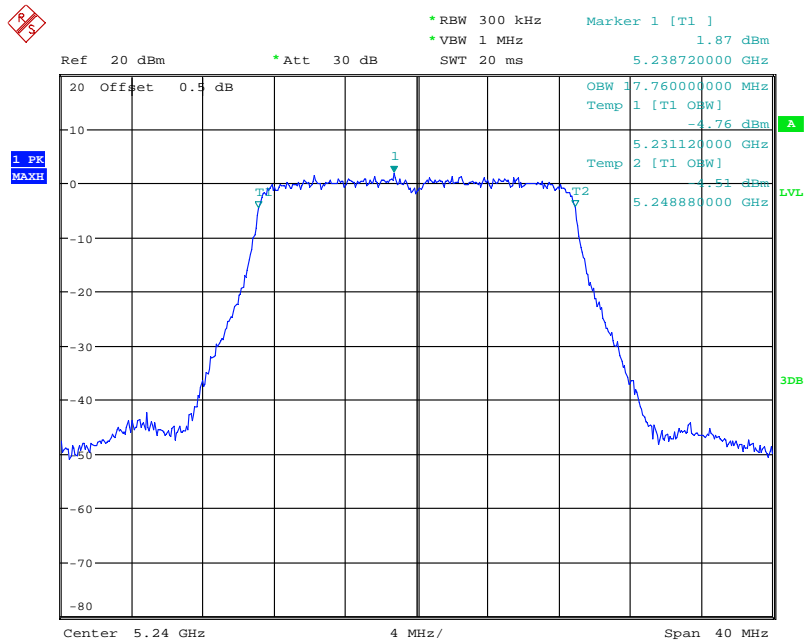


Date: 17.JUN.2021 11:54:25

802.11n ht40 Low Channel

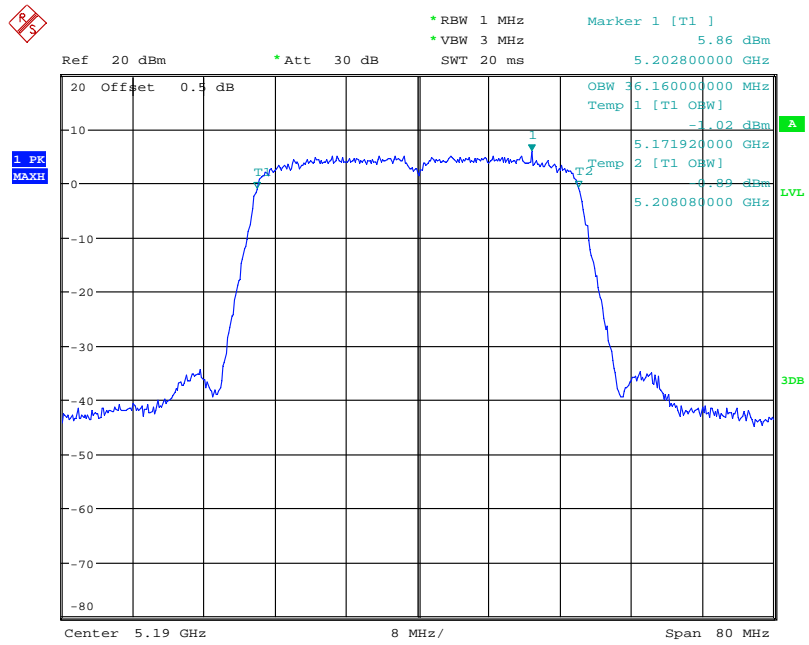


Date: 17.JUN.2021 12:28:52

802.11n ht40 High Channel

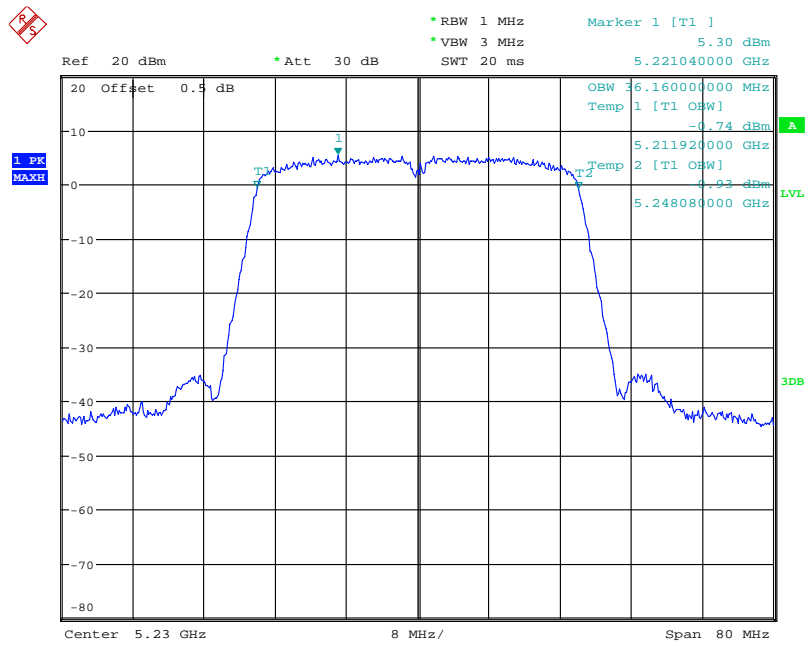


Date: 17.JUN.2021 12:27:02

802.11ac vht20 Low Channel

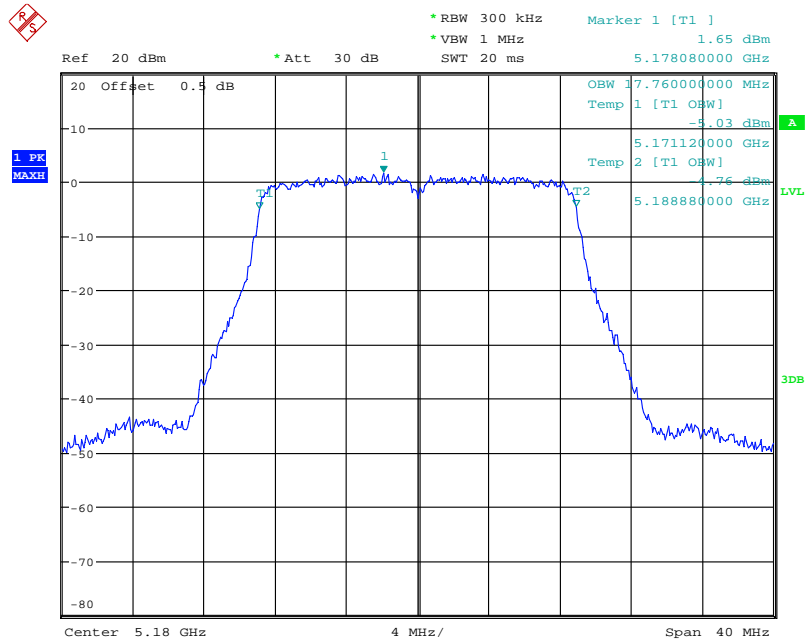


Date: 17.JUN.2021 11:56:00

802.11ac20 Middle Channel

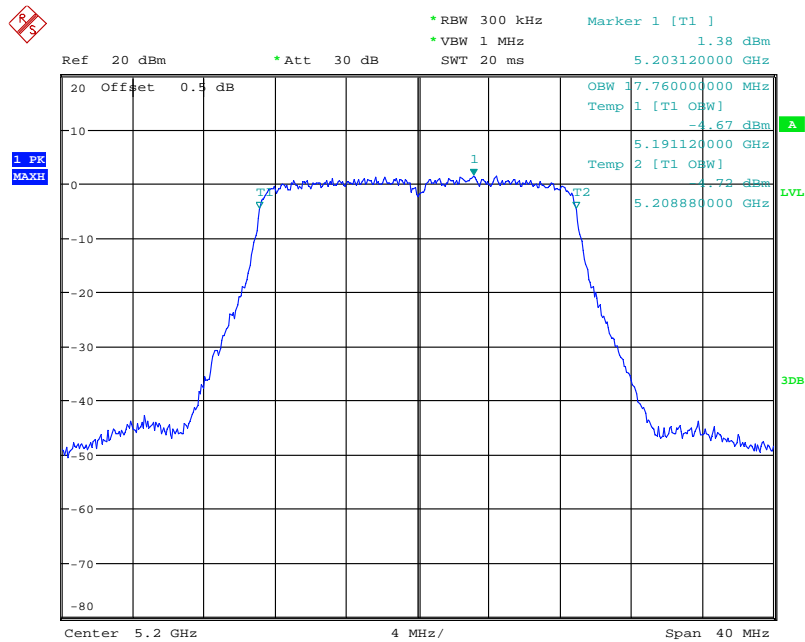


Date: 17.JUN.2021 11:56:58

802.11ac20 High Channel

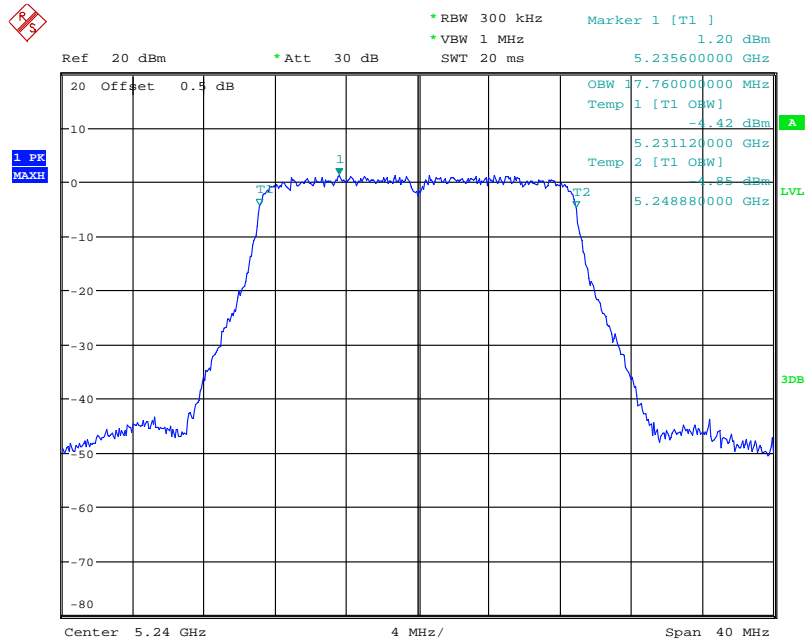


Date: 17.JUN.2021 11:57:59

802.11ac vht40 Low Channel

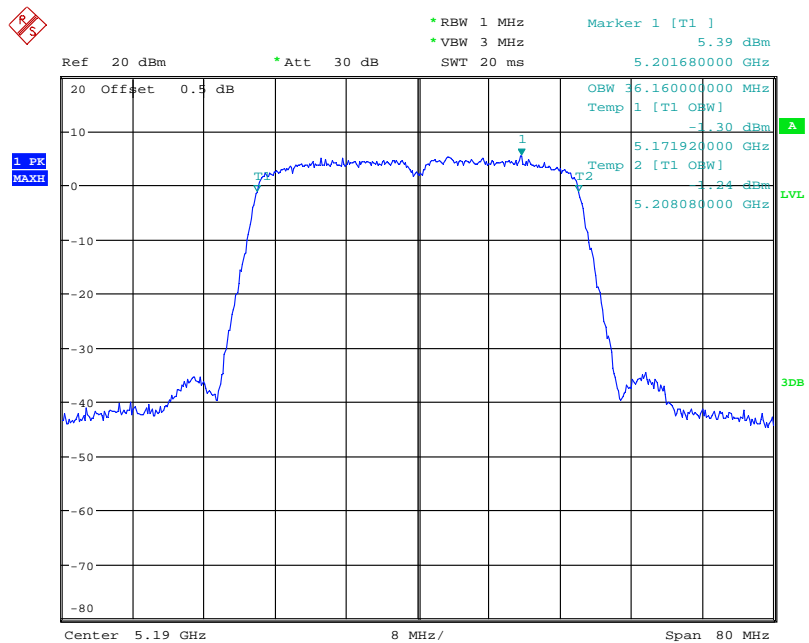


Date: 17.JUN.2021 12:23:42

802.11ac vht40 High Channel

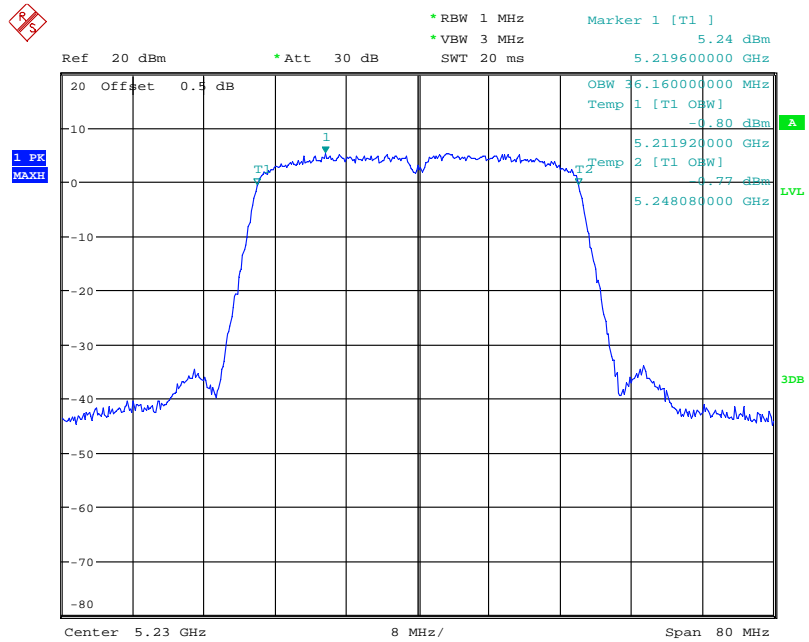

Date: 17.JUN.2021 12:25:21


802.11ac vht80 Middle Channel

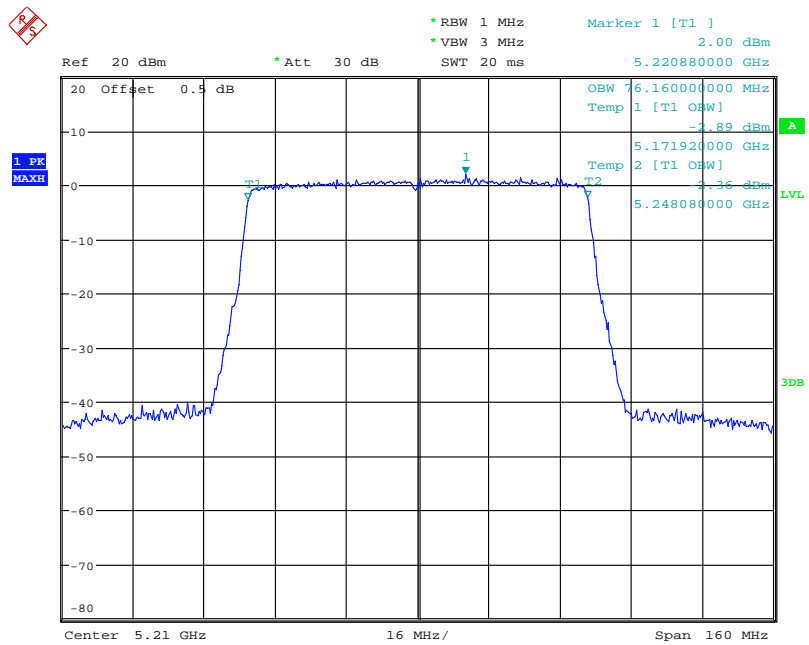

Date: 17.JUN.2021 12:36:25


5725-5850MHz:
6dB Emission Bandwidth:

802.11a Low Channel

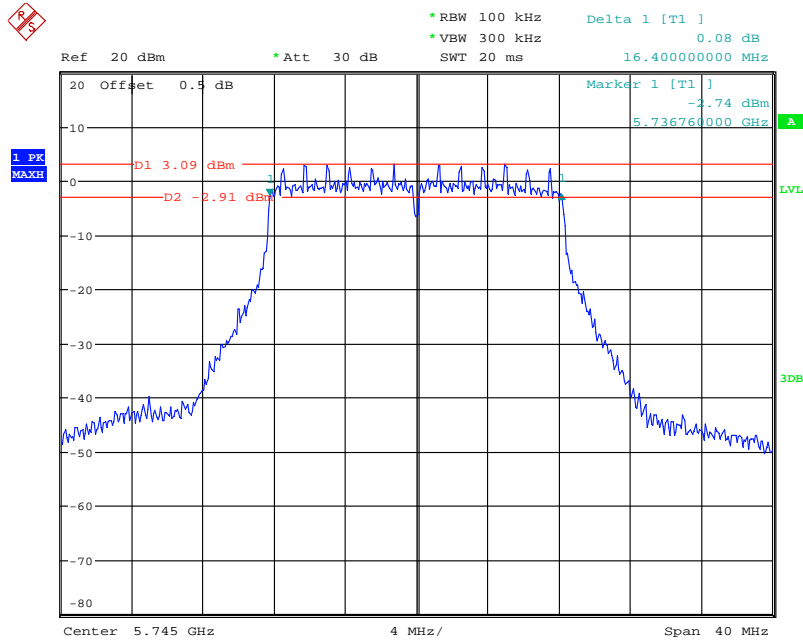


Date: 17.JUN.2021 11:39:23

802.11a Middle Channel

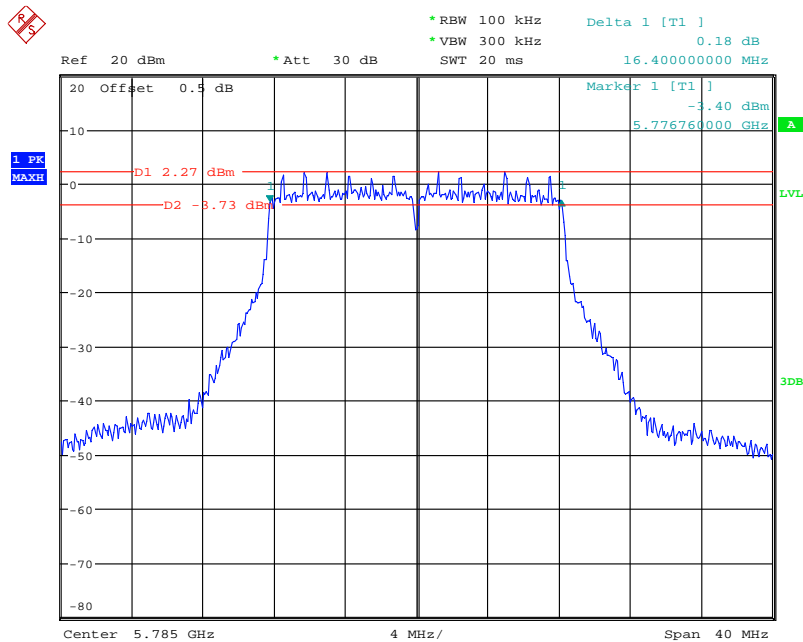


Date: 17.JUN.2021 11:42:29

802.11a High Channel

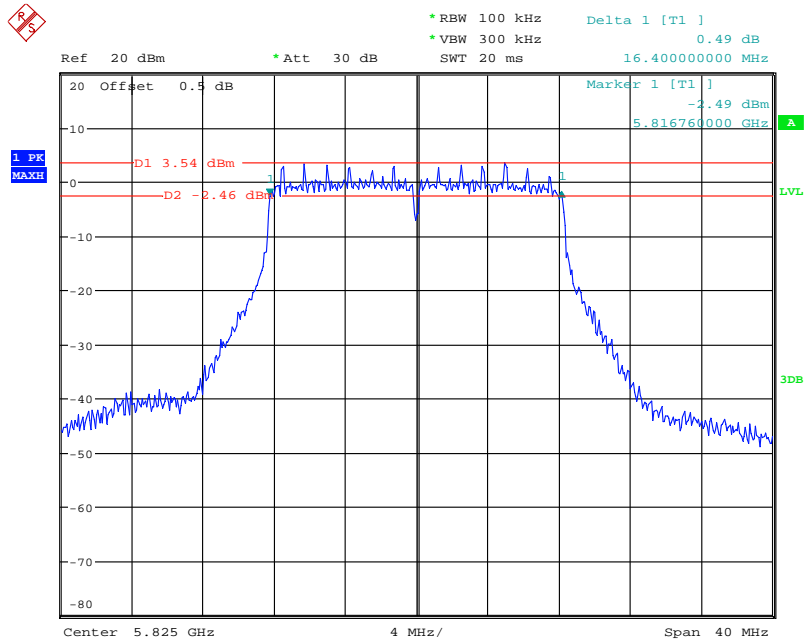


Date: 17.JUN.2021 11:43:48

802.11n ht20 Low Channel

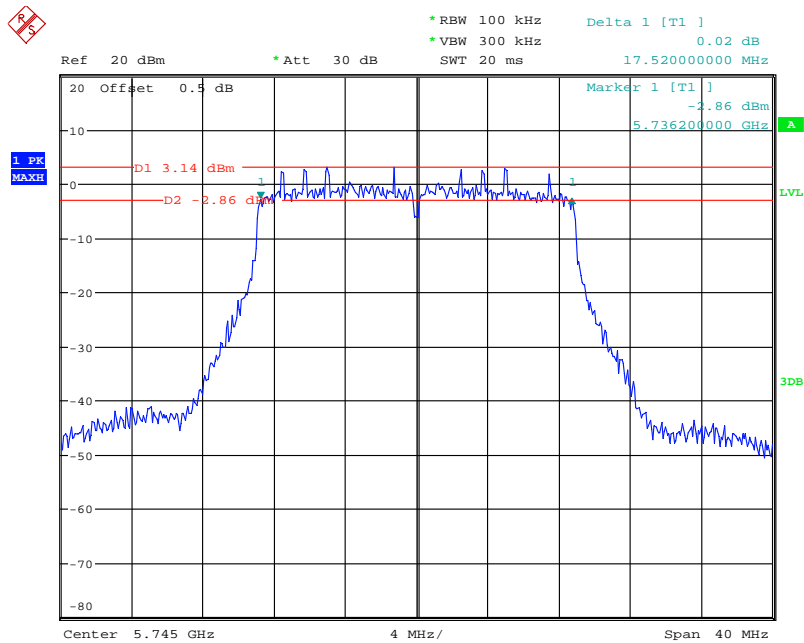


Date: 17.JUN.2021 11:49:07

802.11n ht20 Middle Channel

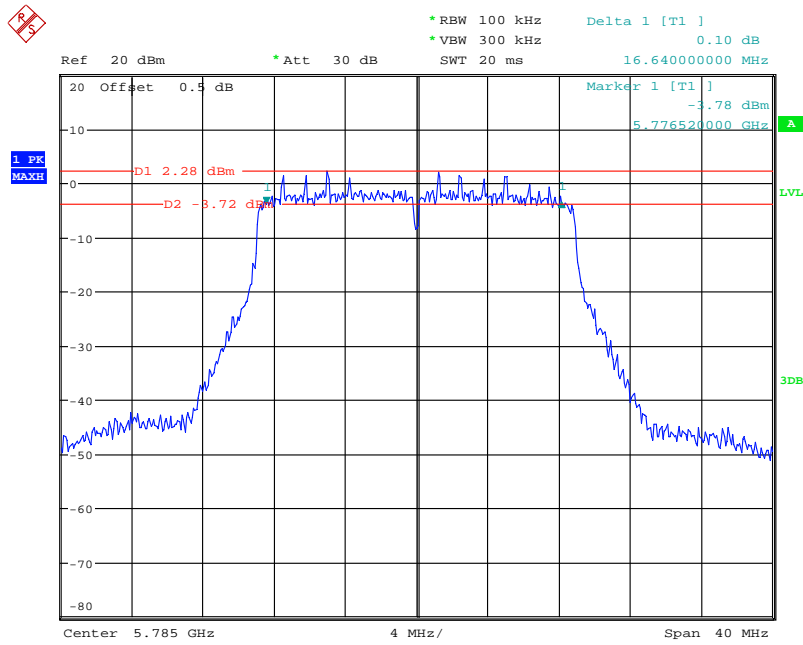


Date: 17.JUN.2021 11:47:14

802.11n ht20 High Channel

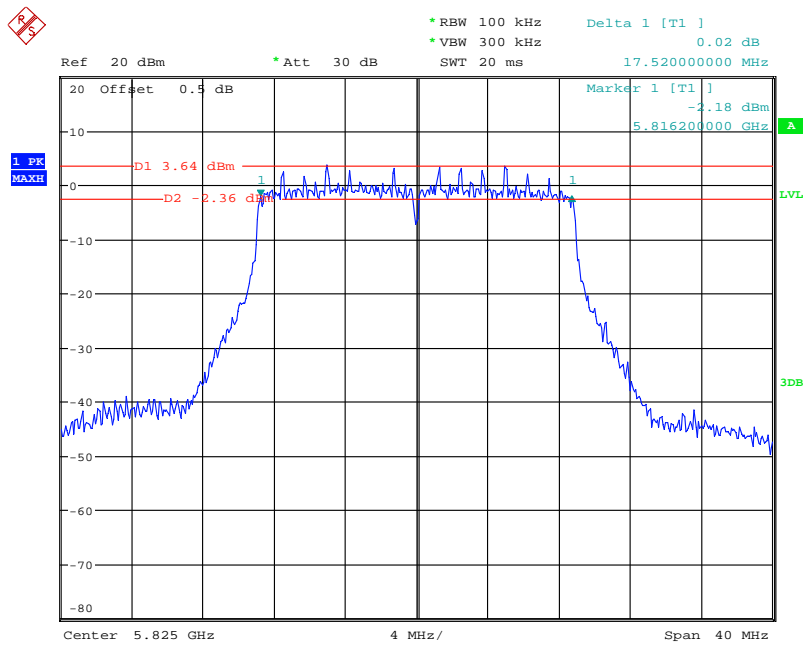


Date: 17.JUN.2021 11:45:55

802.11n ht40 Low Channel

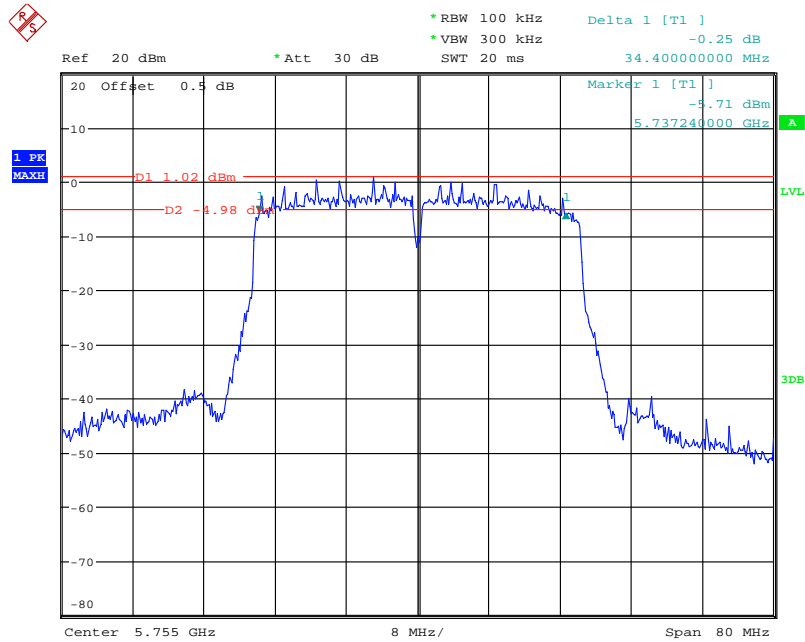


Date: 17.JUN.2021 12:30:36

802.11n ht40 High Channel

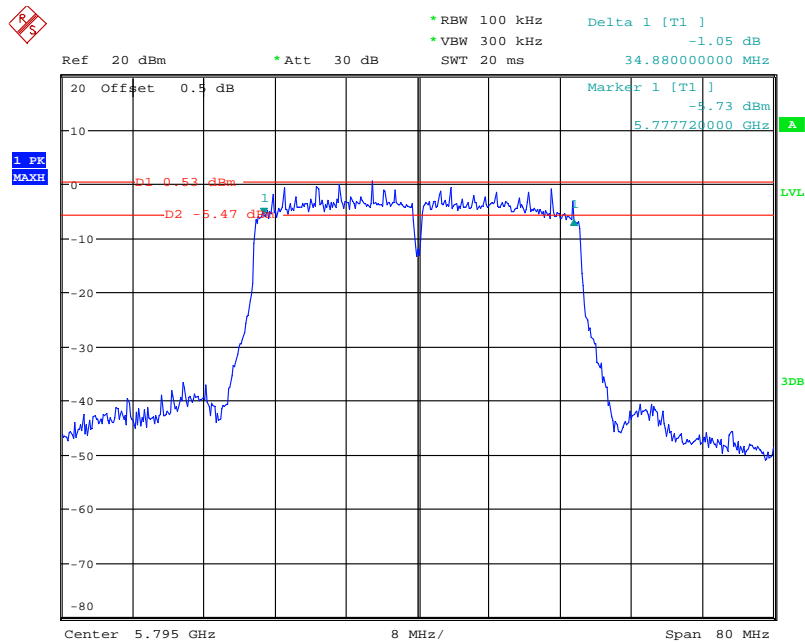


Date: 17.JUN.2021 12:32:03

802.11ac vht20 Low Channel

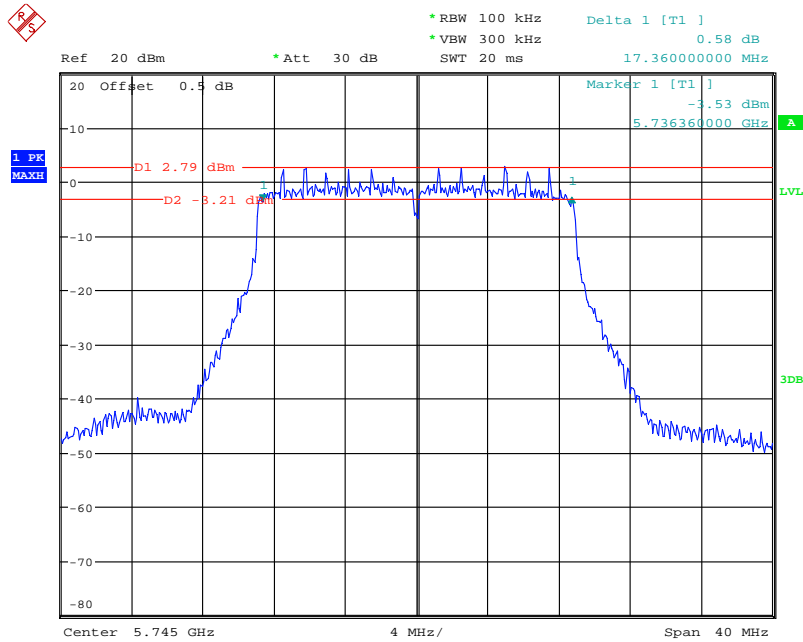


Date: 17.JUN.2021 11:59:06

802.11ac20 Middle Channel

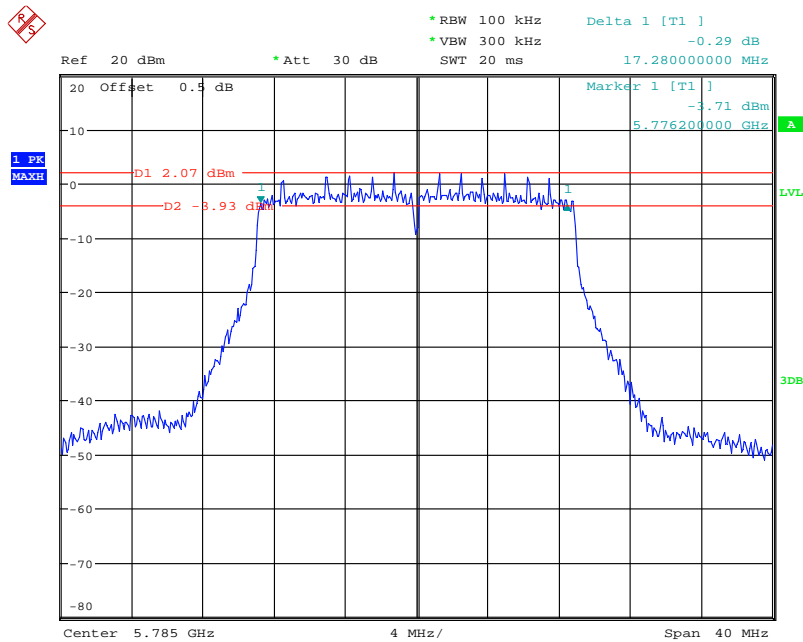


Date: 17.JUN.2021 12:10:07

802.11ac20 High Channel

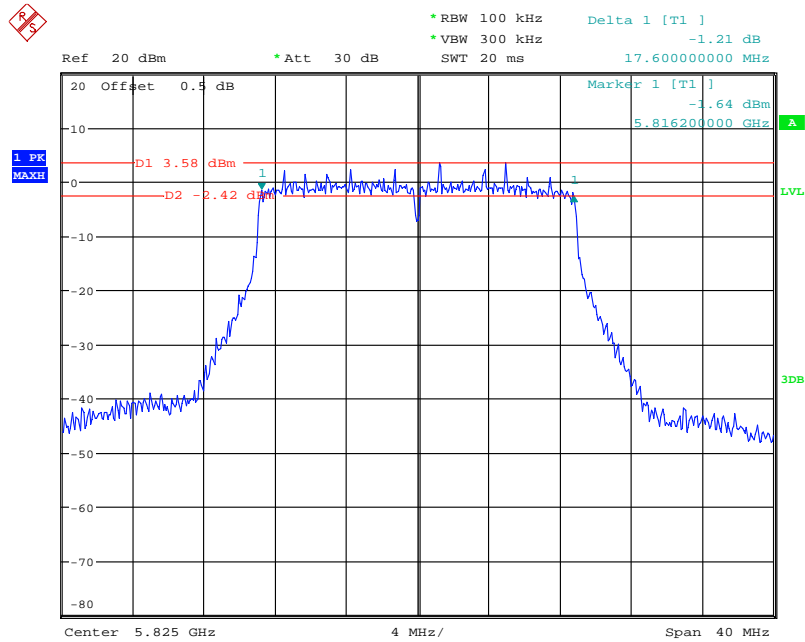


Date: 17.JUN.2021 12:11:21

802.11ac vht40 Low Channel

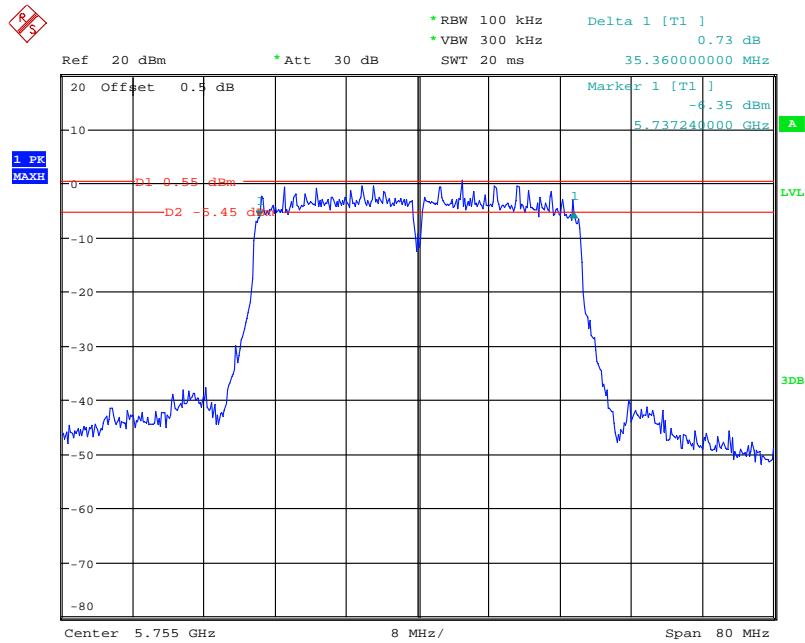


Date: 17.JUN.2021 12:13:41

802.11ac vht40 High Channel

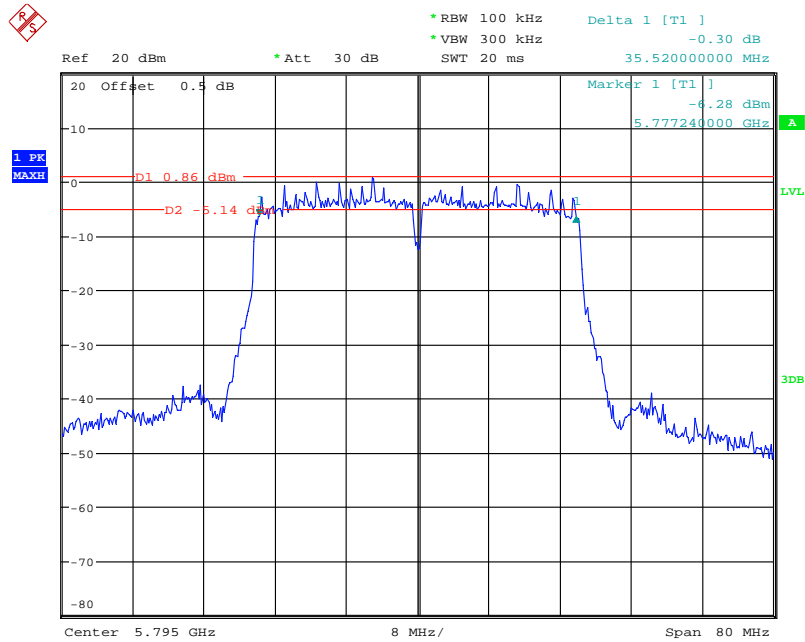

Date: 17.JUN.2021 12:15:00


802.11ac vht80 Middle Channel

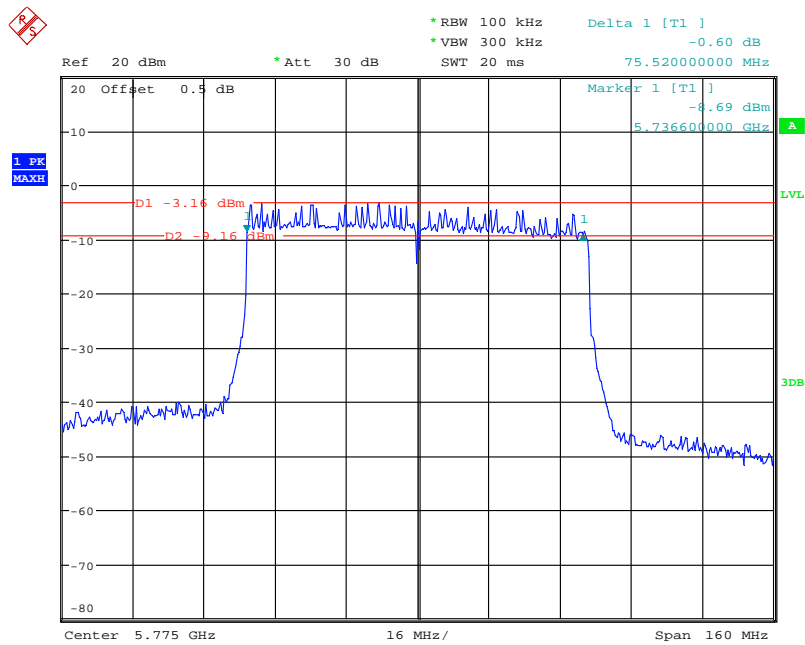

Date: 17.JUN.2021 12:34:22


99% Occupied Bandwidth:

802.11a Low Channel

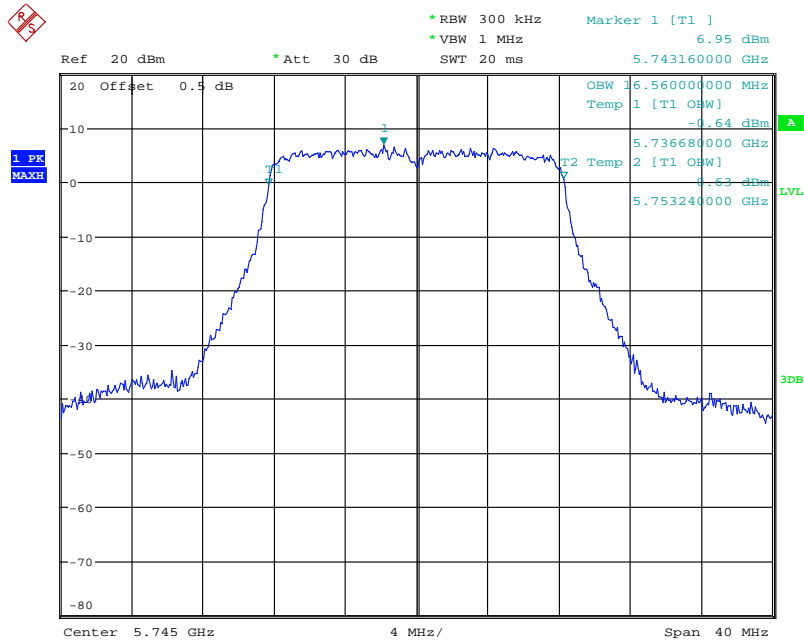


Date: 17.JUN.2021 11:39:37

802.11a Middle Channel

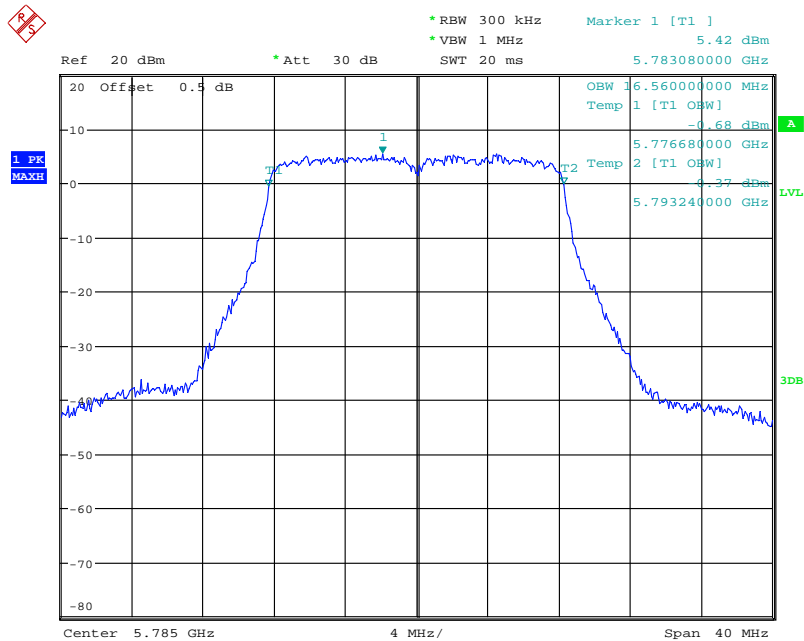


Date: 17.JUN.2021 11:42:43

802.11a High Channel

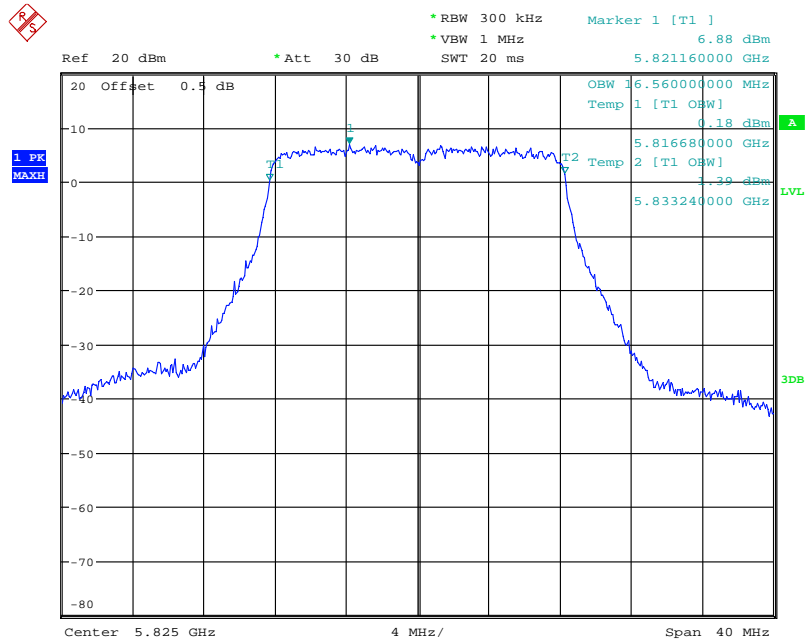


Date: 17.JUN.2021 11:44:01

802.11n ht20 Low Channel

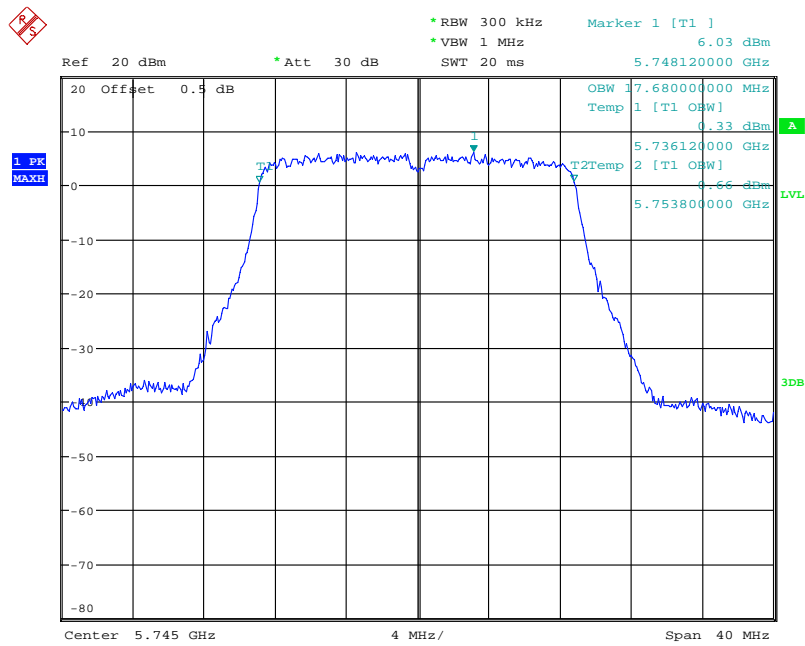


Date: 17.JUN.2021 11:49:21

802.11n ht20 Middle Channel

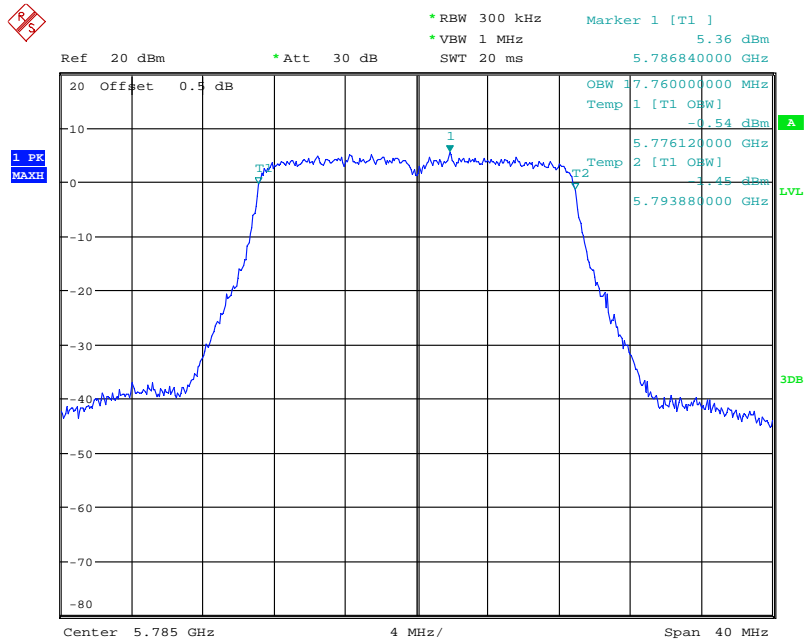


Date: 17.JUN.2021 11:47:27

802.11n ht20 High Channel

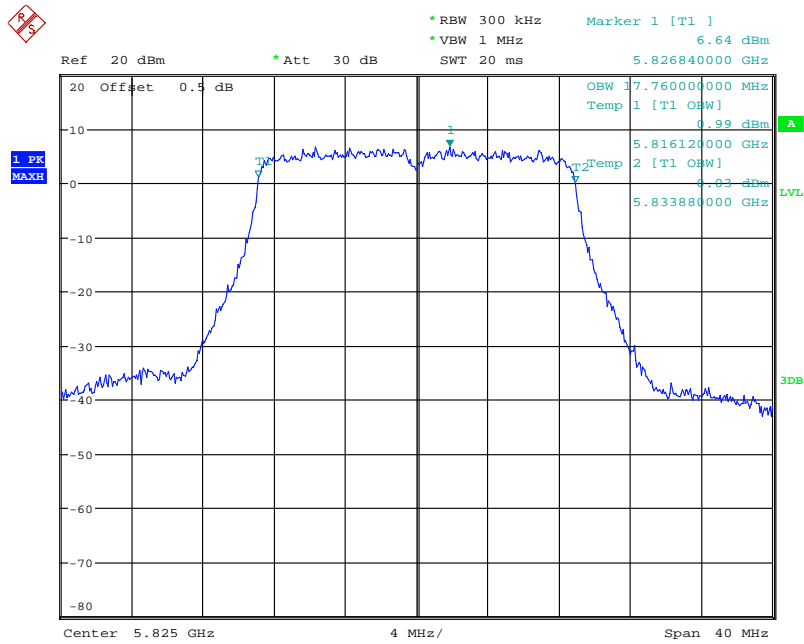


Date: 17.JUN.2021 11:46:09

802.11n ht40 Low Channel

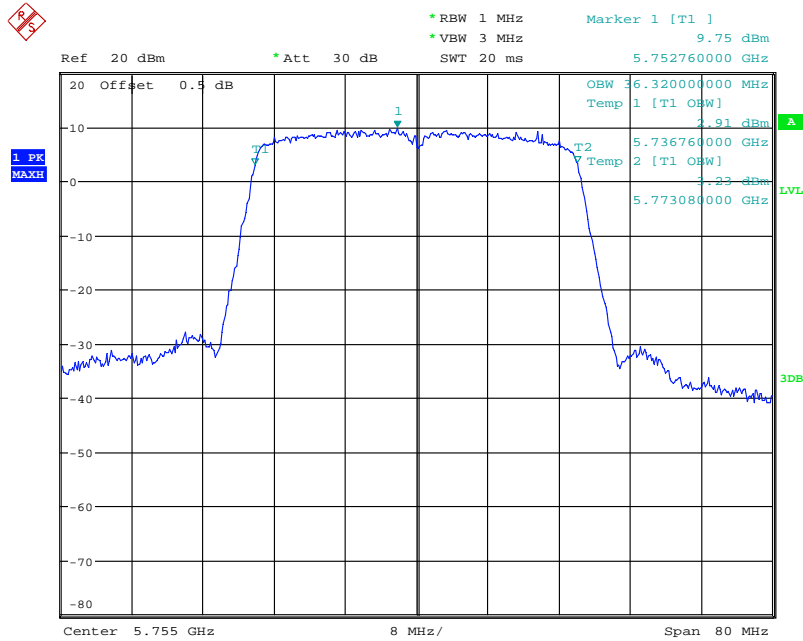


Date: 17.JUN.2021 12:30:50

802.11n ht40 High Channel

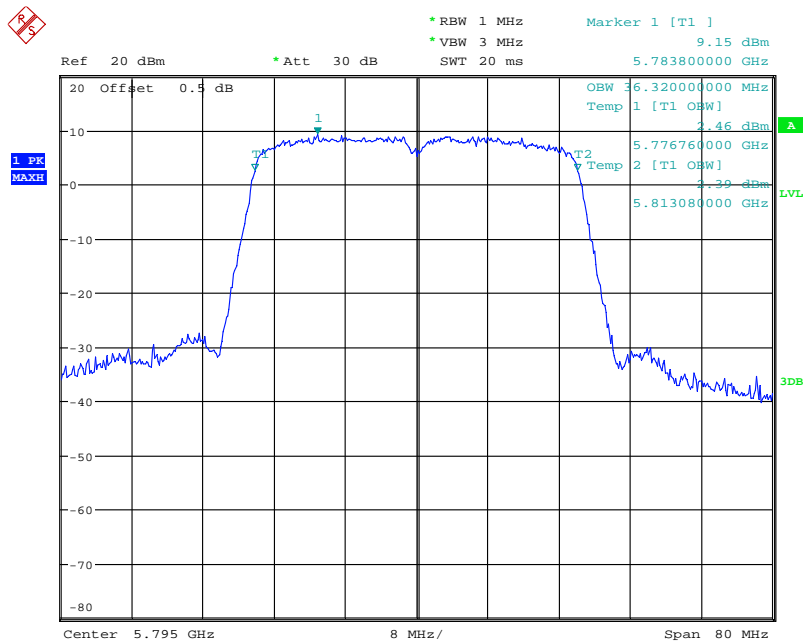


Date: 17.JUN.2021 12:32:17

802.11ac vht20 Low Channel

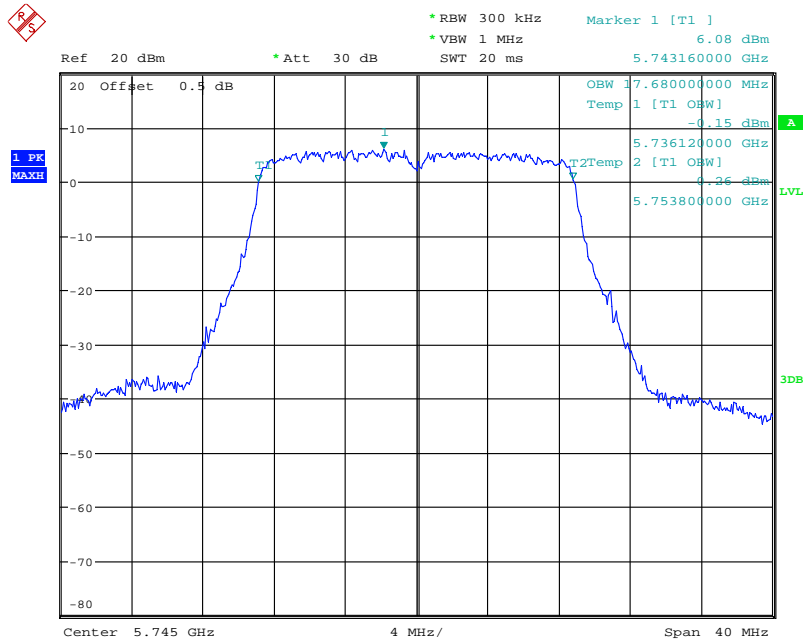


Date: 17.JUN.2021 11:59:20

802.11ac20 Middle Channel

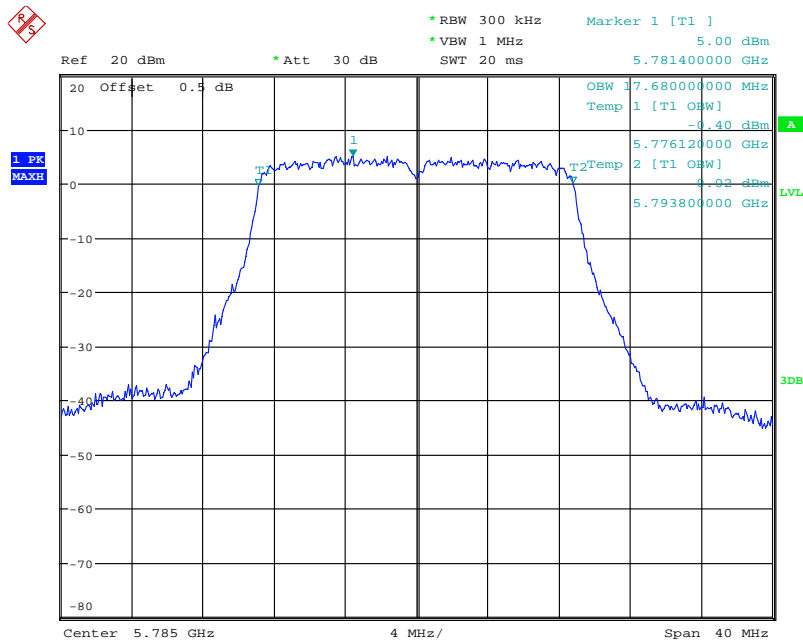


Date: 17.JUN.2021 12:10:21

802.11ac20 High Channel

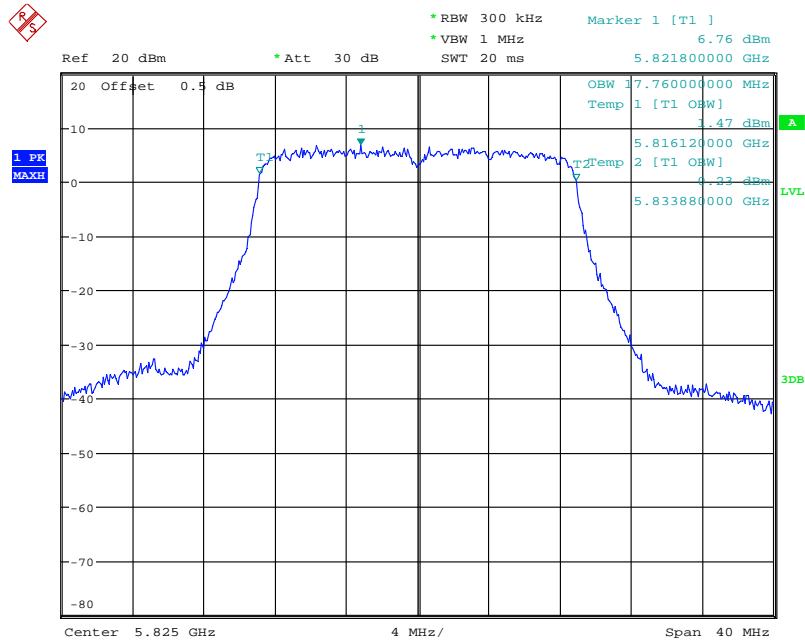


Date: 17.JUN.2021 12:11:38

802.11ac vht40 Low Channel

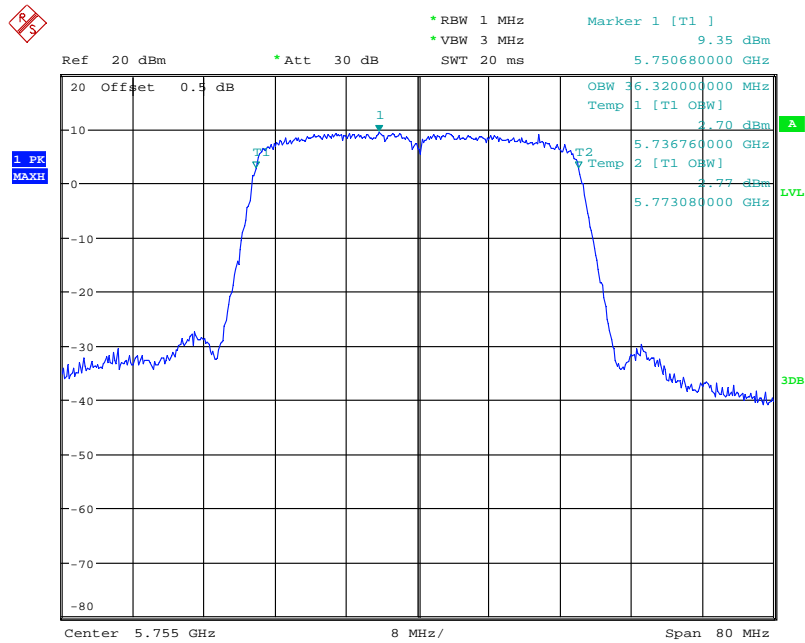


Date: 17.JUN.2021 12:13:55

802.11ac vht40 High Channel

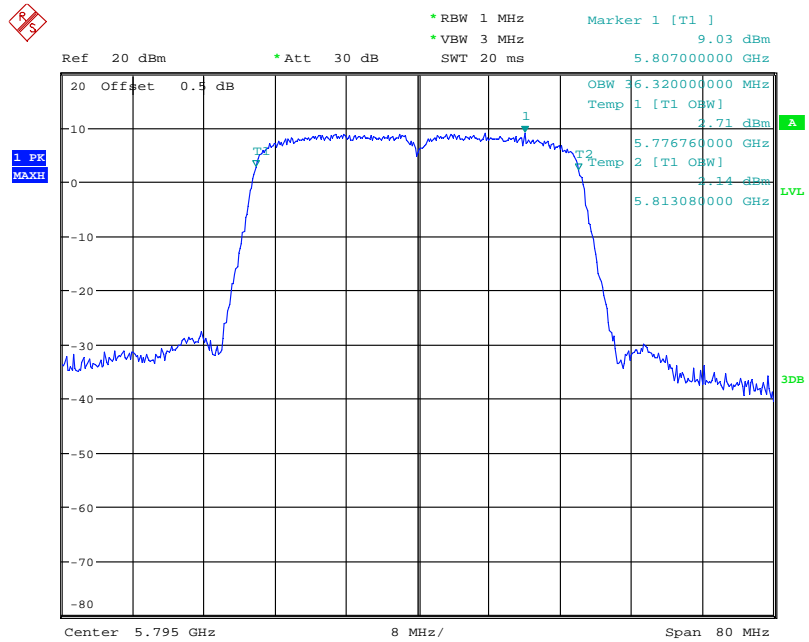

Date: 17.JUN.2021 12:15:15

802.11ac vht80 Middle Channel

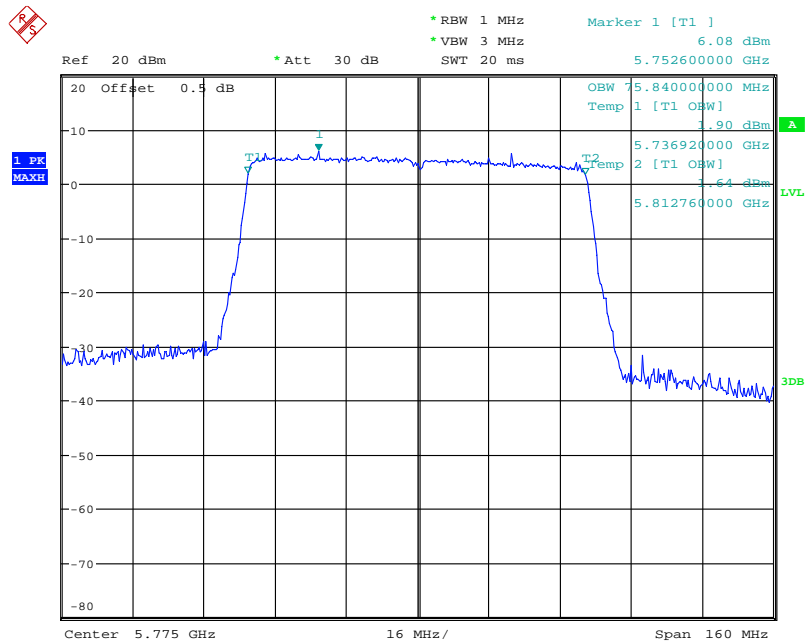

Date: 17.JUN.2021 12:34:40

FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|---------------------------|--------------|---------------|------------------|----------------------|
| E-Microwave | Coaxial Attenuators | EMCA10-5RN-6 | OE01203239 | Each time | N/A |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/01 | Each time | N/A |
| Agilent | USB Wideband Power Sensor | U2022XA | MY5417006 | 2020-09-12 | 2021-09-12 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 23 °C |
| Relative Humidity: | 60 % |
| ATM Pressure: | 100.2 kPa |
| Test by: | Bond Qin |
| Test Date: | 2021-06-17 |

Test Mode: Transmitting

| Band | Mode | Frequency (MHz) | Conducted Average Output Power (dBm) | Limit (dBm) |
|--------------------------|-------------------|-----------------|--------------------------------------|-------------|
| 5150 - 5250 MHz | 802.11 a | 5180 | 10.24 | 15 |
| | | 5200 | 10.28 | 15 |
| | | 5240 | 10.29 | 15 |
| | 802.11n ht20 | 5180 | 9.84 | 15 |
| | | 5200 | 9.92 | 15 |
| | | 5240 | 9.99 | 15 |
| | 802.11n ht40 | 5190 | 10.49 | 15 |
| | | 5230 | 10.59 | 15 |
| | 802.11ac vht20 | 5180 | 9.75 | 15 |
| | | 5200 | 9.77 | 15 |
| | | 5240 | 9.84 | 15 |
| | 802.11ac Vht40 | 5190 | 10.44 | 15 |
| | | 5230 | 10.51 | 15 |
| | 802.11ac vht80 | 5210 | 10.37 | 15 |
| 5725 - 5850 MHz | 802.11 a | 5745 | 14.05 | 15 |
| | | 5785 | 13.78 | 15 |
| | | 5825 | 14.86 | 15 |
| | 802.11n ht20 | 5745 | 14.35 | 15 |
| | | 5785 | 13.49 | 15 |
| | | 5825 | 14.42 | 15 |
| | 802.11n ht40 | 5755 | 14.97 | 15 |
| | | 5795 | 14.48 | 15 |
| | 802.11ac vht20 | 5745 | 14.26 | 15 |
| | | 5785 | 13.62 | 15 |
| | | 5825 | 14.53 | 15 |
| | 802.11ac Vht40 | 5755 | 14.8 | 15 |
| | | 5795 | 14.55 | 15 |
| | 802.11ac vht80 | 5775 | 14.17 | 15 |

Note:

The device is an Outdoor access points or a fixed point-to-point access points, the Outdoor access points use is stricter.

The duty cycle factor has been calculated into the test data.

For 5150-5250 MHz, The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon not exceed 125 mW (21 dBm), please refer to the antenna specification vertical Plane(antenna gain<10dBi for above 30 degrees as measured from the horizon).

The maximum antenna gain is 21dBi in 5GHz band.

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSU 26 | 200256 | 2020-07-07 | 2021-07-07 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/01 | Each time | N/A |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|-----------------------|
| Temperature: | 22.9~24.9 °C |
| Relative Humidity: | 50~60 % |
| ATM Pressure: | 100~100.3 kPa |
| Test by: | Bond Qin |
| Test Date: | 2021-06-17~2021-06-21 |

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

5150-5250MHz:

| Mode | Frequency (MHz) | Maximum Power Spectral Density (dBm/MHz) | Limit (dBm/MHz) |
|----------------|-----------------|--|-----------------|
| 802.11a | 5180 | -0.92 | 2.0 |
| | 5200 | -0.86 | 2.0 |
| | 5240 | -0.79 | 2.0 |
| 802.11n ht20 | 5180 | -1.12 | 2.0 |
| | 5200 | -1.08 | 2.0 |
| | 5240 | -1.12 | 2.0 |
| 802.11n ht40 | 5190 | -3.43 | 2.0 |
| | 5230 | -3.47 | 2.0 |
| 802.11ac vht20 | 5180 | -1.14 | 2.0 |
| | 5200 | -1.19 | 2.0 |
| | 5240 | -1.01 | 2.0 |
| 802.11ac vht40 | 5190 | -3.64 | 2.0 |
| | 5230 | -3.40 | 2.0 |
| 802.11ac vht80 | 5210 | -7.12 | 2.0 |

5725-5850 MHz:

| Mode | Frequency (MHz) | Maximum Power Spectral Density (dBm/500kHz) | Limit (dBm/500kHz) |
|----------------|-----------------|---|--------------------|
| 802.11a | 5745 | 1.46 | 15.0 |
| | 5785 | 0.46 | 15.0 |
| | 5825 | 1.78 | 15.0 |
| 802.11n ht20 | 5745 | 1.85 | 15.0 |
| | 5785 | 0.82 | 15.0 |
| | 5825 | 2.25 | 15.0 |
| 802.11n ht40 | 5755 | -0.52 | 15.0 |
| | 5795 | -0.85 | 15.0 |
| 802.11ac vht20 | 5745 | 1.51 | 15.0 |
| | 5785 | 0.81 | 15.0 |
| | 5825 | 2.38 | 15.0 |
| 802.11ac vht40 | 5755 | -1.11 | 15.0 |
| | 5795 | -1.34 | 15.0 |
| 802.11ac vht80 | 5775 | -4.95 | 15.0 |


Note:

The maximum antenna gain is 21dBi in 5GHz band.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.


5150-5250MHz

802.11a Low Channel

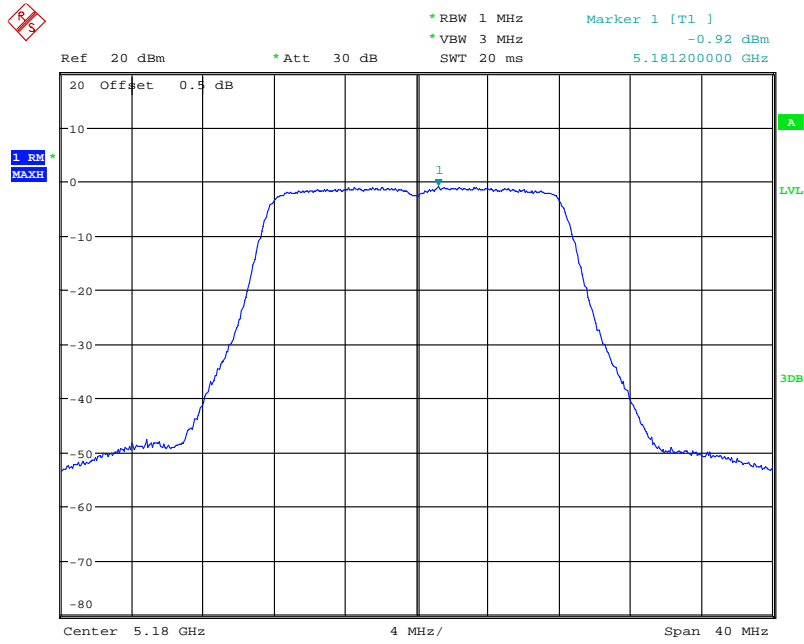


Date: 17.JUN.2021 11:33:14

802.11a Middle Channel

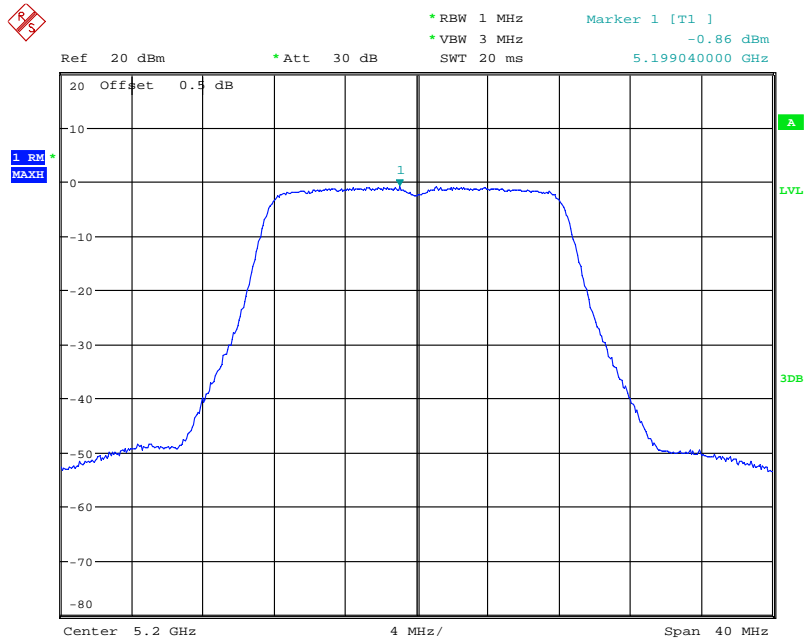


Date: 17.JUN.2021 11:36:32

802.11a High Channel

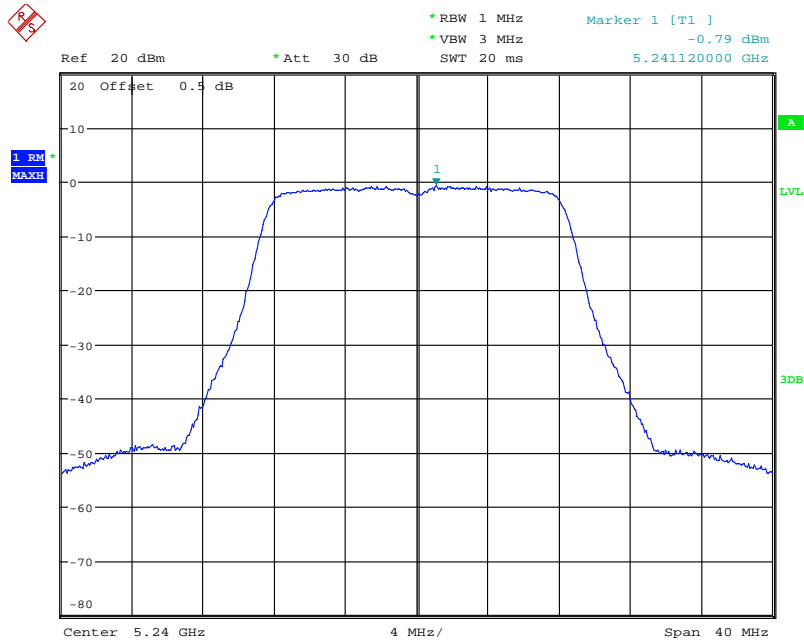


Date: 17.JUN.2021 11:38:12

802.11n ht20 Low Channel

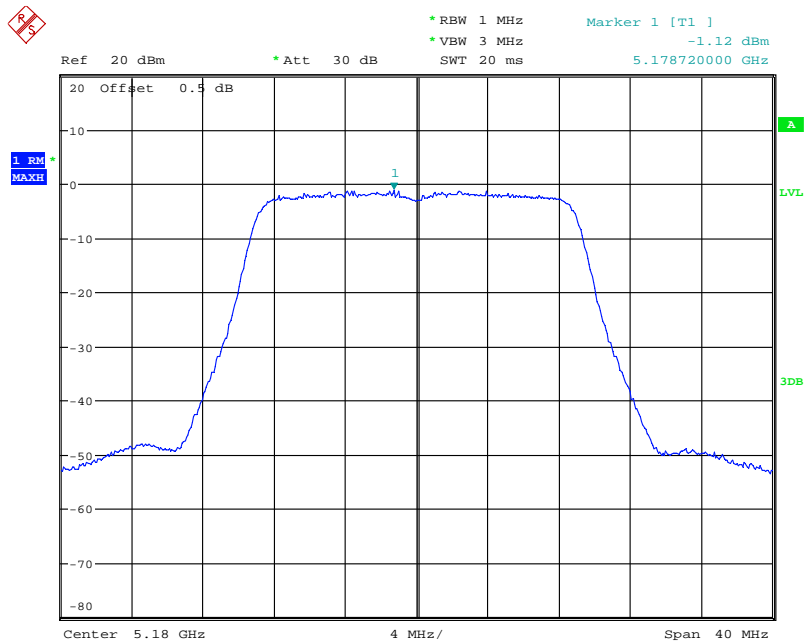


Date: 17.JUN.2021 11:51:55

802.11n ht20 Middle Channel

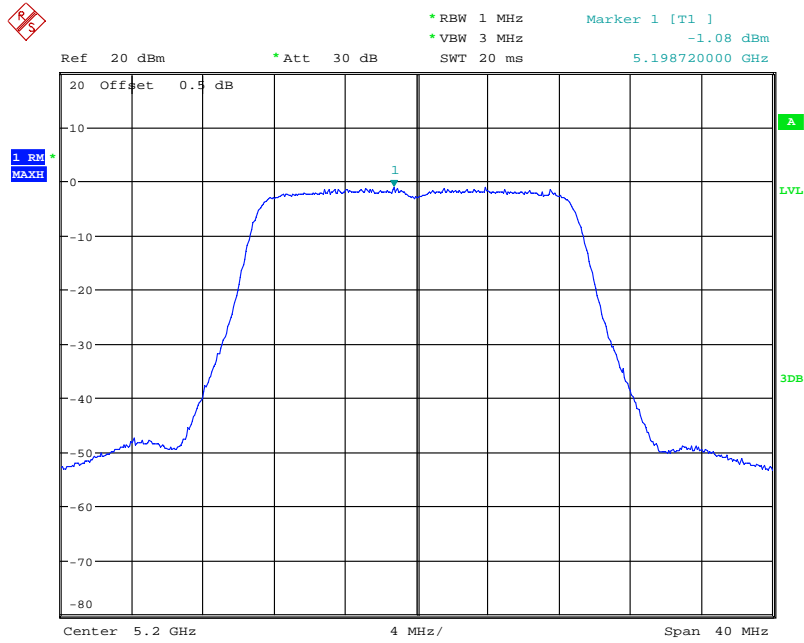


Date: 17.JUN.2021 11:53:05

802.11n ht20 High Channel

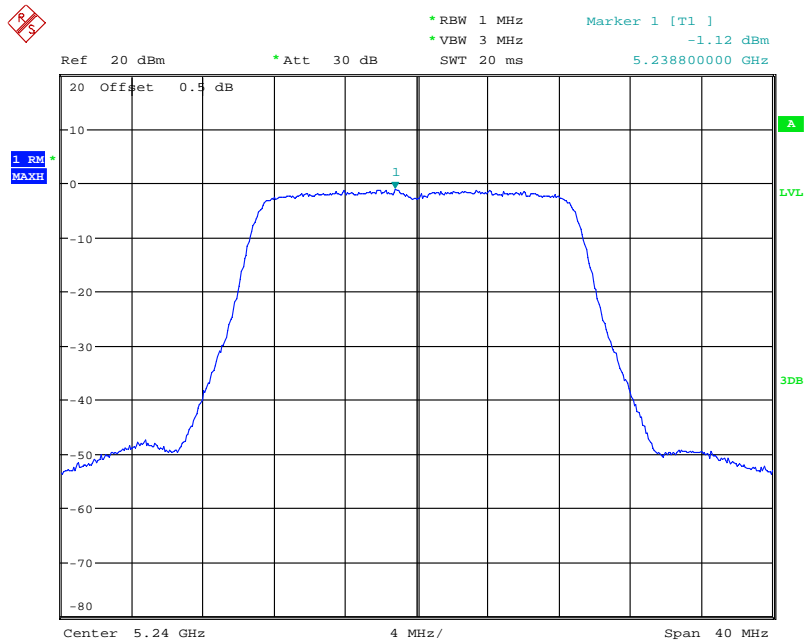


Date: 17.JUN.2021 11:54:35

802.11n ht40 Low Channel

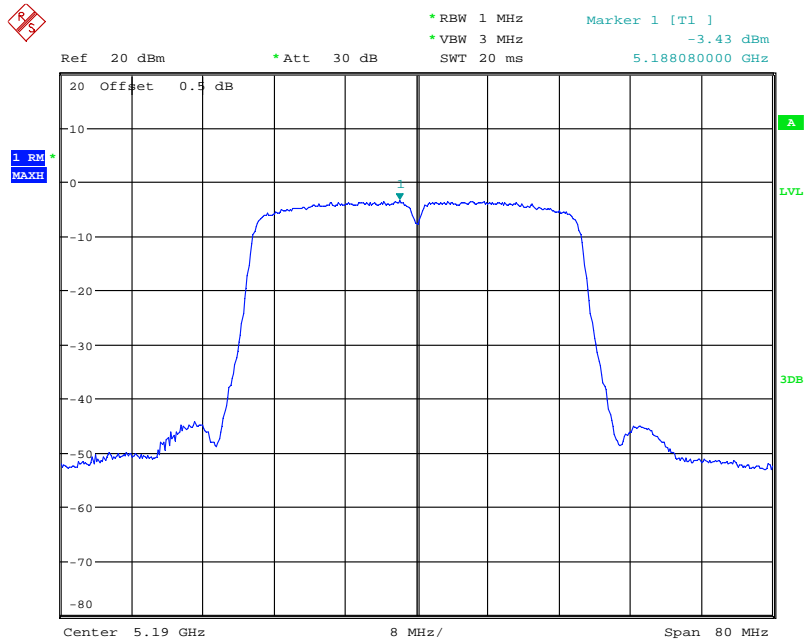


Date: 17.JUN.2021 12:29:01

802.11n ht40 High Channel

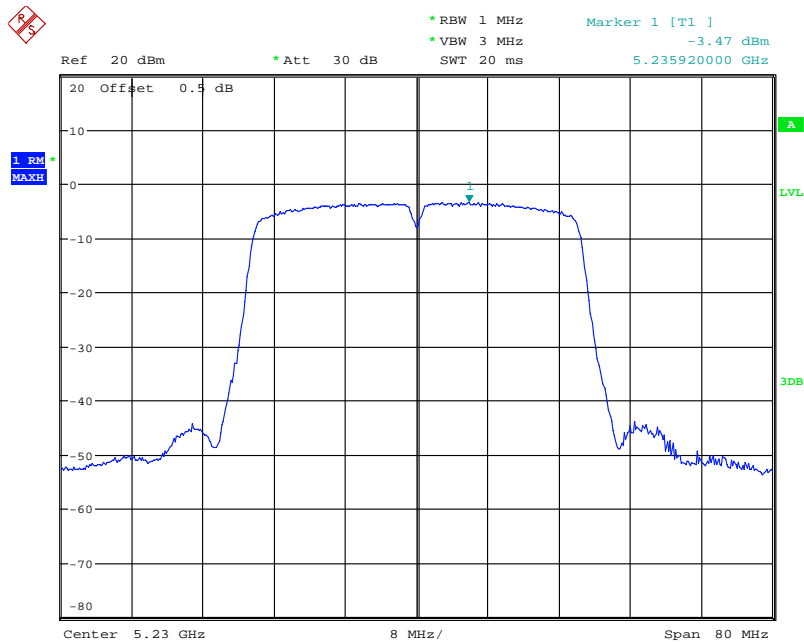


Date: 17.JUN.2021 12:27:12

802.11ac vht20 Low Channel

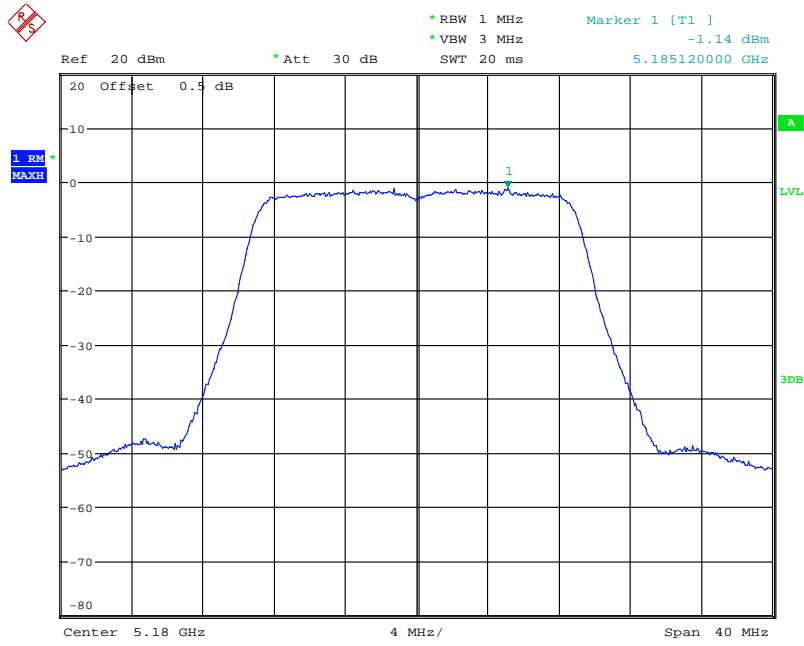


Date: 17.JUN.2021 11:56:10

802.11ac20 Middle Channel

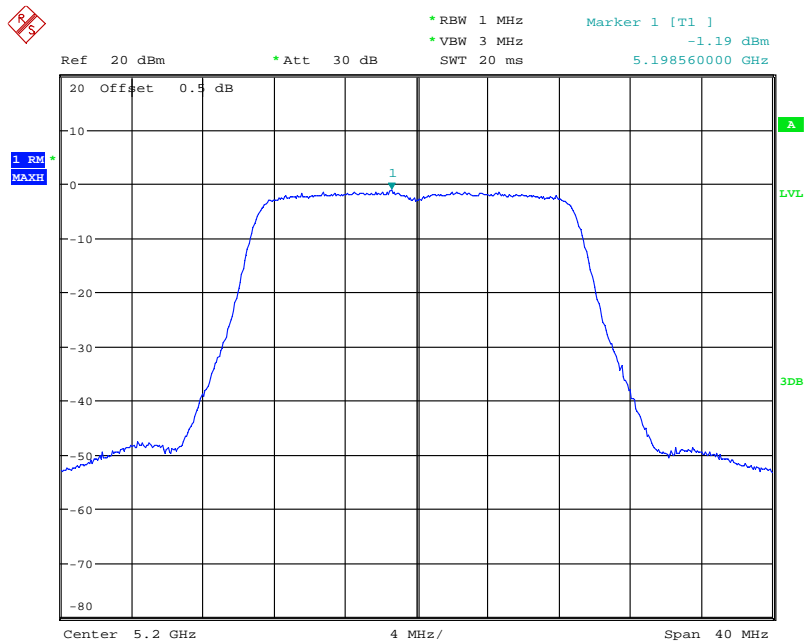


Date: 17.JUN.2021 11:57:08

802.11ac20 High Channel

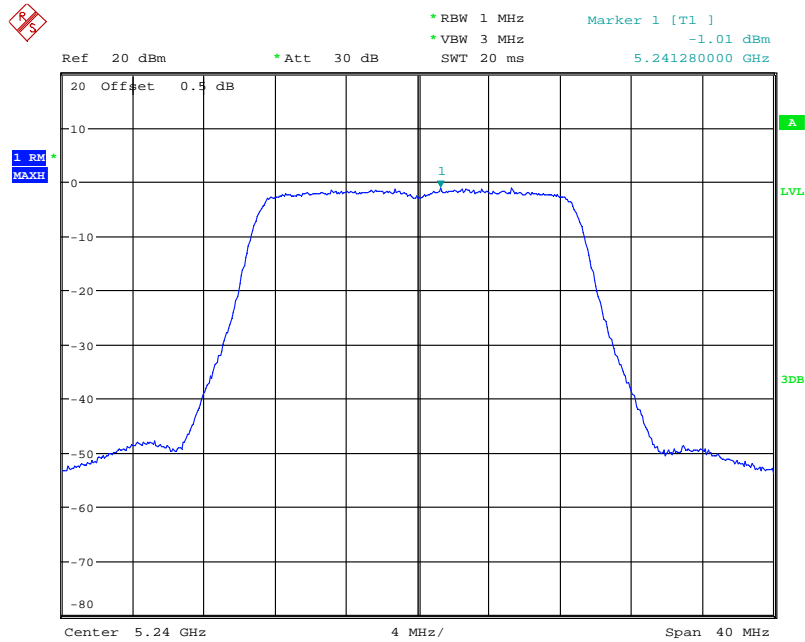


Date: 17.JUN.2021 11:58:08

802.11ac vht40 Low Channel

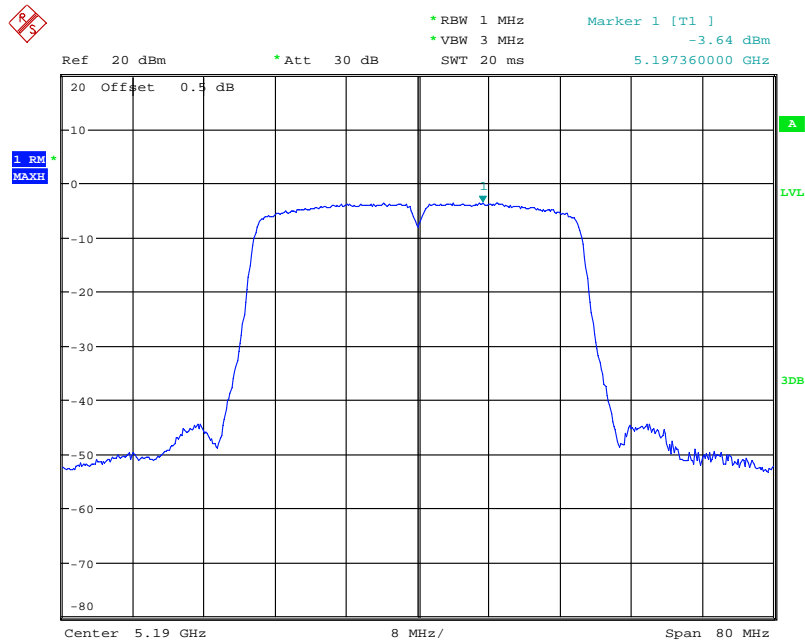


Date: 17.JUN.2021 12:23:51

802.11ac vht40 High Channel

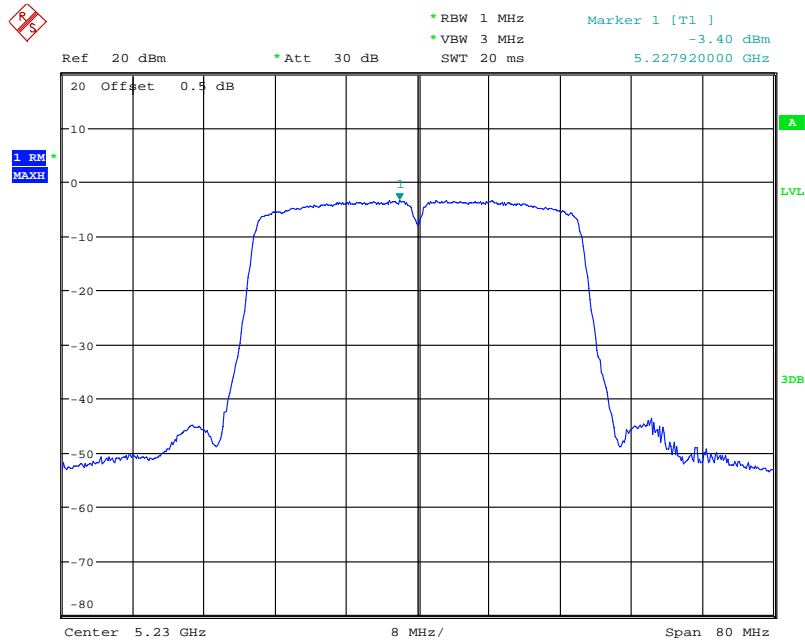

Date: 17.JUN.2021 12:25:31


802.11ac vht80 Middle Channel

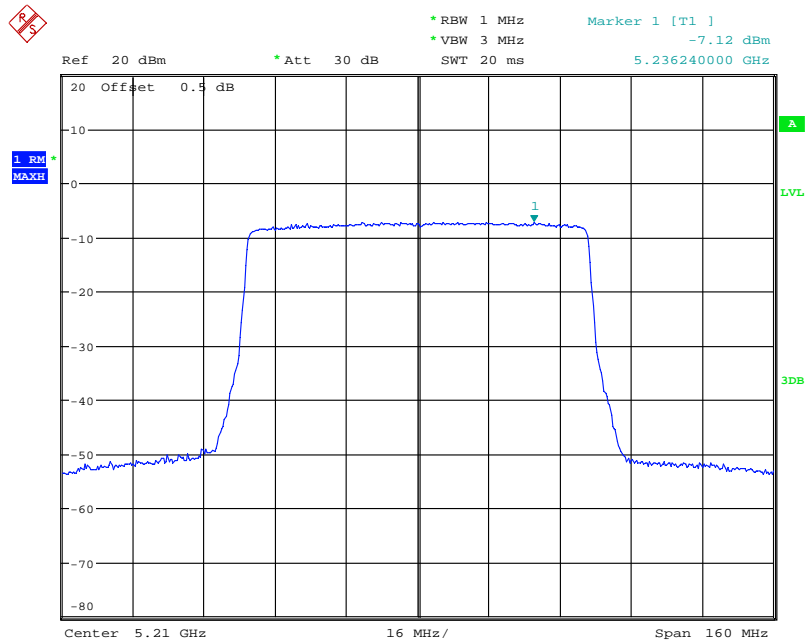

Date: 17.JUN.2021 12:36:35


5725-5850MHz

802.11a Low Channel

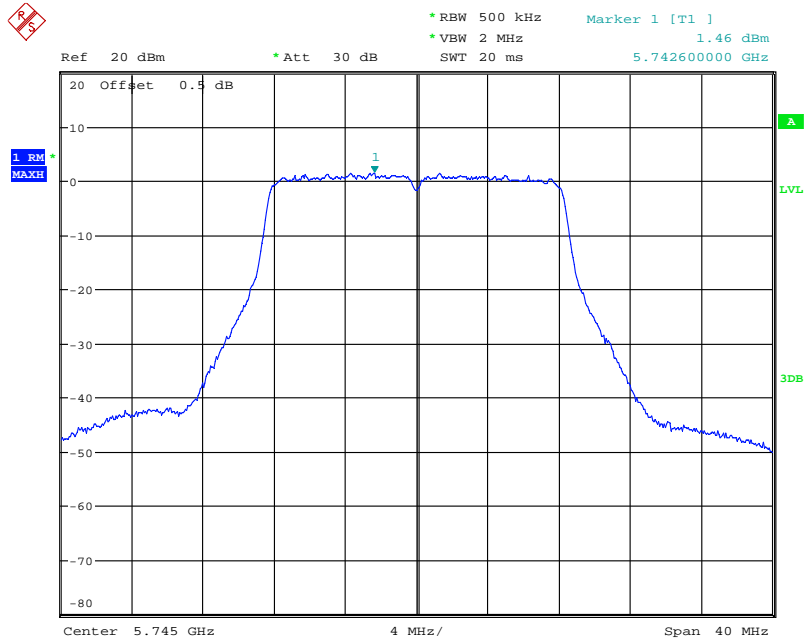


Date: 21.JUN.2021 14:50:53

802.11a Middle Channel

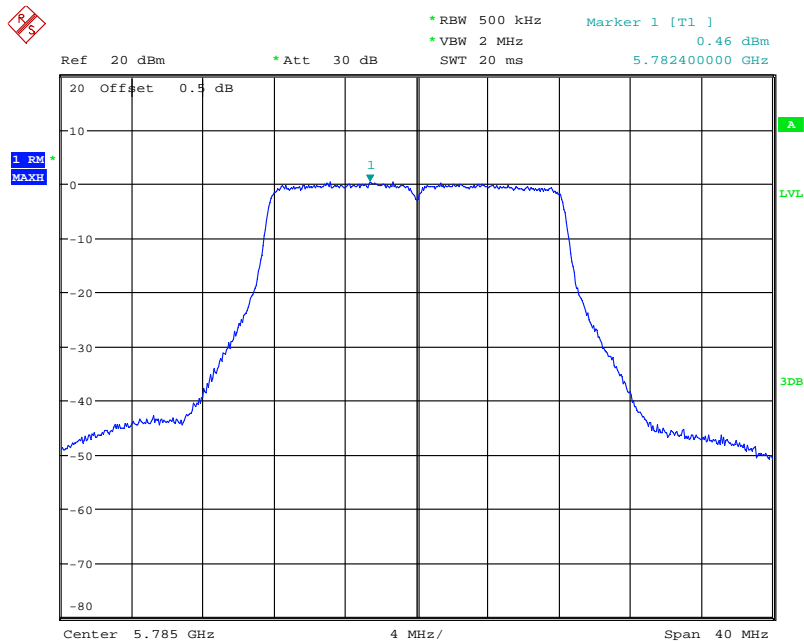


Date: 21.JUN.2021 14:52:28

802.11a High Channel

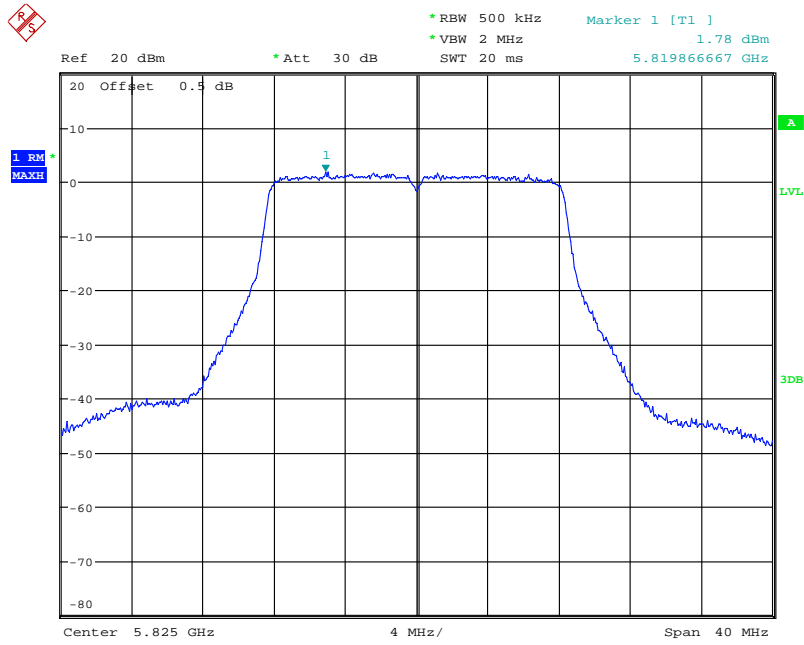


Date: 21.JUN.2021 14:54:19

802.11n ht20 Low Channel

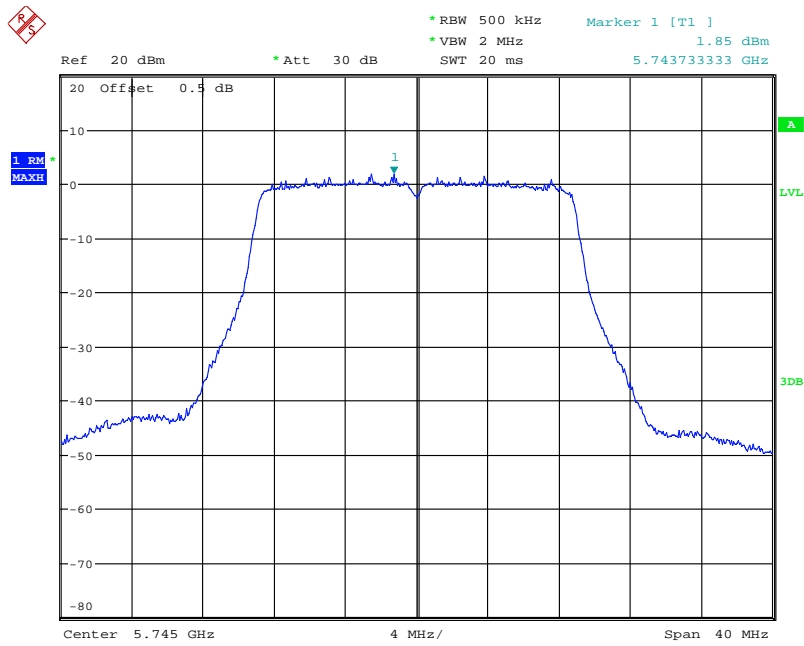


Date: 21.JUN.2021 14:58:11

802.11n ht20 Middle Channel

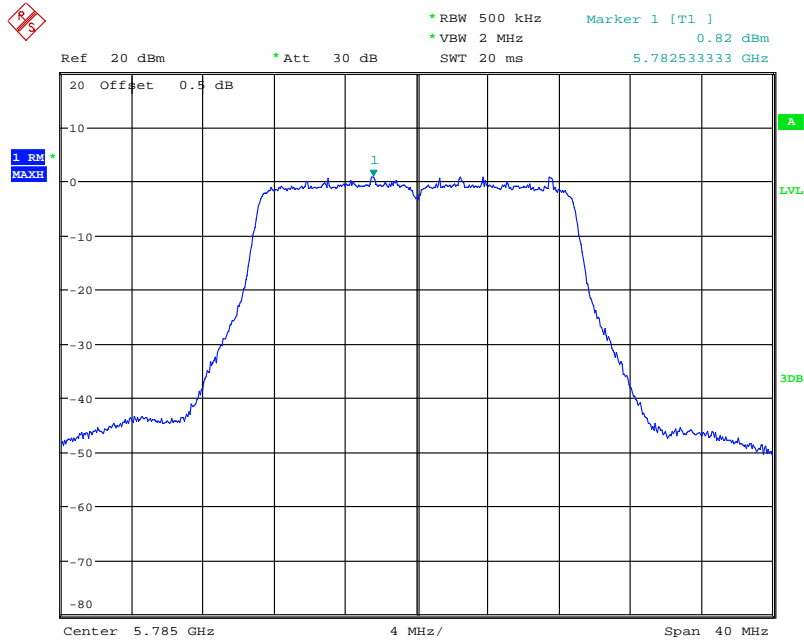


Date: 21.JUN.2021 14:56:26

802.11n ht20 High Channel

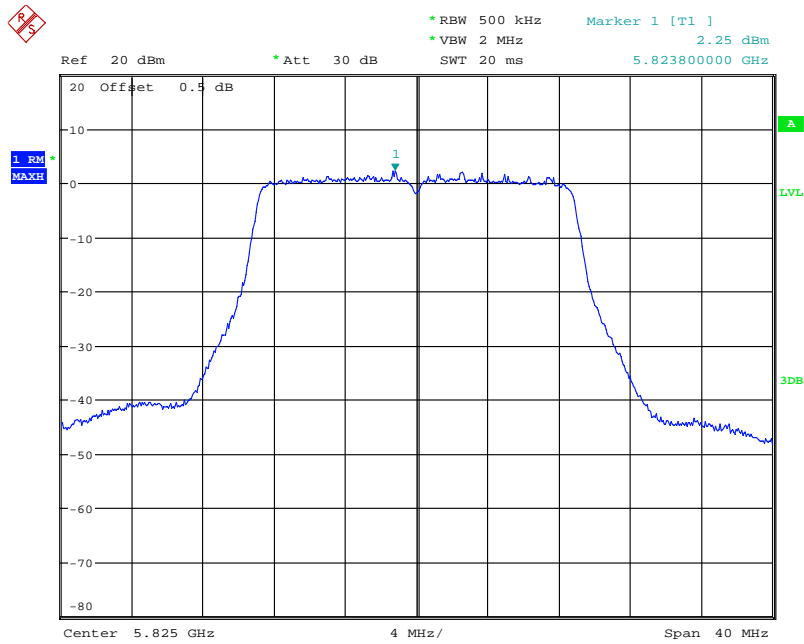


Date: 21.JUN.2021 14:55:42

802.11n ht40 Low Channel

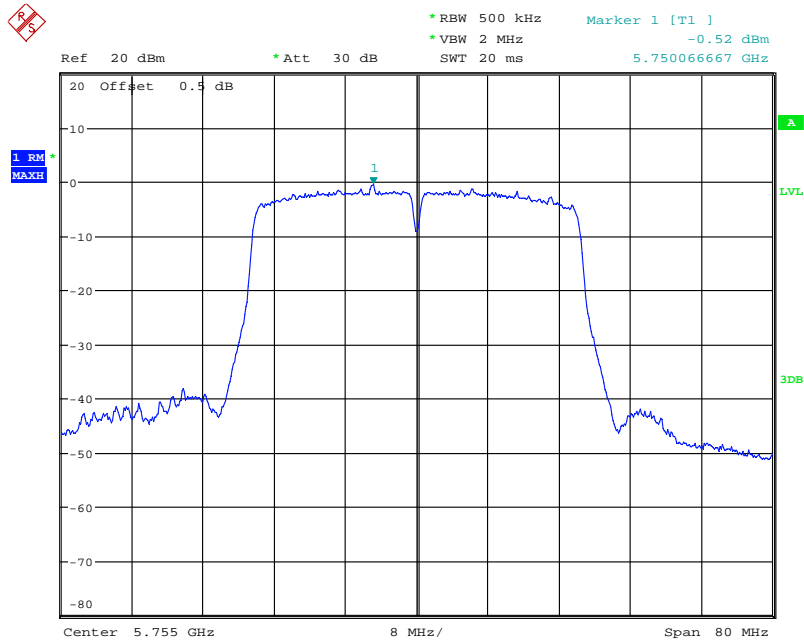


Date: 21.JUN.2021 15:25:19

802.11n ht40 High Channel

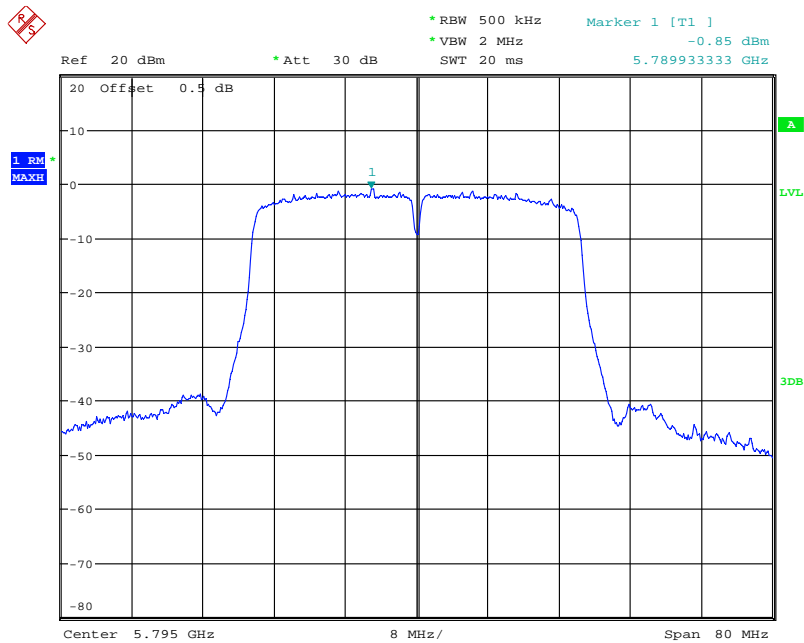


Date: 21.JUN.2021 15:15:10

802.11ac vht20 Low Channel

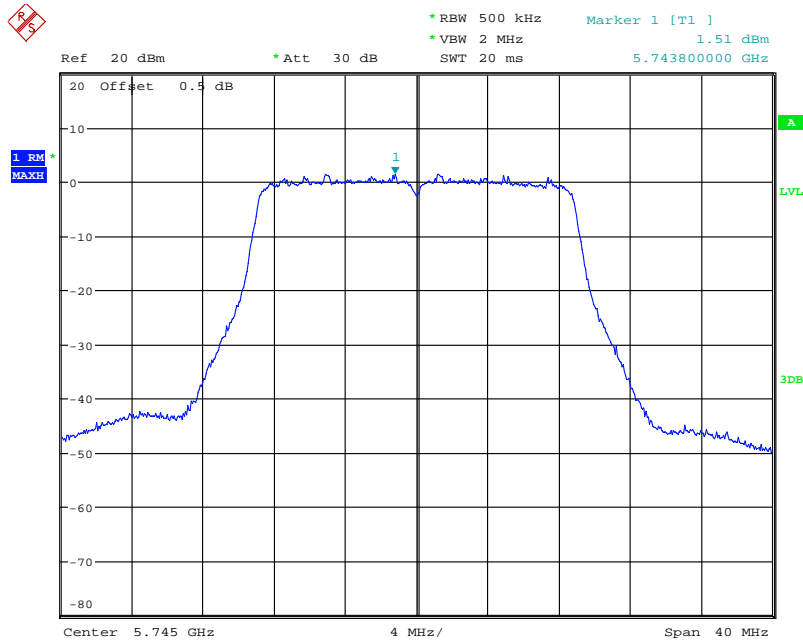


Date: 21.JUN.2021 14:59:04

802.11ac20 Middle Channel

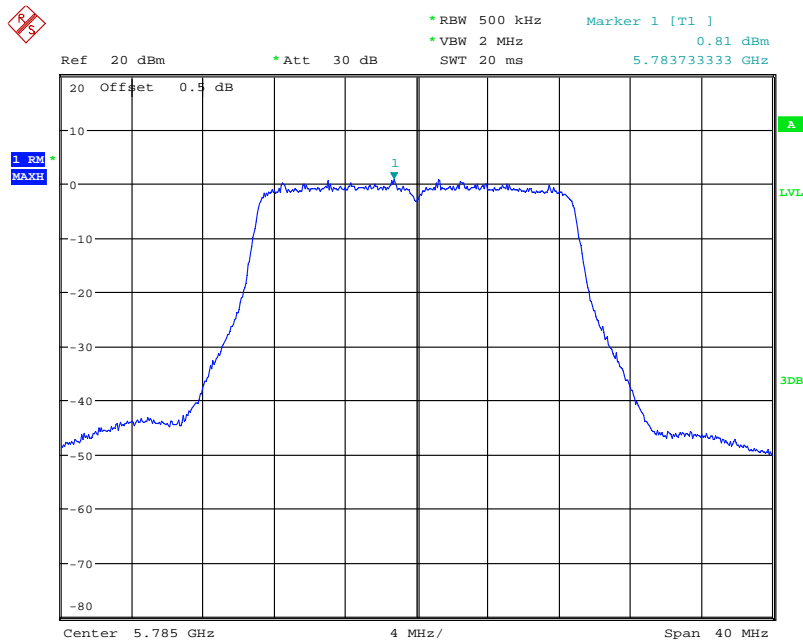


Date: 21.JUN.2021 14:59:56

802.11ac20 High Channel

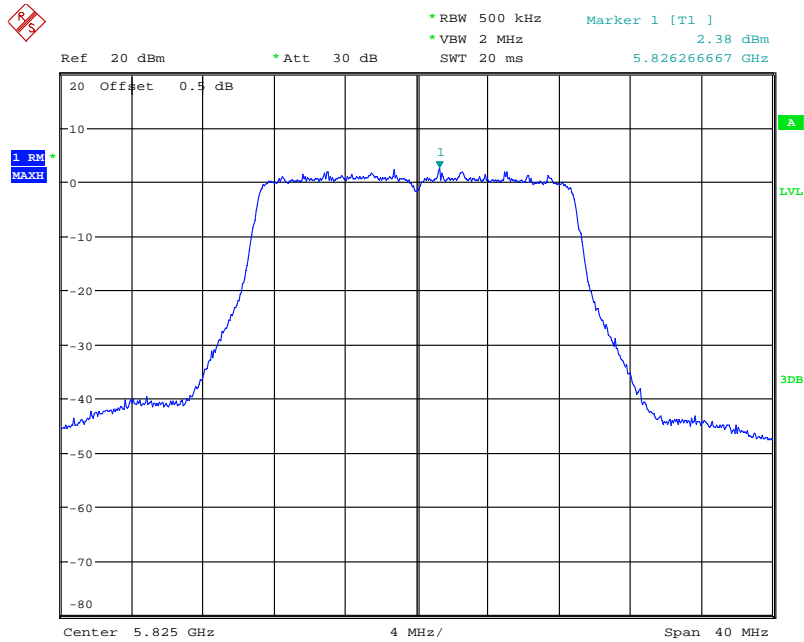


Date: 21.JUN.2021 15:01:17

802.11ac vht40 Low Channel

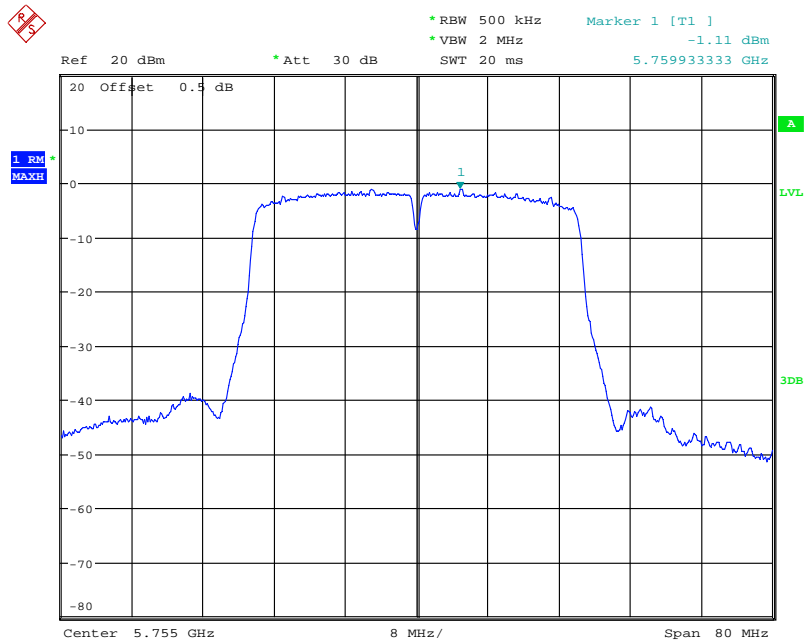


Date: 21.JUN.2021 15:28:39

802.11ac vht40 High Channel

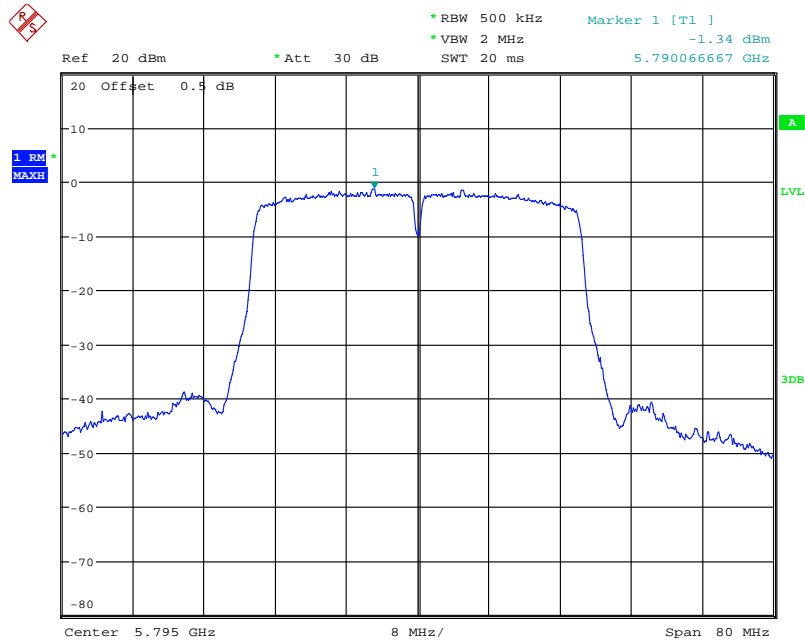

Date: 21.JUN.2021 15:29:34

802.11ac vht80 Middle Channel

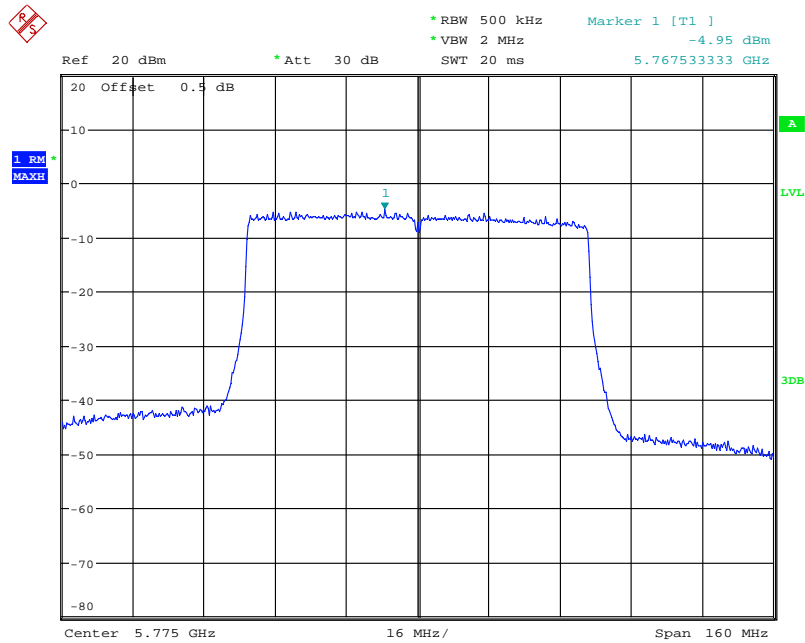

Date: 21.JUN.2021 15:17:14

***** END OF REPORT *****