


Attachment C-- Restricted Bands Requirement and Band-edge Test Data

(1) Radiation Test a/n(20)/ac(20)


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:	TX 802.11a Mode 5180~5240 MHz (U-NII-1) CH Low		

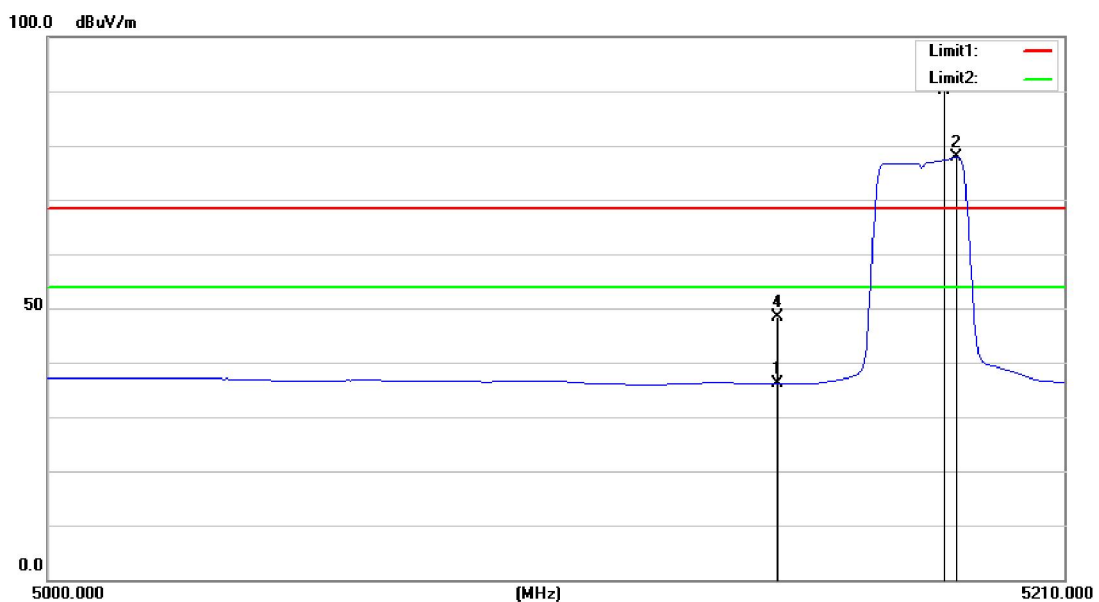

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	26.40	9.65	36.05	54.00	-17.95			AVG
2*	5187.695	67.76	10.12	77.88	Fundamental Frequency				AVG
3X	5184.749	79.97	10.08	90.05	Fundamental Frequency				peak
4	5150.000	38.77	9.65	48.42	68.30	-19.88			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:	TX 802.11a Mode 5180~5240 MHz (U-NII-1) CH Low		

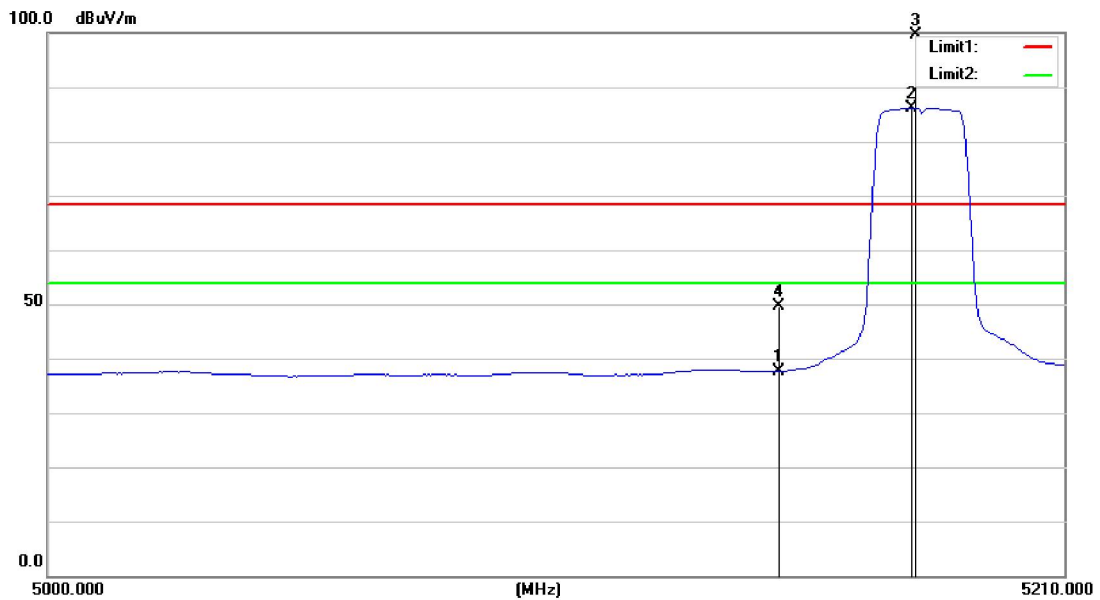

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	27.97	9.65	37.62	54.00	-16.38			AVG
2*	5178.016	76.17	10.00	86.17	Fundamental Frequency				AVG
3X	5178.858	89.62	10.01	99.63	Fundamental Frequency				peak
4	5150.000	40.09	9.65	49.74	68.30	-18.56			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5240 MHz (U-NII-1)		
Remark:	TX 802.11a Mode 5180~5240 MHz (U-NII-1) CH High		

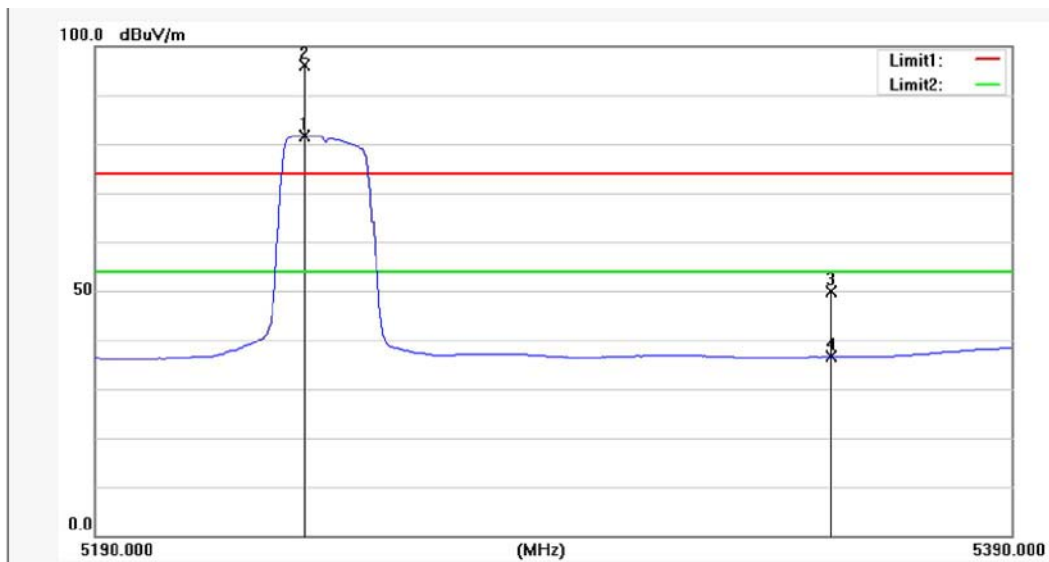

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	5235.291	71.54	10.18	81.72	Fundamental Frequency				AVG
2X	5235.691	85.86	10.17	96.03	74.00	22.03			peak
3	5350.000	39.88	9.99	49.87	Fundamental Frequency				peak
4	5350.000	26.57	9.99	36.56	54.00	-17.44			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5240 MHz (U-NII-1)		
Remark:	TX 802.11a Mode 5180~5240 MHz (U-NII-1) CH High		

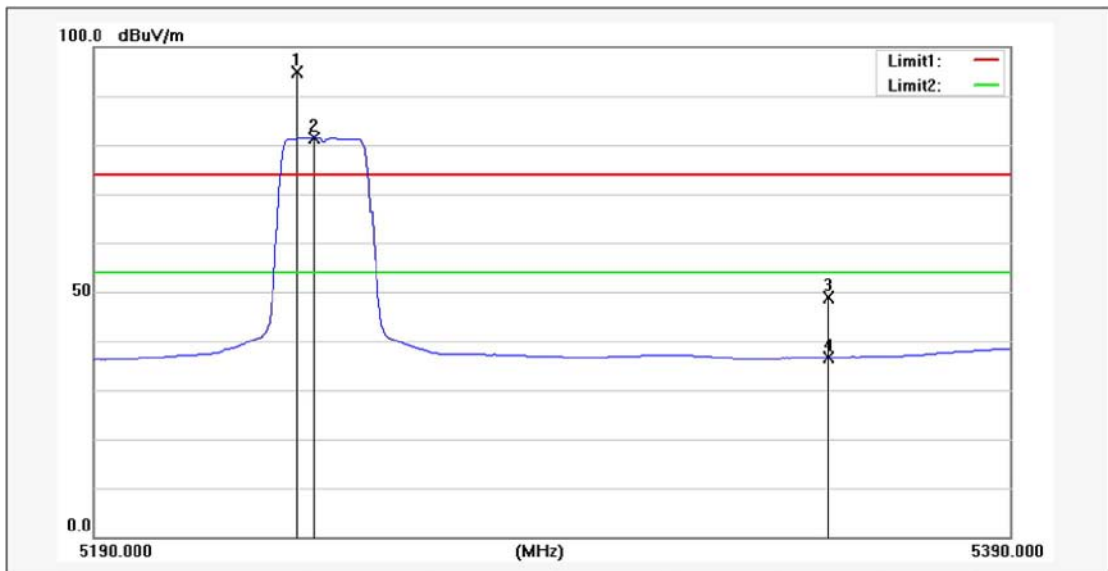

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1X	5234.088	84.82	10.18	95.00	Fundamental Frequency				peak
2*	5237.695	71.20	10.17	81.37	Fundamental Frequency				AVG
3	5350.000	38.89	9.99	48.88	74.00	-25.12			peak
4	5350.000	26.61	9.99	36.60	54.00	-17.40			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5180 MHz (U-NII-1)		
Remark:	TX 802.11 n(20) Mode 5180~5240 MHz (U-NII-1) CH Low		

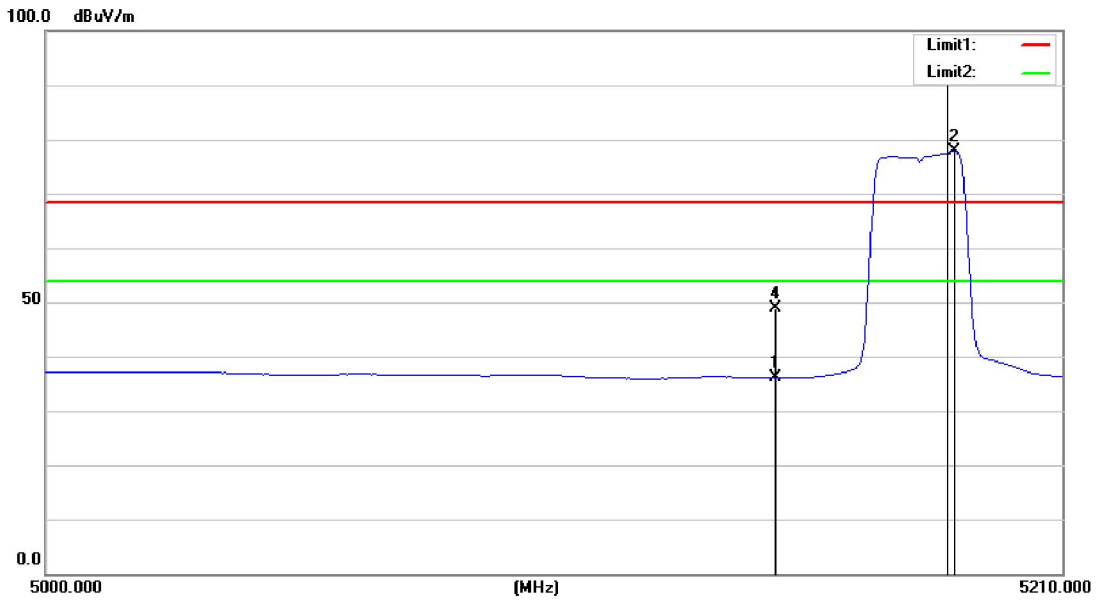

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	26.44	9.65	36.09	54.00	-17.91			AVG
2*	5187.695	67.77	10.12	77.89					Fundamental Frequency AVG
3X	5186.012	81.37	10.10	91.47					Fundamental Frequency peak
4	5150.000	39.21	9.65	48.86	68.30	-19.44			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5180 MHz (U-NII-1)		
Remark:	TX 802.11 n(20) Mode 5180~5240 MHz (U-NII-1) CH Low		

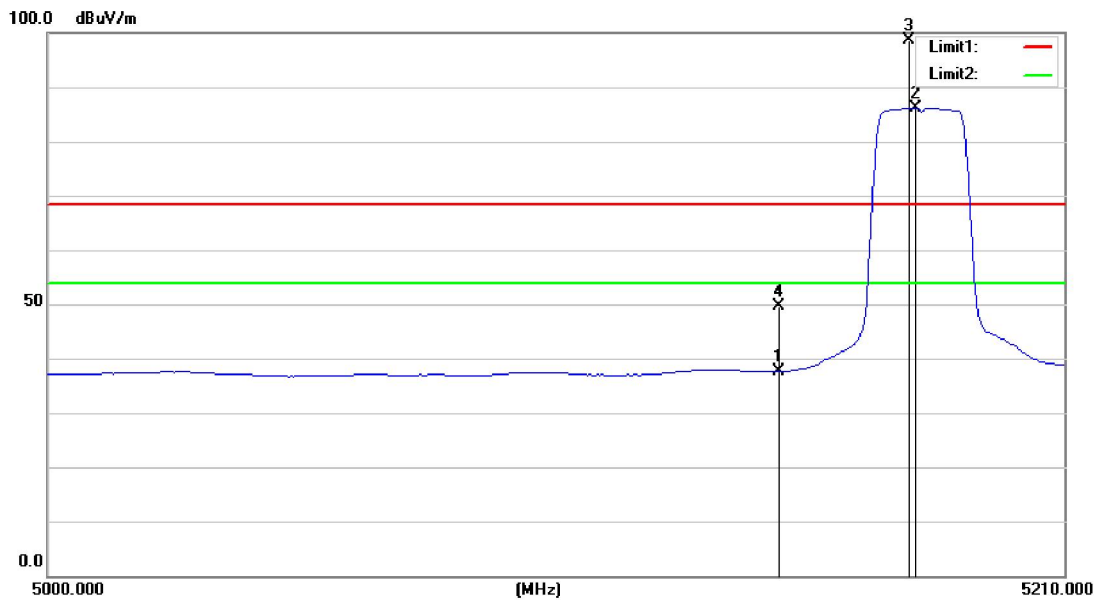

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	27.99	9.65	37.64	54.00	-16.36			AVG
2*	5178.858	76.15	10.01	86.16					AVG
3X	5177.595	88.76	9.99	98.75					peak
4	5150.000	40.08	9.65	49.73	68.30	-18.57			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5240 MHz (U-NII-1)		
Remark:	TX 802.11 n(20) Mode 5180~5240 MHz (U-NII-1) CH High		

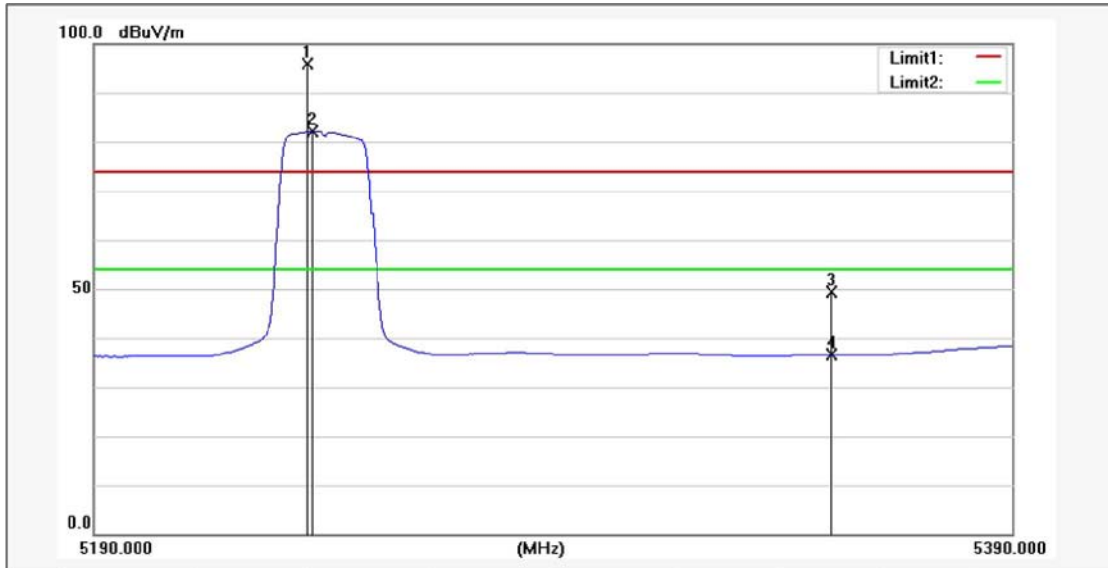

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1X	5236.092	85.71	10.17	95.88					peak
2*	5237.295	71.96	10.17	82.13					AVG
3	5350.000	39.48	9.99	49.47	74.00	-24.53			peak
4	5350.000	26.59	9.99	36.58	54.00	-17.42			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5240 MHz (U-NII-1)		
Remark:	TX 802.11 n(20) Mode 5180~5240 MHz (U-NII-1) CH High		

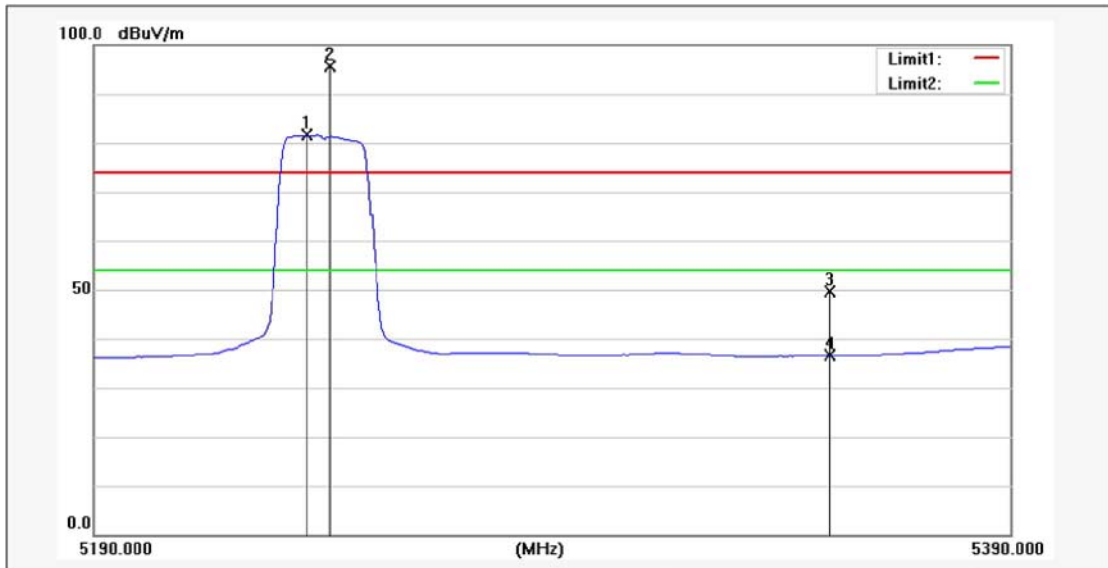

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	5236.092	71.39	10.17	81.56					AVG
2X	5241.302	85.44	10.16	95.60					peak
3	5350.000	39.53	9.99	49.52	74.00	-24.48			peak
4	5350.000	26.57	9.99	36.56	54.00	-17.44			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5180 MHz (U-NII-1)		
Remark:	TX 802.11 ac(20) Mode 5180~5240 MHz (U-NII-1) CH Low		

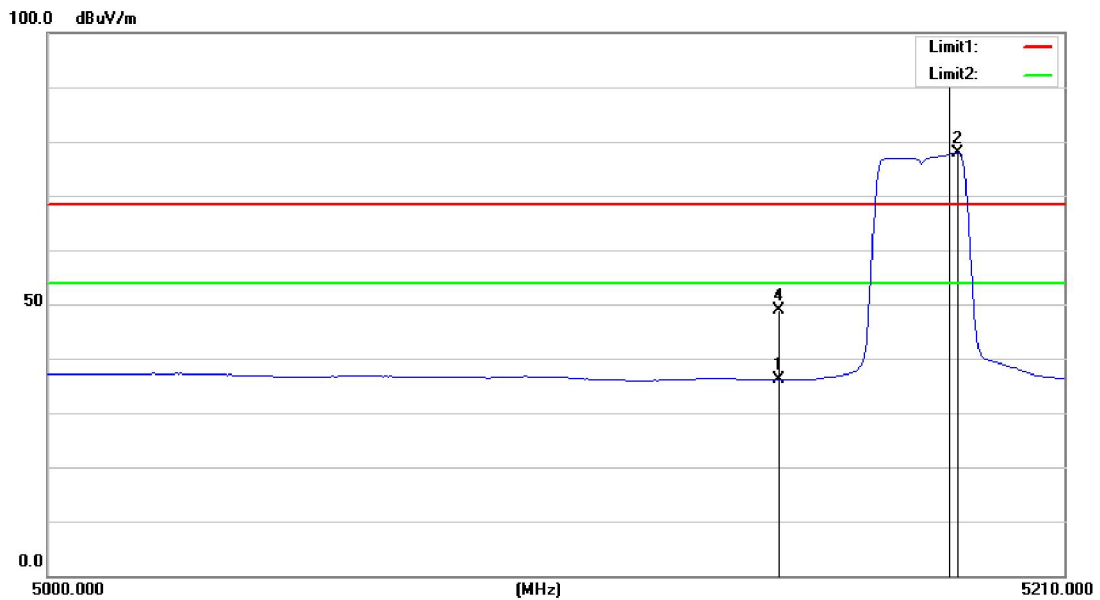

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	26.44	9.65	36.09	54.00	-17.91			AVG
2*	5188.116	67.85	10.12	77.97	Fundamental Frequency				AVG
3X	5186.012	80.92	10.10	91.02	Fundamental Frequency				peak
4	5150.000	39.29	9.65	48.94	68.30	-19.36			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5180 MHz (U-NII-1)		
Remark:	TX 802.11 ac(20) Mode 5180~5240 MHz (U-NII-1) CH Low		

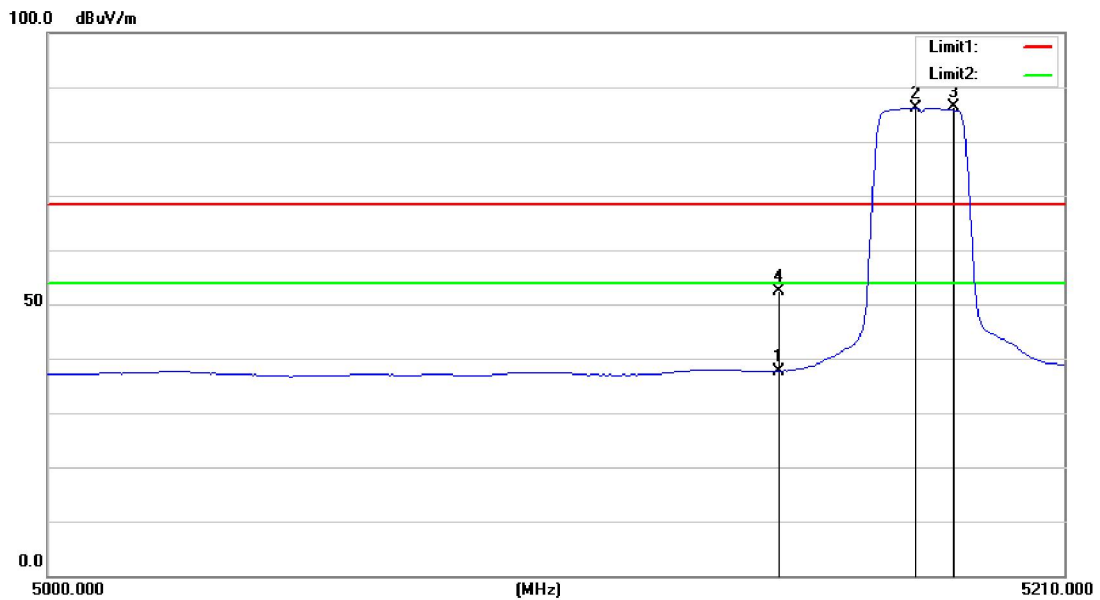

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	28.02	9.65	37.67	54.00	-16.33			AVG
2*	5178.858	76.20	10.01	86.21					Fundamental Frequency AVG
3X	5187.275	76.20	10.11	86.31					Fundamental Frequency peak
4	5150.000	42.85	9.65	52.50	68.30	-15.80			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5240 MHz (U-NII-1)		
Remark:	TX 802.11 ac(20) Mode 5180~5240 MHz (U-NII-1) CH High		

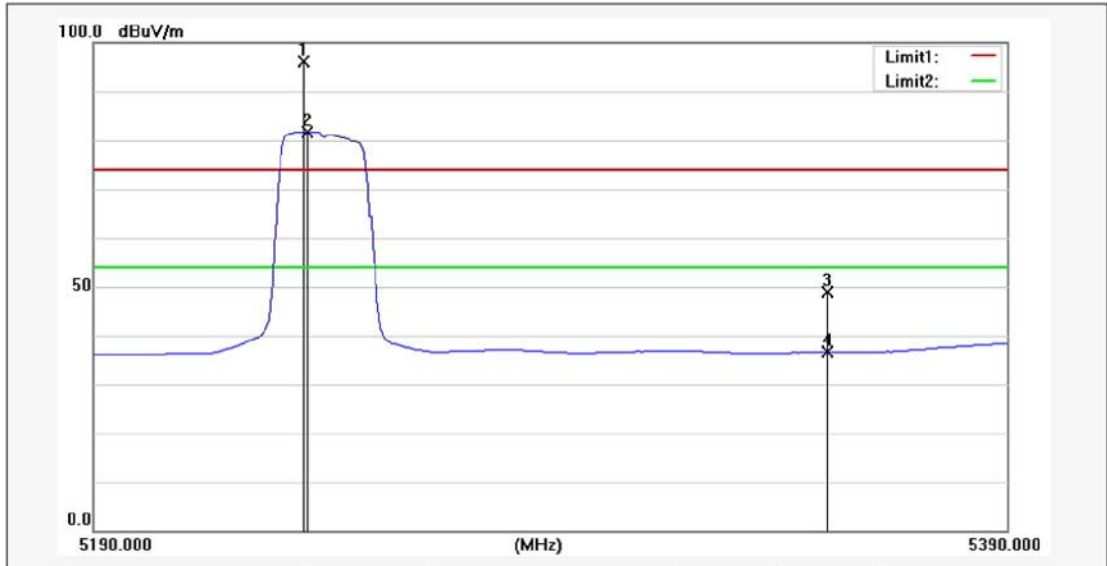

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1X	5235.291	86.03	10.18	96.21	Fundamental Frequency				peak
2*	5236.493	71.49	10.17	81.66	Fundamental Frequency				AVG
3	5350.000	38.90	9.99	48.89	74.00	-25.11			peak
4	5350.000	26.57	9.99	36.56	54.00	-17.44			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5240 MHz (U-NII-1)		
Remark:	TX 802.11 ac(20) Mode 5180~5240 MHz (U-NII-1) CH High		

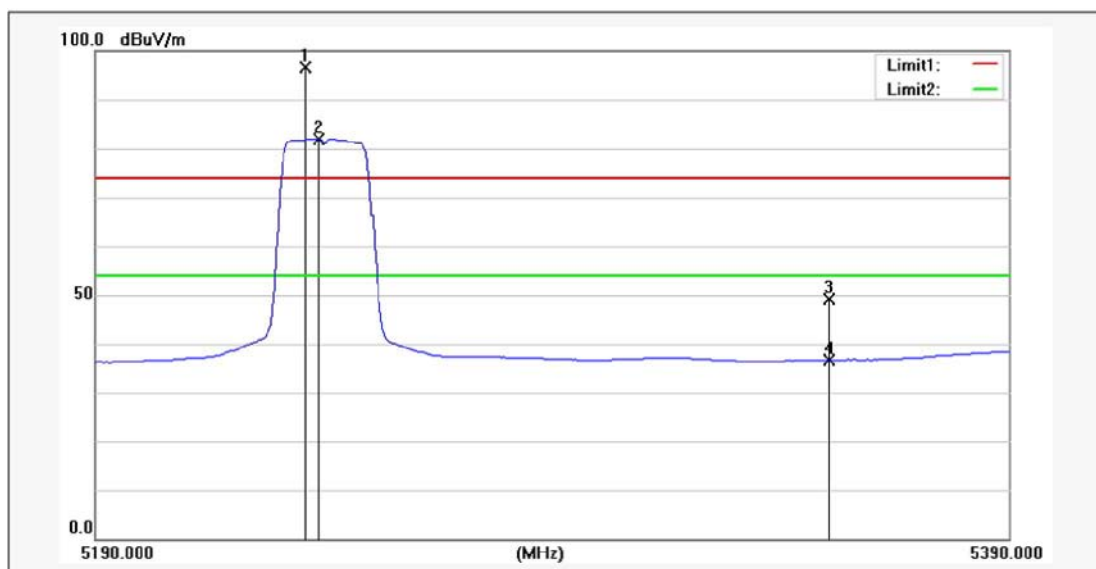

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1X	5235.691	86.46	10.17	96.63	Fundamental Frequency				peak
2*	5238.497	71.72	10.17	81.89	Fundamental Frequency				AVG
3	5350.000	39.18	9.99	49.17	74.00	-24.83			peak
4	5350.000	26.64	9.99	36.63	54.00	-17.37			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

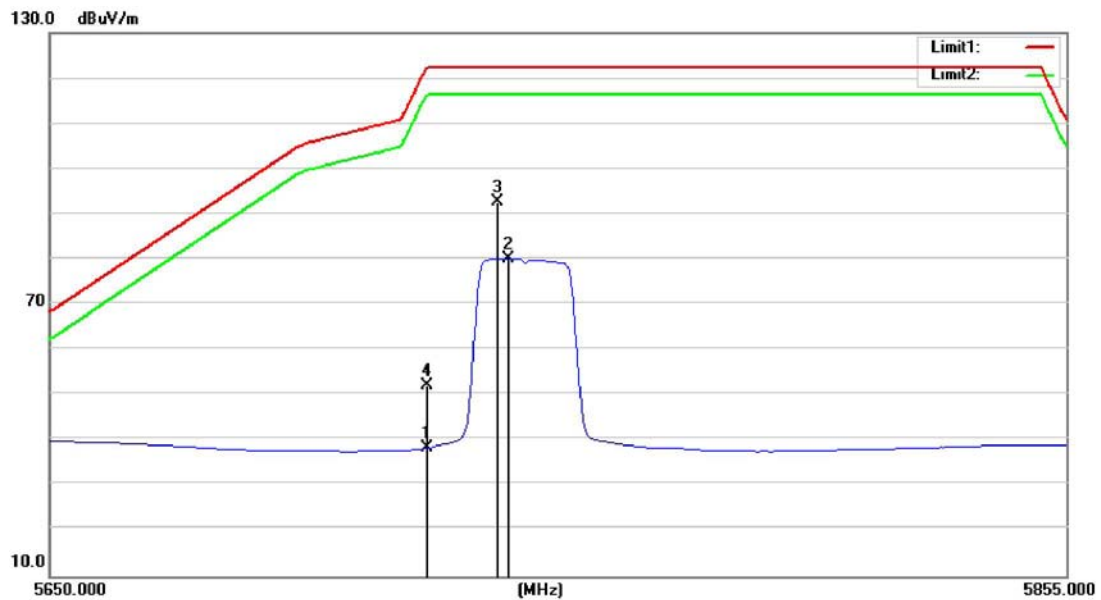

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.28	10.06	38.34	116.30	-77.96			AVG
2	5741.613	69.84	10.31	80.15	116.30	-36.15			AVG
3*	5739.148	82.47	10.26	92.73	122.30	-29.57			peak
4	5725.000	42.17	10.06	52.23	122.30	-70.07			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

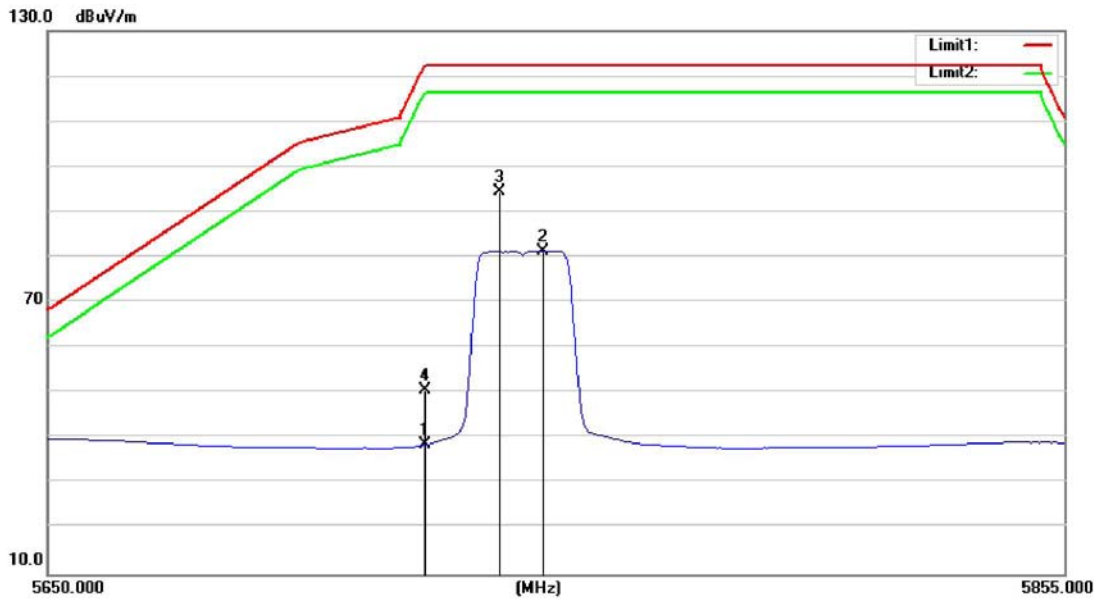

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.49	10.06	38.55	116.30	-77.75			AVG
2	5749.008	70.91	10.41	81.32	116.30	-34.98			AVG
3*	5740.381	84.16	10.28	94.44	122.30	-27.86			peak
4	5725.000	40.72	10.06	50.78	122.30	-71.52			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

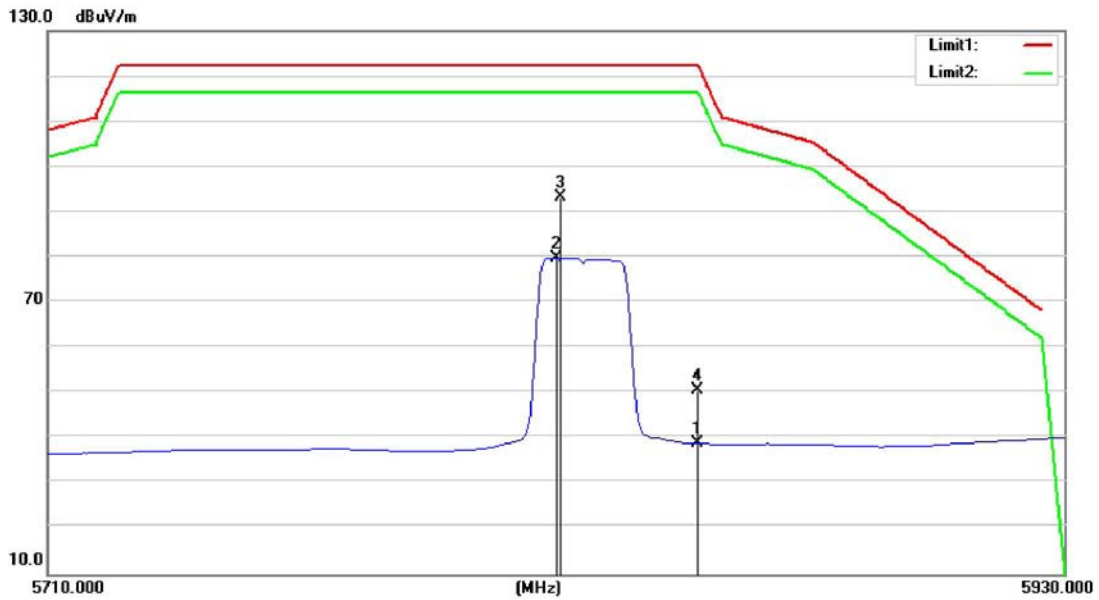

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5850.000	27.98	10.85	38.83	116.30	-77.47			AVG
2	5819.339	69.49	10.35	79.84	116.30	-36.46			AVG
3*	5819.780	82.88	10.35	93.23	122.30	-29.07			peak
4	5850.000	39.88	10.85	50.73	122.30	-71.57			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

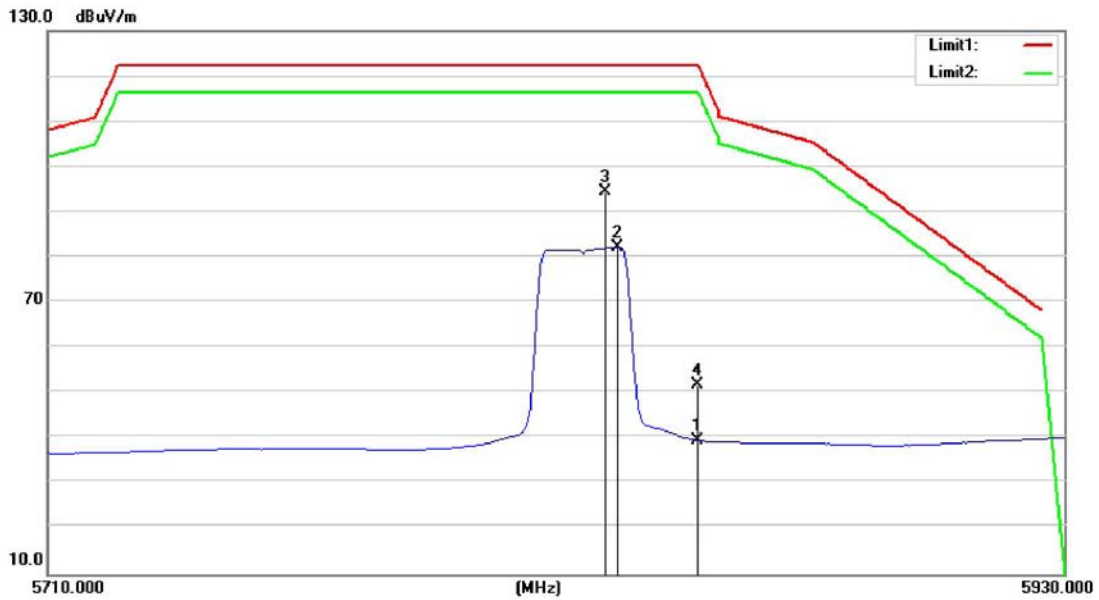

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5850.000	28.69	10.85	39.54	116.30	-76.76			AVG
2	5832.565	71.70	10.55	82.25	116.30	-34.05			AVG
3*	5829.479	84.06	10.51	94.57	122.30	-27.73			peak
4	5850.000	41.09	10.85	51.94	122.30	-70.36			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

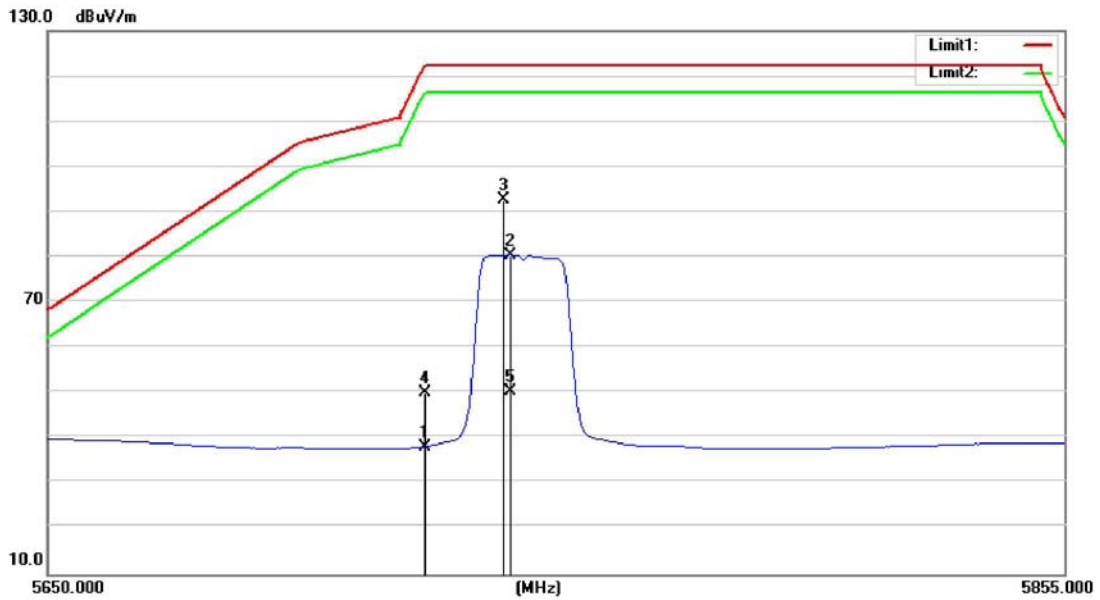

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.08	10.06	38.14	116.30	-78.16			AVG
2	5742.435	70.18	10.32	80.50	116.30	-35.80			AVG
3*	5740.792	82.44	10.28	92.72	122.30	-29.58			peak
4	5725.000	39.91	10.06	49.97	122.30	-72.33			peak
5	5742.435	39.91	10.32	50.23	122.30	-72.07			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

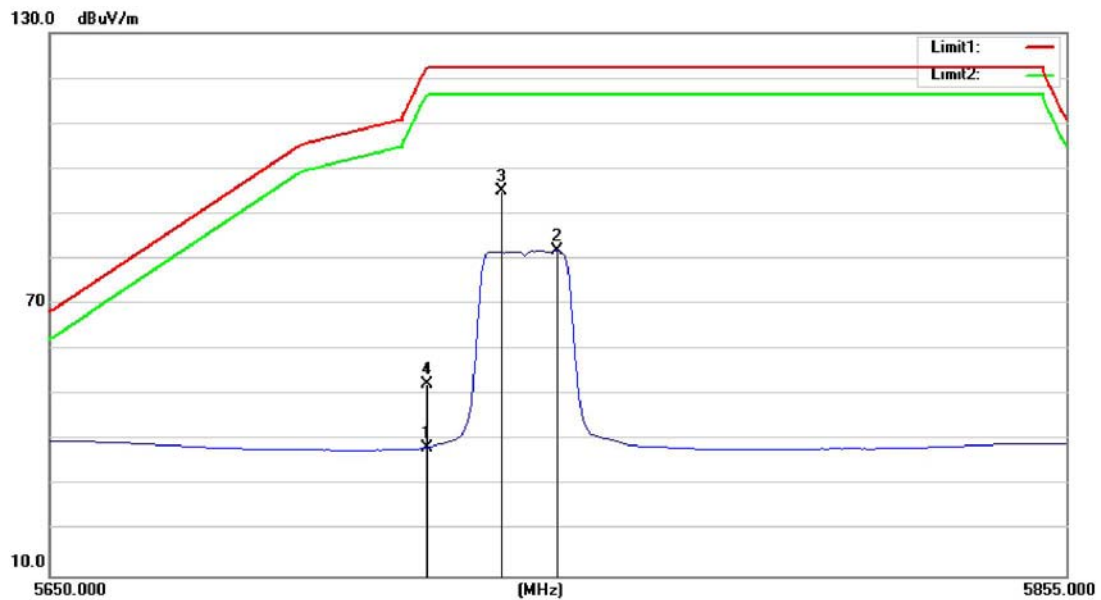

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.32	10.06	38.38	116.30	-77.92			AVG
2	5751.473	71.38	10.42	81.80	116.30	-34.50			AVG
3*	5740.381	84.63	10.28	94.91	122.30	-27.39			peak
4	5725.000	42.42	10.06	52.48	122.30	-69.82			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

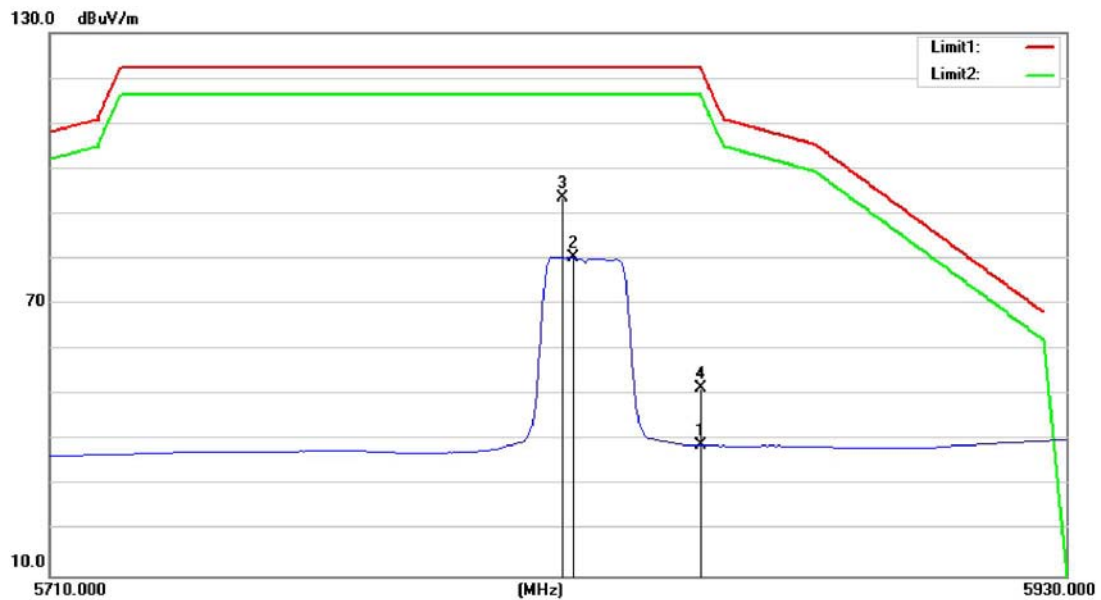

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5850.000	28.01	10.85	38.86	116.30	-77.44			AVG
2	5822.425	69.96	10.39	80.35	116.30	-35.95			AVG
3*	5820.220	83.08	10.36	93.44	122.30	-28.86			peak
4	5850.000	40.66	10.85	51.51	122.30	-70.79			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

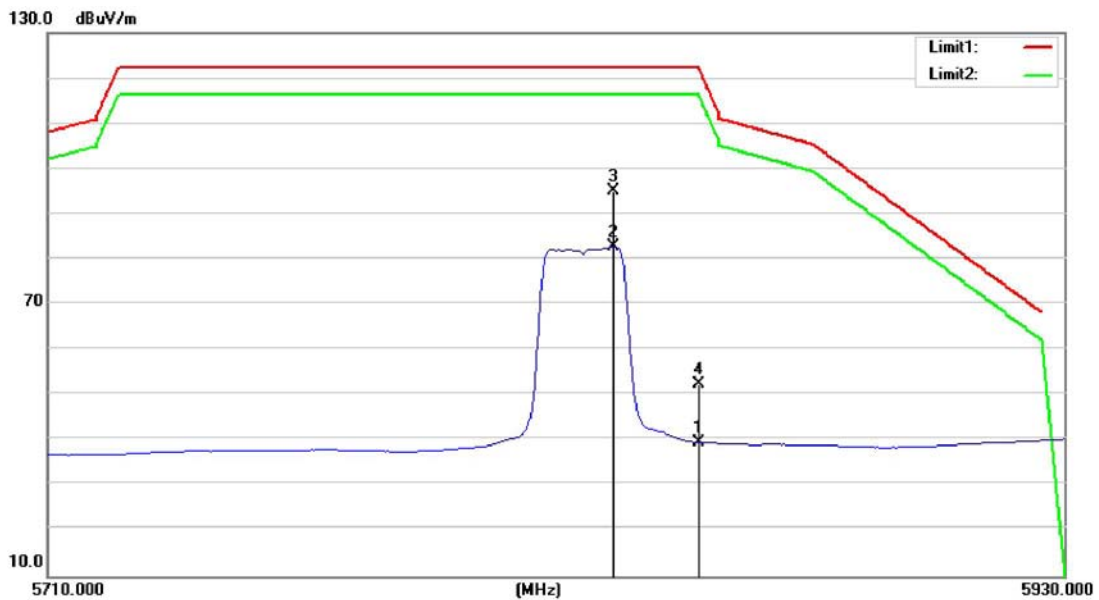

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5850.000	28.81	10.85	39.66	116.30	-76.64			AVG
2	5831.683	72.22	10.54	82.76	116.30	-33.54			AVG
3*	5831.683	84.58	10.54	95.12	122.30	-27.18			peak
4	5850.000	41.73	10.85	52.58	122.30	-69.72			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

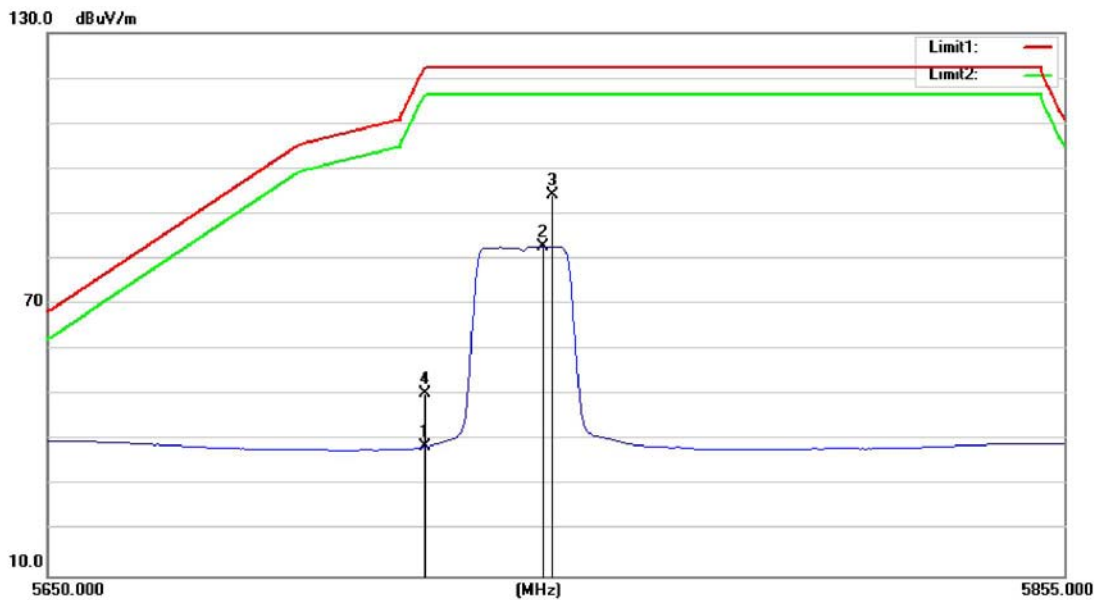

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.47	10.06	38.53	116.30	-77.77			AVG
2	5749.008	72.38	10.41	82.79	116.30	-33.51			AVG
3*	5751.062	83.82	10.42	94.24	122.30	-28.06			peak
4	5725.000	40.38	10.06	50.44	122.30	-71.86			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

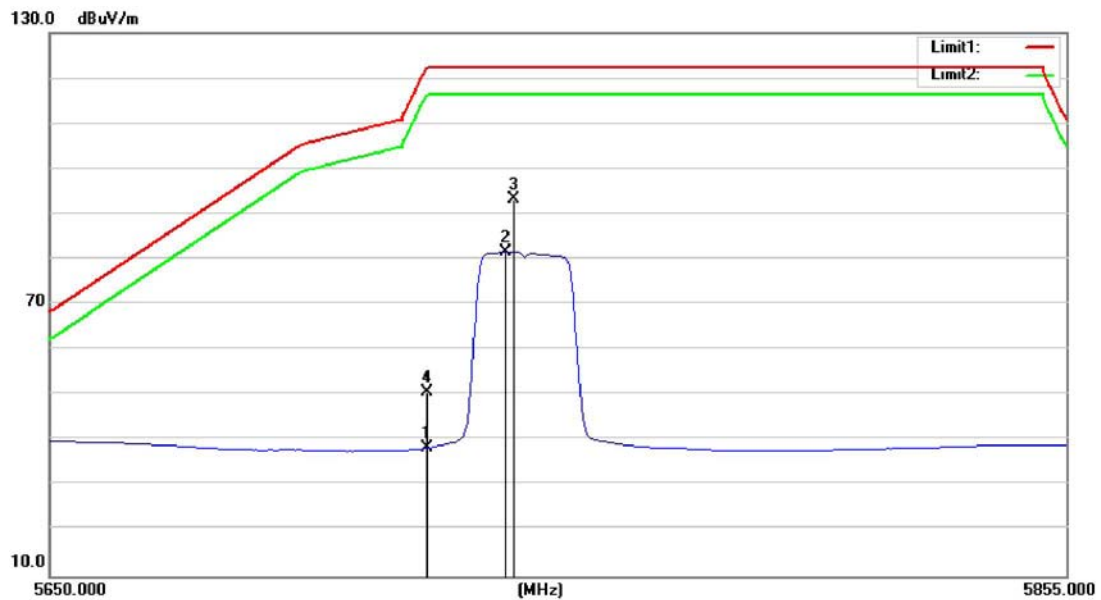

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.19	10.06	38.25	116.30	-78.05			AVG
2	5741.202	71.21	10.29	81.50	116.30	-34.80			AVG
3*	5742.846	83.01	10.32	93.33	122.30	-28.97			peak
4	5725.000	40.56	10.06	50.62	122.30	-71.68			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

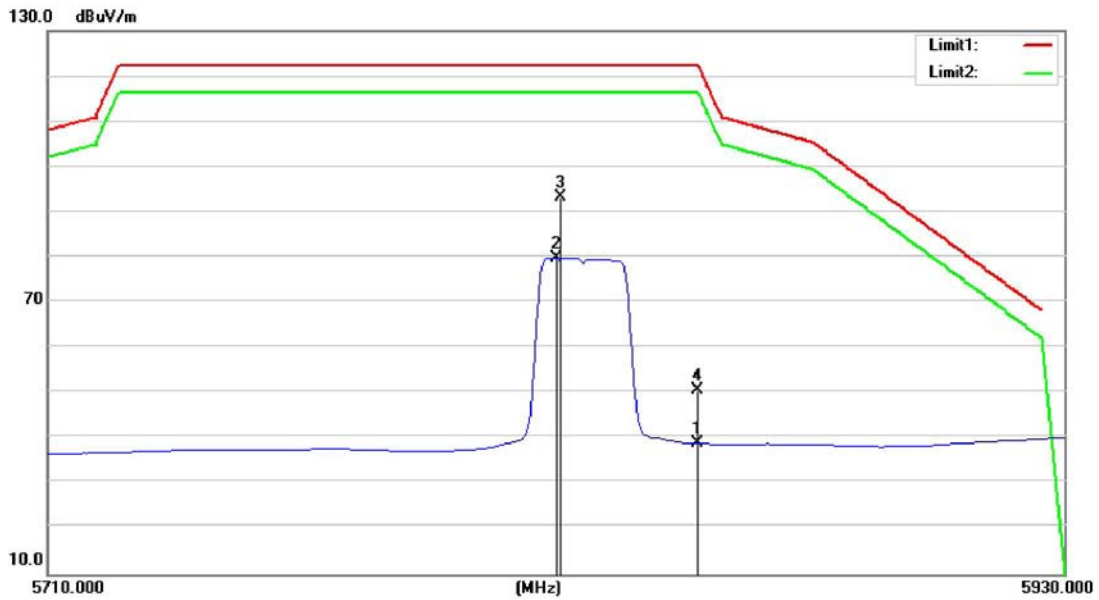

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5850.000	27.98	10.85	38.83	116.30	-77.47			AVG
2	5819.339	69.49	10.35	79.84	116.30	-36.46			AVG
3*	5819.780	82.88	10.35	93.23	122.30	-29.07			peak
4	5850.000	39.88	10.85	50.73	122.30	-71.57			peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

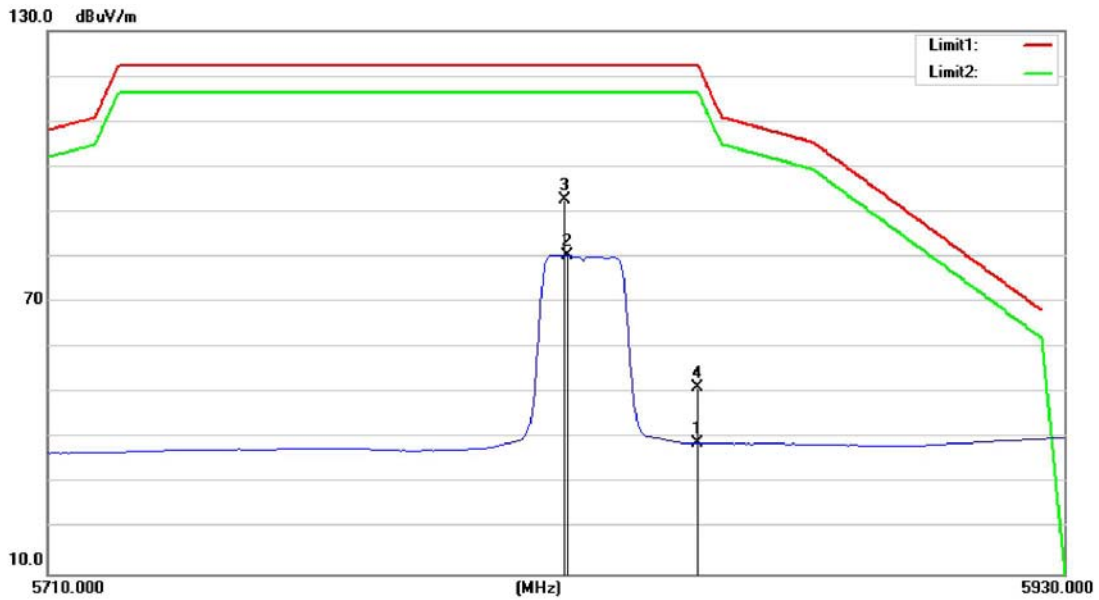


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5850.000	28.07	10.85	38.92	116.30	-77.38			AVG
2	5821.543	69.96	10.38	80.34	116.30	-35.96			AVG
3*	5820.661	82.16	10.37	92.53	122.30	-29.77			peak
4	5850.000	40.37	10.85	51.22	122.30	-71.08			peak

Emission Level= Read Level+ Correct Factor

n(40)/ac(40)


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n (40) Mode 5190 MHz (U-NII-1)		
Remark:	TX 802.11n (40) Mode 5190~5230 MHz (U-NII-1) CH Low		

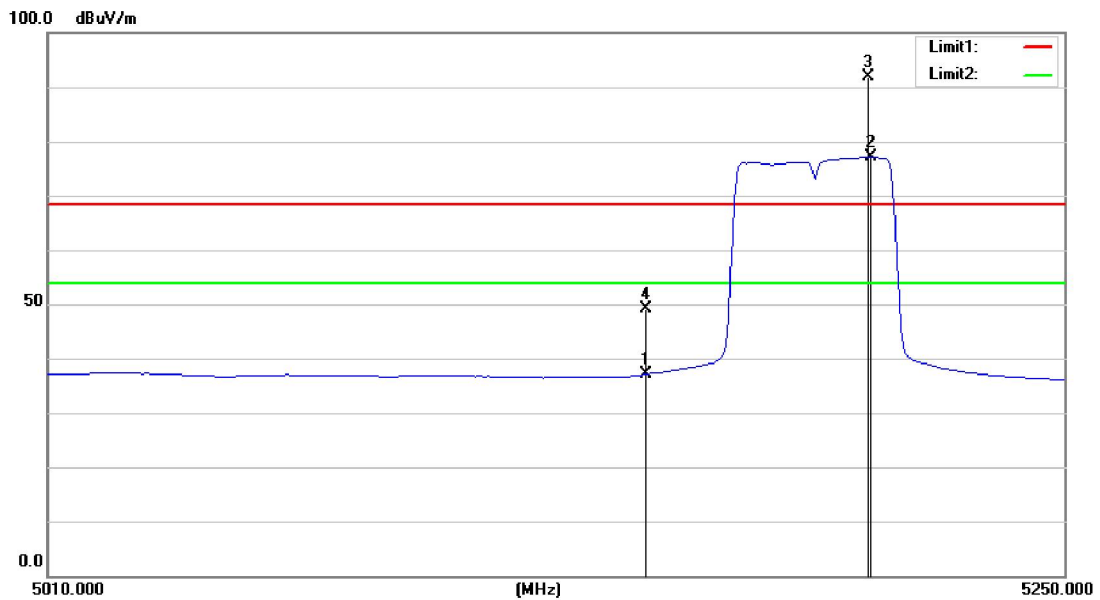

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	27.44	9.65	37.09	54.00	-16.91			AVG
2X	5203.828	66.91	10.26	77.17					Fundamental Frequency AVG
3*	5202.866	81.72	10.26	91.98					Fundamental Frequency peak
4	5150.000	39.53	9.65	49.18	68.30	-19.12			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n (40) Mode 5190 MHz (U-NII-1)		
Remark:	TX 802.11n (40) Mode 5190~5230 MHz (U-NII-1) CH Low		

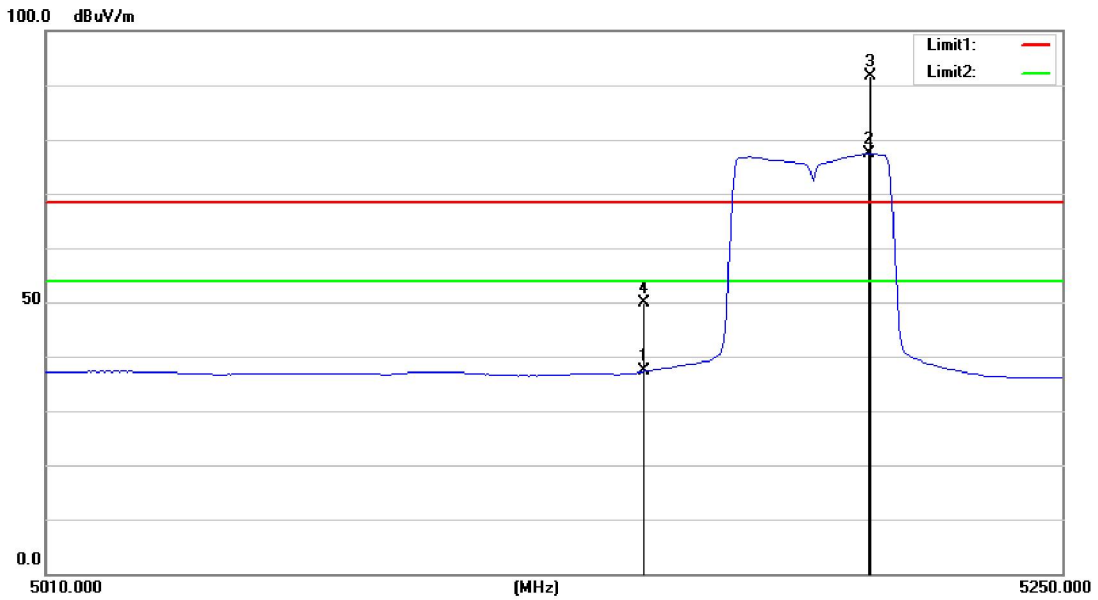

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	27.65	9.65	37.30	54.00	-16.70			AVG
2*	5203.828	67.17	10.26	77.43	Fundamental Frequency				AVG
3X	5204.309	81.44	10.26	91.70	Fundamental Frequency				peak
4	5150.000	40.21	9.65	49.86	68.30	-18.44			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n (40) Mode 5230 MHz (U-NII-1)		
Remark:	TX 802.11n (40) Mode 5190~5230 MHz (U-NII-1) CH High		

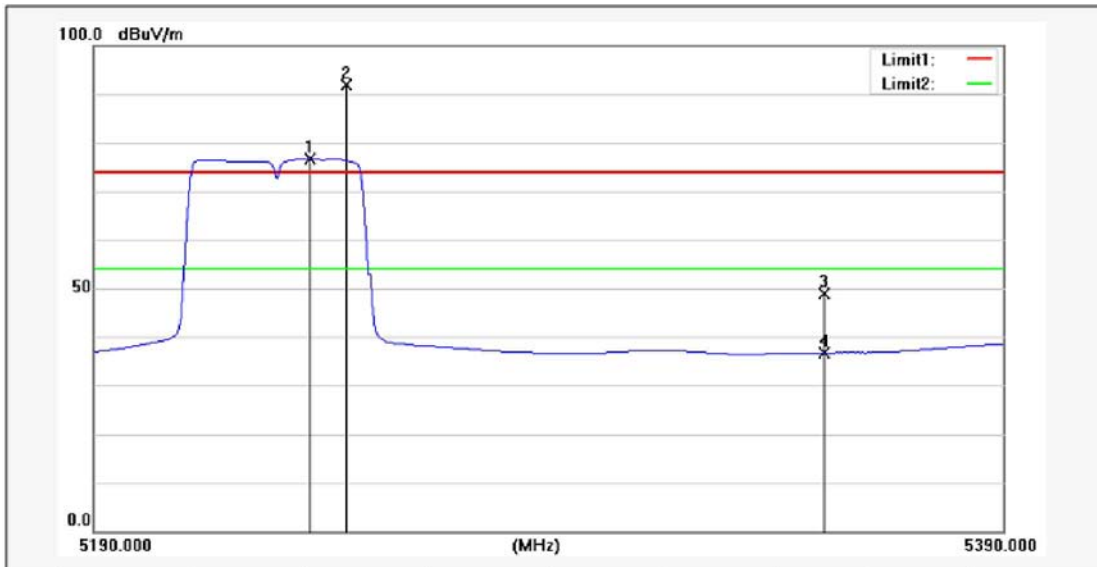

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	5237.295	66.50	10.17	76.67	Fundamental Frequency				AVG
2X	5245.311	81.76	10.15	91.91					Fundamental Frequency
3	5350.000	38.92	9.99	48.91	74.00	-25.09			peak
4	5350.000	26.71	9.99	36.70	54.00	-17.30			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n (40) Mode 5230 MHz (U-NII-1)		
Remark:	TX 802.11n (40) Mode 5190~5230 MHz (U-NII-1) CH High		

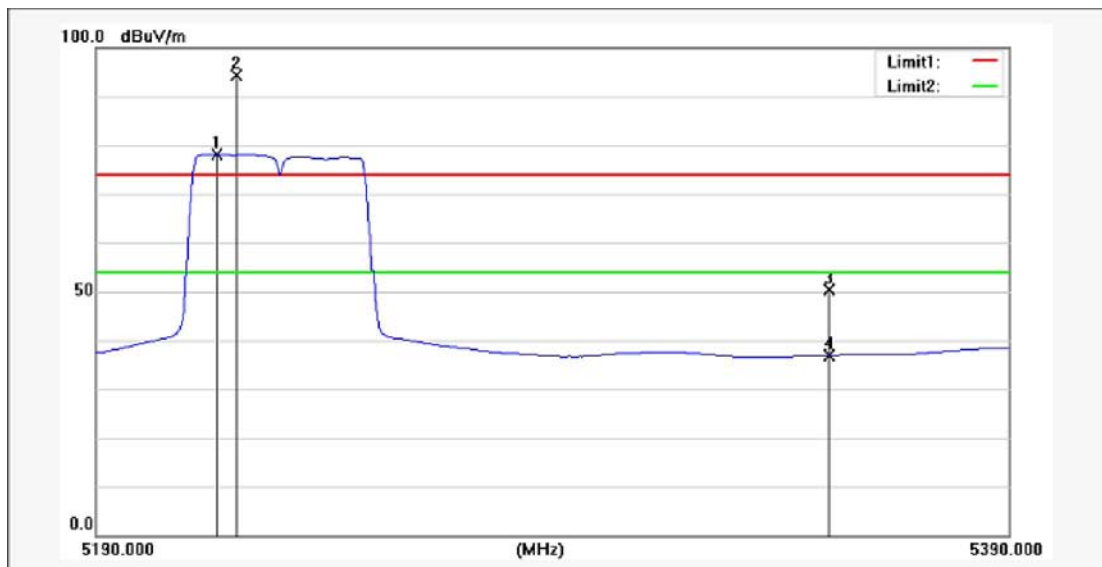

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	5216.052	67.92	10.23	78.15	Fundamental Frequency				AVG
2X	5220.461	84.26	10.21	94.47	Fundamental Frequency				peak
3	5350.000	40.51	9.99	50.50	74.00	-23.50			peak
4	5350.000	26.93	9.99	36.92	54.00	-17.08			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (40) Mode 5190 MHz (U-NII-1)		
Remark:	TX 802.11ac (40) Mode 5190~5230 MHz (U-NII-1) CH Low		

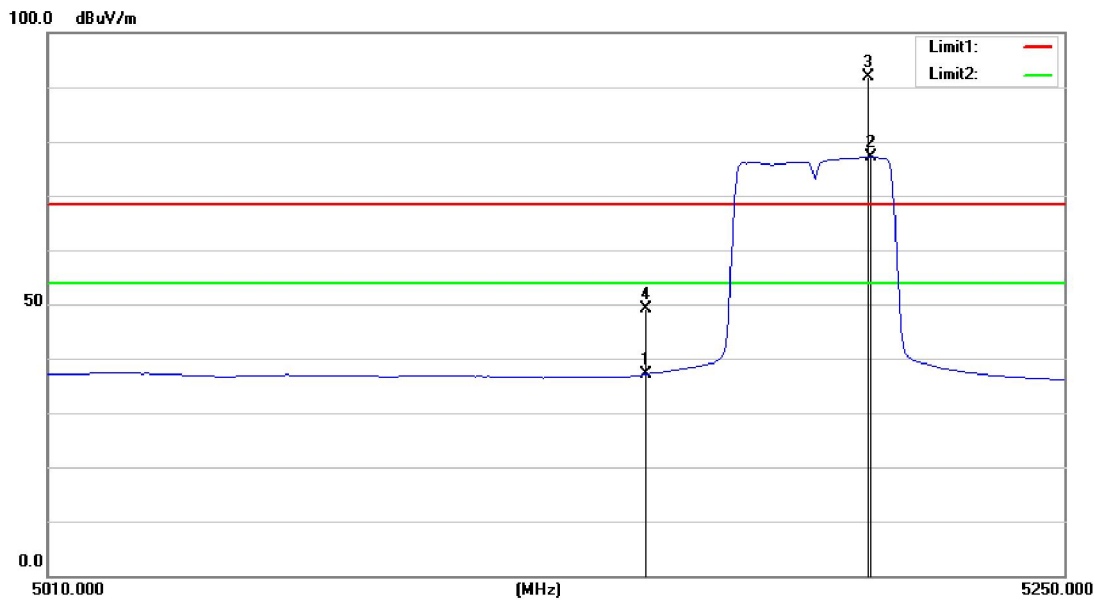

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	27.44	9.65	37.09	54.00	-16.91			AVG
2X	5203.828	66.91	10.26	77.17					Fundamental Frequency AVG
3*	5202.866	81.72	10.26	91.98					Fundamental Frequency peak
4	5150.000	39.53	9.65	49.18	68.30	-19.12			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (40) Mode 5190 MHz (U-NII-1)		
Remark:	TX 802.11ac (40) Mode 5190~5230 MHz (U-NII-1) CH Low		

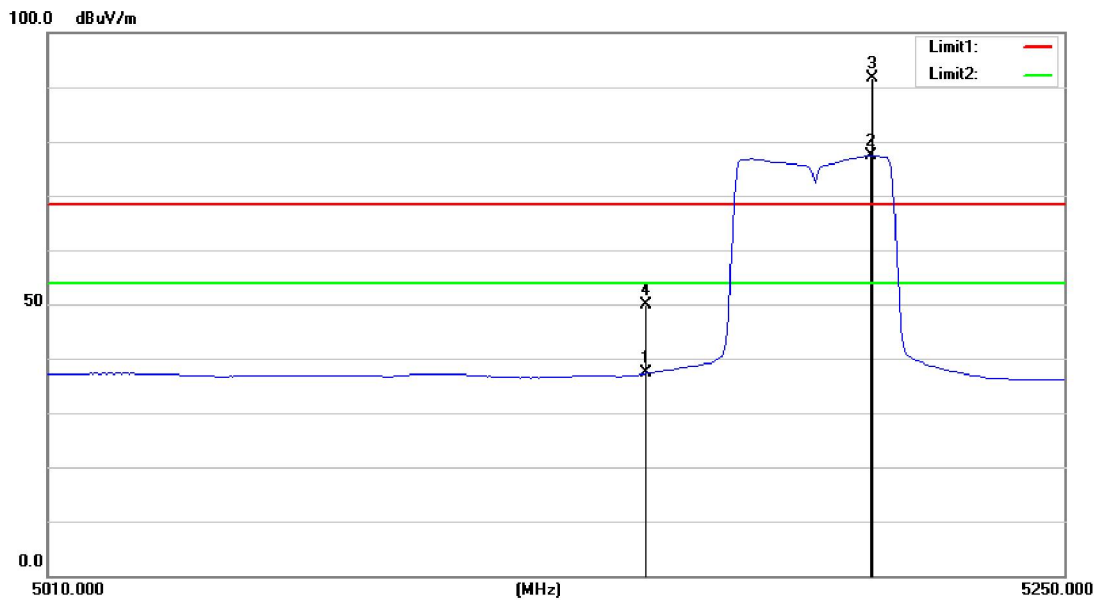

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	27.65	9.65	37.30	54.00	-16.70			AVG
2*	5203.828	67.17	10.26	77.43	Fundamental Frequency				AVG
3X	5204.309	81.44	10.26	91.70	Fundamental Frequency				peak
4	5150.000	40.21	9.65	49.86	68.30	-18.44			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (40) Mode 5230 MHz (U-NII-1)		
Remark:	TX 802.11ac (40) Mode 5190~5230 MHz (U-NII-1) CH High		

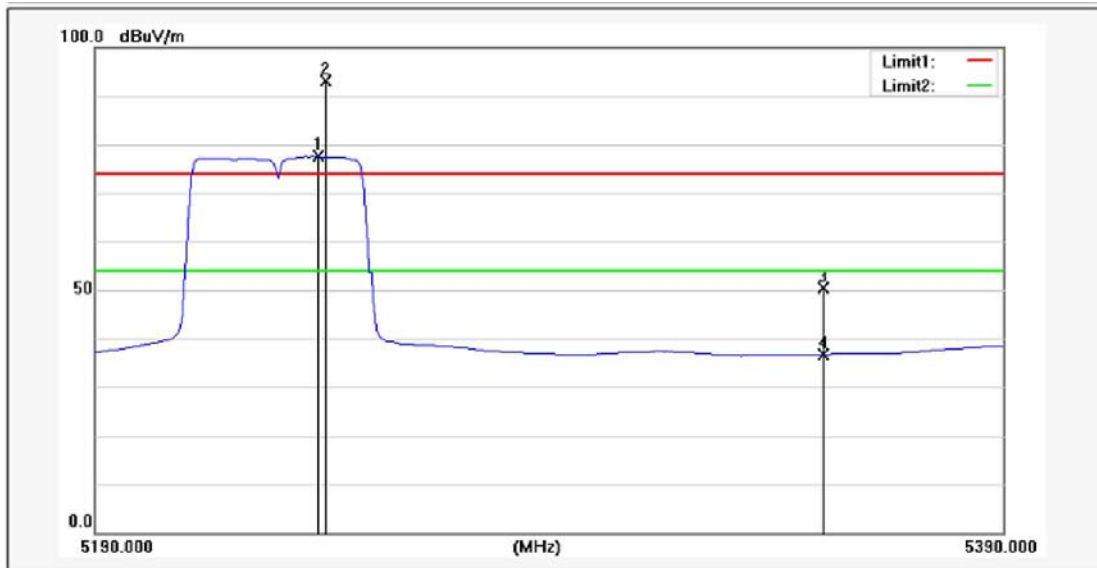

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	5238.898	67.39	10.17	77.56	Fundamental Frequency				AVG
2X	5240.501	83.00	10.16	93.16					Fundamental Frequency
3	5350.000	40.34	9.99	50.33	74.00	-23.67			peak
4	5350.000	26.70	9.99	36.69	54.00	-17.31			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (40) Mode 5230 MHz (U-NII-1)		
Remark:	TX 802.11ac (40) Mode 5190~5230 MHz (U-NII-1) CH High		

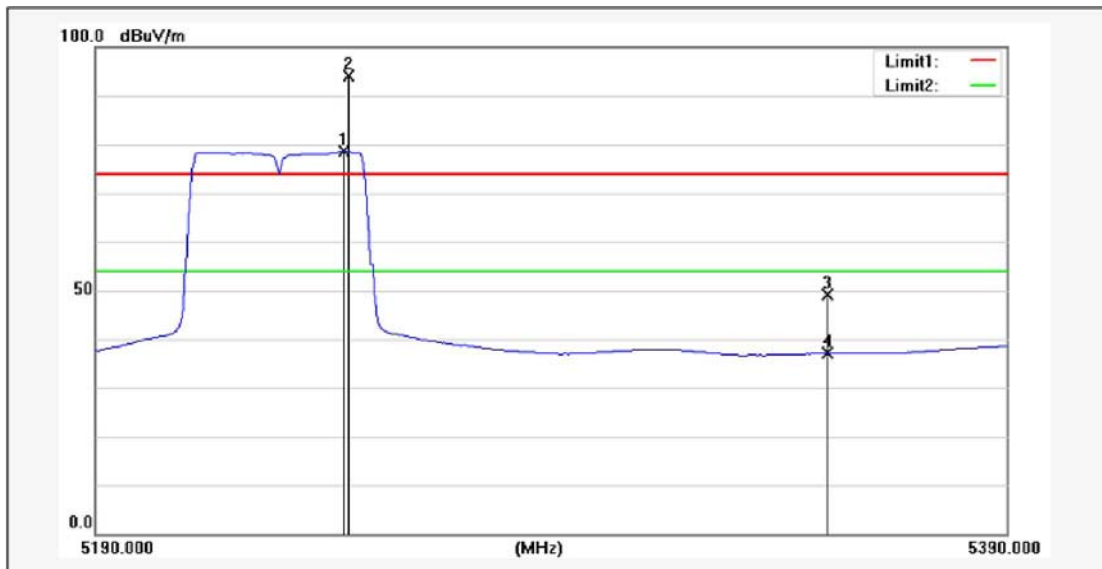

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	5244.108	68.42	10.15	78.57	Fundamental Frequency				AVG
2X	5245.311	84.08	10.15	94.23	Fundamental Frequency				peak
3	5350.000	39.24	9.99	49.23	74.00	-24.77			peak
4	5350.000	27.05	9.99	37.04	54.00	-16.96			AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5755MHz (U-NII-3)		
Remark:	N/A		

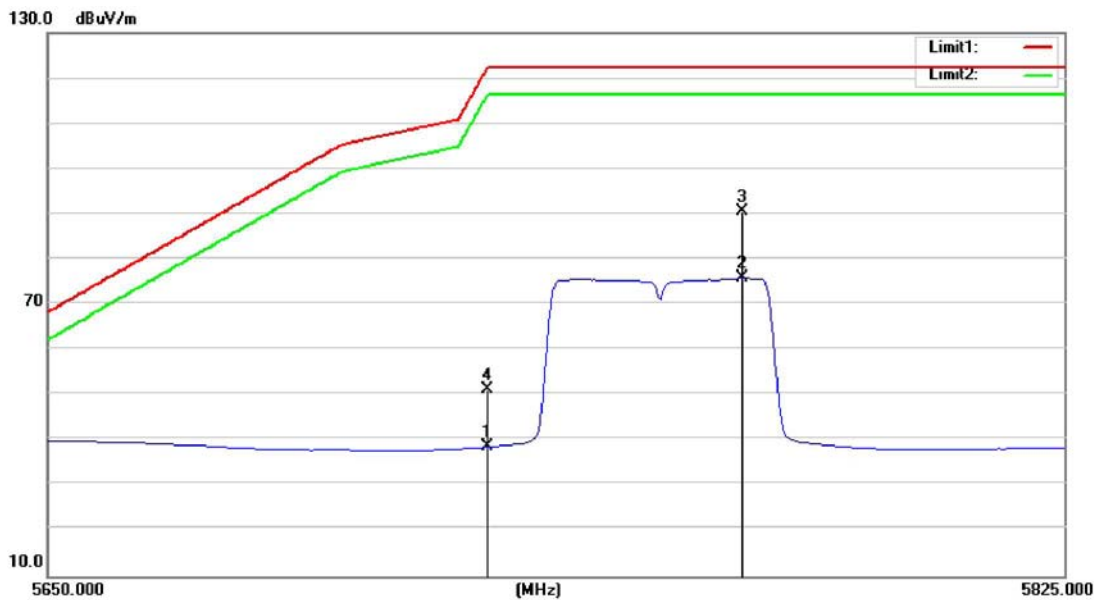

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.47	10.06	38.53	116.30	-77.77			AVG
2	5769.238	65.51	10.27	75.78	116.30	-40.52			AVG
3*	5769.238	80.29	10.27	90.56	122.30	-31.74			peak
4	5725.000	41.13	10.06	51.19	122.30	-71.11			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5755MHz (U-NII-3)		
Remark:	N/A		

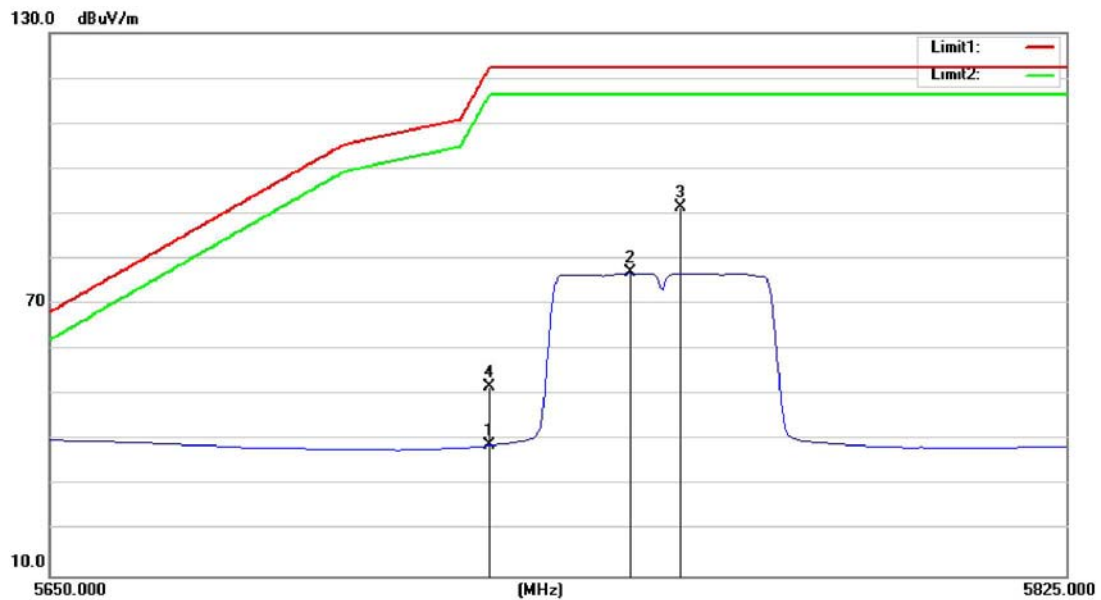

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.78	10.06	38.84	116.30	-77.46			AVG
2	5749.599	66.50	10.41	76.91	116.30	-39.39			AVG
3*	5758.016	81.22	10.36	91.58	122.30	-30.72			peak
4	5725.000	41.68	10.06	51.74	122.30	-70.56			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5795 MHz (U-NII-3)		
Remark:	N/A		

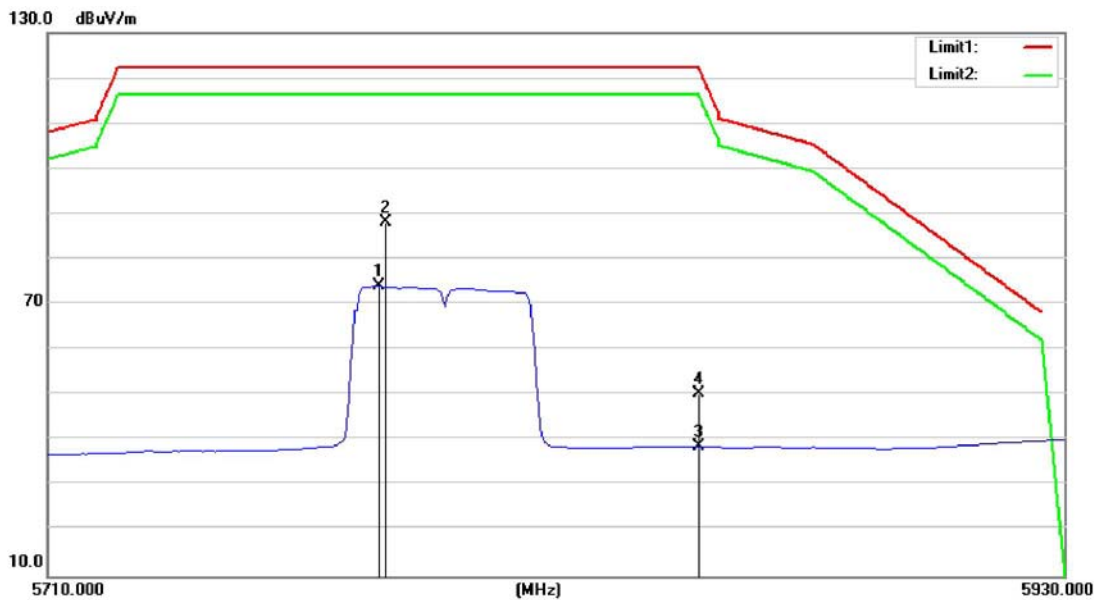

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5780.982	63.84	10.16	74.00	116.30	-42.30			AVG
2*	5781.864	78.06	10.16	88.22	122.30	-34.08			peak
3	5850.000	27.71	10.85	38.56	116.30	-77.74			AVG
4	5850.000	39.43	10.85	50.28	122.30	-72.02			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5795 MHz (U-NII-3)		
Remark:	N/A		

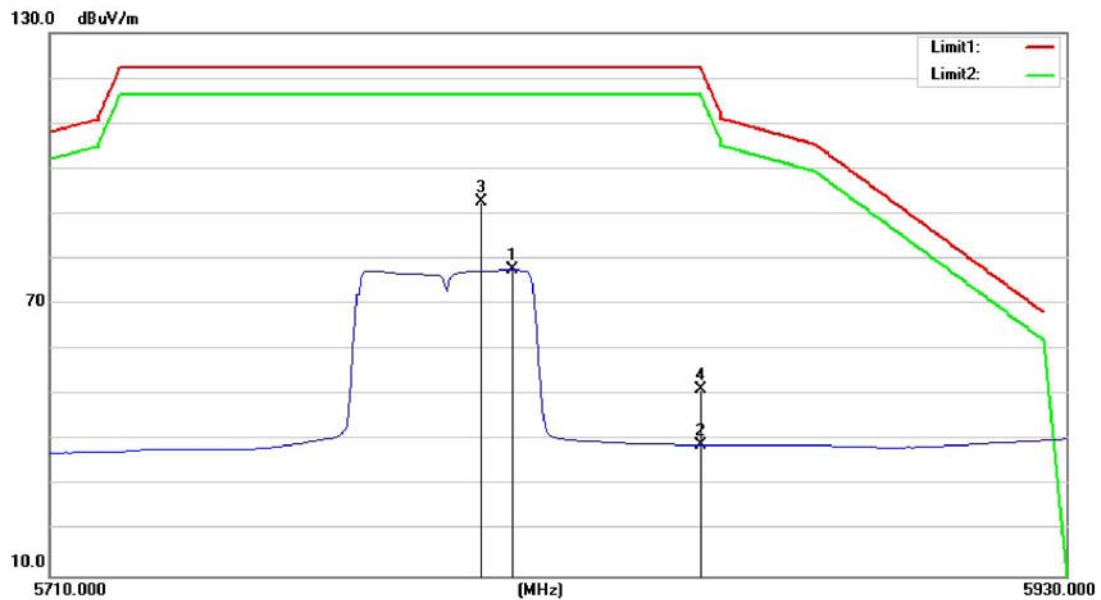

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5809.198	67.54	10.17	77.71	116.30	-38.59			AVG
2	5850.000	28.12	10.85	38.97	116.30	-77.33			AVG
3*	5802.144	82.49	10.05	92.54	122.30	-29.76			peak
4	5850.000	40.55	10.85	51.40	122.30	-70.90			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode 5755 MHz (U-NII-3)		
Remark:	N/A		

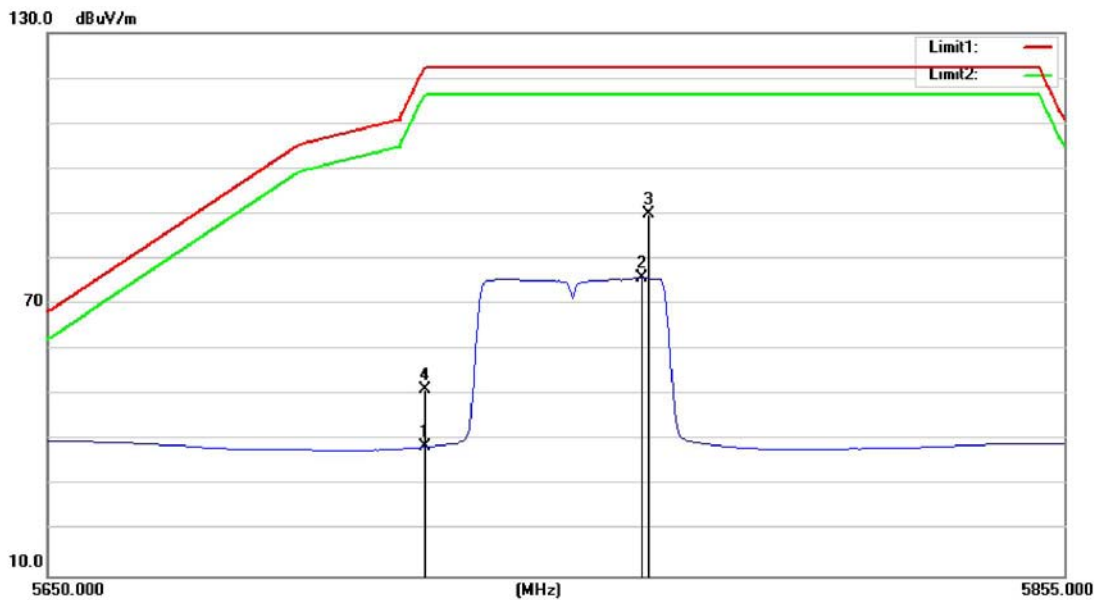

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.54	10.06	38.60	116.30	-77.70			AVG
2	5769.138	65.61	10.27	75.88	116.30	-40.42			AVG
3*	5770.371	79.62	10.26	89.88	122.30	-32.42			peak
4	5725.000	41.14	10.06	51.20	122.30	-71.10			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode 5755 MHz (U-NII-3)		
Remark:	N/A		

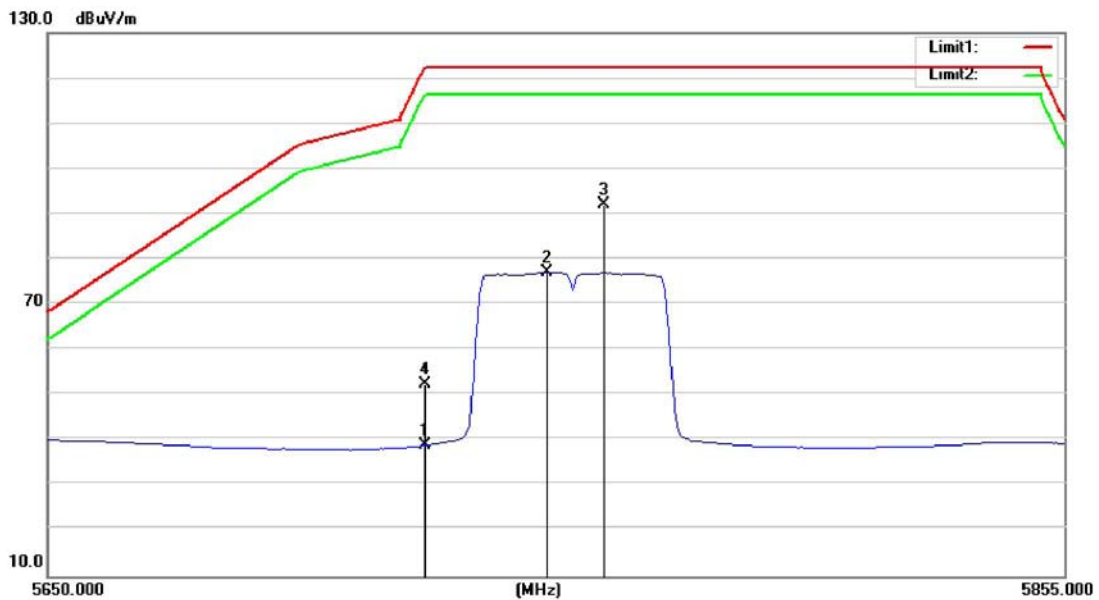

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.83	10.06	38.89	116.30	-77.41			AVG
2	5749.830	66.59	10.42	77.01	116.30	-39.29			AVG
3*	5760.922	81.57	10.34	91.91	122.30	-30.39			peak
4	5725.000	42.31	10.06	52.37	122.30	-69.93			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode 5795 MHz (U-NII-3)		
Remark:	N/A		

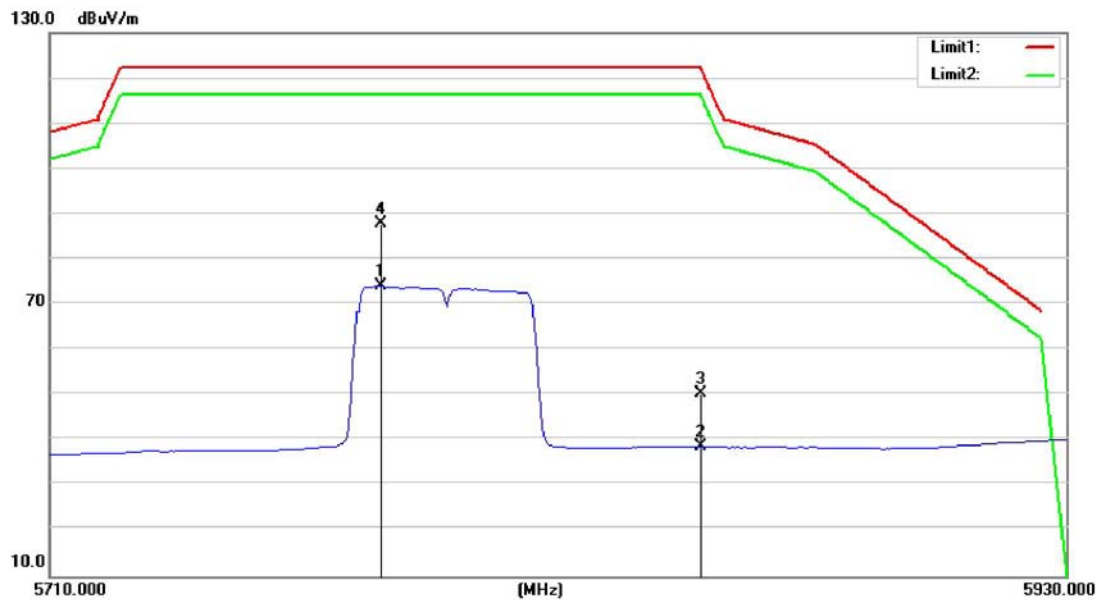

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5780.982	63.82	10.16	73.98	116.30	-42.32			AVG
2	5850.000	27.72	10.85	38.57	116.30	-77.73			AVG
3	5850.000	39.56	10.85	50.41	122.30	-71.89			peak
4*	5780.541	77.75	10.17	87.92	122.30	-34.38			peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode 5795 MHz (U-NII-3)		
Remark:	N/A		

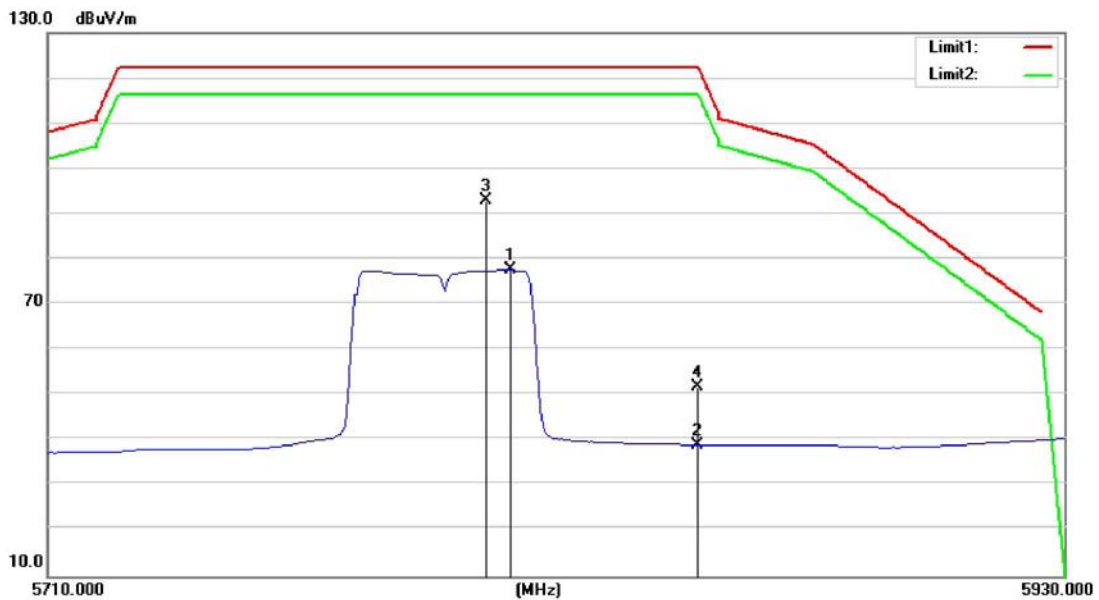


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5809.198	67.50	10.17	77.67	116.30	-38.63			AVG
2	5850.000	28.13	10.85	38.98	116.30	-77.32			AVG
3*	5803.908	82.87	10.08	92.95	122.30	-29.35			peak
4	5850.000	41.04	10.85	51.89	122.30	-70.41			peak

Emission Level= Read Level+ Correct Factor

ac(80)


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(80) Mode 5210MHz (U-NII-1)		
Remark:	N/A		

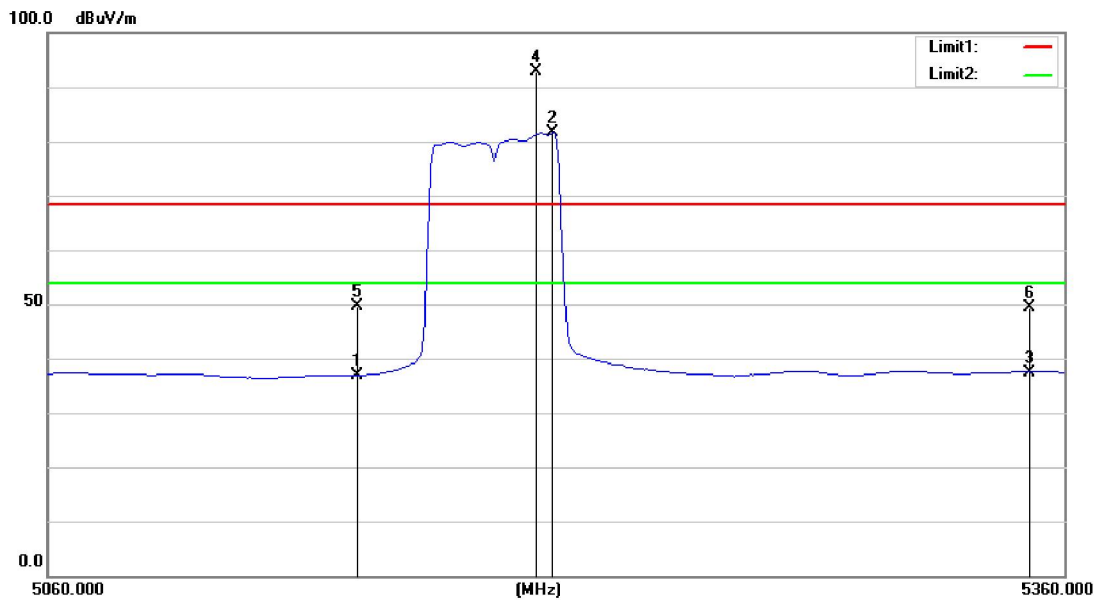

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	27.22	9.65	36.87	54.00	-17.13			AVG
2*	5207.295	71.34	10.24	81.58	Fundamental Frequency				AVG
3	5350.000	27.51	9.99	37.50	54.00	-16.50			AVG
4X	5201.884	82.62	10.27	92.89	Fundamental Frequency				peak
5	5150.000	39.95	9.65	49.60	68.30	-18.70			peak
6	5350.000	39.33	9.99	49.32	68.30	-18.98			peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(80) Mode 5210MHz (U-NII-1)		
Remark:	N/A		

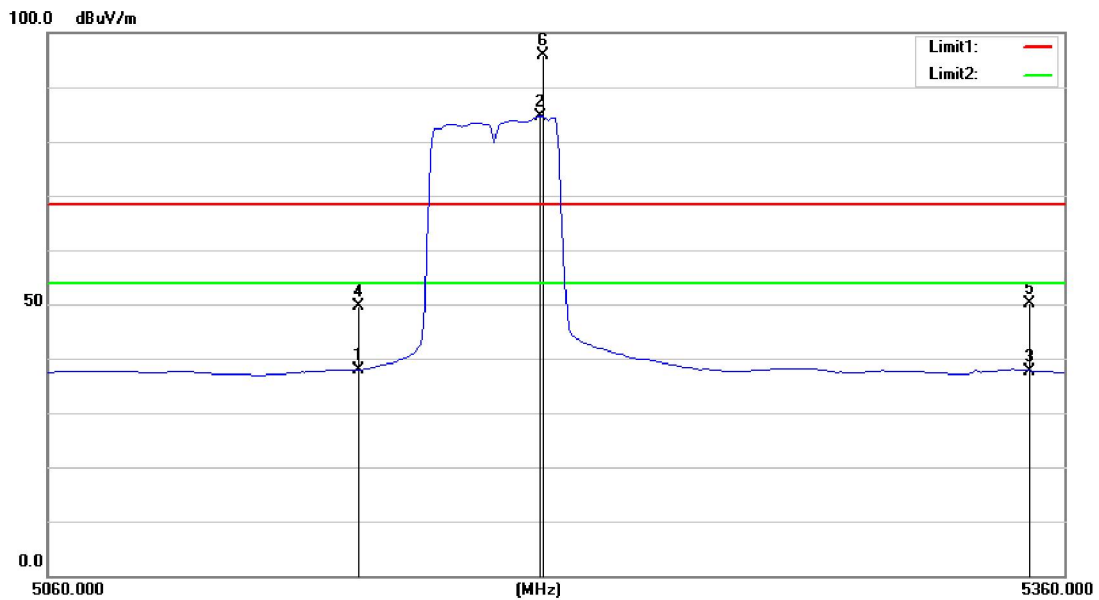

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5150.000	28.23	9.65	37.88	54.00	-16.12			AVG
2*	5203.687	74.30	10.26	84.56	Fundamental Frequency				AVG
3	5350.000	27.74	9.99	37.73	54.00	-16.27			AVG
4	5150.000	39.87	9.65	49.52	68.30	-18.78			peak
5	5350.000	40.23	9.99	50.22	68.30	-18.08			peak
6X	5204.289	85.74	10.26	96.00	Fundamental Frequency				peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(80) Mode 5775MHz (U-NII-3)		
Remark:	N/A		

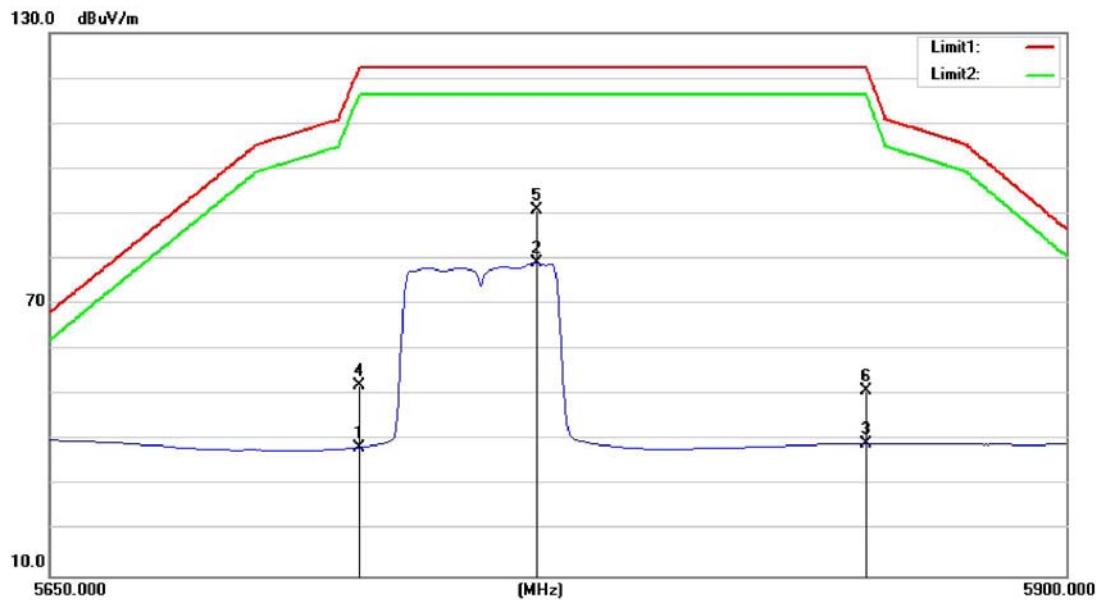

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.39	10.06	38.45	116.30	-77.85			AVG
2	5768.737	68.81	10.28	79.09	116.30	-37.21			AVG
3	5850.000	28.46	10.85	39.31	116.30	-76.99			AVG
4	5725.000	41.98	10.06	52.04	122.30	-70.26			peak
5*	5768.737	80.62	10.28	90.90	122.30	-31.40			peak
6	5850.000	40.16	10.85	51.01	122.30	-71.29			peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(80) Mode 5775MHz (U-NII-3)		
Remark:	N/A		


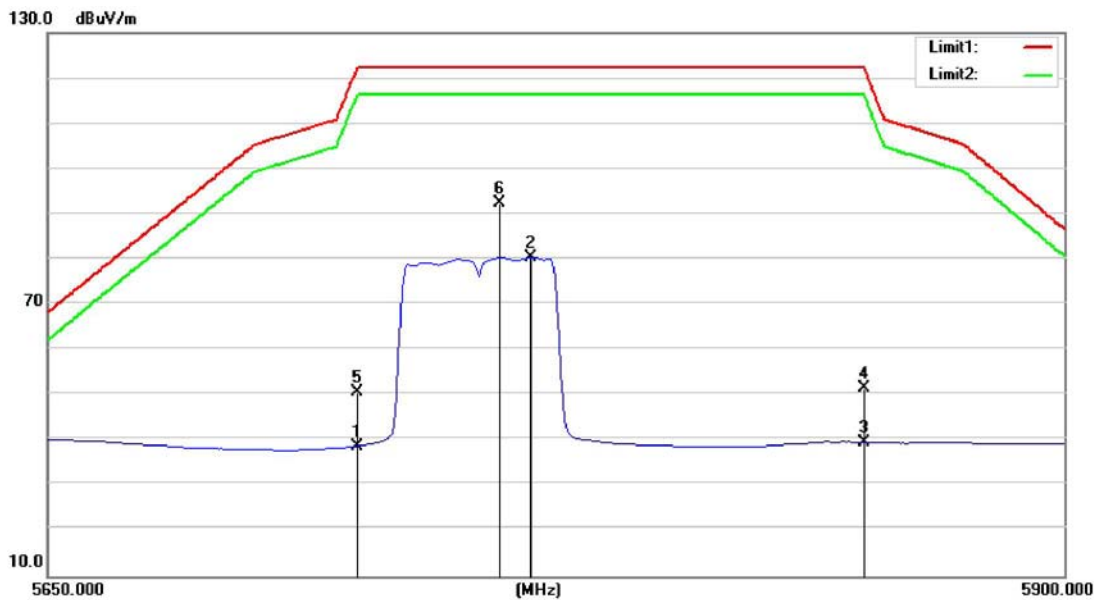


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	5725.000	28.70	10.06	38.76	116.30	-77.54			AVG
2	5767.735	70.15	10.29	80.44	116.30	-35.86			AVG
3	5850.000	28.77	10.85	39.62	116.30	-76.68			AVG
4	5850.000	40.75	10.85	51.60	122.30	-70.70			peak
5	5725.000	40.74	10.06	50.80	122.30	-71.50			peak
6*	5759.719	81.95	10.35	92.30	122.30	-30.00			peak



Emission Level= Read Level+ Correct Factor

(2) Conducted Test



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a mode(U-NII-1) / 5180 ~ 5240MHz		
Remark:	Offset contain antenna gain 4.1dBi		

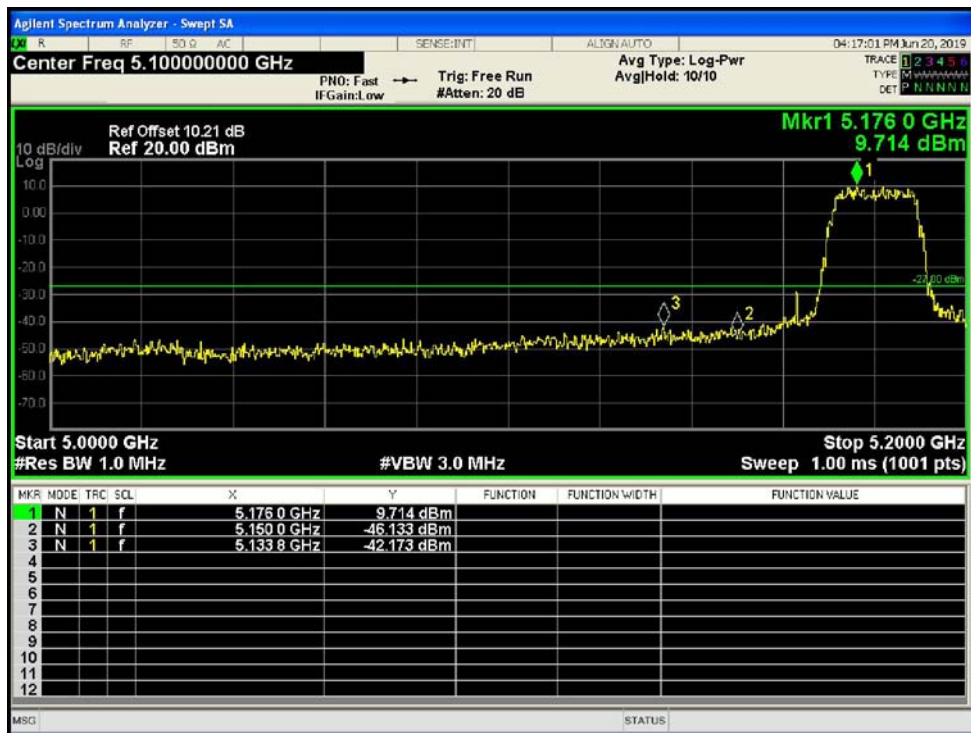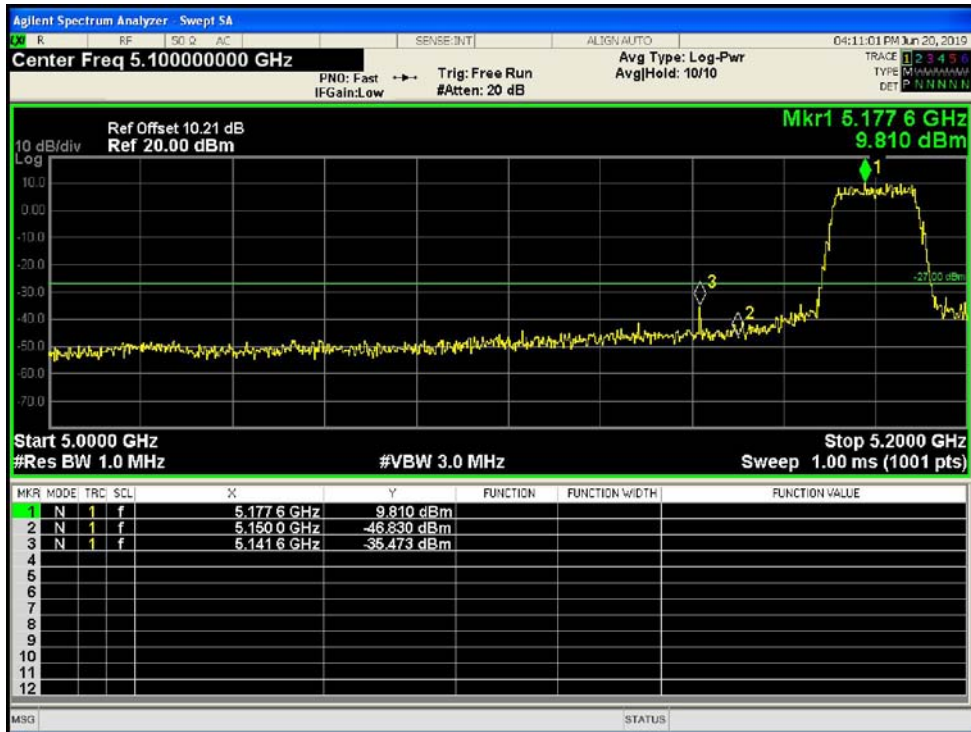



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(20) mode(U-NII-1) / 5180 ~ 5240MHz		
Remark:	Offset contain antenna gain 4.1dBi		

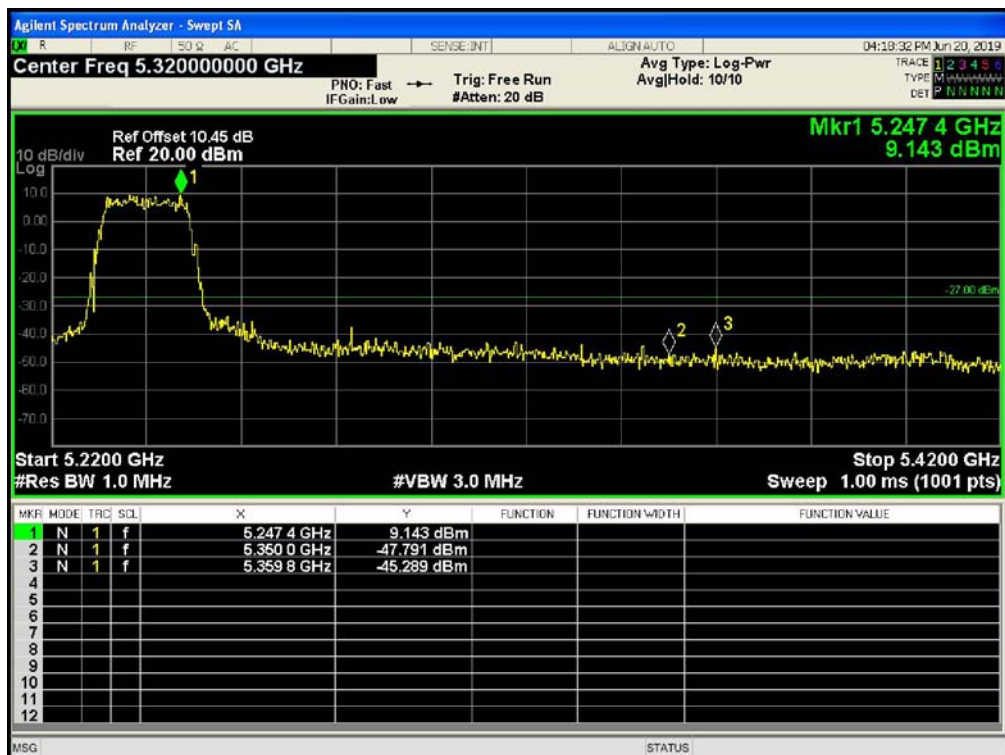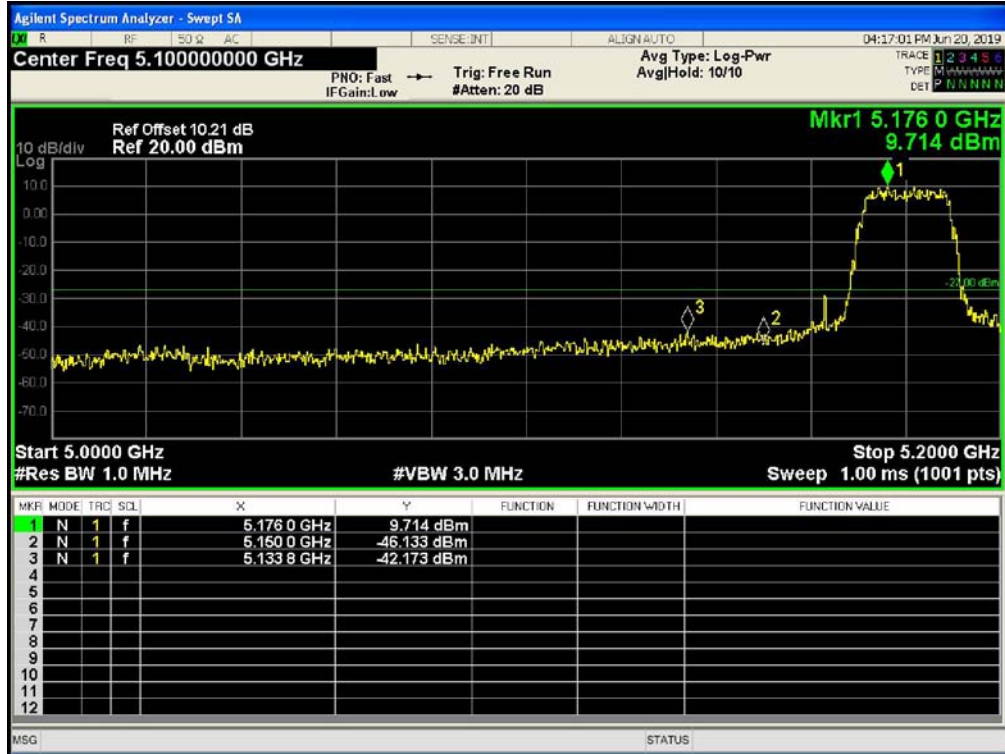


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(20) mode(U-NII-1) / 5180 ~ 5240MHz		
Remark:	Offset contain antenna gain 4.1dBi		

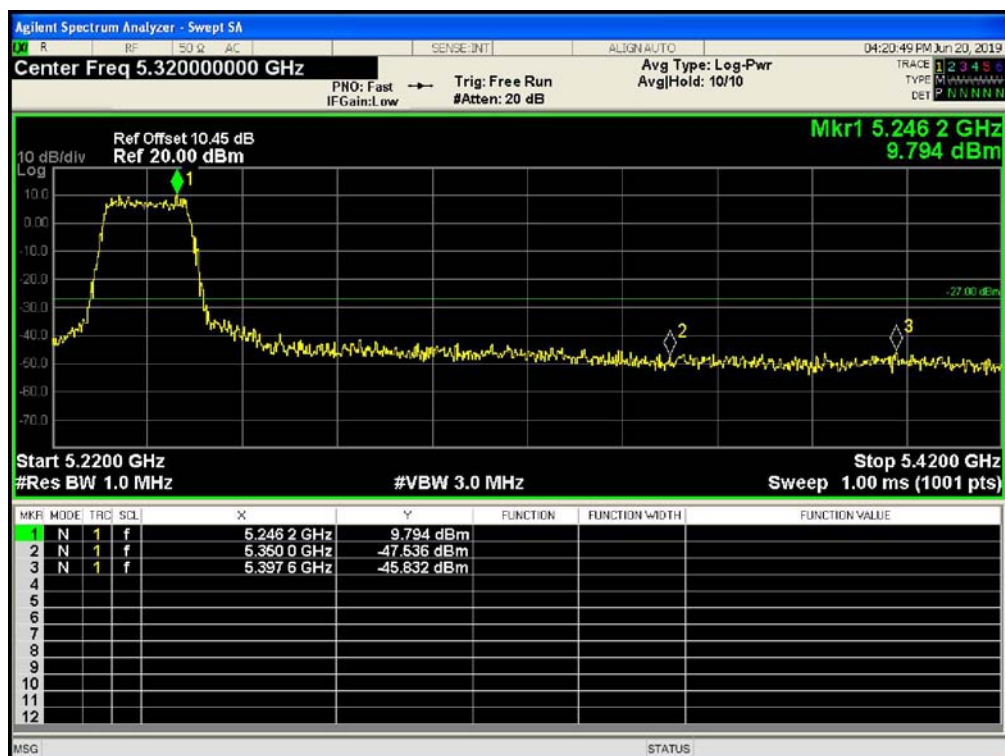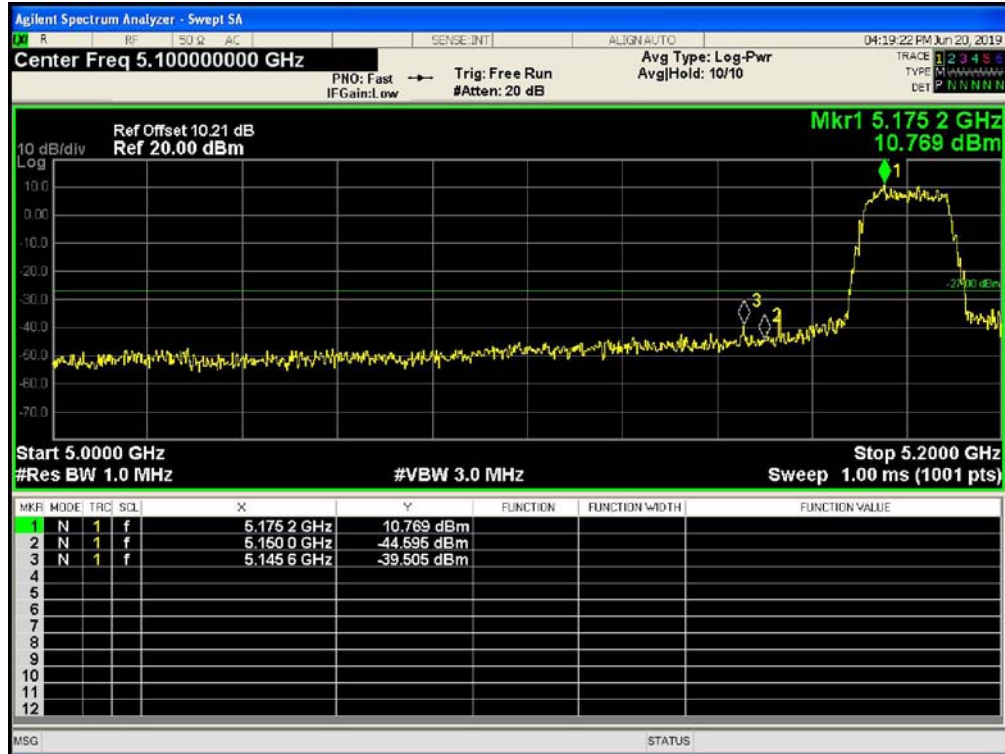


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	Offset contain antenna gain 4.1dBi		

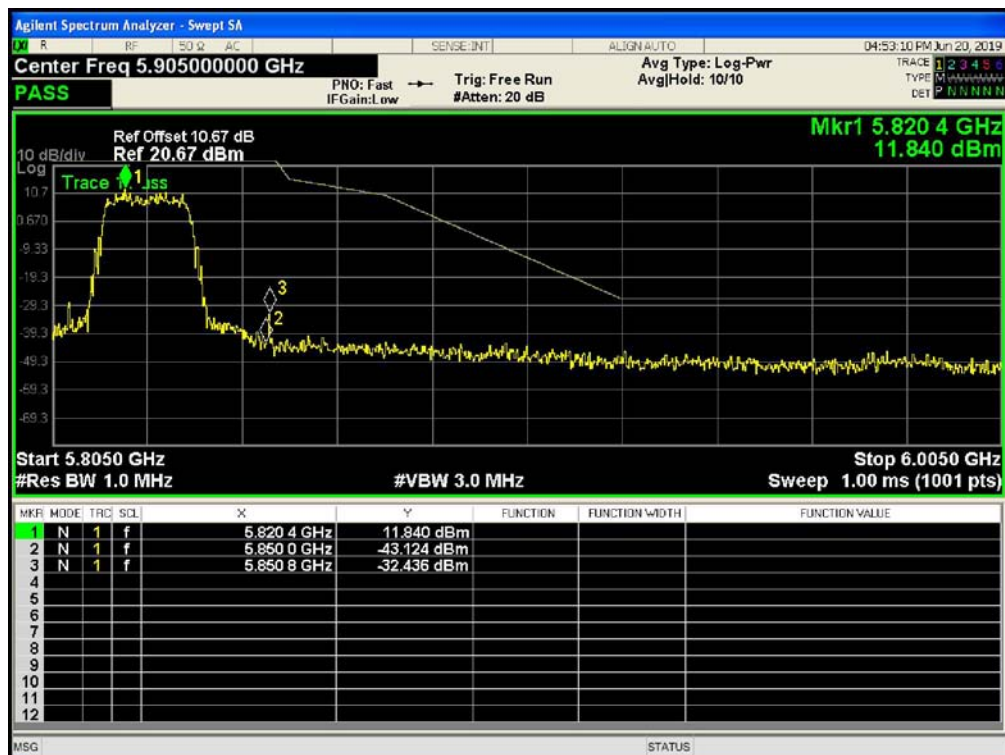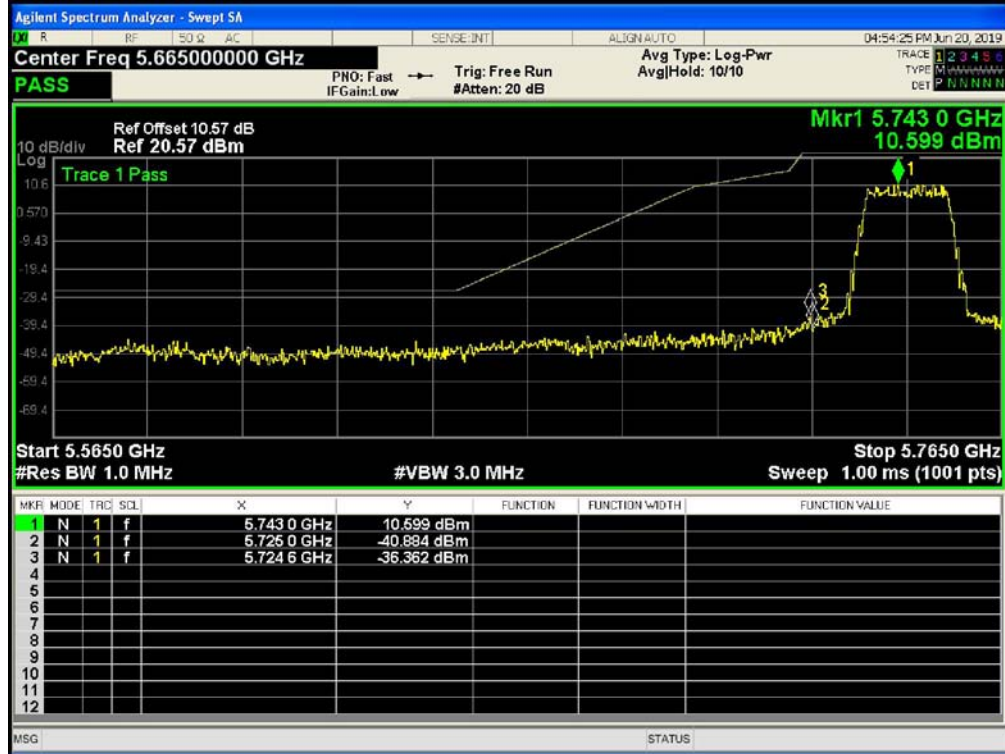



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(20) Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	Offset contain antenna gain 4.1dBi		

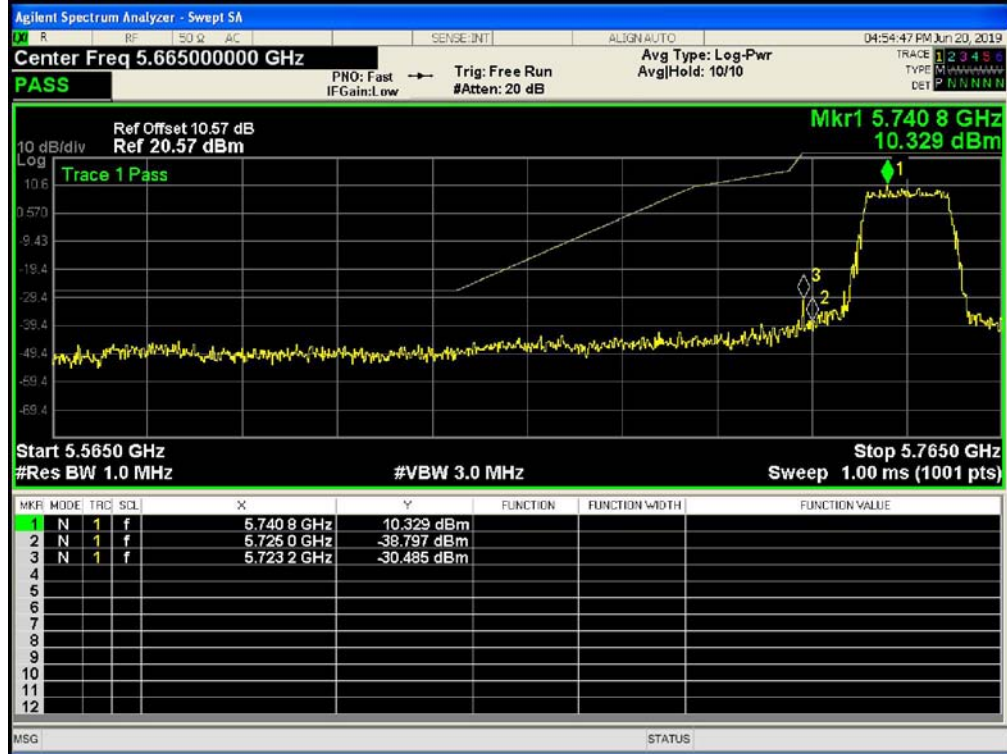



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(20) Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	Offset contain antenna gain 4.1dBi		

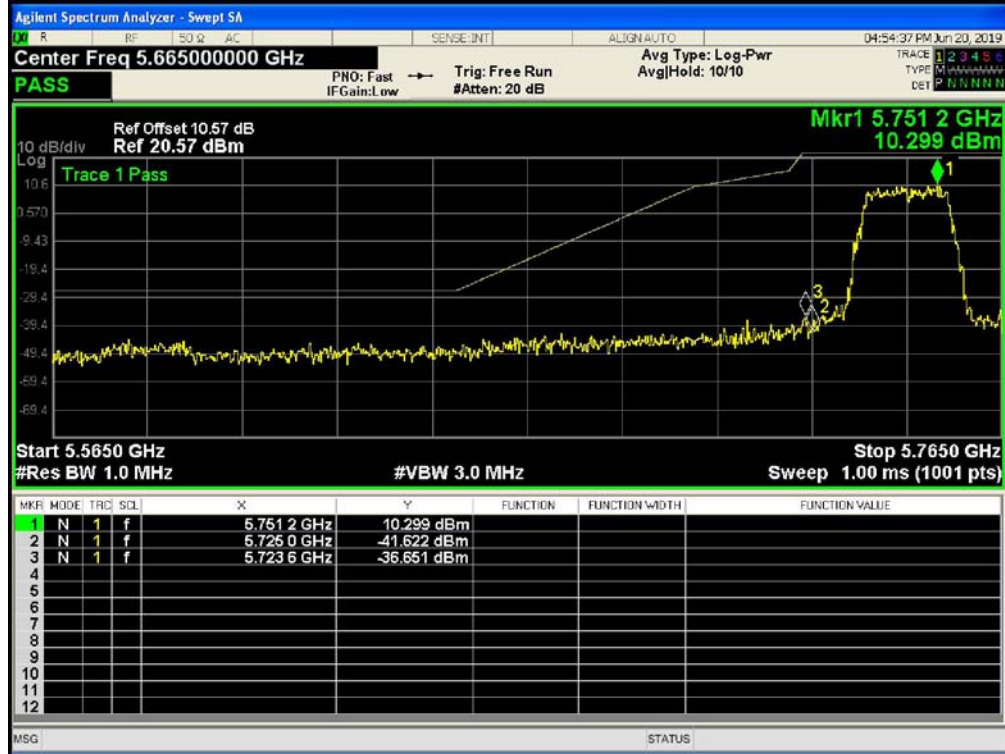



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(40) mode(U-NII-1) / 5190 ~ 5230MHz		
Remark:	Offset contain antenna gain 4.1 dBi		

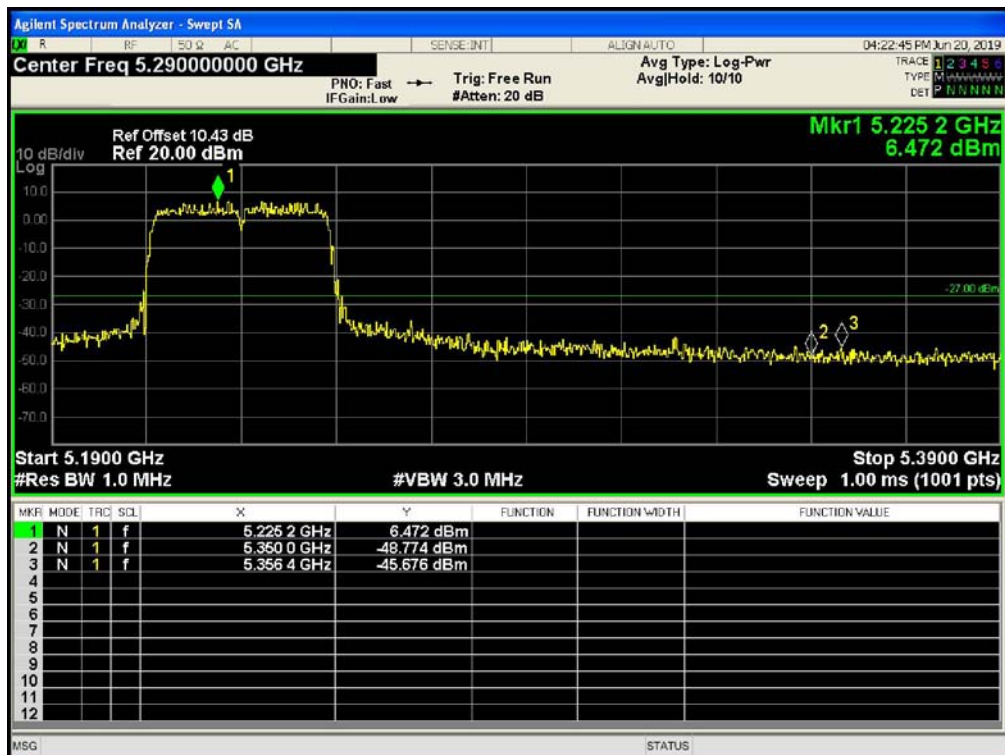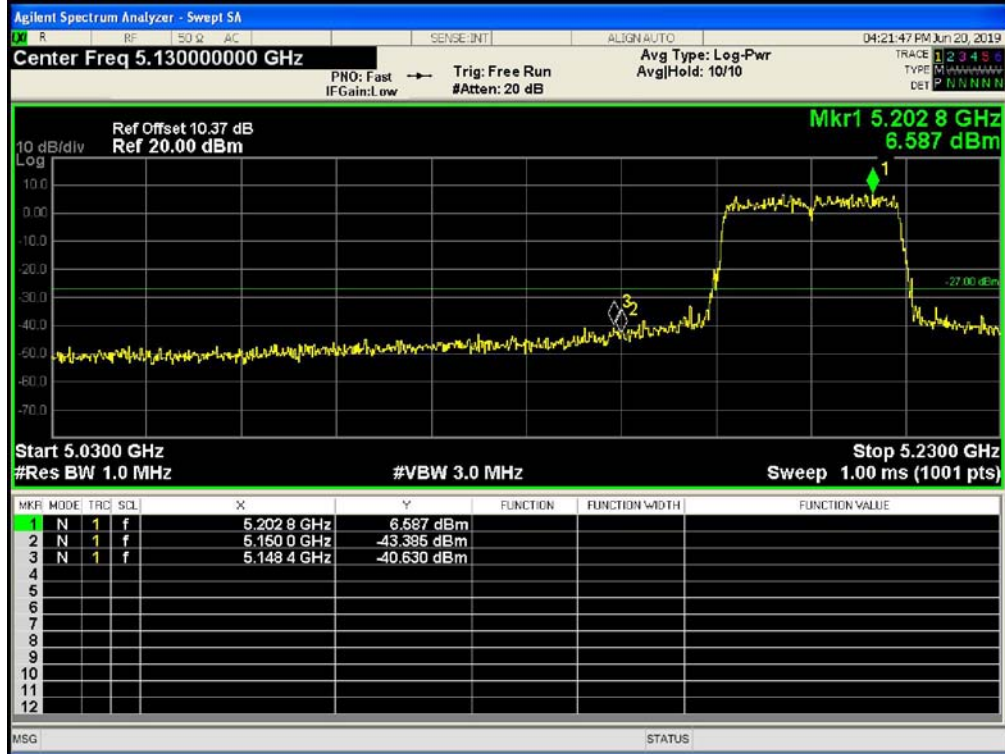



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(40) mode(U-NII-1) / 5190 ~ 5230MHz		
Remark:	Offset contain antenna gain 4.1dBi		

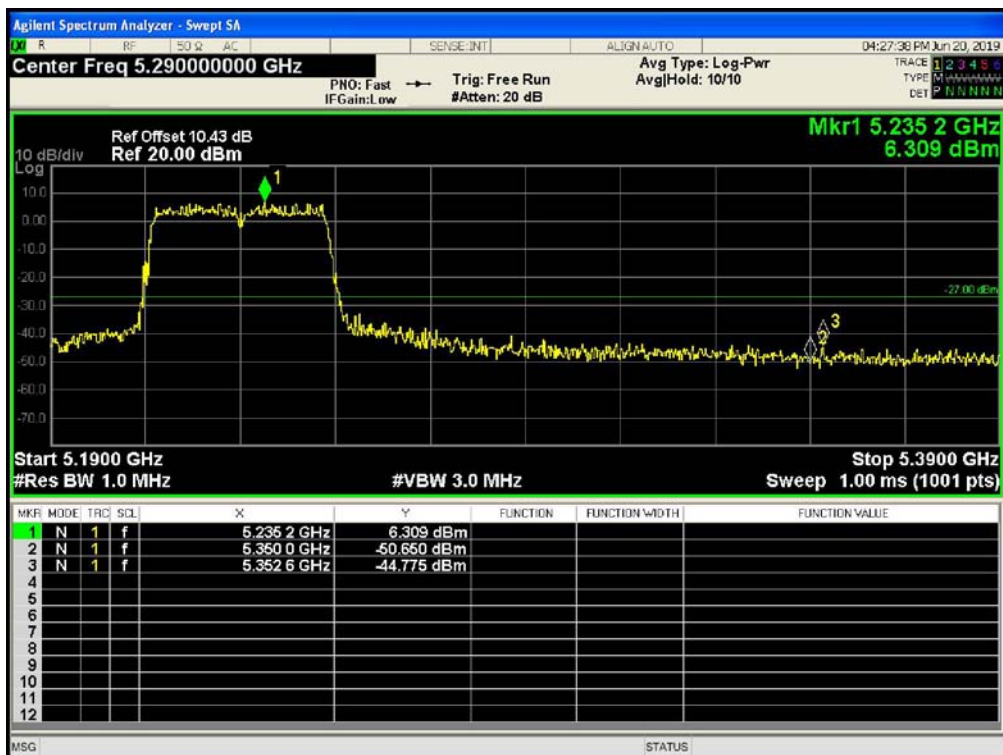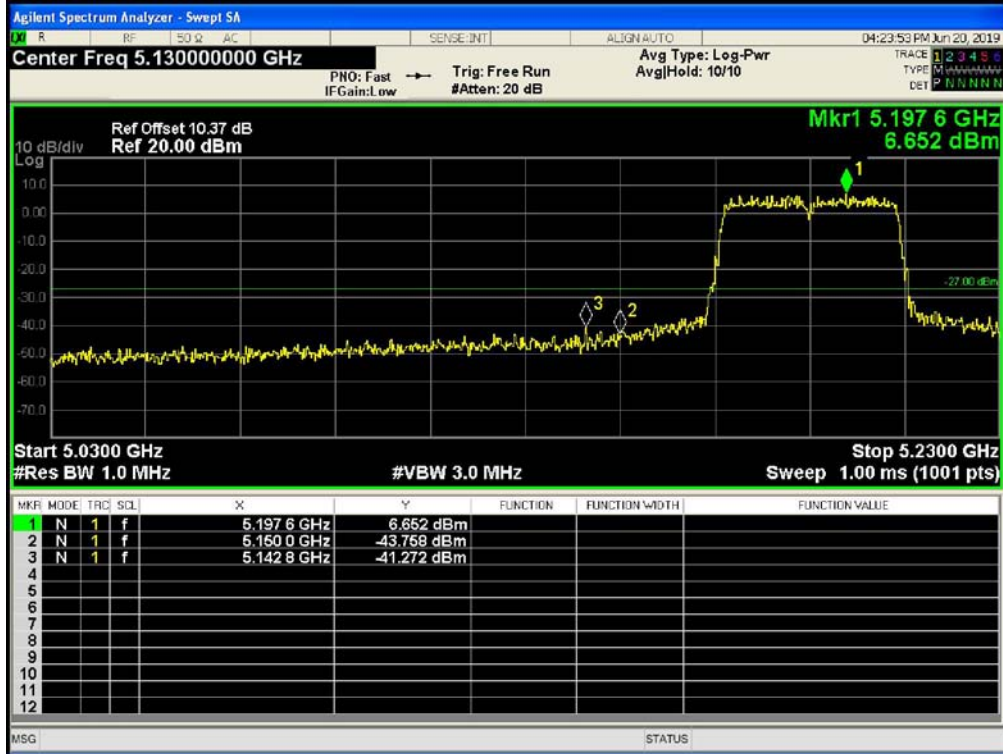


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 n(40) Mode 5755MHz/5795 (U-NII-3)		
Remark:	Offset contain antenna gain 4.1dBi		

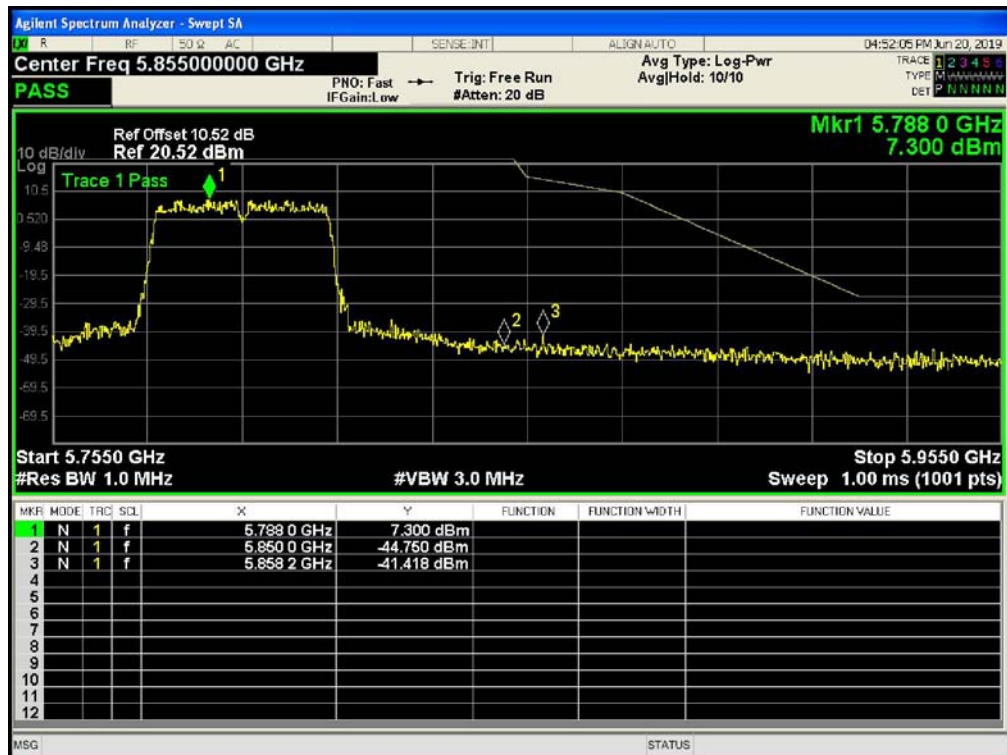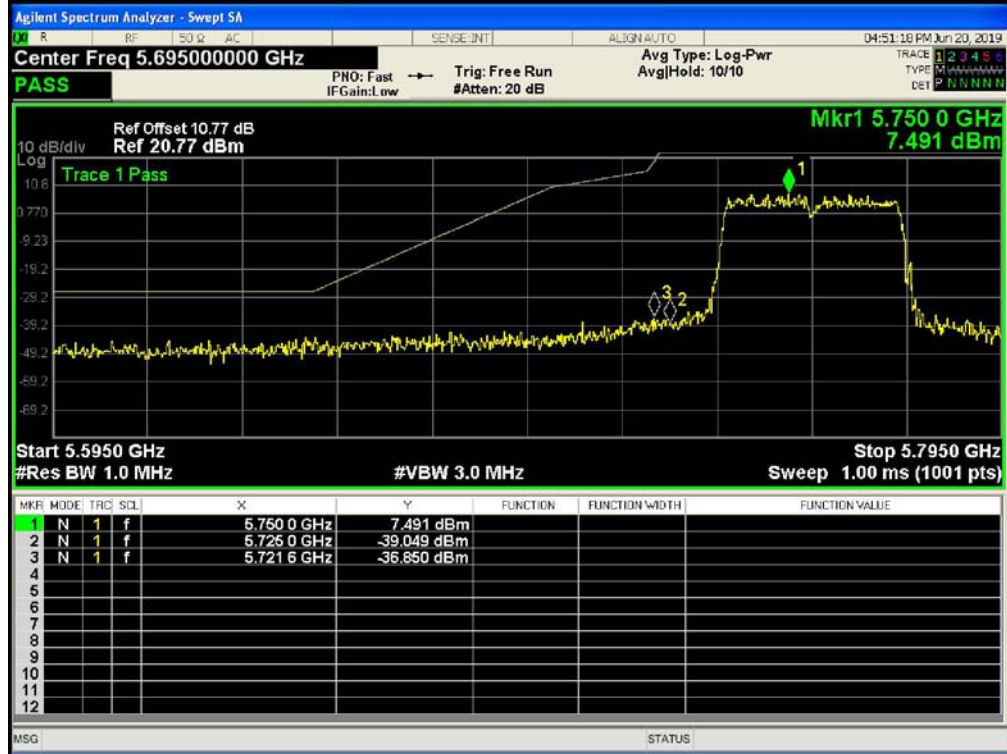

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(40) Mode 5755MHz/5795 (U-NII-3)		
Remark:	Offset contain antenna gain 4.1dBi		

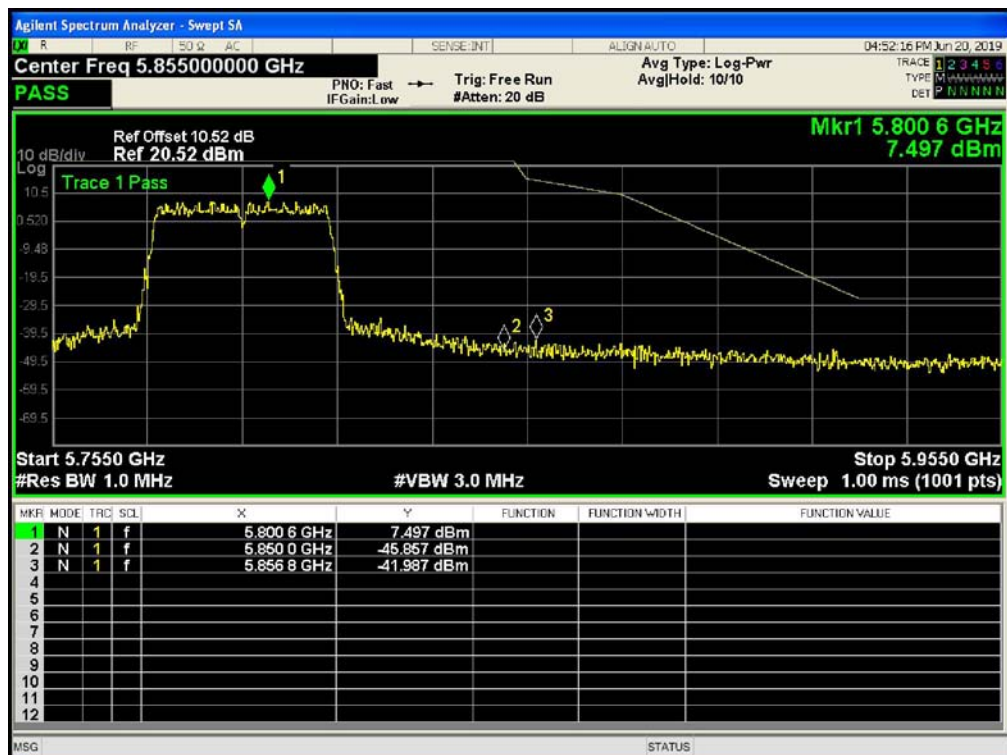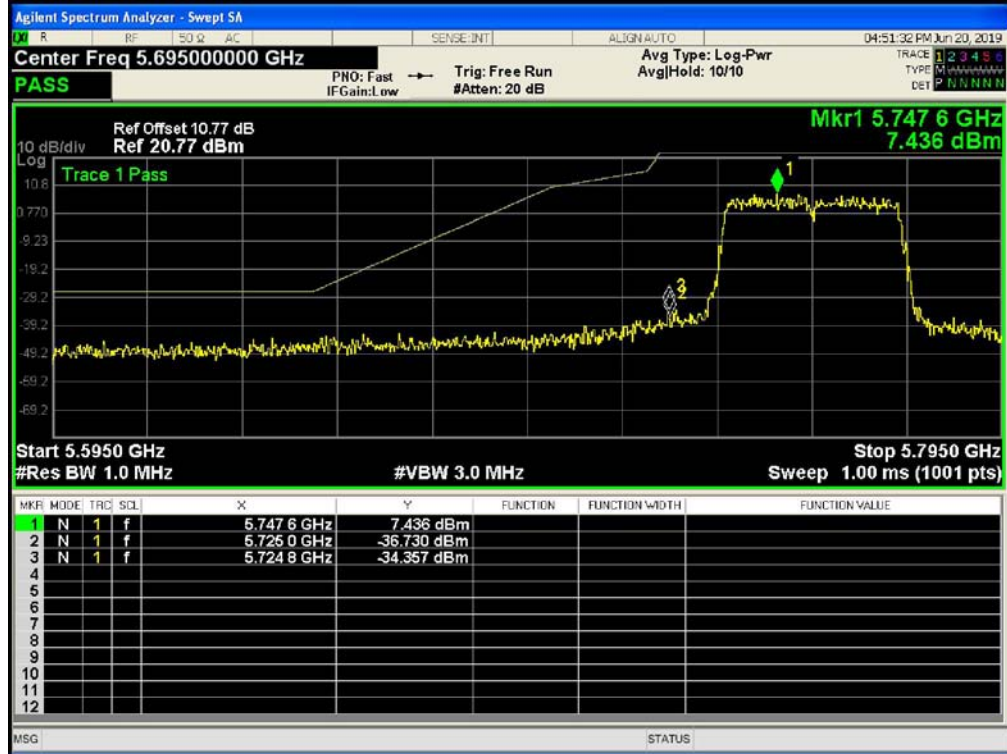

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(80) Mode 5210MHz (U-NII-1)		
Remark:	Offset contain antenna gain 4.1dBi		

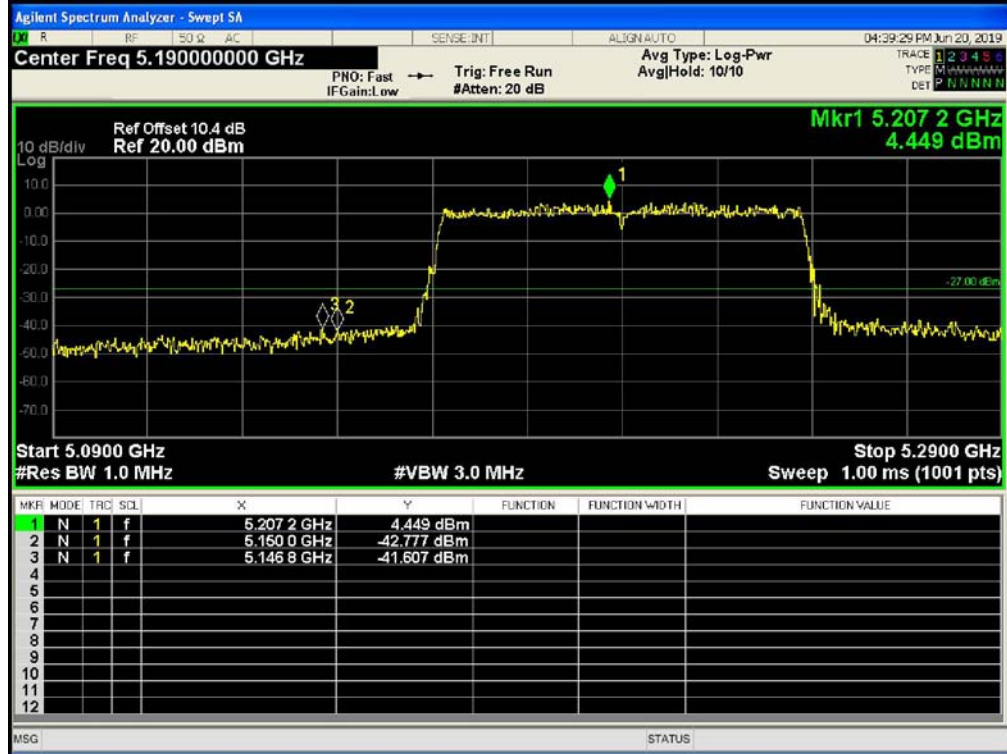

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(80) Mode 5775MHz (U-NII-3)		
Remark:	Offset contain antenna gain 4.1dBi		

