




IEEE 802.11g mode (Antenna 0)

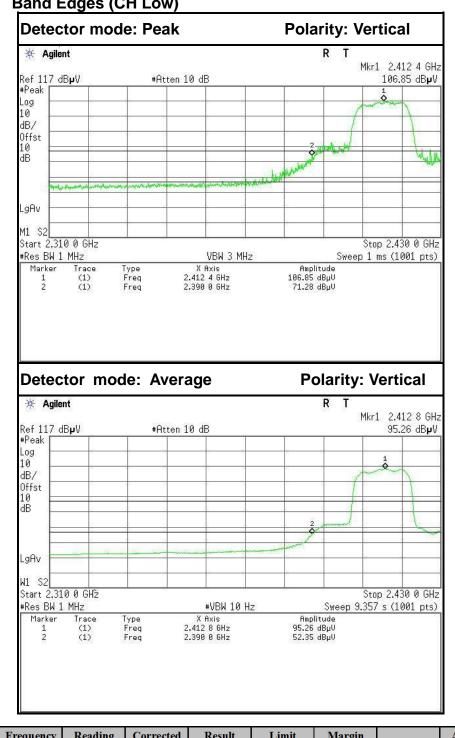

Band Edges (CH Low)


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	64.68	-6.60	71.28	74.00	-2.72	Peak	Vertical
2	2390.0000	45.75	-6.60	52.35	54.00	-1.65	Average	Vertical



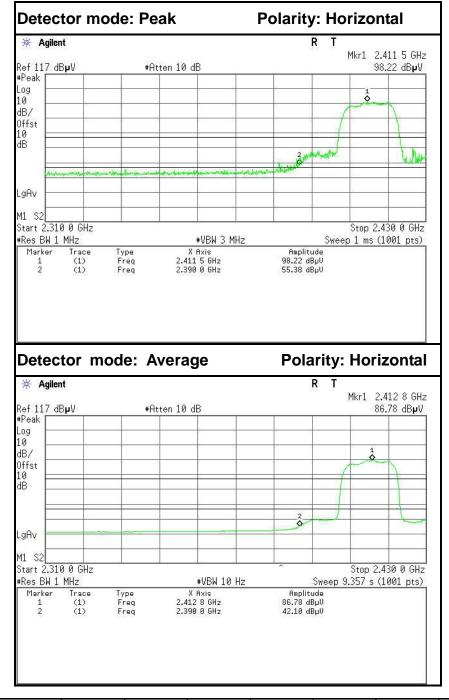


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	48.78	-6.60	55.38	74.00	-18.62	Peak	Horizontal
2	2390.0000	35.50	-6.60	42.10	54.00	-11.90	Average	Horizontal



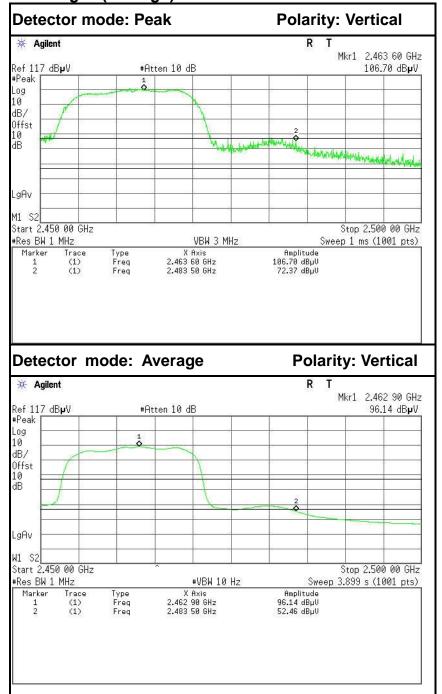

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	66.13	-6.24	72.37	74.00	-1.63	Peak	Vertical
2	2483.5000	46.22	-6.24	52.46	54.00	-1.54	Average	Vertical

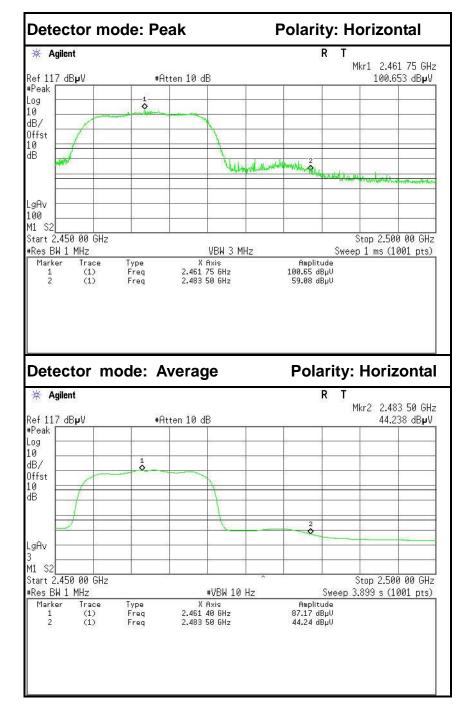


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	52.84	-6.24	59.08	74.00	-14.92	Peak	Horizontal
2	2483.5000	38.00	-6.24	44.24	54.00	-9.76	Average	Horizontal





IEEE 802.11g mode (Antenna 1)



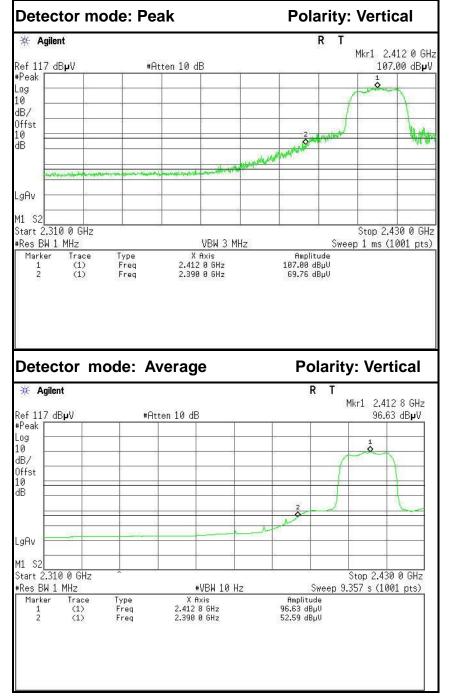


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	63.16	-6.60	69.76	74.00	-4.24	Peak	Vertical
2	2390.0000	45.99	-6.60	52.59	54.00	-1.41	Average	Vertical



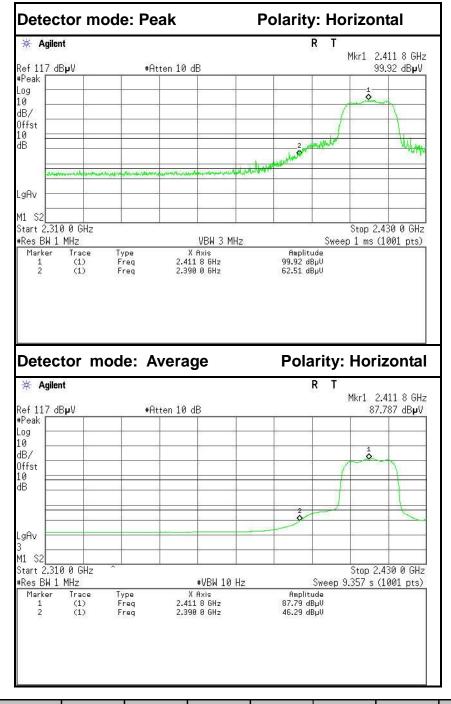


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	55.91	-6.60	62.51	74.00	-11.49	Peak	Horizontal
2	2390.0000	39.69	-6.60	46.29	54.00	-7.71	Average	Horizontal



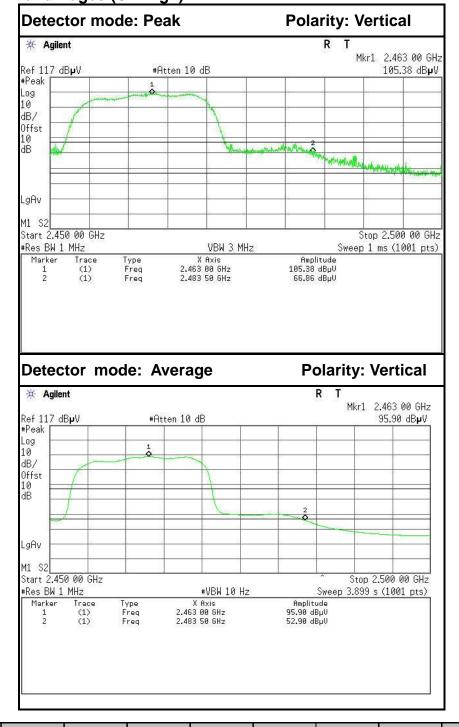


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	60.62	-6.24	66.86	74.00	-7.14	Peak	Vertical
2	2483.5000	46.66	-6.24	52.90	54.00	-1.10	Average	Vertical

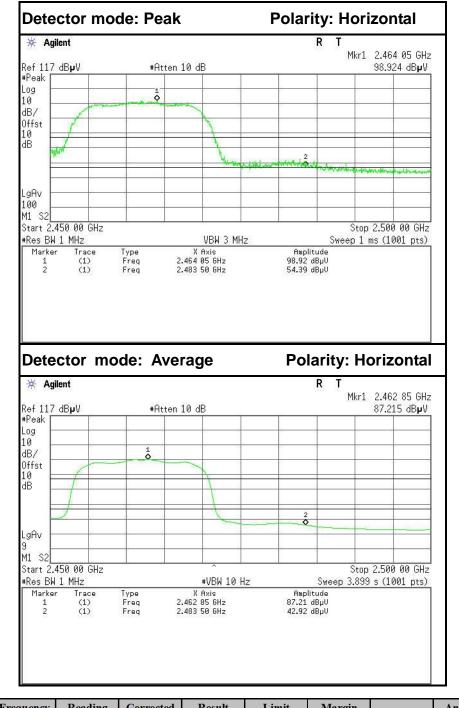


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	48.15	-6.24	54.39	74.00	-19.61	Peak	Horizontal
2	2483.5000	36.68	-6.24	42.92	54.00	-11.08	Average	Horizontal


IEEE 802.11n HT20 MHz mode (Combine with Antenna 0 and Antenna 1)

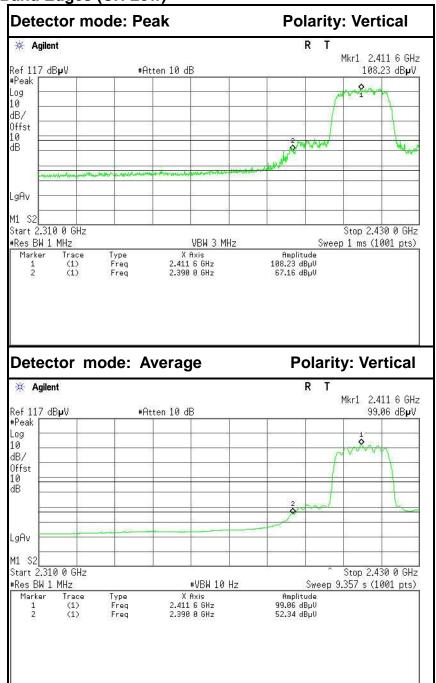

Band Edges (CH Low)


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	60.56	-6.60	67.16	74.00	-6.84	Peak	Vertical
2	2390.0000	45.74	-6.60	52.34	54.00	-1.66	Average	Vertical



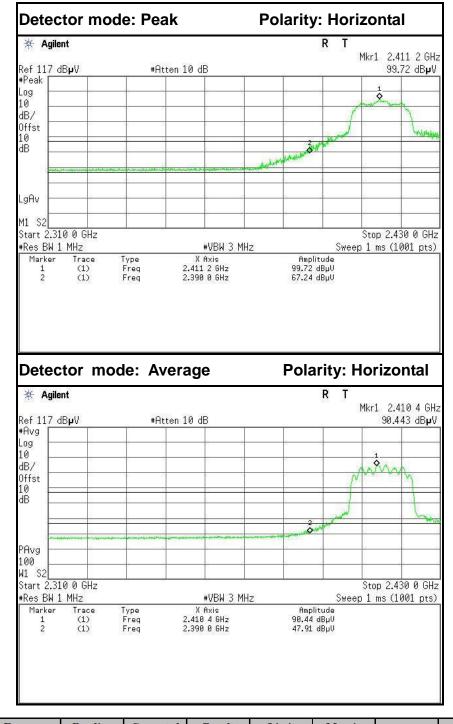


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	60.64	-6.60	67.24	74.00	-6.76	Peak	Horizontal
2	2390.0000	41.31	-6.60	47.91	54.00	-6.09	Average	Horizontal



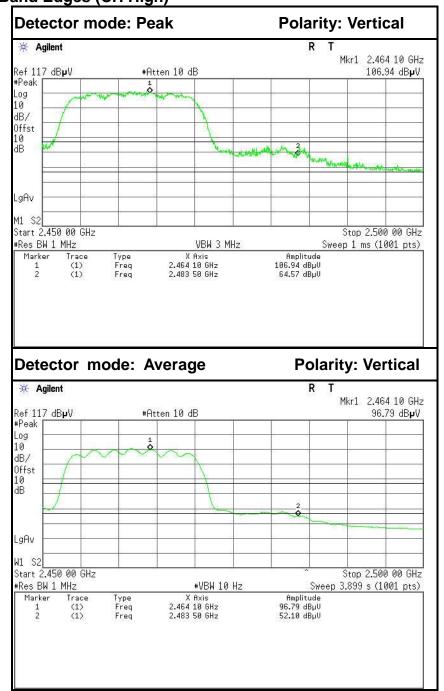


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	58.33	-6.24	64.57	74.00	-9.43	Peak	Vertical
2	2483.5000	45.86	-6.24	52.10	54.00	-1.90	Average	Vertical

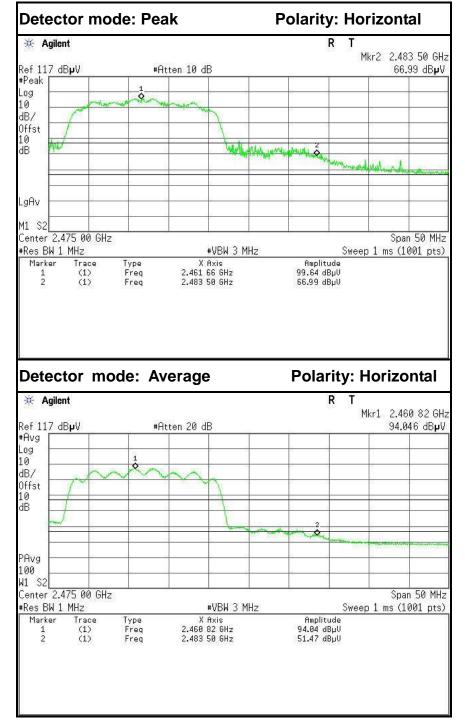


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	60.75	-6.24	66.99	74.00	-7.01	Peak	Horizontal
2	2483.5000	45.23	-6.24	51.47	54.00	-2.53	Average	Horizontal

IEEE 802.11n HT40 MHz mode (Combine with Antenna 0 and Antenna 1)

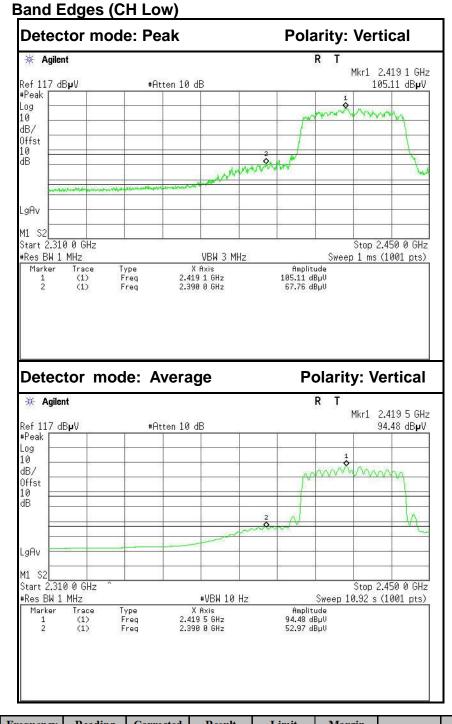


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	61.16	-6.60	67.76	74.00	-6.24	Peak	Vertical
2	2390.0000	46.37	-6.60	52.97	54.00	-1.03	Average	Vertical

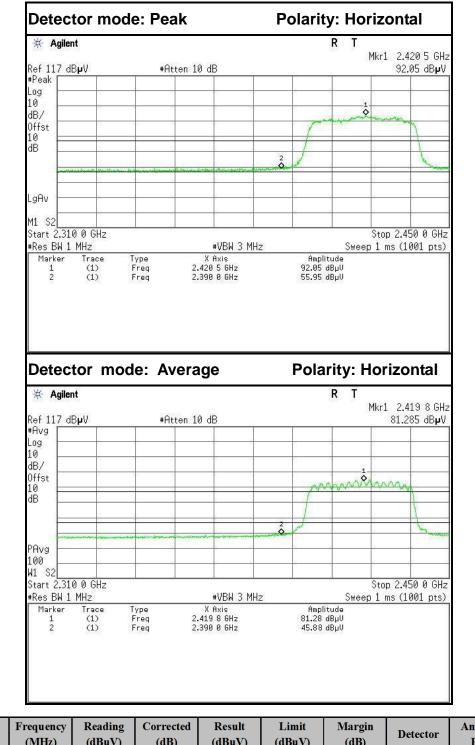


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	49.35	-6.60	55.95	74.00	-18.05	Peak	Horizontal
2	2390.0000	39.28	-6.60	45.88	54.00	-8.12	Average	Horizontal



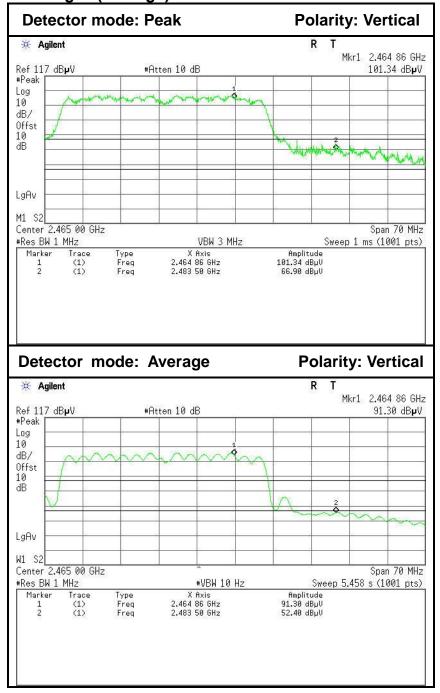

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	60.66	-6.24	66.90	74.00	-7.10	Peak	Vertical
2	2483.5000	46.16	-6.24	52.40	54.00	-1.60	Average	Vertical

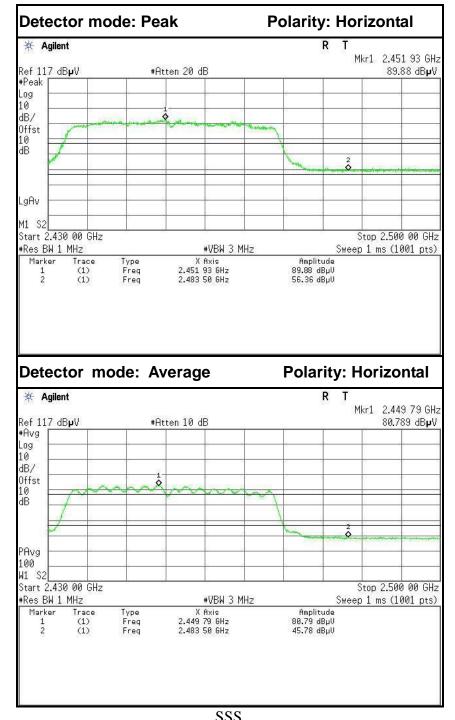

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	50.12	-6.24	56.36	74.00	-17.64	Peak	Horizontal
2	2483.5000	39.54	-6.24	45.78	54.00	-8.22	Average	Horizontal



7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016


7.7.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e)specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

10.2 Method PKPSD (peak PSD)

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS bandwidth.
- 3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.7.4. TEST SETUP



7.7.5. TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b (Antenna 0)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-7.12		PASS
Mid	2437	-8.10	8	PASS
High	2462	-7.26		PASS

Test mode: IEEE 802.11b (Antenna 1)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-9.45		PASS
Mid	2437	-9.79	8	PASS
High	2462	-9.90		PASS

Test mode: IEEE 802.11g (Antenna 0)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-11.38		PASS
Mid	2437	-7.01	8	PASS
High	2462	-11.47		PASS

Test mode: IEEE 802.11g (Antenna 1)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-10.78		PASS
Mid	2437	-9.36	8	PASS
High	2462	-12.42		PASS



Low

Mid

High

2422

2437

2452

-17.44

-15.00

-20.76

-15.28

-11.76

-17.30

PASS

PASS

PASS

8

Channel	Frequency (MHz)		PPSD (dBm)	Limit (dBm)	Test Result	
	(11112)	Antenna 0	Antenna 1	Total	(ubiii)	
Low	2412	-13.35	-12.35	-9.81		PASS
Mid	2437	-11.02	-11.42	-8.21	8	PASS
High	2462	-14.94	-14.99	-11.95		PASS
Test mode:	IEEE 802.1	1n HT40 M⊦	Iz (Combine	e with Anter	nna 0 an	d Antenna 1
Channel	Frequency (MHz)	PPSD (dBm)			Limit	Test Result
		Antenna 0	Antenna 1	Total	(dBm)	

-19.34


-14.56


-19.90

Test mode: IEEE 802.11n HT20 MHz (Combine with Antenna 0 and Antenna 1)




Test Plot




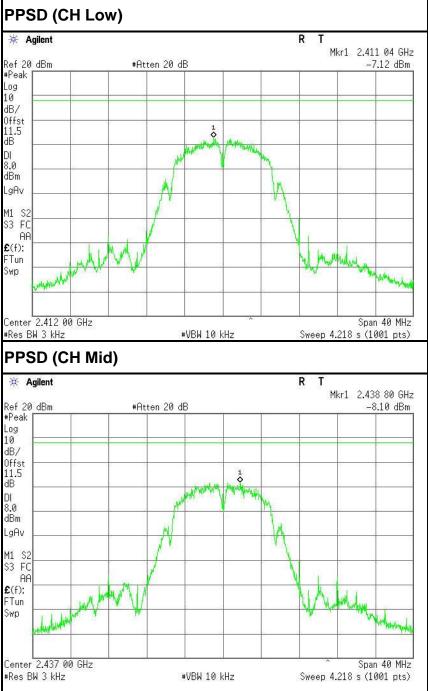



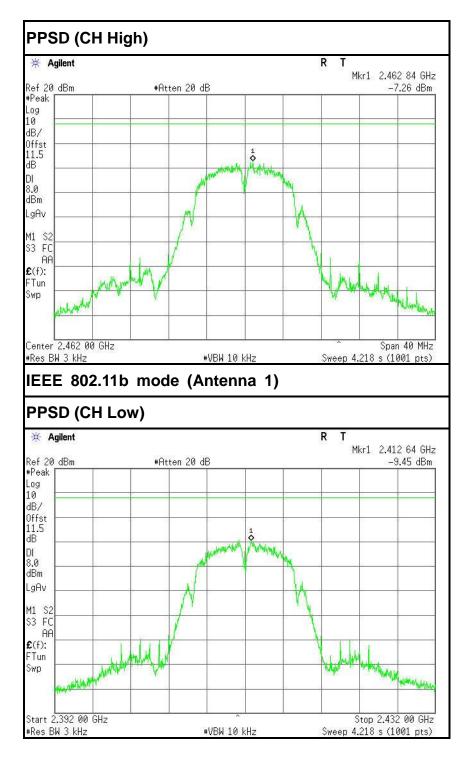



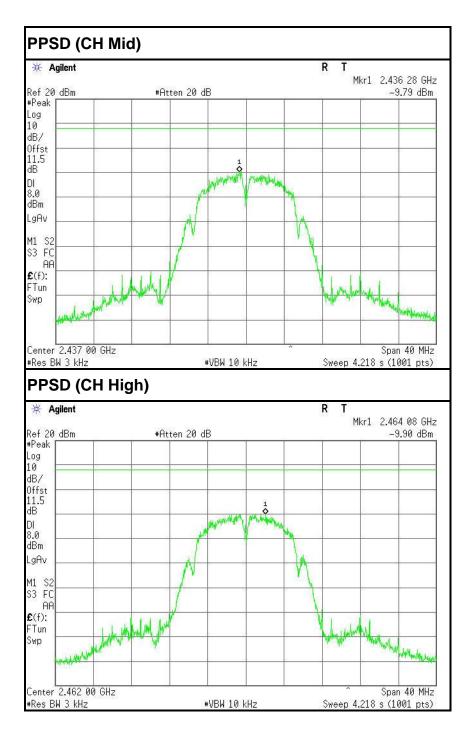





PPSD (CH Low) R 🔆 Agilent Т Mkr1 2.413 60 GHz Ref 20 dBm #Peak -11.38 dBm #Atten 20 dB Log 10 dB/ Offst 11.5 dB 0 where the second where the second states and the second seco DI 8.0 dBm LgAv M1 S2 \$3 FC AA £(f): Non-white and the second second monorphiseppender and a second FTun Swp Start 2.392 00 GHz #Res BW 3 kHz Stop 2.432 00 GHz Sweep 4.218 s (1001 pts) #VBW 10 kHz PPSD (CH Mid) 🔆 Agilent R Т Mkr1 2.436 32 GHz Ref 20 dBm #Peak #Atten 20 dB -7.01 dBm Log 10 dB/ Offst 11.5 dB Were were the second state of the second DI 8.0 dBm LgAv M1 S2 \$3 FC with the way was a second standing the second standing standing standing standing standing standing standing st White the second and the second AA £(f): FTun Swp Stop 2.457 00 GHz Start 2.417 00 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.218 s (1001 pts)

IEEE 802.11g mode (Antenna 0)




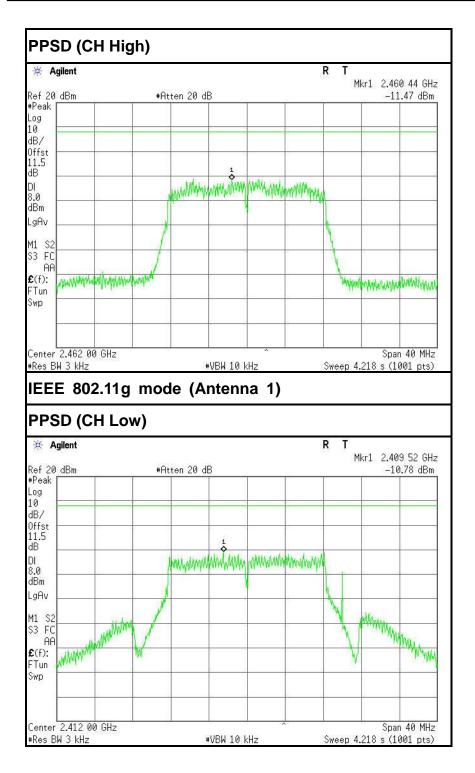



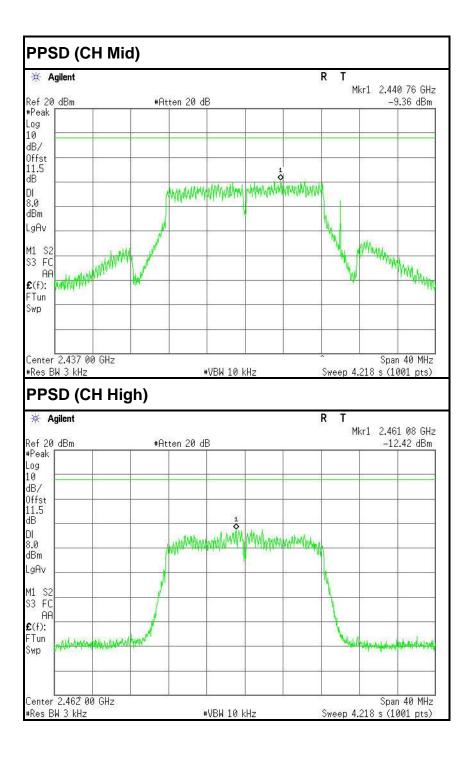




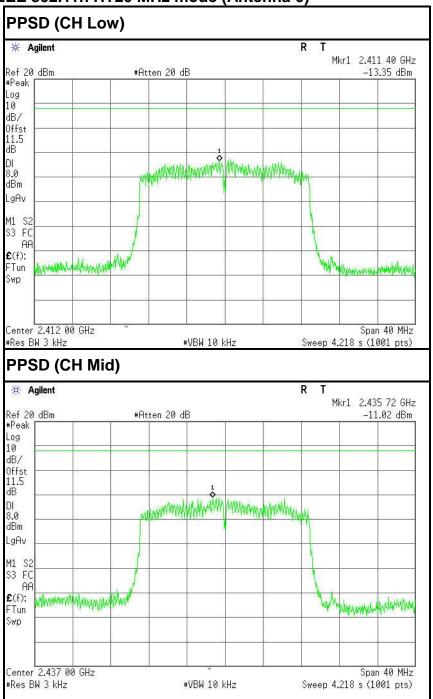


IEEE 802.11n HT20 MHz mode (Antenna 0)




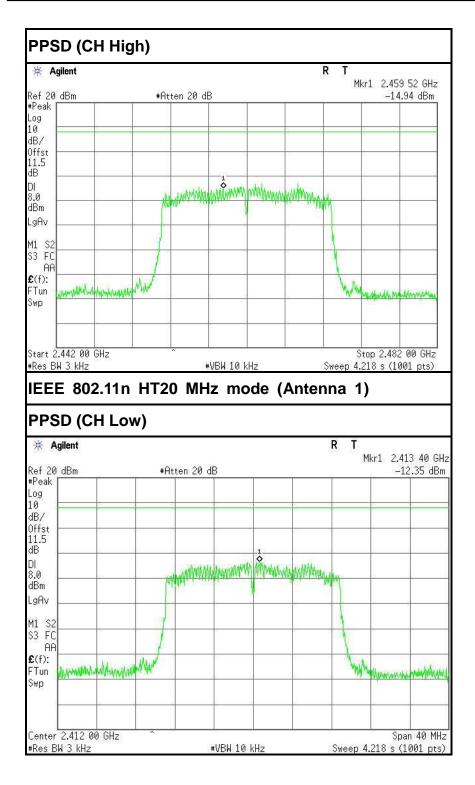



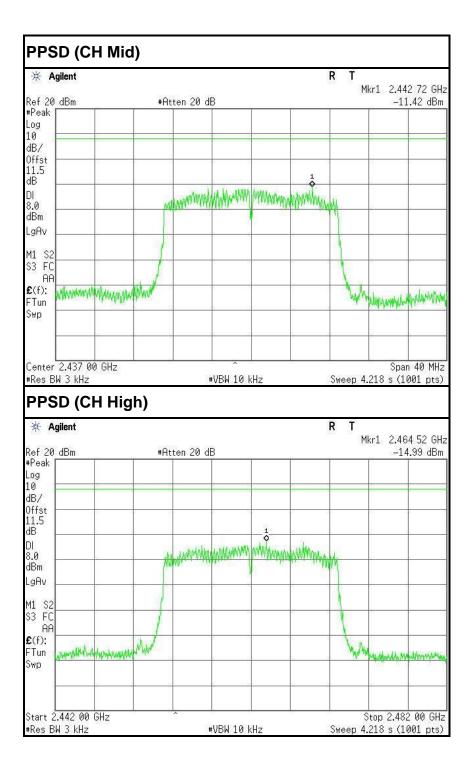



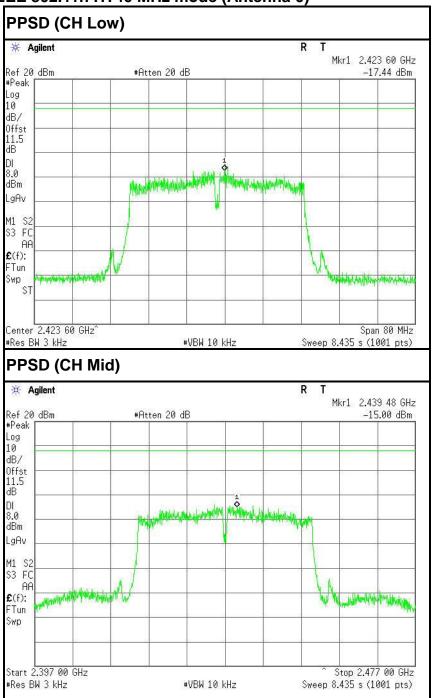

IEEE 802.11n HT40 MHz mode (Antenna 0)



