

FCC PART 15.407

TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Industrial Park, No. 34-1, Shilong Rd., Shiyan Town, Bao'an District, Shenzhen,
P.R.China

FCC ID: V7TW900U

| | |
|---|--|
| Report Type: Original Report | Product Type: Wireless 11ac Dual-band usb Adapter |
| Test Engineer: Leon Chen | <i>leon chen</i> |
| Report Number: R2DG130130002-00C | |
| Report Date: 2013-03-14 | |
| Reviewed By: Ivan Cao RF Leader | <i>Ivan Cao</i> |
| Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY | 4 |
| TEST FACILITY | 4 |
| SYSTEM TEST CONFIGURATION..... | 5 |
| DESCRIPTION OF TEST CONFIGURATION | 5 |
| EUT EXERCISE SOFTWARE | 5 |
| EQUIPMENT MODIFICATIONS | 5 |
| SUPPORT EQUIPMENT LIST AND DETAILS | 5 |
| EXTERNAL CABLE..... | 6 |
| PRINTER | 6 |
| KEYBOARD | 6 |
| BLOCK DIAGRAM OF TEST SETUP | 6 |
| SUMMARY OF TEST RESULTS..... | 7 |
| FCC §15.407 (f) & §1.1307 (b) (1) & §2.1093- RF EXPOSURE | 8 |
| APPLICABLE STANDARD | 8 |
| FCC §15.203 – ANTENNA REQUIREMENT | 9 |
| APPLICABLE STANDARD | 9 |
| ANTENNA CONNECTOR CONSTRUCTION | 9 |
| FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS | 10 |
| APPLICABLE STANDARD | 10 |
| MEASUREMENT UNCERTAINTY | 10 |
| EUT SETUP | 11 |
| EMI TEST RECEIVER SETUP..... | 11 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 11 |
| TEST EQUIPMENT LIST AND DETAILS..... | 12 |
| TEST PROCEDURE | 12 |
| TEST RESULTS SUMMARY | 12 |
| TEST DATA | 12 |
| FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS | 15 |
| APPLICABLE STANDARD | 15 |
| MEASUREMENT UNCERTAINTY..... | 15 |
| EUT SETUP..... | 16 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 16 |
| TEST PROCEDURE | 16 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 17 |
| TEST EQUIPMENT LIST AND DETAILS..... | 17 |
| TEST RESULTS SUMMARY | 17 |
| TEST DATA | 17 |
| CONDUCTED SPURIOUS EMISSION AT ANTENNA PORT..... | 24 |
| TEST DATA | 25 |
| FCC §15.407(b) (1) (2) (3) (4) – OUT OF BAND EMISSIONS | 64 |
| APPLICABLE STANDARD | 64 |

| | |
|---|------------|
| TEST PROCEDURE | 64 |
| TEST EQUIPMENT LIST AND DETAILS..... | 64 |
| TEST DATA | 64 |
| FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH | 78 |
| APPLICABLE STANDARD | 78 |
| TEST EQUIPMENT LIST AND DETAILS..... | 78 |
| TEST PROCEDURE | 78 |
| TEST DATA | 78 |
| FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER..... | 93 |
| APPLICABLE STANDARD | 93 |
| TEST EQUIPMENT LIST AND DETAILS..... | 93 |
| TEST PROCEDURE | 93 |
| TEST DATA | 93 |
| FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY | 109 |
| APPLICABLE STANDARD | 109 |
| TEST PROCEDURE | 109 |
| TEST EQUIPMENT LIST AND DETAILS..... | 109 |
| TEST DATA | 110 |
| FCC §15.407(a) (6) – PEAK EXCURSION RATIO | 125 |
| APPLICABLE STANDARD | 125 |
| TEST PROCEDURE | 125 |
| TEST EQUIPMENT LIST AND DETAILS..... | 125 |
| TEST DATA | 125 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SHENZHEN TENDA TECHNOLOGY CO.,LTD.*'s product, model number: *W900U (FCC ID: V7TW900U)* (the "EUT") in this report was a *Wireless I1ac Dual-band usb Adapter*, which was measured approximately: 9.2 cm (L) x 2.8 cm (W) x 1.1 cm (H), rated input voltage: DC 5.0 V from system.

* All measurement and test data in this report was gathered from production sample serial number: 130130002 (Assigned by *BACL.Dongguan*). The EUT was received on 2013-02-01.

Objective

This type approval report is prepared on behalf of *SHENZHEN TENDA TECHNOLOGY CO.,LTD.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: *V7TW900U* for 2412-2462MHz band.
FCC Part 15C DTS submissions with FCC ID: *V7TW900U* for 5745-5825MHz band.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For 5180~5240MHz band, 7 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 36 | 5180 | 44 | 5220 |
| 38 | 5190 | 46 | 5230 |
| 40 | 5200 | 48 | 5240 |
| 42 | 5210 | / | / |

For 802.11a , 802.11n ht20 and 802.11ac vht 20, Channel 36, 40 ,44 and 48 was used, we choosed the channel 36,40,48 for tested, for 802.11n ht40 and 802.11ac vht 40, Channel 38, 46 was tested, for 802.11ac vht 80 mode channel 42 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all date rates bandwidths, and modulations.

For 802.11a,the EUT can transmitting with chain 0 or chain 1, therefore investigated worst case to representative chain 0 in test report.

EUT Exercise Software

The software ‘Broadcom MTool 2.0.0.3’ was used for testing, which was provided by manufacturer.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|----------|----------------------|
| DELL | Laptop | PP11L | QDS-BRCM1017 |
| HP | Printer | C3941A | JPTVOB2337 |
| DELL | Keyboard | L100 | CNORH656658907BL05DC |
| SAST | Modem | AEM-2100 | 0293 |

External Cable

| Cable Description | Length (m) | From Port | To |
|------------------------------------|------------|-------------------------|----------|
| Shielded Detachable Printer Cable | 1.2 | Parallel Port of Laptop | Printer |
| Shielded Detachable Serial Cable | 1.2 | Serial Port of Laptop | Modem |
| Shielded Detachable Keyboard Cable | 1.5 | Keyboard Port of Laptop | Keyboard |

Block Diagram of Test Setup

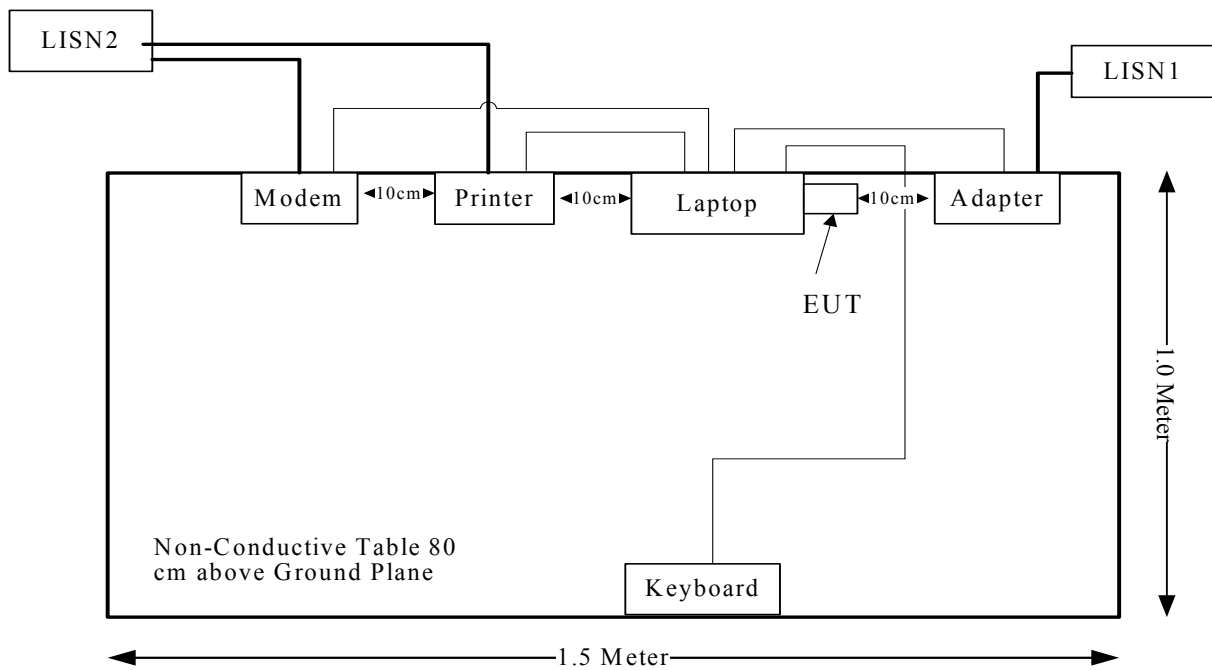

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---|--|---------------|
| §15.407 (f), §2.1093, §1.1307(b)(1) | RF Exposure | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.407(b)(6)& §15.207(a) | Conducted Emissions | Compliance |
| §15.205& §15.209 &§15.407(b) (1),(6),(7) | Undesirable Emission& Restricted Bands | Compliance |
| §15.407(b) (1),(2),(3),(4) | Out Of Band Emissions | Compliance |
| §15.407(a) (1) | 26 dB Bandwidth | Compliance |
| §15.407(a)(1), | Conducted Transmitter Output Power | Compliance |
| §15.407 (a)(1),(5) | Power Spectral Density | Compliance |
| §15.407(a)(6) | Peak Excursion Ratio | Compliance |

FCC §15.407 (f) & §1.1307 (b) (1) & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.407 (f) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 Mobile Portable RF Exposure V05 Appendix A, SAR can be exempted if the output power is less than the SAR exclusion threshold:

For $f=5200\text{MHz}$, the output power is less 7mW at distance of 5mm.

Measurement Result

Peak conducted output power= 7.79 dBm

Antenna gain = 3.0 dBi

SAR exclusion threshold 7 mW (8.45 dBm) > 7.79 dBm

So the SAR evaluation is not necessary.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.407 (a)(1),if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two printed antennas, which were permanently attached on the PCB, and the maximum gain is 3.0dBi, please refer to the internal photos.

Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

| Measurement | U_{cispr} |
|---|-------------|
| Conducted disturbance at mains port using AMN (150 kHz to 30 MHz) | 3.4 dB |

EUT Setup

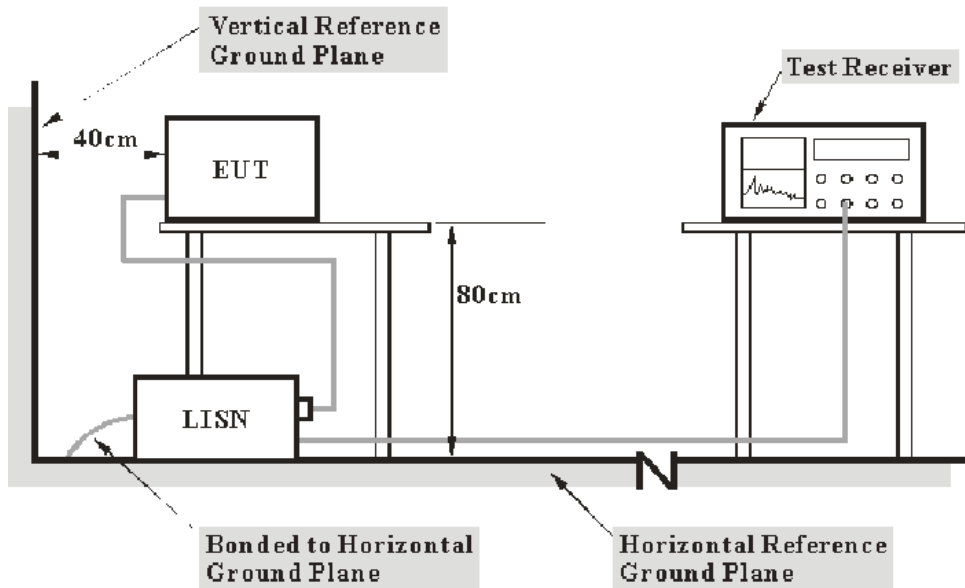

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| <i>Frequency Range</i> | <i>IF B/W</i> |
|------------------------|---------------|
| 150 kHz – 30 MHz | 9 kHz |

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,
 V_C (cord. Reading): corrected voltage amplitude
 V_R : reading voltage amplitude
 A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f: Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|----------|---------------|------------------|----------------------|
| R&S | EMI Test Receiver | ESCS 30 | 830245/006 | 2012-11-29 | 2013-11-28 |
| R&S | LISN1 | ESH3-Z5 | 843331/015 | 2012-09-17 | 2013-09-16 |
| R&S | LISN2 | ESH3-Z5 | 100113 | 2012-11-29 | 2013-11-28 |
| BACL | Test Software | BACL-EMC | V1.0-2010 | N/A | N/A |

Test Procedure

During the conducted emission test, the adapter was connected to the LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

8.37 dB at 0.315 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 23.6 °C |
| Relative Humidity: | 49 % |
| ATM Pressure: | 101.5 kPa |

The testing was performed by Leon Chen on 2013-02-01.

Test Mode: Operating

120 V, 60 Hz, Line:

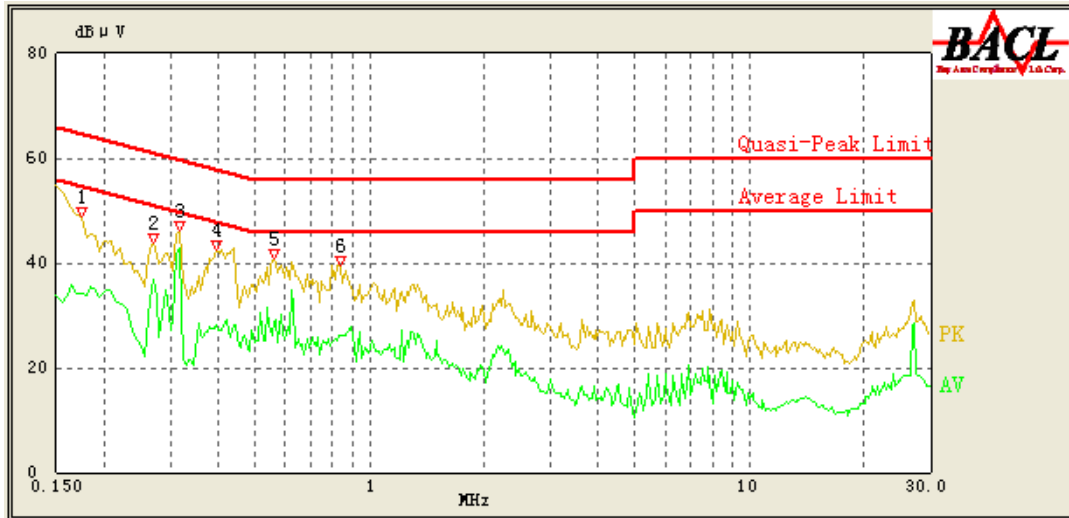

| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.175 | 42.39 | 0.43 | 65.29 | 22.90 | QP |
| 0.175 | 34.25 | 0.43 | 55.29 | 21.04 | AV |
| 0.270 | 40.08 | 0.36 | 62.57 | 22.49 | QP |
| 0.270 | 36.86 | 0.36 | 52.57 | 15.71 | AV |
| 0.315 | 43.53 | 0.34 | 61.29 | 17.76 | QP |
| 0.315 | 42.89 | 0.34 | 51.29 | 8.40 | AV |
| 0.395 | 36.21 | 0.32 | 59.00 | 22.79 | QP |
| 0.395 | 28.30 | 0.32 | 49.00 | 20.70 | AV |
| 0.560 | 35.92 | 0.32 | 56.00 | 20.08 | QP |
| 0.560 | 28.99 | 0.32 | 46.00 | 17.01 | AV |
| 0.835 | 32.35 | 0.32 | 56.00 | 23.65 | QP |
| 0.830 | 26.31 | 0.32 | 46.00 | 19.69 | AV |

120V, 60 Hz, Neutral:



| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.170 | 49.93 | 0.24 | 65.43 | 15.50 | QP |
| 0.170 | 37.82 | 0.24 | 55.43 | 17.61 | AV |
| 0.185 | 49.58 | 0.25 | 65.00 | 15.42 | QP |
| 0.185 | 37.20 | 0.25 | 55.00 | 17.80 | AV |
| 0.315 | 43.81 | 0.23 | 61.29 | 17.48 | QP |
| 0.315 | 42.92 | 0.23 | 51.29 | 8.37 | AV |
| 0.520 | 33.11 | 0.21 | 56.00 | 22.89 | QP |
| 0.515 | 29.86 | 0.21 | 46.00 | 16.14 | AV |
| 0.685 | 30.55 | 0.21 | 56.00 | 25.45 | QP |
| 0.685 | 26.77 | 0.21 | 46.00 | 19.23 | AV |
| 0.830 | 31.70 | 0.22 | 56.00 | 24.30 | QP |
| 0.830 | 22.57 | 0.22 | 46.00 | 23.43 | AV |

FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (6), (7); §15.209; §15.205;

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

According to KDB 789033 D01 General UNII Test Procedures v01, emission shall be computed as:
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}

| Measurement | U_{cispr} |
|--|--------------------|
| Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz) | 6.3 dB |
| Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz) | 5.2 dB |
| Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz) | 5.5 dB |

EUT Setup

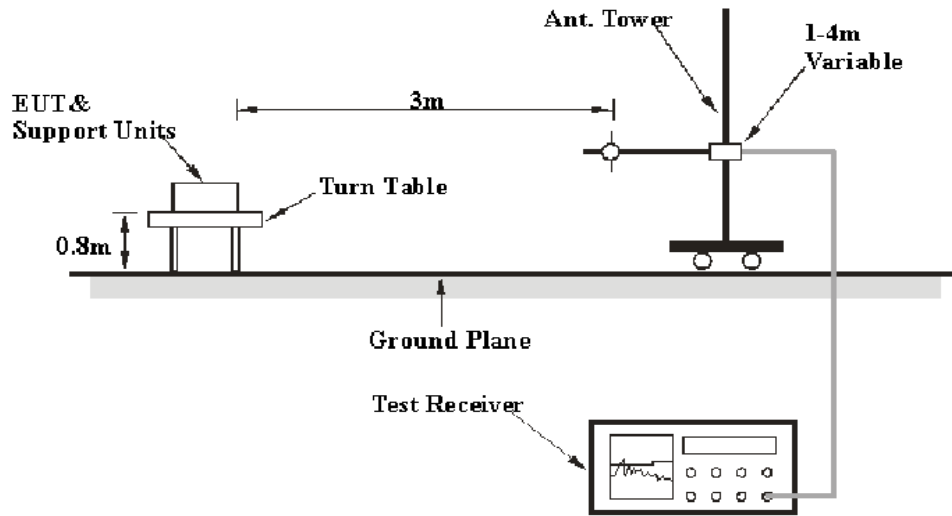

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source,

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| <i>Frequency Range</i> | <i>RBW</i> | <i>Video B/W</i> | <i>Detector</i> |
|------------------------|------------|------------------|-----------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | QP |
| 1000 MHz – 40 GHz | 1 MHz | 3 MHz | PK |
| 1000 MHz – 40 GHz | 1 MHz | 10 Hz | Ave. |

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|------------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100035 | 2012-05-14 | 2013-05-13 |
| Sunol Sciences | Hybrid Antennas | JB3 | A060611-1 | 2011-09-06 | 2013-09-05 |
| HP | Pre-amplifier | 8447E | 2434A02181 | 2012-10-08 | 2013-10-07 |
| R&S | Spectrum Analyzer | FSEM 30 | DE31388 | 2012-03-15 | 2013-03-14 |
| ETS-LINDGREN | Horn Antenna | 3115 | 000 527 35 | 2012-09-06 | 2014-09-05 |
| Mini-Circuit | Amplifier | ZVA-213-S+ | 054201245 | 2013-01-30 | 2014-01-29 |
| Rohde & Schwarz | Spectrum Analyzer | FSP38 | 100478 | 2012-5-14 | 2013-5-13 |

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, Section 15.205, 15.209 and 15.407, with the worst margin reading of:

2.09 dB at 5150 MHz in the Horizontal polarization for 802.11ac80 Mode

Test Data

Environmental Conditions

| | |
|--------------------|----------|
| Temperature: | 22.6 ° C |
| Relative Humidity: | 53 % |
| ATM Pressure: | 101.1kPa |

The testing was performed by Leon Chen from 2013-02-17.

Mode: Transmitting

802.11a Mode:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | FCC 15.407 | |
|-------------------------|-------------------|------------------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
| | Reading (dBµV) | Detector (PK/QP/AV) | Polar (H/V) | Factor (dB) | | | | Limit (dBµV/m) | Margin (dB) |
| Low Channel: 5180MHz | | | | | | | | | |
| 5180 | 52.54 | AV | H | 31.46 | 5.49 | 0.00 | 89.49 | N/A | N/A |
| 5180 | 66.33 | PK | H | 31.46 | 5.49 | 0.00 | 103.28 | N/A | N/A |
| 5180 | 46.25 | AV | V | 31.46 | 5.49 | 0.00 | 83.20 | N/A | N/A |
| 5180 | 59.75 | PK | V | 31.46 | 5.49 | 0.00 | 96.70 | N/A | N/A |
| 10360 | 32.88 | PK | H | 36.97 | 8.34 | 25.85 | 52.34 | 68.20 | 15.86 |
| 15540 | 32.48 | PK | H | 37.43 | 11.42 | 24.10 | 57.23 | 68.20 | 10.97 |
| 15540 | 18.72 | AV | H | 37.43 | 11.42 | 24.10 | 43.47 | 54.00 | 10.53 |
| 5150 | 28.15 | PK | H | 31.40 | 5.45 | 27.29 | 37.71 | 68.20 | 30.49 |
| 5150 | 16.15 | AV | H | 31.40 | 5.45 | 27.29 | 25.71 | 54.00 | 28.29 |
| 250.19 | 43.28 | QP | H | 12.17 | 1.92 | 21.49 | 35.88 | 46.00 | 10.12 |
| 379.61 | 30.22 | QP | V | 15.77 | 2.35 | 21.72 | 26.62 | 46.00 | 19.38 |
| 4971 | 30.25 | PK | V | 31.02 | 4.72 | 27.27 | 38.72 | 68.20 | 29.48 |
| 4971 | 20.28 | AV | V | 31.02 | 4.72 | 27.27 | 28.75 | 54.00 | 25.25 |
| 3815 | 30.22 | PK | V | 29.49 | 4.90 | 27.41 | 37.20 | 68.20 | 31.00 |
| 3815 | 21.48 | AV | V | 29.49 | 4.90 | 27.41 | 28.46 | 54.00 | 25.54 |
| Middle Channel: 5200MHz | | | | | | | | | |
| 5200 | 52.26 | AV | H | 31.50 | 5.51 | 0.00 | 89.27 | N/A | N/A |
| 5200 | 66.28 | PK | H | 31.50 | 5.51 | 0.00 | 103.29 | N/A | N/A |
| 5200 | 46.13 | AV | V | 31.50 | 5.51 | 0.00 | 83.14 | N/A | N/A |
| 5200 | 59.63 | PK | V | 31.50 | 5.51 | 0.00 | 96.64 | N/A | N/A |
| 15600 | 32.56 | PK | H | 37.32 | 11.46 | 24.12 | 57.22 | 68.20 | 10.98 |
| 15600 | 18.78 | AV | H | 37.32 | 11.46 | 24.12 | 43.44 | 54.00 | 10.56 |
| 250.19 | 45.01 | QP | H | 12.17 | 1.92 | 21.49 | 37.61 | 46.00 | 8.39 |
| 10400 | 32.73 | PK | H | 36.98 | 8.34 | 25.92 | 52.13 | 68.20 | 16.07 |
| 379.61 | 30.24 | QP | V | 15.77 | 2.35 | 21.72 | 26.64 | 46.00 | 19.36 |
| 4971 | 31.29 | PK | V | 31.02 | 4.72 | 27.27 | 39.76 | 68.20 | 28.44 |
| 4971 | 21.08 | AV | V | 31.02 | 4.72 | 27.27 | 29.55 | 54.00 | 24.45 |
| 3815 | 32.69 | PK | V | 29.49 | 4.90 | 27.41 | 39.67 | 68.20 | 28.53 |
| 3815 | 20.47 | AV | V | 29.49 | 4.90 | 27.41 | 27.45 | 54.00 | 26.55 |
| High Channel: 5240MHz | | | | | | | | | |
| 5240 | 52.28 | AV | H | 31.58 | 5.09 | 0.00 | 88.95 | N/A | N/A |
| 5240 | 66.22 | PK | H | 31.58 | 5.09 | 0.00 | 102.89 | N/A | N/A |
| 5240 | 46.15 | AV | V | 31.58 | 5.09 | 0.00 | 82.82 | N/A | N/A |
| 5240 | 59.66 | PK | V | 31.58 | 5.09 | 0.00 | 96.33 | N/A | N/A |
| 5350 | 28.61 | PK | H | 31.80 | 4.58 | 27.23 | 37.76 | 68.20 | 30.44 |
| 5350 | 16.34 | AV | H | 31.80 | 4.58 | 27.23 | 25.49 | 54.00 | 28.51 |
| 10480 | 32.51 | PK | H | 37.00 | 8.34 | 26.02 | 51.83 | 68.20 | 16.37 |
| 15720 | 32.56 | PK | H | 37.10 | 11.54 | 23.53 | 57.67 | 68.20 | 10.53 |
| 15720 | 18.73 | AV | H | 37.10 | 11.54 | 23.53 | 43.84 | 54.00 | 10.16 |
| 250.19 | 44.67 | QP | H | 12.17 | 1.92 | 21.49 | 37.27 | 46.00 | 8.73 |
| 379.61 | 33.89 | QP | V | 15.77 | 2.35 | 21.72 | 30.29 | 46.00 | 15.71 |
| 4971 | 32.69 | PK | V | 31.02 | 4.72 | 27.27 | 41.16 | 68.20 | 27.04 |
| 4971 | 23.04 | AV | V | 31.02 | 4.72 | 27.27 | 31.51 | 54.00 | 22.49 |
| 3815 | 33.17 | PK | V | 29.49 | 4.90 | 27.41 | 40.15 | 68.20 | 28.05 |
| 3815 | 24.41 | AV | V | 29.49 | 4.90 | 27.41 | 31.39 | 54.00 | 22.61 |

802.11n20 Mode:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | FCC 15.407 | |
|-------------------------|-------------------|------------------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
| | Reading (dBµV) | Detector (PK/QP/AV) | Polar (H/V) | Factor (dB) | | | | Limit (dBµV/m) | Margin (dB) |
| Low Channel: 5180MHz | | | | | | | | | |
| 5180 | 47.23 | AV | H | 31.46 | 5.49 | 0.00 | 84.18 | N/A | N/A |
| 5180 | 62.77 | PK | H | 31.46 | 5.49 | 0.00 | 99.72 | N/A | N/A |
| 5180 | 39.84 | AV | V | 31.46 | 5.49 | 0.00 | 76.79 | N/A | N/A |
| 5180 | 54.51 | PK | V | 31.46 | 5.49 | 0.00 | 91.46 | N/A | N/A |
| 10360 | 31.76 | PK | H | 36.97 | 8.34 | 25.85 | 51.22 | 68.20 | 16.98 |
| 15540 | 32.65 | PK | H | 37.43 | 11.42 | 24.10 | 57.40 | 68.20 | 10.80 |
| 15540 | 18.7 | AV | H | 37.43 | 11.42 | 24.10 | 43.45 | 54.00 | 10.55 |
| 5150 | 28.03 | PK | H | 31.40 | 5.45 | 27.29 | 37.59 | 68.20 | 30.61 |
| 5150 | 15.1 | AV | H | 31.40 | 5.45 | 27.29 | 24.66 | 54.00 | 29.34 |
| 250.19 | 45.01 | QP | H | 12.17 | 1.92 | 21.49 | 37.61 | 46.00 | 8.39 |
| 380.26 | 34.02 | QP | V | 15.77 | 2.35 | 21.72 | 30.42 | 46.00 | 15.58 |
| 4971 | 33.67 | PK | V | 31.02 | 4.72 | 27.27 | 42.14 | 68.20 | 26.06 |
| 4971 | 24.06 | AV | V | 31.02 | 4.72 | 27.27 | 32.53 | 54.00 | 21.47 |
| 3815 | 34.11 | PK | V | 29.49 | 4.90 | 27.41 | 41.09 | 68.20 | 27.11 |
| 3815 | 25.09 | AV | V | 29.49 | 4.90 | 27.41 | 32.07 | 54.00 | 21.93 |
| Middle Channel: 5200MHz | | | | | | | | | |
| 5200 | 47.12 | AV | H | 31.50 | 5.51 | 0.00 | 84.13 | N/A | N/A |
| 5200 | 62.59 | PK | H | 31.50 | 5.51 | 0.00 | 99.60 | N/A | N/A |
| 5200 | 39.79 | AV | V | 31.50 | 5.51 | 0.00 | 76.80 | N/A | N/A |
| 5200 | 54.41 | PK | V | 31.50 | 5.51 | 0.00 | 91.42 | N/A | N/A |
| 10400 | 31.54 | PK | H | 36.98 | 8.34 | 25.92 | 50.94 | 68.20 | 17.26 |
| 15600 | 33 | PK | H | 37.32 | 11.46 | 24.12 | 57.66 | 68.20 | 10.54 |
| 15600 | 18.71 | AV | H | 37.32 | 11.46 | 24.12 | 43.37 | 54.00 | 10.63 |
| 250.19 | 43.22 | QP | H | 12.17 | 1.92 | 21.49 | 35.82 | 46.00 | 10.18 |
| 380.26 | 35.26 | QP | V | 15.77 | 2.35 | 21.72 | 31.66 | 46.00 | 14.34 |
| 4971 | 32.41 | PK | V | 31.02 | 4.72 | 27.27 | 40.88 | 68.20 | 27.32 |
| 4971 | 22.69 | AV | V | 31.02 | 4.72 | 27.27 | 31.16 | 54.00 | 22.84 |
| 3815 | 35.26 | PK | V | 29.49 | 4.90 | 27.41 | 42.24 | 68.20 | 25.96 |
| 3815 | 21.09 | AV | V | 29.49 | 4.90 | 27.41 | 28.07 | 54.00 | 25.93 |
| High Channel: 5240MHz | | | | | | | | | |
| 5240 | 47.11 | AV | H | 31.58 | 5.09 | 0.00 | 83.78 | N/A | N/A |
| 5240 | 62.47 | PK | H | 31.58 | 5.09 | 0.00 | 99.14 | N/A | N/A |
| 5240 | 39.87 | AV | V | 31.58 | 5.09 | 0.00 | 76.54 | N/A | N/A |
| 5240 | 54.49 | PK | V | 31.58 | 5.09 | 0.00 | 91.16 | N/A | N/A |
| 5350 | 29.73 | PK | H | 31.80 | 4.58 | 27.23 | 38.88 | 68.20 | 29.32 |
| 5350 | 15.09 | AV | H | 31.80 | 4.58 | 27.23 | 24.24 | 54.00 | 29.76 |
| 10480 | 31.56 | PK | H | 37.00 | 8.34 | 26.02 | 50.88 | 68.20 | 17.32 |
| 15720 | 31.96 | PK | H | 37.10 | 11.54 | 23.53 | 57.07 | 68.20 | 11.13 |
| 15720 | 18.59 | AV | H | 37.10 | 11.54 | 23.53 | 43.70 | 54.00 | 10.30 |
| 250.19 | 42.82 | QP | H | 12.17 | 1.92 | 21.49 | 35.42 | 46.00 | 10.58 |
| 380.26 | 33.61 | QP | V | 15.77 | 2.35 | 21.72 | 30.01 | 46.00 | 15.99 |
| 4971 | 33.29 | PK | V | 31.02 | 4.72 | 27.27 | 41.76 | 68.20 | 26.44 |
| 4971 | 24.02 | AV | V | 31.02 | 4.72 | 27.27 | 32.49 | 54.00 | 21.51 |
| 3815 | 34.28 | PK | V | 29.49 | 4.90 | 27.41 | 41.26 | 68.20 | 26.94 |
| 3815 | 20.17 | AV | V | 29.49 | 4.90 | 27.41 | 27.15 | 54.00 | 26.85 |

802.11n40 Mode:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | FCC 15.407 | |
|-----------------------|-------------------|------------------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
| | Reading (dBµV) | Detector (PK/QP/AV) | Polar (H/V) | Factor (dB) | | | | Limit (dBµV/m) | Margin (dB) |
| Low Channel: 5190MHz | | | | | | | | | |
| 5190 | 47.15 | AV | H | 31.48 | 5.50 | 0.00 | 84.13 | N/A | N/A |
| 5190 | 62.13 | PK | H | 31.48 | 5.50 | 0.00 | 99.11 | N/A | N/A |
| 5190 | 39.57 | AV | V | 31.48 | 5.50 | 0.00 | 76.55 | N/A | N/A |
| 5190 | 54.12 | PK | V | 31.48 | 5.50 | 0.00 | 91.10 | N/A | N/A |
| 10380 | 31.31 | PK | H | 36.98 | 8.34 | 25.89 | 50.74 | 68.20 | 17.46 |
| 15570 | 32.76 | PK | H | 37.37 | 11.44 | 24.11 | 57.46 | 68.20 | 10.74 |
| 15570 | 18.67 | AV | H | 37.37 | 11.44 | 24.11 | 43.37 | 54.00 | 10.63 |
| 5150 | 29.31 | PK | H | 31.40 | 5.45 | 27.29 | 38.87 | 68.20 | 29.33 |
| 5150 | 15.07 | AV | H | 31.40 | 5.45 | 27.29 | 24.63 | 54.00 | 29.37 |
| 250.19 | 43.82 | QP | H | 12.17 | 1.92 | 21.49 | 36.42 | 46.00 | 9.58 |
| 378.21 | 34.02 | QP | V | 15.75 | 2.35 | 21.72 | 30.40 | 46.00 | 15.60 |
| 4974 | 36.21 | PK | V | 31.03 | 4.73 | 27.27 | 44.70 | 68.20 | 23.50 |
| 4974 | 26.47 | AV | V | 31.03 | 4.73 | 27.27 | 34.96 | 54.00 | 19.04 |
| 3818 | 35.26 | PK | V | 29.50 | 4.87 | 27.41 | 42.22 | 68.20 | 25.98 |
| 3818 | 25.43 | AV | V | 29.50 | 4.87 | 27.41 | 32.39 | 54.00 | 21.61 |
| High Channel: 5230MHz | | | | | | | | | |
| 5230 | 47.33 | AV | H | 31.56 | 5.20 | 0.00 | 84.09 | N/A | N/A |
| 5230 | 62.09 | PK | H | 31.56 | 5.20 | 0.00 | 98.85 | N/A | N/A |
| 5230 | 39.81 | AV | V | 31.56 | 5.20 | 0.00 | 76.57 | N/A | N/A |
| 5230 | 54.58 | PK | V | 31.56 | 5.20 | 0.00 | 91.34 | N/A | N/A |
| 5350 | 29.45 | PK | H | 31.80 | 4.58 | 27.23 | 38.60 | 68.20 | 29.60 |
| 5350 | 15.06 | AV | H | 31.80 | 4.58 | 27.23 | 24.21 | 54.00 | 29.79 |
| 10460 | 31.56 | PK | H | 36.99 | 8.34 | 26.00 | 50.89 | 68.20 | 17.31 |
| 15690 | 32.36 | PK | H | 37.16 | 11.52 | 23.67 | 57.37 | 68.20 | 10.83 |
| 15690 | 18.95 | AV | H | 37.16 | 11.52 | 23.67 | 43.96 | 54.00 | 10.04 |
| 250.19 | 43.17 | QP | H | 12.17 | 1.92 | 21.49 | 35.77 | 46.00 | 10.23 |
| 378.21 | 35.27 | QP | V | 15.75 | 2.35 | 21.72 | 31.65 | 46.00 | 14.35 |
| 4974 | 37.11 | PK | V | 31.03 | 4.73 | 27.27 | 45.60 | 68.20 | 22.60 |
| 4974 | 26.95 | AV | V | 31.03 | 4.73 | 27.27 | 35.44 | 54.00 | 18.56 |
| 3818 | 36.25 | PK | V | 29.50 | 4.87 | 27.41 | 43.21 | 68.20 | 24.99 |
| 3818 | 26.15 | AV | V | 29.50 | 4.87 | 27.41 | 33.11 | 54.00 | 20.89 |

802.11ac20 Mode:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | FCC 15.407 | |
|-------------------------|-------------------|------------------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
| | Reading (dBµV) | Detector (PK/QP/AV) | Polar (H/V) | Factor (dB) | | | | Limit (dBµV/m) | Margin (dB) |
| Low Channel: 5180MHz | | | | | | | | | |
| 5180 | 47.65 | AV | H | 31.46 | 5.49 | 0.00 | 84.60 | N/A | N/A |
| 5180 | 61.88 | PK | H | 31.46 | 5.49 | 0.00 | 98.83 | N/A | N/A |
| 5180 | 39.88 | AV | V | 31.46 | 5.49 | 0.00 | 76.83 | N/A | N/A |
| 5180 | 53.74 | PK | V | 31.46 | 5.49 | 0.00 | 90.69 | N/A | N/A |
| 10360 | 31.86 | PK | H | 36.97 | 8.34 | 25.85 | 51.32 | 68.20 | 16.88 |
| 15540 | 32.56 | PK | H | 37.43 | 11.42 | 24.10 | 57.31 | 68.20 | 10.89 |
| 15540 | 19.22 | AV | H | 37.43 | 11.42 | 24.10 | 43.97 | 54.00 | 10.03 |
| 5150 | 28.49 | PK | H | 31.40 | 5.45 | 27.29 | 38.05 | 68.20 | 30.15 |
| 5150 | 15.23 | AV | H | 31.40 | 5.45 | 27.29 | 24.79 | 54.00 | 29.21 |
| 250.19 | 44.53 | QP | H | 12.17 | 1.92 | 21.49 | 37.13 | 46.00 | 8.87 |
| 378.21 | 35.22 | QP | V | 15.75 | 2.35 | 21.72 | 31.60 | 46.00 | 14.40 |
| 4974 | 36.24 | PK | V | 31.03 | 4.73 | 27.27 | 44.73 | 68.20 | 23.47 |
| 4974 | 25.47 | AV | V | 31.03 | 4.73 | 27.27 | 33.96 | 54.00 | 20.04 |
| 3818 | 35.29 | PK | V | 29.50 | 4.87 | 27.41 | 42.25 | 68.20 | 25.95 |
| 3818 | 25.68 | AV | V | 29.50 | 4.87 | 27.41 | 32.64 | 54.00 | 21.36 |
| Middle Channel: 5200MHz | | | | | | | | | |
| 5200 | 46.85 | AV | H | 31.50 | 5.51 | 0.00 | 83.86 | N/A | N/A |
| 5200 | 62.68 | PK | H | 31.50 | 5.51 | 0.00 | 99.69 | N/A | N/A |
| 5200 | 38.99 | AV | V | 31.50 | 5.51 | 0.00 | 76.00 | N/A | N/A |
| 5200 | 54.66 | PK | V | 31.50 | 5.51 | 0.00 | 91.67 | N/A | N/A |
| 10400 | 30.66 | PK | H | 36.98 | 8.34 | 25.92 | 50.06 | 68.20 | 18.14 |
| 15600 | 32.97 | PK | H | 37.32 | 11.46 | 24.12 | 57.63 | 68.20 | 10.57 |
| 15600 | 17.94 | AV | H | 37.32 | 11.46 | 24.12 | 42.60 | 54.00 | 11.40 |
| 250.19 | 43.53 | QP | H | 12.17 | 1.92 | 21.49 | 36.13 | 46.00 | 9.87 |
| 378.21 | 34.01 | QP | V | 15.75 | 2.35 | 21.72 | 30.39 | 46.00 | 15.61 |
| 4974 | 32.67 | PK | V | 31.03 | 4.73 | 27.27 | 41.16 | 68.20 | 27.04 |
| 4974 | 24.18 | AV | V | 31.03 | 4.73 | 27.27 | 32.67 | 54.00 | 21.33 |
| 3818 | 34.26 | PK | V | 29.50 | 4.87 | 27.41 | 41.22 | 68.20 | 26.98 |
| 3818 | 22.69 | AV | V | 29.50 | 4.87 | 27.41 | 29.65 | 54.00 | 24.35 |
| High Channel: 5240MHz | | | | | | | | | |
| 5240 | 47.10 | AV | H | 31.58 | 5.09 | 0.00 | 83.77 | N/A | N/A |
| 5240 | 62.92 | PK | H | 31.58 | 5.09 | 0.00 | 99.59 | N/A | N/A |
| 5240 | 39.60 | AV | V | 31.58 | 5.09 | 0.00 | 76.27 | N/A | N/A |
| 5240 | 54.45 | PK | V | 31.58 | 5.09 | 0.00 | 91.12 | N/A | N/A |
| 5350 | 29.90 | PK | H | 31.80 | 4.58 | 27.23 | 39.05 | 68.20 | 29.15 |
| 5350 | 15.75 | AV | H | 31.80 | 4.58 | 27.23 | 24.90 | 54.00 | 29.10 |
| 10480 | 32.13 | PK | H | 37.00 | 8.34 | 26.02 | 51.45 | 68.20 | 16.75 |
| 15720 | 32.22 | PK | H | 37.10 | 11.54 | 23.53 | 57.33 | 68.20 | 10.87 |
| 15720 | 17.94 | AV | H | 37.10 | 11.54 | 23.53 | 43.05 | 54.00 | 10.95 |
| 250.19 | 42.13 | QP | H | 12.17 | 1.92 | 21.49 | 34.73 | 46.00 | 11.27 |
| 378.21 | 32.69 | QP | V | 15.75 | 2.35 | 21.72 | 29.07 | 46.00 | 16.93 |
| 4974 | 31.22 | PK | V | 31.03 | 4.73 | 27.27 | 39.71 | 68.20 | 28.49 |
| 4974 | 21.29 | AV | V | 31.03 | 4.73 | 27.27 | 29.78 | 54.00 | 24.22 |
| 3818 | 35.01 | PK | V | 29.50 | 4.87 | 27.41 | 41.97 | 68.20 | 26.23 |
| 3818 | 21.97 | AV | V | 29.50 | 4.87 | 27.41 | 28.93 | 54.00 | 25.07 |

802.11ac40 Mode:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | FCC 15.407 | |
|-----------------------|-------------------|------------------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
| | Reading (dBµV) | Detector (PK/QP/AV) | Polar (H/V) | Factor (dB) | | | | Limit (dBµV/m) | Margin (dB) |
| Low Channel: 5190MHz | | | | | | | | | |
| 5190 | 47.15 | AV | H | 31.48 | 5.50 | 0.00 | 84.13 | N/A | N/A |
| 5190 | 62.13 | PK | H | 31.48 | 5.50 | 0.00 | 99.11 | N/A | N/A |
| 5190 | 39.57 | AV | V | 31.48 | 5.50 | 0.00 | 76.55 | N/A | N/A |
| 5190 | 54.12 | PK | V | 31.48 | 5.50 | 0.00 | 91.10 | N/A | N/A |
| 10380 | 31.31 | PK | H | 36.98 | 8.34 | 25.89 | 50.74 | 68.20 | 17.46 |
| 15570 | 32.76 | PK | H | 37.37 | 11.44 | 24.11 | 57.46 | 68.20 | 10.74 |
| 15570 | 18.67 | AV | H | 37.37 | 11.44 | 24.11 | 43.37 | 54.00 | 10.63 |
| 5150 | 29.31 | PK | H | 31.40 | 5.45 | 27.29 | 38.87 | 68.20 | 29.33 |
| 5150 | 15.07 | AV | H | 31.40 | 5.45 | 27.29 | 24.63 | 54.00 | 29.37 |
| 250.19 | 43.82 | QP | H | 12.17 | 1.92 | 21.49 | 36.42 | 46.00 | 9.58 |
| 378.21 | 35.25 | QP | V | 15.75 | 2.35 | 21.72 | 31.63 | 46.00 | 14.37 |
| 4974 | 32.89 | PK | V | 31.03 | 4.73 | 27.27 | 41.38 | 68.20 | 26.82 |
| 4974 | 24.02 | AV | V | 31.03 | 4.73 | 27.27 | 32.51 | 54.00 | 21.49 |
| 3818 | 36.26 | PK | V | 29.50 | 4.87 | 27.41 | 43.22 | 68.20 | 24.98 |
| 3818 | 23.94 | AV | V | 29.50 | 4.87 | 27.41 | 30.90 | 54.00 | 23.10 |
| High Channel: 5230MHz | | | | | | | | | |
| 5230 | 47.33 | AV | H | 31.56 | 5.20 | 0.00 | 84.09 | N/A | N/A |
| 5230 | 62.09 | PK | H | 31.56 | 5.20 | 0.00 | 98.85 | N/A | N/A |
| 5230 | 39.81 | AV | V | 31.56 | 5.20 | 0.00 | 76.57 | N/A | N/A |
| 5230 | 54.58 | PK | V | 31.56 | 5.20 | 0.00 | 91.34 | N/A | N/A |
| 5350 | 29.45 | PK | H | 31.80 | 4.58 | 27.23 | 38.60 | 68.20 | 29.60 |
| 5350 | 15.06 | AV | H | 31.80 | 4.58 | 27.23 | 24.21 | 54.00 | 29.79 |
| 10460 | 31.56 | PK | H | 36.99 | 8.34 | 26.00 | 50.89 | 68.20 | 17.31 |
| 15690 | 32.36 | PK | H | 37.16 | 11.52 | 23.67 | 57.37 | 68.20 | 10.83 |
| 15690 | 18.95 | AV | H | 37.16 | 11.52 | 23.67 | 43.96 | 54.00 | 10.04 |
| 250.19 | 43.17 | QP | H | 12.17 | 1.92 | 21.49 | 35.77 | 46.00 | 10.23 |
| 378.21 | 36.22 | QP | V | 15.75 | 2.35 | 21.72 | 32.60 | 46.00 | 13.40 |
| 4974 | 33.58 | PK | V | 31.03 | 4.73 | 27.27 | 42.07 | 68.20 | 26.13 |
| 4974 | 25.67 | AV | V | 31.03 | 4.73 | 27.27 | 34.16 | 54.00 | 19.84 |
| 3818 | 34.09 | PK | V | 29.50 | 4.87 | 27.41 | 41.05 | 68.20 | 27.15 |
| 3818 | 22.47 | AV | V | 29.50 | 4.87 | 27.41 | 29.43 | 54.00 | 24.57 |

802.11ac80 Mode:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | FCC 15.407 | |
|--------------------|-------------------|------------------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
| | Reading (dBµV) | Detector (PK/QP/AV) | Polar (H/V) | Factor (dB) | | | | Limit (dBµV/m) | Margin (dB) |
| Channel:5210MHz | | | | | | | | | |
| 5210 | 43.12 | AV | H | 31.52 | 5.41 | 0.00 | 80.05 | N/A | N/A |
| 5210 | 61.54 | PK | H | 31.52 | 5.41 | 0.00 | 98.47 | N/A | N/A |
| 5210 | 39.59 | AV | V | 31.52 | 5.41 | 0.00 | 76.52 | N/A | N/A |
| 5210 | 54.21 | PK | V | 31.52 | 5.41 | 0.00 | 91.14 | N/A | N/A |
| 5150 | 28.42 | PK | H | 31.40 | 5.45 | 0.00 | 65.27 | 68.20 | 2.93 |
| 5150 | 15.06 | AV | H | 31.40 | 5.45 | 0.00 | 51.91 | 54.00 | 2.09 |
| 10420 | 31.27 | PK | H | 36.98 | 8.34 | 25.95 | 50.64 | 68.20 | 17.56 |
| 15630 | 32.61 | PK | H | 37.27 | 11.48 | 23.97 | 57.39 | 68.20 | 10.81 |
| 15630 | 18.65 | AV | H | 37.27 | 11.48 | 23.97 | 43.43 | 54.00 | 10.57 |
| 5350 | 29.11 | PK | H | 31.80 | 4.58 | 27.23 | 38.26 | 68.20 | 29.94 |
| 5350 | 15.07 | AV | H | 31.80 | 4.58 | 27.23 | 24.22 | 54.00 | 29.78 |
| 250.19 | 44.68 | QP | H | 12.17 | 1.92 | 21.49 | 37.28 | 46.00 | 8.72 |
| 378.21 | 33.71 | QP | V | 15.75 | 2.35 | 21.72 | 30.09 | 46.00 | 15.91 |
| 4974 | 31.26 | PK | V | 31.03 | 4.73 | 27.27 | 39.75 | 68.20 | 28.45 |
| 4974 | 24.05 | AV | V | 31.03 | 4.73 | 27.27 | 32.54 | 54.00 | 21.46 |
| 3818 | 33.92 | PK | V | 29.50 | 4.87 | 27.41 | 40.88 | 68.20 | 27.32 |
| 3818 | 21.09 | AV | V | 29.50 | 4.87 | 27.41 | 28.05 | 54.00 | 25.95 |

*Within measurement uncertainty!

Conducted Spurious Emission at Antenna Port

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The Resolution bandwidth is set to 1MHz, The Video bandwidth is set to ≥ 1 MHz, report the peak value out of the operating band. Offset the antenna gain and cable loss.
3. Repeat above procedures until all frequencies measured were complete.



Test data

Mode: Transmitting


Please refer to the following table and plots.

| Frequency (MHz) | Worst Reading Level (dBm) | Limit (dBm) | Result |
|-----------------------------------|---------------------------|-------------|--------|
| 802.11a | | | |
| 5180 | -39.99 | -27 | PASS |
| 5200 | -39.58 | -27 | PASS |
| 5240 | -40.11 | -27 | PASS |
| 802.11n20 Chain 0 | | | |
| 5180 | -40.36 | -27 | PASS |
| 5200 | -40.20 | -27 | PASS |
| 5240 | -40.43 | -27 | PASS |
| 802.11n20 Chain 1 | | | |
| 5180 | -39.57 | -27 | PASS |
| 5200 | -40.09 | -27 | PASS |
| 5240 | -40.19 | -27 | PASS |
| 802.11n20 Total:Chain 0+ Chain 1 | | | |
| 5180 | -36.94 | -27 | PASS |
| 5200 | -37.13 | -27 | PASS |
| 5240 | -37.30 | -27 | PASS |
| 802.11n40 Chain 0 | | | |
| 5190 | -40.17 | -27 | PASS |
| 5230 | -39.94 | -27 | PASS |
| 802.11n40 Chain 1 | | | |
| 5190 | -39.68 | -27 | PASS |
| 5230 | -40.39 | -27 | PASS |
| 802.11n40 Total:Chain 0+ Chain 1 | | | |
| 5190 | -36.91 | -27 | PASS |
| 5230 | -37.15 | -27 | PASS |
| 802.11ac20 Chain 0 | | | |
| 5180 | -39.35 | -27 | PASS |
| 5200 | -39.81 | -27 | PASS |
| 5240 | -40.78 | -27 | PASS |
| 802.11ac20 Chain 1 | | | |
| 5180 | -40.04 | -27 | PASS |
| 5200 | -40.03 | -27 | PASS |
| 5240 | -40.04 | -27 | PASS |
| 802.11ac20 Total:Chain 0+ Chain 1 | | | |
| 5180 | -36.67 | -27 | PASS |
| 5200 | -36.91 | -27 | PASS |
| 5240 | -37.38 | -27 | PASS |

| 802.11ac40 Chain 0 | | | |
|-----------------------------------|--------|-----|------|
| 5190 | -40.62 | -27 | PASS |
| 5230 | -40.08 | -27 | PASS |
| 802.11ac40 Chain 1 | | | |
| 5190 | -39.63 | -27 | PASS |
| 5230 | -40.52 | -27 | PASS |
| 802.11ac40 Total:Chain 0+ Chain 1 | | | |
| 5190 | -37.09 | -27 | PASS |
| 5230 | -37.28 | -27 | PASS |
| 802.11ac80 Chain 0 | | | |
| 5210 | -39.65 | -27 | PASS |
| 802.11ac80 Chain 1 | | | |
| 5210 | -40.44 | -27 | PASS |
| 802.11ac80 Total:Chain 0+ Chain 1 | | | |
| 5210 | -37.02 | -27 | PASS |


Please refer to the following plots.

802.11a Low Channel 30M-1G

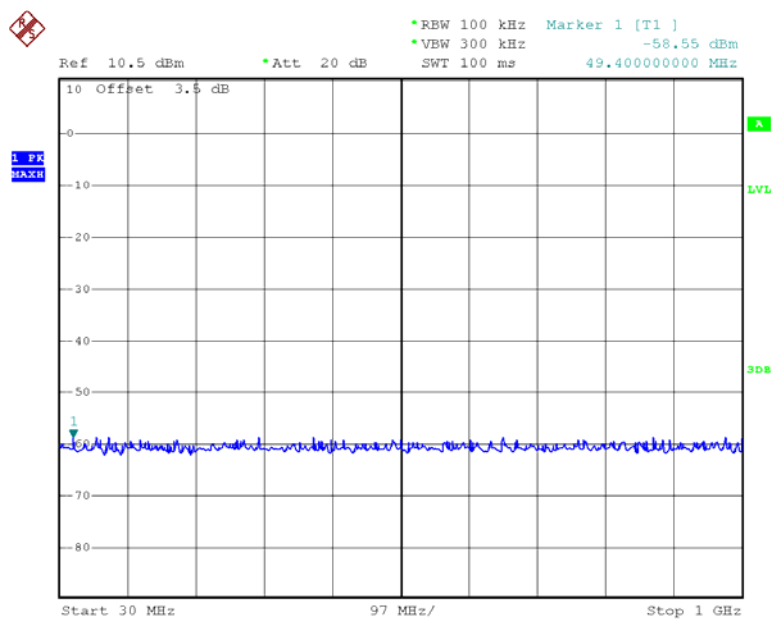


Date: 17.FEB.2013 11:27:03

802.11a Low Channel 1G-26.5G

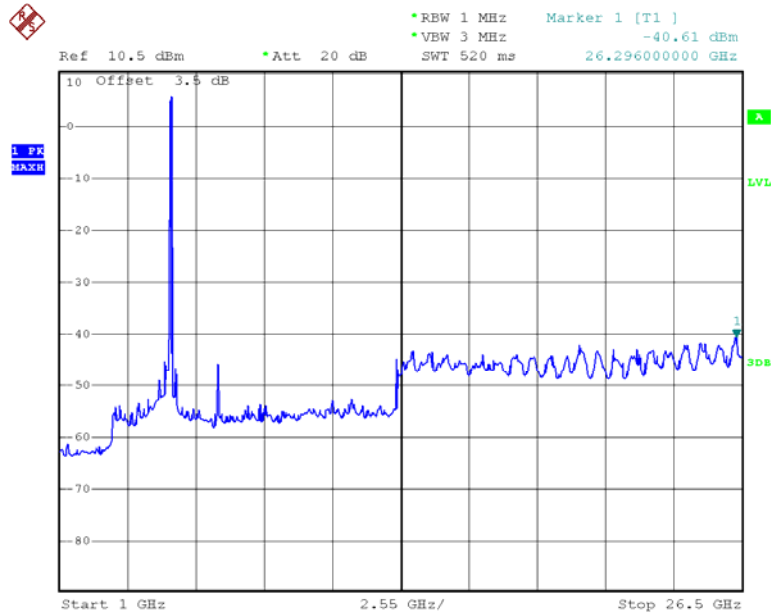


Date: 17.FEB.2013 11:27:22

802.11a Low Channel 26.5-40G

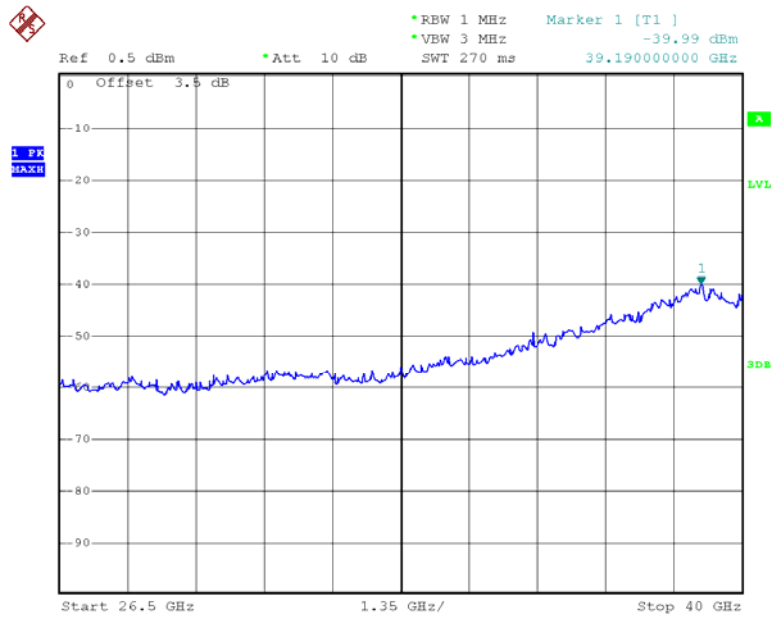


Date: 17.FEB.2013 11:46:23

802.11a Middle Channel 30M-1G

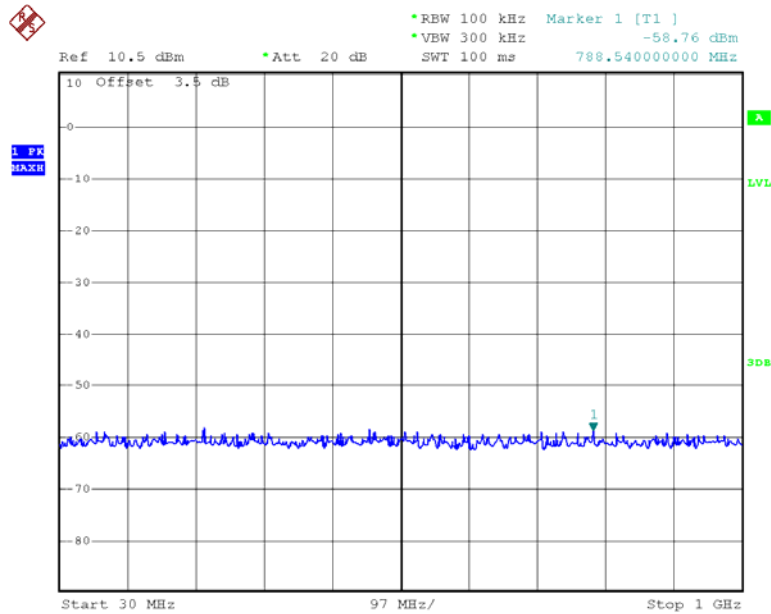


Date: 17.FEB.2013 11:45:09

802.11a Middle Channel 1G -26.5G

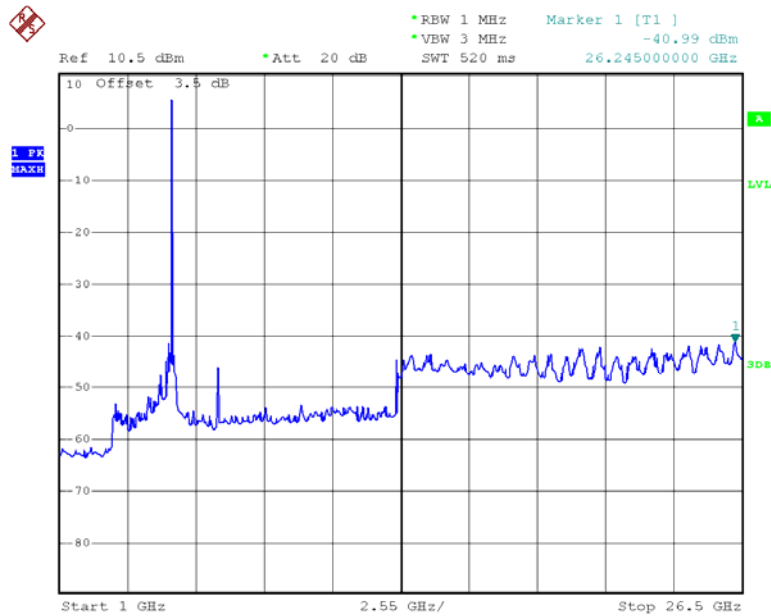


Date: 17.FEB.2013 11:45:27

802.11a Middle Channel 26.5-40G

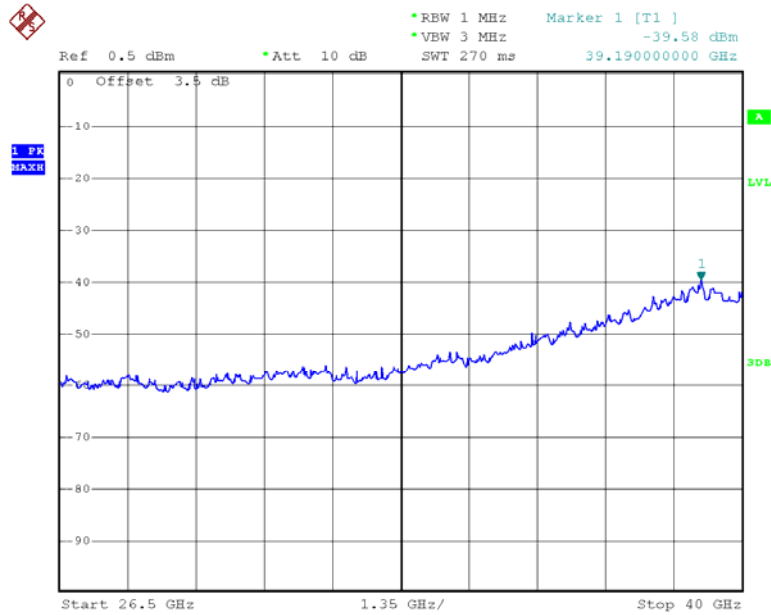


Date: 17.FEB.2013 11:46:12

802.11a High Channel 30M-1G

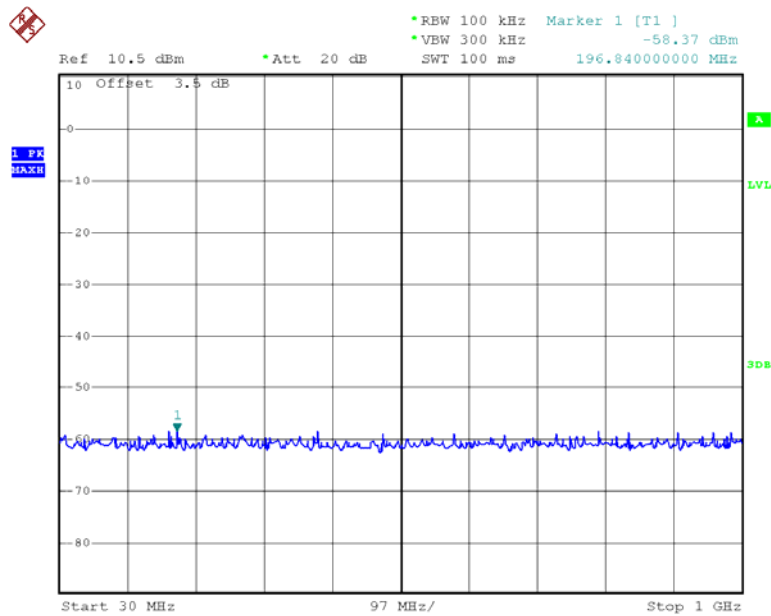


Date: 17.FEB.2013 11:53:02

802.11a High Channel 1G-26.5G

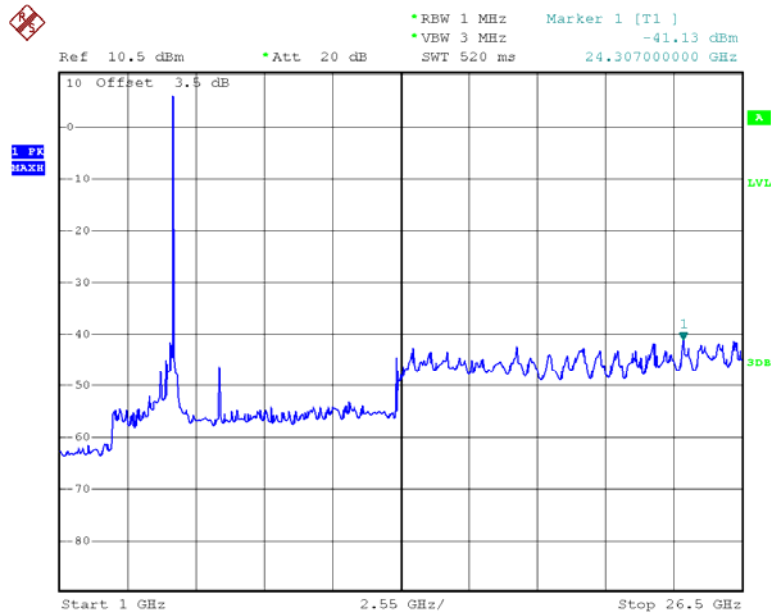

Date: 17.FEB.2013 11:53:18


802.11a High Channel 26.5-40G

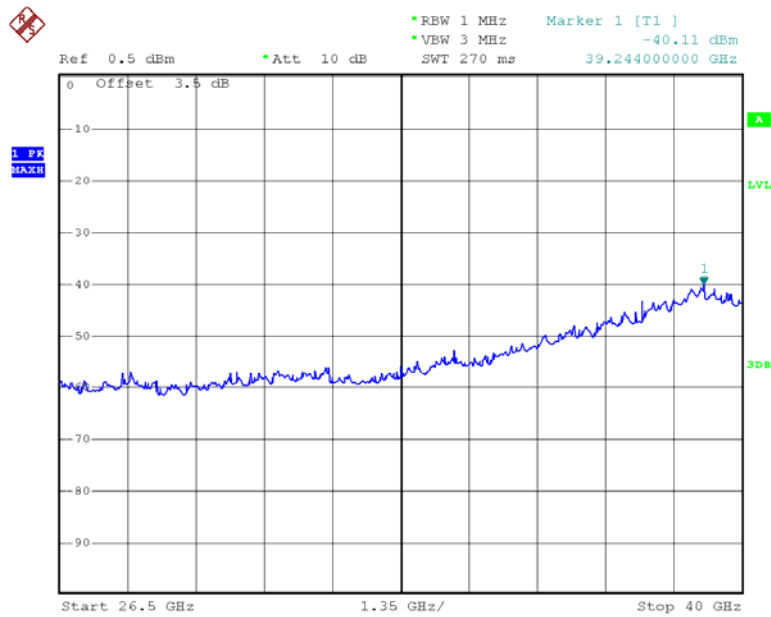

Date: 17.FEB.2013 11:53:38


Chain 0:

802.11n20 Low Channel 30M-1G

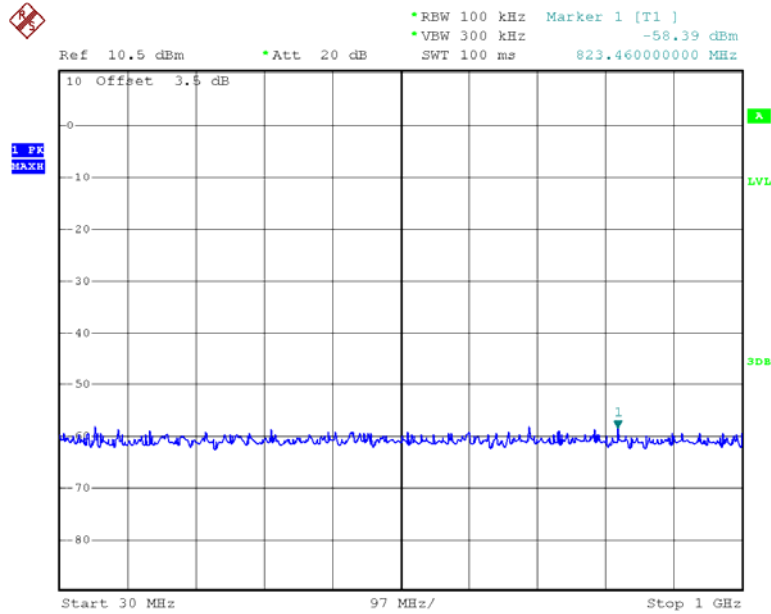


Date: 17.FEB.2013 13:09:19

802.11n20 Low Channel 1G-26.5G

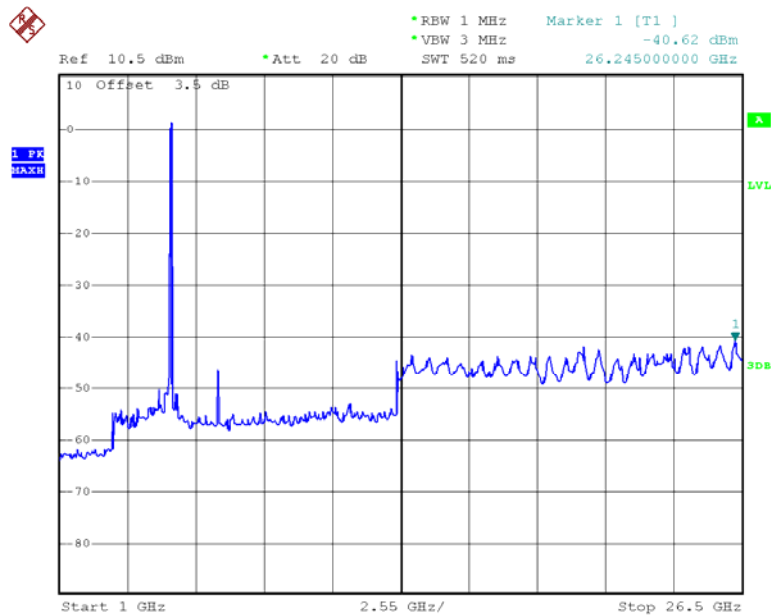


Date: 17.FEB.2013 13:09:36

802.11n20 Low Channel 26.5-40G

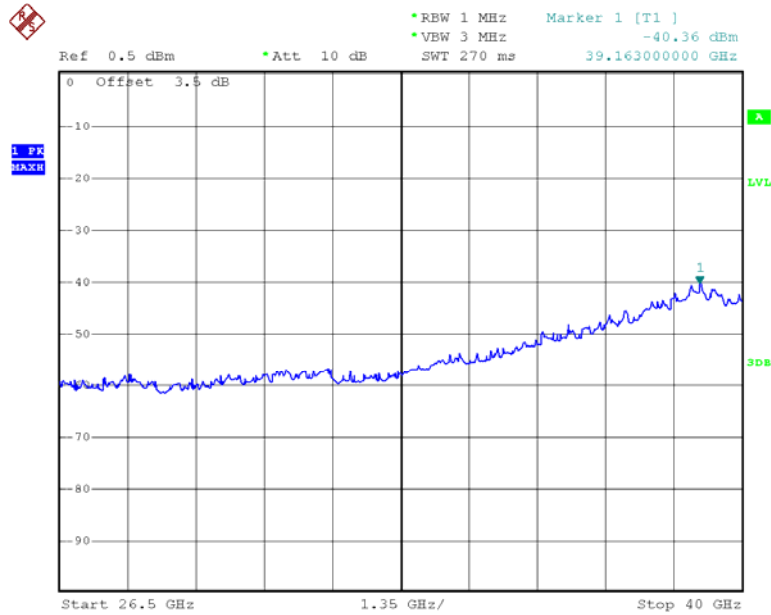


Date: 17.FEB.2013 13:10:05

802.11n20 Middle Channel 30M-1G

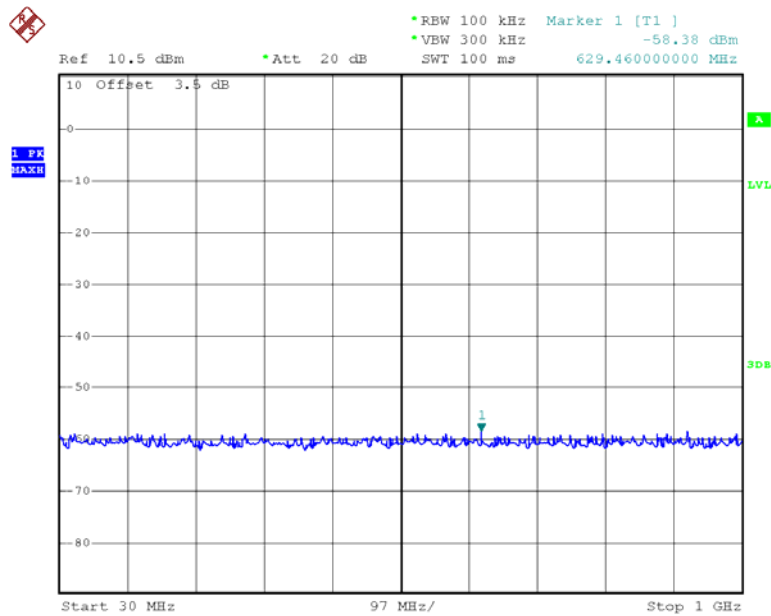


Date: 17.FEB.2013 13:23:01

802.11n20 Middle Channel 1G -26.5G

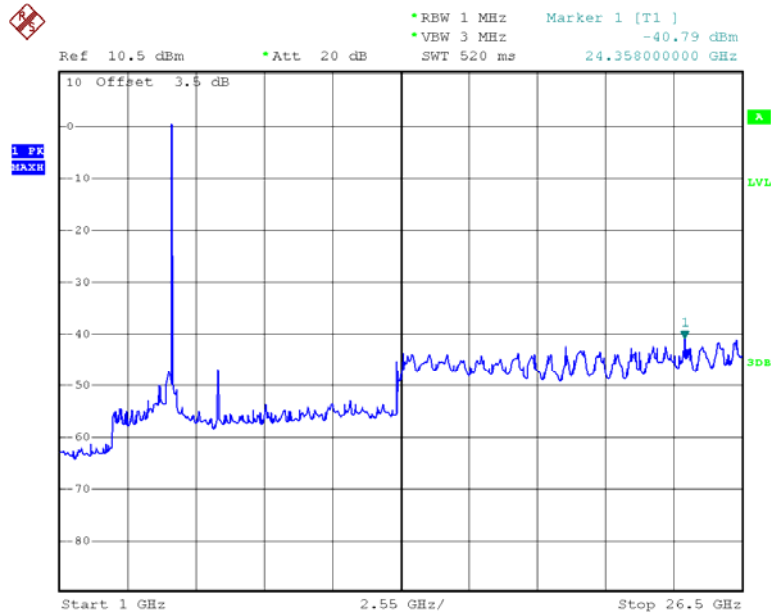


Date: 17.FEB.2013 13:23:18

802.11n20 Middle Channel 26.5-40G

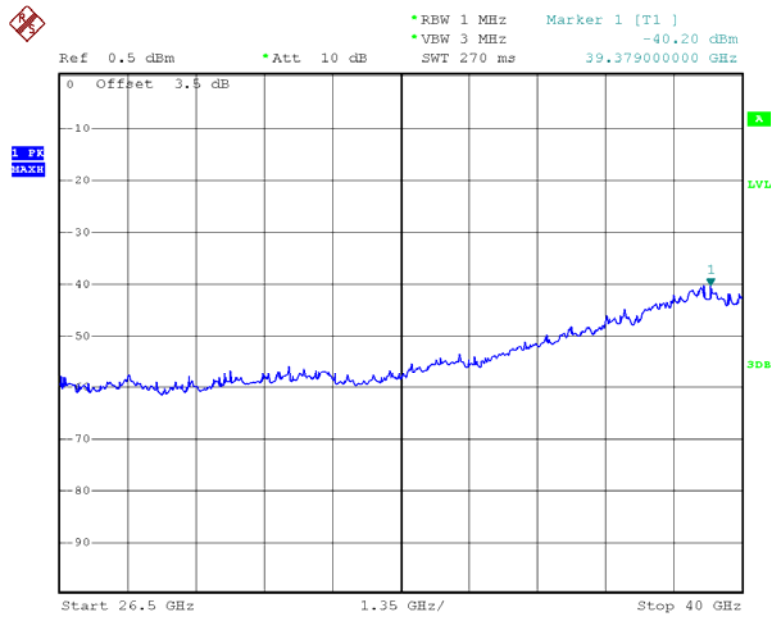


Date: 17.FEB.2013 13:24:11

802.11n20 High Channel 30M-1G

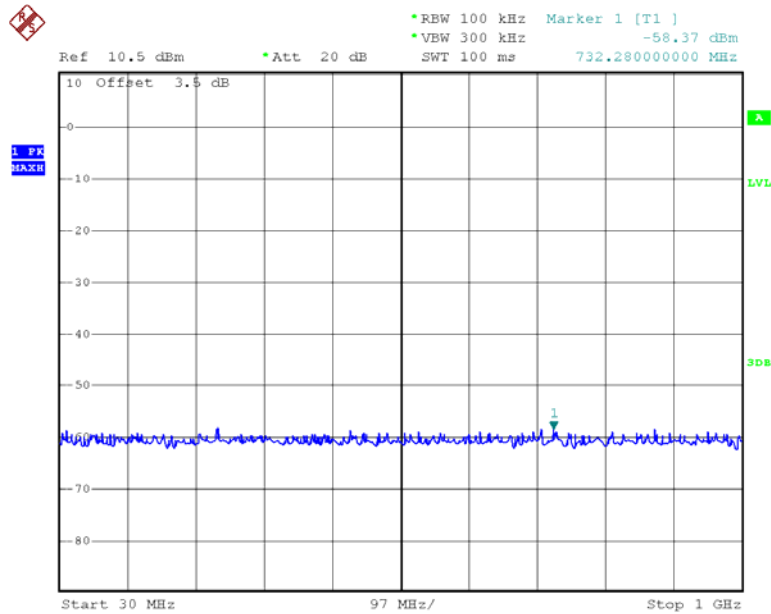


Date: 17.FEB.2013 13:38:37

802.11n20 High Channel 1G-26.5G

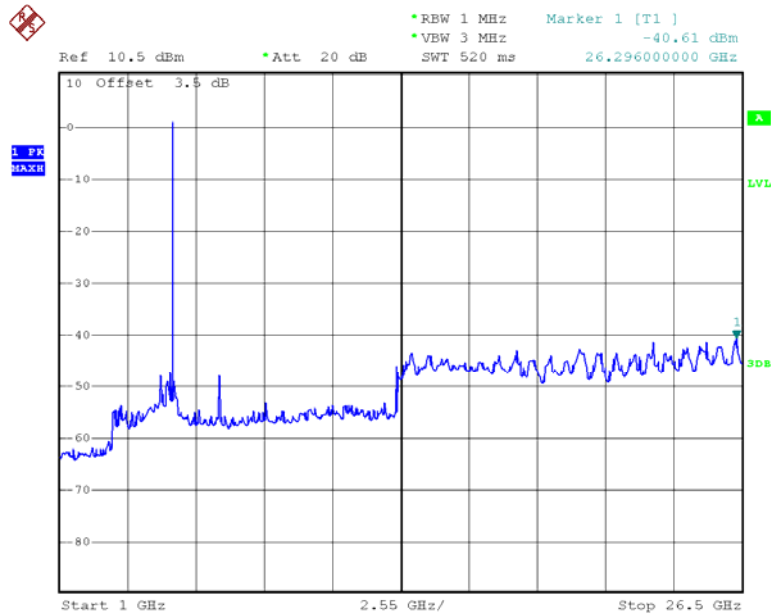


Date: 17.FEB.2013 13:38:53

802.11n20 High Channel 26.5-40G

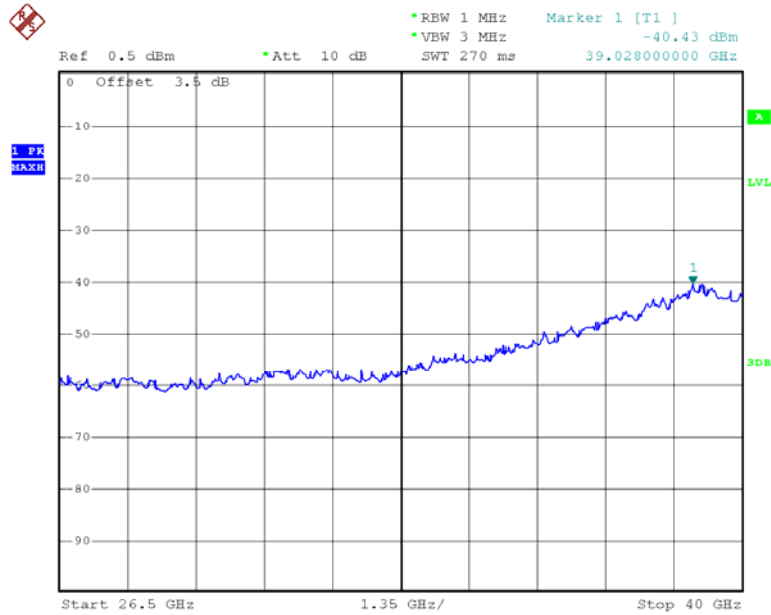


Date: 17.FEB.2013 13:39:18

802.11n40 Low Channel 30M-1G

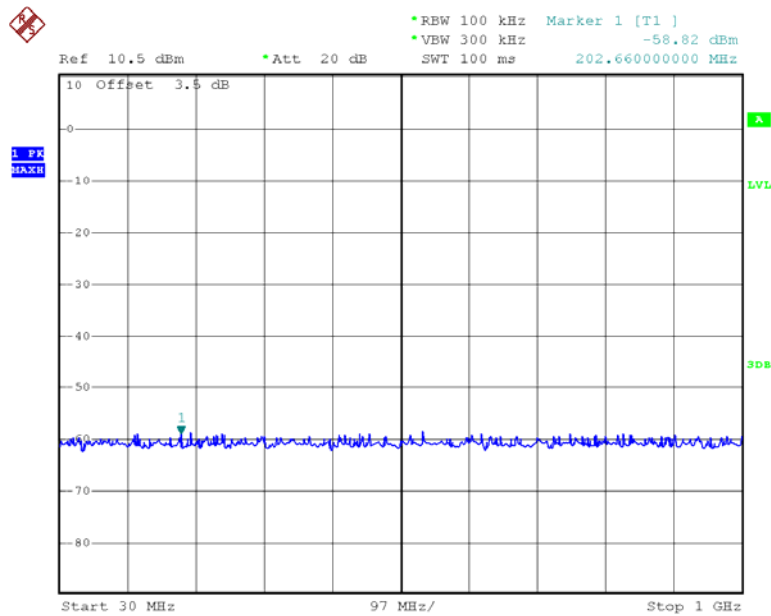


Date: 17.FEB.2013 14:05:13

802.11n40 Low Channel 1G-26.5G

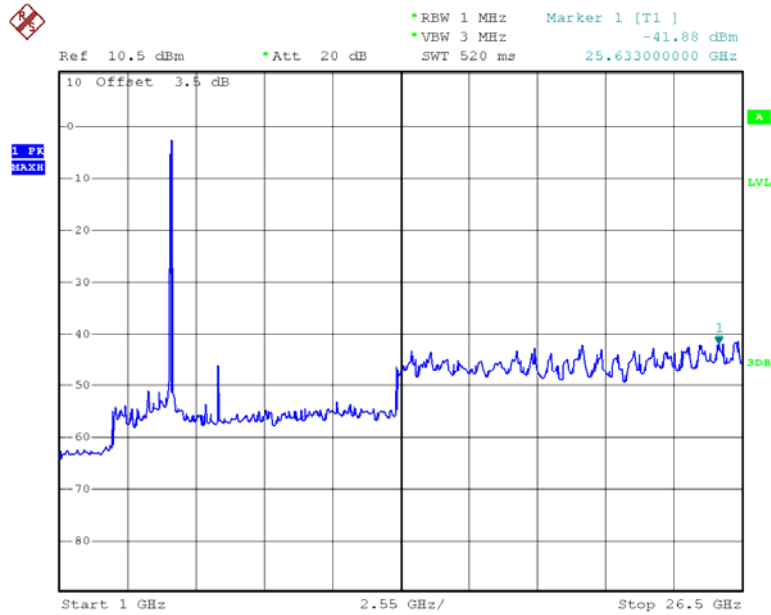


Date: 17.FEB.2013 14:05:28

802.11n40 Low Channel 26.5-40G

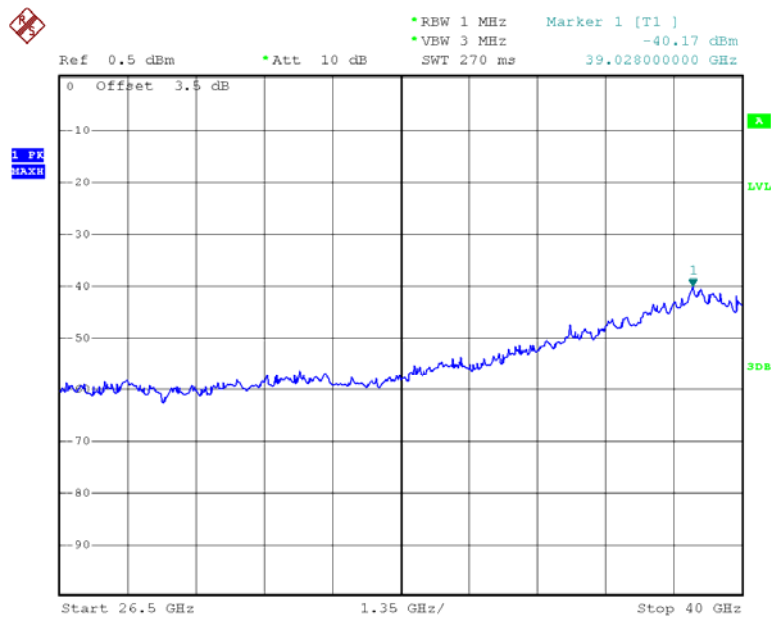


Date: 17.FEB.2013 14:05:45

802.11n40 High Channel 30M-1G

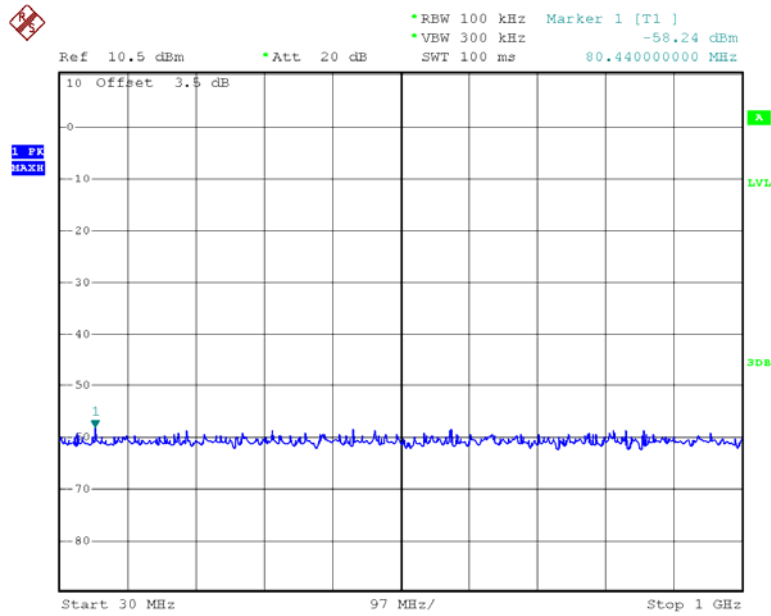


Date: 17.FEB.2013 14:19:20

802.11n40 High Channel 1G-26.5G

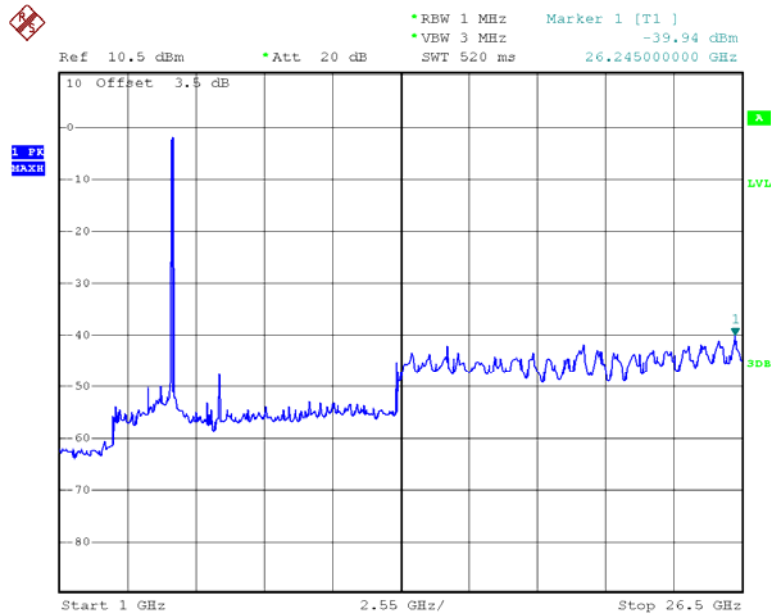


Date: 17.FEB.2013 14:19:44

802.11n40 High Channel 26.5-40G

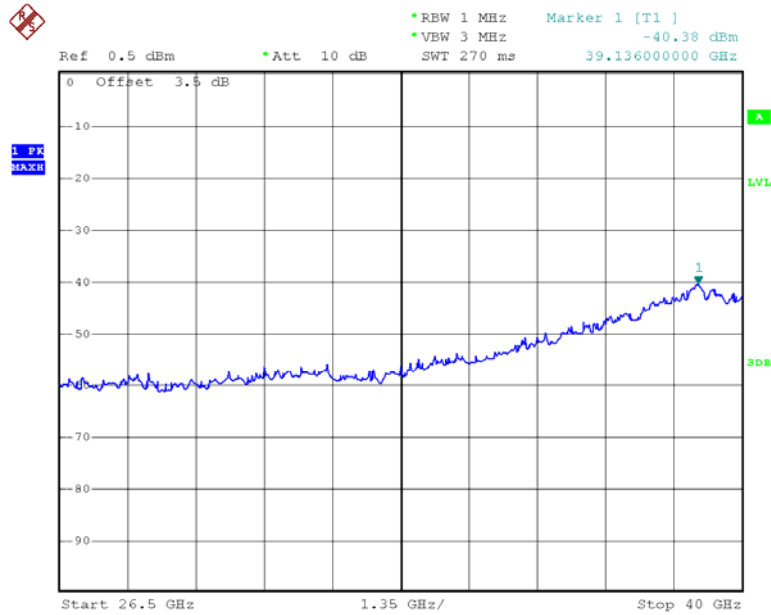


Date: 17.FEB.2013 14:20:01

802.11ac20 Low Channel 30M-1G

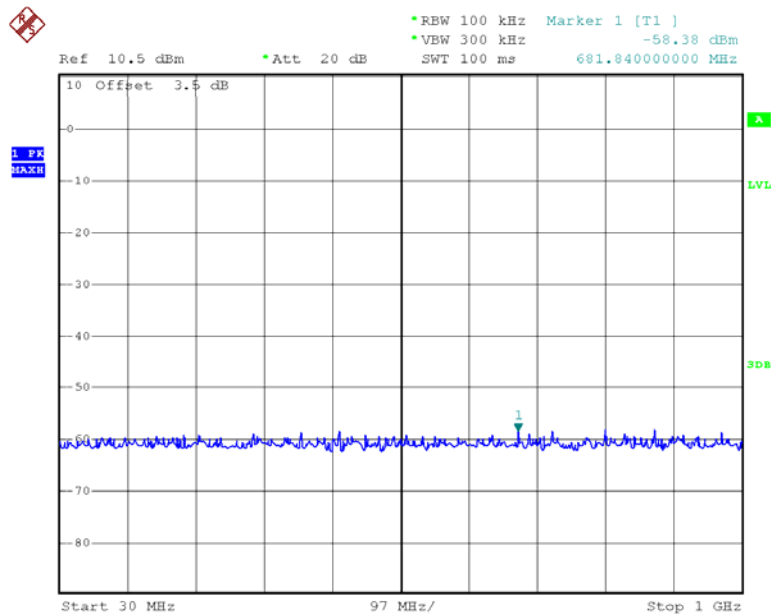


Date: 17.FEB.2013 15:01:18

802.11c20 Low Channel 1G-26.5G

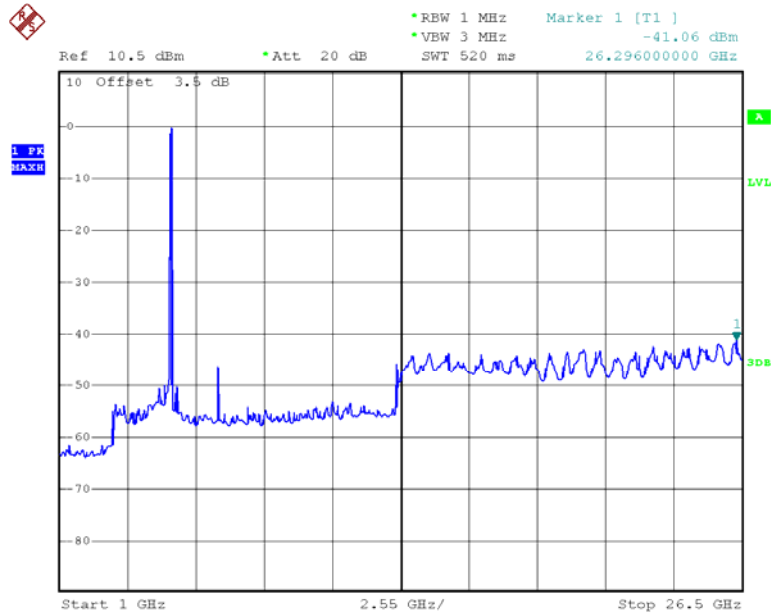


Date: 17.FEB.2013 15:01:36

802.11ac20 Low Channel 26.5-40G

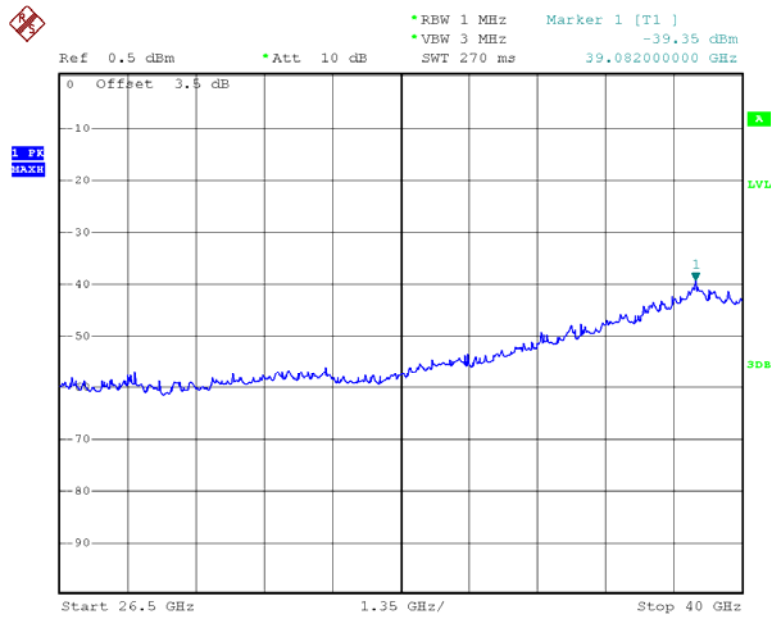


Date: 17.FEB.2013 15:02:00

802.11ac20 Middle Channel 30M-1G

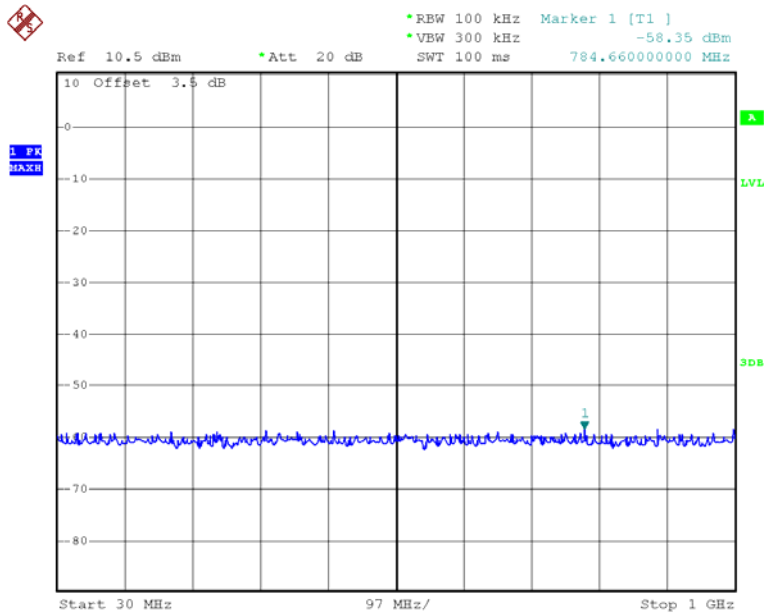


Date: 17.FEB.2013 15:15:05

802.11ac20 Middle Channel 1G -26.5G

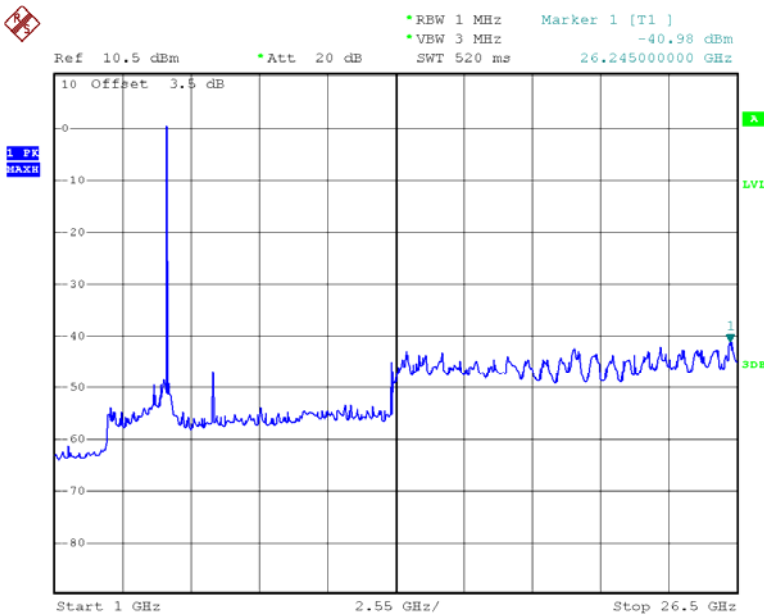


Date: 17.FEB.2013 15:15:22

802.11ac20 Middle Channel 26.5-40G

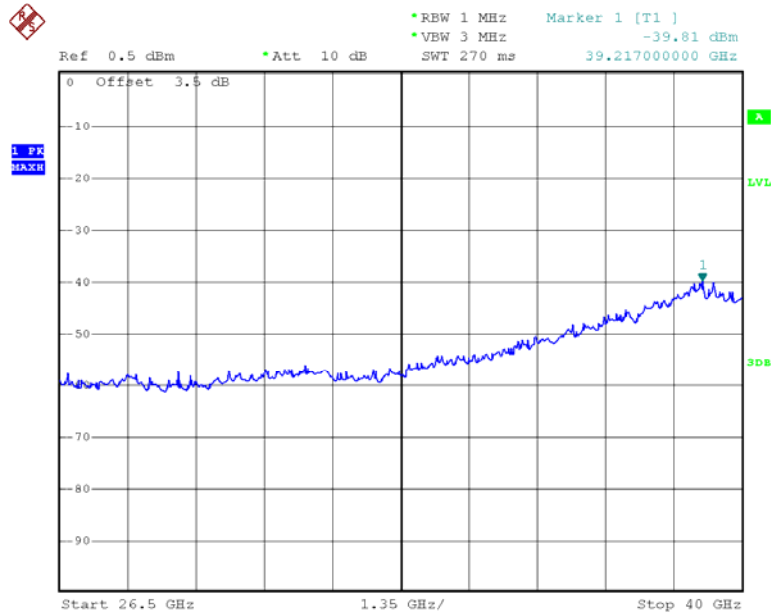


Date: 17.FEB.2013 15:15:40

802.11ac20 High Channel 30M-1G

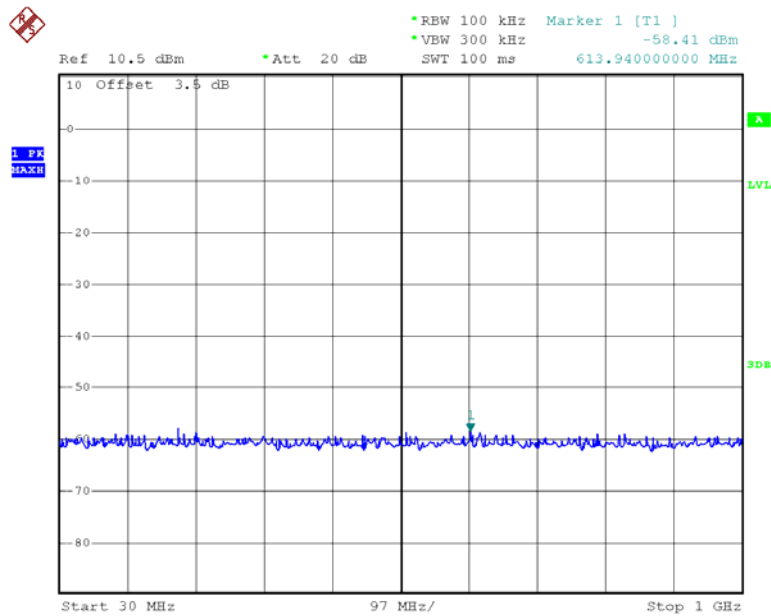


Date: 17.FEB.2013 15:29:27

802.11ac20 High Channel 1G-26.5G

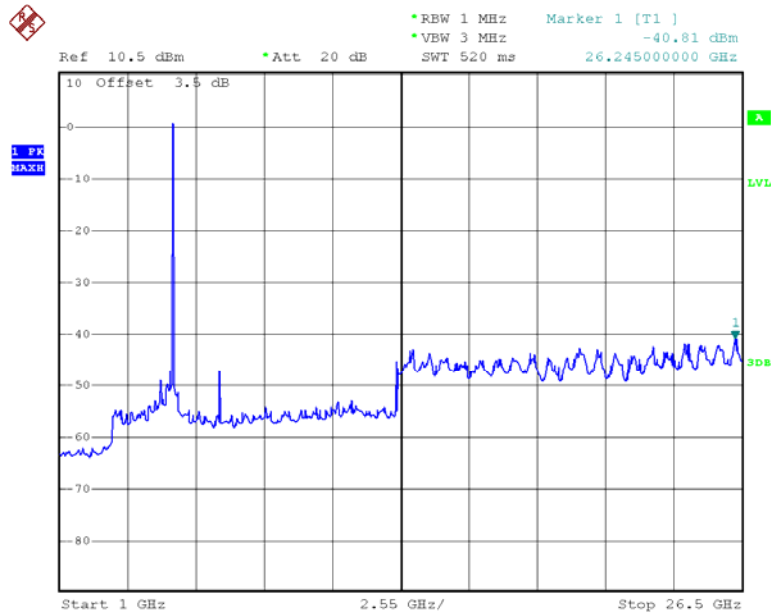


Date: 17.FEB.2013 15:29:13

802.11ac20 High Channel 26.5-40G

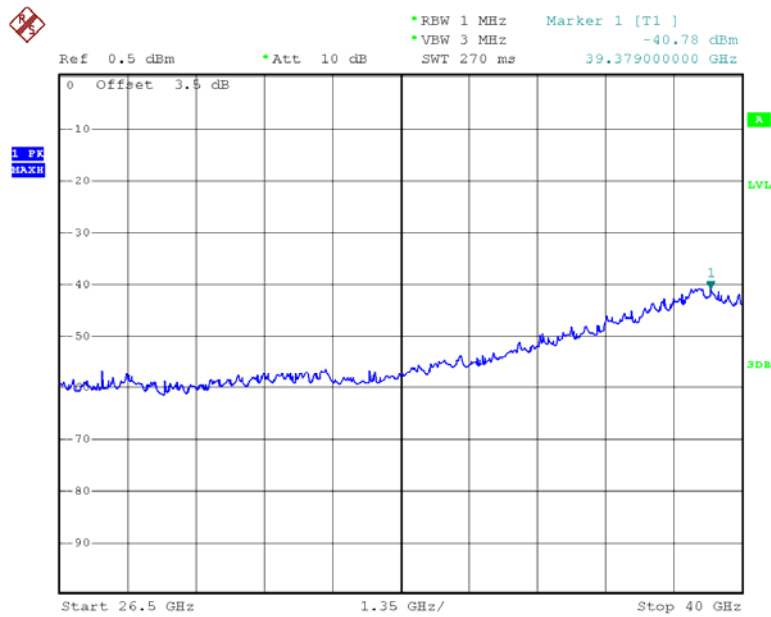


Date: 17.FEB.2013 15:30:15

802.11ac40 Low Channel 30M-1G

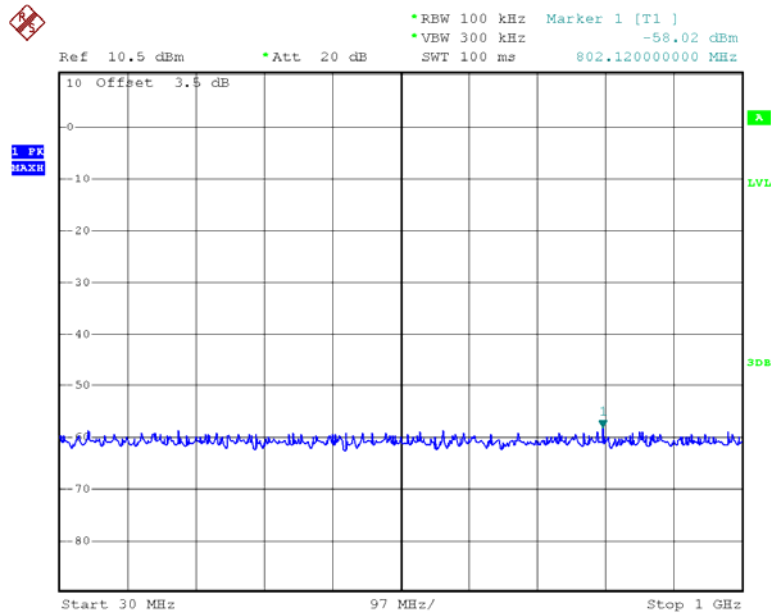


Date: 17.FEB.2013 16:00:23

802.11ac40 Low Channel 1G-26.5G

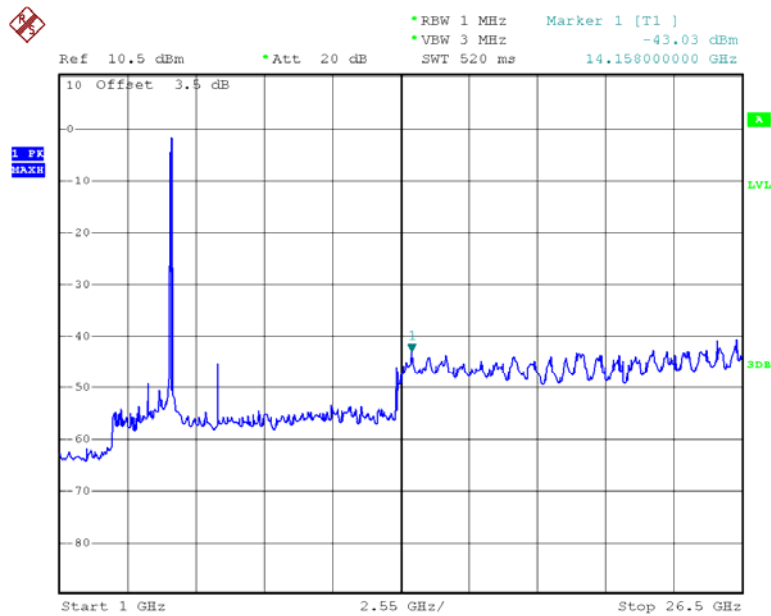


Date: 17.FEB.2013 16:00:38

802.11ac40 Low Channel 26.5-40G

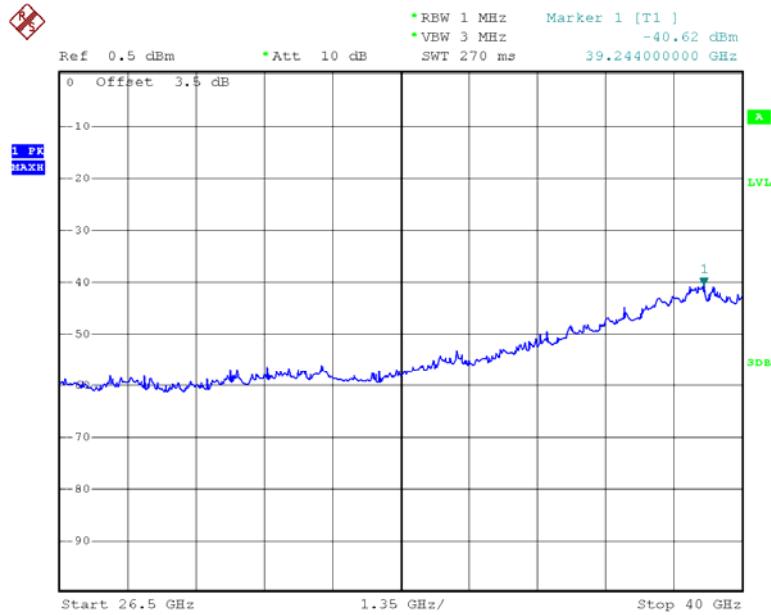


Date: 17.FEB.2013 16:00:56

802.11ac40 High Channel 30M-1G

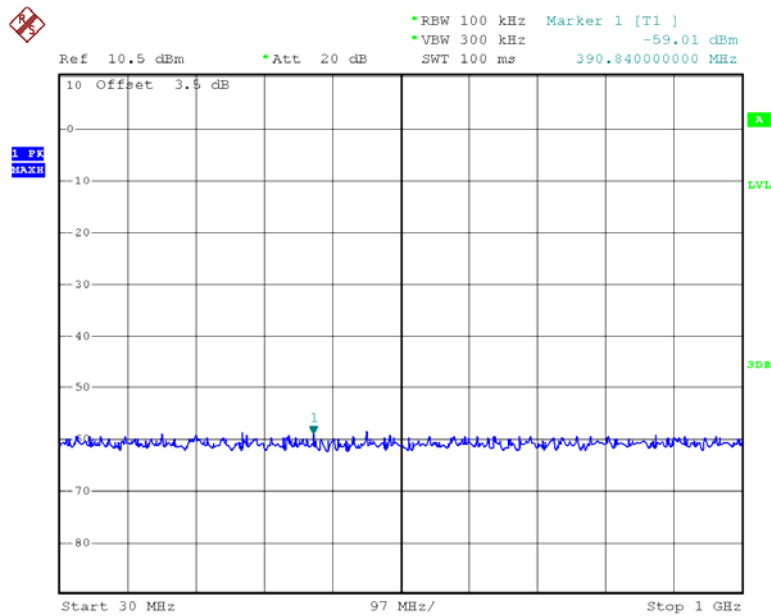


Date: 17.FEB.2013 16:10:39

802.11ac40 High Channel 1G-26.5G

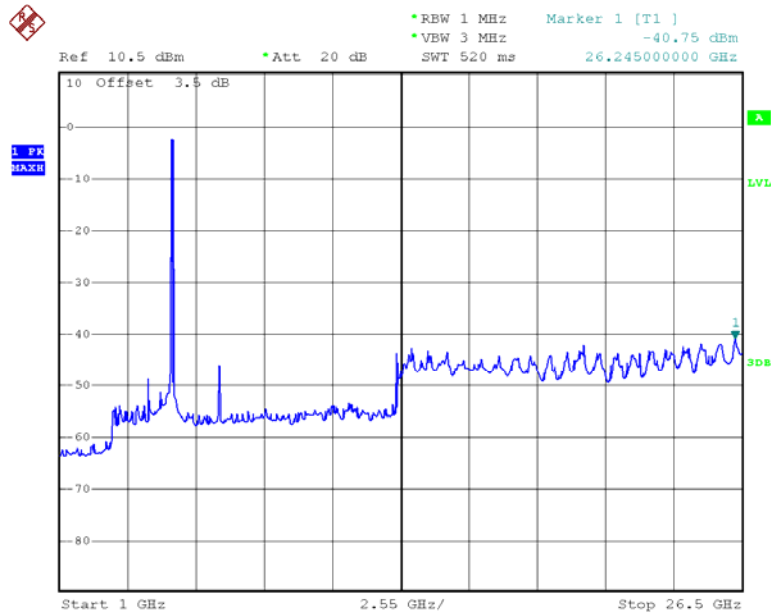


Date: 17.FEB.2013 16:10:55

802.11ac40 High Channel 26.5-40G

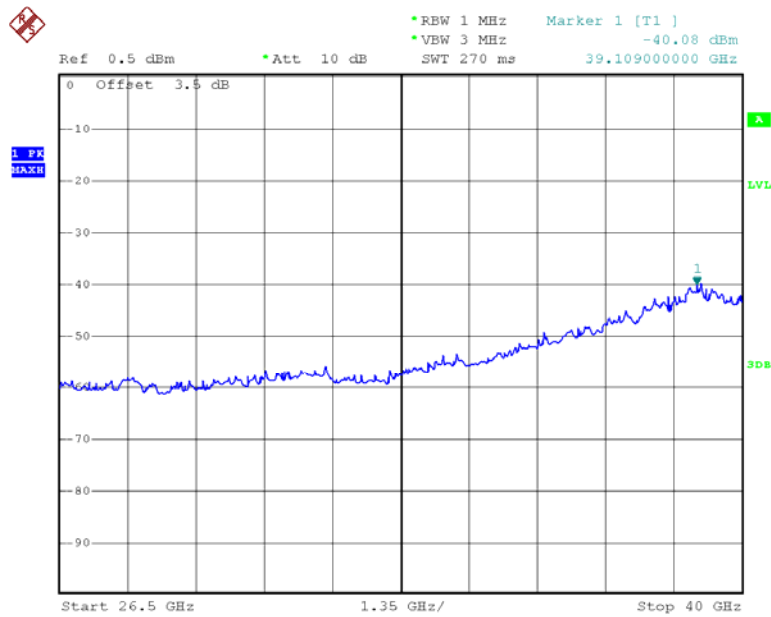


Date: 17.FEB.2013 16:11:15

802.11 ac80 30M-1G

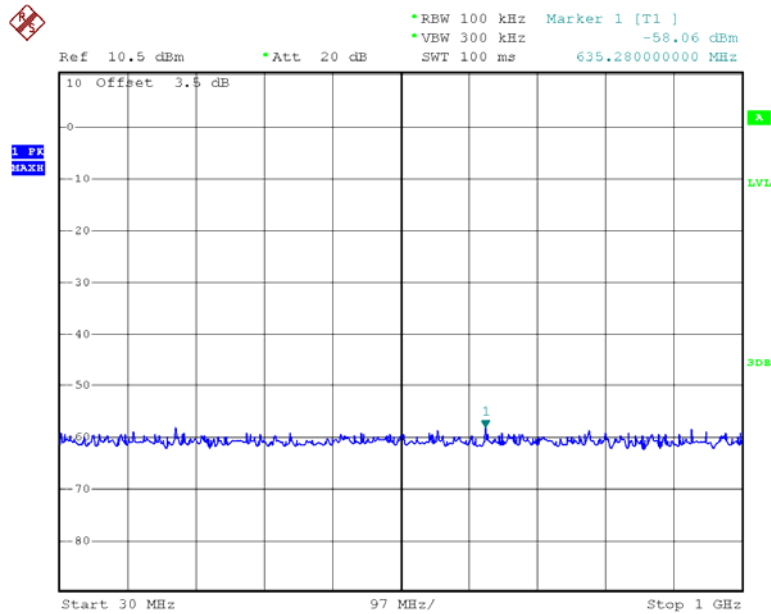


Date: 17.FEB.2013 14:33:48

802.11 ac80 1G-26.5G

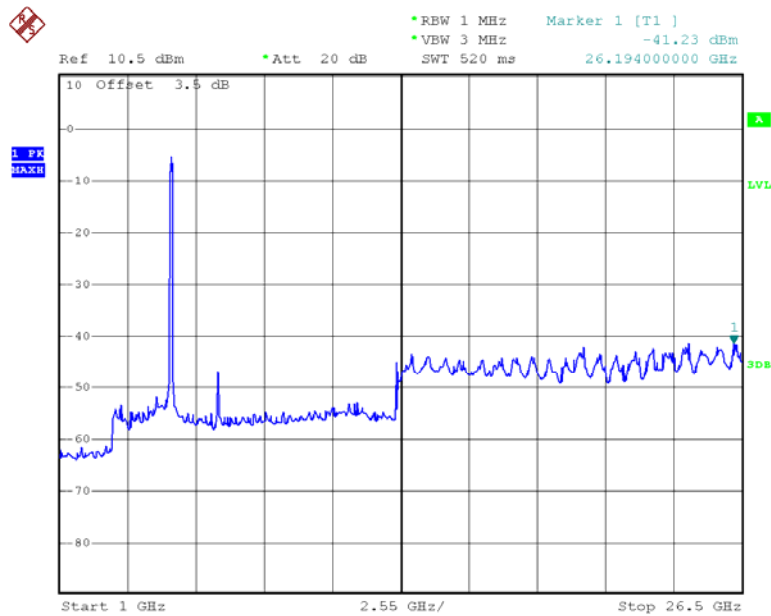

Date: 17.FEB.2013 14:34:03


802.11 ac80 26.5-40G

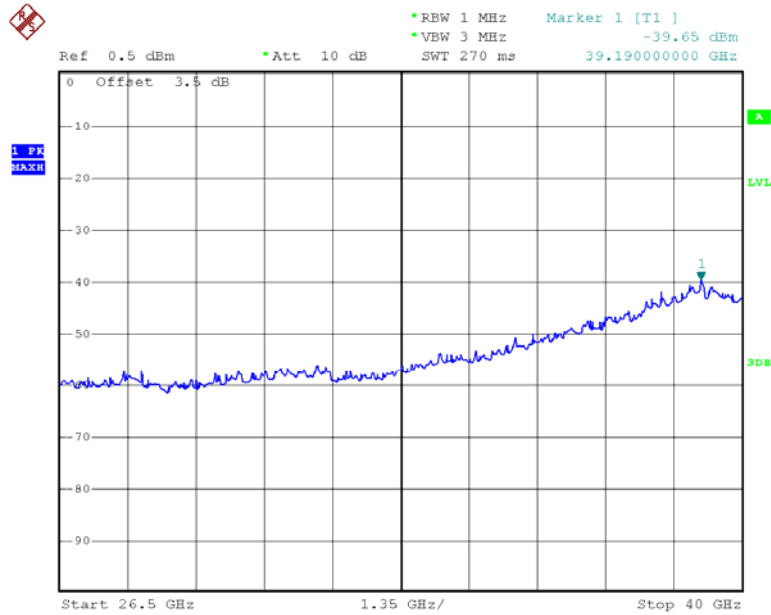

Date: 17.FEB.2013 14:34:24


Chain 1:

802.11n20 Low Channel 30M-1G

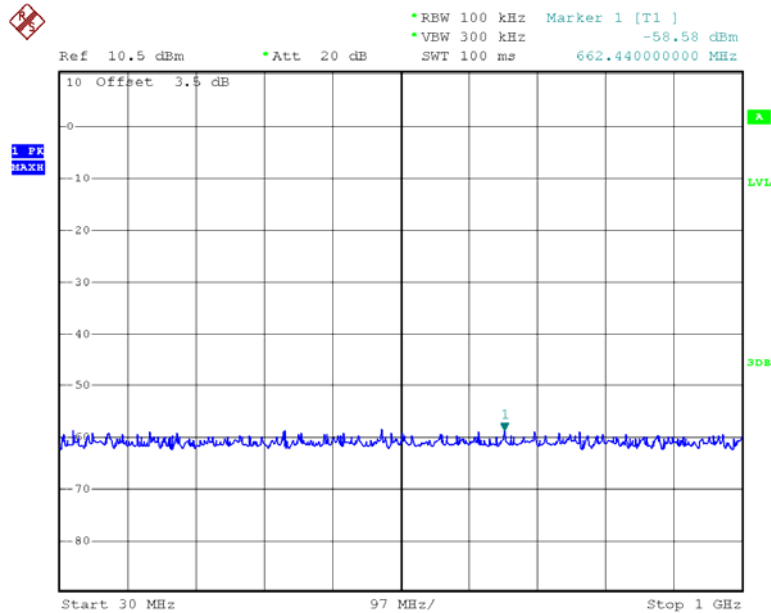


Date: 17.FEB.2013 13:15:44

802.11n20 Low Channel 1G-26.5G

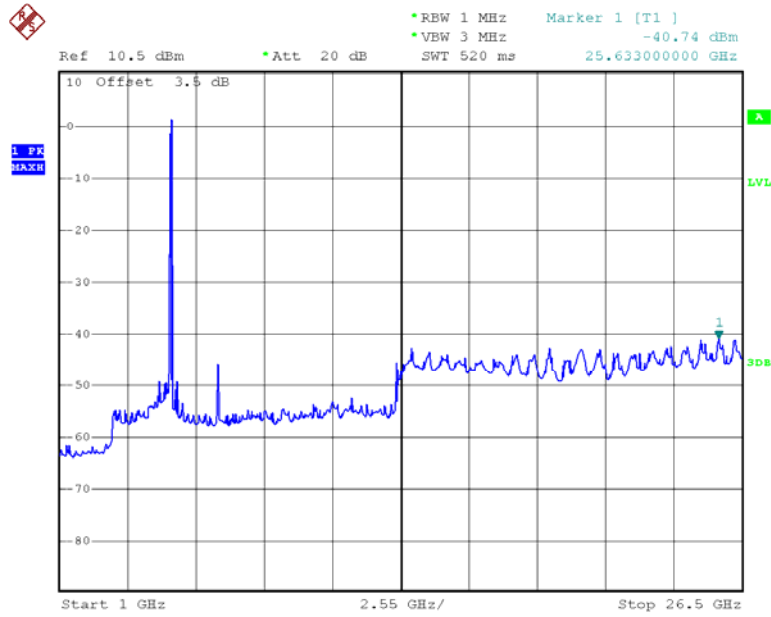


Date: 17.FEB.2013 13:16:02

802.11n20 Low Channel 26.5-40G

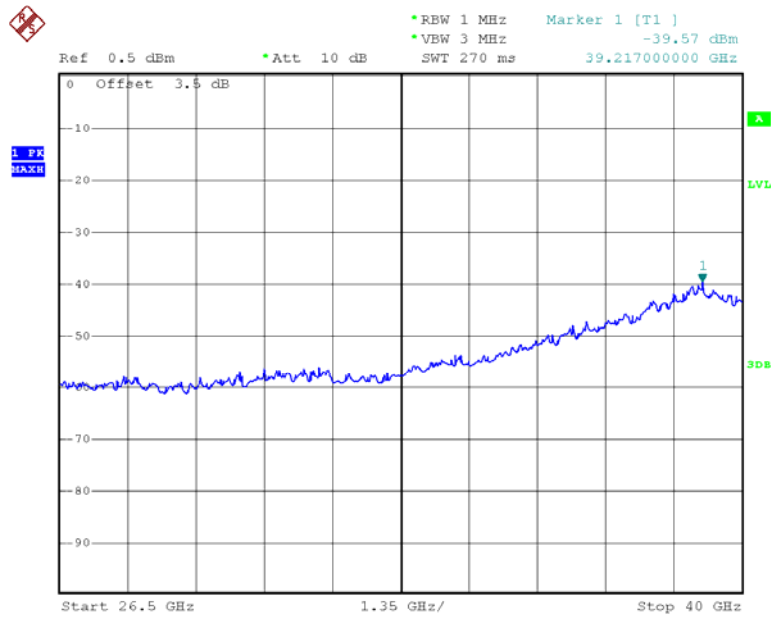


Date: 17.FEB.2013 13:16:27

802.11n20 Middle Channel 30M-1G

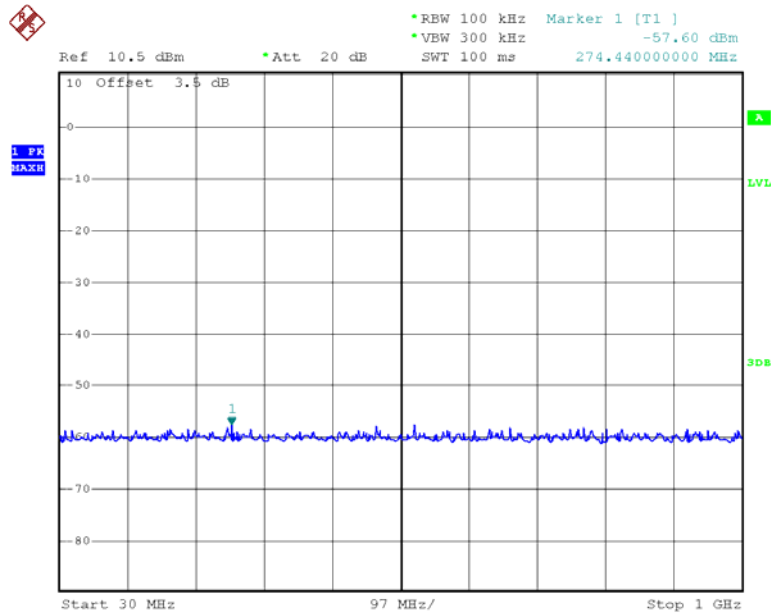


Date: 17.FEB.2013 13:31:59

802.11n20 Middle Channel 1G -26.5G

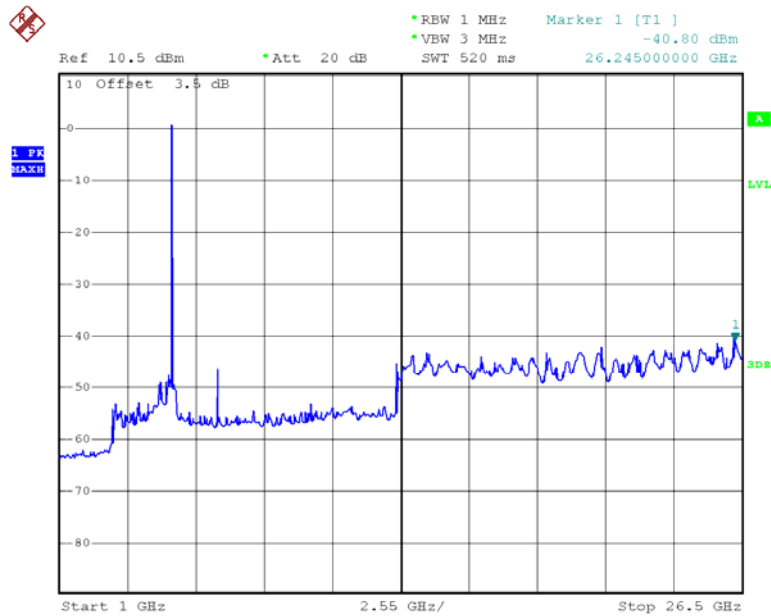


Date: 17.FEB.2013 13:32:27

802.11n20 Middle Channel 26.5-40G

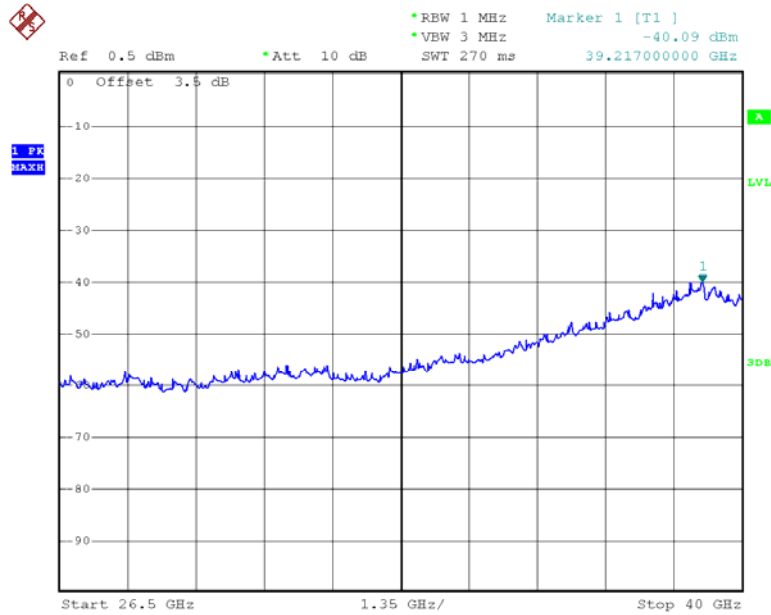


Date: 17.FEB.2013 13:32:48

802.11n20 High Channel 30M-1G

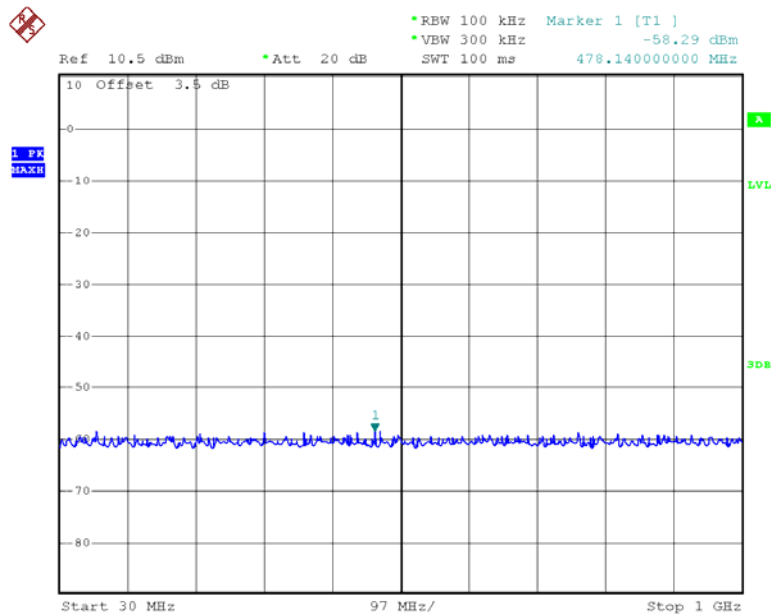


Date: 17.FEB.2013 13:45:38

802.11n20 High Channel 1G-26.5G

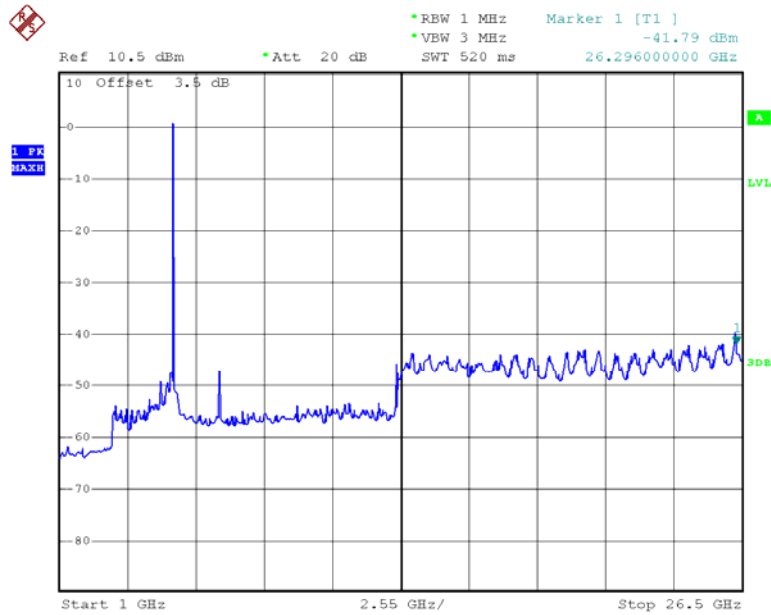


Date: 17.FEB.2013 13:45:55

802.11n20 High Channel 26.5-40G

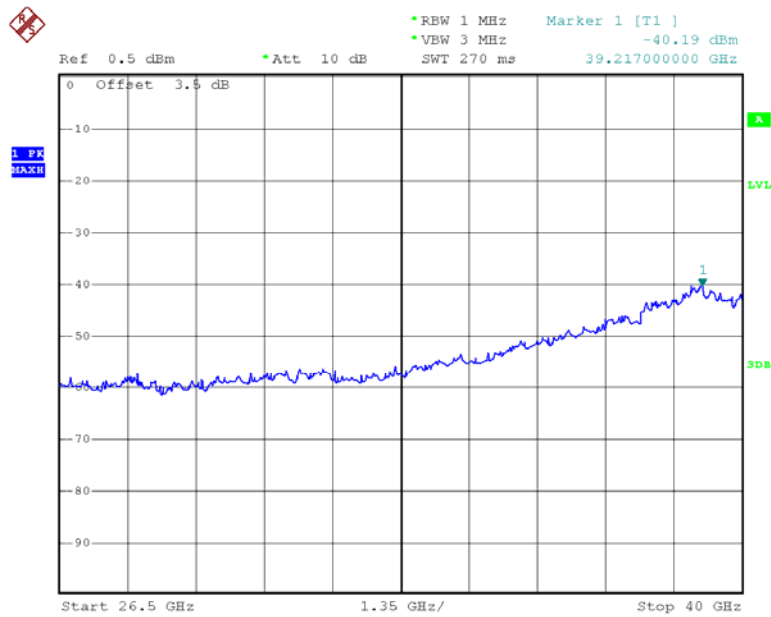


Date: 17.FEB.2013 13:46:16

802.11n40 Low Channel 30M-1G

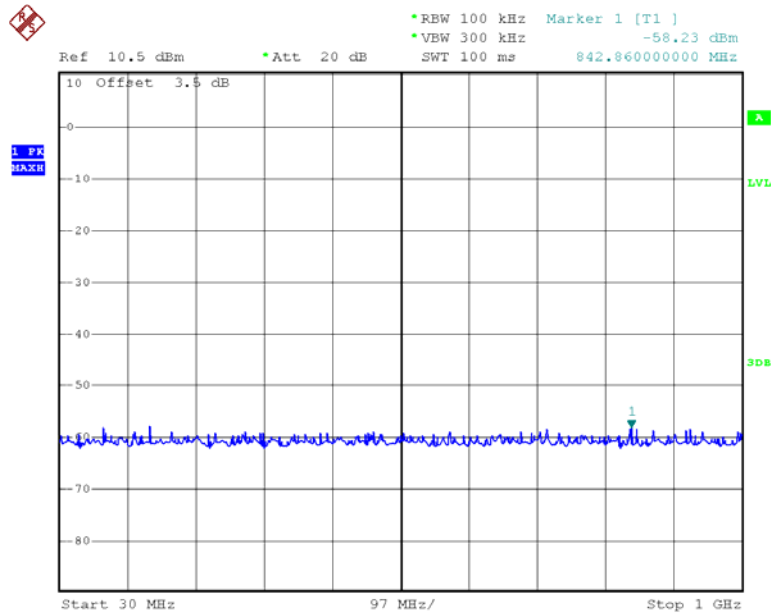


Date: 17.FEB.2013 14:12:43

802.11n40 Low Channel 1G-26.5G

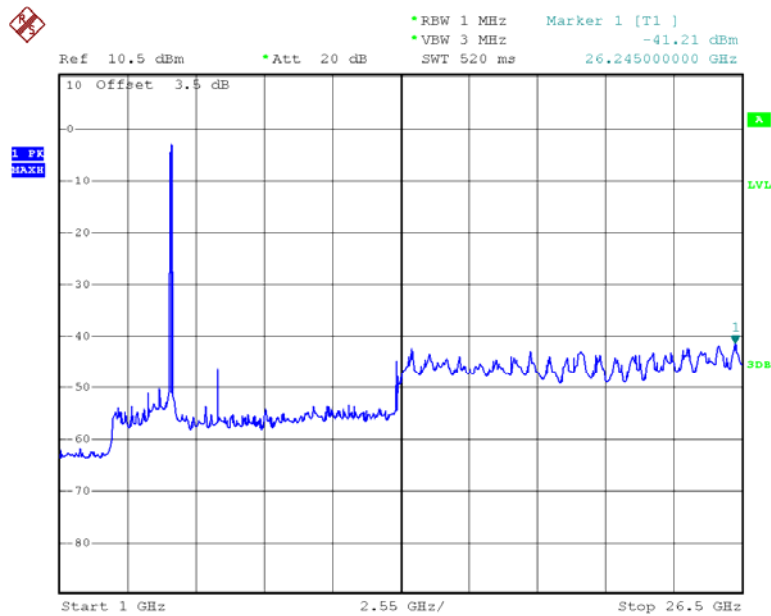


Date: 17.FEB.2013 14:12:59

802.11n40 Low Channel 26.5-40G

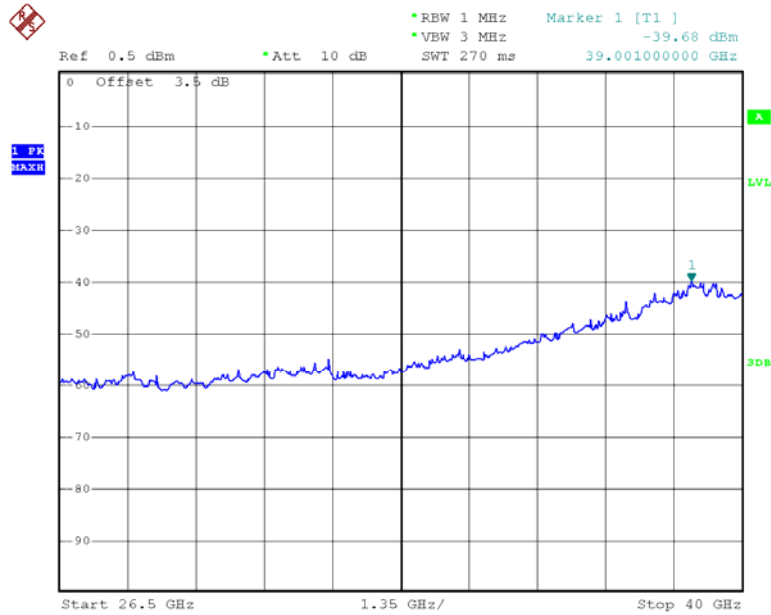


Date: 17.FEB.2013 14:13:28

802.11n40 High Channel 30M-1G

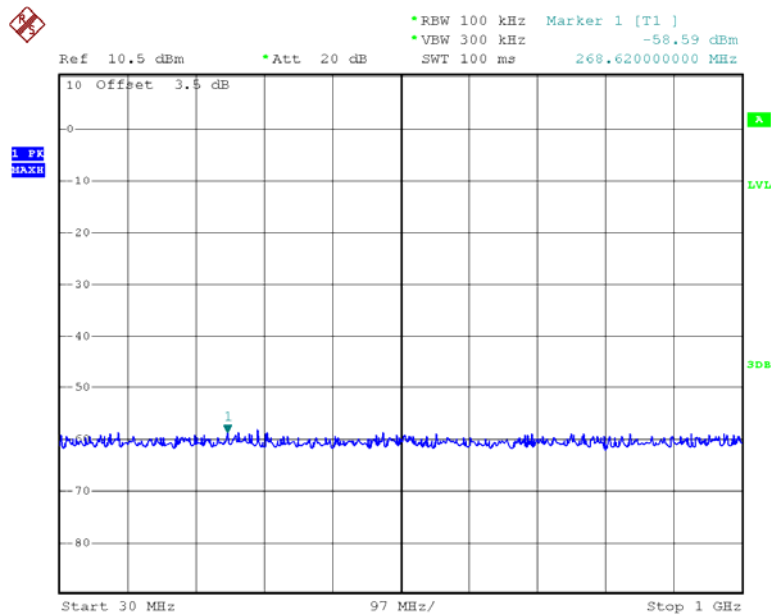


Date: 17.FEB.2013 14:26:15

802.11n40 High Channel 1G-26.5G

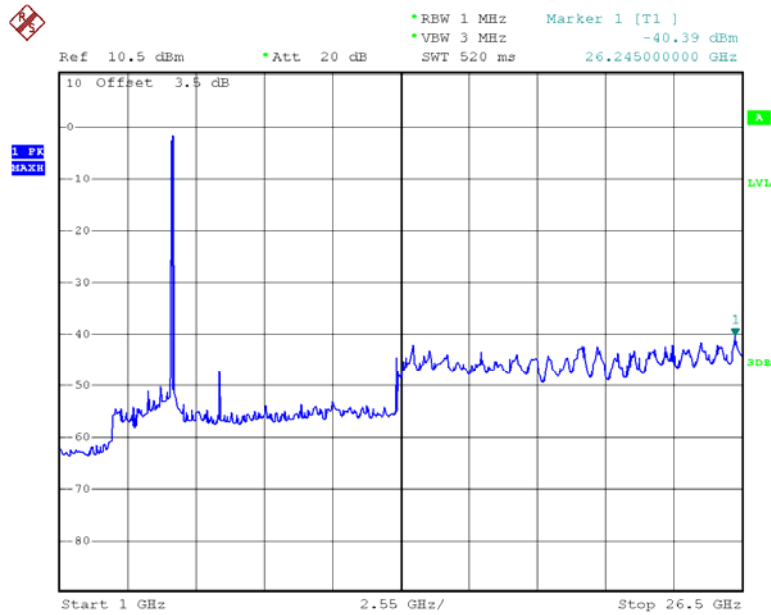


Date: 17.FEB.2013 14:26:33

802.11n40 High Channel 26.5-40G

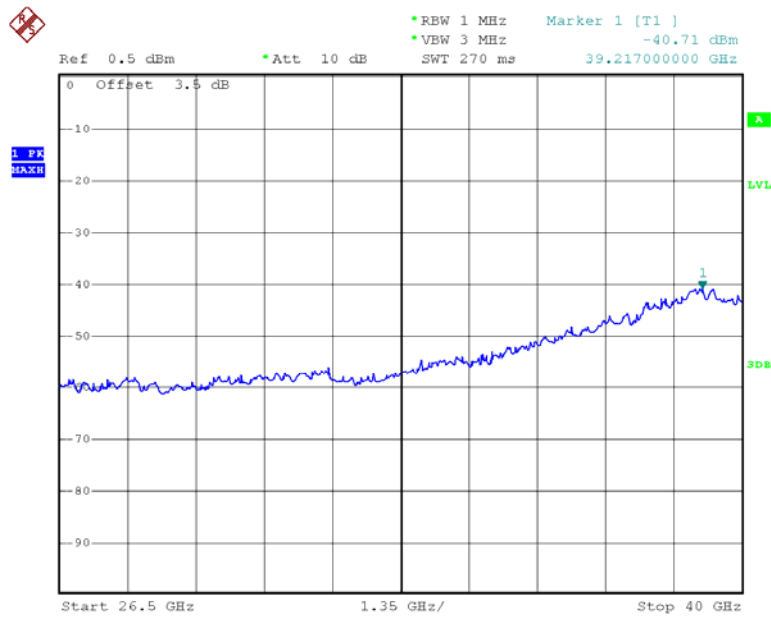


Date: 17.FEB.2013 14:26:53

802.11ac20 Low Channel 30M-1G

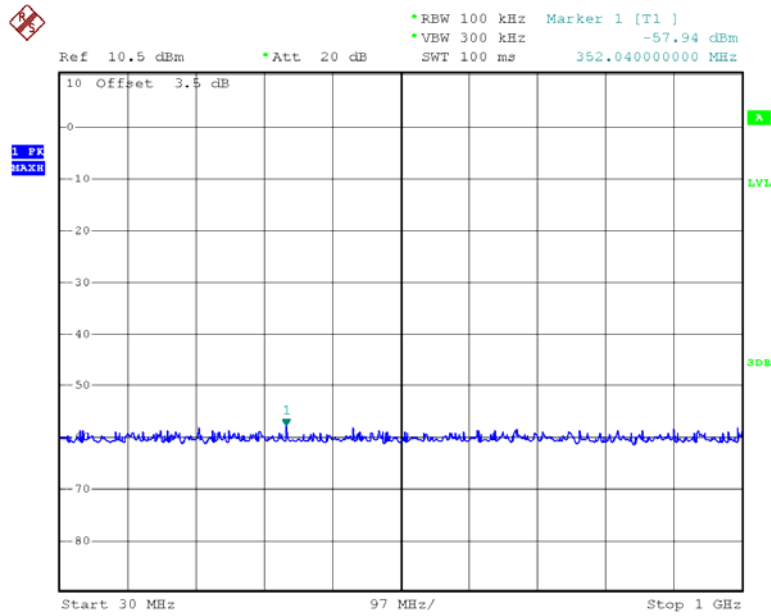


Date: 17.FEB.2013 15:07:51

802.11c20 Low Channel 1G-26.5G

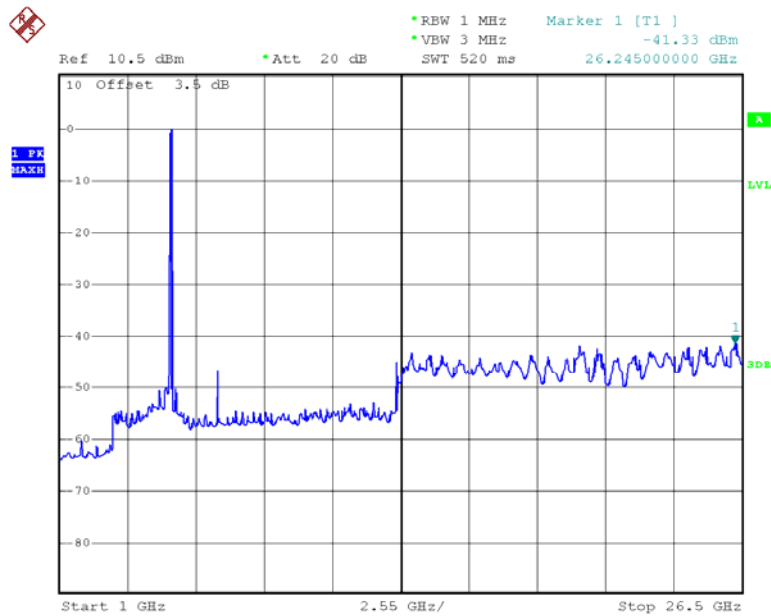


Date: 17.FEB.2013 15:08:13

802.11ac20 Low Channel 26.5-40G

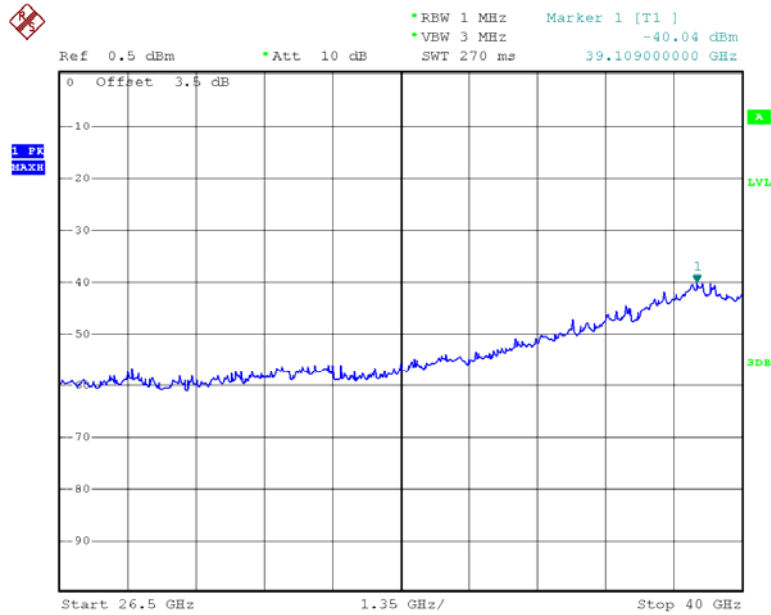


Date: 17.FEB.2013 15:08:36

802.11ac20 Middle Channel 30M-1G

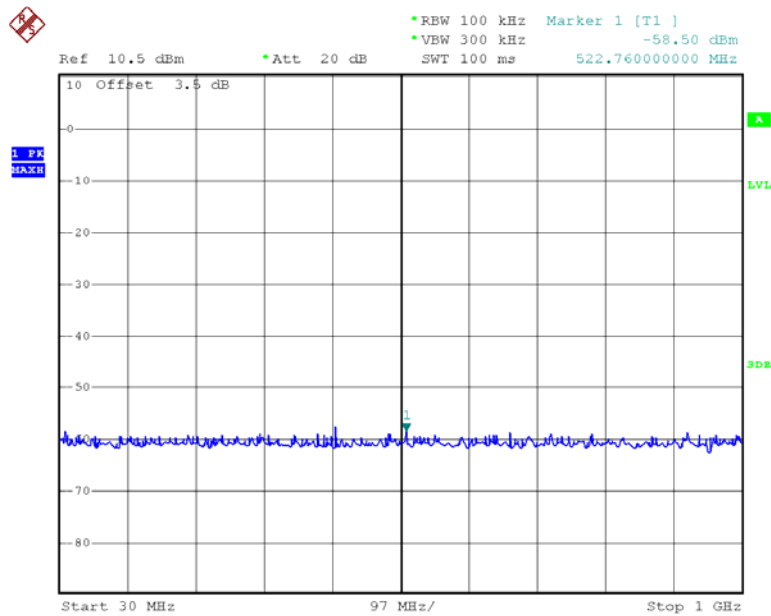


Date: 17.FEB.2013 15:22:03

802.11ac20 Middle Channel 1G -26.5G

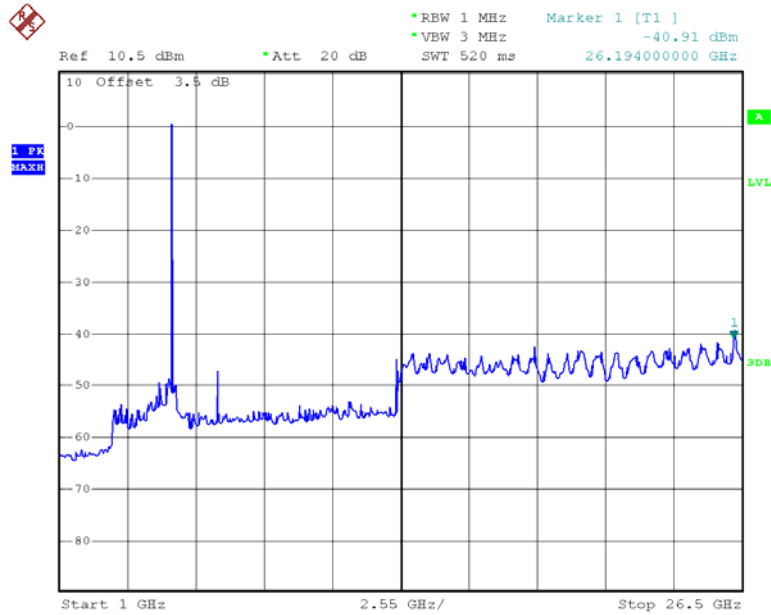


Date: 17.FEB.2013 15:22:17

802.11ac20 Middle Channel 26.5-40G

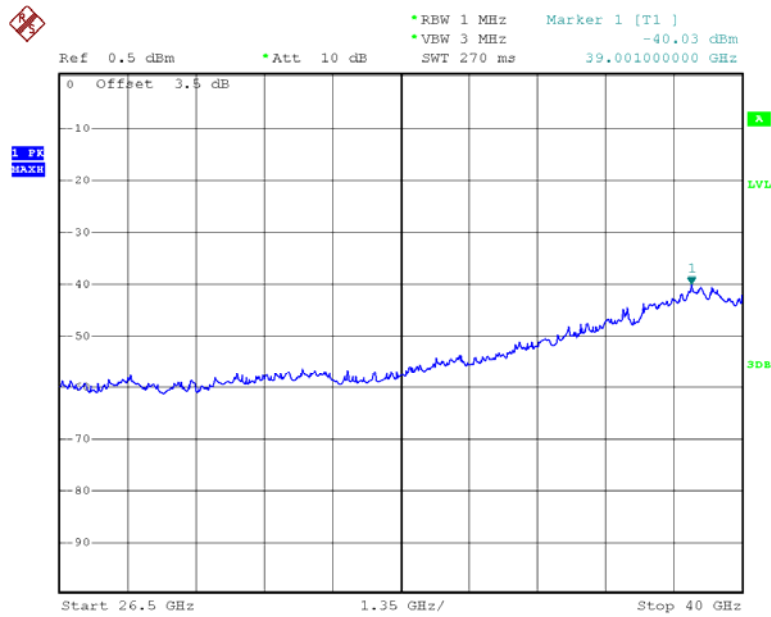


Date: 17.FEB.2013 15:22:38

802.11ac20 High Channel 30M-1G

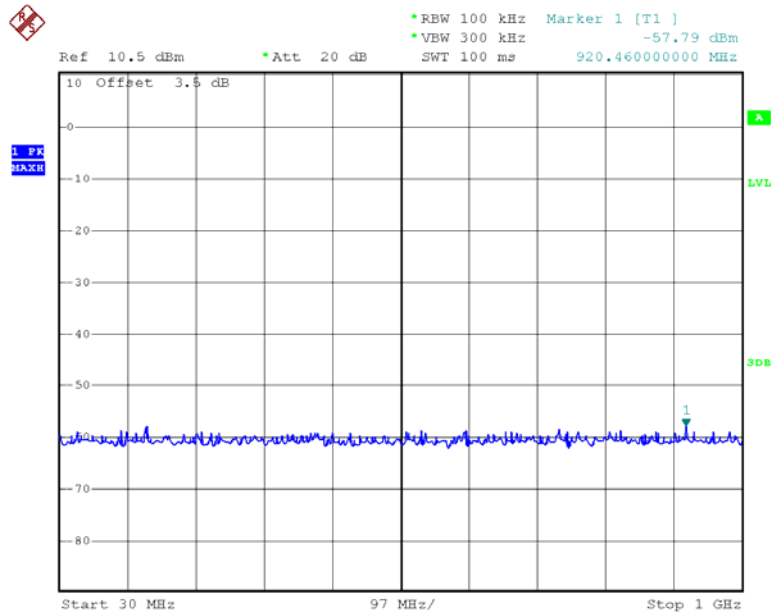


Date: 17.FEB.2013 15:35:34

802.11ac20 High Channel 1G-26.5G

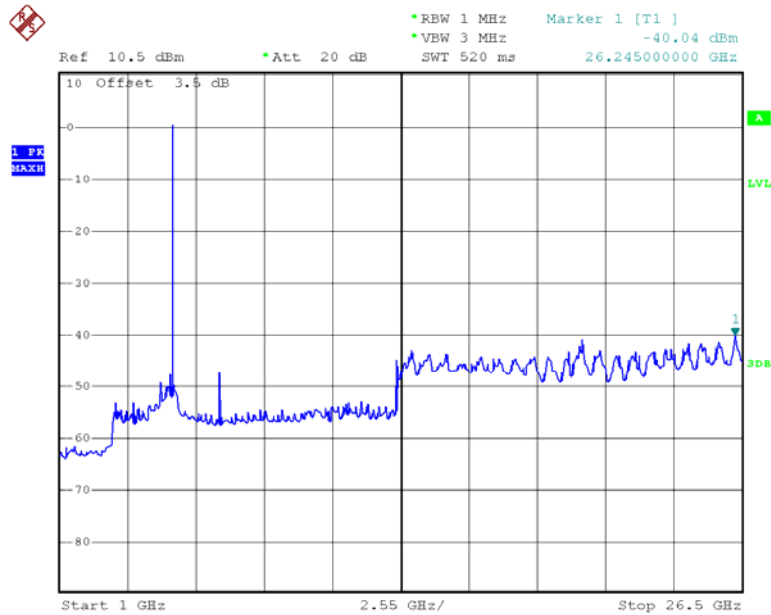


Date: 17.FEB.2013 15:35:57

802.11ac20 High Channel 26.5-40G

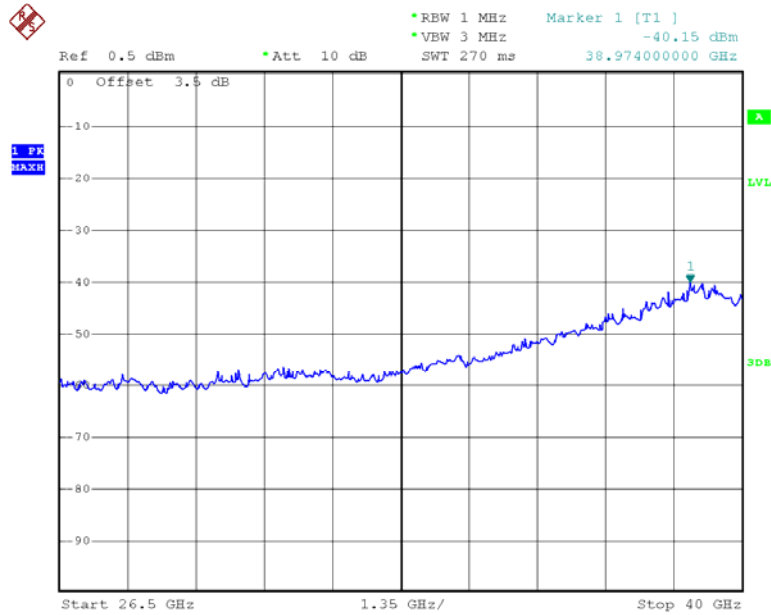


Date: 17.FEB.2013 15:36:18

802.11ac40 Low Channel 30M-1G

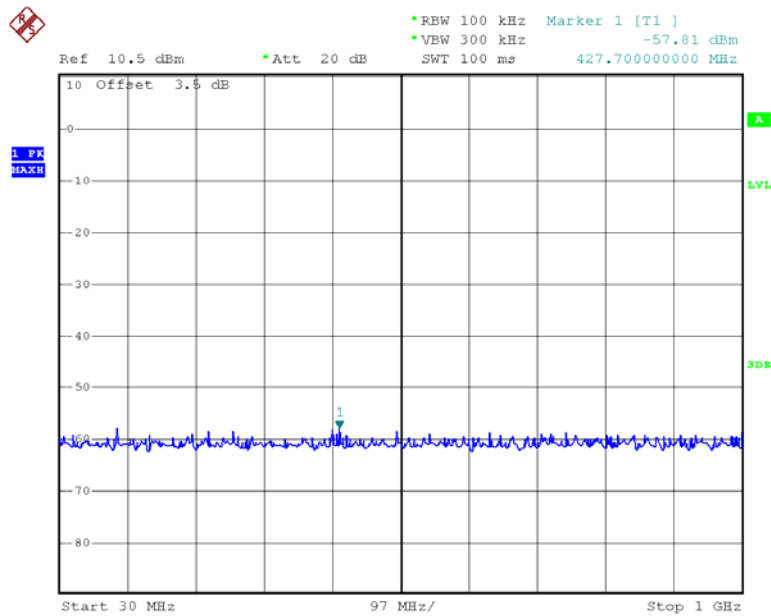


Date: 17.FEB.2013 16:05:47

802.11ac40 Low Channel 1G-26.5G

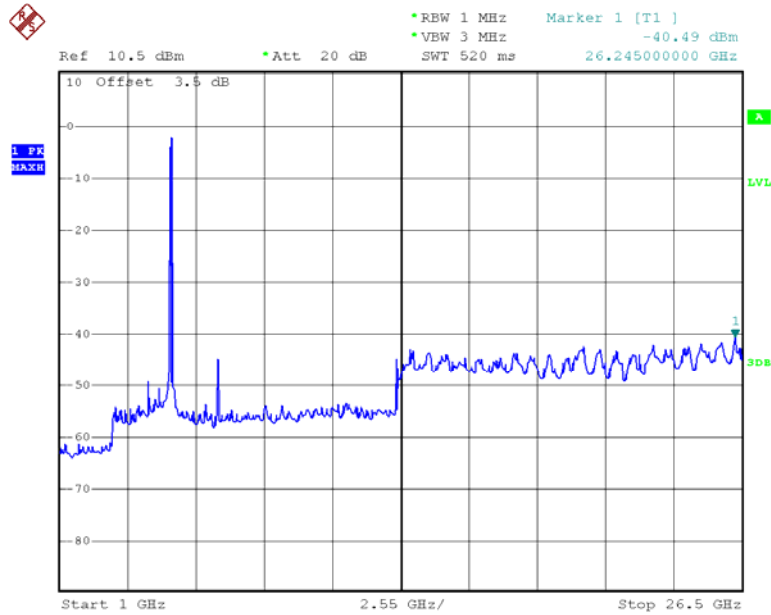


Date: 17.FEB.2013 16:06:19

802.11ac40 Low Channel 26.5-40G

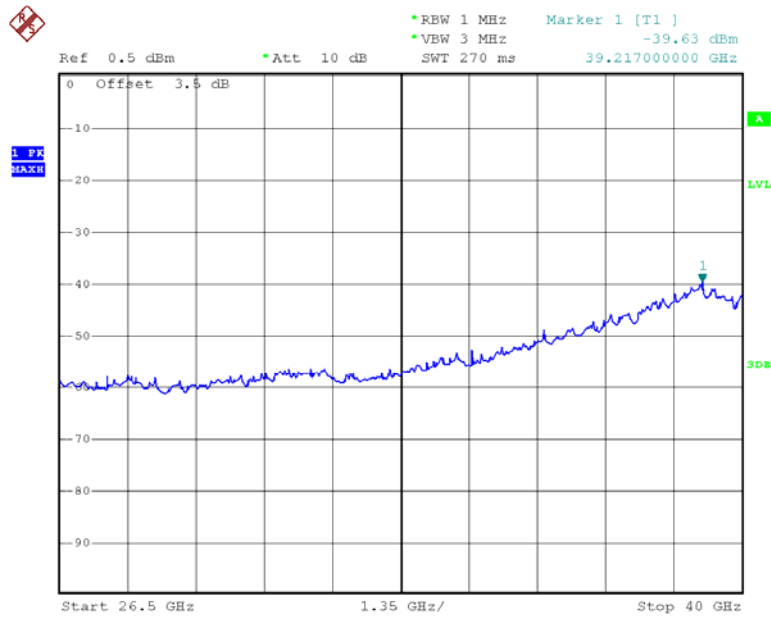


Date: 17.FEB.2013 16:06:44

802.11ac40 High Channel 30M-1G

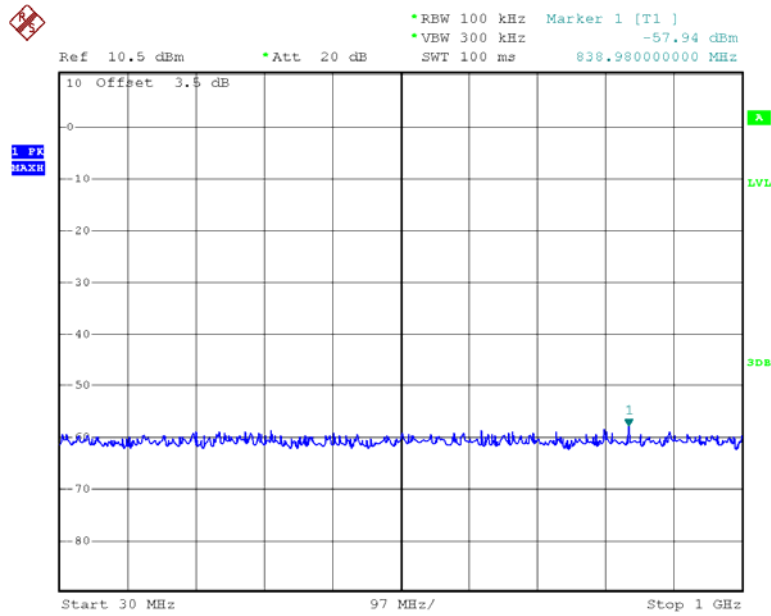


Date: 17.FEB.2013 16:16:04

802.11ac40 High Channel 1G-26.5G

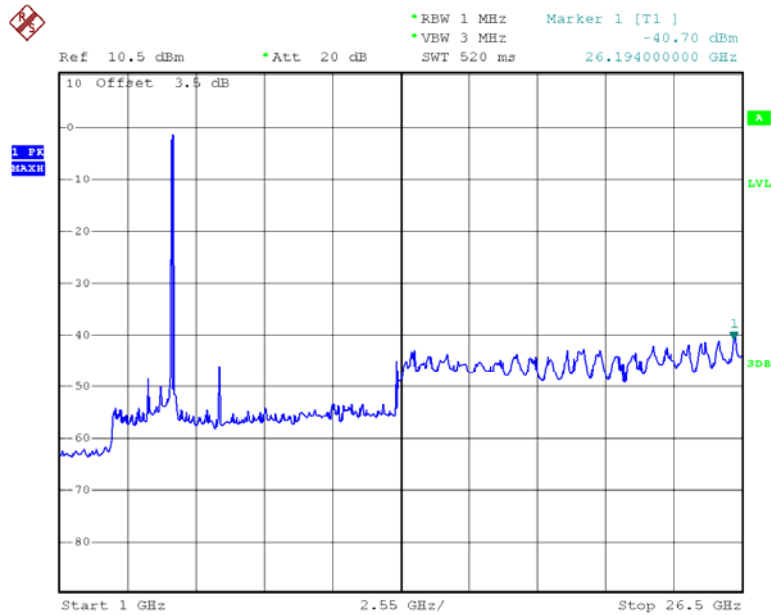


Date: 17.FEB.2013 16:16:25

802.11ac40 High Channel 26.5-40G

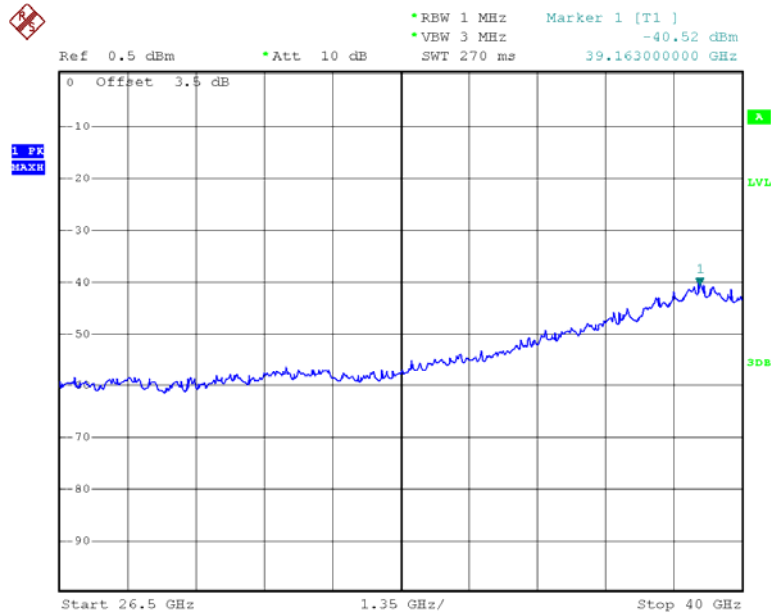


Date: 17.FEB.2013 16:16:45

802.11 ac80 30M-1G

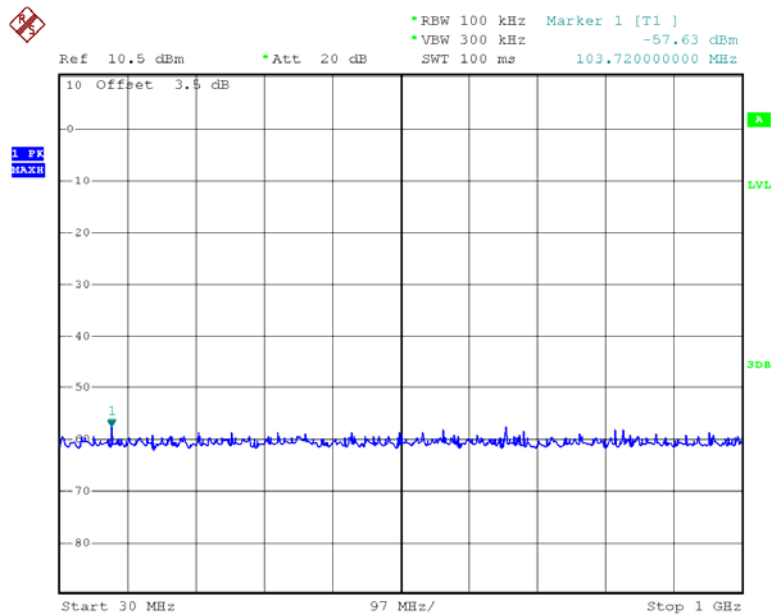


Date: 17.FEB.2013 14:41:17

802.11 ac80 1G-26.5G

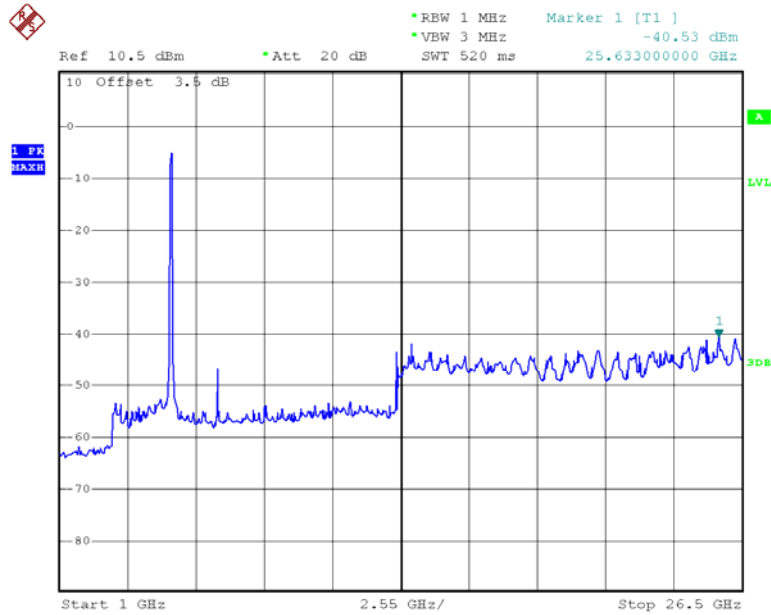

Date: 17.FEB.2013 14:41:32

802.11 ac80 26.5-40G

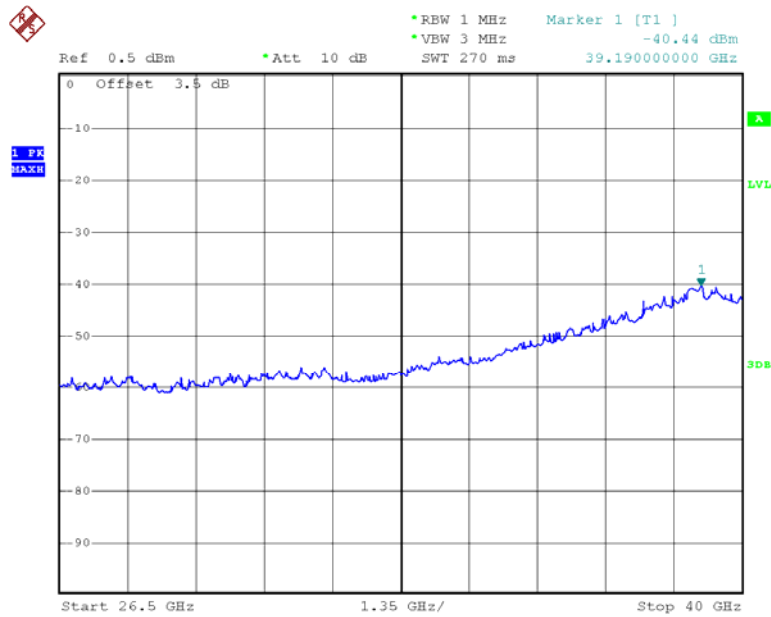

Date: 17.FEB.2013 14:41:57

FCC §15.407(b) (1) (2) (3) (4) – OUT OF BAND EMISSIONS

Applicable Standard

FCC §15.407 (b) (1),(2), (3), (4),;

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz. Devices operating in the 5.25–5.35 GHz band that generate emissions in the 5.15–5.25 GHz band must meet all applicable technical requirements for operation in the 5.15–5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of –27 dBm/MHz in the 5.15–5.25 GHz band.

For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

For transmitters operating in the 5.725–5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of –27 dBm/MHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibration or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1 MHz and VBW to 3MHz of spectrum analyzer, offset the antenna gain and cable loss.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | Spectrum Analyzer | FSP38 | 100478 | 2012-5-14 | 2013-5-13 |

Test Data

Environmental Conditions

| | |
|--------------------|----------------|
| Temperature: | 23.4~28.1 °C |
| Relative Humidity: | 29~63% |
| ATM Pressure: | 100.8~101.9kPa |


The testing was performed by Leon Chen from 2013-02-27 to 2013-03-14.

Please refer to the following table and plots.

| Bandedge | Worst Reading Level (dBm) | Limit (dBm) | Result |
|-----------------------------------|----------------------------------|--------------------|---------------|
| 802.11a | | | |
| Left | -38.95 | -27 | PASS |
| Right | -42.41 | -27 | PASS |
| 802.11n20 Chain 0 | | | |
| Left | -43.75 | -27 | PASS |
| Right | -42.81 | -27 | PASS |
| 802.11n20 Chain 1 | | | |
| Left | -44.08 | -27 | PASS |
| Right | -41.66 | -27 | PASS |
| 802.11n20 Total:Chain 0+ Chain 1 | | | |
| Left | -40.90 | -27 | PASS |
| Right | -39.19 | -27 | PASS |
| 802.11n40 Chain 0 | | | |
| Left | -43.29 | -27 | PASS |
| Right | -41.81 | -27 | PASS |
| 802.11n40 Chain 1 | | | |
| Left | -43.27 | -27 | PASS |
| Right | -42.41 | -27 | PASS |
| 802.11n40 Total:Chain 0+ Chain 1 | | | |
| Left | -40.27 | -27 | PASS |
| Right | -39.09 | -27 | PASS |
| 802.11ac20 Chain 0 | | | |
| Left | -42.22 | -27 | PASS |
| Right | -41.95 | -27 | PASS |
| 802.11ac20 Chain 1 | | | |
| Left | -43.08 | -27 | PASS |
| Right | -42.46 | -27 | PASS |
| 802.11ac20 Total:Chain 0+ Chain 1 | | | |
| Left | -39.62 | -27 | PASS |
| Right | -39.19 | -27 | PASS |
| 802.11ac40 Chain 0 | | | |
| Left | -40.07 | -27 | PASS |
| Right | -44.15 | -27 | PASS |
| 802.11ac40 Chain 1 | | | |
| Left | -39.44 | -27 | PASS |
| Right | -44.33 | -27 | PASS |
| 802.11ac40 Total:Chain 0+ Chain 1 | | | |
| Left | -36.73 | -27 | PASS |
| Right | -41.23 | -27 | PASS |


| 802.11ac80 Chain 0 | | | |
|-----------------------------------|--------|-----|------|
| Left | -40.72 | -27 | PASS |
| Right | -43.14 | -27 | PASS |
| 802.11ac80 Chain 1 | | | |
| Left | -40.27 | -27 | PASS |
| Right | -42.48 | -27 | PASS |
| 802.11ac80 Total:Chain 0+ Chain 1 | | | |
| Left | -37.48 | -27 | PASS |
| Right | -39.79 | -27 | PASS |

802.11a Left Bandedge

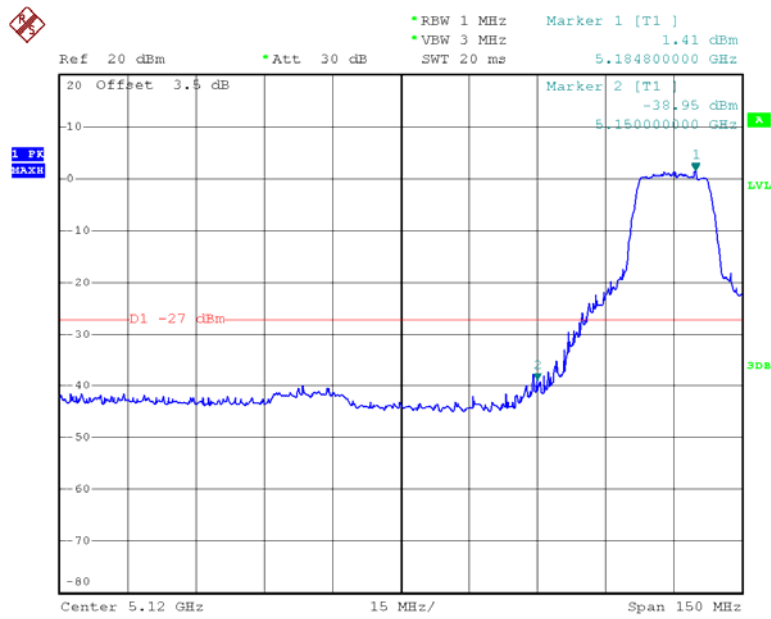


Date: 27.FEB.2013 09:40:48

802.11a Right Bandedge

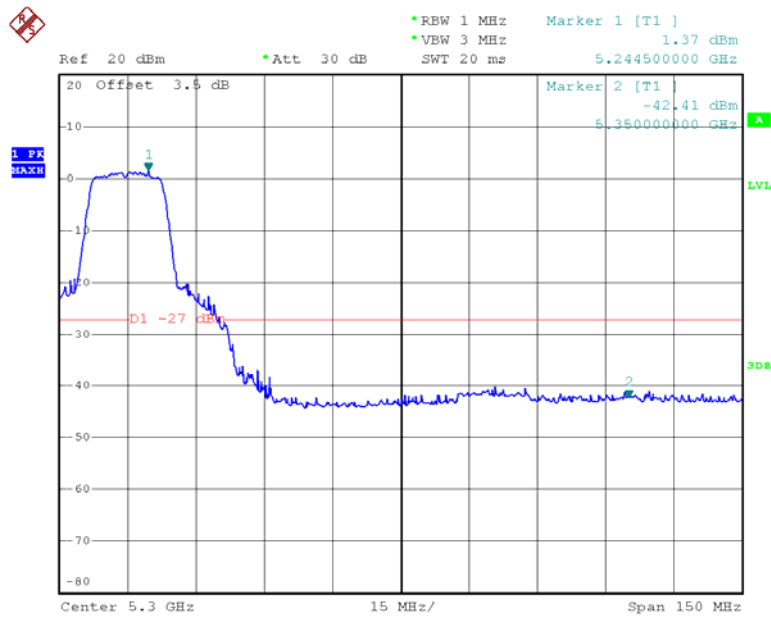


Date: 27.FEB.2013 09:39:54

Chain 0:802.11n20 Left Bandedge

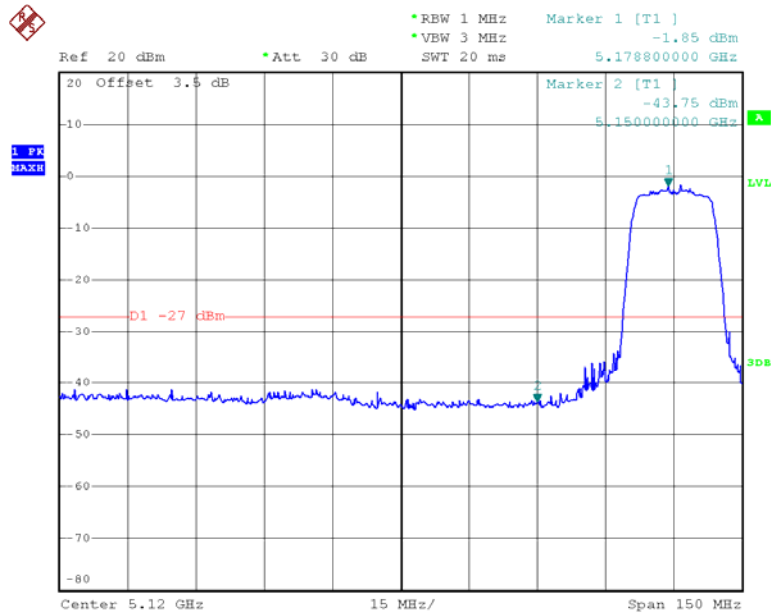


Date: 27.FEB.2013 09:37:00

Chain 0:802.11n20 Right Bandedge

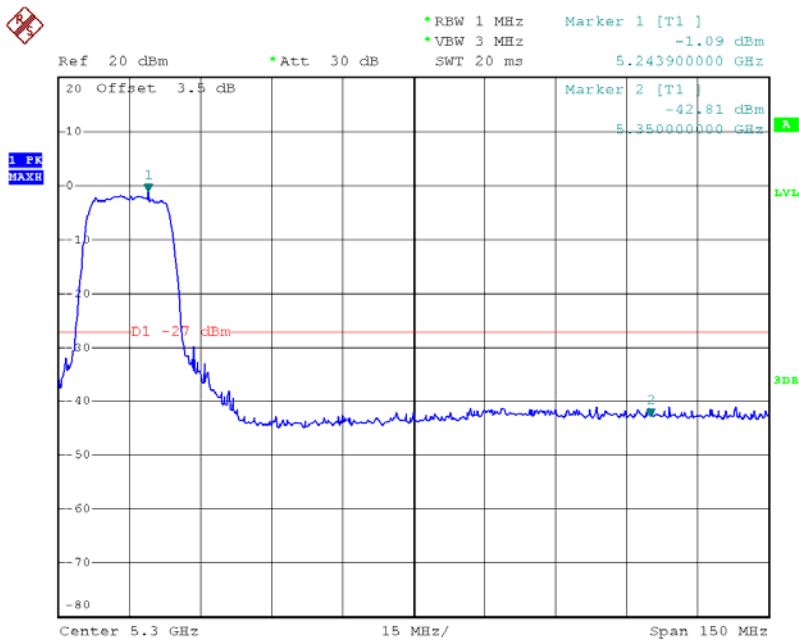


Date: 27.FEB.2013 09:35:46

Chain 0:802.11n40 Left Bandedge

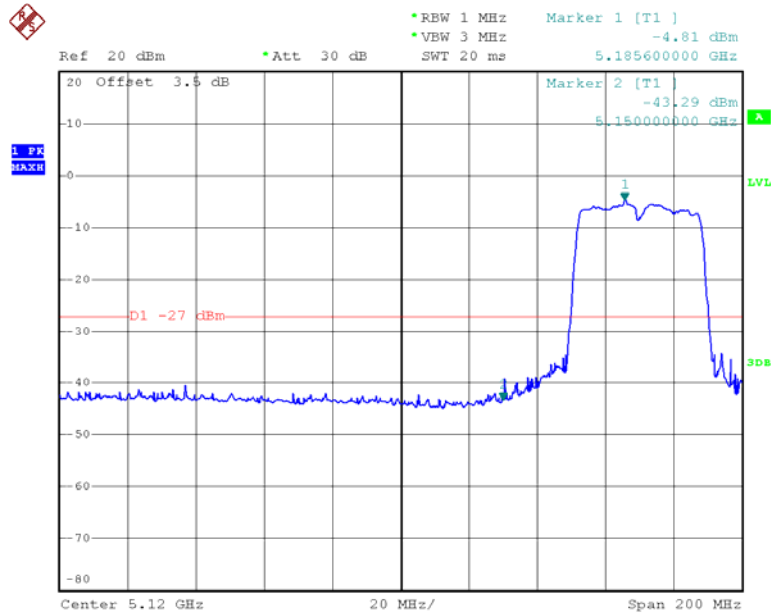


Date: 27.FEB.2013 09:43:05

Chain 0:802.11n40 Right Bandedge

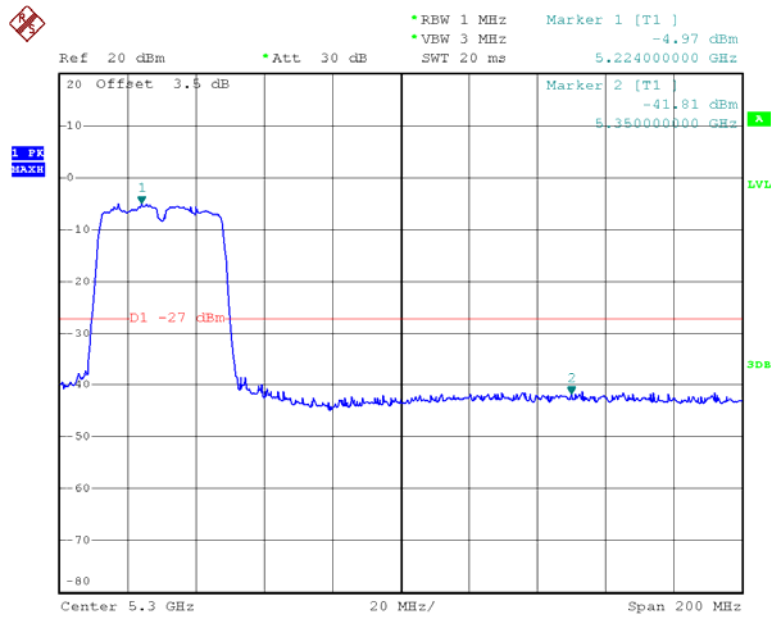


Date: 27.FEB.2013 09:44:08

Chain 0:802.11ac20 Left Bandedge

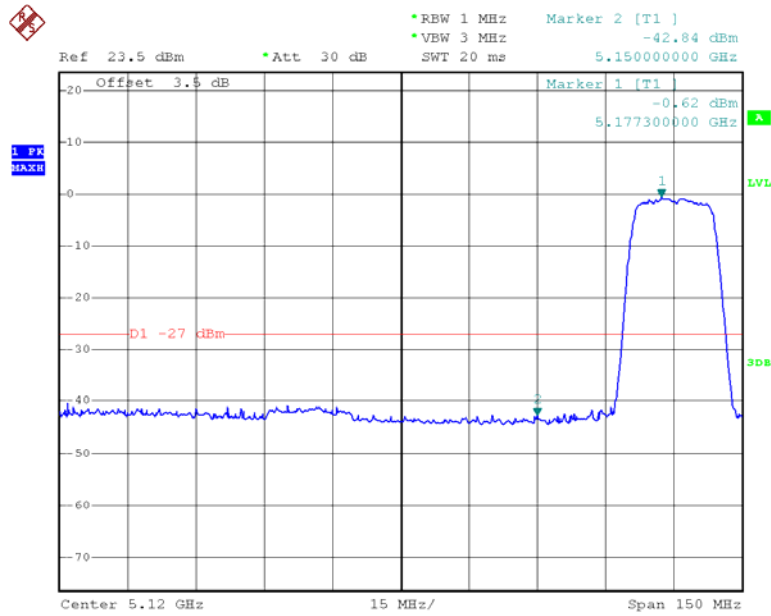


Date: 14.MAR.2013 14:02:49

Chain 0:802.11ac20 Right Bandedge

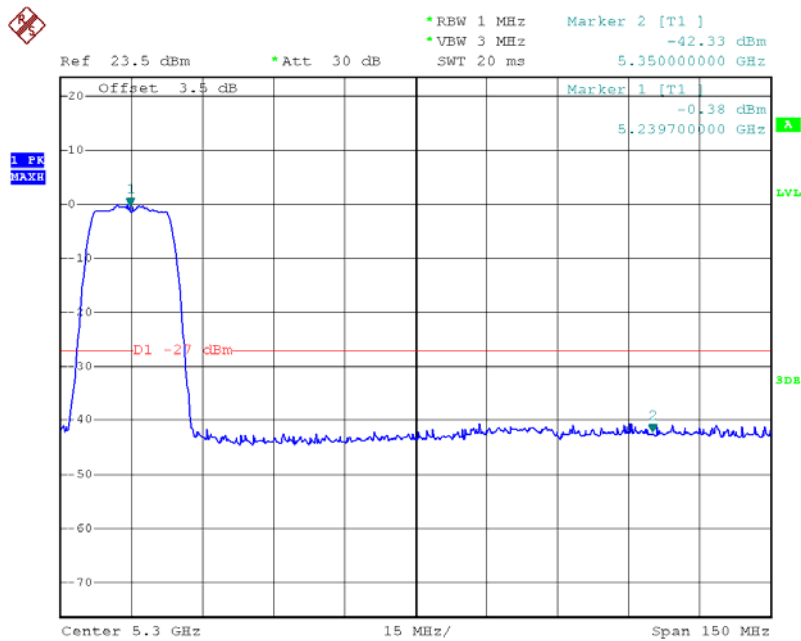


Date: 14.MAR.2013 14:03:42

Chain 0:802.11ac40 Left Bandedge

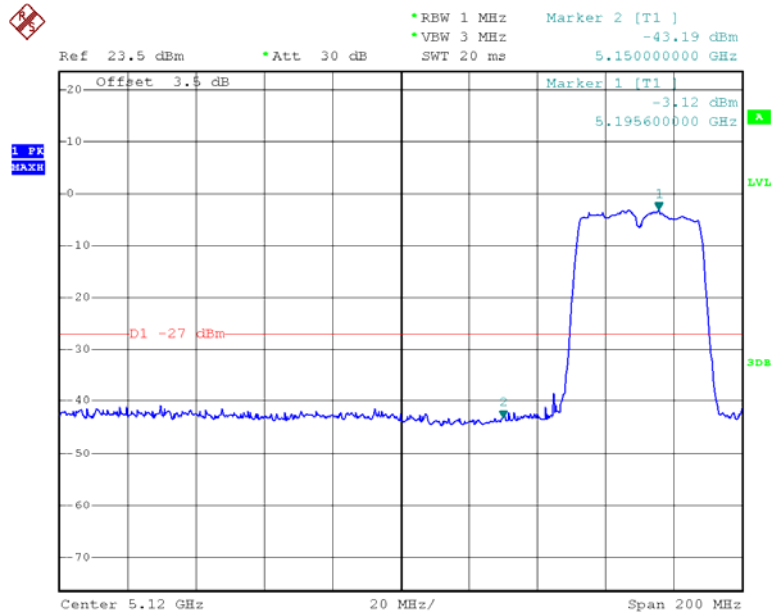


Date: 14.MAR.2013 14:07:53

Chain 0:802.11ac40 Right Bandedge

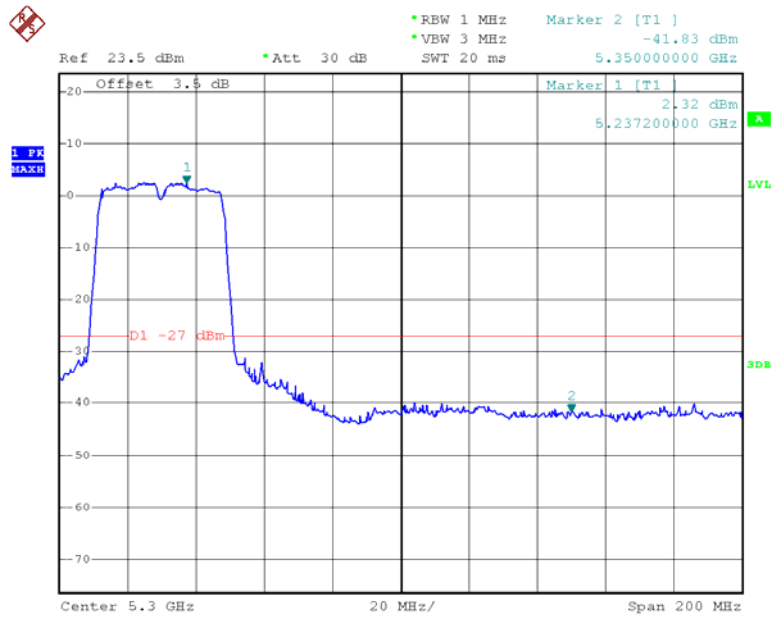


Date: 14.MAR.2013 14:09:54

Chain 0:802.11ac80 Left Bandedge

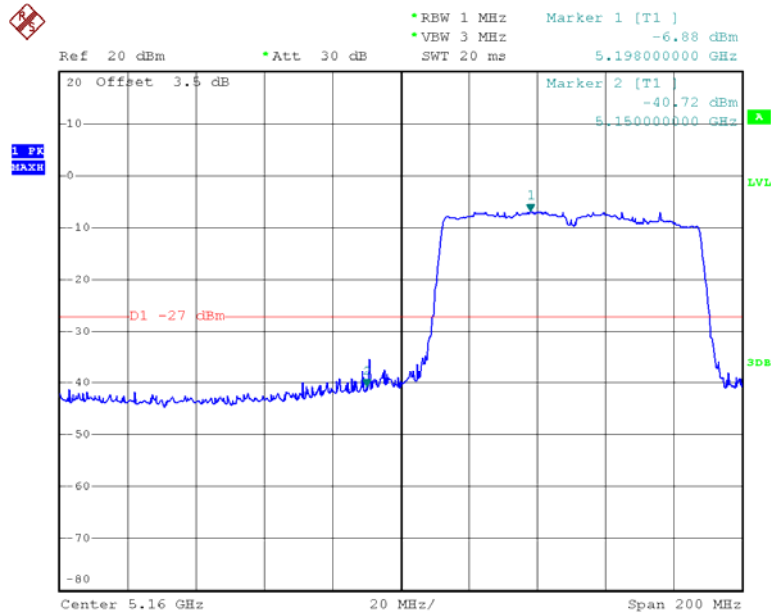


Date: 27.FEB.2013 09:48:41

Chain 0:802.11ac80 Right Bandedge

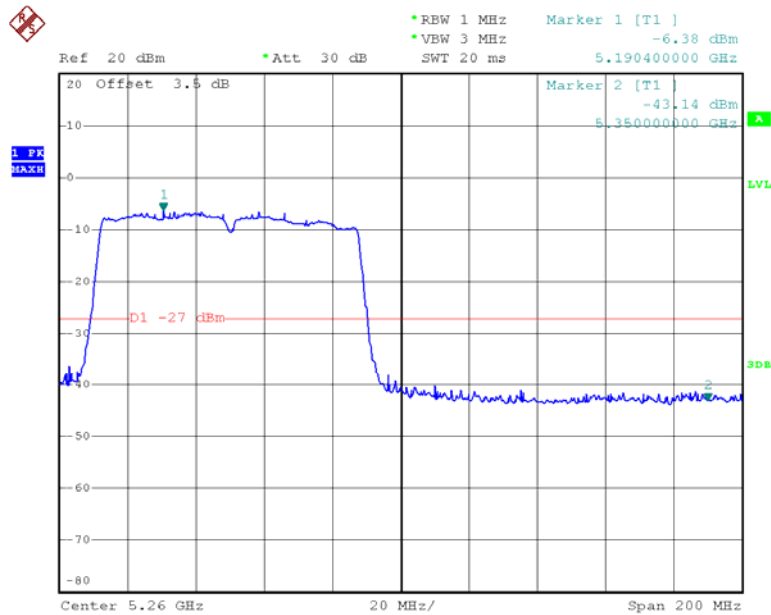


Date: 27.FEB.2013 09:49:16

Chain 1:802.11n20 Left Bandedge

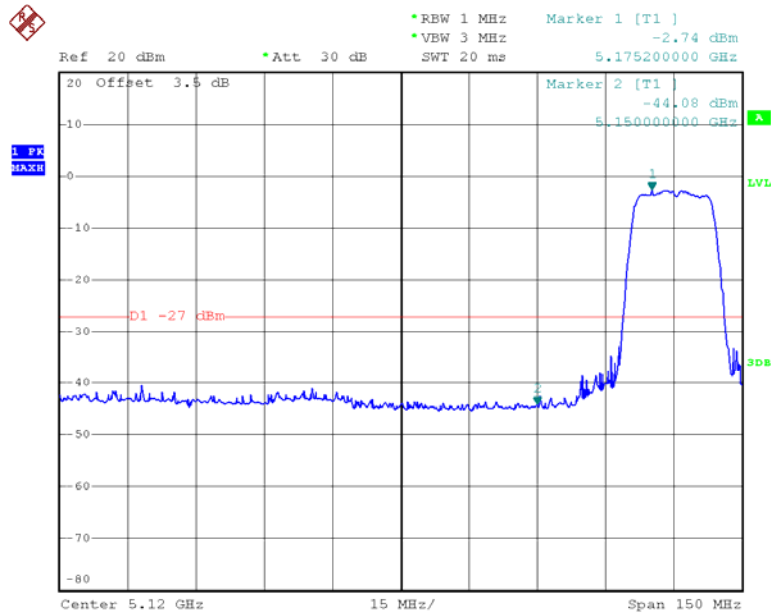


Date: 27.FEB.2013 09:37:34

Chain 1:802.11n20 Right Bandedge

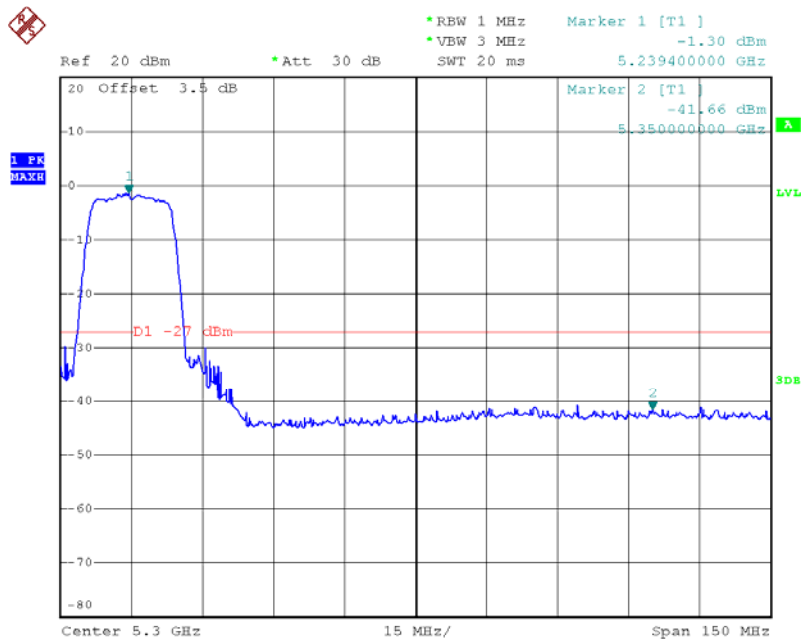


Date: 27.FEB.2013 09:38:12

Chain 1:802.11n40 Left Bandedge

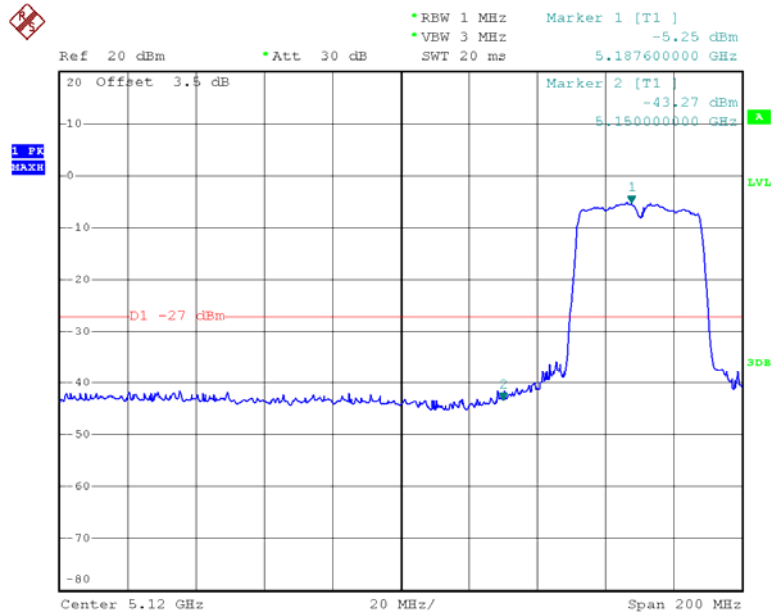


Date: 27.FEB.2013 09:44:51

Chain 1:802.11n40 Right Bandedge

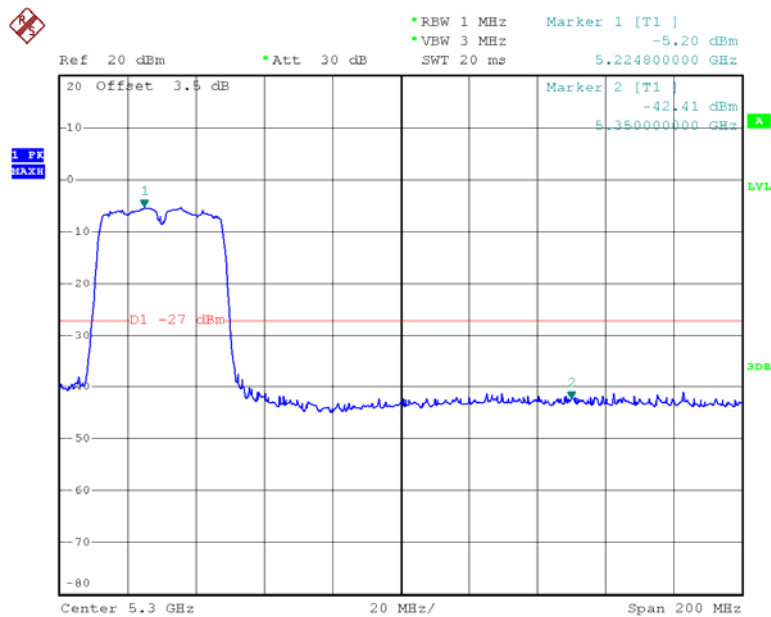


Date: 27.FEB.2013 09:44:23

Chain 1:802.11ac20 Left Bandedge

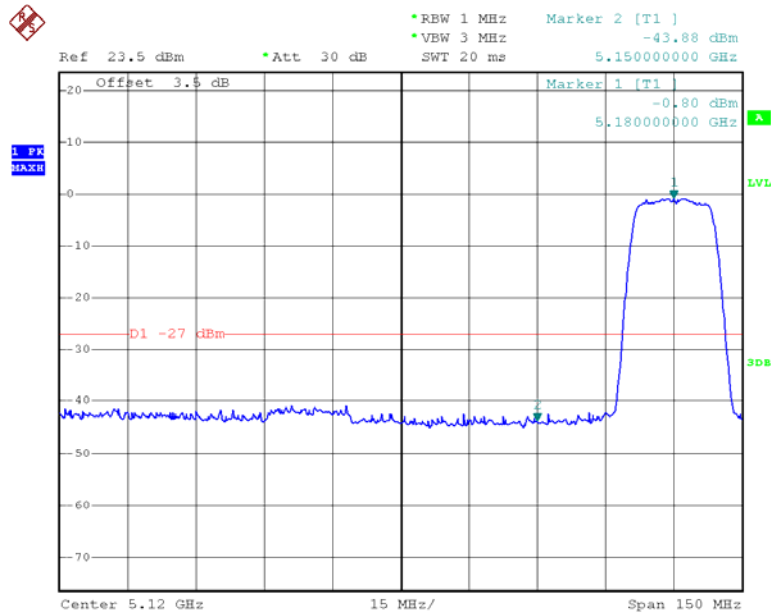


Date: 14.MAR.2013 14:03:04

Chain 1:802.11ac20 Right Bandedge

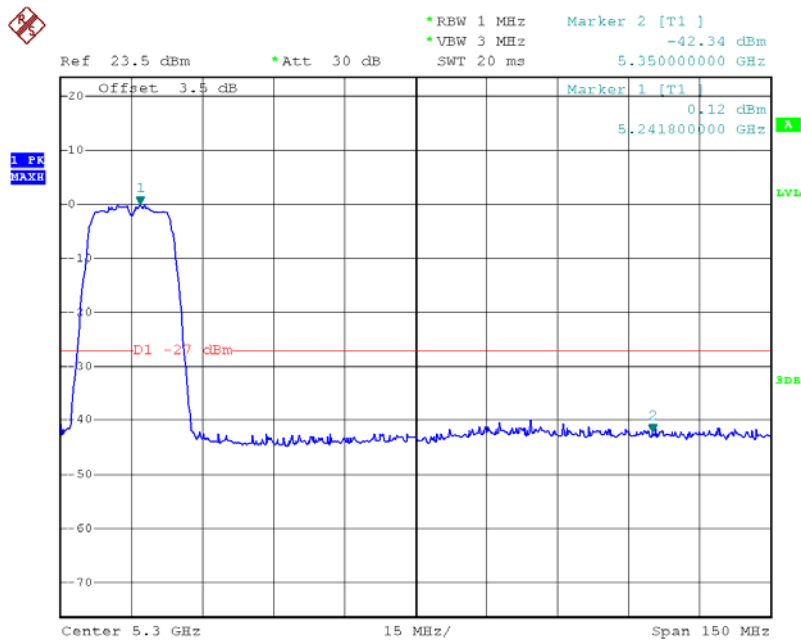


Date: 14.MAR.2013 14:03:54

Chain 1:802.11ac40 Left Bandedge

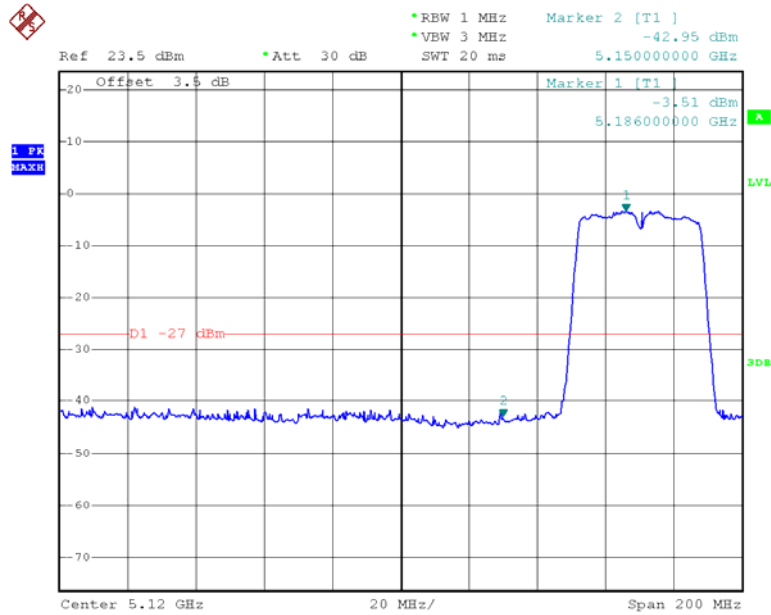


Date: 14.MAR.2013 14:08:05

Chain 1:802.11ac40 Right Bandedge

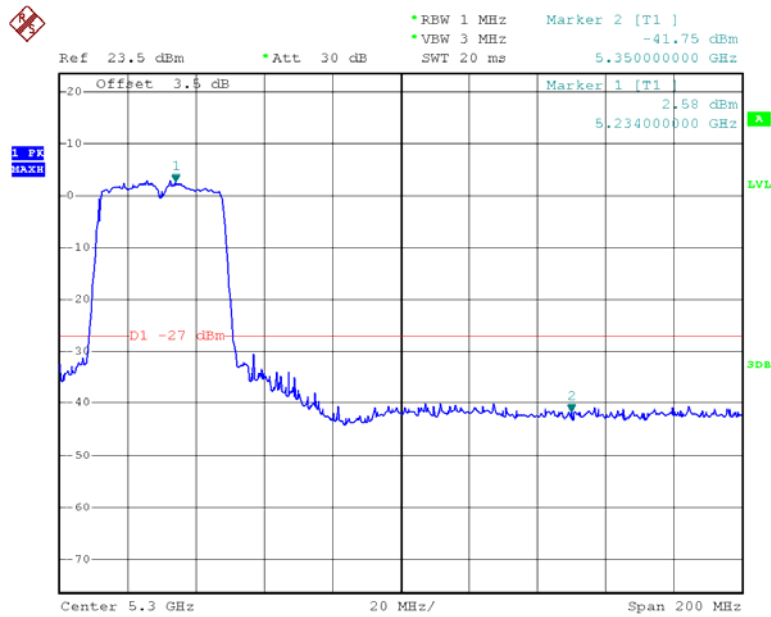


Date: 14.MAR.2013 14:10:09

Chain 1:802.11ac80 Left Bandedge

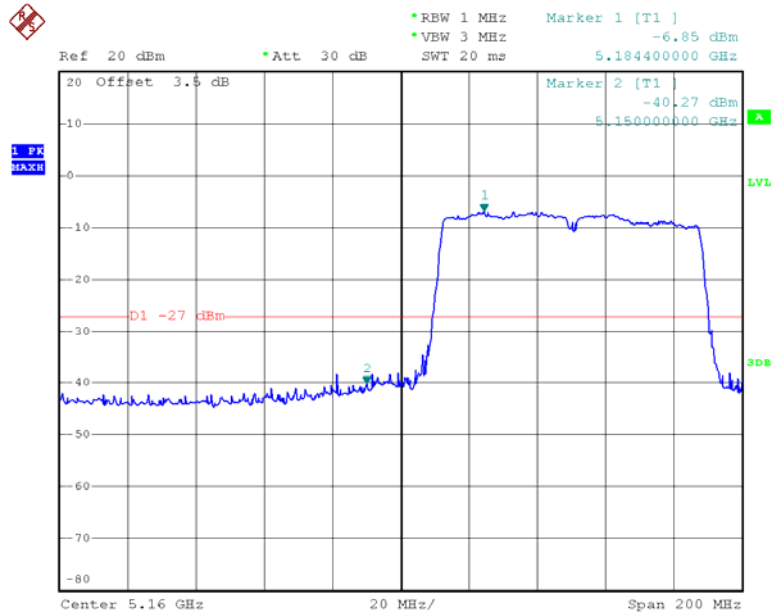

Date: 27.FEB.2013 09:48:54

Chain 1:802.11ac80 Right Bandedge

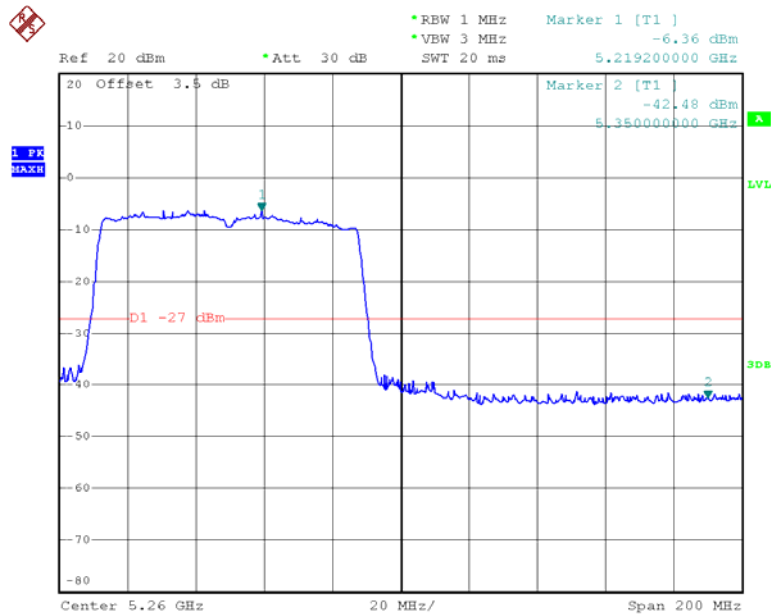

Date: 27.FEB.2013 09:49:34

FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH

Applicable Standard


For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | Spectrum Analyzer | FSP38 | 100478 | 2012-5-14 | 2013-5-13 |

Test Procedure

6. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
7. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
8. Use a RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Use a peak detector. Do not use the Max Hold function. Rather, use the view button to capture the emission. Measure maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat, measurement as needed until the RBW/EBW ratio is approximately 1%.
9. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

| | |
|--------------------|----------|
| Temperature: | 22.6 °C |
| Relative Humidity: | 53 % |
| ATM Pressure: | 101.1kPa |

The testing was performed by Leon Chen from 2013-02-17.


Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting


| Channel | Frequency | 26 dB Bandwidth | Limit |
|-------------------------|-----------|-----------------|-------|
| | (MHz) | (MHz) | (KHz) |
| 802.11a mode | | | |
| Low | 5180 | 21.04 | >500 |
| Middle | 5200 | 20.80 | >500 |
| High | 5240 | 21.04 | >500 |
| chain 0:802.11n20 mode | | | |
| Low | 5180 | 21.20 | >500 |
| Middle | 5200 | 21.20 | >500 |
| High | 5240 | 21.20 | >500 |
| chain 0:802.11n40 mode | | | |
| Low | 5190 | 40.00 | >500 |
| High | 5230 | 40.00 | >500 |
| chain 0:802.11ac20 mode | | | |
| Low | 5180 | 21.20 | >500 |
| Middle | 5200 | 21.20 | >500 |
| High | 5240 | 21.20 | >500 |
| chain 0:802.11ac40 mode | | | |
| Low | 5190 | 39.84 | >500 |
| High | 5230 | 39.68 | >500 |
| chain 0:802.11ac80 mode | | | |
| Low | 5210 | 83.84 | >500 |
| chain 1:802.11n20 mode | | | |
| Low | 5180 | 21.20 | >500 |
| Middle | 5200 | 21.20 | >500 |
| High | 5240 | 21.20 | >500 |
| Chain1:802.11n40 mode | | | |
| Low | 5190 | 40.00 | >500 |
| High | 5230 | 40.00 | >500 |
| chain 1:802.11ac20 mode | | | |
| Low | 5180 | 21.20 | >500 |
| Middle | 5200 | 21.20 | >500 |
| High | 5240 | 21.20 | >500 |
| Chain1:802.11ac40 mode | | | |
| Low | 5190 | 39.52 | >500 |
| High | 5230 | 39.52 | >500 |
| Chain1:802.11ac80 mode | | | |
| Low | 5210 | 83.84 | >500 |

802.11a Low Channel

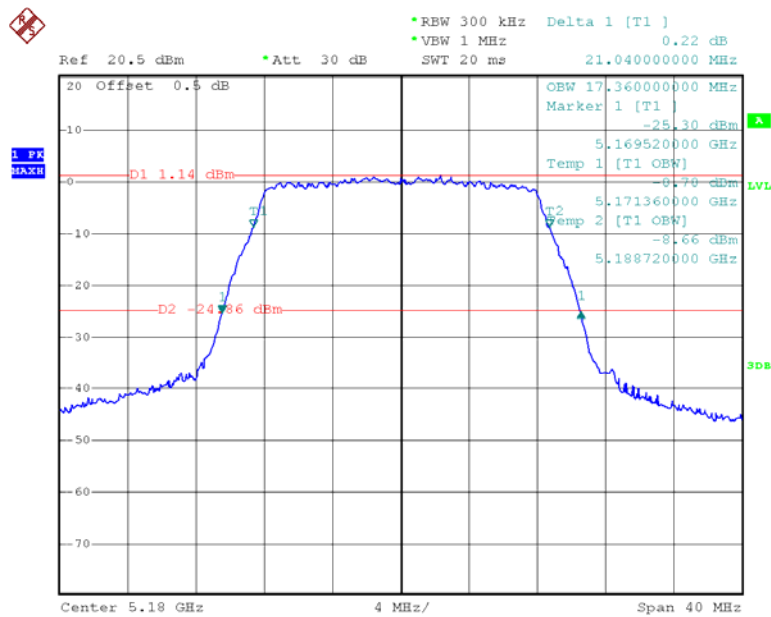


Date: 17.FEB.2013 10:39:53

802.11a Middle Channel

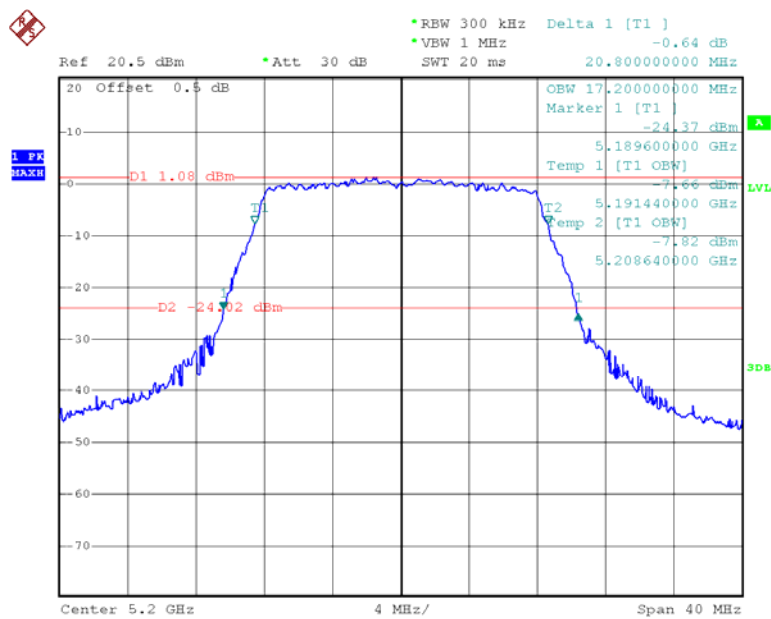


Date: 17.FEB.2013 11:39:52

802.11a High Channel

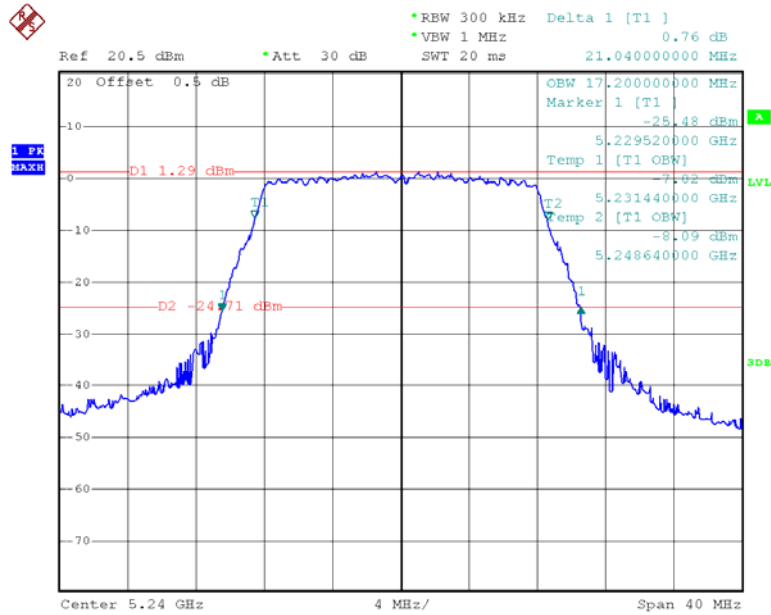


Date: 17.FEB.2013 11:48:55

Chain 0:802.11n20 Low Channel

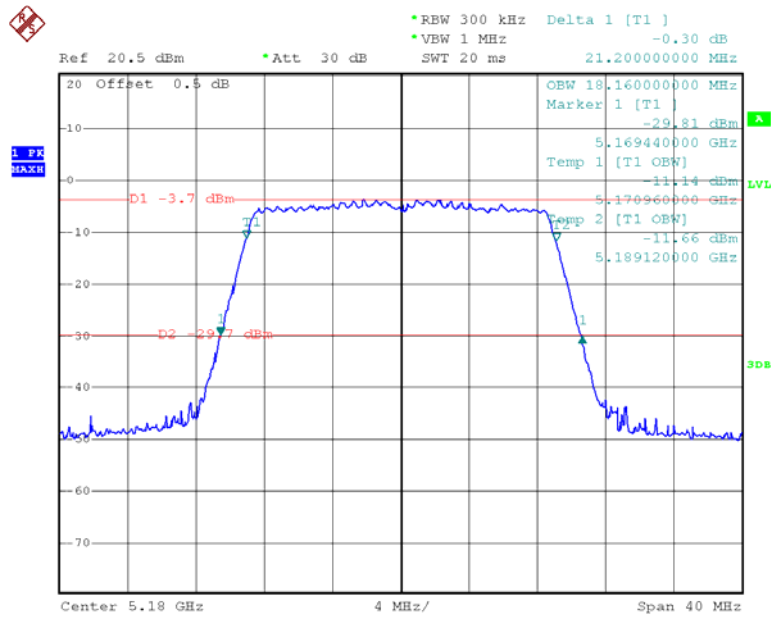


Date: 17.FEB.2013 13:05:02

Chain 0:802.11n20 Middle Channel

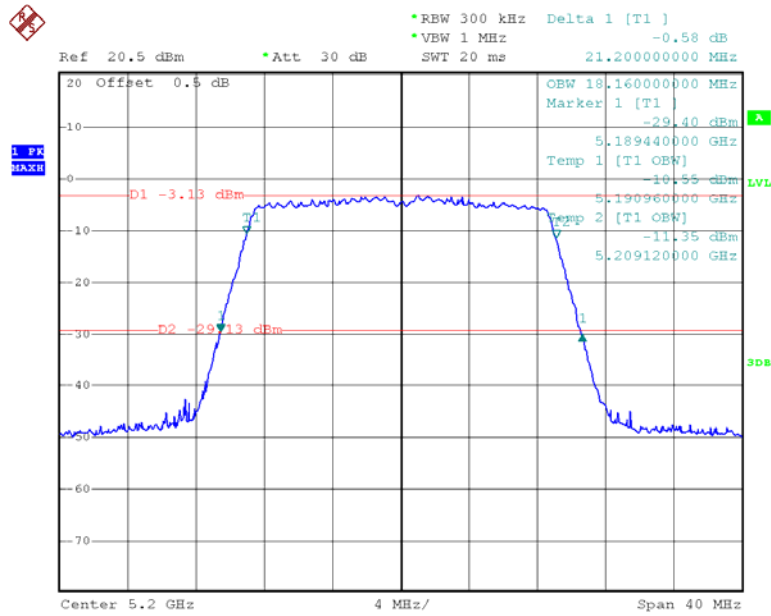


Date: 17.FEB.2013 13:18:37

Chain 0:802.11n20 High Channel

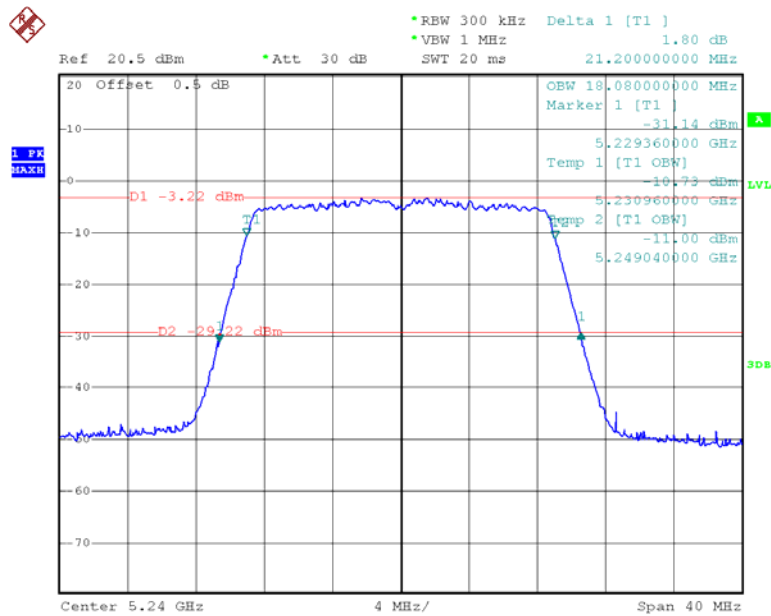


Date: 17.FEB.2013 13:35:32

Chain 0:802.11n40 Low Channel

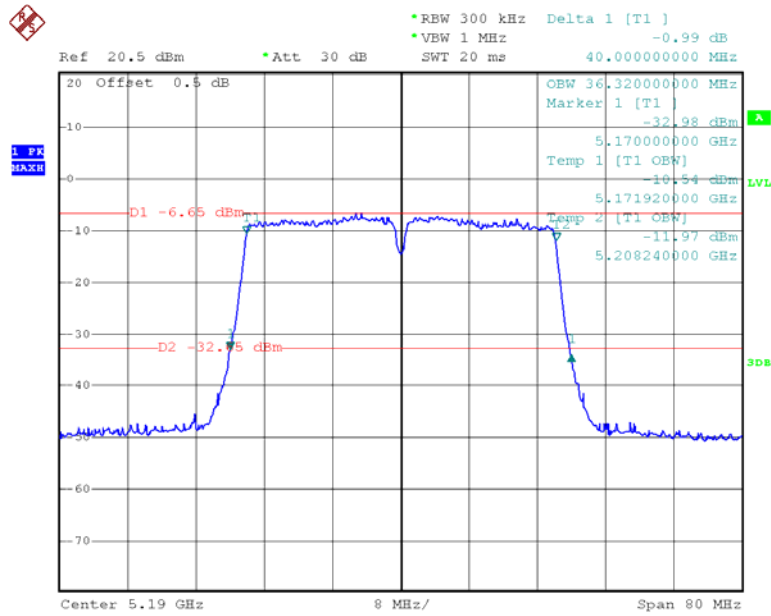


Date: 17.FEB.2013 13:53:37

Chain 0:802.11n40 High Channel

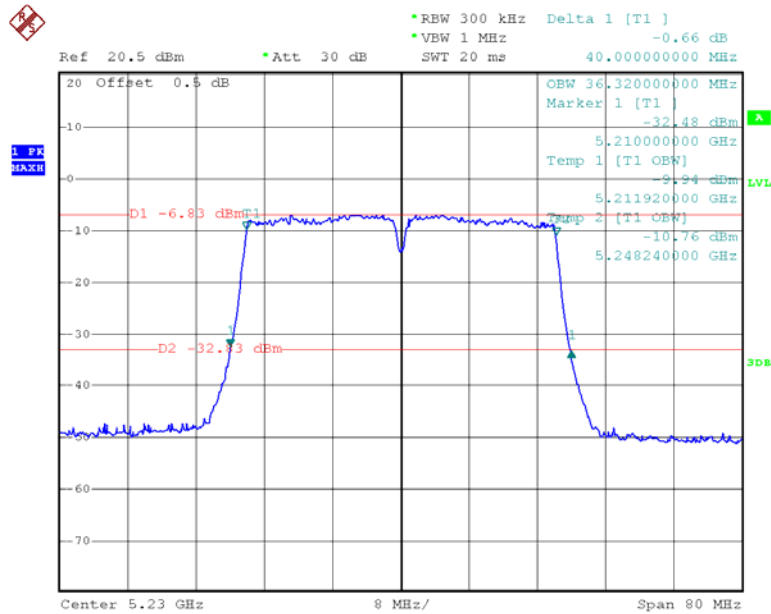


Date: 17.FEB.2013 14:15:44

Chain 0:802.11ac20 Low Channel

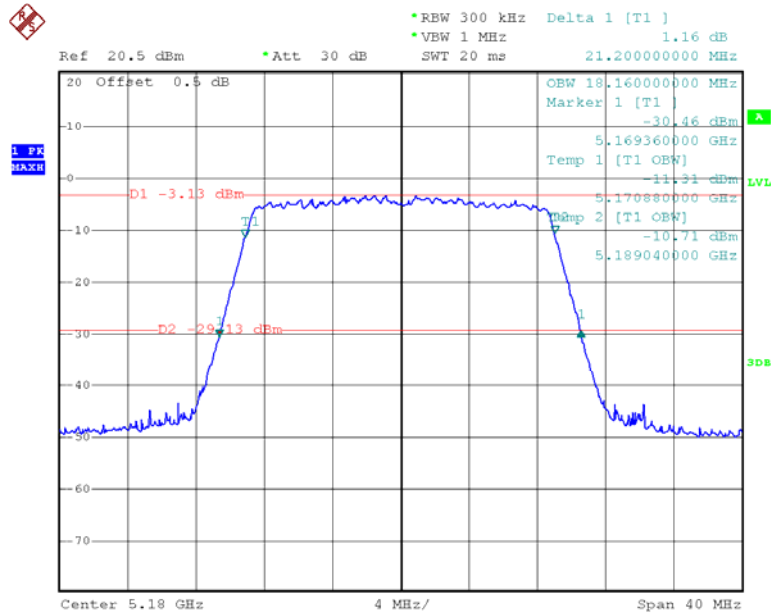


Date: 17.FEB.2013 14:56:24

Chain 0:802.11ac20 Middle Channel

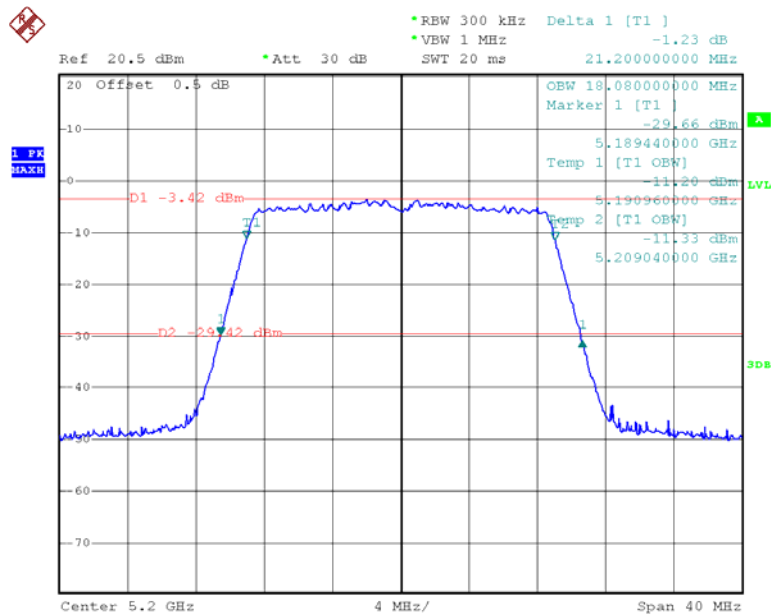


Date: 17.FEB.2013 15:10:30

Chain 0:802.11ac20 High Channel

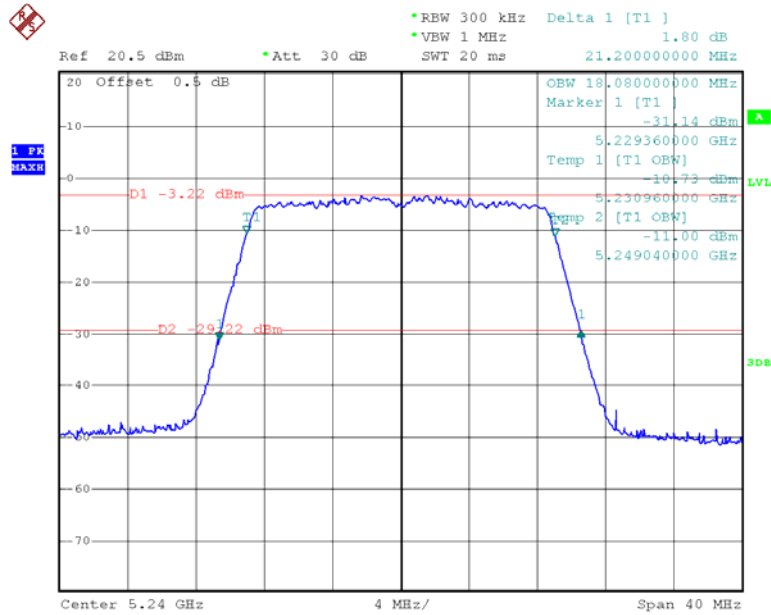


Date: 17.FEB.2013 13:35:32

Chain 0:802.11ac40 Low Channel

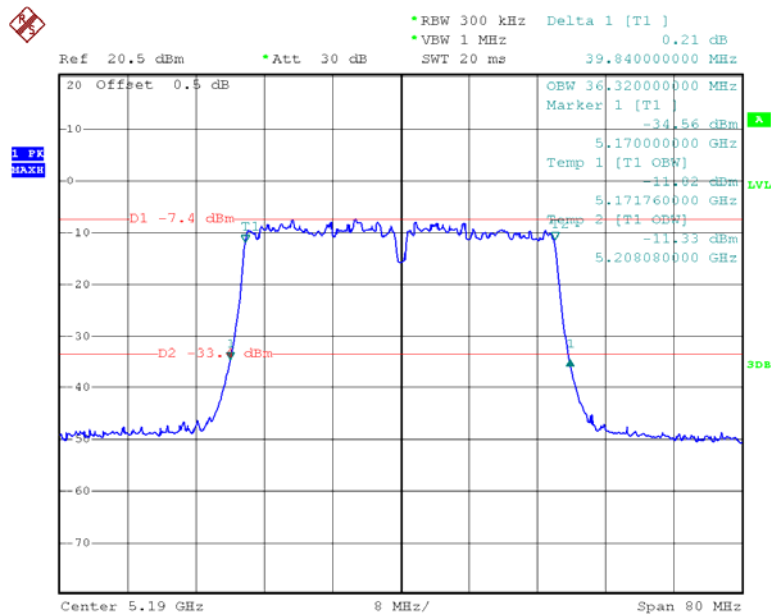


Date: 17.FEB.2013 15:56:25

Chain 0:802.11ac40 High Channel

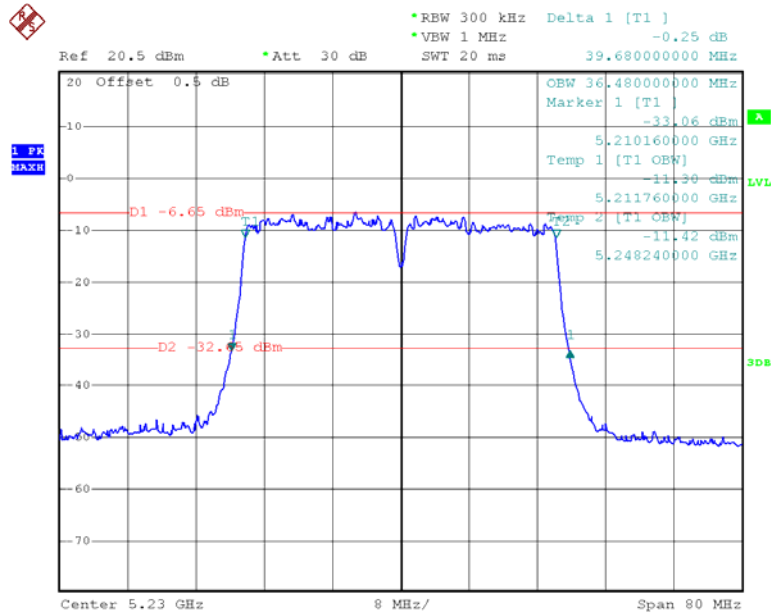


Date: 17.FEB.2013 16:08:04

Chain 0:802.11ac80

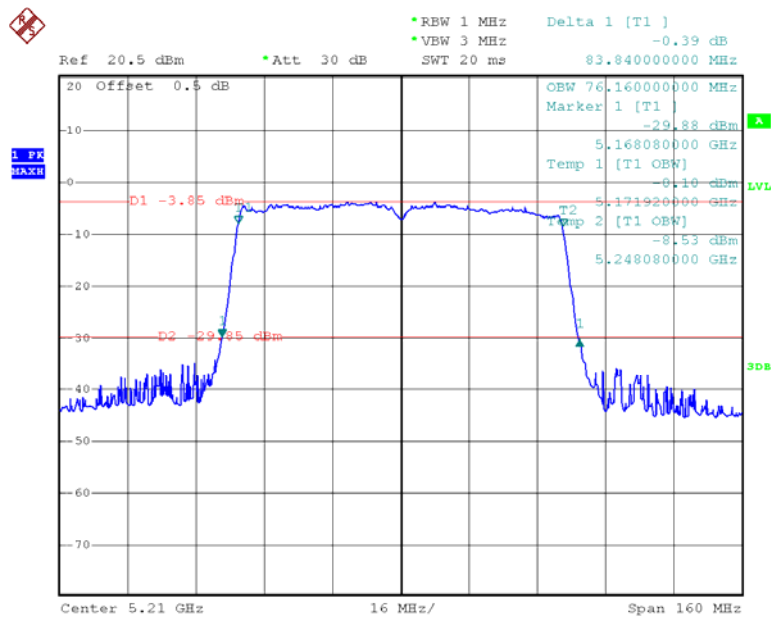


Date: 17.FEB.2013 14:28:47

Chain 1:802.11n20 Low Channel

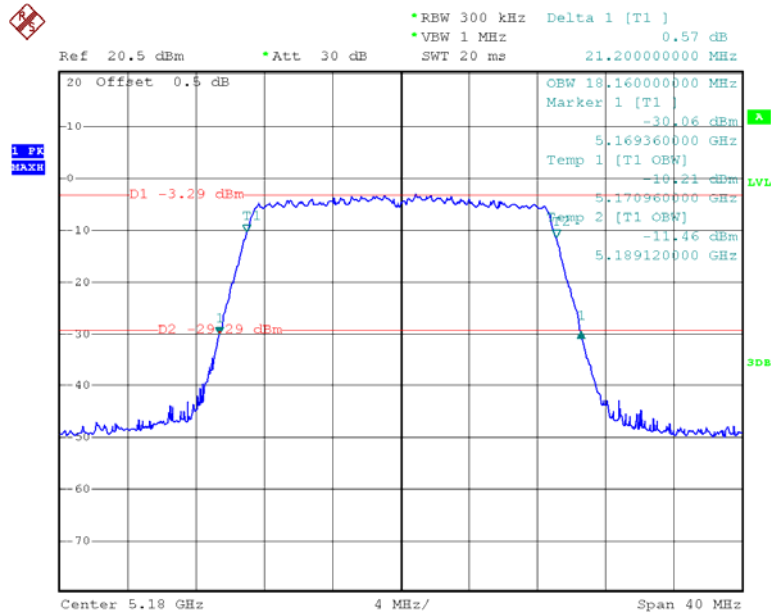


Date: 17.FEB.2013 13:11:39

Chain 1:802.11n20 Middle Channel

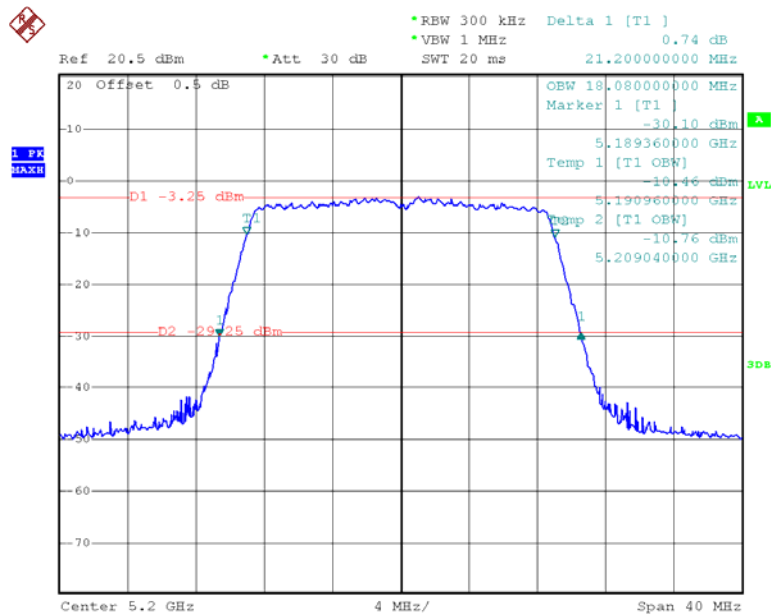


Date: 17.FEB.2013 13:25:59

Chain 1:802.11n20 High Channel

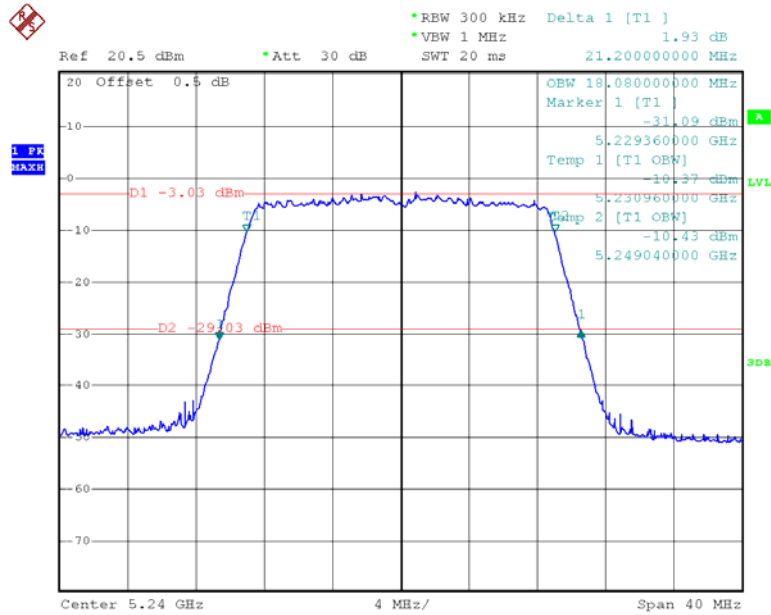


Date: 17.FEB.2013 13:41:34

Chain 1:802.11n40 Low Channel

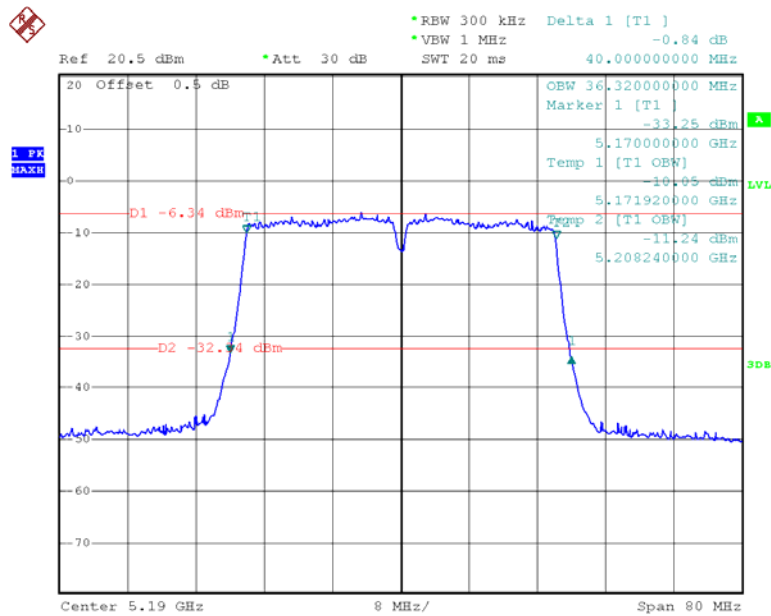


Date: 17.FEB.2013 14:07:16

Chain 1:802.11n40 High Channel

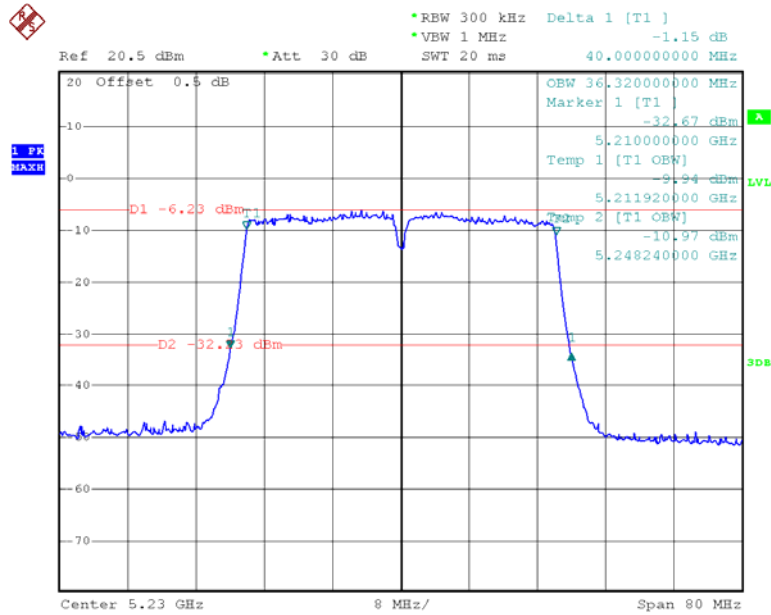


Date: 17.FEB.2013 14:21:51

Chain 1:802.11ac20 Low Channel

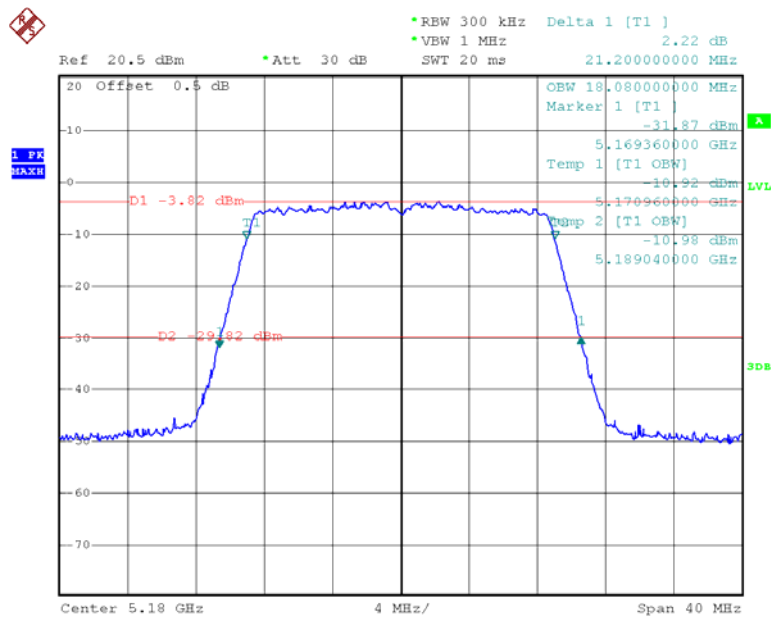


Date: 17.FEB.2013 15:03:25

Chain 1:802.11ac20 Middle Channel

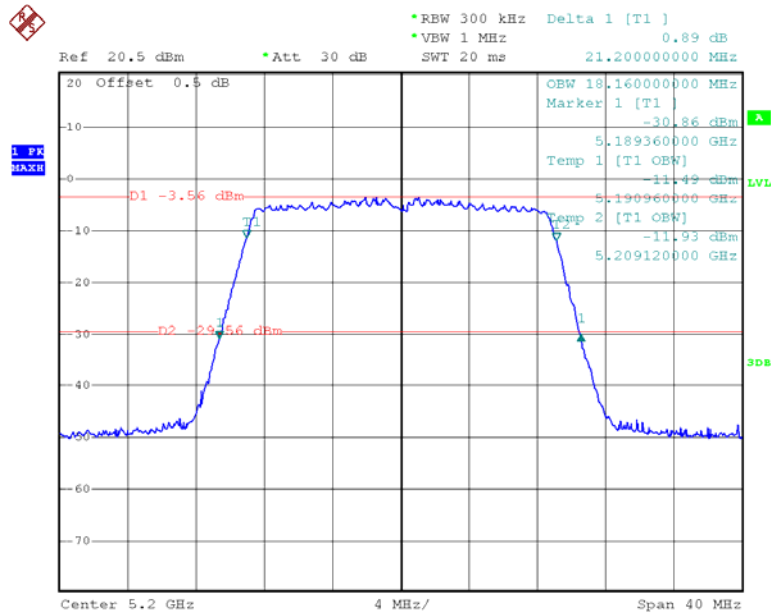


Date: 17.FEB.2013 15:17:04

Chain 1:802.11ac20 High Channel

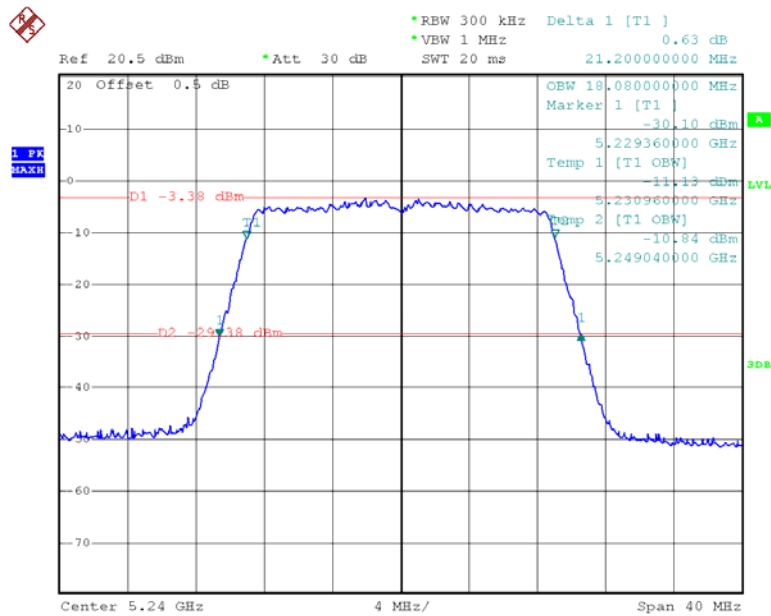


Date: 17.FEB.2013 15:31:56

Chain 1:802.11ac40 Low Channel

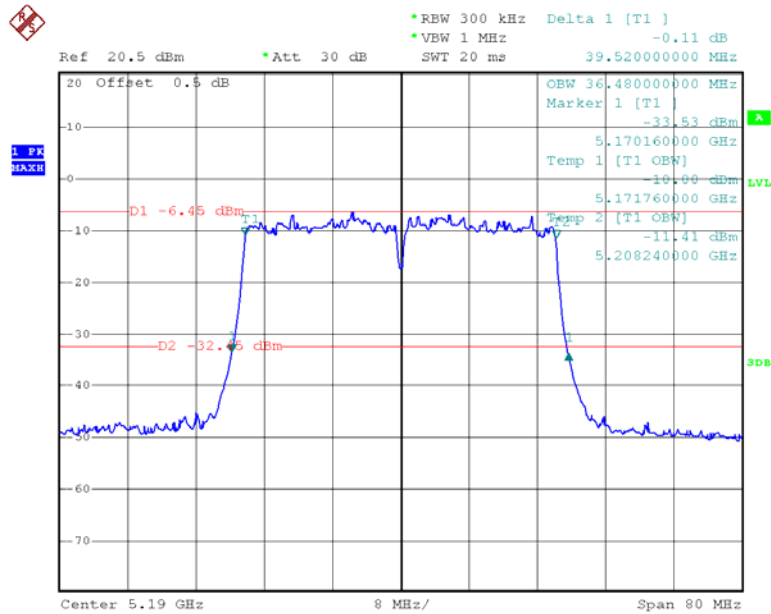


Date: 17.FEB.2013 16:02:39

Chain 1:802.11ac40 High Channel

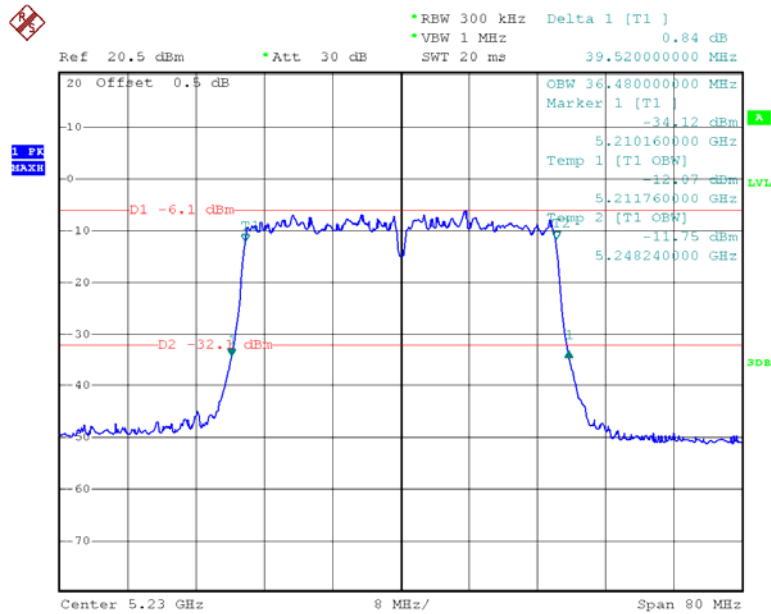

Date: 17.FEB.2013 16:13:21

Chain 1:802.11ac80

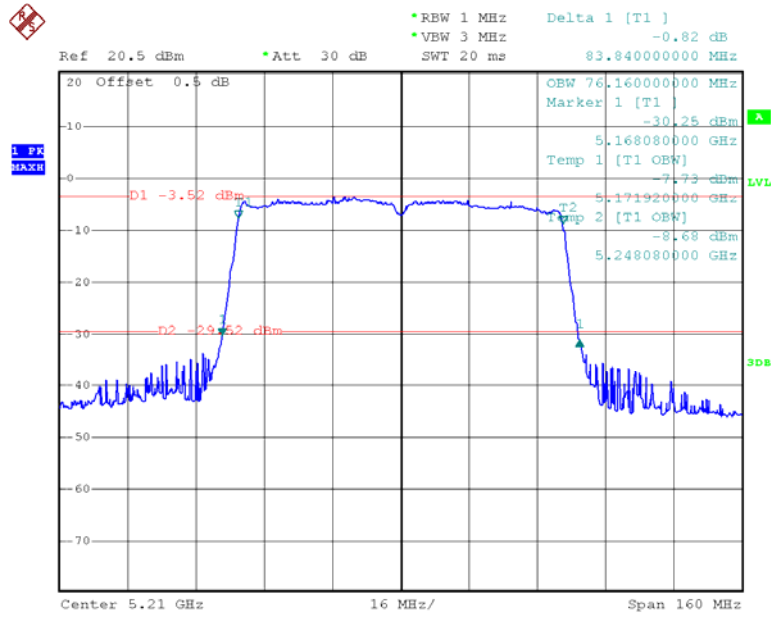

Date: 17.FEB.2013 14:36:42

FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------|--------------------|--------------|----------------------|-------------------------|-----------------------------|
| Rohde & Schwarz | Spectrum Analyzer | FSP38 | 100478 | 2012-5-14 | 2013-5-13 |

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set span to encompass the entire emission bandwidth (EBW) of the signal. Set RBW = 1 MHz. Set VBW ≥ 3 MHz. Use sample detector mode Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

| | |
|---------------------------|-------------------|
| Temperature: | 23.8 ° C~23.9 ° C |
| Relative Humidity: | 46%~48% |
| ATM Pressure: | 101.4kPa~101.7kPa |

The testing was performed by Leon Chen from 2013-02-21 to 2013-02-25.


Test Mode: Transmitting

| Channel | Frequency | Conducted Output Power | Limit | Result |
|-------------------------|-----------|------------------------|-------|--------|
| | (MHz) | (dBm) | (dBm) | |
| 802.11a mode | | | | |
| Low | 5180 | 7.69 | 17 | PASS |
| Middle | 5200 | 7.57 | 17 | PASS |
| High | 5240 | 7.68 | 17 | PASS |
| chain 0:802.11n20 mode | | | | |
| Low | 5180 | 4.65 | 17 | PASS |
| Middle | 5200 | 4.63 | 17 | PASS |
| High | 5240 | 4.36 | 17 | PASS |
| chain 1:802.11n20 mode | | | | |
| Low | 5180 | 4.55 | 17 | PASS |
| Middle | 5200 | 4.72 | 17 | PASS |
| High | 5240 | 4.38 | 17 | PASS |
| chain 0:802.11n40 mode | | | | |
| Low | 5190 | 4.58 | 17 | PASS |
| High | 5230 | 4.67 | 17 | PASS |
| chain 1:802.11n40 mode | | | | |
| Low | 5190 | 4.62 | 17 | PASS |
| High | 5230 | 4.67 | 17 | PASS |
| chain 0:802.11ac20 mode | | | | |
| Low | 5180 | 4.65 | 17 | PASS |
| Middle | 5200 | 4.63 | 17 | PASS |
| High | 5240 | 4.36 | 17 | PASS |
| chain 1:802.11ac20 mode | | | | |
| Low | 5180 | 4.55 | 17 | PASS |
| Middle | 5200 | 4.72 | 17 | PASS |
| High | 5240 | 4.38 | 17 | PASS |
| chain 0:802.11ac40 mode | | | | |
| Low | 5190 | 4.63 | 17 | PASS |
| High | 5230 | 4.74 | 17 | PASS |
| chain 1:802.11ac40 mode | | | | |
| Low | 5190 | 4.74 | 17 | PASS |
| High | 5230 | 4.73 | 17 | PASS |
| chain 0:802.11ac80 mode | | | | |
| Low | 5210 | 4.84 | 17 | PASS |
| chain 1:802.11ac80 mode | | | | |
| Low | 5210 | 4.71 | 17 | PASS |

Total power of 802.11n, 802.11ac: chain 0+ chain 1


| Channel | Frequency | Conducted Output Power | Limit | Result |
|-----------------------|-----------|------------------------|-------|--------|
| | (MHz) | (dBm) | (dBm) | |
| Total:802.11n20 mode | | | | |
| Low | 5180 | 7.58 | 17 | PASS |
| Middle | 5200 | 7.68 | 17 | PASS |
| High | 5240 | 7.55 | 17 | PASS |
| Total:802.11n40 mode | | | | |
| Low | 5190 | 7.61 | 17 | PASS |
| High | 5230 | 7.68 | 17 | PASS |
| Total:802.11ac20 mode | | | | |
| Low | 5180 | 7.61 | 17 | PASS |
| Middle | 5200 | 7.68 | 17 | PASS |
| High | 5240 | 7.69 | 17 | PASS |
| Total:802.11ac40 mode | | | | |
| Low | 5190 | 7.70 | 17 | PASS |
| High | 5230 | 7.75 | 17 | PASS |
| Total:802.11ac80 mode | | | | |
| Low | 5210 | 7.79 | 17 | PASS |

802.11a RF Output Power, Low Channel

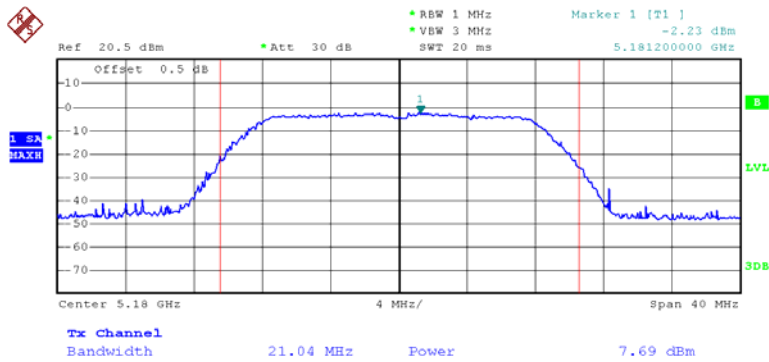


Date: 21.FEB.2013 16:43:19

802.11a RF Output Power, Middle Channel

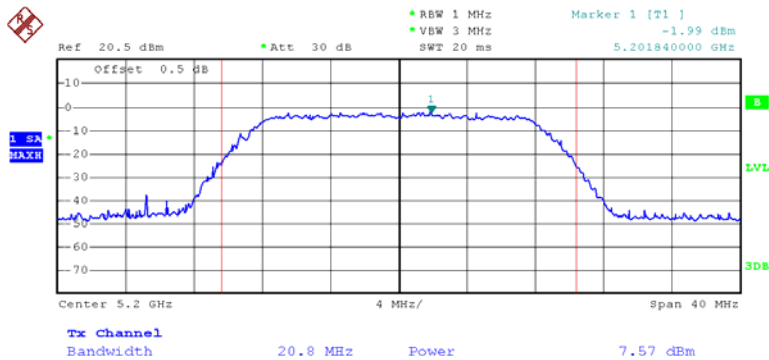


Date: 21.FEB.2013 16:48:12

802.11a RF Output Power, High Channel

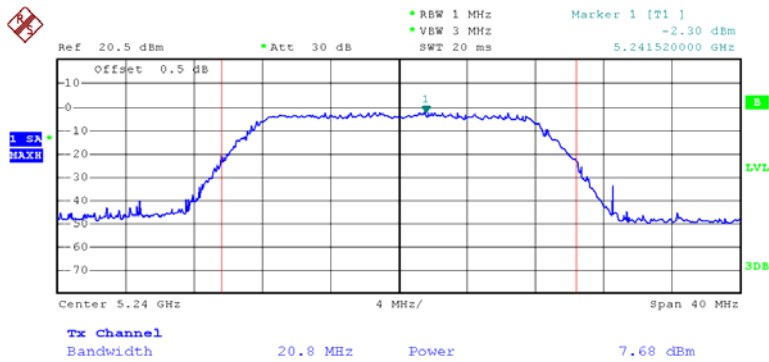


Date: 21.FEB.2013 16:50:07

Chain 0:802.11n20 RF Output Power, Low Channel

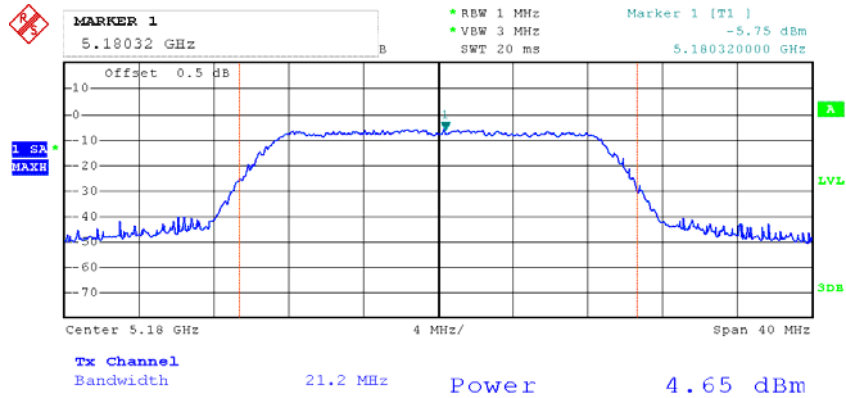


Date: 25.FEB.2013 09:47:53

Chain 0:802.11n20 RF Output Power, Middle Channel

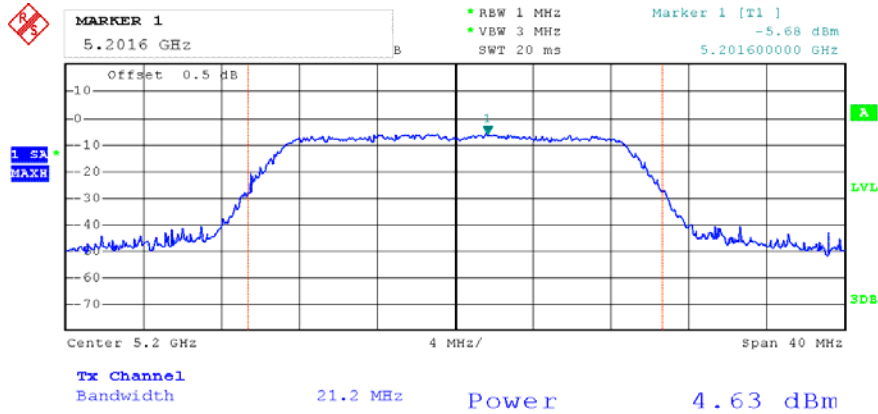


Date: 25.FEB.2013 09:50:41

Chain 0:802.11n20 RF Output Power, High Channel

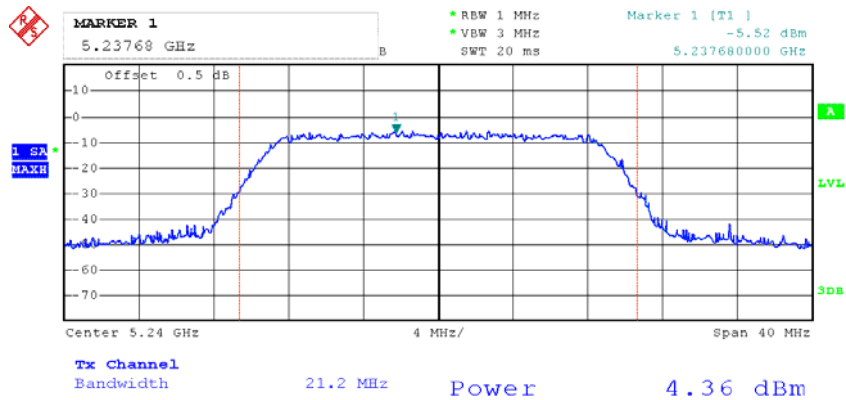


Date: 25.FEB.2013 09:53:14

Chain 0:802.11n40 RF Output Power, Low Channel

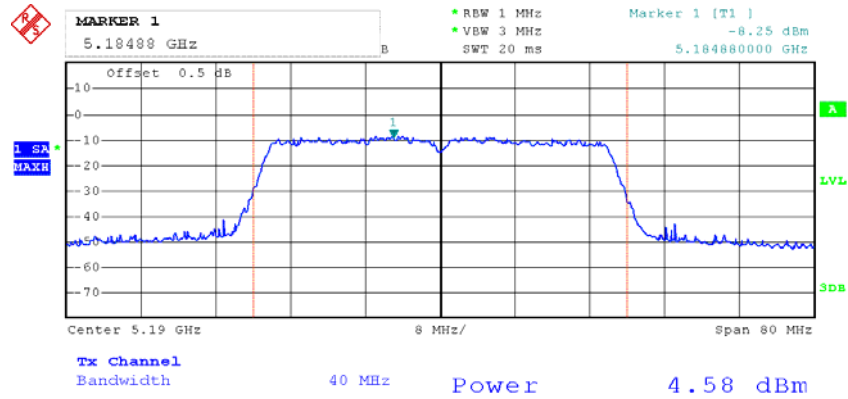


Date: 25.FEB.2013 09:35:03

Chain 0:802.11n40 RF Output Power, High Channel

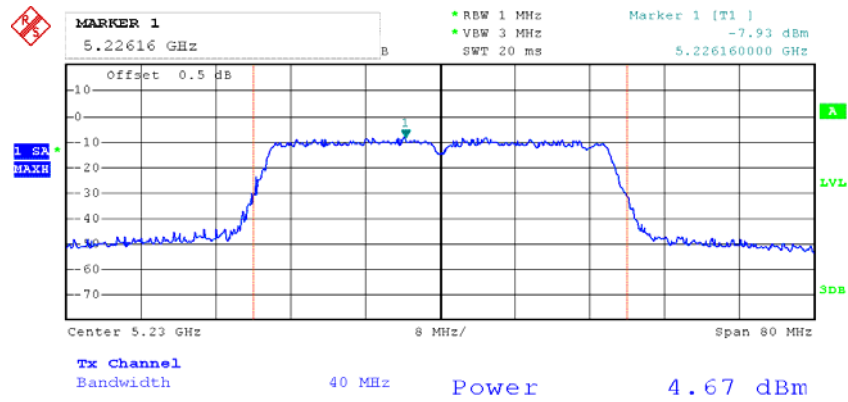


Date: 25.FEB.2013 09:37:19

Chain 0:802.11ac20 RF Output Power, Low Channel

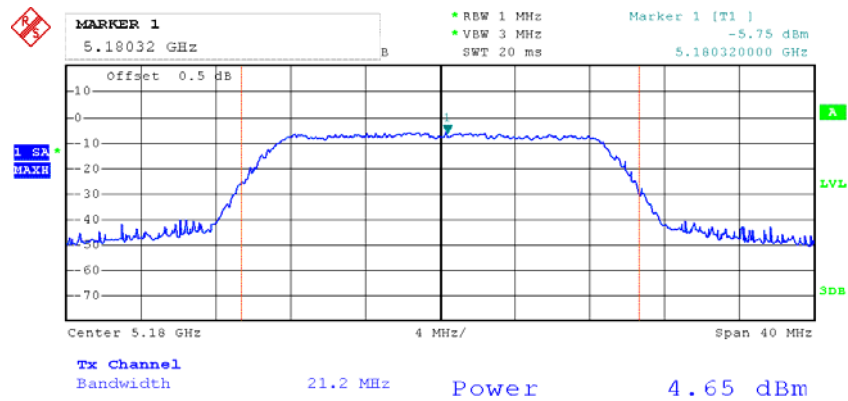


Date: 25.FEB.2013 09:47:53

Chain 0:802.11ac20 RF Output Power, Middle Channel

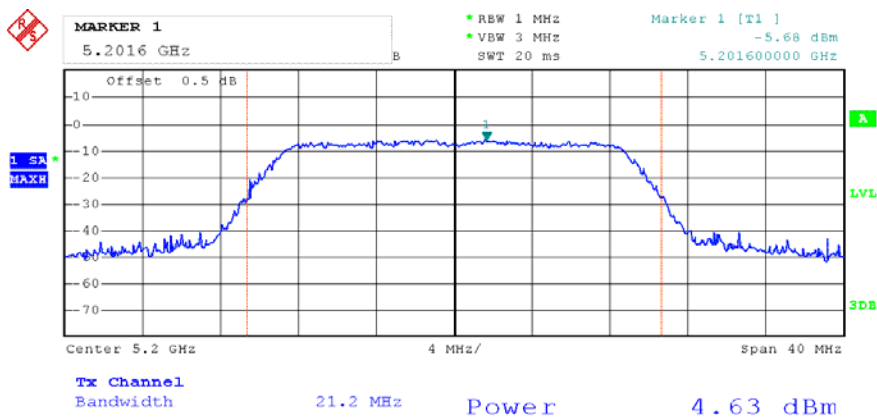


Date: 25.FEB.2013 09:50:41

Chain 0:802.11ac20 RF Output Power, High Channel

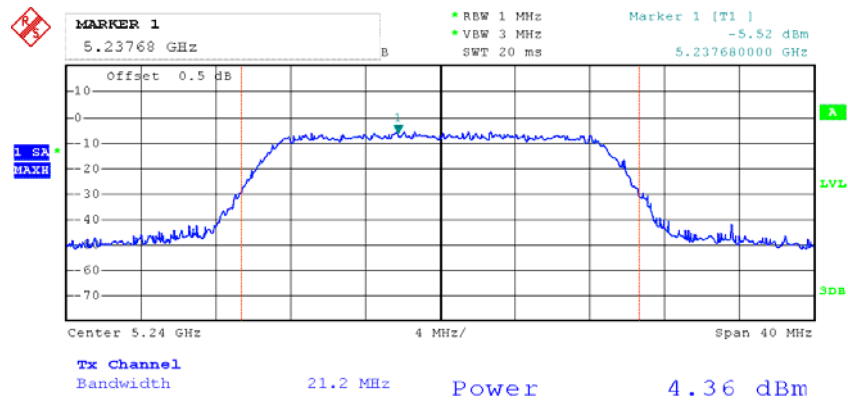


Date: 25.FEB.2013 09:53:14

Chain 0:802.11ac40 RF Output Power, Low Channel

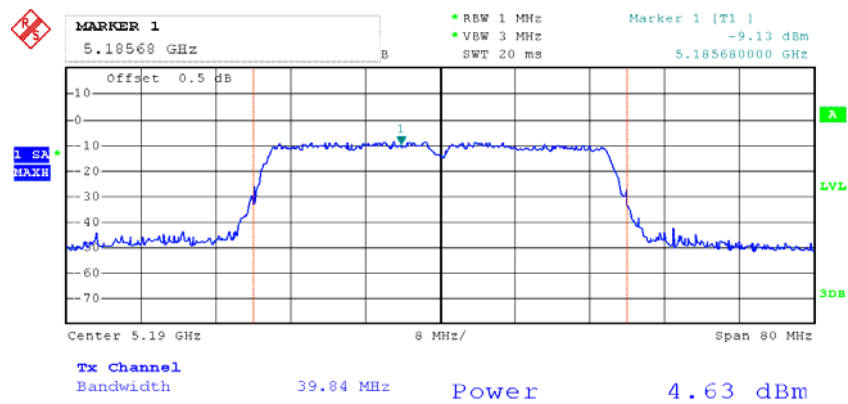


Date: 25.FEB.2013 10:01:17

Chain 0:802.11ac40 RF Output Power, High Channel

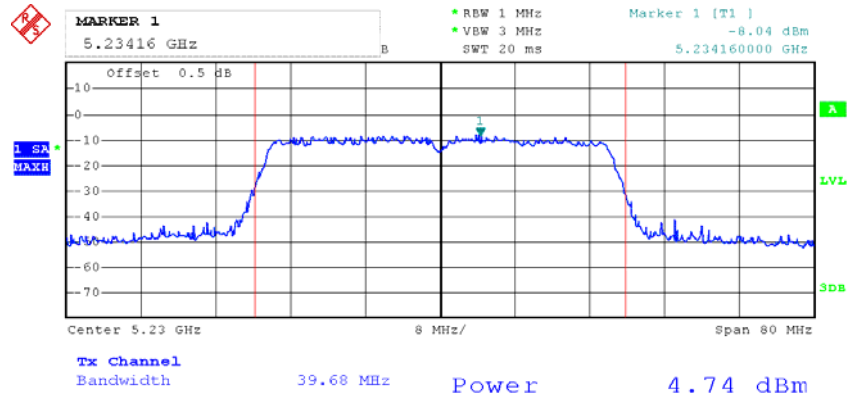


Date: 25.FEB.2013 10:04:02

Chain 0:802.11ac80 RF Output Power, Low Channel

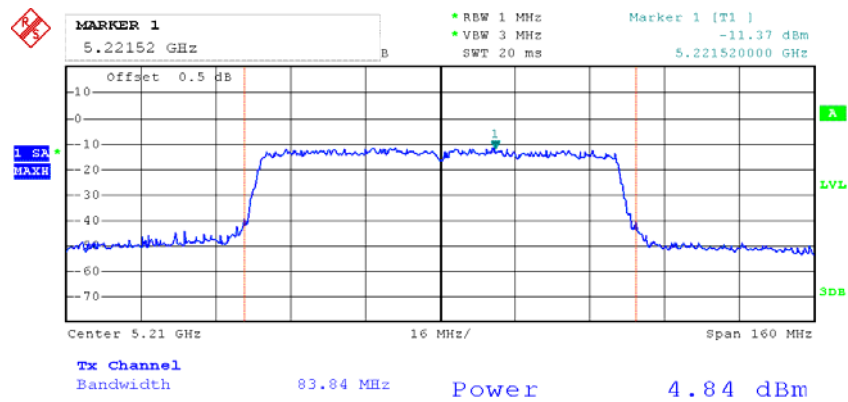


Date: 25.FEB.2013 10:14:42

Chain 1:802.11n20 RF Output Power, Low Channel

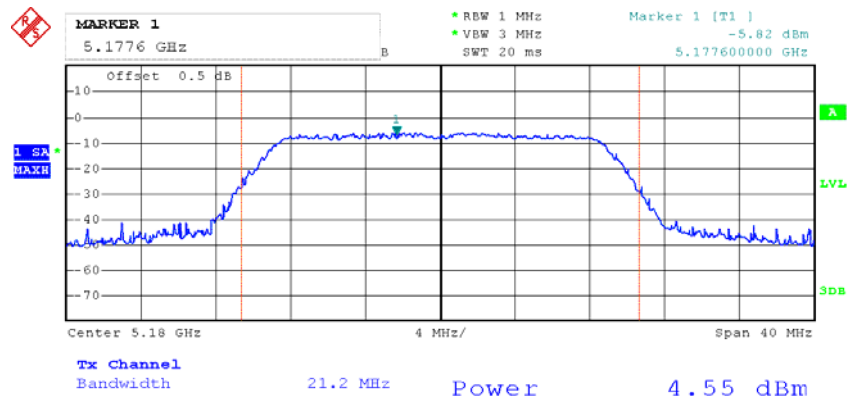


Date: 25.FEB.2013 09:57:58

Chain 1:802.11n20 RF Output Power, Middle Channel

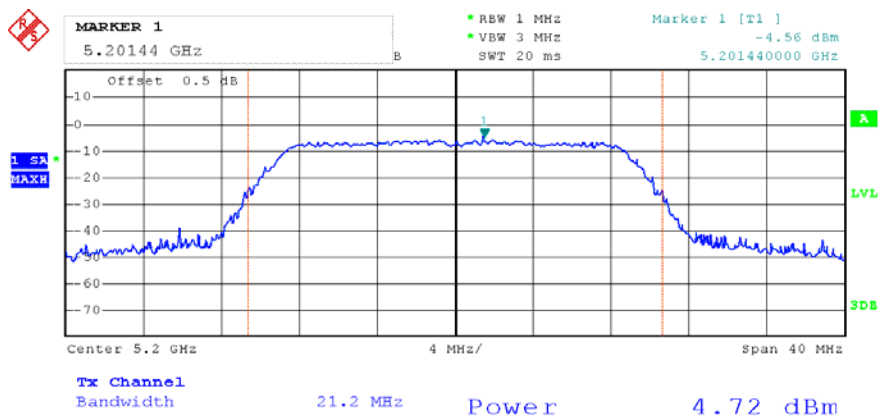


Date: 25.FEB.2013 09:55:53

Chain 1:802.11n20 RF Output Power, High Channel

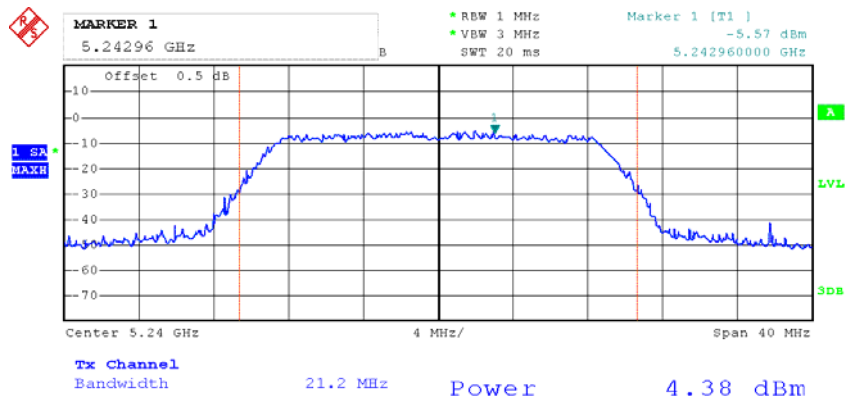


Date: 25.FEB.2013 09:54:31

Chain 1:802.11n40 RF Output Power, Low Channel

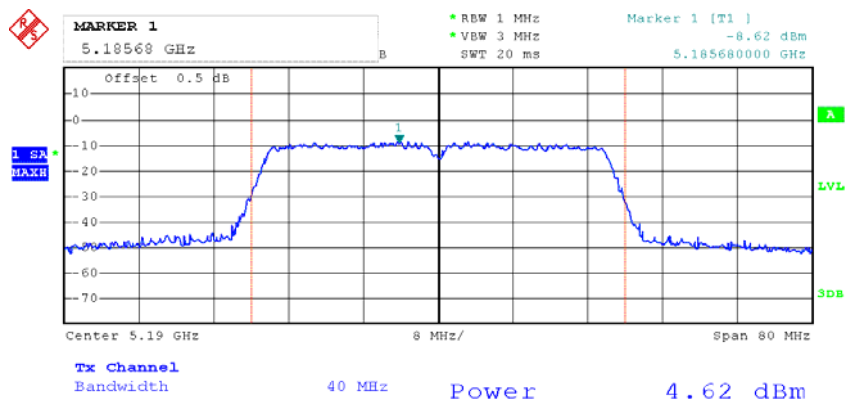


Date: 25.FEB.2013 09:42:46

Chain 1:802.11n40 RF Output Power, High Channel

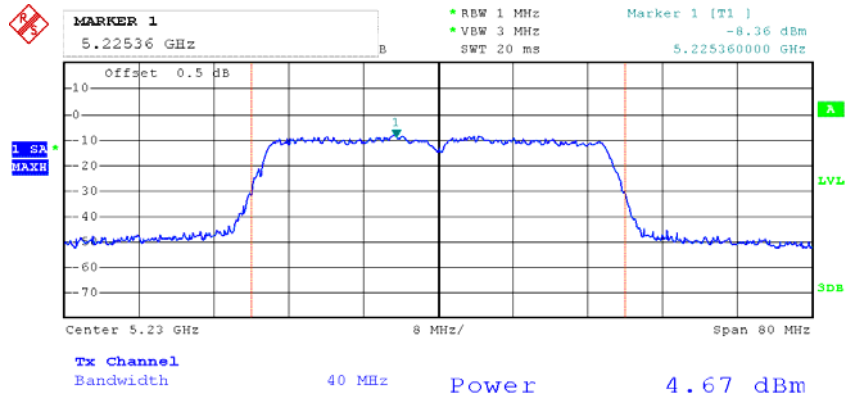


Date: 25.FEB.2013 09:39:48

Chain 1:802.11ac20 RF Output Power, Low Channel

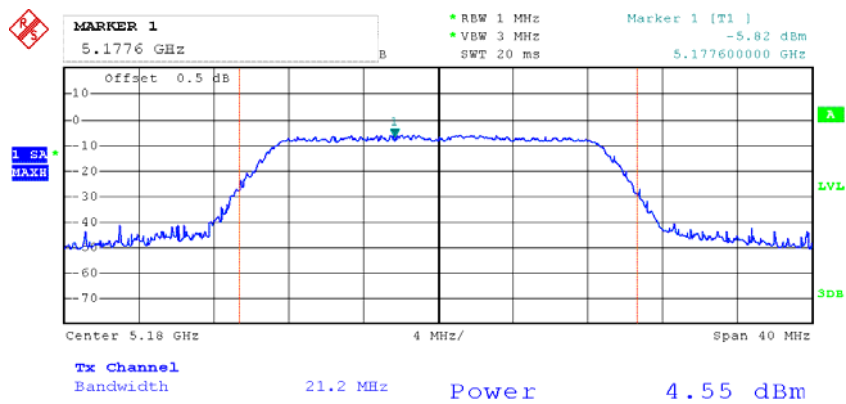


Date: 25.FEB.2013 09:57:58

Chain 1:802.11ac20 RF Output Power, Middle Channel

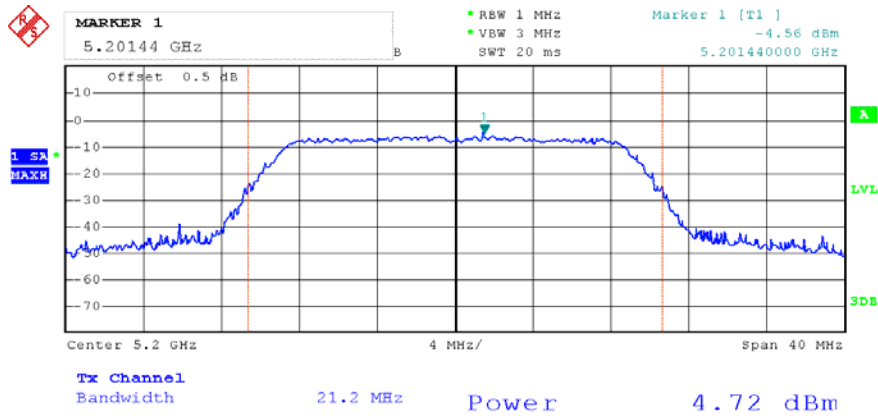


Date: 25.FEB.2013 09:55:53

Chain 1:802.11ac20 RF Output Power, High Channel

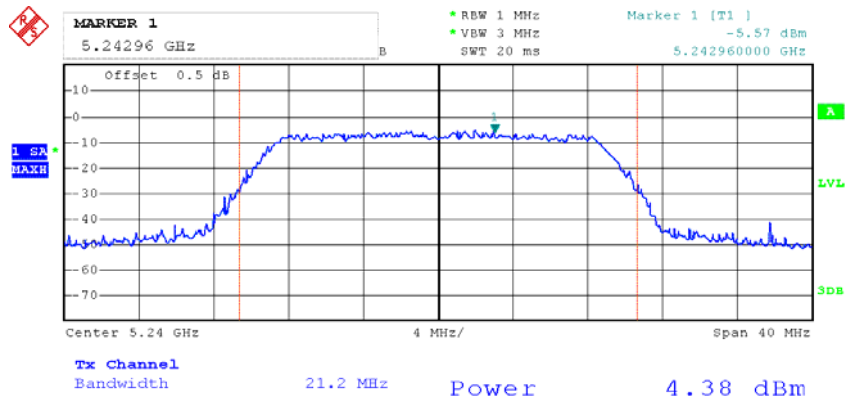


Date: 25.FEB.2013 09:54:31

Chain 1:802.11ac40 RF Output Power, Low Channel

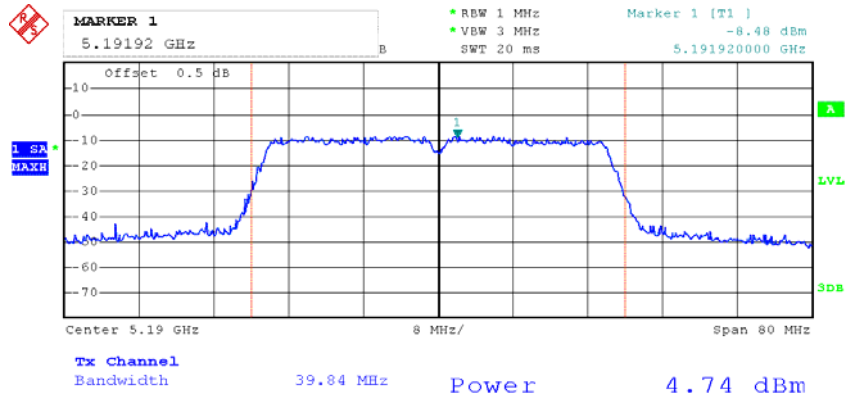


Date: 25.FEB.2013 10:10:22

Chain 1:802.11ac40 RF Output Power, High Channel

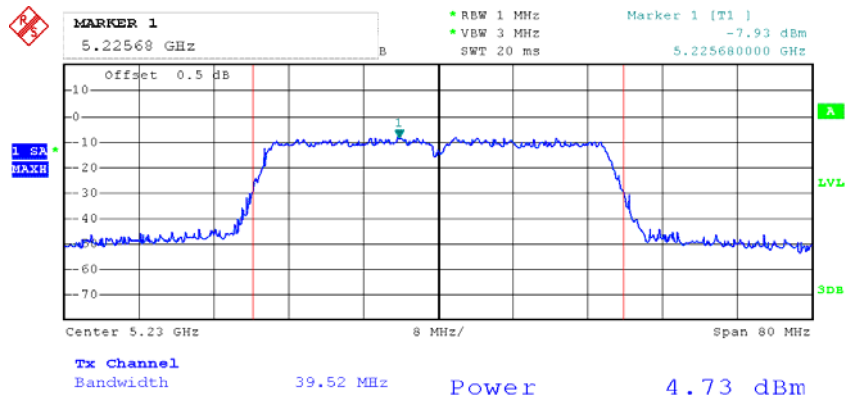

Date: 25.FEB.2013 10:11:46

Chain 1:802.11ac80 RF Output Power

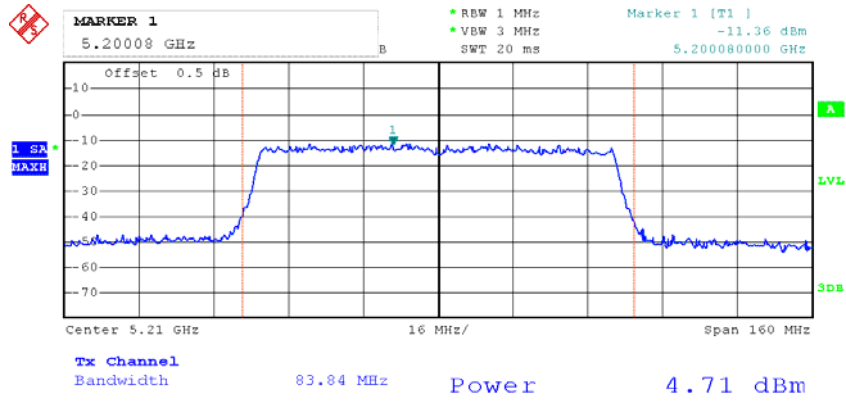

Date: 25.FEB.2013 10:16:00

FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The peak power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Use sample detector and power averaging (not video averaging) mode. Set RBW= 1 MHz, VBW > 1 MHz. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging. This method is permitted only if the transmission pulse or sequence of pulses remains at maximum transmits power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------|--------------------|--------------|----------------------|-------------------------|-----------------------------|
| Rohde & Schwarz | Spectrum Analyzer | FSP38 | 100478 | 2012-5-14 | 2013-5-13 |

Test Data

Environmental Conditions

| | |
|---------------------------|-------------------|
| Temperature: | 23.8 ° C~23.9 ° C |
| Relative Humidity: | 46%~48% |
| ATM Pressure: | 101.4kPa~101.7kPa |

The testing was performed by Leon Chen from 2013-02-21 to 2013-02-25.

Test Mode: Transmitting

Test Result: Pass

Test mode: Transmitting


| Channel | Power Spectral Density | Limit | Result |
|-------------------------|------------------------|-----------|--------|
| | (dBm/MHz) | (dBm/MHz) | |
| 802.11a mode | | | |
| Low | -2.85 | 4 | PASS |
| Middle | -2.21 | 4 | PASS |
| High | -2.31 | 4 | PASS |
| Chain 0:802.11n20 mode | | | |
| Low | -5.84 | 4 | PASS |
| Middle | -5.67 | 4 | PASS |
| High | -5.82 | 4 | PASS |
| Chain 1:802.11n20 mode | | | |
| Low | -5.57 | 4 | PASS |
| Middle | -5.86 | 4 | PASS |
| High | -5.58 | 4 | PASS |
| Chain 0:802.11n40 mode | | | |
| Low | -8.73 | 4 | PASS |
| High | -8.36 | 4 | PASS |
| Chain 1:802.11n40 mode | | | |
| Low | -8.61 | 4 | PASS |
| High | -8.54 | 4 | PASS |
| Chain 0:802.11ac20 mode | | | |
| Low | -5.84 | 4 | PASS |
| Middle | -5.67 | 4 | PASS |
| High | -5.82 | 4 | PASS |
| Chain 1:802.11ac20 mode | | | |
| Low | -5.57 | 4 | PASS |
| Middle | -5.86 | 4 | PASS |
| High | -5.58 | 4 | PASS |
| Chain 0:802.11ac40 mode | | | |
| Low | -8.38 | 4 | PASS |
| High | -7.90 | 4 | PASS |
| Chain 1:802.11ac40 mode | | | |
| Low | -8.48 | 4 | PASS |
| High | -8.57 | 4 | PASS |

| | | | |
|-------------------------|--------|---|------|
| Chain 0:802.11ac80 mode | | | |
| Low | -11.48 | 4 | PASS |
| Chain 1:802.11ac80 mode | | | |
| Low | -11.16 | 4 | PASS |

Total power of 802.11n, 802.11ac: chain 0+ chain 1


| Channel | Power Spectral Density | Limit | Result |
|-----------------------|------------------------|-----------|--------|
| | (dBm/MHz) | (dBm/MHz) | |
| Total:802.11n20 mode | | | |
| Low | -2.69 | 4 | PASS |
| Middle | -2.75 | 4 | PASS |
| High | -2.69 | 4 | PASS |
| Total:802.11n40 mode | | | |
| Low | -5.66 | 4 | PASS |
| High | -5.44 | 4 | PASS |
| Total:802.11ac20 mode | | | |
| Low | -2.69 | 4 | PASS |
| Middle | -2.75 | 4 | PASS |
| High | -2.69 | 4 | PASS |
| Total:802.11ac40 mode | | | |
| Low | -5.42 | 4 | PASS |
| High | -5.21 | 4 | PASS |
| Total:802.11ac80 mode | | | |
| Low | -8.31 | 4 | PASS |

Power Spectral Density, 802.11a Low Channel

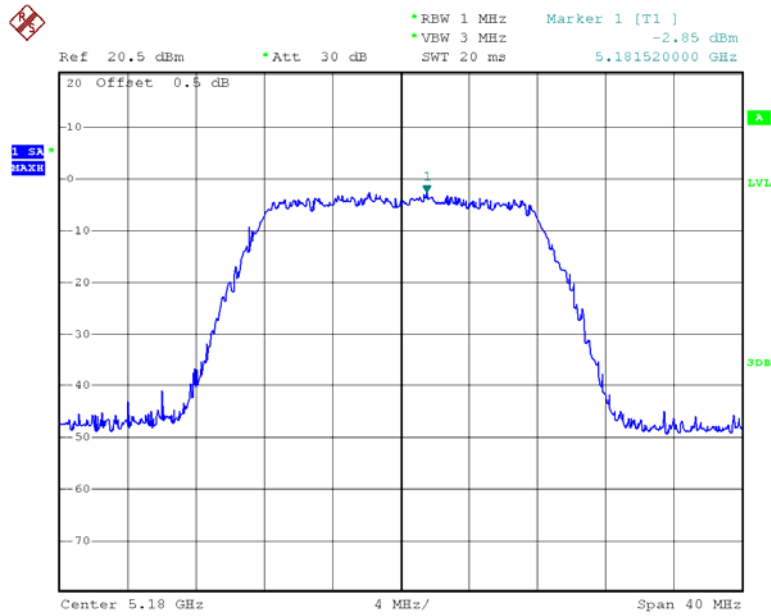


Date: 21.FEB.2013 16:44:00

Power Spectral Density, 802.11a Middle Channel

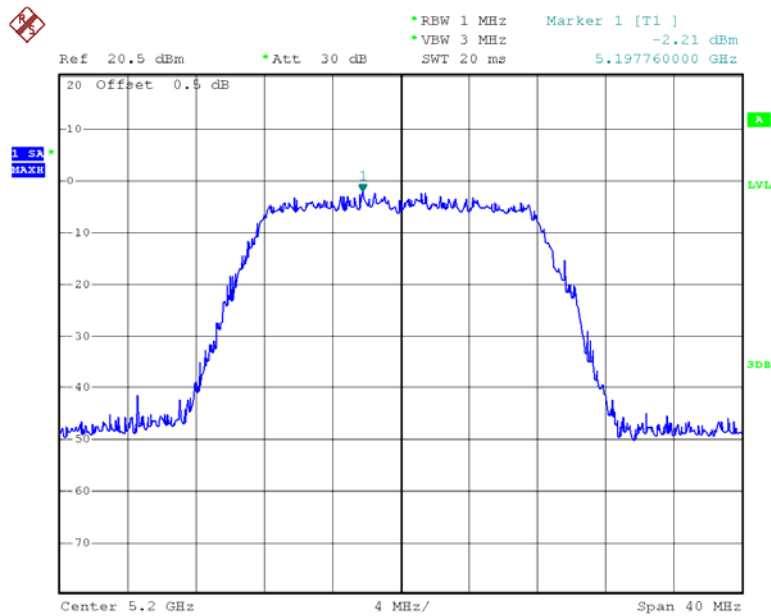


Date: 21.FEB.2013 16:48:55

Power Spectral Density, 802.11a High Channel

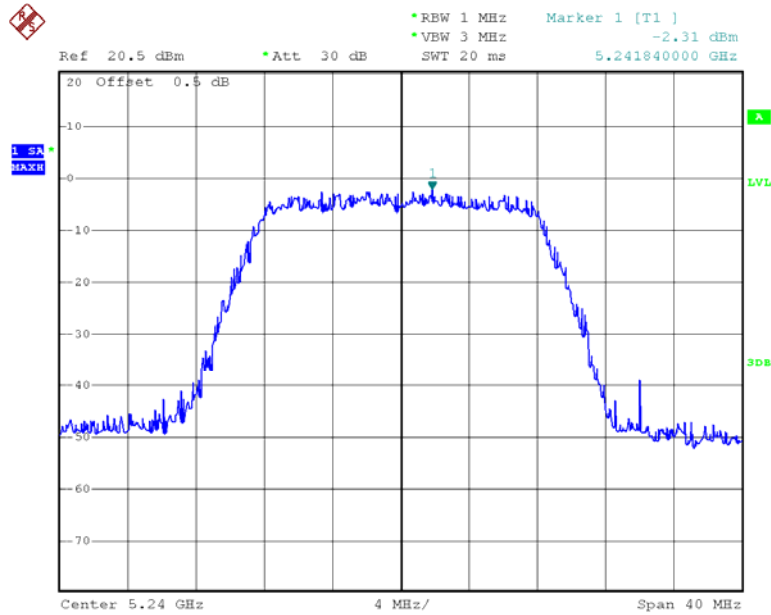


Date: 21.FEB.2013 16:50:38

Chain 0:Power Spectral Density, 802.11n20 Low Channel

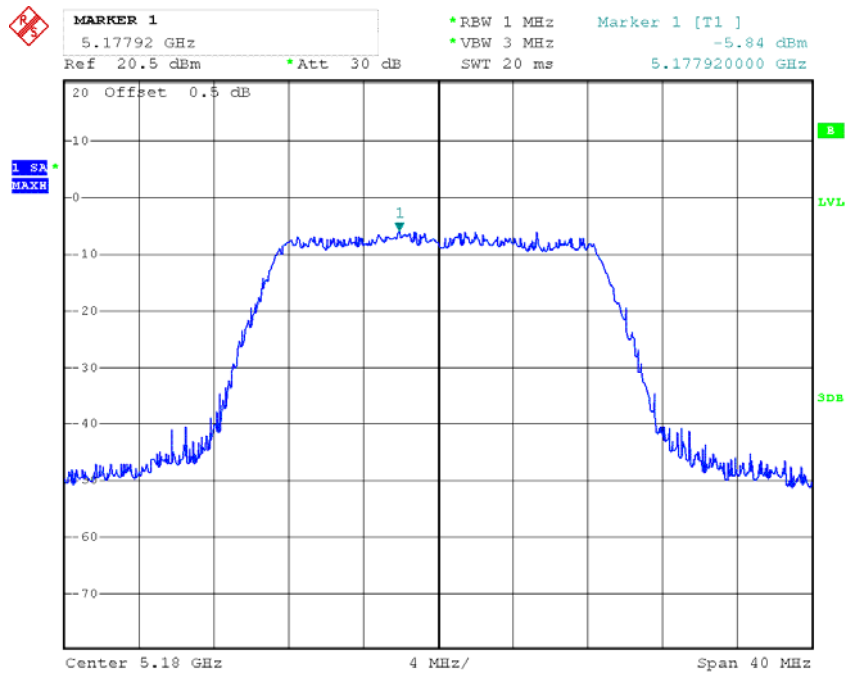


Date: 25.FEB.2013 09:48:25

Chain 0: Power Spectral Density, 802.11n20 Middle Channel

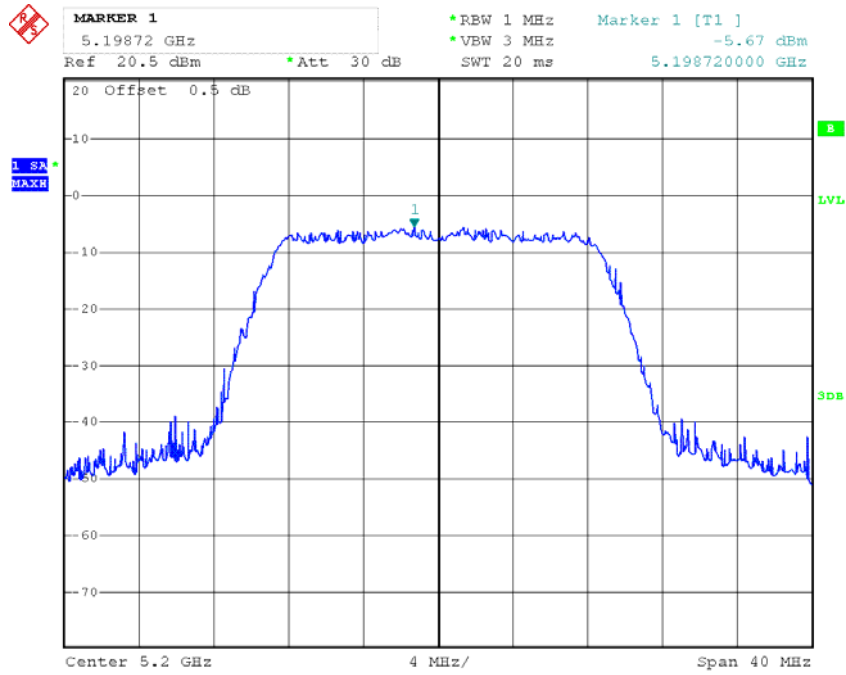


Date: 25.FEB.2013 09:51:14

Chain 0: Power Spectral Density, 802.11n20 High Channel

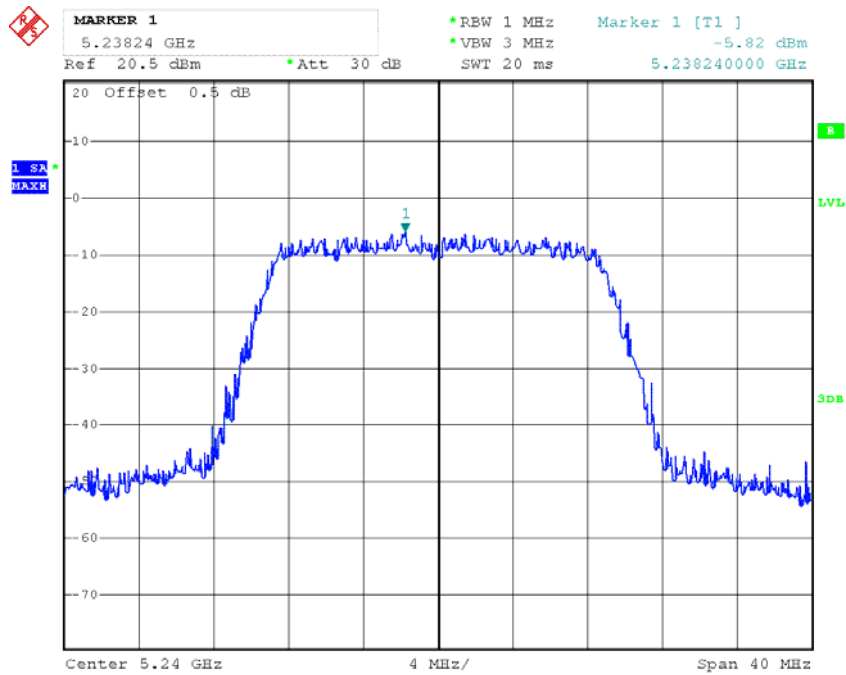


Date: 25.FEB.2013 09:53:35

Chain 0: Power Spectral Density, 802.11n40 Low Channel

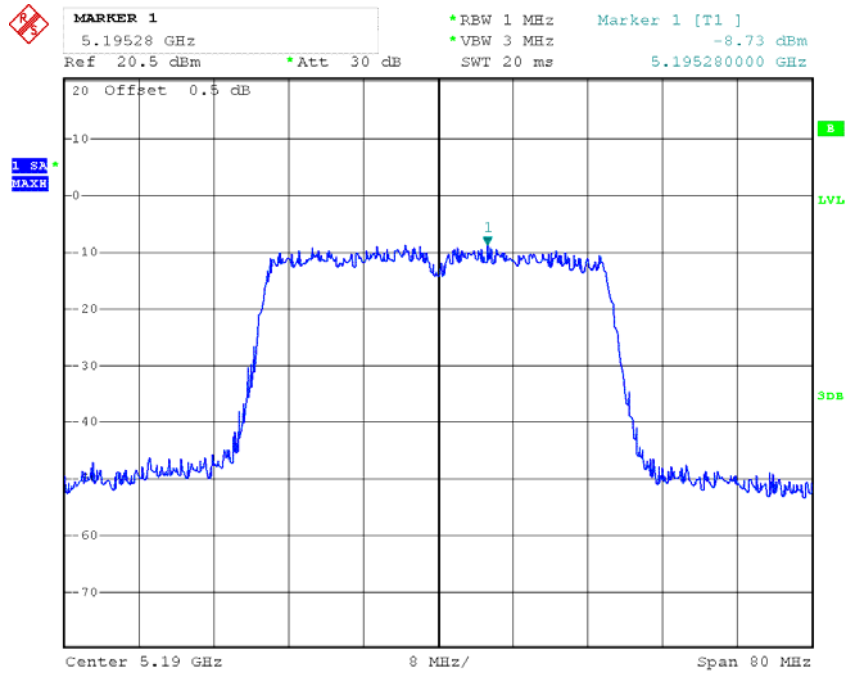


Date: 25.FEB.2013 09:35:54

Chain 0: Power Spectral Density, 802.11n40 High Channel

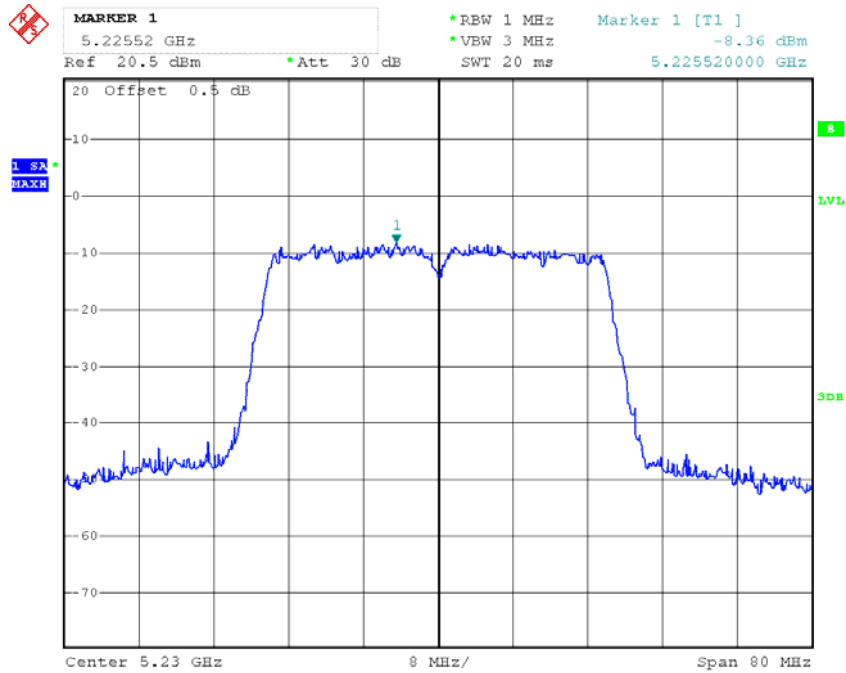


Date: 25.FEB.2013 09:38:25

Chain 0: Power Spectral Density, 802.11ac20 Low Channel

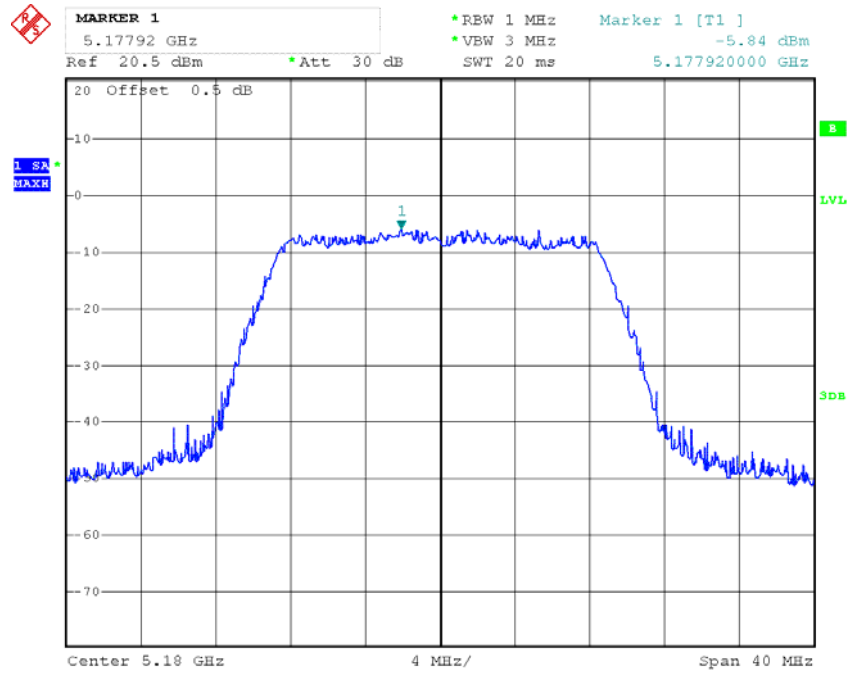


Date: 25.FEB.2013 09:48:25

Chain 0: Power Spectral Density, 802.11ac20 Middle Channel

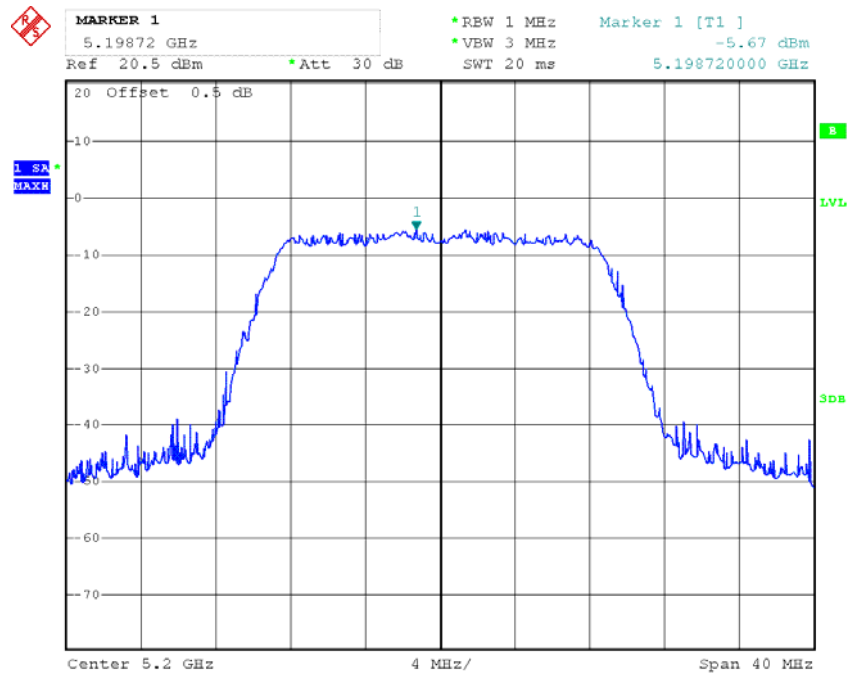


Date: 25.FEB.2013 09:51:14

Chain 0: Power Spectral Density, 802.11ac20 High Channel

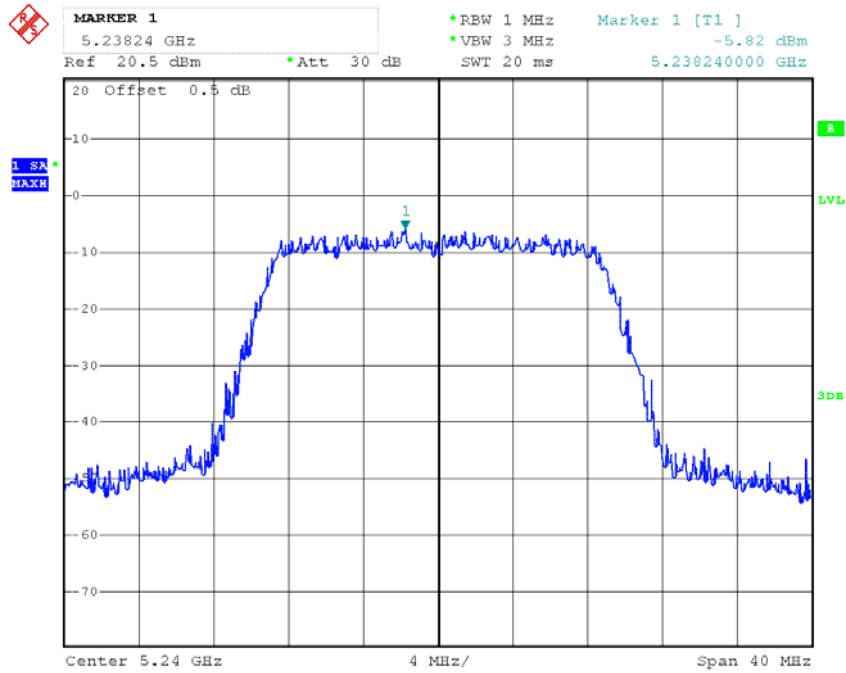


Date: 25.FEB.2013 09:53:35

Chain 0: Power Spectral Density, 802.11ac40 Low Channel

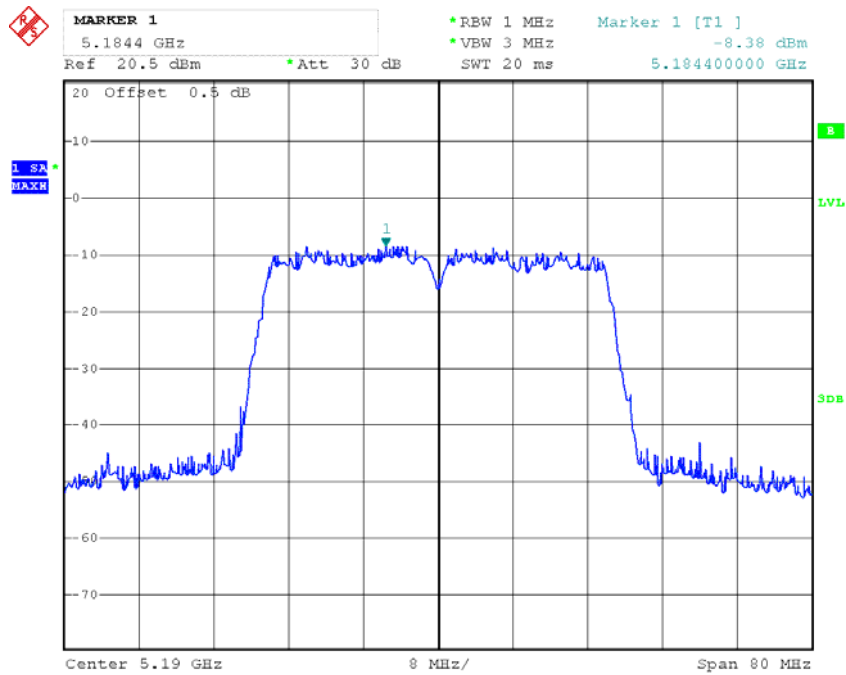


Date: 25.FEB.2013 10:02:49

Chain 0: Power Spectral Density, 802.11ac40 High Channel

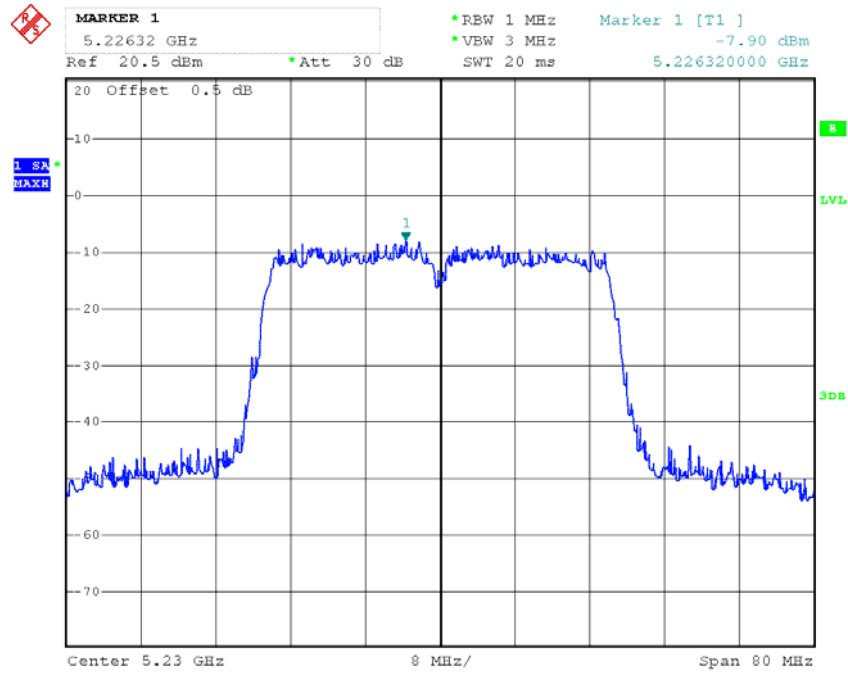


Date: 25.FEB.2013 10:04:22

Chain 0: Power Spectral Density, 802.11ac80 Low Channel

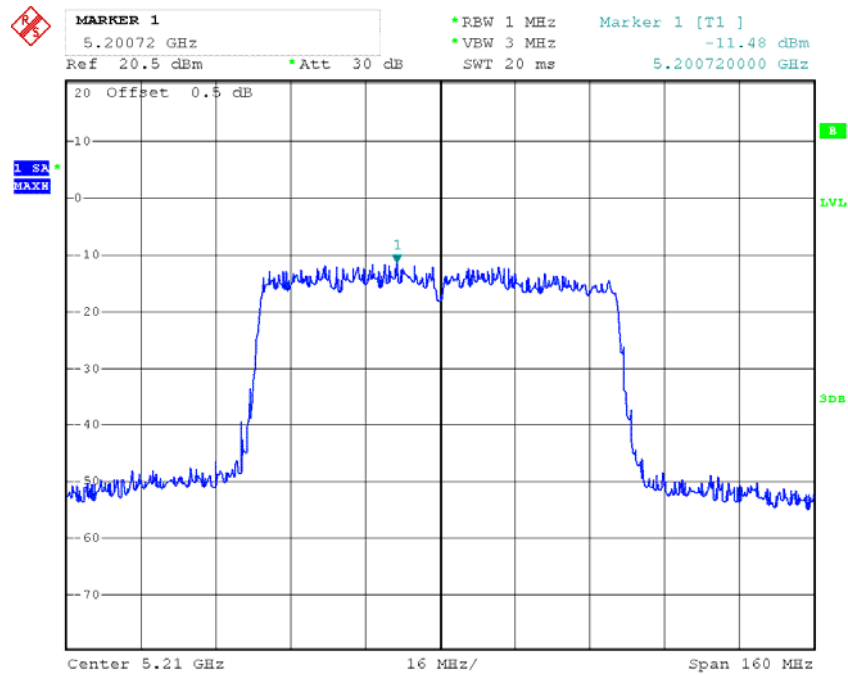


Date: 25.FEB.2013 10:15:08

Chain 1:Power Spectral Density, 802.11 n20 Low Channel

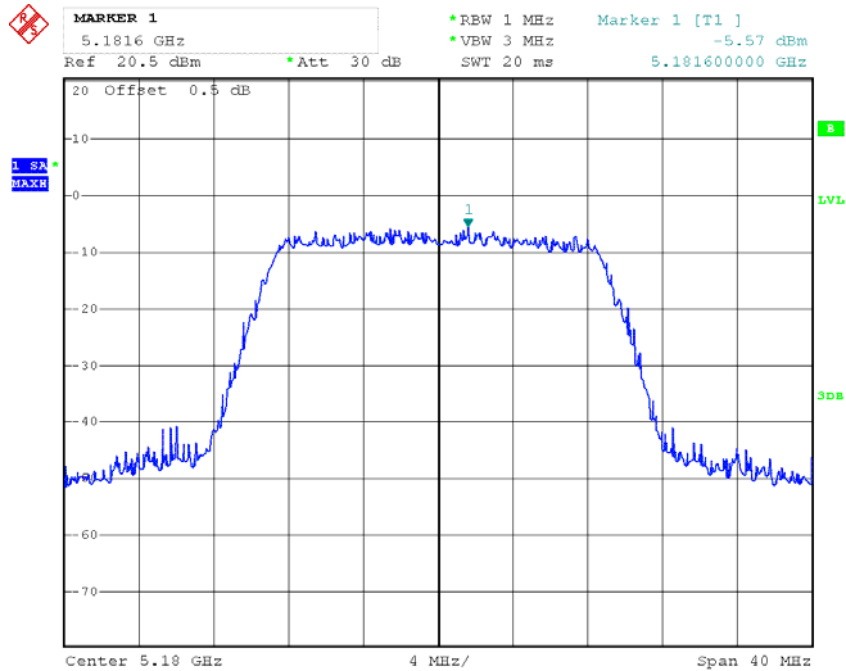


Date: 25.FEB.2013 09:58:16

Chain 1:Power Spectral Density, 802.11n20 Middle Channel

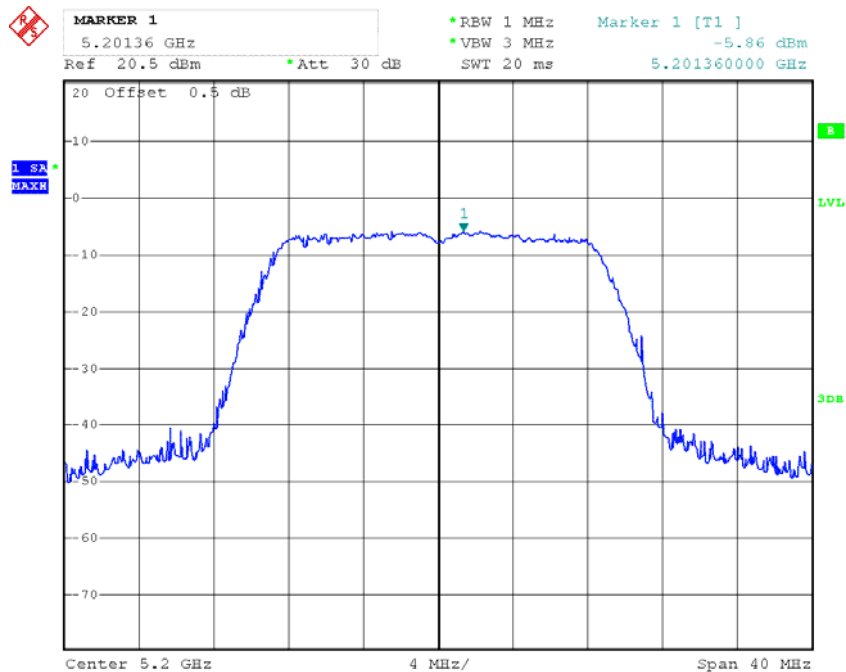


Date: 25.FEB.2013 09:57:05

Chain 1: Power Spectral Density, 802.11n20 High Channel

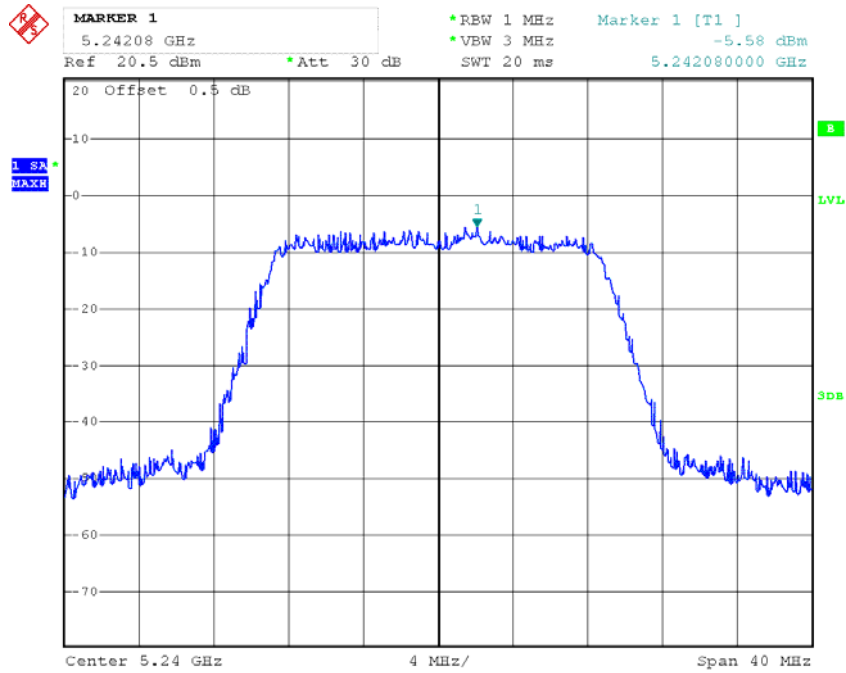


Date: 25.FEB.2013 09:54:50

Chain 1: Power Spectral Density, 802.11n40 Low Channel

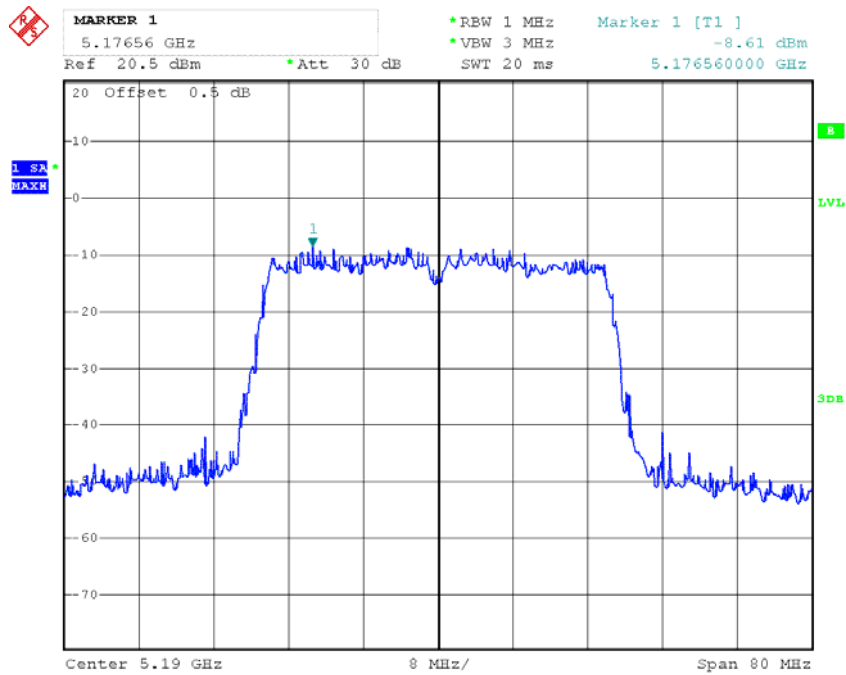


Date: 25.FEB.2013 09:44:46

Chain 1: Power Spectral Density, 802.11n40 High Channel

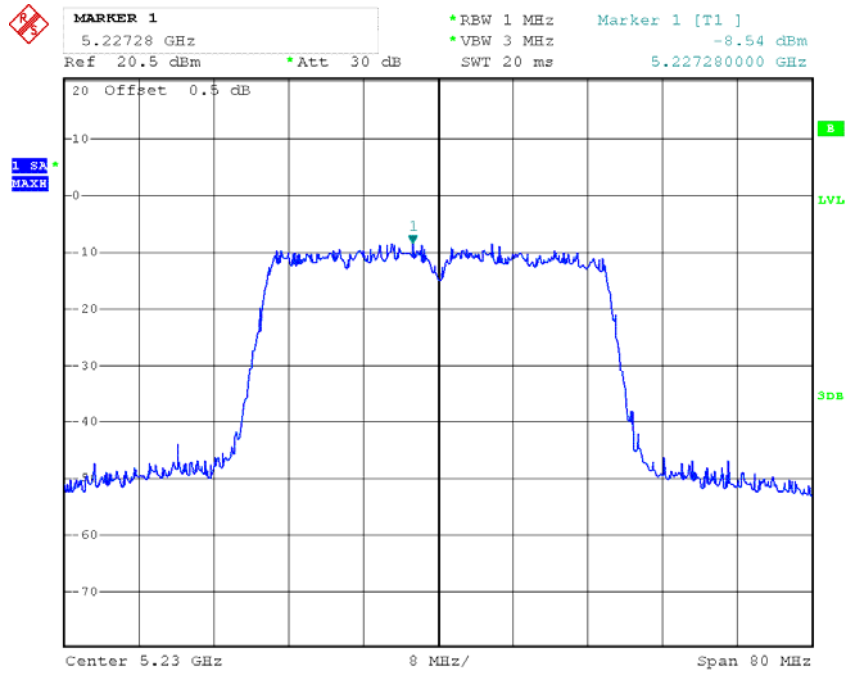


Date: 25.FEB.2013 09:40:53

Chain 1: Power Spectral Density, 802.11ac20 Low Channel

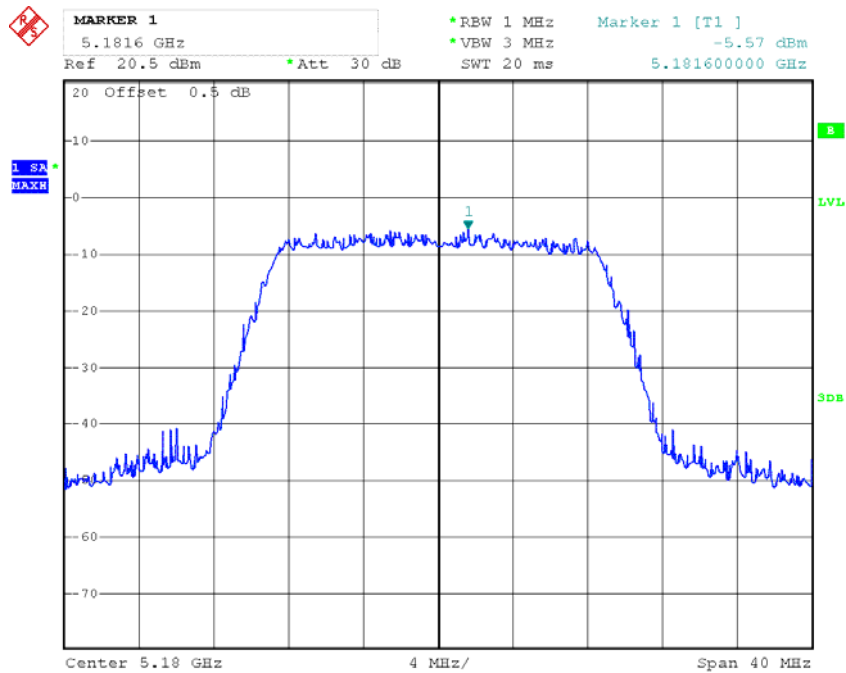


Date: 25.FEB.2013 09:58:16

Chain 1: Power Spectral Density, 802.11ac20 Middle Channel

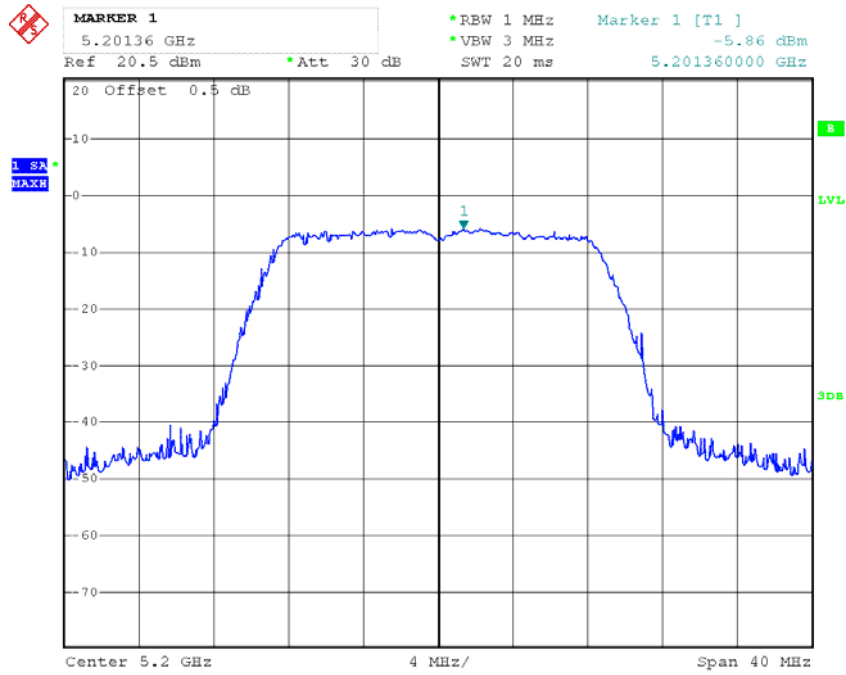


Date: 25.FEB.2013 09:57:05

Chain 1: Power Spectral Density, 802.11ac20 High Channel

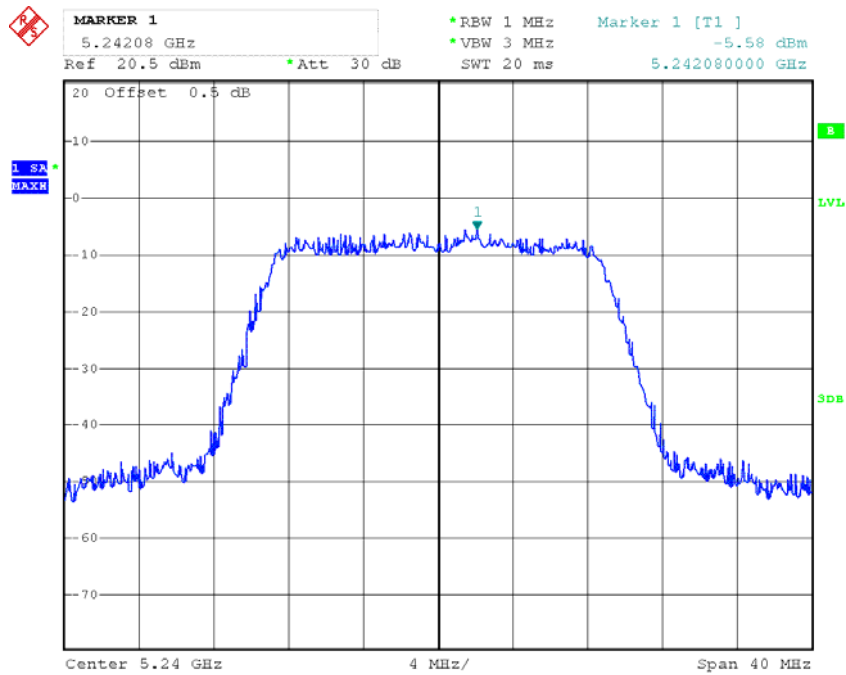


Date: 25.FEB.2013 09:54:50

Chain 1: Power Spectral Density, 802.11ac40 Low Channel

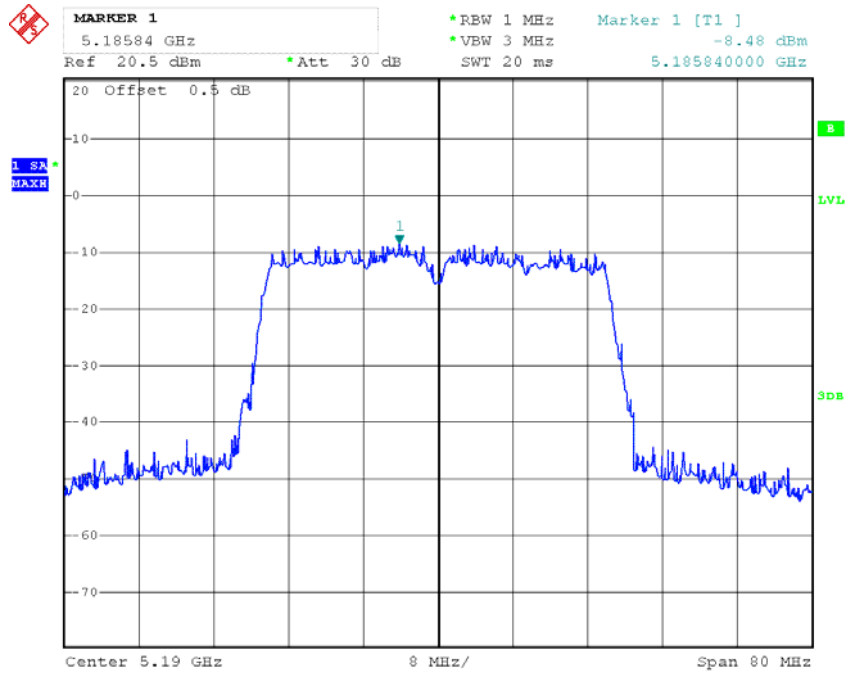


Date: 25.FEB.2013 10:10:42

Chain 1: Power Spectral Density, 802.11ac40 High Channel

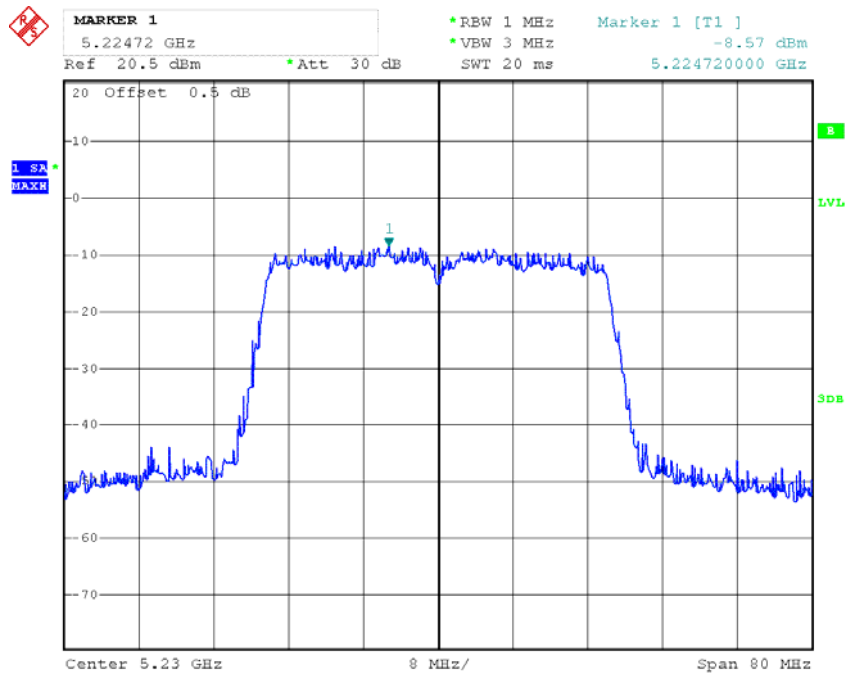

Date: 25.FEB.2013 10:12:07

Chain 1: Power Spectral Density, 802.11n80 Low Channel

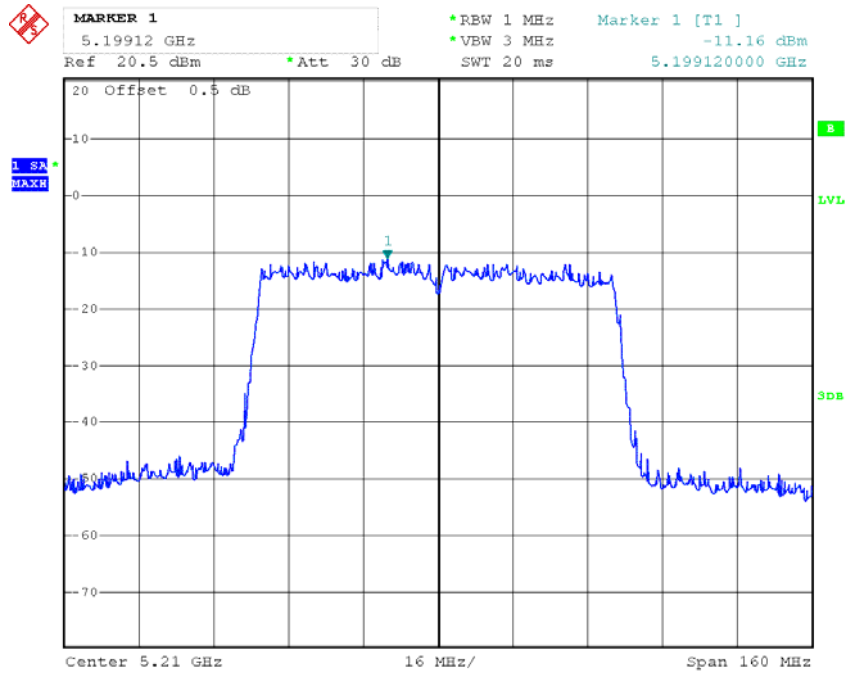

Date: 25.FEB.2013 10:16:42

FCC §15.407(a) (6) – PEAK EXCURSION RATIO

Applicable Standard

According to §15.407(a) (6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Procedure


Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be ≤ 13 dB for all frequencies across the emission bandwidth. Submit a plot.

1st Trace:

- Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and maxhold settings.

2nd Trace:

- create the 2nd trace using the settings described in the setion “FCC §15.407(a)(1)(2) – CONDUCTED TRANSMITTER OUTPUT POWER”.



Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | Spectrum Analyzer | FSP38 | 100478 | 2012-5-14 | 2013-5-13 |

Test Data

Environmental Conditions


| | |
|--------------------|-------------------|
| Temperature: | 23.8 ° C~23.9 ° C |
| Relative Humidity: | 46%~48% |
| ATM Pressure: | 101.4kPa~101.7kPa |

The testing was performed by Leon Chen from 2013-02-21 to 2013-02-25.

Test Mode: Transmitting


| Channel | Peak Excursion Ratio | Limit | Result |
|-------------------------|----------------------|-------|--------|
| | (dB) | (dB) | |
| 802.11a mode | | | |
| Low | 2.23 | 13 | PASS |
| Middle | 1.28 | 13 | PASS |
| High | 1.84 | 13 | PASS |
| Chain 0:802.11n20 mode | | | |
| Low | 1.12 | 13 | PASS |
| Middle | 1.54 | 13 | PASS |
| High | 1.29 | 13 | PASS |
| Chain 1:802.11n20 mode | | | |
| Low | 0.74 | 13 | PASS |
| Middle | 1.23 | 13 | PASS |
| High | 1.31 | 13 | PASS |
| Chain 0:802.11n40 mode | | | |
| Low | 1.16 | 13 | PASS |
| High | 1.64 | 13 | PASS |
| Chain 1:802.11n40 mode | | | |
| Low | 1.27 | 13 | PASS |
| High | 2.11 | 13 | PASS |
| Chain 0:802.11ac20 mode | | | |
| Low | 1.12 | 13 | PASS |
| Middle | 1.54 | 13 | PASS |
| High | 1.29 | 13 | PASS |
| Chain 1:802.11ac20 mode | | | |
| Low | 0.74 | 13 | PASS |
| Middle | 1.23 | 13 | PASS |
| High | 1.31 | 13 | PASS |
| Chain 0:802.11ac40 mode | | | |
| Low | 1.16 | 13 | PASS |
| High | 1.64 | 13 | PASS |
| Chain 1:802.11ac40 mode | | | |
| Low | 1.27 | 13 | PASS |
| High | 2.11 | 13 | PASS |
| Chain 0:802.11ac80 mode | | | |
| Low | 1.49 | 13 | PASS |
| Chain 1:802.11ac80 mode | | | |
| Low | 1.83 | 13 | PASS |

802.11a Peak Excursion, Low Channel

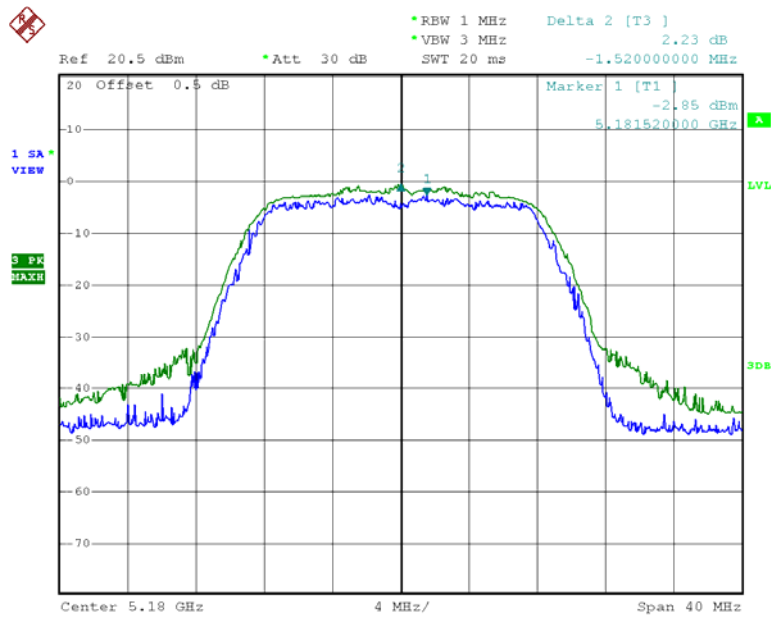


Date: 21.FEB.2013 16:46:30

802.11a Peak Excursion, Middle Channel

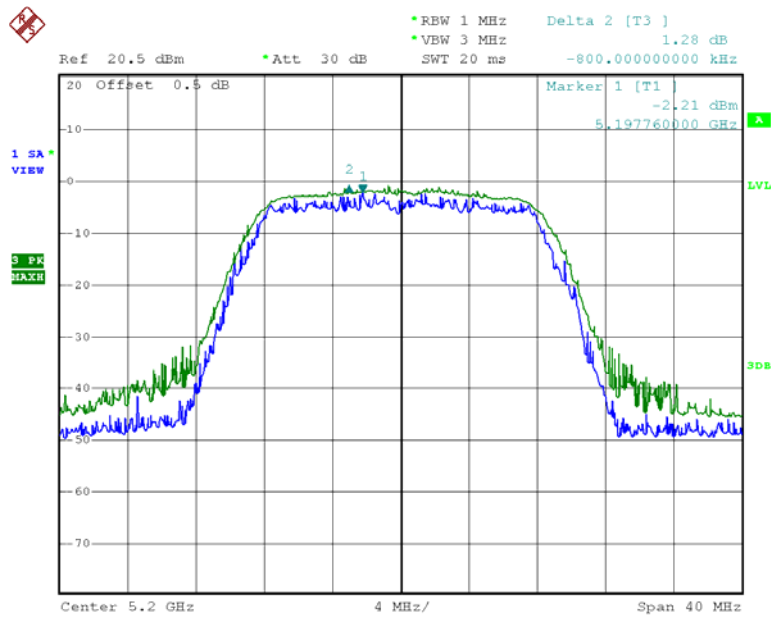


Date: 21.FEB.2013 16:49:26

802.11a Peak Excursion, High Channel

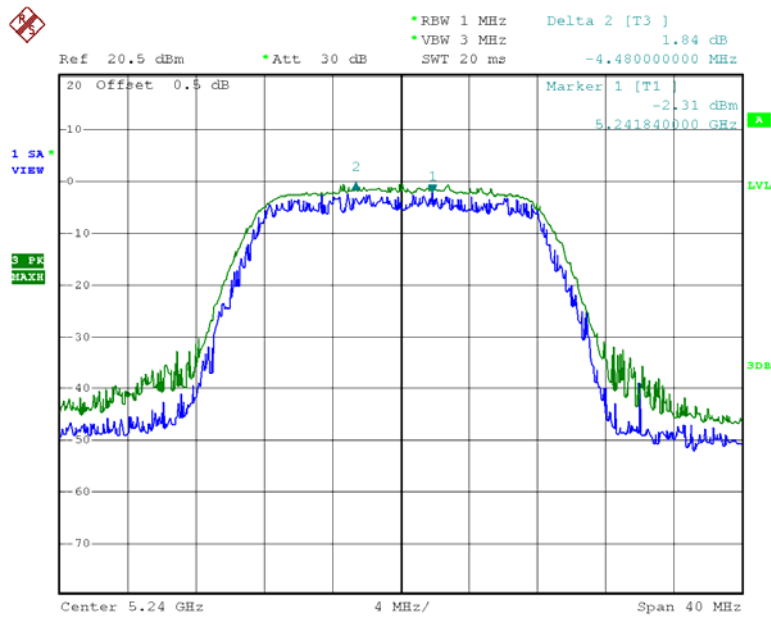


Date: 21.FEB.2013 16:51:11

Chain 0:802.11 n20 Peak Excursion, Low Channel

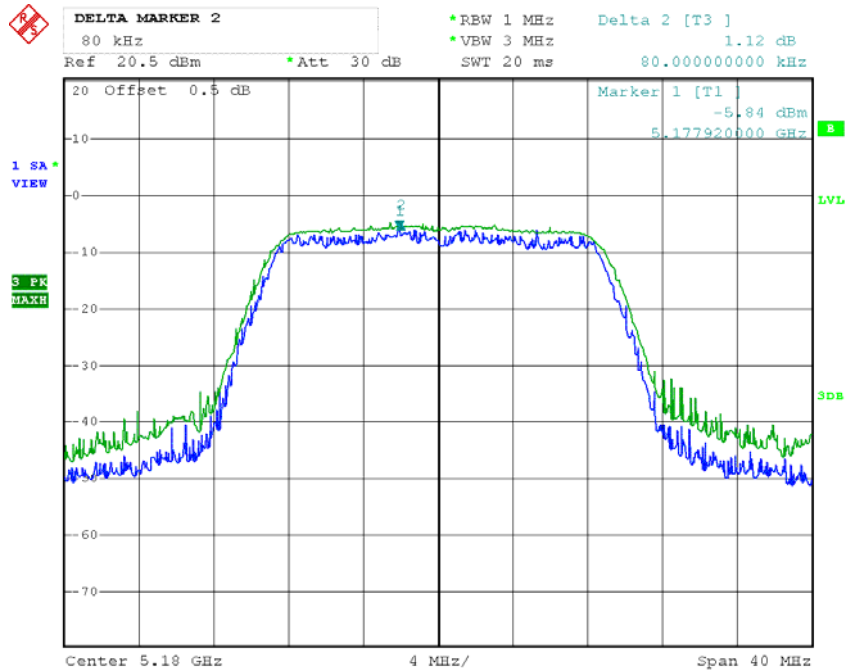


Date: 25.FEB.2013 09:48:43

Chain 0:802.11 n20 Peak Excursion, Middle Channel

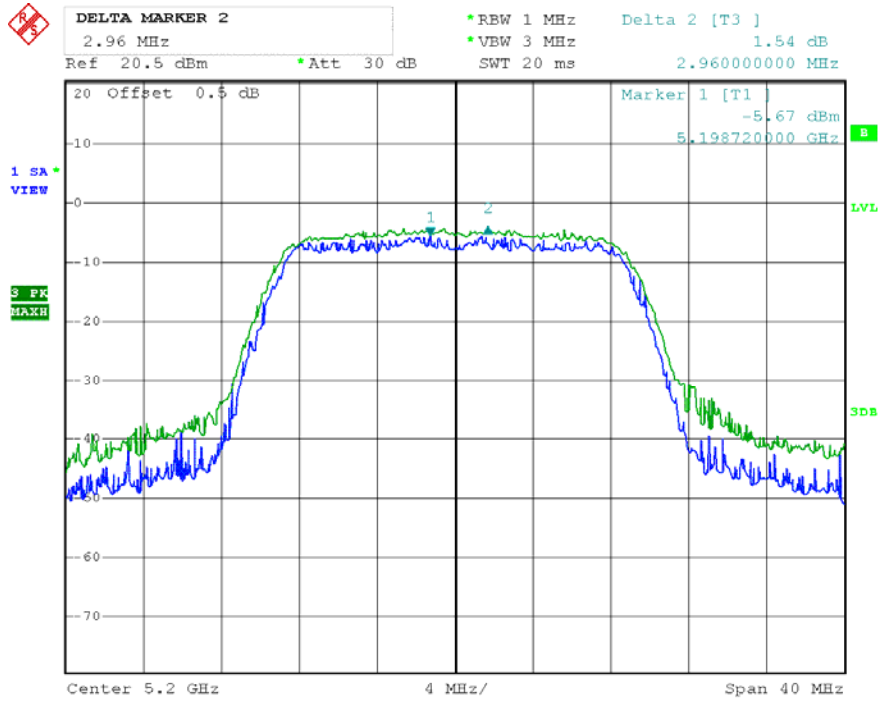


Date: 25.FEB.2013 09:52:27

Chain 0:802.11 n20 Peak Excursion, High Channel

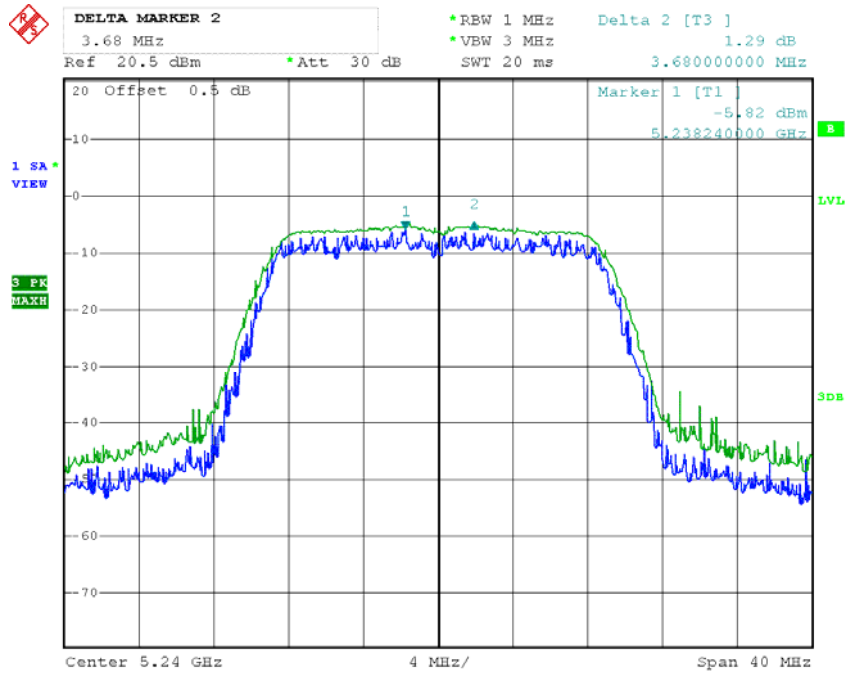


Date: 25.FEB.2013 09:53:48

Chain 0:802.11 n40 Peak Excursion, Low Channel

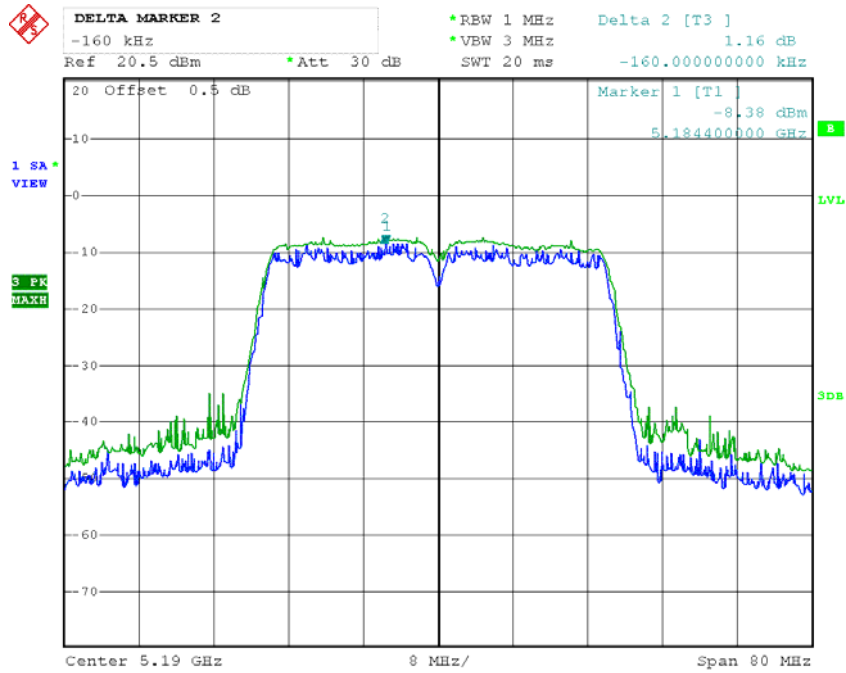


Date: 25.FEB.2013 10:03:04

Chain 0:802.11 n40 Peak Excursion, High Channel

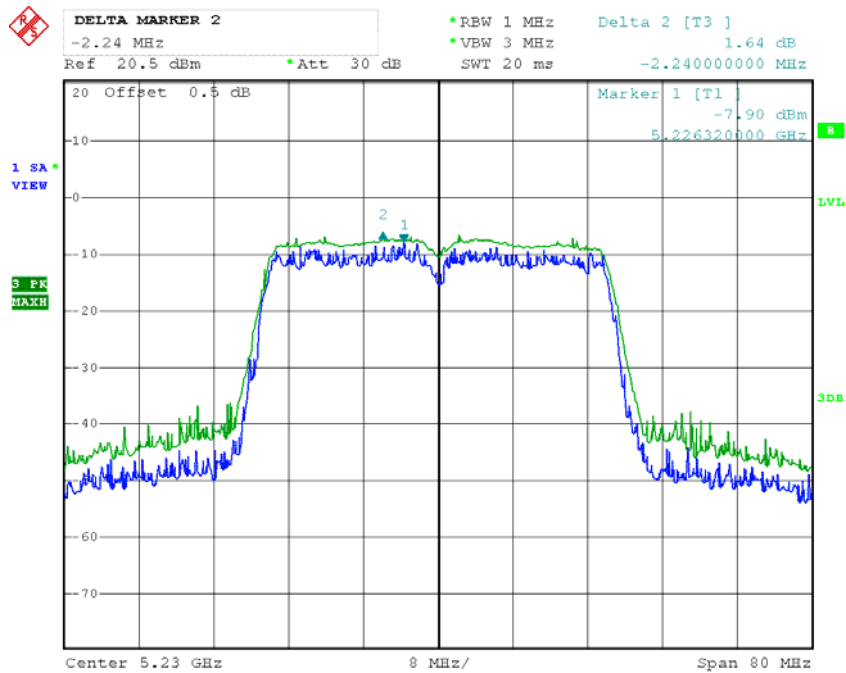


Date: 25.FEB.2013 10:04:53

Chain 0:802.11 ac20 Peak Excursion, Low Channel

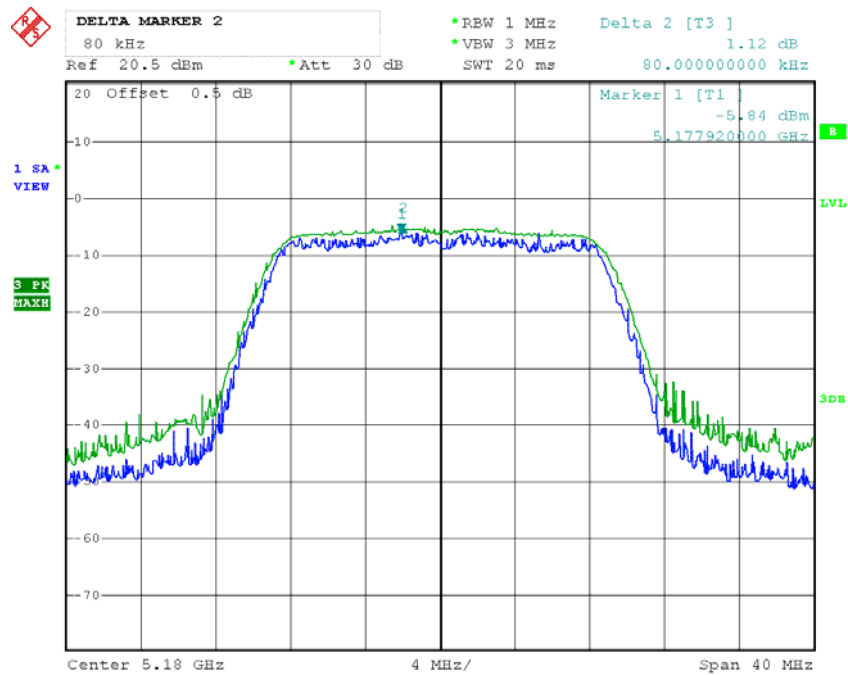


Date: 25.FEB.2013 09:48:43

Chain 0:802.11 ac20 Peak Excursion, Middle Channel

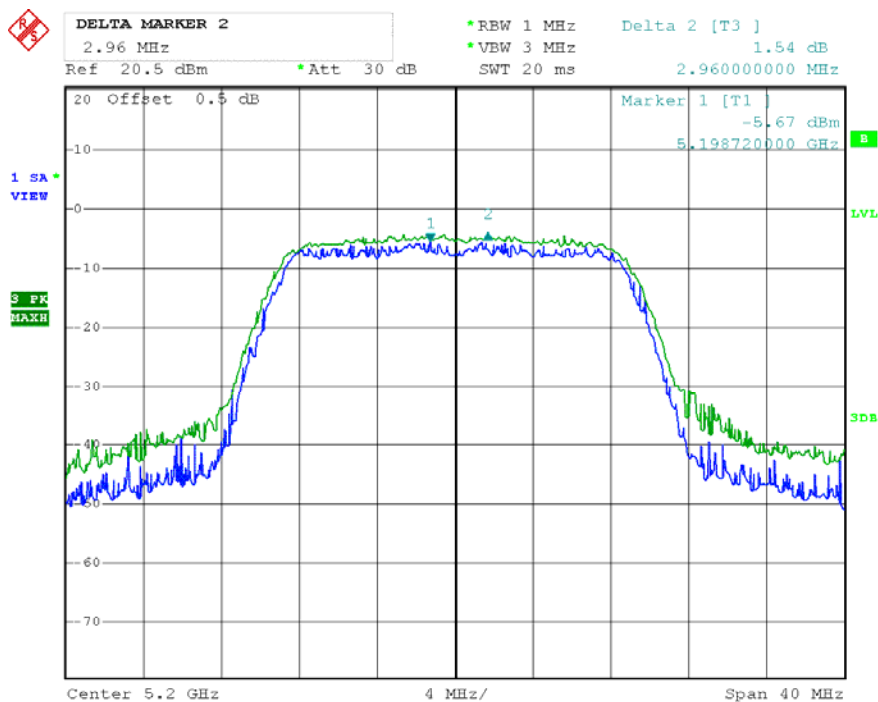


Date: 25.FEB.2013 09:52:27

Chain 0:802.11 ac20 Peak Excursion, High Channel

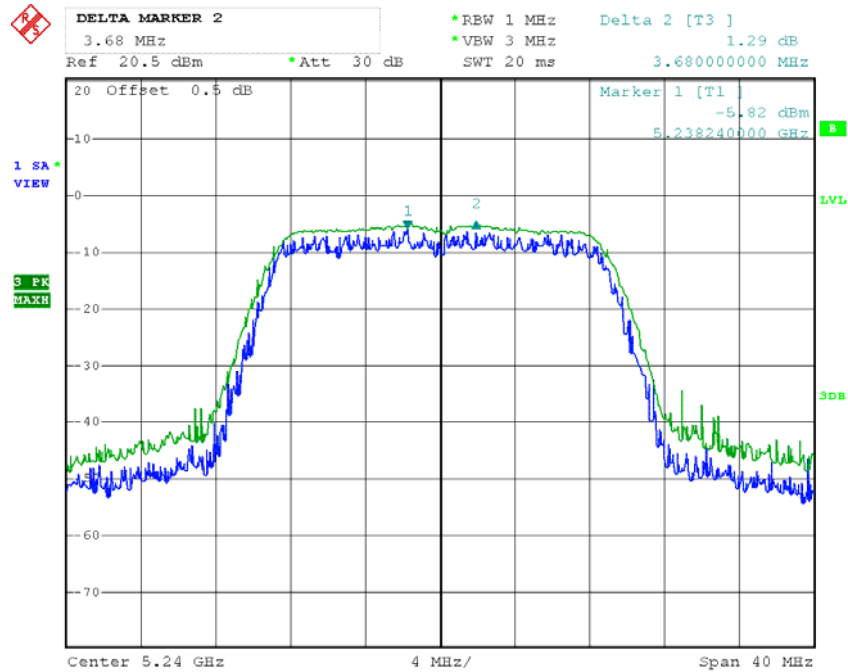


Date: 25.FEB.2013 09:53:48

Chain 0:802.11 ac40 Peak Excursion, Low Channel

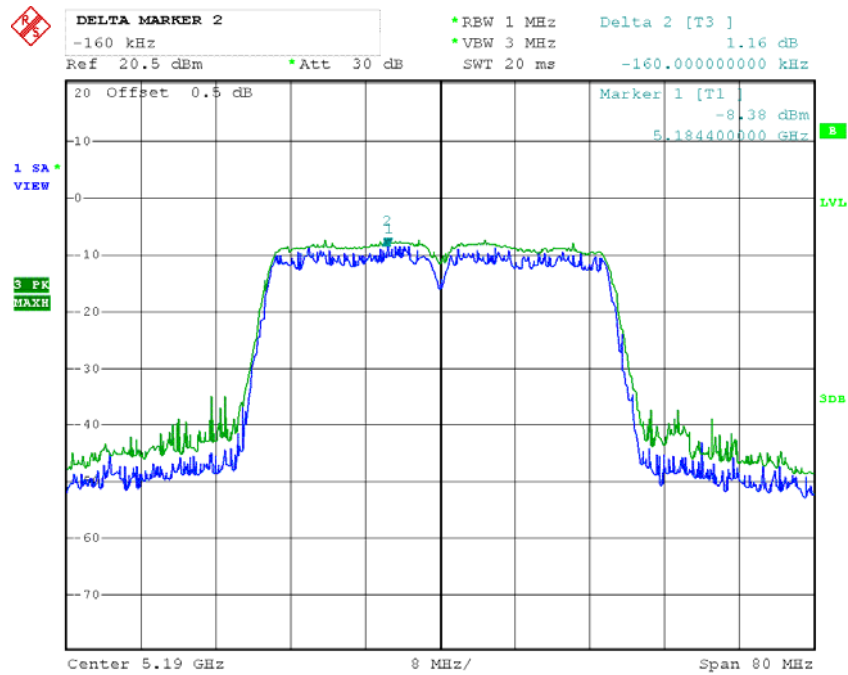


Date: 25.FEB.2013 10:03:04

Chain 0:802.11 ac40 Peak Excursion, High Channel

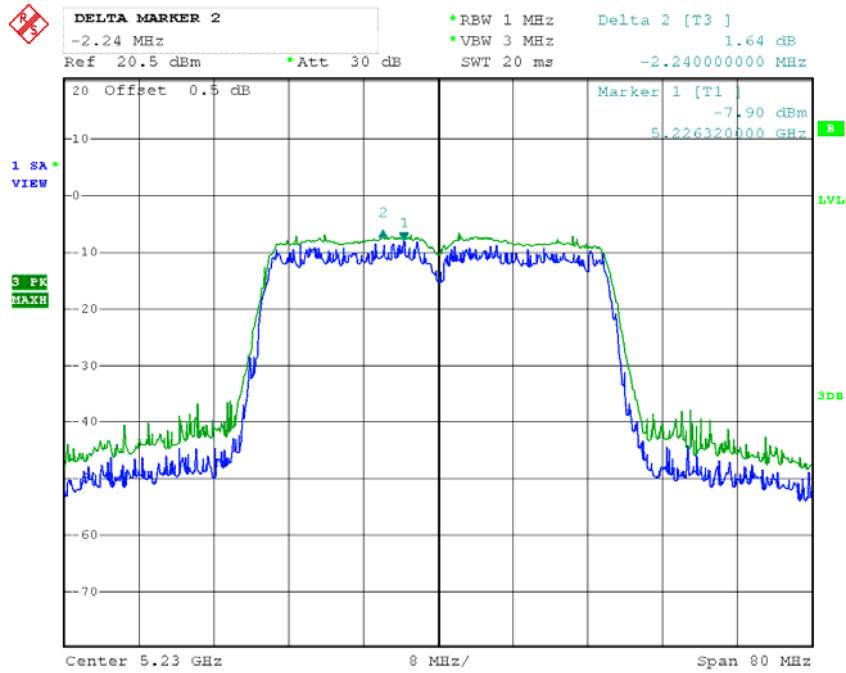


Date: 25.FEB.2013 10:04:53

Chain 0:802.11 ac80 Peak Excursion, Low Channel

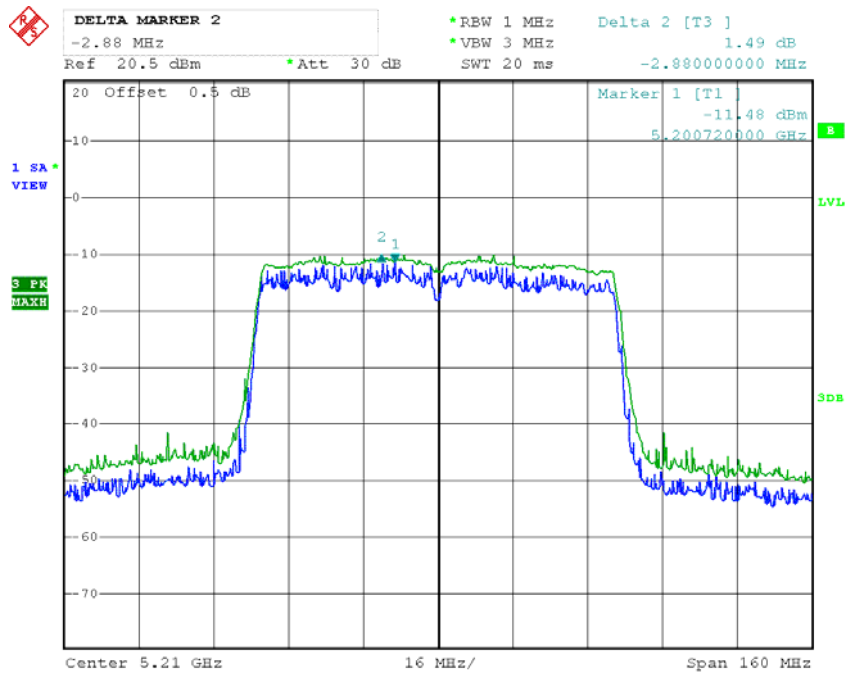


Date: 25.FEB.2013 10:15:24

Chain 1:802.11 n20 Peak Excursion, Low Channel

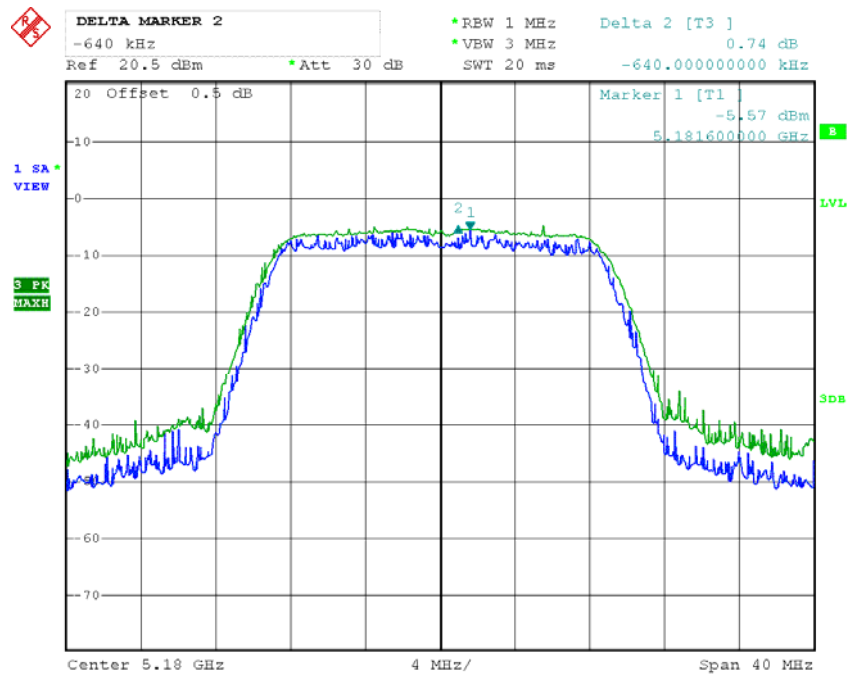


Date: 25.FEB.2013 09:58:32

Chain 1:802.11 n20 Peak Excursion, Middle Channel

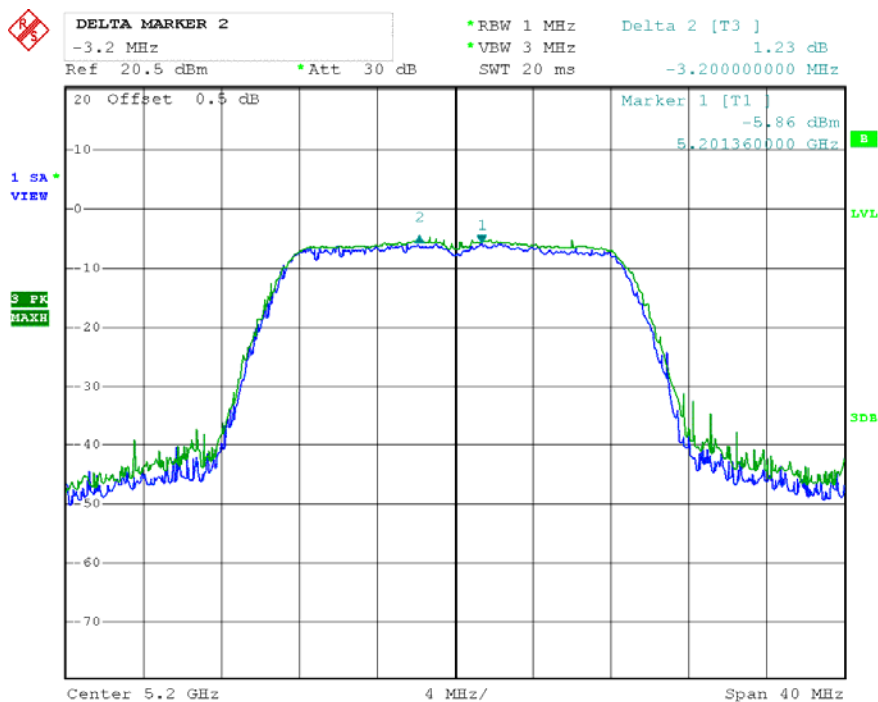


Date: 25.FEB.2013 09:57:14

Chain 1:802.11 n20 Peak Excursion, High Channel

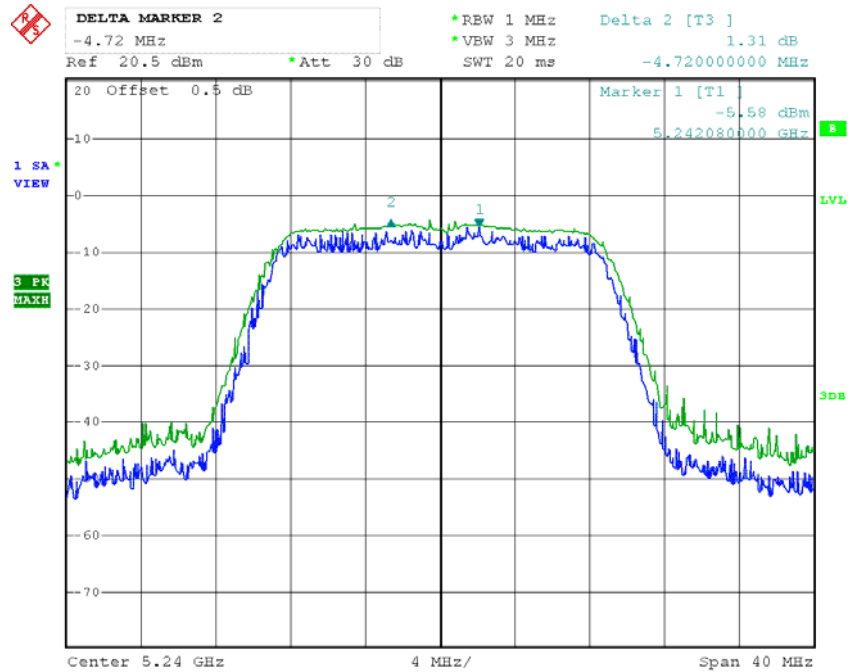


Date: 25.FEB.2013 09:55:09

Chain 1:802.11 n40 Peak Excursion, Low Channel

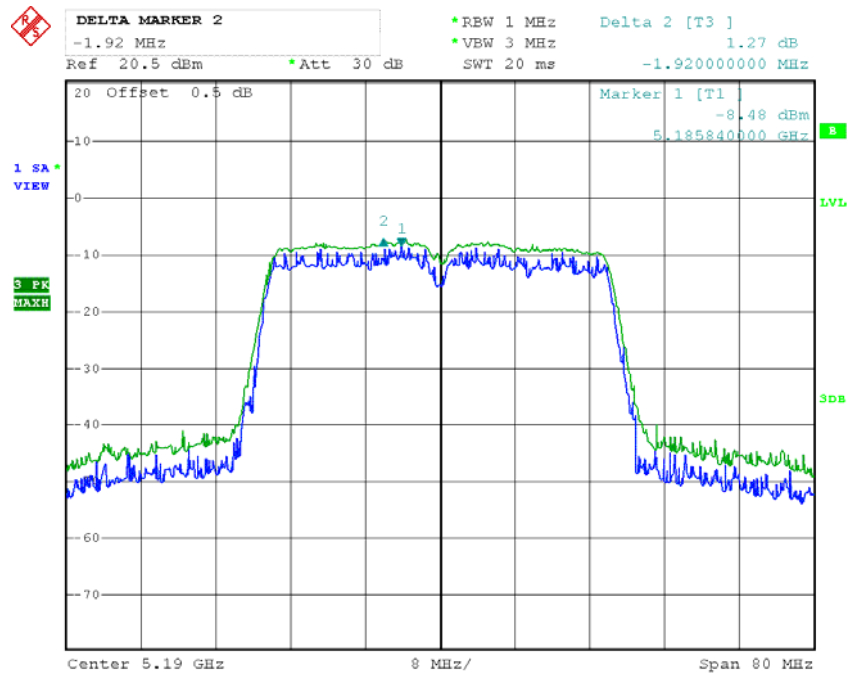


Date: 25.FEB.2013 10:10:56

Chain 1:802.11 n40 Peak Excursion, High Channel

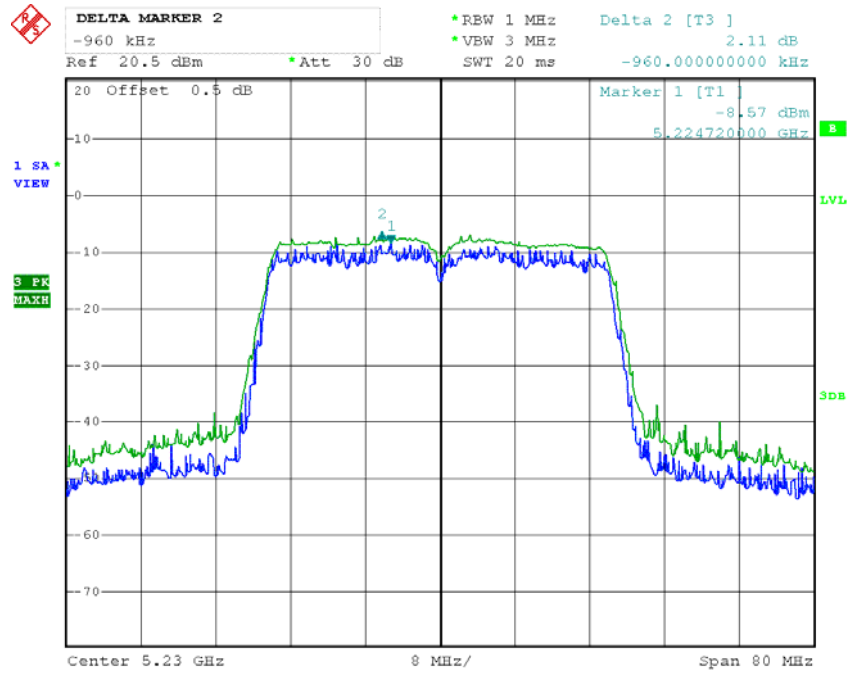


Date: 25.FEB.2013 10:12:23

Chain 1:802.11 ac20 Peak Excursion, Low Channel

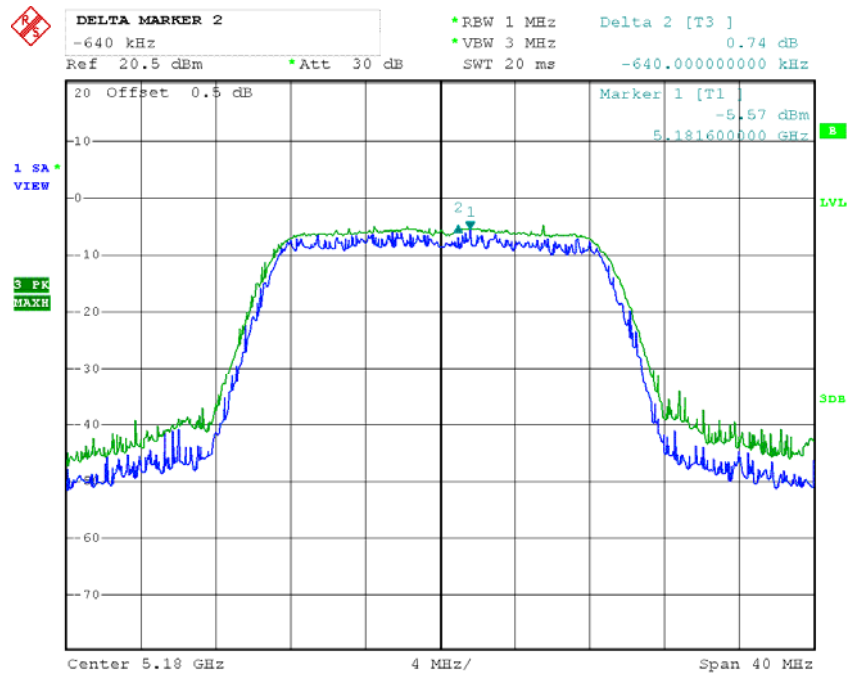


Date: 25.FEB.2013 09:58:32

Chain 1:802.11 ac20 Peak Excursion, Middle Channel

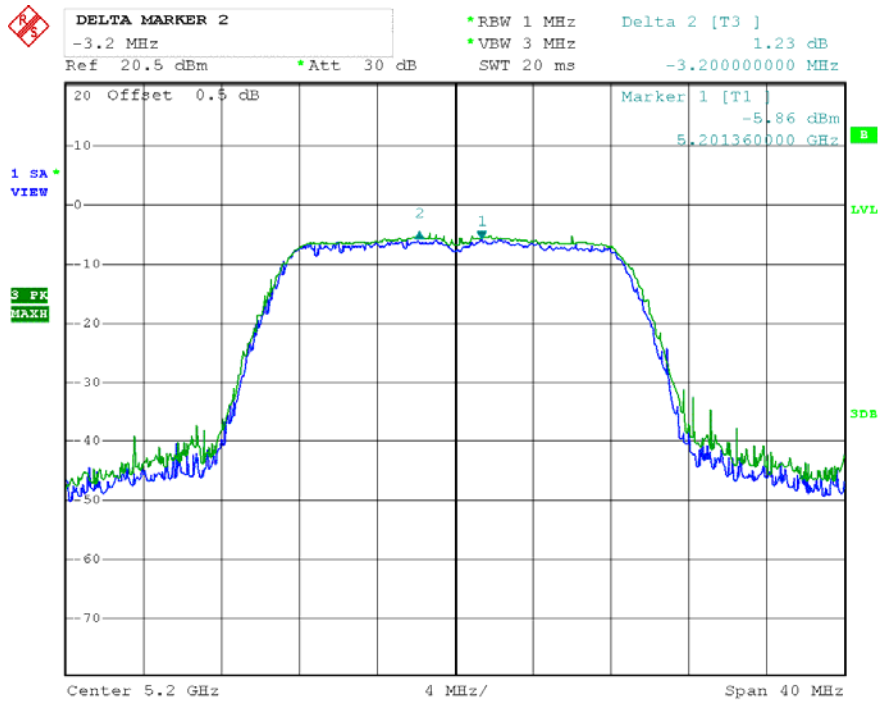


Date: 25.FEB.2013 09:57:14

Chain 1:802.11 ac20 Peak Excursion, High Channel

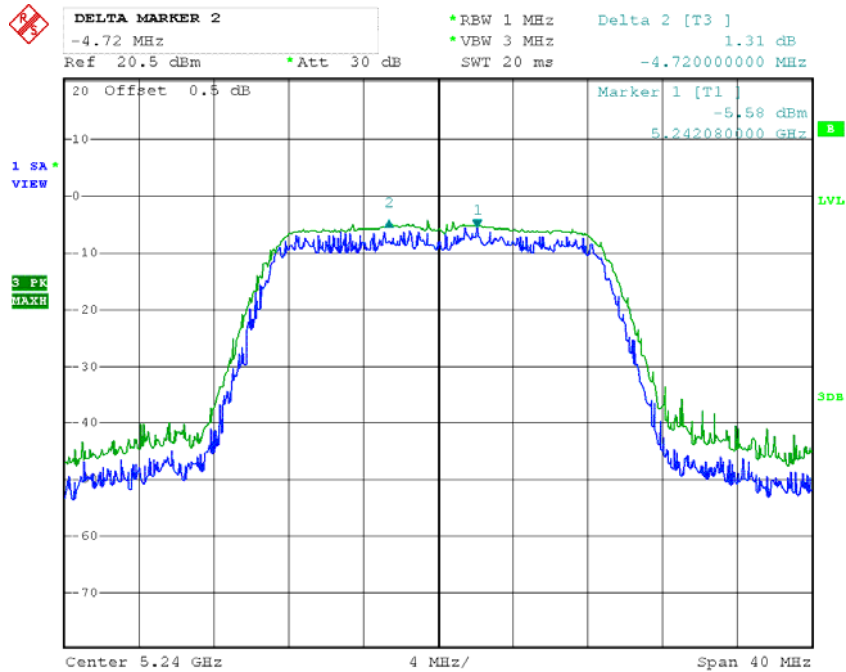


Date: 25.FEB.2013 09:55:09

Chain 1:802.11 ac40 Peak Excursion, Low Channel

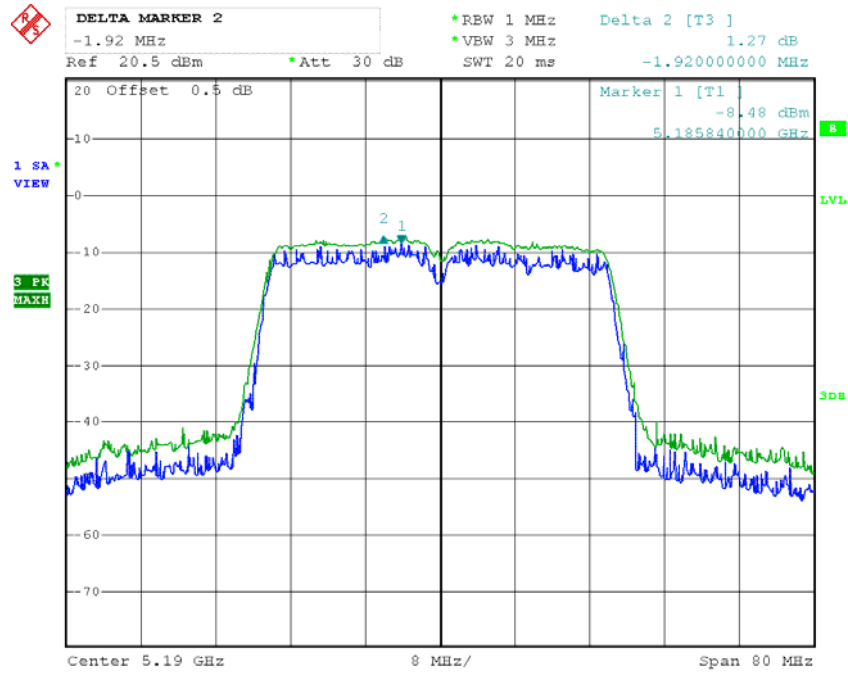


Date: 25.FEB.2013 10:10:56

Chain 1:802.11 ac40 Peak Excursion, High Channel

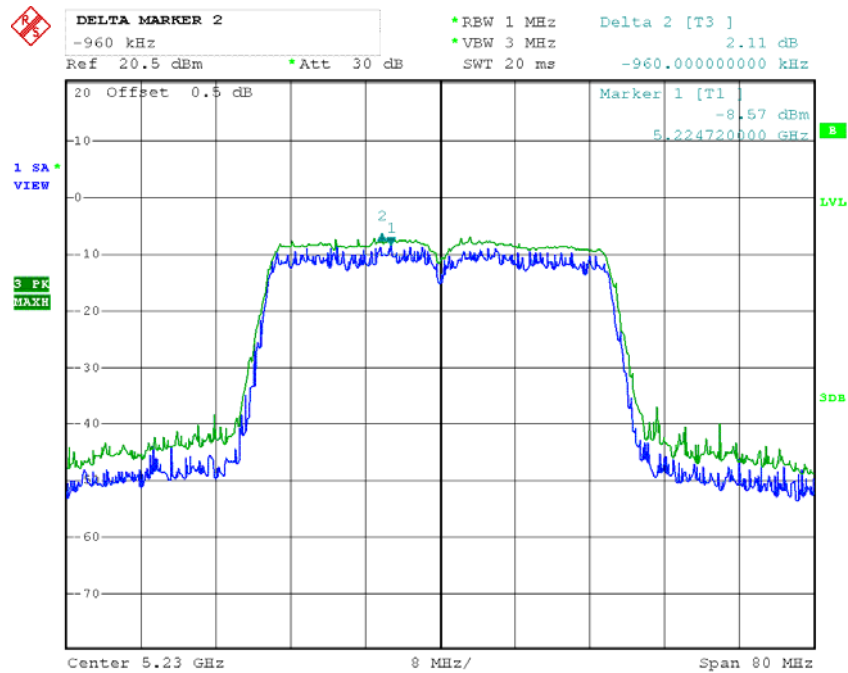

Date: 25.FEB.2013 10:12:23

Chain 1:802.11 ac80 Peak Excursion, Low Channel

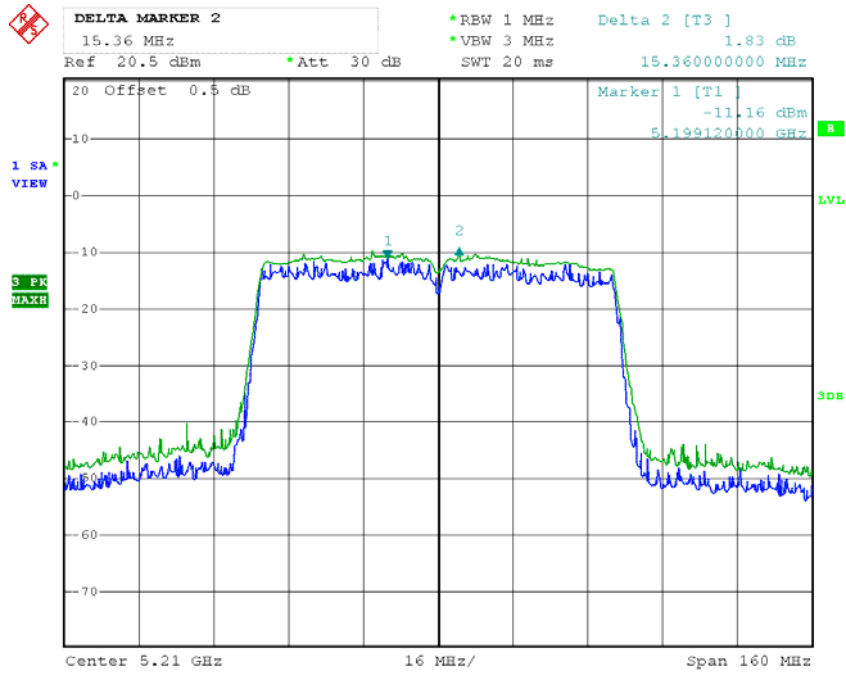

Date: 25.FEB.2013 10:17:14

******* END OF REPORT *******