



A D T

## FCC TEST REPORT (PART 27)

**REPORT NO.:** RF110124E07A-1

**MODEL NO.:** RG300, RG300-2.5, RG300-2.5-4D2V1W,  
RG300-2.5-4D1V1W, RG300-2.5-4D1W,  
RG300-2.5-1D2V1W, RG300-2.5-1D1V1W,  
RG300-2.5-1D1W

**FCC ID:** V8YFW181RG30000W

**RECEIVED:** Mar. 07, 2011

**TESTED:** Mar. 25 to Apr. 11, 2011

**ISSUED:** Apr. 20, 2011

**APPLICANT:** Accton Wireless Broadband Corp.

**ADDRESS:** 3F, No. 1 Creation Rd. III, Science-based Industrial  
Park Hsinchu 30077, Taiwan, R.O.C.

**ISSUED BY :** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 68 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by any government agencies. The test results in the report only apply to the tested sample.



A D T

## TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	4
1 CERTIFICATION .....	5
2 SUMMARY OF TEST RESULTS .....	6
2.1 MEASUREMENT UNCERTAINTY .....	7
3 GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	15
3.4 DESCRIPTION OF SUPPORT UNITS .....	16
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST .....	17
4 TEST TYPES AND RESULTS .....	18
4.1 OUTPUT POWER MEASUREMENT .....	18
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT .....	18
4.1.2 TEST INSTRUMENTS .....	18
4.1.3 TEST PROCEDURES.....	18
4.1.4 TEST SETUP.....	18
4.1.5 EUT OPERATING CONDITIONS.....	19
4.1.6 TEST RESULTS.....	20
4.2 FREQUENCY STABILITY MEASUREMENT .....	21
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	21
4.2.2 TEST INSTRUMENTS .....	21
4.2.3 TEST PROCEDURE .....	22
4.2.4 TEST SETUP .....	22
4.2.5 TEST RESULTS.....	23
4.3 EMISSION BANDWIDTH MEASUREMENT.....	24
4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT .....	24
4.3.2 TEST INSTRUMENTS .....	24
4.3.3 TEST SETUP.....	24
4.3.4 TEST PROCEDURES.....	25
4.3.5 TEST RESULTS.....	26
4.4 CHANNEL EDGE MEASUREMENT .....	30
4.4.1 LIMITS OF CHANNEL EDGE MEASUREMENT .....	30
4.4.2 TEST INSTRUMENTS .....	30
4.4.3 TEST SETUP.....	30
4.4.4 TEST PROCEDURES.....	31
4.4.5 EUT OPERATING CONDITION .....	31
4.4.6 TEST RESULTS.....	32
4.5 CONDUCTED SPURIOUS EMISSIONS .....	38



A D T

4.5.1	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	38
4.5.2	TEST INSTRUMENTS .....	38
4.5.3	TEST PROCEDURE .....	39
4.5.4	TEST SETUP.....	39
4.5.5	EUT OPERATING CONDITIONS.....	39
4.5.6	TEST RESULTS.....	40
4.6	RADIATED EMISSION MEASUREMENT (BELOW 1GHz) .....	52
4.6.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	52
4.6.2	TEST INSTRUMENTS .....	52
4.6.3	TEST PROCEDURES.....	53
4.6.4	DEVIATION FROM TEST STANDARD .....	53
4.6.5	TEST SETUP.....	54
4.6.6	EUT OPERATING CONDITIONS.....	54
4.6.7	TEST RESULTS.....	55
4.7	RADIATED EMISSION MEASUREMENT (ABOVE 1GHz).....	57
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	57
4.7.2	TEST INSTRUMENTS .....	57
4.7.3	TEST PROCEDURES.....	58
4.7.4	DEVIATION FROM TEST STANDARD .....	58
4.7.5	TEST SETUP .....	59
4.7.6	EUT OPERATING CONDITIONS.....	59
4.7.7	TEST RESULTS.....	60
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	66
6	INFORMATION ON THE TESTING LABORATORIES .....	67
7	APPENDIX - A DL/UL RATION FOR TEST .....	68



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF110124E07A-1	Original release	Apr. 20, 2011



# 1 CERTIFICATION

**PRODUCT:** WIMAX 802.16e Indoor Gateway

**BRAND NAME:** AWB

**MODEL NO.:** RG300, RG300-2.5, RG300-2.5-4D2V1W,  
RG300-2.5-4D1V1W, RG300-2.5-4D1W,  
RG300-2.5-1D2V1W, RG300-2.5-1D1V1W,  
RG300-2.5-1D1W

**TEST SAMPLE:** R&D SAMPLE

**APPLICANT:** Accton Wireless Broadband Corp.


**TESTED:** Mar. 25 to Apr. 11, 2011


**TEST STANDARDS:** FCC 47 CFR Part 2

FCC 47 CFR Part 27, Subpart C & M

ANSI/TIA/EIA-603-C-2004

The above equipment (Model No.: RG300) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** :  , **DATE:** Apr. 20, 2011  
( Claire Kuan, Specialist )

**APPROVED BY** :  , **DATE:** Apr. 20, 2011  
( May Chen, Deputy Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: FCC Part 27 &amp; Part 2</b>			
<b>STANDARD SECTION</b>	<b>TEST TYPE AND LIMIT</b>	<b>RESULT</b>	<b>REMARK</b>
2.1046 27.50(h)(2)	Maximum Peak Output Power Limit: max. 2 watts conducted peak power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	PASS	Meet the requirement of limit.
2.1049 27.53(m)(6)	Emission Bandwidth	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	PASS	Meet the requirement of limit.



A D T

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	WiMAX 802.16e Indoor Gateway
<b>MODEL NO.</b>	RG300, RG300-2.5, RG300-2.5-4D2V1W, RG300-2.5-4D1V1W, RG300-2.5-4D1W, RG300-2.5-1D2V1W, RG300-2.5-1D1V1W, RG300-2.5-1D1W
<b>FCC ID</b>	V8YFW181RG30000W
<b>POWER SUPPLY</b>	DC 12V from adapter
<b>MODULATION TECHNOLOGY</b>	OFDMA
<b>MODULATION</b>	Up Link :QPSK-1/2, -3/4, 16QAM-1/2, 3/4
	Down Link: QPSK-1/2, -3/4, 16QAM-1/2, 3/4, 64QAM-1/2, -2/3, -3/4, -5/6
<b>OPERATING FREQUENCY</b>	5MHz: 2502.5MHz ~ 2687.5MHz 10MHz: 2505MHz ~ 2685MHz
<b>CHANNEL BANDWIDTH</b>	5MHz & 10MHz
<b>MAX. CONDUCTED POWER</b>	5MHz: 27.09dBm 10MHz: 27.00dBm
<b>ANTENNA TYPE</b>	Please see note
<b>DATA CABLE</b>	RJ-45 cable (Unshielded, 1.9m)
<b>I/O PORTS</b>	LAN port x 4 VoIP port x 2
<b>ASSOCIATED DEVICES</b>	Adapter x 1

**NOTE:**

1. There are WiMAX technology and WiFi technology used for the EUT, this report was recorded the **WiMAX** test data. For the WiFi test data was recorded in another test report<RF110124E07A>.
2. Spurious emission of the simultaneous operation (WiFi & WiMAX) has been evaluated and no non-compliance found.



3. The EUT has eight model names which are identical to each other in all aspects except for the following table:

Brand	Model Name	Description
AWB	RG300	For marketing to separate difference models.
	RG300-2.5	
	RG300-2.5-4D2V1W	
	RG300-2.5-4D1V1W	
	RG300-2.5-4D1W	
	RG300-2.5-1D2V1W	
	RG300-2.5-1D1V1W	
	RG300-2.5-1D1W	

From the above models, model: **RG300** was selected as representative model for the test and its data was recorded in this report.

4. There are antennas provided to this EUT, please refer to the following table:

WiMAX ANTENNA					
No.	Transmitter Circuit	Antenna Type	Antenna Connector	Antenna Gain (dBi)	Diversity Function
1	Chain(0)	Omni Directional	IPEX	6.47	YES
2	Chain(1)	Omni Directional	IPEX	6.7	YES
WiFi ANTENNA					
Antenna Type		Antenna Connector	Antenna Gain (dBi)		
Printed Antenna		NA	2		

5. The EUT must be supplied with a power adapter and following two different model names could be chosen:

Item	Brand	Model No.	Spec.
Adapter 1	Sunny	SYS1381-1212-W2	AC Input: 100-240V, 50-60Hz, 0.5A DC Output: 12V, 1A DC output cable(Unshielded, 1.9m)
Adapter 2	APD	WA-12I12FU	AC Input: 100-240V, 50-60Hz, 0.5A DC Output: 12V, 1A DC output cable(Unshielded, 1.5m)

From the above adapters, the worst radiated test item was found in **Adapter 1**. Therefore only the test data of the mode was recorded in this report.



A D T

6. For the EUT Modulation type and coding rate. After pre-testing items of output power and spurious emissions, QPSK-1/2 was found to be 5MHz /10MHz worst case, and was selected for the final test configuration.

Up Link		Down Link	
Modulation	Coding rate	Modulation	Coding rate
QPSK	1/2	QPSK	1/2
	3/4		3/4
16QAM	1/2	16QAM	1/2
	3/4		3/4
		64QAM	1/2
			2/3
			3/4
			5/6

7. The EUT incorporates a SIMO function for WiMAX. Physically, the EUT provides one completed transmit and two receivers.
8. The EUT embedded a firmware for testing that needs to control from Notebook computer to let EUT with different DL/UL ration.
9. The device has different DL/UL ration in normal operation. It was tested with (DL:UL= 29:18) duty cycle mode for 5MHz and 10MHz, which is the worse mode, and controlled by software. (The detail duty cycle refer to appendix A).
10. The above EUT information was declared by manufacturer and for more detailed feature descriptions, please refers to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Three channels have been tested and presented.

#### **CHANNEL BANDWIDTH: 5MHz**

**Low channel (L):** 2502.5MHz.

**Middle channel (M):** 2600MHz.

**High channel (H):** 2687.5MHz.

#### **CHANNEL BANDWIDTH: 10MHz**

**Low channel (L):** 2505MHz.

**Middle channel (M):** 2600MHz.

**High channel (H):** 2685MHz.



### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	EB	CE	CSE	RE<1G	RE <sup>3</sup> 1G	
MODE 1	√	√	√	√	√	√	√	Channel Bandwidth: 5MHz
MODE 2	√	-	√	√	√	√	√	Channel Bandwidth: 10MHz

Where **OP**: Output power **FS**: Frequency stability  
**EB**: Emission bandwidth **CE**: Channel edge  
**CSE**: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz  
**RE<sup>3</sup>1G**: Radiated emission above 1GHz

#### **OUTPUT POWER MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

#### **FREQUENCY STABILITY MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
M	OFDMA	Unmodulation

**EMISSION BANDWIDTH MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

**CHANNEL EDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

**CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

**RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	H	OFDMA	QPSK-1/2
MODE 2	M	OFDMA	QPSK-1/2

**RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27, Subpart C & M**

**ANSI/TIA/EIA-603-C-2004**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
3	NOTEBOOK COMPUTER	DELL	PP32LA	DSL32S	FCC DoC
4	TELEPHONE	WONDER	WD-303	6C17FA00774	NA
5	TELEPHONE	WONDER	WD-303	6C17FA00515	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m UTP cable
2	10m UTP cable
3	NA
4	3m TEL line
5	3m TEL line

**NOTE:** All power cords of the above support units are non shielded (1.8m).



### 3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

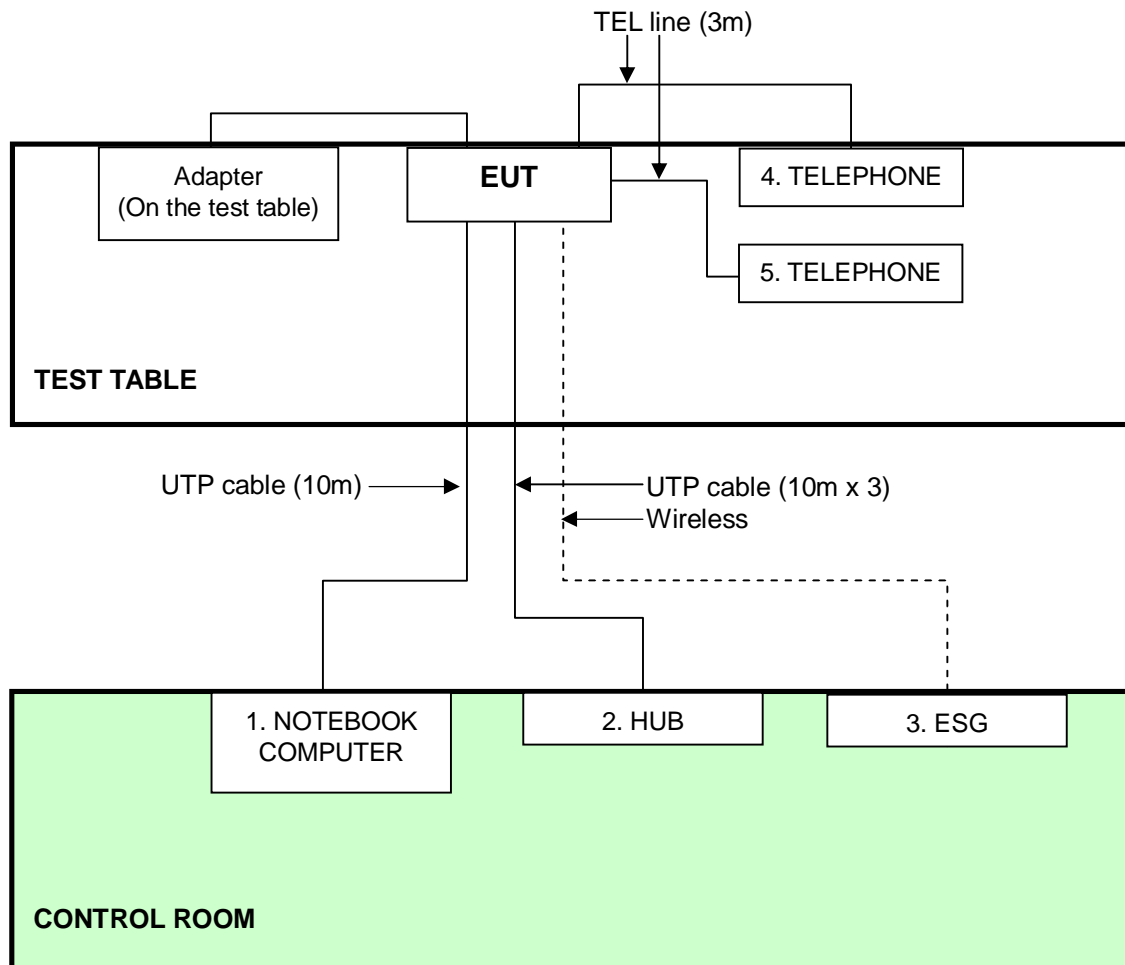

## 4 TEST TYPES AND RESULTS

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The conducted peak output power shall be according to the specific rule Part 27.50(h)(2) that “All user stations are limited to 2 watts and 27.50(i) specific that “Peak transmit power shall be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Anritsu Power meter	ML2495A	0824006	April 25, 2010	April 24, 2011
JFW 10dB attenuation	50HF-010-SMA	N/A	NA	NA


**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.1.3 TEST PROCEDURES

The transmitter output was connected to power meter through an attenuator. The test result was measured and recorded.

#### 4.1.4 TEST SETUP

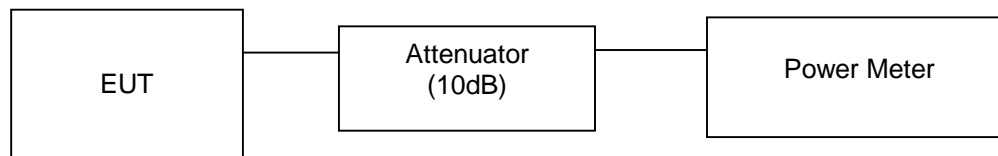

#### 4.1.5 EUT OPERATING CONDITIONS

1. Support unit 3 (ESG) ran test program “Beceem X350 VGS Control Panel 4.02.00” to enable EUT under transmission/receiving condition continuously via wireless transmission.
2. The EUT connects the support unit 1(Notebook computer) via one UTP cable.



A D T

#### 4.1.6 TEST RESULTS

##### CHANNEL BANDWIDTH: 5MHz

<b>INPUT POWER</b>	120Vac, 60Hz		
<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa	<b>TESTED BY</b>	Rex Huang

CONDUCTED POWER			
CHANNEL	FREQUENCY (MHz)	POWER OUTPUT(mW)	POWER OUTPUT(dBm)
Low	2502.5	490.908	26.91
Middle	2600	501.187	27.00
High	2687.5	511.682	27.09

##### CHANNEL BANDWIDTH: 10MHz

<b>INPUT POWER</b>	120Vac, 60Hz		
<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa	<b>TESTED BY</b>	Rex Huang

CONDUCTED POWER			
CHANNEL	FREQUENCY (MHz)	POWER OUTPUT(mW)	POWER OUTPUT(dBm)
Low	2505	458.142	26.61
Middle	2600	501.187	27.00
High	2685	448.745	26.52



## 4.2 FREQUENCY STABILITY MEASUREMENT

### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.1055 and 27.54 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT -30°C ~ 50°C.

### 4.2.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 02, 2010	Aug. 01, 2011
OVEN	MHU-225AU	911033	Dec. 16, 2010	Dec. 15, 2011
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 14, 2010	Aug. 13, 2011
AC POWER SOURCE	6205	1140503	NA	NA

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.2.3 TEST PROCEDURE

- a. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 102 Volts to 138 Volts. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing.
- d. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

#### 4.2.4 TEST SETUP

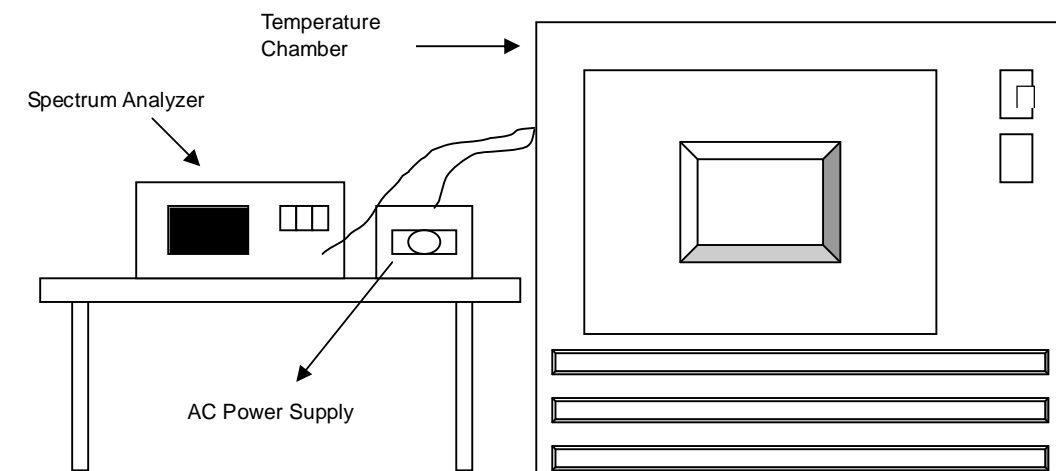



A D T

#### 4.2.5 TEST RESULTS

<b>MODE</b>	Middle channel (2600MHz)	<b>INPUT POWER</b>	120Vac, 60Hz
<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa	<b>TESTED BY</b>	Rex Huang

AFC FREQUENCY ERROR VS. VOLTAGE								
VOLTAGE (Volts)	0Minutes		2Minutes		5Minutes		10Minutes	
	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)
138	2600.00778	0.000299	2600.0048	0.000185	2600.0025	0.000096	2600.0021	0.000081
120	2599.99019	0.000377	2600.0081	0.000312	2600.0082	0.000315	2600.0096	0.000369
102	2600.00124	0.000048	2600.0047	0.000181	2600.0029	0.000112	2600.0029	0.000112

AFC FREQUENCY ERROR VS. TEMP								
TEMP (°C)	0Minutes		2Minutes		5Minutes		10Minutes	
	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)
50	2600.00503	0.000194	2600.0012	0.000046	2600.0011	0.000042	2600.0028	0.000108
40	2600.00907	0.000349	2599.9931	0.000265	2599.9923	0.000296	2599.9926	0.000285
30	2599.99391	0.000234	2600.0044	0.000169	2600.0024	0.000092	2600.0027	0.000104
20	2599.99019	0.000377	2600.0081	0.000312	2600.0082	0.000315	2600.0096	0.000369
10	2599.99257	0.000286	2600.0107	0.000412	2600.0122	0.000469	2600.0140	0.000538
0	2600.00058	0.000022	2599.9918	0.000315	2599.9934	0.000254	2599.9949	0.000196
-10	2600.00502	0.000193	2599.993	0.000269	2599.9939	0.000235	2599.9952	0.000185
-20	2599.99592	0.000157	2599.9971	0.000112	2600.0013	0.000050	2600.0025	0.000096

**NOTE:** The EUT can't operate and without any TX signal at -30°C

### 4.3 EMISSION BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT


According to FCC 27.53(m)(6) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY46180622	May 12, 2010	May 11, 2011
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 14, 2010	Aug. 13, 2011
JFW 10dB attenuation	50HF-010-SMA	N/A	N/A	N/A

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST SETUP

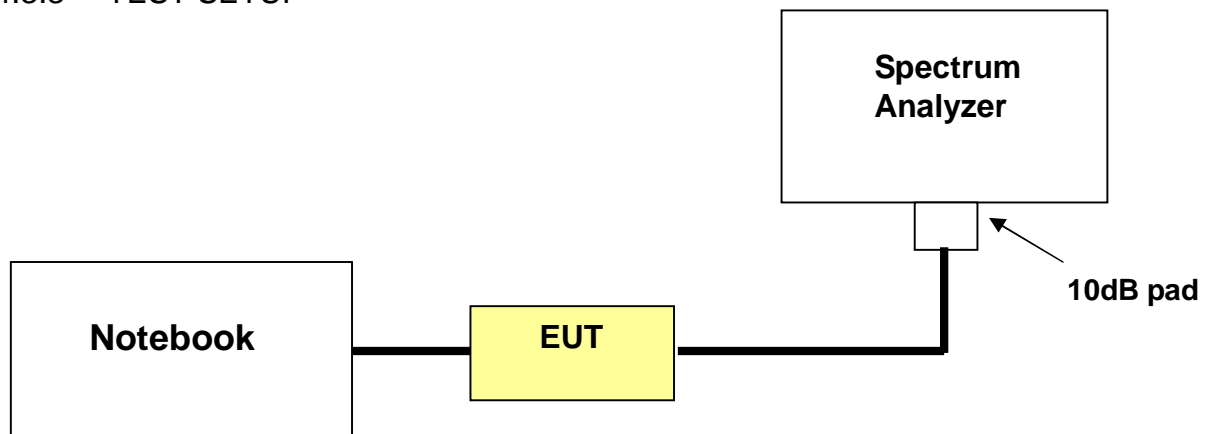



#### 4.3.4 TEST PROCEDURES

- a. The Notebook controlled EUT to export rated output power under transmission mode and specific channel frequency. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. Measure the bandwidth at the -26dBc levels with respect to the reference level.




A D T

### 4.3.5 TEST RESULTS

#### CHANNEL BANDWIDTH: 5MHz

FREQUENCY (MHz)	-26 dBc BANDWIDTH (MHz)
2502.5	5.07
2600	5.06
2687.5	5.09


#### LOW CHANNEL

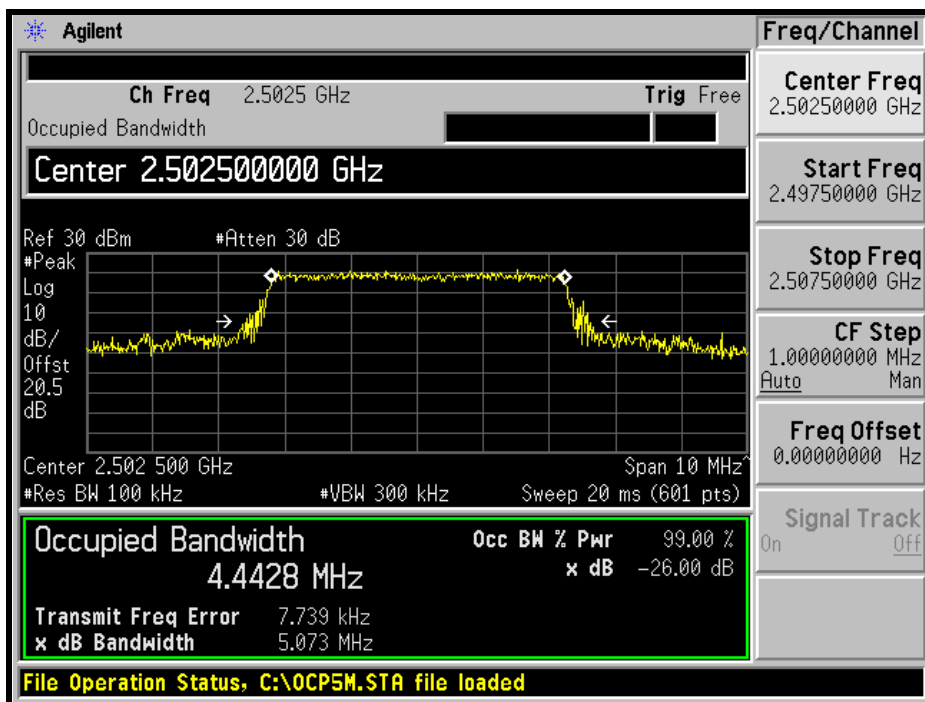




A D T

### MIDDLE CHANNEL

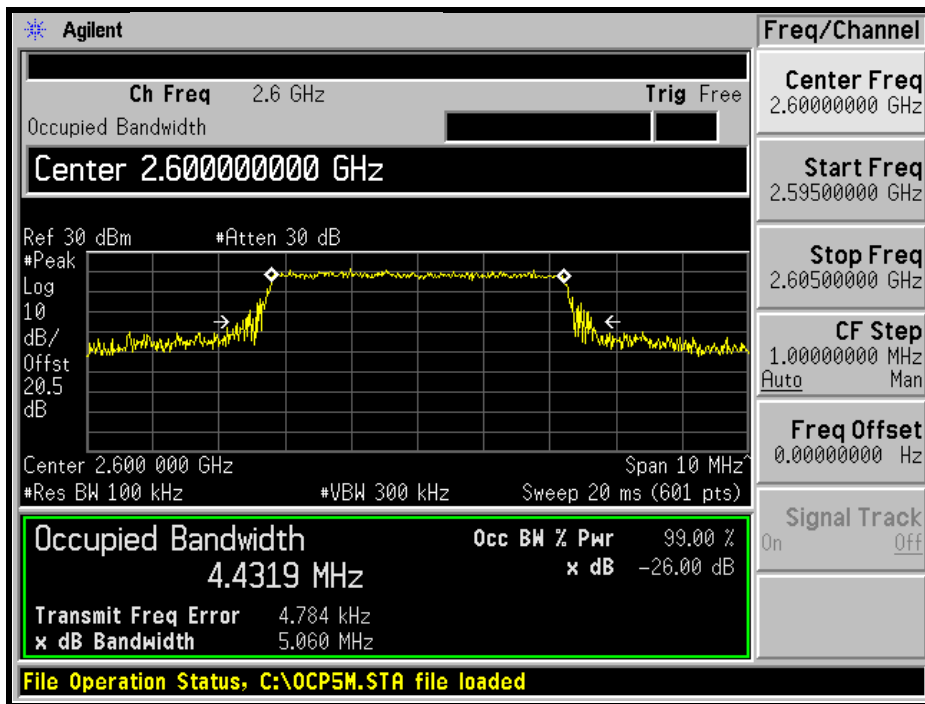

### HIGH CHANNEL

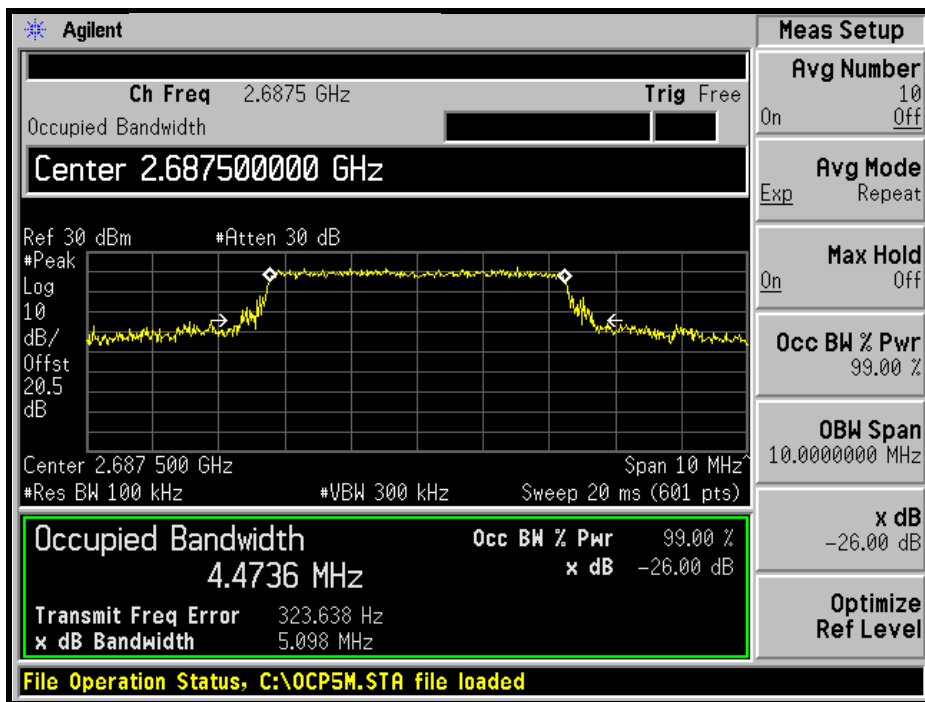




A D T

### CHANNEL BANDWIDTH: 10MHz

FREQUENCY (MHz)	-26 dBc BANDWIDTH (MHz)
2505	10.34
2600	10.20
2685	10.24


### LOW CHANNEL

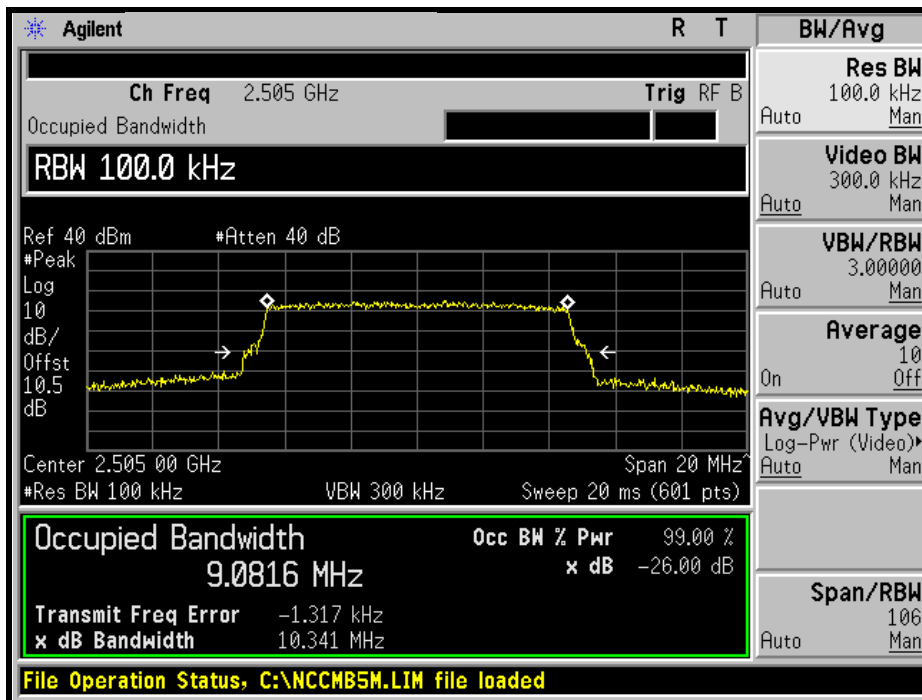




A D T

### MIDDLE CHANNEL

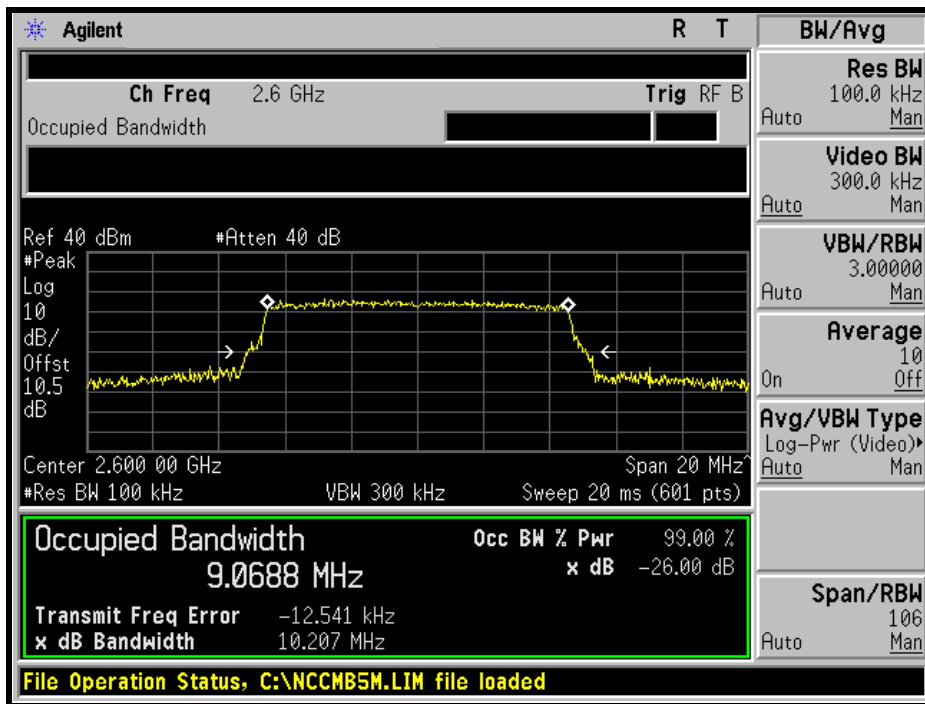

### HIGH CHANNEL

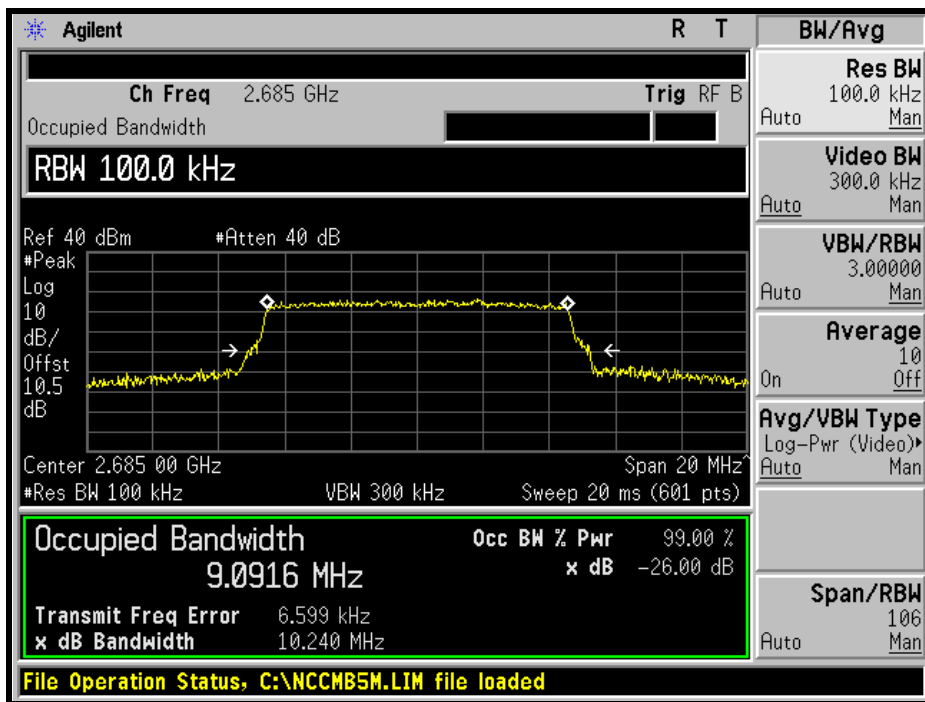

## 4.4 CHANNEL EDGE MEASUREMENT

### 4.4.1 LIMITS OF CHANNEL EDGE MEASUREMENT

According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB and  $55 + 10 \log(P)$  dB at 5.5 MHz from the channel edges. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY46180622	May 12, 2010	May 11, 2011
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 14, 2010	Aug. 13, 2011
JFW 10dB attenuation	50HF-010-SMA	NA	NA	NA

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.4.3 TEST SETUP

Same as Item 4.3.3

#### 4.4.4 TEST PROCEDURES

- a. The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. For Channel bandwidth: 5 MHz:  
The center frequency of spectrum is the band edge frequency and span is 20MHz. RBW of the spectrum is 51kHz and VB W of the spectrum is 160kHz.
- c. For Channel bandwidth: 10 MHz:  
The center frequency of spectrum is the band edge frequency and span is 30MHz. RB W of the spectrum is 110kHz and VB W of the spectrum is 330kHz.
- d. Record the max trace plot into the test report.

#### 4.4.5 EUT OPERATING CONDITION

Same as item 4.1.5





A D T

#### 4.4.6 TEST RESULTS

### CHANNEL BANDWIDTH: 5MHz

#### LOW CHANNEL

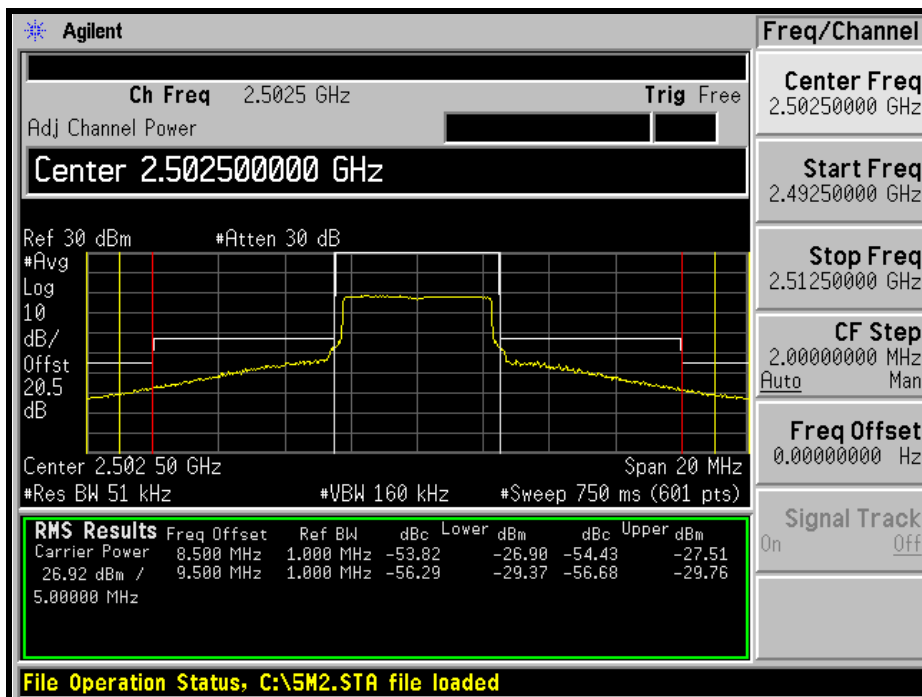
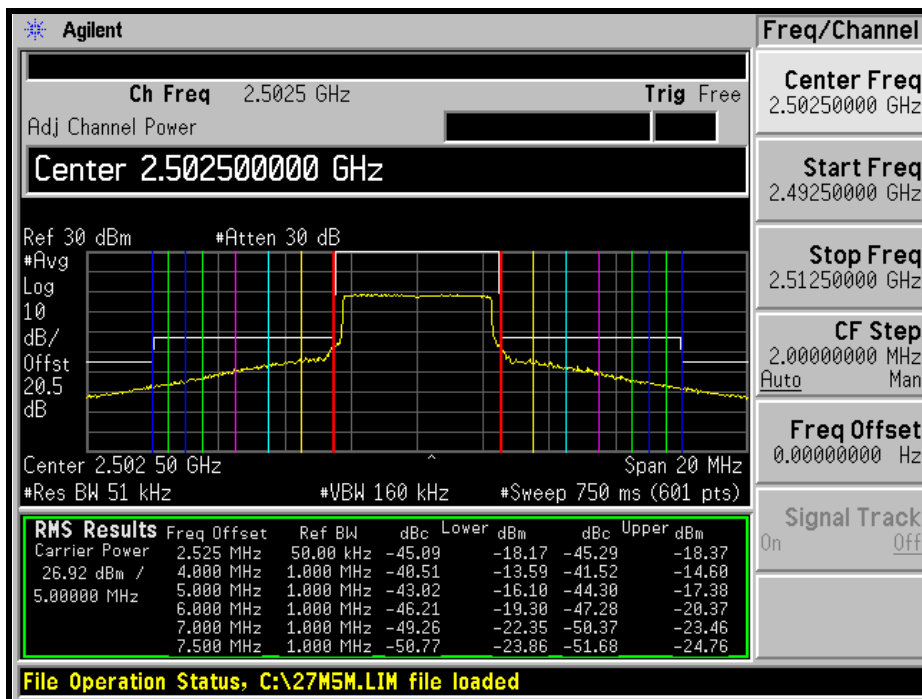






A D T



MIDDLE CHANNEL

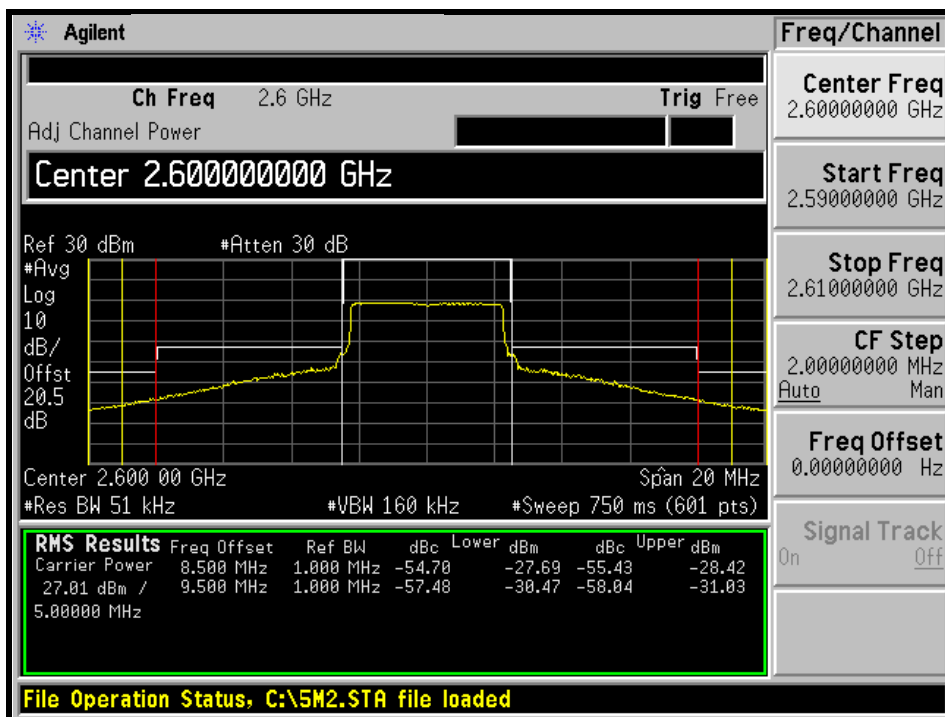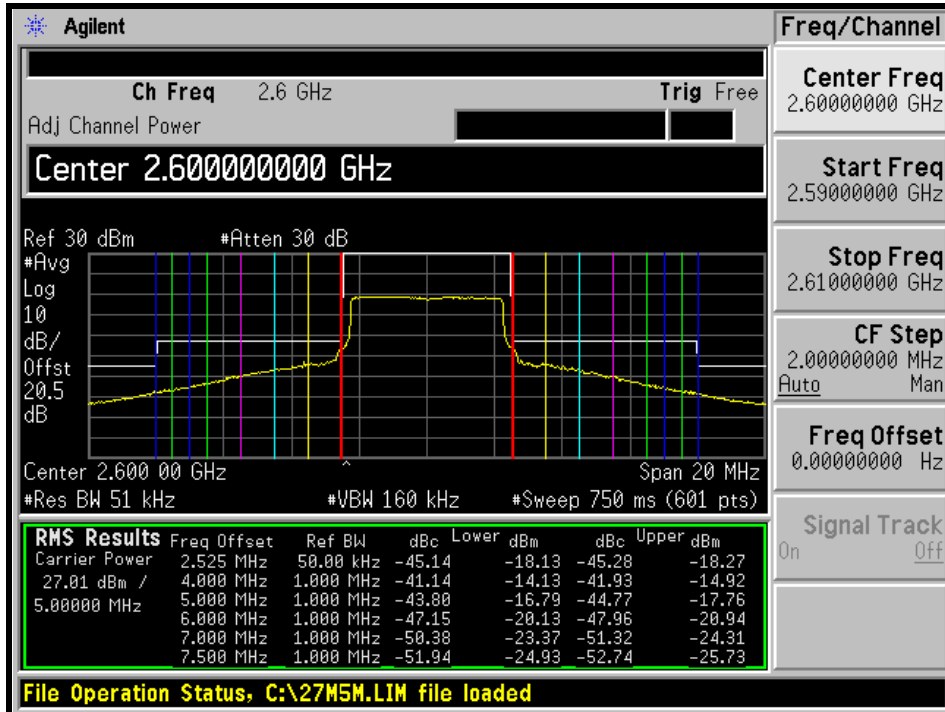



A D T

### HIGH CHANNEL

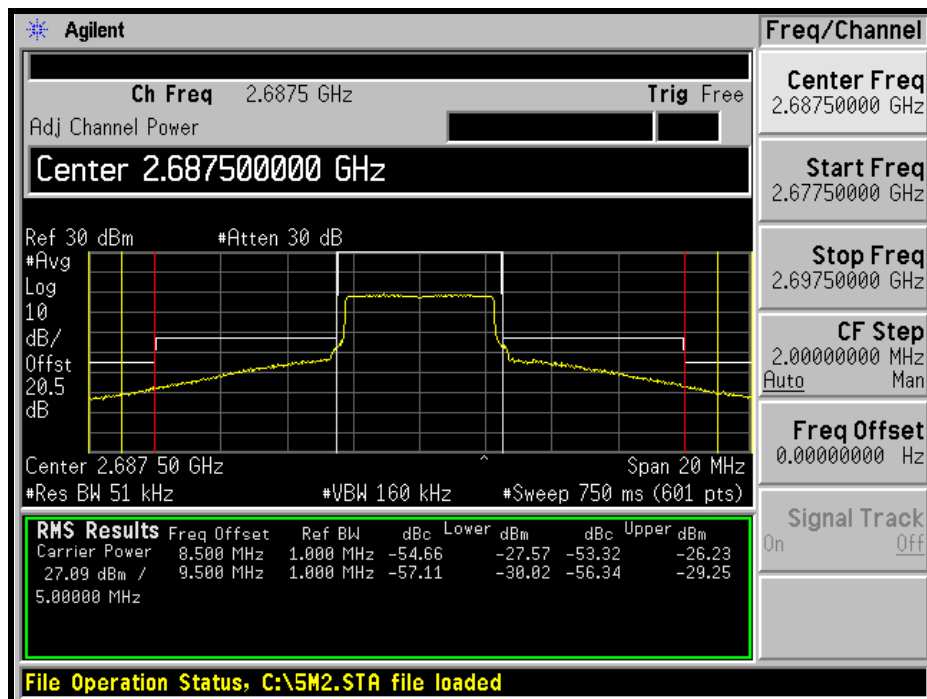
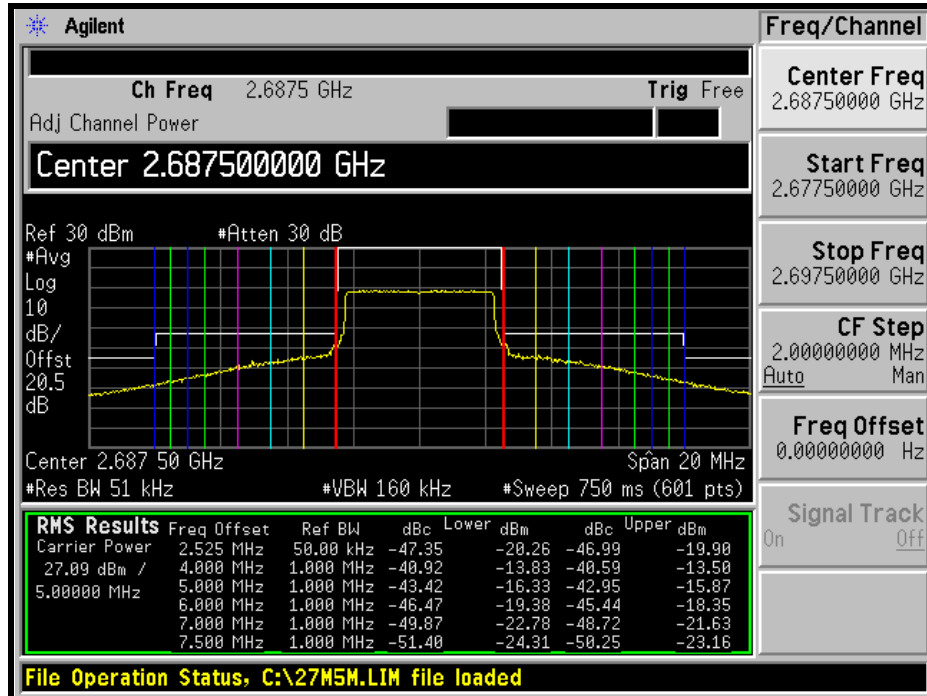




A D T

# CHANNEL BANDWIDTH: 10MHz



## LOW CHANNEL

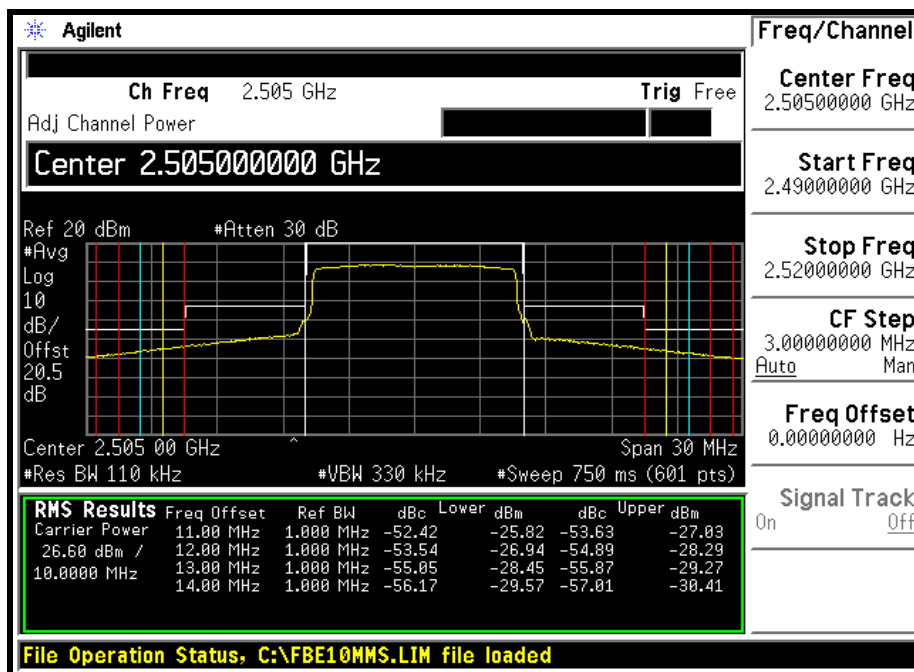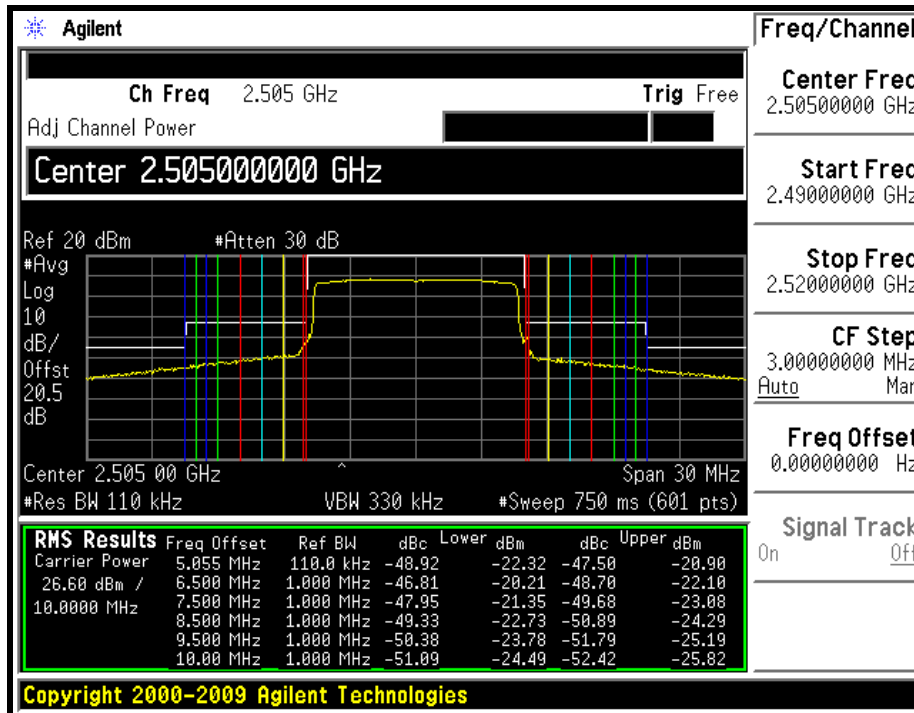



A D T



MIDDLE CHANNEL

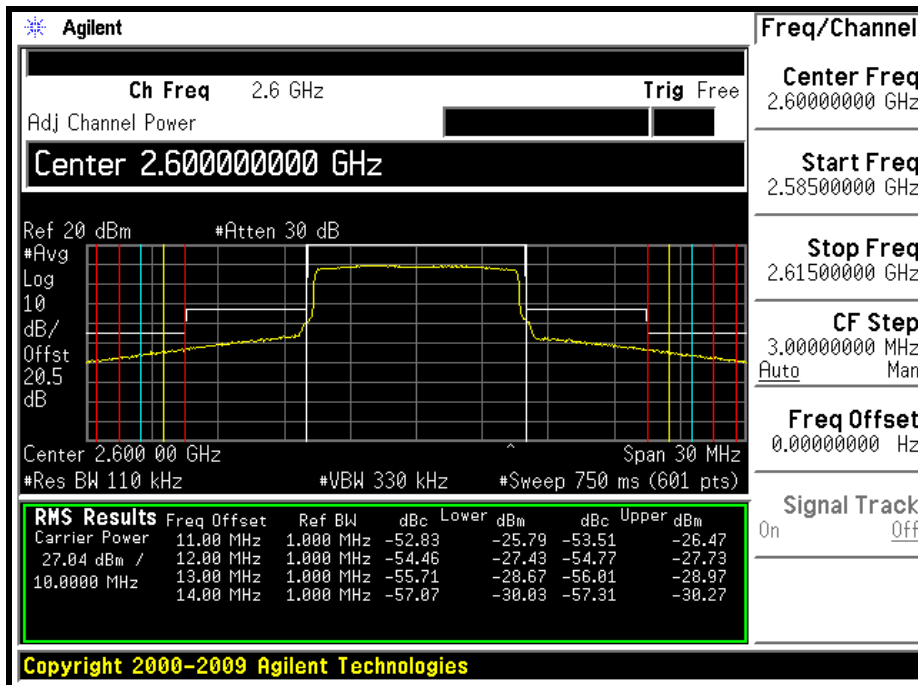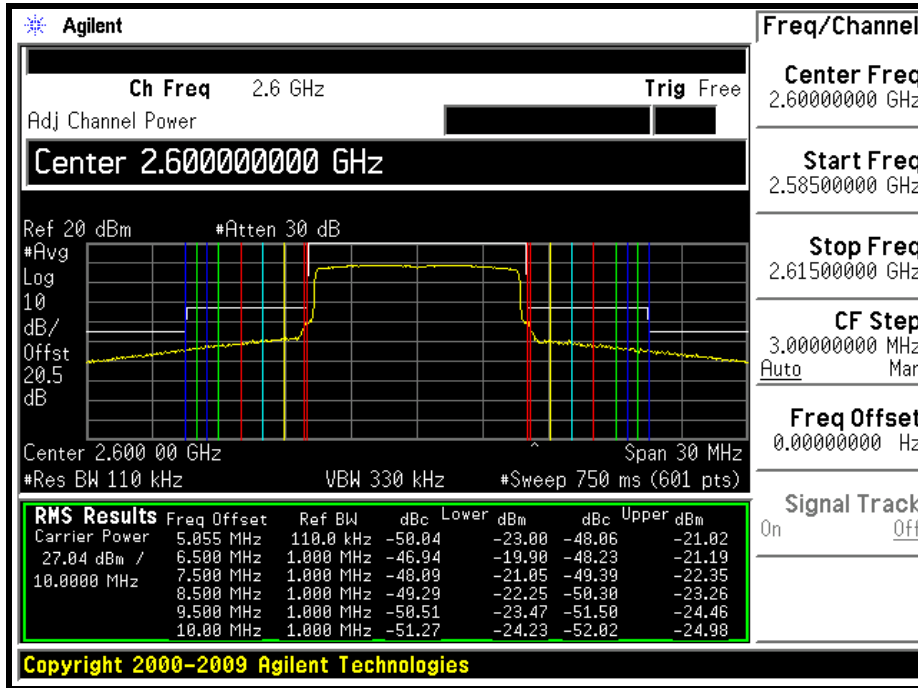



A D T

### HIGH CHANNEL

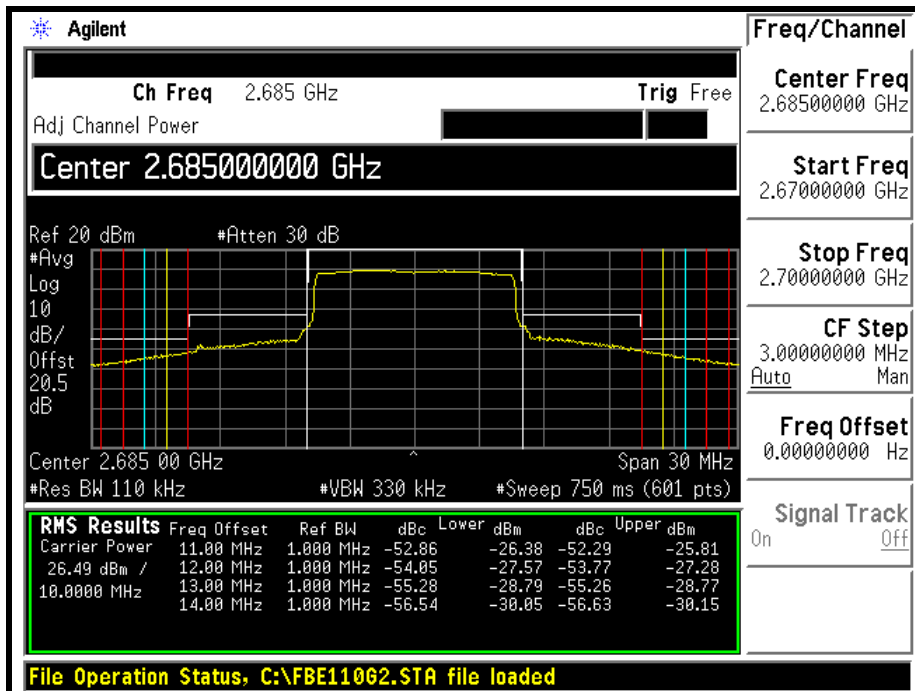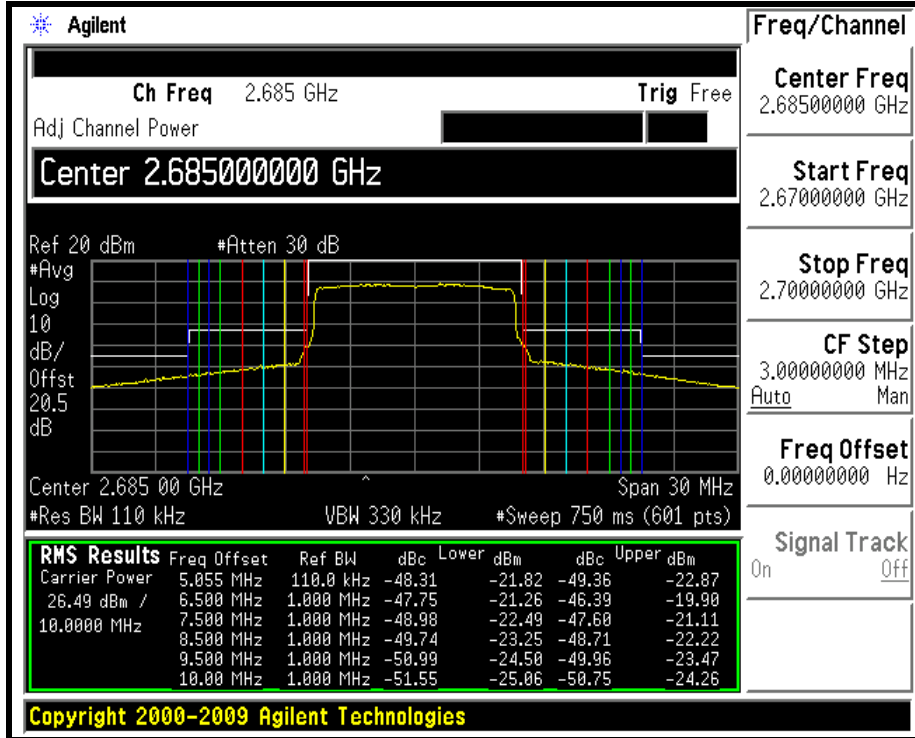



A D T

## 4.5 CONDUCTED SPURIOUS EMISSIONS

### 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 27.53(m)(4), On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB and  $55 + 10 \log (P)$  dB at 5.5 MHz from the channel edges.

### 4.5.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 02, 2010	Aug. 01, 2011
HUBER+SUHNER	SUCOFLEX104	22238114	July 30, 2010	July 29, 2011
JFW 10dB attenuation	50HF-010-SMA	N/A	N/A	N/A

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE

- a. The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 30MHz to 27GHz, it shall be connected to the 10dB pad attenuated the carried frequency. The spectrum set RB = 1MHz, VB = 3MHz.

#### 4.5.4 TEST SETUP

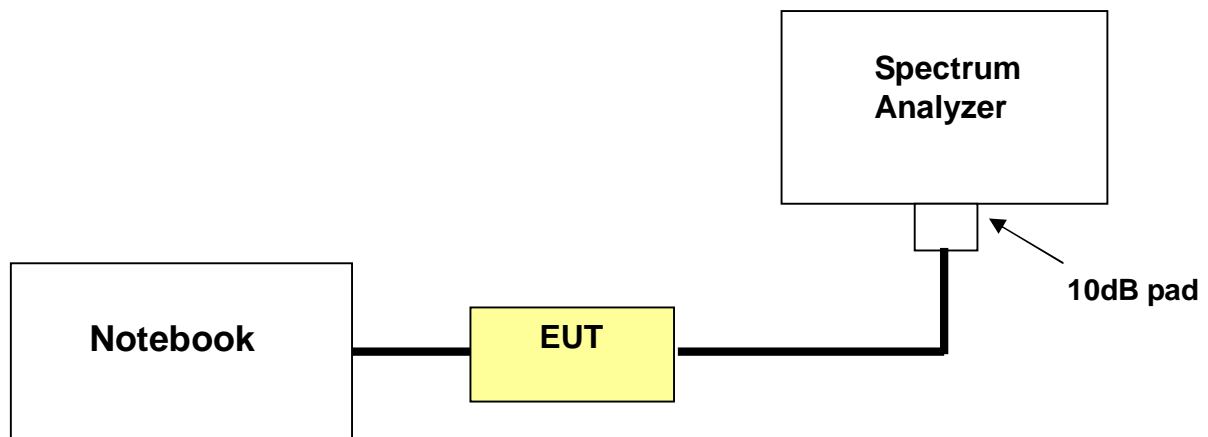

#### 4.5.5 EUT OPERATING CONDITIONS

Same as item 4.1.5




A D T


### 4.5.6 TEST RESULTS

#### CHANNEL BANDWIDTH: 5MHz

LOW CHANNEL: 30MHz ~ 1GHz:

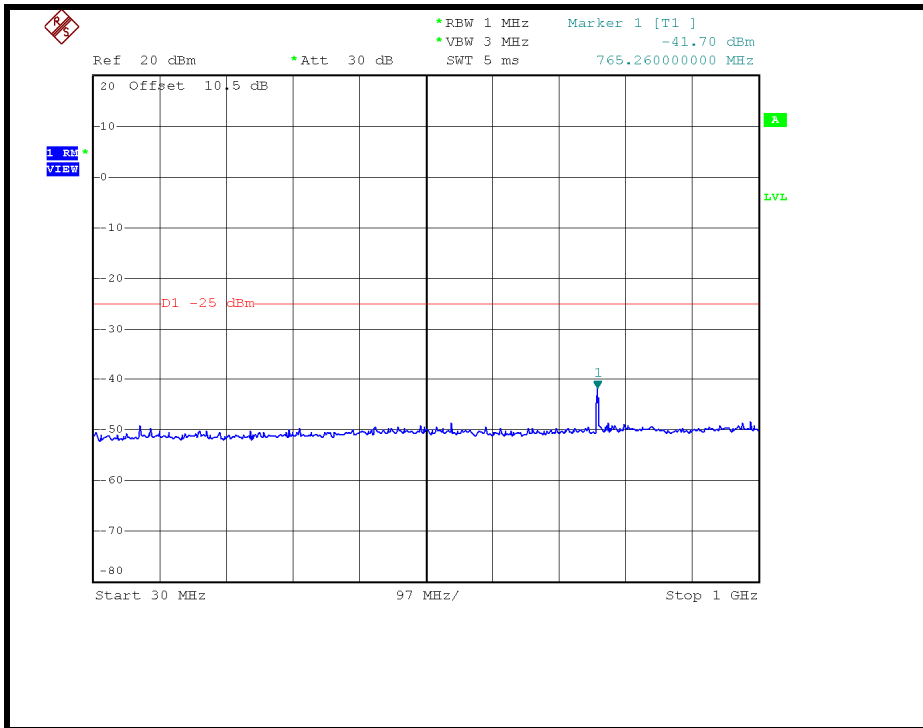

1GHz ~ 5GHz:

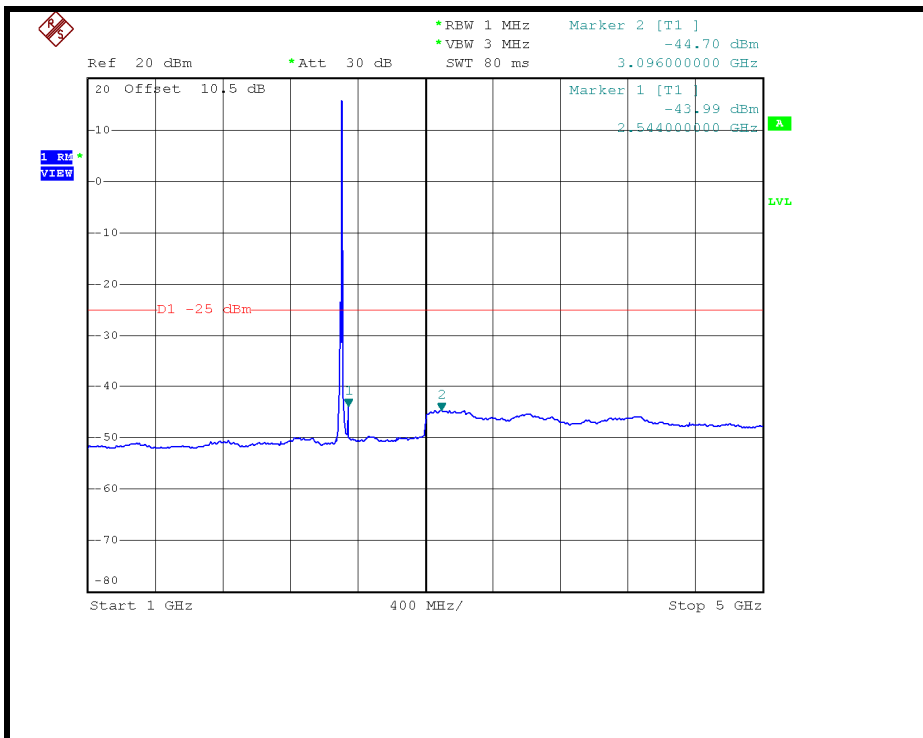







A D T

### 5GHz ~ 10GHz:

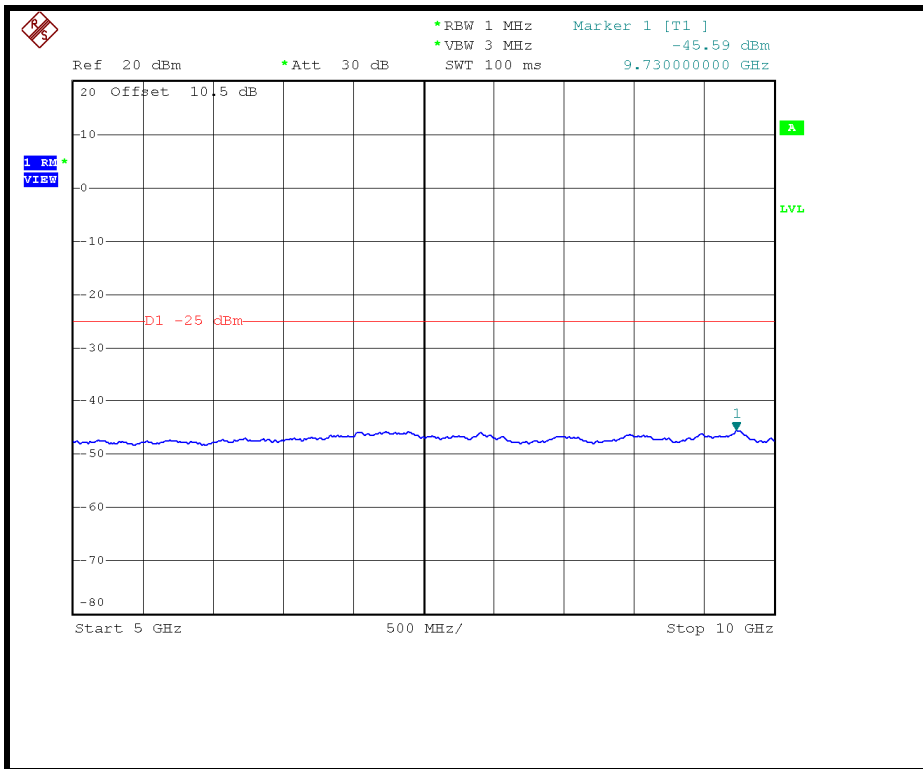


### 10GHz ~ 27GHz:

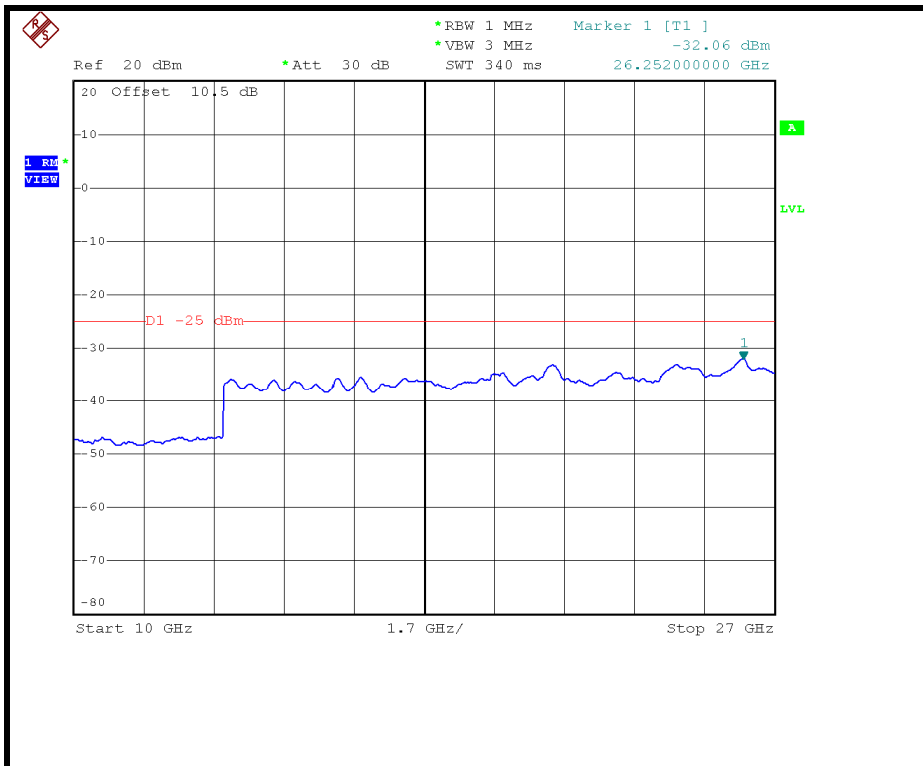




A D T

### MIDDLE CHANNEL: 30MHz ~ 1GHz:

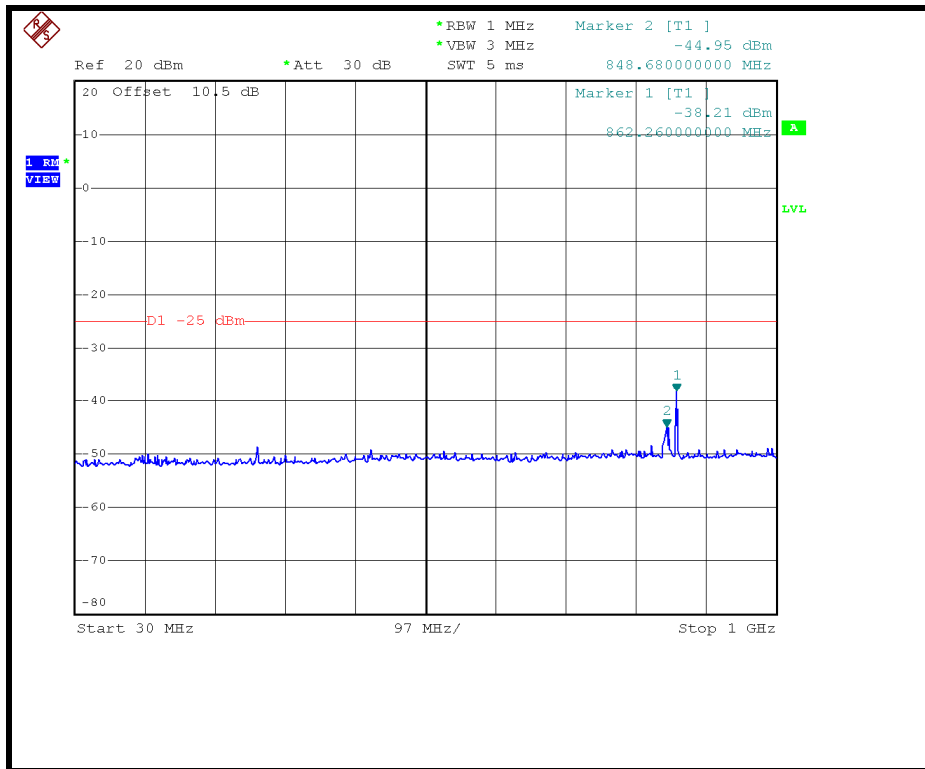


### 1GHz ~ 5GHz:

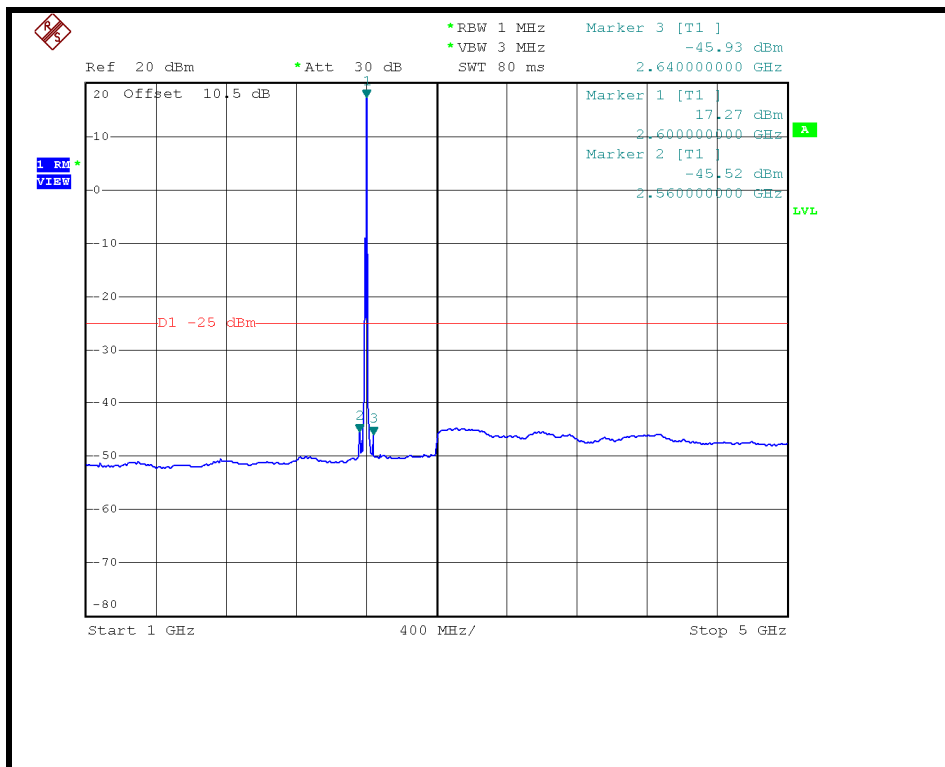




A D T

### 5GHz ~ 10GHz:

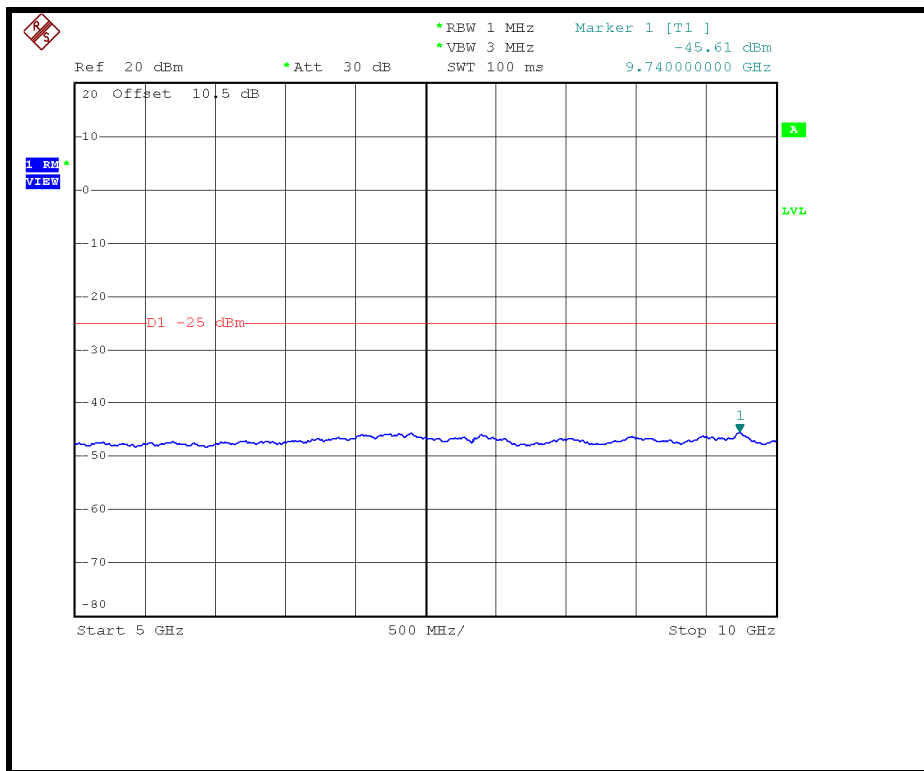


### 10GHz ~ 27GHz:

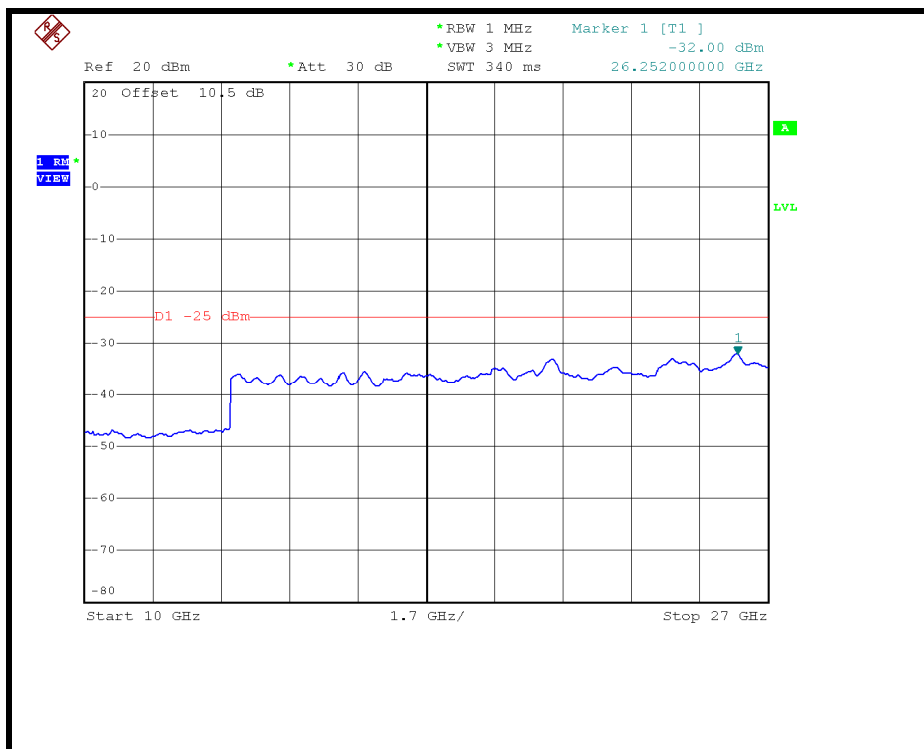




A D T

### HIGH CHANNEL: 30MHz ~ 1GHz:

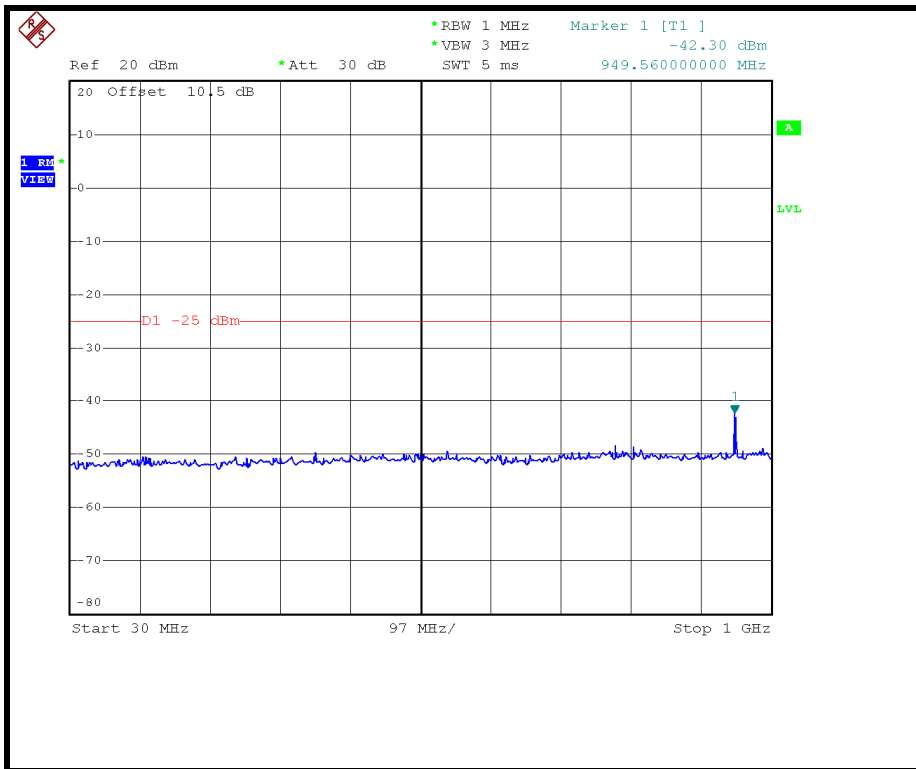


### 1GHz ~ 5GHz:

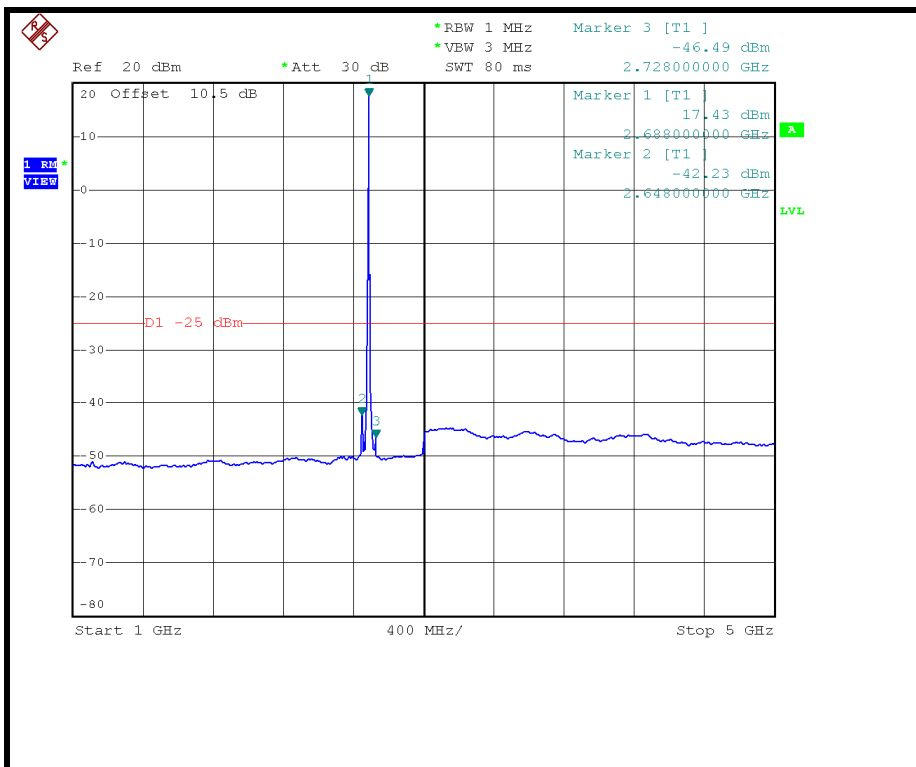




A D T

### 5GHz ~ 10GHz:

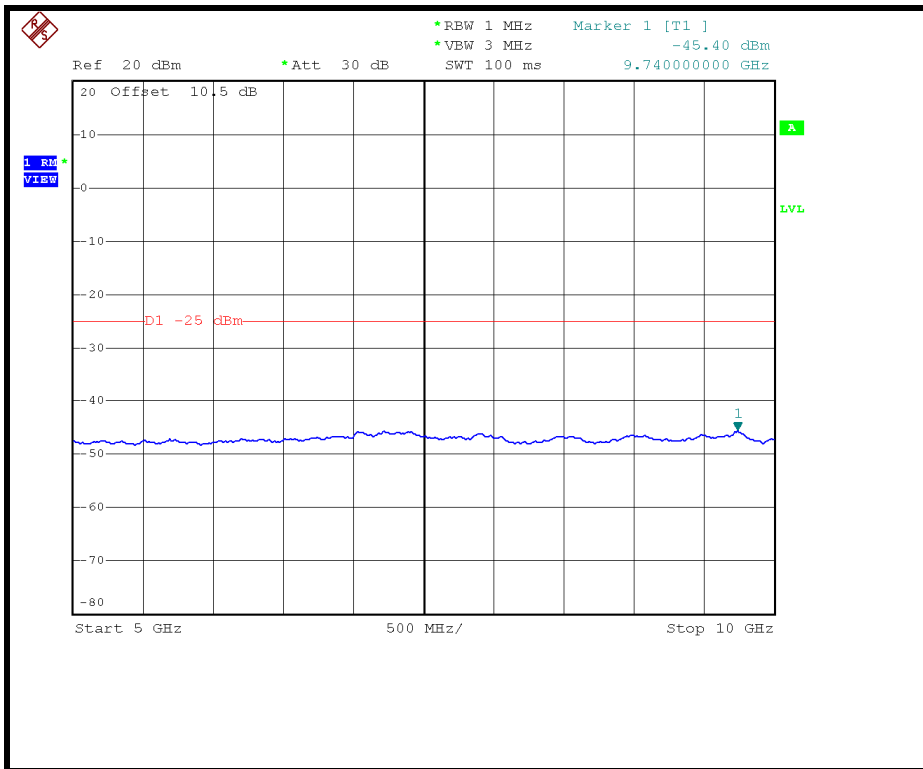

### 10GHz ~ 27GHz:

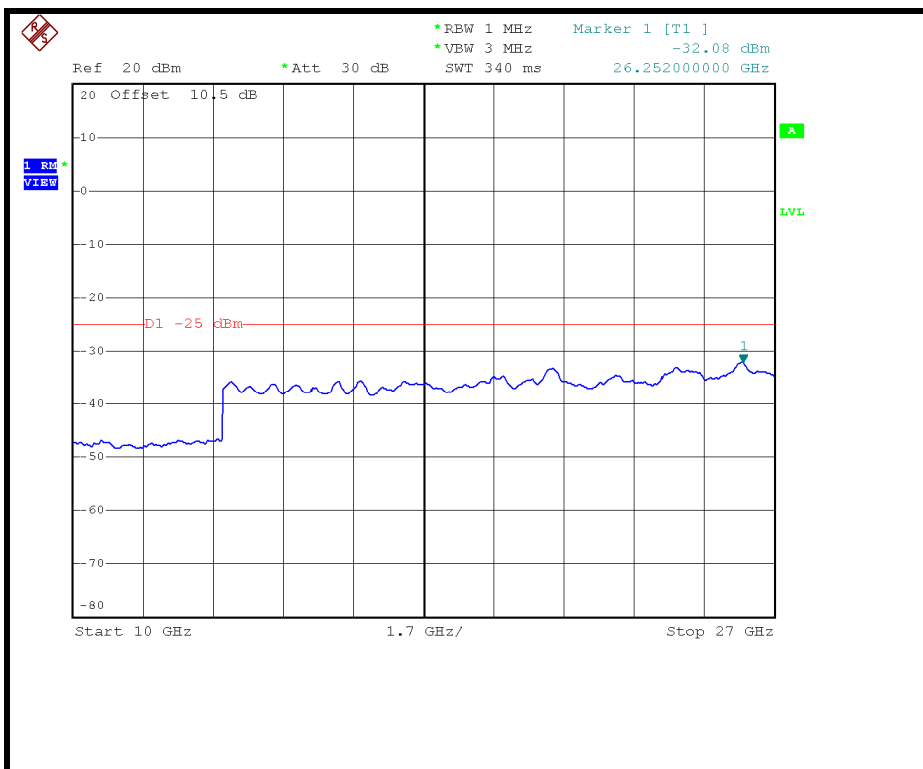





A D T

### CHANNEL BANDWIDTH: 10MHz

LOW CHANNEL: 30MHz ~ 1GHz:

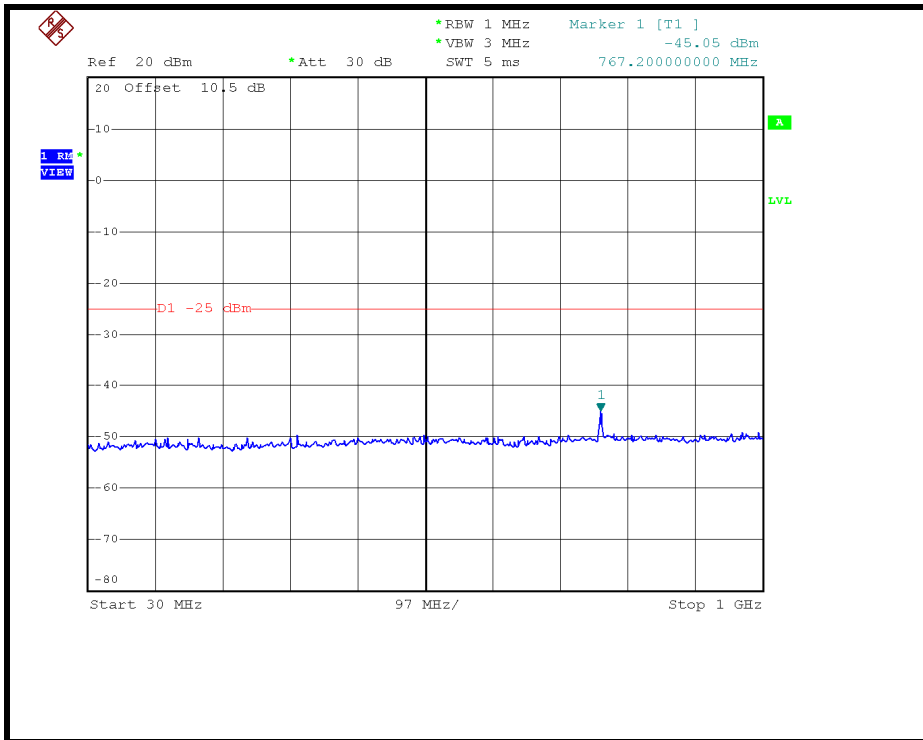


1GHz ~ 5GHz:

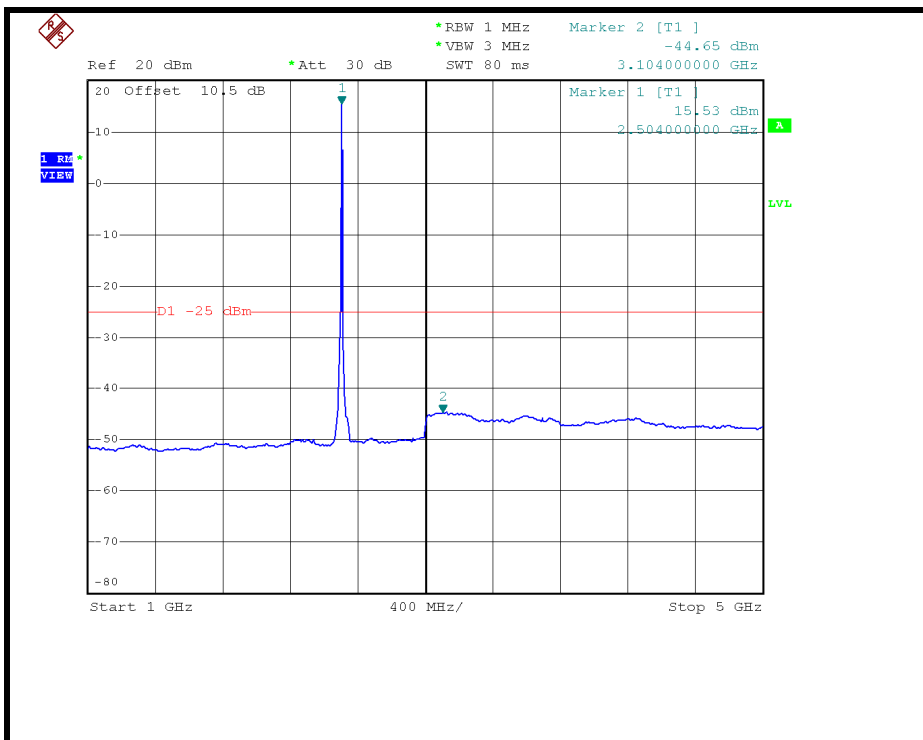




A D T

### 5GHz ~ 10GHz:

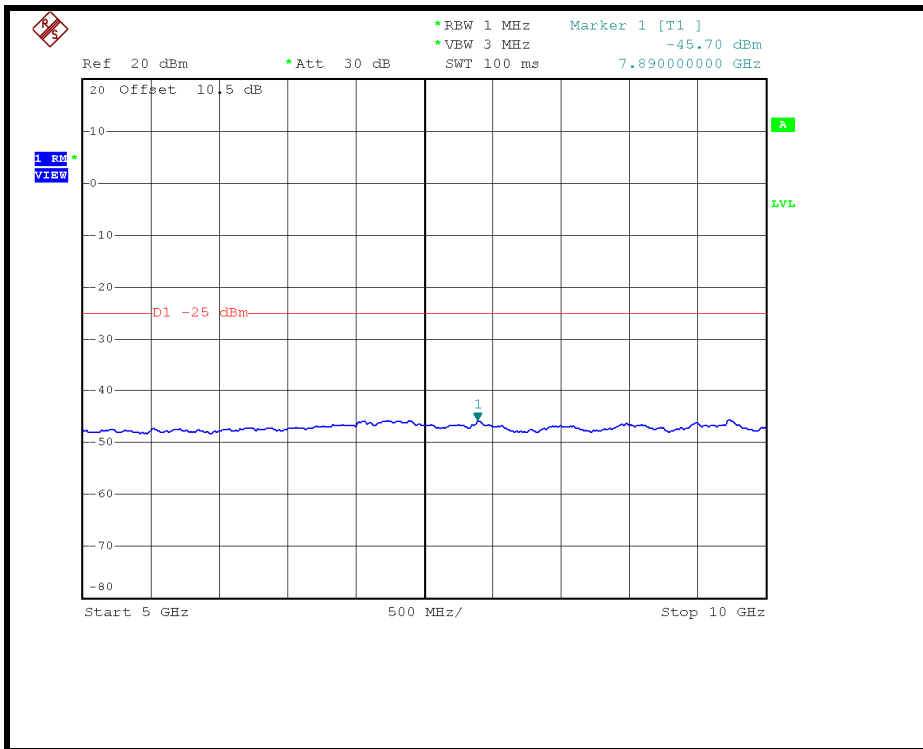


### 10GHz ~ 27GHz:

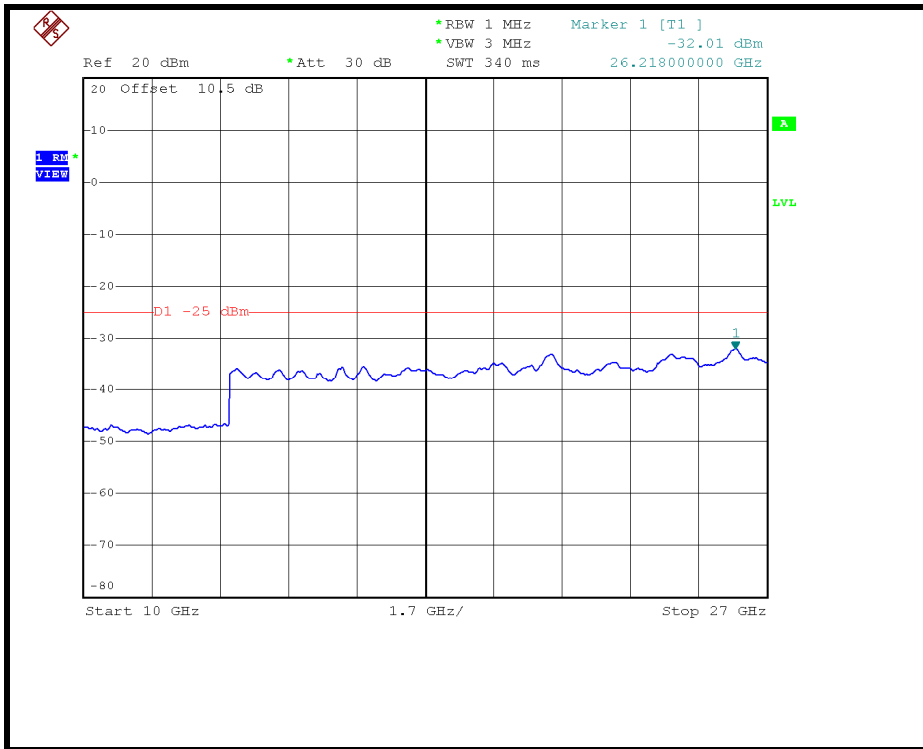




A D T

### MIDDLE CHANNEL: 30MHz ~ 1GHz:

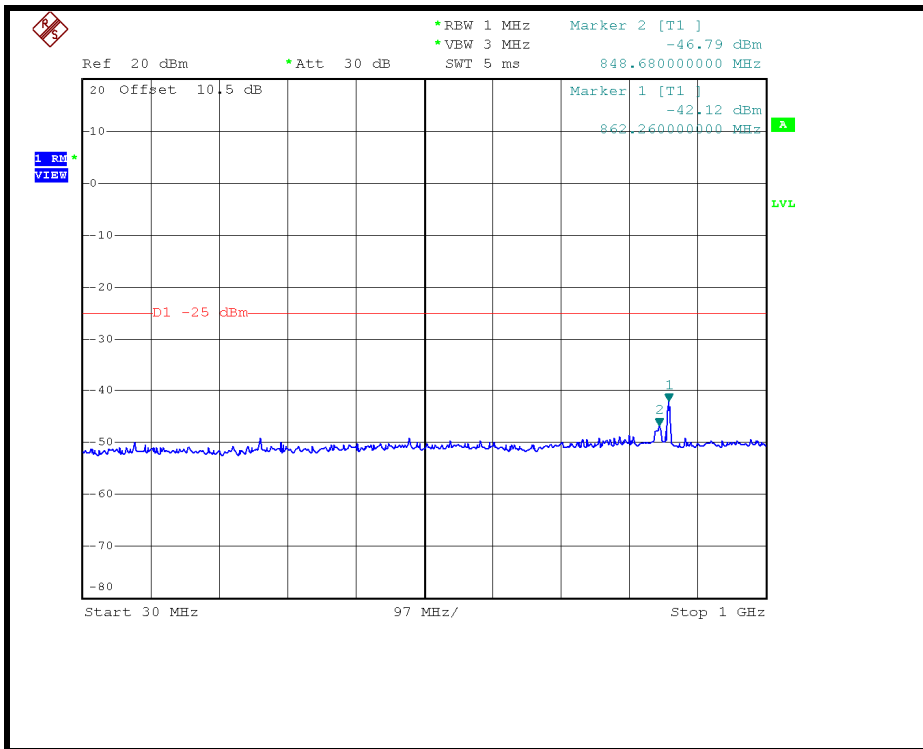

### 1GHz ~ 5GHz:

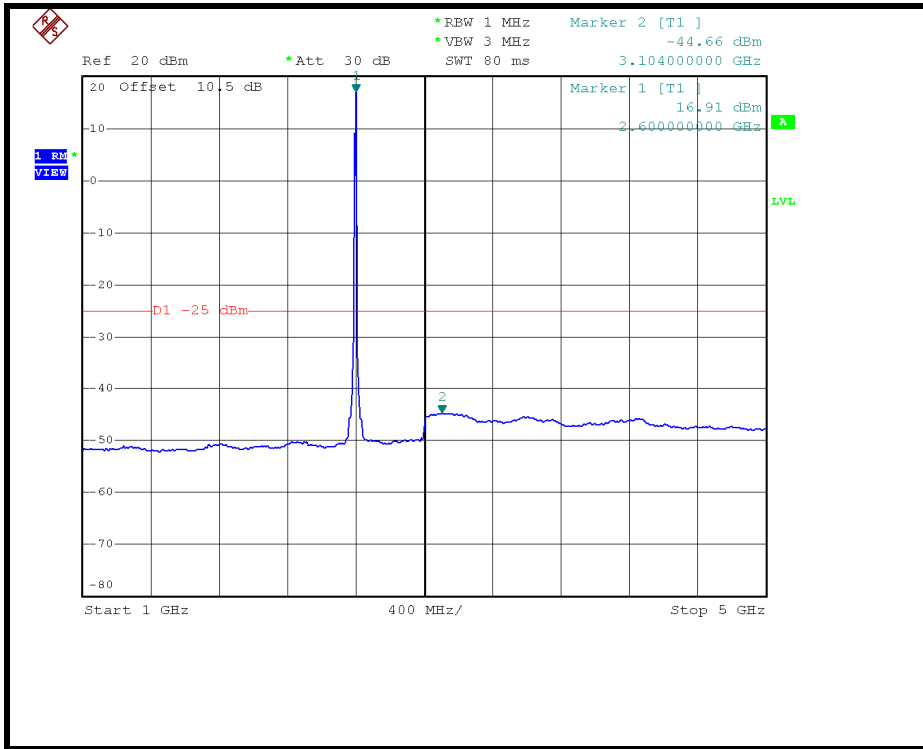







A D T

### 5GHz ~ 10GHz:

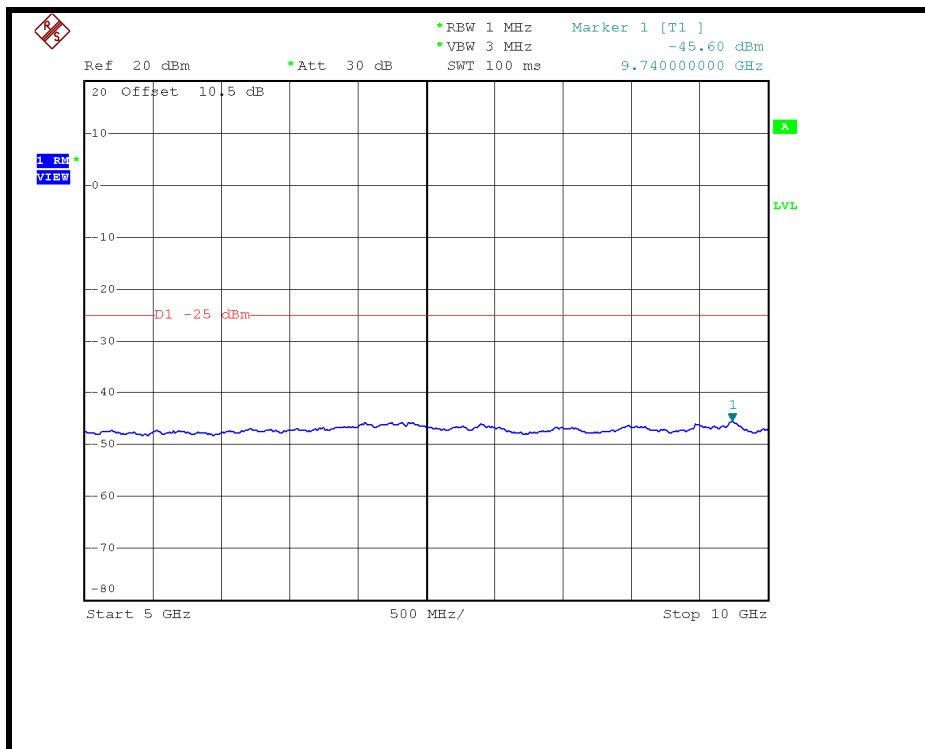


### 10GHz ~ 27GHz:

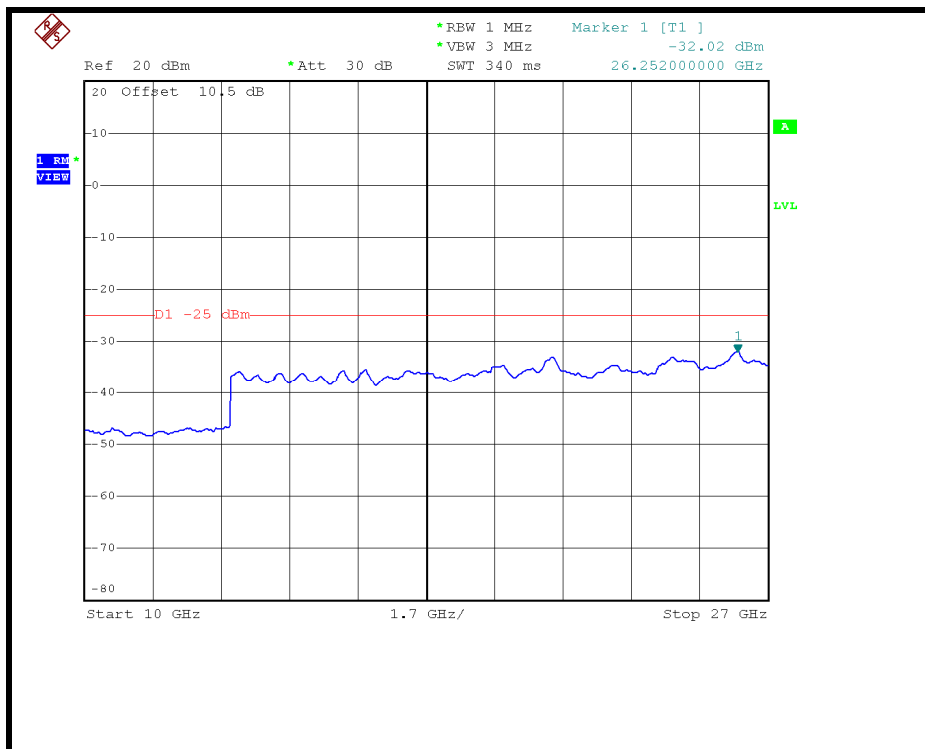




A D T

### HIGH CHANNEL: 30MHz ~ 1GHz:

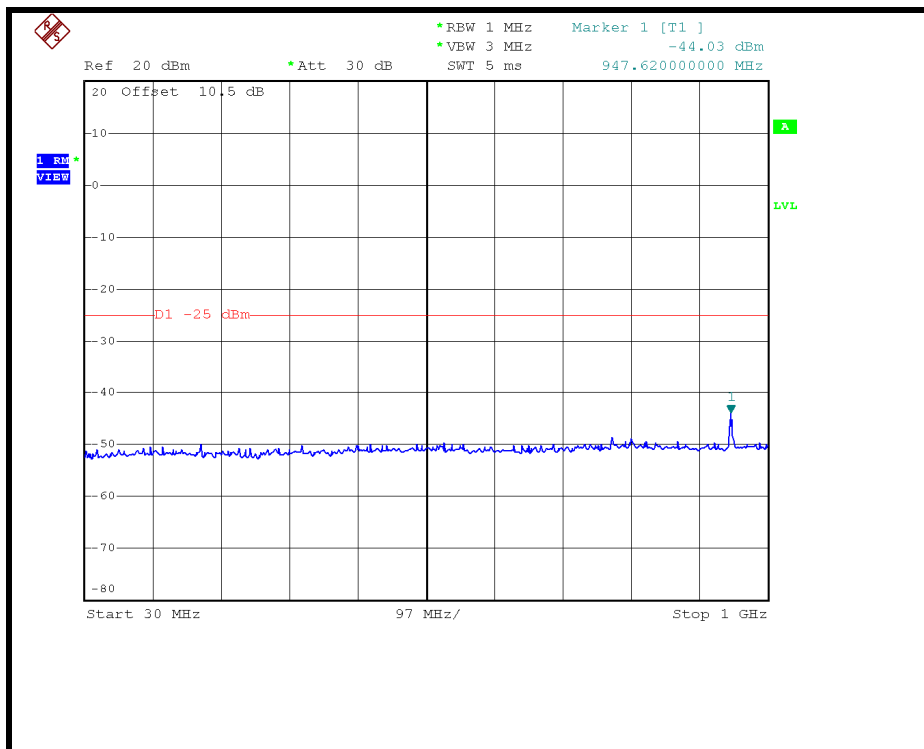


### 1GHz ~ 5GHz:

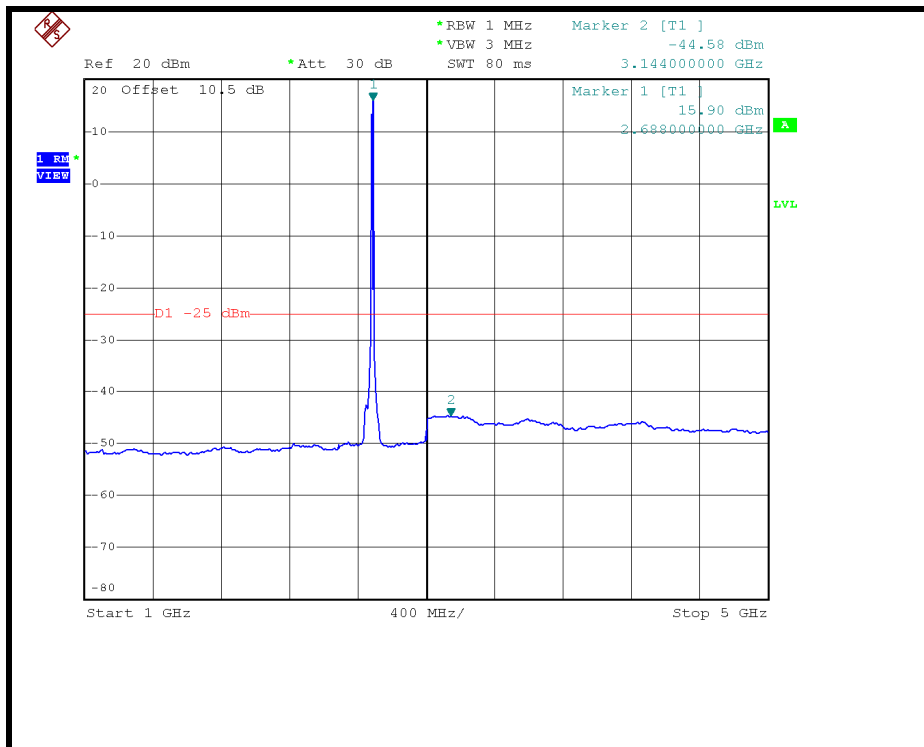




A D T

### 5GHz ~ 10GHz:

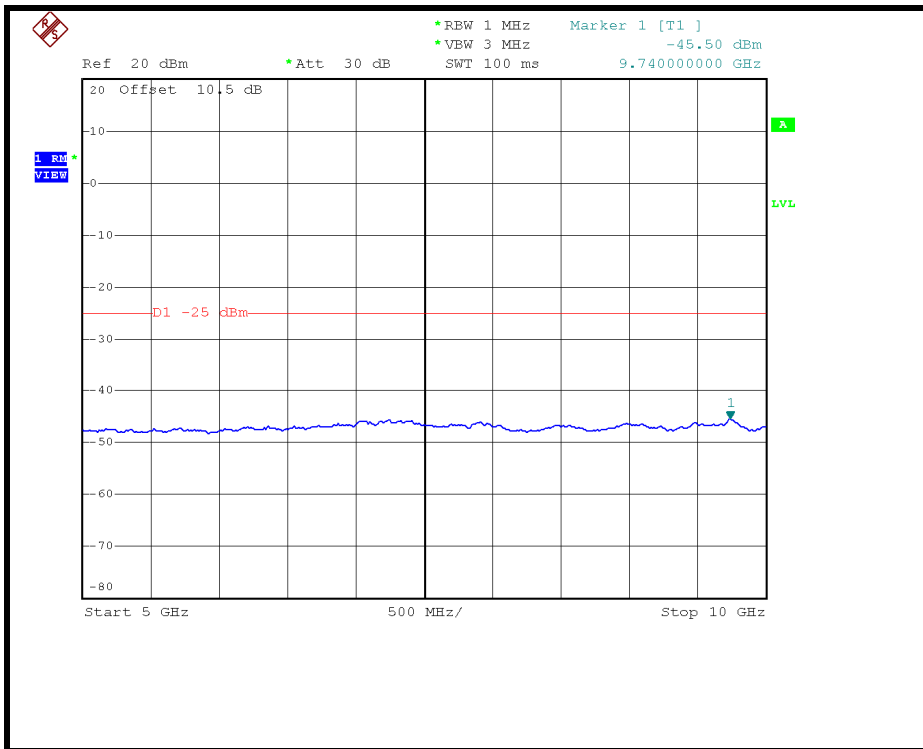

### 10GHz ~ 27GHz:

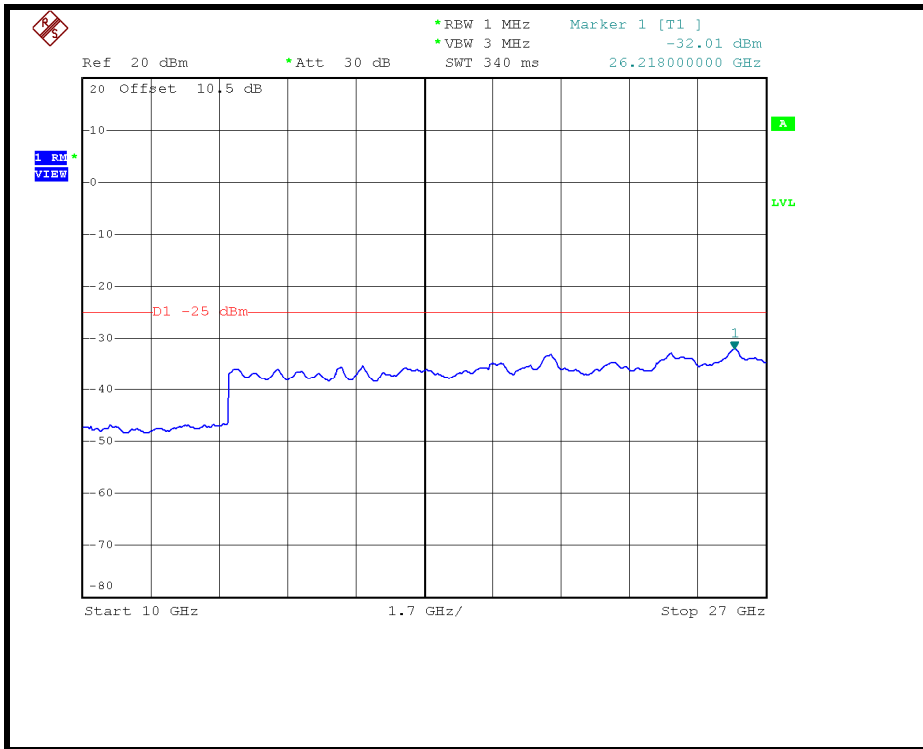



## 4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

### 4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB and  $55 + 10 \log (P)$  dB at 5.5 MHz from the channel edges.

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	May 12 , 2010	May 11 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 01, 2010	Oct. 31, 2011
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 03, 2010	Sep. 02, 2011
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 28, 2010	Apr. 27, 2011
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 17, 2010	Dec. 16, 2011
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 17, 2011	Jan. 16, 2012
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 104+ Sucoflex 106	RF104-101+R F106-101	Aug. 24, 2010	Aug. 23, 2011
RF Cable	8DFB	STCCAB-30M- 1GHz	NA	NA
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.



A D T

#### 4.6.3 TEST PROCEDURES


1. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
2. Substitution method is used for E.I.R.P measurement. In the open area test site, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
3. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
4. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution antenna.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP

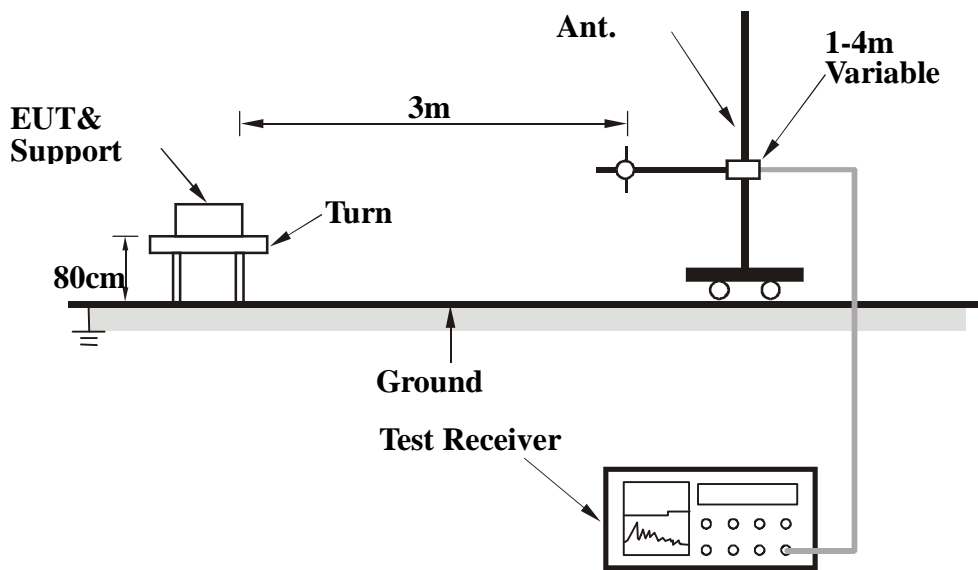

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.6.6 EUT OPERATING CONDITIONS

Same as item 4.1.5



A D T

#### 4.6.7 TEST RESULTS

##### CHANNEL BANDWIDTH: 5MHz

<b>MODE</b>	High channel	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa
<b>TESTED BY</b>	Kent Liu		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	125	30.86	-25	-59.82	-1.21	-61.04
2	250	28.82	-25	-66.14	3.89	-62.25
3	320	31.50	-25	-65.12	3.67	-61.45
4	500	28.48	-25	-68.04	3.89	-64.15
5	625	27.95	-25	-68.86	3.77	-65.09
6	880	34.84	-25	-65.26	3.71	-61.55
7	920	40.04	-25	-62.47	4.43	-58.04

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	125	29.65	-25	-61.03	-1.21	-62.25
2	250	27.27	-25	-67.69	3.89	-63.80
3	320	31.64	-25	-64.98	3.67	-61.31
4	500	28.82	-25	-67.70	3.89	-63.81
5	625	29.43	-25	-67.38	3.77	-63.61
6	880	33.58	-25	-66.52	3.71	-62.81
7	920	39.95	-25	-62.56	4.43	-58.13

**REMARKS:** 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

**CHANNEL BANDWIDTH: 10MHz**

<b>MODE</b>	Middle channel	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa
<b>TESTED BY</b>	Kent Liu		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	125	32.00	-25	-58.68	-1.21	-59.90
2	250	28.92	-25	-66.04	3.89	-62.15
3	320	31.16	-25	-65.46	3.67	-61.79
4	500	28.92	-25	-67.60	3.89	-63.71
5	625	29.01	-25	-67.80	3.77	-64.03
6	880	34.80	-25	-65.30	3.71	-61.59
7	920	39.53	-25	-62.98	4.43	-58.55

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	125	29.76	-25	-60.92	-1.21	-62.14
2	250	27.32	-25	-67.64	3.89	-63.75
3	320	32.04	-25	-64.58	3.67	-60.91
4	500	28.36	-25	-68.16	3.89	-64.27
5	625	29.95	-25	-66.86	3.77	-63.09
6	880	33.12	-25	-66.98	3.71	-63.27
7	920	40.04	-25	-62.47	4.43	-58.04

**REMARKS:** 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)





A D T

## 4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

### 4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB and  $55 + 10 \log (P)$  dB at 5.5 MHz from the channel edges.

### 4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	May 12 , 2010	May 11 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 01, 2010	Oct. 31, 2011
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 03, 2010	Sep. 02, 2011
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 28, 2010	Apr. 27, 2011
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 17, 2010	Dec. 16, 2011
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 17, 2011	Jan. 16, 2012
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 104+ Sucoflex 106	RF104-101+R F106-101	Aug. 24, 2010	Aug. 23, 2011
RF Cable	8DFB	STCCAB-30M- 1GHz	NA	NA
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

#### 4.7.3 TEST PROCEDURES


1. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
2. Substitution method is used for E.I.R.P measurement. In the open area test site, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
3. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
4. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution antenna.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.7.5 TEST SETUP

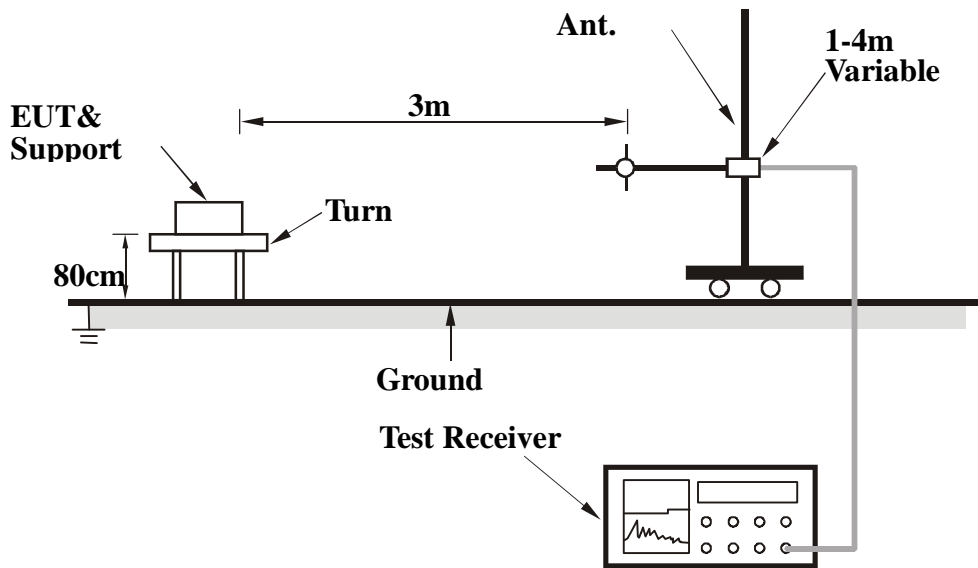

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.7.6 EUT OPERATING CONDITIONS

Same as item 4.1.5



A D T

### 4.7.7 TEST RESULTS

#### CHANNEL BANDWIDTH: 5MHz

<b>MODE</b>	Low channel	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa
<b>TESTED BY</b>	Kent Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5005	54.70	-25	-49.54	7.01	-42.53
2	7507.5	56.60	-25	-46.02	4.54	-41.48
3	10010	63.30	-25	-38.27	4.03	-34.24
4	12512.5	59.80	-25	-41.78	4.34	-37.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5005	55.10	-25	-49.14	7.01	-42.13
2	7507.5	56.40	-25	-46.22	4.54	-41.68
3	10010	58.30	-25	-43.27	4.03	-39.24
4	12512.5	60.50	-25	-41.08	4.34	-36.74

**REMARKS:** 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

<b>MODE</b>	Middle channel	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa
<b>TESTED BY</b>	Kent Liu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5200	56.60	-25	-47.93	7.05	-40.88
2	7800	57.60	-25	-45.02	4.29	-40.73
3	10400	61.90	-25	-40.11	3.66	-36.44
4	13000	61.30	-25	-39.53	4.45	-35.08

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5200	56.80	-25	-47.73	7.05	-40.68
2	7800	57.70	-25	-44.92	4.29	-40.63
3	10400	57.90	-25	-44.11	3.66	-40.44
4	13000	61.20	-25	-39.63	4.45	-35.18

**REMARKS:** 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

<b>MODE</b>	High channel	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa
<b>TESTED BY</b>	Kent Liu		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5375	57.30	-25	-47.49	7.09	-40.40
2	8062.5	58.20	-25	-44.42	4.13	-40.29
3	10750	63.90	-25	-37.94	3.33	-34.60
4	13437.5	61.50	-25	-38.72	3.41	-35.31

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5375	57.60	-25	-47.19	7.09	-40.10
2	8062.5	57.50	-25	-45.12	4.13	-40.99
3	10750	58.80	-25	-43.04	3.33	-39.70
4	13437.5	62.00	-25	-38.22	3.41	-34.81

**REMARKS:** 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

**CHANNEL BANDWIDTH: 10MHz**

<b>MODE</b>	Low channel	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa
<b>TESTED BY</b>	Kent Liu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5010	54.40	-25	-49.85	7.01	-42.83
2	7515	56.50	-25	-46.12	4.53	-41.59
3	10020	62.30	-25	-39.28	4.02	-35.26
4	12525	59.50	-25	-42.06	4.34	-37.72

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5010	54.60	-25	-49.65	7.01	-42.63
2	7515	55.50	-25	-47.12	4.53	-42.59
3	10020	57.20	-25	-44.38	4.02	-40.36
4	12525	60.10	-25	-41.46	4.34	-37.12

**REMARKS:** 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

<b>MODE</b>	Middle channel	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa
<b>TESTED BY</b>	Kent Liu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5200	54.80	-25	-49.73	7.05	-42.68
2	7800	58.40	-25	-44.22	4.29	-39.93
3	10400	61.80	-25	-40.21	3.66	-36.54
4	13000	61.80	-25	-39.03	4.45	-34.58

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5200	55.00	-25	-49.53	7.05	-42.48
2	7800	56.60	-25	-46.02	4.29	-41.73
3	10400	57.90	-25	-44.11	3.66	-40.44
4	13000	60.50	-25	-40.33	4.45	-35.88

**REMARKS:** 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)





A D T

<b>MODE</b>	High channel	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg°C, 60%RH 1025hPa
<b>TESTED BY</b>	Kent Liu		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5370	56.20	-25	-48.58	7.09	-41.49
2	8055	58.30	-25	-44.32	4.13	-40.19
3	10740	63.30	-25	-38.55	3.34	-35.21
4	13425	61.70	-25	-38.54	3.44	-35.10

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5370	54.90	-25	-49.88	7.09	-42.79
2	8055	57.50	-25	-45.12	4.13	-40.99
3	10740	59.50	-25	-42.35	3.34	-39.01
4	13425	62.00	-25	-38.24	3.44	-34.80

**REMARKS:** 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





## 6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5.phtml](http://www.adt.com.tw/index.5.phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050


**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.


## 7 APPENDIX - A DL/UL RATION FOR TEST

For reference (5MHz)

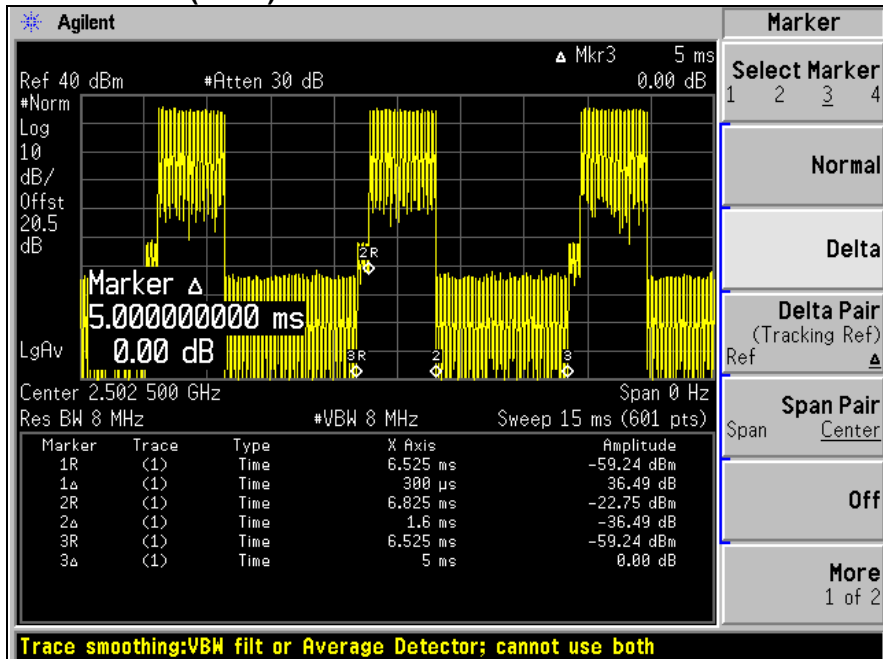

$$\text{Ratio} = (1.6 / 5) \% = 32\%$$

For reference (10MHz)

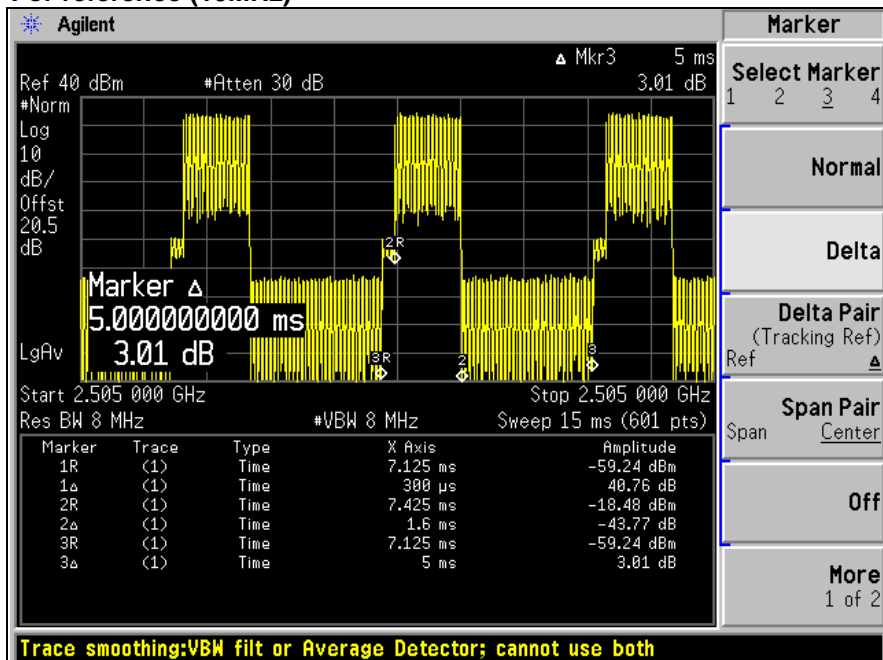

$$\text{Ratio} = (1.6 / 5) \% = 32\%$$

--- END ---