

**FCC TEST REPORT****FCC 47 CFR Part 15D****Unlicensed Personal Communication Service Devices****Industry Canada RSS-213****2GHz License-exempt Personal Communications Service Devices (LE-PCS)****Report Reference No.** .....: G0M-1408-4062-TFC15DFP77-V01**Testing Laboratory** .....: Eurofins Product Service GmbHAddress .....: Storkower Str. 38c  
15526 Reichenwalde  
Germany**Accreditation** .....:A2LA Accredited Testing Laboratory, Certificate No.: 1983.01  
FCC Filed Test Laboratory, Reg.-No.: 96970  
IC OATS Filing assigned code: 3470A**Applicant's name** .....: Sonetics CorporationAddress .....: 7340 SW Durham Road  
OR 97224 Portland  
USA**Test specification:**Standard .....: 47 CFR Part 15D  
47 CFR Part 15C  
47 CFR Part 15B  
RSS-213, Issue 2, 2005-12  
RSS-Gen, Issue 3, 2010-12  
ANSI C63.17:2006  
ANSI C63.4:2003**Equipment under test (EUT):**

Product description	Communication Headsets
Model No.	APX377
Additional Model(s)	None
Brand Name(s)	Sonetics
Hardware version	APX377 Rev A (See additional information)
Firmware / Software version	Revision A (See additional information)
	FCC-ID: V9N950325300V1 IC: 7895A-95032530
<b>Test result</b>	<b>Passed</b>

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Possible test case verdicts:**

- neither assessed nor tested ..... N/N
- required by standard but not appl. to test object..... N/A
- required by standard but not tested..... N/T
- not required by standard for the test object ..... N/R
- test object does meet the requirement..... P (Pass)
- test object does not meet the requirement..... F (Fail)

**Testing:**

Test Lab Temperature ..... 20 – 23 °C

Test Lab Humidity ..... 32 – 38 %

Date of receipt of test item ..... 2014-09-22

Date (s) of performance of tests ..... 2014-09-22 – 2014-09-24

Compiled by ..... Wilfried Treffke

Tested by (+ signature) ..... Wilfried Treffke  
(Responsible for Test)



Approved by (+ signature) ..... Christian Weber

Date of issue ..... 2014-12-18

Total number of pages ..... 136

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

**Additional comments:**

Testing has been performed on model APX379 Rev A as the worst case model. The UPCS radio parts and antennas of both models (APX379 Rev A and APX377 Rev A) are identical. See customer declarations below.

Page 1 of 2



**Subject: Hardware Software/Firmware Declaration**

**Date: December 01, 2014**

**Model Number: APX379 DECT & Bluetooth Headset, Revision A**

**The APX379 Headset shares the same common hardware and software as represented in table A**

Muff Features	300 Series Model Number		
	APX379	APX377	APX375
Convertible Design: Overhead and Underhelmet	X	X	X
Identical Materials and Headset Muff Design	X	X	X
Waterproof Design	X	X	X
Wired Aux Line In	X	X	X
Internal Sound Dosimeter	X	X	X
Stereo Listen Thru	X	X	X
Automatic Noise Gate	X	X	X
Passive Noise Reduction	X	X	X
Automatic Active Noise Reduction	X	X	X
Voice Prompts	X	X	X
Wireless Bluetooth (Line in)	X		X
Wireless DECT (2 way radio)	X	X	

**Sonetics Corporation hereby declares that the above referenced model, submitted to Eurofins for FCC and IC testing, has the following firmware and hardware installed.**

APX379 DECT & Bluetooth Headset Revision A (No Headband P/N: 950-3257-00 Revision A)					
Item Reference	Part Number	Description	Qty	BOM Version Revision	Firmware Radio Related?
10	490-4006-00	Firmware, GEN-3 BOOT LOADER	1	A	No
15	490-4016-00	Firmware, APX379, DECT, BT	1	A	Yes
20	490-4009-00	Firmware, BLUETOOTH CONFIG	1	A	Yes
25	490-4012-00	Firmware, RTX1040 RADIO RTX Release Ver 7.0	1	A	Yes
35	490-4015-00	Firmware, VOICEPROMPTS, PP, ENGLISH-	1	A	No
40	490-4017-00	Firmware, APX379, CONFIGURATION	1	A	No
5	121-4030-G1	PCBA_APX379_HS_MAIN BOARD	1	G	Hardware
0	121-4031-J1	PCBA_HS-7X BATTERY BOARD	1	J	Hardware

**The above is declares accurate and true as of 12 01, 2014.**  
**Sincerely,**



**Michael Heade**  
 Quality Assurance Engineer  
 Regulatory & Product Compliance Engineer  
**Sonetics Corporation**  
 Phone: 800-833-4558 ext. 122  
 Direct: 503-608-3422  
 Email: [michael.heade@soneticscorp.com](mailto:michael.heade@soneticscorp.com)  
[www.soneticscorp.com](http://www.soneticscorp.com)  
[www.firecom.com](http://www.firecom.com)

7340 SW Durham Road • Portland, Oregon U.S.A. 97224 • 503/684-7080 • Fax 503/620-2943

Page 1 of 2


**Subject: Hardware Software/Firmware Declaration**
**Date: December 01, 2014**
**Model Number: APX377 DECT Headset, Revision A**

The APX377 and APX379 Headsets share the same common hardware and software as represented in table A and as further described as Hardware and Software Differences below:

Muff Features	300 Series Model Number		
	APX379	APX377	APX375
Convertible Design: Overhead and Underhelmet	X	X	X
Identical Materials and Headset Muff Design	X	X	X
Waterproof Design	X	X	X
Wired Aux Line In	X	X	X
Internal Sound Dosimeter	X	X	X
Stereo Listen Thru	X	X	X
Automatic Noise Gate	X	X	X
Passive Noise Reduction	X	X	X
Automatic Active Noise Reduction	X	X	X
Voice Prompts	X	X	X
Wireless Bluetooth (Line in)	X		X
Wireless DECT (2 way radio)	X	X	

**Sonetics Corporation hereby declares that the above referenced model, submitted to Eurofins for FCC and IC testing has the following firmware installed:**

APX377 DECT (only) Headset Revision A		No Headband P/N: 950-3257-00 Revision A)		
Item Reference	Part Number	Description	Qty	BOM Version Revision
10	490-4006-00	Firmware, GEN-3 BOOT LOADER	1	A No
15	490-4018-00	Firmware, APX377, DECT ONLY	1	A Yes
20	490-4012-00	Firmware, RTX1040 RADIO RTX Release Ver 7.0	1	A Yes
25	490-4013-00	Firmware, RTX1040 PP CONFIG	1	A Yes
30	490-4015-00	Firmware, VOICEPROMPTS, PP, ENGLISH-	1	A No
35	490-4019-00	FW, APX377, CONFIGURATION	1	A No
5	121-4035-G1	PCBA, APX377, HS, MAIN BOARD	1	G Hardware
0	121-4031-J1	PCBA, HS-7X, BATTERY BOARD	1	J Hardware

**Hardware Differences between APX377 and APX379:**

The APX377 is the same physically as APX 379 with the exception that the 490-4009-00 Bluetooth Firmware is not loaded and the 490-4018-00 firmware which replaces the 490-0016-00 firmware (used on APX379) which is the same except it deletes Bluetooth menus, which are not used in the APX377.

The 121-4030-G1 Mainboard in the APX377 is physically the same PCBA as the APX379 except the following Bluetooth related components are omitted from the PCBA (not populated): C7, C8, C11, C12, C28, C31, C32, C97, C101, C105, C109, C113, C117, C121, C125, C129, C133, C134, C137, C141, C145, C149, C150, C153, C157, C161, C165, E1, E5, J6, J10, L3, L4, L5, L7, L9, L13, L17, R7, R8, R11, R12, R15, R16, R31, R32, R48, R54, R60, R69, R72, R73, R74, R75, R76, R85, R89, R93, R97, R101, R105, R106, R109, R113, R117, R121, R122, R125, R129, R133, R137, R141, R145, R149, R153, R157, R161, R165, R169, R173, U4, U10, U11, U17, U21, U25, Y5

7340 SW Durham Road • Portland, Oregon U.S.A. 97224 • 503/684-7080 • Fax 503/620-2943

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

---

## Version History

Version	Issue Date	Remarks	Revised by
01	2014-12-18	Initial Release	

---

## REPORT INDEX

<b>1 EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>8</b>
1.1 Photos - Equipment external	10
1.2 Photos - Equipment internal	12
1.3 Photos – Test setup	14
1.4 Supporting Equipment Used During Testing	15
1.5 Test Modes:	16
1.6 Test Equipment Used During Testing	17
1.7 Sample emission level calculation	18
<b>2 RESULT SUMMARY</b>	<b>19</b>
<b>3 TEST CONDITIONS AND RESULTS</b>	<b>21</b>
3.1 Test Conditions and Results – Coordination with fixed microwave service	21
3.2 Test Conditions and Results – Cross reference to subpart B	22
3.3 Test Conditions and Results – AC power line conducted emissions	23
3.4 Test Conditions and Results – Antenna requirement	26
3.5 Test Conditions and Results – Digital modulation	27
3.6 Test Conditions and Results – Occupied Bandwidth	28
3.7 Test Conditions and Results – Emission Bandwidth	32
3.8 Test Conditions and Results – Peak transmit power	35
3.9 Test Conditions and Results – Power spectral density	39
3.10 Test Conditions and Results – Carrier frequency stability	42
3.11 Test Conditions and Results – Transmitter in-band unwanted emissions	46
3.12 Test Conditions and Results – Transmitter out-of-band emissions	50
3.13 Test Conditions and Results – Receiver spurious emissions	104
3.14 Test Conditions and Results – Automatic discontinuation of Transmission	113
3.15 Test Conditions and Results – Radiofrequency radiation exposure	114
3.16 Test Conditions and Results – Monitoring threshold	115
3.17 Test Conditions and Results – LIC confirmation	117
3.18 Test Conditions and Results – LIC selection	118
3.19 Test Conditions and Results – Monitoring antenna	119
3.20 Test Conditions and Results – Monitoring time	121
3.21 Test Conditions and Results – Monitoring bandwidth	122
3.22 Test Conditions and Results – Monitoring reaction time	123
3.23 Test Conditions and Results – Acknowledgements	125

3.24 Test Conditions and Results – Maximum transmit period	128
3.25 Test Conditions and Results – Maximum spectral occupancy	129
3.26 Test Conditions and Results – Duplex connections	130
3.27 Test Conditions and Results – Fair access	132
3.28 Test Conditions and Results – Frame period and Jitter	133
3.29 Test Conditions and Results – Frame repetition stability	135

## 1 Equipment (Test item) Description

<b>Description</b>	Communication Headsets	
<b>Model</b>	APX377	
<b>Additional Model(s)</b>	None	
<b>Brand Name(s)</b>	Sonetics	
<b>Serial number</b>	None	
<b>Hardware version</b>	APX377 Rev A (See additional information)	
<b>Software / Firmware version</b>	Revision A (See additional information)	
<b>FCC-ID</b>	V9N950325300V1	
<b>IC</b>	7895A-95032530	
<b>Equipment type</b>	End Product	
<b>Radio type</b>	DECT Portable Part	
<b>Number of Radios</b>	1 transceivers is built into the device	
<b>Radio technology</b>	DECT 6.0	
<b>Operating frequency range</b>	1921.536 - 1928.448MHz	
<b>Assigned frequency band</b>	1920 - 1930MHz	
<b>Number of RF channels</b>	5	
<b>Supported slots</b>	even and odd	
<b>Number of time slots</b>	12 x Tx + 12 x RX = 24	
<b>Channels</b>	$F_0$	Ch:0 / 1928.448MHz
	$F_1$	Ch:1 / 1926.720MHz
	$F_2$	Ch:2 / 1924.992MHz
	$F_3$	Ch:3 / 1923.264MHz
	$F_4$	Ch:4 / 1921.536MHz
<b>Main test frequencies</b>	$F_{\text{LOW}}$	Ch:4 / 1921.536MHz
	$F_{\text{MID}}$	Ch:2 / 1924.992MHz
	$F_{\text{HIGH}}$	Ch:0 / 1928.448MHz
<b>Modulations</b>	GFSK	
<b>Emission designator</b>	F7D	
<b>Nominal emission bandwidth</b>	1.44 MHz	
<b>Channel spacing</b>	1728 kHz	
<b>Spectrum access</b>	Listen before transmit	
<b>Nominal lower threshold</b>	N/A	
<b>Nominal upper threshold</b>	-60 dBm	
<b>Number of antennas</b>	2 per transceiver	

<b>Antenna 1</b>	Type	Integrated / printed inverted f Monopole antenna
	Model	Batt PCBA
	Manufacturer	Sonetics
	Gain	0 dBi
<b>Antenna 2</b>	Type	Integrated / printed inverted f Monopole antenna
	Model	HS Main
	Manufacturer	Sonetics
	Gain	0 dBi
<b>Manufacturer</b>	Sonetics Corporation 7340 SW Durham Road OR 97224 Portland USA	
<b>Power supply</b>	$V_{NOM}$	3.7 VDC (lithium battery)
	$V_{MIN}$	N/R
	$V_{MAX}$	N/R
<b>AC/DC-Adaptor</b>	Model	YMC06-3U
	Vendor	Ji Ming
	Input	110 - 240 VAC 50/60 Hz
	Output	12VDC Used for charging the 3.7V cell
<b>Temperature</b>	$T_{NOM}$	25°C
	$T_{MIN}$	-30°C
	$T_{MAX}$	70°C

#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
		None		

**\*Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

### 1.5 Test Modes:

Mode #	Description	
TDMA	General conditions:	EUT powered by laboratory power supply. Active connection to companion device.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum
Receive	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone receive Modulation = GFSK
AC-Powerline	General conditions:	Active data connection between EUT and companion device. EUT powered by AC mains via AC/DC-Adaptor.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum

**1.6 Test Equipment Used During Testing**

<b>Measurement Software</b>					
Description	Manufacturer	Name		Version	
EMC Test Software	Dare Instruments	Radimation		2014.1.15	

<b>Conducted</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02
Signal Generator	R&S	SMP 02	EF00165	2013-05	2015-05
Signal Generator	R&S	SMIQ 03B	EF00153	2014-09	2016-09
Signal Generator	R&S	SMIQ 03B	EF00316	2013-06	2015-06
Signal Generator	R&S	SMIQ 03	EF00316	2013-06	2015-06
Signal Generator	R&S	SMT 03	EF00164	2013-04	2015-04
Step Attenuator	R&S	RSP	EF00155	2013-11	2015-11
Frequency Standard	EFRATOM Elektronik GmbH	MFS	EF00308	2013-05	2018-05
Power Meter	R&S	NRVD	EF00139	2014-07	2015-07
Diode Power Sensor	R&S	NRV-Z1	EF00314	2013-06	2015-06

<b>Radiated spurious emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

<b>AC powerline conducted emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{lll} \text{Reading} + \text{AF} = & \text{Net Reading} : & \text{Net reading - FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = & 47.5 \text{ dB}\mu\text{V/m} : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

<b>FCC 47 CFR Part 15D, 15C, IC RSS-213, IC RSS-Gen</b>				
<b>Product Specific Standard Section</b>	<b>Requirement – Test</b>	<b>Reference Method</b>	<b>Result</b>	<b>Remarks</b>
FCC 15.307	Coordination with fixed microwave service	declaration	N/A	
FCC 15.309(b)	Cross reference to subpart B	declaration	N/A	
FCC 15.315 FCC 15.207 IC RSS-213 6.3 IC RSS-213 4.2 IC RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	
FCC 15.317 FCC 15.203 IC RSS-213 4.1(e)	Antenna requirements	visual inspection	PASS	
FCC 15.319(b) IC RSS-213 6.1	Digital modulation	ANSI C63.17 6.1.4	PASS	
IC RSS-213 6.4 RSS-Gen 4.6.1	Occupied bandwidth	RSS-Gen 4.6.1	PASS	
FCC 15.323(a)	Emission Bandwidth	ANSI C63.17 6.1.3	PASS	
FCC 15.319(c) FCC 15.319(e) IC RSS-213 6.5 IC RSS-213 4.3.1	Peak transmit power	ANSI C63.17 6.1.2	PASS	
FCC 15.319(d) IC RSS-213 6.6 IC RSS-213 4.3.2	Power spectral density	ANSI C63.17 6.1.5	PASS	
FCC 15.323(f) IC RSS-213 6.2	Carrier frequency stability	ANSI C63.17 6.2.1	PASS	
FCC 15.323(d) IC RSS-213 6.7.2	Transmitter in-band unwanted emissions	ANSI C63.17 6.1.6	PASS	
FCC 15.323(d) IC RSS-213 6.7.1	Transmitter out-of-band emissions	ANSI C63.17 6.1.6 ANSI C63.4	PASS	
IC RSS-213 6.8 IC RSS-Gen 4.10, 6	Receiver spurious emissions	ANSI C63.4	PASS	
FCC 15.319(f) IC RSS-213 4.3.4(a)	Automatic discontinuation of transmission	functional test	PASS	
FCC 15.319(i) RSS-102	Radiofrequency radiation exposure	dedicated report	PASS	
FCC 15.323(c)(2),(5),(9) IC RSS-213 4.3.4(b)(2),(5),(9)	Monitoring threshold + Monitoring threshold relaxation	ANSI C63.17 7.3.1	PASS	
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	LIC confirmation	ANSI C63.17 7.3.4 / 7.3.4	PASS	
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	LIC selection	ANSI C63.17 7.3.2 / 7.3.3	PASS	
FCC 15.323(c)(8) IC RSS-213 4.3.4(b)(8)	Monitoring antenna	ANSI C63.17 4	PASS	

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

FCC 15.323(c)(1) IC RSS-213 4.3.4(b)(1)	Monitoring time	ANSI C63.17 7.3.4	PASS	
FCC 15.323(c)(7) IC RSS-213 4.3.4(b)(7)	Monitoring bandwidth	ANSI C63.17 7.4	PASS	
FCC 15.323(c)(7) IC RSS-213 4.3.4(b)(7)	Monitoring reaction time	ANSI C63.17 7.5	PASS	
FCC 15.323(c)(6) IC RSS-213 4.3.4(b)(6)	Access criteria test interval	ANSI C63.17 8.1.1	N/A	Only FP
FCC 15.323(c)(6) IC RSS-213 4.3.4(b)(6)	Access criteria functional test	ANSI C63.17 8.1.2 / 8.1.3	N/A	Only FP
FCC 15.323(c)(4) IC RSS-213 4.3.4(b)(4)	Acknowledgements	ANSI C63.17 8.2.1	PASS	
FCC 15.323(c)(3) IC RSS-213 4.3.4(b)(3)	Maximum transmit period	ANSI C63.17 8.2.2	PASS	
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	Maximum spectrum occupancy	declaration	PASS	
FCC 15.323(c)(10) IC RSS-213 4.3.4(b)(10)	Duplex connections	ANSI C63.17 8.3	PASS	Only PP
FCC 15.323(c)(11) IC RSS-213 4.3.4(b)(11)	Alternative monitoring interval	ANSI C63.17 8.4	N/A	
FCC 15.323(c)(12) IC RSS-213 4.3.4(b)(12)	Fair access	declaration	PASS	
FCC 15.323(e)(1),(4),(5) IC RSS-213 4.3.4(c)(1),(4),(5)	Frame period and Jitter	ANSI C63.17 6.2.3	PASS	
FCC 15.323(e)(2),(3) IC RSS-213 4.3.4(c)(2),(3)	Frame repetition stability	ANSI C63.17 6.2.2	PASS	
<b>Remarks:</b>				

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Coordination with fixed microwave service

Coordination with fixed microwave service acc. to FCC 47 CFR 15D	
EUT requirement rule parts and clause	Reference FCC 15.307
Test according to measurement reference	Reference Method Customer declaration
Requirements	
UTAM, Inc. is designated to coordinate and manage the transition of the 1910–1930 MHz band from the Private Operational-Fixed Microwave Service (OFS) operating under part 101 of this chapter to unlicensed PCS operations.	
Each application for certification of equipment operating under the provisions of this subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the Commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.	
Result	
The applicant will provide the affidavit from UTAM Inc. later in the course of certification by TCB or FCB.	

### 3.2 Test Conditions and Results – Cross reference to subpart B

Cross reference to subpart B acc. to FCC 47 CFR 15D		Verdict: N/A
EUT requirement rule parts and clause	Reference	
	FCC 15.309(b)	
Test according to measurement reference	Reference Method	
	Declaration	
Requirements		
The requirements of subpart D apply only to the radio transmitter contained in the PCS device. Other aspects of the operation of a PCS device may be subject to requirements contained elsewhere in this chapter. In particular, a PCS device that includes digital circuitry not directly associated with the radio transmitter also is subject to the requirements for unintentional radiators in subpart B.		
Result		
The test results related to subpart B are given in a dedicated test report		

**3.3 Test Conditions and Results – AC power line conducted emissions**

<b>Conducted emissions acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>		
EUT requirement rule parts and clause		Reference FCC 15.315 / FCC 15.207 / IC RSS-213 6.3, 4.2		
Test according referenced standards		Reference Method ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range 0.15MHz to 30MHz		
Points of Application		Application Interface		
AC Mains		LISN		
EUT test mode		AC-Powerline		
<b>Limits and results</b>				
Frequency [MHz]	Quasi-Peak [dB $\mu$ V]	Result	Average [dB $\mu$ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				


### Conducted Emissions

#### EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation  
 EUT Name: Communication Headsets  
 Model: APX379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Marquardt  
 Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)  
 LISN: ESH2-Z5 N  
 Mode: charging  
 Test Date: 2014-11-18  
 Note:

Index 2

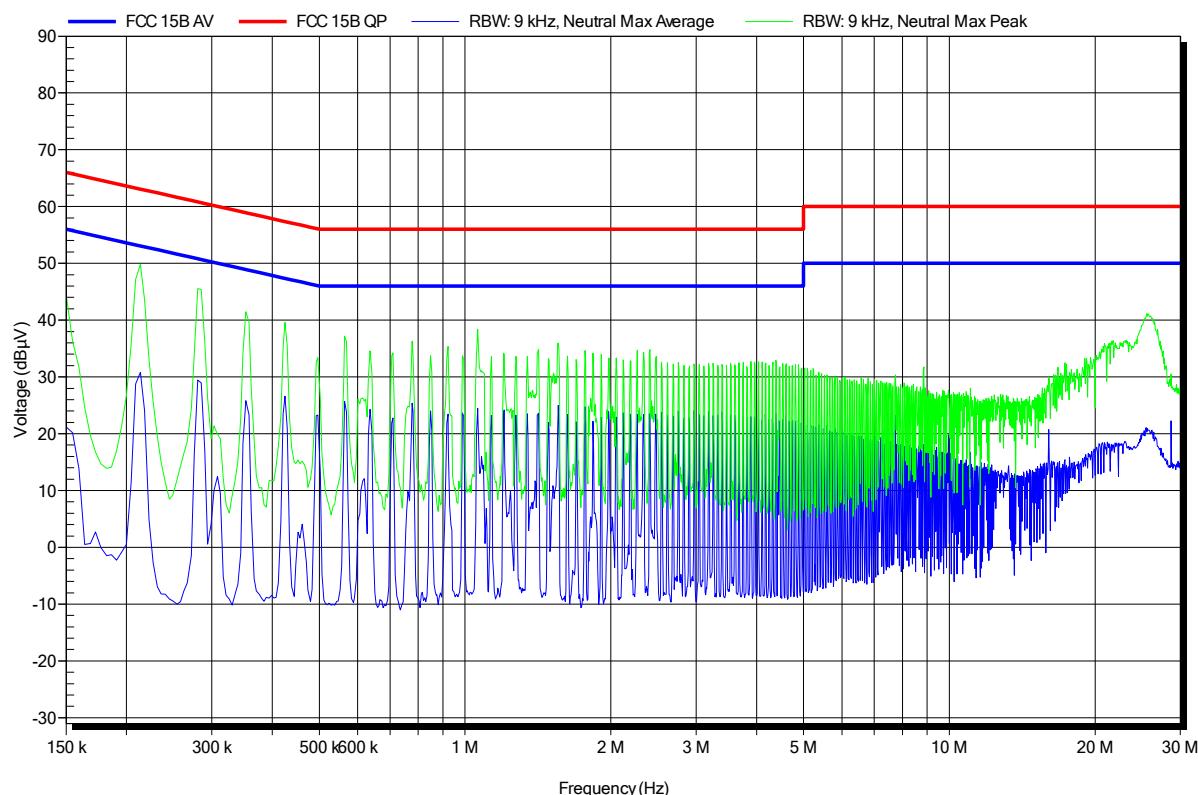


**Conducted Emissions****EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation  
EUT Name: Communication Headsets  
Model: APX379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Marquardt  
Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)  
LISN: ESH2-Z5 L  
Mode: charging  
Test Date: 2014-11-18  
Note:

Index 1

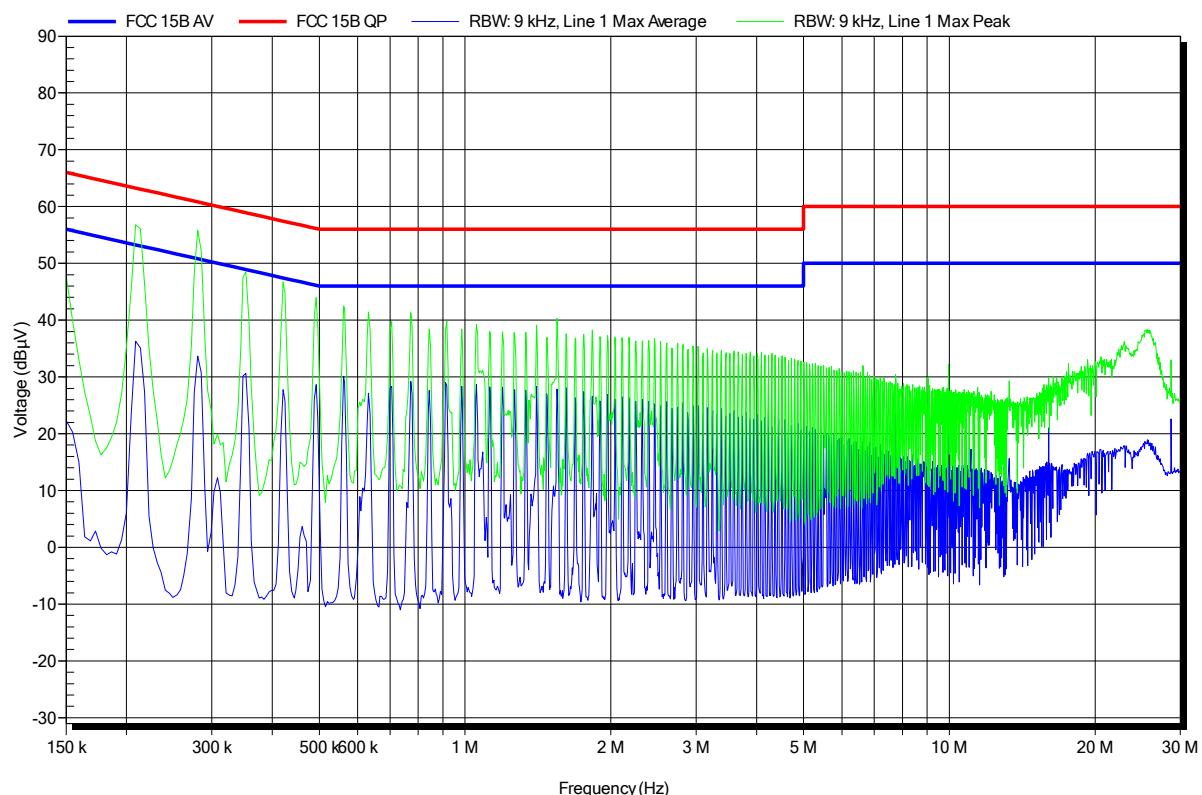


### 3.4 Test Conditions and Results – Antenna requirement

Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause	Reference		
	FCC 15.317 / FCC 15.203 / IC RSS-213 4.1(e)		
Test according to measurement reference	Reference Method		
	visual inspection & declaration		
Requirements			
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>When an antenna conducted measurement is used to determine the RF output power of the device, the effective gain of the antenna intended for the device must be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 3 dBi (3 dB above isotropic gain) shall be added to the measured RF output power before using the power limits</p>			
Results			
Antenna No.	Type	Antenna gain [dBi]	Antenna gain in excess of 3dBi
1	internal	0	0
2	internal	0	0

### 3.5 Test Conditions and Results – Digital modulation


<b>Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.319(b) / IC RSS-213 6.1	
Test according to measurement reference	Reference Method	
	Declaration	
<b>Requirements</b>		
All transmissions must use only digital modulation techniques.		
<b>Results</b>		
The test sample is an isochronous digital modulated device that operates in 1920-1930 MHz band. This device bases on DECT technology described in European Standards EN 300 175-2 and EN 300 175-3, now operating in frequency channels mentioned above.		
The operating modes are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation.		
For further details see operational description provided by manufacturer.		

### 3.6 Test Conditions and Results – Occupied Bandwidth
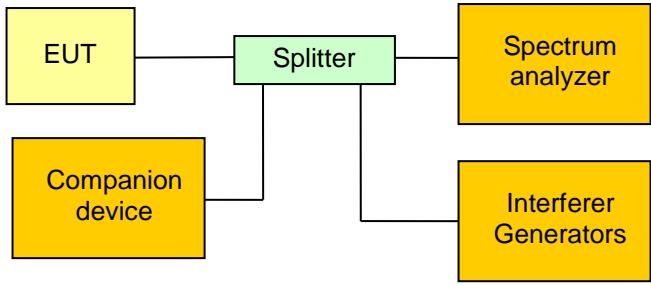
<b>Occupied Bandwidth acc. to IC RSS-213</b>		<b>Verdict: PASS</b>		
Test according to measurement reference		Reference Method		
		IC RSS-213 4.3.2, 6.4 / IC RSS-Gen 4.6.1		
Tested frequencies		$F_{\text{LOW}} / F_{\text{MID}} / F_{\text{HIGH}}$		
EUT test mode		TDMA		
<b>Limits</b>				
0.05 MHz $\leq$ Occupied Bandwidth $<$ 2.5 MHz				
<b>Test setup</b>				
				
<b>Test procedure</b>				
<ol style="list-style-type: none"> <li>1. EUT is restricted to test channel with the interferes</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Resolution bandwidth set to 1% of span</li> <li>4. Occupied Bandwidth (99%) measurement with spectrum analyzer built in measurement function</li> </ol>				
<b>Test results</b>				
Channel	Center frequency [MHz]	Lower edge [MHz]	Upper edge [MHz]	Occupied Bandwidth [MHz]
$F_{\text{LOW}}$	1921.536	1920.912	1922.136	1.224
$F_{\text{MID}}$	1924.992	1924.376	1925.592	1.216
$F_{\text{HIGH}}$	1928.448	1927.824	1929.048	1.224
Comments:				

**Occupied Bandwidth -  $F_{LOW}$** 
**RSS Gen  
Occupied Bandwidth**


EUT Communication Headset  
 Model AXP379  
 Approval Holder Sonetics Corporation  
 Temperature / Voltage 24°C / Vnom  
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke  
 Test Specification Occupied Bandwidth  
 Comment 1 Channel.: 4  
 Comment 2 A spectrum analyzer with an integrated 99% power BW function is used  
 Comment 3 OBW: 1.224 MHz

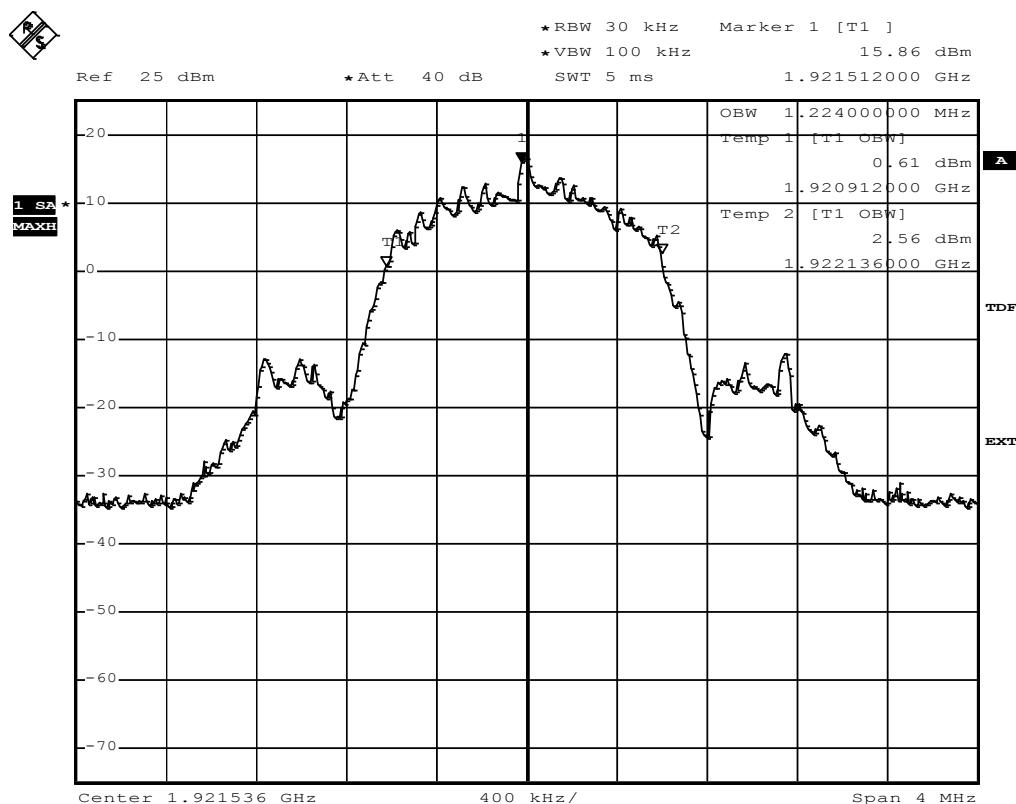

Comment: -  
 Date: 23.SEP.2014 12:59:33

**Occupied Bandwidth –  $F_{\text{MID}}$** 
**RSS Gen  
Occupied Bandwidth**


EUT Communication Headset  
 Model AXP379  
 Approval Holder Sonetics Corporation  
 Temperature / Voltage 24°C / Vnom  
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke  
 Test Specification Occupied Bandwidth  
 Comment 1 Channel.: 2  
 Comment 2 A spectrum analyzer with an integrated 99% power BW function is used  
 Comment 3 OBW: 1.216 MHz

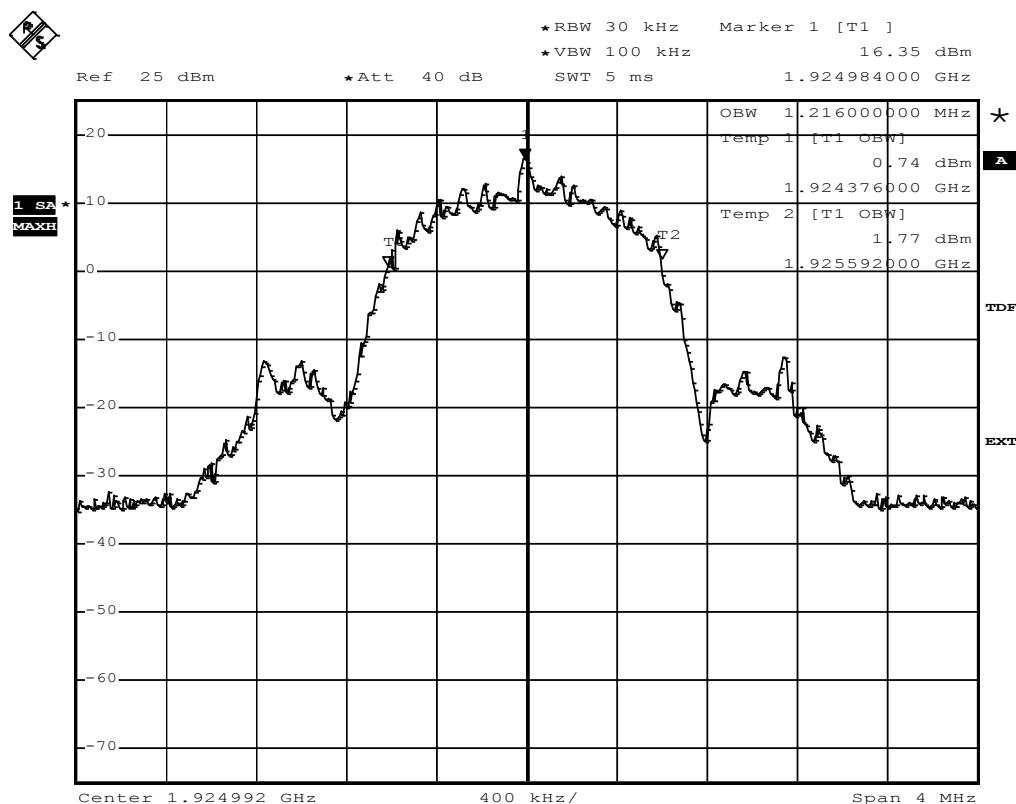

Comment: —  
 Date: 23.SEP.2014 13:04:46


**Occupied Bandwidth –  $F_{HIGH}$** 
**RSS Gen  
Occupied Bandwidth**

EUT Communication Headset  
 Model AXP379  
 Approval Holder Sonetics Corporation  
 Temperature / Voltage 24°C / Vnom  
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke  
 Test Specification Occupied Bandwidth  
 Comment 1 Channel.: 0  
 Comment 2 A spectrum analyzer with an integrated 99% power BW function is used  
 Comment 3 OBW: 1.224 MHz

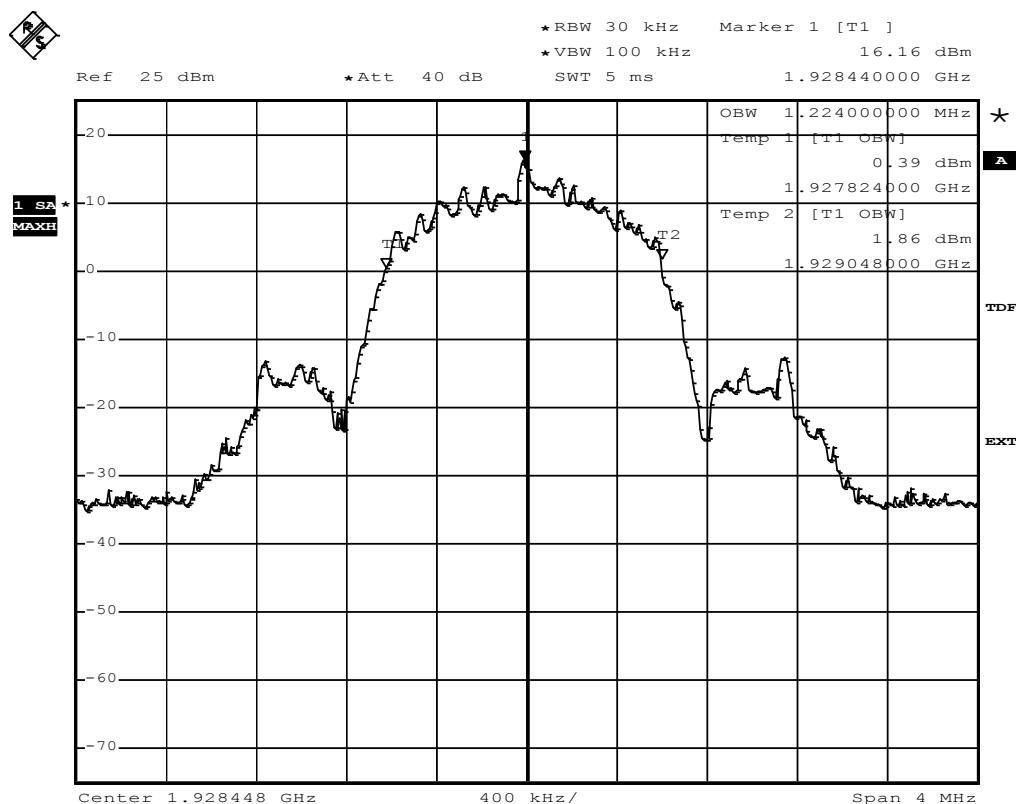

Comment: —  
 Date: 23.SEP.2014 13:07:20

### 3.7 Test Conditions and Results – Emission Bandwidth

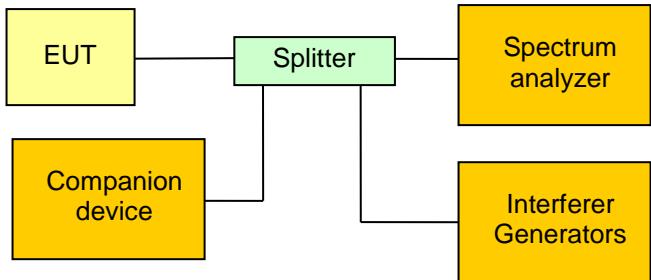
<b>Emission Bandwidth acc. to FCC 47 CFR 15D</b>					<b>Verdict: PASS</b>
EUT requirement rule parts and clause					Reference
					FCC 15.323(a)
Test according to measurement reference					Reference Method
					ANSI C63.17 6.1.3
Tested frequencies					$F_{\text{LOW}} / F_{\text{HIGH}}$
EUT test mode					TDMA
<b>Limits</b>					
0.05 MHz ≤ Emission Bandwidth < 2.5 MHz					
<b>Test setup</b>					
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]     Companion --- Interferers[Interferer Generators]   </pre>					
<b>Test procedure</b>					
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Resolution bandwidth set to 1% of emission bandwidth and detector is set to peak with max hold</li> <li>4. The emission bandwidth is determined by the two -26dB points left and right of the maximum emission level</li> <li>5. (The emission bandwidth is determined by the two -12dB points left and right of the maximum emission level)</li> <li>6. (The emission bandwidth is determined by the two -6dB points left and right of the maximum emission level)</li> </ol>					
<b>Test result</b>					
Channel	Center frequency [MHz]	Mode	Lower edge [MHz]	Upper edge [MHz]	Bandwidth [MHz]
$F_{\text{LOW}}$	1921.536	-26 dB	1920.826	1922.244	1.418
$F_{\text{HIGH}}$	1928.448	-26 dB	1927.716	1929.156	1.440
$F_{\text{LOW}}$	1921.536	-12 dB	1920.954	1922.118	1.160
$F_{\text{HIGH}}$	1928.448	-12 dB	1927.866	1929.028	1.160
$F_{\text{LOW}}$	1921.536	-6 dB	1921.134	1921.998	0.860
$F_{\text{HIGH}}$	1928.448	-6 dB	1928.024	1928.908	0.880
Comments:					

**Emission Bandwidth –  $F_{LOW}$** 
**FCC Part 15.303 Emission bandwidth**
**Testprocedure ANSI 63.17  
UPCS**

EUT Communications Headset  
 Model AXP379  
 Applicant Sonetics Corporation  
 Temperature 23°C  
 Test Site / Operator Eurofins Product Service GmbH  
 Test Specification Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.42MHz  
 Max. Permitted Power Limit = 2.5 MHz

Test result Verdict = PASS

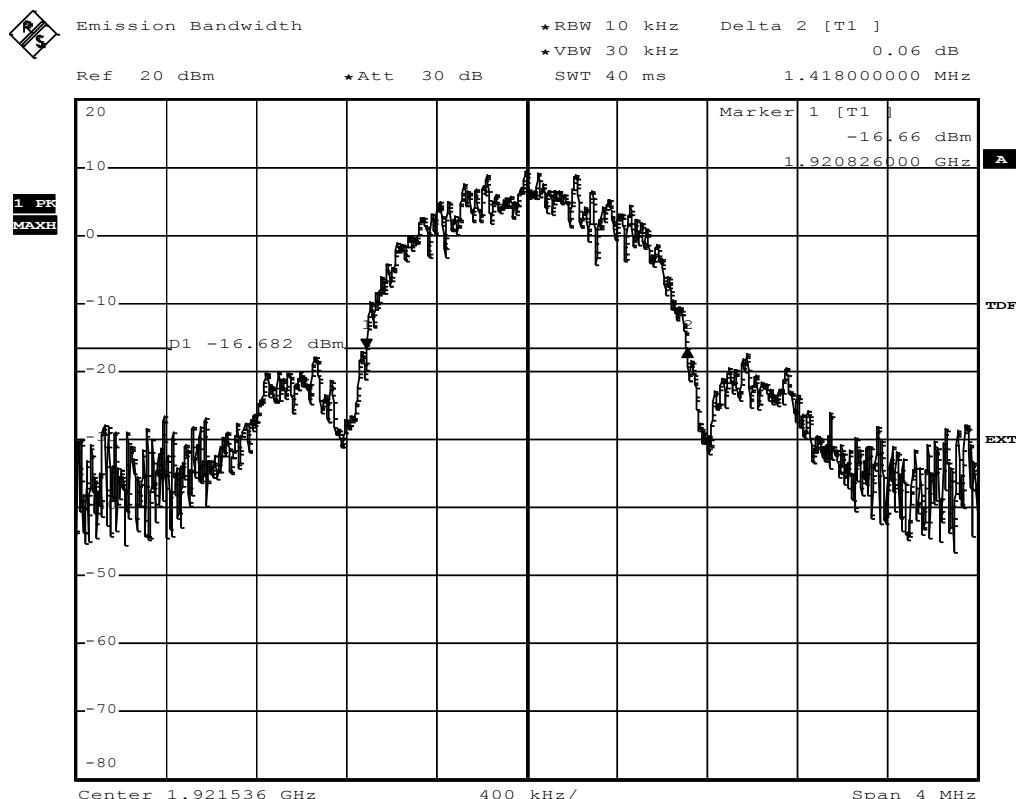


Comment: Ansi C63.17-2006 6.1.3  
 Date: 23.SEP.2014 11:32:07

**Emission Bandwidth –  $F_{HIGH}$** 
**FCC Part 15.303 Emission bandwidth**
**Testprocedure ANSI 63.17  
UPCS**

EUT Communications Headset  
 Model AXP379  
 Applicant Sonetics Corporation  
 Temperature 23°C  
 Test Site / Operator Eurofins Product Service GmbH  
 Test Specification Emission bandwidth


Measured Bandwidth Emission Bandwidth = 1.44MHz  
 Max. Permitted Power Limit = 2.5 MHz

Test result Verdict = PASS

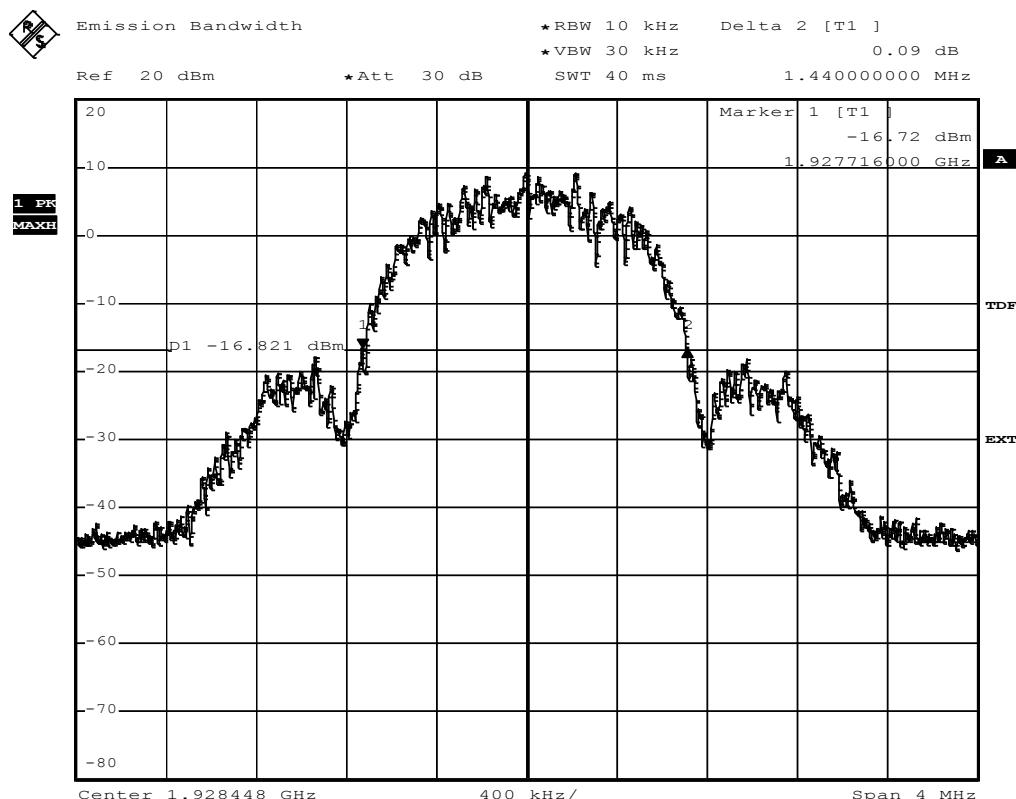

Comment: Ansi C63.17-2006 6.1.3  
 Date: 23.SEP.2014 12:45:39


### 3.8 Test Conditions and Results – Peak transmit power

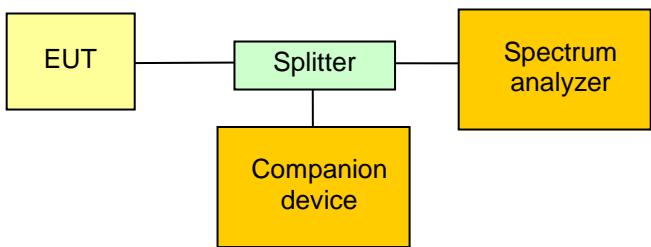Peak transmit power acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS				
EUT requirement rule parts and clause	Reference					
	FCC 15.319(c),(e) / IC RSS-213 4.3.1, 6.5					
Test according to measurement reference	Reference Method					
	ANSI C63.17 6.1.2					
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$					
EUT test mode	TDMA					
Antenna excess gain	0 dB					
Limits						
Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.						
$P_{EUT}[\text{dBm}] \leq P_{\text{limit}} \text{ where } P_{\text{limit}} = \begin{cases} P_{\text{max}} - (G_A - g), & \text{when } G_A > 3 \text{ dBi} \\ P_{\text{max}}, & G_A \leq 3 \text{ dBi} \end{cases}$ $P_{\text{max}}[\text{dBm}] = 5 \log(\text{Emission}/\text{Occupied Bandwidth} [\text{Hz}]) - 10 \text{ dBm}$						
Test setup						
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]   </pre>						
Test procedure						
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. The RBW is set to be larger than the emission bandwidth and <math>\text{VBW} \geq \text{RBW}</math></li> <li>3. Transmission burst is measured in zero span and peak detector</li> <li>4. The maximum level in the burst is recorded as peak transmit power</li> </ol>						
Test results - FCC						
Channel	Frequency [MHz]	Peak Power [dbm]	Emission Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
$F_{\text{LOW}}$	1921.536	20.18	1418000	0	20.76	-0.58
$F_{\text{HIGH}}$	1928.448	20.18	1440000	0	20.79	-0.61

Test results - IC						
Channel	Frequency [MHz]	Peak Power [dbm]	Occupied Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
F <sub>LOW</sub>	1921.536	20.18	1224000	0	20.43	-0.25
F <sub>HIGH</sub>	1928.448	20.18	1224000	0	20.43	-0.25
Comments:						

**Peak Power –  $F_{\text{LOW}}$** 
**FCC Part 15.319 Peak Transmit Power limit**
**Testprocedure ANSI 63.17  
UPCS**


EUT Communications Headset  
 Model AXP379  
 Applicant Sonetics Corporation  
 Temperature 23°C  
 Test Site / Operator Eurofins Product Service GmbH  
 Test Specification Peak transmit power  
 Supply  
 Measured Bandwidth 1.418MHz  
 Max. Permitted Power 20,75 dBm  
 Measured Power 20,18 dBm  
 Test result Verdict = PASS

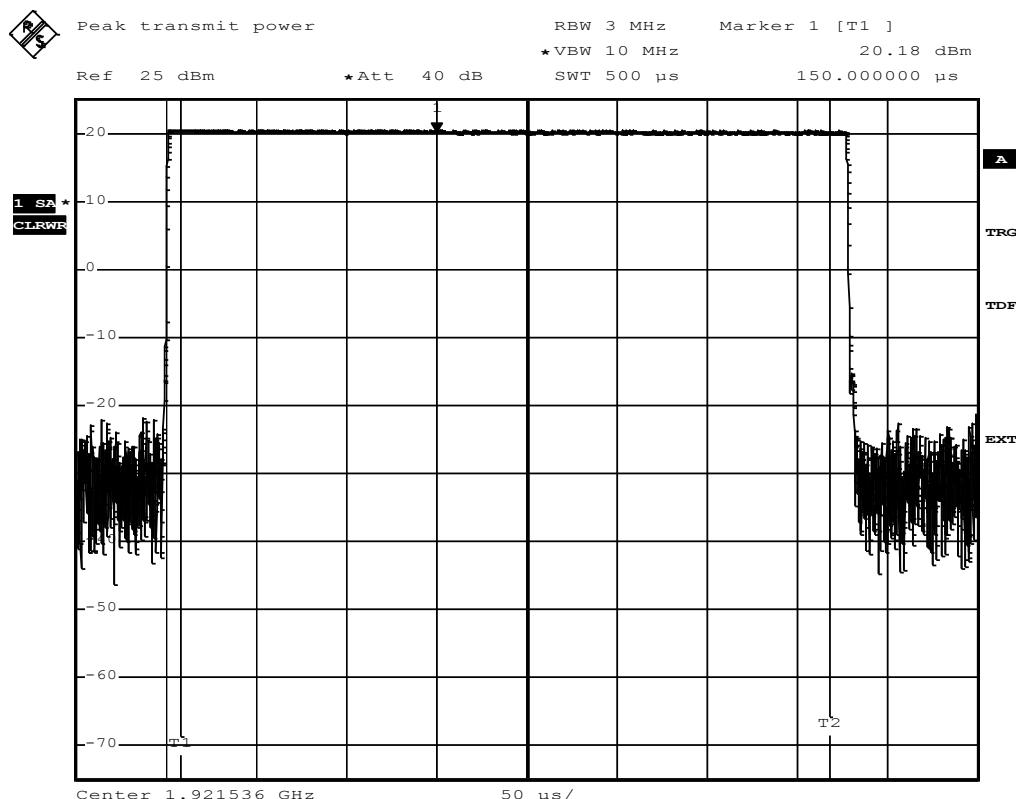

Comment: Ansi C63.17-2006 6.1.2  
 Date: 23.SEP.2014 11:33:55

**Peak Power –  $F_{HIGH}$** 
**FCC Part 15.319 Peak Transmit Power limit**
**Testprocedure ANSI 63.17**
**UPCS**

EUT Communications Headset  
 Model AXP379  
 Applicant Sonetics Corporation  
 Temperature 23°C  
 Test Site / Operator Eurofins Product Service GmbH  
 Test Specification Peak transmit power  
 Supply  
 Measured Bandwidth 1.44MHz  
 Max. Permitted Power 20,79 dBm  
 Measured Power 20,18 dBm  
 Test result Verdict = PASS

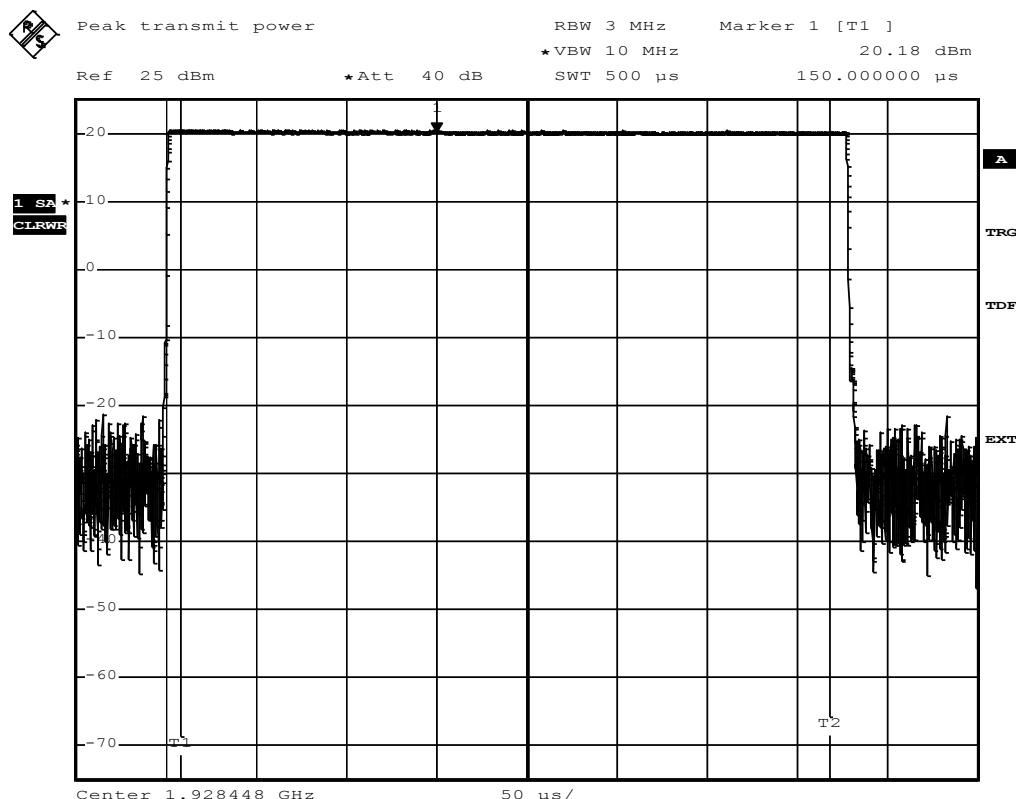

Comment: Ansi C63.17-2006 6.1.2  
 Date: 23.SEP.2014 12:50:05

### 3.9 Test Conditions and Results – Power spectral density


<b>Power spectral density acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>		
EUT requirement rule parts and clause	Reference			
	FCC 15.319(d) / IC RSS-213 4.3.2, 6.5			
Test according to measurement reference	Reference Method			
	ANSI C63.17 6.1.2			
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$			
EUT test mode	TDMA			
<b>Limits</b>				
$\leq 3 \text{ mW (4.77 dBm) / 3 kHz}$				
<b>Test setup</b>				
<pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]   </pre>				
<b>Test procedure</b>				
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. The RBW is set to 3 kHz and VBW <math>\geq 3 \times</math> RBW</li> <li>3. The center frequency is set to the maximum of the emission envelope and the span is set to zero</li> <li>4. With sample detector and a minimum of 100 sweeps the -20 dB points below the first peak are determined and the data points between the two -20 dB points are summed and normalized to get the average pulse power in a 3 kHz bandwidth</li> </ol>				
<b>Test results</b>				
Channel	Frequency [MHz]	Peak Density [dbm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
$F_{\text{LOW}}$	1921.532	-4.9207	4.77	-09.69
$F_{\text{HIGH}}$	1928.444	-1.0525	4.77	-05.82
Comments:				

**Power Spectral Density –  $F_{LOW}$** 
**FCC Part 15.319 Power spectral density**
**Testprocedure ANSI 63.17  
UPCS**

EUT	Communications Headset
Model	AXP379
Applicant	Sonetcs Corporation
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Power spectral density
Peak Frequency in MHz	1921,532000 MHz
Total pulse energy in mW	0,000122 mW
Wideband pulse duration in ms	0,377438 ms
PSD in mW	0,3221 mW
PSD in dBm	-4,9207 dBm

Pass criteria: PSD is less than 3mW

Verdict = PASS

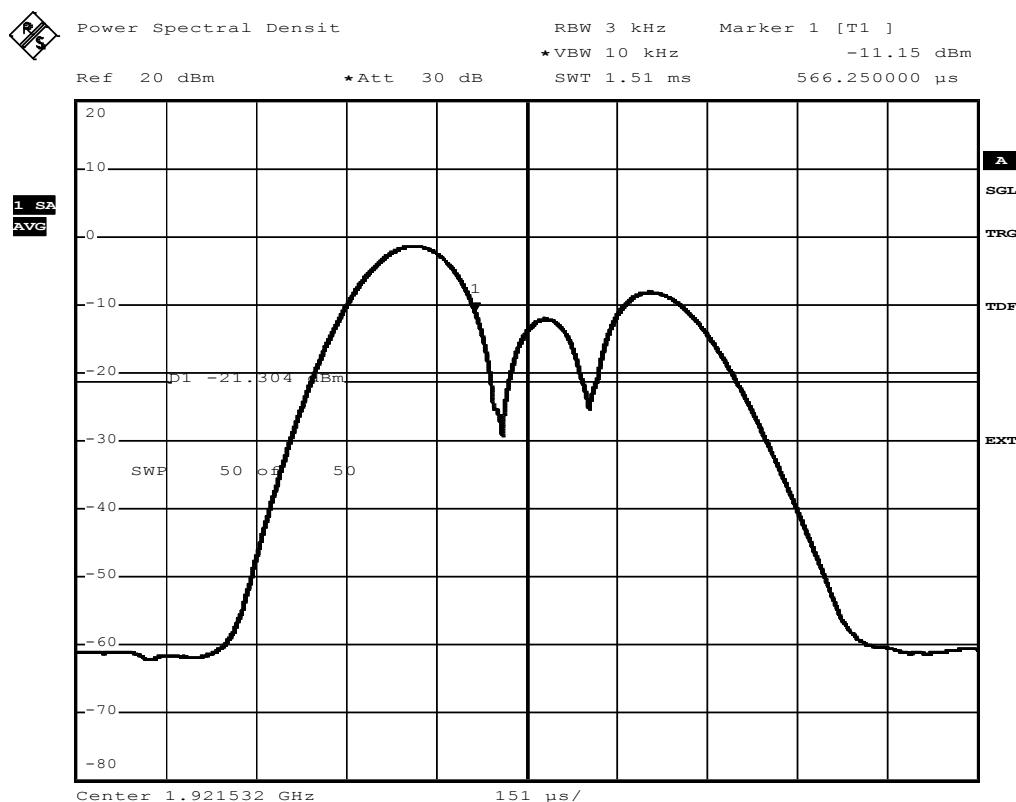


Comment: Ansi C63.17-2006 6.1.5  
 Date: 23.SEP.2014 11:36:43

**Power Spectral Density –  $F_{HIGH}$** 
**FCC Part 15.319 Power spectral density**
**Testprocedure ANSI 63.17  
UPCS**

EUT	Communications Headset
Model	AXP379
Applicant	Sonetcs Corporation
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Power spectral density
Peak Frequency in MHz	1928,444000 MHz
Total pulse energy in mW	0,000296 mW
Wideband pulse duration in ms	0,377713 ms
PSD in mW	0,7848 mW
PSD in dBm	-1,0525 dBm


Pass criteria: PSD is less than 3mW

Verdict = PASS

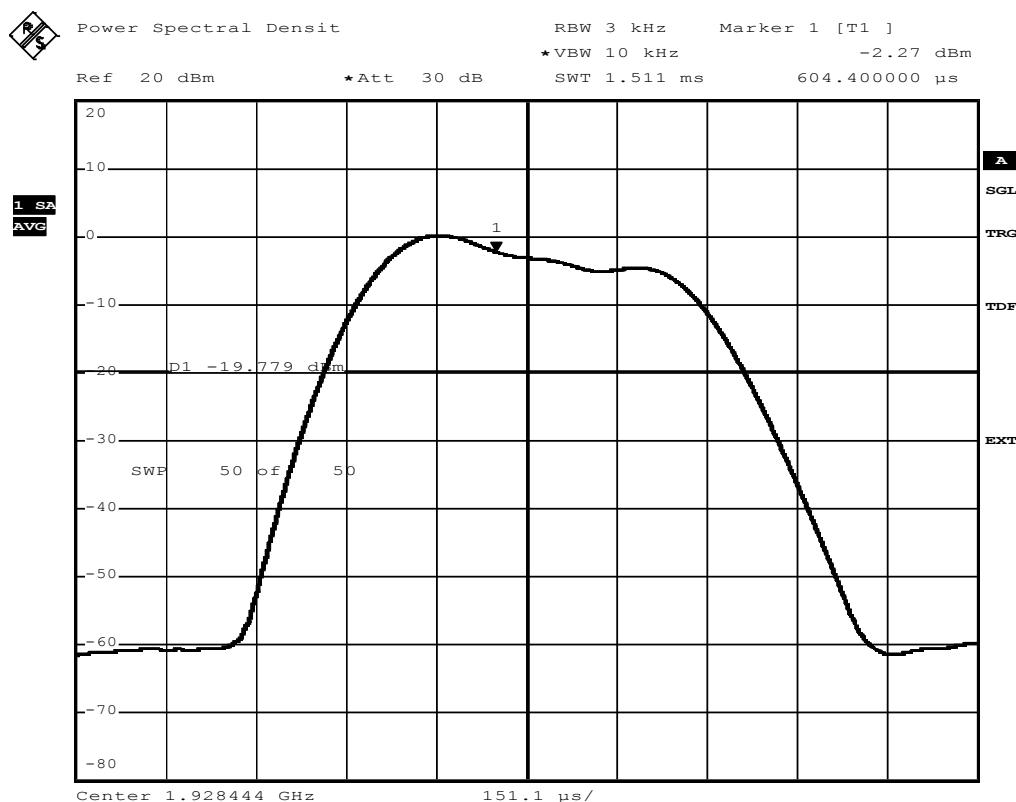


Comment: Ansi C63.17-2006 6.1.5  
 Date: 23.SEP.2014 12:48:08

**3.10 Test Conditions and Results – Carrier frequency stability**
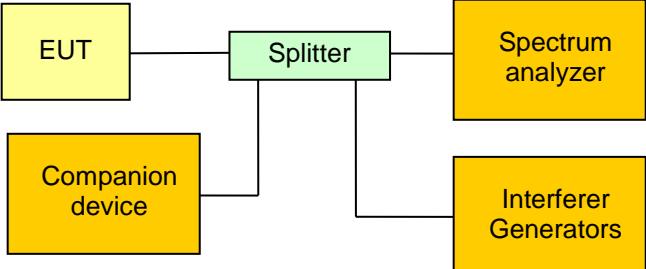
<b>Carrier frequency stability acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>		
EUT requirement rule parts and clause	Reference			
	FCC 15.323(f) / IC RSS-213 6.2			
Test according to measurement reference	Reference Method			
	ANSI C63.17 6.2.1			
Tested frequencies	$F_{MID}$			
EUT test mode	TDMA			
<b>Limits</b>				
$\pm 10$ ppm / hour				
<b>Test setup</b>				
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Interferer[Interferer Generators]     Companion[Companion device] --- Splitter   </pre>				
<b>Test procedure</b>				
<ol style="list-style-type: none"> <li>With interferer signals the EUT is forced to center channel and communication to companion device is established.</li> <li>The demodulated carrier EUT signal is captured over time</li> <li>The mean frequency is determined under all supply voltage and temperature conditions</li> </ol>				
<b>Test results</b>				
Voltage	Temperature	Maximum Frequency deviation [ppm]	Limit [ppm]	Margin [ppm]
3.7 VDC	25°C	0.00 (reference)	$\pm 10.0$	N/A
3.7 VDC	-30°C	0.36	$\pm 10.0$	-09.64
3.7 VDC	70°C	0.21	$\pm 10.0$	-09.79
Comments:				


**Carrier stability – Frequency stability –  $T_{NOM}$   $V_{NOM}$** 
**FCC Part 15.323 Carrier Frequency Stability**
**Testprocedure ANSI 63.17**

EUT	Communications Headset
Model	AXP379
Applicant	Sonetech Corporation
Temperature	25 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	$V_{nom}$
Frequency of carrier	1924,98743 MHz
Measured mean	1924,98743 MHz
Stability (supply temp)	0,00 ppm
Result	Verdict = PASS
Stability over time	$f_{max} : 0,56$ ppm $f_{min} : 0,63$ ppm
Result	Verdict = PASS

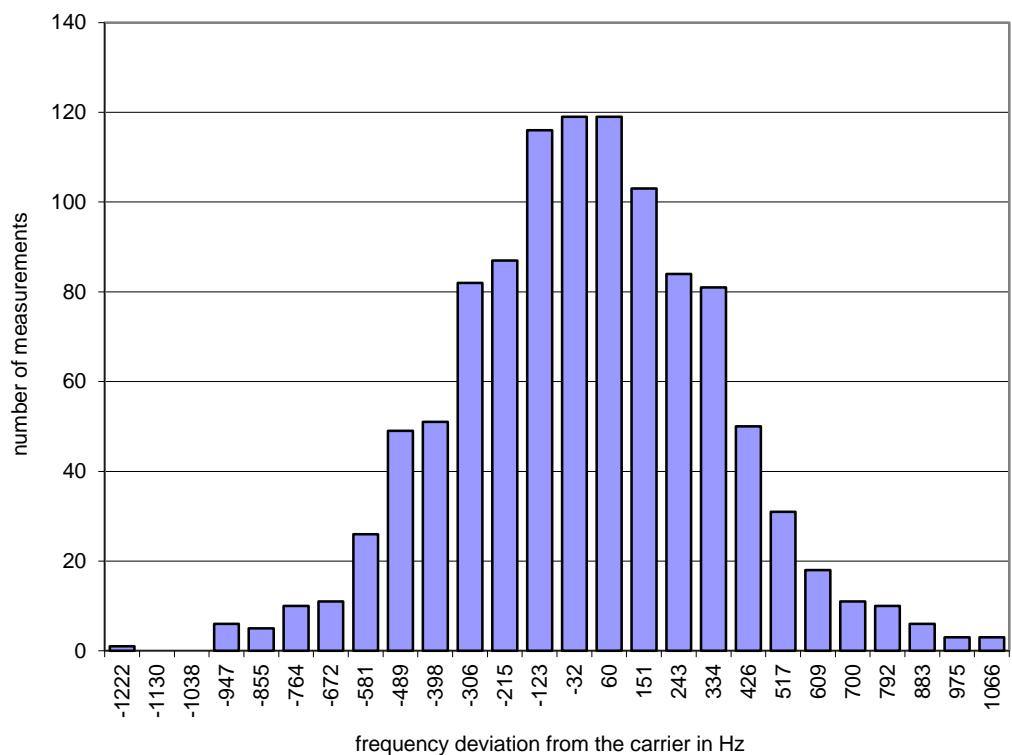**Histogram**


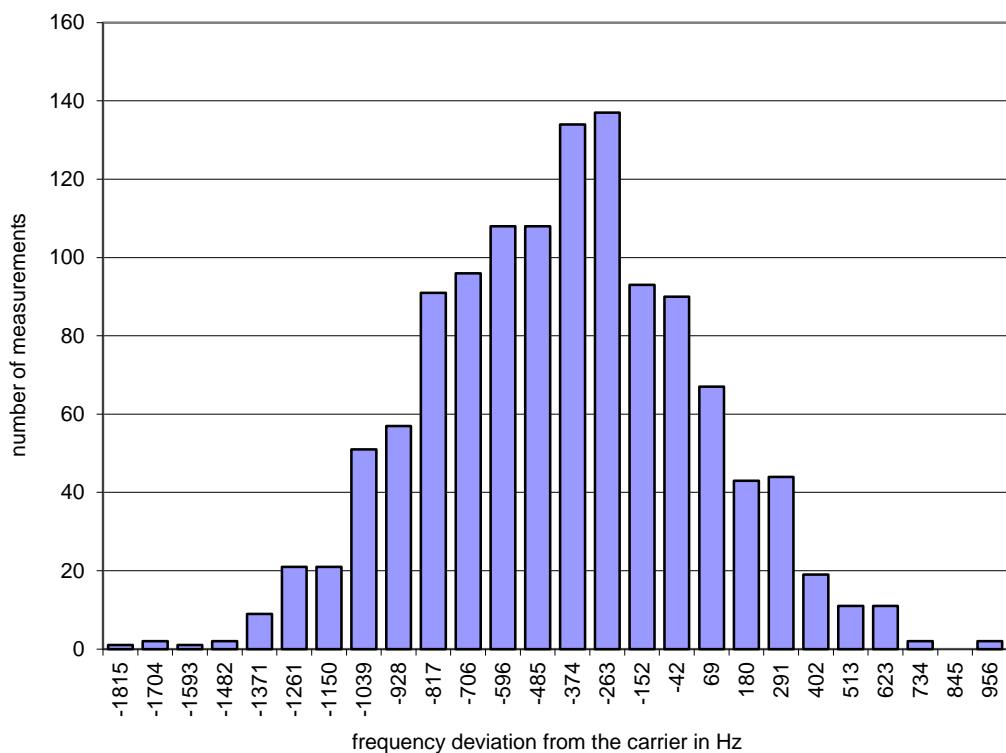
**Carrier stability – Frequency stability –  $T_{MIN}$   $V_{NOM}$** 
**FCC Part 15.323 Carrier Frequency Stability**
**Testprocedure ANSI 63.17**

EUT	Communications Headset
Model	AXP379
Applicant	Sonetics Corporation
Temperature	-30 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	$V_{NOM}$
Frequency of carrier	1924,987440 MHz
Measured mean	1924,986745 MHz
Stability (supply temp)	0,36 ppm
Result	Verdict = PASS
Stability over time	fmax : 0,79 ppm fmin : 1,30 ppm
Result	Verdict = PASS

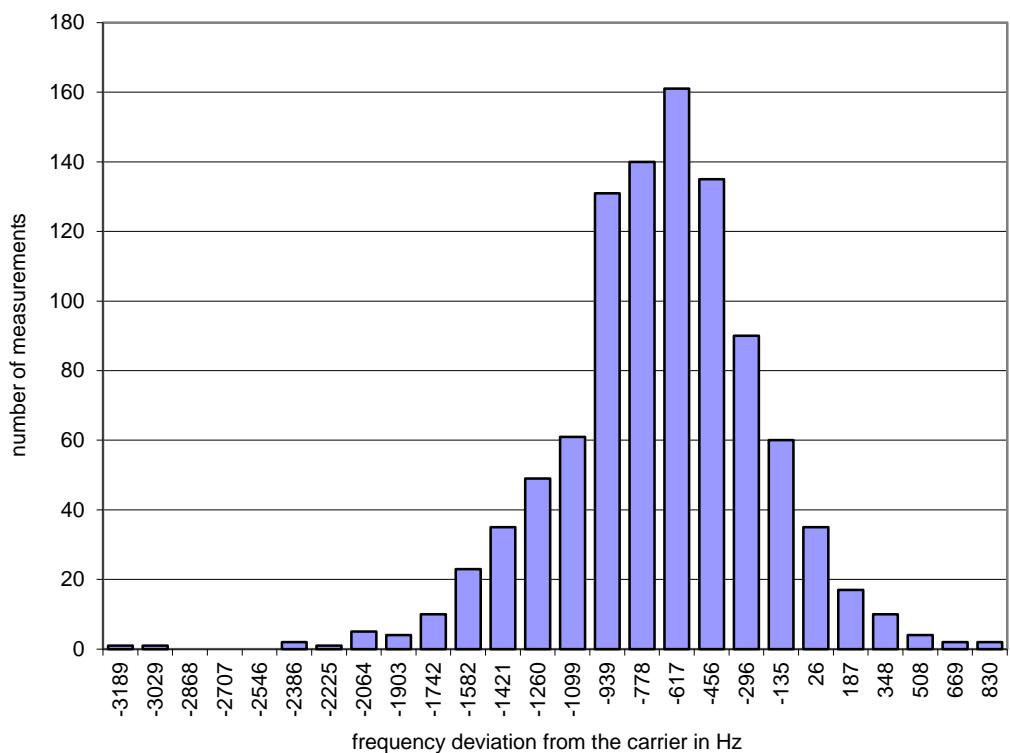
**Histogram**


**Carrier stability – Frequency stability –  $T_{MAX}$   $V_{NOM}$** 
**FCC Part 15.323 Carrier Frequency Stability**
**Testprocedure ANSI 63.17**

EUT	Communications Headset
Model	AXP379
Applicant	Sonetics Corporation
Temperature	70 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	$V_{NOM}$
Frequency of carrier	1924,987430 MHz
Measured mean	1924,987027 MHz
Stability (supply temp)	0,21 ppm
Result	Verdict = PASS
Stability over time	fmax : 0,71 ppm fmin : 0,73 ppm
Result	Verdict = PASS

**Histogram**


### 3.11 Test Conditions and Results – Transmitter in-band unwanted emissions
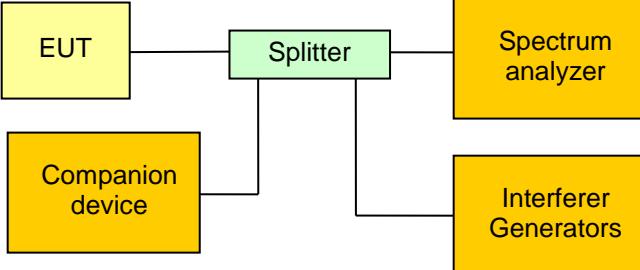
<b>Transmitter in-band unwanted emissions acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
Test according referenced standards	Reference Method	
	FCC 15.323(d) / IC RSS-213 6.7.2	
Test according to measurement reference	Reference Method	
	ANSI C63.17 6.1.6	
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$	
Tested frequency range	1920 – 1930 MHz	
<b>Limits</b>		
Frequency range [MHz]	Detector	Limit [dBc]
1920 MHz to ( $F_c - 3B$ )	Peak	-60
( $F_c - 3B$ ) to ( $F_c - 2B$ )	Peak	-50
( $F_c - 2B$ ) to ( $F_c - 1B$ )	Peak	-30
( $F_c + 1B$ ) to ( $F_c + 2B$ )	Peak	-30
( $F_c + 2B$ ) to ( $F_c + 3B$ )	Peak	-50
( $F_c + 3B$ ) to 1930 MHz	Peak	-60
B = emission / occupied bandwidth of selected channel $F_c$ = Center frequency of selected channel		
<b>Test setup</b>		
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]     Splitter --- Interferer[Interferer Generators]     Companion --- Splitter     Interferer --- Splitter   </pre>		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>With interferer signal the EUT is forced to the test channel and a communication session is established between the EUT and the companion device</li> <li>The RBW of the spectrum analyzer is set to 1% of the emission bandwidth and the VBW is set to 3 times the RBW</li> <li>With peak detector and max hold the emission spectrum is recorded over the corresponding frequency range</li> </ol>		

Test results		
Channel	Frequency [MHz]	Verdict
$F_{LOW}$	1921.536	PASS
$F_{HIGH}$	1928.448	PASS
Comments:		

## Transmitter in-band unwanted emissions – $F_{LOW}$


## FCC Part 15.323 In-band unwanted emission

## Testprocedure ANSI 63.17

UPCS

EUT Communications Headset  
Model AXP379  
Applicant Sonetics Corporation  
Temperature 23°C  
Test Site / Operator Eurofins Product Service GmbH  
Test Specification In-band unwanted emission

1.418MHz

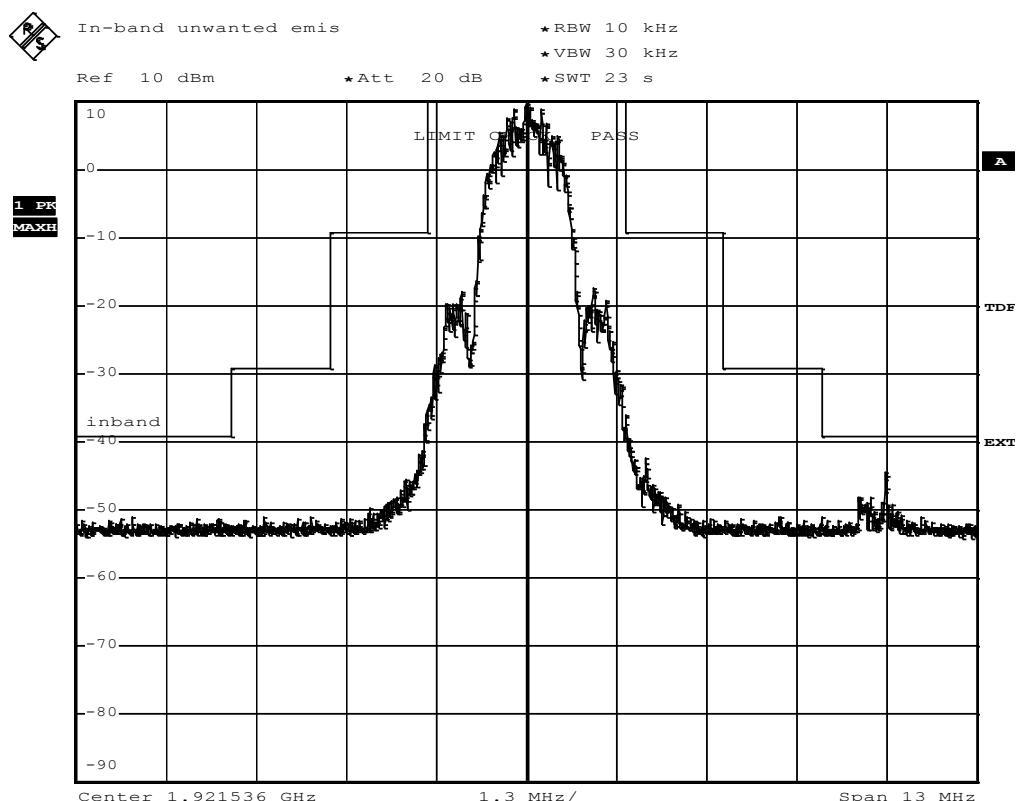

Comment: Ansi C63.17-2006 6.1.6.1  
Date: 23.SEP.2014 11:56:15

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

## Transmitter in-band unwanted emissions – $F_{HIGH}$


## FCC Part 15.323 In-band unwanted emission

## Testprocedure ANSI 63.17

UPCS

EUT Communications Headset  
Model AXP379  
Applicant Sonetics Corporation  
Temperature 23°C  
Test Site / Operator Eurofins Product Service GmbH  
Test Specification In-band unwanted emission

1.418MHz

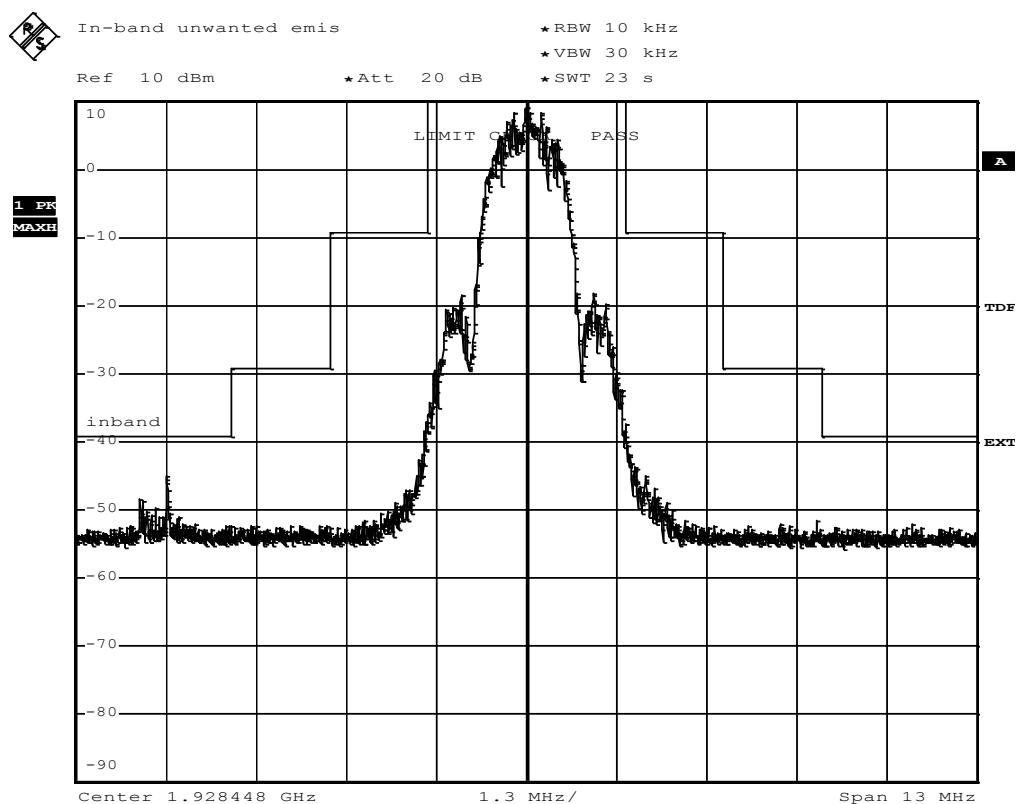


Comment: Ansi C63.17-2006 6.1.6.1  
Date: 23.SEP.2014 12:43:54

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

### 3.12 Test Conditions and Results – Transmitter out-of-band emissions

<b>Transmitter out-of-band emissions acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>	
Test according referenced standards	Reference Method		
	FCC 15.323(d) / IC RSS-213 6.7.1		
Test according to measurement reference	Reference Method		
	ANSI C63.17 6.1.6		
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$		
Tested frequency range	30 MHz – 10 <sup>th</sup> Harmonic		
Test option	Tested according to option a), b) and d) in C63.17 6.1.6.2		
<b>Limits</b>			
Frequency range [MHz]	Detector	Limit	Limit Distance [m]
30 – 88	Quasi-Peak	100 $\mu$ V/m (40 dB $\mu$ V/m)	3
88 – 216	Quasi-Peak	150 $\mu$ V/m (43.5 dB $\mu$ V/m)	3
216 – 960	Quasi-Peak	200 $\mu$ V/m (46 dB $\mu$ V/m)	3
960 – 1000	Quasi-Peak	500 $\mu$ V/m (54 dB $\mu$ V/m)	3
1000 – 1917.5	Average	500 $\mu$ V/m (54 dB $\mu$ V/m)	3
1917.5 – 1918.75	Peak	-39.5 dBm *	N/A
1918.75 – 1920	Peak	-29.5 dBm *	N/A
1930 – 1931.25	Peak	-29.5 dBm *	N/A
1931.25 – 1932.5	Peak	-39.5 dBm *	N/A
1932.5 - 20000	Average	500 $\mu$ V/m (54 dB $\mu$ V/m)	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).			
When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.			
* Measurement is performed with conducted measurement setup			

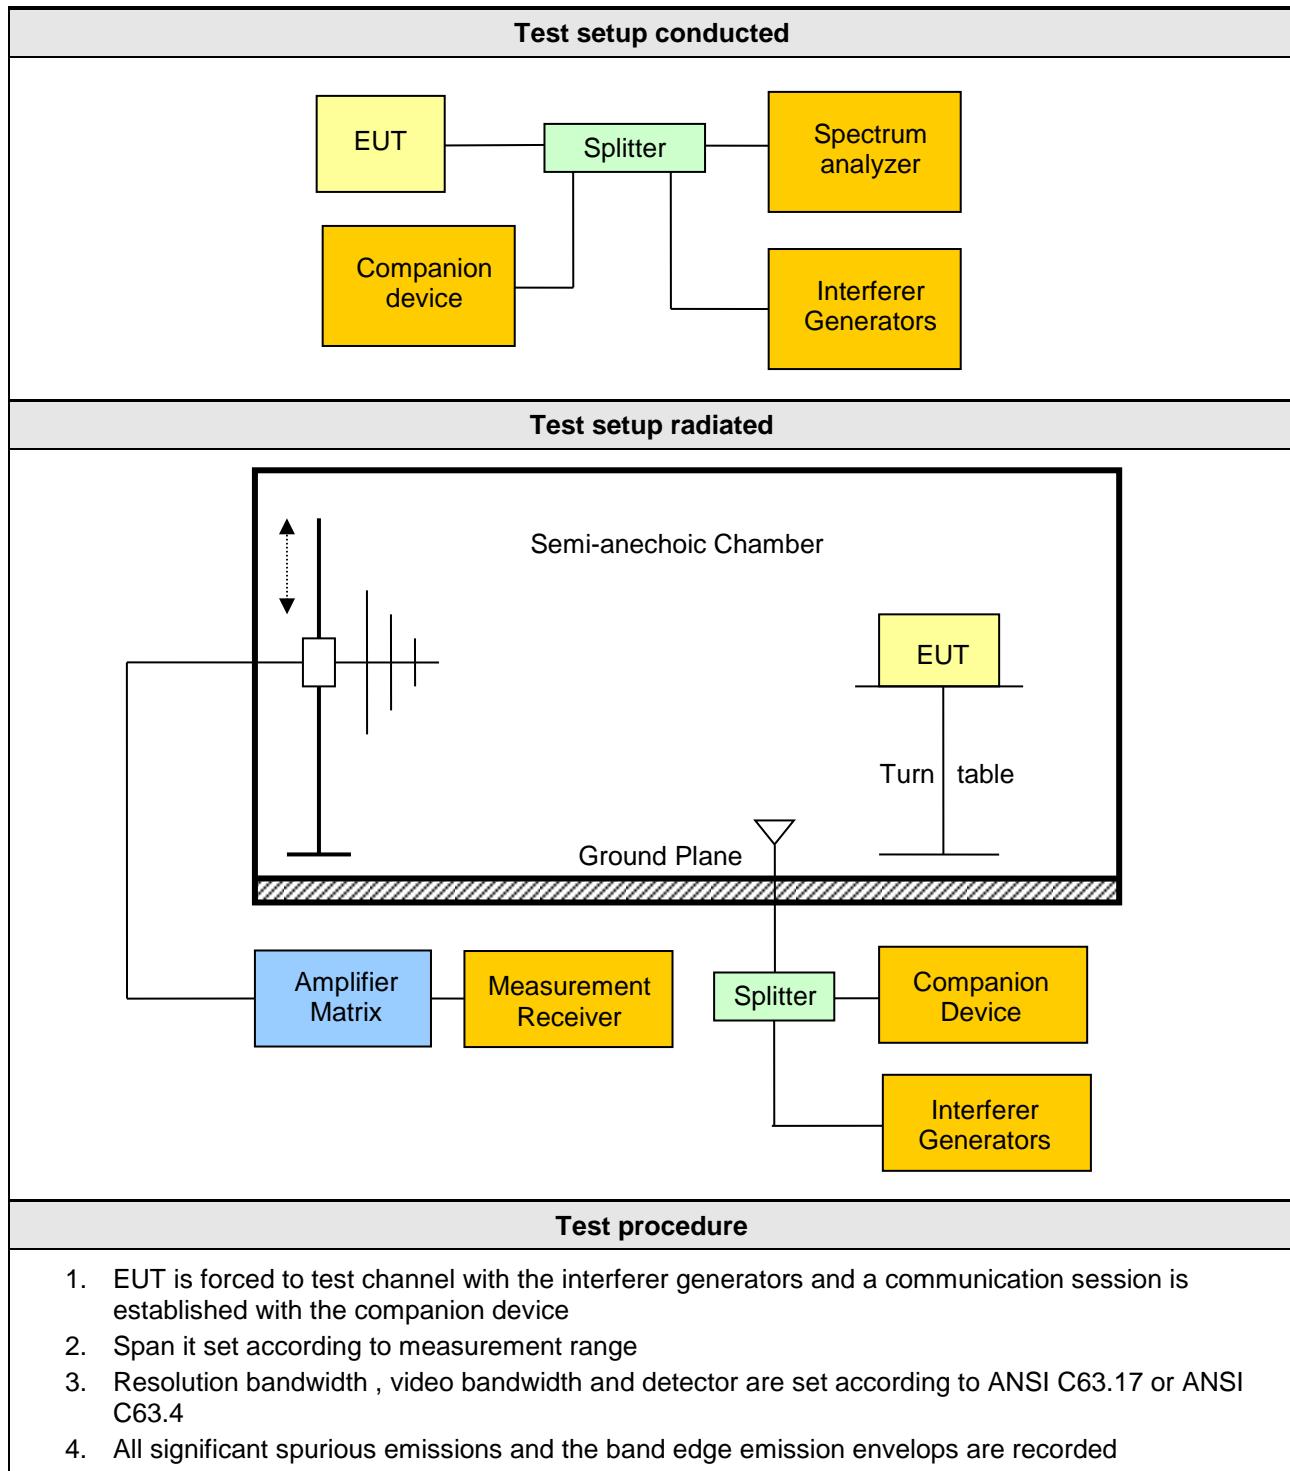

Test results – antenna 0									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [db $\mu$ V/m]	Det.	Pol.	Limit [db $\mu$ V/m]	Limit dist. [m]*	Margin [dB]
F <sub>HIGH</sub>	1928.448	TX	1932.5	57.80	pk	hor	73.90	3	-16.10
F <sub>HIGH</sub>	1928.448	TX	1932.5	33.17	avg	hor	53.90	3	-20.73
F <sub>HIGH</sub>	1928.448	TX	1932.5	61.73	pk	ver	73.90	3	-12.17
F <sub>HIGH</sub>	1928.448	TX	1932.5	29.98	avg	ver	53.90	3	-23.92
F <sub>HIGH</sub>	1928.448	TX	3855.3	48.43	pk	hor	73.90	3	-25.47
F <sub>HIGH</sub>	1928.448	TX	3855.3	50.52	pk	ver	73.90	3	-23.38
F <sub>HIGH</sub>	1928.448	TX	5784	54.97	pk	hor	73.90	3	-18.93
F <sub>HIGH</sub>	1928.448	TX	5784	51.01	pk	ver	73.90	3	-22.89
F <sub>HIGH</sub>	1928.448	TX	5786	26.29	avg	hor	53.90	3	-27.61
F <sub>LOW</sub>	1921.536	TX	1917.2	56.84	pk	hor	73.90	3	-17.06
F <sub>LOW</sub>	1921.536	TX	1917.2	26.90	avg	hor	53.90	3	-27.00
F <sub>LOW</sub>	1921.536	TX	1917.4	63.27	pk	ver	73.90	3	-10.63
F <sub>LOW</sub>	1921.536	TX	1917.4	30.91	avg	ver	53.90	3	-22.99
F <sub>LOW</sub>	1921.536	TX	3838.7	49.27	pk	hor	73.90	3	-24.63
F <sub>LOW</sub>	1921.536	TX	3842.9	51.68	pk	ver	73.90	3	-22.22
F <sub>LOW</sub>	1921.536	TX	5760	51.45	pk	hor	73.90	3	-22.45
F <sub>LOW</sub>	1921.536	TX	5760	49.87	pk	ver	73.90	3	-24.03

Comments: \* Physical distance between EUT and measurement antenna.

Test results – antenna 1									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [db $\mu$ V/m]	Det.	Pol.	Limit [db $\mu$ V/m]	Limit dist. [m]*	Margin [dB]
F <sub>HIGH</sub>	1928.448	TX	1932.5	62.94	pk	hor	73.90	3	-10.96
F <sub>HIGH</sub>	1928.448	TX	1932.5	37.95	avg	hor	53.90	3	-15.95
F <sub>HIGH</sub>	1928.448	TX	1932.5	60.88	pk	ver	73.90	3	-13.02
F <sub>HIGH</sub>	1928.448	TX	1932.5	27.19	avg	ver	53.90	3	-26.71
F <sub>HIGH</sub>	1928.448	TX	3855.3	48.23	pk	hor	73.90	3	-25.67
F <sub>HIGH</sub>	1928.448	TX	3855.3	49.29	pk	ver	73.90	3	-24.61
F <sub>HIGH</sub>	1928.448	TX	5784	46.01	pk	hor	73.90	3	-27.89
F <sub>HIGH</sub>	1928.448	TX	5784	45.18	pk	ver	73.90	3	-28.72
F <sub>LOW</sub>	1921.536	TX	1917.2	64.14	pk	hor	73.90	3	-09.76
F <sub>LOW</sub>	1921.536	TX	1917.2	30.88	avg	hor	53.90	3	-23.02
F <sub>LOW</sub>	1921.536	TX	1917.2	63.92	pk	ver	73.90	3	-09.98
F <sub>LOW</sub>	1921.536	TX	1917.2	30.70	avg	ver	53.90	3	-23.20
F <sub>LOW</sub>	1921.536	TX	3838.7	49.52	pk	ver	73.90	3	-24.38
F <sub>LOW</sub>	1921.536	TX	5760	46.74	pk	hor	73.90	3	-27.16
F <sub>LOW</sub>	1921.536	TX	5760	47.74	pk	ver	73.90	3	-26.16

Comments: \* Physical distance between EUT and measurement antenna.

## Transmitter out-of-band emissions – Band edge $F_{\text{Low}}$


## FCC Part 15.323 Out-of-band emission

## Testprocedure ANSI 63.17

UPCS

EUT	Communications Headset
Model	AXP379
Applicant	Sonetics Corporation
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Out-of-band emission

measurement on the lowest carrier  
Carrier=1921.536MHz

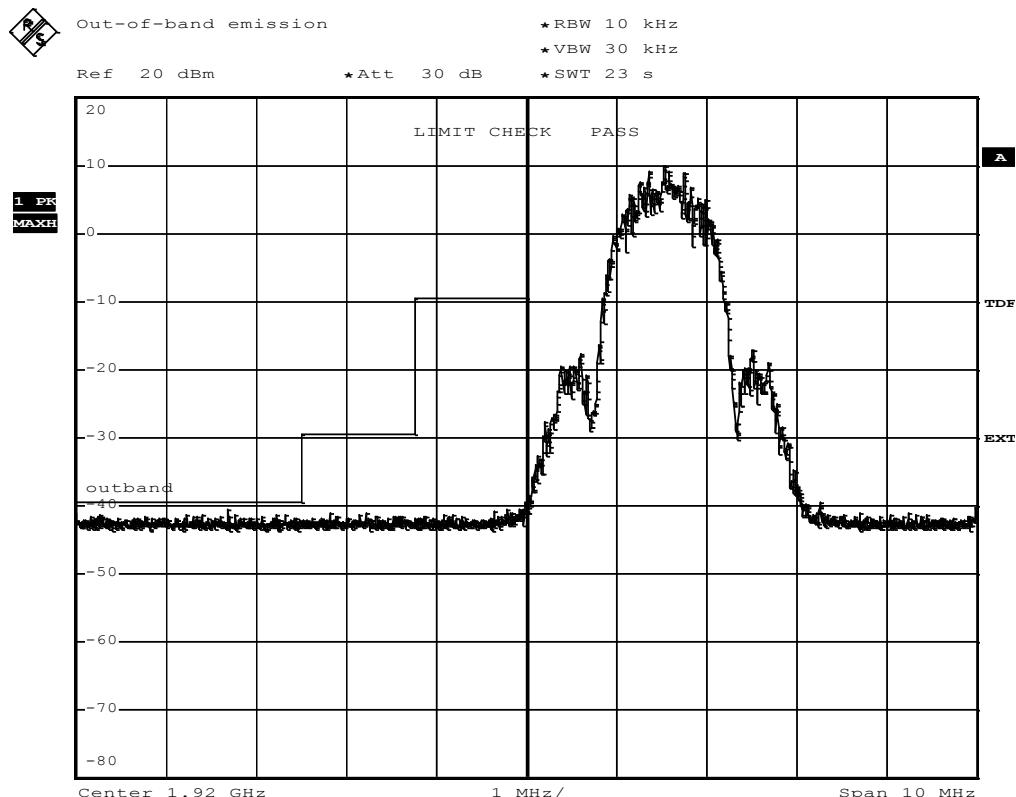

Comment: Ansi C63.17-2006 6.1.6.2  
Date: 23.SEP.2014 12:36:19

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

## Transmitter out-of-band emissions – Band edge $F_{HIGH}$


## FCC Part 15.323 Out-of-band emission

## Testprocedure ANSI 63.17

UPCS

EUT	Communications Headset
Model	AXP379
Applicant	Sonetics Corporation
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Out-of-band emission

measurement on the highest carrier  
Carrier=1928.448MHz

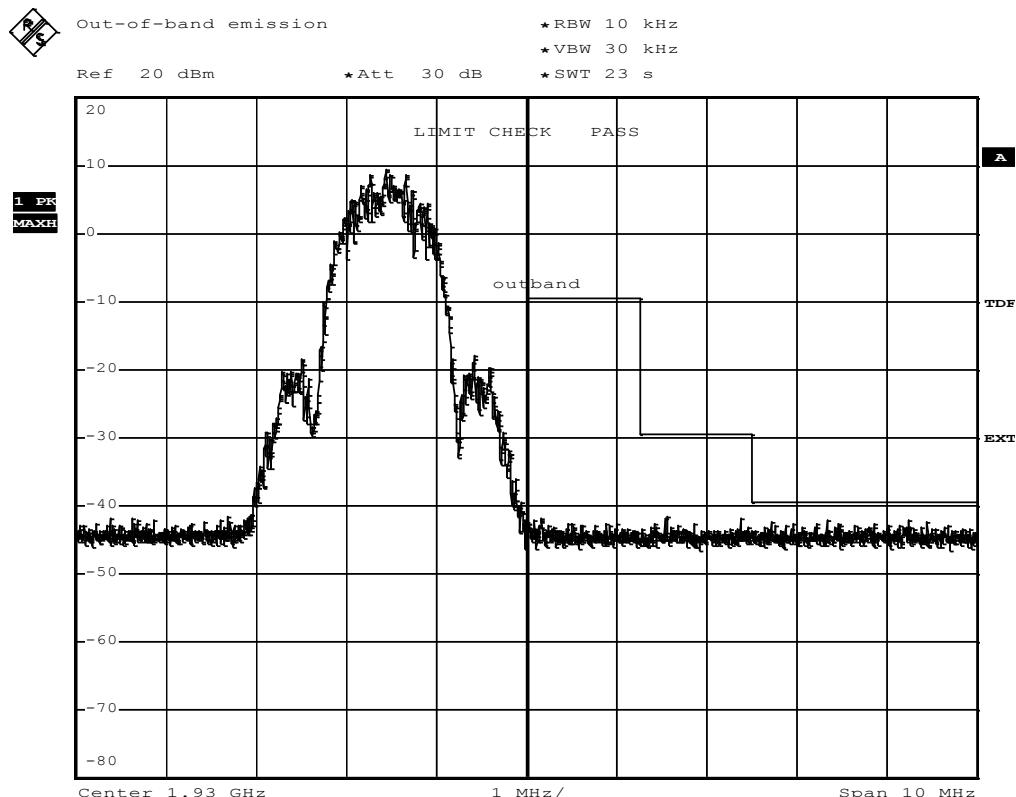

Comment: Ansi C63.17-2006 6.1.6.2  
Date: 23.SEP.2014 12:41:12


Test Report No.: G0M-1408-4062-TFC15DFP77-V01

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HK 116, Horizontal  
Measurement distance: 3 m  
Mode: TX; channel 4; antenna 0  
Test Date: 2014-09-29  
Note: worst case

Index 5

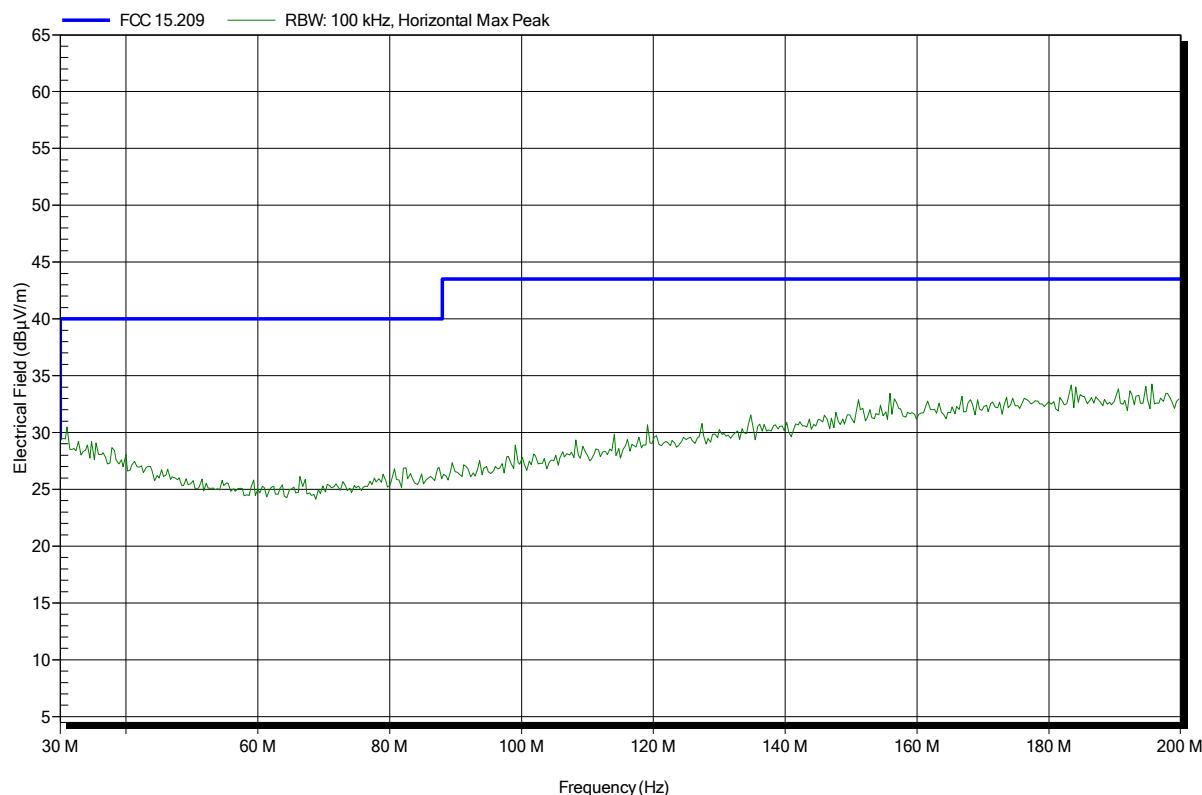


**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HK 116, Vertical  
Measurement distance: 3 m  
Mode: TX; channel 4; antenna 0  
Test Date: 2014-09-29  
Note: worst case

Index 6

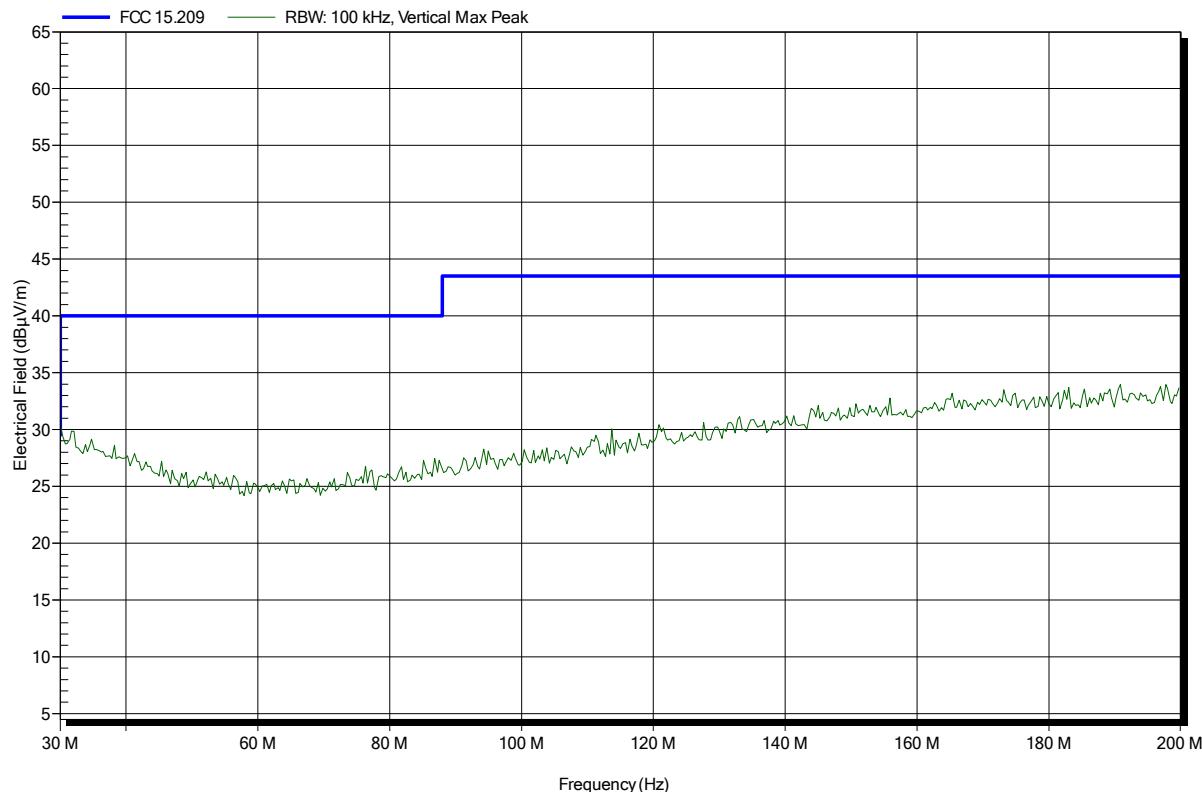


**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 223, Horizontal  
Measurement distance: 3 m  
Mode: TX; channel 4; antenna 0  
Test Date: 2014-09-29  
Note: worst case

Index 3

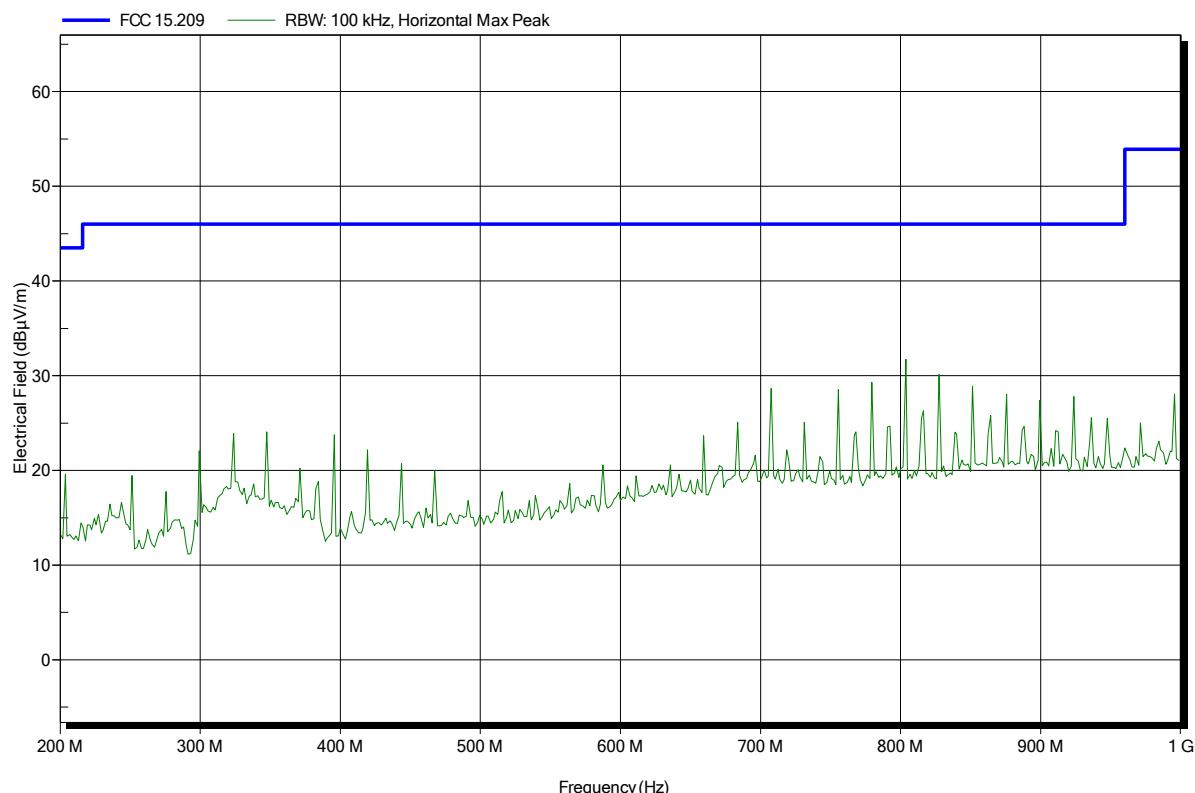


**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 223, Vertical  
Measurement distance: 3 m  
Mode: TX; channel 4; antenna 0  
Test Date: 2014-09-29  
Note: worst case

Index 4

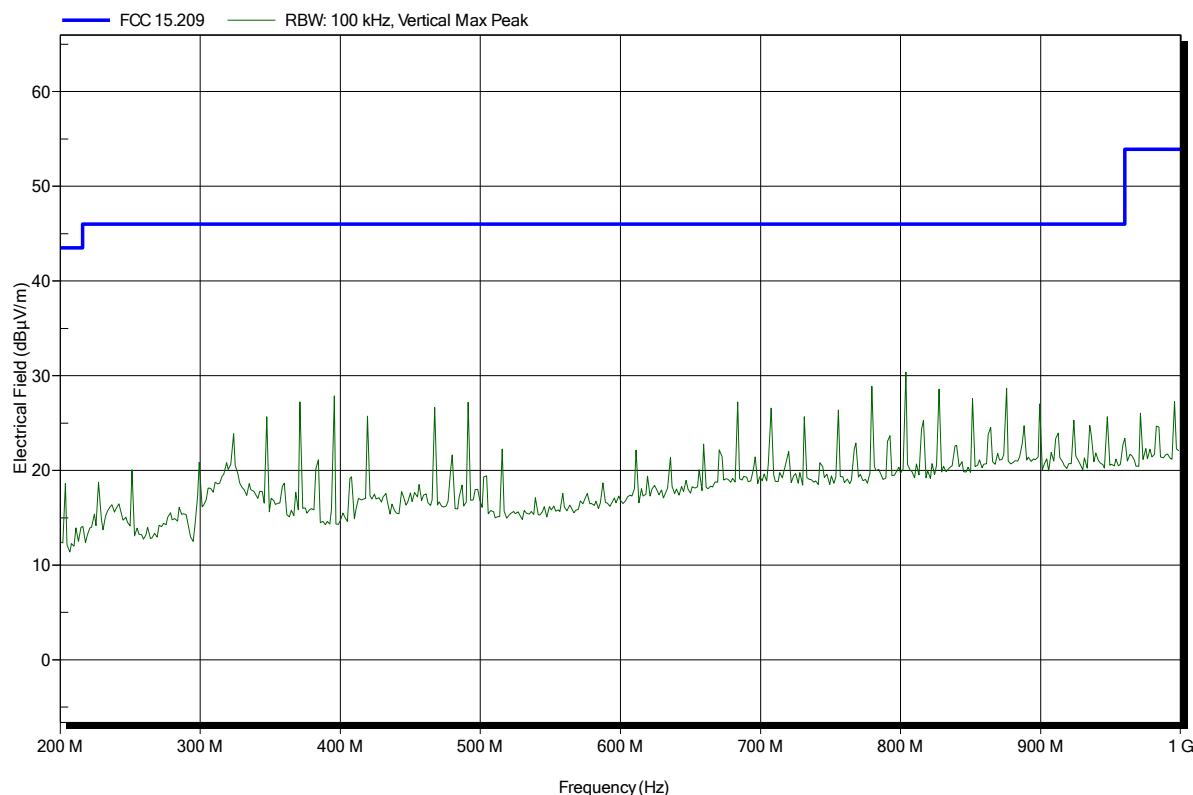

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 59 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; channel 4; antenna 0  
 Test Date: 2014-09-29  
 Note: with notch-filter

Index 11

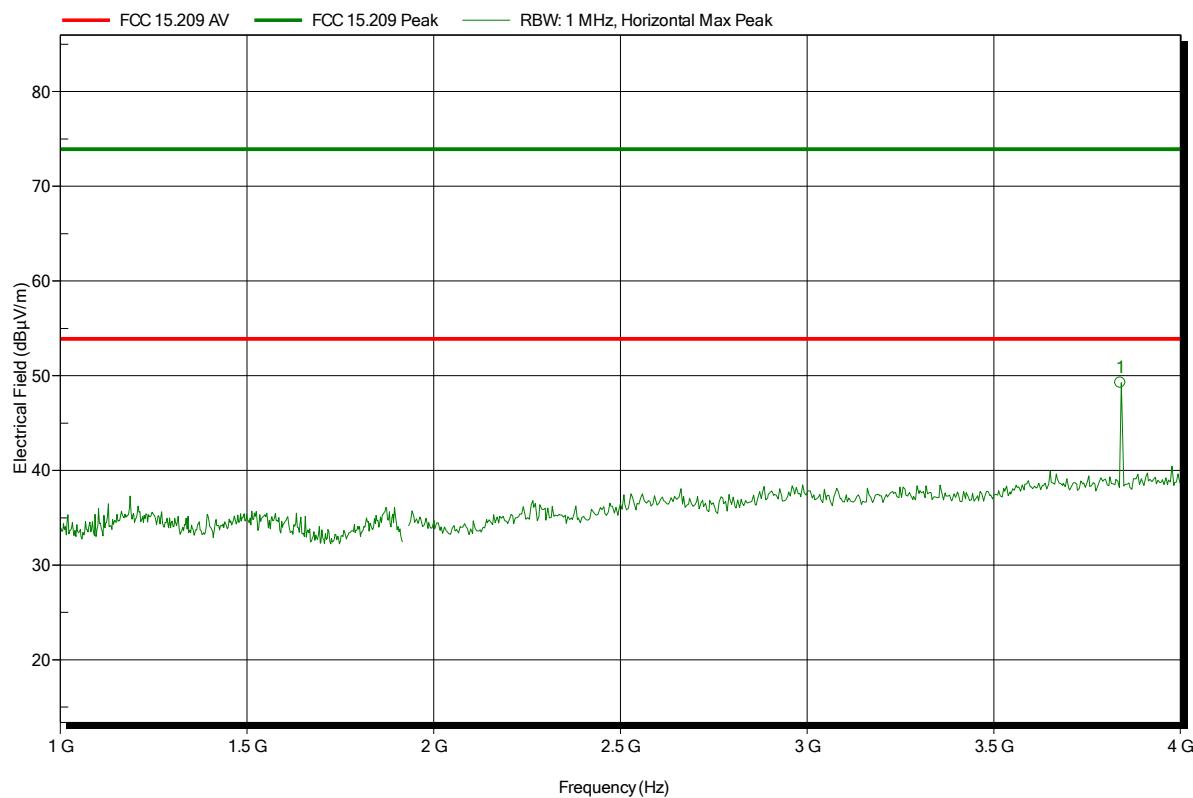

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; channel 4; antenna 0  
 Test Date: 2014-09-29  
 Note: with notch-filter

Index 12

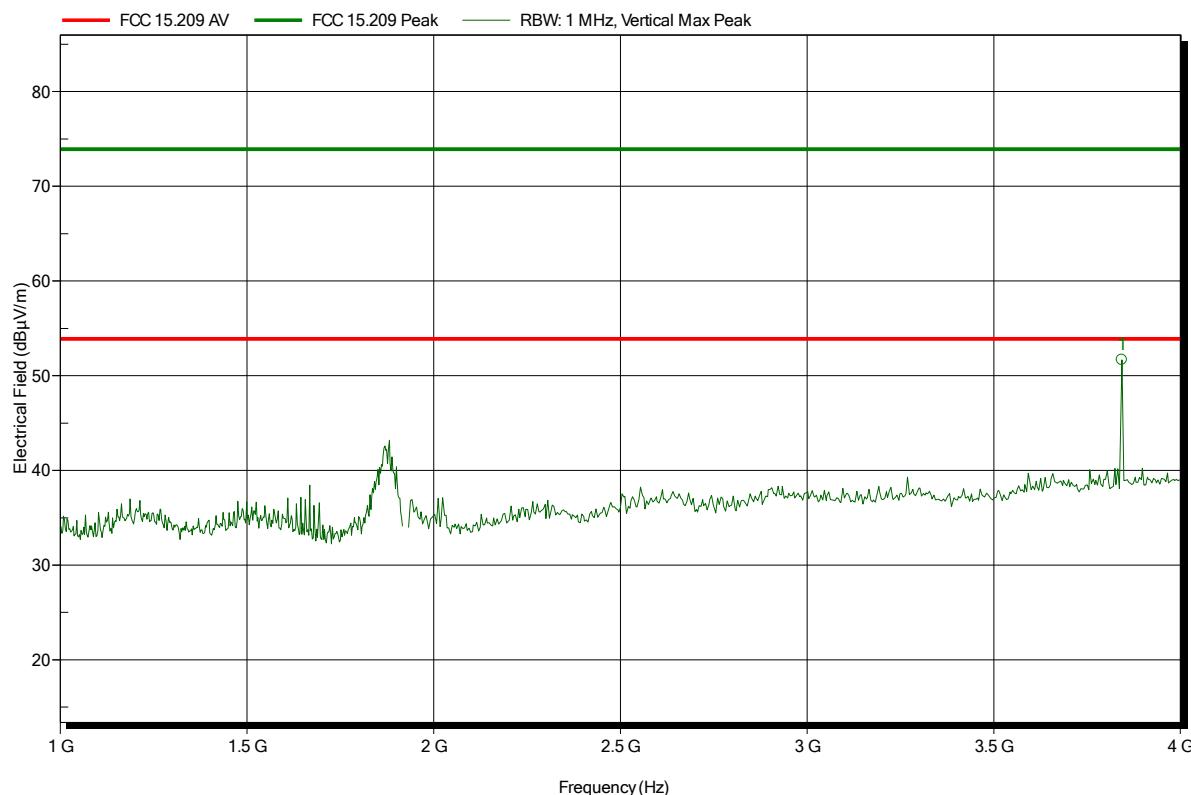

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 61 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; channel 4; antenna 0  
 Test Date: 2014-09-29  
 Note:

Index 14

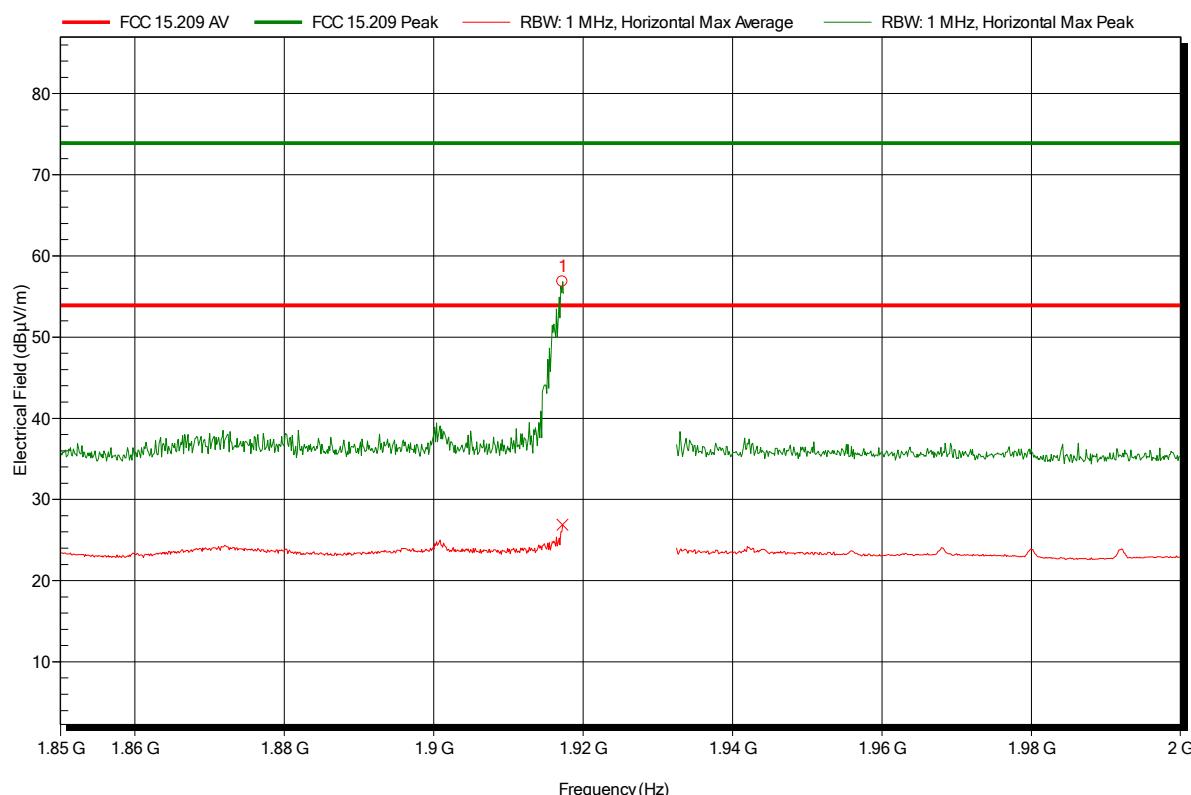


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9172 GHz	56.84 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-17.06 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9172 GHz	26.9 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-27 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; channel 4; antenna 0  
 Test Date: 2014-09-29  
 Note:

Index 13

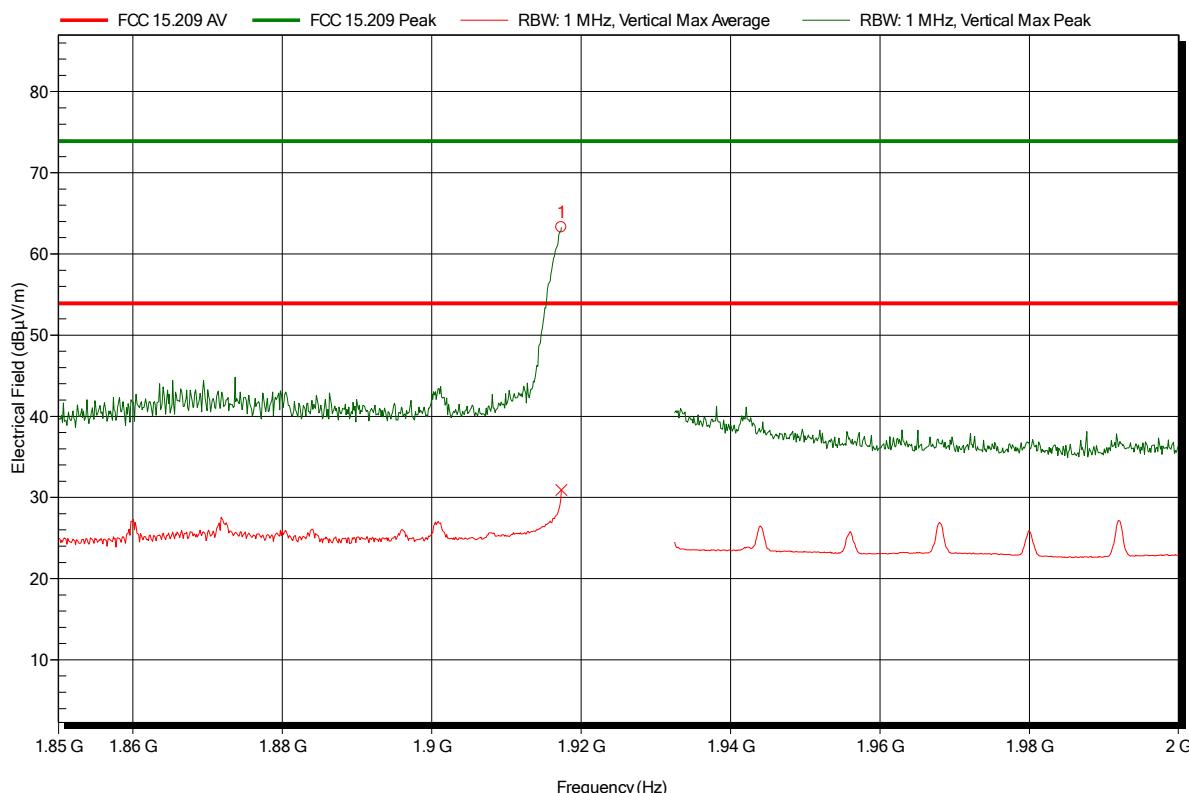


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9174 GHz	63.27 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-10.63 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9174 GHz	30.91 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-22.99 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m  
 Mode: TX; channel 4; antenna 0  
 Test Date: 2014-09-29  
 Note:

Index 25

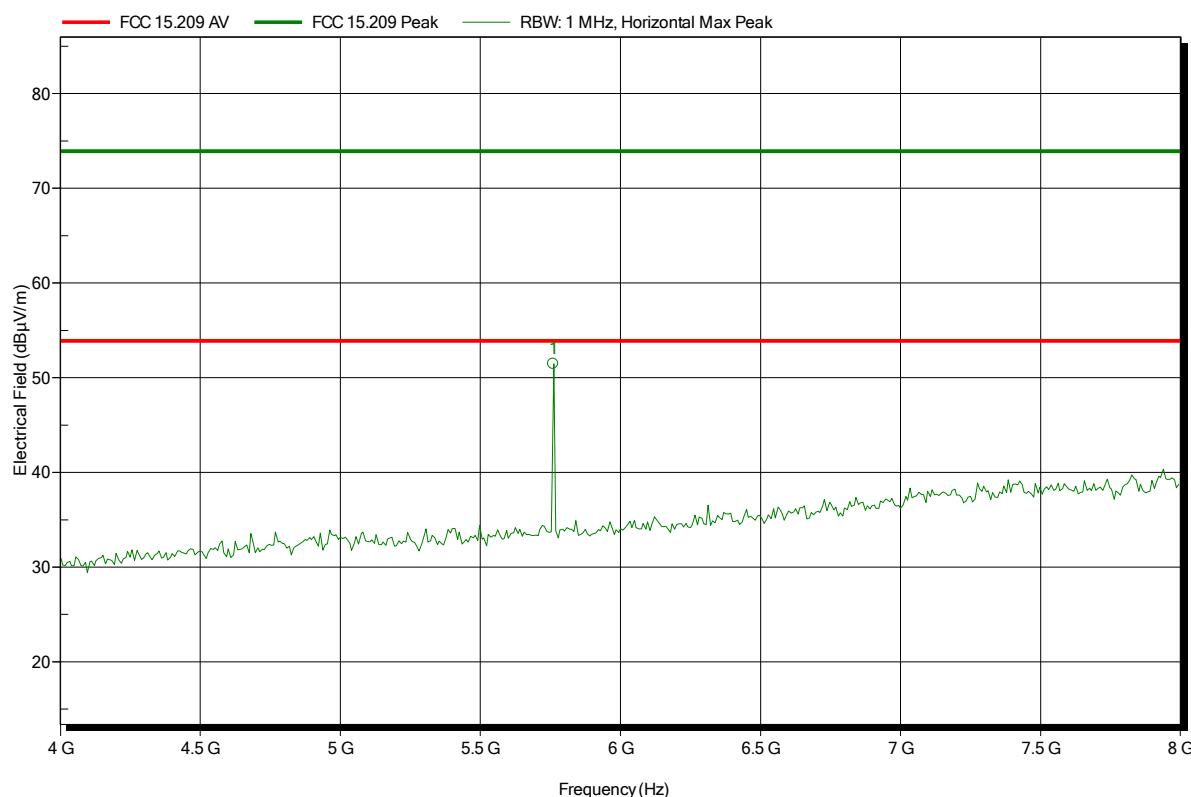

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m  
 Mode: TX; channel 4; antenna 0  
 Test Date: 2014-09-29  
 Note:

Index 28

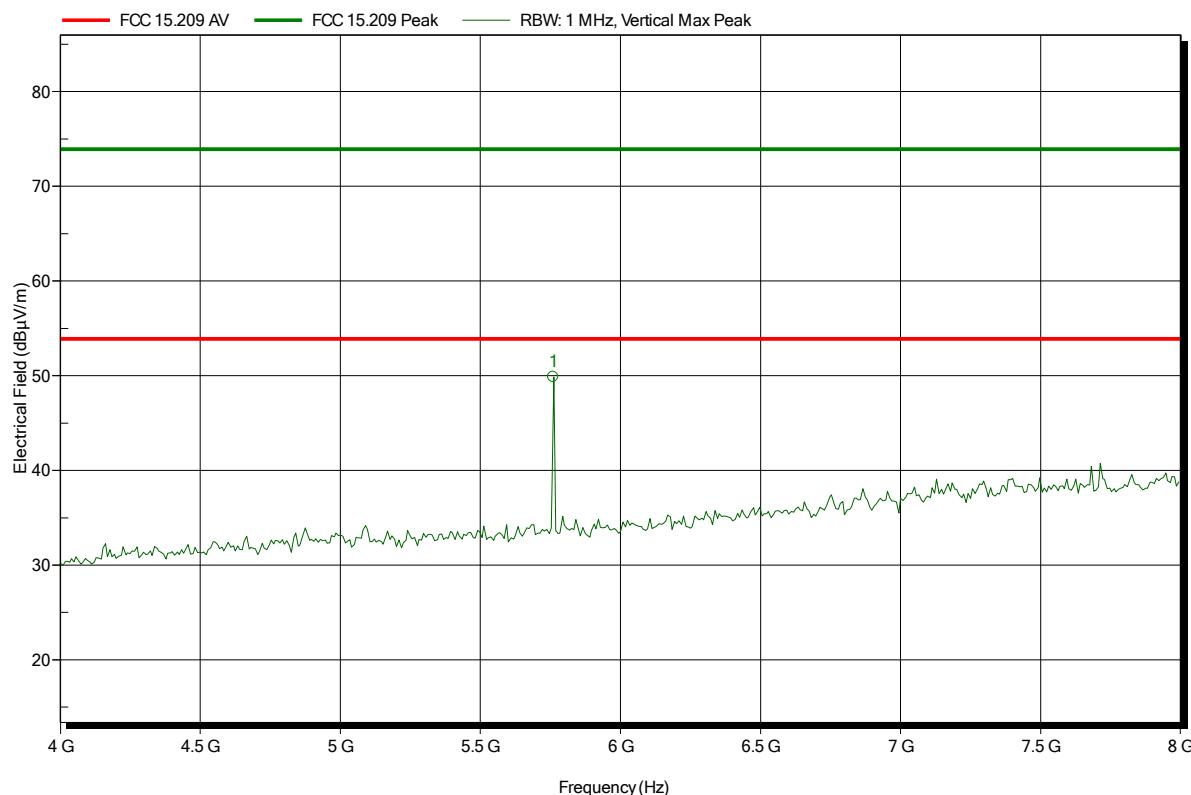

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m  
Mode: TX; channel 4; antenna 0  
Test Date: 2014-09-29  
Note:

Index 26

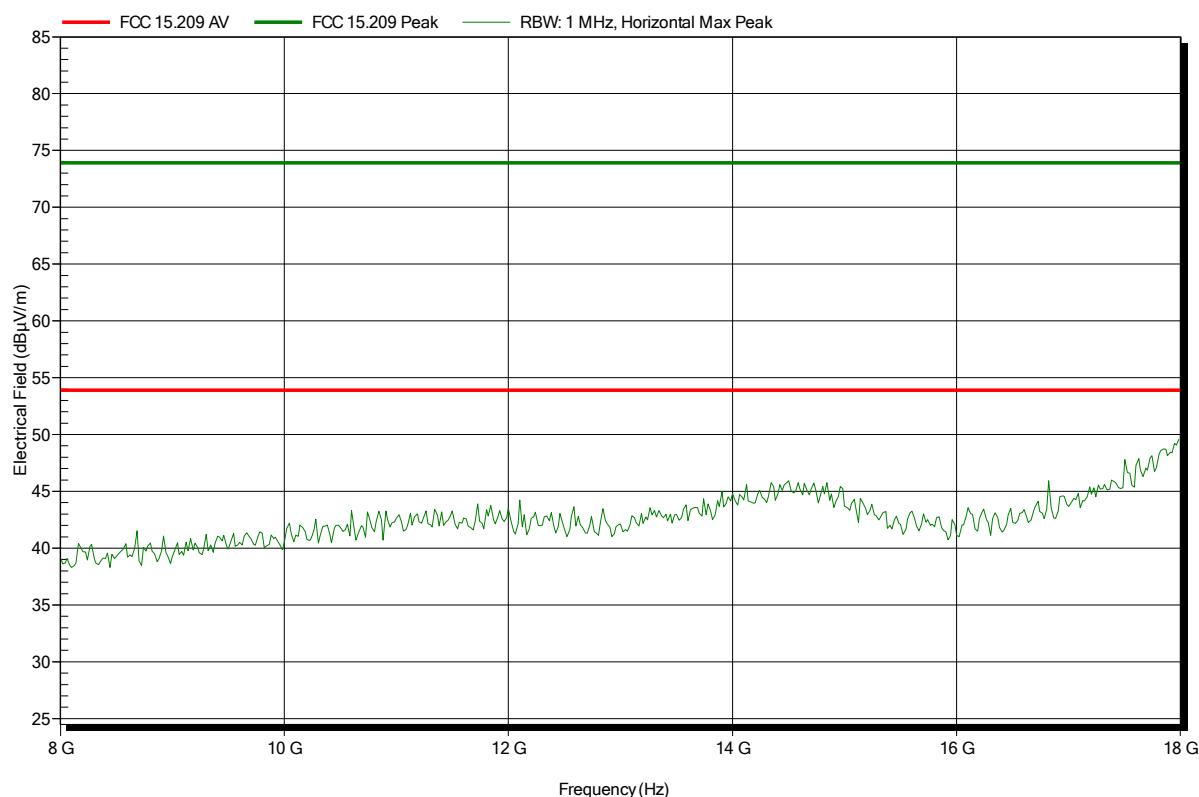

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 66 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: T<sub>nom</sub>: 25°C, V<sub>nom</sub>: 3.7 vDC lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m  
Mode: TX; channel 4; antenna 0  
Test Date: 2014-09-29  
Note:

Index 29

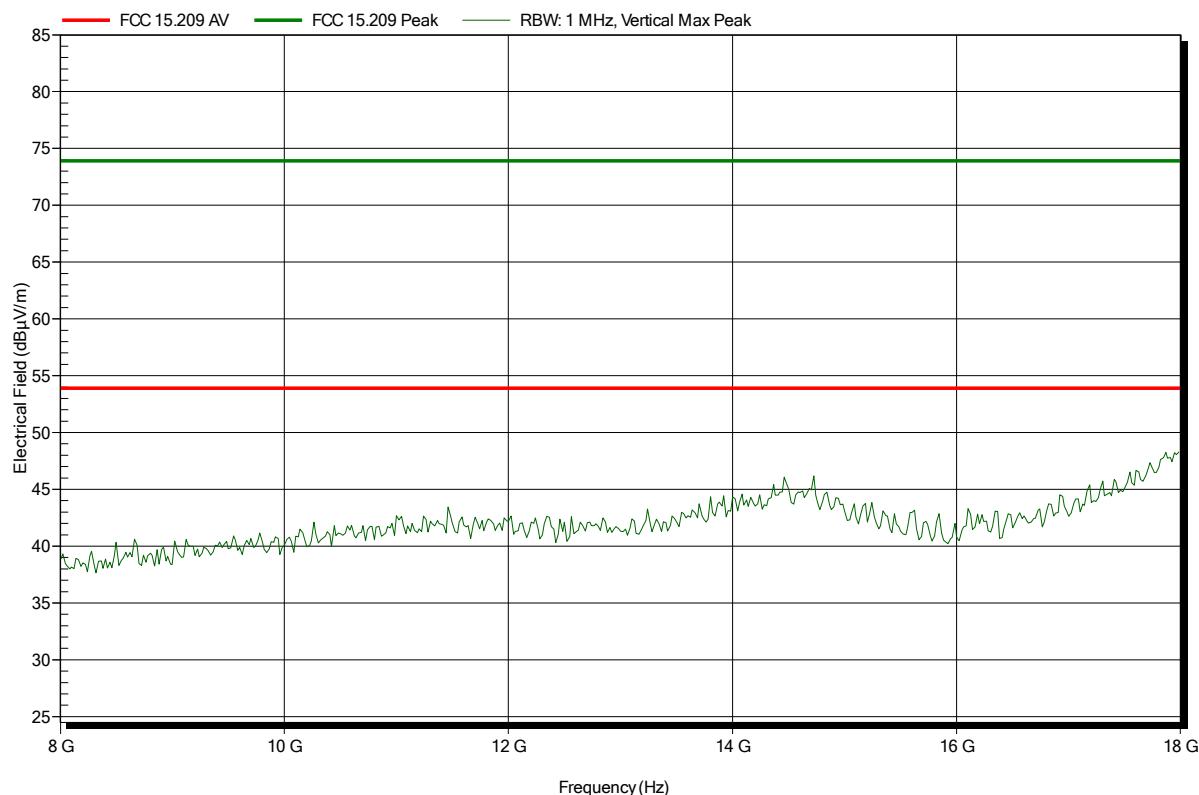

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 67 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 025, Horizontal  
Measurement distance: 1 m  
Mode: TX; channel 4; antenna 0  
Test Date: 2014-09-29  
Note:

Index 27

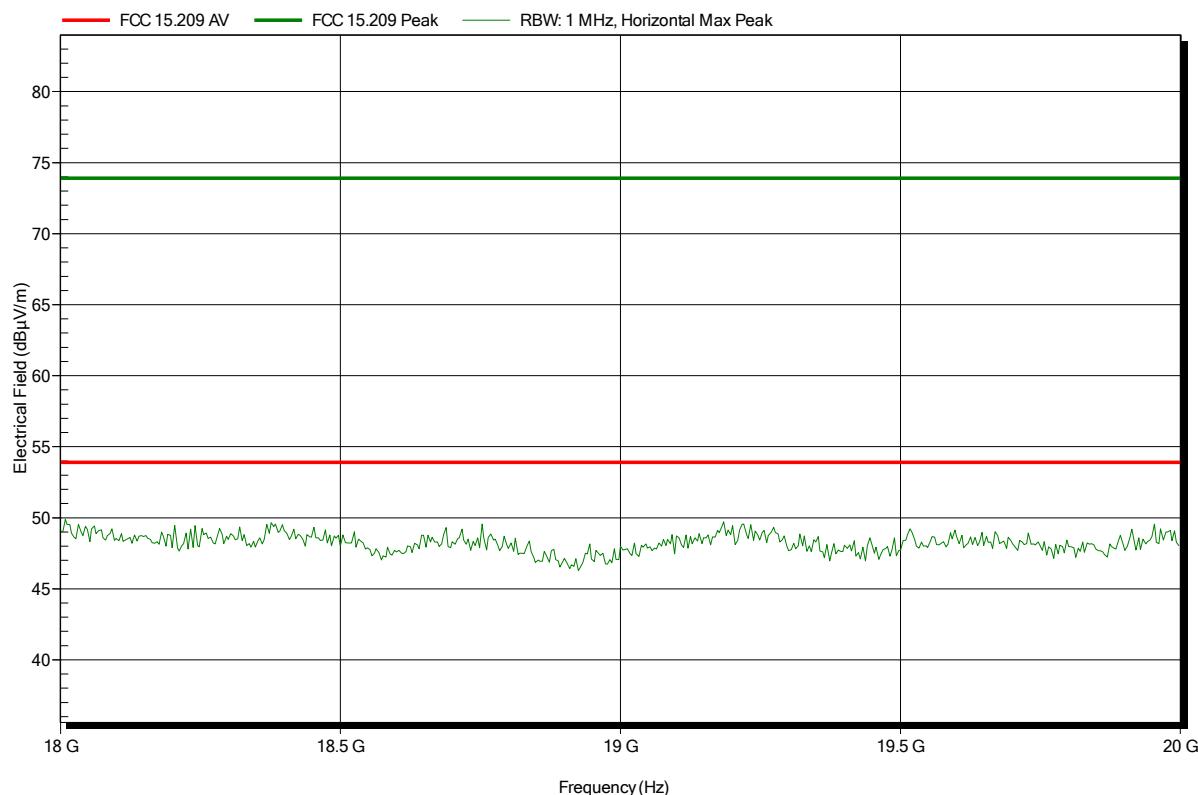

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 68 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 025, Vertical  
Measurement distance: 1 m  
Mode: TX; channel 4; antenna 0  
Test Date: 2014-09-29  
Note:

Index 30

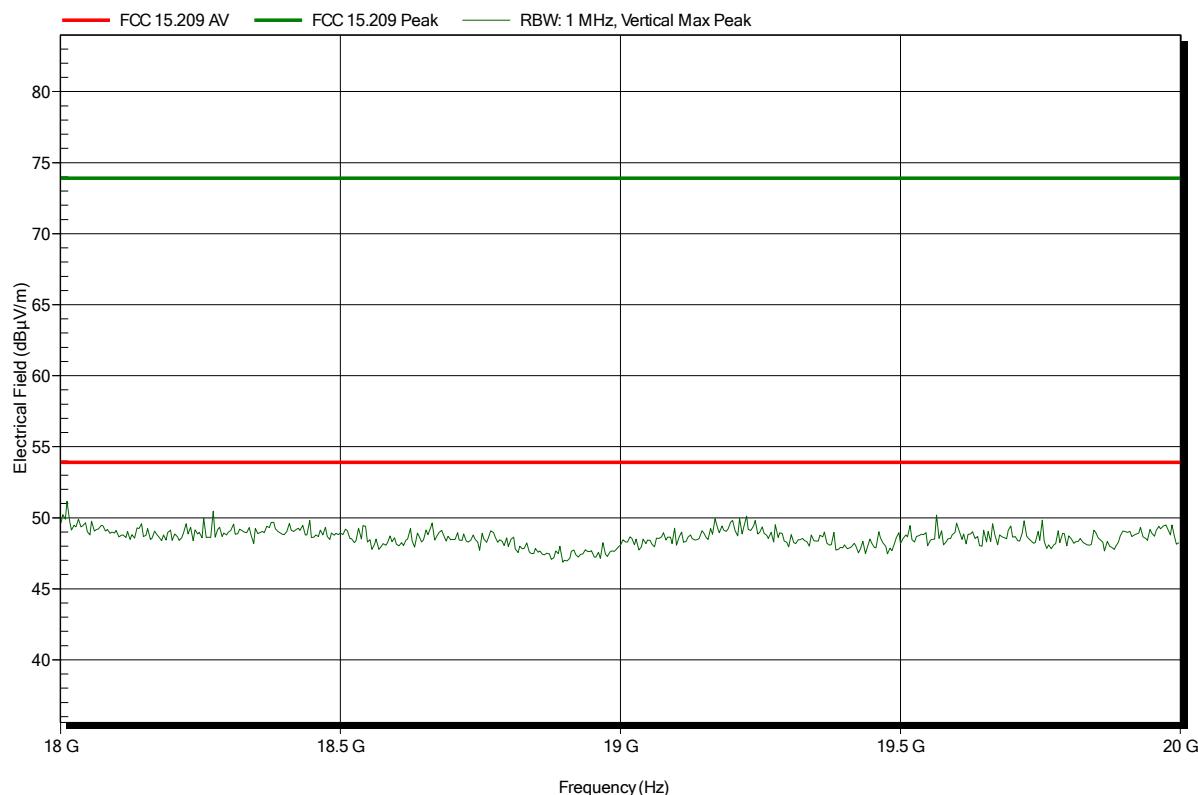

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 69 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 3 m  
Mode: TX; channel 4; antenna 1  
Test Date: 2014-09-29  
Note: with notch-filter

Index 45

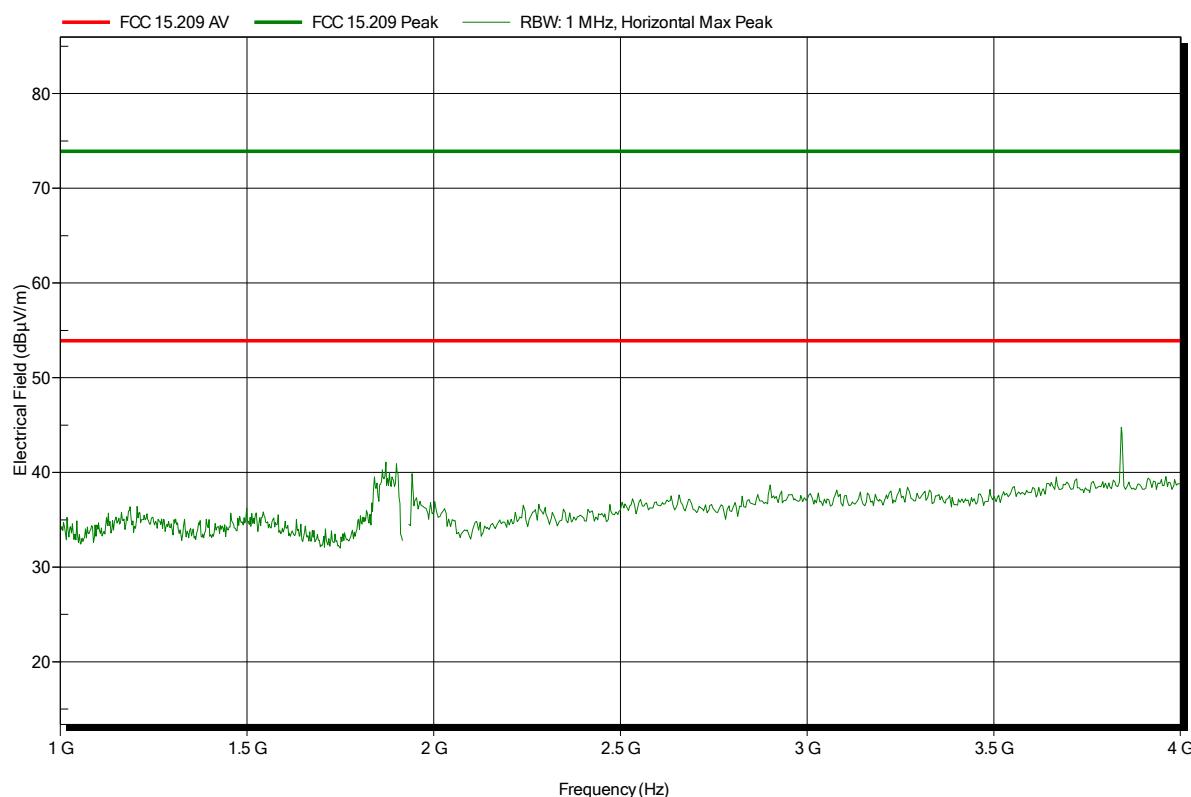

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 70 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; channel 4; antenna 1  
 Test Date: 2014-09-29  
 Note: with notch-filter

Index 46

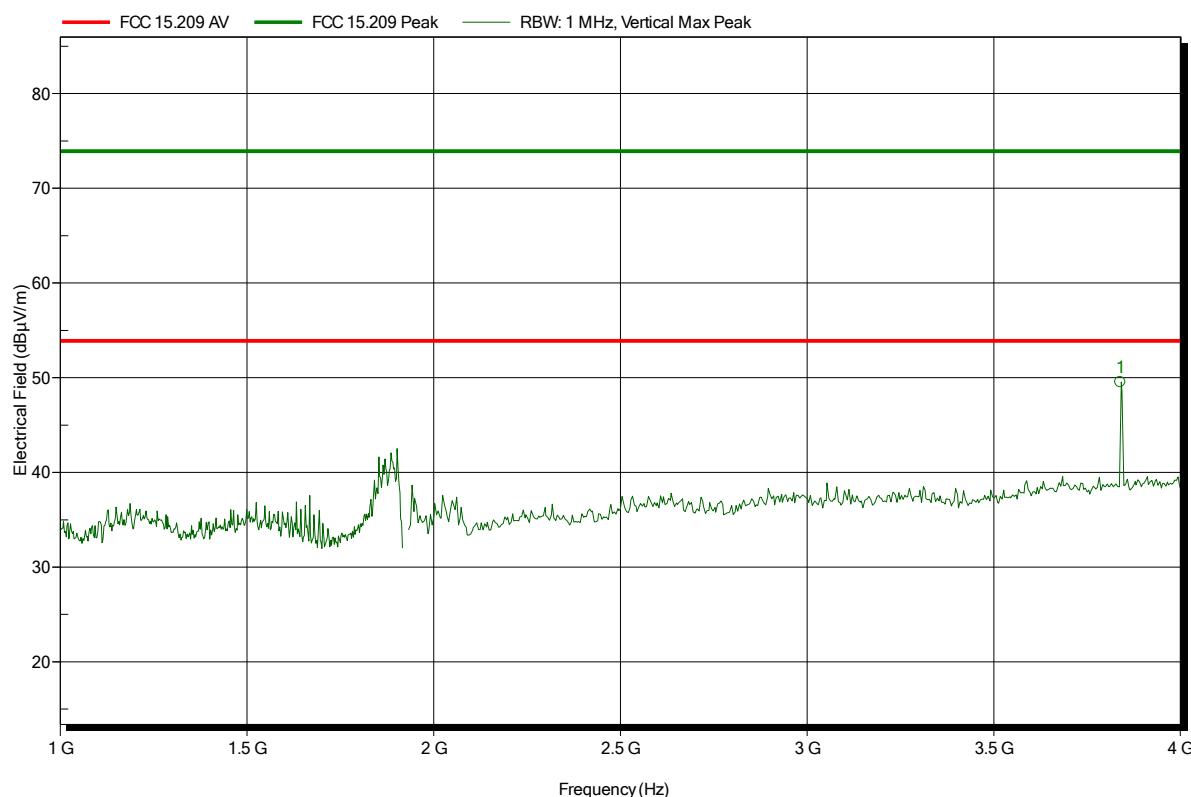

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; channel 4; antenna 1  
 Test Date: 2014-09-30  
 Note:

Index 49

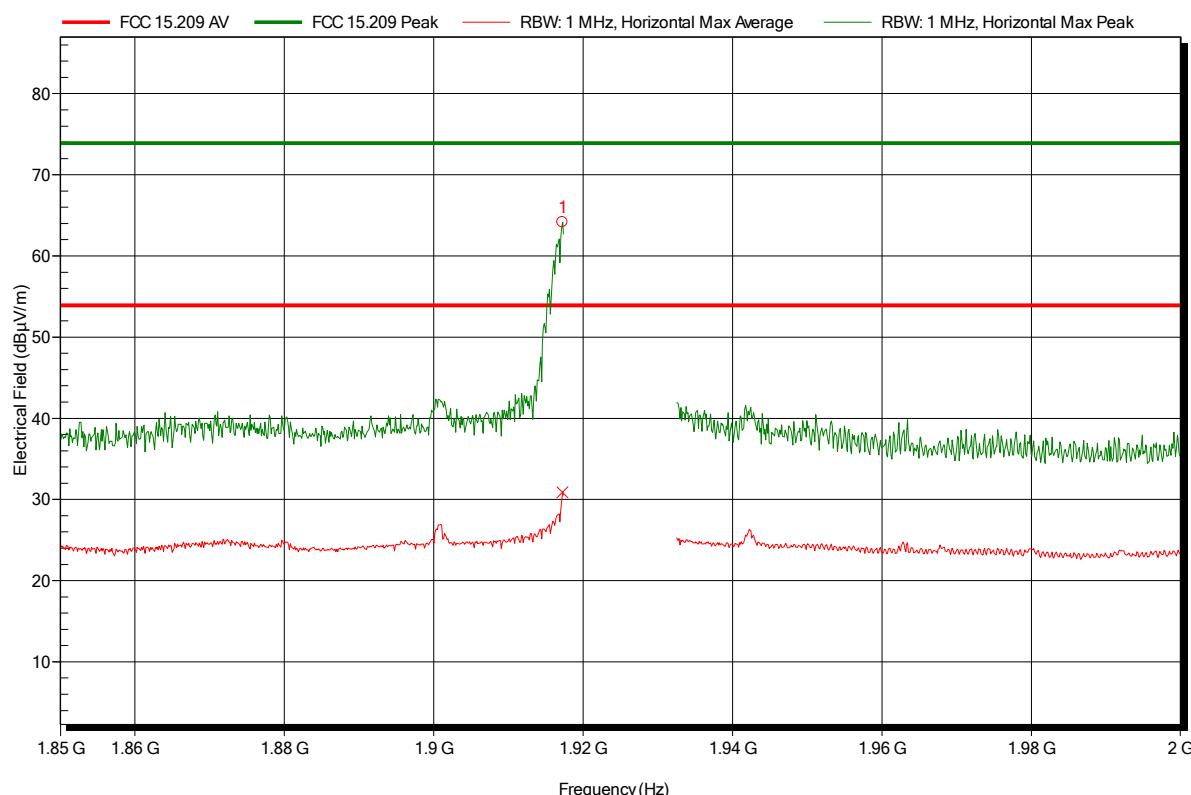


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9172 GHz	64.14 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-9.76 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9172 GHz	30.88 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-23.02 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; channel 4; antenna 1  
 Test Date: 2014-09-30  
 Note:

Index 48

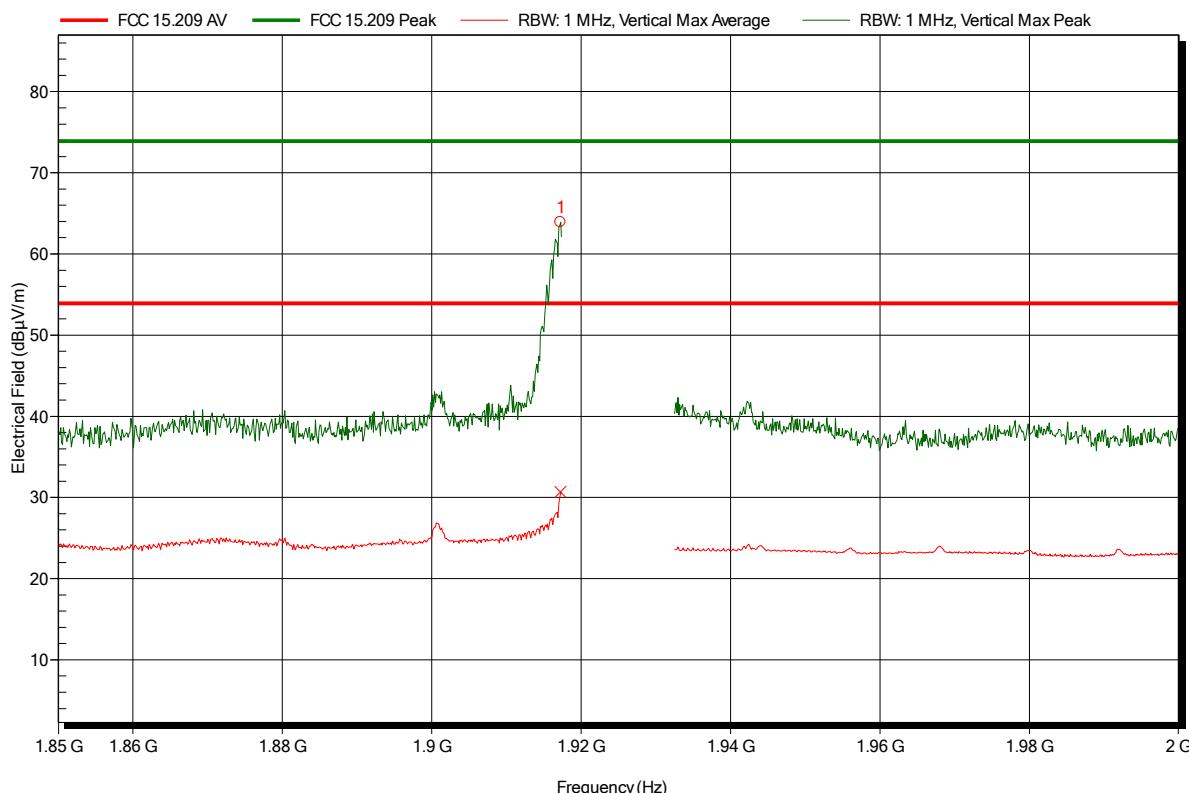


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9172 GHz	63.92 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-9.98 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9172 GHz	30.7 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-23.2 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m  
 Mode: TX; channel 4; antenna 1  
 Test Date: 2014-09-29  
 Note:

Index 31

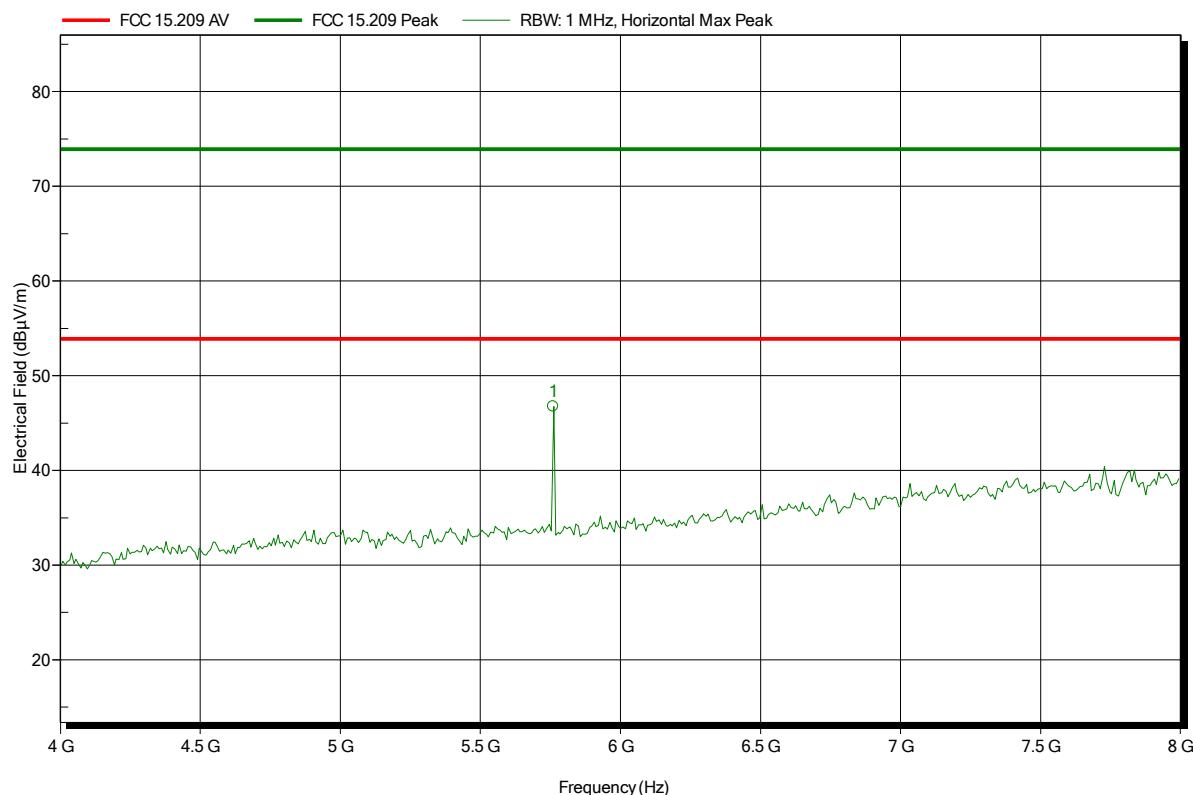

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m  
 Mode: TX; channel 4; antenna 1  
 Test Date: 2014-09-29  
 Note:

Index 34

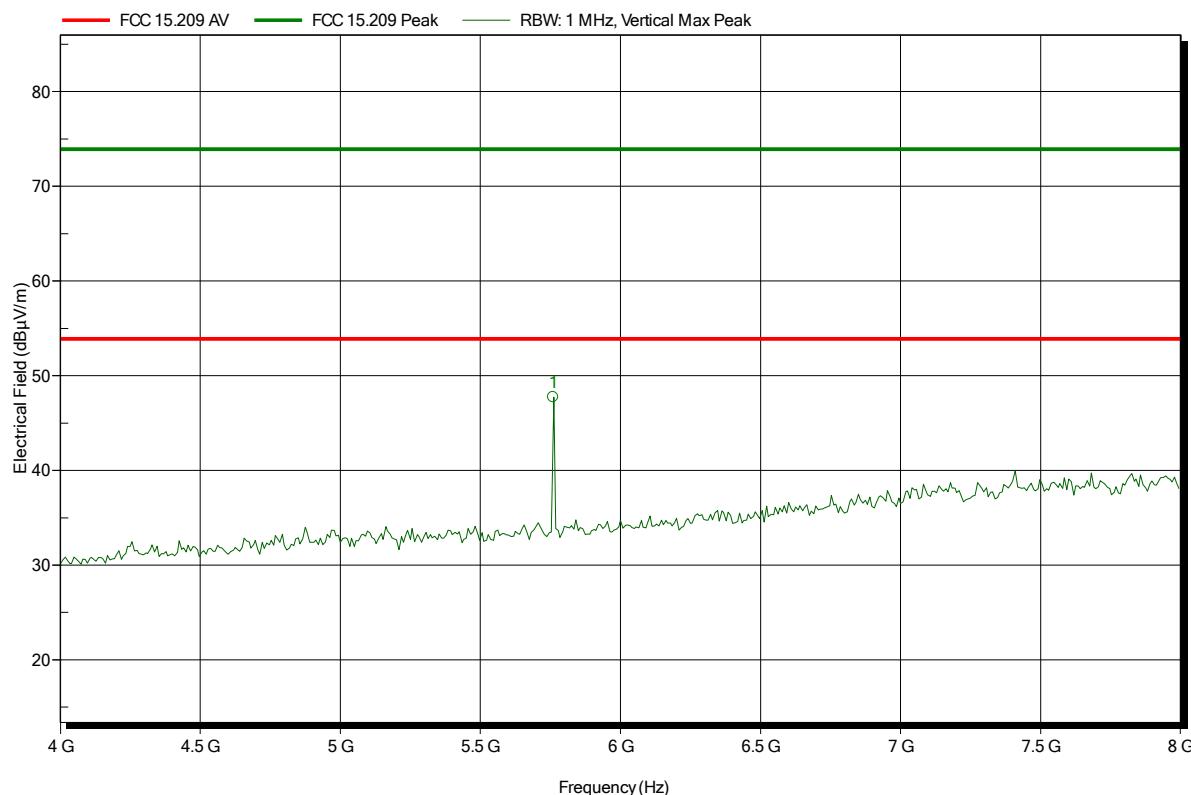

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m  
Mode: TX; channel 4; antenna 1  
Test Date: 2014-09-29  
Note:

Index 32

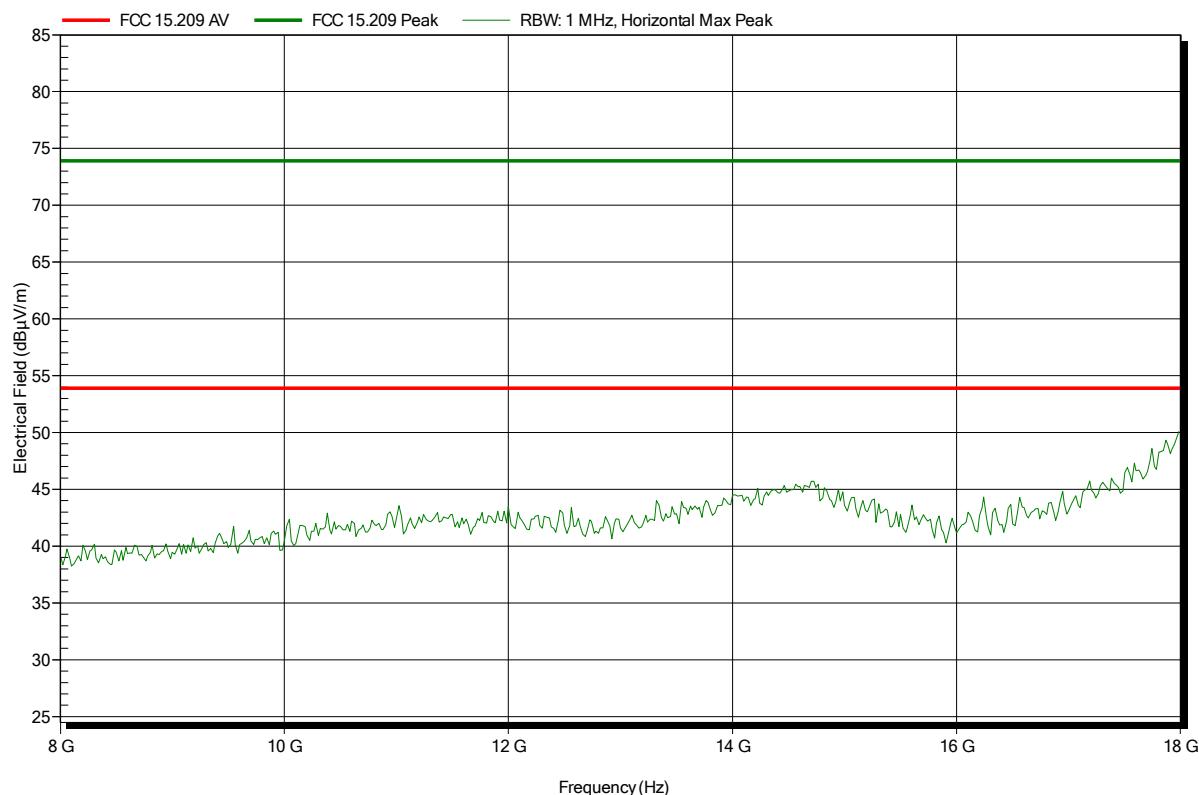

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 76 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: T<sub>nom</sub>: 25°C, V<sub>nom</sub>: 3.7 vDC lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m  
Mode: TX; channel 4; antenna 1  
Test Date: 2014-09-29  
Note:

Index 35

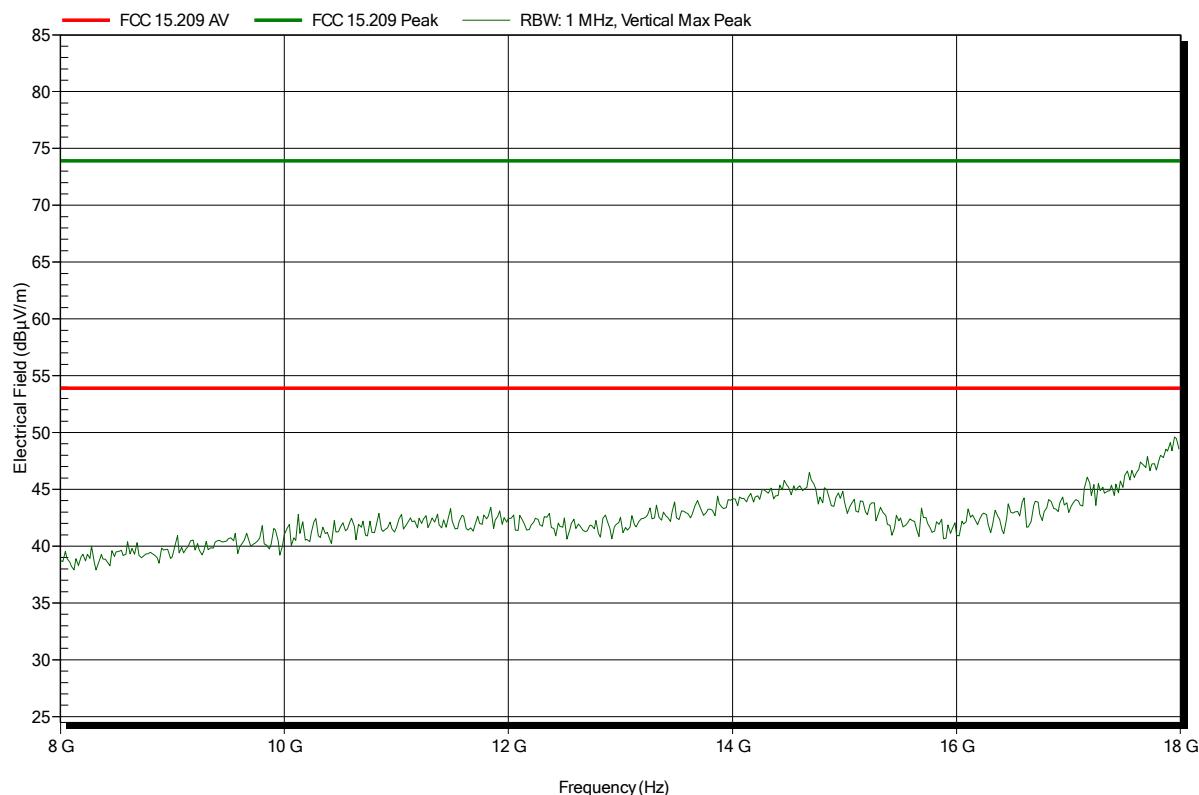

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 77 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 025, Horizontal  
Measurement distance: 1 m  
Mode: TX; channel 4; antenna 1  
Test Date: 2014-09-29  
Note:

Index 33

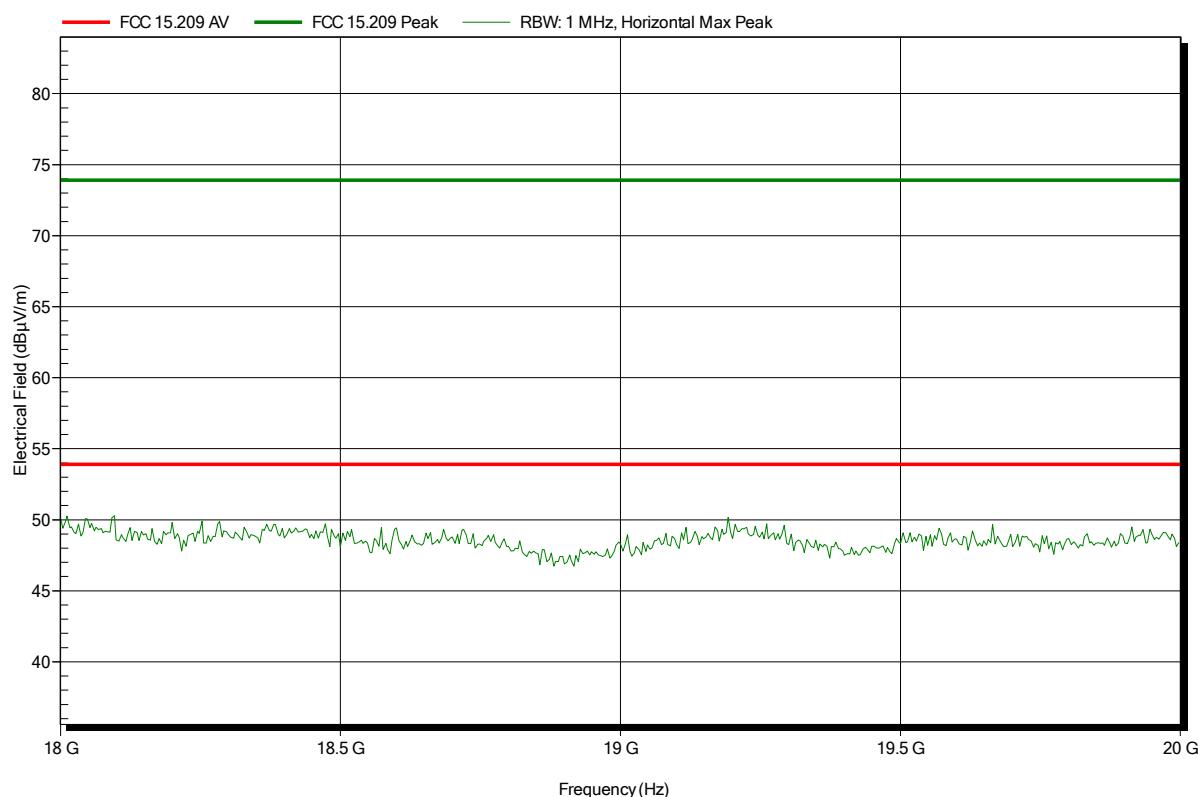

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 78 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 025, Vertical  
Measurement distance: 1 m  
Mode: TX; channel 4; antenna 1  
Test Date: 2014-09-29  
Note:

Index 36

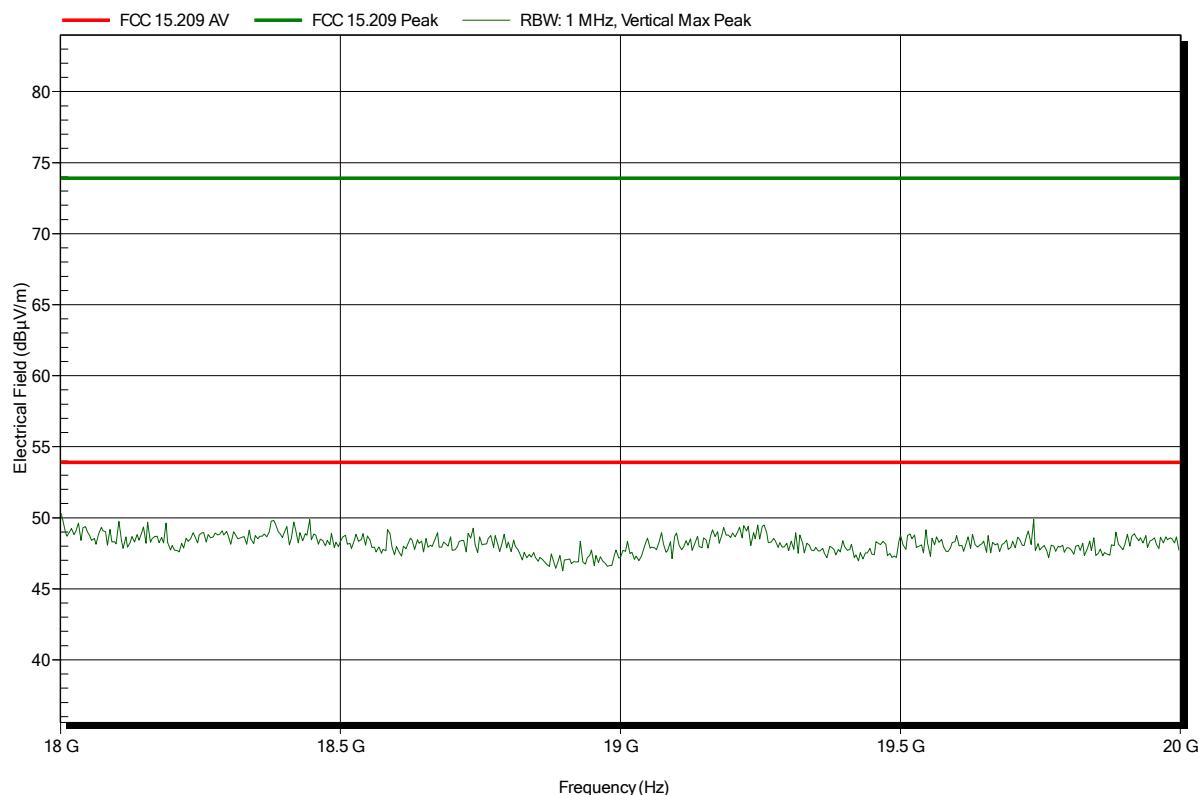


**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HK 116, Horizontal  
Measurement distance: 3 m  
Mode: TX; channel 0; antenna 0  
Test Date: 2014-09-29  
Note: worst case

Index 7

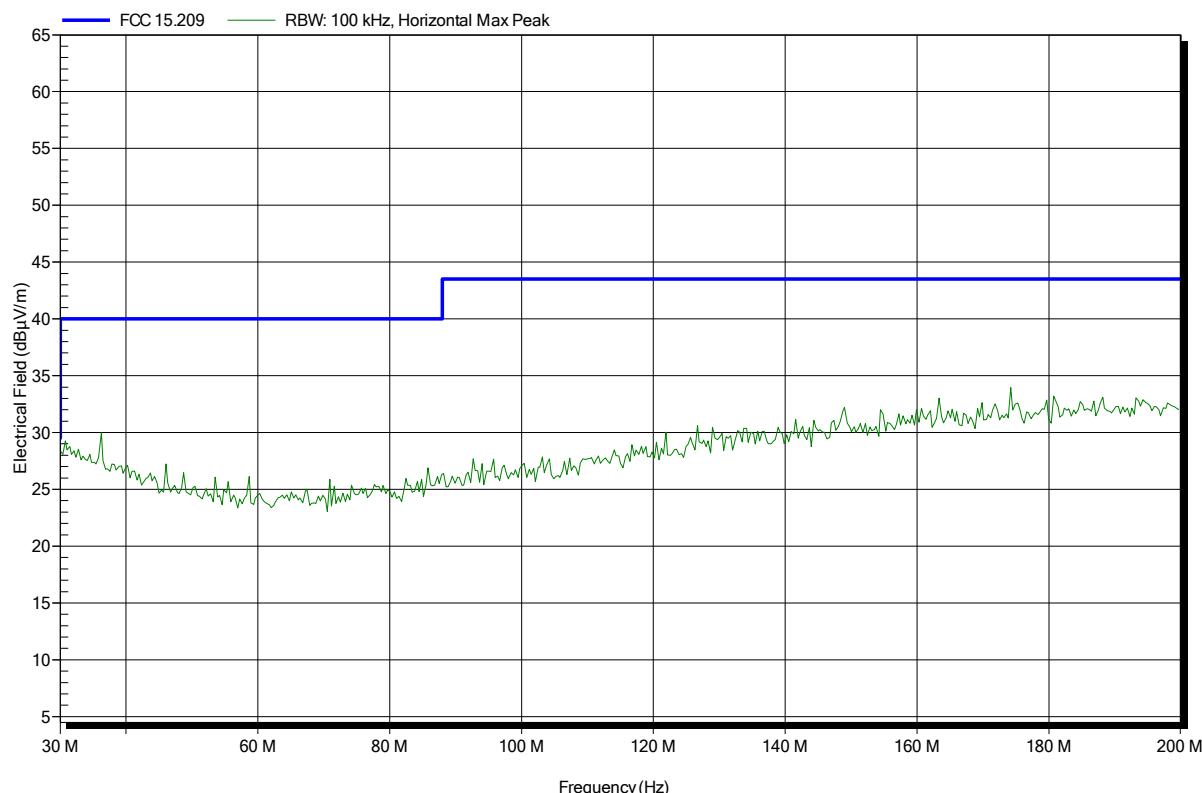


**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HK 116, Vertical  
Measurement distance: 3 m  
Mode: TX; channel 0; antenna 0  
Test Date: 2014-09-29  
Note: worst case

Index 8

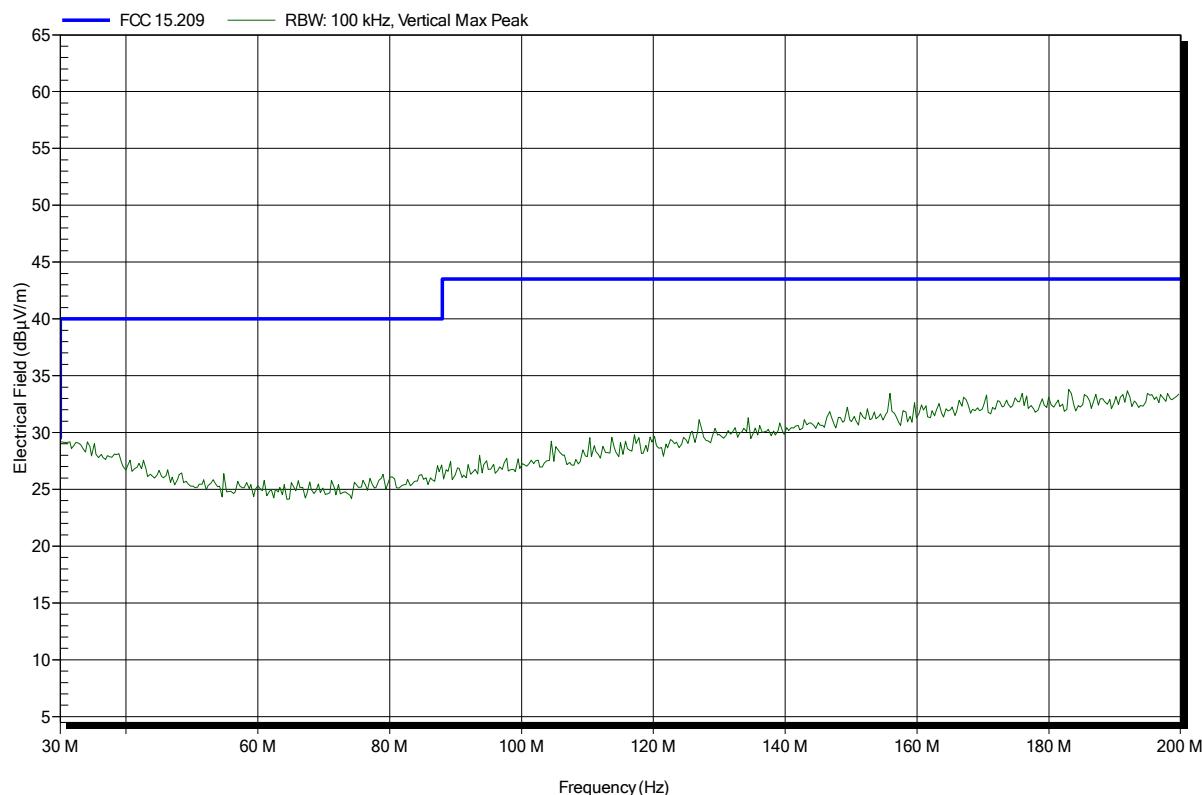

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 81 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 223, Horizontal  
Measurement distance: 3 m  
Mode: TX; channel 0; antenna 0  
Test Date: 2014-09-29  
Note: worst case

Index 10

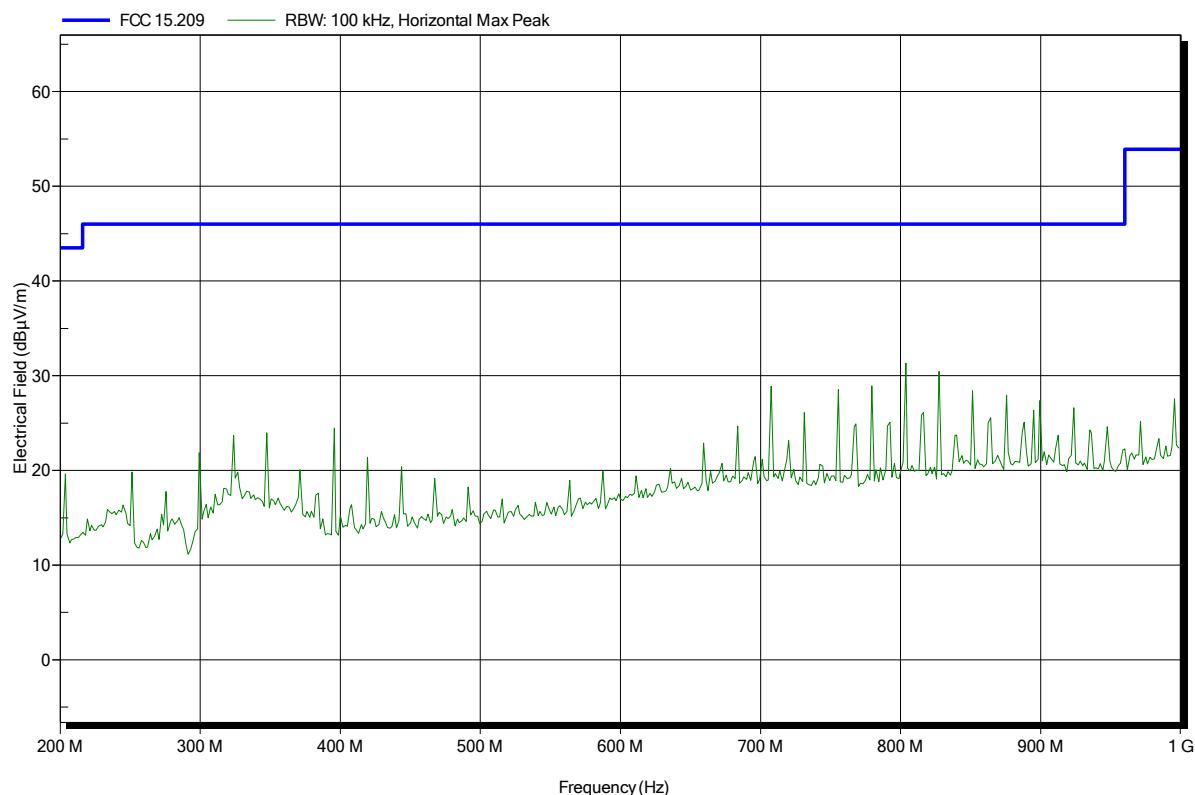

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 82 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 223, Vertical  
Measurement distance: 3 m  
Mode: TX; channel 0; antenna 0  
Test Date: 2014-09-29  
Note: worst case

Index 9

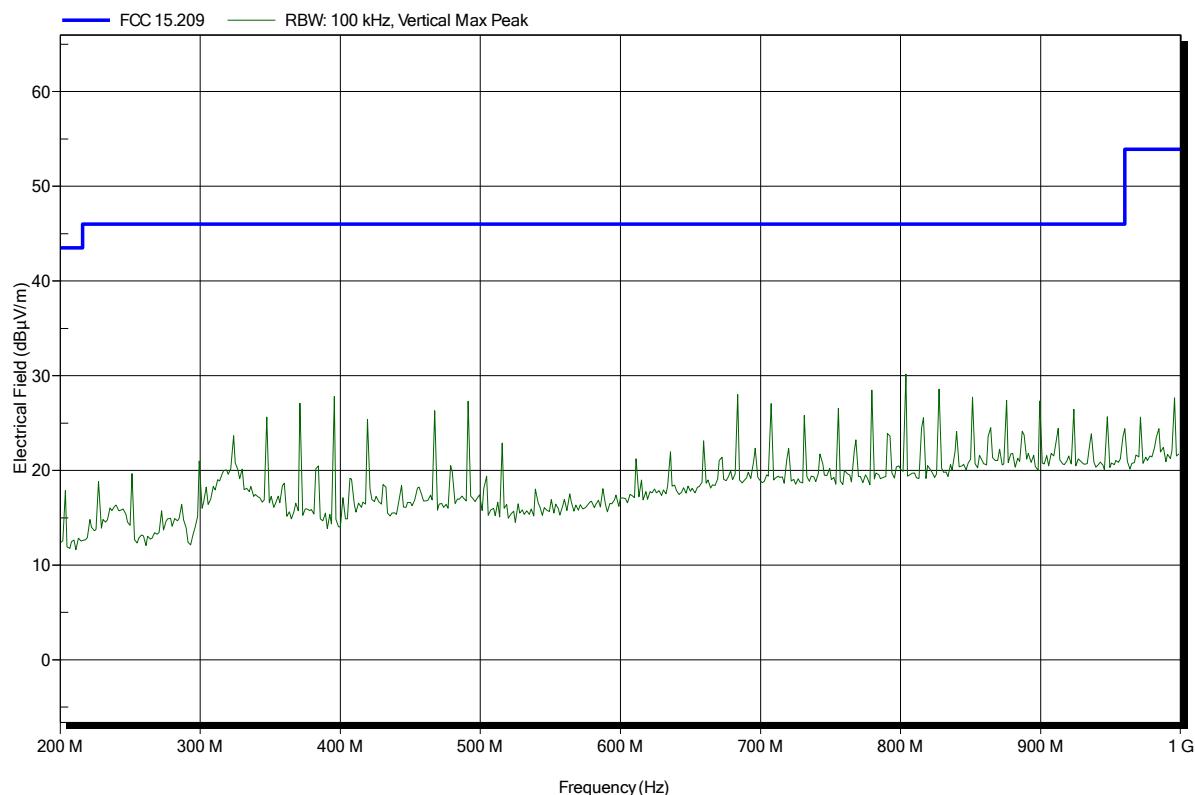


**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; channel 0; antenna 0  
 Test Date: 2014-09-29  
 Note: with notch-filter

Index 18

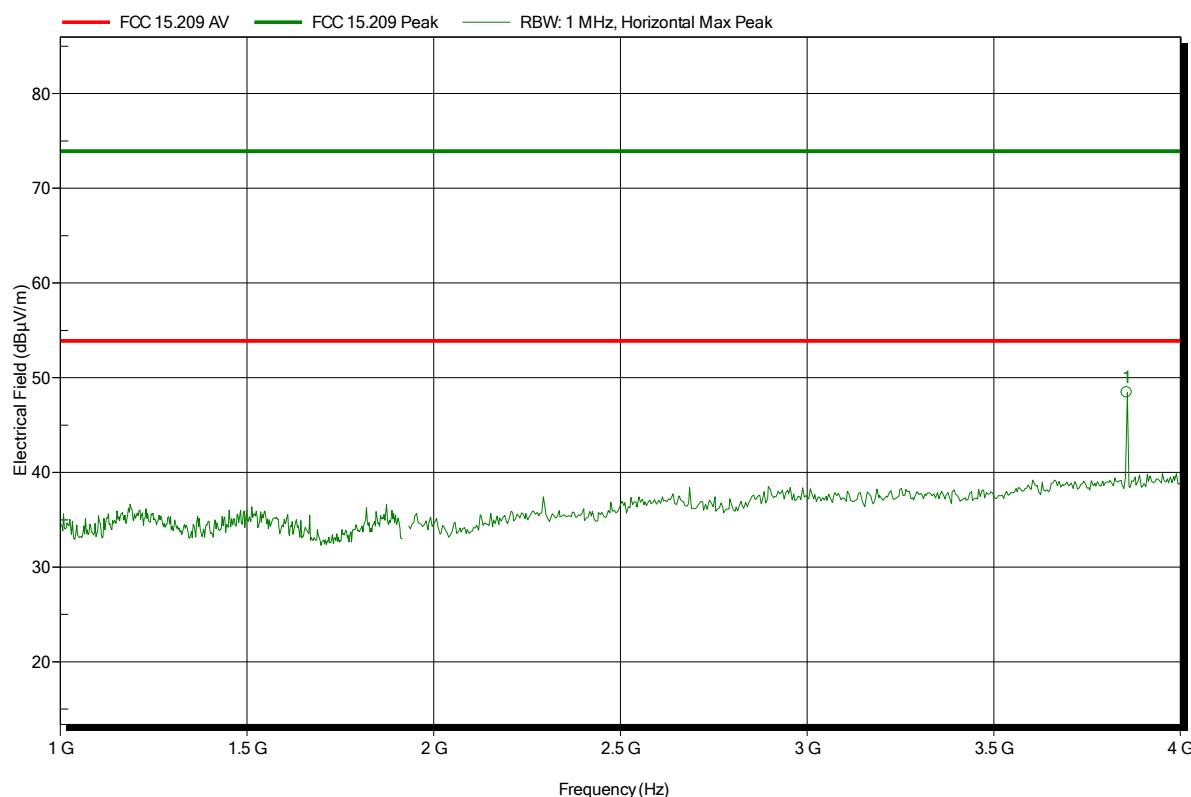

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; channel 0; antenna 0  
 Test Date: 2014-09-29  
 Note: with notch-filter

Index 17

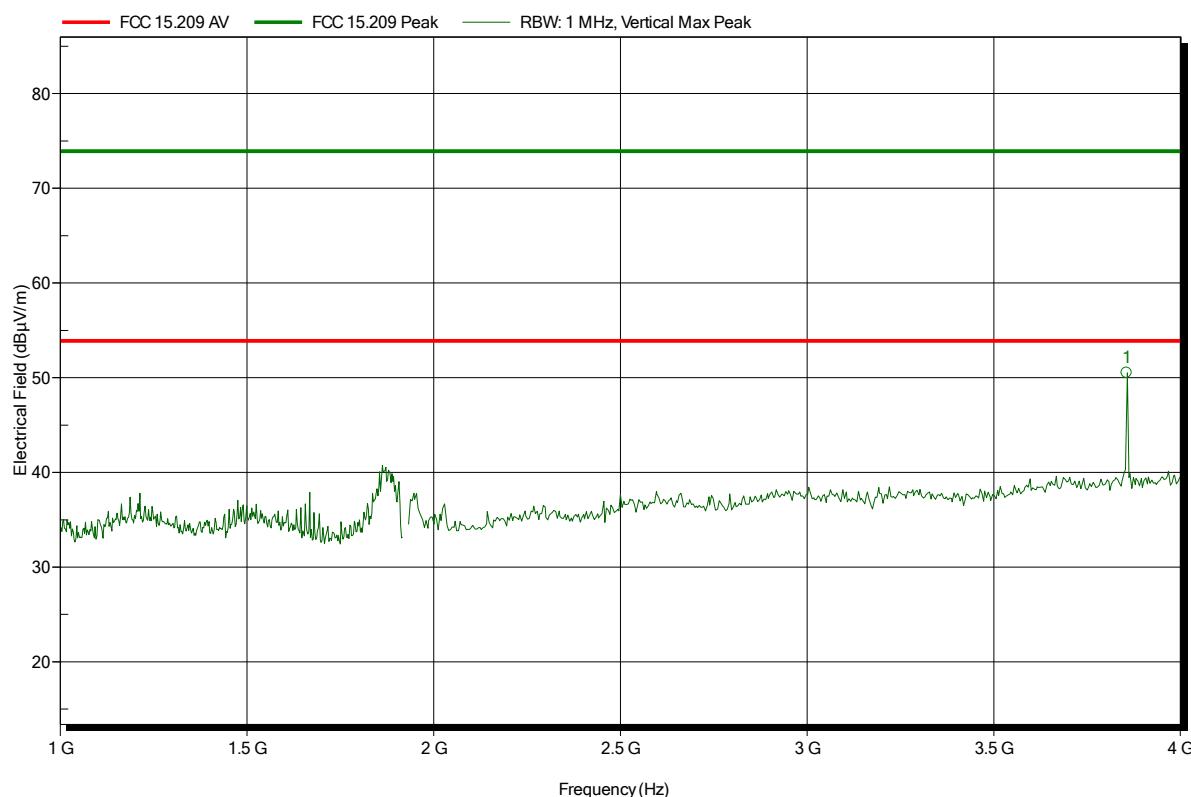

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 85 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; channel 0; antenna 0  
 Test Date: 2014-09-29  
 Note:

Index 15

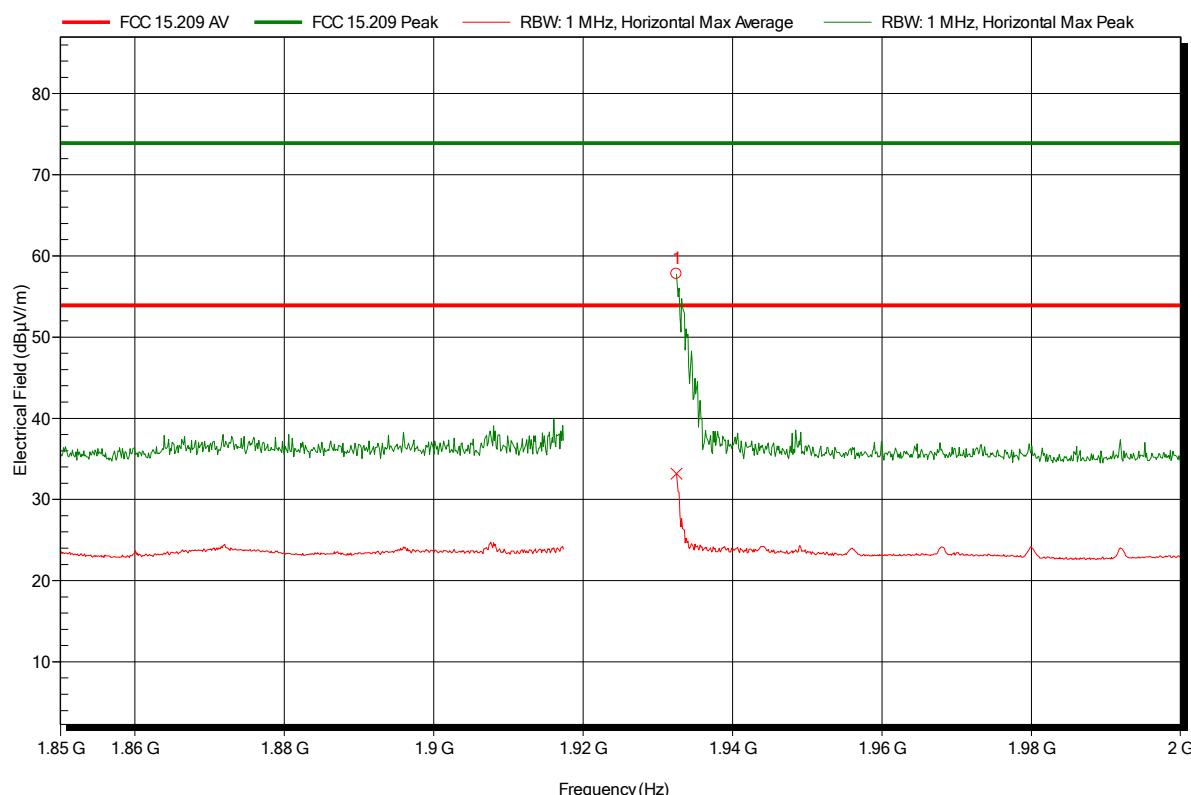


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9325 GHz	57.8 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-16.1 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9325 GHz	33.17 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-20.73 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; channel 0; antenna 0  
 Test Date: 2014-09-29  
 Note:

Index 16

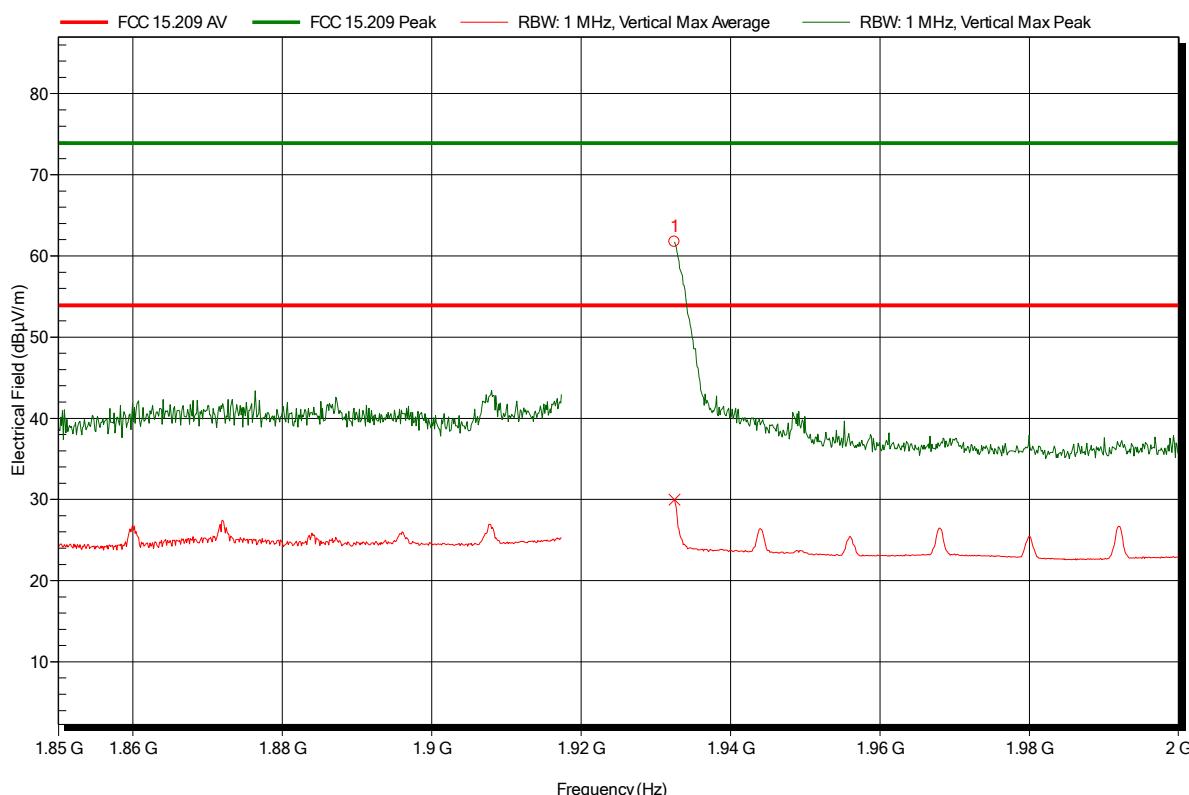


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9325 GHz	61.73 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-12.17 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9325 GHz	29.98 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-23.92 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m  
 Mode: TX; channel 0; antenna 0  
 Test Date: 2014-09-29  
 Note:

Index 19

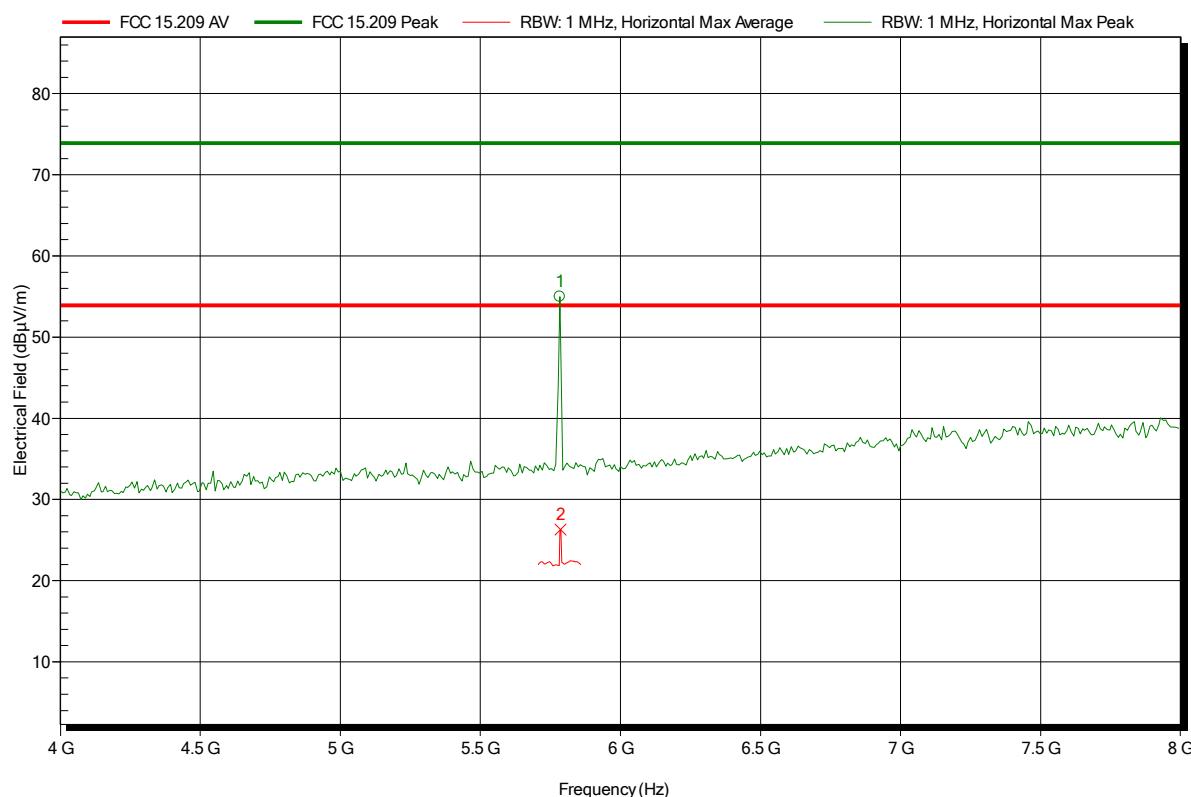


Frequency	Peak	Peak Limit	Peak Difference	Status
5.784 GHz	54.97 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-18.93 dB	Pass
5.786 GHz				Pass
Frequency	Average	Average Limit	Average Difference	Average Status
5.784 GHz	26.29 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-27.61 dB	Pass
5.786 GHz				

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m  
 Mode: TX; channel 0; antenna 0  
 Test Date: 2014-09-29  
 Note:

Index 22

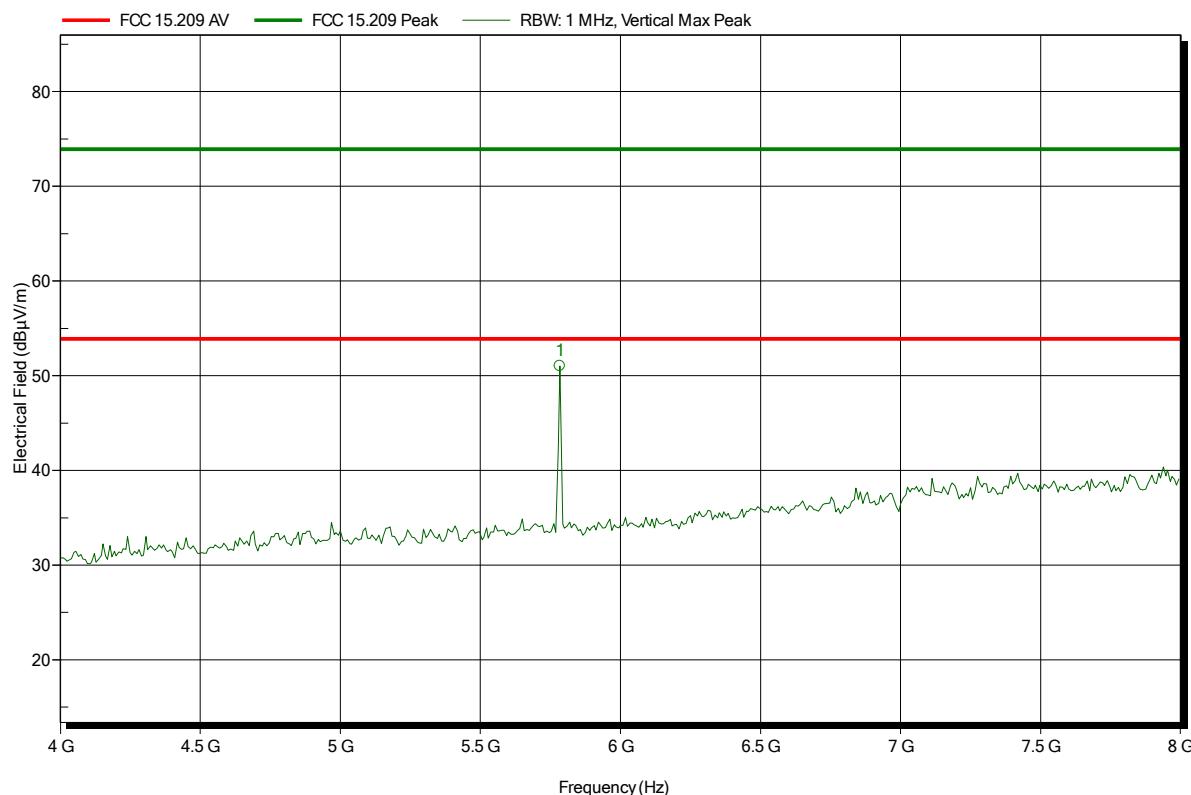


**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m  
Mode: TX; channel 0; antenna 0  
Test Date: 2014-09-29  
Note:

Index 20

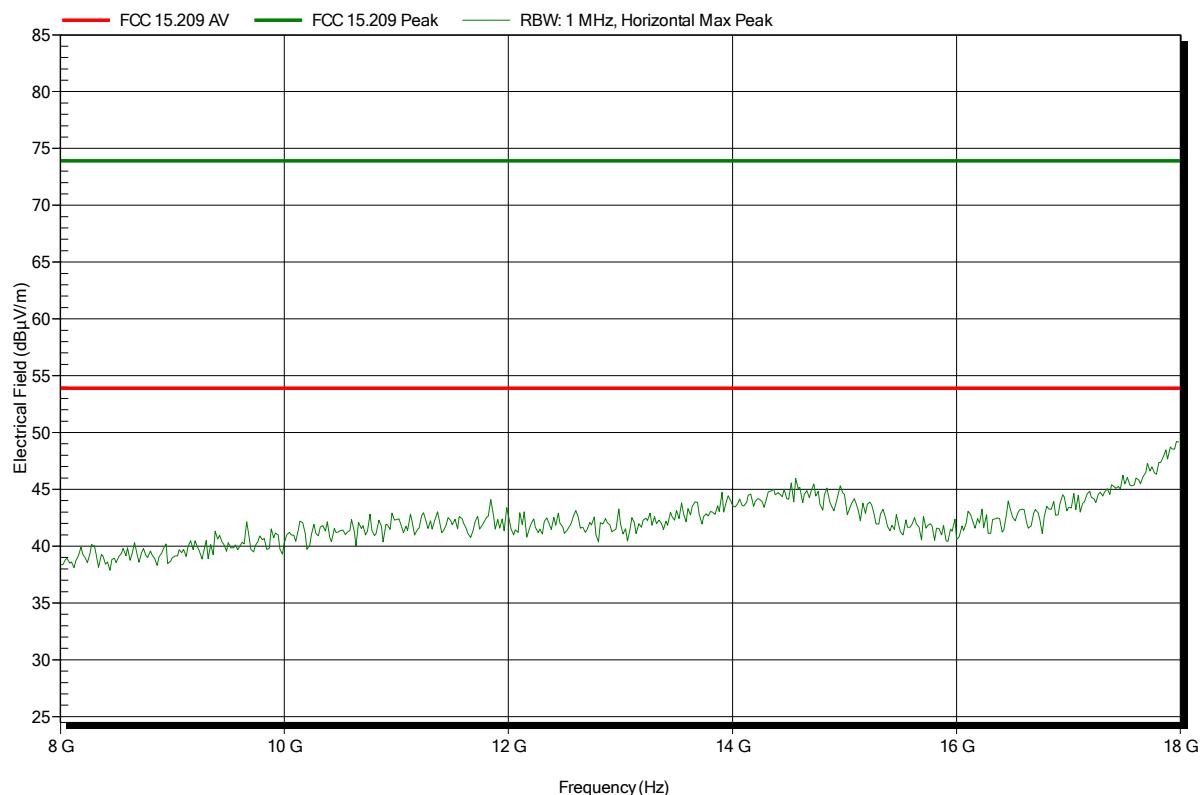

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 90 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}$ : 25°C,  $V_{nom}$ : 3.7 vDC lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m  
Mode: TX; channel 0; antenna 0  
Test Date: 2014-09-29  
Note:

Index 23

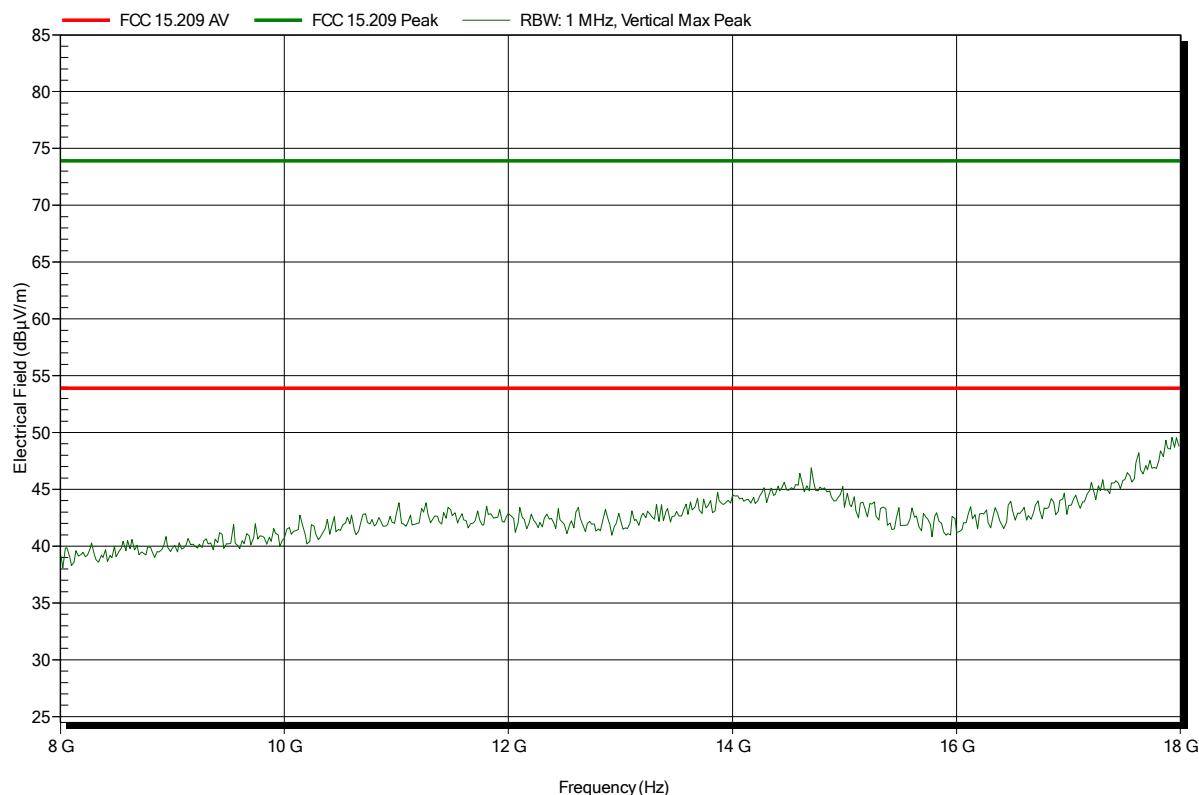

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 91 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 025, Horizontal  
Measurement distance: 1 m  
Mode: TX; channel 0; antenna 0  
Test Date: 2014-09-29  
Note:

Index 21

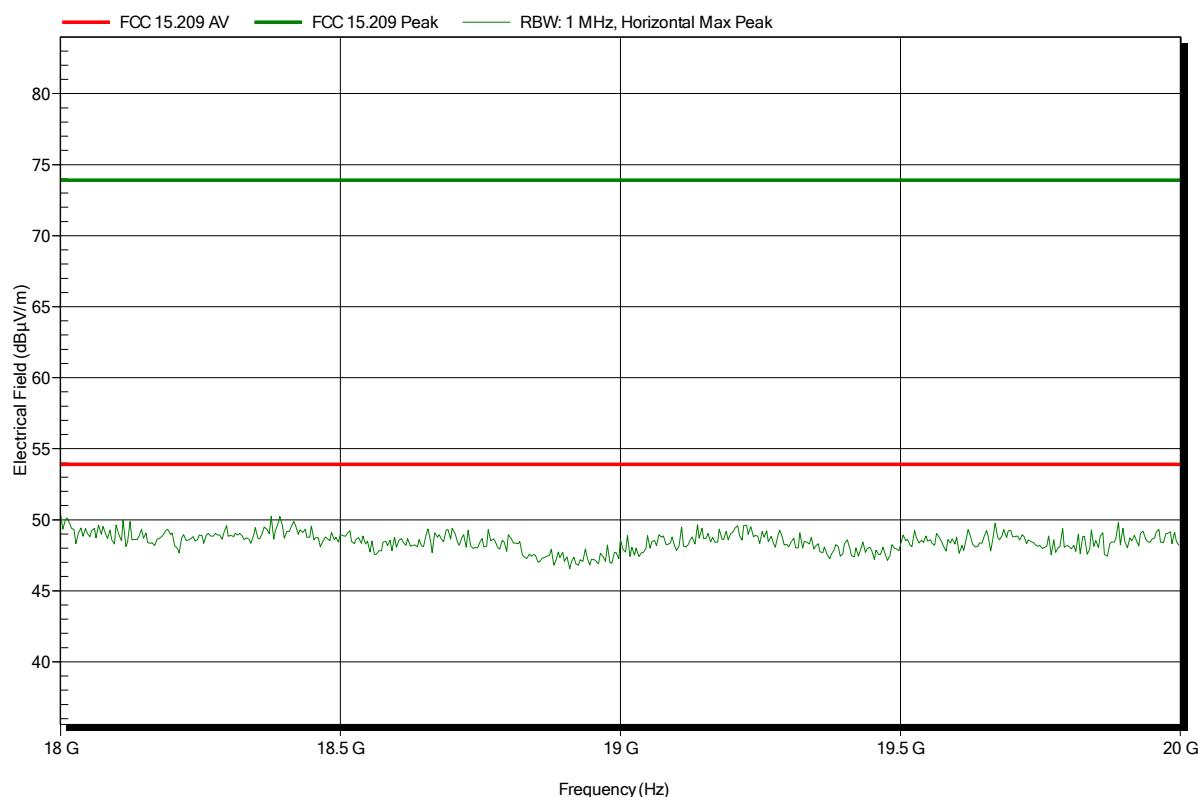

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 92 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 025, Vertical  
Measurement distance: 1 m  
Mode: TX; channel 0; antenna 0  
Test Date: 2014-09-29  
Note:

Index 24

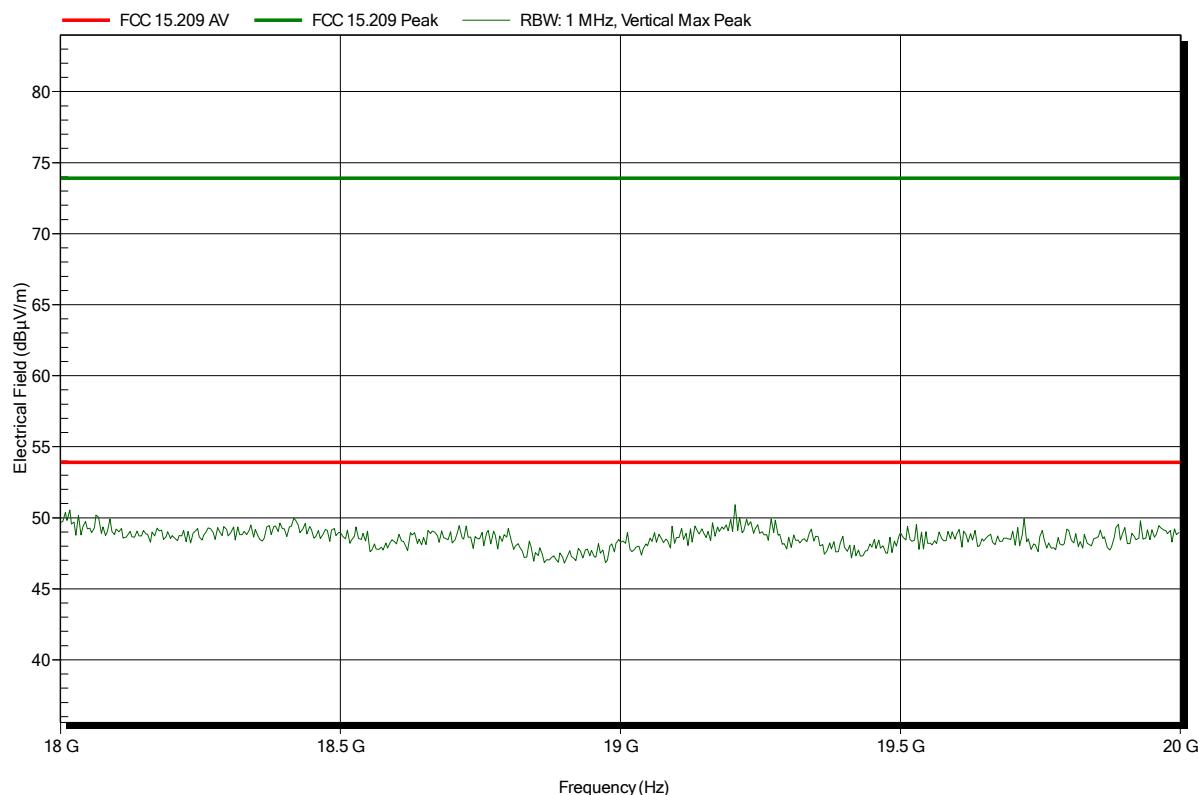

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 93 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; channel 0; antenna 1  
 Test Date: 2014-09-29  
 Note: with notch-filter

Index 43

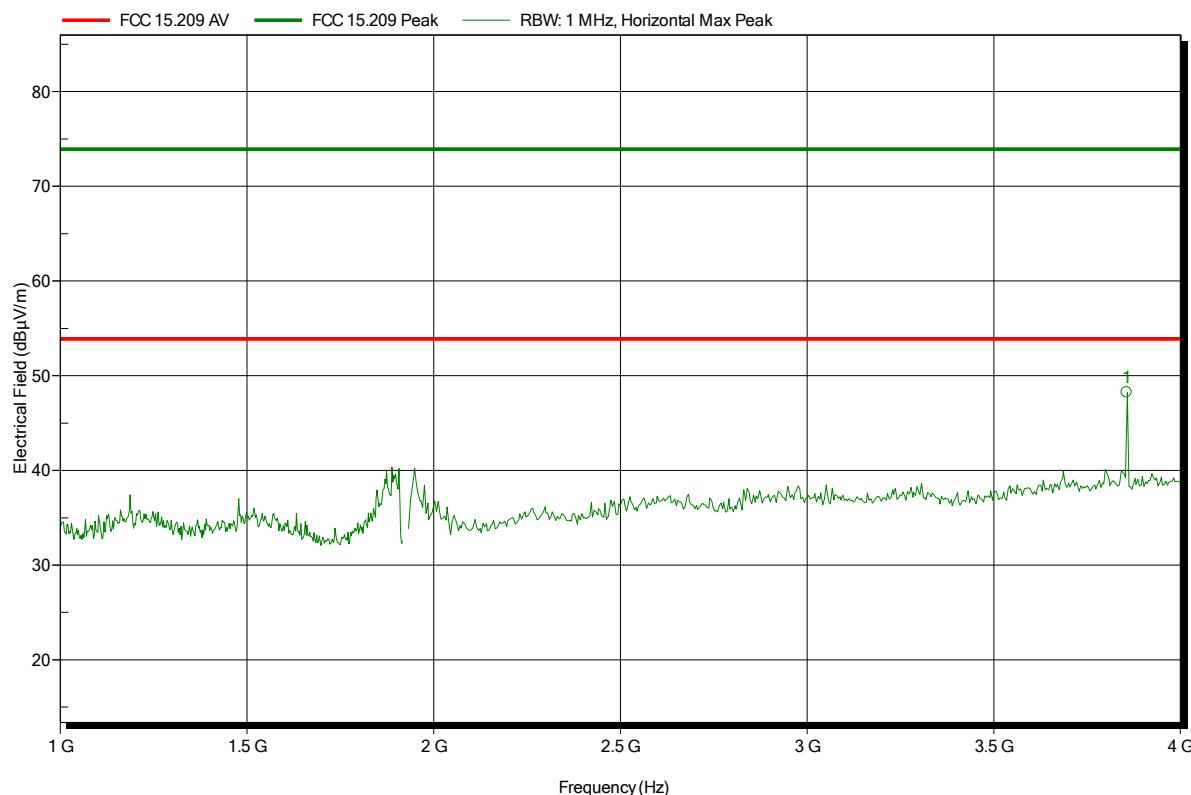


Frequency	Peak	Peak Limit	Peak Difference	Status
3.8553 GHz	48.23 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-25.67 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; channel 0; antenna 1  
 Test Date: 2014-09-29  
 Note: with notch-filter

Index 44

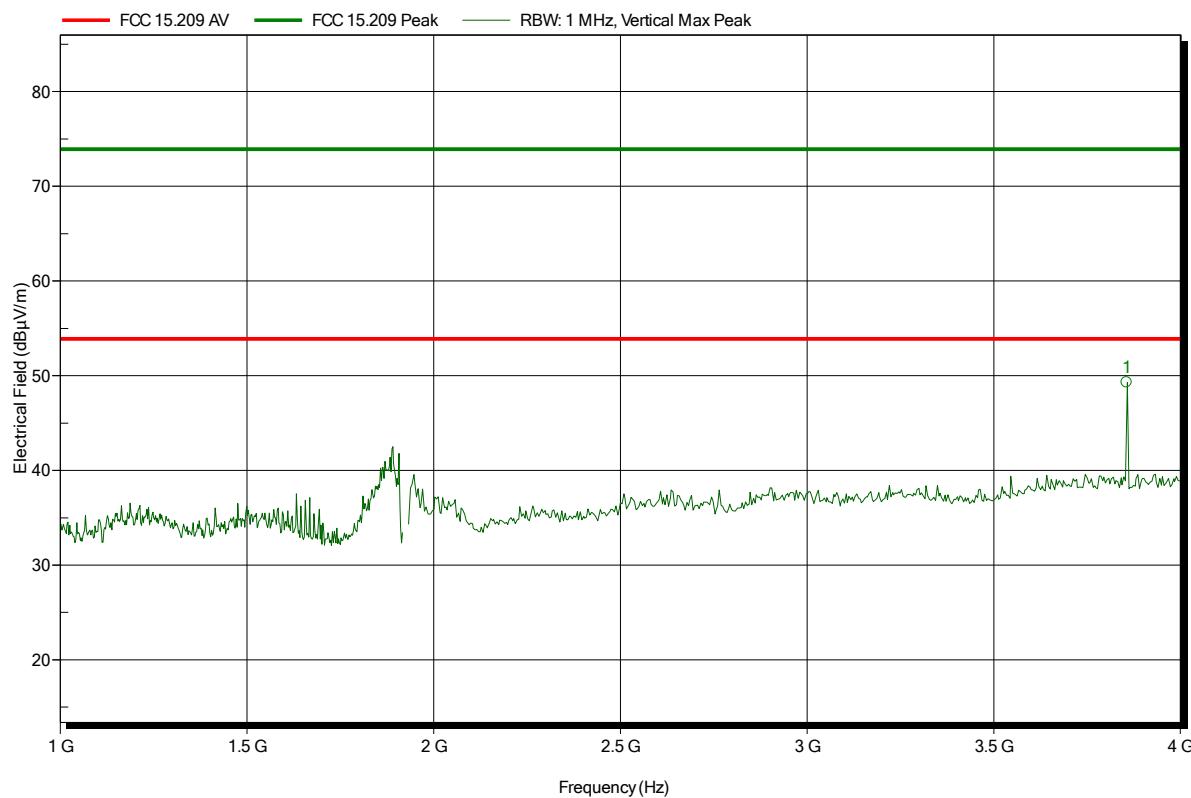

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 95 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; channel 0; antenna 1  
 Test Date: 2014-09-30  
 Note:

Index 50

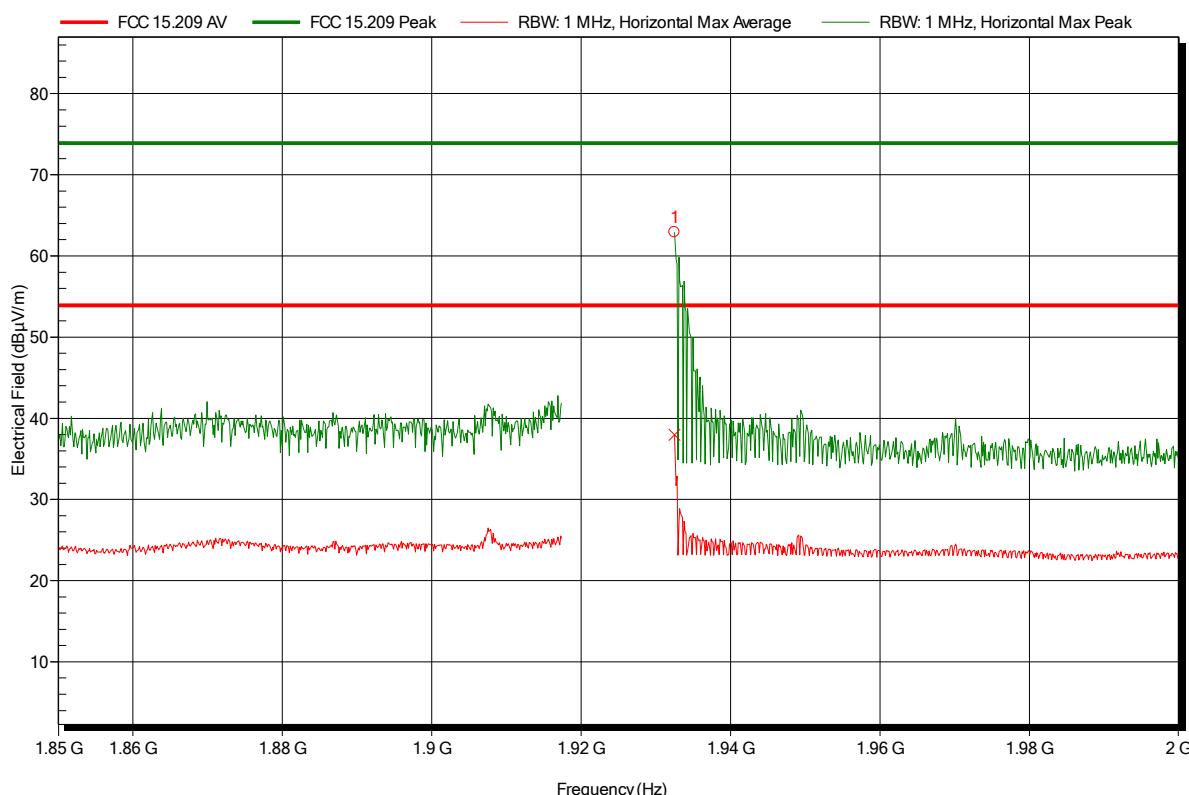


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9325 GHz	62.94 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-10.96 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9325 GHz	37.95 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-15.95 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; channel 0; antenna 1  
 Test Date: 2014-09-30  
 Note:

Index 51

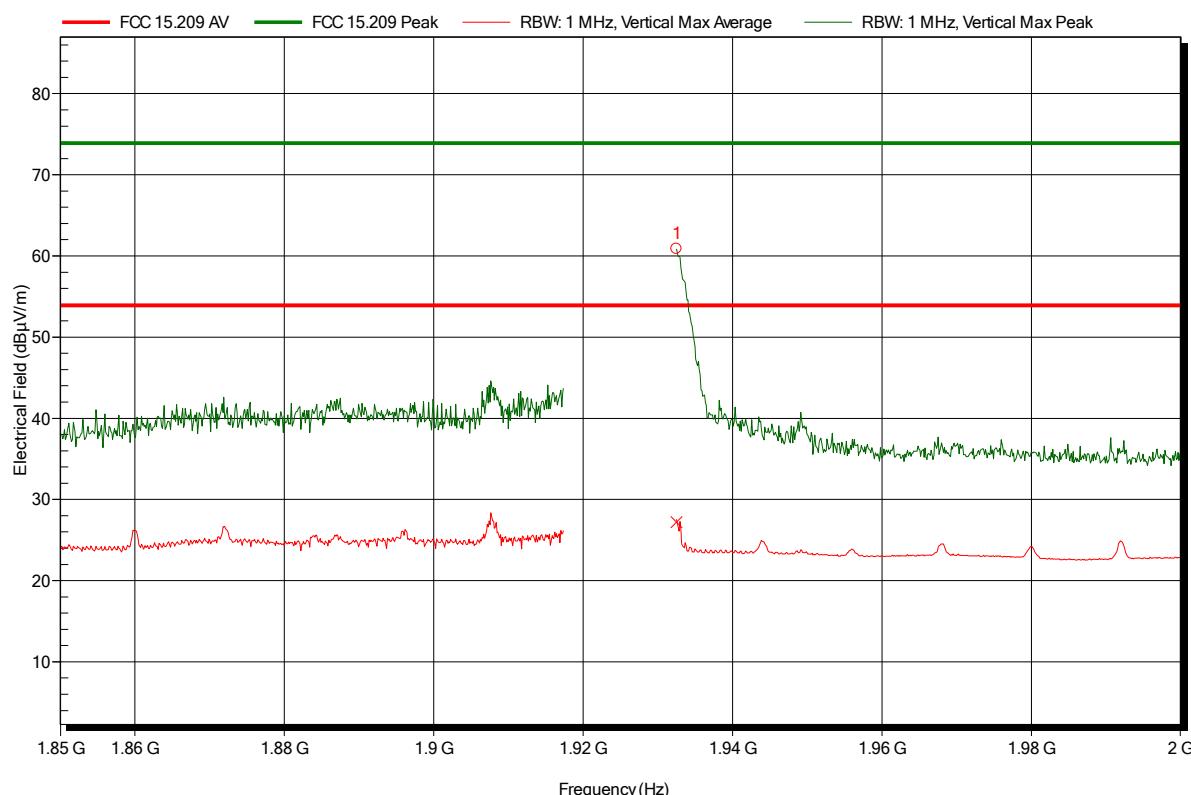


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9325 GHz	60.88 dB $\mu$ V/m	73.9 dB $\mu$ V/m	-13.02 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9325 GHz	27.19 dB $\mu$ V/m	53.9 dB $\mu$ V/m	-26.71 dB	Pass

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m  
 Mode: TX; channel 0; antenna 1  
 Test Date: 2014-09-29  
 Note:

Index 37

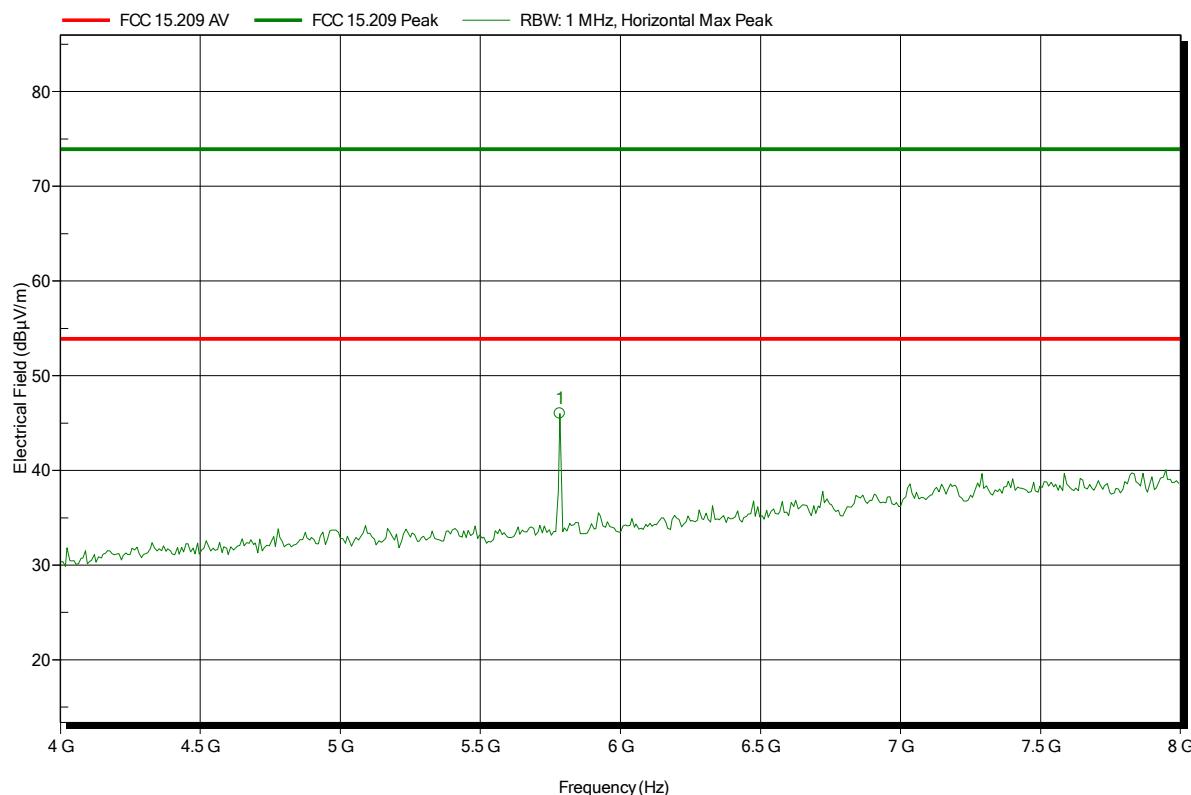

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m  
 Mode: TX; channel 0; antenna 1  
 Test Date: 2014-09-29  
 Note:

Index 39

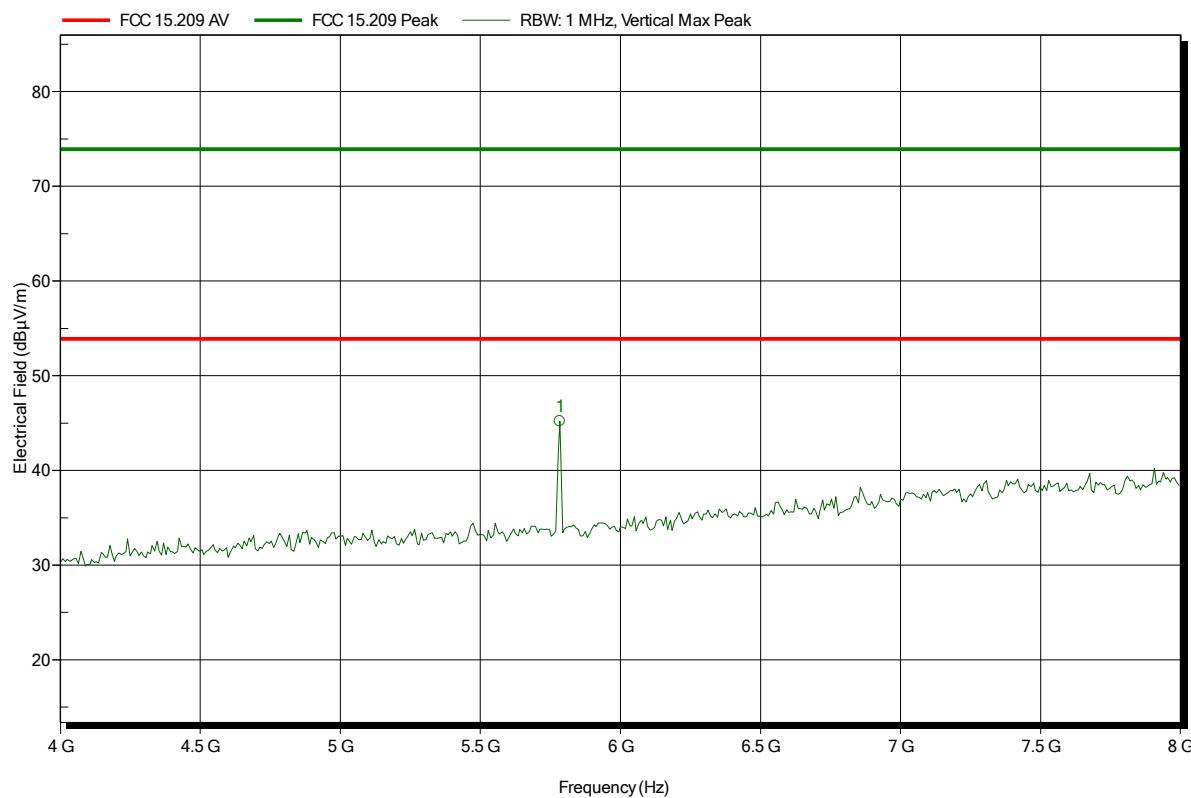

Test Report No.: G0M-1408-4062-TFC15DFP77-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m  
Mode: TX; channel 0; antenna 1  
Test Date: 2014-09-29  
Note:

Index 38

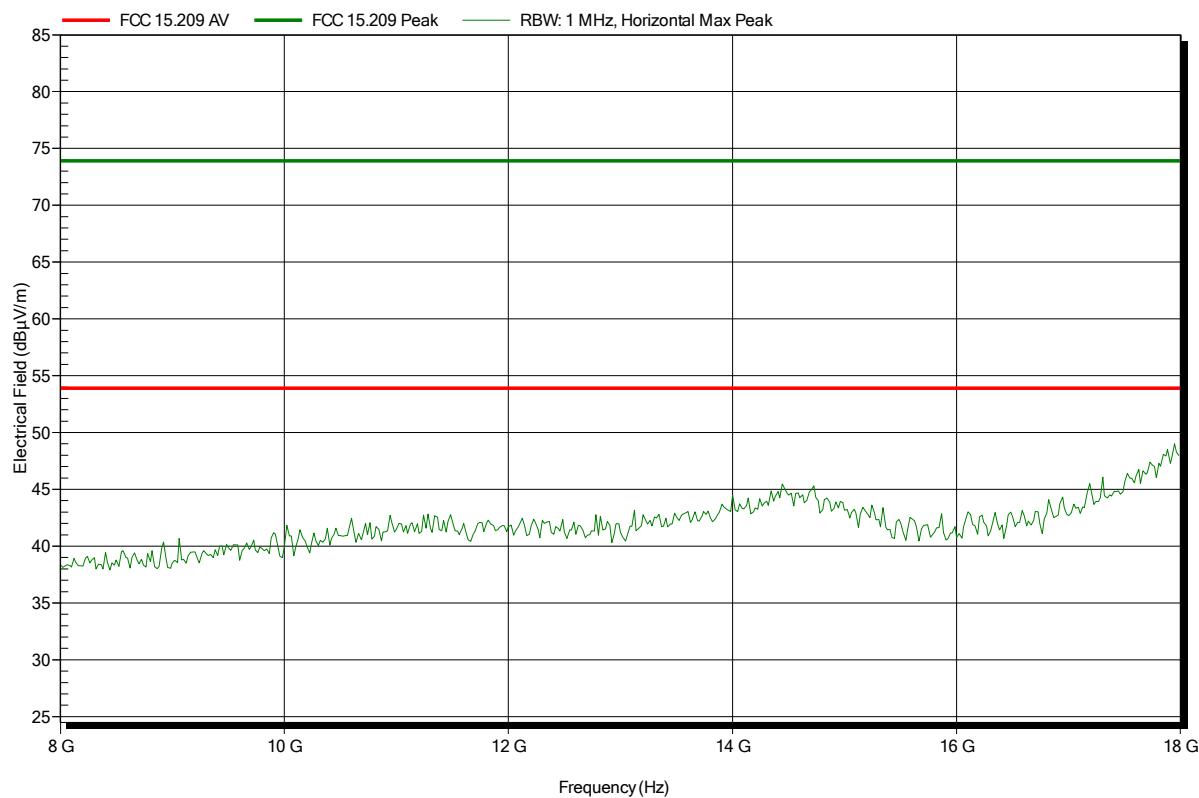

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 100 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ vDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m  
Mode: TX; channel 0; antenna 1  
Test Date: 2014-09-29  
Note:

Index 40

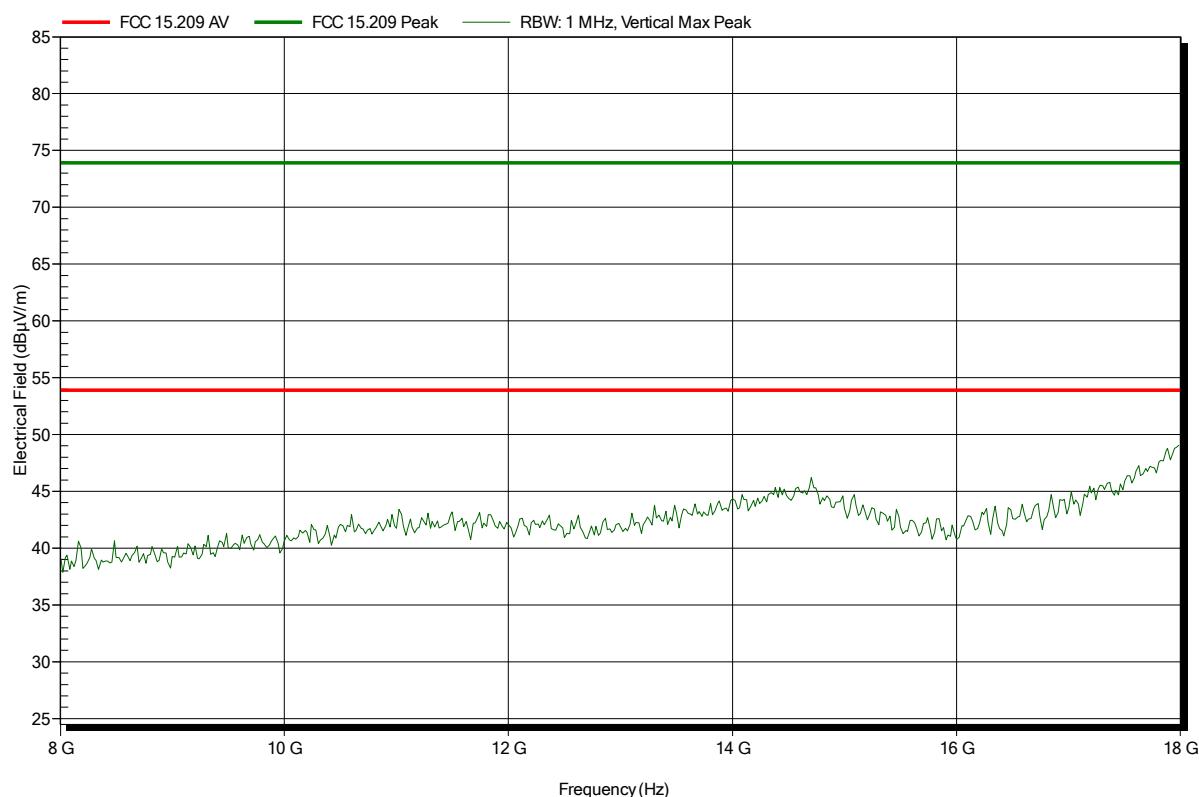

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 101 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 025, Horizontal  
Measurement distance: 1 m  
Mode: TX; channel 0; antenna 1  
Test Date: 2014-09-29  
Note:

Index 42

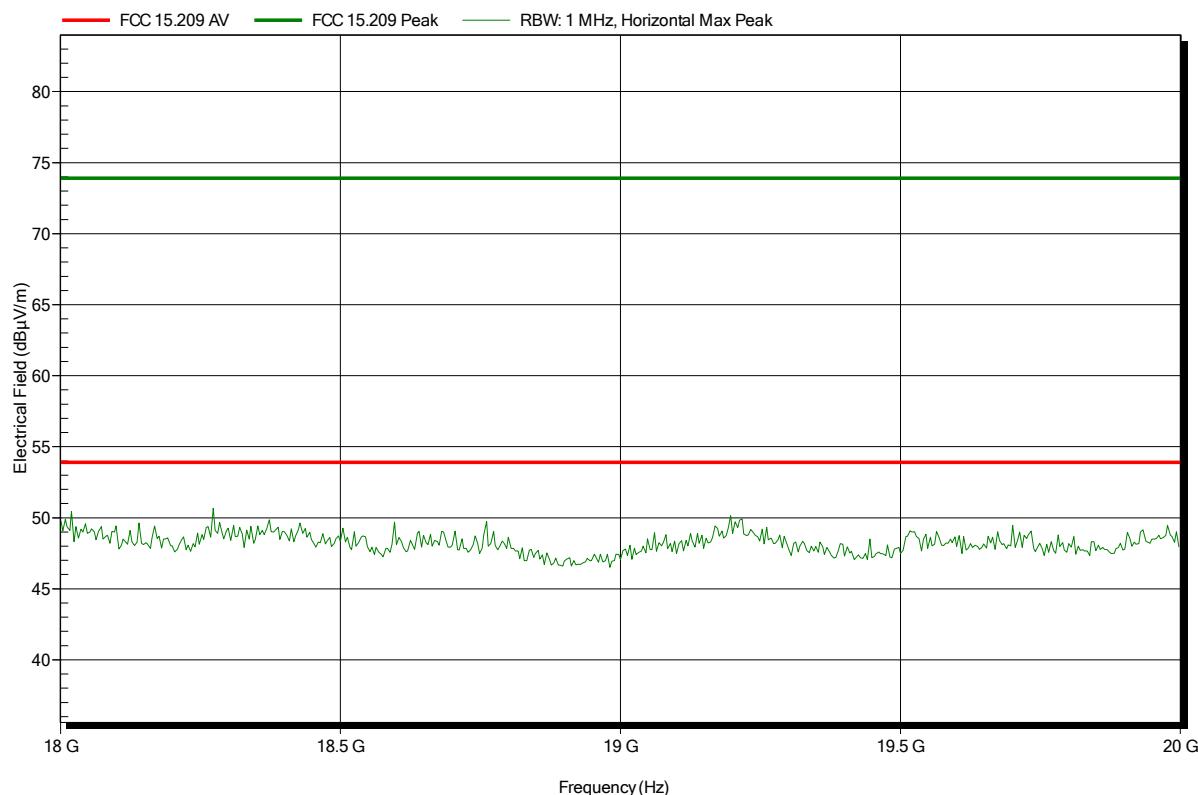

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 102 of 136

**Spurious emissions according to FCC 15.209**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ vDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 025, Vertical  
Measurement distance: 1 m  
Mode: TX; channel 0; antenna 1  
Test Date: 2014-09-29  
Note:

Index 41

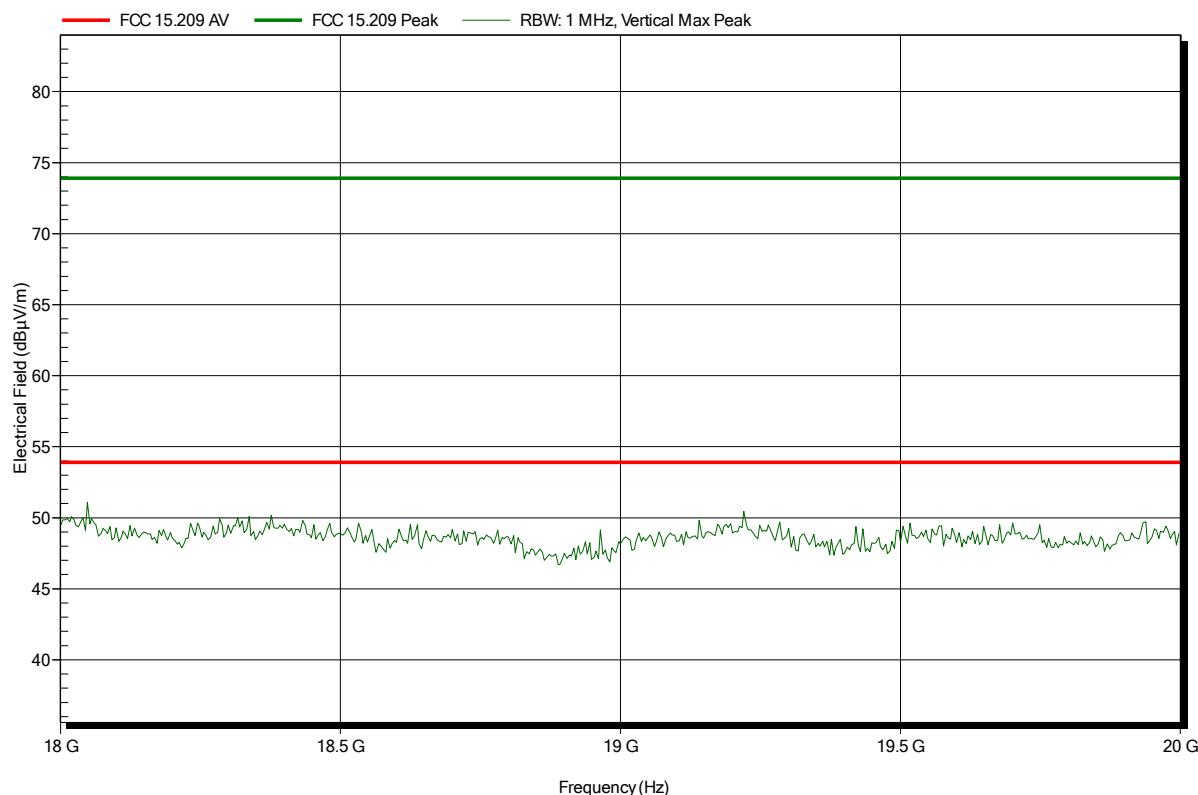

---


Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 103 of 136

### 3.13 Test Conditions and Results – Receiver spurious emissions
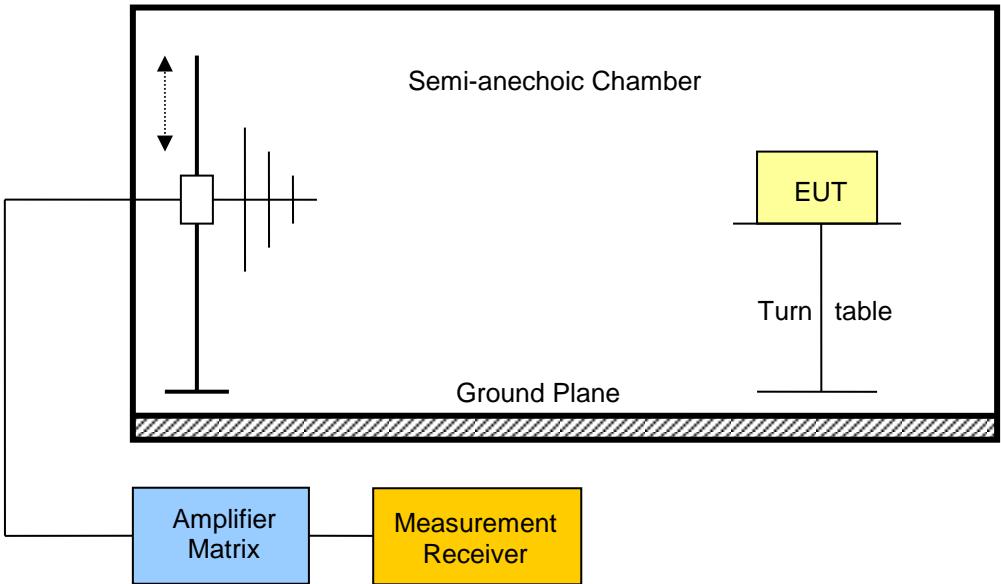
<b>Receiver spurious emissions acc. to IC RSS-213</b>		<b>Verdict: PASS</b>		
Test according referenced standards	Reference Method			
	IC RSS-210 A8.5			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Tested frequencies	Scan (All)			
Tested frequency range	30 MHz – 3 <sup>th</sup> Harmonic			
EUT test mode	Receive			
<b>Limits</b>				
Frequency range [MHz]	Detector	Limit [ $\mu$ V/m]	Limit [dB $\mu$ V/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
<b>Test setup</b>				
				


Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dB $\mu$ V/m]	Pol.	Det.	Limit [dB $\mu$ V/m]	Margin [dB]
F <sub>MID</sub>	1924.992	419.2	30.24	ver	pk	46.00	-15.76
Comments: * Physical distance between EUT and measurement antenna. ** Emission level corresponds to ambient noise floor							

### Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom}: 25^{\circ}\text{C}$ ,  $V_{nom}: 3.7 \text{ VDC}$  lithium battery  
Antenna: Rohde & Schwarz HK 116, Vertical  
Measurement distance: 3 m  
Mode: RX; DECT ch.2 and BT ch.39 active  
Test Date: 2014-10-02  
Note:

Index 92

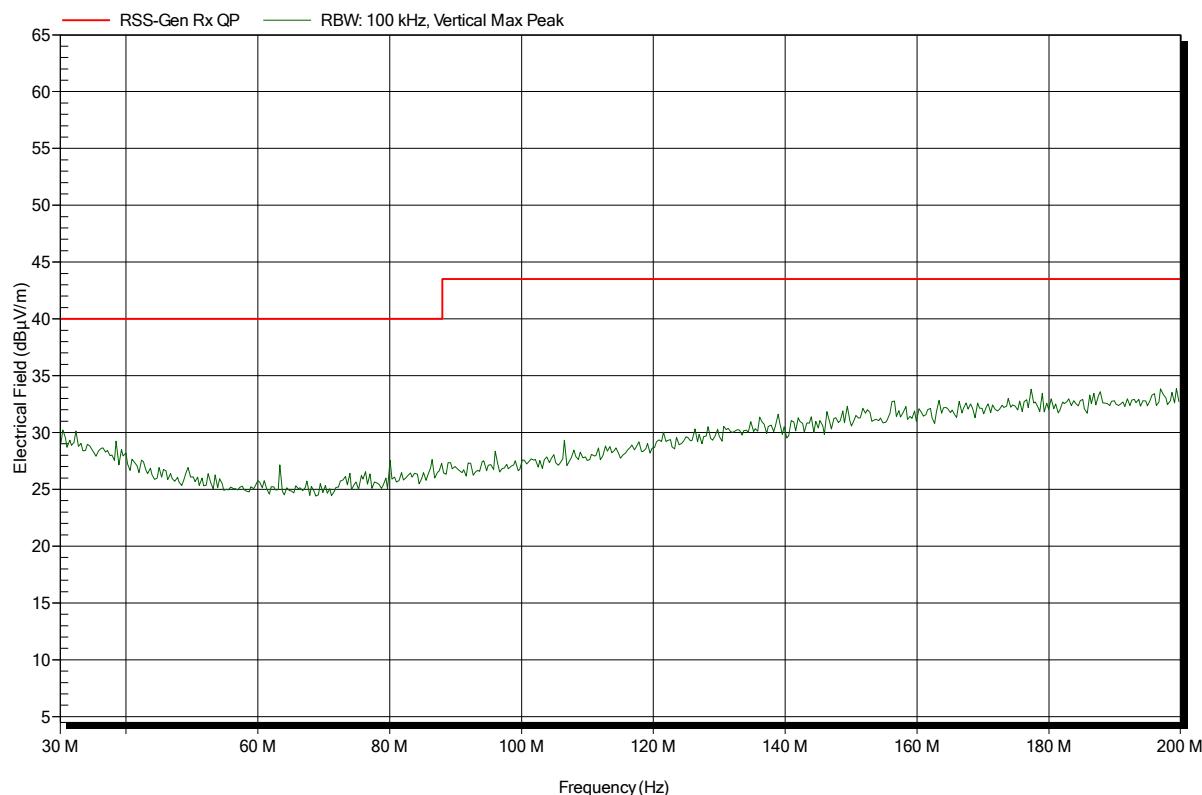

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 106 of 136

### Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^\circ\text{C}$ ,  $V_{nom} = 3.7 \text{ VDC}$  lithium battery  
Antenna: Rohde & Schwarz HL 223, Horizontal  
Measurement distance: 3 m  
Mode: RX; DECT ch.2 and BT ch.39 active  
Test Date: 2014-10-02  
Note:

Index 93

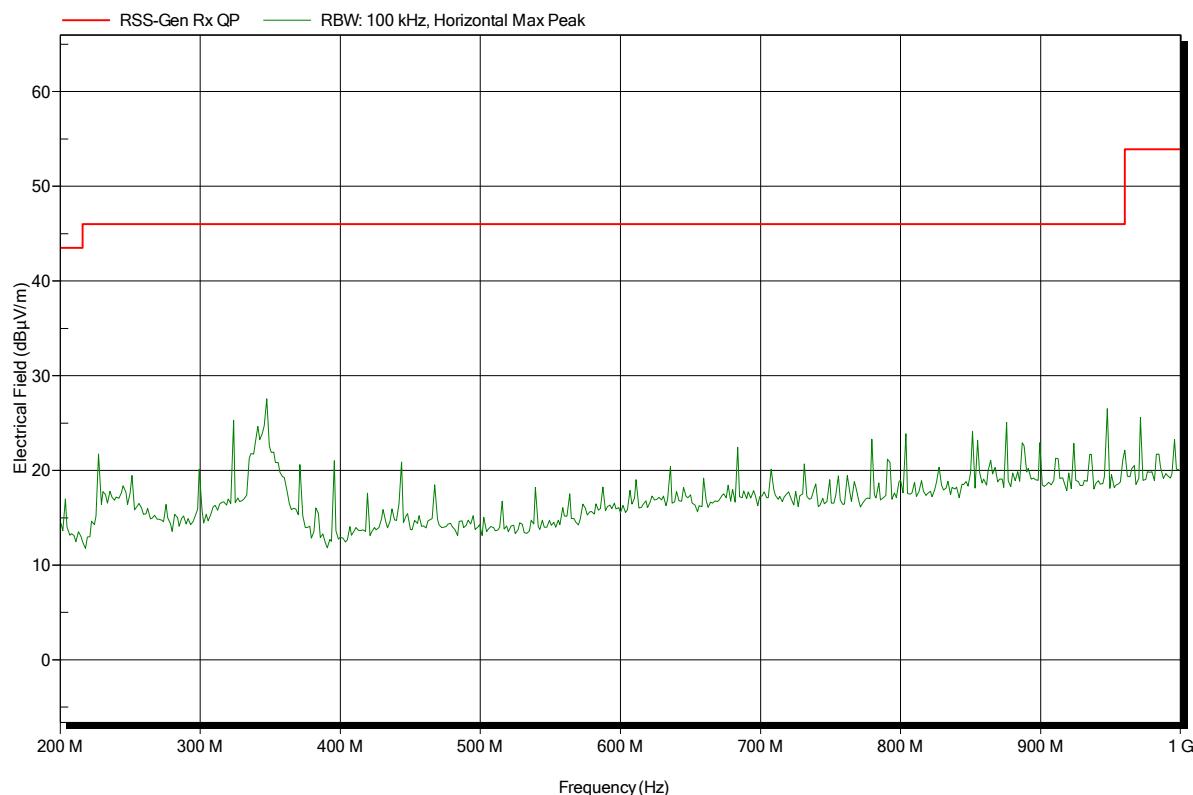

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 107 of 136

**Spurious emissions according to RSS-GEN**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
 EUT Name: Communications Headset  
 Model: AXP379  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions:  $T_{nom} = 25^\circ\text{C}$ ,  $V_{nom} = 3.7 \text{ VDC}$  lithium battery  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: RX; DECT ch.2 and BT ch.39 active  
 Test Date: 2014-10-02  
 Note:

Index 94

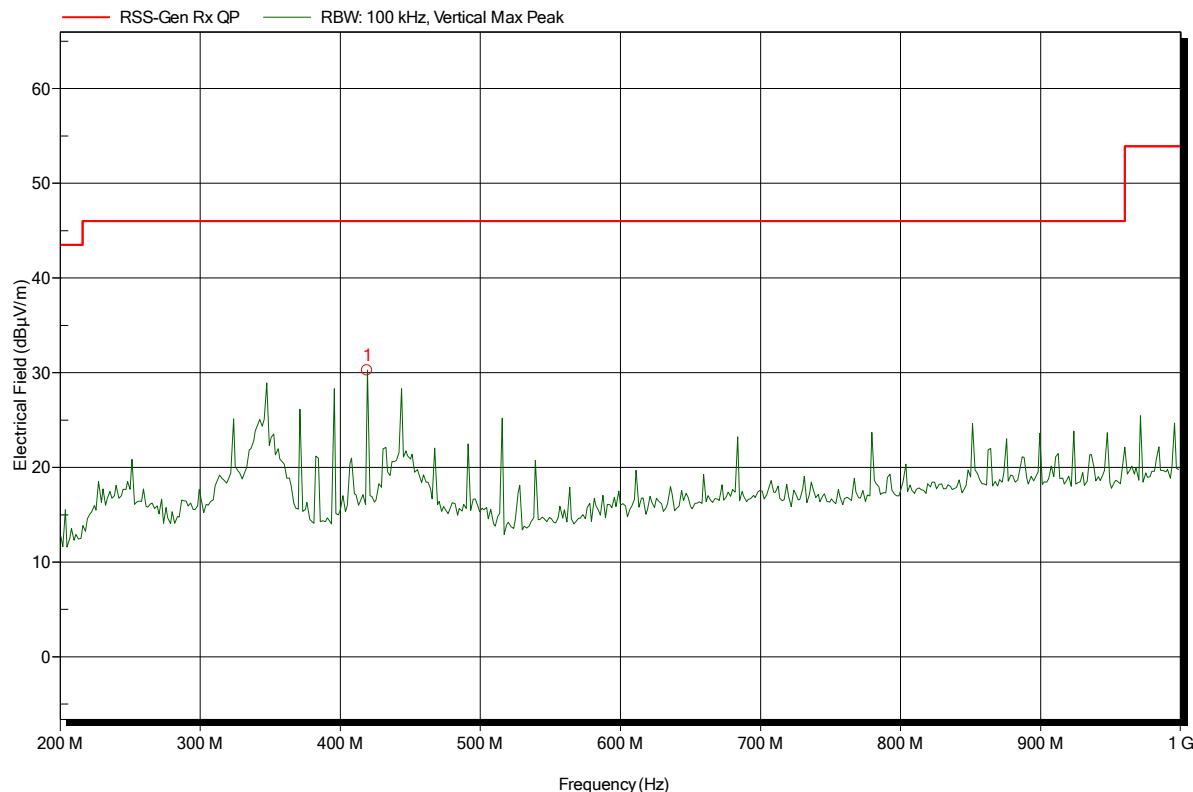


Parameter	Value
Frequency	419.2 MHz
Peak	30.24 dB $\mu$ V/m
Peak Limit	46 dB $\mu$ V/m
Peak Difference	-15.76 dB
Status	Pass

### Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ VDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 3 m  
Mode: RX; DECT ch.2 and BT ch.39 active  
Test Date: 2014-10-02  
Note:

Index 95

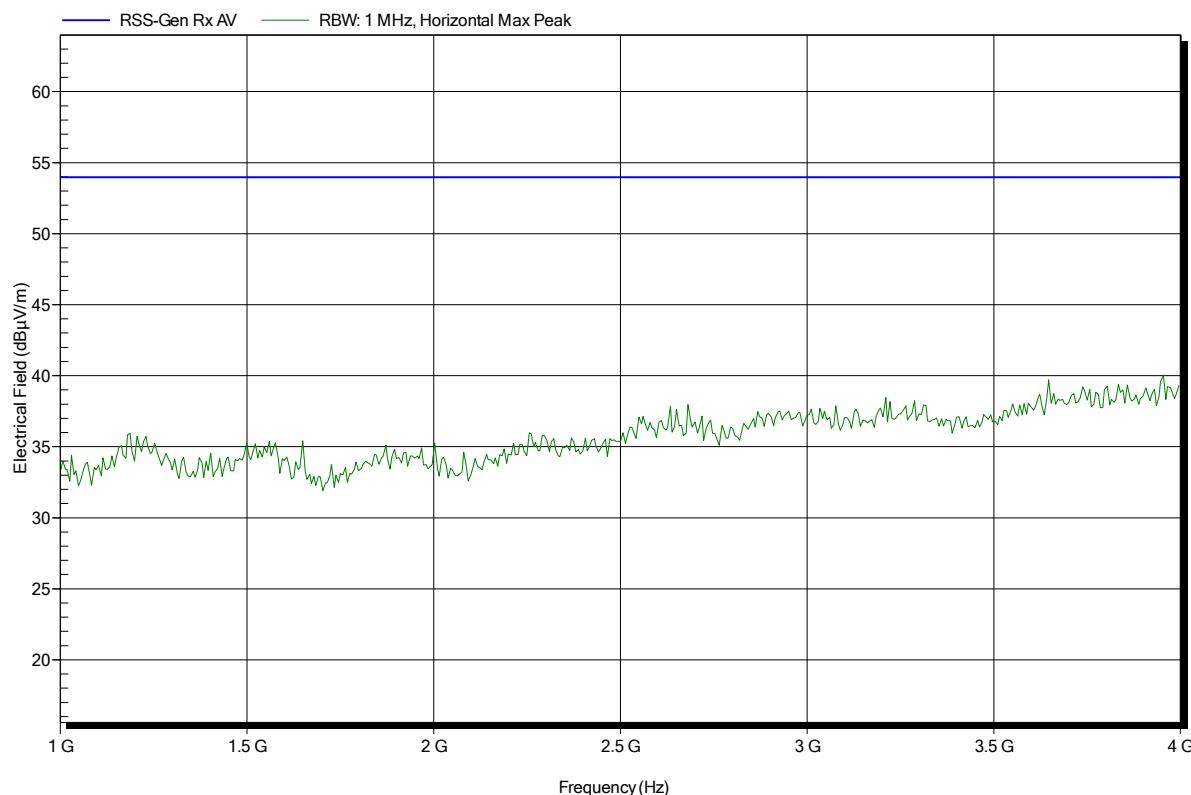

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 109 of 136

### Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ VDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 3 m  
Mode: RX; DECT ch.2 and BT ch.39 active  
Test Date: 2014-10-02  
Note:

Index 97

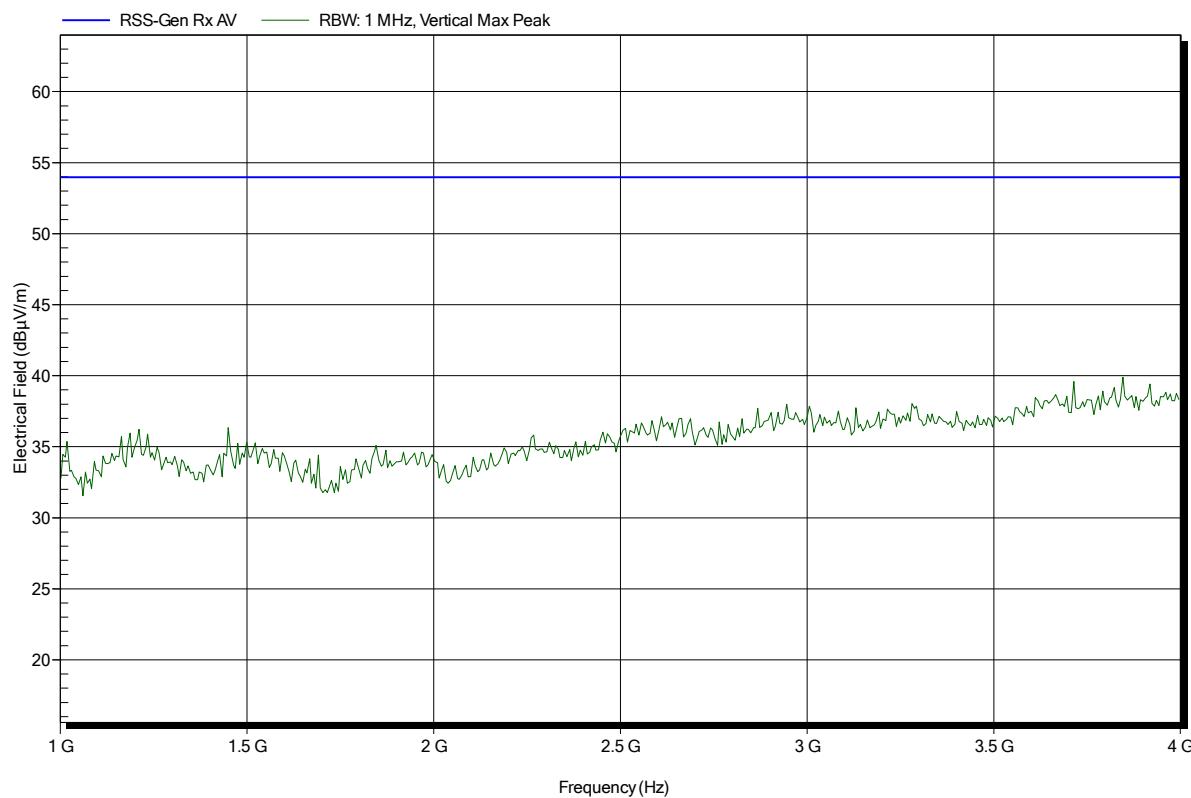

---

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 110 of 136

**Spurious emissions according to RSS-GEN**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions:  $T_{nom} = 25^{\circ}\text{C}$ ,  $V_{nom} = 3.7 \text{ VDC}$  lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 3 m  
Mode: RX; DECT ch.2 and BT ch.39 active  
Test Date: 2014-10-02  
Note:

Index 96

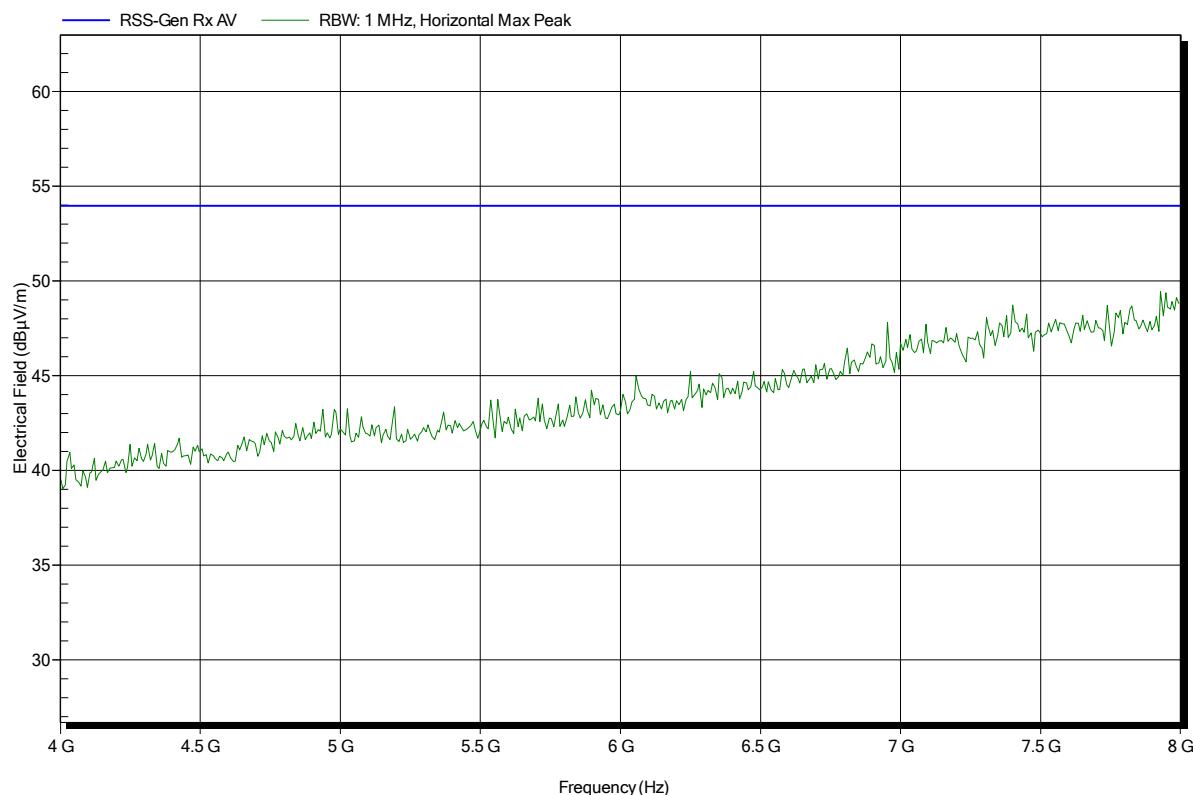

Test Report No.: G0M-1408-4062-TFC15DFP77-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 111 of 136

**Spurious emissions according to RSS-GEN**

Project number: G0M-1408-4062

Applicant: Sonetics Corporation  
EUT Name: Communications Headset  
Model: AXP379  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: T<sub>nom</sub>: 25°C, V<sub>nom</sub>: 3.7 VDC lithium battery  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 3 m  
Mode: RX; DECT ch.2 and BT ch.39 active  
Test Date: 2014-10-02  
Note:

Index 98

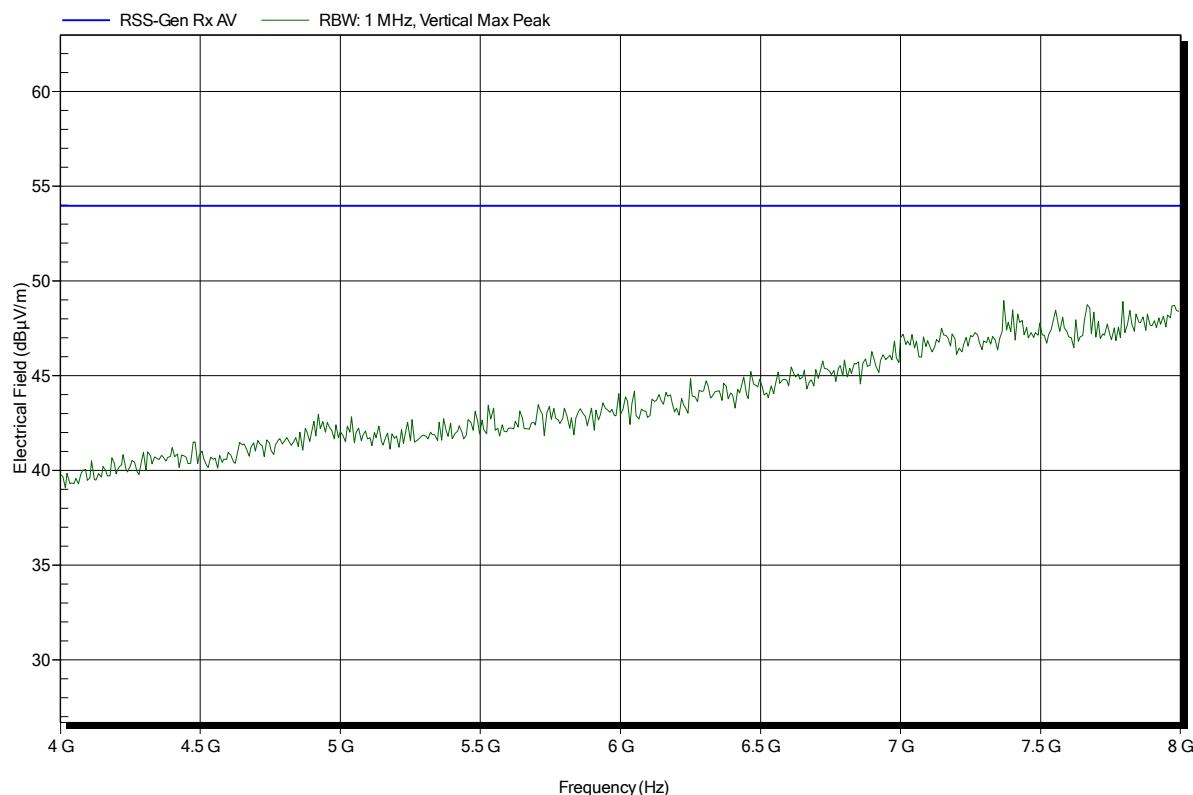

---


Test Report No.: G0M-1408-4062-TFC15DFP77-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 112 of 136


### 3.14 Test Conditions and Results – Automatic discontinuation of Transmission
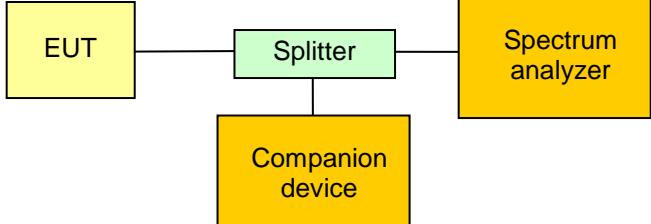
<b>Automatic discontinuation of transmission acc. to FCC 15D / RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.319(f) / IC RSS-213 4.3.4(a)	
Test according to measurement reference	Reference Method	
	Manual evaluation	
EUT equipment type	Fixed part	
<b>Requirements</b>		
The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. This is not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.		
<b>Test setup</b>		
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]     Companion --- Splitter   </pre>		
<b>Test procedure</b>		
The following situations were simulated to test the reaction of the EUT:		
<ul style="list-style-type: none"> <li>• EUT power removed</li> <li>• EUT switched –off</li> <li>• Companion device switched off</li> <li>• Hook-on by companion device</li> <li>• Hook-on by EUT</li> <li>• Power removed from companion device</li> </ul>		
The reaction of the EUT is recorded by the following results:		
A – Connection breakdown, cease of all transmissions B – Connection breakdown, EUT transmits control and signalling information C – Connection breakdown, Companion device transmits control and signalling information N/A – Not applicable (the EUT or companion device does not have an on/off switch or cannot perform hook on)		
<b>Result</b>		
Test	Reaction	Verdict
Power removed : EUT	A	PASS
Power removed : Companion device	A	PASS
Switch –off : EUT	A	PASS
Switch –off : Companion device	A	PASS
Hook-on : EUT	N/A	--
Hook-on : Companion device	N/A	--

**3.15 Test Conditions and Results – Radiofrequency radiation exposure**

<b>Radiofrequency radiation exposure acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
FCC 15.319(c)(i) / IC RSS-Gen 5.6		
<b>Requirements</b>		
FCC : Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.		
IC : Category I and Category II equipment shall comply with the applicable requirements of RSS-102.		
<b>Result</b>		
Reference	Verdict	
see dedicated report : G0M-1408-4062-TFC093SR-V01 issued by Eurofins Product Service GmbH	PASS	

### 3.16 Test Conditions and Results – Monitoring threshold

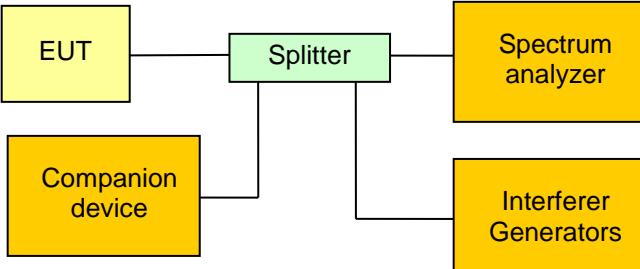
<b>Monitoring threshold acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause		Reference
		FCC 15.323(c)(2),(5),(9) / IC RSS-213 4.3.4(b)(2),(5),(9)
Test according referenced standards		Reference Method
		ANSI C63.17 7.3.4
Number of duplex channels used		5 carrier with 12 duplex timeslots = 60 duplex channels
<b>Requirements</b>		
The monitoring threshold must not be more than 30 dB above the thermal noise power (KTB) of a bandwidth equivalent to the emission/occupied bandwidth of the device.		
Devices that have a power output lower than the maximum permitted under this standard may increase their detection threshold by 1 dB for each 1 dB that the transmitter power is below the maximum permitted.		
IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.		
$T_U[dBm] = -174 + 10 \cdot \log_{10}(Bandwidth [Hz]) + M_U + P_{max}[dBm] - P_{EUT}[dBm]$ $T_L[dBm] = -174 + 10 \cdot \log_{10}(Bandwidth [Hz]) + M_L + P_{max}[dBm] - P_{EUT}[dBm]$		
With $M_U = 50$ dB and $M_L = 30$ dB, $P_{max}$ as given under "Peak transmit power" and bandwidth as emission or occupied bandwidth. The power threshold limit is given by $T_U + U_M$ ( $U_M = 6$ dB).		
<b>Test setup</b>		
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Interferer[Interferer Generators]     Companion[Companion device] --- Splitter   </pre>		
<b>Test procedure – Lower threshold for EUTs that do not implement LIC procedure</b>		
<ol style="list-style-type: none"> <li>1. An interferer level of <math>T_L + U_M + 10</math> dB is applied to all carrier frequencies</li> <li>2. It is verified that the EUT does not transmit on any carrier frequency</li> <li>3. The interferer level is decreased in 1 dB steps until the EUT starts to transmit on a channel</li> </ol>		
<b>Test procedure – Upper threshold for EUTs that implement LIC procedure</b>		
<ol style="list-style-type: none"> <li>1. An interferer level of <math>T_U + U_M + 10</math> dB is applied to all carrier frequencies</li> <li>2. It is verified that the EUT does not transmit on any carrier frequency</li> <li>3. The interferer level is decreased in 1 dB steps until the EUT starts to transmit on a channel</li> </ol>		

Test results - FCC						
Threshold	Emission Bandwidth [Hz]	Noise Excess Level [dB]	Output power [dBm]	Power Limit [dBm]	Power Threshold Limit [dBm]	Threshold Level [dBm]
Upper	1440000	50	20.18	20.79	-55.8	-60
Lower	N/A	N/A	N/A	N/A	N/A	N/A
Test results - IC						
Threshold	Occupied Bandwidth [Hz]	Noise Excess Level [dB]	Output power [dBm]	Power Limit [dBm]	Power Threshold Limit [dBm]	Threshold Level [dBm]
Upper	1224000	50	20.18	20.44	-56.9	-60
Lower	N/A	N/A	N/A	N/A	N/A	N/A
Comments:						


### 3.17 Test Conditions and Results – LIC confirmation

<b>LIC confirmation acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 4.3.4(b)(5)	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.3.4	
<b>Requirements</b>		
A device utilizing the provisions of FCC 47 CFR 15.323(c)(5) / IC RSS-213(b)(5) must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 millisecond frame period) immediately preceding actual channel access, that the detected power of the selected time and spectrum windows is no higher than the previously detected value.		
<b>Test result</b>		
Evaluation		Verdict
The requirement is verified using the “Monitoring time” and “LIC Selection” test.		PASS
Comments:		

### 3.18 Test Conditions and Results – LIC selection
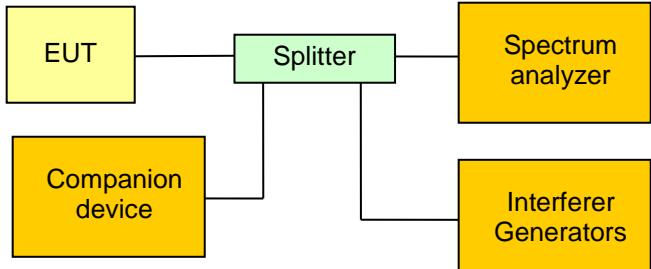
<b>LIC selection acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>	
EUT requirement rule parts and clause	Reference		
	FCC 15.323(c)(5) / IC RSS-213 4.3.4(b)(5)		
Test according referenced standards	Reference Method		
	ANSI C63.17 7.3.3		
<b>Requirements</b>			
FCC: If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed.			
IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.			
<b>Test setup</b>			
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]     Companion --- Interferers[Interferer Generators]   </pre>			
<b>Test procedure</b>			
<ol style="list-style-type: none"> <li>1. The EUT is forced to two carrier frequencies <math>f_1</math> and <math>f_2</math> only by the use of interferer generators with power levels higher than the upper threshold <math>T_U</math> plus the measurement uncertainty <math>U_M</math> of 6 dB</li> <li>2. Additional interferer signals are applied to the channels <math>f_1</math> and <math>f_2</math> according to the result table below</li> <li>3. A communication session with the companion device is initiated</li> <li>4. Transmission on the least interfered channel is verified</li> <li>5. The communication session is terminated</li> <li>6. The communications session is established another 4 times</li> </ol>			
<b>Test results</b>			
Interferer Level $f_1$	Interferer Level $f_2$	Communication channel	Verdict
$T_L + U_M + 7$ dB	$T_L + U_M$	$f_2$	PASS
$T_L + U_M$	$T_L + U_M + 7$ dB	$f_1$	PASS
$T_L + U_M + 1$ dB	$T_L + U_M - 6$ dB	$f_2$	PASS
$T_L + U_M - 6$ dB	$T_L + U_M + 1$ dB	$f_1$	PASS
Comments: $T_L$ corresponds to the lower threshold power value			

### 3.19 Test Conditions and Results – Monitoring antenna
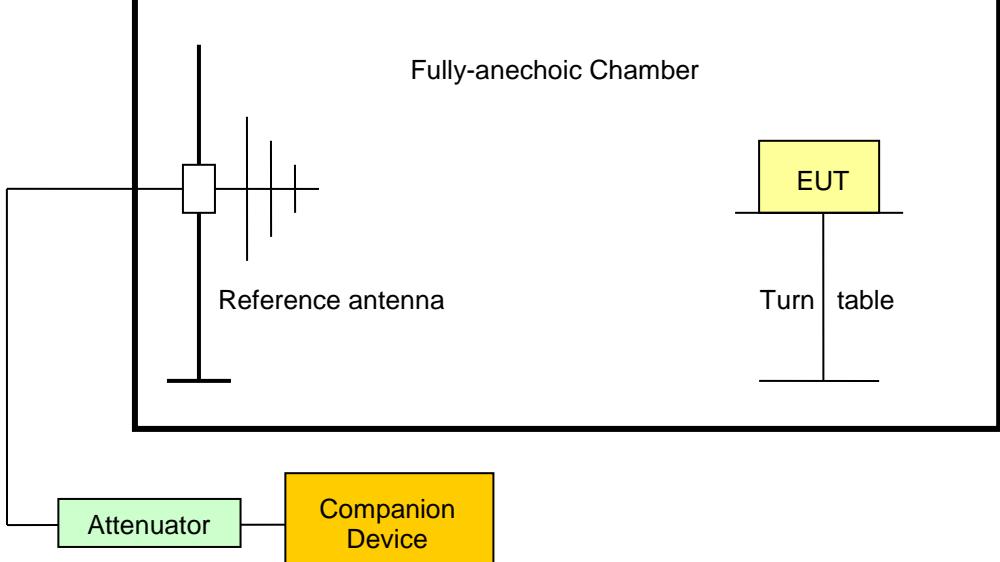
<b>Monitoring antenna acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.319(c)(8) / IC RSS-213 (b)(8)	
Test according to measurement reference	Reference Method	
	ANSI C63.17 4.6	
Monitoring antenna	The same as transmitting antenna	
<b>Requirements</b>		
The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.		
<b>Test setup radiated (monitoring and transmit antenna are not the same)</b>		
		
<b>Test procedure (collocated monitoring antenna of different type)</b>		
<ol style="list-style-type: none"> <li>1. The reference antenna is orientated for horizontal polarization</li> <li>2. The EUT is placed so that the direction of maximum radiation of the transmitting antenna is facing the direction of the main lobe of the reference antenna</li> <li>3. A signal with threshold power level is applied to the reference antenna</li> <li>4. It is observed whether or not a connection can be established</li> <li>5. The polarization of the reference antenna is changed to vertical polarization</li> <li>6. It is observed whether or not a connection can be established</li> </ol>		


**Test procedure (arbitrarily placed monitoring antenna)**

1. The reference antenna is orientated for horizontal polarization
2. The EUT is placed so that the direction of maximum radiation of the transmitting antenna is facing the direction of the main lobe of the reference antenna
3. The distance between the reference antenna and the EUT is increased by the maximum distance between the monitoring and transmitting antenna
4. The EUT is aligned in such a way that the direction of minimum sensitivity faces the reference antenna
5. A signal with threshold power level is applied to the reference antenna and the EUT is illuminated
6. It is observed whether the EUT can connect to the companion device or not
7. The polarization of the reference antenna is changed to vertical polarization
8. It is observed whether or not a connection can be established


**Results**

Connection status	Verdict
N/A (monitoring antenna identical to transmitting antenna)	PASS


### 3.20 Test Conditions and Results – Monitoring time

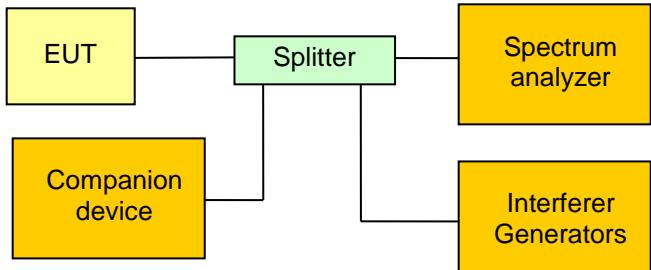Monitoring time acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference FCC 15.323(c)(1) / IC RSS-213 4.3.4(b)(1)	
Test according referenced standards		Reference Method ANSI C63.17 7.3.4	
Requirements			
Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.			
Test setup			
			
Test procedure			
<ol style="list-style-type: none"> <li>1. The EUT is forced to two carrier frequencies <math>f_1</math> and <math>f_2</math> only by the use of interferer generators with power levels higher than the upper threshold <math>T_U</math> plus the measurement uncertainty <math>U_M</math> of 6 dB</li> <li>2. The interferer level on channel frequency <math>f_1</math> is also set to <math>T_U + U_M</math> and channel <math>f_2</math> has no interferer</li> <li>3. A communication session is initiated on <math>f_2</math> and transmission on <math>f_2</math> is verified</li> <li>4. An interferer level of <math>T_U + U_M</math> is applied to <math>f_2</math> and the interferer on channel <math>f_1</math> is removed 20ms after the interferer on <math>f_2</math> is applied</li> <li>5. Transmission on <math>f_1</math> and <math>f_2</math> is monitored with the spectrum analyzer and it is verified that the EUT does not transmit on <math>f_2</math>.</li> </ol>			
Test results			
Initial transmit channel	Interferer level	Final transmit channel	Verdict
$f_2$	0	$f_2$	PASS
$f_2$	$T_U + U_M$	$f_1$	PASS
Comments:			

### 3.21 Test Conditions and Results – Monitoring bandwidth

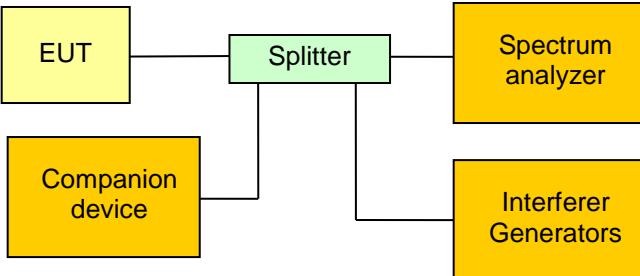
<b>Monitoring bandwidth acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>	
EUT requirement rule parts and clause		Reference FCC 15.323(c)(7) / IC RSS-213 4.3.4(b)(7)	
Test according referenced standards		Reference Method ANSI C63.17 7.4	
<b>Requirements</b>			
The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.			
<b>Test setup</b>			
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]     Companion --- Interferers[Interferer Generators]     Interferers --- Splitter   </pre>			
<b>Test procedure</b>			
<ol style="list-style-type: none"> <li>1. Using interferer signals, operation is restricted to channels <math>f_1</math></li> <li>2. A communication session is established without interference on <math>f_1</math></li> <li>3. An interference signal is set to <math>f_1 + 30\%</math> of the emission/occupied bandwidth with a level of <math>10 \text{ dB} + U_M</math> above <math>T_U</math> or <math>T_L</math> as appropriate. The bandwidth of the interferer is set to be greater than 0.05 MHz.</li> <li>4. It is verified that the EUT does not transmit</li> <li>5. The interferer is set to <math>f_1 - 30\%</math> of the emission/occupied bandwidth</li> <li>6. It is verified that the EUT does not transmit</li> </ol>			
<b>Test results</b>			
Interferer Frequency	Interferer Level	Transmission status	Verdict
$F_{\text{LOW}} + 30\% \cdot \text{BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{\text{LOW}} - 30\% \cdot \text{BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{\text{HIGH}} + 30\% \cdot \text{BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{\text{HIGH}} - 30\% \cdot \text{BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
Comments:			

### 3.22 Test Conditions and Results – Monitoring reaction time
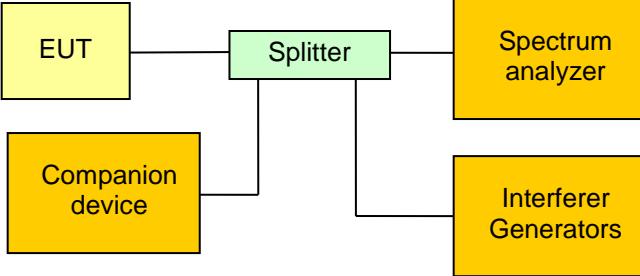
<b>Monitoring reaction time acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(7) / IC RSS-213 4.3.4(b)(7)	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.5	
<b>Requirements</b>		
The monitor shall have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission(occupied) bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission (occupied) bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.		
<b>Test setup</b>		
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Interferer[Interferer Generators]     Companion[Companion device] --- Splitter     SA --- Interferer   </pre>		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>1. Using interferer signals operation is restricted to channel <math>f_1</math></li> <li>2. A time-synchronized, pulsed interference is applied to <math>f_1</math> with a power level of <math>T_U + U_M</math> or <math>T_L + U_M</math> as appropriate</li> <li>3. For systems with a 10 ms frame time and N timeslots per frame, a channel interferer with N pulses in a 10 ms repetition period is applied</li> <li>4. The level of the interferer pulses is also set to <math>T_U + U_M</math> or <math>T_L + U_M</math> as appropriate</li> <li>5. The pulse width is set to the largest of 50 <math>\mu\text{s}</math> and <math>50 \cdot \sqrt{1.25/\text{Bandwidth[MHz]}} \mu\text{s}</math></li> <li>6. It is observed whether or not a connection can be established to the companion device</li> <li>7. The level of the interferer pulses is set to 6 dB above <math>T_U + U_M</math> or <math>T_L + U_M</math> as appropriate</li> <li>8. The pulse width is set to the largest of 35 <math>\mu\text{s}</math> and <math>35 \cdot \sqrt{1.25/\text{Bandwidth[MHz]}} \mu\text{s}</math></li> <li>9. It is observed whether or not a connection can be established to the companion device</li> </ol>		

Test results - FCC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [μs]	Pulse width for test [μs]	Connection possible	Verdict
$F_{\text{LOW}}$	1.418	$50 \cdot \sqrt{1.25/B[\text{MHz}]} =$	46.9	No	PASS
$F_{\text{LOW}}$	1.418	$35 \cdot \sqrt{1.25/B[\text{MHz}]} =$	32.8	No	PASS
$F_{\text{HIGH}}$	1.440	$50 \cdot \sqrt{1.25/B[\text{MHz}]} =$	46.6	No	PASS
$F_{\text{HIGH}}$	1.440	$35 \cdot \sqrt{1.25/B[\text{MHz}]} =$	32.6	No	PASS
Test results - IC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [μs]	Pulse width for test [μs]	Connection possible	Verdict
$F_{\text{LOW}}$	1.224	$50 \cdot \sqrt{1.25/B[\text{MHz}]} =$	41.3	No	PASS
$F_{\text{LOW}}$	1.224	$35 \cdot \sqrt{1.25/B[\text{MHz}]} =$	28.9	No	PASS
$F_{\text{HIGH}}$	1.224	$50 \cdot \sqrt{1.25/B[\text{MHz}]} =$	41.3	No	PASS
$F_{\text{HIGH}}$	1.224	$35 \cdot \sqrt{1.25/B[\text{MHz}]} =$	28.9	No	PASS
Comments:					


### 3.23 Test Conditions and Results – Acknowledgements
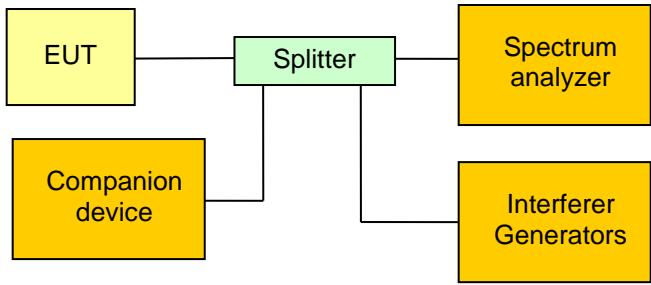
<b>Acknowledgements acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause		Reference
		FCC 15.323(c)(4) / IC RSS-213 4.3.4(b)(4)
Test according referenced standards		Reference Method
		ANSI C63.17 8.2.1
EUT can initiate a communication session		No
<b>Requirements</b>		
Once access to specific combined time and spectrum windows is obtained, an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease.		
Periodic acknowledgements must be received at least every 30 seconds or transmission must cease.		
<b>Test setup</b>		
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]     Companion --- Interferers[Interferer Generators]     Interferers --- Splitter   </pre>		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>1. (Applies to EUTs that can initiate a communication session (e.g. portable parts)) The acknowledgement timeslots are blocked by interferer signals</li> <li>2. An attempt to establish communication session is started from the EUT</li> <li>3. The emissions from the EUT are monitored to verify that the EUT does not transmit for more than 1s</li> <li>4. Next the acknowledgements are unblocked and another communication session is established between the EUT and the companion device</li> <li>5. It is verified that the communication session is successful</li> <li>6. (Applies to all EUTs) With all acknowledges unblocked, an communication session is initiated between the EUT and the companion device</li> <li>7. The acknowledgements were blocked and the time the EUT continues to transmit is recorded</li> </ol>		

Test results		
Maximum initial transmission [s]	Transmission time limit [s]	Verdict
0.513	1	PASS
Maximum transmission time [s]	Transmission time limit [s]	Verdict
7	30	PASS
Comments:		


**Acknowledgments**
**ANSI C63.17 - Acknowledgements**
**UPCS**

EUT Communication Headset  
 Model AXP379  
 Approval Holder Sonetics Corporation  
 Temperature / Voltage 24°C / Vnom  
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke  
 Test Specification ANSI C63.17 - Acknowledgements  
 Comment 1 paragraph a) blocked acknowledgements from the companion device  
 Comment 2 by blocking the Rx time slots from the companion device  
 Comment 3 The EUT cease transmission on the communications channel after 513 ms,  
 Limit: < 1second , Pass

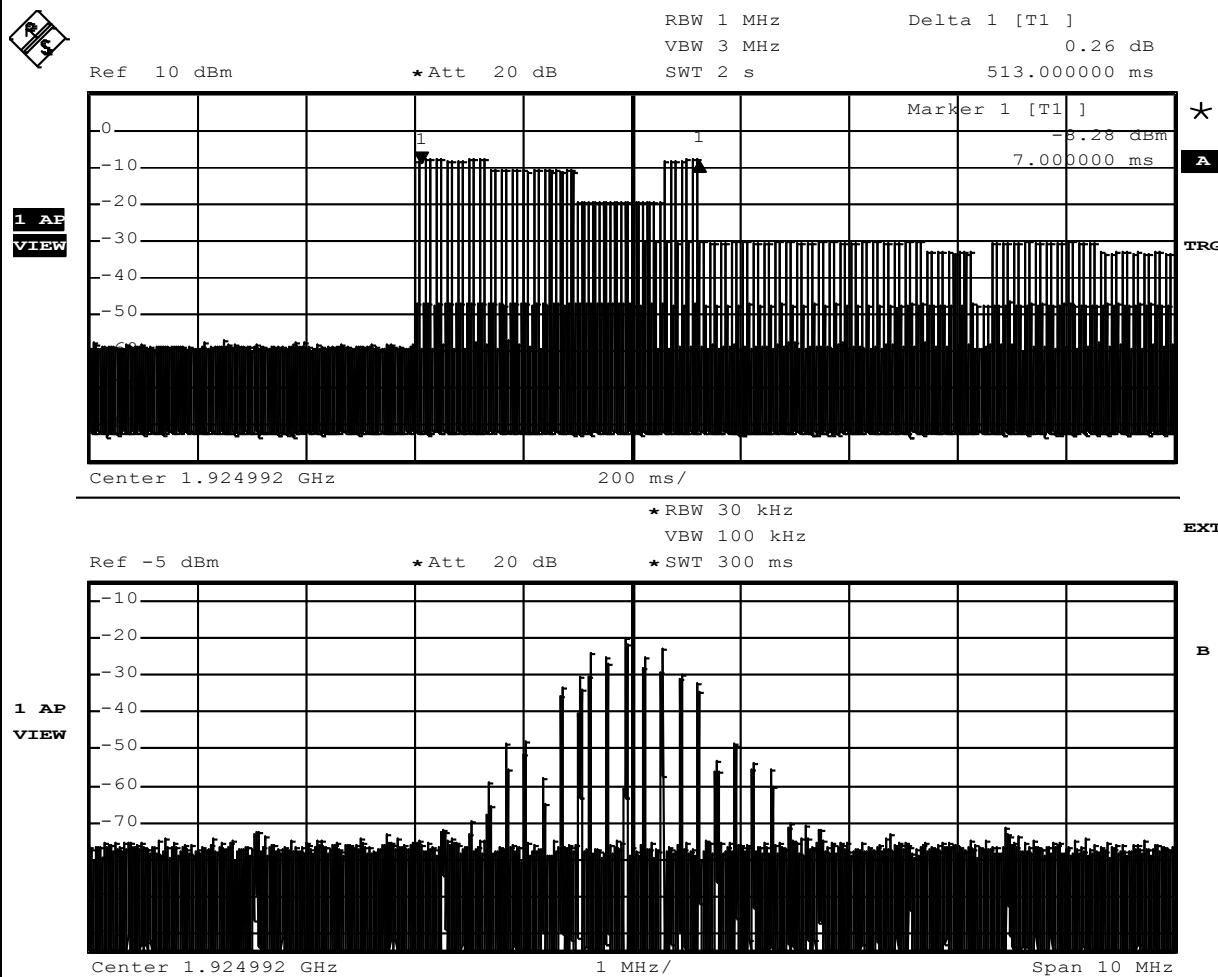

Comment: Ansi C63.17-1998 6.1.6.2  
 Date: 26.SEP.2014 09:22:44


### 3.24 Test Conditions and Results – Maximum transmit period
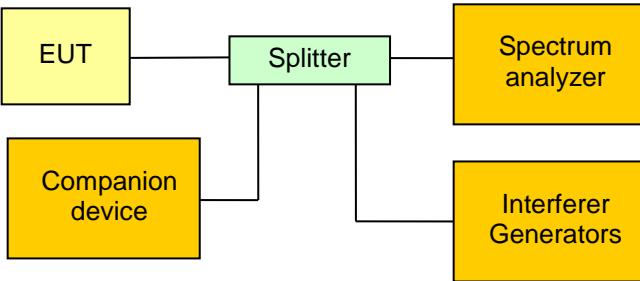
<b>Maximum transmit period acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: N/A</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(3) / IC RSS-213 4.3.4(b)(3)	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.2.2	
<b>Requirements</b>		
<p>If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring.</p> <p>However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.</p>		
<b>Test setup</b>		
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Interferer[Interferer Generators]     Companion[Companion device] --- Splitter   </pre>		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>1. A communication session is established between the EUT and the companion device.</li> <li>2. With the beginning of the communication session a counter is started</li> <li>3. An interferer is introduced on the communication channel to force the EUT to select a different communication channel if the communications has to be reestablished</li> <li>4. As soon as the communication session switches to a different channel the time measurement is stopped</li> </ol>		
<b>Test results</b>		
Total transmission time [h]	Transmission time limit	Verdict
3.55	8 hours	N/A
<p>Comments:</p> <p>For the DECT system the communication session is established by the portable part and the fixed part simply follows the portable part. Hence it's the responsibility of the portable part to control the maximum transmit period.</p>		

**3.25 Test Conditions and Results – Maximum spectral occupancy**

<b>Maximum spectral occupancy acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 4.3.4(b)(5)	
Test according referenced standards	Reference Method	
	Customer declaration	
<b>Requirements</b>		
No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.		
<b>Test result</b>		
Evaluation	Verdict	
According to the technical documentation the total number of time and spectrum windows is: $5 \times 12 = 60$	PASS	
According to customer declaration the total number of concurrent time and spectrum windows is: 12		
The number of concurrent allocated time and spectrum windows is less than one third of the total time and spectrum windows of the EUT		
Comments:		

### 3.26 Test Conditions and Results – Duplex connections
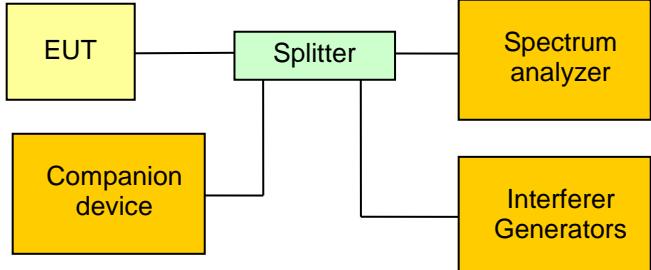
<b>Duplex system LBT acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause		Reference FCC 15.323(c)(10) / IC RSS-213 4.3.4(b)(10)
Test according referenced standards		Reference Method ANSI C63.17 8.3.2
EUT implements upper threshold		Yes
EUT is initiating device		Yes
<b>Requirements</b>		
An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows.		
If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window.		
If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.		
<b>Test setup</b>		
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- IG[Interferer Generators]     Companion[Companion device] --- Splitter     SA --- IG   </pre>		
<b>Test procedure (EUT does not implement upper threshold)</b>		
<ol style="list-style-type: none"> <li>1. The path loss between the EUT and the companion device is adjusted such that the received signal to the EUT is at least 40 dB above <math>T_L + U_M</math></li> <li>2. By the use of interference signals the EUT is restricted to channel <math>f_1</math></li> <li>3. An interference of level <math>T_L + U_M</math> is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below <math>T_L</math></li> <li>4. An interference of level <math>T_L + U_M</math> is applied per carrier on the enabled carriers on all its transmit time/spectrum windows</li> <li>5. It is verified that the interference levels at the companion device are at least 10 dB below <math>T_L</math> for all time/spectrum windows</li> <li>6. An attempt is made to establish a connection</li> <li>7. Next an interference at <math>T_L + U_M</math> is applied to all enabled carriers on all its time/spectrum windows except one, which has interference at least 10 dB below <math>T_L</math></li> <li>8. An interference of level <math>T_L + U_M</math> is applied per carrier on the enabled carriers on all its receive time/spectrum windows</li> <li>9. It is verified that the interference levels at the companion device are at least 10 dB below <math>T_L</math> for all time/spectrum windows</li> <li>10. An attempt is made to establish a connection</li> </ol>		

**Test procedure (EUT implements upper threshold)**

1. The path loss between the EUT and the companion device is adjusted such that the received signal to the EUT is at least 40 dB above  $T_L + U_M$
2. By the use of interference signals the EUT is restricted to channel  $f_1$
3. An interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its transmit time/spectrum windows except one, which has interference at least 10 dB below  $T_L$
4. An interference of level  $T_L + U_M + 7\text{dB}$  is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below  $T_L$ . The interference free receive time/spectrum window must not be the duplex mate of the interference-free transmit time/spectrum window
5. It is verified that the interference levels at the companion device are at least 10 dB below  $T_L$  for all time/spectrum windows
6. An attempt is made to establish a connection and it is verified that the connection is established on the interference-free receive time/spectrum window and its duplex mate
7. Next an interference of level  $T_L + U_M + 7\text{dB}$  is applied per carrier on the enabled carriers on all its transmit time/spectrum windows except one, which has interference at least 10 dB below  $T_L$
8. An interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below  $T_L$ . The interference free receive time/spectrum window must not be the duplex mate of the interference-free transmit time/spectrum window
9. It is verified that the interference levels at the companion device are at least 10 dB below  $T_L$  for all time/spectrum windows
10. An attempt is made to establish a connection and it is verified that the connection is established on the interference-free transmit time/spectrum window and its duplex mate
11. Next an interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its transmit time/spectrum windows except one, which has interference at least 10 dB below  $T_L$
12. An interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below  $T_L$ . The interference free receive time/spectrum window must not be the duplex mate of the interference-free transmit time/spectrum window
13. The path loss between the EUT and the companion device is adjusted such that the received signal to the EUT is at least 30 dB above  $T_U$
14. An attempt is made to establish a connection and it is verified that no connection can be established

**Test results – upper threshold not implemented**

Transmit time/spectrum windows	Receive time/spectrum windows	Connection possible	Verdict
$T_L + U_M$	$T_L + U_M$	No	N/A
$T_L + U_M$	$T_L + U_M$	No	N/A

**Test results – upper threshold implemented**


Transmit time/spectrum windows	Receive time/spectrum windows	Connection time/spectrum window	Verdict
$T_L + U_M$	$T_L + U_M + 7\text{dB}$	Receive	PASS
$T_L + U_M + 7\text{dB}$	$T_L + U_M$	Transmit	PASS
$T_L + U_M$	$T_L + U_M$	None	PASS

Comments:

### 3.27 Test Conditions and Results – Fair access

Fair access acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(11) / IC RSS-213 4.3.4(b)(11)	
Test according to measurement reference	Reference Method	
	Customer declaration	
Requirements		
The provisions of FCC 47 CRF 15.323(c)(10), IC RSS-213(b)(10) or FCC 47 CRF 15.323(c)(11), IC RSS-213(b)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.		
Declaration		
The manufacturer declares that this device does not work in a mode which denies fair access to spectrum for other participants		


**3.28 Test Conditions and Results – Frame period and Jitter**
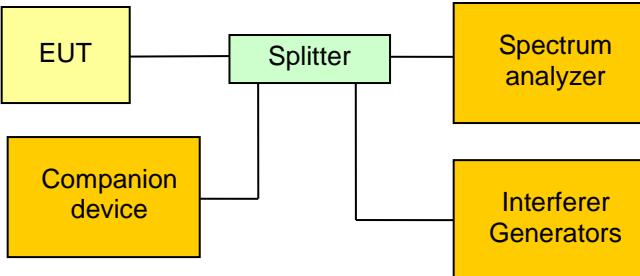
<b>Frame period and Jitter acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.323(e)(1),(4) / IC RSS-213 4.3.4(c)(1),(4)	
Test according referenced standards	Reference Method	
	ANSI C63.17 6.2.3	
<b>Requirements</b>		
<p>The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this sub-band shall be 20 milliseconds/X where X is a positive whole number.</p> <p>The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions.</p>		
<b>Test setup</b>		
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Companion[Companion device]     Companion --- Interferers[Interferer Generators]   </pre>		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>1. With a spectrum analyzer the frame periods are measured over time</li> <li>2. 100 000 frames are measured</li> <li>3. The the peak-to-peak, mean and standard deviation values are computed</li> </ol>		
<b>Test results – Frame period</b>		
Mean value [ms]	Divider X (10ms/X)	Verdict
9.999988 = 10.00 – 0.000012	1	PASS
<b>Test results – Jitter</b>		
Maximum difference between frames [μs]	Limit [μs]	Verdict
0.069849	25 – 0.000012 = 24.999988	PASS
Comments:		


**Frame period and Jitter**
**FCC Part 15.323 Frame Period and jitter**
**Testprocedure ANSI 63.17**
**UPCS**

EUT Communications Headset  
 Model AXP379  
 Applicant Sonetics Corporation  
 Temperature 23°C  
 Test Site / Operator Eurofins Product Service GmbH  
 Test Specification Frame Period and jitter

Width of the 0,002794 µs  
 time class 9,999895 ms  
 Mean 0,000012  
 Deviation 0,069849 µs  
 Max-Min  
 Test result Verdict = PASS

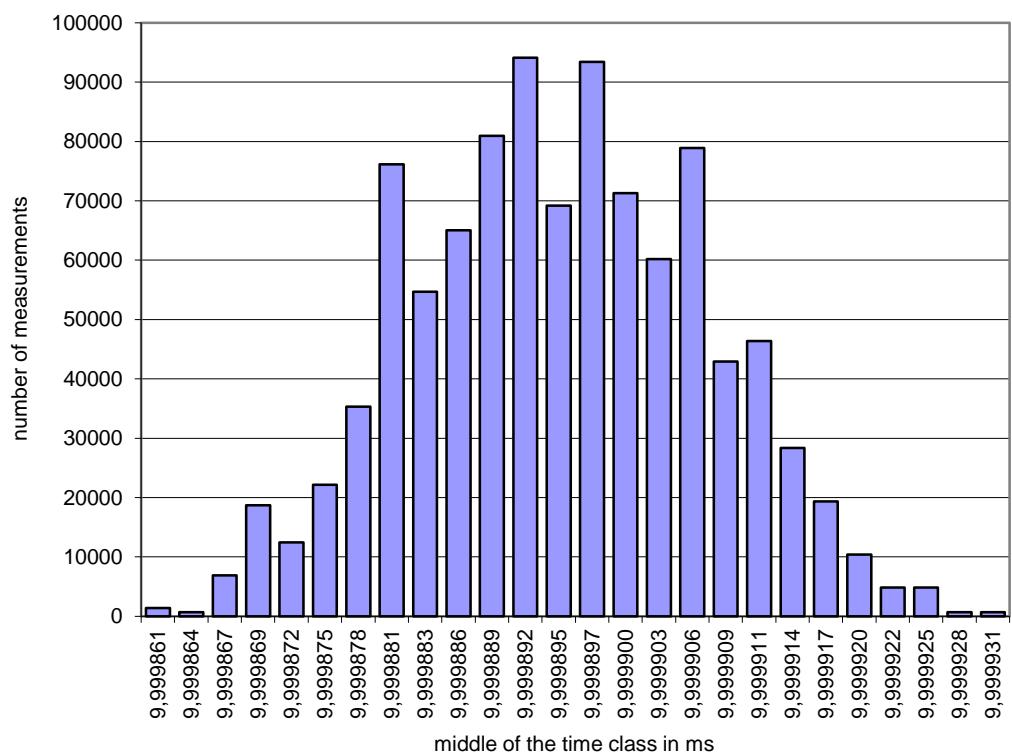**Histogram**


### 3.29 Test Conditions and Results – Frame repetition stability
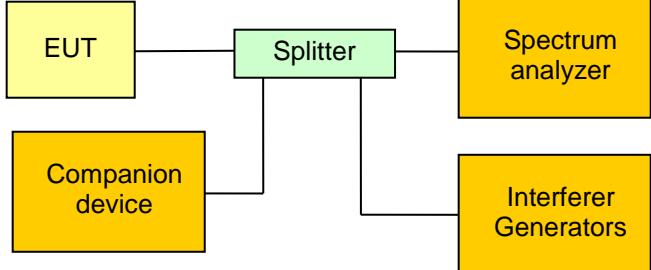
<b>Frame repetition stability acc. to FCC 47 CFR 15D / IC RSS-213</b>		<b>Verdict: PASS</b>		
EUT requirement rule parts and clause	Reference			
	FCC 15.323(e)(2),(3) / IC RSS-213 4.3.4(c)(2),(3)			
Test according referenced standards	Reference Method			
	ANSI C63.17 6.2.2			
Access scheme used	Time Division Multiple Access			
<b>Requirements</b>				
<p>Each device that implements time division for the purpose of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm).</p> <p>Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.</p>				
<b>Test setup</b>				
 <pre> graph LR     EUT[EUT] --- Splitter[Splitter]     Splitter --- SA[Spectrum analyzer]     Splitter --- Interferer[Interferer Generators]     Companion[Companion device] --- Splitter   </pre>				
<b>Test procedure</b>				
<ol style="list-style-type: none"> <li>1. With a spectrum analyzer the frame repetition periods are measured over time</li> <li>2. 1 000 frame repetitions are measured</li> <li>3. The mean and standard deviation values are computed</li> </ol>				
<b>Test results</b>				
Access scheme	Error [ppm]	Limit [ppm]	Verdict	
Time Division Access	N/A	50	N/A	
Time Division Multiple Access	0.043350	10	PASS	
Comments:				

**Frame repetition stability**
**FCC Part 15.323 Frame repetition**
**Testprocedure ANSI 63.17**
**UPCS**

EUT	Communications Headset
Model	AXP379
Applicant	Sonetcs Corporation
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frame repetition
Width of the frequency class	0,000000 Hz
Mean	99,999820 Hz
Deviation	0,000001
Stability in ppm	0,043350 ppm
Test result	Verdict = PASS

**Histogram**
